



FCC RADIO TEST REPORT

FCC ID : 2AGOZ-D87L
Equipment : Media receiver
Brand Name : facebook
Model Name : DT90GB
Applicant : Facebook Technologies, LLC
1 Hacker Way, Menlo Park, CA 94025, USA
Standard : FCC Part 15 Subpart E §15.407

The product was received on May 24, 2019 and testing was started from Jun. 10 2019 and completed on Jun. 29, 2019. We, SPORTON INTERNATIONAL INC., EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Approved by: Jones Tsai

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory
No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



Table of Contents

1	General Description	5
1.1	Product Feature of Equipment Under Test	5
1.2	Modification of EUT	5
1.3	Testing Location	5
1.4	Applicable Standards	6
2	Test Configuration of Equipment Under Test	7
2.1	Carrier Frequency and Channel	7
2.2	Test Mode	8
2.3	Connection Diagram of Test System	9
2.4	Support Unit used in test configuration and system	9
2.5	EUT Operation Test Setup	10
2.6	Measurement Results Explanation Example	10
3	Test Result	11
3.1	6dB and 26dB and 99% Occupied Bandwidth Measurement	11
3.2	Maximum Conducted Output Power Measurement	14
3.3	Power Spectral Density Measurement	15
3.4	Unwanted Emissions Measurement	17
3.5	AC Conducted Emission Measurement	22
3.6	Automatically Discontinue Transmission	24
3.7	Antenna Requirements	26
4	List of Measuring Equipment	27
5	Uncertainty of Evaluation	28
	Appendix A. Conducted Test Results	
	Appendix B. AC Conducted Emission Test Result	
	Appendix C. Radiated Spurious Emission	
	Appendix D. Radiated Spurious Emission Plots	
	Appendix E. Duty Cycle Plots	
	Appendix F. Setup Photographs	



History of this test report

Report No.	Version	Description	Issued Date
FR952407E	01	Initial issue of report	Jul. 11, 2019
FR952407E	02	Revise the connection diagram of test system in section 2.3	Jul. 29, 2019



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.403 (i)	6dB & 26dB Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Reporting only	-
3.2	15.407 (a)	Maximum Conducted Output Power	Pass	-
3.3	15.407 (a)	Power Spectral Density	Pass	-
3.4	15.407(b)	Unwanted Emissions	Pass	Under limit 9.70 dB at 5644.200 MHz
3.5	15.207	AC Conducted Emission	Pass	Under limit 14.82 dB at 0.152 MHz
3.6	15.407 (c)	Automatically Discontinue Transmission	Pass	-
3.7	15.203 & 15.407 (a)	Antenna Requirement	Pass	-

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Reviewed by: Wii Chang**Report Producer: Yimin Ho**



1 General Description

1.1 Product Feature of Equipment Under Test

Bluetooth, Wi-Fi 2.4GHz 802.11b/g/n/ac, and Wi-Fi 5GHz 802.11a/n/ac

Product Specification subjective to this standard	
Antenna Type	WLAN: FPC Antenna Bluetooth: FPC Antenna

1.2 Modification of EUT

No modifications are made to the EUT during all test items.

1.3 Testing Location

Test Site	SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory		
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978		
Test Site No.	Sporton Site No.		
	TH05-HY	CO05-HY	DFS02-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

Test Site	SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory		
Test Site Location	No. 58, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978		
Test Site No.	Sporton Site No.		
	03CH016-HY		

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW1190 and TW0007



1.4 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ NCC LP0002 (2018-01-10)
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01.
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5725-5850 MHz Band 4 (U-NII-3)	149	5745	157	5785
	151*	5755	159*	5795
	153	5765	161	5805
	155 [#]	5775	165	5825

Note:

- 1. The above Frequency and Channel in "*" were 802.11n HT40 and 802.11ac VHT40.
- 2. The above Frequency and Channel in "[#]" were 802.11ac VHT80.



2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.

Single Mode (Covered by MIMO Mode)

Modulation	Data Rate
802.11a	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0
802.11ac VHT20	MCS0
802.11ac VHT40	MCS0
802.11ac VHT80	MCS0


MIMO Mode

Modulation	Data Rate
802.11a	6 Mbps
802.11n HT20 (Covered by VHT20)	MCS0
802.11n HT40 (Covered by VHT40)	MCS0
802.11ac VHT20	MCS0
802.11ac VHT40	MCS0
802.11ac VHT80	MCS0

Test Cases	
AC Conducted Emission	Mode 1 : Bluetooth Link + WLAN (5GHz) Link + Thermal Test + Adapter

Ch. #	Band IV : 5725-5850 MHz			
	802.11a	802.11ac VHT20	802.11ac VHT40	802.11ac VHT80
L Low	149	149	151	-
M Middle	157	157	-	155
H High	165	165	159	-

2.3 Connection Diagram of Test System

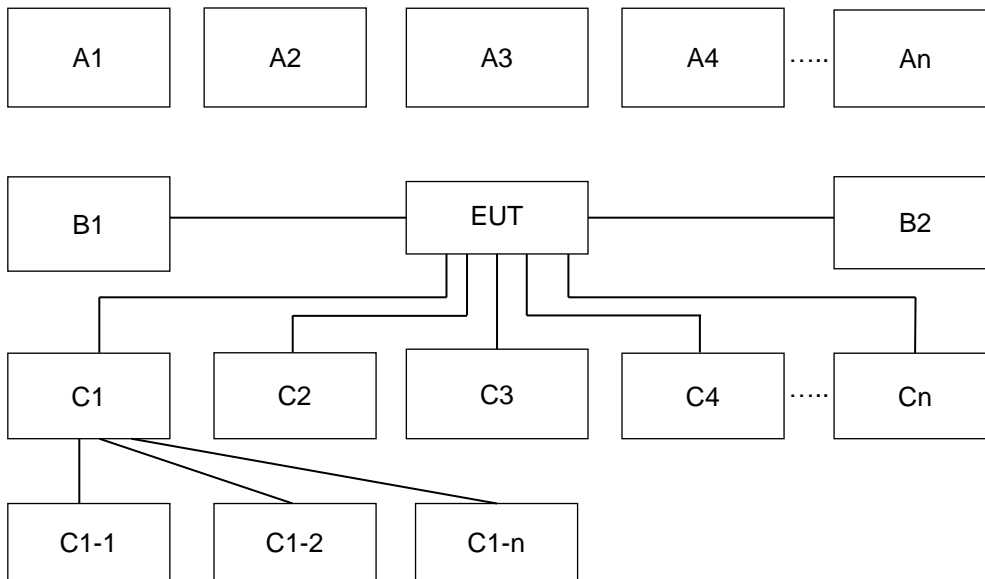

Conduction Test Setup									
No.	Wireless Station	Connection Type	Test Mode						
			1	-	-	-	-	-	-
A1	BT Earphone	Bluetooth	X	-	-	-	-	-	-
A2	AP router	WiFi	X	-	-	-	-	-	-
A3	Notebook	WiFi	X	-	-	-	-	-	-
No.	Power Source	Connection Type	1	-	-	-	-	-	-
B1	AC : 120V/60Hz	AC Power Cable	X	-	-	-	-	-	-

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	WLAN AP	ASUS	RT-AC66U	MSQ-RTAC66U	N/A	Unshielded, 1.8m
2.	Notebook	DELL	Latitude E6320	FCC DoC/ Contains FCC ID: QDS-BRCM1054	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
3.	Notebook	Lenovo	LAPTOP- J4S01QMP	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
4.	Bluetooth Earphone	Sony Ericsson	MW600	PY7DDA-2029	N/A	N/A



2.5 EUT Operation Test Setup

The RF test items, utility “QRCT V4.0.00108” was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 8.2 dB and 20dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 8.2 + 20 = 28.2 \text{ (dB)} \end{aligned}$$

3 Test Result

3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement

3.1.1 Description of 6dB and 26dB and 99% Occupied Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

26dB and 99% Occupied bandwidth are reporting only.


3.1.2 Measuring Instruments

See list of measuring equipment of this test report.

3.1.3 Test Procedures



1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section C) Emission bandwidth for the band 5.725-5.85GHz
2. Set RBW = 100kHz.
3. Set the VBW $\geq 3 \times$ RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 6 dB down from the peak of the emission.
7. Measure and record the results in the test report.


3.1.4 Test Setup

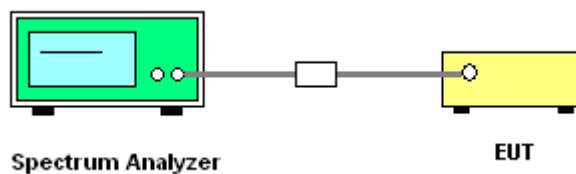

3.1.5 Test Result of 6dB and 26dB and 99% Occupied Bandwidth

Please refer to Appendix A.

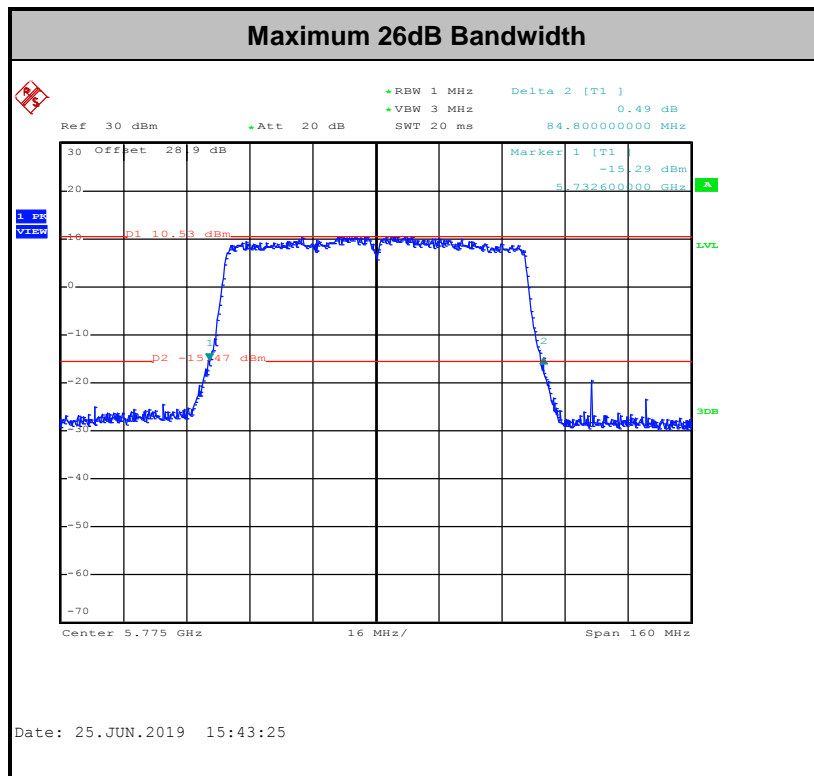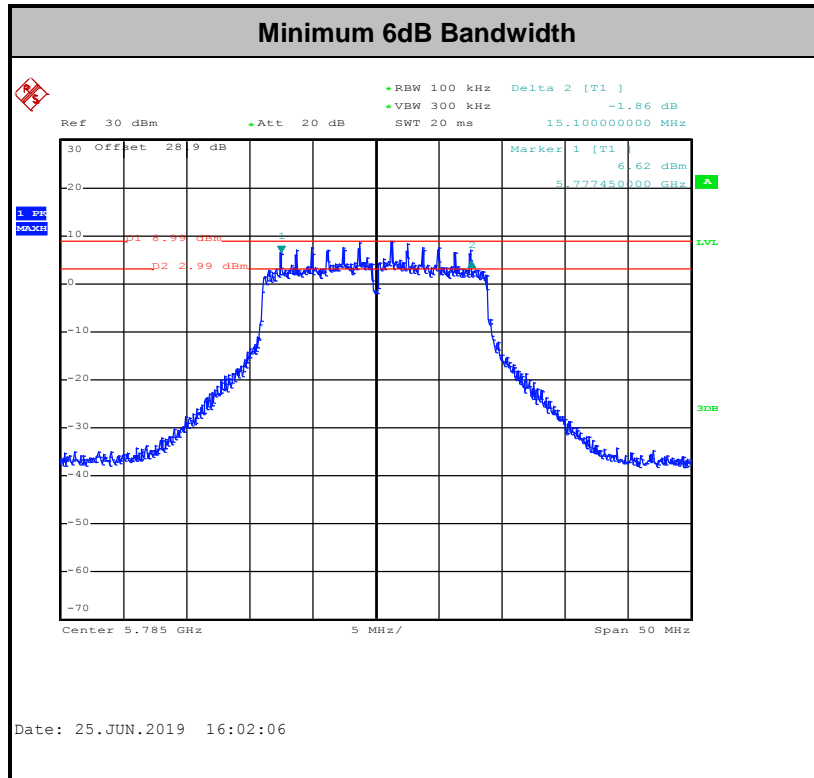

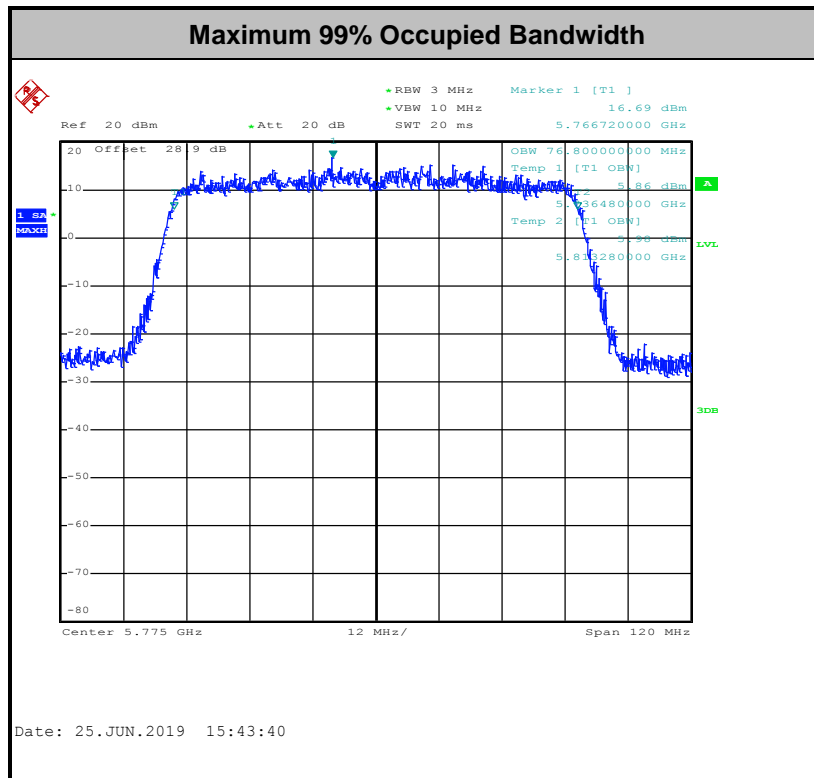

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Maximum Conducted Output Power Measurement

3.2.1 Limit of Maximum Conducted Output Power

For the band 5.725–5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.2.2 Measuring Instruments

See list of measuring equipment of this test report.


3.2.3 Test Procedures

The testing follows Method PM-G of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM-G (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit at its maximum power control level.
3. Measure the average power of the transmitter
4. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

3.2.4 Test Setup

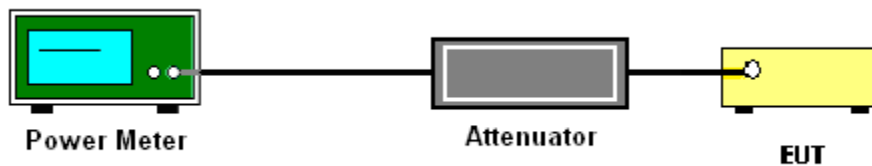

3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.



3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

For the band 5.725–5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2 Measuring Instruments

See list of measuring equipment of this test report.

3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section F) Maximum power spectral density.

Method SA-2

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).


- Measure the duty cycle.
- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 300 kHz.
- Set VBW \geq 1 MHz.
- Number of points in sweep \geq 2 Span / RBW.
- Sweep time = auto.
- Detector = RMS
- Trace average at least 100 traces in power averaging mode.
- Add $10 \log(500\text{kHz}/\text{RBW})$ to the test result.
- Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.

1. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.
3. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

Method (c): Measure and add $10 \log(N_{ANT})$ dB.


With this technique, spectrum measurements are performed at each output of the device, but rather than summing the spectra or the spectral peaks across the outputs, the quantity $10 \log(N_{ANT})$ dB is added to each spectrum value before comparing to the emission limit. The addition of $10 \log(N_{ANT})$ dB serves to apportion the emission limit among the N_{ANT} outputs so that each output is permitted to contribute no more than $1/N_{ANT}^{th}$ of the PSD limit.

3.3.4 Test Setup

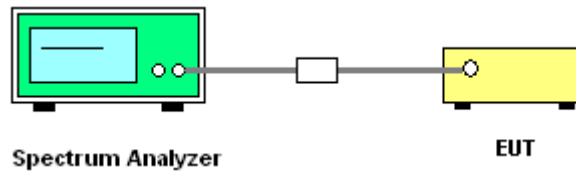

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

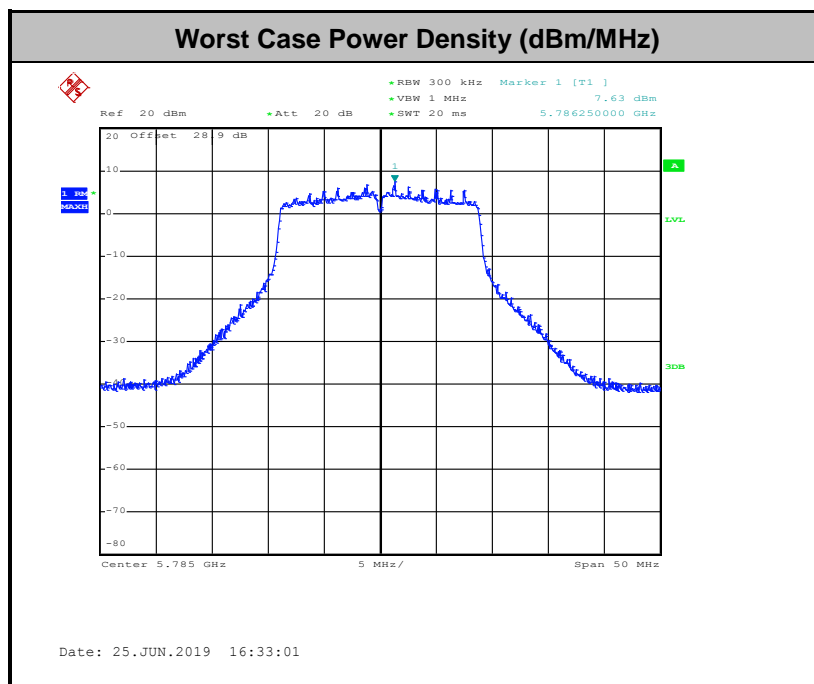



3.4 Unwanted Emissions Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

3.4.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5.725-5.85 GHz band:
 15.407(b)(4)(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
- (2) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

Note: The following formula is used to convert the EIRP to field strength.

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$

EIRP (dBm)	Field Strength at 3m (dBμV/m)
- 27	68.3



(3) KDB789033 D02 v02r01 G)2)c)

- (i) Section 15.407(b)(1) to (b)(3) specify the unwanted emission limits for the U-NII-1 and U-NII-2 bands. As specified, emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit of -27 dBm/MHz.³
- (ii) Section 15.407(b)(4) specifies the unwanted emission limit for the U-NII-3 band. A band emissions mask is specified in Section 15.407(b)(4)(i). The emission limits are in terms of a Peak detector. An alternative to the band emissions mask is specified in Section 15.407(b)(4)(ii). The alternative limits are based on the highest antenna gain specified in the filing. There are also marketing and importation restrictions for the devices using the alternative limit.⁴

Note 3: An out-of-band emission that complies with both the average and peak limits of Section 15.209 is not required to satisfy the -27 dBm/MHz peak emission limit.

Note 4: Only devices with antenna gains of 10 dBi or less may be approved using the emission limits specified in Section 15.247(d) till March 2, 2018; all other devices operating in this band must use the mask specified in Section 15.407(b)(4)(i).

3.4.2 Measuring Instruments

See list of measuring equipment of this test report.




3.4.3 Test Procedures


1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section G) Unwanted emissions measurement.
 - (1) Procedure for Unwanted Emissions Measurements Below 1000MHz
 - RBW = 120 kHz
 - VBW = 300 kHz
 - Detector = Peak
 - Trace mode = max hold
 - (2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
 - RBW = 1 MHz
 - VBW \geq 3 MHz
 - Detector = Peak
 - Sweep time = auto
 - Trace mode = max hold
 - (3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz
 - RBW = 1 MHz
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW \geq 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.4.4 Test Setup


For radiated emissions below 30MHz

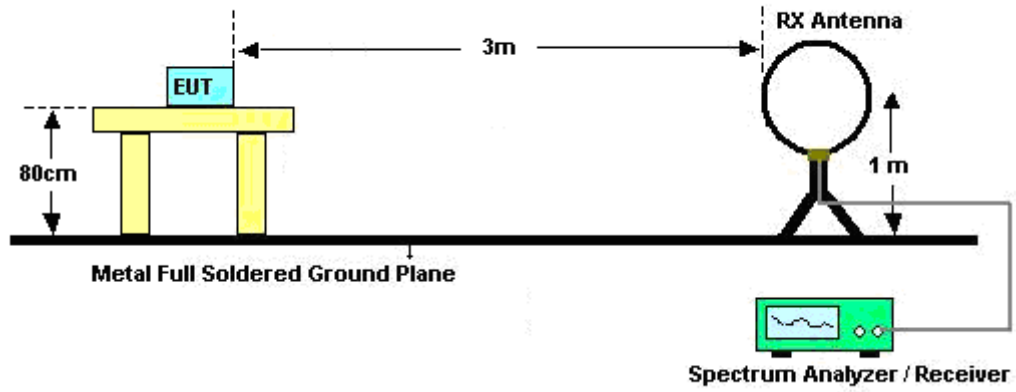

For radiated emissions from 30MHz to 1GHz

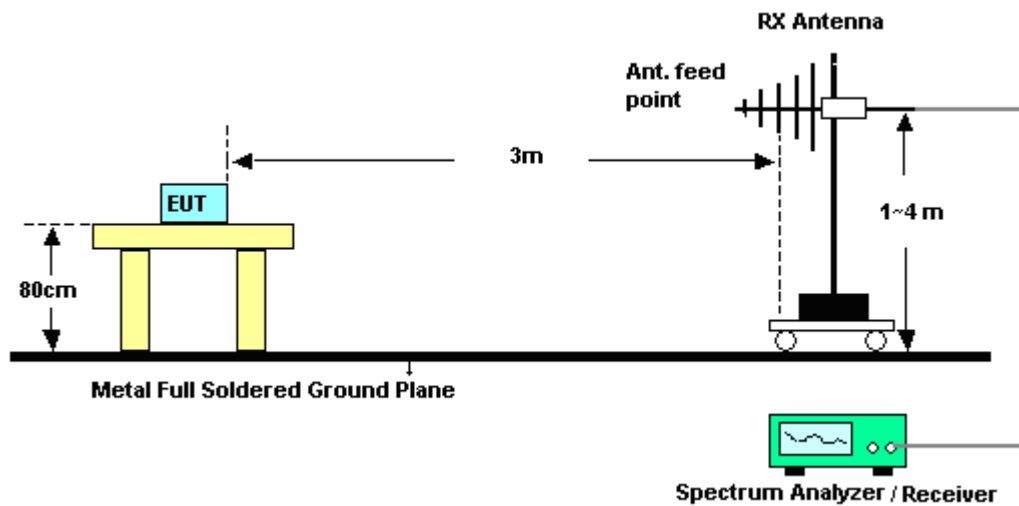

For radiated emissions above 1GHz

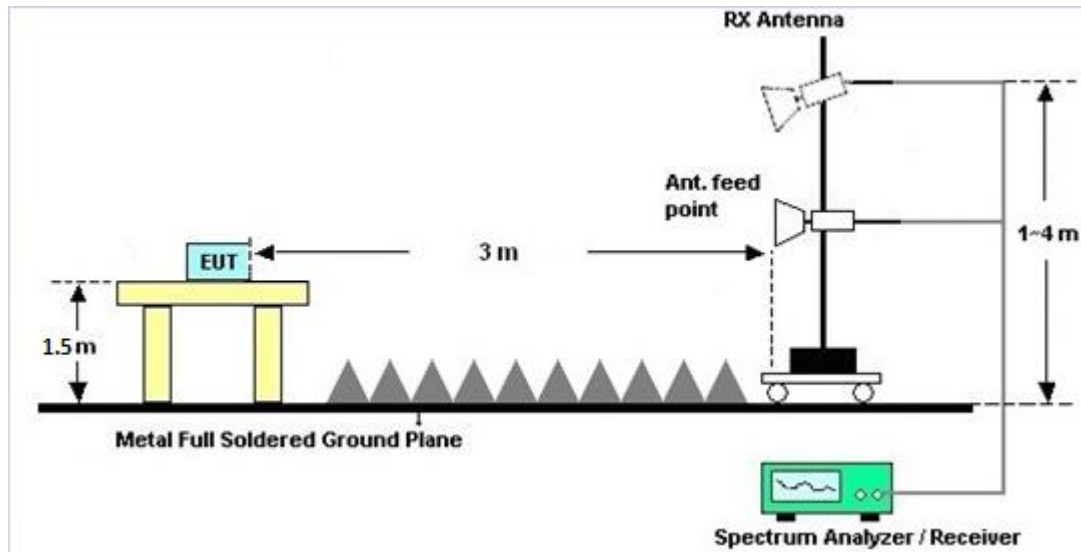

3.4.5 Test Results of Radiated Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.

3.4.6 Test Result of Radiated Band Edges

Please refer to Appendix C and D.

3.4.7 Duty Cycle

Please refer to Appendix E.

3.4.8 Test Result of Unwanted Radiated Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix C and D.



3.5 AC Conducted Emission Measurement

3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.5.2 Measuring Instruments

See list of measuring equipment of this test report.

3.5.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.5.4 Test Setup

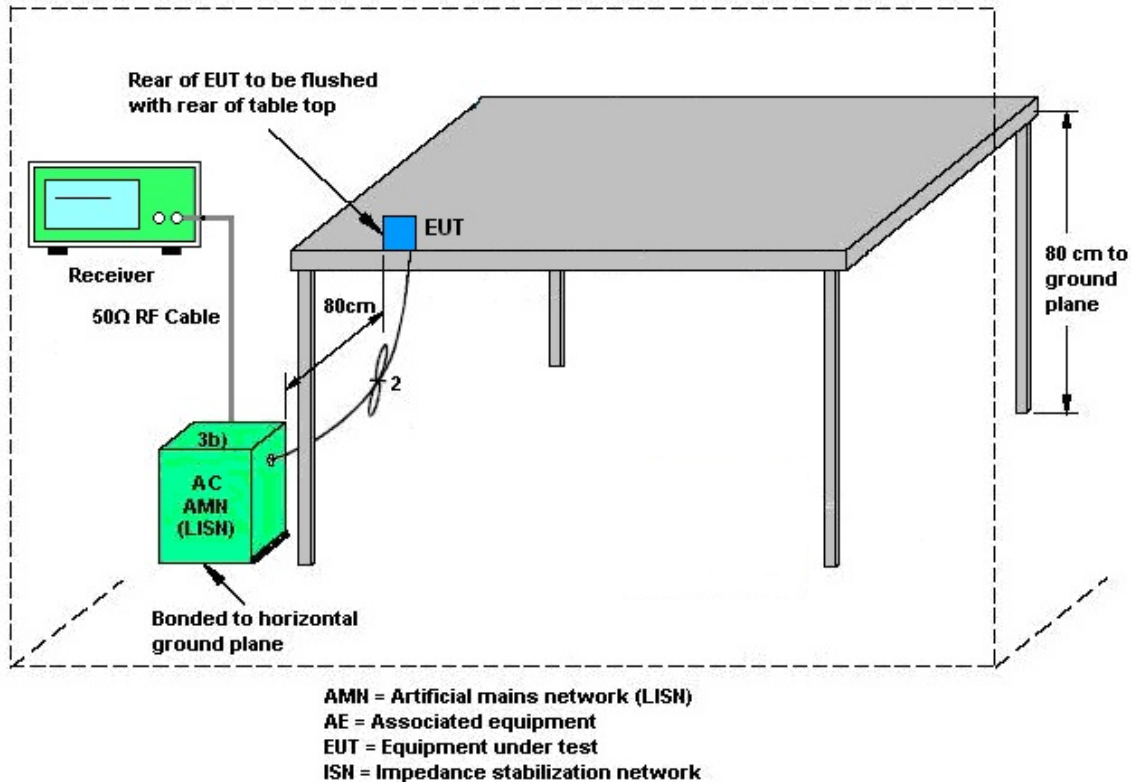

3.5.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.6 Automatically Discontinue Transmission

3.6.1 Limit of Automatically Discontinue Transmission

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

3.6.2 Measuring Instruments

See list of measuring equipment of this test report.

3.6.3 Test Result of Automatically Discontinue Transmission


EUT is verified this characteristic during the function check of normal sample associated with an access point:

- A. Information start: make EUT supply information to the access point.
- B. Information stop: stop supplying information to the access point.

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving.

- C. Information start: make EUT supply information to the access point again.

The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.

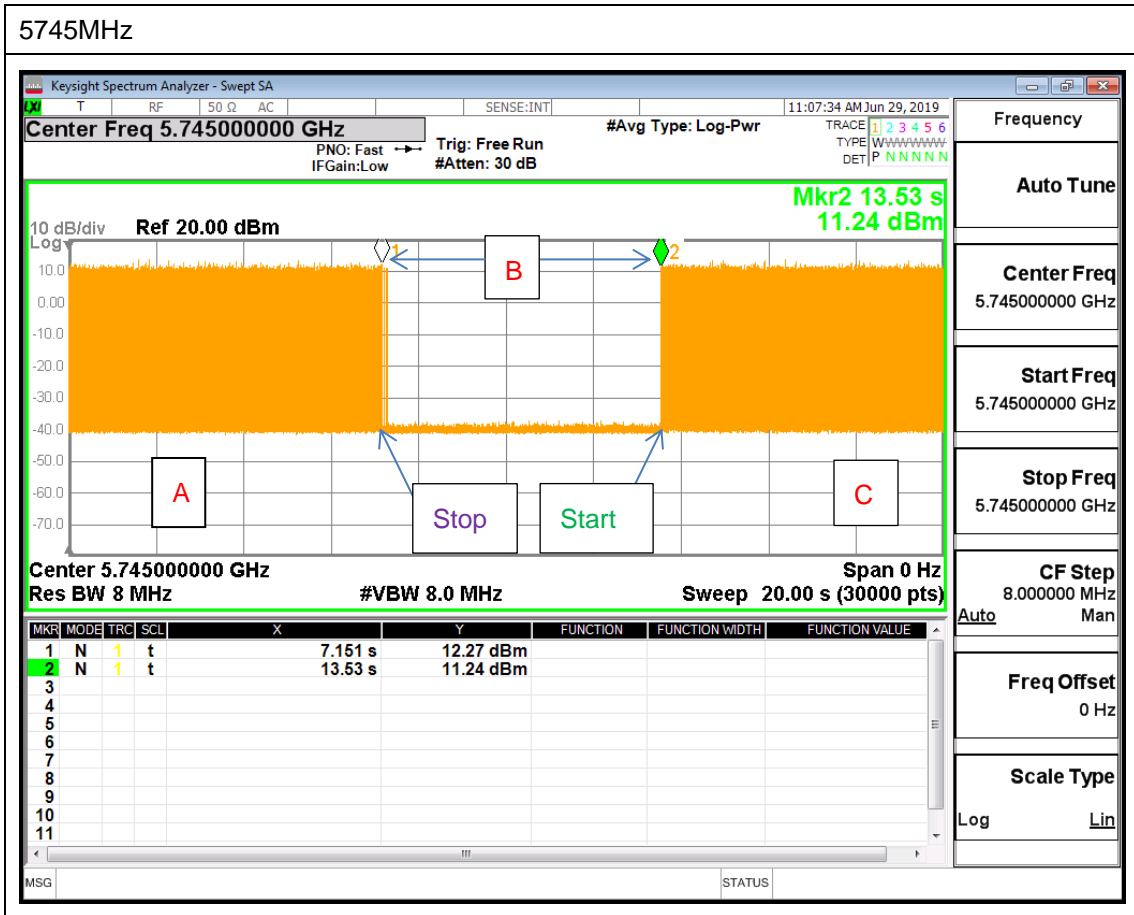

Note: The control / signaling information during the period B is precluded.



3.7 Antenna Requirements

3.7.1 Standard Applicable

If transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

<CDD Modes >

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

For CDD transmissions, directional gain is calculated as

Directional gain = GANT + Array Gain, where Array Gain is as follows.

For power spectral density (PSD) measurements on all devices,

Array Gain = 10 log(NANT/NSS=1) dB.

For power measurements on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for NANT ≤ 4.

Directional gain may be calculated by using the formulas applicable to equal gain antennas with

GANT set equal to the gain of the antenna having the highest gain;

The EUT supports CDD mode.

For power, the directional gain GANT is set equal to the antenna having the highest gain, i.e., F)2)f)i).

For PSD, the directional gain calculation is following F)2)f)ii) of KDB 662911 D01 v02r01.

The power and PSD limit should be modified if the directional gain of EUT is over 6 dBi,

The directional gain "DG" is calculated as following table.

<CDD Modes>						
			DG	DG	Power	PSD
	Ant. 1	Ant. 2	for	for	Limit	Limit
	(dBi)	(dBi)	Power	PSD	Reduction	Reduction
			(dBi)	(dBi)	(dB)	(dB)
Band IV	1.71	1.95	4.84	4.84	0.00	0.00

Power Limit Reduction = DG(Power) – 6dBi, (min = 0)

PSD Limit Reduction = DG(PSD) – 6dBi, (min = 0)



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Power Sensor	DARE	RPR3006W	13I00030S NO32	9kHz~6GHz	Dec. 03, 2018	Jun. 10, 2019~ Jun. 28, 2019	Dec. 02, 2019	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV40	101397	10Hz~40GHz	Nov. 13, 2018	Jun. 10, 2019~ Jun. 28, 2019	Nov. 12, 2019	Conducted (TH05-HY)
Switch Box & RF Cable	Burgeon	ETF-058	EC120838 2	N/A	Mar. 27, 2019	Jun. 10, 2019~ Jun. 28, 2019	Mar. 26, 2020	Conducted (TH05-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz~30 MHz	Jan. 11, 2019	Jun. 13, 2019~ Jun. 24, 2019	Jan. 10, 2020	Radiation (03CH16-HY)
Bilog Antenna	TESEQ	CBL6111D&0 0802N1D01N- 06	47020&06	30MHz to 1GHz	Oct. 13, 2018	Jun. 13, 2019~ Jun. 24, 2019	Oct. 12, 2019	Radiation (03CH16-HY)
Horn Antenna	SCHWARZBE CK	BBHA 9120 D	9120D-152 2	1G~18GHz	Sep. 07, 2018	Jun. 13, 2019~ Jun. 24, 2019	Sep. 06, 2019	Radiation (03CH16-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA 9170	BBHA9170 251	18GHz ~ 40GHz	Nov. 20, 2018	Jun. 13, 2019~ Jun. 24, 2019	Nov. 19, 2019	Radiation (03CH16-HY)
Amplifier	SONOMA	310N	371607	9kHz~1000MHz	Oct. 02, 2018	Jun. 13, 2019~ Jun. 24, 2019	Oct. 01, 2019	Radiation (03CH16-HY)
Preamplifier	Jet-Power	JPA0118-55-3 03	171000180 0055007	1GHz~18GHz	Apr. 01, 2019	Jun. 13, 2019~ Jun. 24, 2019	Mar. 31, 2020	Radiation (03CH16-HY)
Preamplifier	Keysight	83017A	MY532702 64	1GHz~26.5GHz	Dec. 12, 2018	Jun. 13, 2019~ Jun. 24, 2019	Dec. 11, 2019	Radiation (03CH16-HY)
Amplifier	MITEQ	TTA1840-35- HG	1871923	18GHz~40GHz, VSWR : 2.5:1 max	Jul. 16, 2018	Jun. 13, 2019~ Jun. 24, 2019	Jul. 15, 2019	Radiation (03CH16-HY)
EMI Test Receiver	Keysight	N9038A (MXE)	MY572901 11	3Hz~26.5GHz	Nov. 29, 2018	Jun. 13, 2019~ Jun. 24, 2019	Nov. 28, 2019	Radiation (03CH16-HY)
Spectrum Analyzer	Agilent	N9010A	MY542004 86	10Hz~44GHz	Oct. 19, 2018	Jun. 13, 2019~ Jun. 24, 2019	Oct. 18, 2019	Radiation (03CH16-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 126E	MY1082/2 6EA	30M-18G	Oct. 15, 2018	Jun. 13, 2019~ Jun. 24, 2019	Oct. 14, 2019	Radiation (03CH16-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY15539/ 4	30M-18G	Feb. 26, 2019	Jun. 13, 2019~ Jun. 24, 2019	Feb. 25, 2020	Radiation (03CH16-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY36980/ 4	30M~18GHz	Apr. 15, 2019	Jun. 13, 2019~ Jun. 24, 2019	Apr. 14, 2020	Radiation (03CH16-HY)
Software	Audix	E3 6.2009-8-24	RK-001136	N/A	N/A	Jun. 13, 2019~ Jun. 24, 2019	N/A	Radiation (03CH16-HY)
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Jun. 16, 2019	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102388	9KHz~3.6GHz	Nov. 12, 2018	Jun. 16, 2019	Nov. 11, 2019	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100080	9kHz~30MHz	Nov. 14, 2018	Jun. 16, 2019	Nov. 13, 2019	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100081	9kHz~30MHz	Nov. 09, 2018	Jun. 16, 2019	Nov. 08, 2019	Conduction (CO05-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	Jun. 16, 2019	N/A	Conduction (CO05-HY)
LF Cable	HUBER + SUHNER	RG-214/U	LF01	N/A	Dec. 31, 2018	Jun. 16, 2019	Dec. 30, 2019	Conduction (CO05-HY)
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100851	N/A	Dec. 31, 2018	Jun. 16, 2019	Dec. 30, 2019	Conduction (CO05-HY)
Spectrum Analyzer	Keysight	N9010A	MY560704 12	10Hz~7GHz	Aug. 16, 2018	Jun. 29, 2019	Aug. 15, 2019	DFS (DFS02-HY)



5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.2
---	-----

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.9
---	-----

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	6.7
---	-----

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.9
---	-----

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Luffy Lin/Richard Qiu	Temperature:	21~25	°C
Test Date:	2019/6/10~2019/6/28	Relative Humidity:	51~54	%
TX Tool	QRCT 4.0	TX Tool Version		

TEST RESULTS DATA
6dB and 26dB EBW and 99% OBW

Band IV												
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26dB Bandwidth (MHz)		6 dB Bandwidth (MHz)		6 dB Bandwidth Min. Limit (MHz)	Pass/Fail
					Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2		
11a	6Mbps	2	149	5745	17.85	17.85	26.00	25.15	15.50	16.00	0.5	Pass
11a	6Mbps	2	157	5785	17.90	17.85	25.25	25.45	15.10	16.55	0.5	Pass
11a	6Mbps	2	165	5825	17.90	17.90	25.75	25.90	16.00	15.65	0.5	Pass
VHT20	MCS0	2	149	5745	17.85	17.85	25.40	24.90	16.00	15.10	0.5	Pass
VHT20	MCS0	2	157	5785	17.90	17.80	25.50	24.60	15.95	15.45	0.5	Pass
VHT20	MCS0	2	165	5825	17.85	17.85	25.90	25.00	16.10	15.45	0.5	Pass
VHT40	MCS0	2	151	5755	36.70	36.50	41.94	41.94	35.93	35.15	0.5	Pass
VHT40	MCS0	2	159	5795	36.60	36.50	41.88	42.12	35.15	35.33	0.5	Pass
VHT80	MCS0	2	155	5775	76.80	76.68	84.80	83.20	75.12	75.23	0.5	Pass

TEST RESULTS DATA
Average Power Table

Band IV												
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail
					Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	1	149	5745	17.90	17.70		30.00	30.00	1.71	1.95	Pass
11a	6Mbps	1	157	5785	18.20	18.00		30.00	30.00	1.71	1.95	Pass
11a	6Mbps	1	165	5825	18.20	18.60		30.00	30.00	1.71	1.95	Pass
HT20	MCS0	1	149	5745	17.70	17.50		30.00	30.00	1.71	1.95	Pass
HT20	MCS0	1	157	5785	17.90	17.80		30.00	30.00	1.71	1.95	Pass
HT20	MCS0	1	165	5825	18.00	18.20		30.00	30.00	1.71	1.95	Pass
HT40	MCS0	1	151	5755	18.30	18.10		30.00	30.00	1.71	1.95	Pass
HT40	MCS0	1	159	5795	18.50	18.50		30.00	30.00	1.71	1.95	Pass
VHT20	MCS0	1	149	5745	17.80	17.70		30.00	30.00	1.71	1.95	Pass
VHT20	MCS0	1	157	5785	18.00	17.90		30.00	30.00	1.71	1.95	Pass
VHT20	MCS0	1	165	5825	18.10	18.30		30.00	30.00	1.71	1.95	Pass
VHT40	MCS0	1	151	5755	18.40	18.20		30.00	30.00	1.71	1.95	Pass
VHT40	MCS0	1	159	5795	18.60	18.60		30.00	30.00	1.71	1.95	Pass
VHT80	MCS0	1	155	5775	18.30	18.20		30.00	30.00	1.71	1.95	Pass
11a	6Mbps	2	149	5745	18.00	17.80	20.91	30.00		1.95		Pass
11a	6Mbps	2	157	5785	18.30	18.10	21.21	30.00		1.95		Pass
11a	6Mbps	2	165	5825	18.30	18.70	21.51	30.00		1.95		Pass
HT20	MCS0	2	149	5745	17.90	17.60	20.76	30.00		1.95		Pass
HT20	MCS0	2	157	5785	18.00	17.90	20.96	30.00		1.95		Pass
HT20	MCS0	2	165	5825	18.10	18.40	21.26	30.00		1.95		Pass
HT40	MCS0	2	151	5755	18.40	18.20	21.31	30.00		1.95		Pass
HT40	MCS0	2	159	5795	18.60	18.60	21.61	30.00		1.95		Pass
VHT20	MCS0	2	149	5745	17.90	17.80	20.86	30.00		1.95		Pass
VHT20	MCS0	2	157	5785	18.10	18.00	21.06	30.00		1.95		Pass
VHT20	MCS0	2	165	5825	18.20	18.40	21.31	30.00		1.95		Pass
VHT40	MCS0	2	151	5755	18.50	18.30	21.41	30.00		1.95		Pass
VHT40	MCS0	2	159	5795	18.70	18.70	21.71	30.00		1.95		Pass
VHT80	MCS0	2	155	5775	18.40	18.30	21.36	30.00		1.95		Pass

TEST RESULTS DATA
Power Spectral Density

Band IV																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		10log (500kHz /RBW) Factor (dB)		Average Power Density (dBm/500kHz)			Average PSD Limit (dBm/500kHz)		DG (dBi)		Pass /Fail
					Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	2	149	5745	0.00	0.00	2.22		8.85	8.54	11.86	30.00		4.84		Pass
11a	6Mbps	2	157	5785	0.00	0.00	2.22		8.66	9.19	12.20	30.00		4.84		Pass
11a	6Mbps	2	165	5825	0.00	0.00	2.22		9.42	9.22	12.43	30.00		4.84		Pass
VHT20	MCS0	2	149	5745	0.00	0.00	2.22		8.44	8.40	11.45	30.00		4.84		Pass
VHT20	MCS0	2	157	5785	0.00	0.00	2.22		9.85	8.48	12.86	30.00		4.84		Pass
VHT20	MCS0	2	165	5825	0.00	0.00	2.22		9.11	9.79	12.80	30.00		4.84		Pass
VHT40	MCS0	2	151	5755	0.00	0.00	2.22		5.47	5.15	8.48	30.00		4.84		Pass
VHT40	MCS0	2	159	5795	0.00	0.00	2.22		6.19	5.88	9.20	30.00		4.84		Pass
VHT80	MCS0	2	155	5775	0.00	0.00	2.22		3.37	3.27	6.38	30.00		4.84		Pass

Note: PSD Sum = Max PSD(Ant. 1, Ant. 2) + 10 log (n)




Appendix B. AC Conducted Emission Test Results

Test Engineer :	Jimmy Chang	Temperature :	24~26°C
		Relative Humidity :	52~54%

EUT Information

Report NO : 952407
 Test Mode : Mode 1
 Test Voltage : 120Vac/60Hz
 Phase : Line

Full Spectrum

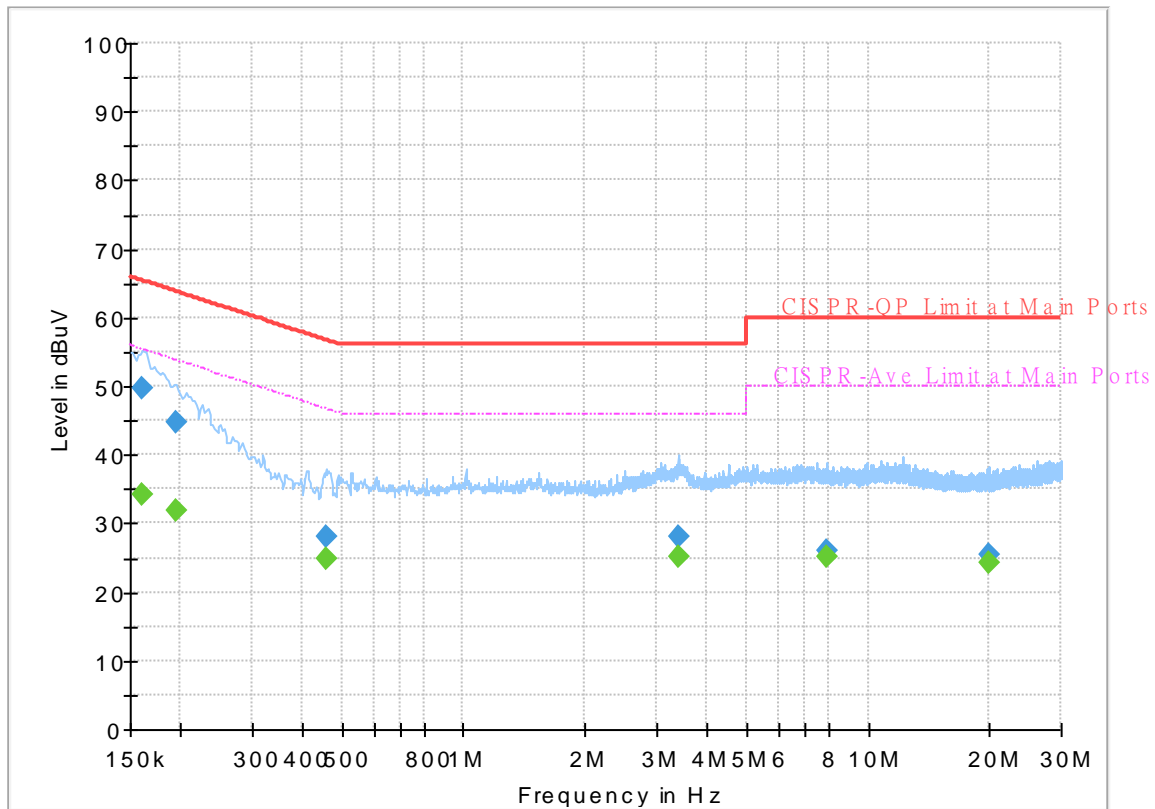


Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.161250	---	34.34	55.40	21.06	L1	OFF	19.5
0.161250	49.69	---	65.40	15.71	L1	OFF	19.5
0.195000	---	31.73	53.82	22.09	L1	OFF	19.5
0.195000	44.60	---	63.82	19.22	L1	OFF	19.5
0.456000	---	24.75	46.77	22.02	L1	OFF	19.5
0.456000	28.14	---	56.77	28.63	L1	OFF	19.5
3.385500	---	25.25	46.00	20.75	L1	OFF	19.7
3.385500	27.93	---	56.00	28.07	L1	OFF	19.7
7.878750	---	25.01	50.00	24.99	L1	OFF	19.8
7.878750	26.12	---	60.00	33.88	L1	OFF	19.8
19.999500	---	24.37	50.00	25.63	L1	OFF	20.3
19.999500	25.46	---	60.00	34.54	L1	OFF	20.3

EUT Information

Report NO : 952407
 Test Mode : Mode 1
 Test Voltage : 120Vac/60Hz
 Phase : Neutral

Full Spectrum

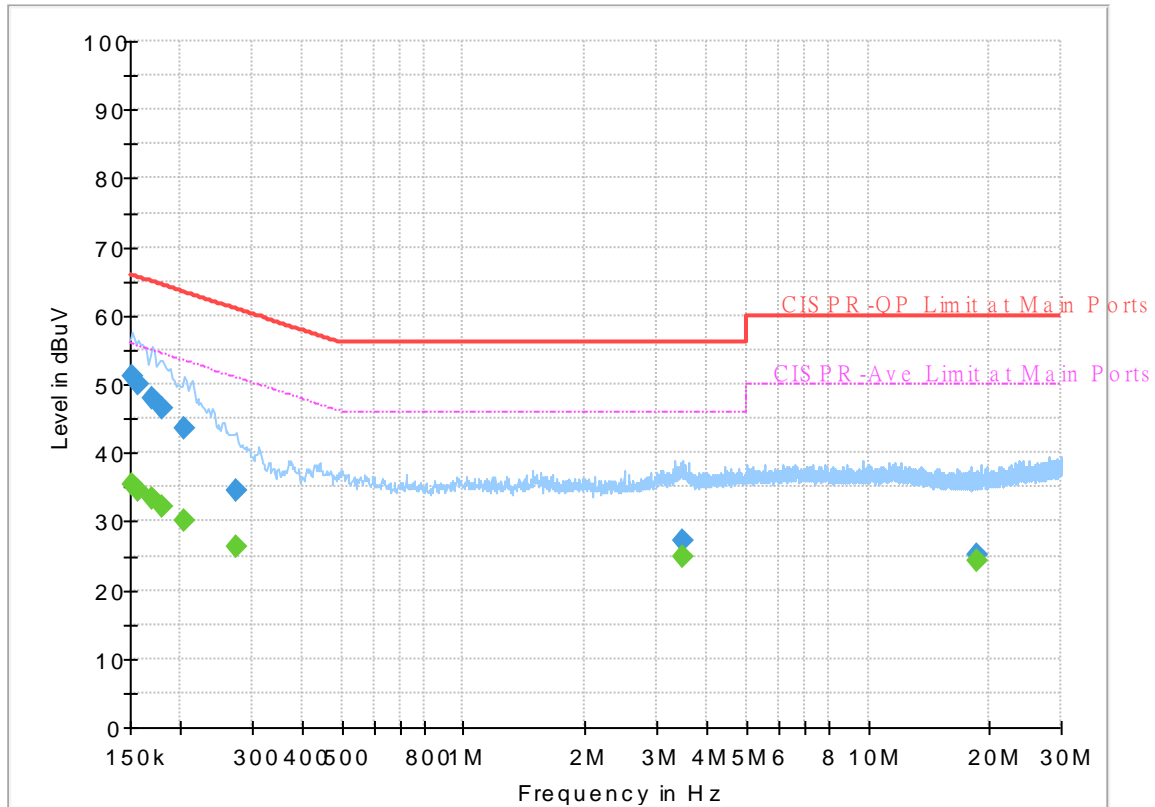

Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.152250	---	35.37	55.88	20.51	N	OFF	19.5
0.152250	51.06	---	65.88	14.82	N	OFF	19.5
0.156750	---	34.38	55.63	21.25	N	OFF	19.5
0.156750	50.15	---	65.63	15.48	N	OFF	19.5
0.170250	---	33.41	54.95	21.54	N	OFF	19.5
0.170250	48.04	---	64.95	16.91	N	OFF	19.5
0.179250	---	32.29	54.52	22.23	N	OFF	19.5
0.179250	46.47	---	64.52	18.05	N	OFF	19.5
0.204000	---	30.09	53.45	23.36	N	OFF	19.5
0.204000	43.67	---	63.45	19.78	N	OFF	19.5
0.273750	---	26.18	51.00	24.82	N	OFF	19.5
0.273750	34.43	---	61.00	26.57	N	OFF	19.5
3.482250	---	24.72	46.00	21.28	N	OFF	19.7
3.482250	27.22	---	56.00	28.78	N	OFF	19.7
18.579750	---	24.30	50.00	25.70	N	OFF	20.3
18.579750	25.23	---	60.00	34.77	N	OFF	20.3



Appendix C. Radiated Spurious Emission

Test Engineer :	Jacky Hung, Austin Li, CR Liao	Temperature :	20~25°C
		Relative Humidity :	50~60%

Band 4 - 5725~5850MHz

WIFI 802.11a (Band Edge @ 3m)

WIFI Ant.	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 149 5745MHz		5619.8	55.75	-12.45	68.2	39.38	32.46	13.71	29.8	200	244	P	H
		5695.2	58.72	-42.94	101.66	42	32.63	13.92	29.83	200	244	P	H
		5719.8	59.67	-51.07	110.74	42.86	32.68	13.98	29.85	200	244	P	H
		5723	62.66	-54.98	117.64	45.83	32.69	13.99	29.85	200	244	P	H
	*	5745	116.86	-	-	99.93	32.74	14.05	29.86	200	244	P	H
	*	5745	108.61	-	-	91.68	32.74	14.05	29.86	200	244	A	H
		5625	56.47	-11.73	68.2	40.07	32.47	13.73	29.8	216	107	P	V
		5694.8	58.46	-42.91	101.37	41.74	32.63	13.92	29.83	216	107	P	V
		5719	63.14	-47.38	110.52	46.33	32.68	13.98	29.85	216	107	P	V
		5725	66.1	-56.1	122.2	49.26	32.69	14	29.85	216	107	P	V
	*	5745	118.8	-	-	101.87	32.74	14.05	29.86	216	107	P	V
	*	5745	111.29	-	-	94.36	32.74	14.05	29.86	216	107	A	V



WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBµV/m)	Over Limit (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 157 5785MHz		5648.8	55.34	-12.86	68.2	38.83	32.53	13.79	29.81	215	243	P	H
		5698.4	56.29	-47.73	104.02	39.56	32.64	13.93	29.84	215	243	P	H
		5718	57.03	-53.21	110.24	40.21	32.68	13.98	29.84	215	243	P	H
		5720.2	57.86	-53.4	111.26	41.05	32.68	13.98	29.85	215	243	P	H
	*	5785	117.07	-	-	99.96	32.83	14.16	29.88	215	243	P	H
	*	5785	109.56	-	-	92.45	32.83	14.16	29.88	215	243	A	H
		5853	56.76	-58.6	115.36	39.67	32.98	14.02	29.91	215	243	P	H
		5857	56.65	-53.59	110.24	39.56	32.99	14.01	29.91	215	243	P	H
		5878.4	56.21	-46.46	102.67	39.16	33.03	13.94	29.92	215	243	P	H
		5933.2	55.75	-12.45	68.2	38.8	33.15	13.75	29.95	215	243	P	H
		5625	55.89	-12.31	68.2	39.49	32.47	13.73	29.8	210	106	P	V
		5695.8	56.24	-45.86	102.1	39.52	32.63	13.92	29.83	210	106	P	V
		5710.8	57.79	-50.44	108.23	41.01	32.66	13.96	29.84	210	106	P	V
		5722.4	58.13	-58.14	116.27	41.3	32.69	13.99	29.85	210	106	P	V
	*	5785	119.31	-	-	102.2	32.83	14.16	29.88	210	106	P	V
	*	5785	111.59	-	-	94.48	32.83	14.16	29.88	210	106	A	V
		5850.2	58.9	-62.84	121.74	41.81	32.97	14.03	29.91	210	106	P	V
		5863.8	57.21	-51.12	108.33	40.13	33	13.99	29.91	210	106	P	V
		5904.4	57.65	-25.76	83.41	40.64	33.09	13.85	29.93	210	106	P	V
	5936.2	55.91	-12.29	68.2	38.96	33.16	13.74	29.95	210	106	P	V	



WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 165 5825MHz	*	5825	117.02	-	-	99.88	32.92	14.12	29.9	191	245	P	H
	*	5825	109.39	-	-	92.25	32.92	14.12	29.9	191	245	A	H
		5854.4	61.1	-51.07	112.17	44.01	32.98	14.02	29.91	191	245	P	H
		5858.8	60.86	-48.87	109.73	43.78	32.99	14	29.91	191	245	P	H
		5882.4	58.13	-41.57	99.7	41.09	33.04	13.92	29.92	191	245	P	H
		5942.8	55.96	-12.24	68.2	39.02	33.17	13.72	29.95	191	245	P	H
	*	5825	119.22	-	-	102.08	32.92	14.12	29.9	208	105	P	V
	*	5825	111.57	-	-	94.43	32.92	14.12	29.9	208	105	A	V
		5855	62.45	-48.35	110.8	45.36	32.98	14.02	29.91	208	105	P	V
		5875.4	62.2	-42.7	104.9	45.14	33.03	13.95	29.92	208	105	P	V
		5898.2	59.22	-28.77	87.99	42.2	33.08	13.87	29.93	208	105	P	V
		5925.4	56.28	-11.92	68.2	39.3	33.14	13.78	29.94	208	105	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz
WIFI 802.11ac VHT20 (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT20 CH 149 5745MHz		5641.4	55.75	-12.45	68.2	39.28	32.51	13.77	29.81	198	243	P	H
		5697.2	58.4	-44.74	103.14	41.68	32.63	13.92	29.83	198	243	P	H
		5720	62.38	-48.42	110.8	45.57	32.68	13.98	29.85	198	243	P	H
		5723.8	64.82	-54.64	119.46	47.99	32.69	13.99	29.85	198	243	P	H
	*	5745	115.8	-	-	98.87	32.74	14.05	29.86	198	243	P	H
	*	5745	108.18	-	-	91.25	32.74	14.05	29.86	198	243	A	H
		5638.8	55.52	-12.68	68.2	39.06	32.51	13.76	29.81	202	108	P	V
		5695	58.22	-43.29	101.51	41.5	32.63	13.92	29.83	202	108	P	V
		5716.8	61.57	-48.34	109.91	44.75	32.68	13.98	29.84	202	108	P	V
		5722.8	64.28	-52.9	117.18	47.45	32.69	13.99	29.85	202	108	P	V
	*	5745	117.92	-	-	100.99	32.74	14.05	29.86	202	108	P	V
*	5745	109.56	-	-	92.63	32.74	14.05	29.86	202	108	A	V	



WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBµV/m)	Over Limit (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT20 CH 157 5785MHz		5639.4	55.91	-12.29	68.2	39.44	32.51	13.77	29.81	202	241	P	H
		5681.8	56.78	-34.99	91.77	40.13	32.6	13.88	29.83	202	241	P	H
		5714.8	56.52	-52.83	109.35	39.72	32.67	13.97	29.84	202	241	P	H
		5724.8	56.81	-64.93	121.74	39.97	32.69	14	29.85	202	241	P	H
	*	5785	116.47	-	-	99.36	32.83	14.16	29.88	202	241	P	H
	*	5785	108.75	-	-	91.64	32.83	14.16	29.88	202	241	A	H
		5852.4	56.81	-59.92	116.73	39.72	32.98	14.02	29.91	202	241	P	H
		5867.8	56.66	-50.55	107.21	39.6	33.01	13.97	29.92	202	241	P	H
		5876	56.2	-48.26	104.46	39.14	33.03	13.95	29.92	202	241	P	H
		5929	54.98	-13.22	68.2	38.02	33.14	13.77	29.95	202	241	P	H
		5640.2	55.62	-12.58	68.2	39.15	32.51	13.77	29.81	197	107	P	V
		5699.8	56.29	-48.76	105.05	39.56	32.64	13.93	29.84	197	107	P	V
		5703.6	58.04	-48.17	106.21	41.29	32.65	13.94	29.84	197	107	P	V
		5722.2	58.27	-57.55	115.82	41.44	32.69	13.99	29.85	197	107	P	V
	*	5785	118.62	-	-	101.51	32.83	14.16	29.88	197	107	P	V
	*	5785	110.45	-	-	93.34	32.83	14.16	29.88	197	107	A	V
		5850.8	57.9	-62.48	120.38	40.81	32.97	14.03	29.91	197	107	P	V
		5859.4	58.81	-50.76	109.57	41.73	32.99	14	29.91	197	107	P	V
	5893.6	57.19	-34.21	91.4	40.16	33.07	13.89	29.93	197	107	P	V	
	5947.4	56.02	-12.18	68.2	39.08	33.18	13.71	29.95	197	107	P	V	



WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT20 CH 165 5825MHz	*	5825	116.19	-	-	99.05	32.92	14.12	29.9	207	249	P	H
	*	5825	108.12	-	-	90.98	32.92	14.12	29.9	207	249	A	H
		5851.6	61.81	-56.74	118.55	44.72	32.97	14.03	29.91	207	249	P	H
		5856.4	58.86	-51.55	110.41	41.78	32.98	14.01	29.91	207	249	P	H
		5877.2	58.07	-45.5	103.57	41.02	33.03	13.94	29.92	207	249	P	H
		5935	56.87	-11.33	68.2	39.91	33.16	13.75	29.95	207	249	P	H
	*	5825	119.03	-	-	101.89	32.92	14.12	29.9	220	109	P	V
	*	5825	111.3	-	-	94.16	32.92	14.12	29.9	220	109	A	V
		5850	63.2	-59	122.2	46.11	32.97	14.03	29.91	220	109	P	V
		5873.6	61.01	-44.58	105.59	43.96	33.02	13.95	29.92	220	109	P	V
		5875.8	60.16	-44.45	104.61	43.1	33.03	13.95	29.92	220	109	P	V
		5930.8	56.86	-11.34	68.2	39.9	33.15	13.76	29.95	220	109	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11ac VHT20 (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11ac		11490	47.02	-26.98	74	51.13	39.71	18.37	62.19	100	0	P	H
VHT20		17235	51.3	-16.9	68.2	43.99	43.12	23.27	59.08	100	0	P	H
CH 149		11490	46.16	-27.84	74	50.27	39.71	18.37	62.19	100	0	P	V
5745MHz		17235	52.12	-16.08	68.2	44.81	43.12	23.27	59.08	100	0	P	V
802.11ac		11570	47.26	-26.74	74	51.48	39.6	18.44	62.26	100	0	P	H
VHT20		17355	51.41	-16.79	68.2	43.05	43.75	23.43	58.82	100	0	P	H
CH 157		11570	46.64	-27.36	74	50.86	39.6	18.44	62.26	100	0	P	V
5785MHz		17355	51.81	-16.39	68.2	43.45	43.75	23.43	58.82	100	0	P	V
802.11ac		11650	46.1	-27.9	74	50.43	39.49	18.5	62.32	100	0	P	H
VHT20		17475	51.78	-16.42	68.2	42.38	44.37	23.59	58.56	100	0	P	H
CH 165		11650	45.7	-28.3	74	50.03	39.49	18.5	62.32	100	0	P	V
5825MHz		17475	51.35	-16.85	68.2	41.95	44.37	23.59	58.56	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11ac VHT40 (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preampl	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11ac VHT40 CH 151 5755MHz		5637.4	54.24	-13.96	68.2	37.79	32.5	13.76	29.81	207	245	P	H
		5699	59.5	-44.96	104.46	42.77	32.64	13.93	29.84	207	245	P	H
		5718.2	63.23	-47.07	110.3	46.41	32.68	13.98	29.84	207	245	P	H
		5723.4	63.23	-55.32	118.55	46.4	32.69	13.99	29.85	207	245	P	H
	*	5755	112.25	-	-	95.27	32.76	14.08	29.86	207	245	P	H
	*	5755	104.52	-	-	87.54	32.76	14.08	29.86	207	245	A	H
		5853.6	54.07	-59.92	113.99	36.98	32.98	14.02	29.91	207	245	P	H
		5871.4	55.3	-50.91	106.21	38.24	33.02	13.96	29.92	207	245	P	H
		5902.6	55.34	-29.4	84.74	38.32	33.09	13.86	29.93	207	245	P	H
		5929.4	54.83	-13.37	68.2	37.87	33.14	13.77	29.95	207	245	P	H
		5648	55.06	-13.14	68.2	38.55	32.53	13.79	29.81	202	86	P	V
		5698	58.39	-45.34	103.73	41.67	32.64	13.92	29.84	202	86	P	V
		5717.4	62.94	-47.13	110.07	46.12	32.68	13.98	29.84	202	86	P	V
		5722.2	65.64	-50.18	115.82	48.81	32.69	13.99	29.85	202	86	P	V
	*	5755	113.46	-	-	96.48	32.76	14.08	29.86	202	86	P	V
	*	5755	105.58	-	-	88.6	32.76	14.08	29.86	202	86	A	V
		5850	55.63	-66.57	122.2	38.54	32.97	14.03	29.91	202	86	P	V
		5859.8	55.74	-53.71	109.45	38.66	32.99	14	29.91	202	86	P	V
	5896.2	55.58	-33.89	89.47	38.56	33.07	13.88	29.93	202	86	P	V	
	5940.6	55.35	-12.85	68.2	38.4	33.17	13.73	29.95	202	86	P	V	



WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBµV/m)	Over Limit (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT40 CH 159 5795MHz		5603.4	54.26	-13.94	68.2	37.95	32.43	13.67	29.79	212	247	P	H
		5698.4	54.62	-49.4	104.02	37.89	32.64	13.93	29.84	212	247	P	H
		5720	56.85	-53.95	110.8	40.04	32.68	13.98	29.85	212	247	P	H
		5722	57.18	-58.18	115.36	40.35	32.69	13.99	29.85	212	247	P	H
	*	5795	112.91	-	-	95.75	32.85	14.19	29.88	212	247	P	H
	*	5795	104.97	-	-	87.81	32.85	14.19	29.88	212	247	A	H
		5851.4	58.49	-60.52	119.01	41.4	32.97	14.03	29.91	212	247	P	H
		5873.2	57.76	-47.94	105.7	40.71	33.02	13.95	29.92	212	247	P	H
		5878.4	56.5	-46.17	102.67	39.45	33.03	13.94	29.92	212	247	P	H
		5925.8	54.2	-14	68.2	37.22	33.14	13.78	29.94	212	247	P	H
		5612.2	53.33	-14.87	68.2	36.98	32.45	13.69	29.79	214	113	P	V
		5687.6	54.95	-41.1	96.05	38.27	32.61	13.9	29.83	214	113	P	V
		5719	55.7	-54.82	110.52	38.89	32.68	13.98	29.85	214	113	P	V
		5722.6	55.77	-60.96	116.73	38.94	32.69	13.99	29.85	214	113	P	V
	*	5795	113.29	-	-	96.13	32.85	14.19	29.88	214	113	P	V
	*	5795	105.94	-	-	88.78	32.85	14.19	29.88	214	113	A	V
		5850.2	59.07	-62.67	121.74	41.98	32.97	14.03	29.91	214	113	P	V
		5857.2	59.58	-50.6	110.18	42.49	32.99	14.01	29.91	214	113	P	V
	5876.2	57.57	-46.74	104.31	40.52	33.03	13.94	29.92	214	113	P	V	
	5930.8	55.8	-12.4	68.2	38.84	33.15	13.76	29.95	214	113	P	V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11ac VHT80 (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11ac VHT80 CH 155 5775MHz		5641.8	57.5	-10.7	68.2	41.03	32.51	13.77	29.81	207	243	P	H
		5696.8	67.56	-35.28	102.84	50.84	32.63	13.92	29.83	207	243	P	H
		5717.2	71.01	-39.01	110.02	54.19	32.68	13.98	29.84	207	243	P	H
		5721.8	71.18	-43.72	114.9	54.35	32.69	13.99	29.85	207	243	P	H
	*	5775	111.42	-	-	94.35	32.81	14.13	29.87	207	243	P	H
	*	5775	103.39	-	-	86.32	32.81	14.13	29.87	207	243	A	H
		5850	65.23	-56.97	122.2	48.14	32.97	14.03	29.91	207	243	P	H
		5860.6	65.91	-43.32	109.23	48.83	32.99	14	29.91	207	243	P	H
		5878.8	61.13	-41.25	102.38	44.08	33.03	13.94	29.92	207	243	P	H
		5925.6	55.3	-12.9	68.2	38.32	33.14	13.78	29.94	207	243	P	H
		5644.2	58.5	-9.7	68.2	42.01	32.52	13.78	29.81	221	95	P	V
		5699.2	67.87	-36.74	104.61	51.14	32.64	13.93	29.84	221	95	P	V
		5715.4	69.38	-40.13	109.51	52.58	32.67	13.97	29.84	221	95	P	V
		5720.4	70.11	-41.6	111.71	53.29	32.68	13.99	29.85	221	95	P	V
	*	5775	112.95	-	-	95.88	32.81	14.13	29.87	221	95	P	V
	*	5775	105.47	-	-	88.4	32.81	14.13	29.87	221	95	A	V
		5853.4	67.9	-46.55	114.45	50.81	32.98	14.02	29.91	221	95	P	V
		5859.2	68.74	-40.88	109.62	51.66	32.99	14	29.91	221	95	P	V
	5876.2	63.16	-41.15	104.31	46.11	33.03	13.94	29.92	221	95	P	V	
	5938.4	57.78	-10.42	68.2	40.83	33.16	13.74	29.95	221	95	P	V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

5GHz WIFI 802.11ac VHT80 (LF @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
5GHz 802.11ac VHT 80 LF		107.6	24.59	-18.91	43.5	38.99	16.86	1.11	32.37	-	-	P	H
		172.59	27.37	-16.13	43.5	42.72	15.41	1.6	32.36	-	-	P	H
		569.32	26.74	-19.26	46	29.83	25.87	3.69	32.65	-	-	P	H
		740.04	29.51	-16.49	46	29.45	28.08	4.44	32.46	-	-	P	H
		945.68	33.18	-12.82	46	29.34	30.62	4.61	31.39	100	0	P	H
		996.12	34.67	-19.33	54	29.5	30.58	5.53	30.94	-	-	P	H
		74.62	24.5	-15.5	40	43.13	12.82	0.95	32.4	-	-	P	V
		167.74	25.84	-17.66	43.5	40.88	15.74	1.58	32.36	-	-	P	V
		312.27	20.8	-25.2	46	31.28	19.38	2.58	32.44	-	-	P	V
		654.68	27.54	-18.46	46	29.75	26.31	4.08	32.6	-	-	P	V
		863.23	31.97	-14.03	46	30.21	29.11	4.65	32	100	0	P	V
	994.18	34.59	-19.41	54	29.44	30.62	5.49	30.96	-	-	P	V	
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H
2412MHz													

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) = Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
= 55.45 (dBμV/m)
2. Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 55.45(dBμV/m) – 74(dBμV/m)
= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
= 43.54 (dBμV/m)
2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)
= 43.54(dBμV/m) – 54(dBμV/m)
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.





Appendix D. Radiated Spurious Emission Plots

Test Engineer :	Jacky Hung, Austin Li, CR Liao	Temperature :	20~25°C
		Relative Humidity :	50~60%

Band 4 - 5725~5850MHz
WIFI 802.11a (Band Edge @ 3m)

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH149 5745MHz	
1+2	Horizontal	Fundamental
Peak	<p>Site : 03CH16-HY Condition : PEAK_REF(84)_16-24 3m 91200_1522 HORIZONTAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector : Peak Project : 952407</p>	<p>Site : 03CH16-HY Condition : PEAK(UMR)_3m 91200_1522 HORIZONTAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector : Peak Project : 952407</p>

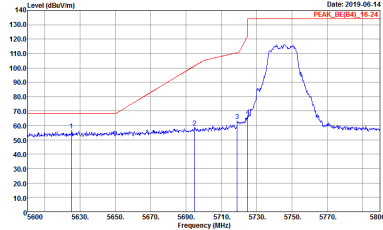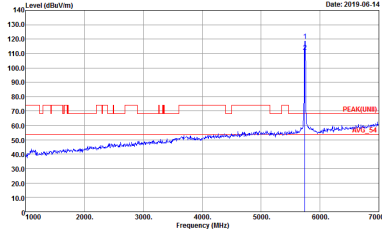

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH149 5745MHz	
1+2	Vertical	Fundamental
Peak	 <p>Site : 03CH16-11Y Condition : PEAK_BE(B4)_16-24 3m 91200_1522 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 952407</p>	 <p>Site : 03CH16-11Y Condition : PEAK(LINII) 3m 91200_1522 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 952407</p>





WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH157 5785MHz	
1+2	Horizontal	Fundamental
Peak	<p>Date: 2019-06-14 PEAK_BE(B4)_16-24</p> <p>Site : 03CH16-HY Condition : PEAK_BE(B4)_16-24 3m 91200_1522 HORIZONTAL Detector : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Project : 952407</p>	<p>Date: 2019-06-14 PEAK(B4)</p> <p>Site : 03CH16-HY Condition : PEAKUNII 3m 91200_1522 HORIZONTAL Detector : Peak Project : 952407</p>
Peak	<p>Date: 2019-06-14 PEAK_BE(B4)_16-24</p> <p>Site : 03CH16-HY Condition : PEAK_BE(B4)_16-24 3m 91200_1522 HORIZONTAL Detector : Peak Project : 952407</p>	Left blank





WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH157 5785MHz	
1+2	Vertical	Fundamental
Peak	<p>Date: 2019-06-14 PEAK_BE(B4)_16-24</p> <p>Site : 03CH16-HY Condition : PEAK_BE(B4)_16-24 3m 91200_1522 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 952407</p>	<p>Date: 2019-06-14 PEAK(B4)</p> <p>Site : 03CH16-HY Condition : PEAK(UNII) 3m 91200_1522 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 952407</p>
	<p>Date: 2019-06-14 PEAK_BE(B4)_16-24</p> <p>Site : 03CH16-HY Condition : PEAK_BE(B4)_16-24 3m 91200_1522 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 952407</p>	Left blank

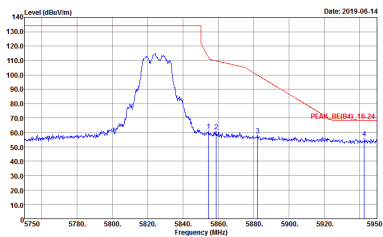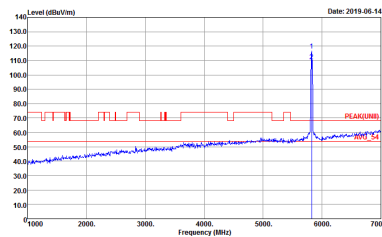

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH165 5825MHz	
1+2	Horizontal	Fundamental
Peak	 <p>Site : 03CH16-11Y Condition : PEAK_BE(B4)_16-24 3m 91200_1522 HORIZONTAL Detector : Peak Project : 952407</p>	 <p>Site : 03CH16-11Y Condition : PEAK(BE) 3m 91200_1522 HORIZONTAL Detector : Peak Project : 952407</p>

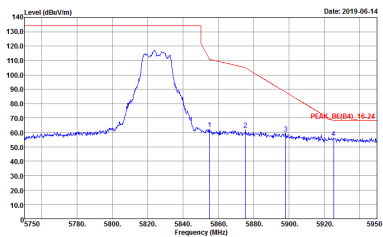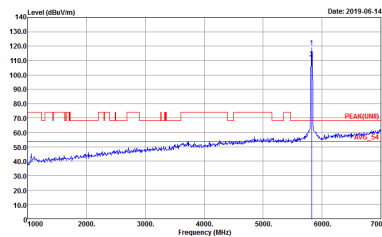



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH165 5825MHz	
1+2	Vertical	Fundamental
Peak	 <p>Site : 03CH16-11Y Condition : PEAK_BE(B4)_16-24 3m 91200_1522 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 952407</p>	 <p>Site : 03CH16-11Y Condition : PEAK(UNII) 3m 91200_1522 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 952407</p>



Band 4 5725~5850MHz
WIFI 802.11ac VHT20 (Band Edge @ 3m)

Table with 2 columns: WIFI (Band 4 5725~5850MHz Band Edge @ 3m), ANT (802.11ac VHT20 CH149 5745MHz). Row 1+2 shows Peak analysis for Horizontal and Fundamental components with associated graphs and metadata.

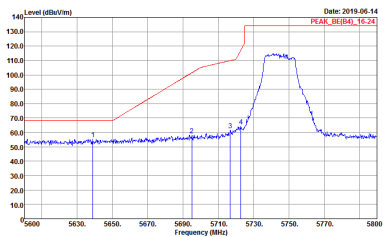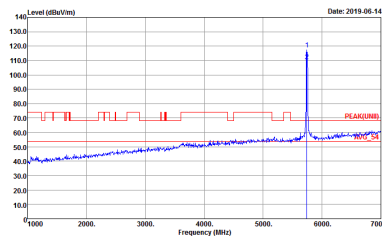

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ac VHT20 CH149 5745MHz	
1+2	Vertical	Fundamental
<p>Peak</p> <p>Avg.</p>	 <p>Site : 03CH16-11Y Condition : PEAK_BE(B4)_16-24 3m 91200_1522 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 952407</p>	 <p>Site : 03CH16-11Y Condition : PEAK(UNII) 3m 91200_1522 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 952407</p>



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ac VHT20 CH157 5785MHz	
1+2	Horizontal	Fundamental
<p>Peak</p>	<p>Date: 2019-06-14 PEAK_BE(B4)_16-24</p> <p>Site : 03CH16-HY Condition : PEAK_BE(B4)_16-24 3m 91200_1522 HORIZONTAL Detector : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Project : 952407</p>	<p>Date: 2019-06-14 PEAK(B4)_16-24</p> <p>Site : 03CH16-HY Condition : PEAKUNII 3m 91200_1522 HORIZONTAL Detector : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Project : 952407</p>
<p>Peak</p>	<p>Date: 2019-06-14 PEAK_BE(B4)_16-24</p> <p>Site : 03CH16-HY Condition : PEAK_BE(B4)_16-24 3m 91200_1522 HORIZONTAL Detector : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Project : 952407</p>	<p>Left blank</p>





WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ac VHT20 CH157 5785MHz	
1+2	Vertical	Fundamental
<p>Peak</p>	<p>Date: 2019-06-14 PEAK_BE(B4)_16-24</p> <p>Site : 03CH16-HY Condition : PEAK_BE(B4)_16-24 3m 91200_1522 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 952407</p>	<p>Date: 2019-06-14 PEAK(B4)</p> <p>Site : 03CH16-HY Condition : PEAK(UNII) 3m 91200_1522 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 952407</p>
<p>Peak</p>	<p>Date: 2019-06-14 PEAK_BE(B4)_16-24</p> <p>Site : 03CH16-HY Condition : PEAK_BE(B4)_16-24 3m 91200_1522 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 952407</p>	<p>Left blank</p>



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ac VHT20 CH165 5825MHz	
1+2	Horizontal	Fundamental
Peak	<p>Site : 03CH16-11Y Condition : PEAK_BE(B4)_16-24 3m 91200_1522 HORIZONTAL Detector : Peak Project : 952407</p>	<p>Site : 03CH16-11Y Condition : PEAK(LINII) 3m 91200_1522 HORIZONTAL Detector : Peak Project : 952407</p>

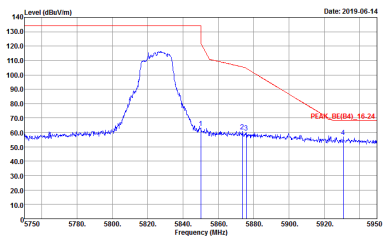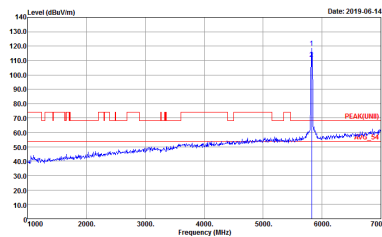

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ac VHT20 CH165 5825MHz	
1+2	Vertical	Fundamental
<p>Peak Avg.</p>	 <p>Site : 03CH16-11Y Condition : PEAK_BE(B4)_16-24 3m 91200_1522 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 952407</p>	 <p>Site : 03CH16-11Y Condition : PEAK(UNII) 3m 91200_1522 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 952407</p>



Band 4 5725~5850MHz
WIFI 802.11ac VHT40 (Band Edge @ 3m)

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ac VHT40 CH151 5755MHz	
1+2	Horizontal	Fundamental
Peak	<p>Site : 03CH16-1FY Condition : PEAK_BE(B4)_16-24 3m 91200_1522 HORIZONTAL Detector : Peak Project : 952407</p>	<p>Site : 03CH16-1FY Condition : PEAK(UNIT) 3m 91200_1522 HORIZONTAL Detector : Peak Project : 952407</p>
Peak	<p>Site : 03CH16-1FY Condition : PEAK_BE(B4)_16-24 3m 91200_1522 HORIZONTAL Detector : Peak Project : 952407</p>	Left blank



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ac VHT40 CH151 5755MHz	
1+2	Vertical	Fundamental
<p>Peak</p>	<p>Date: 2019-06-16 PEAK_BE(B4)_16-24</p> <p>Site : 03CH16-HY Condition : PEAK_BE(B4)_16-24 3m 91200_1522 VERTICAL Detector : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Project : 952407</p>	<p>Date: 2019-06-16 PEAK(B4)</p> <p>Site : 03CH16-HY Condition : PEAK(UNII) 3m 91200_1522 VERTICAL Detector : Peak Project : 952407</p>
<p>Peak</p>	<p>Date: 2019-06-16 PEAK_BE(B4)_16-24</p> <p>Site : 03CH16-HY Condition : PEAK_BE(B4)_16-24 3m 91200_1522 VERTICAL Detector : Peak Project : 952407</p>	<p>Left blank</p>



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ac VHT40 CH159 5795MHz	
1+2	Horizontal	Fundamental
<p>Peak</p>	<p>Date: 2019-06-16 PEAK_BE(B4)_16-24</p> <p>Site : 03CH16-HY Condition : PEAK_BE(B4)_16-24 3m 91200_1522 HORIZONTAL Detector : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Project : Peak Project : 952407</p>	<p>Date: 2019-06-16 PEAK(B4)</p> <p>Site : 03CH16-HY Condition : PEAK(LINII) 3m 91200_1522 HORIZONTAL Detector : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Project : Peak Project : 952407</p>
<p>Peak</p>	<p>Date: 2019-06-16 PEAK_BE(B4)_16-24</p> <p>Site : 03CH16-HY Condition : PEAK_BE(B4)_16-24 3m 91200_1522 HORIZONTAL Detector : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Project : Peak Project : 952407</p>	<p>Left blank</p>






WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ac VHT40 CH159 5795MHz	
1+2	Vertical	Fundamental
Peak	<p>Site : 03CH16-HY Condition : PEAK_BE(B4)_16-24 3m 91200_1522 VERTICAL Detector : Peak Project : 952407</p>	<p>Site : 03CH16-HY Condition : PEAK(UNII) 3m 91200_1522 VERTICAL Detector : Peak Project : 952407</p>
Peak	<p>Site : 03CH16-HY Condition : PEAK_BE(B4)_16-24 3m 91200_1522 VERTICAL Detector : Peak Project : 952407</p>	Left blank



Band 4 5725~5850MHz
WIFI 802.11ac VHT80 (Band Edge @ 3m)

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ac VHT80 CH155 5775MHz	
1+2	Horizontal	Fundamental
Peak	<p>Site : 03CH16-HY Condition : PEAK_BE(B4)_16-24 3m 91200_1522 HORIZONTAL Detector : Peak Project : 952407</p>	<p>Site : 03CH16-HY Condition : PEAK(UNIT) 3m 91200_1522 HORIZONTAL Detector : Peak Project : 952407</p>
Peak	<p>Site : 03CH16-HY Condition : PEAK_BE(B4)_16-24 3m 91200_1522 HORIZONTAL Detector : Peak Project : 952407</p>	Left blank

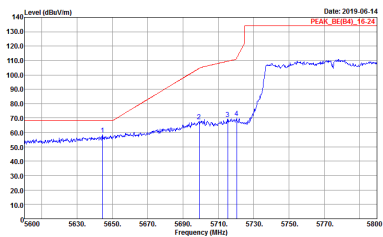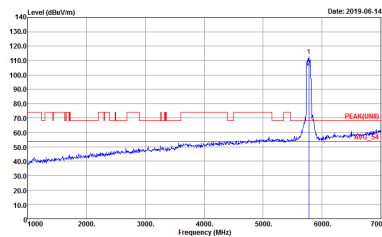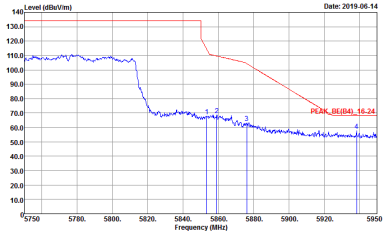

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ac VHT80 CH155 5775MHz	
1+2	Vertical	Fundamental
Peak	 <p>Date: 2019-06-14 PEAK_BE(B4)_16-24</p> <p>Site : 03CH16-HY Condition : PEAK_BE(B4)_16-24 3m 91200_1522 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 952407</p>	 <p>Date: 2019-06-14 PEAK(B4)</p> <p>Site : 03CH16-HY Condition : PEAK(UNII) 3m 91200_1522 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 952407</p>
Peak	 <p>Date: 2019-06-14 PEAK_BE(B4)_16-24</p> <p>Site : 03CH16-HY Condition : PEAK_BE(B4)_16-24 3m 91200_1522 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 952407</p>	Left blank





Band 4 - 5725~5850MHz
WIFI 802.11ac VHT20 (Harmonic @ 3m)

WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11ac VHT20 CH149 5745MHz	
1+2	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH16-HY Condition : PEAR(LINET) 3m 91200_1522 HORIZONTAL Detector : Peak Project : 952407</p>	<p>Site : 03CH16-HY Condition : PEAR(LINET) 3m 91200_1522 VERTICAL Detector : Peak Project : 952407</p>



WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11ac VHT20 CH157 5785MHz	
1+2	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH16-11Y Condition : PEAK(UNII) 3m 9120D_1522 HORIZONTAL Detector : Peak Project : 952407</p>	<p>Site : 03CH16-11Y Condition : PEAK(UNII) 3m 9120D_1522 VERTICAL Detector : Peak Project : 952407</p>

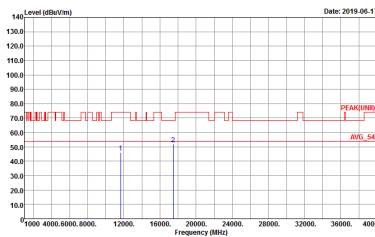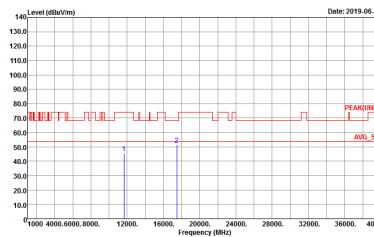

WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11ac VHT20 CH165 5825MHz	
1+2	Horizontal	Vertical
Peak Avg.	 <p>Site : 03CH16-11Y Condition : PEAK(UNII) 3m 9120D_1522 HORIZONTAL Detector : Peak Project : 952407</p>	 <p>Site : 03CH16-11Y Condition : PEAK(UNII) 3m 9120D_1522 VERTICAL Detector : Peak Project : 952407</p>



Emission below 1GHz
5GHz WIFI 802.11ac VHT80 (LF)

WIFI	5GHz 5725-5850MHz	
ANT	802.11ac VHT80 LF	
1+2	Horizontal	Vertical
QP / Peak	<p>Site : 03CH16-HY Condition : QP 3m BIL06_47020606 HORIZONTAL Detector : Peak Project : 952407</p>	<p>Site : 03CH16-HY Condition : QP 3m BIL06_47020606 VERTICAL Detector : Peak Project : 952407</p>




Appendix E. Duty Cycle Plots

Antenna	Band	Duty Cycle (%)	T(us)	1/T(kHz)	VBW Setting	Duty Factor (dB)
1	802.11a	97.31	2024	0.49	1kHz	0.12
2	802.11a	97.31	2024	0.49	1kHz	0.12
1+2	802.11a for Ant 1	97.55	2029	0.49	1kHz	0.11
1+2	802.11a for Ant 2	97.31	2024	0.49	1kHz	0.12
1	802.11n HT20	97.52	1888	0.53	1kHz	0.11
2	802.11n HT20	97.11	1879	0.53	1kHz	0.13
1+2	802.11n HT20 for Ant 1	97.52	1891	0.53	1kHz	0.11
1+2	802.11n HT20 for Ant 2	97.82	1887	0.53	1kHz	0.10
1	802.11n HT40	95.88	930	1.08	3kHz	0.18
2	802.11n HT40	95.38	930	1.08	3kHz	0.21
1+2	802.11n HT40 for Ant 1	94.90	930	1.08	3kHz	0.23
1+2	802.11n HT40 for Ant 2	95.88	930	1.08	3kHz	0.18
1	802.11ac VHT20	97.41	1880	0.53	1kHz	0.11
2	802.11ac VHT20	97.42	1890	0.53	1kHz	0.11
1+2	802.11ac VHT20 for Ant 1	96.91	1880	0.53	1kHz	0.14
1+2	802.11ac VHT20 for Ant 2	97.14	1870	0.53	1kHz	0.13
1	802.11ac VHT40	95.90	935	1.07	3kHz	0.18
2	802.11ac VHT40	95.90	935	1.07	3kHz	0.18
1+2	802.11ac VHT40 for Ant 1	95.92	940	1.06	3kHz	0.18
1+2	802.11ac VHT40 for Ant 2	95.88	930	1.08	3kHz	0.18
1	802.11ac VHT80	92.06	452	2.21	3kHz	0.36
2	802.11ac VHT80	91.46	450	2.22	3kHz	0.39
1+2	802.11ac VHT80 for Ant 1	92.71	458	2.18	3kHz	0.33
1+2	802.11ac VHT80 for Ant 2	91.87	452	2.21	3kHz	0.37




<Ant. 1>

802.11a

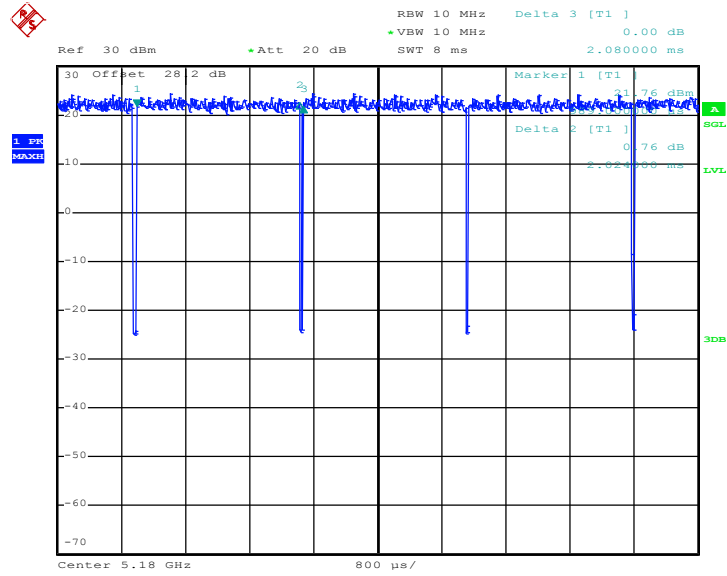

Date: 10.JUN.2019 03:14:47


802.11n HT20

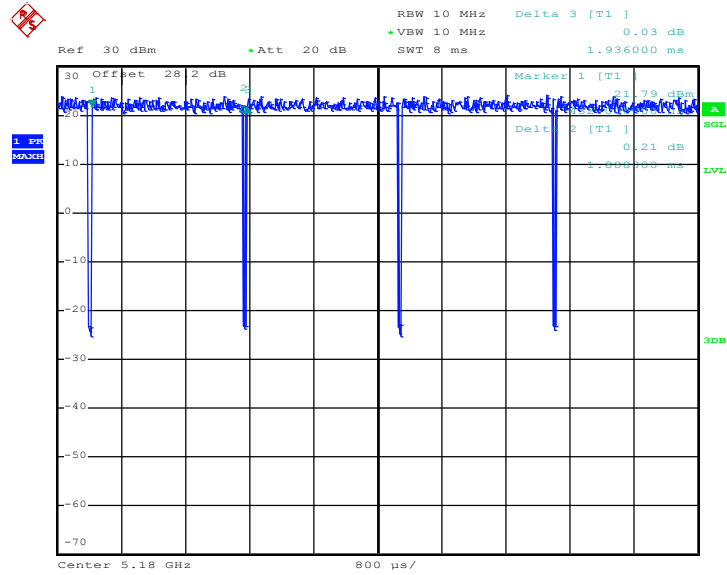

Date: 10.JUN.2019 05:08:27




802.11n HT40

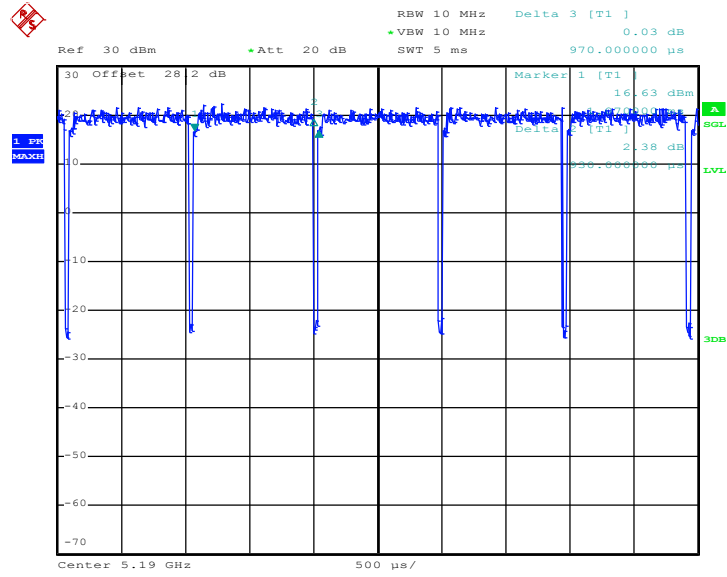

Date: 10.JUN.2019 05:17:30


802.11ac VHT20

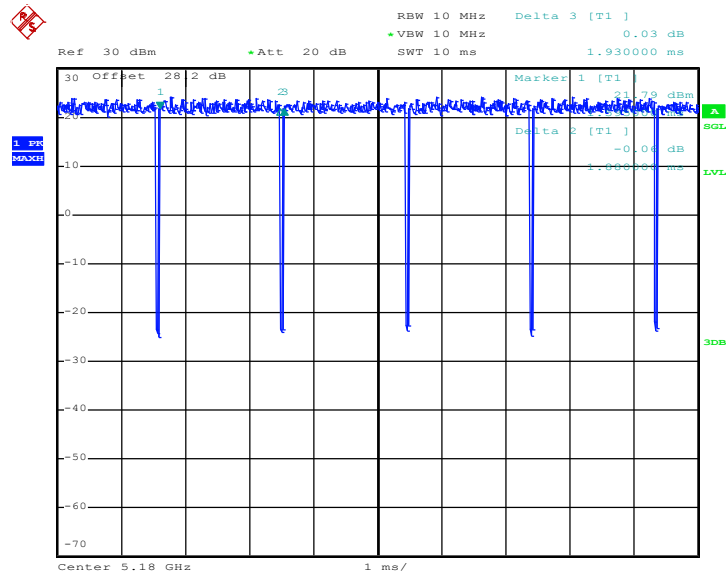

Date: 10.JUN.2019 03:58:42




802.11ac VHT40

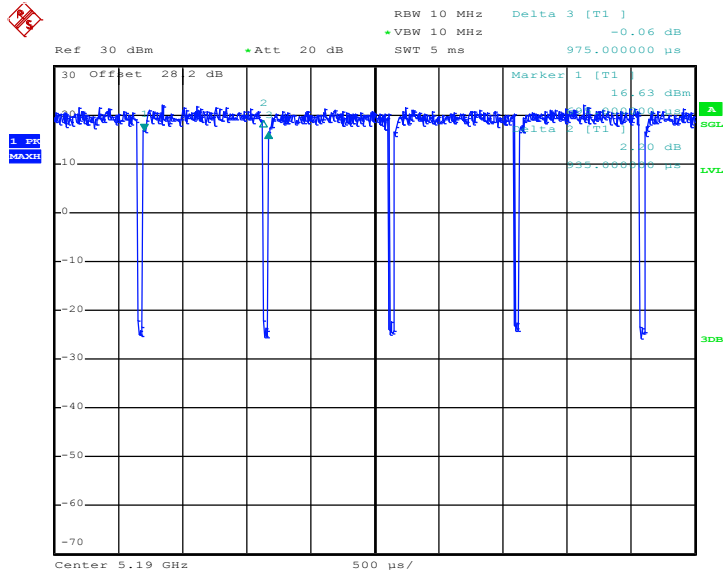

Date: 10.JUN.2019 04:32:55

802.11ac VHT80

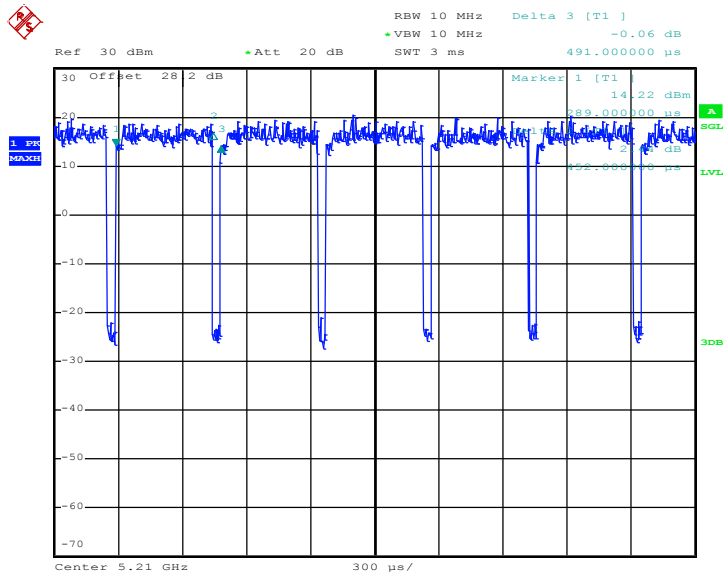


Date: 10.JUN.2019 05:27:59




<Ant. 2>

802.11a

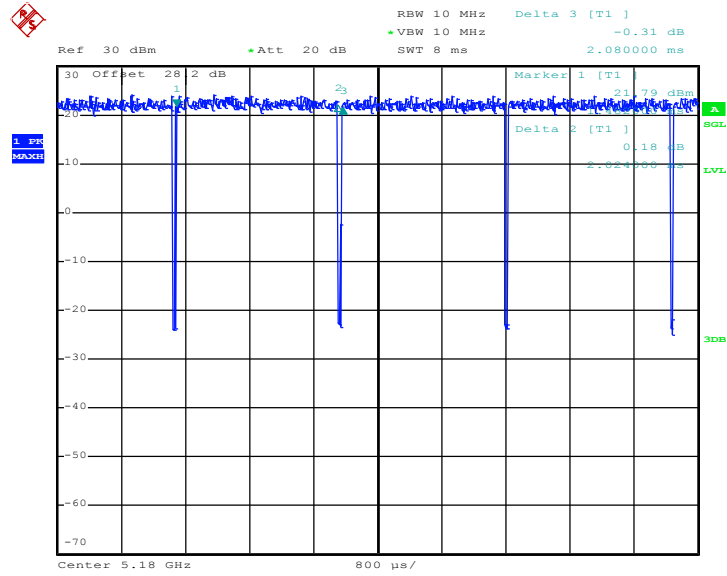

Date: 10.JUN.2019 03:17:03


802.11n HT20

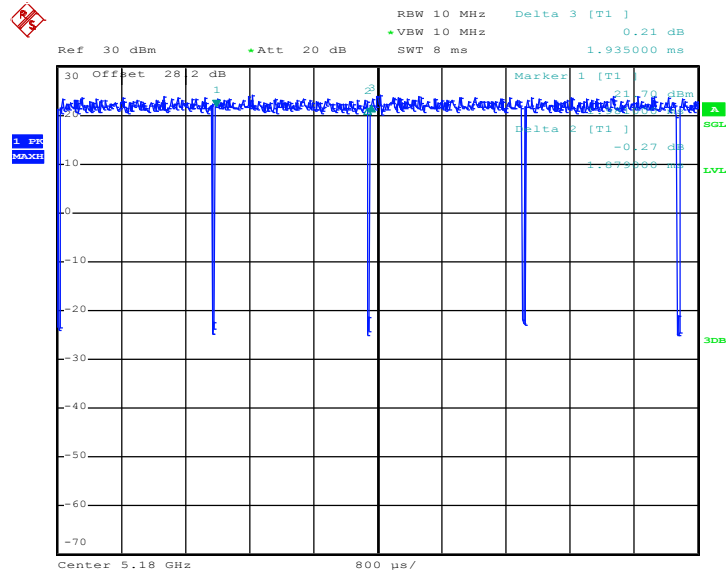

Date: 10.JUN.2019 05:09:20




802.11n HT40

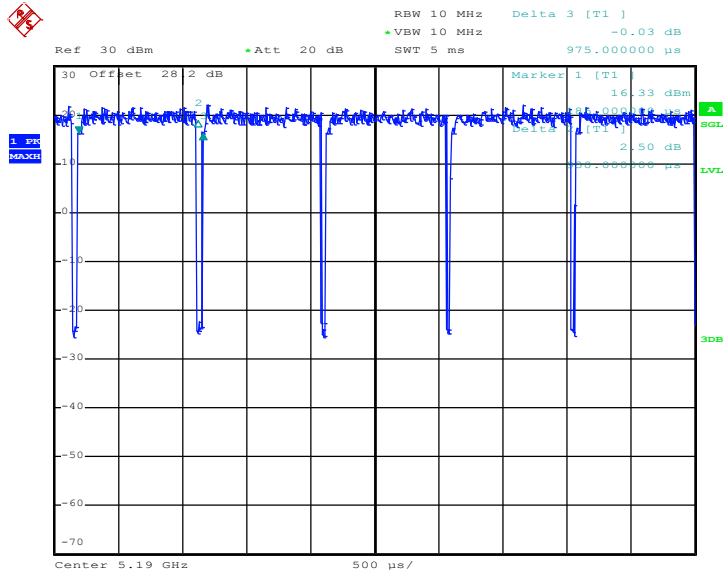

Date: 10.JUN.2019 05:18:31


802.11ac VHT20

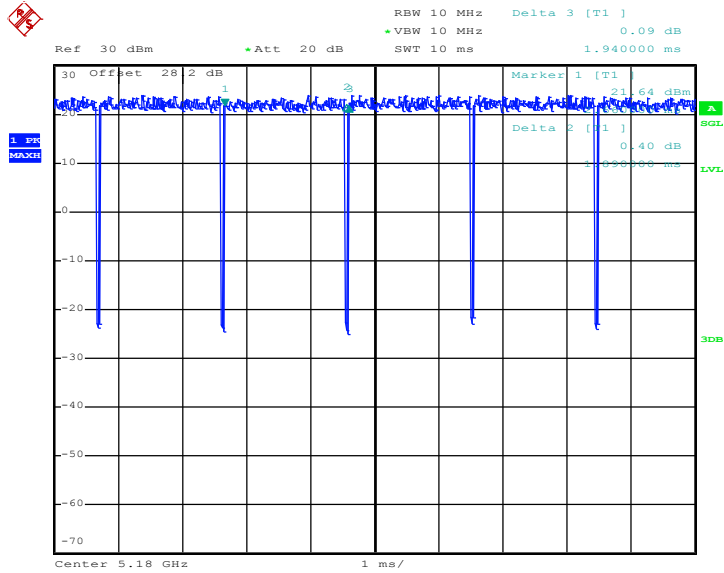

Date: 10.JUN.2019 03:57:47




802.11ac VHT40

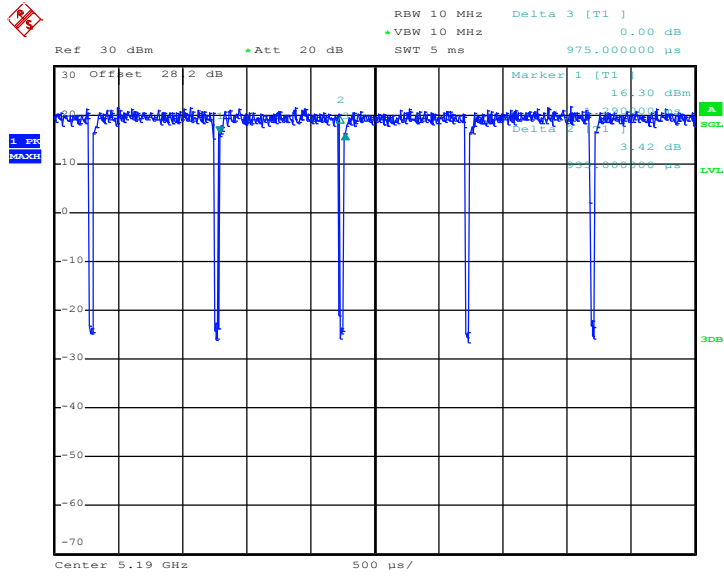

Date: 10.JUN.2019 04:33:52

802.11ac VHT80

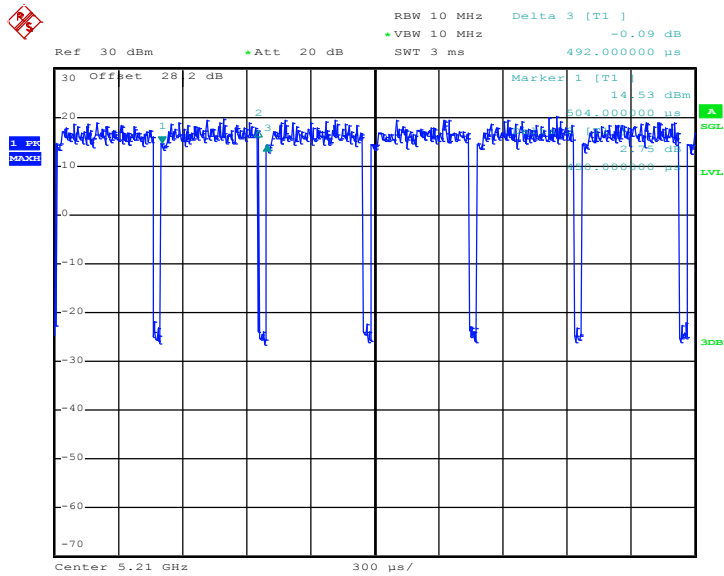


Date: 10.JUN.2019 05:29:04




MIMO <Ant. 1>

802.11a

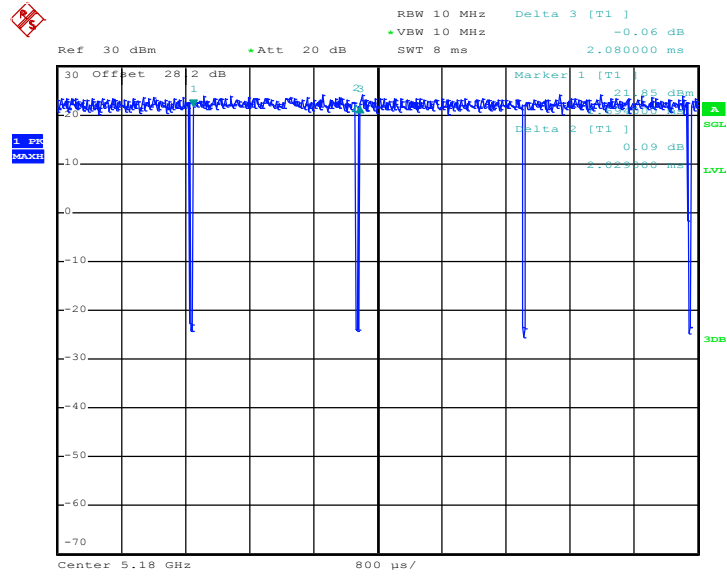

Date: 10.JUN.2019 03:06:10


802.11n HT20

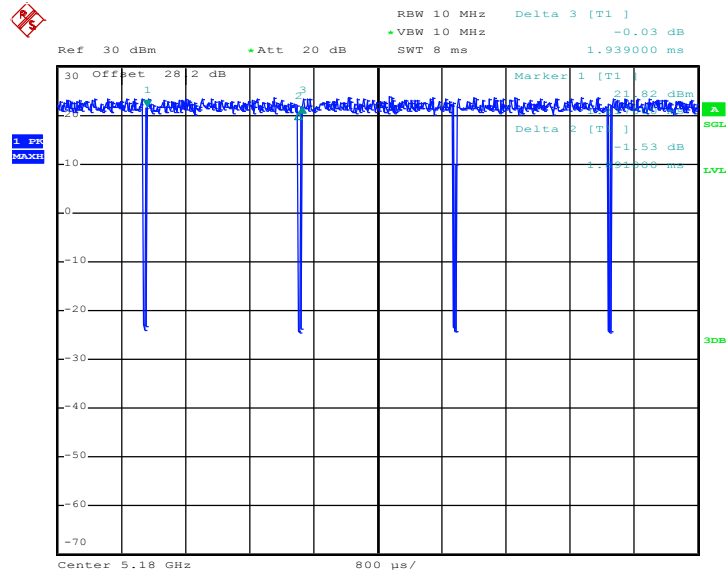

Date: 10.JUN.2019 04:53:34




802.11n HT40

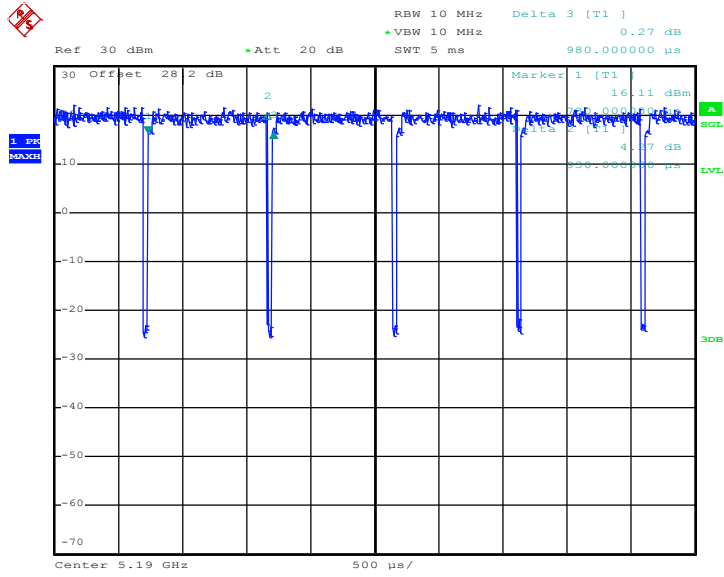

Date: 10.JUN.2019 05:11:01


802.11ac VHT20

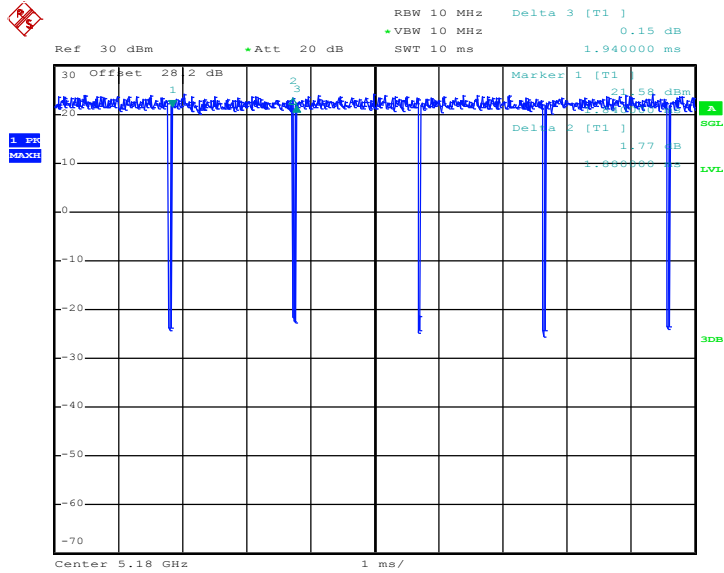

Date: 10.JUN.2019 03:33:02




802.11ac VHT40

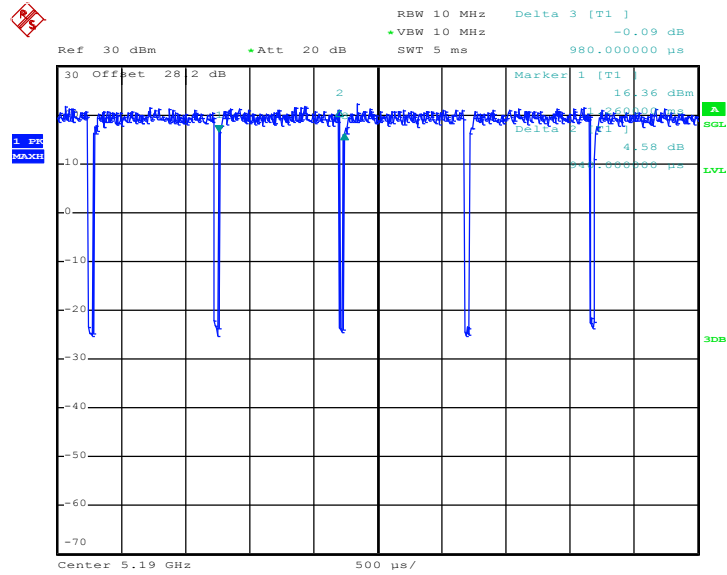

Date: 10.JUN.2019 04:16:38

802.11ac VHT80

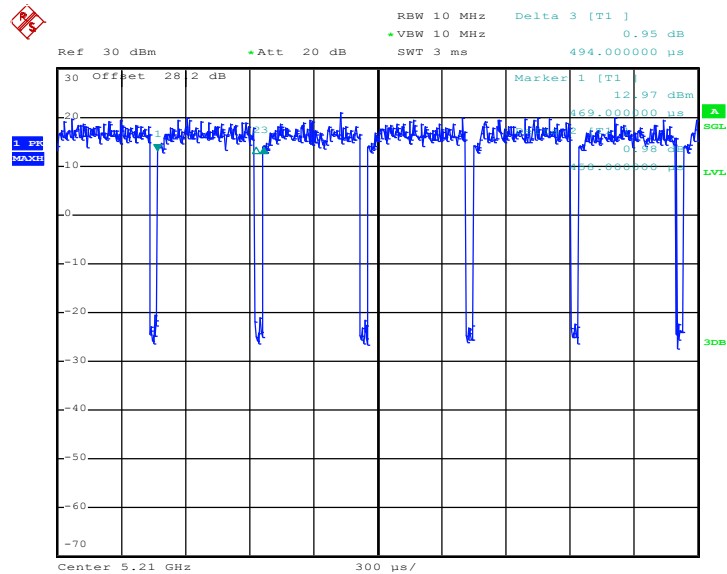


Date: 10.JUN.2019 05:26:18




MIMO <Ant. 2>

802.11a

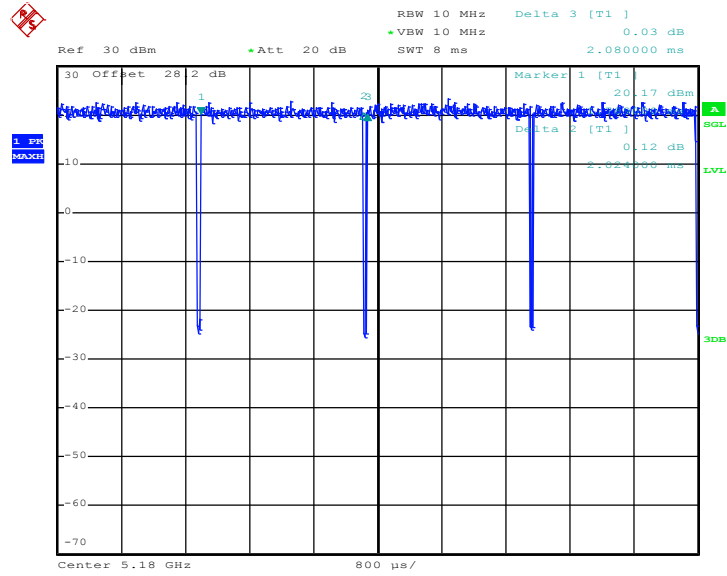

Date: 27.JUN.2019 00:49:16


802.11n HT20

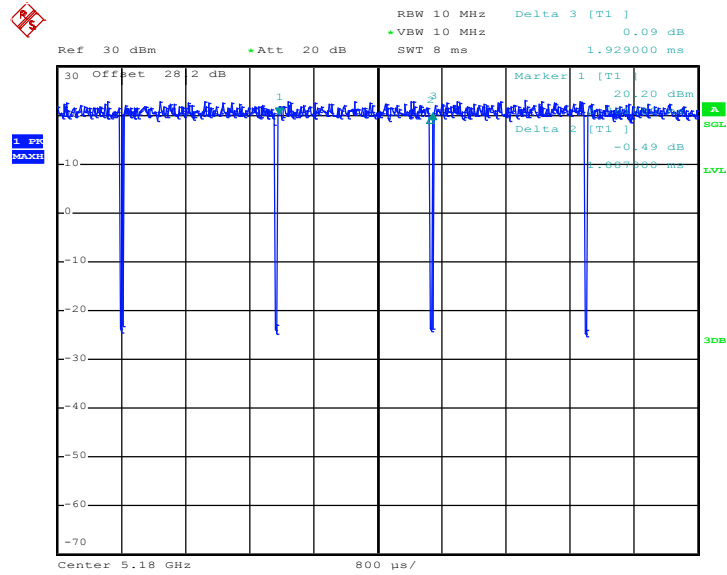

Date: 27.JUN.2019 01:34:08




802.11n HT40

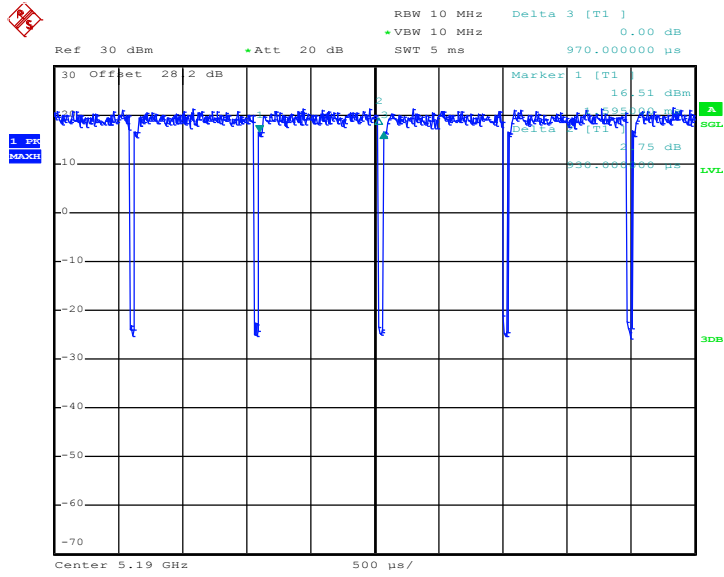

Date: 10.JUN.2019 05:11:42


802.11ac VHT20

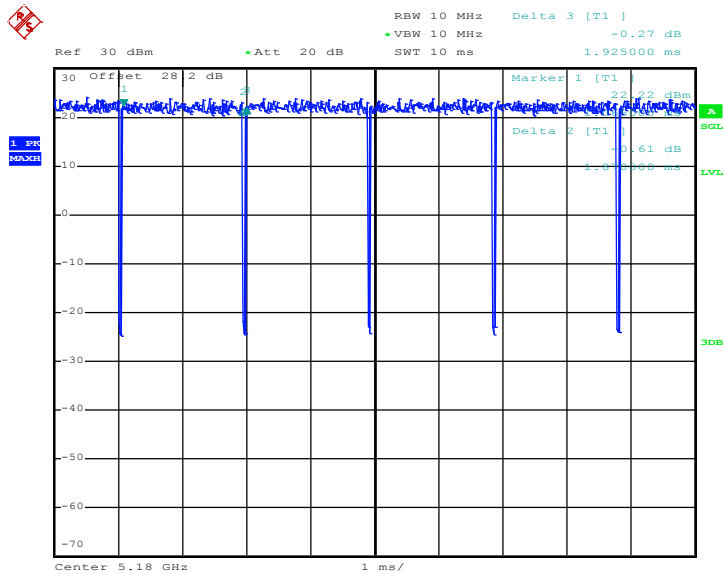

Date: 10.JUN.2019 03:33:49




802.11ac VHT40

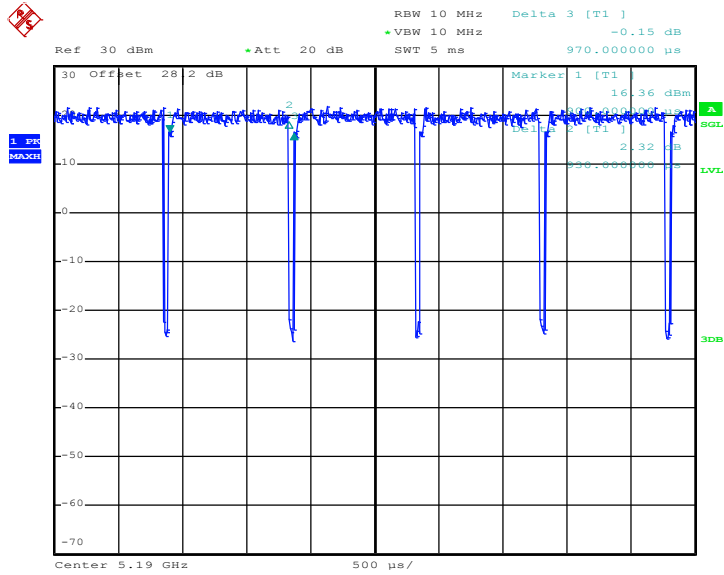

Date: 10.JUN.2019 04:17:14

802.11ac VHT80

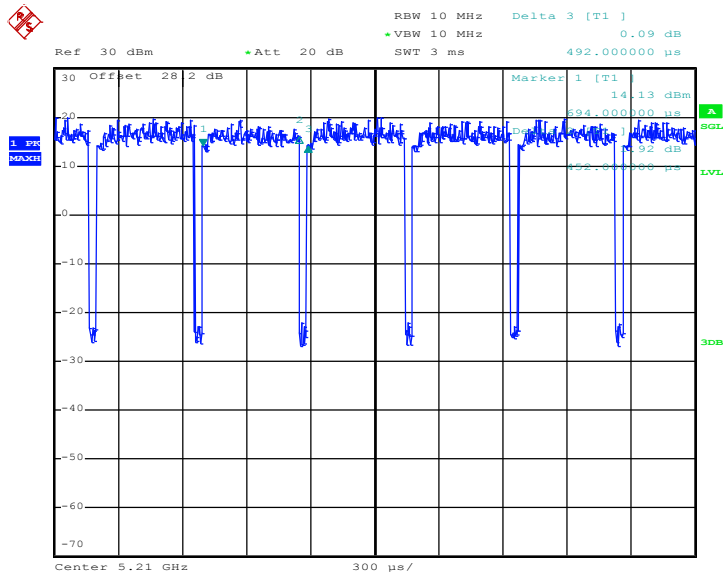

Date: 10.JUN.2019 05:27:05