



# FCC RF Test Report

**APPLICANT** : Meta Platforms Technologies, LLC.  
**EQUIPMENT** : VR Headset  
**BRAND NAME** : META PLATFORMS TECHNOLOGIES, LLC  
**MODEL NAME** : DK94EC  
**FCC ID** : 2AGOZ-L31W  
**STANDARD** : FCC Part 15 Subpart C §15.247  
**CLASSIFICATION** : (DTS) Digital Transmission System  
**TEST DATE(S)** : Mar. 28, 2022 ~ Jun. 30, 2022

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



**Sporton International Inc. (Kunshan)**

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300  
People's Republic of China**



# TABLE OF CONTENTS

**REVISION HISTORY..... 3**

**SUMMARY OF TEST RESULT ..... 4**

**1 GENERAL DESCRIPTION ..... 5**

    1.1 Applicant ..... 5

    1.2 Product Feature of Equipment Under Test..... 5

    1.3 Product Specification of Equipment Under Test..... 5

    1.4 Modification of EUT ..... 6

    1.5 Testing Location ..... 6

    1.6 Test Software..... 6

    1.7 Applicable Standards..... 7

**2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST ..... 8**

    2.1 Carrier Frequency and Channel ..... 8

    2.2 Test Mode ..... 9

    2.3 Connection Diagram of Test System ..... 10

    2.4 Support Unit used in test configuration and system ..... 11

    2.5 EUT Operation Test Setup ..... 12

    2.6 Measurement Results Explanation Example..... 12

**3 TEST RESULT ..... 13**

    3.1 6dB and 99% Bandwidth Measurement ..... 13

    3.2 Output Power Measurement..... 14

    3.3 Power Spectral Density Measurement ..... 15

    3.4 Conducted Band Edges and Spurious Emission Measurement ..... 17

    3.5 Radiated Band Edges and Spurious Emission Measurement ..... 18

    3.6 AC Conducted Emission Measurement..... 22

    3.7 Antenna Requirements ..... 24

**4 LIST OF MEASURING EQUIPMENT ..... 25**

**5 UNCERTAINTY OF EVALUATION ..... 26**

**APPENDIX A. CONDUCTED TEST RESULTS**

**APPENDIX B. AC CONDUCTED EMISSION TEST RESULT**

**APPENDIX C. RADIATED SPURIOUS EMISSION**

**APPENDIX D. DUTY CYCLE PLOTS**

**APPENDIX E. SETUP PHOTOGRAPHS**



### REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR222304-01D	Rev. 01	Initial issue of report	Jul. 09, 2022
FR222304-01D	Rev. 02	Update the antenna gain in Appendix A.	Aug. 02, 2022



## SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.1	-	99% Bandwidth	-	Report Only	-
3.2	15.247(b)	Power Output Measurement	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	Conducted Band Edges	$\leq 20\text{dBc}$	Pass	-
		Conducted Spurious Emission		Pass	-
3.5	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 3.08 dB at 2483.50 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 19.11 dB at 0.150 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	15.203 & 15.247(b)	Pass	-

### Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits.

### Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



# 1 General Description

## 1.1 Applicant

Meta Platforms Technologies, LLC.  
1 Hacker Way, Menlo Park, CA 94025, USA

## 1.2 Product Feature of Equipment Under Test

Product Feature	
Equipment	VR Headset
Brand Name	META PLATFORMS TECHNOLOGIES, LLC
Model Name	DK94EC
FCC ID	2AGOZ-L31W
SW Version	28151810289300000
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

## 1.3 Product Specification of Equipment Under Test

Standards-related Product Specification			
Tx/Rx Channel Frequency Range	2412 MHz ~ 2462 MHz		
Maximum (Peak) Output Power to antenna	802.11b : 20.82 dBm (0.1208 W) 802.11g : 27.89 dBm (0.6152 W) 802.11n HT20 : 27.53 dBm (0.5662 W) 802.11ac VHT20 : 27.60 dBm (0.5754 W) 802.11ax HE20 : 27.86 dBm (0.6109 W)		
99% Occupied Bandwidth	802.11b : 13.147 MHz 802.11g : 17.582 MHz 802.11ax HE20 : 19.261 MHz		
Antenna Type / Gain	<Ant. 1> : FPC Antenna with gain 3.50 dBi <Ant. 2> : FPC Antenna with gain 3.70 dBi		
Type of Modulation	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ac/ax : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM / 1024QAM)		
Antenna Function Description		Ant. 1	Ant. 2
	802.11 b SISO	V	V
	802.11 g/n/ac/ax MIMO	V	V

**Note:**

- 802.11b only support SISO Mode, 11g/n/ac/ax support MIMO mode.
- For 802.11n/ac/ax mode, the whole testing have assessed only 802.11ax HE20 by referring to the maximum output power.



- 3. WIFI MIMO support CDD mode.
- 4. WIFI Ant. 1 / Ant. 2 corresponding to EUT Photo WIFI Right / Left Antenna.

### 1.4 Modification of EUT

No modifications are made to the EUT during all test items.

### 1.5 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

<b>Test Firm</b>	Sporton International Inc. (Kunshan)		
<b>Test Site Location</b>	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958		
<b>Test Site No.</b>	<b>Sporton Site No.</b>	<b>FCC Designation No.</b>	<b>FCC Test Firm Registration No.</b>
	CO01-KS 03CH06-KS TH01-KS	CN1257	314309

### 1.6 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH06-KS	AUDIX	E3	6.2009-8-24a1
2.	CO01-KS	AUDIX	E3	6.2009-8-24



## 1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart C §15.247
- ♦ FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ♦ ANSI C63.10-2013

### **Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



## 2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z.
  
- b. AC power line Conducted Emission was tested under maximum output power.

### 2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437		





## 2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.


### MIMO Antenna

Modulation	Data Rate
802.11b	1 Mbps
802.11g	6 Mbps
802.11ax HE20	MCS0


Test Cases	
<b>AC Conducted Emission</b>	Mode 1 :Bluetooth Link + WLAN Link(2.4G)+ nRF TX + USB Cable (Charging from Adapter)
<b>Remark:</b> For Radiated Test Cases, The tests were performance with Adapter, Earphone, and USB Cable.	


## 2.3 Connection Diagram of Test System

For AC Conducted Emission:

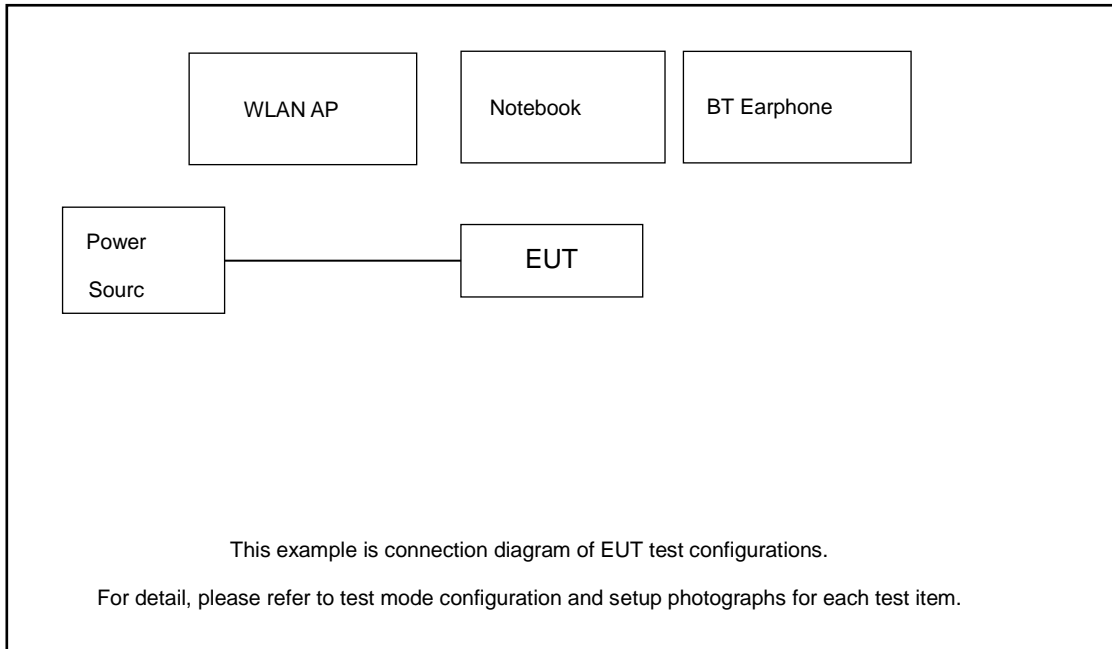

For Radiated Emission:

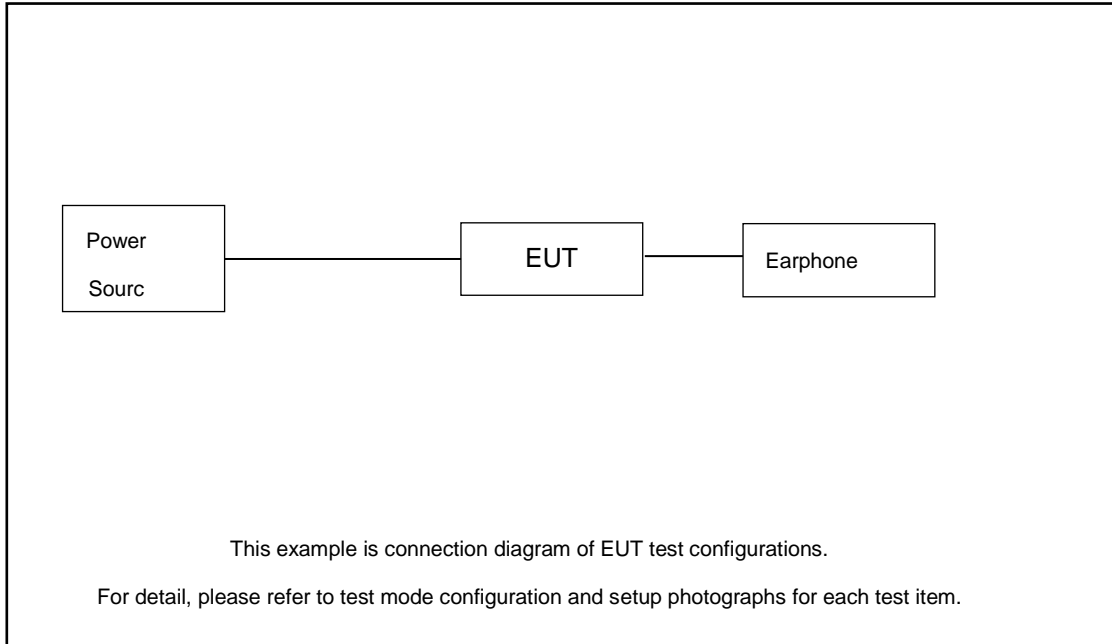

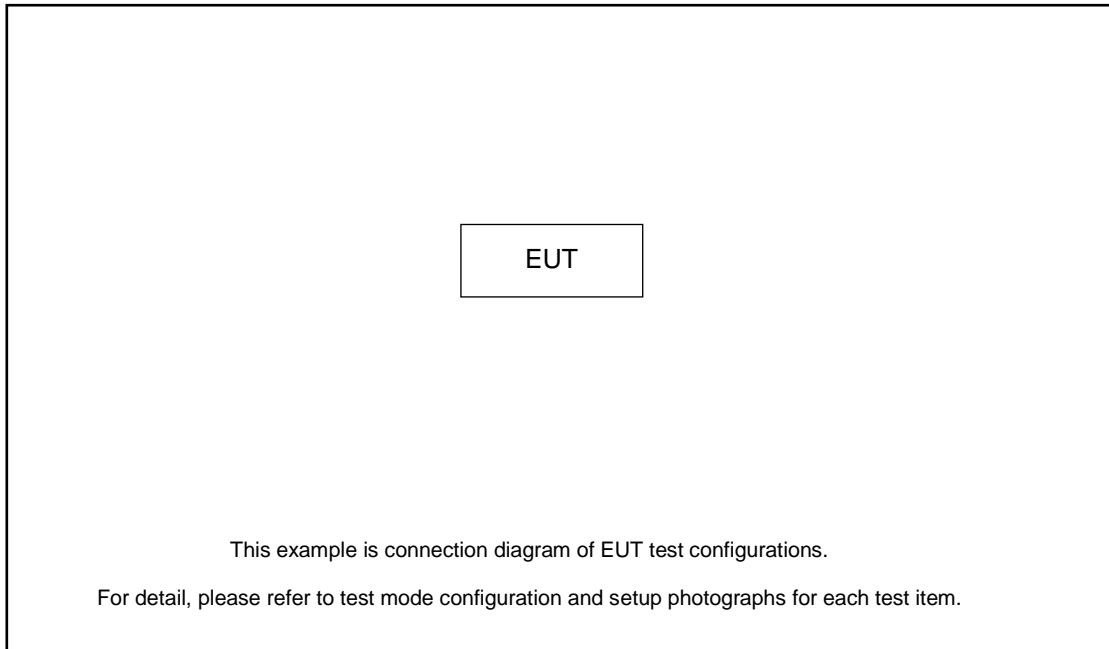

## 2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Bluetooth Earphone	Xiaomi	LYEJ02LM	N/A	N/A	N/A
2.	WLAN AP	D-link	DIR-655	KA21R655B1	N/A	Unshielded,1.8m
3.	Notebook	Lenovo	V130-15IKB005	FCC DoC	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m
4.	Earphone	Xiaomi	N/A	N/A	N/A	N/A



## 2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuous transmit.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

## 2.6 Measurement Results Explanation Example

**For all conducted test items:**

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

*Offset = RF cable loss + attenuator factor.*

Following shows an offset computation example with cable loss 2.65 dB and 10dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 2.65 + 10 = 12.65 \text{ (dB)} \end{aligned}$$

### 3 Test Result

#### 3.1 6dB and 99% Bandwidth Measurement

##### 3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

##### 3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

##### 3.1.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.8
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) = 1MHz and set the Video bandwidth (VBW) = 3MHz.
6. Measure and record the results in the test report.

##### 3.1.4 Test Setup



##### 3.1.5 Test Result of 6dB and 99% Occupied Bandwidth

Please refer to Appendix A.

## 3.2 Output Power Measurement

### 3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna with directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


### 3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of ANSI C63.10-2013 clause 11.9.1.3 PKPM1 Peak power meter or ANSI C63.10-2013 clause 11.9.2.3.1 Method AVGPM method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.
5. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

### 3.2.4 Test Setup

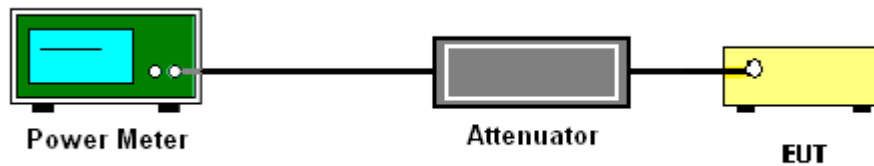

### 3.2.5 Test Result of Peak Output Power

Please refer to Appendix A.

### 3.2.6 Test Result of Average Output Power (Reporting Only)

Please refer to Appendix A.



### 3.3 Power Spectral Density Measurement

#### 3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.

#### 3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.3.3 Test Procedures

1. The testing follows Measurement Procedure of ANSI C63.10-2013 clause 11.10.2 Method PKPSD.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.


If measurements performed using method (2) plus  $10 \log(N)$  exceeds the emission limit, the test should choose method (1) before declaring that the device fails the emission limit.

Method (1): Measure and sum the spectra across the outputs.

The total final Power Spectral Density is from a device with 2 transmitter outputs. The spectrum measurements of the individual outputs are all performed with the same span and number of points, the spectrum value in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 to obtain the value for the first frequency bin of the summed spectrum.

Method (2): Measure and add  $10 \log(N)$  dB, where N is the number of outputs. (N=2)

### 3.3.4 Test Setup

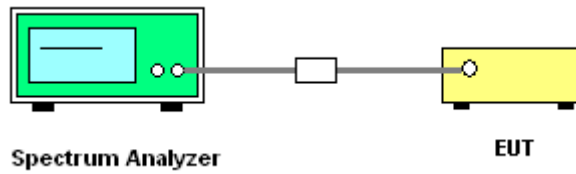

### 3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.



## 3.4 Conducted Band Edges and Spurious Emission Measurement

### 3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement.

### 3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.4.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.13
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

### 3.4.4 Test Setup



### 3.4.5 Test Result of Conducted Band Edges and Spurious Emission

Please refer to Appendix A.



### 3.5 Radiated Band Edges and Spurious Emission Measurement

#### 3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

#### 3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




### 3.5.3 Test Procedures


1. The testing follows ANSI C63.10-2013 clause 11.11 & 11.12
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Set RBW=100 kHz for  $f < 1$  GHz; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold;
  - (3) Set RBW = 1 MHz, VBW= 3MHz for  $f \geq 1$  GHz for peak measurement.  
For average measurement:
    - VBW = 10 Hz, when duty cycle is no less than 98 percent.
    - VBW  $\geq 1/T$ , when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

### 3.5.4 Test Setup


For radiated emissions below 30MHz

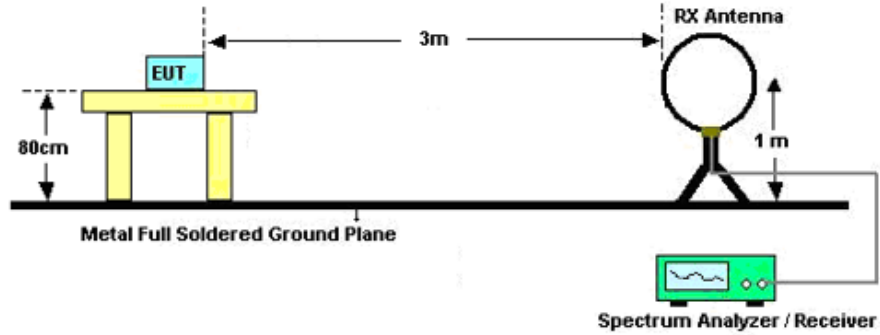

For radiated emissions from 30MHz to 1GHz

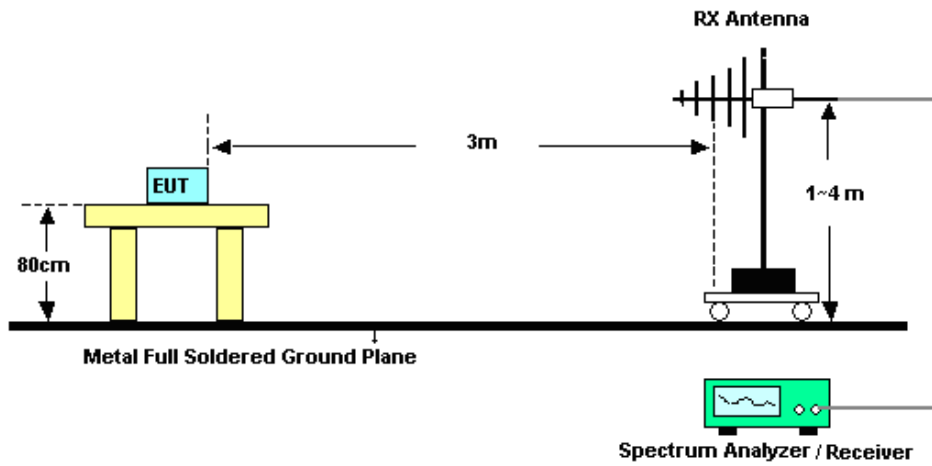

For radiated emissions above 1GHz

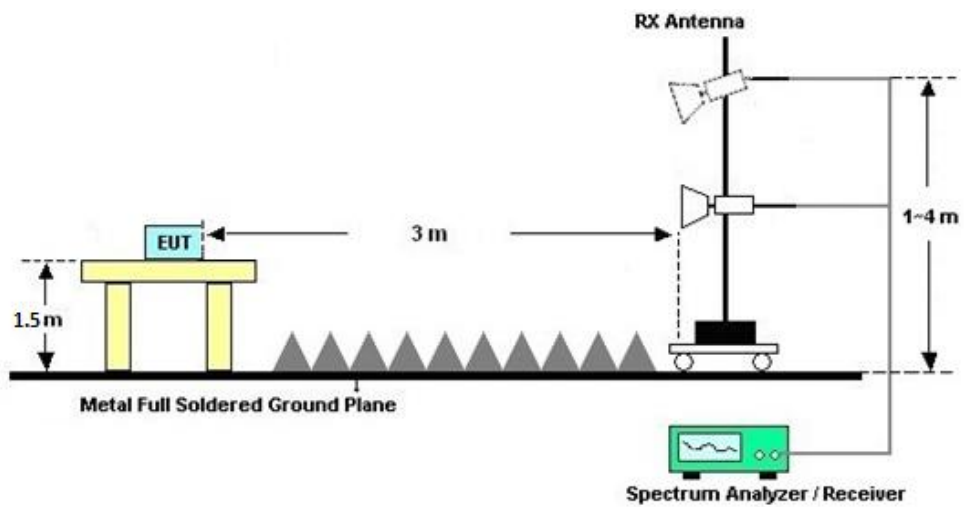



### **3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

### **3.5.6 Test Result of Radiated Spurious at Band Edges**

Please refer to Appendix C.

### **3.5.7 Duty Cycle**

Please refer to Appendix D.

### **3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)**

Please refer to Appendix C.

## 3.6 AC Conducted Emission Measurement

### 3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dB $\mu$ V)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


### 3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.

### 3.6.4 Test Setup

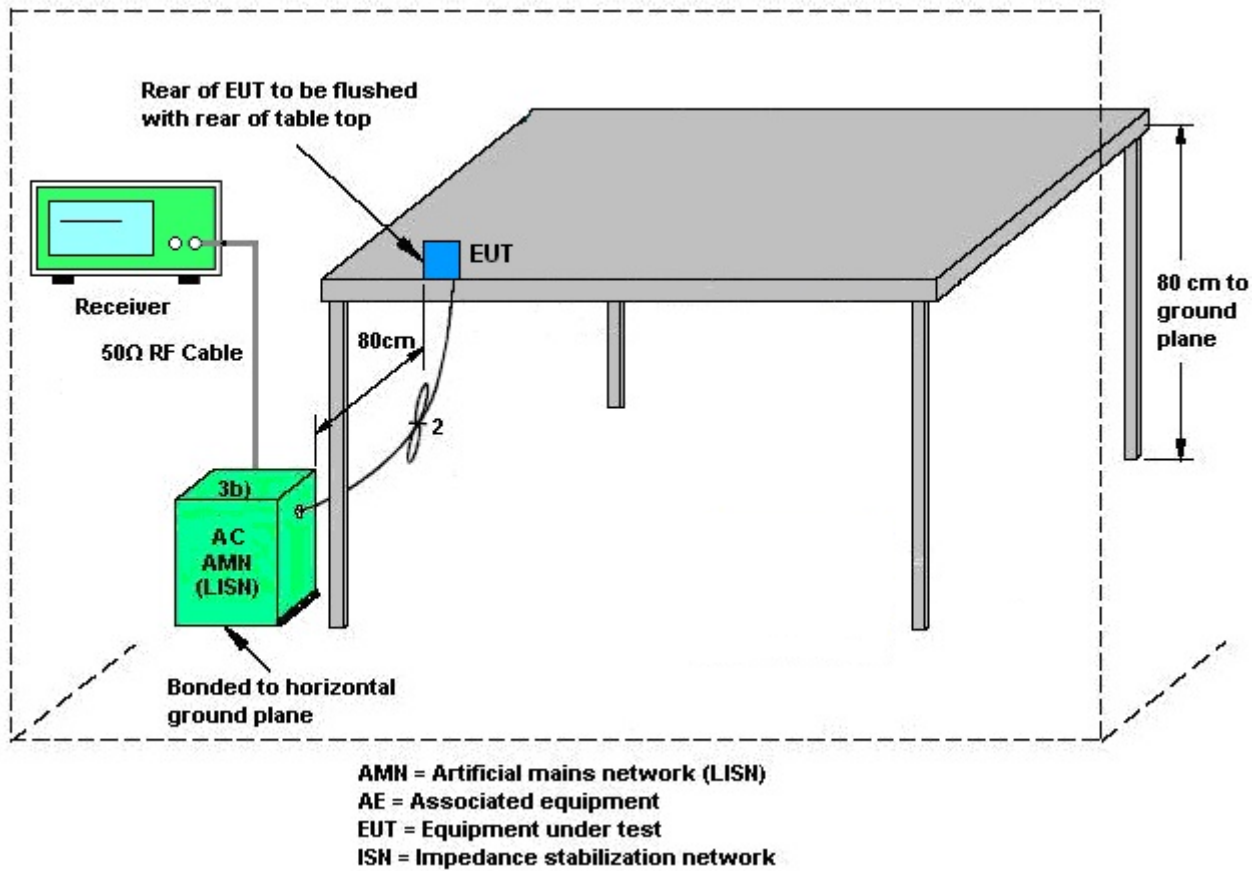

### 3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



### 3.7 Antenna Requirements

#### 3.7.1 Standard Applicable

If directional gain of transmitting Antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached Antenna or of an Antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

#### 3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

#### 3.7.3 Antenna Gain

<CDD Modes >

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

For CDD transmissions, directional gain is calculated as

Directional gain =  $G_{ANT}$  + Array Gain, where Array Gain is as follows.

For power spectral density (PSD) measurements on all devices,

Array Gain =  $10 \log(N_{ANT}/N_{SS}=1)$  dB.

For power measurements on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for  $N_{ANT} \leq 4$ .

Directional gain may be calculated by using the formulas applicable to equal gain antennas with

$G_{ANT}$  set equal to the gain of the antenna having the highest gain;

The EUT supports CDD mode.

For power, the directional gain  $G_{ANT}$  is set equal to the antenna having the highest gain, i.e., F)2)f)i).

For PSD, the directional gain calculation is following F)2)f)ii) of KDB 662911 D01 v02r01.

The power and PSD limit should be modified if the directional gain of EUT is over 6 dBi,

The directional gain "DG" is calculated as following table.

<b>&lt;CDD Modes&gt;</b>						
			<b>DG for Power (dBi)</b>	<b>DG for PSD (dBi)</b>	<b>Power Limit Reduction (dB)</b>	<b>PSD Limit Reduction (dB)</b>
	<b>Ant. 1 (dBi)</b>	<b>Ant. 2 (dBi)</b>				
<b>2.4 GHz</b>	3.50	3.70	3.70	6.61	0.00	0.61

$Power\ Limit\ Reduction = DG(Power) - 6dBi, (min = 0)$

$PSD\ Limit\ Reduction = DG(PSD) - 6dBi, (min = 0)$





## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 14, 2021	Mar. 28, 2022~ Jun. 30 2022	Oct. 13, 2022	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 05, 2022	Mar. 28, 2022~ Jun. 30 2022	Jan. 04, 2023	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 05, 2022	Mar. 28, 2022~ Jun. 30 2022	Jan. 04, 2023	Conducted (TH01-KS)
EMI Test Receiver	Keysight	N9038A	MY564000 04	3Hz~8.5GHz;Ma x 30dBm	Oct. 16, 2021	Jun. 16, 2022	Oct. 15, 2022	Radiation (03CH06-KS)
EXA Spectrum Analyzer	Keysight	N9010B	MY602421 26	10Hz-44GHz	Oct. 26, 2021	Jun. 16, 2022	Oct. 25, 2022	Radiation (03CH06-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 30, 2021	Jun. 16, 2022	Oct. 29, 2022	Radiation (03CH06-KS)
Bilog Antenna	TeseQ	CBL6111D	49921	30MHz-1GHz	May 24, 2022	Jun. 16, 2022	May 23, 2023	Radiation (03CH06-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00240138	1GHz~18GHz	Jul. 19, 2021	Jun. 16, 2022	Jul. 18, 2022	Radiation (03CH06-KS)
SHF-EHF Horn	Com-power	AH-840	101093	18GHz~40GHz	Jan. 05, 2022	Jun. 16, 2022	Jan. 04, 2023	Radiation (03CH06-KS)
Amplifier	SONOMA	310N	380827	9KHz ~1GHZ	Jul. 30, 2021	Jun. 16, 2022	Jul. 29, 2022	Radiation (03CH06-KS)
Amplifier	MITEQ	EM18G40GG A	060728	18~40GHz	Jan. 05, 2022	Jun. 16, 2022	Jan. 04, 2023	Radiation (03CH06-KS)
high gain Amplifier	MITEQ	AMF-7D-0010 1800-30-10P	2025788	1Ghz-18Ghz	Jul. 30, 2021	Jun. 16, 2022	Jul. 29, 2022	Radiation (03CH06-KS)
Amplifier	Keysight	83017A	MY532703 19	500MHz~26.5GH z	Oct. 14, 2021	Jun. 16, 2022	Oct. 13, 2022	Radiation (03CH06-KS)
AC Power Source	Chroma	61601	F1040900 04	N/A	NCR	Jun. 16, 2022	NCR	Radiation (03CH06-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Jun. 16, 2022	NCR	Radiation (03CH06-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Jun. 16, 2022	NCR	Radiation (03CH06-KS)
EMI Receiver	R&S	ESCi7	100768	9kHz~7GHz;	May 24, 2022	Jun. 17, 2022	May 23, 2023	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 14, 2021	Jun. 17, 2022	Oct. 13, 2022	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	May 24, 2022	Jun. 17, 2022	May 23, 2023	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP00000 0811	AC 0V~300V, 45Hz~1000Hz	Oct. 14, 2021	Jun. 17, 2022	Oct. 13, 2022	Conduction (CO01-KS)

NCR: No Calibration Required



## 5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

### Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Power	±0.56 dB
Conducted Emissions	±0.92 dB
Occupied Channel Bandwidth	±0.03 %
Conducted Power Spectral Density	±0.54 dB

### Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.94
---	------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0
---	-----

### Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0
---	-----

### Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0
---	-----

----- THE END -----



## **Appendix A. Conducted Test Results**

Test Engineer:	Jiang Jun	Temperature:	0-40	°C
Test Date:	2022.3.28~2022.6.30	Relative Humidity:	51~54	%

**TEST RESULTS DATA**  
**Peak Output Power**

2.4GHz Band																	
Mod.	Data Rate	NTX	RU	CH.	Freq. (MHz)	Peak Conducted Power (dBm)			Conducted Power Limit (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)		Pass /Fail
						Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	
11b	1Mbps	1		1	2412	20.08	20.82		30.00	30.00	3.50	3.70	23.58	24.52	36.00	36.00	Pass
11b	1Mbps	1		2	2417	20.17	20.54		30.00	30.00	3.50	3.70	23.67	24.24	36.00	36.00	Pass
11b	1Mbps	1		3	2422	20.12	20.67		30.00	30.00	3.50	3.70	23.62	24.37	36.00	36.00	Pass
11b	1Mbps	1		6	2437	20.17	20.54		30.00	30.00	3.50	3.70	23.67	24.24	36.00	36.00	Pass
11b	1Mbps	1		11	2462	20.12	20.67		30.00	30.00	3.50	3.70	23.62	24.37	36.00	36.00	Pass
11g	6Mbps	2		1	2412	23.69	23.47	26.59	30.00		3.70		30.29		36.00		Pass
11g	6Mbps	2		6	2437	24.48	25.25	27.89	30.00		3.70		31.59		36.00		Pass
11g	6Mbps	2		8	2447	24.13	24.84	27.51	30.00		3.70		31.21		36.00		Pass
11g	6Mbps	2		9	2452	24.42	25.22	27.85	30.00		3.70		31.55		36.00		Pass
11g	6Mbps	2		10	2457	24.00	25.24	27.67	30.00		3.70		31.37		36.00		Pass
11g	6Mbps	2		11	2462	21.34	22.21	24.81	30.00		3.70		28.51		36.00		Pass
HT20	MCS0	2		1	2412	21.38	21.92	24.67	30.00		3.70		28.37		36.00		Pass
HT20	MCS0	2		2	2417	23.75	25.18	27.53	30.00		3.70		31.23		36.00		Pass
HT20	MCS0	2		3	2422	23.33	24.64	27.04	30.00		3.70		30.74		36.00		Pass
HT20	MCS0	2		6	2437	23.70	24.24	26.99	30.00		3.70		30.69		36.00		Pass
HT20	MCS0	2		8	2447	23.18	25.06	27.23	30.00		3.70		30.93		36.00		Pass
HT20	MCS0	2		9	2452	23.58	24.80	27.24	30.00		3.70		30.94		36.00		Pass
HT20	MCS0	2		10	2457	23.22	24.79	27.09	30.00		3.70		30.79		36.00		Pass
HT20	MCS0	2		11	2462	20.35	21.13	23.77	30.00		3.70		27.47		36.00		Pass
VHT20	MCS0	2		1	2412	21.46	22.02	24.76	30.00		3.70		28.46		36.00		Pass
VHT20	MCS0	2		2	2417	23.85	25.22	27.60	30.00		3.70		31.30		36.00		Pass
VHT20	MCS0	2		3	2422	23.47	24.86	27.23	30.00		3.70		30.93		36.00		Pass
VHT20	MCS0	2		6	2437	23.74	24.51	27.15	30.00		3.70		30.85		36.00		Pass
VHT20	MCS0	2		8	2447	23.25	25.16	27.32	30.00		3.70		31.02		36.00		Pass
VHT20	MCS0	2		9	2452	23.70	24.97	27.39	30.00		3.70		31.09		36.00		Pass
VHT20	MCS0	2		10	2457	23.37	24.83	27.17	30.00		3.70		30.87		36.00		Pass
VHT20	MCS0	2		11	2462	20.42	21.25	23.87	30.00		3.70		27.57		36.00		Pass
HE20	MCS0	2	Full	1	2412	21.71	22.22	24.98	30.00		3.70		28.68		36.00		Pass
HE20	MCS0	2	26	1	2412	22.63	22.78	25.72	30.00		3.70		29.42		36.00		Pass
HE20	MCS0	2	52	1	2412	23.24	23.51	26.39	30.00		3.70		30.09		36.00		Pass
HE20	MCS0	2	106	1	2412	23.14	23.69	26.43	30.00		3.70		30.13		36.00		Pass
HE20	MCS0	2	Full	2	2417	23.91	25.33	27.69	30.00		3.70		31.39		36.00		Pass
HE20	MCS0	2	26	2	2417	24.21	25.01	27.64	30.00		3.70		31.34		36.00		Pass
HE20	MCS0	2	52	2	2417	24.12	24.89	27.53	30.00		3.70		31.23		36.00		Pass
HE20	MCS0	2	106	2	2417	24.18	24.96	27.60	30.00		3.70		31.30		36.00		Pass
HE20	MCS0	2	Full	3	2422	23.64	25.28	27.55	30.00		3.70		31.25		36.00		Pass
HE20	MCS0	2	26	3	2422	24.15	24.78	27.49	30.00		3.70		31.19		36.00		Pass
HE20	MCS0	2	52	3	2422	23.91	24.95	27.47	30.00		3.70		31.17		36.00		Pass
HE20	MCS0	2	106	3	2422	23.98	25.02	27.54	30.00		3.70		31.24		36.00		Pass
HE20	MCS0	2	Full	6	2437	24.06	24.67	27.39	30.00		3.70		31.09		36.00		Pass
HE20	MCS0	2	26	6	2437	24.42	25.13	27.80	30.00		3.70		31.50		36.00		Pass
HE20	MCS0	2	52	6	2437	24.46	25.21	27.86	30.00		3.70		31.56		36.00		Pass
HE20	MCS0	2	106	6	2437	24.44	25.18	27.84	30.00		3.70		31.54		36.00		Pass
HE20	MCS0	2	Full	8	2447	23.42	25.30	27.47	30.00		3.70		31.17		36.00		Pass
HE20	MCS0	2	26	8	2447	23.90	24.97	27.48	30.00		3.70		31.18		36.00		Pass
HE20	MCS0	2	52	8	2447	23.86	24.84	27.39	30.00		3.70		31.09		36.00		Pass
HE20	MCS0	2	106	8	2447	24.10	24.80	27.47	30.00		3.70		31.17		36.00		Pass
HE20	MCS0	2	Full	9	2452	23.89	25.28	27.65	30.00		3.70		31.35		36.00		Pass
HE20	MCS0	2	26	9	2452	24.13	24.84	27.51	30.00		3.70		31.21		36.00		Pass
HE20	MCS0	2	52	9	2452	23.90	25.09	27.55	30.00		3.70		31.25		36.00		Pass
HE20	MCS0	2	106	9	2452	23.99	25.34	27.73	30.00		3.70		31.43		36.00		Pass
HE20	MCS0	2	Full	10	2457	23.77	25.15	27.52	30.00		3.70		31.22		36.00		Pass
HE20	MCS0	2	26	10	2457	24.24	24.94	27.61	30.00		3.70		31.31		36.00		Pass
HE20	MCS0	2	52	10	2457	23.92	25.06	27.54	30.00		3.70		31.24		36.00		Pass
HE20	MCS0	2	106	10	2457	23.89	24.98	27.48	30.00		3.70		31.18		36.00		Pass
HE20	MCS0	2	Full	11	2462	20.82	21.69	24.29	30.00		3.70		27.99		36.00		Pass
HE20	MCS0	2	26	11	2462	21.42	22.01	24.74	30.00		3.70		28.44		36.00		Pass
HE20	MCS0	2	52	11	2462	21.39	21.97	24.70	30.00		3.70		28.40		36.00		Pass
HE20	MCS0	2	106	11	2462	21.35	21.97	24.68	30.00		3.70		28.38		36.00		Pass

Note: Measured power (dBm) has offset with cable loss.

**TEST RESULTS DATA**  
**Average Output Power**

2.4GHz Band										
Mod.	Data Rate	NTX	RU	CH.	Freq. (MHz)	Duty Factor (dB)		Average Conducted Power (dBm)		
						Ant 1	Ant 2	Ant 1	Ant 2	SUM
11b	1Mbps	2		1	2412	0.04	0.06	17.68	18.36	
11b	1Mbps	2		6	2437	0.04	0.06	17.73	18.31	
11b	1Mbps	2		11	2462	0.04	0.06	17.74	18.27	
11g	6Mbps	2		1	2412	0.00	0.00	14.69	14.47	17.59
11g	6Mbps	2		6	2437	0.00	0.00	15.48	16.25	18.89
11g	6Mbps	2		11	2462	0.00	0.00	12.34	13.21	15.81
HT20	MCS0	2		1	2412	0.05	0.05	12.38	12.97	15.69
HT20	MCS0	2		2	2417	0.05	0.05	14.80	16.23	18.58
HT20	MCS0	2		3	2422	0.05	0.05	14.38	15.69	18.09
HT20	MCS0	2		6	2437	0.05	0.05	14.75	15.29	18.04
HT20	MCS0	2		8	2447	0.05	0.05	14.23	16.11	18.28
HT20	MCS0	2		9	2452	0.05	0.05	14.63	15.85	18.29
HT20	MCS0	2		10	2457	0.05	0.05	14.27	15.84	18.13
HT20	MCS0	2		11	2462	0.05	0.05	11.40	12.18	14.82
VHT20	MCS0	2		1	2412	0.05	0.07	12.46	13.09	15.80
VHT20	MCS0	2		2	2417	0.05	0.07	14.90	16.29	18.66
VHT20	MCS0	2		3	2422	0.05	0.07	14.52	15.93	18.29
VHT20	MCS0	2		6	2437	0.05	0.07	14.79	15.58	18.21
VHT20	MCS0	2		8	2447	0.05	0.07	14.30	16.23	18.38
VHT20	MCS0	2		9	2452	0.05	0.07	14.75	16.04	18.45
VHT20	MCS0	2		10	2457	0.05	0.07	14.42	15.90	18.23
VHT20	MCS0	2		11	2462	0.05	0.07	11.47	12.32	14.93
HE20	MCS0	2	Full	1	2412	0.09	0.09	12.71	13.22	15.98
HE20	MCS0	2	26	1	2412	0.06	0.06	13.63	13.78	16.72
HE20	MCS0	2	52	1	2412	0.04	0.04	14.24	14.51	17.38
HE20	MCS0	2	106	1	2412	0.05	0.05	14.14	14.69	17.44
HE20	MCS0	2	Full	2	2417	0.09	0.09	14.91	16.33	18.68
HE20	MCS0	2	26	2	2417	0.06	0.06	15.21	16.01	18.64
HE20	MCS0	2	52	2	2417	0.05	0.07	15.12	15.89	18.53
HE20	MCS0	2	106	2	2417	0.07	0.05	15.18	15.96	18.60
HE20	MCS0	2	Full	3	2422	0.09	0.09	14.64	16.28	18.54
HE20	MCS0	2	26	3	2422	0.06	0.06	15.15	15.78	18.49
HE20	MCS0	2	52	3	2422	0.05	0.07	14.99	16.09	18.58
HE20	MCS0	2	106	3	2422	0.07	0.05	15.04	16.03	18.57
HE20	MCS0	2	Full	6	2437	0.09	0.09	15.06	15.67	18.38
HE20	MCS0	2	26	6	2437	0.06	0.06	15.42	16.13	18.80
HE20	MCS0	2	52	6	2437	0.04	0.04	15.47	16.21	18.86
HE20	MCS0	2	106	6	2437	0.05	0.05	15.44	16.18	18.84
HE20	MCS0	2	Full	8	2447	0.09	0.09	14.42	16.30	18.47
HE20	MCS0	2	26	8	2447	0.06	0.06	14.90	15.97	18.48
HE20	MCS0	2	52	8	2447	0.05	0.07	14.86	15.84	18.38
HE20	MCS0	2	106	8	2447	0.07	0.05	15.11	15.79	18.48
HE20	MCS0	2	Full	9	2452	0.09	0.09	14.89	16.28	18.65
HE20	MCS0	2	26	9	2452	0.06	0.06	15.13	15.84	18.51
HE20	MCS0	2	52	9	2452	0.05	0.07	14.90	16.09	18.54
HE20	MCS0	2	106	9	2452	0.07	0.05	14.99	16.34	18.73
HE20	MCS0	2	Full	10	2457	0.09	0.09	14.77	16.15	18.52
HE20	MCS0	2	26	10	2457	0.06	0.06	15.24	15.94	18.62
HE20	MCS0	2	52	10	2457	0.05	0.07	15.06	16.05	18.59
HE20	MCS0	2	106	10	2457	0.07	0.05	14.89	15.98	18.48
HE20	MCS0	2	Full	11	2462	0.09	0.09	11.82	12.69	15.28
HE20	MCS0	2	26	11	2462	0.06	0.06	12.42	13.01	15.74
HE20	MCS0	2	52	11	2462	0.04	0.04	12.51	12.92	15.73
HE20	MCS0	2	106	11	2462	0.05	0.05	12.35	12.97	15.68

Note: Measured power (dBm) has offset with cable loss.





### DTS Bandwidth

#### Test Result


TestMode	Antenna	Frequency[MHz]	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	9.04	2407.48	2416.52	0.5	PASS
	Ant2	2412	7.56	2408.44	2416.00	0.5	PASS
	Ant1	2437	8.56	2432.48	2441.04	0.5	PASS
	Ant2	2437	8.04	2432.96	2441.00	0.5	PASS
	Ant1	2462	8.04	2457.96	2466.00	0.5	PASS
	Ant2	2462	8.56	2457.96	2466.52	0.5	PASS
11G-CDD	Ant1	2412	16.32	2403.84	2420.16	0.5	PASS
	Ant2	2412	16.32	2403.84	2420.16	0.5	PASS
	Ant1	2417	16.36	2408.80	2425.16	0.5	PASS
	Ant2	2417	16.36	2408.80	2425.16	0.5	PASS
	Ant1	2422	16.36	2413.80	2430.16	0.5	PASS
	Ant2	2422	16.36	2413.80	2430.16	0.5	PASS
	Ant1	2437	16.32	2428.84	2445.16	0.5	PASS
	Ant2	2437	16.32	2428.84	2445.16	0.5	PASS
	Ant1	2447	16.32	2438.84	2455.16	0.5	PASS
	Ant2	2447	16.36	2438.80	2455.16	0.5	PASS
	Ant1	2452	16.32	2443.84	2460.16	0.5	PASS
	Ant2	2452	16.36	2443.80	2460.16	0.5	PASS
	Ant1	2457	16.32	2448.84	2465.16	0.5	PASS
	Ant2	2457	16.32	2448.84	2465.16	0.5	PASS
	Ant1	2462	16.36	2453.80	2470.16	0.5	PASS
	Ant2	2462	16.36	2453.80	2470.16	0.5	PASS
11AX20MIMO	Ant1	2412	19.00	2402.52	2421.52	0.5	PASS
	Ant2	2412	18.88	2402.52	2421.40	0.5	PASS
	Ant1	2417	19.04	2407.48	2426.52	0.5	PASS
	Ant2	2417	18.96	2407.52	2426.48	0.5	PASS
	Ant1	2422	19.00	2412.48	2431.48	0.5	PASS
	Ant2	2422	18.88	2412.56	2431.44	0.5	PASS
	Ant1	2437	19.00	2427.48	2446.48	0.5	PASS
	Ant2	2437	18.92	2427.52	2446.44	0.5	PASS
	Ant1	2447	18.88	2437.52	2456.40	0.5	PASS
	Ant2	2447	18.92	2437.52	2456.44	0.5	PASS
	Ant1	2452	18.96	2442.52	2461.48	0.5	PASS
	Ant2	2452	18.92	2442.52	2461.44	0.5	PASS
	Ant1	2457	18.92	2447.52	2466.44	0.5	PASS
	Ant2	2457	18.84	2447.56	2466.40	0.5	PASS
	Ant1	2462	19.00	2452.52	2471.52	0.5	PASS
	Ant2	2462	18.96	2452.52	2471.48	0.5	PASS




Test Graphs

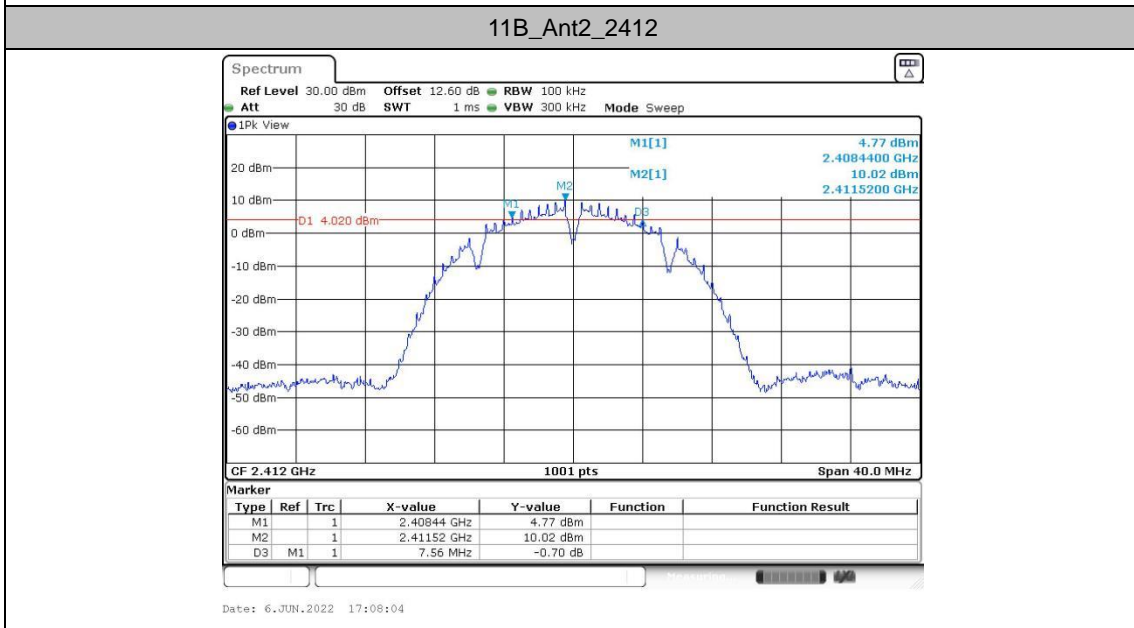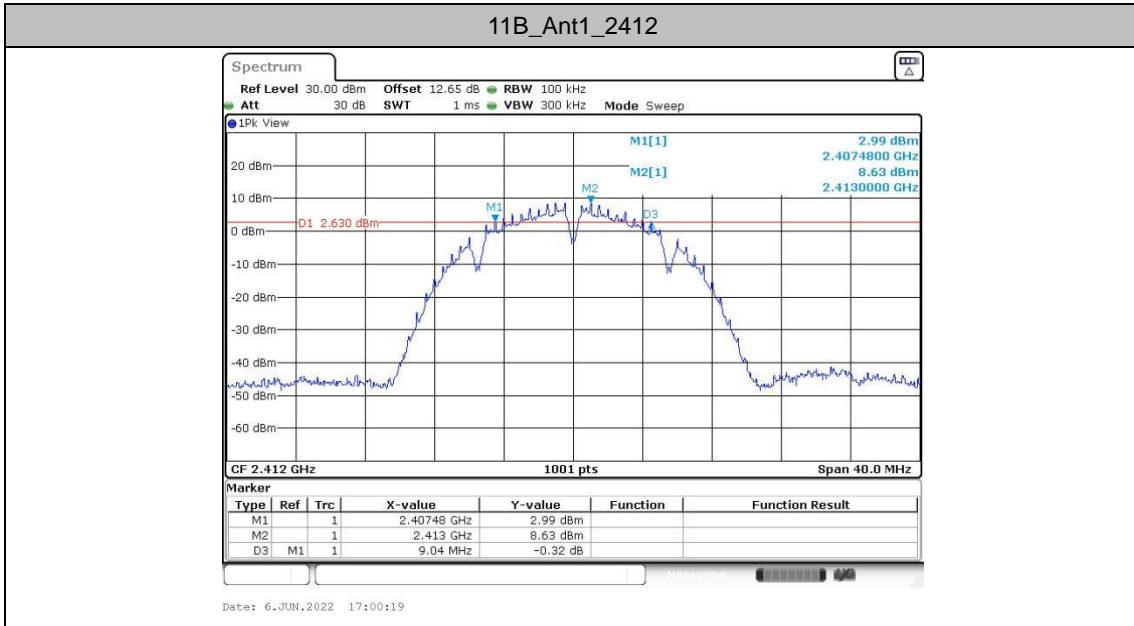





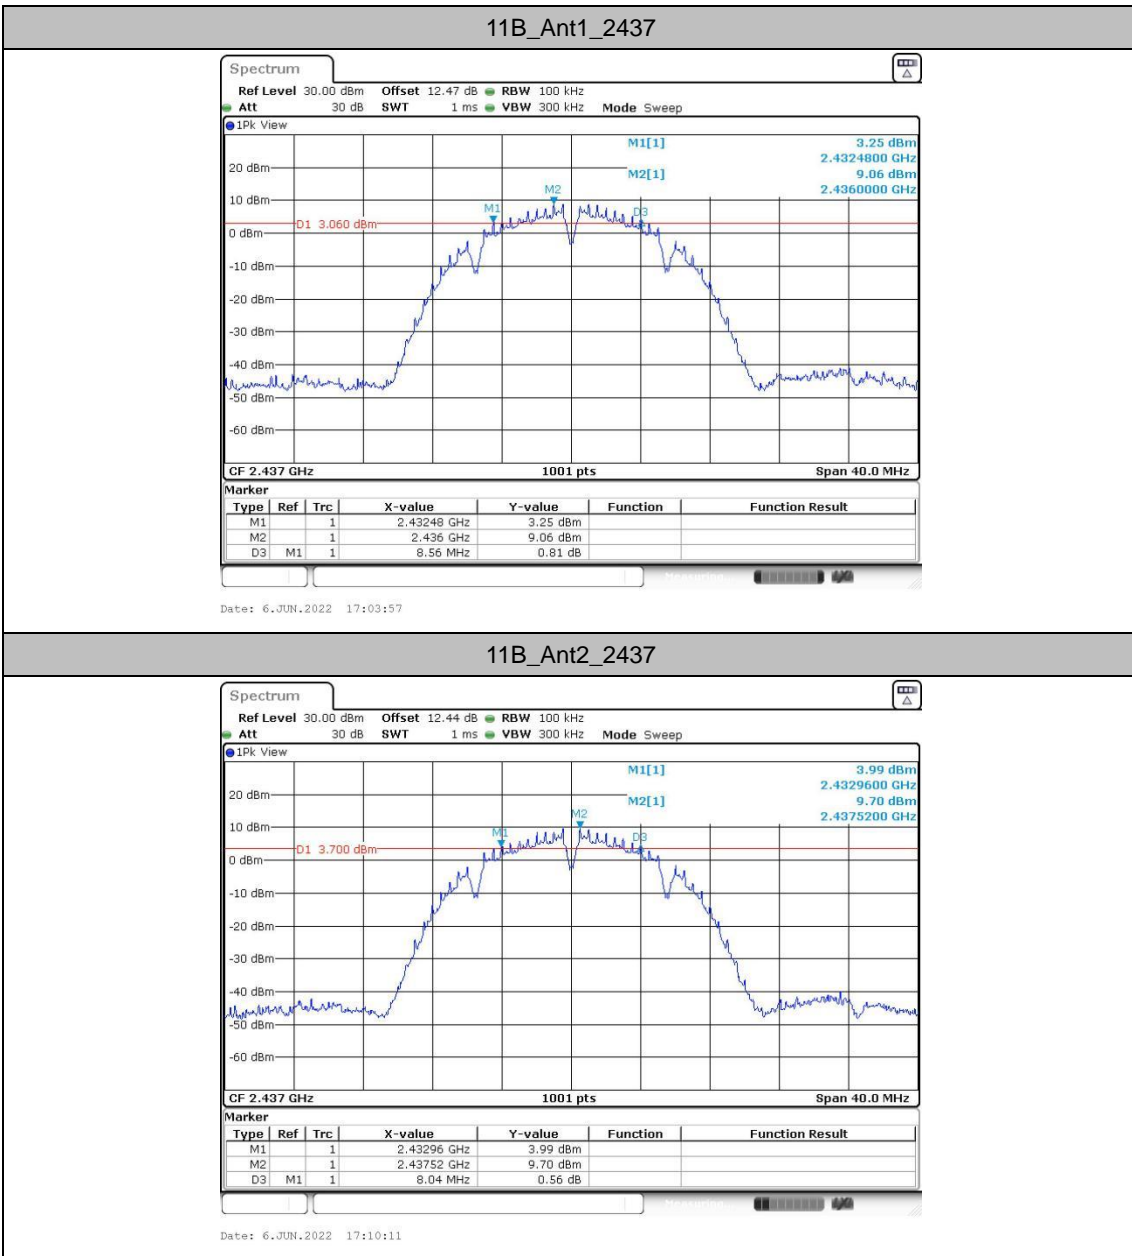


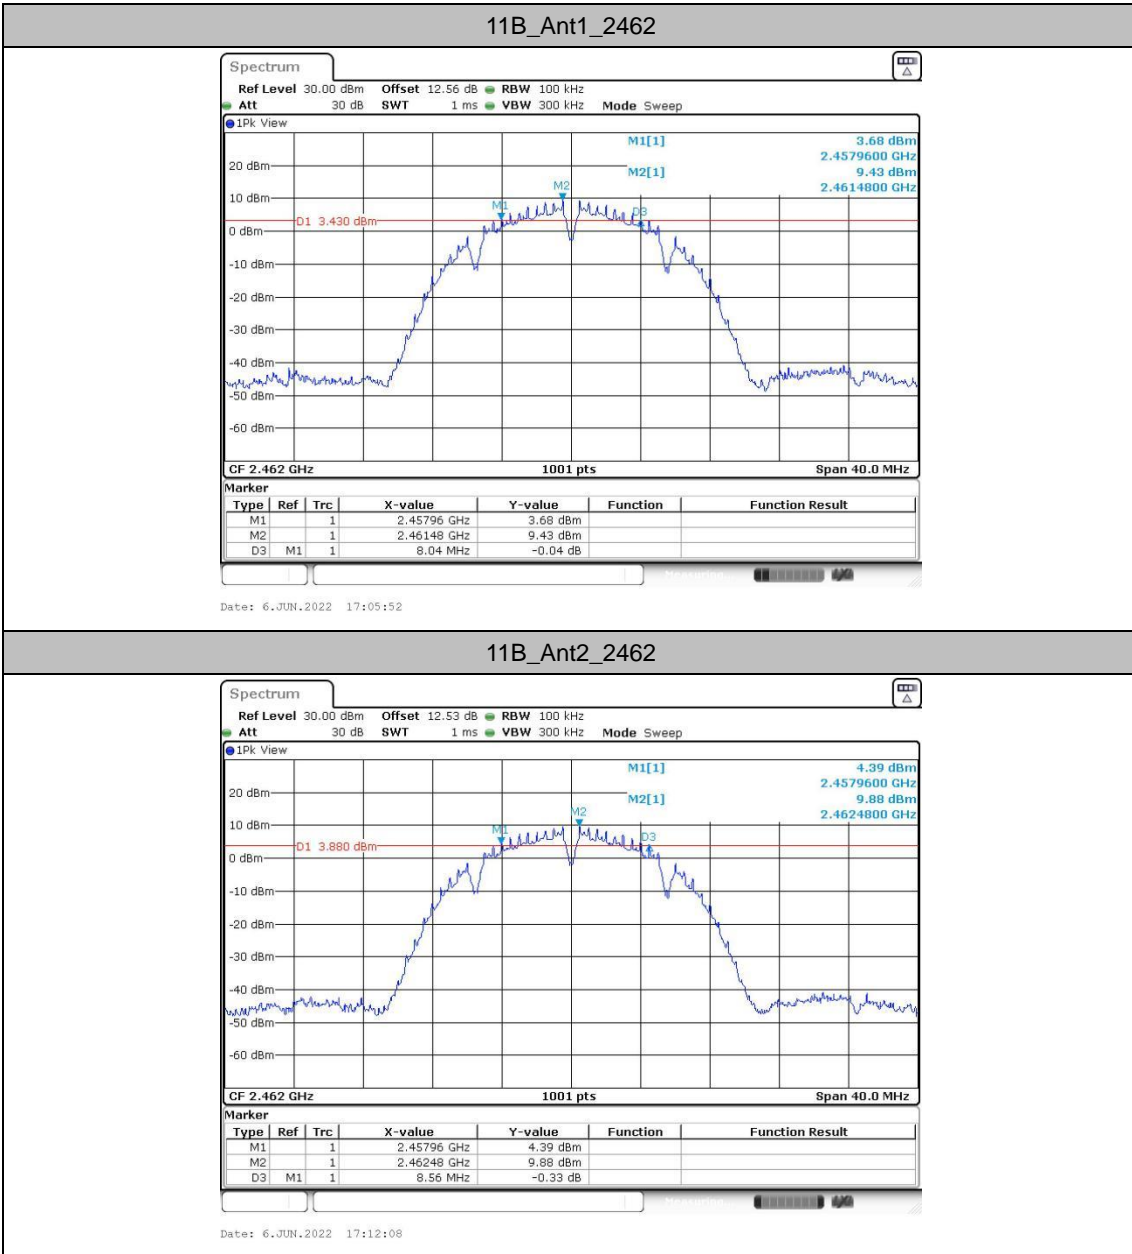



### 11B\_Ant2\_2462

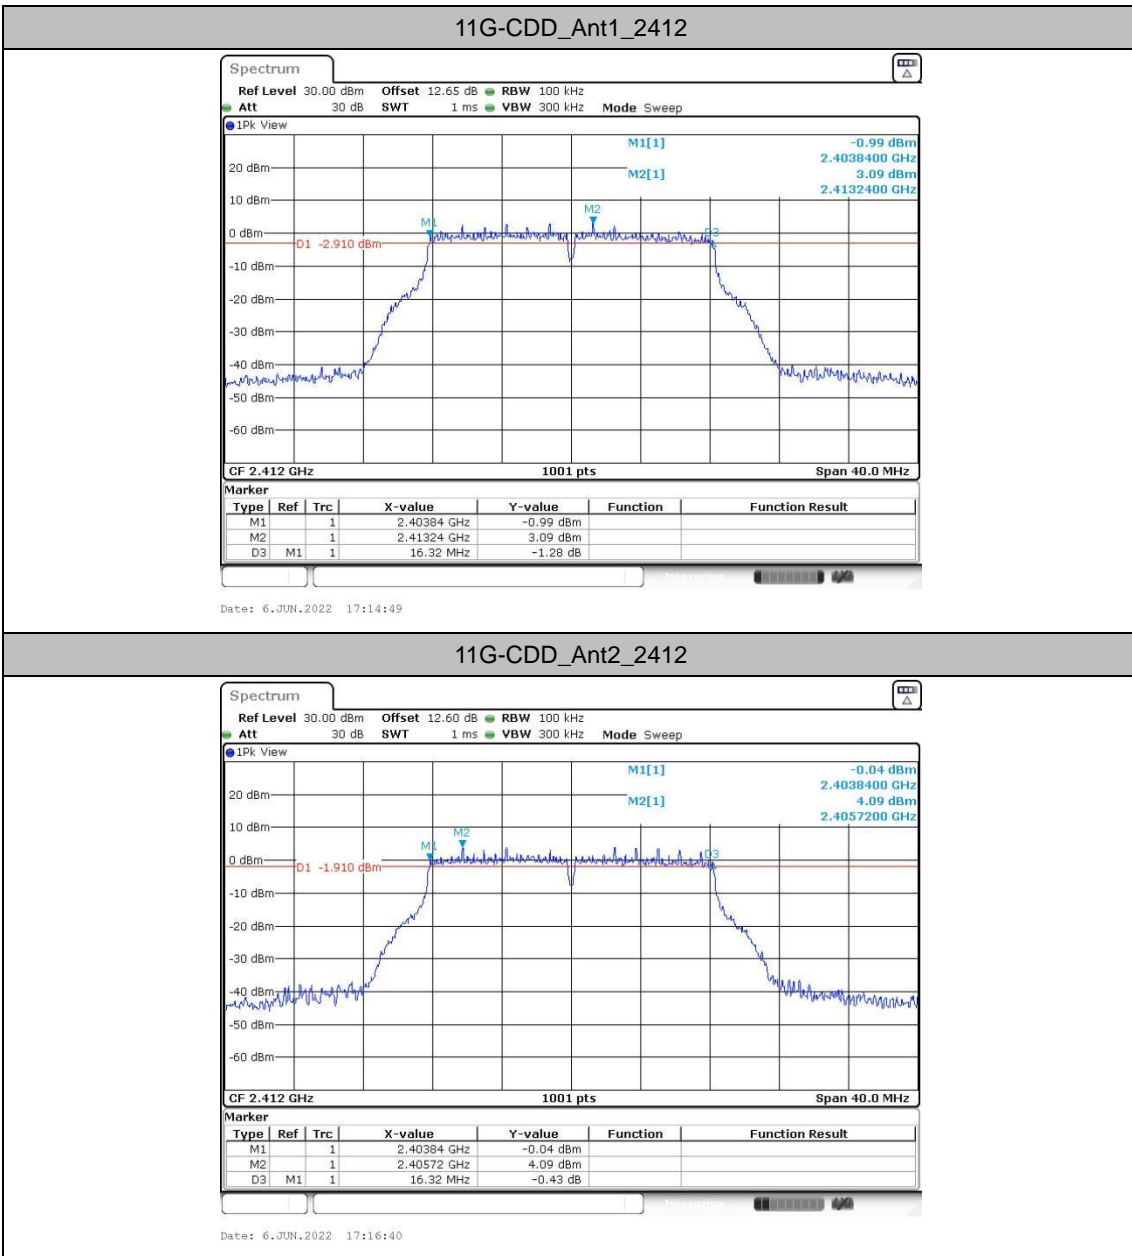


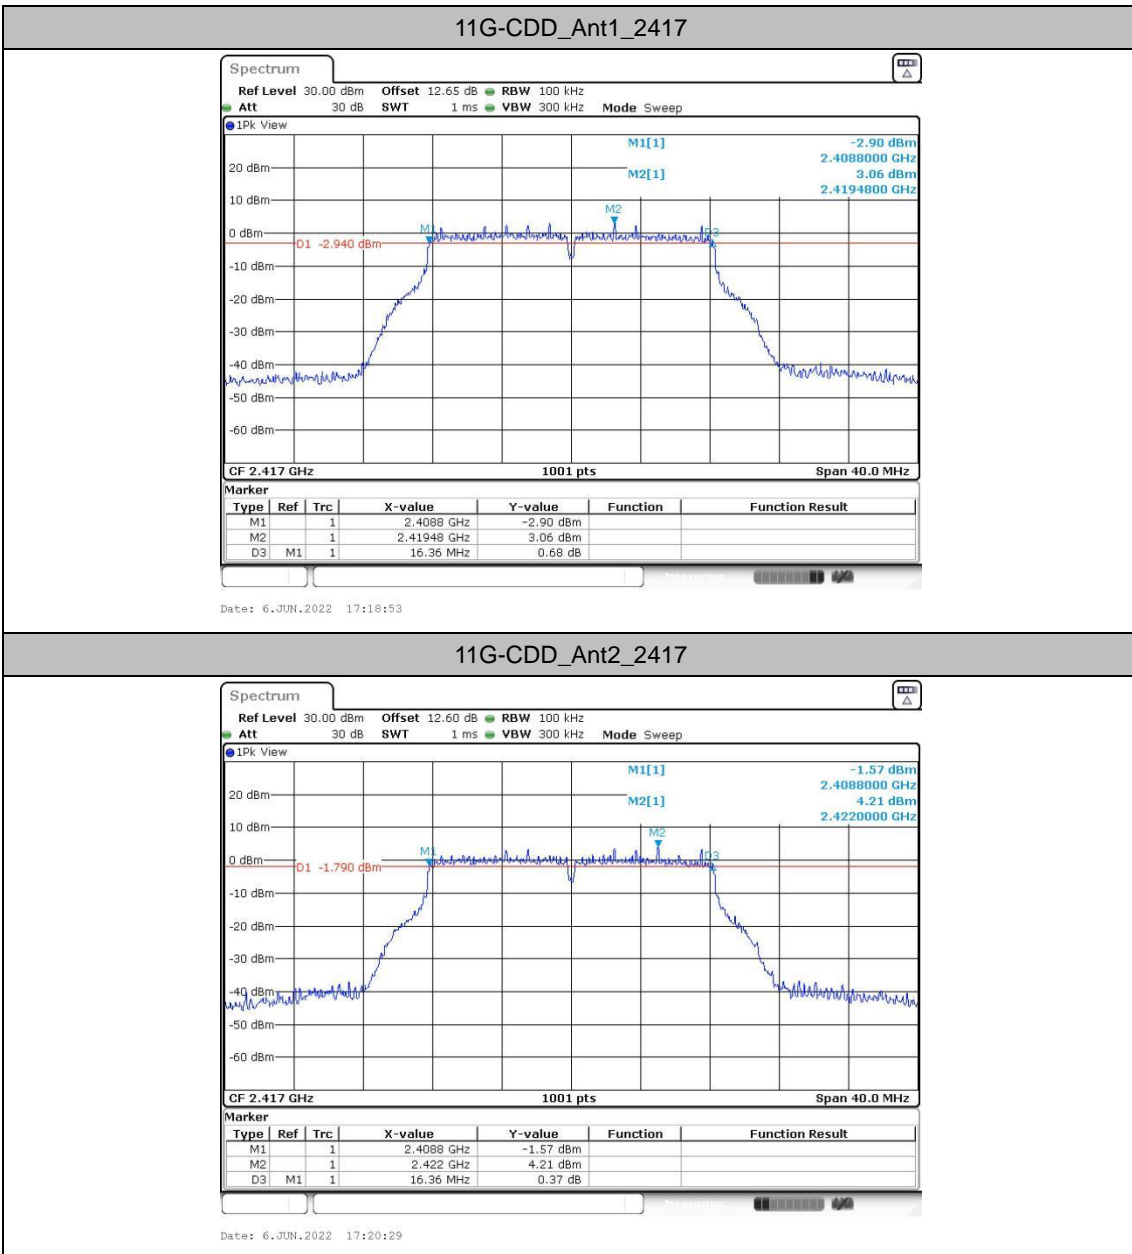

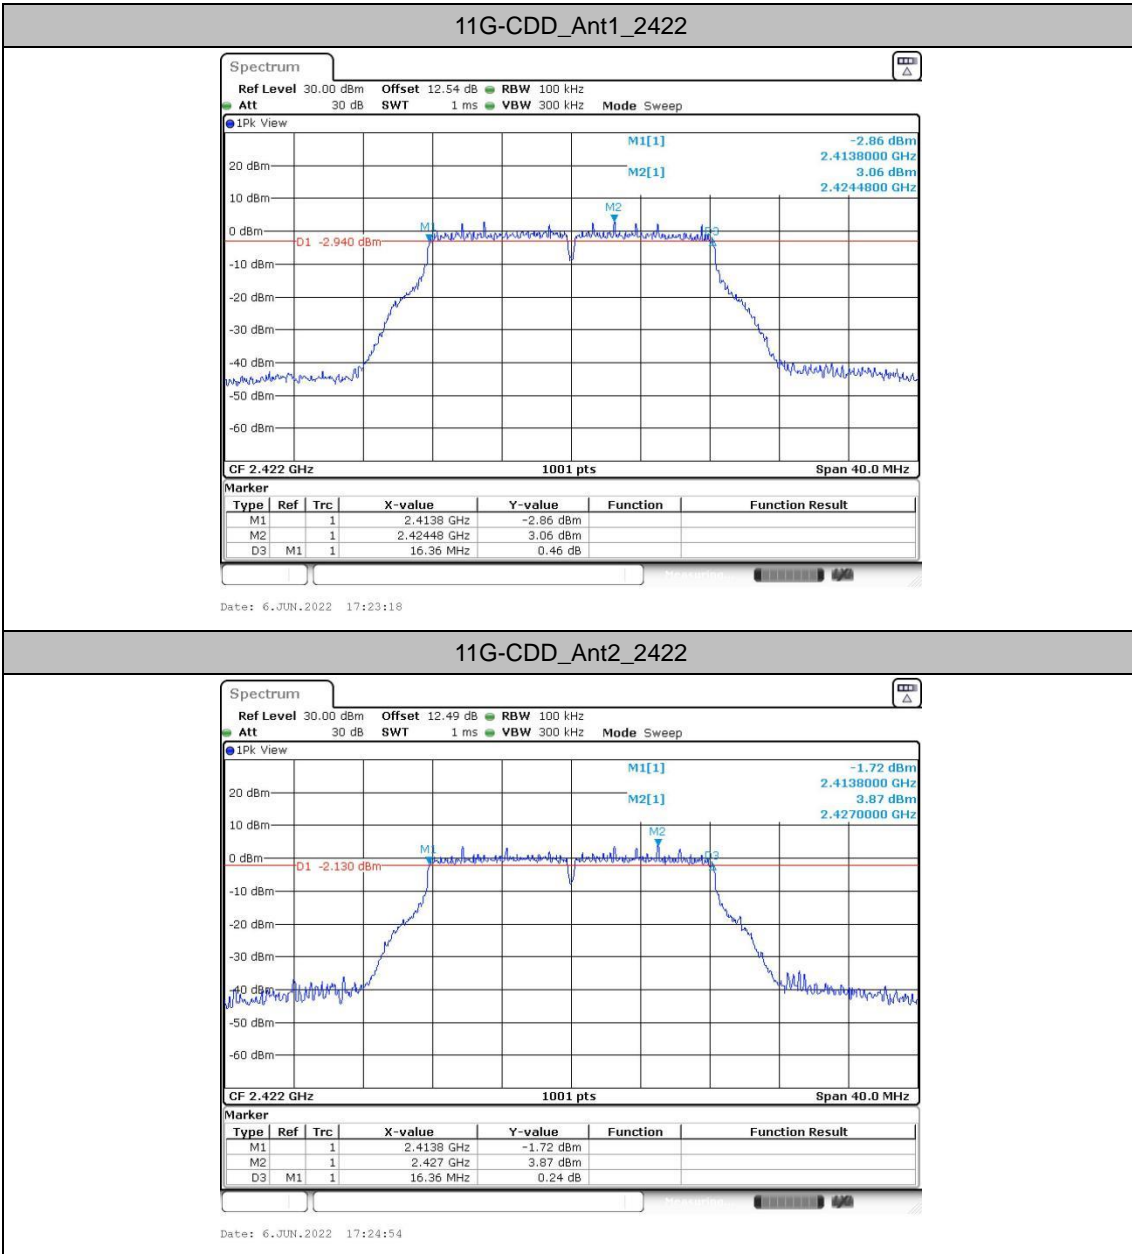


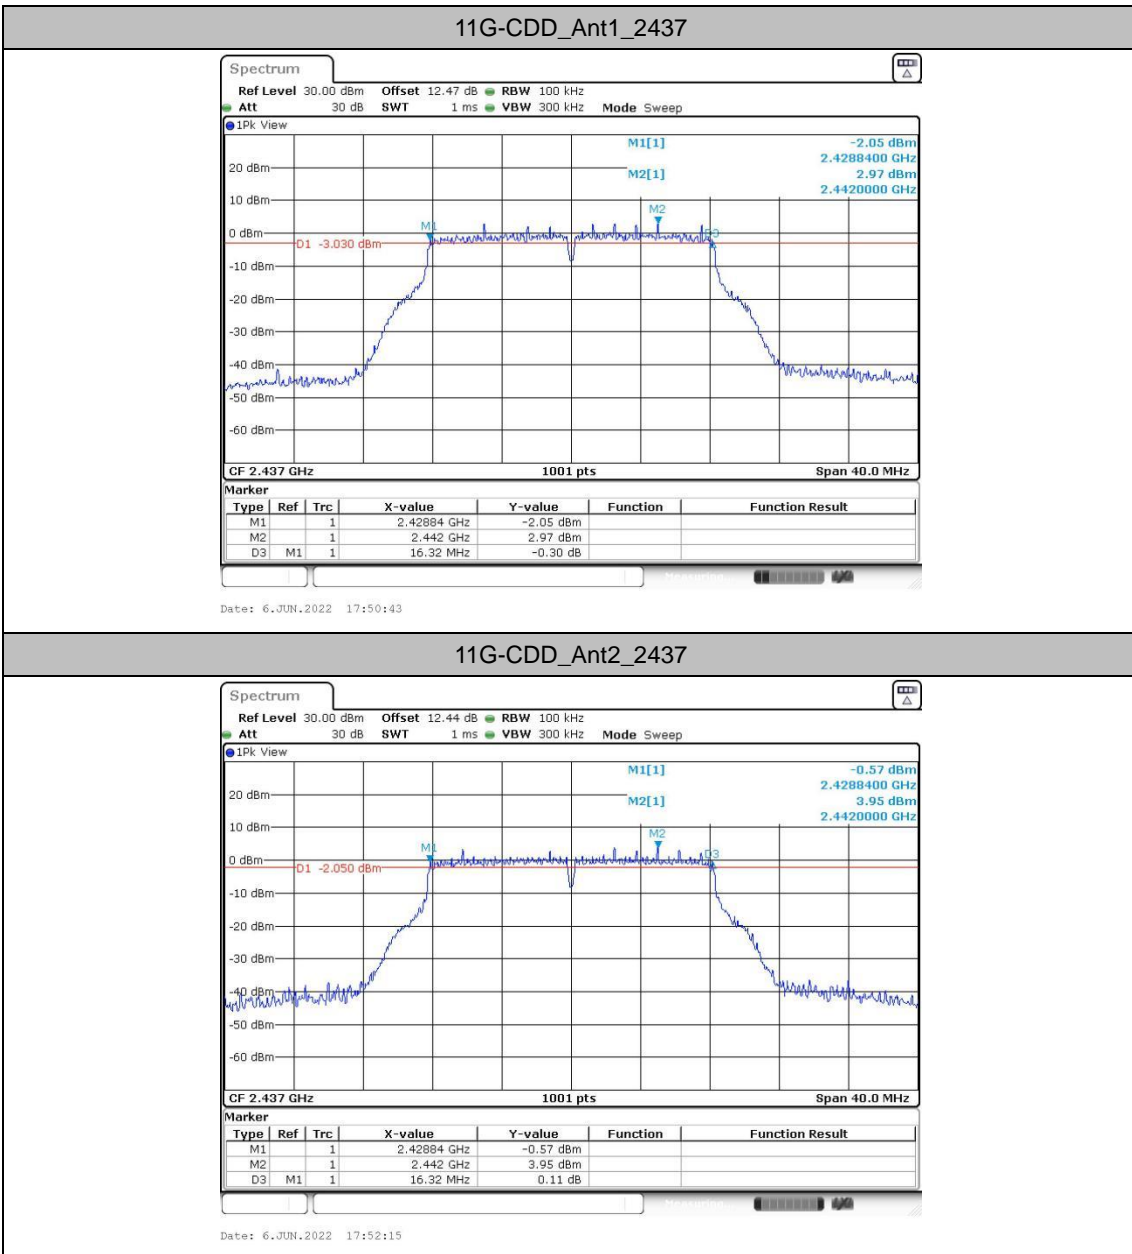


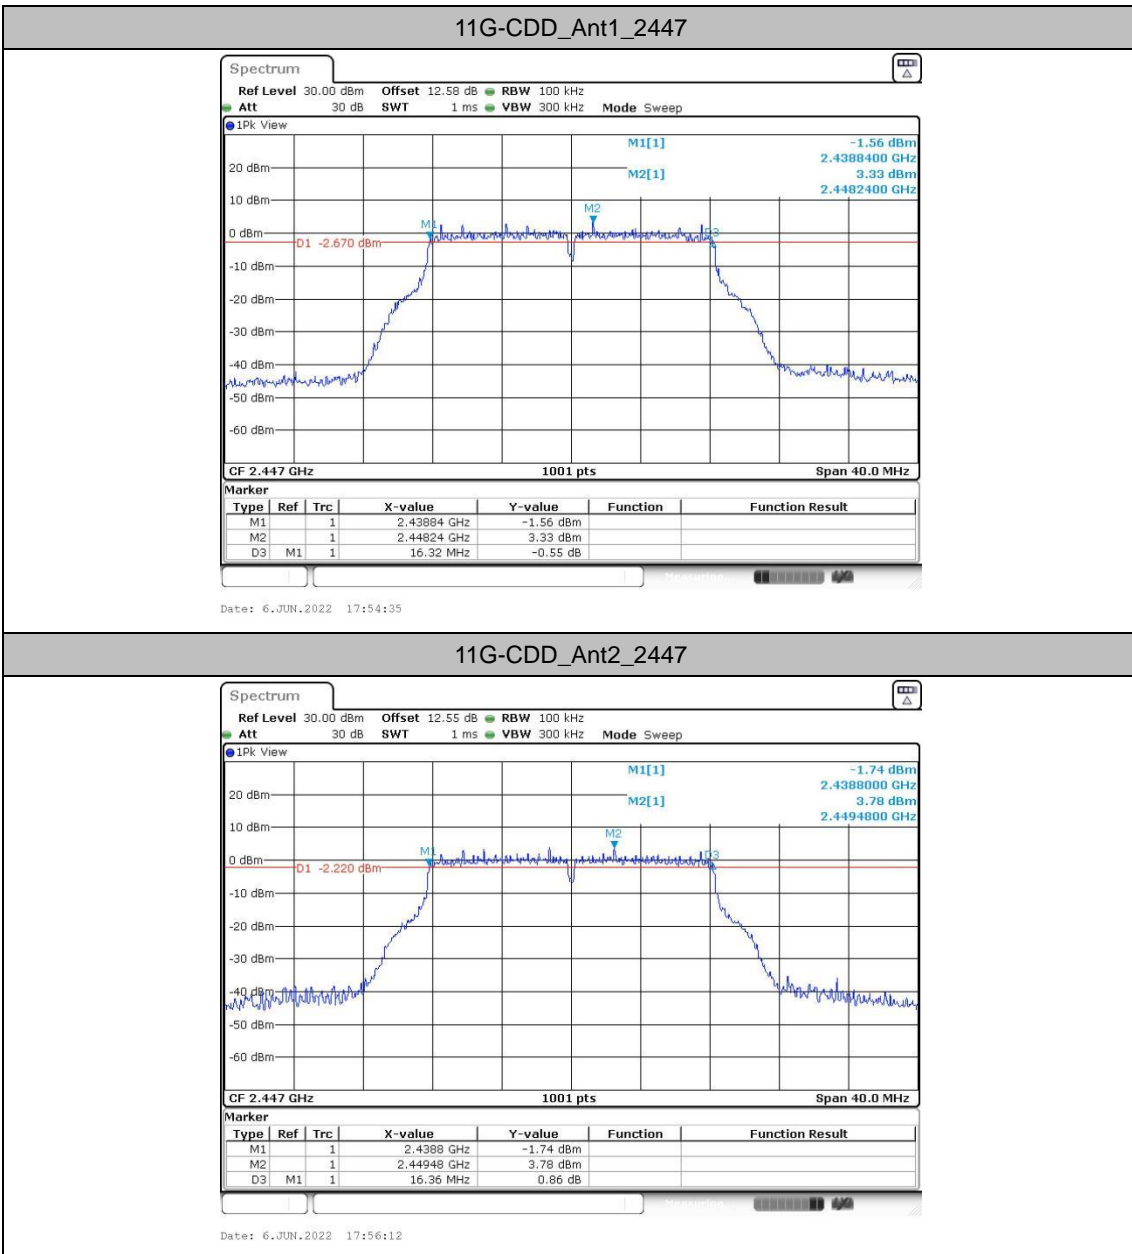


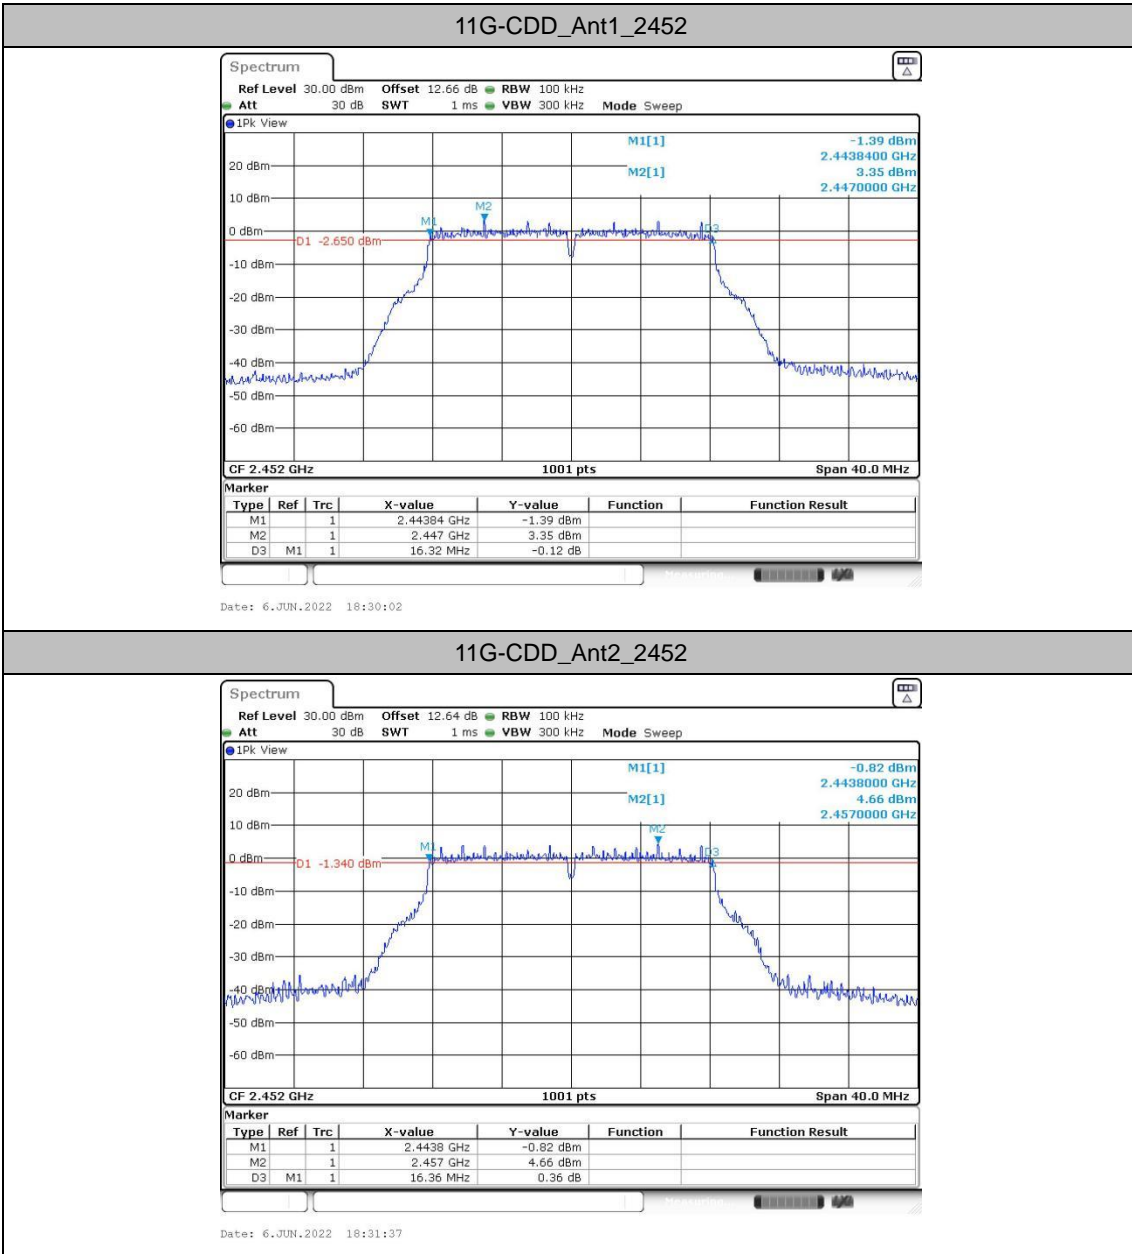





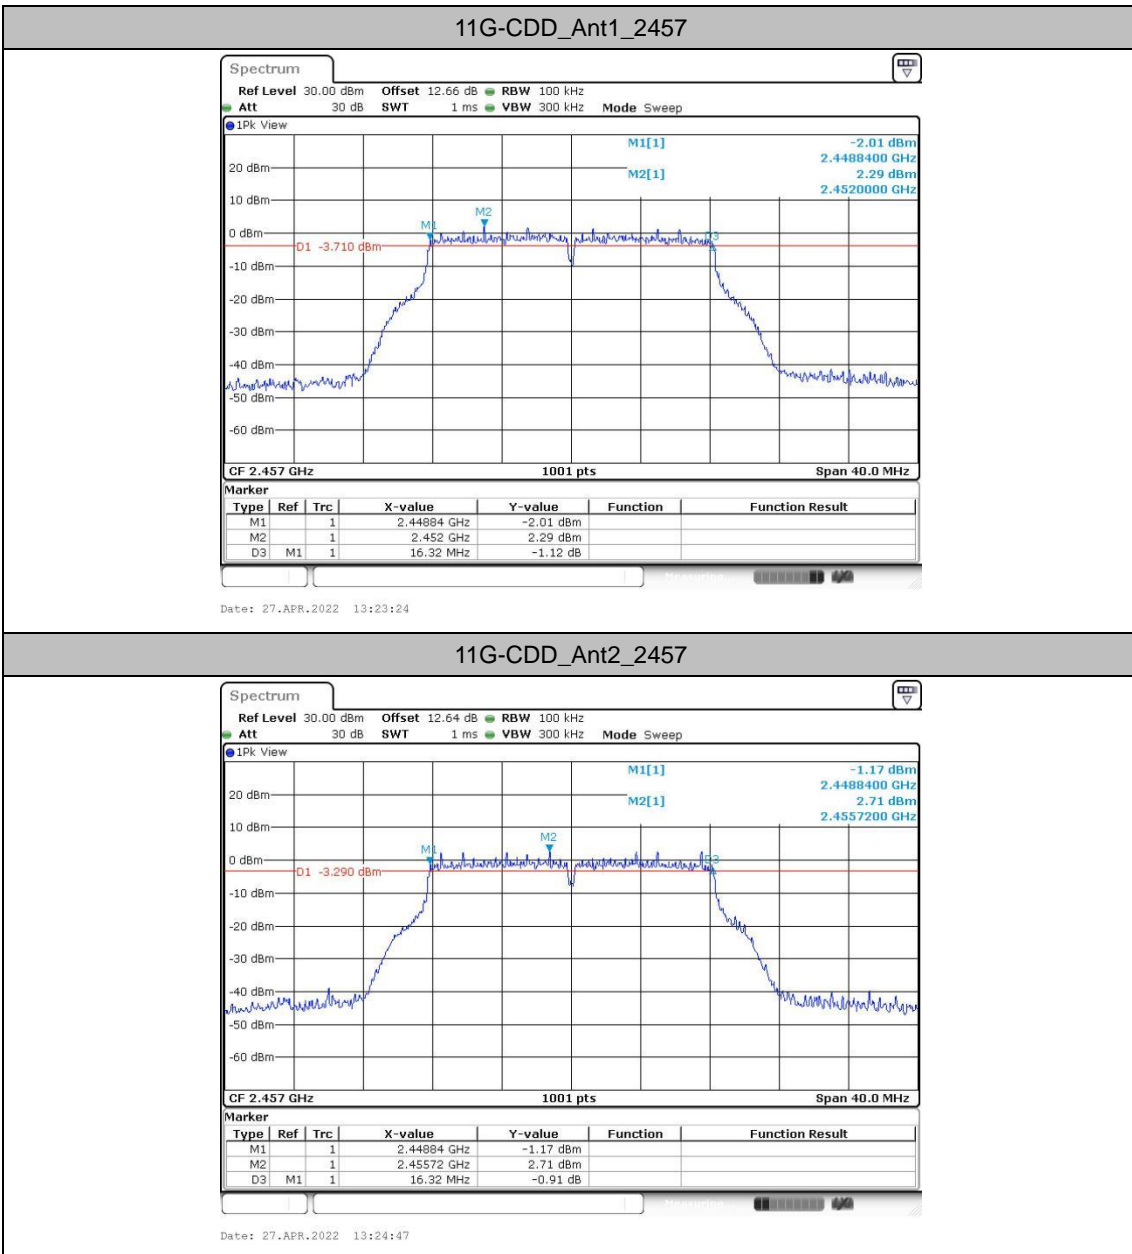


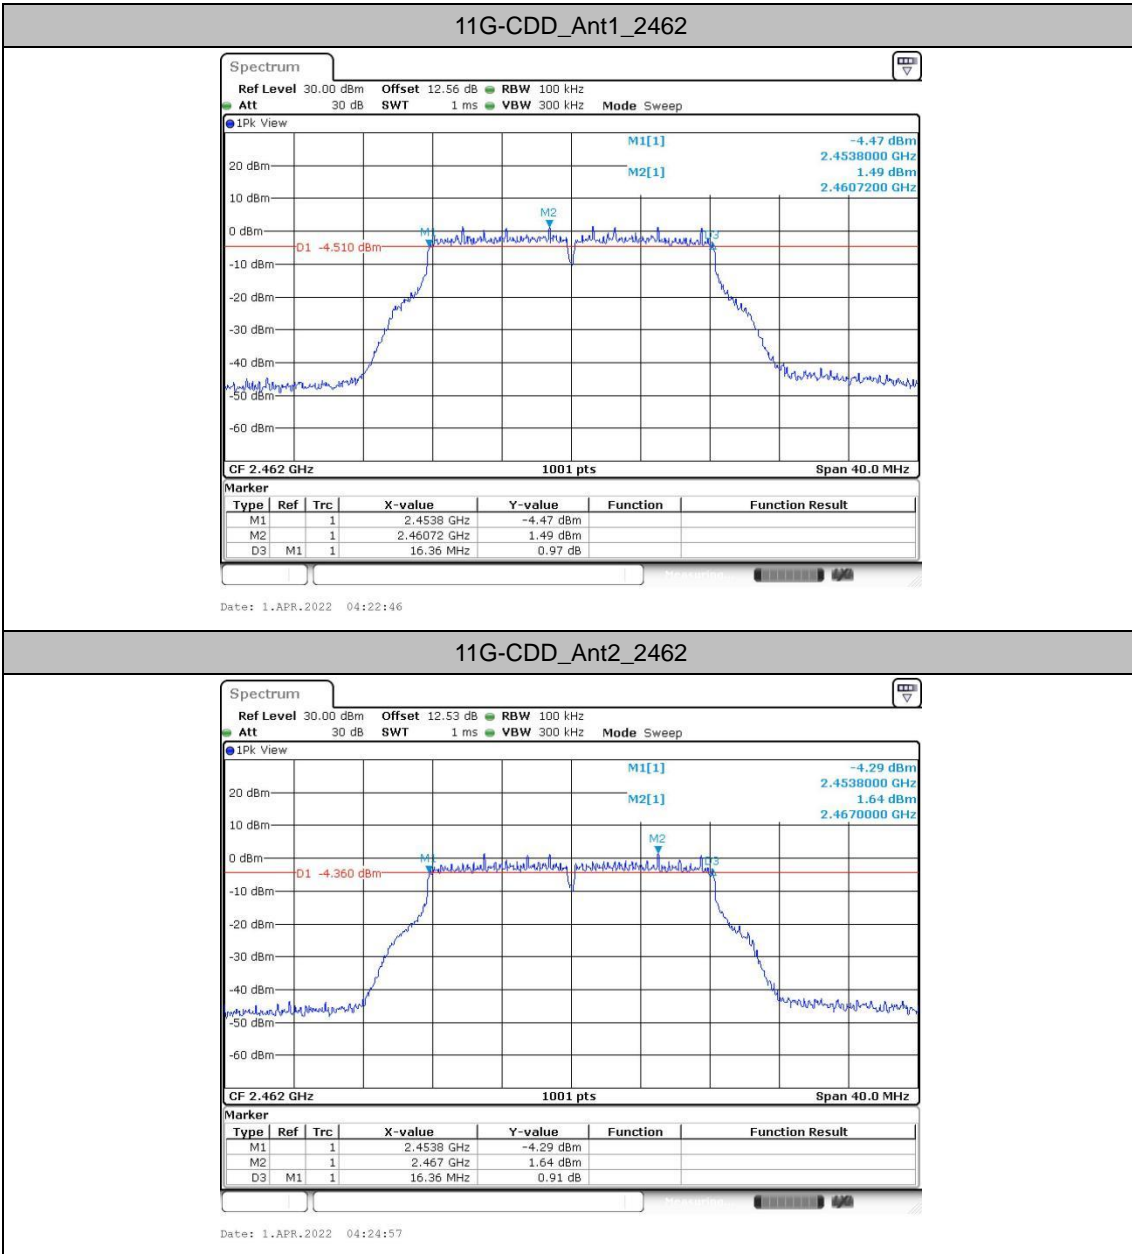


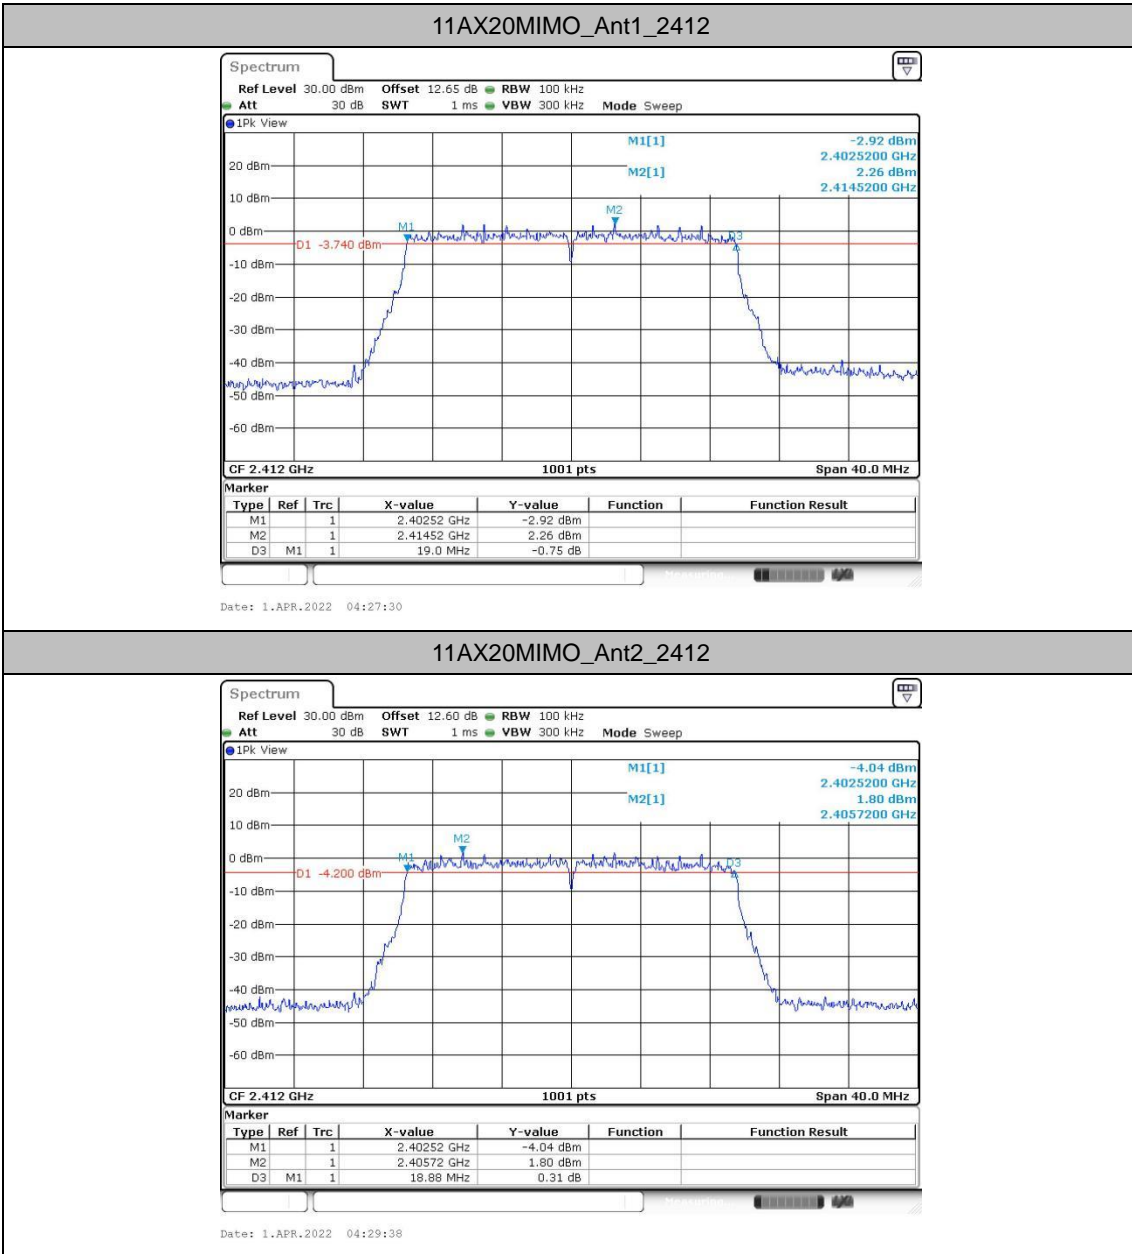


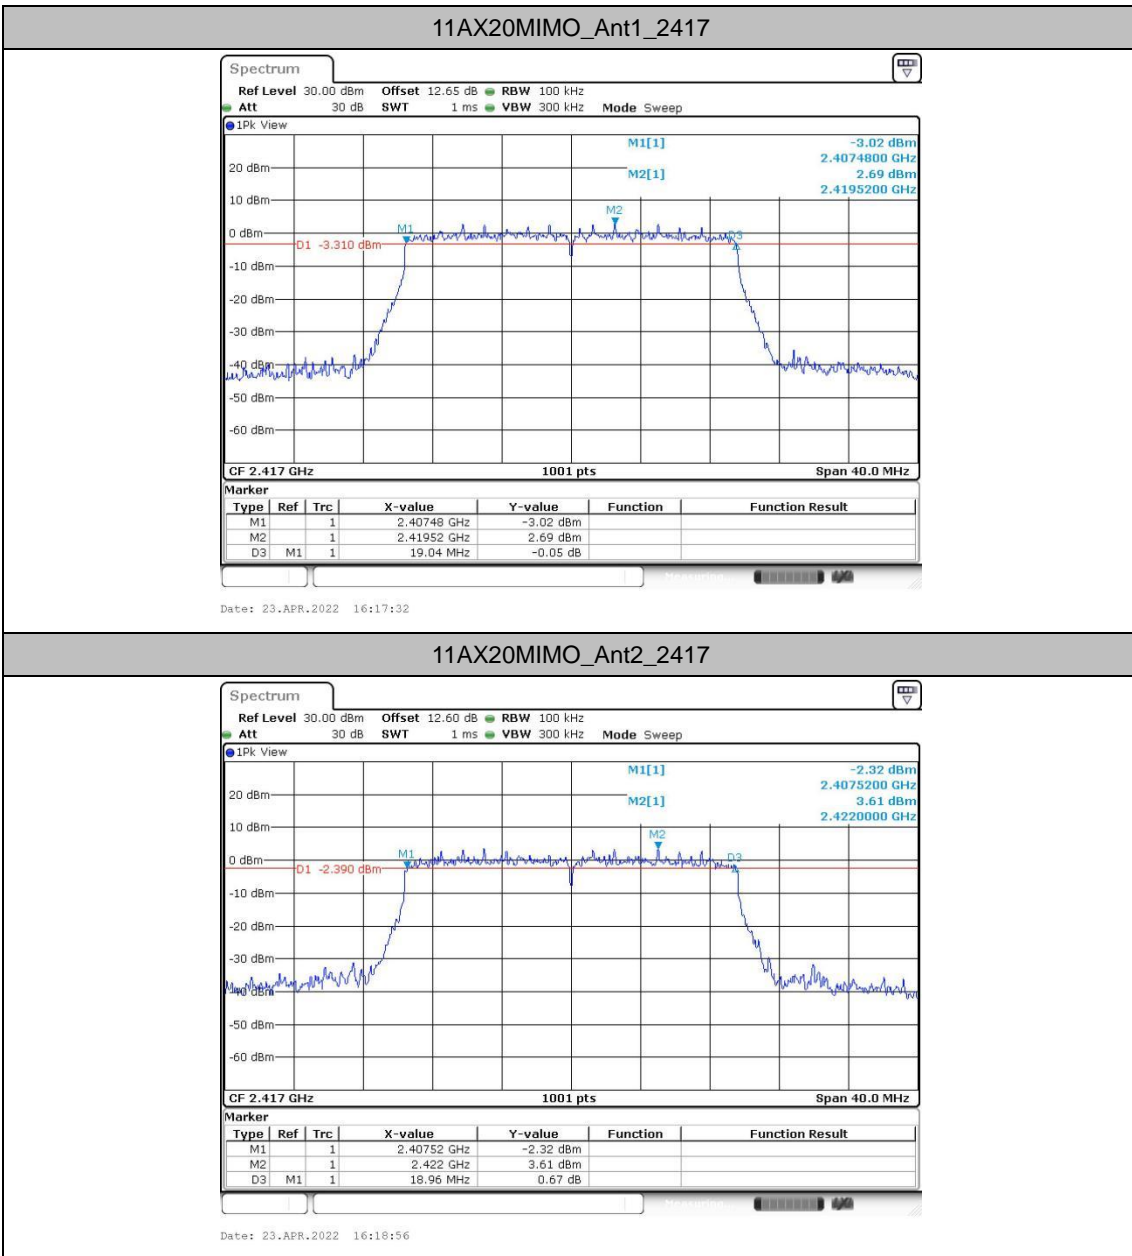

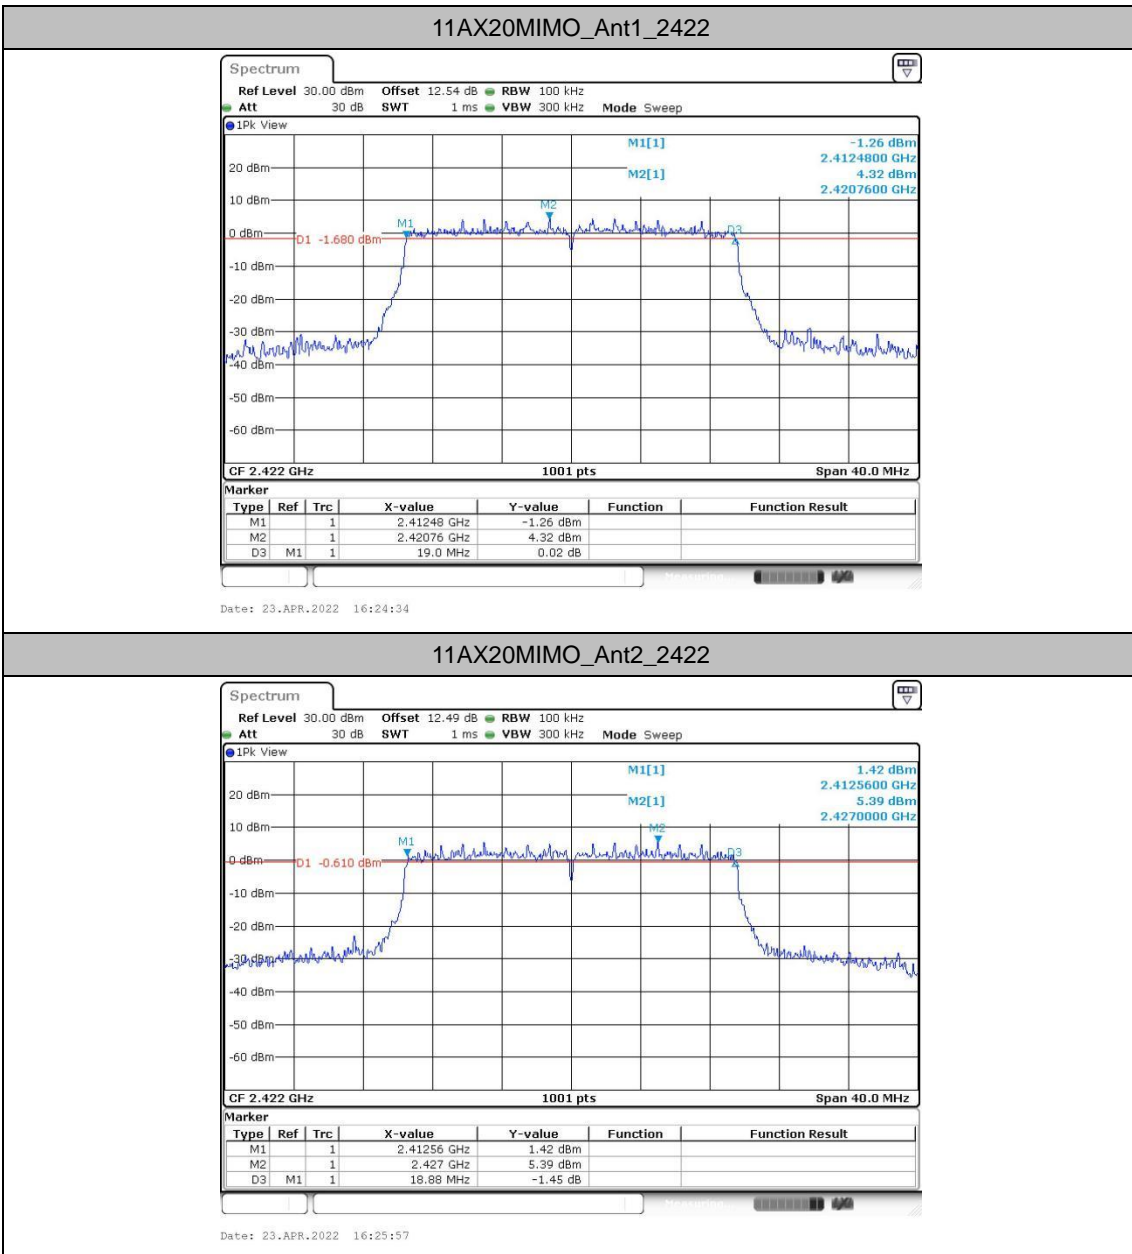


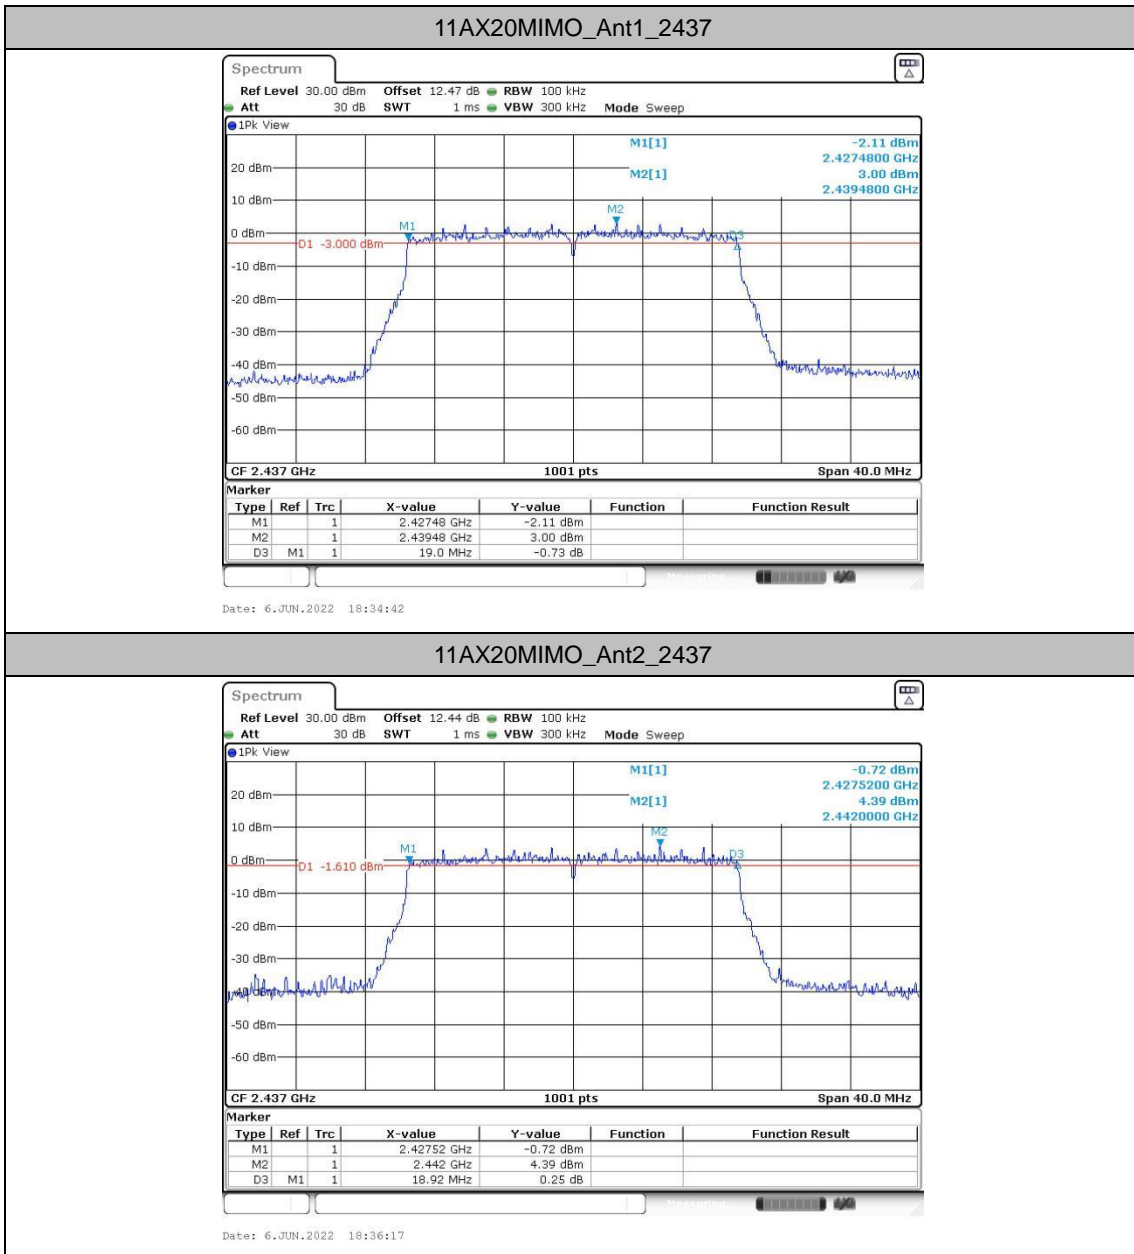

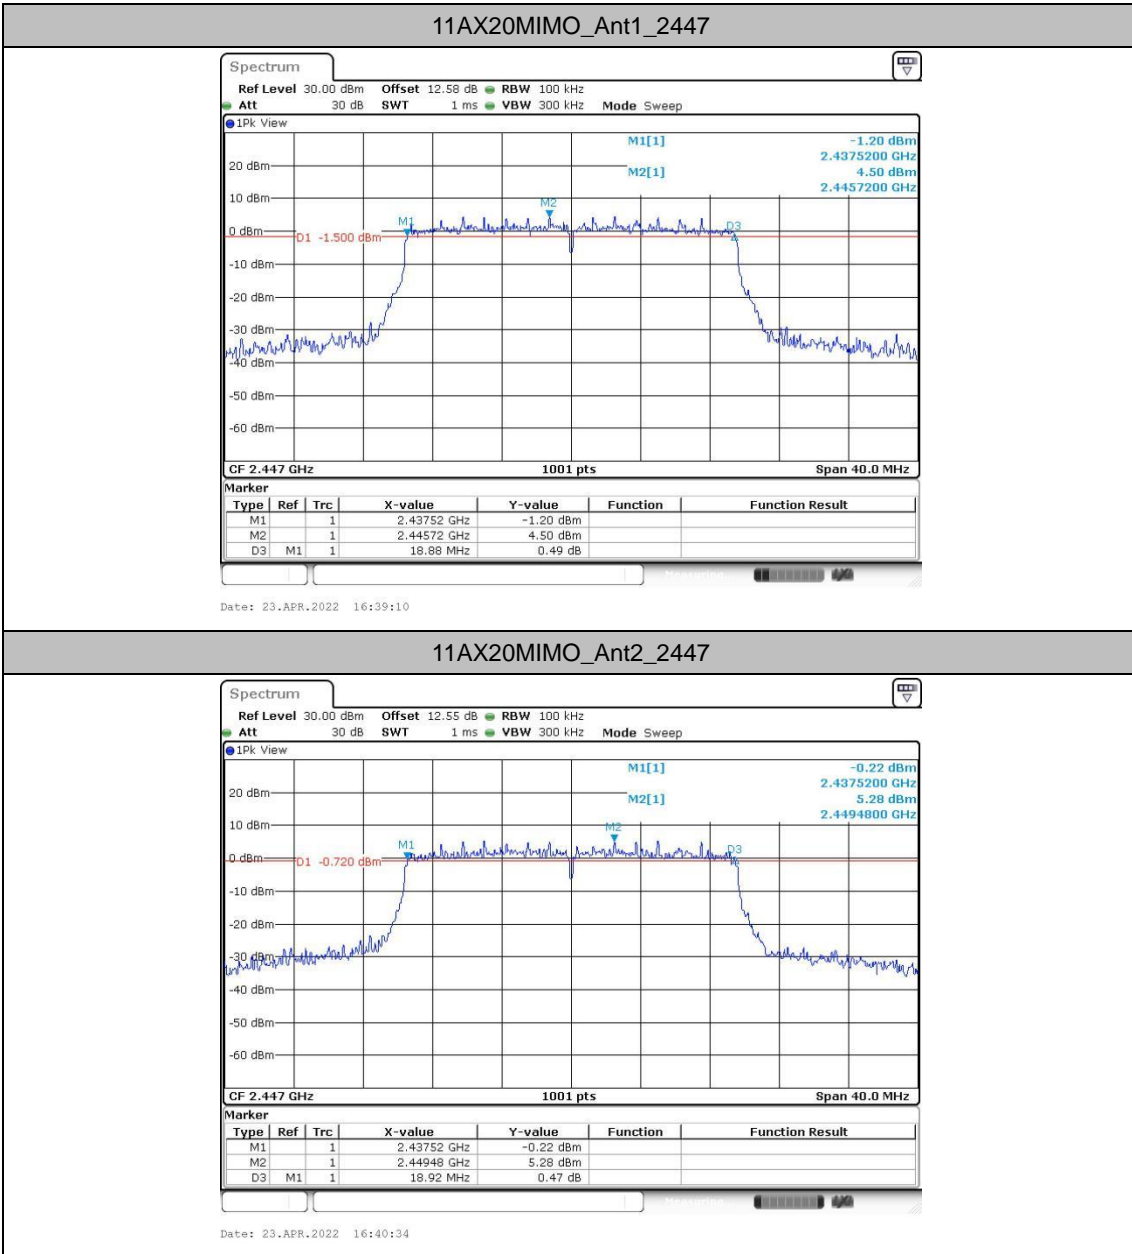

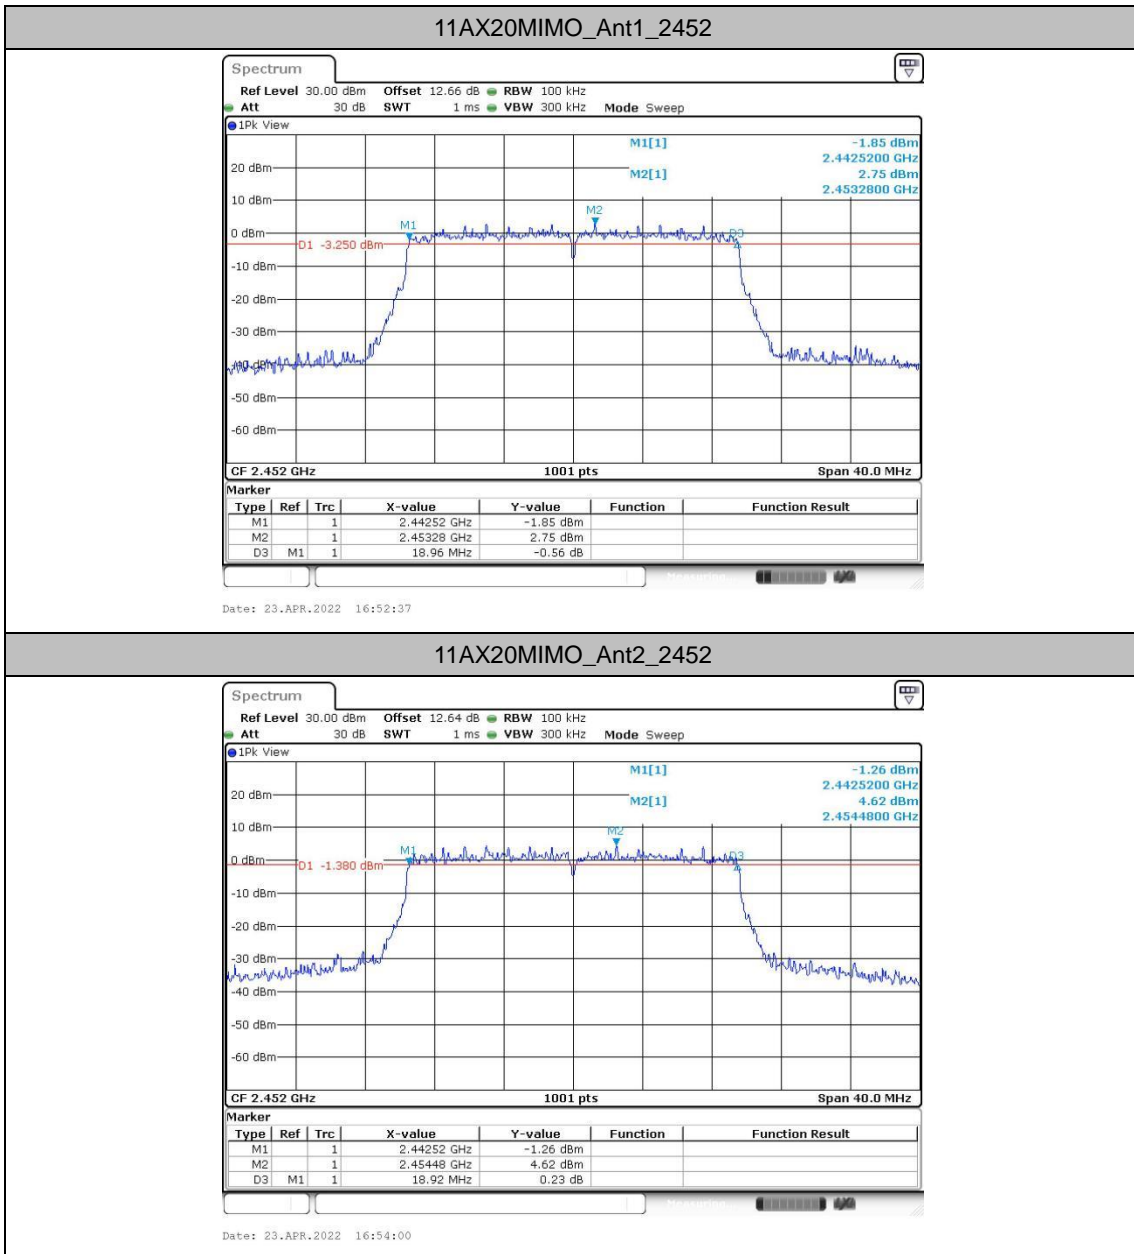




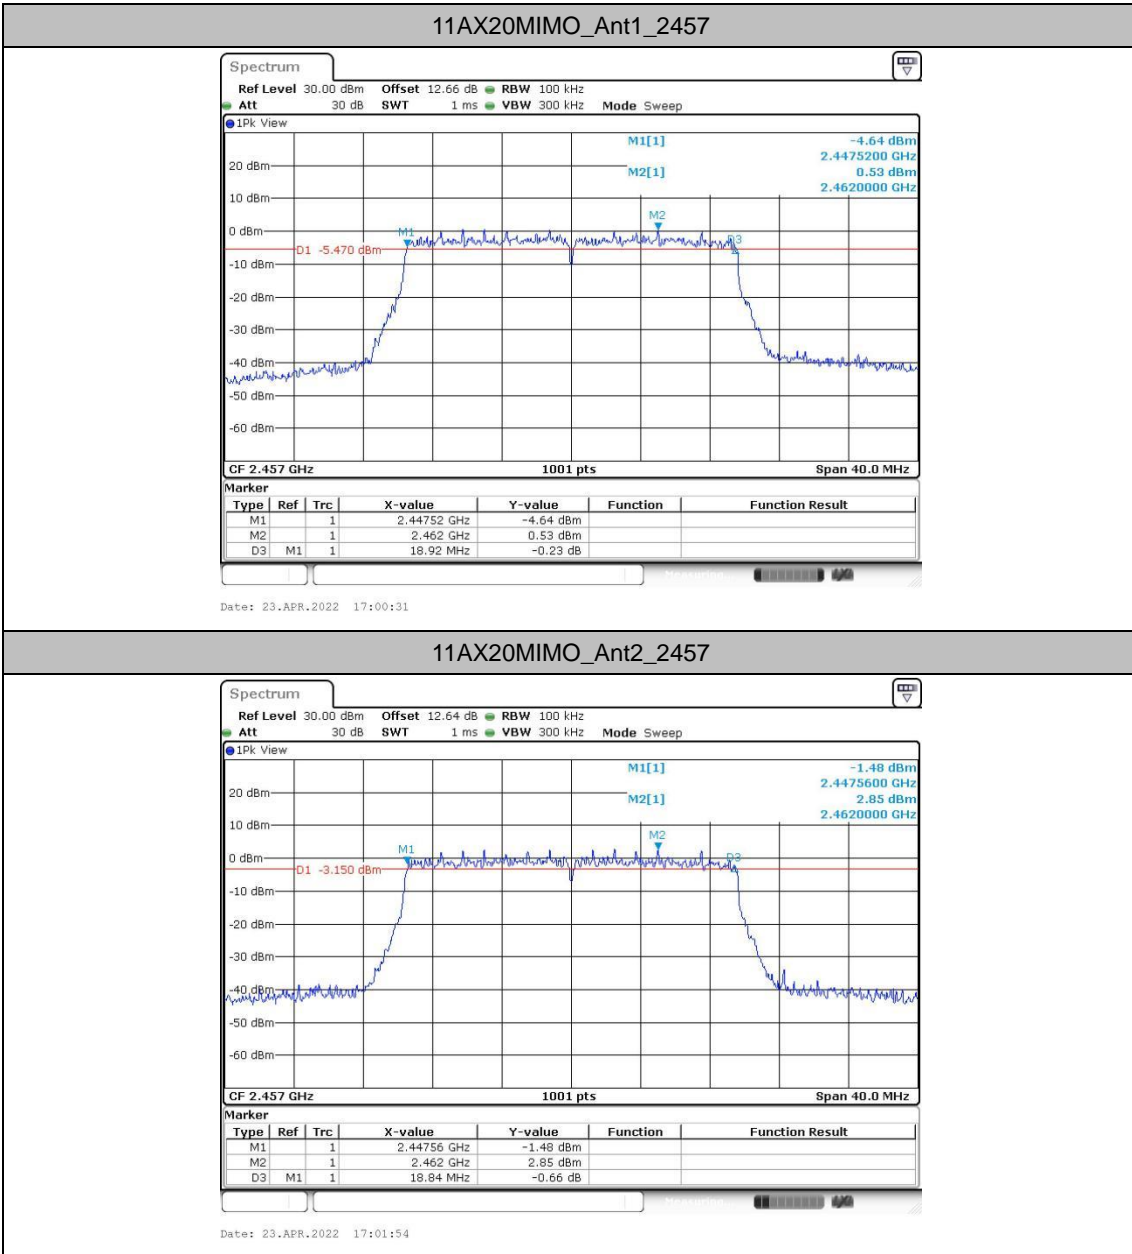




11AX20MIMO\_Ant1\_2462

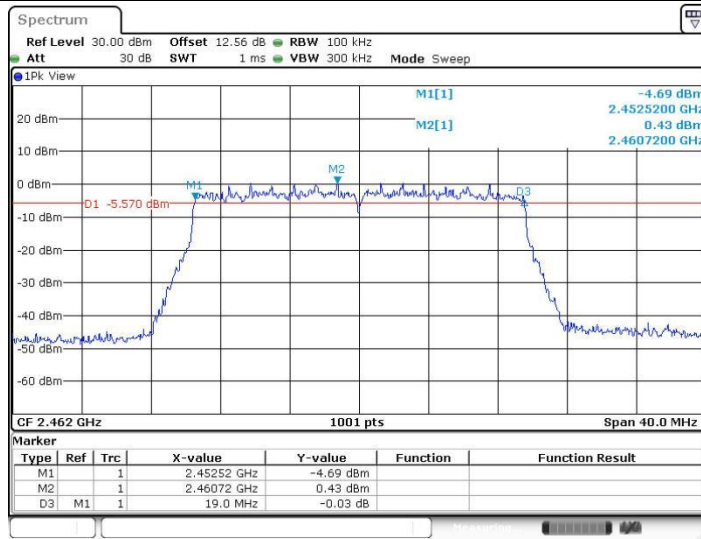

Date: 1.APR.2022 04:36:18

11AX20MIMO\_Ant2\_2462

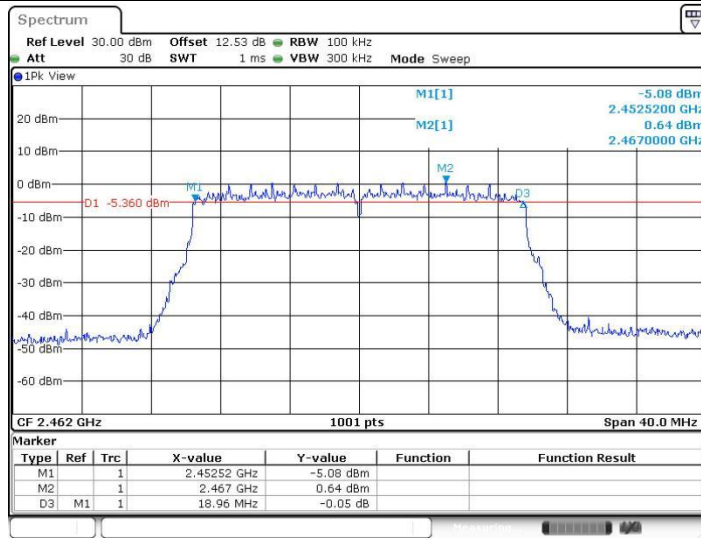

Date: 1.APR.2022 04:36:24



### Occupied Channel Bandwidth

#### Test Result

TestMode	Antenna	Channel Frequency [MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	13.067	2405.407	2418.474	---	---
	Ant2	2412	13.147	2405.367	2418.513	---	---
	Ant1	2437	13.067	2430.487	2443.553	---	---
	Ant2	2437	13.147	2430.447	2443.593	---	---
	Ant1	2462	13.107	2455.407	2468.513	---	---
	Ant2	2462	13.107	2455.407	2468.513	---	---
11G-CDD	Ant1	2412	17.582	2403.129	2420.711	---	---
	Ant2	2412	17.263	2403.369	2420.631	---	---
	Ant1	2417	17.582	2408.169	2425.751	---	---
	Ant2	2417	17.303	2408.369	2425.671	---	---
	Ant1	2422	17.542	2413.169	2430.711	---	---
	Ant2	2422	17.263	2413.409	2430.671	---	---
	Ant1	2437	17.542	2428.209	2445.751	---	---
	Ant2	2437	17.263	2428.449	2445.711	---	---
	Ant1	2447	17.542	2438.209	2455.751	---	---
	Ant2	2447	17.183	2438.449	2455.631	---	---
	Ant1	2452	17.502	2443.209	2460.711	---	---
	Ant2	2452	17.183	2443.449	2460.631	---	---
	Ant1	2457	17.542	2448.209	2465.751	---	---
	Ant2	2457	17.263	2448.409	2465.671	---	---
	Ant1	2462	17.542	2453.169	2470.711	---	---
	Ant2	2462	17.183	2453.449	2470.631	---	---
11AX20MIMO	Ant1	2412	19.221	2402.370	2421.590	---	---
	Ant2	2412	19.141	2402.370	2421.510	---	---
	Ant1	2417	19.261	2407.330	2426.590	---	---
	Ant2	2417	19.181	2407.370	2426.550	---	---
	Ant1	2422	19.261	2412.370	2431.630	---	---
	Ant2	2422	19.261	2412.330	2431.590	---	---
	Ant1	2437	19.181	2427.410	2446.590	---	---
	Ant2	2437	19.181	2427.410	2446.590	---	---
	Ant1	2447	19.221	2437.370	2456.590	---	---
	Ant2	2447	19.221	2437.370	2456.590	---	---
	Ant1	2452	19.181	2442.370	2461.550	---	---
	Ant2	2452	19.221	2442.370	2461.590	---	---
	Ant1	2457	19.221	2447.370	2466.590	---	---
	Ant2	2457	19.221	2447.370	2466.590	---	---
	Ant1	2462	19.181	2452.370	2471.550	---	---
	Ant2	2462	19.141	2452.410	2471.550	---	---



Test Graphs

