





FCC RADIO TEST REPORT

FCC ID : 2AGOZ-P97
Equipment : VR Headset
Brand Name : 
Model Name : P97
Applicant : Meta Platforms Technologies, LLC.
1 Hacker Way, Menlo Park, CA 94025, USA
Manufacturer : Meta Platforms Technologies, LLC.
1 Hacker Way, Menlo Park, CA 94025, USA
Standard : FCC Part 15 Subpart C §15.247

The product was received on Apr. 03, 2024 and testing was performed from Apr. 11, 2024 to May 18, 2024. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.



Approved by: Louis Wu

Sporton International Inc. Wensan Laboratory

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)



Table of Contents

History of this test report..... 3

Summary of Test Result..... 4

1 General Description..... 5

 1.1 Product Feature of Equipment Under Test..... 5

 1.2 Modification of EUT 6

 1.3 Testing Location 6

 1.4 Applicable Standards..... 6

2 Test Configuration of Equipment Under Test 7

 2.1 Carrier Frequency Channel 7

 2.2 Test Mode..... 8

 2.3 Connection Diagram of Test System..... 9

 2.4 Support Unit used in test configuration and system 10

 2.5 EUT Operation Test Setup 10

 2.6 Measurement Results Explanation Example..... 10

3 Test Result..... 11

 3.1 6dB and 99% Bandwidth Measurement 11

 3.2 Output Power Measurement..... 12

 3.3 Power Spectral Density Measurement 13

 3.4 Conducted Band Edges and Spurious Emission Measurement 14

 3.5 Radiated Band Edges and Spurious Emission Measurement 15

 3.6 AC Conducted Emission Measurement..... 19

 3.7 Antenna Requirements 21

4 List of Measuring Equipment 22

5 Measurement Uncertainty 24

Appendix A. Conducted Test Results

Appendix B. AC Conducted Emission Test Result

Appendix C. Radiated Spurious Emission

Appendix D. Radiated Spurious Emission Plots

Appendix E. Duty Cycle Plots

Appendix F. Setup Photographs



History of this test report

Report No.	Version	Description	Issue Date
FR413013-01B	01	Initial issue of report	May 27, 2024



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.247(a)(2)	6dB Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Reporting only	-
3.2	15.247(b)(3) 15.247(b)(4)	Output Power	Pass	-
3.3	15.247(e)	Power Spectral Density	Pass	-
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	Pass	-
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	Pass	6.46 dB under the limit at 45.93 MHz
3.6	15.207	AC Conducted Emission	Pass	3.50 dB under the limit at 0.16 MHz
3.7	15.203	Antenna Requirement	Pass	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Yun Huang
Report Producer: Mila Chen



1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
General Specs	Bluetooth, Wi-Fi 2.4GHz 802.11b/g/n/ac/ax, Wi-Fi 5GHz 802.11a/n/ac/ax, Wi-Fi 6GHz 802.11ax and nRF.
Sample 1	E2-C1
Sample 2	E2-C2
Sample 3	E2-C3
Sample 4	E2-C4
Antenna Type	Bluetooth: <Ant. 0>: Hybrid Slot Monopole Antenna <Ant. 1>: Hybrid Slot Monopole Antenna WLAN: <Ant. 0>: Hybrid Slot Monopole Antenna <Ant. 1>: Hybrid Slot Monopole Antenna nRF: Folded Dipole Antenna

Antenna information		
2400 MHz ~ 2483.5 MHz	Peak Gain (dBi)	Ant. 0: 4.0 Ant. 1: 4.1

Remark: The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.



1.2 Modification of EUT

No modifications made to the EUT during the testing.

1.3 Testing Location

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sporton Site No.
	TH05-HY, CO07-HY, 03CH13-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW3786

1.4 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 15.247 Meas Guidance v05r02
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01
- ♦ ANSI C63.10-2013

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.
3. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	21	2444
	1	2404	22	2446
	2	2406	23	2448
	3	2408	24	2450
	4	2410	25	2452
	5	2412	26	2454
	6	2414	27	2456
	7	2416	28	2458
	8	2418	29	2460
	9	2420	30	2462
	10	2422	31	2464
	11	2424	32	2466
	12	2426	33	2468
	13	2428	34	2470
	14	2430	35	2472
	15	2432	36	2474
	16	2434	37	2476
	17	2436	38	2478
	18	2438	39	2480
	19	2440	-	-
20	2442	-	-	



2.2 Test Mode


- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape), and adjusting the measurement antenna orientation, following C63.10 exploratory test procedures and only the worst case emissions were reported in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.


Summary table of Test Cases	
Test Item	Data Rate / Modulation
Conducted Test Cases	Bluetooth – LE / GFSK
	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps
	Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps
	Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
	Mode 4: Bluetooth Tx CH00_2402 MHz_2Mbps
	Mode 5: Bluetooth Tx CH19_2440 MHz_2Mbps
	Mode 6: Bluetooth Tx CH39_2480 MHz_2Mbps
Radiated Test Cases	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps
	Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps
	Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
	Mode 4: Bluetooth Tx CH00_2402 MHz_2Mbps
	Mode 5: Bluetooth Tx CH19_2440 MHz_2Mbps
	Mode 6: Bluetooth Tx CH39_2480 MHz_2Mbps
AC Conducted Emission	Mode 1 :Bluetooth Link + WLAN (2.4GHz) Link + nRF Link + USB Cable (Charging from AC Adapter) for Sample 1
	Mode 2 :Bluetooth Link + WLAN (2.4GHz) Link + nRF Link + USB Cable (Charging from AC Adapter) for Sample 2
	Mode 3 :Bluetooth Link + WLAN (2.4GHz) Link + nRF Link + USB Cable (Charging from AC Adapter) for Sample 3
Remark:	
1. The worst case of Conducted Emission is mode 1; only the test data of it was reported.	
2. For radiation spurious emission, the modulation and the data rate picked for testing are determined by the Max. RF conducted power.	

2.3 Connection Diagram of Test System

<AC Conducted Emission Mode>

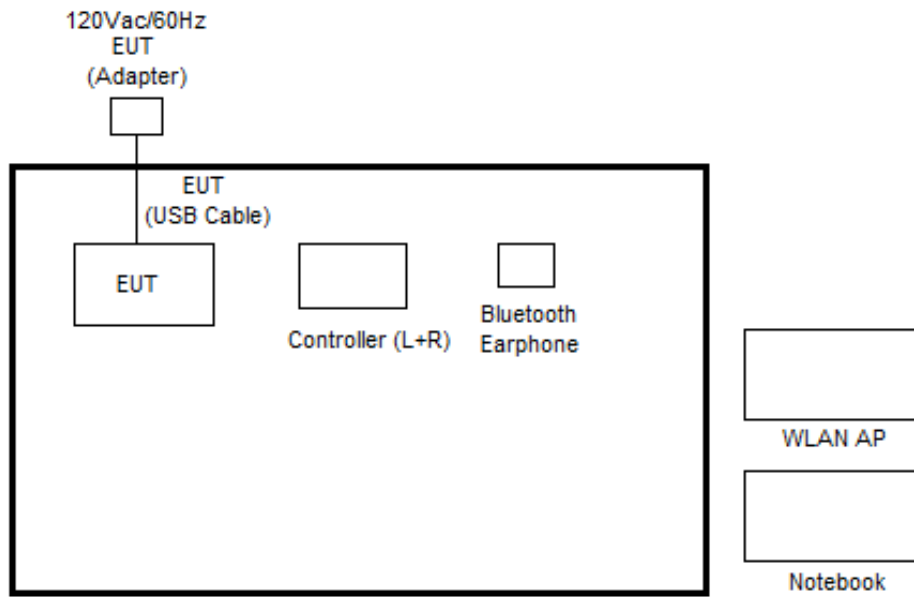

<Bluetooth-LE Tx Mode>

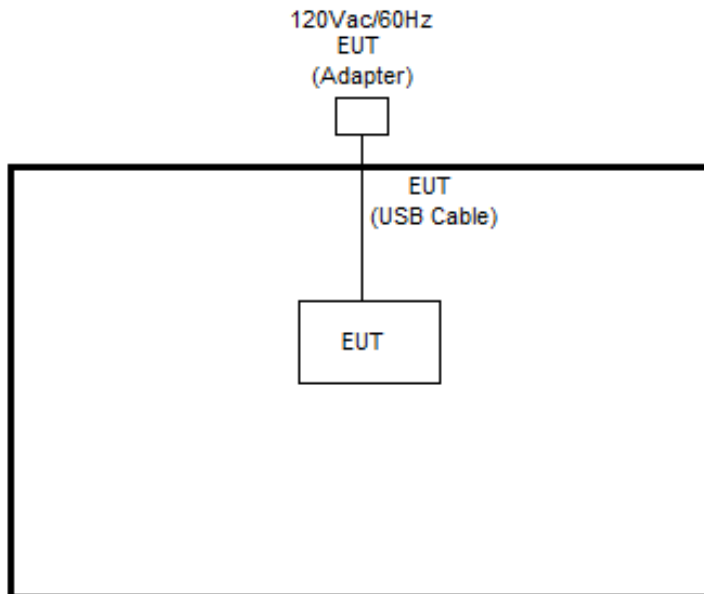



2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Bluetooth Earphone	Sony	SBH20	PY7-RD0010	N/A	N/A
2.	WLAN AP	Netgear	RAXE500	PY320300508	N/A	Unshielded, 1.8 m
3.	Controller	Meta	Rubby	N/A	N/A	N/A
4.	Notebook	Dell	Latitude 3420	N/A	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m

2.5 EUT Operation Test Setup

The RF test items, utility “QRCT Version 4.0.211.0” was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10 dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

3.1.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.1.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 11.8.1 (6dB BW).
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW) $\geq 3 * RBW$.
6. Measure and record the results in the test report.

3.1.4 Test Setup



3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.

3.1.6 Test Result of 99% Occupied Bandwidth

Please refer to Appendix A.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5 MHz, the limit for output power is 30 dBm. If transmitting antenna of directional gain greater than 6 dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.


3.2.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.2.3 Test Procedures

1. For Average Power, the testing follows ANSI C63.10 Section 11.9.2.3.2 Method AVGP-M-G
2. The RF output of EUT is connected to the power meter by RF cable and attenuator.
3. The path loss is compensated to the results for each measurement.
4. Set the maximum power setting and enable the EUT to transmit continuously.
5. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

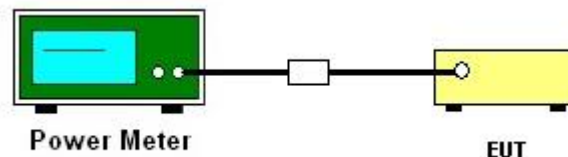

3.2.5 Test Result of Average Output Power

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8 dBm in any 3 kHz band at any time interval of continuous transmission.

3.3.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.3.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.10.2 Method PKPSD.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth (VBW) = 10 kHz. In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6 dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100 kHz is a reference level and is used as 20 dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

3.3.4 Test Setup



3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 30 dB down from the highest emission level within the authorized band.

3.4.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.4.3 Test Procedure

1. The testing follows the ANSI C63.10 Section 11.11.3 Emission level measurement.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Set RBW = 100 kHz, VBW = 300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup



3.4.5 Test Result of Conducted Band Edges Plots

Please refer to Appendix A.

3.4.6 Test Result of Conducted Spurious Emission Plots

Please refer to Appendix A.



3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments


Please refer to the measuring equipment list in this test report.

**3.5.3 Test Procedures**


1. The testing follows the ANSI C63.10 Section 11.12.1 Radiated emission measurements.
2. The EUT is arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT is placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
4. The EUT is set 3 meters away from the receiving antenna, which is mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. Radiated testing below 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading. When there is no suspected emission found and the emission level is with at least 6 dB margin against QP limit line, the position is marked as “-“.
7. Radiated testing above 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading for scanning all frequencies. When there is no suspected emission found and the harmonic emission level is with at least 6 dB margin against average limit line, the position is marked as “-“.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW = 100 kHz for $f < 1$ GHz; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW = 3 MHz for $f \geq 1$ GHz for peak measurement.
For average measurement:
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated test below 30MHz

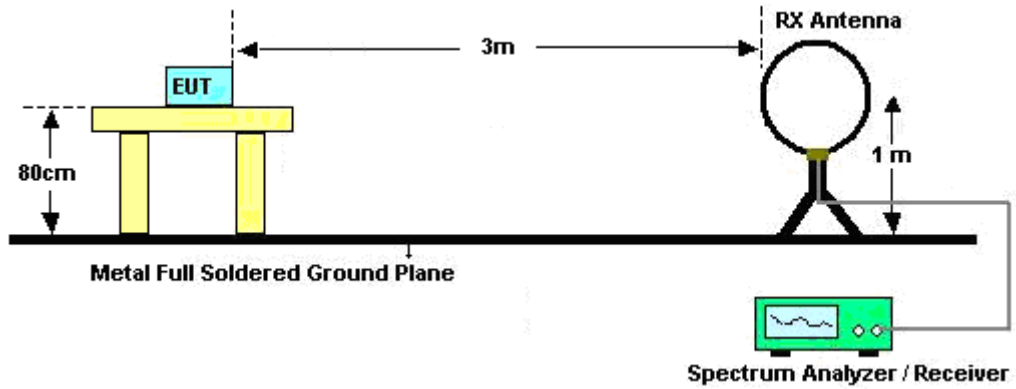


For radiated test from 30MHz to 1GHz

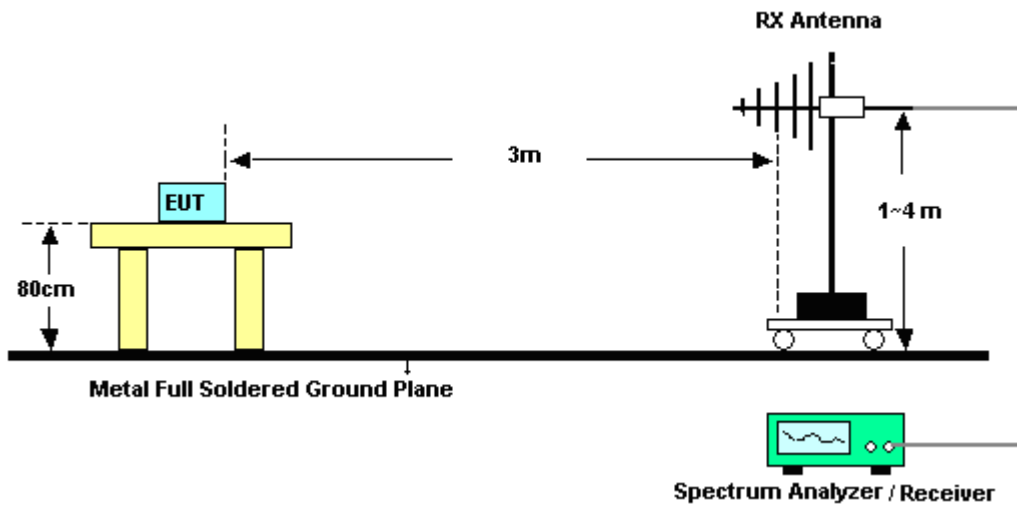

For radiated test from 1GHz to 18GHz

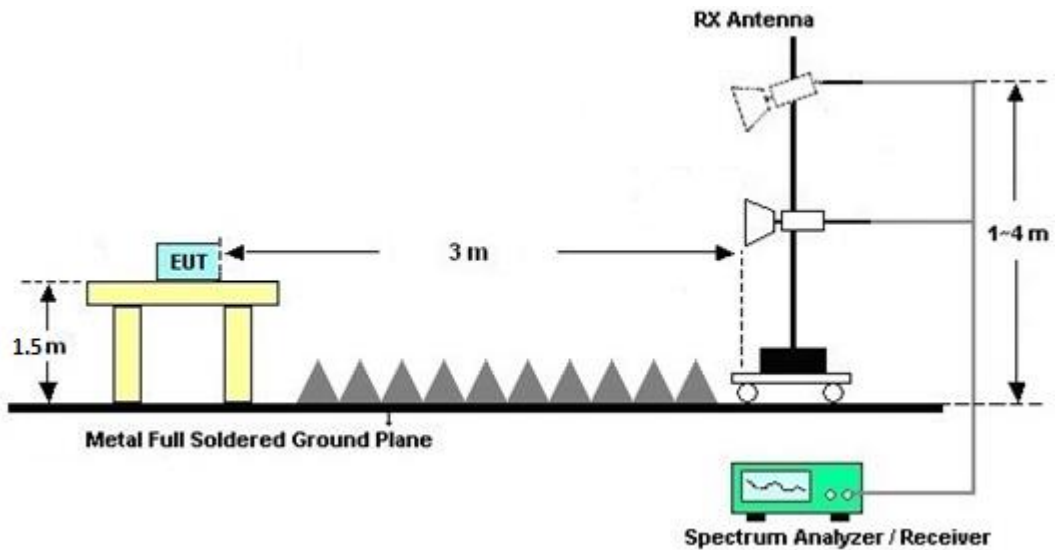

For radiated test above 18GHz

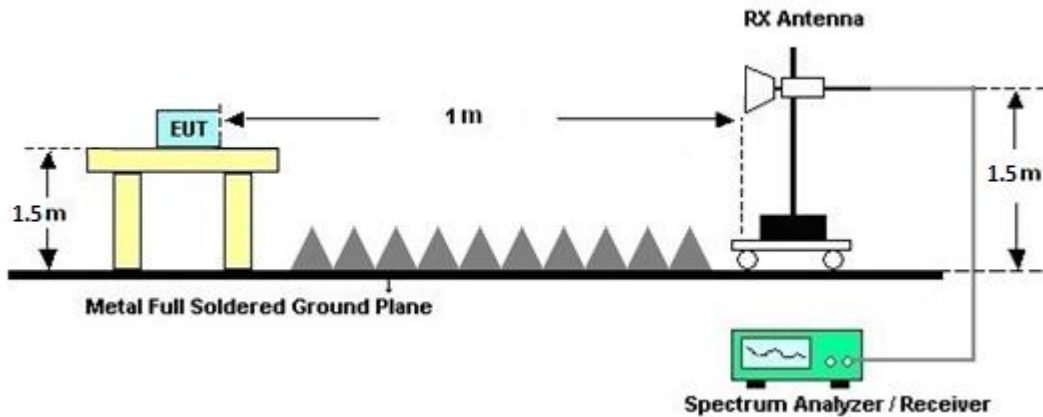

3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which starts from 9 kHz to 30 MHz, is pre-scanned and the result which is 20 dB lower than the limit line is not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result comes out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C and D.

3.5.7 Duty Cycle

Please refer to Appendix E.

3.5.8 Test Result of Radiated Spurious Emission (30 MHz ~ 10th Harmonic)

Please refer to Appendix C and D.



3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.6.3 Test Procedures

1. The EUT is placed 0.4 meter away from the conducting wall of the shielding room, and is kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN shall be used.
6. Both Line and Neutral shall be tested in order to find out the maximum conducted emission.
7. The frequency range from 150 kHz to 30 MHz is scanned.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9 kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.6.4 Test Setup

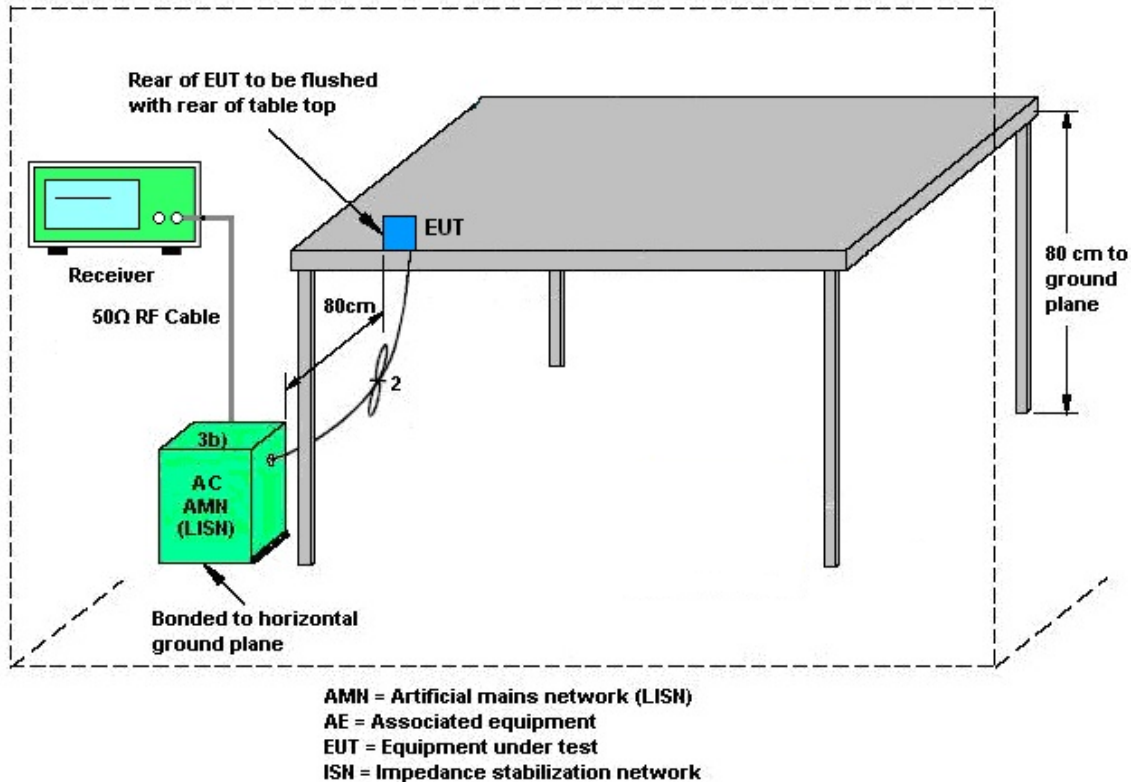

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.



4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Hygrometer	TECEPEL	DTM-303A	TP201996	N/A	Nov. 07, 2023	Apr. 12, 2024~ May 18, 2024	Nov. 06, 2024	Conducted (TH05-HY)
Power Sensor	DARE	RPR3006W	17100015SNO 35 (NO:109)	10MHz~6GHz	Jan. 15, 2024	Apr. 12, 2024~ May 18, 2024	Jan. 14, 2025	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV40	101566	10Hz~40GHz	Aug. 23, 2023	Apr. 12, 2024~ May 18, 2024	Aug. 22, 2024	Conducted (TH05-HY)
AC Power Source	ACPOWER	AFC-11003G	F317040033	N/A	N/A	Apr. 25, 2024	N/A	Conduction (CO07-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	Apr. 25, 2024	N/A	Conduction (CO07-HY)
Pulse Limiter	SCHWARZBECK	VTSD 9561-F N	9561-F N00373	9kHz~200MHz	Oct. 20, 2023	Apr. 25, 2024	Oct. 19, 2024	Conduction (CO07-HY)
RF Cable	HUBER + SUHNER	RG 214/U	1358175	9kHz~30MHz	Mar. 14, 2024	Apr. 25, 2024	Mar. 13, 2025	Conduction (CO07-HY)
Two-Line V-Network	TESEQ	NNB 51	45051	N/A	Mar. 10, 2024	Apr. 25, 2024	Mar. 09, 2025	Conduction (CO07-HY)
Four-Line V-Network	TESEQ	NNB 52	36122	N/A	Mar. 07, 2024	Apr. 25, 2024	Mar. 06, 2025	Conduction (CO07-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102317	9kHz~3.6GHz	Sep. 20, 2023	Apr. 25, 2024	Sep. 19, 2024	Conduction (CO07-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz~30 MHz	Feb. 23, 2024	Apr. 11, 2024~ May 09, 2024	Feb. 22, 2025	Radiation (03CH13-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	803951/2	9k~30M	Mar. 06, 2024	Apr. 11, 2024~ May 09, 2024	Mar. 05, 2025	Radiation (03CH13-HY)
Amplifier	SONOMA	310N	187282	9kHz~1GHz	Dec. 13, 2023	Apr. 11, 2024~ May 09, 2024	Dec. 12, 2024	Radiation (03CH13-HY)
Bilog Antenna	TESEQ	CBL 6111D & 00800N1D01N -06	40103 & 07	30MHz~1GHz	Apr. 23, 2023	Apr. 11, 2024	Apr. 22, 2024	Radiation (03CH13-HY)
Bilog Antenna	TESEQ	CBL 6111D & 00800N1D01N -06	40103 & 07	30MHz~1GHz	Apr. 12, 2024	Apr. 12, 2024~ May 09, 2024	Apr. 11, 2025	Radiation (03CH13-HY)
EMI Test Receiver	Agilent	N9038A(MXE)	MY53290045	20MHz~8.4GHz	Apr. 25, 2023	Apr. 11, 2024~ Apr. 16, 2024	Apr. 24, 2024	Radiation (03CH13-HY)
EMI Test Receiver	Agilent	N9038A(MXE)	MY53290045	20MHz~8.4GHz	Apr. 17, 2024	Apr. 17, 2024~ May 09, 2024	Apr. 16, 2025	Radiation (03CH13-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-1326	1GHz~18GHz	Aug. 17, 2023	Apr. 11, 2024~ May 09, 2024	Aug. 16, 2024	Radiation (03CH13-HY)
Preamplifier	MITEQ	AMF-7D-0010 1800-30-10P	1590074	1GHz~18GHz	May 16, 2023	Apr. 11, 2024~ May 09, 2024	May 15, 2024	Radiation (03CH13-HY)
Preamplifier	EM Electronics	EM01G18G	060803	1GHz~18GHz	Jan. 09, 2024	Apr. 11, 2024~ May 09, 2024	Jan. 08, 2025	Radiation (03CH13-HY)
Preamplifier	EMEC	EM18G40G	060801	18GHz~40GHz	Jun. 27, 2023	Apr. 11, 2024~ May 09, 2024	Jun. 26, 2024	Radiation (03CH13-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA9170	00993	18GHz~40GHz	Nov. 24, 2023	Apr. 11, 2024~ May 09, 2024	Nov. 23, 2024	Radiation (03CH13-HY)
Spectrum Analyzer	Keysight	N9010B	MY62170337	10Hz~44GHz	Aug. 17, 2023	Apr. 11, 2024~ May 09, 2024	Aug. 16, 2024	Radiation (03CH13-HY)
Filter	Wainwright	WLK10-4630-5 093-11000-40 SS	SN1	4.5GHz Low Pass Filter	Sep. 11, 2023	Apr. 11, 2024~ May 09, 2024	Sep. 10, 2024	Radiation (03CH13-HY)
Filter	Wainwright	WHKX8-5872. 5-6750-18000- 40ST	SN5	6.75GHz High Pass Filter	Mar. 08, 2024	Apr. 11, 2024~ May 09, 2024	Mar. 07, 2025	Radiation (03CH13-HY)



Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Filter	Wainwright	WHKX6-7268-9200-26500-40 CD	SN4	9GHz High Pass Filter	May 23, 2023	Apr. 11, 2024~ May 09, 2024	May 22, 2024	Radiation (03CH13-HY)
Filter	Wainwright	WLK4-1000-1530-8000-40SS	SN4	1.53GHz Low Pass Filter	Jun. 14, 2023	Apr. 11, 2024~ May 09, 2024	Jun. 13, 2024	Radiation (03CH13-HY)
Filter	Wainwright	WHKX12-2700-3000-18000-60SS	SN2	3GHz High Pass Filter	Jul. 10, 2023	Apr. 11, 2024~ May 09, 2024	Jul. 09, 2024	Radiation (03CH13-HY)
Notch Filter	Wainwright	WRCQV14-6025-6425-7125-7525-60SS	SN2	N/A	Jan. 05, 2024	Apr. 11, 2024~ May 09, 2024	Jan. 04, 2025	Radiation (03CH13-HY)
Notch Filter	Wainwright	WRCQV14-5425-5825-6525-6925-60SS	SN1	N/A	Jan. 05, 2024	Apr. 11, 2024~ May 09, 2024	Jan. 04, 2025	Radiation (03CH13-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 126E	0030/126E	30MHz~18GHz	Feb. 07, 2024	Apr. 11, 2024~ May 09, 2024	Feb. 06, 2025	Radiation (03CH13-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	804011/2, 804012/2	18GHz ~40GHz	Jan. 02, 2024	Apr. 11, 2024~ May 09, 2024	Jan. 01, 2025	Radiation (03CH13-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	804793/4	30MHz~18GHz	Feb. 07, 2024	Apr. 11, 2024~ May 09, 2024	Feb. 06, 2025	Radiation (03CH13-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY24961/4	30MHz~18GHz	Feb. 07, 2024	Apr. 11, 2024~ May 09, 2024	Feb. 06, 2025	Radiation (03CH13-HY)
Hygrometer	TECPEL	DTM-303A	TP215159	N/A	Sep. 13, 2023	Apr. 11, 2024~ May 09, 2024	Sep. 12, 2024	Radiation (03CH13-HY)
Controller	EMEC	EM1000	N/A	Control Turn table & Ant Mast	N/A	Apr. 11, 2024~ May 09, 2024	N/A	Radiation (03CH13-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1m~4m	N/A	Apr. 11, 2024~ May 09, 2024	N/A	Radiation (03CH13-HY)
Turn Table	EMEC	TT2000	N/A	0~360 Degree	N/A	Apr. 11, 2024~ May 09, 2024	N/A	Radiation (03CH13-HY)
Software	Audix	N/A	RK-001124	N/A	N/A	Apr. 11, 2024~ May 09, 2024	N/A	Radiation (03CH13-HY)



5 Measurement Uncertainty

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.44 dB
---	---------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	6.5 dB
---	--------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 6000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.2 dB
---	--------

Uncertainty of Radiated Emission Measurement (6000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.6 dB
---	--------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.3 dB
---	--------

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Hank Hsu	Temperature:	21~25	°C
Test Date:	2024/4/12~2024/5/18	Relative Humidity:	51~54	%

<Ant. 0>

TEST RESULTS DATA 6dB and 99% Occupied Bandwidth

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	1Mbps	1	0	2402	1.016	0.668	0.50	Pass
BLE	1Mbps	1	19	2440	1.018	0.668	0.50	Pass
BLE	1Mbps	1	39	2480	1.016	0.672	0.50	Pass

TEST RESULTS DATA Average Power Table

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	1Mbps	1	0	2402	2.40	30.00	4.00	6.40	36.00	Pass
BLE	1Mbps	1	19	2440	2.60	30.00	4.00	6.60	36.00	Pass
BLE	1Mbps	1	39	2480	2.90	30.00	4.00	6.90	36.00	Pass

TEST RESULTS DATA Peak Power Density

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	1Mbps	1	0	2402	1.64	-12.65	4.00	8.00	Pass
BLE	1Mbps	1	19	2440	1.76	-12.55	4.00	8.00	Pass
BLE	1Mbps	1	39	2480	2.13	-12.19	4.00	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	2Mbps	1	0	2402	2.009	1.143	0.50	Pass
BLE	2Mbps	1	19	2440	1.998	1.142	0.50	Pass
BLE	2Mbps	1	39	2480	2.001	1.143	0.50	Pass

TEST RESULTS DATA
Average Power Table

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	2Mbps	1	0	2402	2.40	30.00	4.00	6.40	36.00	Pass
BLE	2Mbps	1	19	2440	2.50	30.00	4.00	6.50	36.00	Pass
BLE	2Mbps	1	39	2480	2.90	30.00	4.00	6.90	36.00	Pass

TEST RESULTS DATA
Peak Power Density

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	2Mbps	1	0	2402	1.59	-15.70	4.00	8.00	Pass
BLE	2Mbps	1	19	2440	1.73	-15.58	4.00	8.00	Pass
BLE	2Mbps	1	39	2480	2.12	-15.17	4.00	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.

<Ant. 1>

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	1Mbps	1	0	2402	1.016	0.668	0.50	Pass
BLE	1Mbps	1	19	2440	1.016	0.668	0.50	Pass
BLE	1Mbps	1	39	2480	1.016	0.669	0.50	Pass

TEST RESULTS DATA
Average Power Table

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	1Mbps	1	0	2402	2.90	30.00	4.10	7.00	36.00	Pass
BLE	1Mbps	1	19	2440	3.30	30.00	4.10	7.40	36.00	Pass
BLE	1Mbps	1	39	2480	3.00	30.00	4.10	7.10	36.00	Pass

TEST RESULTS DATA
Peak Power Density

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	1Mbps	1	0	2402	2.12	-12.22	4.10	8.00	Pass
BLE	1Mbps	1	19	2440	2.48	-11.86	4.10	8.00	Pass
BLE	1Mbps	1	39	2480	2.15	-12.23	4.10	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	2Mbps	1	0	2402	2.005	1.140	0.50	Pass
BLE	2Mbps	1	19	2440	1.998	1.146	0.50	Pass
BLE	2Mbps	1	39	2480	2.001	1.147	0.50	Pass

TEST RESULTS DATA
Average Power Table

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	2Mbps	1	0	2402	2.90	30.00	4.10	7.00	36.00	Pass
BLE	2Mbps	1	19	2440	3.30	30.00	4.10	7.40	36.00	Pass
BLE	2Mbps	1	39	2480	3.00	30.00	4.10	7.10	36.00	Pass

TEST RESULTS DATA
Peak Power Density

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	2Mbps	1	0	2402	2.12	-15.19	4.10	8.00	Pass
BLE	2Mbps	1	19	2440	2.46	-14.81	4.10	8.00	Pass
BLE	2Mbps	1	39	2480	2.15	-15.20	4.10	8.00	Pass


Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.



<Ant. 0>

6dB Bandwidth


<1Mbps>

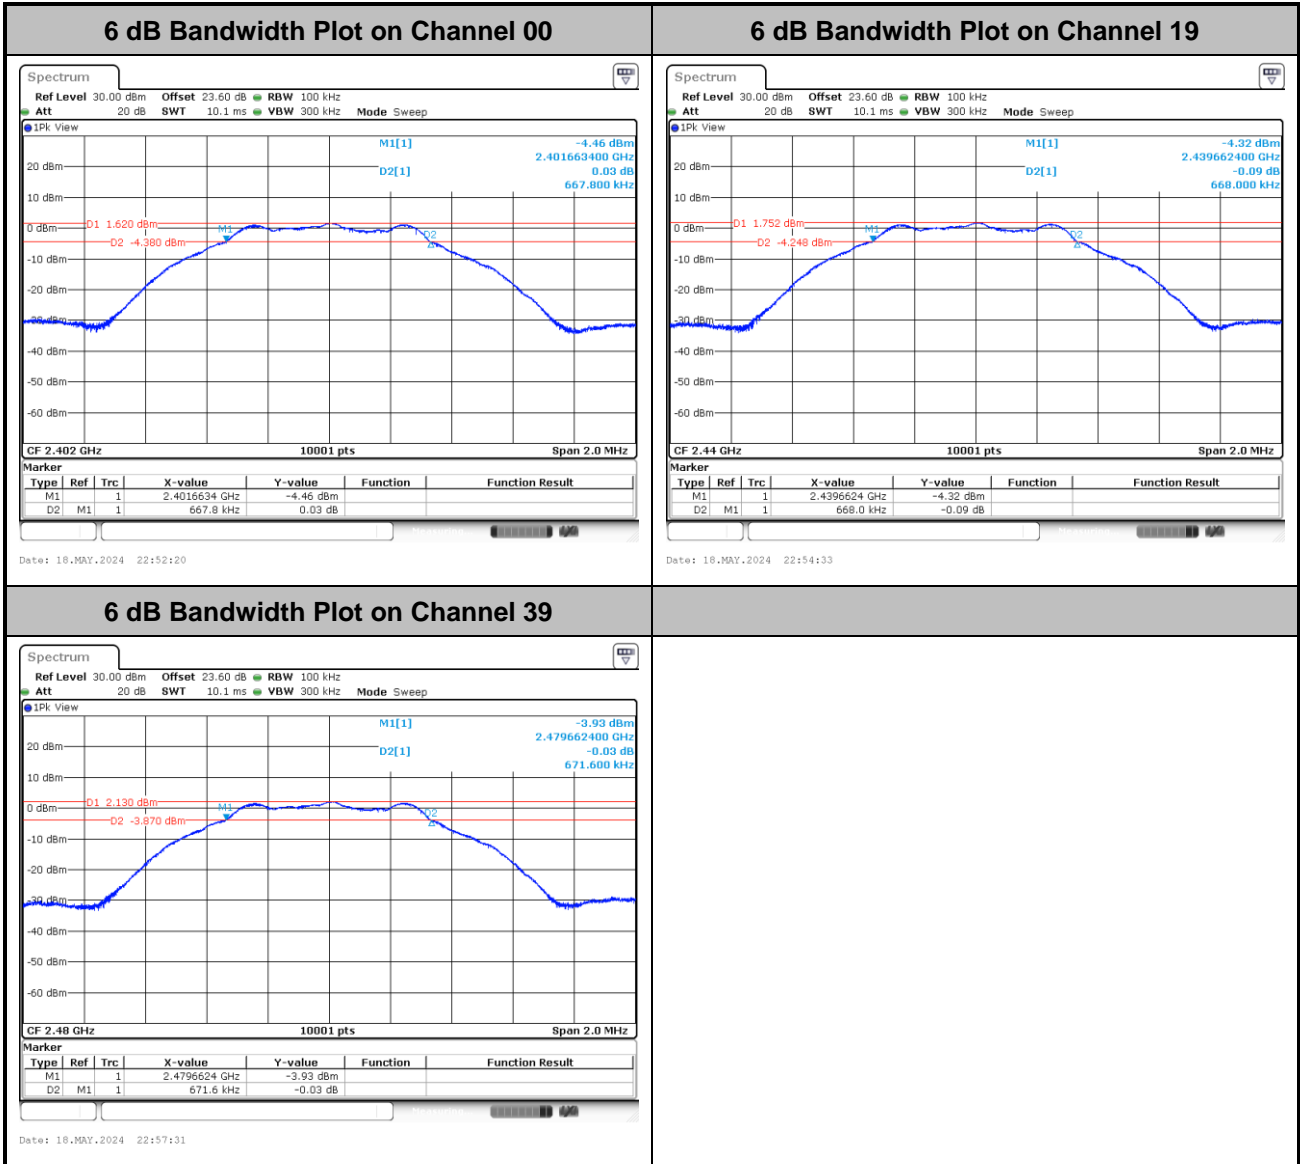




<2Mbps>


6 dB Bandwidth Plot on Channel 00

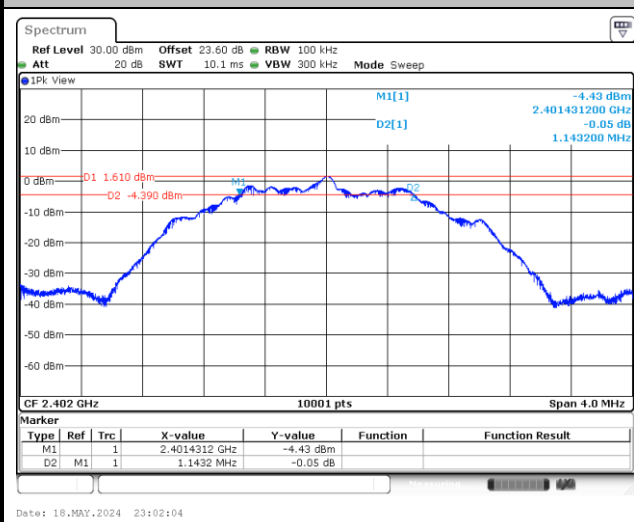

6 dB Bandwidth Plot on Channel 19

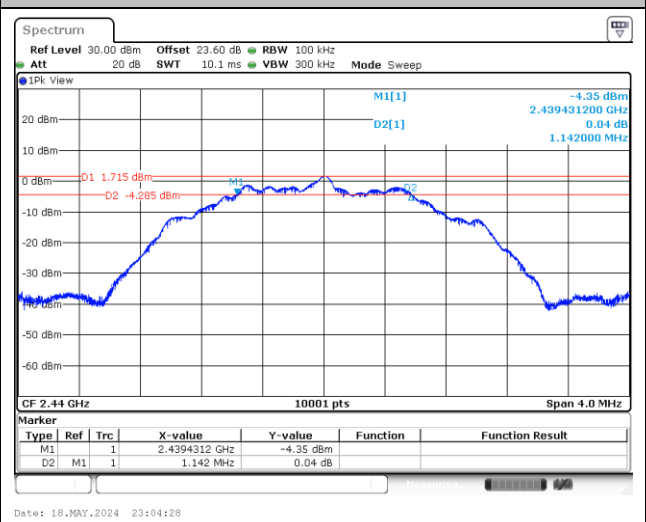


6 dB Bandwidth Plot on Channel 39

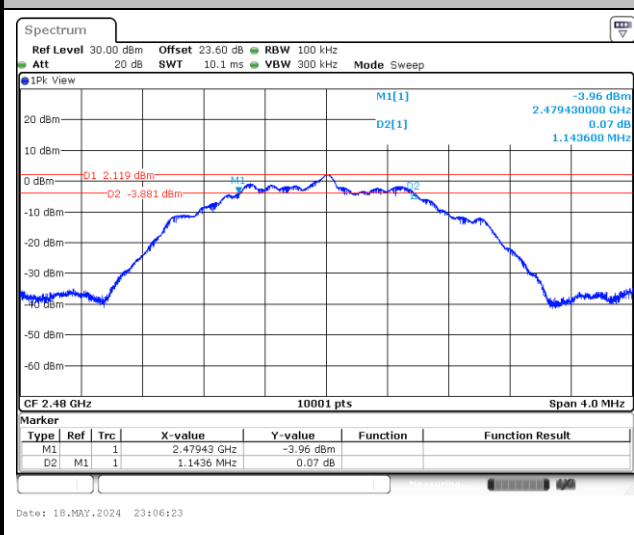




99% Occupied Bandwidth

<1Mbps>

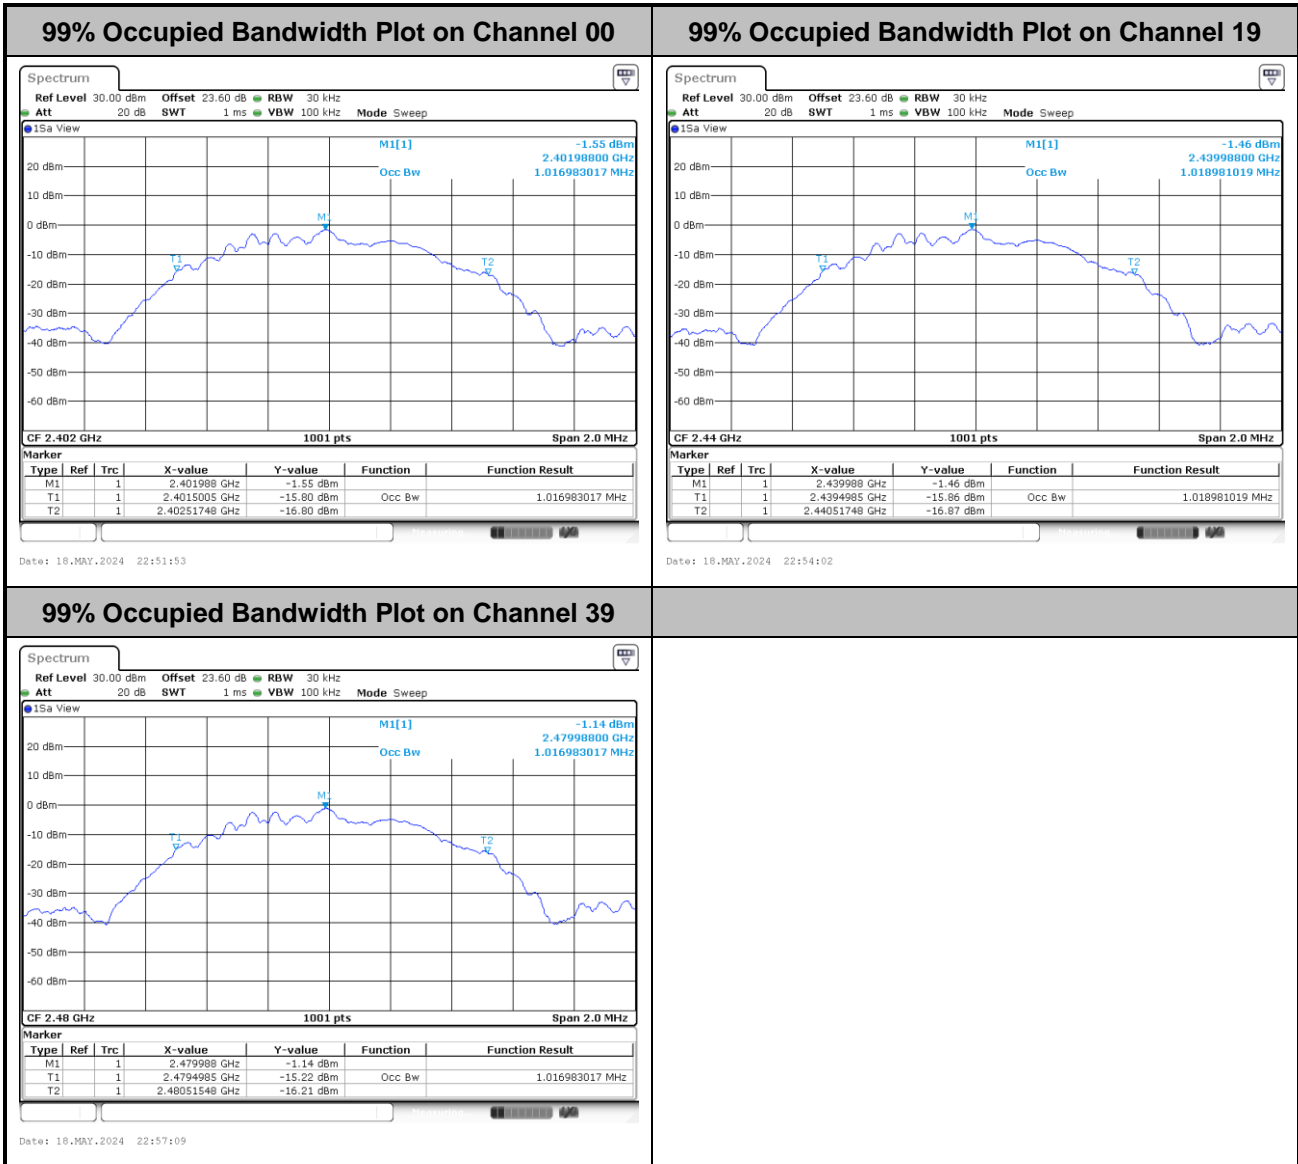




<2Mbps>

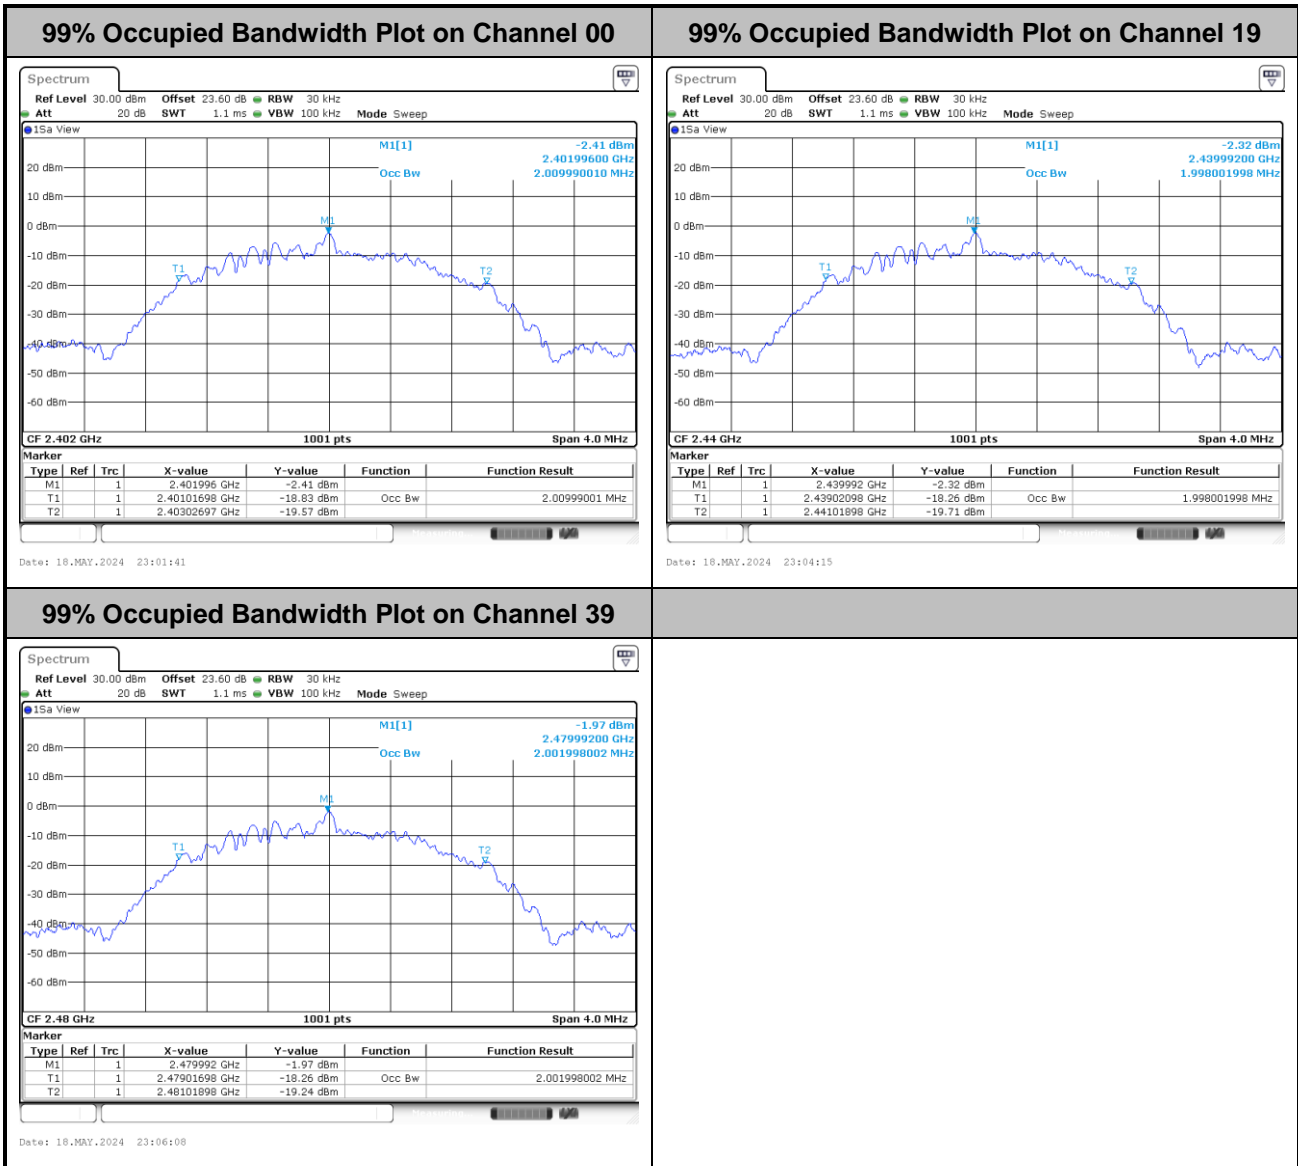




Power Spectral Density (dBm/3kHz)

<1Mbps>

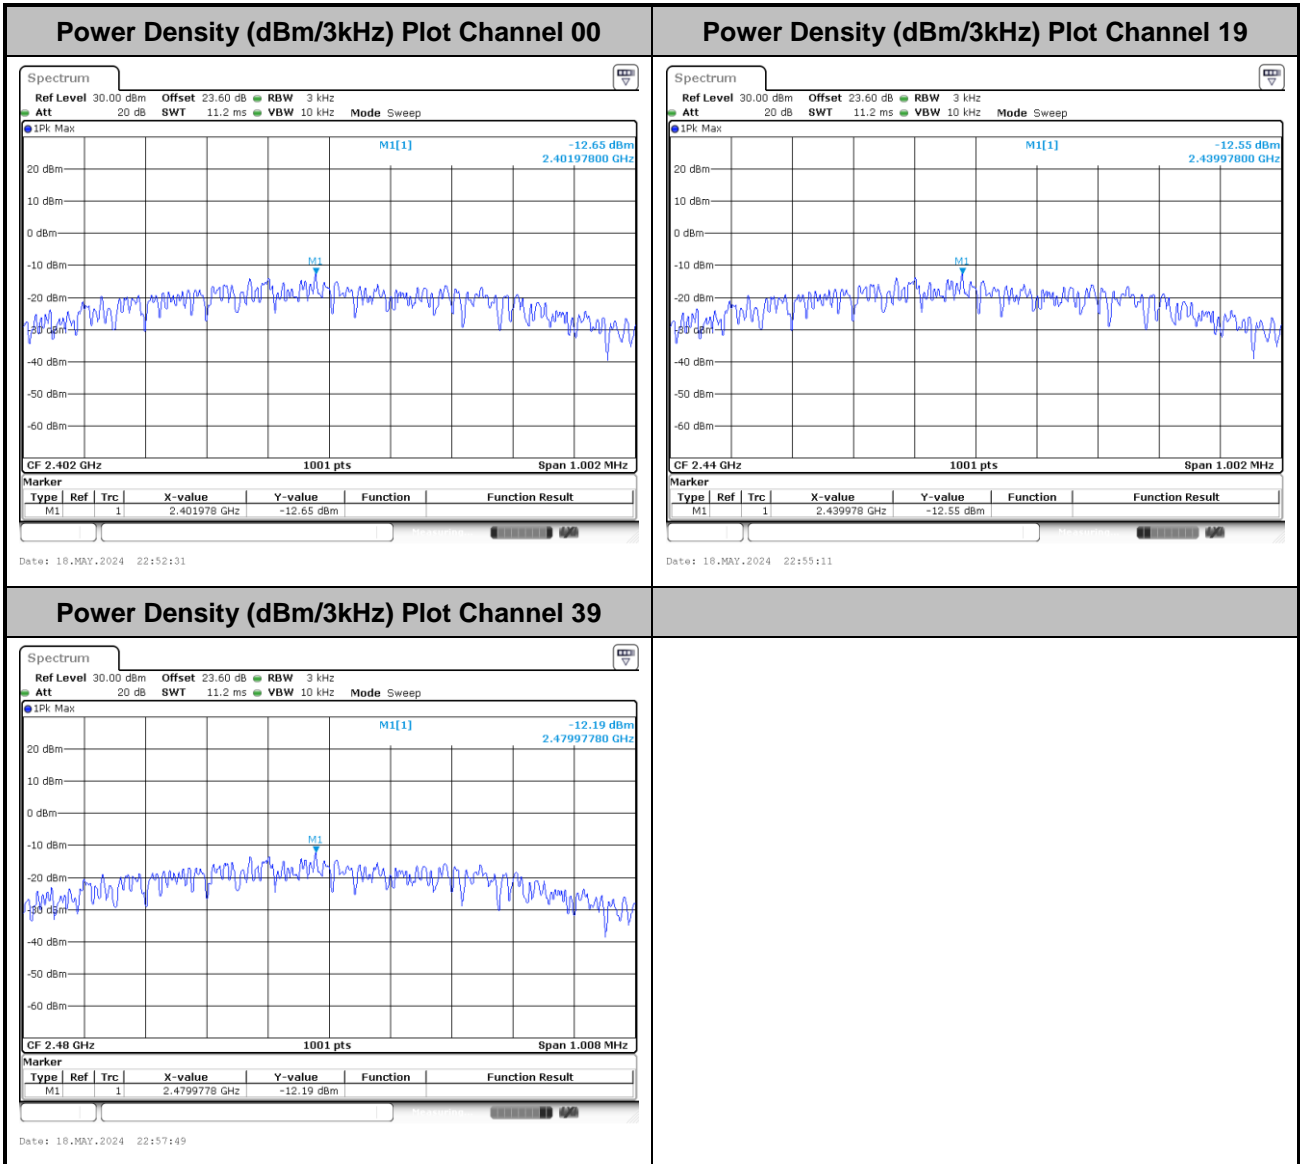



<2Mbps>

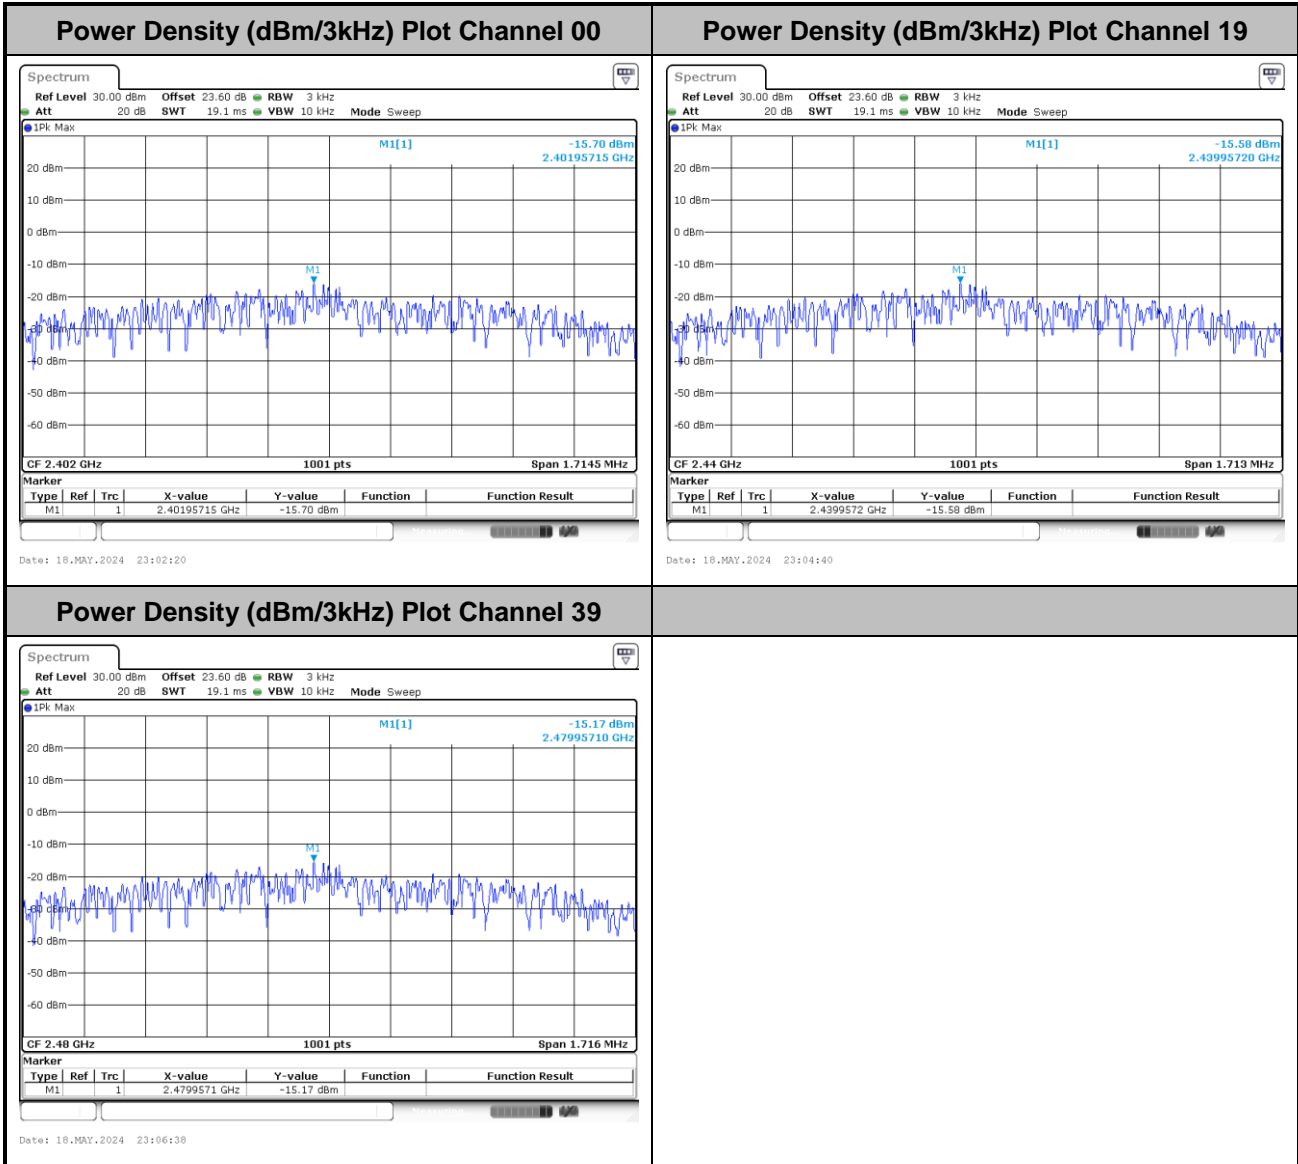




Band Edge and Conducted Spurious Emission


<1Mbps>

Channel 00


100kHz PSD reference Level Plot

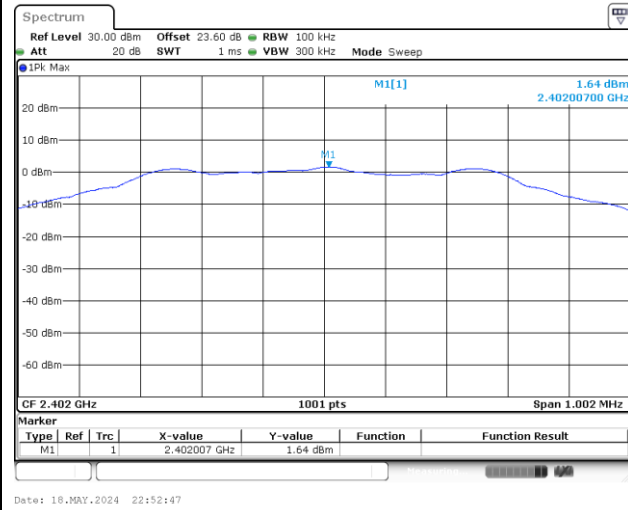


Low Channel Plot

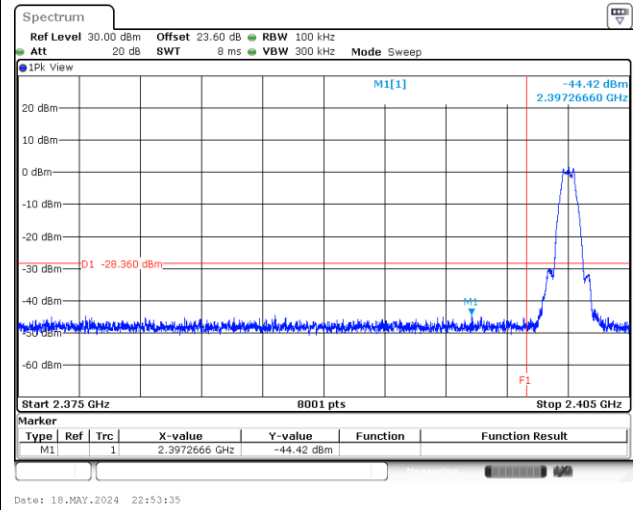

Spurious Emission 30MHz~1GHz Plot

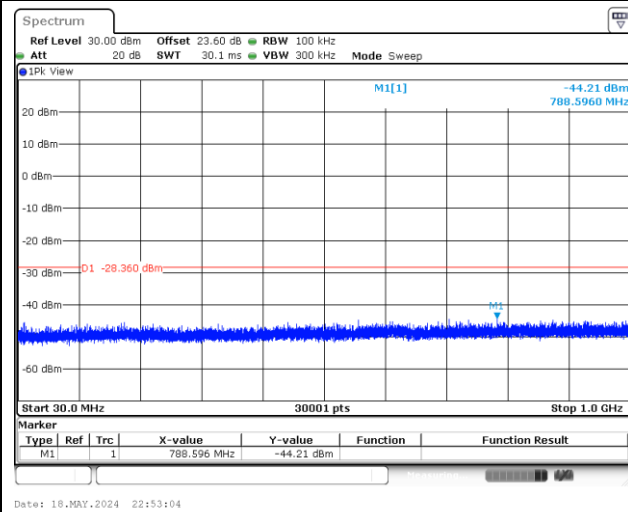


Spurious Emission 1GHz~26.5GHz Plot

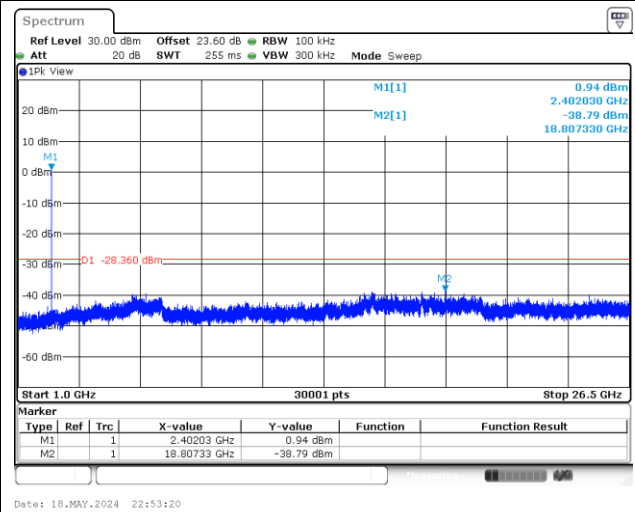



Channel 19


100kHz PSD reference Level Plot

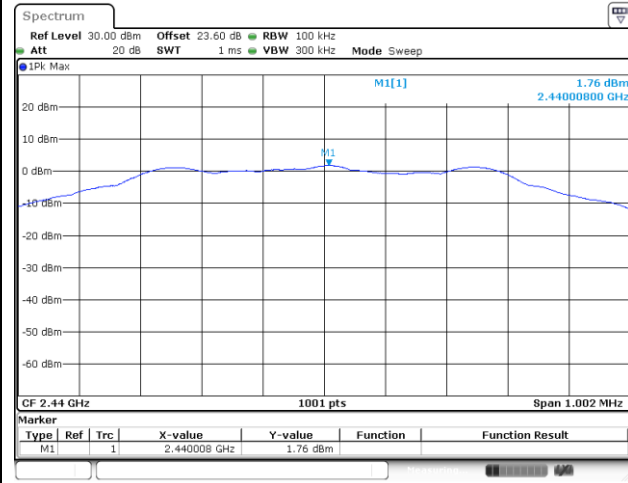

Date: 18.MAY.2024 22:55:28


Mid Channel Plot

Spurious Emission 30MHz~1GHz Plot

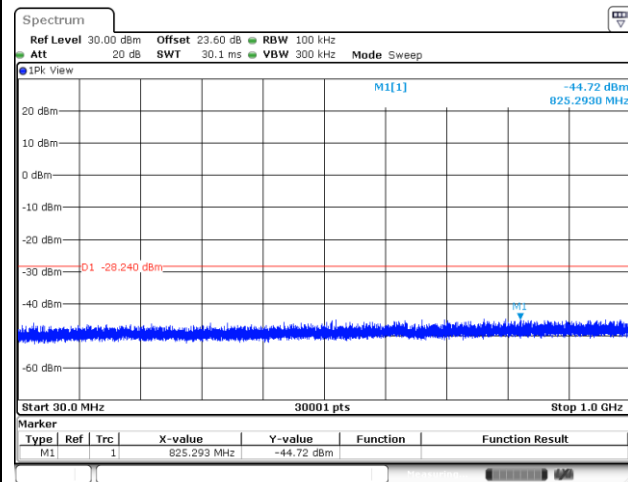

Date: 18.MAY.2024 22:55:46

Spurious Emission 1GHz~26.5GHz Plot

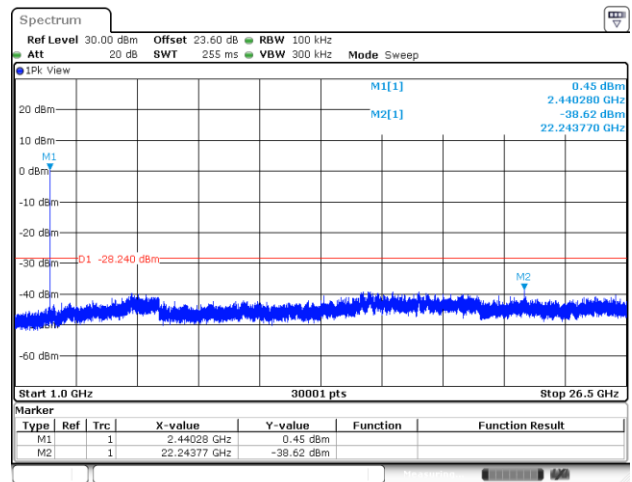


Date: 18.MAY.2024 22:56:03




Channel 39

100kHz PSD reference Level Plot

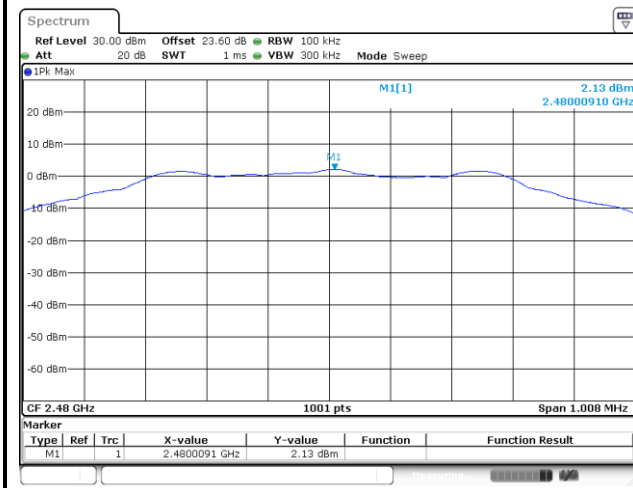


Date: 18.MAY.2024 22:58:09

High Channel Plot

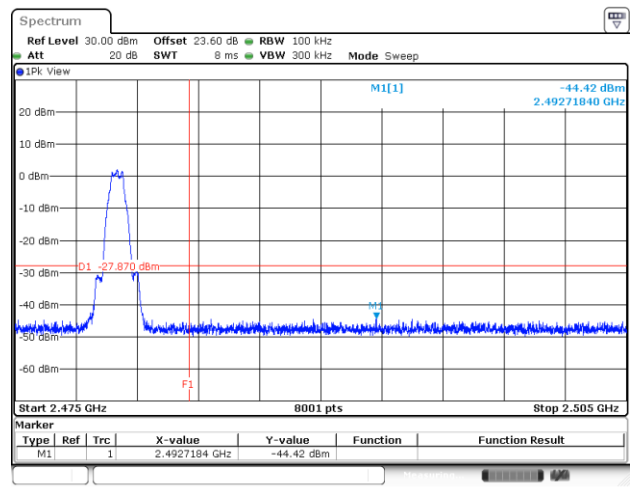


Date: 18.MAY.2024 22:59:30

Spurious Emission 30MHz~1GHz Plot

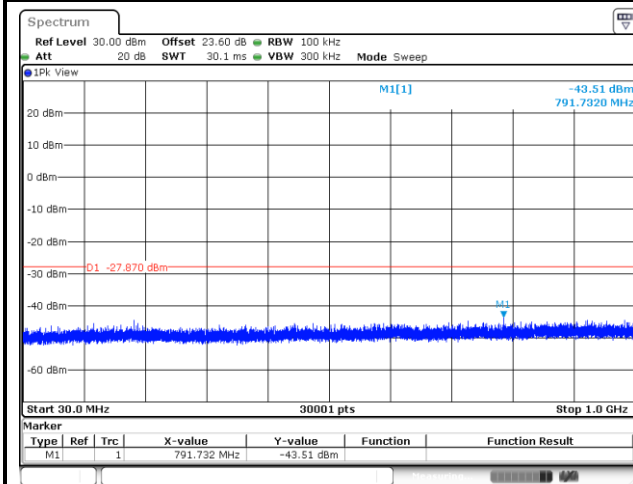

Date: 18.MAY.2024 22:58:26

Spurious Emission 1GHz~26.5GHz Plot

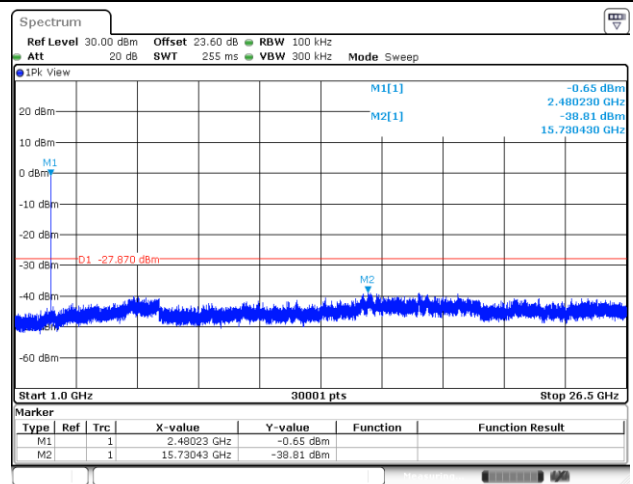


Date: 18.MAY.2024 22:58:41




<2Mbps>

Channel 00


100kHz PSD reference Level Plot

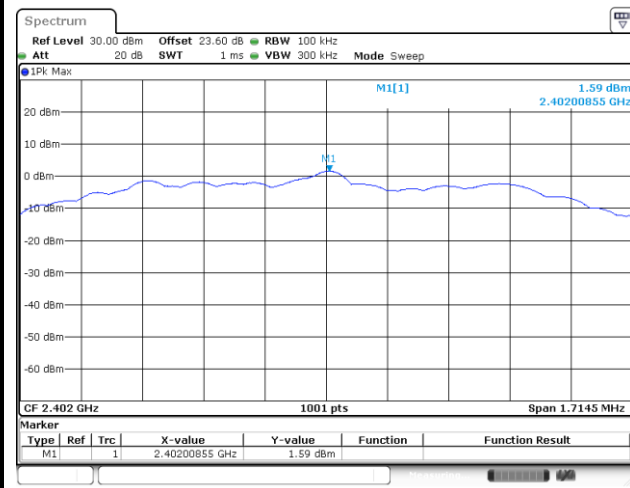


Low Channel Plot

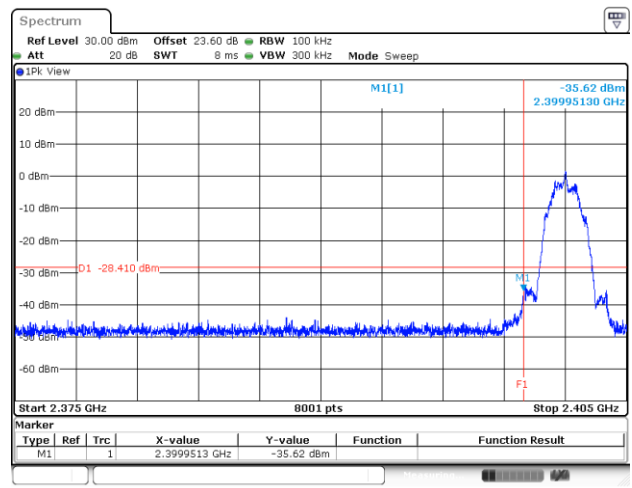

Spurious Emission 30MHz~1GHz Plot

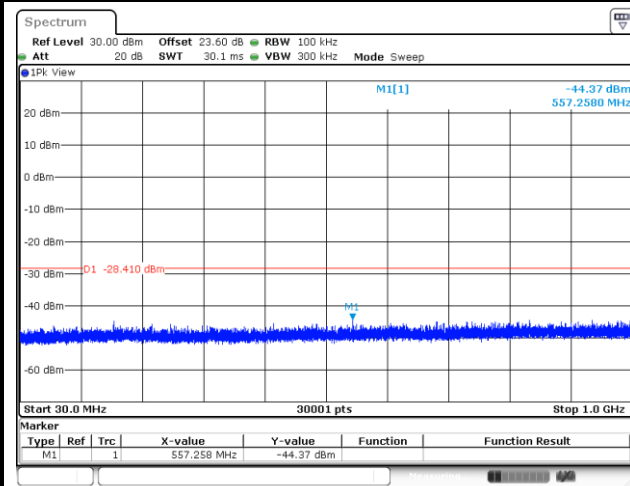

Spurious Emission 1GHz~26.5GHz Plot

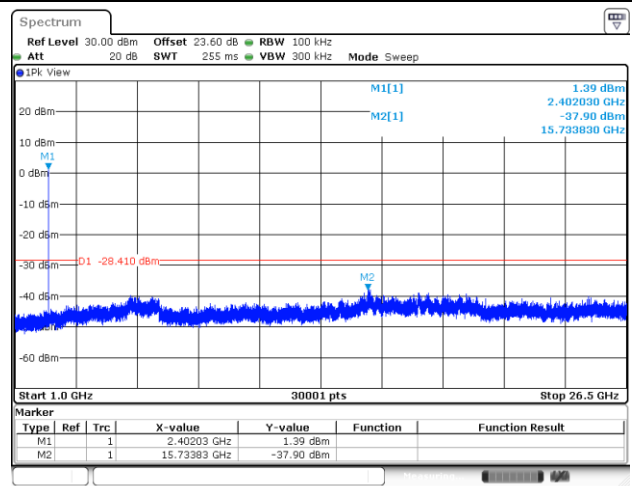




Channel 19



100kHz PSD reference Level Plot

Mid Channel Plot

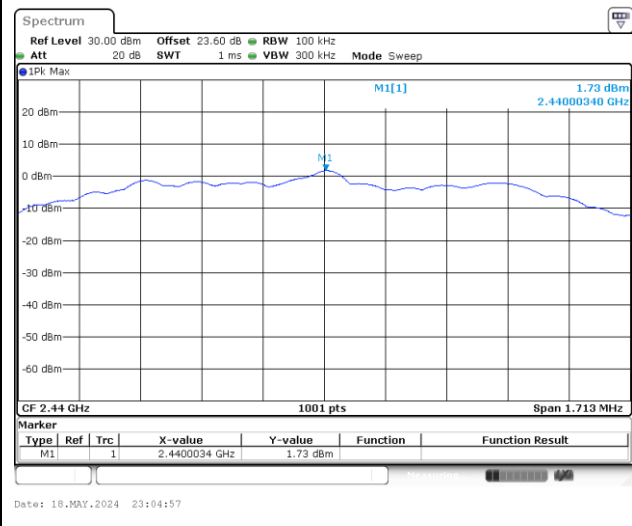

Spurious Emission 30MHz~1GHz Plot


Spurious Emission 1GHz~26.5GHz Plot

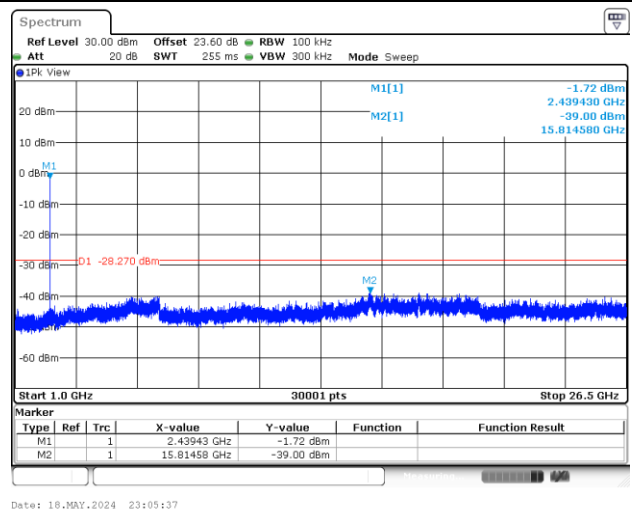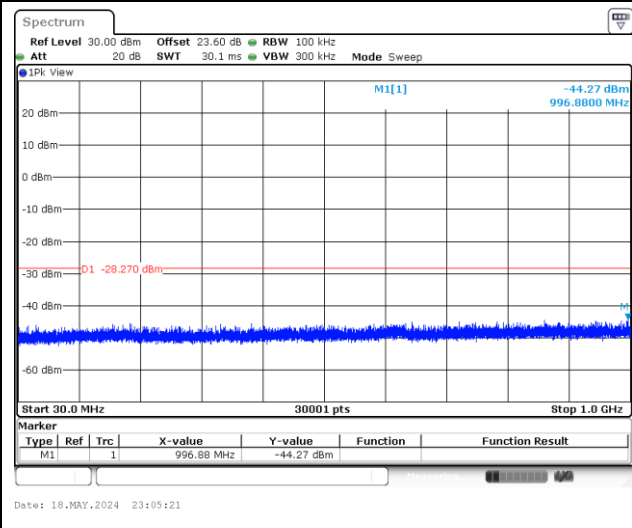




Channel 39


100kHz PSD reference Level Plot

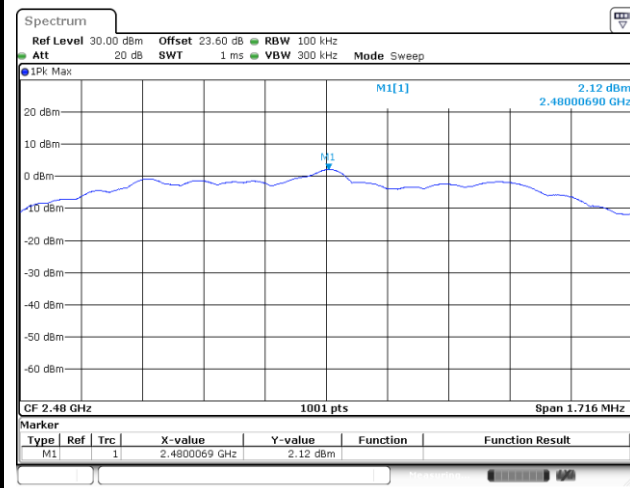


High Channel Plot

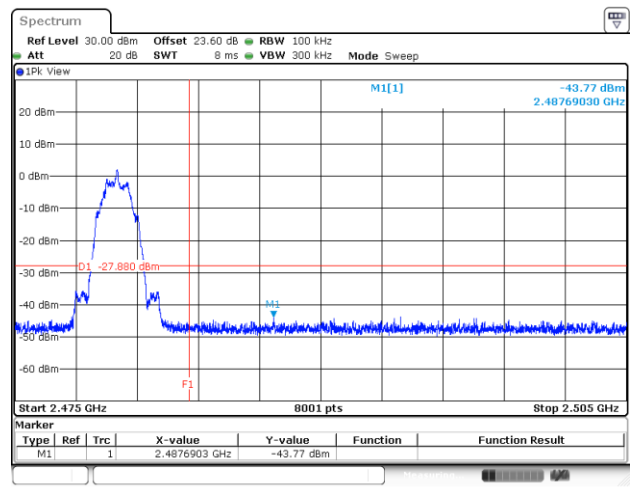

Spurious Emission 30MHz~1GHz Plot

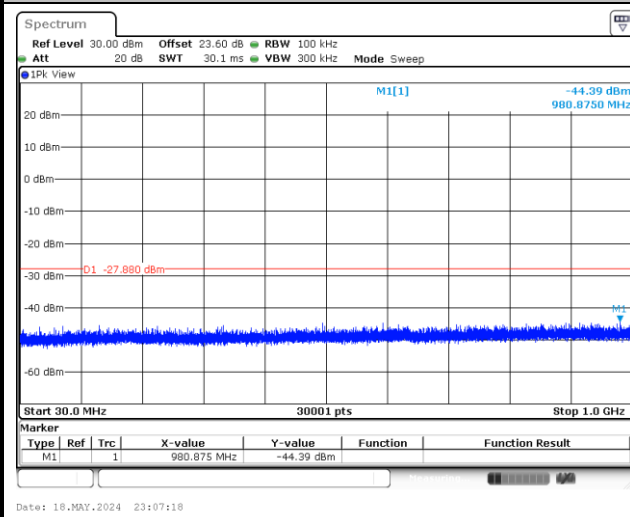

Spurious Emission 1GHz~26.5GHz Plot

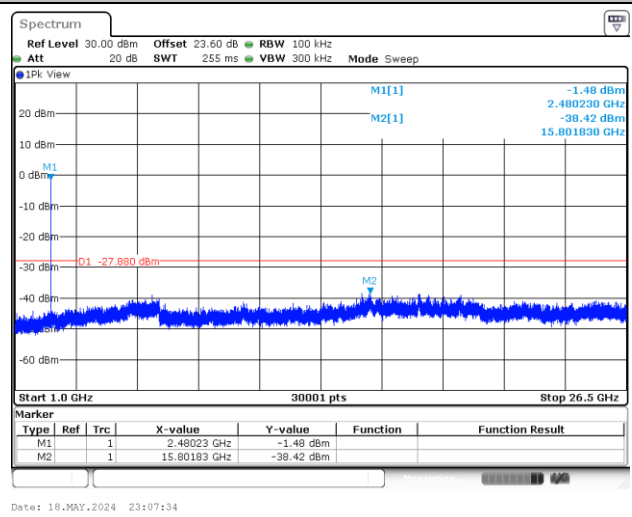




<Ant. 1>

6dB Bandwidth


<1Mbps>

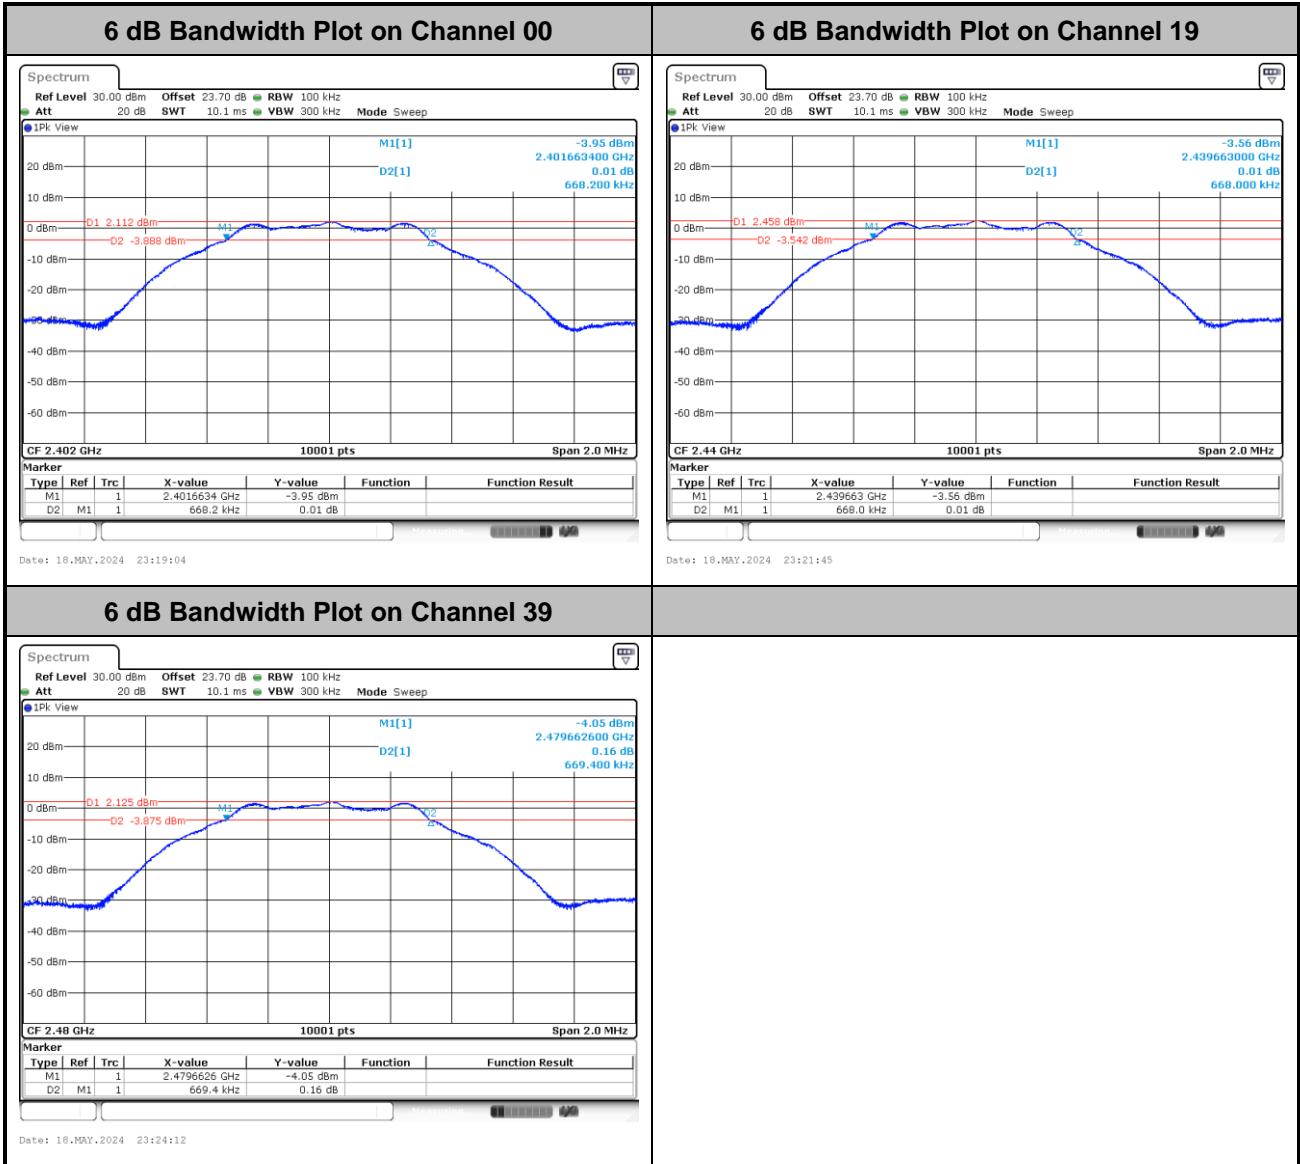




<2Mbps>


6 dB Bandwidth Plot on Channel 00

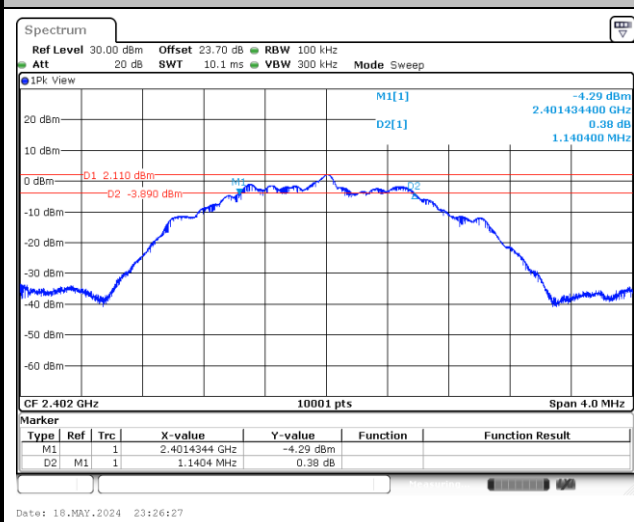

6 dB Bandwidth Plot on Channel 19

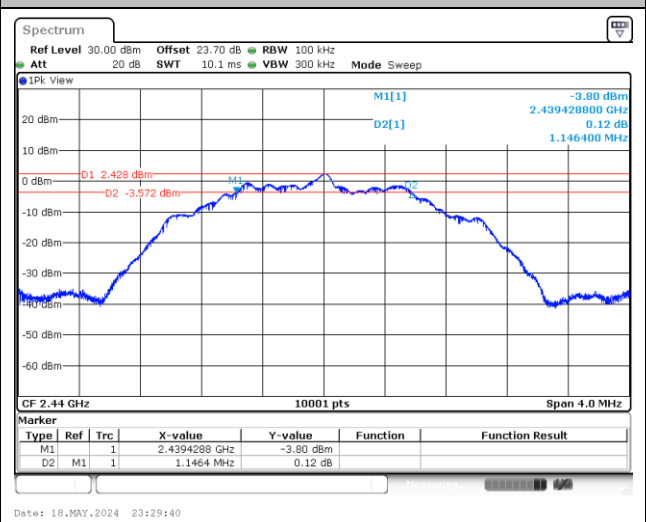

6 dB Bandwidth Plot on Channel 39

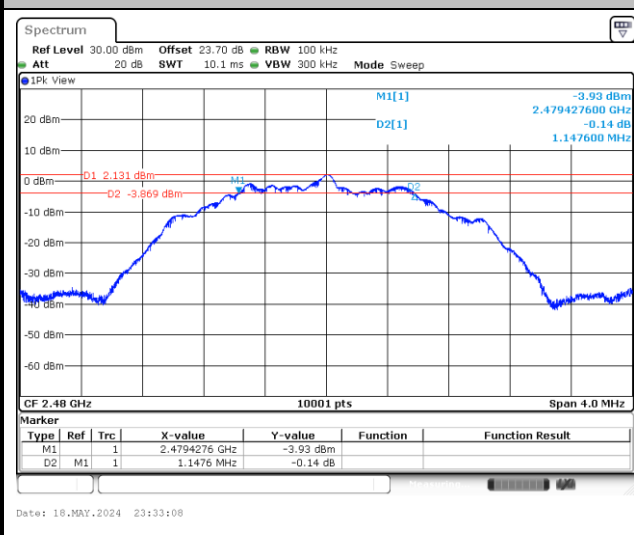




99% Occupied Bandwidth


<1Mbps>

99% Occupied Bandwidth Plot on Channel 00

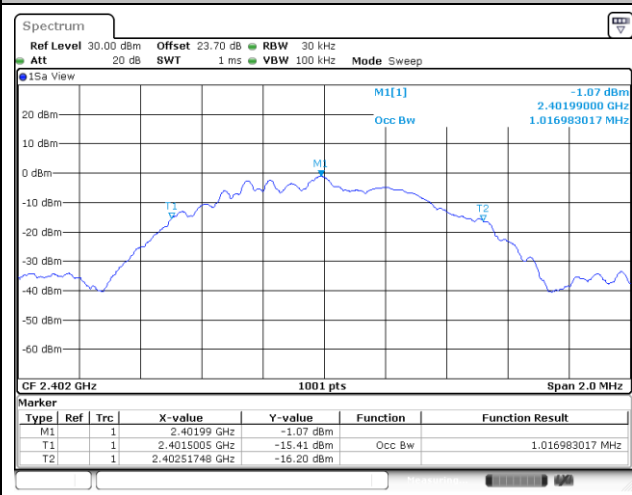


Date: 18.MAY.2024 23:18:44

99% Occupied Bandwidth Plot on Channel 19

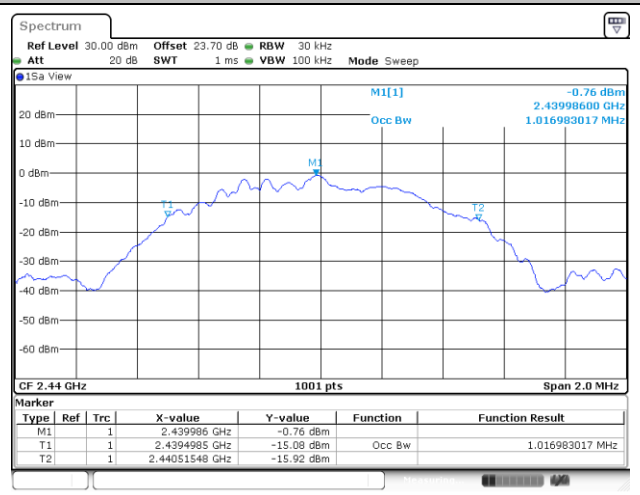

Date: 18.MAY.2024 23:21:32

99% Occupied Bandwidth Plot on Channel 39

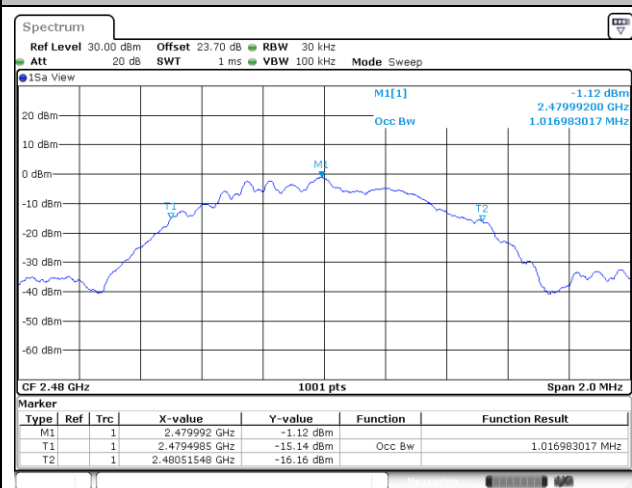


Date: 18.MAY.2024 23:23:45




<2Mbps>


99% Occupied Bandwidth Plot on Channel 00

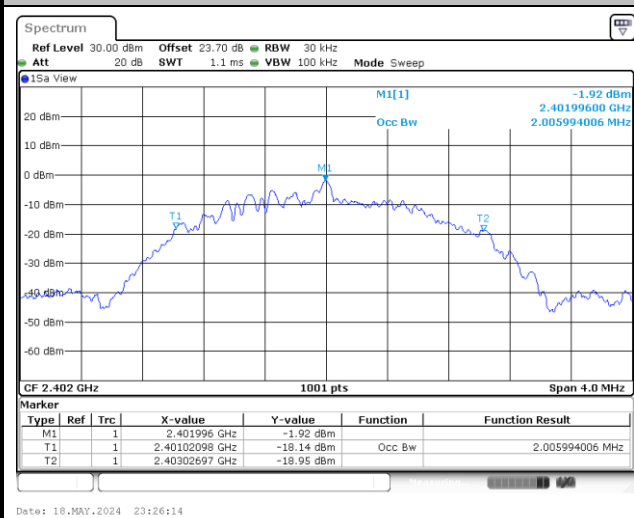

99% Occupied Bandwidth Plot on Channel 19

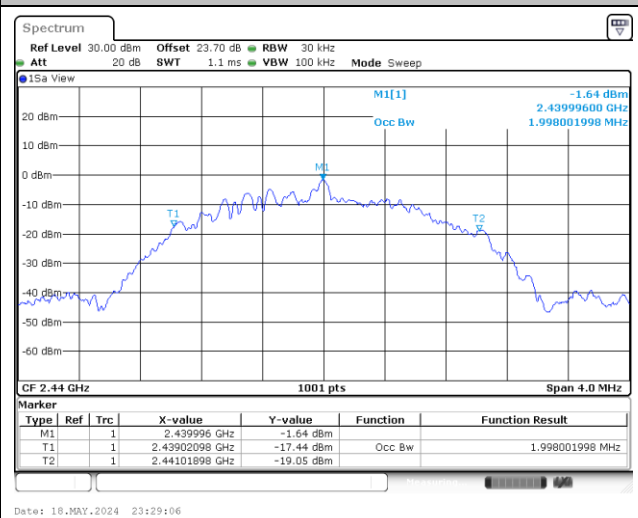


99% Occupied Bandwidth Plot on Channel 39

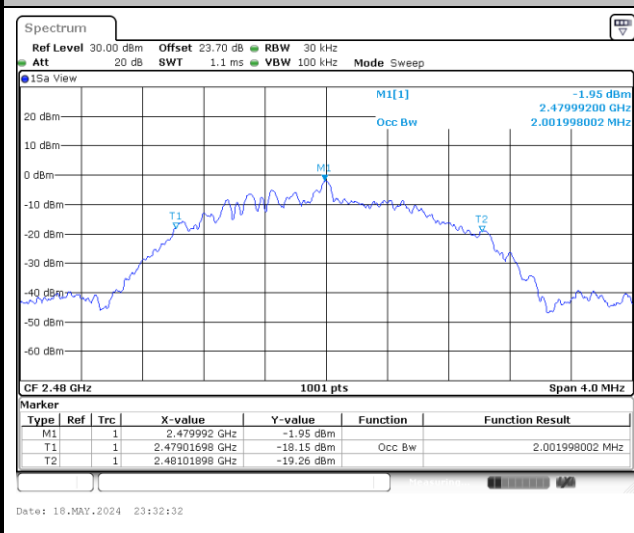




Power Spectral Density (dBm/3kHz)

<1Mbps>

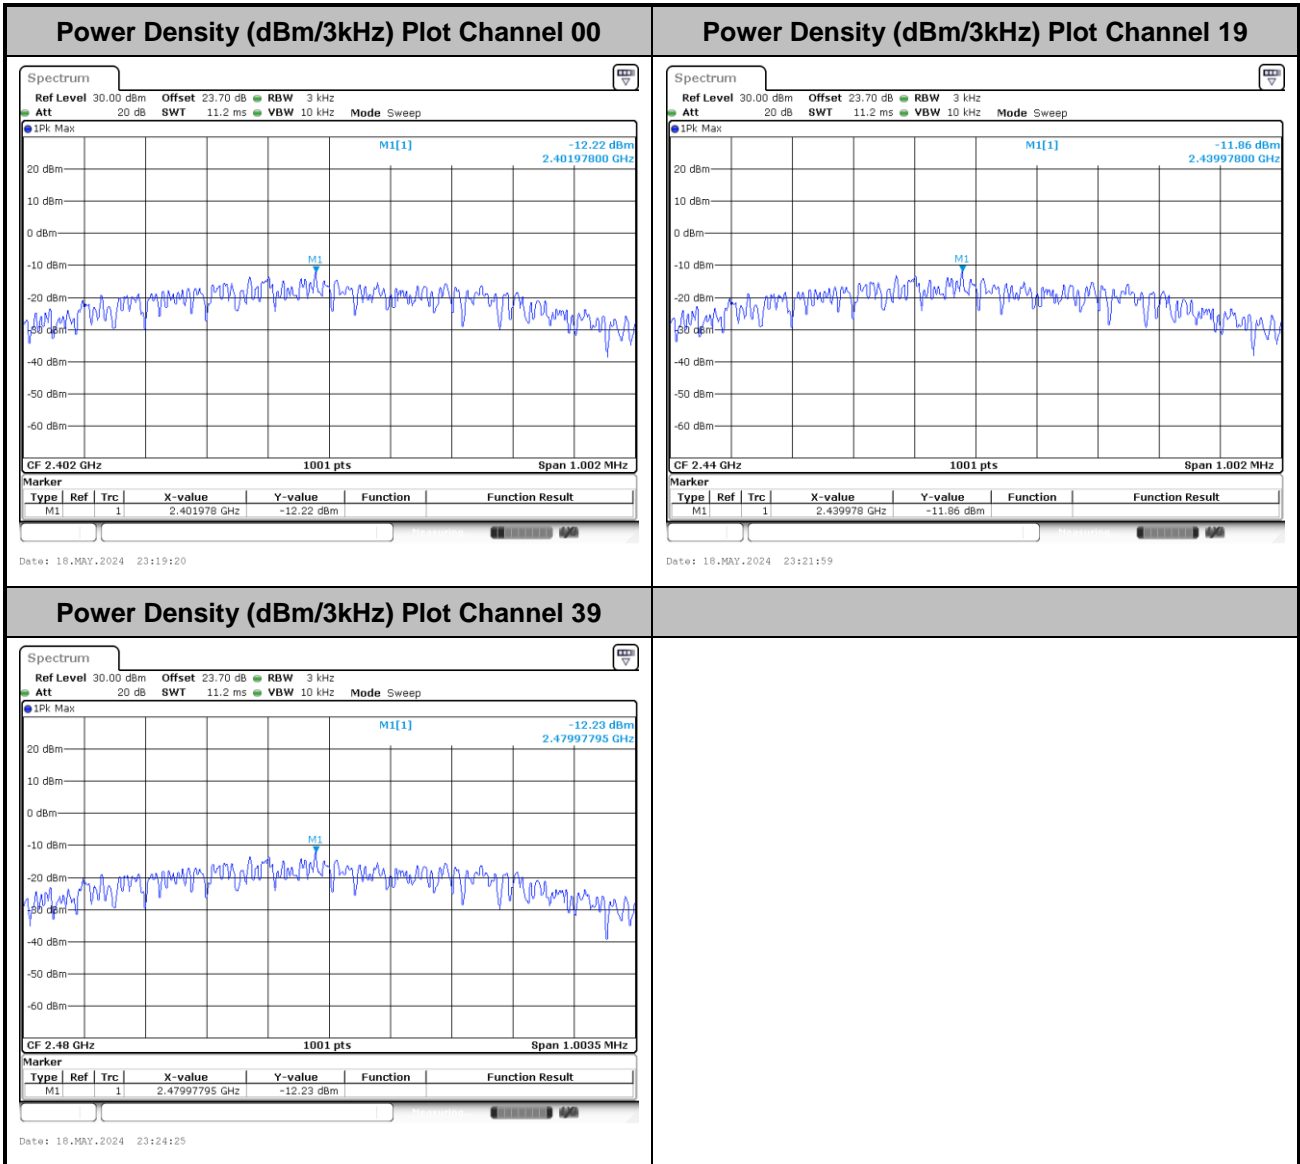



<2Mbps>

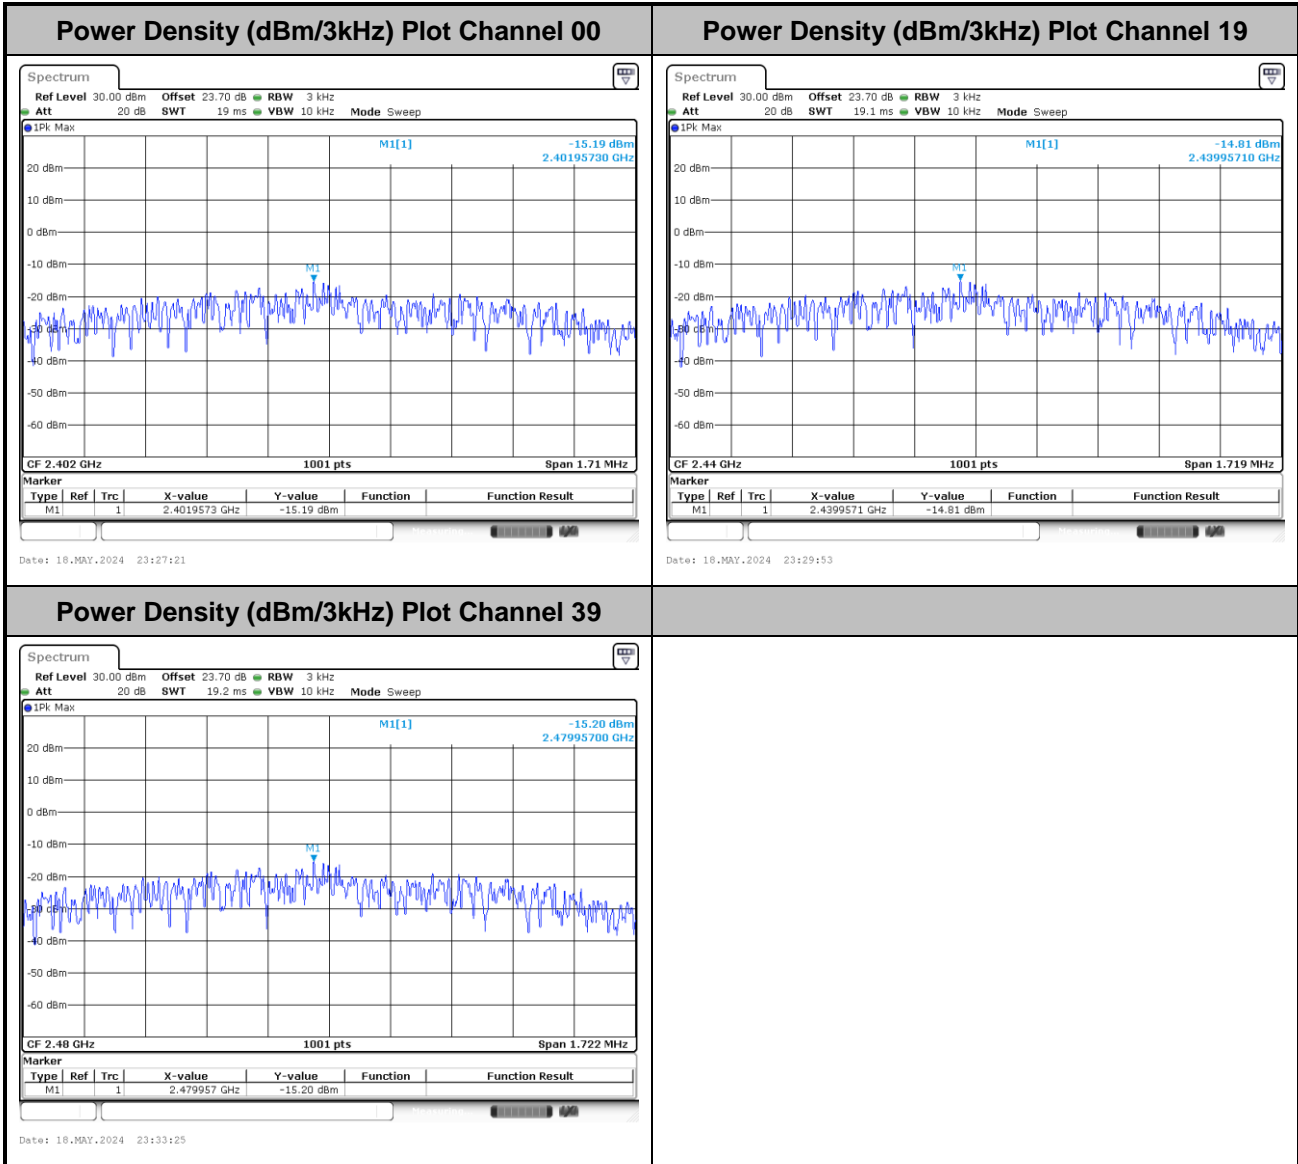




Band Edge and Conducted Spurious Emission


<1Mbps>

Channel 00


100kHz PSD reference Level Plot

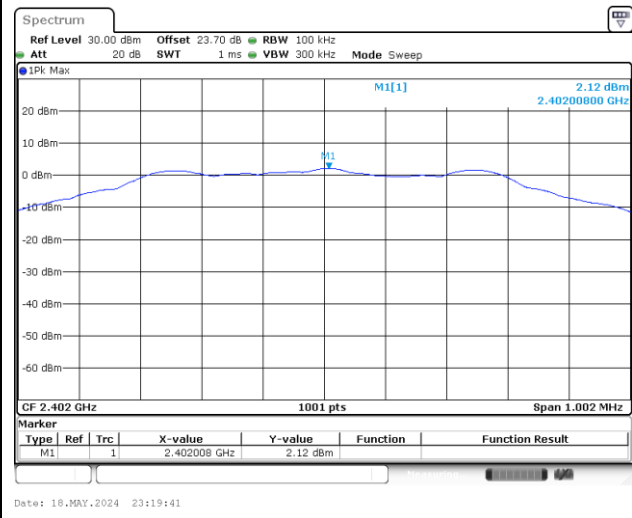


Low Channel Plot

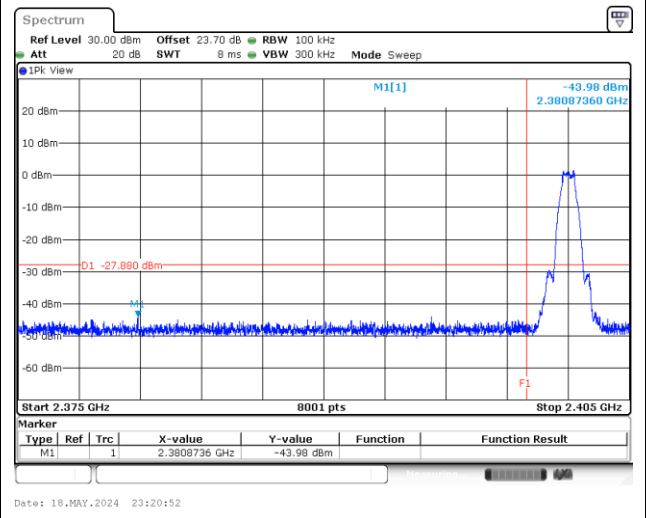

Spurious Emission 30MHz~1GHz Plot

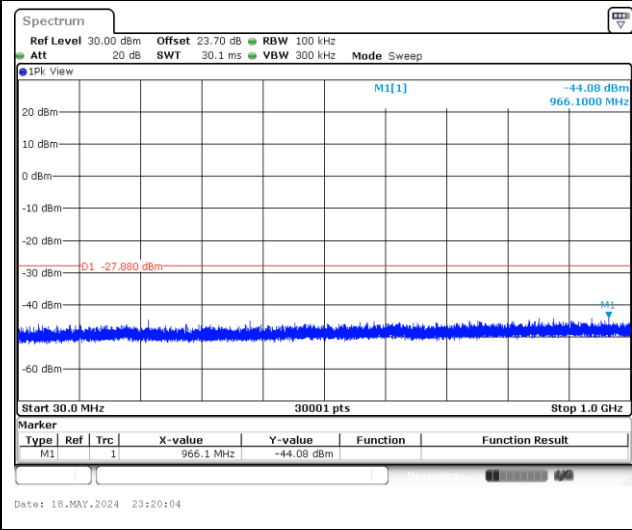


Spurious Emission 1GHz~26.5GHz Plot

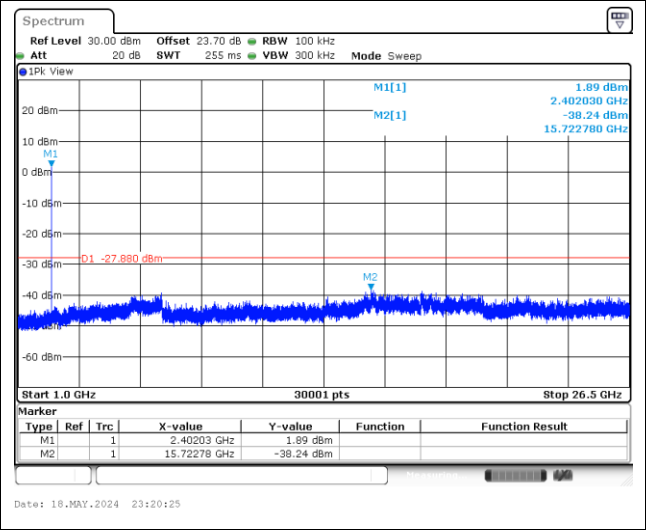



Channel 19


100kHz PSD reference Level Plot

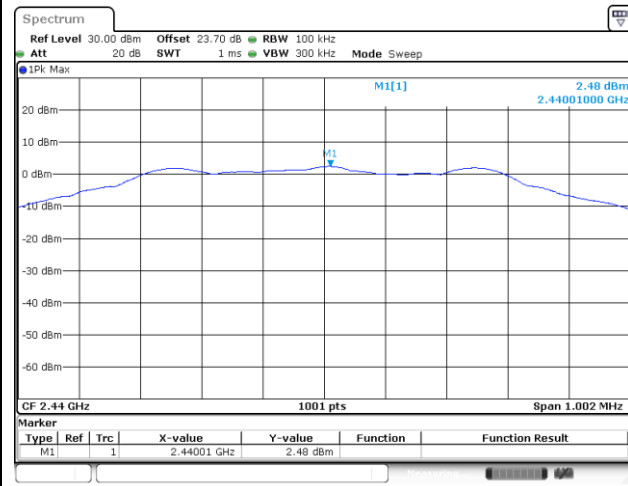

Date: 18.MAY.2024 23:22:21


Mid Channel Plot

Spurious Emission 30MHz~1GHz Plot

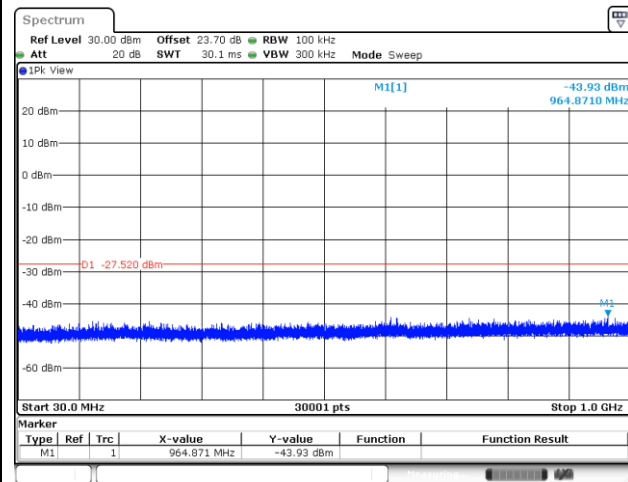

Date: 18.MAY.2024 23:22:45

Spurious Emission 1GHz~26.5GHz Plot

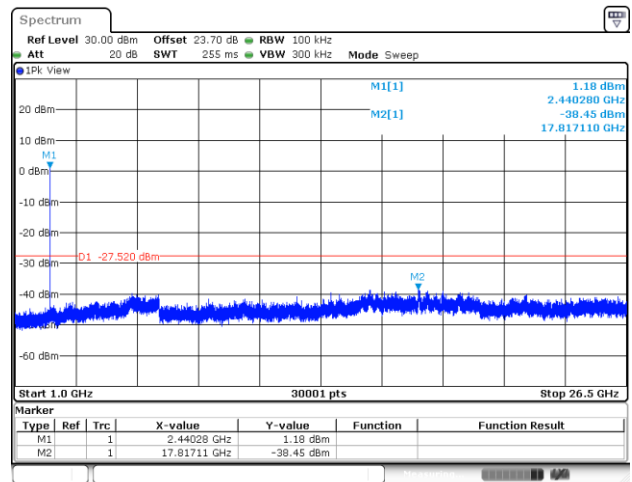


Date: 18.MAY.2024 23:23:03




Channel 39

100kHz PSD reference Level Plot

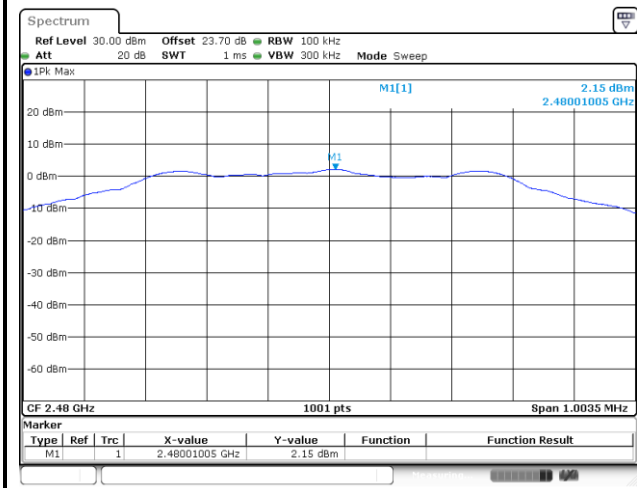


Date: 18.MAY.2024 23:24:42

High Channel Plot

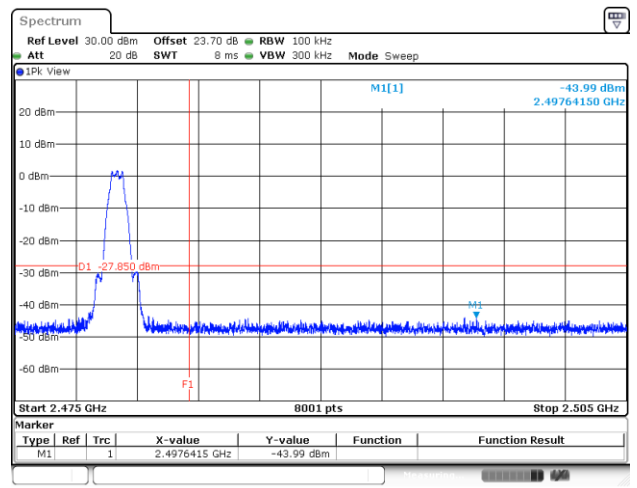


Date: 18.MAY.2024 23:25:44

Spurious Emission 30MHz~1GHz Plot

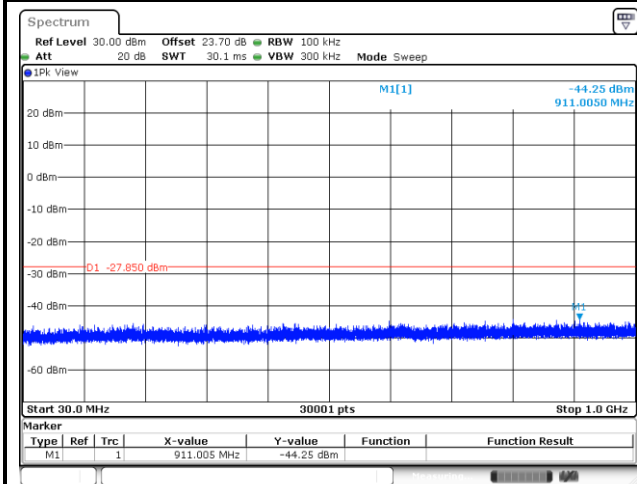

Date: 18.MAY.2024 23:25:02

Spurious Emission 1GHz~26.5GHz Plot

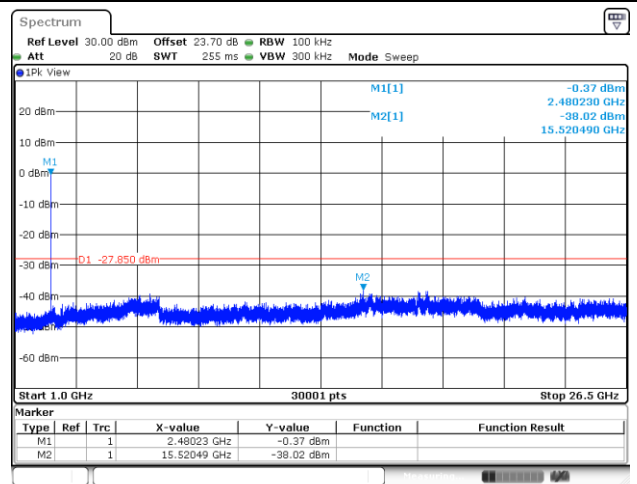


Date: 18.MAY.2024 23:25:18




<2Mbps>

Channel 00


100kHz PSD reference Level Plot

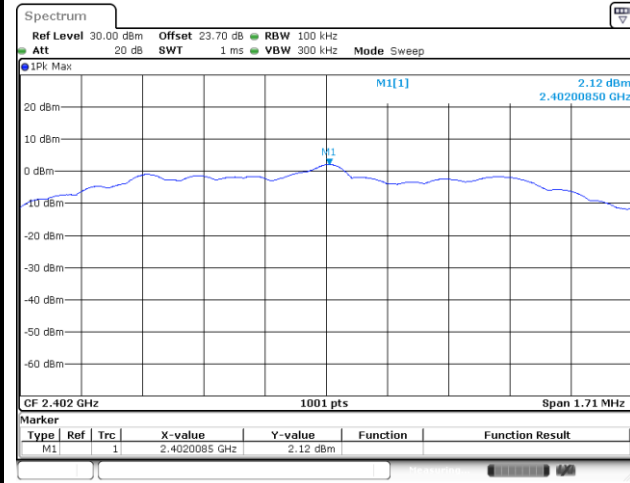


Low Channel Plot

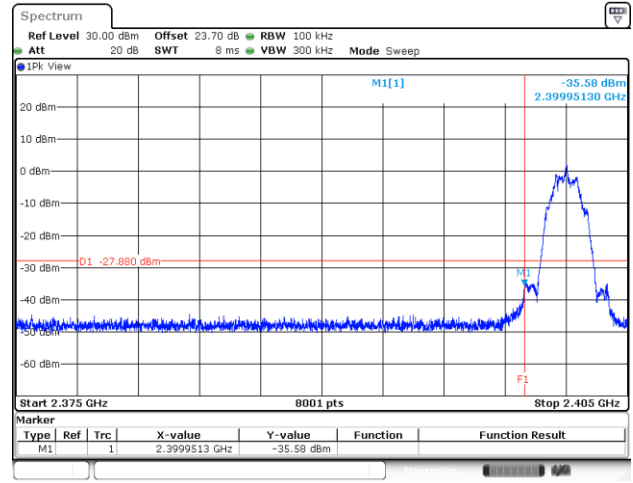

Spurious Emission 30MHz~1GHz Plot

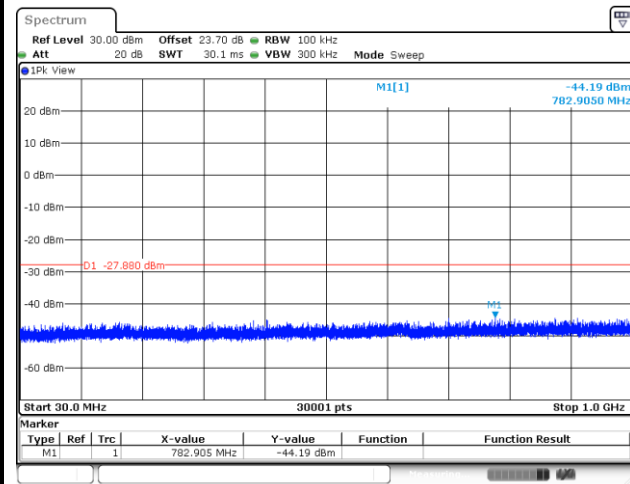


Spurious Emission 1GHz~26.5GHz Plot

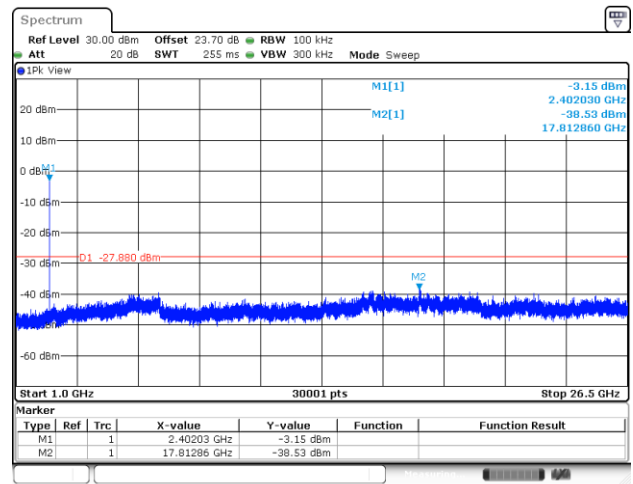



Channel 19

100kHz PSD reference Level Plot

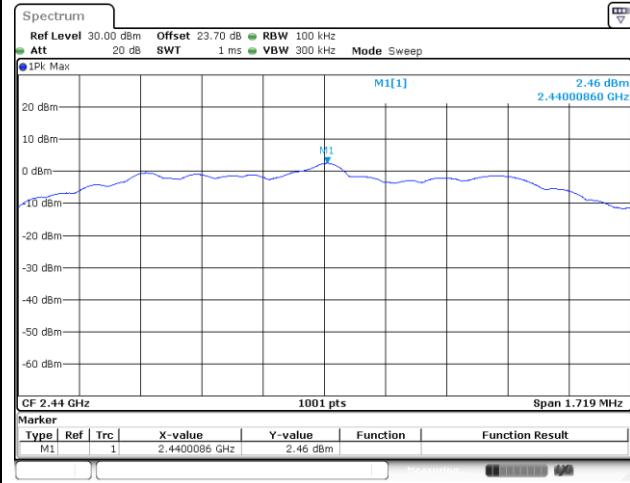


Date: 18.MAY.2024 23:31:27

Mid Channel Plot




Spurious Emission 30MHz~1GHz Plot

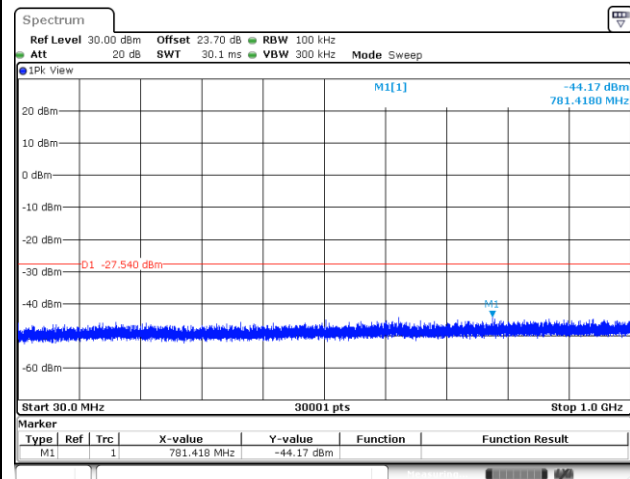

Date: 18.MAY.2024 23:31:45

Spurious Emission 1GHz~26.5GHz Plot

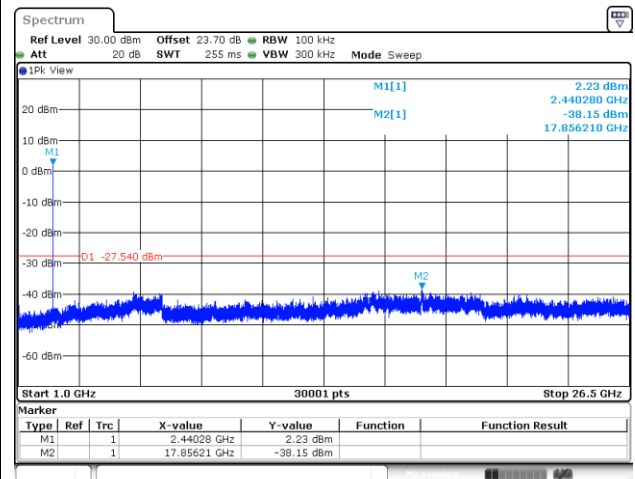


Date: 18.MAY.2024 23:32:02




Channel 39


100kHz PSD reference Level Plot

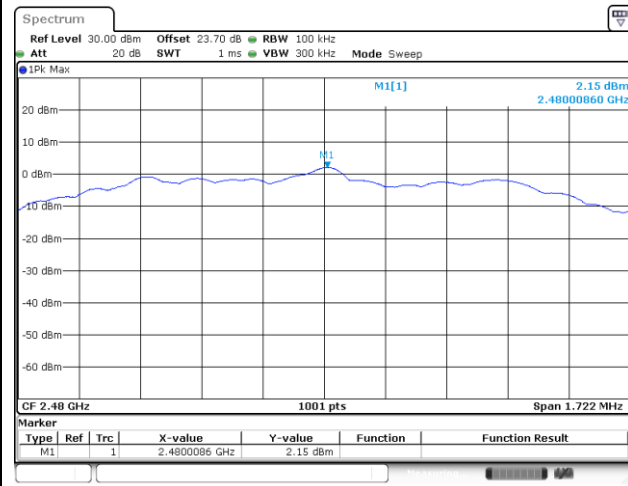


High Channel Plot

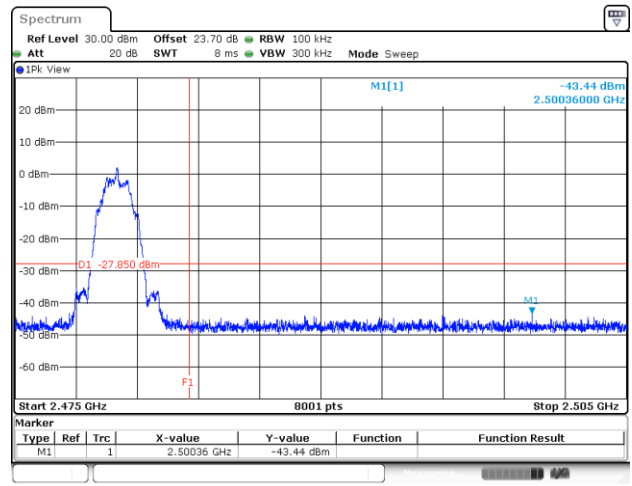

Spurious Emission 30MHz~1GHz Plot

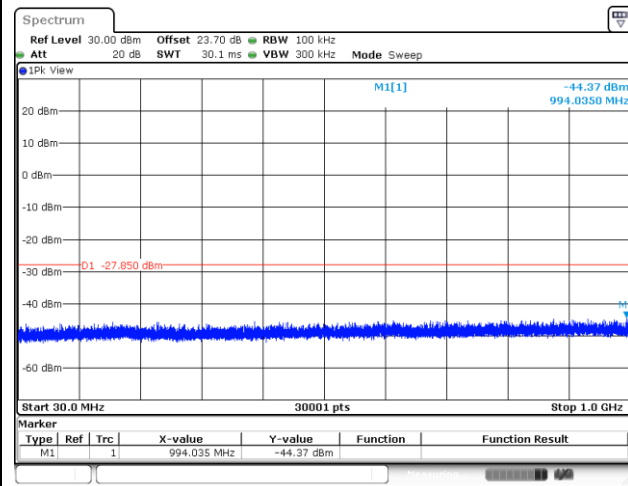

Spurious Emission 1GHz~26.5GHz Plot

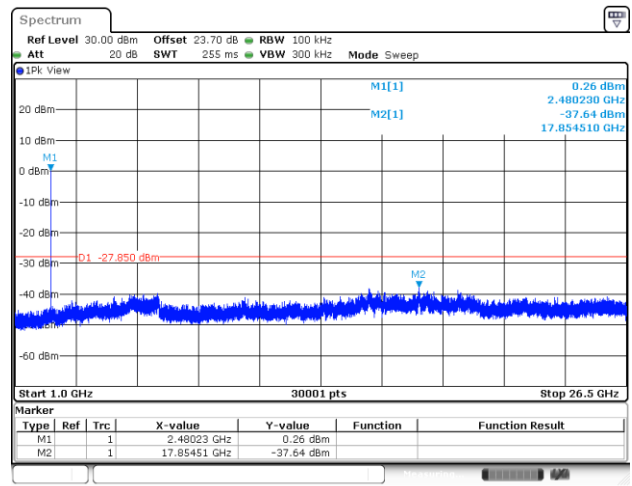




Appendix B. AC Conducted Emission Test Results

Test Engineer :	Louis Chung	Temperature :	23.4~24.6°C
		Relative Humidity :	48.3~55.7%

EUT Information

Report NO : 413013-01
 Test Mode : Mode 1
 Test Voltage : 120Vac/60Hz
 Phase : Line

Full Spectrum

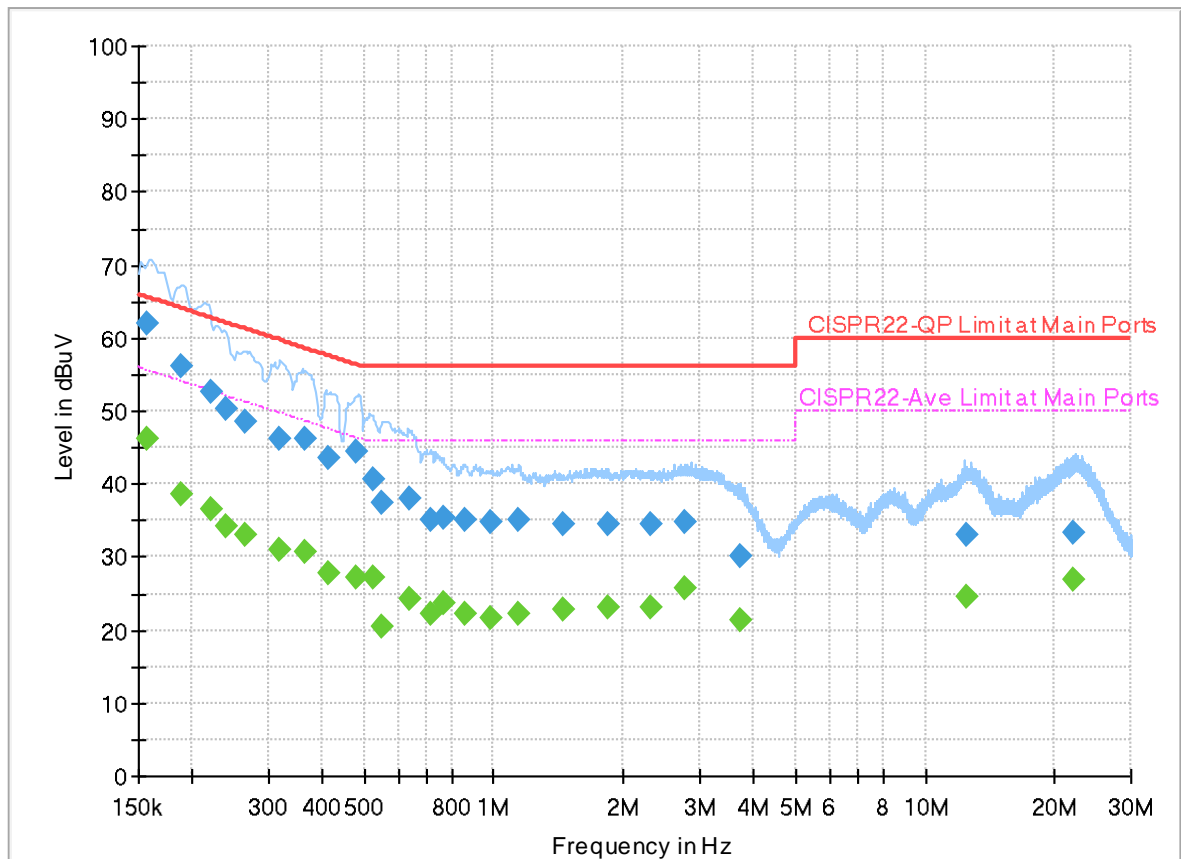

Final_Result


Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.156750	---	46.22	55.63	9.41	L1	OFF	19.9
0.156750	62.13	---	65.63	3.50	L1	OFF	19.9
0.187350	---	38.54	54.15	15.61	L1	OFF	19.9
0.187350	56.01	---	64.15	8.14	L1	OFF	19.9
0.220380	---	36.61	52.81	16.20	L1	OFF	19.9
0.220380	52.66	---	62.81	10.15	L1	OFF	19.9
0.238110	---	34.26	52.16	17.90	L1	OFF	19.9
0.238110	50.25	---	62.16	11.91	L1	OFF	19.9
0.265920	---	33.16	51.24	18.08	L1	OFF	19.9
0.265920	48.45	---	61.24	12.79	L1	OFF	19.9
0.319920	---	31.03	49.71	18.68	L1	OFF	19.9
0.319920	46.06	---	59.71	13.65	L1	OFF	19.9
0.365460	---	30.72	48.60	17.88	L1	OFF	19.9
0.365460	46.10	---	58.60	12.50	L1	OFF	19.9
0.414600	---	27.86	47.56	19.70	L1	OFF	19.9
0.414600	43.62	---	57.56	13.94	L1	OFF	19.9
0.477510	---	27.29	46.38	19.09	L1	OFF	19.9
0.477510	44.35	---	56.38	12.03	L1	OFF	19.9
0.523500	---	27.16	46.00	18.84	L1	OFF	19.9

0.523500	40.61	---	56.00	15.39	L1	OFF	19.9
0.552750	---	20.38	46.00	25.62	L1	OFF	19.9
0.552750	37.37	---	56.00	18.63	L1	OFF	19.9
0.634560	---	24.28	46.00	21.72	L1	OFF	19.9
0.634560	37.92	---	56.00	18.08	L1	OFF	19.9
0.711330	---	22.28	46.00	23.72	L1	OFF	19.9
0.711330	35.02	---	56.00	20.98	L1	OFF	19.9
0.763620	---	23.80	46.00	22.20	L1	OFF	19.9
0.763620	35.34	---	56.00	20.66	L1	OFF	19.9
0.854970	---	22.35	46.00	23.65	L1	OFF	19.9
0.854970	35.15	---	56.00	20.85	L1	OFF	19.9
0.985740	---	21.70	46.00	24.30	L1	OFF	19.9
0.985740	34.68	---	56.00	21.32	L1	OFF	19.9
1.142700	---	22.31	46.00	23.69	L1	OFF	19.9
1.142700	35.00	---	56.00	21.00	L1	OFF	19.9
1.442490	---	22.77	46.00	23.23	L1	OFF	19.9
1.442490	34.63	---	56.00	21.37	L1	OFF	19.9
1.829310	---	23.02	46.00	22.98	L1	OFF	19.9
1.829310	34.36	---	56.00	21.64	L1	OFF	19.9
2.323500	---	23.07	46.00	22.93	L1	OFF	20.0
2.323500	34.51	---	56.00	21.49	L1	OFF	20.0
2.760090	---	25.87	46.00	20.13	L1	OFF	20.0
2.760090	34.68	---	56.00	21.32	L1	OFF	20.0
3.745140	---	21.46	46.00	24.54	L1	OFF	20.0
3.745140	30.21	---	56.00	25.79	L1	OFF	20.0
12.518250	---	24.53	50.00	25.47	L1	OFF	20.1
12.518250	33.00	---	60.00	27.00	L1	OFF	20.1
22.051500	---	26.79	50.00	23.21	L1	OFF	20.1
22.051500	33.42	---	60.00	26.58	L1	OFF	20.1

EUT Information

Report NO : 413013-01
 Test Mode : Mode 1
 Test Voltage : 120Vac/60Hz
 Phase : Neutral

Full Spectrum

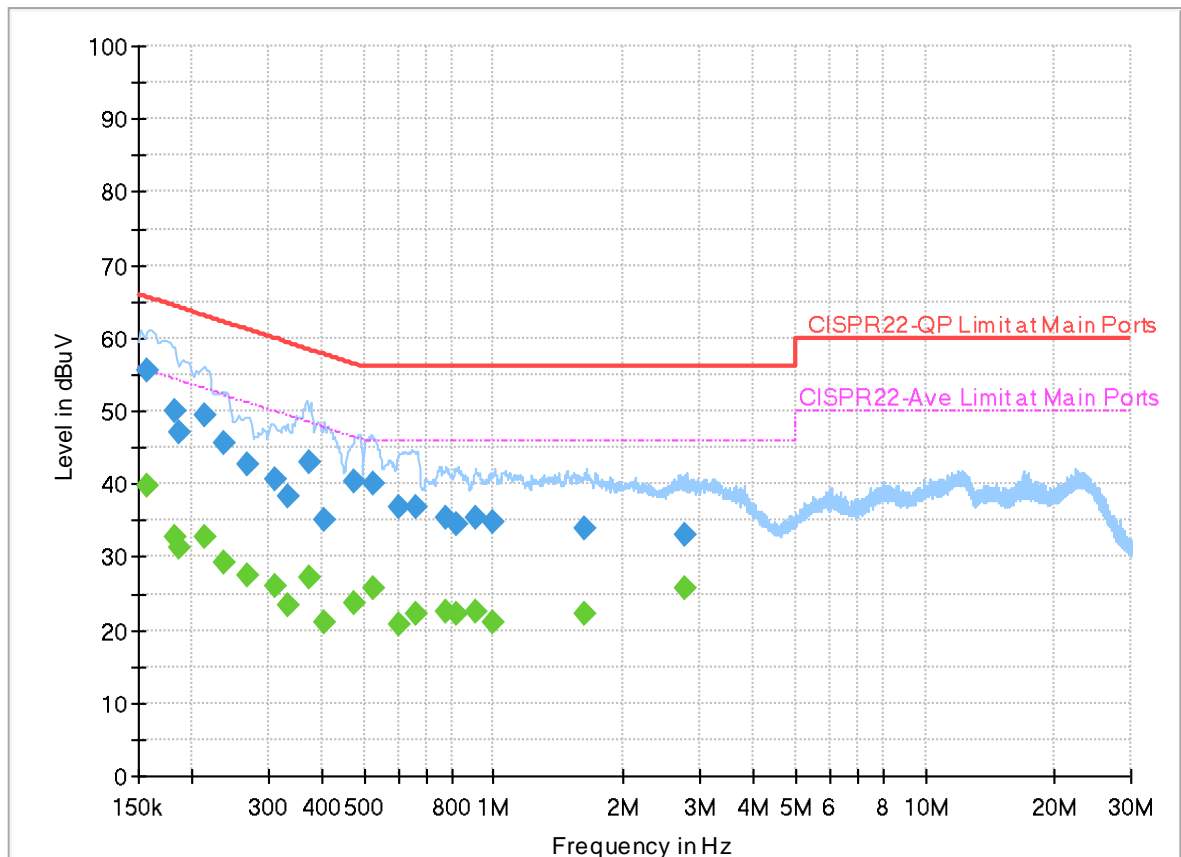

Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.156750	---	39.85	55.63	15.78	N	OFF	19.9
0.156750	55.65	---	65.63	9.98	N	OFF	19.9
0.181500	---	32.86	54.42	21.56	N	OFF	19.9
0.181500	50.00	---	64.42	14.42	N	OFF	19.9
0.186900	---	31.24	54.17	22.93	N	OFF	19.9
0.186900	47.11	---	64.17	17.06	N	OFF	19.9
0.214620	---	32.71	53.03	20.32	N	OFF	19.9
0.214620	49.31	---	63.03	13.72	N	OFF	19.9
0.235500	---	29.20	52.25	23.05	N	OFF	19.9
0.235500	45.58	---	62.25	16.67	N	OFF	19.9
0.267900	---	27.57	51.18	23.61	N	OFF	19.9
0.267900	42.70	---	61.18	18.48	N	OFF	19.9
0.312000	---	26.03	49.92	23.89	N	OFF	19.9
0.312000	40.71	---	59.92	19.21	N	OFF	19.9
0.332430	---	23.31	49.39	26.08	N	OFF	19.9
0.332430	38.25	---	59.39	21.14	N	OFF	19.9
0.375000	---	27.30	48.39	21.09	N	OFF	19.9
0.375000	43.04	---	58.39	15.35	N	OFF	19.9
0.402000	---	21.03	47.81	26.78	N	OFF	19.9

0.402000	35.18	---	57.81	22.63	N	OFF	19.9
0.474630	---	23.73	46.43	22.70	N	OFF	19.9
0.474630	40.28	---	56.43	16.15	N	OFF	19.9
0.526650	---	25.59	46.00	20.41	N	OFF	19.9
0.526650	40.07	---	56.00	15.93	N	OFF	19.9
0.604500	---	20.62	46.00	25.38	N	OFF	19.9
0.604500	36.77	---	56.00	19.23	N	OFF	19.9
0.658500	---	22.13	46.00	23.87	N	OFF	19.9
0.658500	36.84	---	56.00	19.16	N	OFF	19.9
0.771720	---	22.50	46.00	23.50	N	OFF	19.9
0.771720	35.42	---	56.00	20.58	N	OFF	19.9
0.820500	---	22.16	46.00	23.84	N	OFF	19.9
0.820500	34.59	---	56.00	21.41	N	OFF	19.9
0.912750	---	22.65	46.00	23.35	N	OFF	19.9
0.912750	35.30	---	56.00	20.70	N	OFF	19.9
0.998880	---	20.94	46.00	25.06	N	OFF	19.9
0.998880	34.86	---	56.00	21.14	N	OFF	19.9
1.627350	---	22.21	46.00	23.79	N	OFF	19.9
1.627350	33.98	---	56.00	22.02	N	OFF	19.9
2.767110	---	25.66	46.00	20.34	N	OFF	20.0
2.767110	33.06	---	56.00	22.94	N	OFF	20.0



Appendix C. Radiated Spurious Emission

Test Engineer :	Jacky Hung, Mancy Chou, and Rain Lee	Temperature :	20~26°C
		Relative Humidity :	40~65%

<Ant. 0>

<1Mbps>

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
BLE CH 00 2402MHz		2386.44	49.82	-24.18	74	44.82	27.46	14.62	37.08	120	224	P	H	
		2389.485	39.57	-14.43	54	34.54	27.49	14.62	37.08	120	224	A	H	
	*	2402	98.03	-	-	92.98	27.5	14.63	37.08	120	224	P	H	
	*	2402	97.5	-	-	92.45	27.5	14.63	37.08	120	224	A	H	
													H	
			2370.795	49.64	-24.36	74	44.82	27.31	14.6	37.09	149	217	P	V
			2351.79	39.73	-14.27	54	34.94	27.3	14.58	37.09	149	217	A	V
	*		2402	102.04	-	-	96.99	27.5	14.63	37.08	149	217	P	V
	*		2402	101.48	-	-	96.43	27.5	14.63	37.08	149	217	A	V
														V
BLE CH 19 2440MHz		2354.66	49.72	-24.28	74	44.92	27.3	14.59	37.09	113	221	P	H	
		2378.6	39.7	-14.3	54	34.78	27.39	14.61	37.08	113	221	A	H	
	*	2440	98.63	-	-	93.44	27.6	14.67	37.08	113	221	P	H	
	*	2440	98.08	-	-	92.89	27.6	14.67	37.08	113	221	A	H	
			2488.52	49.85	-24.15	74	44.39	27.8	14.73	37.07	113	221	P	H
			2490.9	39.76	-14.24	54	34.3	27.8	14.73	37.07	113	221	A	H
			2362.5	49.39	-24.61	74	44.59	27.3	14.59	37.09	186	223	P	V
			2386.58	39.79	-14.21	54	34.78	27.47	14.62	37.08	186	223	A	V
	*		2440	102.75	-	-	97.56	27.6	14.67	37.08	186	223	P	V
	*		2440	102.24	-	-	97.05	27.6	14.67	37.08	186	223	A	V
			2484.67	49.22	-24.78	74	43.77	27.8	14.72	37.07	186	223	P	V
			2488.8	39.91	-14.09	54	34.45	27.8	14.73	37.07	186	223	A	V



BLE CH 39 2480MHz	*	2480	96.93	-	-	91.48	27.8	14.72	37.07	107	222	P	H
	*	2480	96.4	-	-	90.95	27.8	14.72	37.07	107	222	A	H
		2492.24	49.51	-24.49	74	44.05	27.8	14.73	37.07	107	222	P	H
		2488.08	40.1	-13.9	54	34.64	27.8	14.73	37.07	107	222	A	H
													H
													H
	*	2480	101.59	-	-	96.14	27.8	14.72	37.07	112	224	P	V
	*	2480	100.99	-	-	95.54	27.8	14.72	37.07	112	224	A	V
		2483.56	50.21	-23.79	74	44.76	27.8	14.72	37.07	112	224	P	V
		2483.64	40.22	-13.78	54	34.77	27.8	14.72	37.07	112	224	A	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**2.4GHz 2400~2483.5MHz
BLE (Harmonic @ 3m)**

BLE	Note	Frequency (MHz)	Level (dBµV/m)	Margin (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 00 2402MHz		4804	39.91	-34.09	74	57.7	32.32	7.29	57.4	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
			4804	38.8	-35.2	74	56.59	32.32	7.29	57.4	-	-	P
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V



BLE	Note	Frequency (MHz)	Level (dBµV/m)	Margin (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 19 2440MHz		4880	40.98	-33.02	74	57.97	32.66	7.53	57.18	-	-	P	H
		7320	45.64	-28.36	74	56.08	36.92	9.48	56.84	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
			4880	42.16	-31.84	74	59.15	32.66	7.53	57.18	-	-	P
		7320	45.09	-28.91	74	55.53	36.92	9.48	56.84	-	-	P	V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V



BLE	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 39 2480MHz		4960	42.06	-31.94	74	58.18	33.06	7.77	56.95	-	-	P	H
		7440	44.55	-29.45	74	55.72	36.42	9.46	57.05	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
			4960	41.83	-32.17	74	57.95	33.06	7.77	56.95	-	-	P
		7440	44.64	-29.36	74	55.81	36.42	9.46	57.05	-	-	P	V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against Peak and Average limit line. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only. 												



<2Mbps>

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	Note	Frequency	Level	Margin	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)	
BLE CH 00 2402MHz		2339.505	48.5	-25.5	74	43.82	27.2	14.57	37.09	100	229	P	H	
		2338.77	40.88	-13.12	54	36.2	27.2	14.57	37.09	100	229	A	H	
	*	2402	97.11	-	-	92.06	27.5	14.63	37.08	100	229	P	H	
	*	2402	95.89	-	-	90.84	27.5	14.63	37.08	100	229	A	H	
													H	
			2381.085	48.59	-25.41	74	43.65	27.41	14.61	37.08	149	213	P	V
			2388.015	40.72	-13.28	54	35.7	27.48	14.62	37.08	149	213	A	V
	*		2402	102.07	-	-	97.02	27.5	14.63	37.08	149	213	P	V
	*		2402	100.74	-	-	95.69	27.5	14.63	37.08	149	213	A	V
														V
BLE CH 19 2440MHz		2362.64	48.41	-25.59	74	43.61	27.3	14.59	37.09	110	221	P	H	
		2387	41.12	-12.88	54	36.11	27.47	14.62	37.08	110	221	A	H	
	*	2440	98.08	-	-	92.89	27.6	14.67	37.08	110	221	P	H	
	*	2440	96.9	-	-	91.71	27.6	14.67	37.08	110	221	A	H	
			2495.03	48.74	-25.26	74	43.28	27.8	14.73	37.07	110	221	P	H
			2493.91	41.47	-12.53	54	36.01	27.8	14.73	37.07	110	221	A	H
			2322.88	48.28	-25.72	74	43.61	27.2	14.56	37.09	190	226	P	V
			2388.12	41.05	-12.95	54	36.03	27.48	14.62	37.08	190	226	A	V
	*		2440	102.76	-	-	97.57	27.6	14.67	37.08	190	226	P	V
	*		2440	101.23	-	-	96.04	27.6	14.67	37.08	190	226	A	V
			2498.81	49.39	-24.61	74	43.92	27.8	14.74	37.07	190	226	P	V
			2487.68	41.2	-12.8	54	35.74	27.8	14.73	37.07	190	226	A	V



BLE CH 39 2480MHz	*	2480	97.3	-	-	91.85	27.8	14.72	37.07	106	224	P	H
	*	2480	96.03	-	-	90.58	27.8	14.72	37.07	106	224	A	H
		2488.2	49.99	-24.01	74	44.53	27.8	14.73	37.07	106	224	P	H
		2485.16	41.61	-12.39	54	36.16	27.8	14.72	37.07	106	224	A	H
													H
													H
	*	2480	101.68	-	-	96.23	27.8	14.72	37.07	110	224	P	V
	*	2480	100.39	-	-	94.94	27.8	14.72	37.07	110	224	A	V
		2483.68	52.32	-21.68	74	46.87	27.8	14.72	37.07	110	224	P	V
		2483.52	42.85	-11.15	54	37.4	27.8	14.72	37.07	110	224	A	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz
BLE (Harmonic @ 3m)

BLE	Note	Frequency (MHz)	Level (dBµV/m)	Margin (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 00 2402MHz		4804	40.1	-33.9	74	57.89	32.32	7.29	57.4	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
			4804	39.3	-34.7	74	57.09	32.32	7.29	57.4	-	-	P
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V



BLE	Note	Frequency (MHz)	Level (dBµV/m)	Margin (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 19 2440MHz		4880	41.92	-32.08	74	58.91	32.66	7.53	57.18	-	-	P	H
		7320	45.72	-28.28	74	56.16	36.92	9.48	56.84	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
			4880	41.36	-32.64	74	58.35	32.66	7.53	57.18	-	-	P
		7320	45.17	-28.83	74	55.61	36.92	9.48	56.84	-	-	P	V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V



BLE	Note	Frequency (MHz)	Level (dBµV/m)	Margin (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 39 2480MHz		4960	41.88	-32.12	74	58	33.06	7.77	56.95	-	-	P	H
		7440	45.09	-28.91	74	56.26	36.42	9.46	57.05	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
			4960	41.9	-32.1	74	58.02	33.06	7.77	56.95	-	-	P
		7440	45.27	-28.73	74	56.44	36.42	9.46	57.05	-	-	P	V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against Peak and Average limit line. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only. 												



Emission above 18GHz

2.4GHz BLE (SHF)

BT	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz BLE SHF		24706	41.01	-32.99	74	57.56	39.28	-2.41	53.42	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
			23964	43.03	-30.97	74	60.9	38.7	-2.65	53.92	-	-	P
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against limit line. 3. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.												



Emission below 1GHz

2.4GHz BLE (LF)

BLE	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)	
2.4GHz BLE LF		45.39	24.42	-15.58	40	38.85	16.7	1.27	32.4	-	-	P	H	
		182.82	27.93	-15.57	43.5	43.58	14.82	1.8	32.27	-	-	P	H	
		268.41	27.03	-18.97	46	37.88	19.32	2.04	32.21	-	-	P	H	
		657.7	27.79	-18.21	46	30.78	26.4	2.81	32.2	-	-	P	H	
		741.7	31.36	-14.64	46	32.46	28.1	2.96	32.16	-	-	P	H	
		959.4	33.36	-12.64	46	30.05	31	3.34	31.03	-	-	P	H	
														H
														H
														H
														H
														H
														H
			45.66	33.46	-6.54	40	48.01	16.57	1.27	32.39	100	25	Q	V
			58.89	32.63	-7.37	40	51.82	11.8	1.33	32.32	-	-	P	V
			179.04	28.17	-15.33	43.5	43.64	15	1.8	32.27	-	-	P	V
			717.9	29.55	-16.45	46	31.68	27.12	2.92	32.17	-	-	P	V
			841.8	31.46	-14.54	46	31.05	29.07	3.16	31.82	-	-	P	V
			951.7	32.88	-13.12	46	29.67	31	3.31	31.1	-	-	P	V
														V
														V
													V	
													V	
													V	

Remark

- No other spurious found.
- All results are PASS against limit line.
- The emission position marked as "-" means no suspected emission found and emission level has at least 6dB margin against limit or emission is noise floor only.



<Ant. 1>

<1Mbps>

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
BLE CH 00 2402MHz		2342.55	49.4	-24.6	74	44.68	27.23	14.58	37.09	120	224	P	H	
		2346.225	39.99	-14.01	54	35.24	27.26	14.58	37.09	120	224	A	H	
	*	2402	98.4	-	-	93.35	27.5	14.63	37.08	120	224	P	H	
	*	2402	97.85	-	-	92.8	27.5	14.63	37.08	120	224	A	H	
													H	
														H
			2378.775	49.32	-24.68	74	44.4	27.39	14.61	37.08	169	216	P	V
			2389.17	39.87	-14.13	54	34.84	27.49	14.62	37.08	169	216	A	V
	*		2402	102.01	-	-	96.96	27.5	14.63	37.08	169	216	P	V
	*		2402	101.48	-	-	96.43	27.5	14.63	37.08	169	216	A	V
														V
														V
BLE CH 19 2440MHz		2384.2	49.56	-24.44	74	44.59	27.44	14.61	37.08	109	218	P	H	
		2387.84	39.66	-14.34	54	34.64	27.48	14.62	37.08	109	218	A	H	
	*	2440	98.67	-	-	93.48	27.6	14.67	37.08	109	218	P	H	
	*	2440	98.07	-	-	92.88	27.6	14.67	37.08	109	218	A	H	
			2486.98	49.39	-24.61	74	43.93	27.8	14.73	37.07	109	218	P	H
			2488.17	39.94	-14.06	54	34.48	27.8	14.73	37.07	109	218	A	H
			2371.74	50.14	-23.86	74	45.31	27.32	14.6	37.09	164	220	P	V
			2387.84	39.68	-14.32	54	34.66	27.48	14.62	37.08	164	220	A	V
	*		2440	102.64	-	-	97.45	27.6	14.67	37.08	164	220	P	V
	*		2440	102.14	-	-	96.95	27.6	14.67	37.08	164	220	A	V
			2490.62	49.49	-24.51	74	44.03	27.8	14.73	37.07	164	220	P	V
			2494.75	40.18	-13.82	54	34.72	27.8	14.73	37.07	164	220	A	V



BLE CH 39 2480MHz	*	2480	96.96	-	-	91.51	27.8	14.72	37.07	100	221	P	H
	*	2480	96.42	-	-	90.97	27.8	14.72	37.07	100	221	A	H
		2488.4	49.73	-24.27	74	44.27	27.8	14.73	37.07	100	221	P	H
		2486.96	40.25	-13.75	54	34.79	27.8	14.73	37.07	100	221	A	H
													H
													H
	*	2480	101.82	-	-	96.37	27.8	14.72	37.07	225	220	P	V
	*	2480	101.31	-	-	95.86	27.8	14.72	37.07	225	220	A	V
		2483.52	50.78	-23.22	74	45.33	27.8	14.72	37.07	225	220	P	V
		2485.64	40.26	-13.74	54	34.81	27.8	14.72	37.07	225	220	A	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**2.4GHz 2400~2483.5MHz
BLE (Harmonic @ 3m)**

BLE	Note	Frequency (MHz)	Level (dBµV/m)	Margin (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 00 2402MHz		4804	39.19	-34.81	74	56.98	32.32	7.29	57.4	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
			4804	38.89	-35.11	74	56.68	32.32	7.29	57.4	-	-	P
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V



BLE	Note	Frequency (MHz)	Level (dBµV/m)	Margin (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
BLE CH 19 2440MHz		4880	41.4	-32.6	74	58.39	32.66	7.53	57.18	-	-	P	H	
		7320	46.17	-27.83	74	56.61	36.92	9.48	56.84	-	-	P	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
			4880	41.05	-32.95	74	58.04	32.66	7.53	57.18	-	-	P	V
			7320	45.38	-28.62	74	55.82	36.92	9.48	56.84	-	-	P	V
														V
														V
														V
														V
														V
														V
													V	
													V	



BLE	Note	Frequency (MHz)	Level (dBµV/m)	Margin (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 39 2480MHz		4960	41.84	-32.16	74	57.96	33.06	7.77	56.95	-	-	P	H
		7440	44.89	-29.11	74	56.06	36.42	9.46	57.05	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
			4960	42.95	-31.05	74	59.07	33.06	7.77	56.95	-	-	P
		7440	45.48	-28.52	74	56.65	36.42	9.46	57.05	-	-	P	V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against Peak and Average limit line. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only. 												



<2Mbps>

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	Note	Frequency	Level	Margin	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)	
BLE CH 00 2402MHz		2369.325	48.68	-25.32	74	43.87	27.3	14.6	37.09	123	223	P	H	
		2349.06	41.25	-12.75	54	36.47	27.29	14.58	37.09	123	223	A	H	
	*	2402	98.16	-	-	93.11	27.5	14.63	37.08	123	223	P	H	
	*	2402	96.58	-	-	91.53	27.5	14.63	37.08	123	223	A	H	
													H	
													H	
			2375.31	48.81	-25.19	74	43.93	27.35	14.61	37.08	189	209	P	V
			2365.125	41.39	-12.61	54	36.58	27.3	14.6	37.09	189	209	A	V
	*		2402	101.53	-	-	96.48	27.5	14.63	37.08	189	209	P	V
	*		2402	100.26	-	-	95.21	27.5	14.63	37.08	189	209	A	V
													V	
												V		
BLE CH 19 2440MHz		2343.04	48.71	-25.29	74	43.99	27.23	14.58	37.09	118	215	P	H	
		2387.28	41.35	-12.65	54	36.34	27.47	14.62	37.08	118	215	A	H	
	*	2440	98.45	-	-	93.26	27.6	14.67	37.08	118	215	P	H	
	*	2440	97.08	-	-	91.89	27.6	14.67	37.08	118	215	A	H	
			2485.65	49.67	-24.33	74	44.22	27.8	14.72	37.07	118	215	P	H
			2485.09	41.36	-12.64	54	35.91	27.8	14.72	37.07	118	215	A	H
			2340.52	49.31	-24.69	74	44.62	27.21	14.57	37.09	179	219	P	V
			2352.14	41.13	-12.87	54	36.34	27.3	14.58	37.09	179	219	A	V
	*		2440	102.49	-	-	97.3	27.6	14.67	37.08	179	219	P	V
	*		2440	101.2	-	-	96.01	27.6	14.67	37.08	179	219	A	V
			2493.42	48.96	-25.04	74	43.5	27.8	14.73	37.07	179	219	P	V
		2483.76	41.44	-12.56	54	35.99	27.8	14.72	37.07	179	219	A	V	



BLE CH 39 2480MHz	*	2480	96.87	-	-	91.42	27.8	14.72	37.07	107	219	P	H
	*	2480	95.59	-	-	90.14	27.8	14.72	37.07	107	219	A	H
		2491.24	49.87	-24.13	74	44.41	27.8	14.73	37.07	107	219	P	H
		2499.8	41.73	-12.27	54	36.26	27.8	14.74	37.07	107	219	A	H
													H
													H
	*	2480	101.22	-	-	95.77	27.8	14.72	37.07	165	221	P	V
	*	2480	99.98	-	-	94.53	27.8	14.72	37.07	165	221	A	V
		2483.64	52.05	-21.95	74	46.6	27.8	14.72	37.07	165	221	P	V
		2483.52	42.56	-11.44	54	37.11	27.8	14.72	37.07	165	221	A	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**2.4GHz 2400~2483.5MHz
BLE (Harmonic @ 3m)**

BLE	Note	Frequency (MHz)	Level (dBµV/m)	Margin (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 00 2402MHz		4804	39.66	-34.34	74	57.45	32.32	7.29	57.4	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
			4804	39.4	-34.6	74	57.19	32.32	7.29	57.4	-	-	P
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V



BLE	Note	Frequency (MHz)	Level (dBµV/m)	Margin (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 19 2440MHz		4880	41.92	-32.08	74	58.91	32.66	7.53	57.18	-	-	P	H
		7320	45.62	-28.38	74	56.06	36.92	9.48	56.84	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
			4880	40.91	-33.09	74	57.9	32.66	7.53	57.18	-	-	P
		7320	44.88	-29.12	74	55.32	36.92	9.48	56.84	-	-	P	V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V



BLE	Note	Frequency (MHz)	Level (dBµV/m)	Margin (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 39 2480MHz		4960	42.34	-31.66	74	58.46	33.06	7.77	56.95	-	-	P	H
		7440	45.01	-28.99	74	56.18	36.42	9.46	57.05	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
			4960	41.28	-32.72	74	57.4	33.06	7.77	56.95	-	-	P
		7440	45.43	-28.57	74	56.6	36.42	9.46	57.05	-	-	P	V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against Peak and Average limit line. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only. 												



Emission above 18GHz

2.4GHz BLE (SHF)

BT	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz BLE SHF		23999	41.58	-32.42	74	59.43	38.7	-2.65	53.9	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
			23985	41.91	-32.09	74	59.77	38.7	-2.65	53.91	-	-	P
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V

Remark

- No other spurious found.
- All results are PASS against limit line.
- The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.



Emission below 1GHz

2.4GHz BLE (LF)

BLE	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)	
2.4GHz BLE LF		45.39	29.04	-10.96	40	43.47	16.7	1.27	32.4	-	-	P	H	
		181.2	27.55	-15.95	43.5	43.2	14.82	1.8	32.27	-	-	P	H	
		268.95	26.25	-19.75	46	37.2	19.21	2.05	32.21	-	-	P	H	
		704.6	32.58	-13.42	46	35.16	26.68	2.91	32.17	-	-	P	H	
		717.9	32.59	-13.41	46	34.72	27.12	2.92	32.17	-	-	P	H	
		948.9	33.06	-12.94	46	29.92	30.96	3.31	31.13	-	-	P	H	
														H
														H
														H
														H
														H
														H
														H
			45.93	33.54	-6.46	40	48.23	16.43	1.27	32.39	100	26	Q	V
			57.54	31.72	-8.28	40	50.8	11.94	1.3	32.32	-	-	P	V
			176.88	28.24	-15.26	43.5	43.61	15.11	1.79	32.27	-	-	P	V
			729.1	32.49	-13.51	46	34.23	27.48	2.94	32.16	-	-	P	V
			736.8	38.3	-7.7	46	39.57	27.94	2.95	32.16	-	-	P	V
			953.8	33.33	-12.67	46	30.09	31	3.32	31.08	-	-	P	V
														V
													V	
													V	
													V	
													V	
													V	

Remark

- No other spurious found.
- All results are PASS against limit line.
- The emission position marked as "-" means no suspected emission found and emission level has at least 6dB margin against limit or emission is noise floor only.



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is Margin line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

BLE	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BLE CH 00 2402MHz		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) =
Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Margin (dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
= 55.45 (dBμV/m)
2. Margin (dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 55.45(dBμV/m) – 74(dBμV/m)
= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
= 43.54 (dBμV/m)
2. Margin (dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 43.54(dBμV/m) – 54(dBμV/m)
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.



Appendix D. Radiated Spurious Emission Plots

Test Engineer :	Jacky Hung, Mancy Chou, and Rain Lee	Temperature :	20~26°C
		Relative Humidity :	40~65%

Note symbol

-L	Low channel location
-R	High channel location



<Ant. 0>





<1Mbps>

2.4GHz 2400~2483.5MHz





BLE (Band Edge @ 3m)

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH00 2402MHz	
	Horizontal	Fundamental
Peak	<p>Site : 03CH13-HY Condition : PEAK_BE_74 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	<p>Site : 03CH13-HY Condition : PEAK_74 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	<p>Site : 03CH13-HY Condition : AVG_BE_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto</p>	<p>Site : 03CH13-HY Condition : AVG_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto</p>

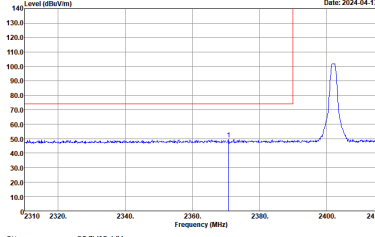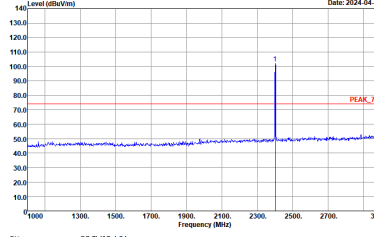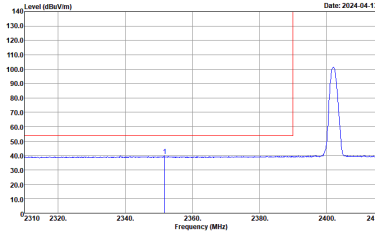
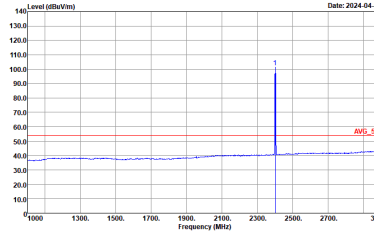


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH00 2402MHz	
	Vertical	Fundamental
Peak	 <p>Site : 03CH13-HY Condition : PEAK_BE_74 3m HORN_91200_1326 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Site : 03CH13-HY Condition : PEAK_74 3m HORN_91200_1326 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	 <p>Site : 03CH13-HY Condition : AVG_BE_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto</p>	 <p>Site : 03CH13-HY Condition : AVG_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto</p>

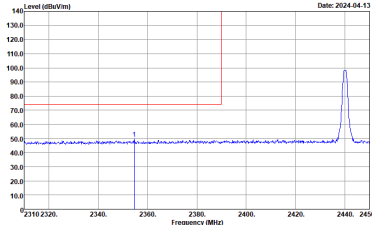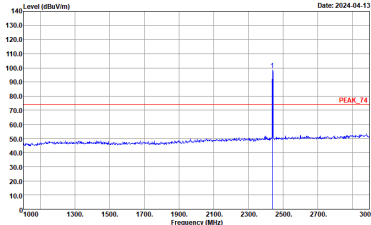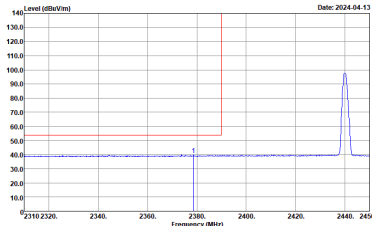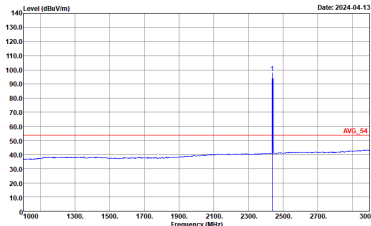

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH19 2440MHz - L	
	Horizontal	Fundamental
Peak	 <p>Date: 2024-04-13</p> <p>Site : 03CH13-HY Condition : PEAK_BE_74 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Date: 2024-04-13</p> <p>Site : 03CH13-HY Condition : PEAK_74 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	 <p>Date: 2024-04-13</p> <p>Site : 03CH13-HY Condition : AVG_BE_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto</p>	 <p>Date: 2024-04-13</p> <p>Site : 03CH13-HY Condition : AVG_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto</p>

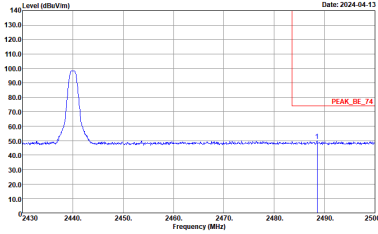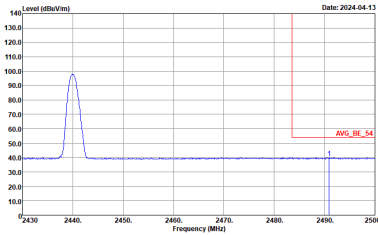

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH19 2440MHz - R	
	Horizontal	Fundamental
Peak	 <p>Site : 03CH13-HY Condition : PEAK_BE_74 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	Left blank
Avg.	 <p>Site : 03CH13-HY Condition : AVG_BE_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto</p>	Left blank







BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH19 2440MHz - L	
	Vertical	Fundamental
Peak	<p>Site : 03CH13-HY Condition : PEAK_BE_74 3m HORN_91200_1326 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	<p>Site : 03CH13-HY Condition : PEAK_74 3m HORN_91200_1326 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	<p>Site : 03CH13-HY Condition : AVG_BE_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto</p>	<p>Site : 03CH13-HY Condition : AVG_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto</p>







BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH19 2440MHz - R	
	Vertical	Fundamental
Peak	<p>Site : 03CH13-HY Condition : PEAK_BE_74 3m HORN_91200_1326 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWF:Auto</p>	Left blank
Avg.	<p>Site : 03CH13-HY Condition : AVG_BE_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000KHz VBW:3.000KHz SWF:Auto</p>	Left blank

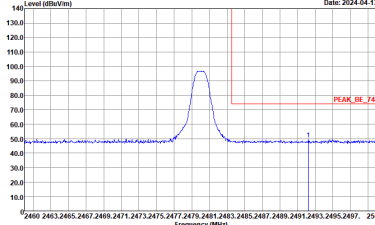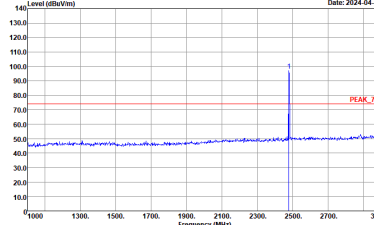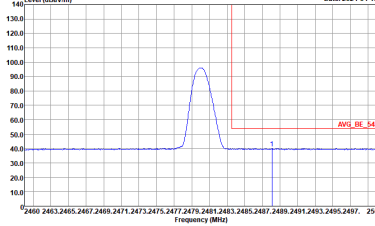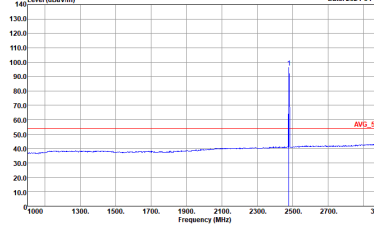

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH39 2480MHz	
	Horizontal	Fundamental
Peak	 <p>Site : 03CH13-HY Condition : PEAK_BE_74 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Site : 03CH13-HY Condition : PEAK_74 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	 <p>Site : 03CH13-HY Condition : AVG_BE_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto</p>	 <p>Site : 03CH13-HY Condition : AVG_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto</p>

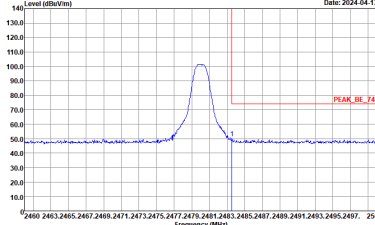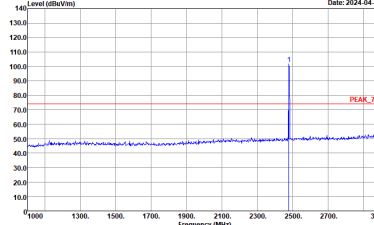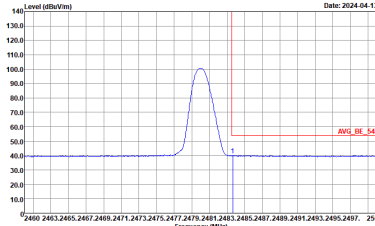
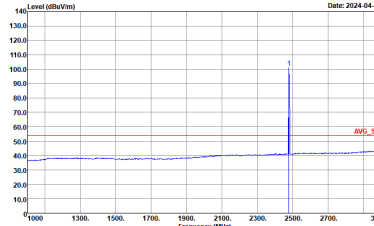


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH39 2480MHz	
	Vertical	Fundamental
Peak	 <p>Date: 2024-04-13</p> <p>Site : 03CH13-HY Condition : PEAK_BE_74 3m HORN_91200_1326 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Date: 2024-04-13</p> <p>Site : 03CH13-HY Condition : PEAK_74 3m HORN_91200_1326 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	 <p>Date: 2024-04-13</p> <p>Site : 03CH13-HY Condition : AVG_BE_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto</p>	 <p>Date: 2024-04-13</p> <p>Site : 03CH13-HY Condition : AVG_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto</p>



2.4GHz 2400~2483.5MHz

BLE (Harmonic @ 3m)

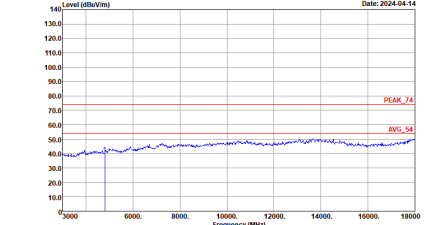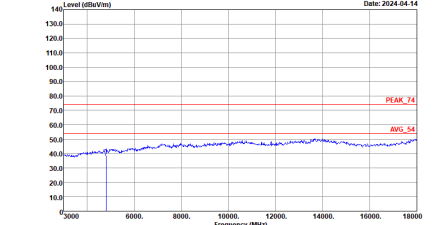BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	BLE CH00 2402MHz	
	Horizontal	Vertical
Peak Avg.	 <p>Site : 03CH13-14Y Condition : PEAK_74 3m HORN_91200_1326 HORIZONTAL</p>	 <p>Site : 03CH13-14Y Condition : PEAK_74 3m HORN_91200_1326 VERTICAL</p>



BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	BLE CH00 2402MHz	
	Horizontal	Vertical
14.47G ~14.5G Avg.	<p>Graph showing Level (dBuV/m) vs Frequency (MHz) for Horizontal orientation. The y-axis ranges from 10.0 to 140.0 dBuV/m, and the x-axis ranges from 14470 to 14500 MHz. A red line labeled 'AVG_54' is at approximately 55 dBuV/m. A blue line is at approximately 40 dBuV/m. Date: 2024-04-14.</p> <p>Site : 03CH13-HY Condition : AVG_54 3m HORN_9120D_1326 HORIZONTAL</p>	<p>Graph showing Level (dBuV/m) vs Frequency (MHz) for Vertical orientation. The y-axis ranges from 10.0 to 140.0 dBuV/m, and the x-axis ranges from 14470 to 14500 MHz. A red line labeled 'AVG_54' is at approximately 55 dBuV/m. A blue line is at approximately 40 dBuV/m. Date: 2024-04-14.</p> <p>Site : 03CH13-HY Condition : AVG_54 3m HORN_9120D_1326 VERTICAL</p>
	17.7G ~18G Avg.	<p>Graph showing Level (dBuV/m) vs Frequency (MHz) for Horizontal orientation. The y-axis ranges from 10.0 to 140.0 dBuV/m, and the x-axis ranges from 17700 to 18000 MHz. A red line labeled 'AVG_54' is at approximately 60 dBuV/m. A blue line is at approximately 40 dBuV/m. Date: 2024-04-14.</p> <p>Site : 03CH13-HY Condition : AV6_54 3m HORN_9120D_1326 HORIZONTAL</p>