

FCC TEST REPORT

For

EMV Android Validator

Model Number: FX925F PM, FX925F WM

FCC ID: 2AGQIFX925F

Report Number : WT198005840

Test Laboratory : Shenzhen Academy of Metrology and Quality Inspection

Site Location : NETC Building, No.4 Tongfa Rd., Xili, Nanshan, Shenzhen, China

Tel : 0086-755-86928965

Fax : 0086-755-86009898-31396

Web : www.smq.com.cn

E-mail : emcrcf@smq.com.cn

TEST REPORT DECLARATION

Applicant : FAMOCO SAS
Address : 59 avenue Victor Hugo Paris, France
Manufacturer : FAMOCO SAS
Address : 59 avenue Victor Hugo Paris, France
EUT Description : EMV Android Validator
Model No : FX925F PM, FX925F WM
Trade mark : FAMOCO
Serial Number : /
FCC ID : 2AGQIFX925F


Test Standards:

FCC Part 15 15.209, 15.225 (2018)

The EUT described above is tested by Shenzhen Academy of Metrology and Quality Inspection EMC Laboratory to determine the maximum emissions from the EUT. Shenzhen Academy of Metrology and Quality Inspection EMC Laboratory is assumed full responsibility for the accuracy of the test results. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with FCC Rules Part 15.209, 15.225.

The test report is valid for above tested sample only and shall not be reproduced in part without written approval of the laboratory.

Project Engineer: 
Date: Nov.08, 2019
(Chen Sulin 陈司林)

Checked by: 
Date: Nov.08, 2019
(Lin Yixiang 林奕翔)

Approved by: 
Date: Nov.08, 2019
(Lin Bin 林斌)

TABLE OF CONTENTS

TEST REPORT DECLARATION	2
1. TEST RESULTS SUMMARY.....	5
2. GENERAL INFORMATION	6
2.1. Report information.....	6
2.2. Laboratory Accreditation and Relationship to Customer	6
2.3. Measurement Uncertainty	7
3. PRODUCT DESCRIPTION	8
3.1. EUT Description.....	8
3.2. Related Submittal(s) / Grant (s)	8
3.3. Block Diagram of EUT Configuration	8
3.4. Operating Condition of EUT.....	8
3.5. Support Equipment List	9
3.6. Test Conditions.....	9
3.7. Special Accessories.....	9
3.8. Equipment Modifications	9
4. TEST EQUIPMENT USED	10
5. 20DB BANDWIDTH MEASUREMENT	11
5.1. Test Standard	11
5.2. TEST PROCEDURE.....	11
5.3. TEST SETUP	11
5.4. Test Data	11
6. IN-BAND RADIATED SPURIOUS EMISSION MEASUREMENTS.....	13
6.1. Test Standard	13
6.2. TEST PROCEDURE.....	13
6.3. TEST DATA.....	13
7. RADIATED SPURIOUS EMISSION MEASUREMENTS, OUT-OF-BAND	15
7.1. Test Standard and Limit	15
7.2. TEST PROCEDURE.....	15
7.3. Test Arrangement.....	15

7.4. TEST DATA.....	15
8. FREQUENCY STABILITY TOLERANCE.....	20
8.1. Test Standard	20
8.2. TEST PROCEDURE.....	20
8.3. TEST DATA.....	20
9. ANTENNA REQUIREMENT.....	21

1. TEST RESULTS SUMMARY

Table 1 Test Results Summary

Test Items	FCC Rules	Test Results
Occupied Bandwidth	2.1049	Pass
In-Band Emission	15.225(a)(b)(c)	Pass
Out-of-Band Emission	15.209 15.225(d)	Pass
Conducted emission test for AC power port	15.207	N/A
Frequency Stability Tolerance	15.225(e)	Pass
Antenna Requirement	15.203	Pass

Remark: "N/A" means "Not applicable."

2. GENERAL INFORMATION

2.1. Report information

This report is not a certificate of quality; it only applies to the sample of the specific product/equipment given at the time of its testing. The results are not used to indicate or imply that they are application to the similar items. In addition, such results must not be used to indicate or imply that SMQ approves recommends or endorses the manufacture, supplier or use of such product/equipment, or that SMQ in any way guarantees the later performance of the product/equipment.

The sample/s mentioned in this report is/are supplied by Applicant, SMQ therefore assumes no responsibility for the accuracy of information on the brand name, model number, origin of manufacture or any information supplied.

Additional copies of the report are available to the Applicant at an additional fee. No third part can obtain a copy of this report through SMQ, unless the applicant has authorized SMQ in writing to do so.

2.2. Laboratory Accreditation and Relationship to Customer

The testing report were performed by the Shenzhen Academy of Metrology and quality Inspection EMC Laboratory (Guangdong EMC compliance testing center), in their facilities located at NETC Building, No.4 Tongfa Rd., Xili, Nanshan, Shenzhen, China. At the time of testing, Laboratory is accredited by the following organizations:

China National Accreditation Service for Conformity Assessment (CNAS) accredits the Laboratory for conformance to FCC standards, EMC international standards and EN standards. The Registration Number is CNAS L0579.

The Laboratory is Accredited Testing Laboratory of FCC with Designation number CN1165 and Site registration number 582918.

The Laboratory is registered to perform emission tests with Innovation, Science and Economic Development (ISED), and the registration number is 11177A.

2.3. Measurement Uncertainty

Conducted Emission
9kHz~30MHz 3.5dB

Radiated Emission
30MHz~1000MHz 4.5dB
1GHz~26.5GHz 4.6dB

3. PRODUCT DESCRIPTION

3.1. EUT Description

Description : EMV Android Validator
Manufacturer : FAMOCO SAS
Model Number : FX925F PM, FX925F WM
Operate Frequency : 13.56MHz
Modulation : ASK
Antenna Designation : Integral antenna
Operating voltage : DC: 10.8V (Low)/12V (Nominal)/ 13.2V (Max)

Remark: FX925F PM compared with FX925F WM, only have different model number and appearance. All of the models' circuit theory, electrical design and the Critical Components are the same. The differences do not affect the RF performance. Unless otherwise specified, the model FX925F PM was chosen as representative model to perform all the tests.

3.2. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: **2AGQIFX925F**, filing to comply with Section 15.209 and 15.225 of the FCC Part 15 Subpart C Rules.

3.3. Block Diagram of EUT Configuration



Figure 1 EUT setup

3.4. Operating Condition of EUT

The Radiated spurious emission measurements were carried out in semi-anechoic chamber with 3-meter test range, and EUT is rotated on three test planes to find out the worst emission (X plane).

3.5. Support Equipment List

Table 2 Support Equipment List

Name	Model No	S/N	Manufacturer
Mouse	MS111-L	--	DELL Inc

3.6. Test Conditions

Date of test : Oct.15, 2019 - Nov.07, 2019

Date of EUT Receive : Oct.15, 2019

Temperature: 21 ~ 25 °C

Relative Humidity: 42-53%

3.7. Special Accessories

Not available for this EUT intended for grant.

3.8. Equipment Modifications

Not available for this EUT intended for grant.

4. TEST EQUIPMENT USED

Table 3 Test Equipment

No.	Equipment	Manufacturer	Model No.	Last Cal.	Cal. Interval
SB9054/04	EMI Test Receiver	Rohde & Schwarz	ESU8	Sep.03, 2018	1 Year
SB3955	Bilog Antenna	Schwarzbeck	VULB9163	Jun.01, 2019	1 Year
SB3345	Loop Antenna	Schwarzbeck	FMZB1516	Feb.20, 2019	1 Year
SB12829	Spectrum Analyzer	Rohde & Schwarz	FSL18	May.29, 2019	1 Year
SB9721/07	DC Source	Agilent	66319D	--	--
SB11818	Temperature & Humidity Test chamber	Espec	EH-010U	Mar.25, 2019	1 Year
--	Radiated Test Software	Rohde & Schwarz	ES-K1 V1.73	--	--

5. 20DB BANDWIDTH MEASUREMENT

5.1. Test Standard

5.1.1. Test Standard

FCC part 2.1049

5.2. TEST PROCEDURE

The 20dB bandwidth is measured with a spectrum analyzer connected via a receive antenna placed near the EUT while the EUT is operating in transmission mode


5.3. TEST SETUP



5.4. Test Data

Table 4 20dB Bandwidth Test Data

FREQUENCY (MHz)	20dB BANDWIDTH (kHz)	99% BANDWIDTH (kHz)
13.56	25.95	21.956

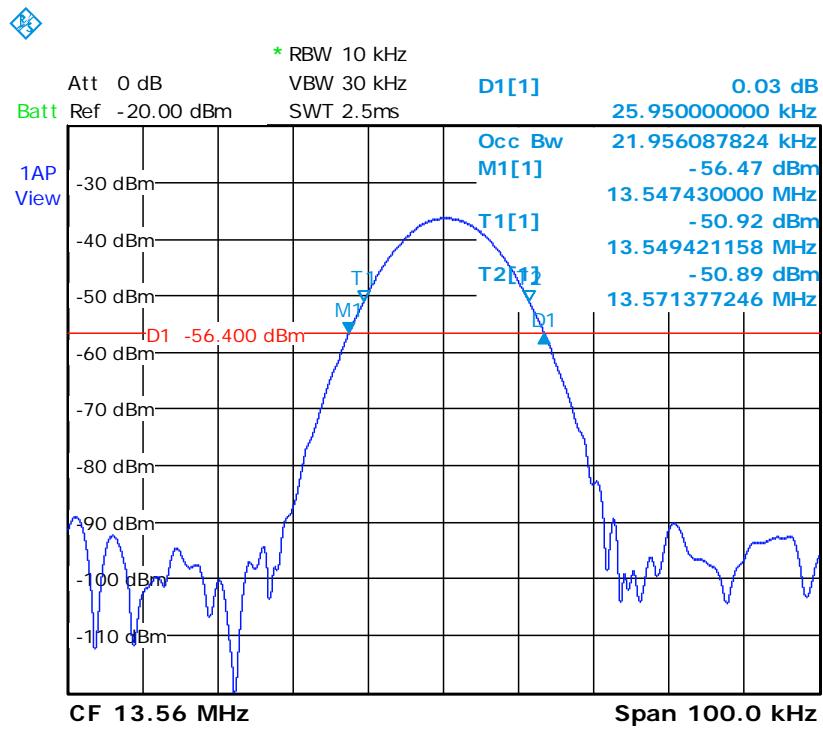

6. IN-BAND RADIATED SPURIOUS EMISSION MEASUREMENTS

6.1. Test Standard

6.1.1. Test Standard

FCC part 15.225(a)(b)(c)

6.2. TEST PROCEDURE


Radiated emission testing was performed in the band 13.110 – 14.010 MHz.

1. All measurements were performed using a loop antenna. The antenna was positioned in three orthogonal positions (X front, Y side, Z top) and the position with the highest emission level was recorded.
2. The EUT was positioned in three orthogonal planes to determine the orientation resulting in the worst case emissions.
3. Measurements were performed at 3m and the data was extrapolated to the specified measurement distance of 30m using the square of an inverse linear distance extrapolation factor (40 dB/decade) as specified in §15.31(f)(2).
Extrapolation Factor = $20 \log 10 (30/3) 2 = 40\text{dB}$.
4. The spectrum was investigated from 9kHz up to 30MHz using the loop antenna. Only the emissions shown in the table above were found to be significant.
5. All measurements were recorded using a spectrum analyzer employing a quasi-peak detector.

6.3. TEST DATA

Emission level(dBuV)=Read Value(dBuV/m) + Antenna Factor(dB)+ Cable Loss + pre amp(dB)

The emissions don't show in above result tables are more than 20dB below the limits

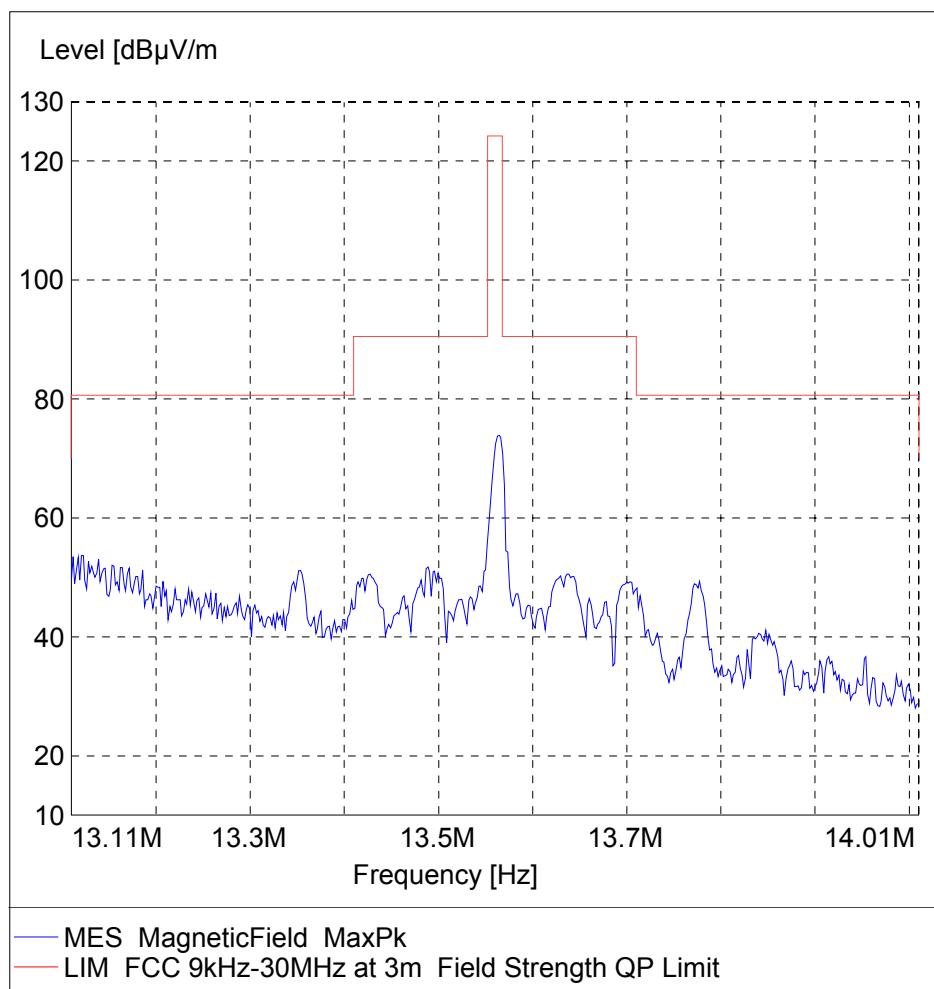

Frequency (MHz)	QuasiPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Azimuth (deg)	Corr. (dB)	ANT Position (deg)
13.566	73.67	124	50.33	0	20	0

7. RADIATED SPURIOUS EMISSION MEASUREMENTS, OUT-OF-BAND

7.1. Test Standard and Limit

7.1.1. Test Standard

FCC part 15.205, 15.209 &15.225(d)

7.1.2. Test Limit

FCC Part 15.209

(a) Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Fieldstrength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100 **	3
88-216	150 **	3
216-960	200 **	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241.

Formula for converting the field strength from $\mu\text{V}/\text{m}$ to $\text{dB}\mu\text{V}/\text{m}$ is:
 $\text{dB}\mu\text{V}/\text{m} = 20\log_{10}(\mu\text{V}/\text{m})$

7.2. TEST PROCEDURE

The EUT was tested from 9kHz up to the 1GHz excluding the band 13.110 – 14.010 MHz. All measurement up to 960MHz were recorded with a spectrum analyzer employing a quasi-peak detector. All out-of-band emissions must not exceed the limits shown in Table 8-5 per Section 15.209. A loop antenna was used to investigate emissions below 30MHz

7.3. Test Arrangement


The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application. The detailed information refers to test picture.

7.4. TEST DATA

The emissions don't show in following result tables are more than 20dB below the limits, the test curves are shown in the next page.

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

9kHz-30MHz

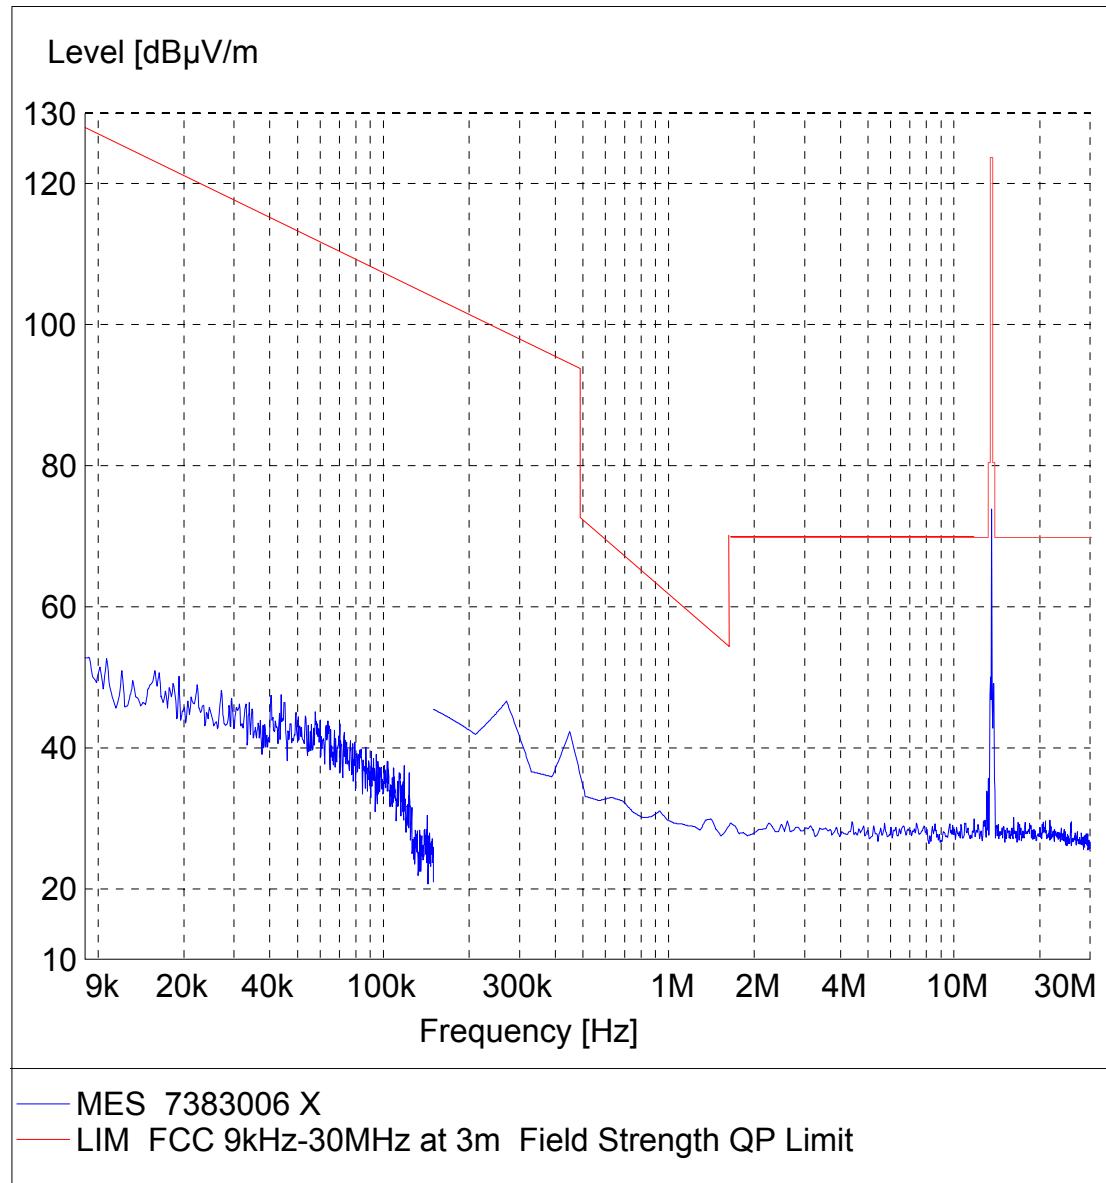


30MHz-1GHz

Table 5 Radiated Emission Test Data 30MHz-1GHz

Frequency (MHz)	Cable Loss +preamp (dB)	Antenna Factor (dB)	Readings (dB μ V/m)	Level (dB μ V/m)	Polarity (H/V)	Limits (dB μ V/m)	Margin (dB)	Height (cm)	Azimuth (Degs)
93.699	1.1	11.9	23.4	36.4	V	43.5	7.1	100	210
119.48	1.3	12.3	18.4	32	V	43.5	11.5	100	300
150.63	1.4	8.3	20.4	30.1	V	43.5	13.4	100	310
179.32	1.6	9.0	21.5	32.1	V	43.5	11.4	100	270
230.72	1.7	11.2	29.2	42.1	V	46.0	3.9	100	60
961.93	3.9	21.1	18.0	43	V	53.9	10.9	100	300
93.699	1.1	11.9	30.2	43.2	H	43.5	0.3	200	270
103.887	1.3	13.2	27.1	41.6	H	43.5	1.9	200	180
120.021	1.3	10.5	29.4	41.2	H	43.5	2.3	200	300
148.746	1.5	8.2	33.5	43.2	H	43.5	0.3	200	160
180.615	1.6	9.7	30.3	41.6	H	43.5	1.9	200	90
240.102	1.9	12.1	26.4	40.4	H	46	5.6	200	60

Remark: Emission level (dB μ V)=Read Value(dB μ V/m) + Antenna Factor(dB)+ Cable Loss +preamp(dB)

30MHz-1GHz

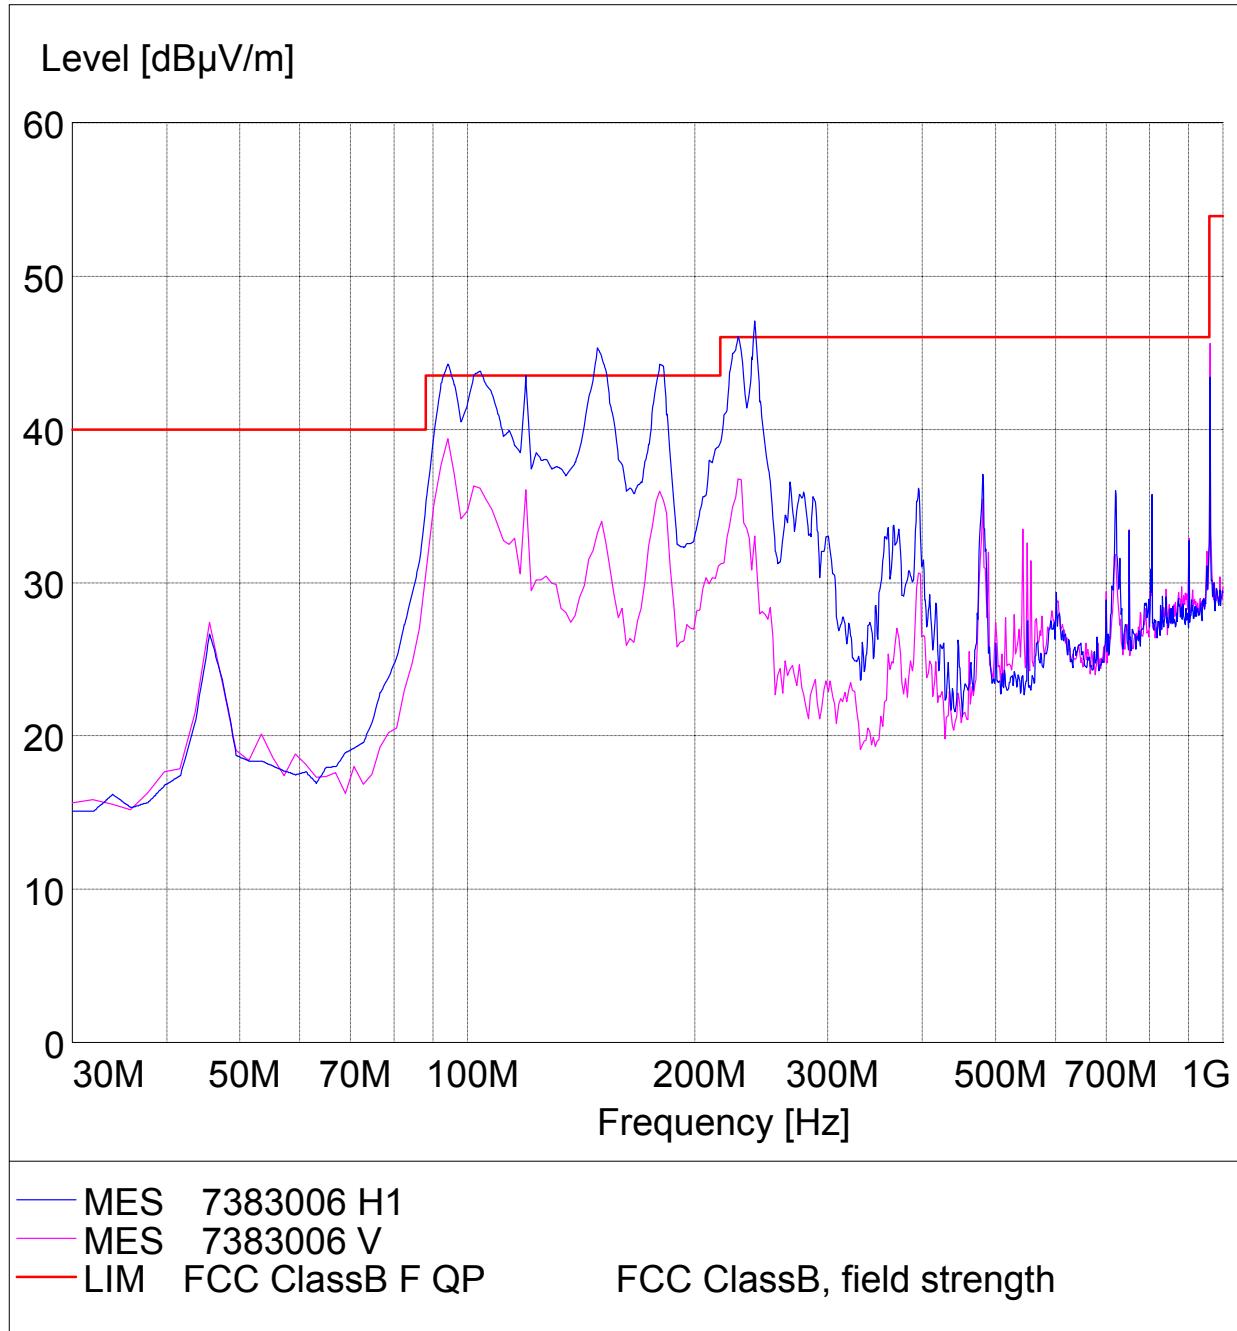

8. FREQUENCY STABILITY TOLERANCE

8.1. Test Standard

8.1.1. Test Standard

FCC part 15.225(e)

The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency over a temperature variation of -20 degrees to + 50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

8.2. TEST PROCEDURE

ANSI C63.10-2013 Clause 6.8

8.3. TEST DATA

Table 6 Frequency Stability Tolerance Test Data

Nominal Frequency (MHz)	Voltage (%)	Voltage (Vdc)	Temperature (°C)	Measured Frequency Error(Hz)	Limit (Hz)	Verdict
13.56	100%	12	-20	52	1356	PASS
	100%	12	-10	-36	1356	PASS
	100%	12	0	-72	1356	PASS
	100%	12	+10	-15	1356	PASS
	100%	12	+20	63	1356	PASS
	100%	12	+30	108	1356	PASS
	100%	12	+40	-76	1356	PASS
	100%	12	+50	-12	1356	PASS
	High	13.8	+20	84	1356	PASS
	End. Point	10.8	+20	104	1356	PASS

9. ANTENNA REQUIREMENT

According to Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

The EUT has a built in antenna which is integrated inside the enclosure, this is permanently attached antenna and meets the requirements of this section.

END OF REPORT