



MEASUREMENT REPORT

(FCC Class II Change & IC Class IV Change)

FCC PART 15.247 & IC RSS-247 WLAN 802.11b/g/n

FCC ID: 2AGRR-LBEE5ZZ1PJ
IC: 8110A-LBEE5ZZ1PJ
APPLICANT: Zykrnix Inc. Taiwan Branch
Application Type: Certification
Product: W-LAN + Bluetooth Module
Model No.: LBEE5ZZ1PJ
FCC Classification: (DTS) Digital Transmission System
FCC & IC Rule Part(s): Part 15.247 & RSS-247 Issue 2
Test Procedure(s): ANSI C63.10-2013
Received Date: April 6, 2020
Test Date: July 28 ~ August 6, 2020

Tested By : *Peter Syu*

(Peter Syu)

Reviewed By : *Paddy Chen*

(Paddy Chen)

Approved By : *Chenz Ker*

(Chenz Ker)



Testing Laboratory
3261

The test results only relate to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Taiwan) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
2004TW0501-U4	1.0	Original Report	2020-09-17	

CONTENTS

Description	Page
§2.1033 General Information	5
1. INTRODUCTION	6
1.1. Scope.....	6
1.2. MRT Test Location.....	6
2. PRODUCT INFORMATION	7
2.1. Equipment Description	7
2.2. Working Frequencies for this Report	9
2.3. Test Mode.....	11
2.4. Test Software	11
2.5. Test Configuration.....	12
2.6. EMI Suppression Device(s)/Modifications	12
2.7. Labeling Requirements	12
3. DESCRIPTION of TEST	13
3.1. Evaluation Procedure	13
3.2. AC Line Conducted Emissions	13
3.3. Radiated Emissions	14
4. ANTENNA REQUIREMENTS.....	15
5. TEST EQUIPMENT CALIBRATION DATE.....	16
6. MEASUREMENT UNCERTAINTY.....	17
7. TEST RESULT	18
7.1. Summary.....	18
7.2. 6dB Bandwidth Measurement	20
7.2.1. Test Limit.....	20
7.2.2. Test Procedure used	20
7.2.3. Test Setting	20
7.2.4. Test Setup	20
7.2.5. Test Result	21
7.3. Output Power Measurement.....	22
7.3.1. Test Limit.....	22
7.3.2. Test Procedure Used.....	22
7.3.3. Test Setting	22
7.3.4. Test Setup	22
7.3.5. Test Result of Output Power	23
7.4. Power Spectral Density Measurement	25
7.4.1. Test Limit.....	25
7.4.2. Test Procedure Used.....	25
7.4.3. Test Setting	25
7.4.4. Test Setup	25
7.4.5. Test Result	26
7.5. Out-of-Band Spurious Emissions Emissions Measurement.....	27

7.5.1.	Test Limit	27
7.5.2.	Test Procedure Used	27
7.5.3.	Test Settintg	27
7.5.4.	Test Setup	27
7.5.5.	Test Result	28
7.6.	Radiated Spurious Emission Measurement.....	29
7.6.1.	Test Limit	29
7.6.2.	Test Procedure Used	29
7.6.3.	Test Setting	29
7.6.4.	Test Setup	31
7.6.5.	Test Result	33
7.7.	Radiated Restricted Band Edge Measurement.....	85
7.7.1.	Test Limit	85
7.7.2.	Test Procedure Used	85
7.7.3.	Test Setting	85
7.7.4.	Test Setup	87
7.7.5.	Test Result	88
7.8.	AC Conducted Emissions Measurement	152
7.8.1.	Test Limit	152
7.8.2.	Test Setup	152
7.8.3.	Test Result	153
8.	CONCLUSION	161

§2.1033 General Information

Applicant	Zykronix Inc. Taiwan Branch
Applicant Address	14F.-8, No. 3, Sec. 4, New Taipei Blvd., Xinzhuang Dist., New Taipei City, Taiwan
Manufacturer	Zykronix Inc. Taiwan Branch
Manufacturer Address	14F.-8, No. 3, Sec. 4, New Taipei Blvd., Xinzhuang Dist., New Taipei City, Taiwan
Test Site	MRT Technology (Taiwan) Co., Ltd
Test Site Address	No. 38, Fuxing Second Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C)
MRT FCC Registration No.	291082
FCC / IC Rule Part(s)	Part 15.247 / RSS-247
Model No.	Sonata, Sonata XL, Opus, Opus XL
Test Device Serial No.	N/A <input type="checkbox"/> Production <input checked="" type="checkbox"/> Pre-Production <input type="checkbox"/> Engineering

Test Facility / Accreditations

1. MRT facility is a FCC registered (Reg. No. 291082) test facility with the site description report on file and is designated by the FCC as an Accredited Test Firm.
2. MRT facility is an IC registered (MRT Reg. No. 21723) test laboratory with the site description on file at Industry Canada.
3. MRT Lab is accredited to ISO 17025 by the Taiwan Accreditation Foundation (TAF Cert. No. 3261) in EMC, Telecommunications and Radio testing for FCC (Designation Number: TW3261), Industry Taiwan, EU and TELEC Rules.


1. INTRODUCTION

1.1. Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

1.2. MRT Test Location

The map below shows the location of the MRT LABORATORY, its proximity to the Taoyuan City. These measurement tests were conducted at the MRT Technology (Taiwan) Co., Ltd. Facility located at No.38, Fuxing 2nd Rd., Guishan Dist., Taoyuan City 33377, Taiwan (R.O.C).

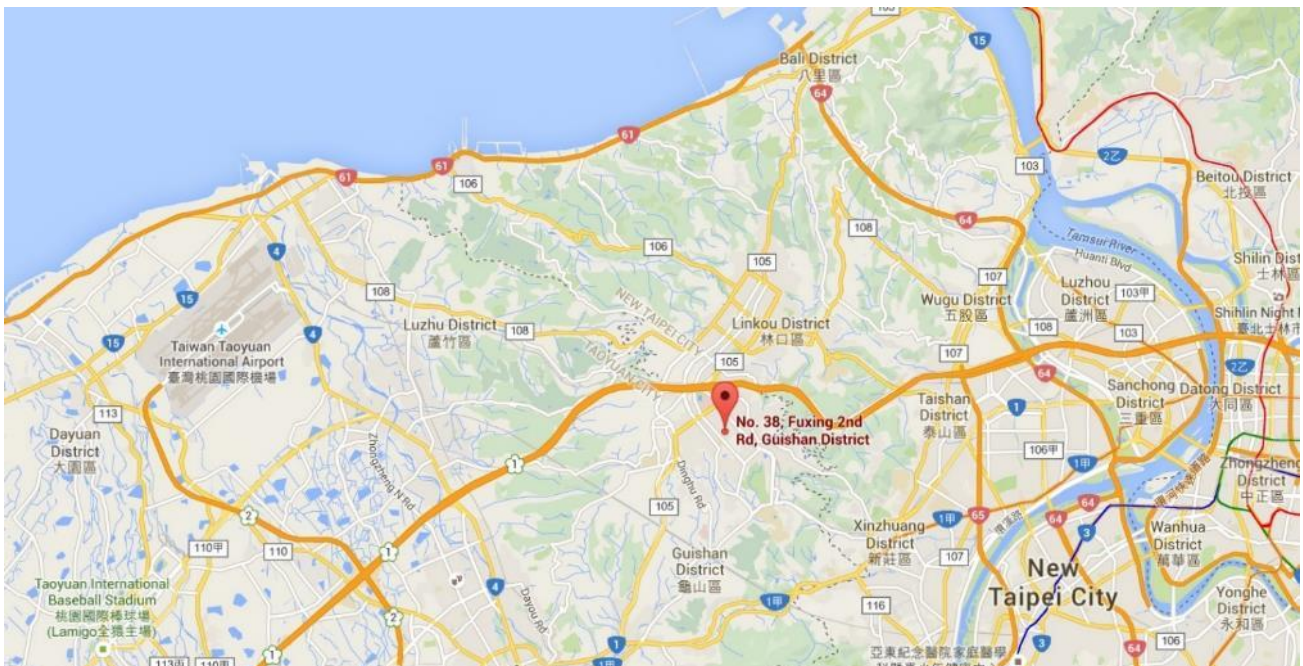

2. PRODUCT INFORMATION

2.1. Equipment Description

Product Name	W-LAN + Bluetooth Module
Model No.	LBEE5ZZ1PJ
Supports Radios Spec.	WLAN: 2.4G: 802.11b/g/n-HT20/VHT20/n-HT40/VHT40; Bluetooth Dual Mode: V5.0
Wi-Fi Specification	802.11b/g/n
Frequency Range	<u>2.4GHz:</u> For 802.11b/g/n-HT20: 2412 ~ 2462 MHz For 802.11n-HT40: 2422 ~ 2452 MHz
Type of Modulation	802.11b: DSSS, DBPSK, DQPSK, CCK 802.11g/n-20M: OFDM, BPSK, QPSK, 16QAM, 64QAM
2.4GHz Maximum Output Power	802.11b: 20.89dBm 802.11g: 26.45dBm 802.11n-HT20: 26.24dBm 802.11VHT20: 24.54dBm 802.11n-HT40: 26.08dBm 802.11VHT40: 25.45dBm
Power Adapter	MFR: DELTA ELECTRONICS, INC. Model No: ADP-85NB A Input: AC 100-240V~1.5A, 50-60Hz Output: DC 24V, 3.55A Cable Out: Non-shielding, 1.5m with Core*1

Note:

1. This case is to add Host (Product Name: 8.0" Touch Screen Controller, 5.7" Touch Screen Controller, Model No.: Sonata, Sonata XL, Opus, Opus XL) and disable WIFI-5G & reduce WIFI-2.4G Power, so the FCC C2PC & IC C4PC (Radiated Spurious Emission, Conducted Output Power, AC Conducted Emissions) is executed.

FCC Original Report Grant Date: 09/11/2020, FCC ID: 2AGRR-LBEE5ZZ1PJ

IC Original Report Grant Date: 09/14/2020, IC: 8110A-LBEE5ZZ1PJ

2. Model difference: (declared by the manufacturer)

Product Name	Trade Name	Model Number	Different
8.0" Touch Screen Controller	Zykronix	Sonata XL	This model is main model.
8.0" Touch Screen Controller	Zykronix	Sonata	The difference from the main model is that the frame has no LED.
5.7" Touch Screen Controller	Zykronix	Opus XL	The difference from the main model is that the screen size.
5.7" Touch Screen Controller	Zykronix	Opus	The difference from the main model is that the screen size & has no LED.

2.2. Working Frequencies for this Report

802.11b/g/n-20M


Channel	Frequency	Channel	Frequency	Channel	Frequency
01	2412 MHz	02	2417 MHz	03	2422 MHz
04	2427 MHz	05	2432 MHz	06	2437 MHz
07	2442 MHz	08	2447 MHz	09	2452 MHz
10	2457 MHz	11	2462 MHz	--	--

802.11n-HT40

Channel	Frequency	Channel	Frequency	Channel	Frequency
03	2422 MHz	04	2427 MHz	05	2432 MHz
06	2437 MHz	07	2442 MHz	08	2447 MHz
09	2452 MHz	--	--	--	--

Duty Cycle

Test Mode	Duty Cycle
802.11b	99%
802.11g	95%
802.11 n-HT20	96%
802.11 n-HT40	86%

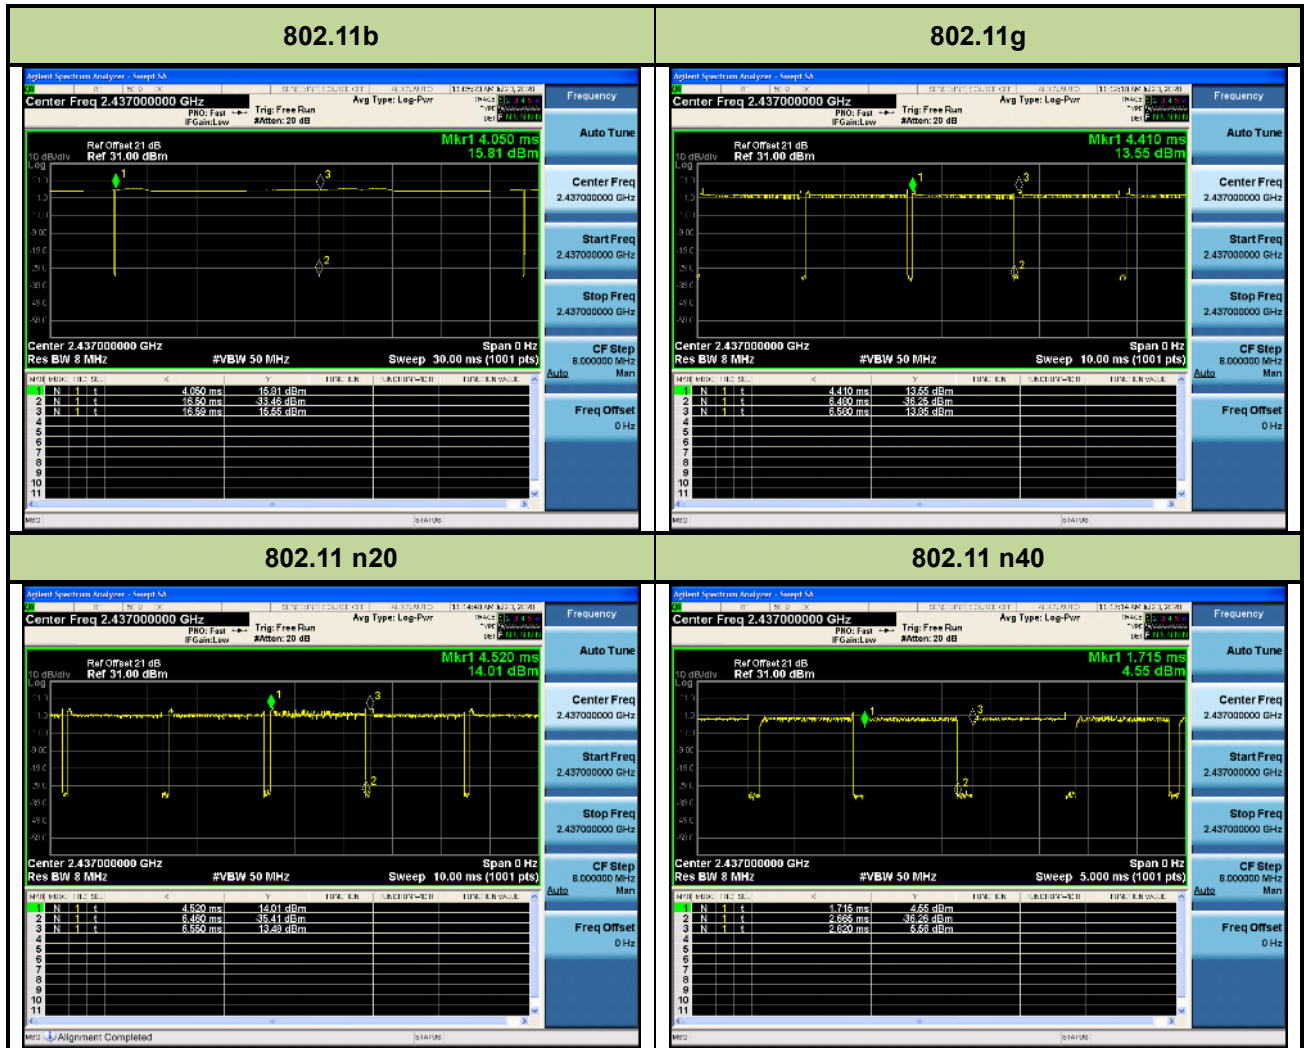

2.3. Test Mode

Test Mode	Mode 1: Transmit by 802.11b
	Mode 2: Transmit by 802.11g
	Mode 3: Transmit by 802.11n-20M
	Mode 4: Transmit by 802.11n-40M

Note:

1. Regarding to the operation frequency, the lowest, middle and highest frequency are selected to perform the test.

2.4. Test Software

The test utility software used during testing was “QRCT”.

2.5. Test Configuration

This device was tested per the guidance of ANSI C63.10-2013. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing.

2.6. EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

2.7. Labeling Requirements

Per 2.1074 & 15.19; Docket 95-19

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase. However, when the device is so small wherein placement of the label with specified statement is not practical, only the FCC ID must be displayed on the device per Section 15.19(a)(5). Please see attachment for FCC ID label and label location.

3. DESCRIPTION of TEST

3.1. Evaluation Procedure

The measurement procedures described in the American National Standard for Testing Unlicensed Wireless Devices (ANSI C63.10-2013), and the guidance provided in KDB 558074 D01v05 were used in the measurement of the device.

Deviation from measurement procedure.....None

3.2. AC Line Conducted Emissions

The line-conducted facility is located inside an 9'x4'x3' shielded enclosure. A 1m x 2m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50uH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference ground-plane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the receiver and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The receiver was scanned from 150kHz to 30MHz. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 9kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Each emission was also maximized by varying: power lines, the mode of operation or data exchange speed, or support equipment which determined the worst-case emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions are used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

An extension cord was used to connect to a single LISN which powered by EUT. The extension cord was calibrated with LISN, the impedance and insertion loss are compliance with the requirements as stated in ANSI C63.10-2013.

Line conducted emissions test results are shown in Section 7.8.

3.3. Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. A MF Model 210SS turntable is used for radiated measurement. It is a continuously rotatable, remote controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm high PVC support structure is placed on top of the turntable. For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up for frequencies below 1GHz was placed on top of the 0.8 meter high, 1 x 1.5 meter table; and test set-up for frequencies 1-40GHz was placed on top of the 1.5 meter high, 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, if applicable, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, which produced the worst-case emissions.

According to 3dB Beam-Width of horn antenna, the horn antenna should be always directed to the EUT when rising height.

Radiated emissions test results are shown in Section 7.6 & 7.7 .

4. ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules & §RSS-GEN of the IC /Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antenna of the **8.0” Touch Screen Controller, 5.7” Touch Screen Controller**, is permanently attached.
- There are no provisions for connection to an external antenna.

Conclusion:

The EUT unit complies with the requirement of §15.203 & RSS-GEN 6.8.

Antenna List

No.	Manufacturer	Part No.	Antenna Type	Peak Gain
1	ANJIE Electronics	ANDQ1J-B0025	PCB	2.15dBi

5. TEST EQUIPMENT CALIBRATION DATE

Conducted Emissions – SR2

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Two-Line V-Network	R&S	ENV216	MRTTWA00019	1 year	2021/3/26
Cable	Rosnol	N1C50-RG400- B1C50-500CM	MRTTWE00013	1 year	2021/6/21
EMI Test Receiver	R&S	ESR3	MRTTWA00009	1 year	2021/3/25

Radiated Emissions – AC1

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Broadband TRILOG Antenna	SCHWARZBECK	VULB 9162	MRTTWA00001	1 year	2020/9/4
EMI Test Receiver	R&S	ESR3	MRTTWA00009	1 year	2021/3/25
Active Loop Antenna	Schwarzbeck	FMZB 1519B	MRTTWA00002	1 year	2021/4/27
Broadband Horn antenna	SCHWARZBECK	BBHA 9120D	MRTTWA00003	1 year	2021/4/24
Breitband Hornantenna	Schwarzbeck	BBHA 9170	MRTTWA00004	1 year	2021/4/24
Broadband Amplifier	Schwarzbeck	BBV 9721	MRTTWA00006	1 year	2021/4/24
Broadband Preampifier	SCHWARZBECK	BBV 9718	MRTTWA00005	1 year	2021/4/24
Cable	HUBERSUHNER	SF106	MRTTWE00010	1 year	2021/6/16
Cable	Rosnol	K1K50-UP0264- K1K50-4M	MRTTWE00012	1 year	2021/6/20

Conducted Test Equipment – SR2

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EXA Signal Analyzer	KEYSIGHT	N9010A	MRTTWA00012	1 year	2020/10/2
EXA Signal Analyzer	KEYSIGHT	N9010B	MRTTWA00074	1 year	2021/7/14
USB Wideband Power Sensor	KEYSIGHT	U2021XA	MRTTWA00015	1 year	2021/3/26

Test Software

Software	Version	Function
e3	9.160520a	EMI Test Software
EMI	V3	EMI Test Software

6. MEASUREMENT UNCERTAINTY

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

Conducted Emission- Power Line
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 0.15MHz~30MHz: $\pm 2.53\text{dB}$
Radiated Spurious Emission
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 9kHz~30MHz: $\pm 3.92\text{dB}$ 30MHz~1GHz: $\pm 4.25\text{dB}$ 1GHz~18GHz: $\pm 4.40\text{dB}$ 18GHz~40GHz: $\pm 4.45\text{dB}$
Frequency Error
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): $\pm 78.4\text{Hz}$
Conducted Power
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): $\pm 0.84\text{dB}$
Conducted Spurious Emission
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): $\pm 2.65\text{ dB}$
Occupied Bandwidth
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 3.3%
Temp. / Humidity
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): $\pm 0.82^\circ\text{C} / \pm 3\%$
DC Voltage
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): $\pm 0.3\%$

7. TEST RESULT

7.1. Summary

Product Name: 8.0" Touch Screen Controller, 5.7" Touch Screen Controller
FCC Classification: (DTS) Digital Transmission System
Data Rate(s) Tested: 1Mbps ~ 11Mbps (b); 6Mbps ~ 54Mbps (g);
6.5/7.2Mbps ~ 130/173.3Mbps (n-20M/VHT-20);
13.5/15Mbps ~ 270/400Mbps (n-40M/VHT-40)

FCC Part Section(s)	IC Standard	Test Description	Test Limit	Test Condition	Test Result	Reference
15.247(a)(2)	RSS-247 5.2 (a)	6dB Bandwidth	$\geq 500\text{kHz}$	Conducted	N/A	N/A
15.247(b)(3)	RSS-247 5.4 (d)	Output Power	$\leq 30.00\text{dBm}$		Pass	Section 7.3
15.247(e)	RSS-247 5.2 (b)	Power Spectral Density	$\leq 8.00\text{dBm}/3\text{kHz}$		N/A	N/A
15.247(d)	RSS-247 5.5	Out-of-Band Emissions	Conducted $\geq 20\text{dBc}$		N/A	N/A
15.205 15.209	RSS-247 5.5	Spurious Emission	< FCC 15.209 limits < RSS-Gen Table 4	Radiated	Pass	Section 7.6
15.205 15.209	RSS-247 5.5	Band Edge Measurement	$\cong 74\text{dBuV/m(Peak)}$ $\cong 54\text{dBuV/m(Average)}$		Pass	Section 7.7
15.207	RSS-Gen 8.8	AC Conducted Emissions 150kHz - 30MHz	< FCC 15.207 limits < RSS-Gen Table 3	Line Conducted	Pass	Section 7.8

Notes:

- Determining compliance is based on the test results met the regulation limits or requirements declared by clients, and the test results don't take into account the value of measurement uncertainty.
- All modes of operation and data rates were investigated. For radiated emission test, every axis (X, Y, Z) was also verified when applicable. The test results shown in the following sections represent the worst case emissions.

- 3) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 4) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.

7.2. 6dB Bandwidth Measurement

7.2.1. Test Limit

The minimum 6dB bandwidth shall be at least 500 kHz.


7.2.2. Test Procedure used

ANSI C63.10-2013 – Section 11.8.2 Option 2

7.2.3. Test Setting

1. The Spectrum's automatic bandwidth measurement capability was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 6$. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. Set RBW = 100 kHz
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. Allow the trace was allowed to stabilize

7.2.4. Test Setup

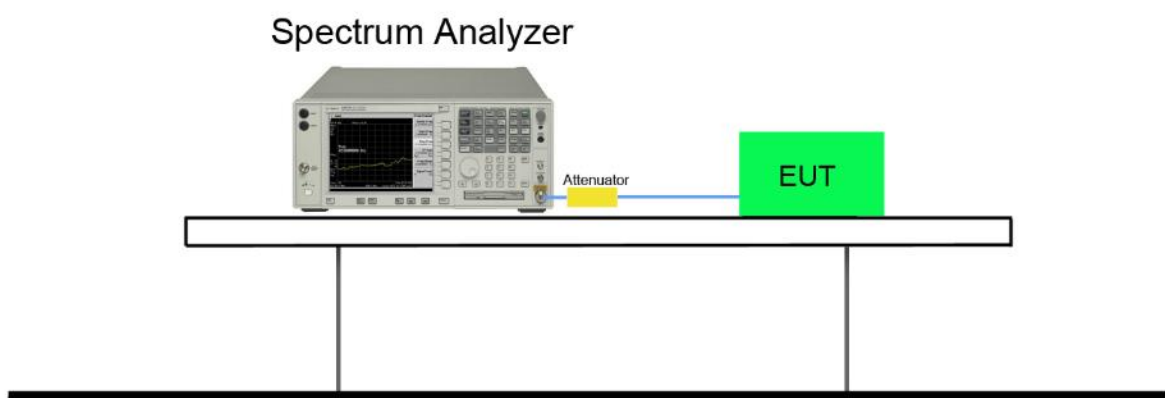

7.2.5. Test Result

Note: Reference

FCC Original Report Grant Date: 09/11/2020, FCC ID: 2AGRR-LBEE5ZZ1PJ

IC Original Report Grant Date: 09/14/2020, IC: 8110A-LBEE5ZZ1PJ

7.3. Output Power Measurement

7.3.1. Test Limit

The maximum out power shall be less 1 Watt (30dBm).

7.3.2. Test Procedure Used

ANSI C63.10-2013 – Section 11.9.2.3.2

7.3.3. Test Setting


Peak Power Measurement

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

Average Power Measurement

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

7.3.4. Test Setup

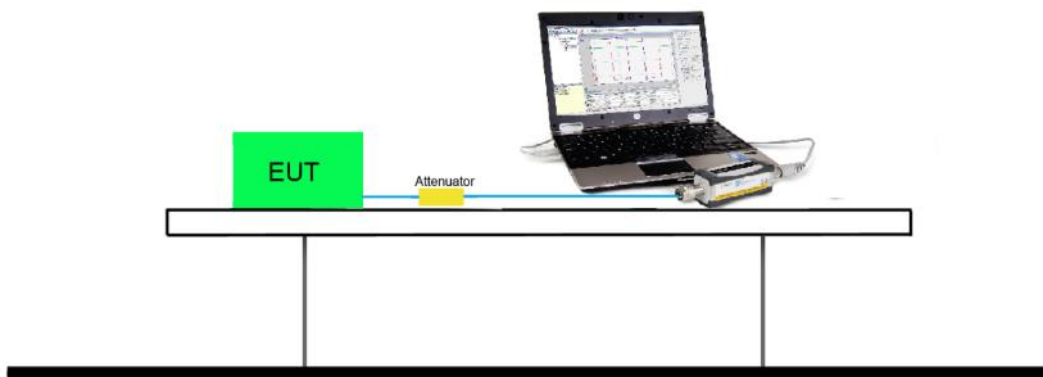

7.3.5. Test Result of Output Power

2.4GHz 802.11b RF Output Power (dBm)											
Channel No.	Frequency (MHz)	Average Power For different Data Rate (Mbps)				Peak Power	Required Limit				
		1	2	5.5	11						
01	2412	18.54	--	--	--	20.89	1Watt= 30 dBm				
06	2437	18.50	18.5	18.49	18.49	20.87	1Watt= 30 dBm				
11	2462	18.49	--	--	--	20.69	1Watt= 30 dBm				
2.4GHz 802.11g RF Output Power (dBm)											
Channel No.	Frequency (MHz)	Average Power For different Data Rate (Mbps)								Peak Power	Required Limit
		6	9	12	18	24	36	48	54		
01	2412	17.52	--	--	--	--	--	--	--	25.23	1Watt= 30 dBm
06	2437	17.84	17.53	17.24	16.92	16.75	16.04	15.37	14.71	26.45	1Watt= 30 dBm
11	2462	17.51	--	--	--	--	--	--	--	24.49	1Watt= 30 dBm
2.4GHz 802.11n-HT20M RF Output Power (dBm)											
Channel No.	Frequency (MHz)	Average Power For different Data Rate (Mbps)								Peak Power	Required Limit
		MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7		
01	2412	17.49	--	--	--	--	--	--	--	24.12	1Watt= 30 dBm
06	2437	17.74	17.7	17.67	17.64	17.61	17.59	17.57	17.56	26.24	1Watt= 30 dBm
11	2462	17.44	--	--	--	--	--	--	--	24.15	1Watt= 30 dBm
2.4GHz 802.11n-HT40M RF Output Power (dBm)											
Channel No.	Frequency (MHz)	Average Power For different Data Rate (Mbps)								Peak Power	Required Limit
		MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7		
03	2422	16.60	--	--	--	--	--	--	--	25.44	1Watt= 30 dBm
06	2437	16.65	16.47	16.22	16.05	15.84	15.63	15.51	15.43	26.08	1Watt= 30 dBm
09	2452	16.52	--	--	--	--	--	--	--	25.89	1Watt= 30 dBm

Note: Output power = Reading value on power meter + duty cycle factor + cable loss °

2.4GHz 802.11VHT20M RF Output Power (dBm)											
Channel No.	Frequency (MHz)	Average Power For different Data Rate (Mbps)								Peak Power	Required Limit
		MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7		
01	2412	17.27	--	--	--	--	--	--	--	23.84	1Watt= 30 dBm
06	2437	17.56	17.48	17.45	17.41	17.39	17.3	17.12	16.99	24.54	1Watt= 30 dBm
11	2462	17.06	--	--	--	--	--	--	--	24.13	1Watt= 30 dBm
2.4GHz 802.11VHT40M RF Output Power (dBm)											
Channel No.	Frequency (MHz)	Average Power For different Data Rate (Mbps)								Peak Power	Required Limit
		MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7		
03	2422	16.55	--	--	--	--	--	--	--	25.12	1Watt= 30 dBm
06	2437	16.40	16.36	16.18	16.01	15.82	15.6	15.23	15.08	25.21	1Watt= 30 dBm
09	2452	16.32	--	--	--	--	--	--	--	24.45	1Watt= 30 dBm

Note: Output power = Reading value on power meter + duty cycle factor + cable loss °

7.4. Power Spectral Density Measurement

7.4.1. Test Limit

The maximum permissible power spectral density is 8dBm in any 3 kHz band.

7.4.2. Test Procedure Used


ANSI C63.10-2013 – Section 11.10.5

7.4.3. Test Setting

This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance, and is optional if the maximum conducted (average) output power was used to demonstrate compliance.

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 times the DTS bandwidth.
- c) Set the RBW to: 3 kHz.
- d) Set the VBW $\geq 3 \times$ RBW.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.

7.4.4. Test Setup

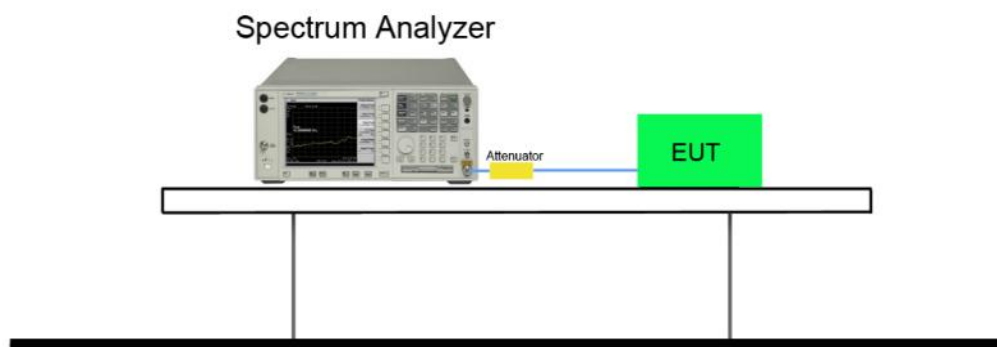

7.4.5. Test Result

Note: Reference

FCC Original Report Grant Date: 09/11/2020, FCC ID: 2AGRR-LBEE5ZZ1PJ

IC Original Report Grant Date: 09/14/2020, IC: 8110A-LBEE5ZZ1PJ

7.5. Out-of-Band Spurious Emissions Emissions Measurement

7.5.1. Test Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on RF conducted measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.


7.5.2. Test Procedure Used

ANSI C63.10-2013 – Section 11.11

7.5.3. Test Setting

- (a) Set instrument center frequency to DTS channel center frequency
- (b) Set the span to ≥ 1.5 times the DTS bandwidth
- (c) Set the RBW = 100 kHz
- (d) Set the VBW $\geq 3 \times$ RBW
- (e) Detector = peak
- (f) Sweep time = auto couple
- (g) Trace mode = max hold
- (h) Allow trace to fully stabilize

7.5.4. Test Setup

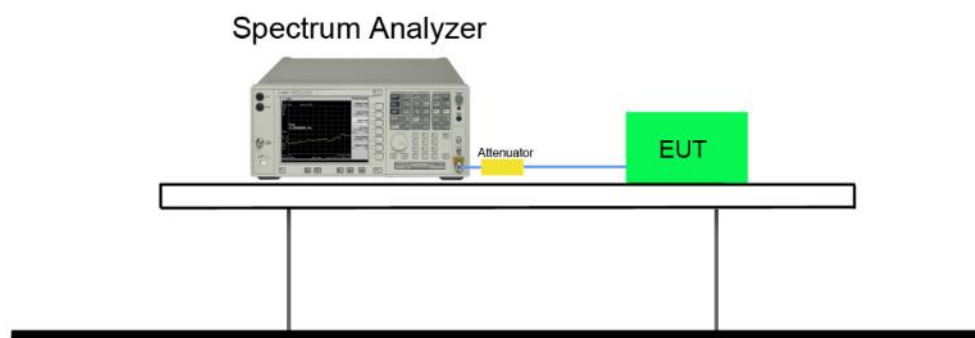

7.5.5. Test Result

Note: Reference

FCC Original Report Grant Date: 09/11/2020, FCC ID: 2AGRR-LBEE5ZZ1PJ

IC Original Report Grant Date: 09/14/2020, IC: 8110A-LBEE5ZZ1PJ

7.6. Radiated Spurious Emission Measurement

7.6.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [V/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.6.2. Test Procedure Used

ANSI C63.10-2013 – Section 11.12.2.3 (quasi-peak measurements)

ANSI C63.10-2013 – Section 11.12.2.4 (peak power measurements)

ANSI C63.10-2013 – Section 11.12.2.5 (average power measurements)

7.6.3. Test Setting

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = as specified in Table 1
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple

6. Trace mode = max hold

7. Trace was allowed to stabilize

Table 1 - RBW as a function of frequency

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000 MHz	1 MHz

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest

2. RBW = 1MHz

3. VBW \geq 1/T

4. De As an alternative, the instrument may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some instruments require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to "Voltage" regardless of the display mode

5. Detector = Peak


6. Sweep time = auto

7. Trace mode = max hold


8. Allow max hold to run for at least 50 times (1/duty cycle) traces

7.6.4. Test Setup


9kHz ~ 30MHz Test Setup:

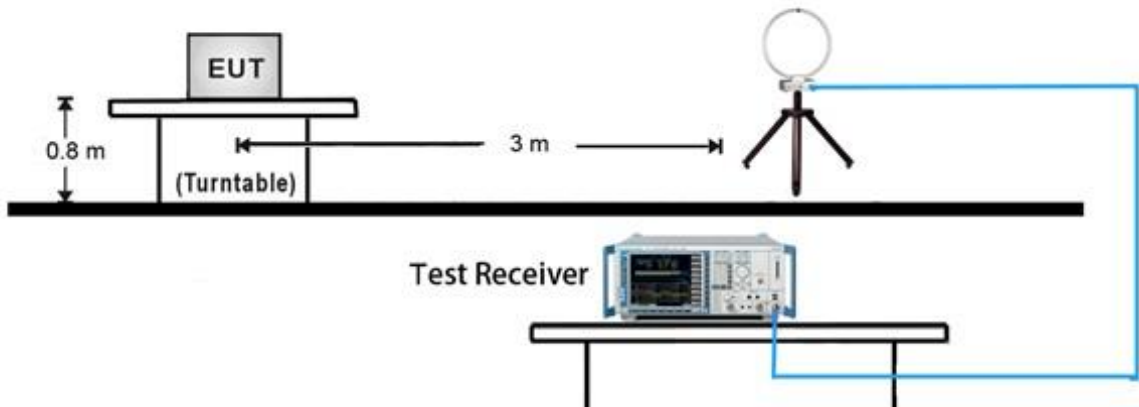


30MHz ~ 1GHz Test Setup:

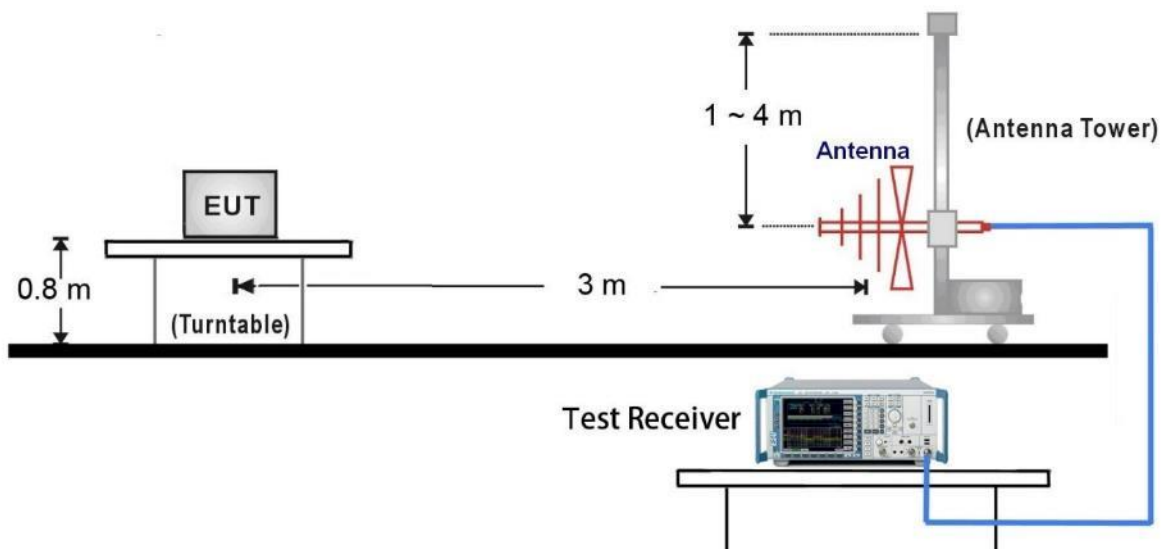

1GHz ~ 18GHz Test Setup:

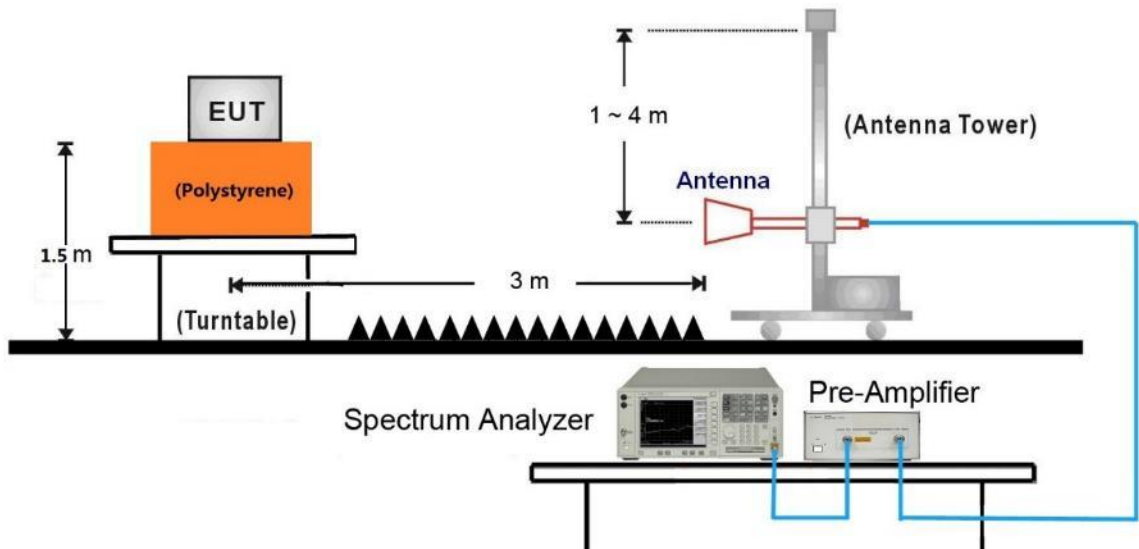


18GHz ~25GHz Test Setup:

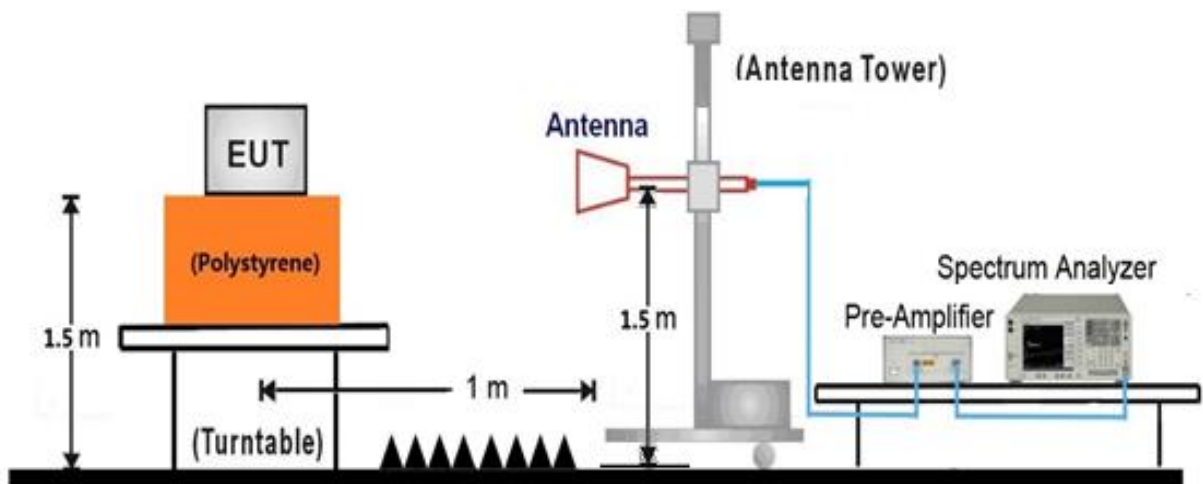

7.6.5. Test Result

EUT	Sonata XL	Date of Test	2020-08-06
Factor	VULB 9162	Temp. / Humidity	24°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	30MHz-1GHz_802.11n-20MHz_TX	Test Voltage	AC 120V/60Hz

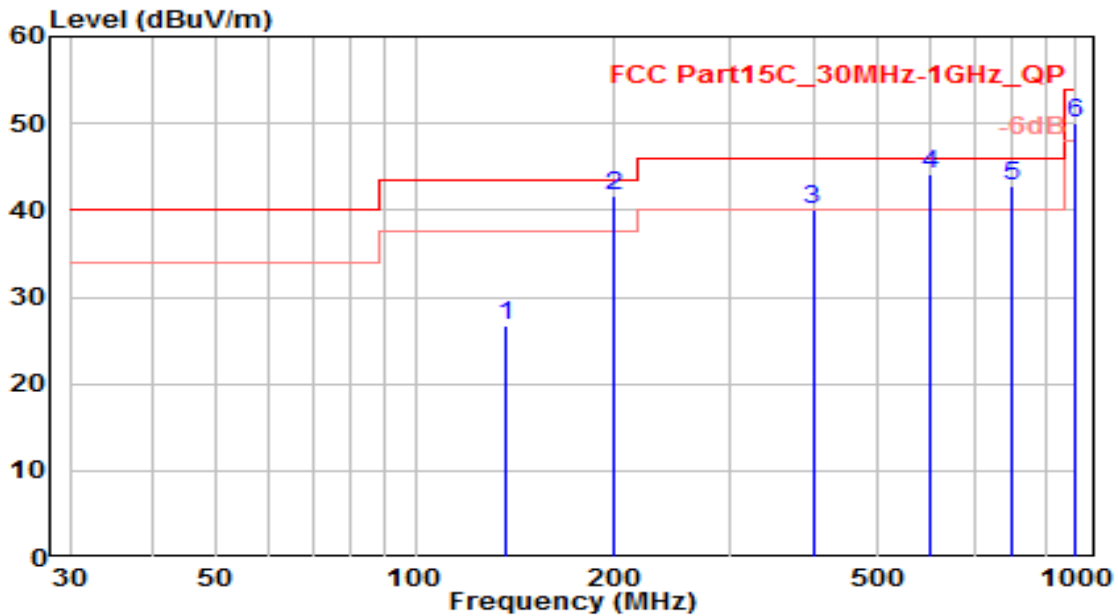


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	136.620	11.03	15.62	26.65	-16.85	43.50	100	110	QP
2	* 199.760	22.68	18.94	41.62	-1.88	43.50	100	205	QP
3	399.680	15.88	24.16	40.04	-5.96	46.00	100	210	QP
4	599.380	16.62	27.49	44.11	-1.89	46.00	100	300	QP
5	799.750	12.44	30.30	42.74	-3.26	46.00	100	210	QP
6	1000.000	17.42	32.55	49.97	-4.03	54.00	100	320	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Sonata XL	Date of Test	2020-08-06
Factor	VULB 9162	Temp. / Humidity	24°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	30MHz-1GHz_802.11n-20MHz_TX	Test Voltage	AC 120V/60Hz

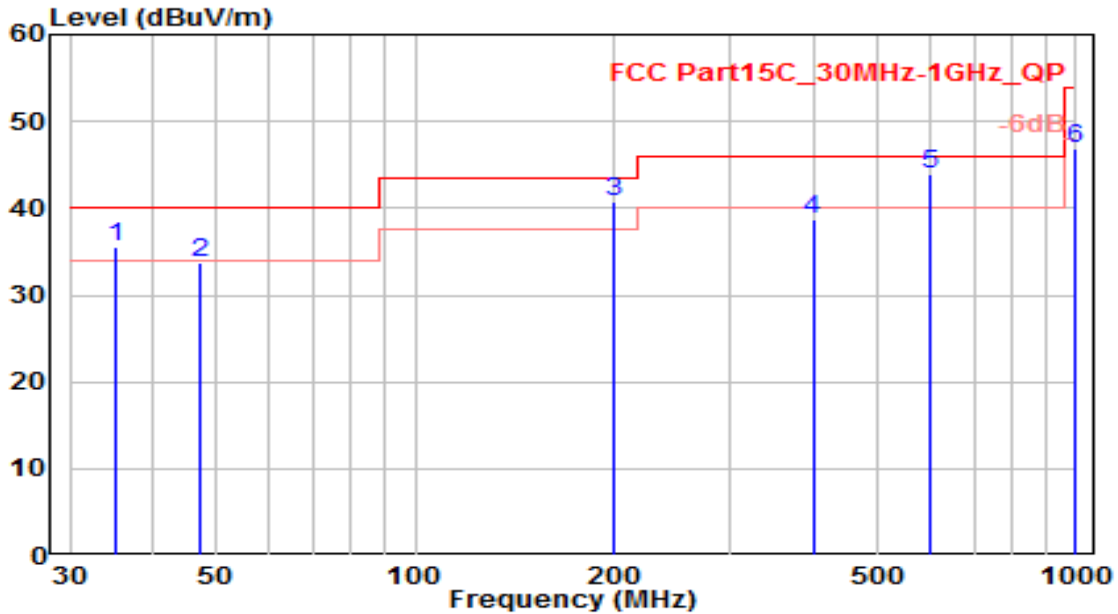


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	35.260	16.55	19.11	35.66	-4.34	40.00	100	220	QP
2	47.260	12.32	21.52	33.84	-6.16	40.00	100	300	QP
3	199.850	21.89	18.95	40.84	-2.66	43.50	100	55	QP
4	399.650	14.66	24.15	38.81	-7.19	46.00	100	200	QP
5	* 599.270	16.55	27.49	44.04	-1.96	46.00	100	60	QP
6	1000.000	14.32	32.55	46.87	-7.13	54.00	100	215	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Opus XL	Date of Test	2020-08-06
Factor	VULB 9162	Temp. / Humidity	24°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11802.11n-20MHz_TX_CH 6_ANT 0	Test Voltage	AC 120V/60Hz

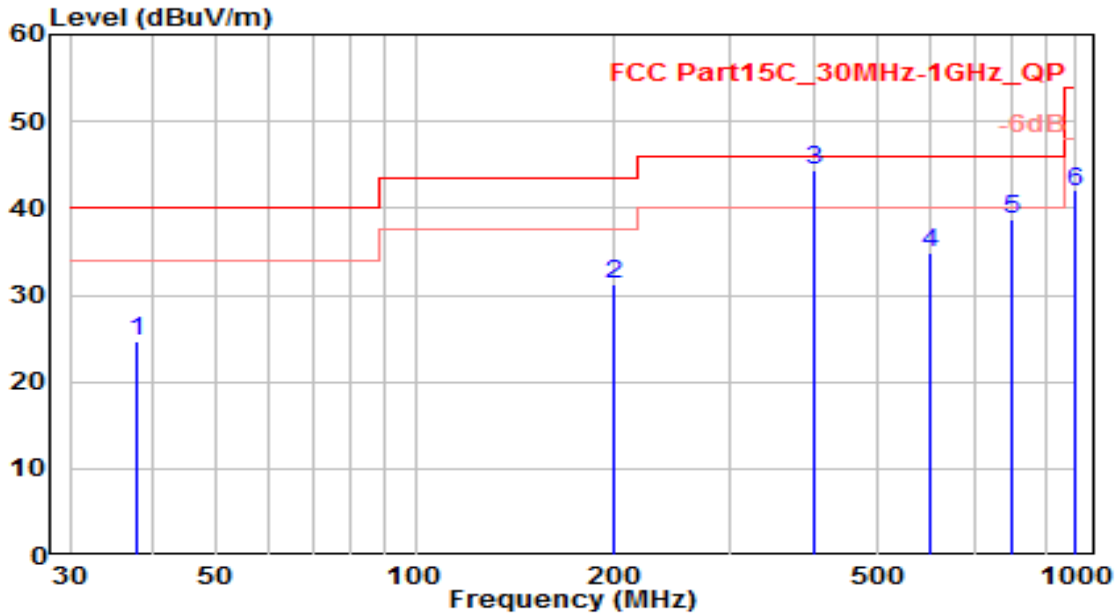


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	37.840	4.62	19.95	24.57	-15.43	40.00	100	50	QP
2	199.650	12.22	18.94	31.16	-12.34	43.50	100	100	QP
3	* 400.080	20.22	24.16	44.38	-1.62	46.00	100	100	QP
4	600.150	7.32	27.50	34.82	-11.18	46.00	100	200	QP
5	800.110	8.49	30.30	38.79	-7.21	46.00	100	365	QP
6	1000.000	9.45	32.55	42.00	-12.00	54.00	100	60	QP

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Opus XL	Date of Test	2020-08-06
Factor	VULB 9162	Temp. / Humidity	24°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11802.11n-20MHz_TX_CH 6_ANT 0	Test Voltage	AC 120V/60Hz

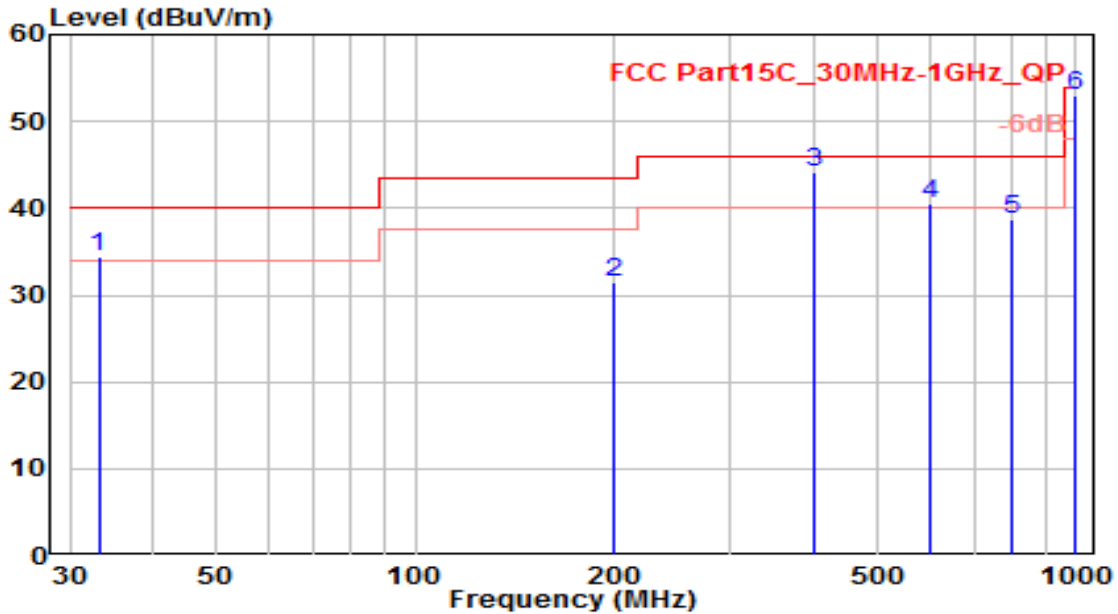


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	33.150	15.68	18.64	34.32	-5.68	40.00	100	10	QP
2	200.150	12.44	18.94	31.38	-12.12	43.50	100	30	QP
3	399.950	20.02	24.16	44.18	-1.82	46.00	100	75	QP
4	599.150	13.04	27.48	40.52	-5.48	46.00	100	220	QP
5	800.250	8.45	30.30	38.75	-7.25	46.00	100	220	QP
6	* 1000.000	20.33	32.55	52.88	-1.12	54.00	100	35	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Sonata XL	Date of Test	2020-08-06
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /55%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11b_TX_CH 1_ANT 0	Test Voltage	AC 120V/60Hz

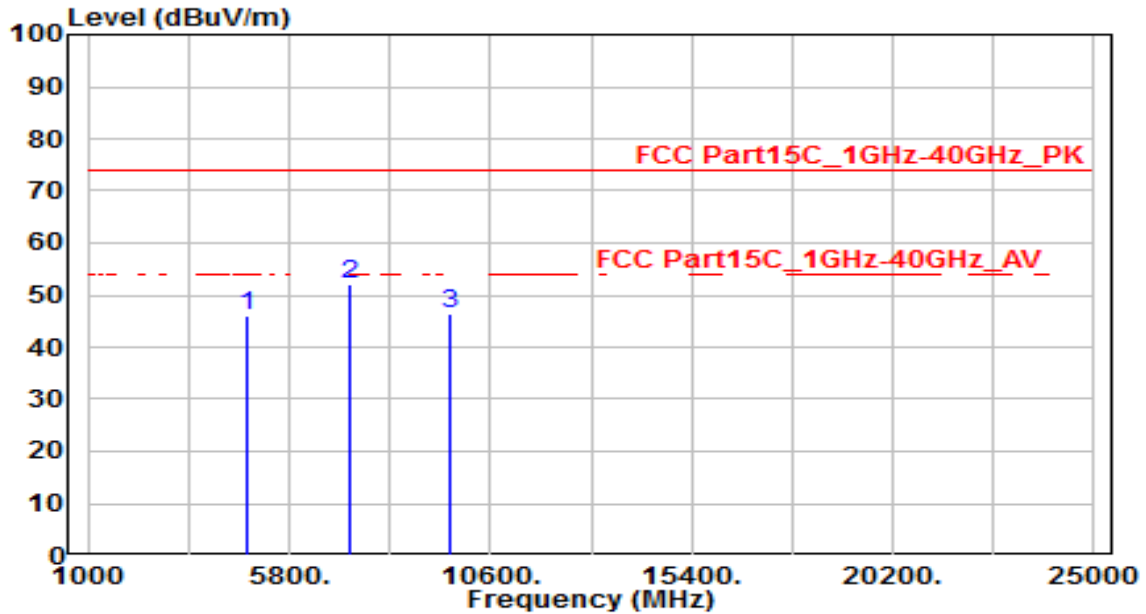


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	42.68	3.33	46.01	-27.99	74.00	150	400	Peak
2	* 7236.000	41.06	10.97	52.03	-21.97	74.00	150	400	Peak
3	9648.000	31.67	14.70	46.37	-27.63	74.00	150	400	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Sonata XL	Date of Test	2020-08-06
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /55%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11b_TX_CH 1_ANT 0	Test Voltage	AC 120V/60Hz

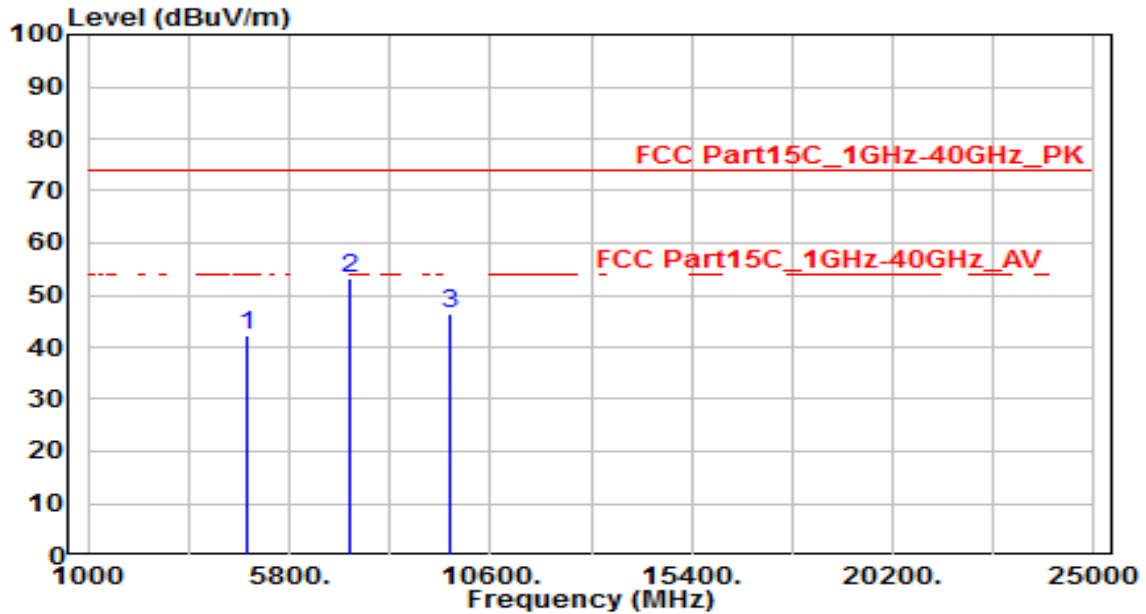


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	39.00	3.33	42.33	-31.67	74.00	150	400	Peak
2	* 7236.000	42.12	10.97	53.08	-20.92	74.00	150	400	Peak
3	9648.000	31.77	14.70	46.47	-27.53	74.00	150	400	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Sonata XL	Date of Test	2020-08-06
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /55%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11b_TX_CH 6_ANT 0	Test Voltage	AC 120V/60Hz

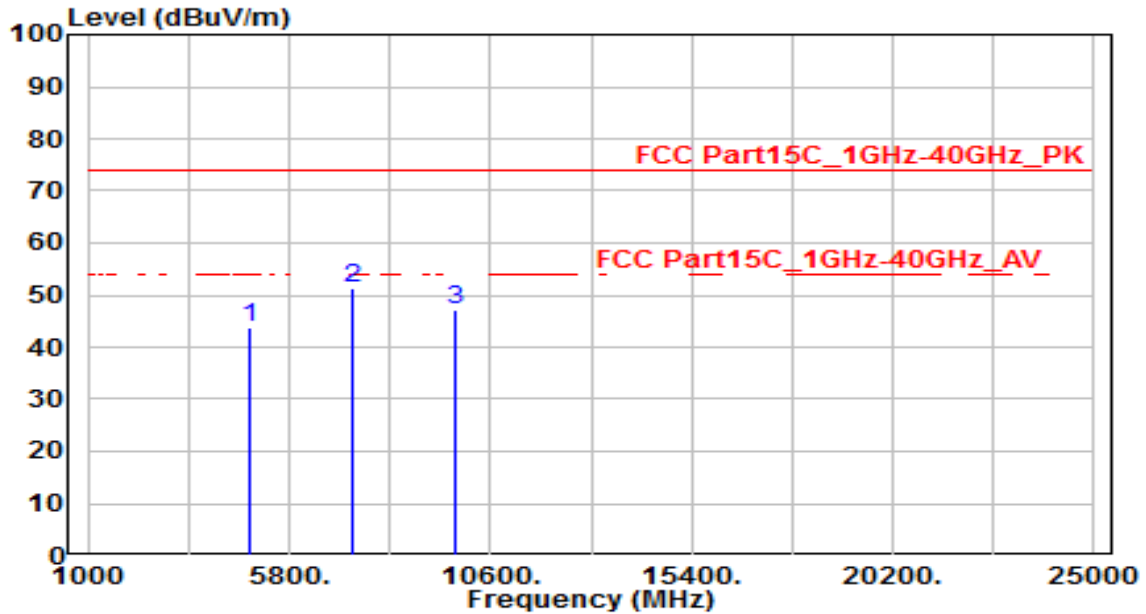


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	40.48	3.45	43.93	-30.07	74.00	150	400	Peak
2	* 7311.000	40.21	11.18	51.39	-22.61	74.00	150	400	Peak
3	9748.000	32.19	14.89	47.08	-26.92	74.00	150	400	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Sonata XL	Date of Test	2020-08-06
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /55%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11b_TX_CH 6_ANT 0	Test Voltage	AC 120V/60Hz

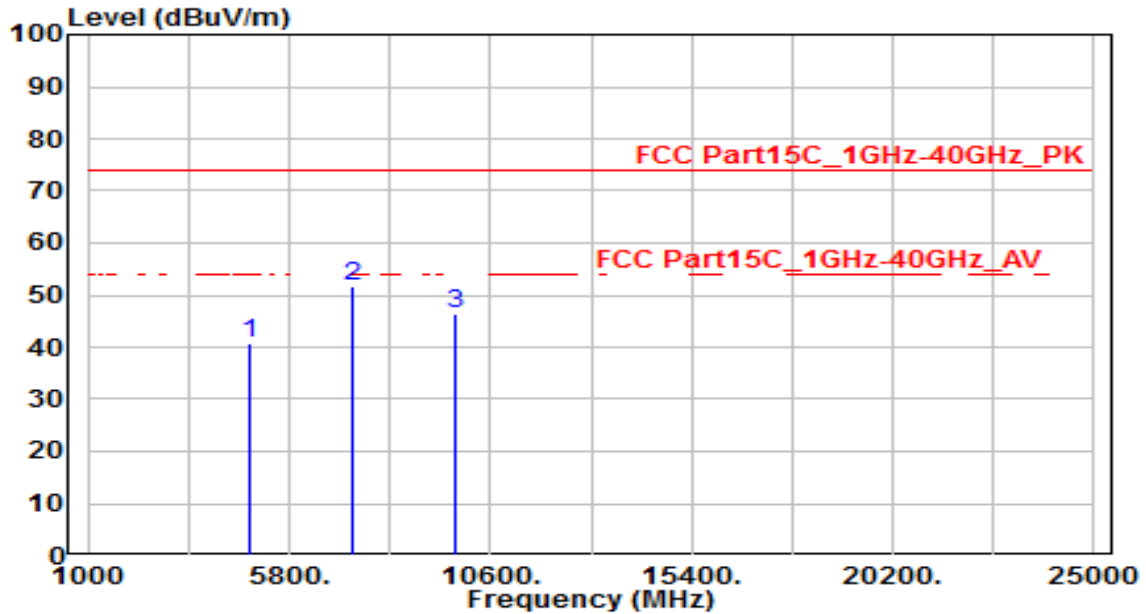


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	37.42	3.45	40.87	-33.13	74.00	150	400	Peak
2	* 7311.000	40.44	11.18	51.62	-22.38	74.00	150	400	Peak
3	9748.000	31.55	14.89	46.43	-27.57	74.00	150	400	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Sonata XL	Date of Test	2020-08-06
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /55%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11b_TX_CH 11_ANT 0	Test Voltage	AC 120V/60Hz

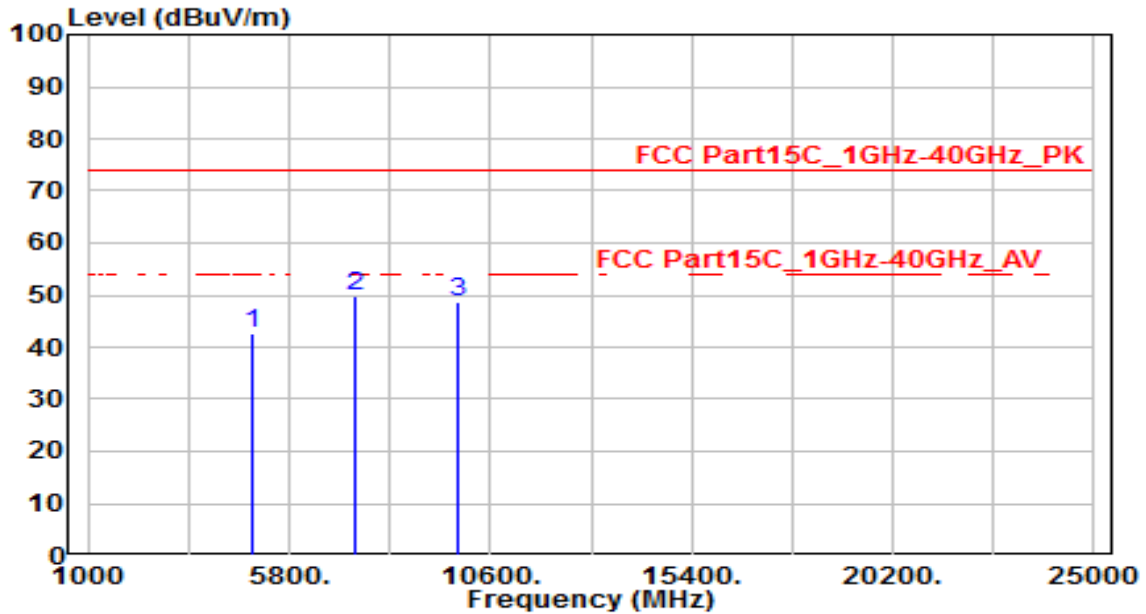


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	39.08	3.57	42.65	-31.35	74.00	150	400	Peak
2	* 7386.000	38.52	11.39	49.91	-24.09	74.00	150	400	Peak
3	9848.000	33.61	15.07	48.69	-25.31	74.00	150	400	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Sonata XL	Date of Test	2020-08-06
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /55%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11b_TX_CH 11_ANT 0	Test Voltage	AC 120V/60Hz

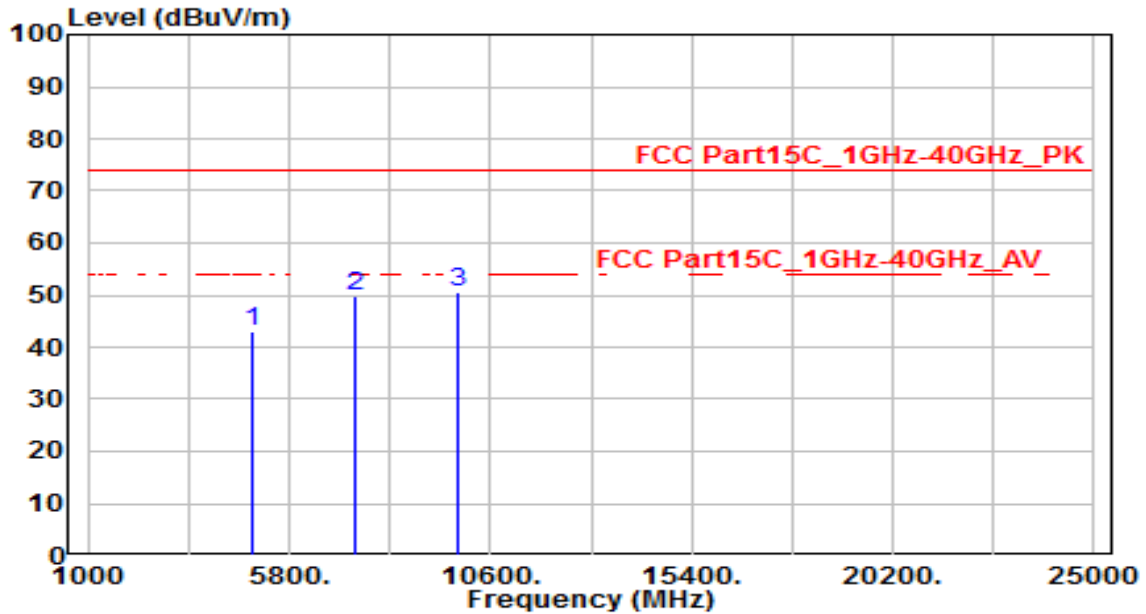


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	39.36	3.57	42.93	-31.07	74.00	150	400	Peak
2	7386.000	38.34	11.39	49.73	-24.27	74.00	150	400	Peak
3	* 9848.000	35.61	15.07	50.69	-23.31	74.00	150	400	Peak

Note:

1. " *" , means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Sonata XL	Date of Test	2020-08-06
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /55%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11g_TX_CH 1_ANT 0	Test Voltage	AC 120V/60Hz

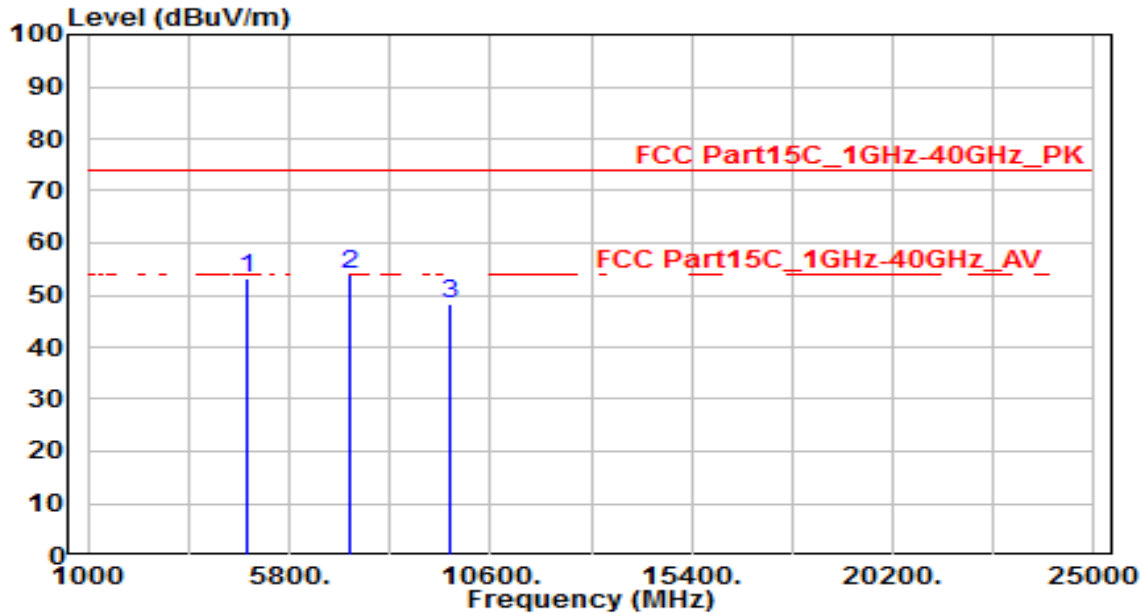


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	49.83	3.33	53.15	-20.85	74.00	150	400	Peak
2	* 7236.000	43.10	10.97	54.06	-19.94	74.00	150	400	Peak
3	9648.000	33.51	14.70	48.21	-25.79	74.00	150	400	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Sonata XL	Date of Test	2020-08-06
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /55%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11g_TX_CH 1_ANT 0	Test Voltage	AC 120V/60Hz

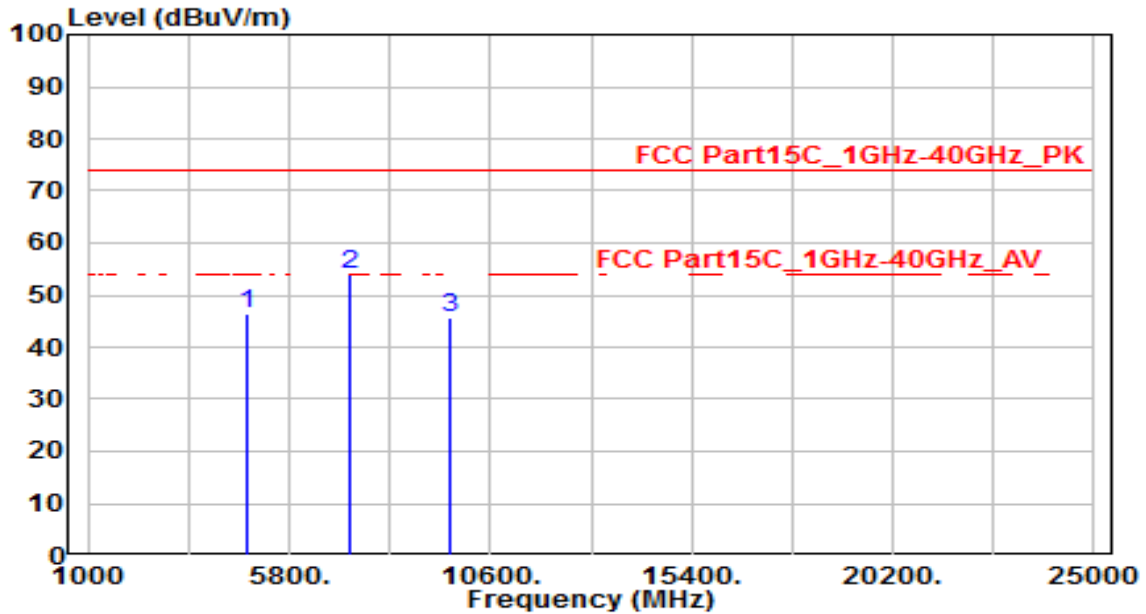


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	42.91	3.33	46.23	-27.77	74.00	150	400	Peak
2	* 7236.000	42.88	10.97	53.84	-20.16	74.00	150	400	Peak
3	9648.000	30.91	14.70	45.61	-28.39	74.00	150	400	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Sonata XL	Date of Test	2020-08-06
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /55%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11g_TX_CH 6_ANT 0	Test Voltage	AC 120V/60Hz

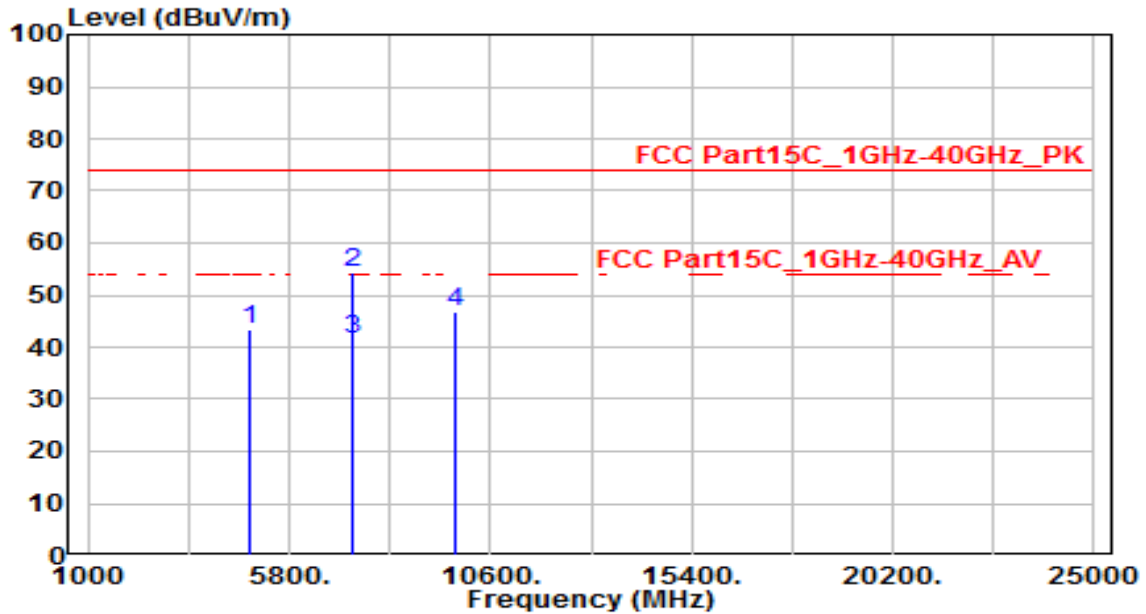


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	39.93	3.45	43.38	-30.62	74.00	150	400	Peak
2	7311.000	43.21	11.18	54.39	-19.61	74.00	150	320	Peak
3	* 7311.000	30.26	11.18	41.44	-12.56	54.00	150	320	Average
4	9748.000	31.96	14.89	46.85	-27.15	74.00	150	400	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Sonata XL	Date of Test	2020-08-06
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /55%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11g_TX_CH 6_ANT 0	Test Voltage	AC 120V/60Hz

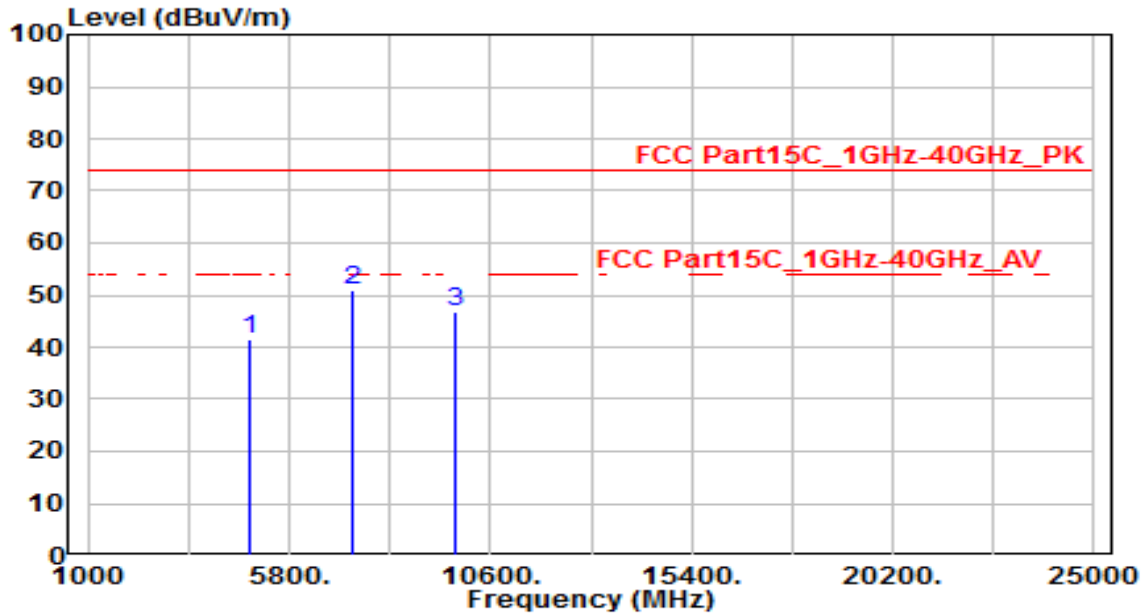


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	38.20	3.45	41.64	-32.36	74.00	150	400	Peak
2	* 7311.000	39.62	11.18	50.80	-23.20	74.00	150	400	Peak
3	9748.000	32.04	14.89	46.93	-27.07	74.00	150	400	Peak

Note:

1. " *" , means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Sonata XL	Date of Test	2020-08-06
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /55%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11g_TX_CH 11_ANT 0	Test Voltage	AC 120V/60Hz

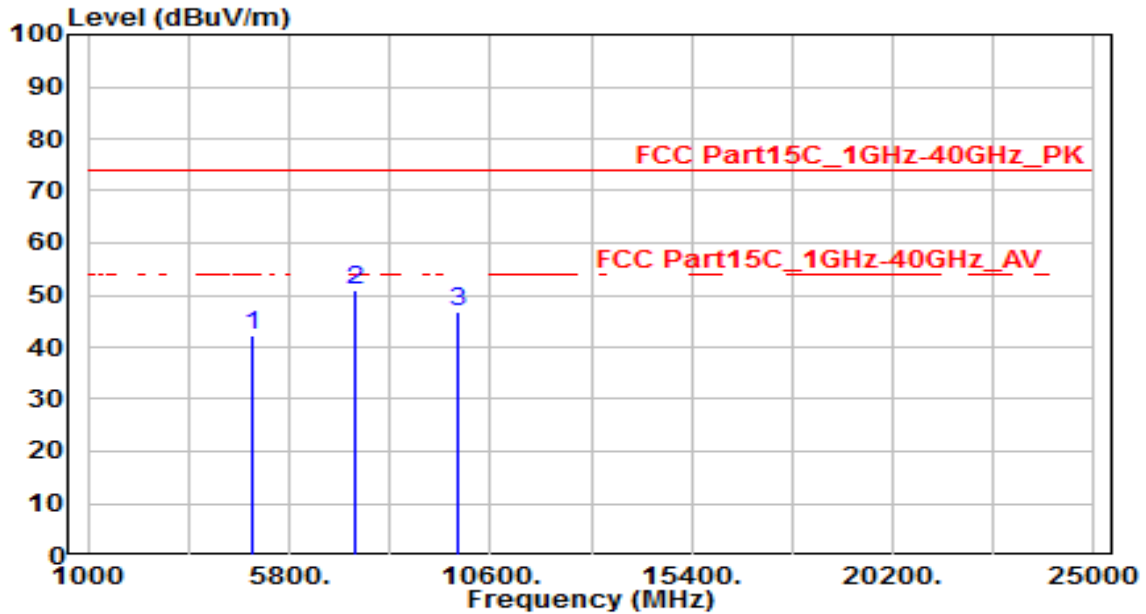


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	38.76	3.57	42.33	-31.67	74.00	150	400	Peak
2	* 7386.000	39.62	11.39	51.02	-22.98	74.00	150	400	Peak
3	9848.000	31.78	15.07	46.85	-27.15	74.00	150	400	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Sonata XL	Date of Test	2020-08-06
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /55%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11g_TX_CH 11_ANT 0	Test Voltage	AC 120V/60Hz

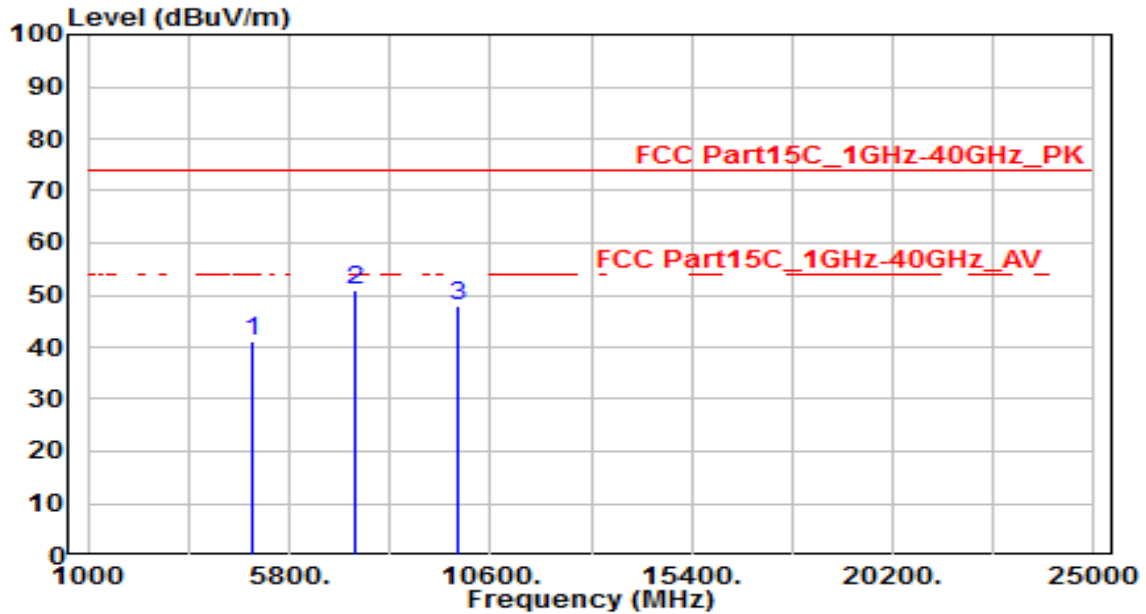


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	37.57	3.57	41.14	-32.86	74.00	150	400	Peak
2	* 7386.000	39.38	11.39	50.77	-23.23	74.00	150	400	Peak
3	9848.000	33.02	15.07	48.10	-25.90	74.00	150	400	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Sonata XL	Date of Test	2020-08-06
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /55%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0	Test Voltage	AC 120V/60Hz

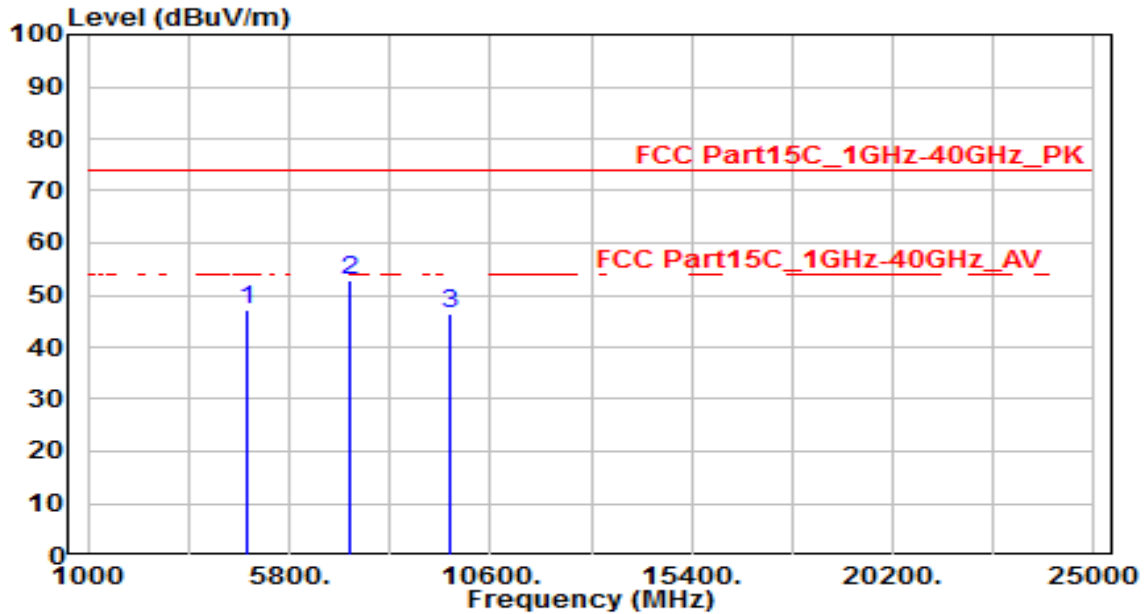


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	44.03	3.33	47.36	-26.64	74.00	150	400	Peak
2	* 7236.000	41.86	10.97	52.83	-21.17	74.00	150	400	Peak
3	9648.000	31.73	14.70	46.43	-27.57	74.00	150	400	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Sonata XL	Date of Test	2020-08-06
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /55%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0	Test Voltage	AC 120V/60Hz

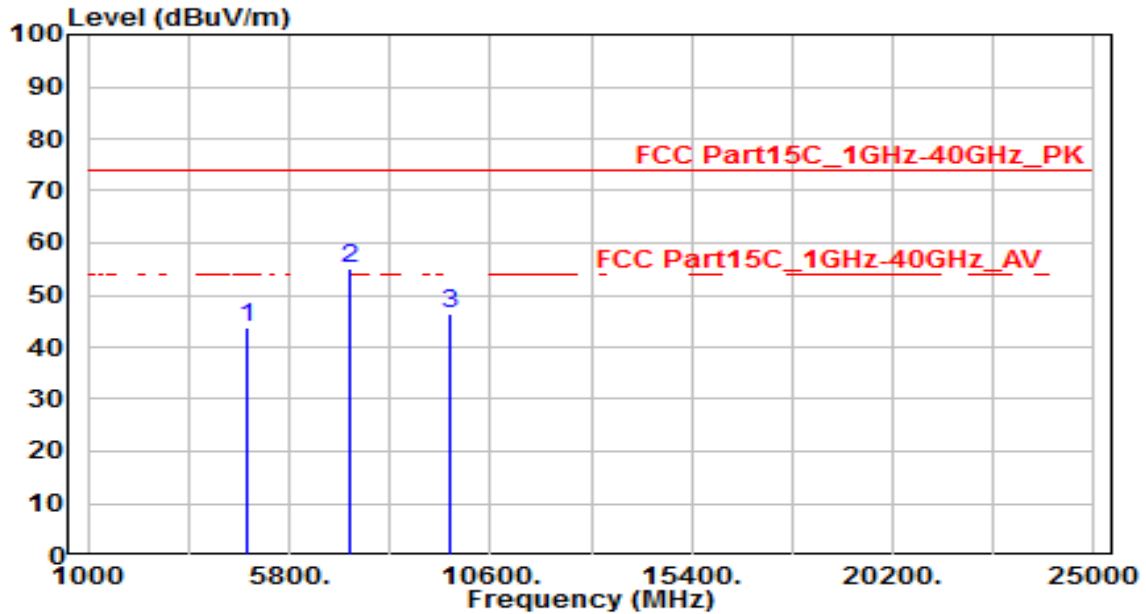


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	40.32	3.33	43.64	-30.36	74.00	150	400	Peak
2	* 7236.000	44.14	10.97	55.11	-18.89	74.00	150	400	Peak
3	9648.000	31.79	14.70	46.49	-27.51	74.00	150	400	Peak

Note:

1. " *" , means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Sonata XL	Date of Test	2020-08-06
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /55%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0	Test Voltage	AC 120V/60Hz

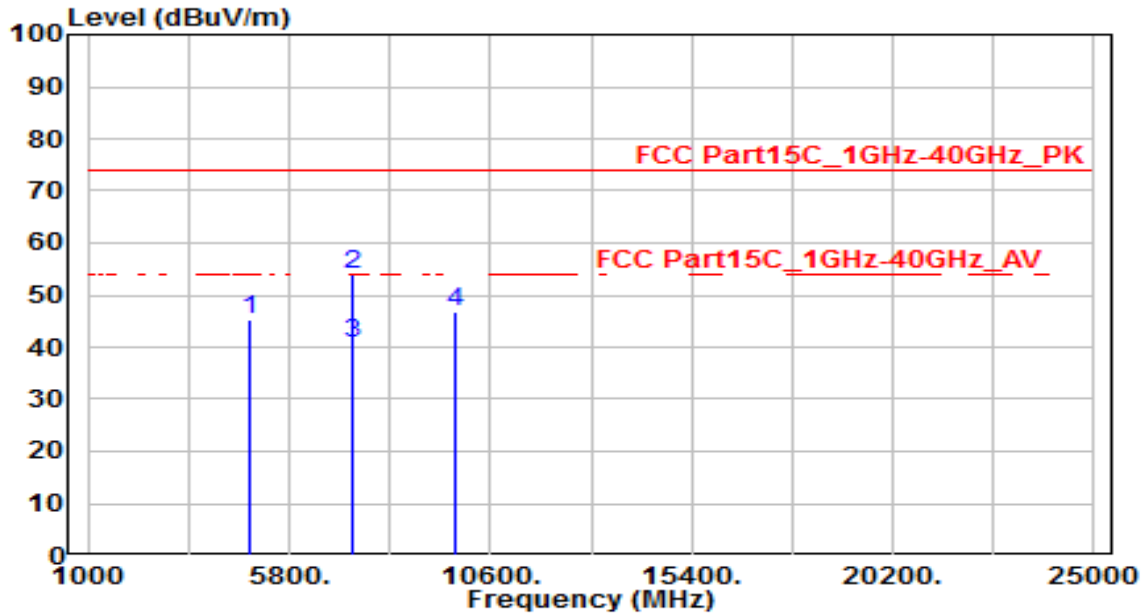


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	41.93	3.45	45.38	-28.62	74.00	150	400	Peak
2	7311.000	42.86	11.18	54.04	-19.96	74.00	150	220	Peak
3	* 7311.000	29.62	11.18	40.80	-13.20	54.00	150	220	Average
4	9748.000	31.76	14.89	46.64	-27.36	74.00	150	400	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Sonata XL	Date of Test	2020-08-06
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /55%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0	Test Voltage	AC 120V/60Hz

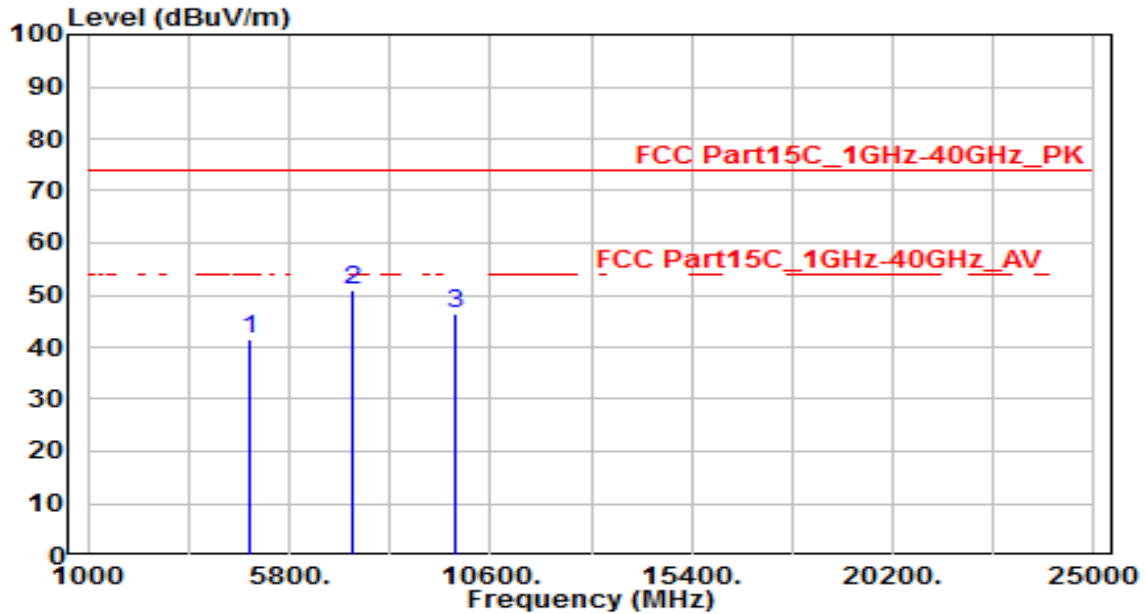


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	37.94	3.45	41.39	-32.61	74.00	150	400	Peak
2	* 7311.000	39.79	11.18	50.97	-23.03	74.00	150	400	Peak
3	9748.000	31.45	14.89	46.34	-27.66	74.00	150	400	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Sonata XL	Date of Test	2020-08-06
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /55%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0	Test Voltage	AC 120V/60Hz

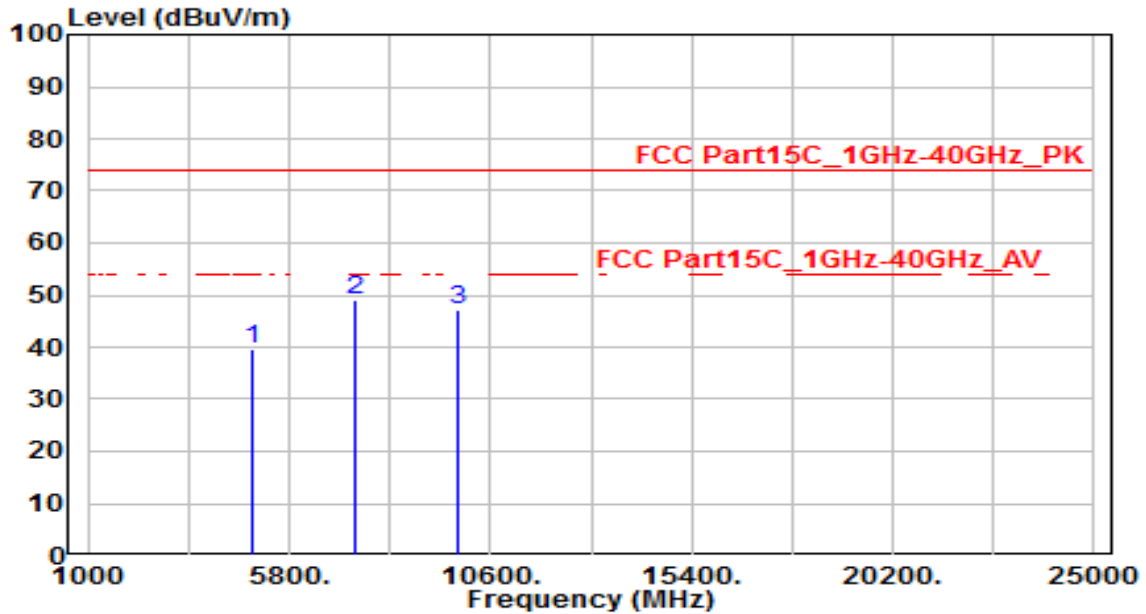


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	36.03	3.57	39.59	-34.41	74.00	150	400	Peak
2	* 7386.000	37.59	11.39	48.98	-25.02	74.00	150	400	Peak
3	9848.000	32.18	15.07	47.26	-26.74	74.00	150	400	Peak

Note:

1. " *" , means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Sonata XL	Date of Test	2020-08-06
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /55%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0	Test Voltage	AC 120V/60Hz

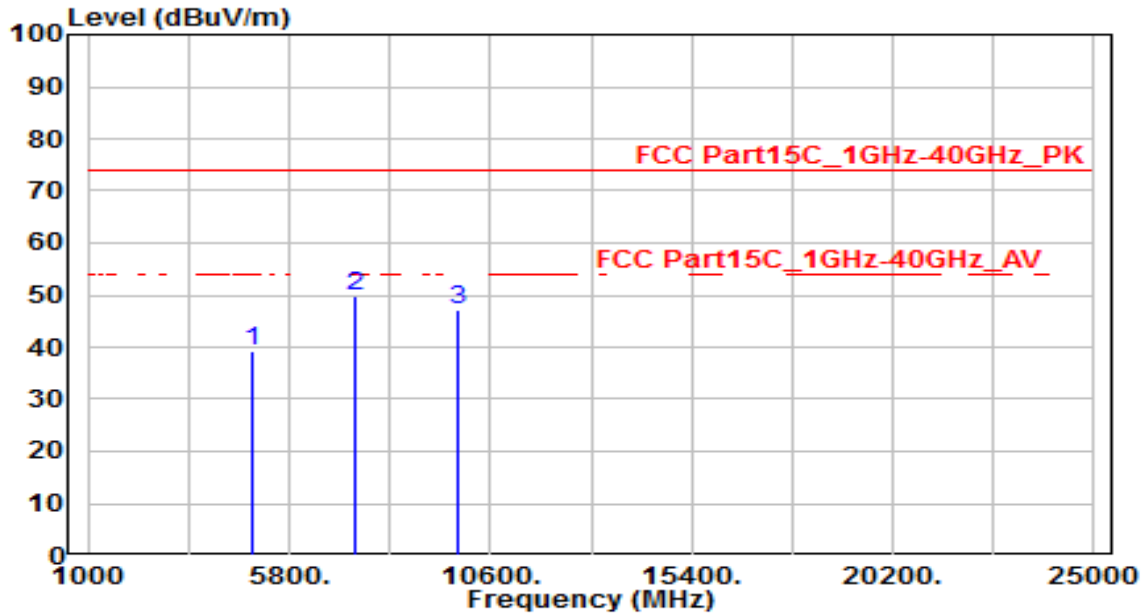


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	35.65	3.57	39.21	-34.79	74.00	150	400	Peak
2	* 7386.000	38.51	11.39	49.90	-24.10	74.00	150	400	Peak
3	9848.000	32.05	15.07	47.12	-26.88	74.00	150	400	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Sonata XL	Date of Test	2020-08-06
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /55%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0	Test Voltage	AC 120V/60Hz

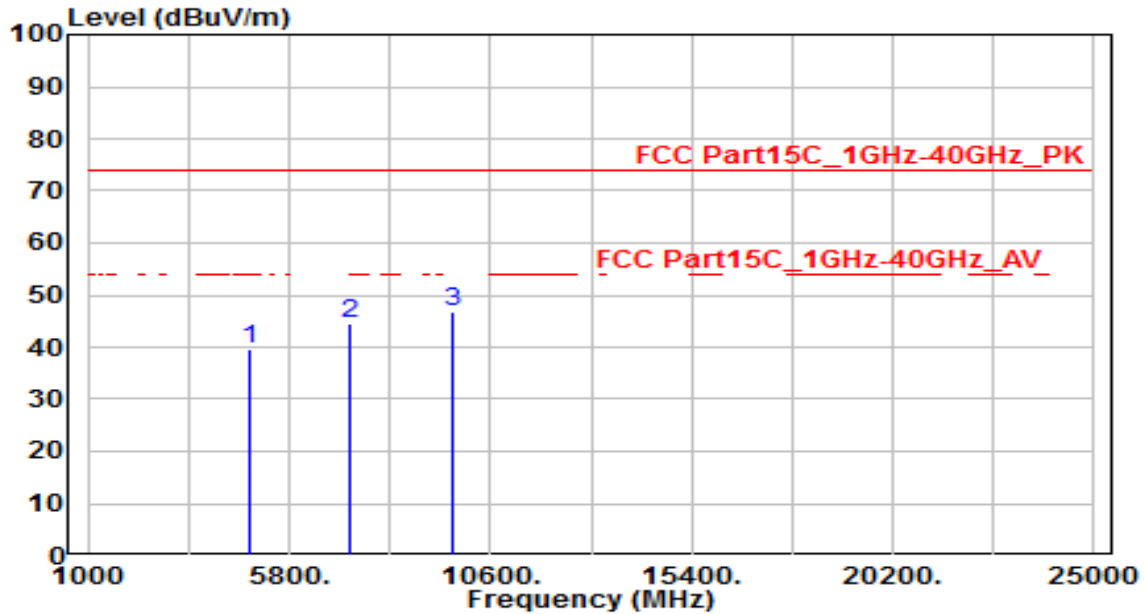


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	36.06	3.38	39.44	-34.56	74.00	150	400	Peak
2	7266.000	33.53	11.05	44.59	-29.41	74.00	150	400	Peak
3	* 9688.000	32.00	14.77	46.78	-27.22	74.00	150	400	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Sonata XL	Date of Test	2020-08-06
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /55%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0	Test Voltage	AC 120V/60Hz

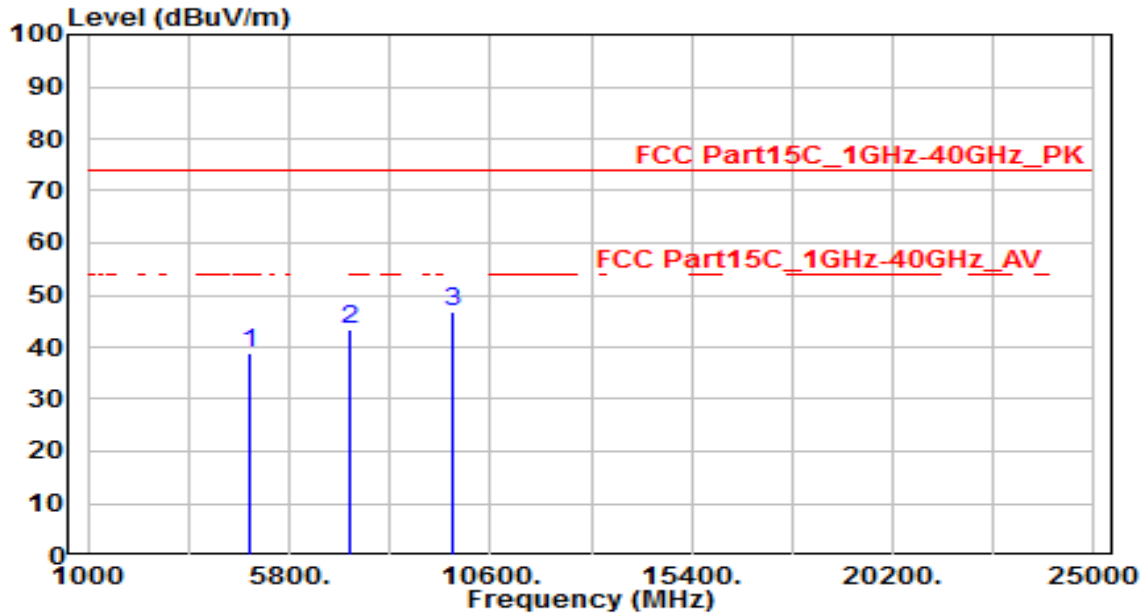


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	35.60	3.38	38.98	-35.02	74.00	150	400	Peak
2	7266.000	32.34	11.05	43.40	-30.60	74.00	150	400	Peak
3	* 9688.000	31.83	14.77	46.60	-27.40	74.00	150	400	Peak

Note:

1. " *" means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Sonata XL	Date of Test	2020-08-06
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /55%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0	Test Voltage	AC 120V/60Hz

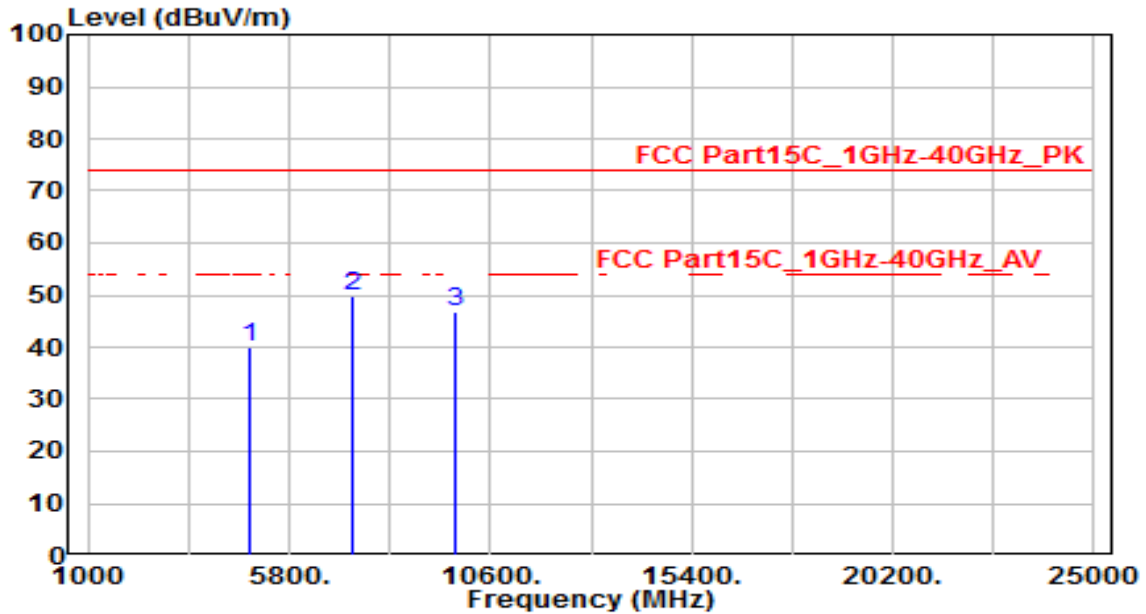


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	36.64	3.45	40.08	-33.92	74.00	150	400	Peak
2	* 7311.000	38.80	11.18	49.98	-24.02	74.00	150	400	Peak
3	9748.000	32.01	14.89	46.89	-27.11	74.00	150	400	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Sonata XL	Date of Test	2020-08-06
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /55%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0	Test Voltage	AC 120V/60Hz

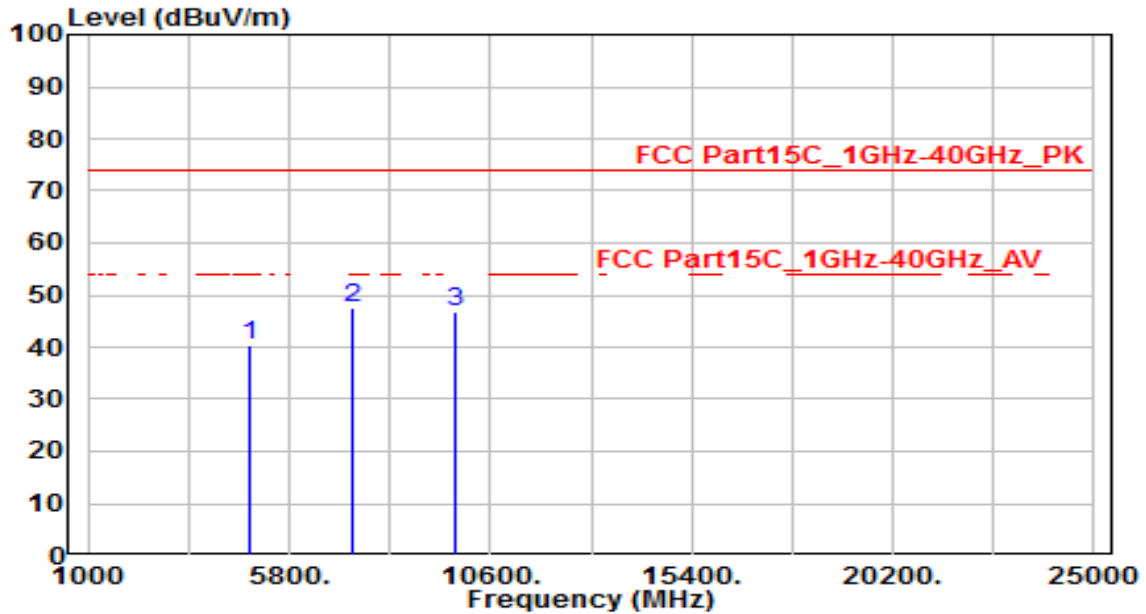


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	37.11	3.45	40.56	-33.44	74.00	150	400	Peak
2	* 7311.000	36.40	11.18	47.58	-26.42	74.00	150	400	Peak
3	9748.000	32.03	14.89	46.91	-27.09	74.00	150	400	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Sonata XL	Date of Test	2020-08-06
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /55%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0	Test Voltage	AC 120V/60Hz

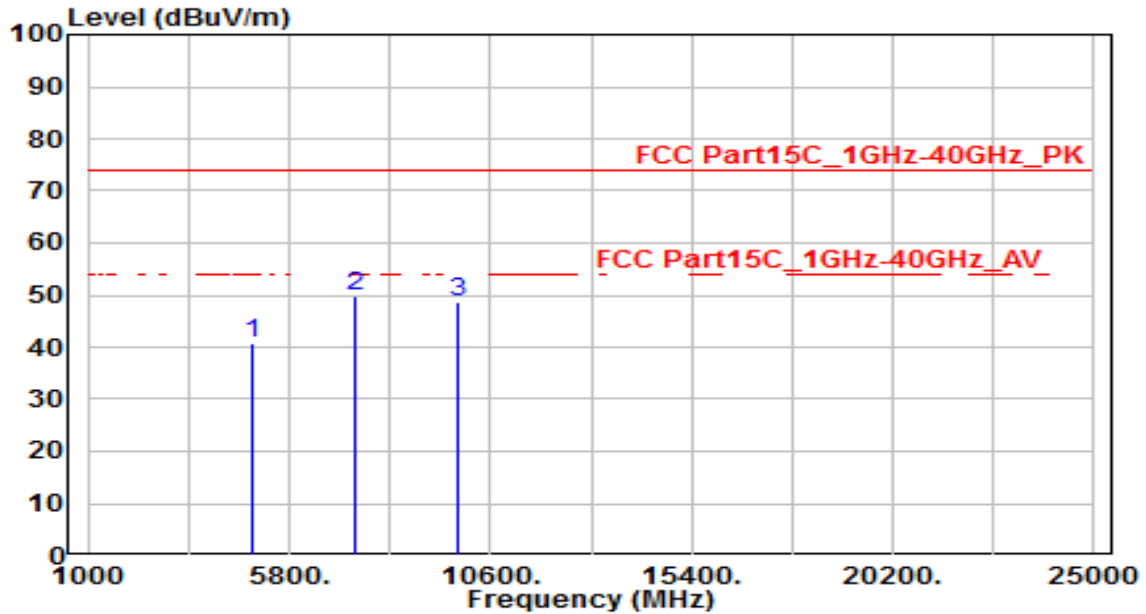


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4904.000	37.19	3.52	40.71	-33.29	74.00	150	400	Peak
2	* 7356.000	38.52	11.31	49.82	-24.18	74.00	150	400	Peak
3	9808.000	33.74	15.00	48.74	-25.26	74.00	150	400	Peak

Note:

1. " *" , means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Sonata XL	Date of Test	2020-08-06
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /55%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0	Test Voltage	AC 120V/60Hz

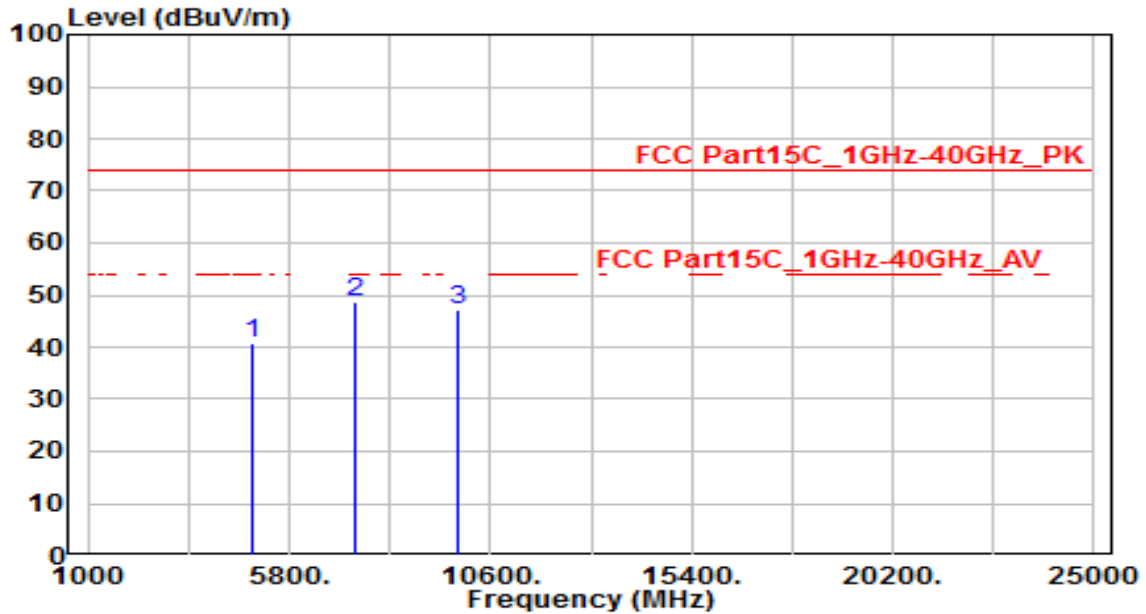


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4904.000	37.23	3.52	40.75	-33.25	74.00	150	400	Peak
2	* 7356.000	37.42	11.31	48.73	-25.27	74.00	150	400	Peak
3	9808.000	32.20	15.00	47.20	-26.80	74.00	150	400	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Opus XL	Date of Test	2020-08-06
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /55%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11b_TX_CH 1_ANT 0	Test Voltage	AC 120V/60Hz

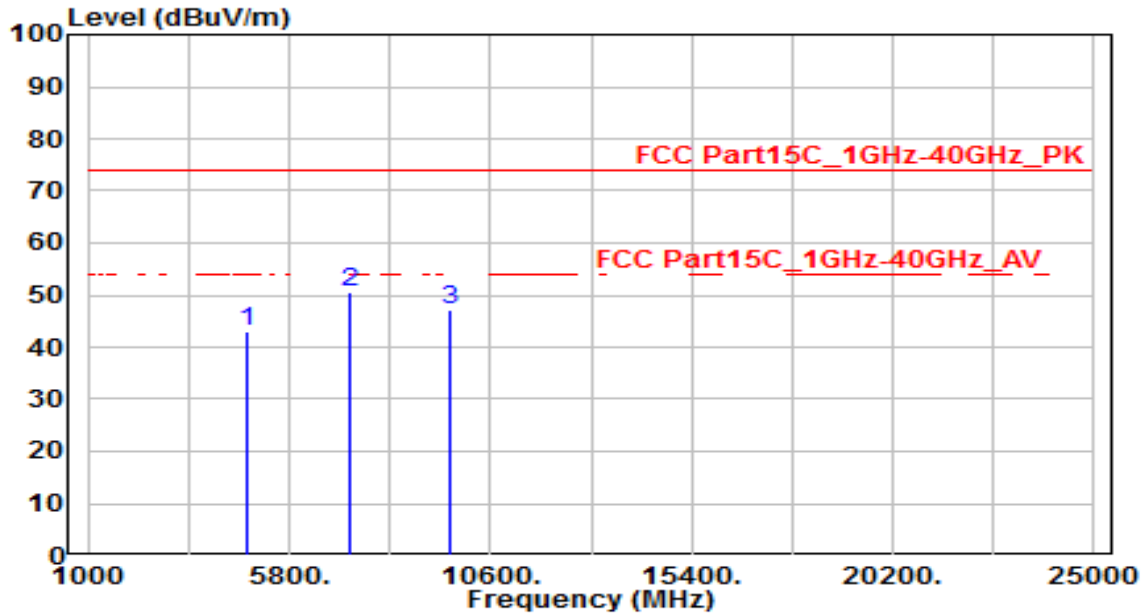


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	39.52	3.33	42.85	-31.15	74.00	150	400	Peak
2	* 7236.000	39.70	10.97	50.67	-23.33	74.00	150	400	Peak
3	9648.000	32.52	14.70	47.22	-26.78	74.00	150	400	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Opus XL	Date of Test	2020-08-06
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /55%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11b_TX_CH 1_ANT 0	Test Voltage	AC 120V/60Hz

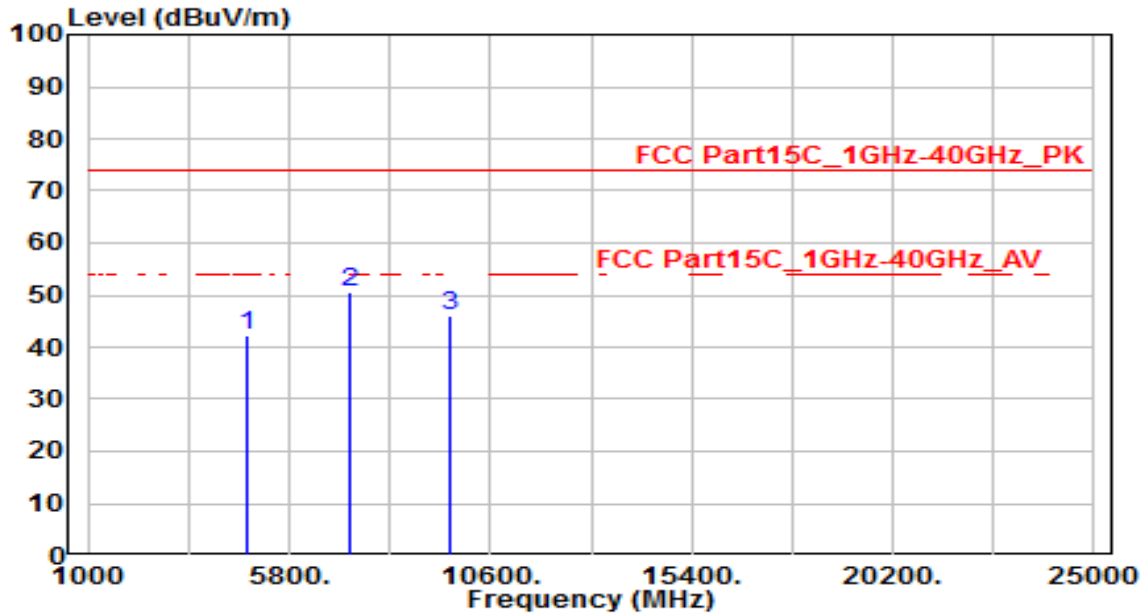


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	38.97	3.33	42.29	-31.71	74.00	150	400	Peak
2	* 7236.000	39.61	10.97	50.58	-23.42	74.00	150	400	Peak
3	9648.000	31.17	14.70	45.87	-28.13	74.00	150	400	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Opus XL	Date of Test	2020-08-06
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /55%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11b_TX_CH 6_ANT 0	Test Voltage	AC 120V/60Hz

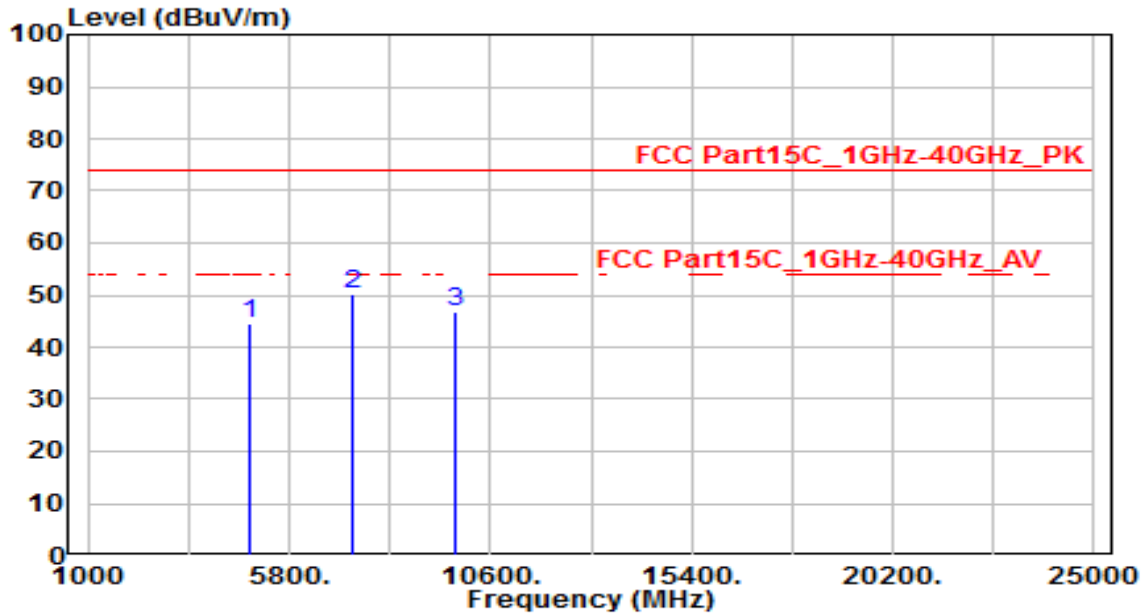


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	41.02	3.45	44.47	-29.53	74.00	150	400	Peak
2	* 7311.000	38.86	11.18	50.04	-23.96	74.00	150	400	Peak
3	9748.000	32.00	14.89	46.89	-27.11	74.00	150	400	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Opus XL	Date of Test	2020-08-06
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /55%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11b_TX_CH 6_ANT 0	Test Voltage	AC 120V/60Hz

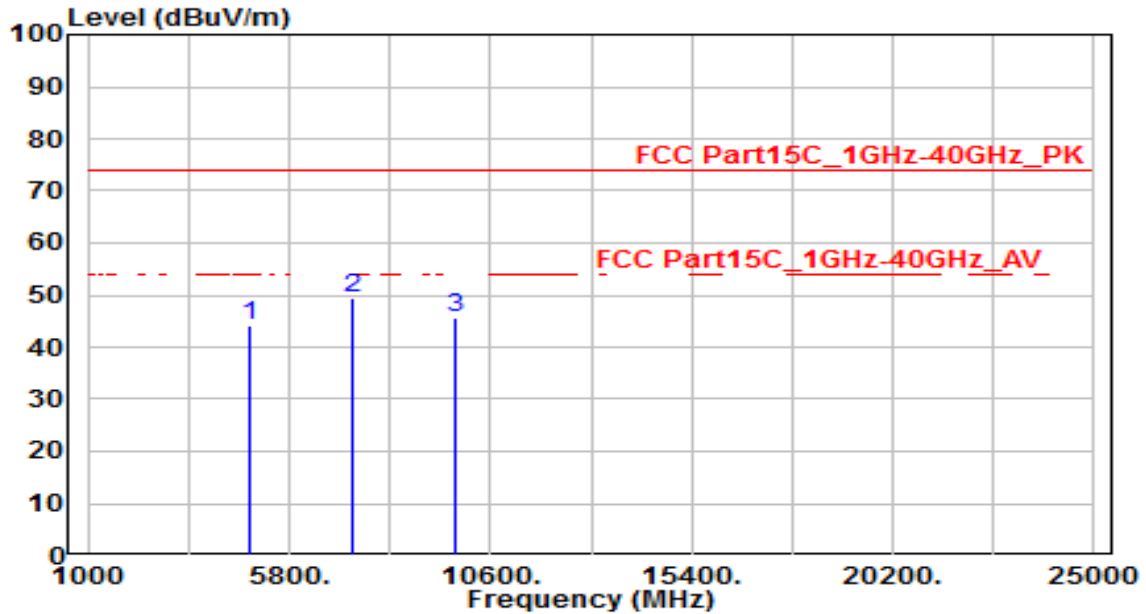


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	40.57	3.45	44.02	-29.98	74.00	150	400	Peak
2	* 7311.000	38.43	11.18	49.61	-24.39	74.00	150	400	Peak
3	9748.000	30.96	14.89	45.85	-28.15	74.00	150	400	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Opus XL	Date of Test	2020-08-06
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /55%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11b_TX_CH 11_ANT 0	Test Voltage	AC 120V/60Hz

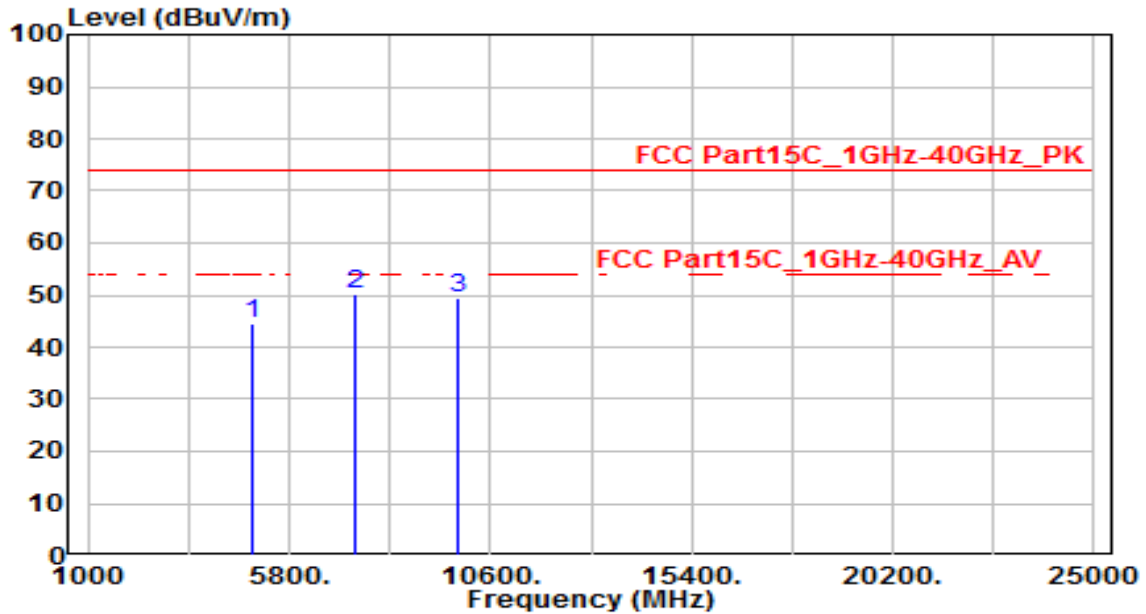


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	40.91	3.57	44.48	-29.52	74.00	150	400	Peak
2	* 7386.000	38.96	11.39	50.35	-23.65	74.00	150	400	Peak
3	9848.000	34.19	15.07	49.26	-24.74	74.00	150	400	Peak

Note:

1. " *" means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Opus XL	Date of Test	2020-08-06
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /55%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11b_TX_CH 11_ANT 0	Test Voltage	AC 120V/60Hz

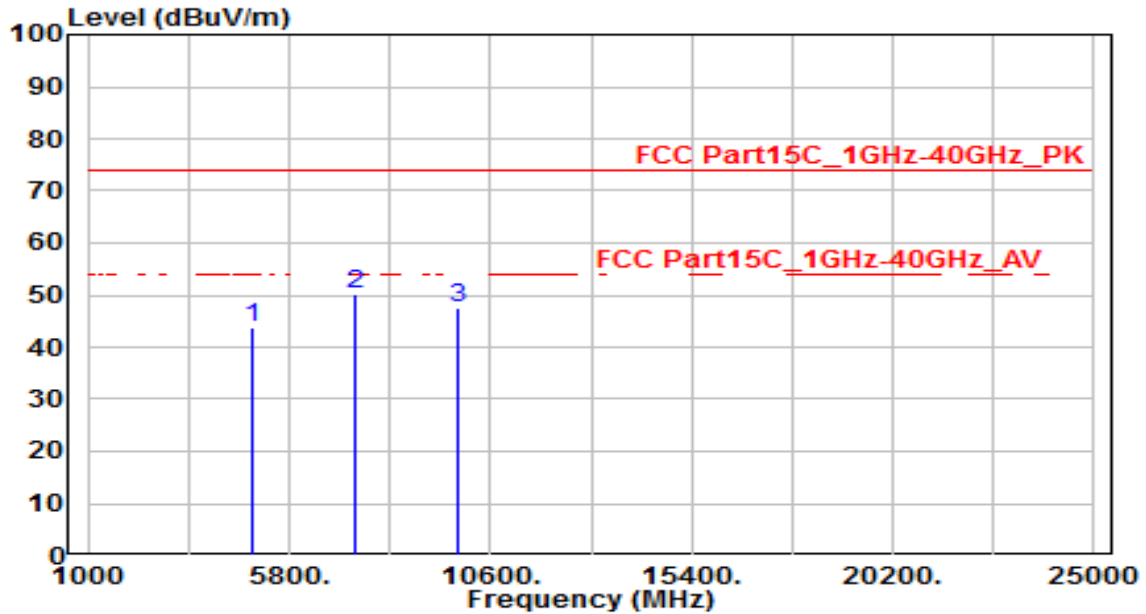


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	40.27	3.57	43.84	-30.16	74.00	150	400	Peak
2	* 7386.000	38.63	11.39	50.02	-23.98	74.00	150	400	Peak
3	9848.000	32.61	15.07	47.68	-26.32	74.00	150	400	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Opus XL	Date of Test	2020-08-06
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /55%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11g_TX_CH 1_ANT 0	Test Voltage	AC 120V/60Hz

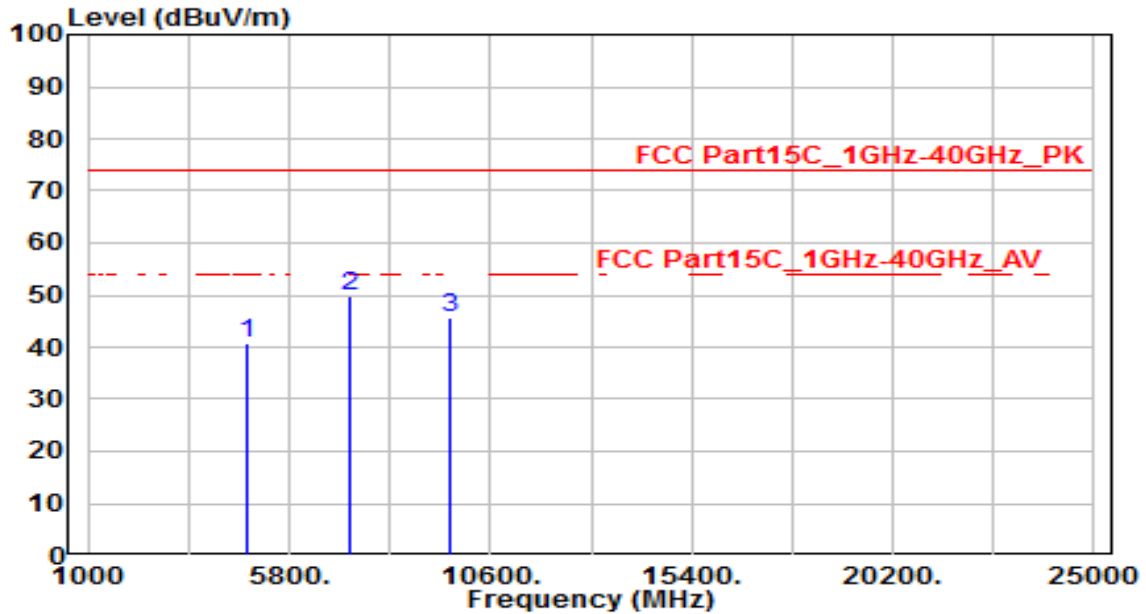


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	37.57	3.33	40.90	-33.10	74.00	150	400	Peak
2	* 7236.000	38.86	10.97	49.83	-24.17	74.00	150	400	Peak
3	9648.000	31.09	14.70	45.79	-28.21	74.00	150	400	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Opus XL	Date of Test	2020-08-06
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /55%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11g_TX_CH 1_ANT 0	Test Voltage	AC 120V/60Hz

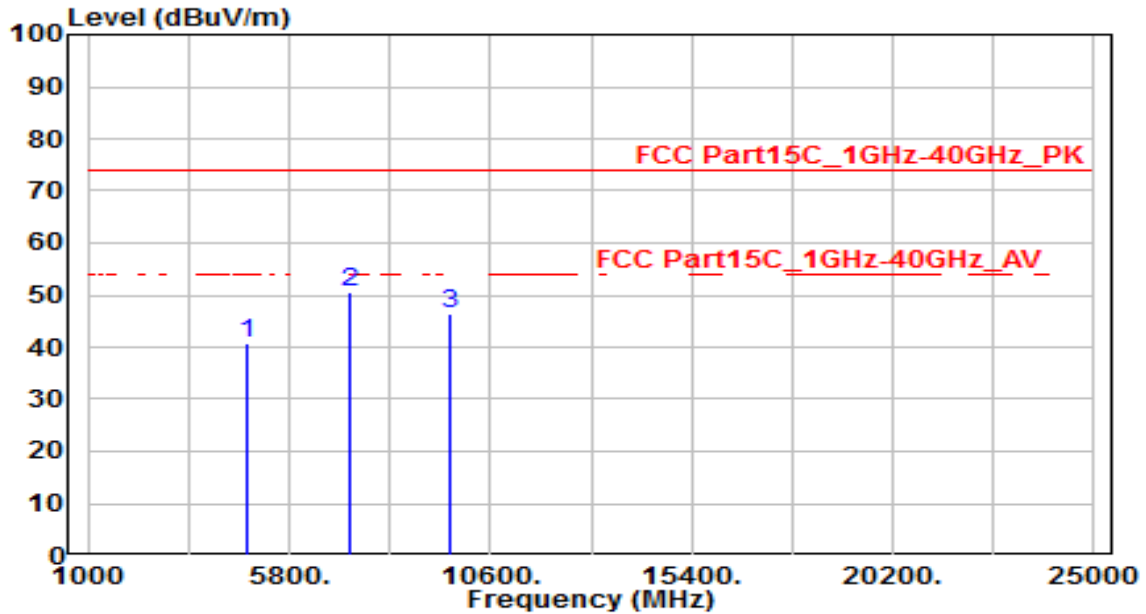


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	37.45	3.33	40.77	-33.23	74.00	150	400	Peak
2	* 7236.000	39.49	10.97	50.45	-23.55	74.00	150	400	Peak
3	9648.000	31.76	14.70	46.46	-27.54	74.00	150	400	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Opus XL	Date of Test	2020-08-06
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /55%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11g_TX_CH 6_ANT 0	Test Voltage	AC 120V/60Hz

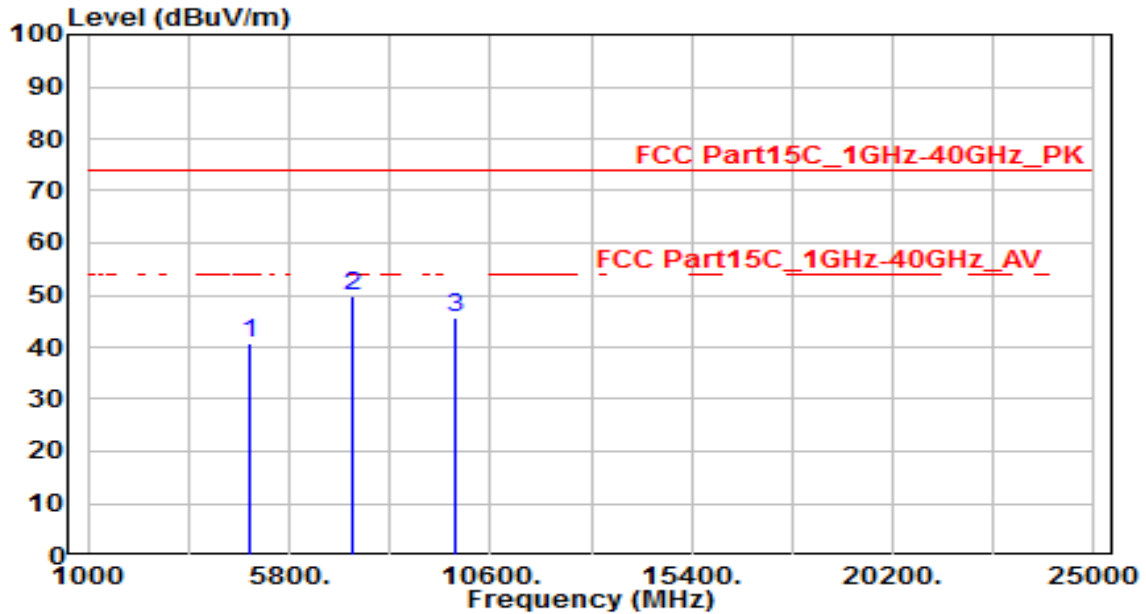


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	37.46	3.45	40.91	-33.09	74.00	150	400	Peak
2	* 7311.000	38.81	11.18	49.99	-24.01	74.00	150	400	Peak
3	9748.000	30.73	14.89	45.62	-28.38	74.00	150	400	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Opus XL	Date of Test	2020-08-06
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /55%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11g_TX_CH 6_ANT 0	Test Voltage	AC 120V/60Hz

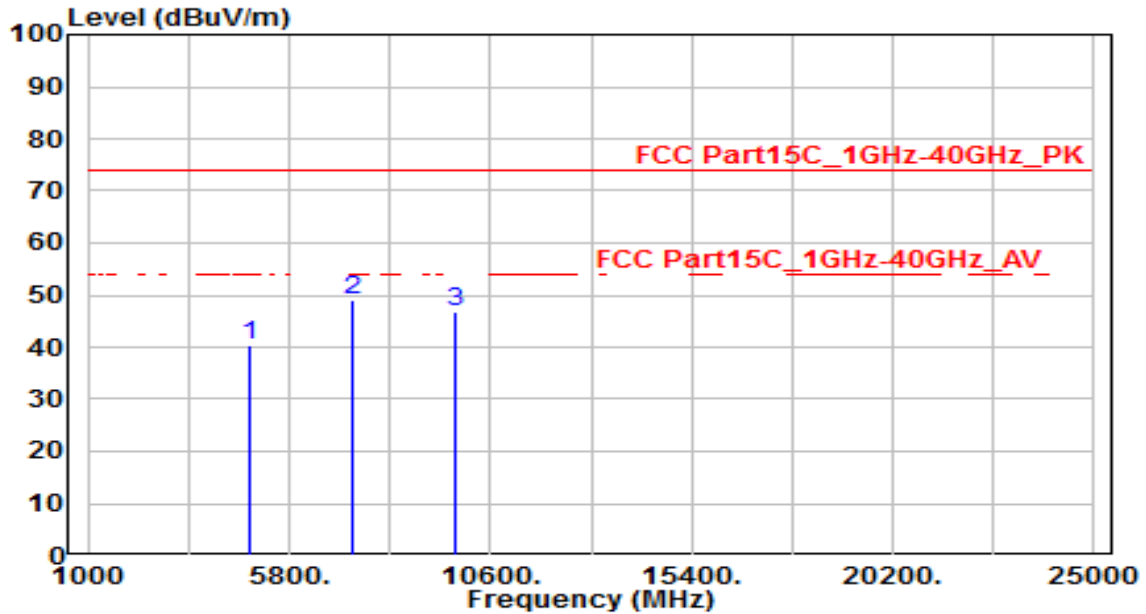


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	36.97	3.45	40.41	-33.59	74.00	150	400	Peak
2	* 7311.000	37.90	11.18	49.08	-24.92	74.00	150	400	Peak
3	9748.000	31.98	14.89	46.87	-27.13	74.00	150	400	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Opus XL	Date of Test	2020-08-06
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /55%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11g_TX_CH 11_ANT 0	Test Voltage	AC 120V/60Hz

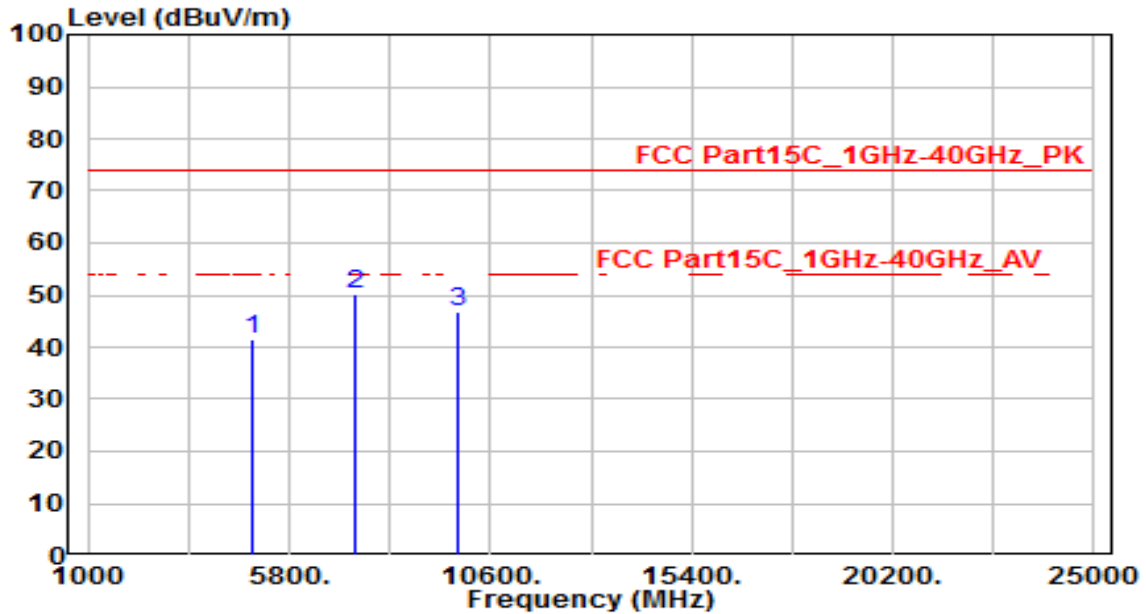


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	37.85	3.57	41.42	-32.58	74.00	150	400	Peak
2	* 7386.000	38.66	11.39	50.05	-23.95	74.00	150	400	Peak
3	9848.000	31.72	15.07	46.80	-27.20	74.00	150	400	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Opus XL	Date of Test	2020-08-06
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /55%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11g_TX_CH 11_ANT 0	Test Voltage	AC 120V/60Hz

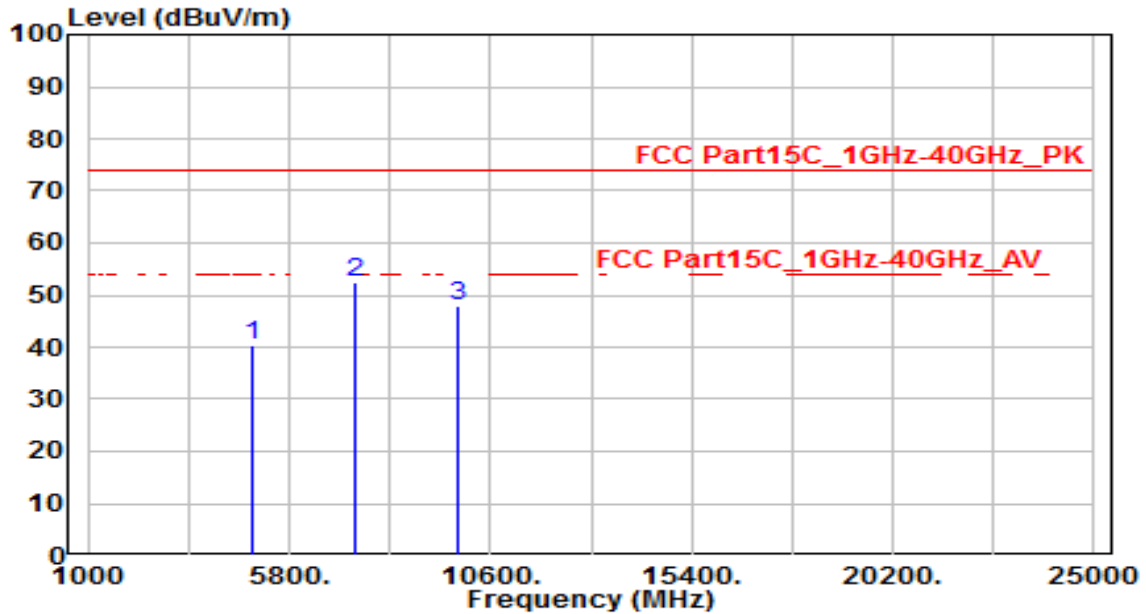


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	36.96	3.57	40.53	-33.47	74.00	150	400	Peak
2	* 7386.000	40.93	11.39	52.32	-21.68	74.00	150	400	Peak
3	9848.000	32.79	15.07	47.86	-26.14	74.00	150	400	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Opus XL	Date of Test	2020-08-06
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /55%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0	Test Voltage	AC 120V/60Hz

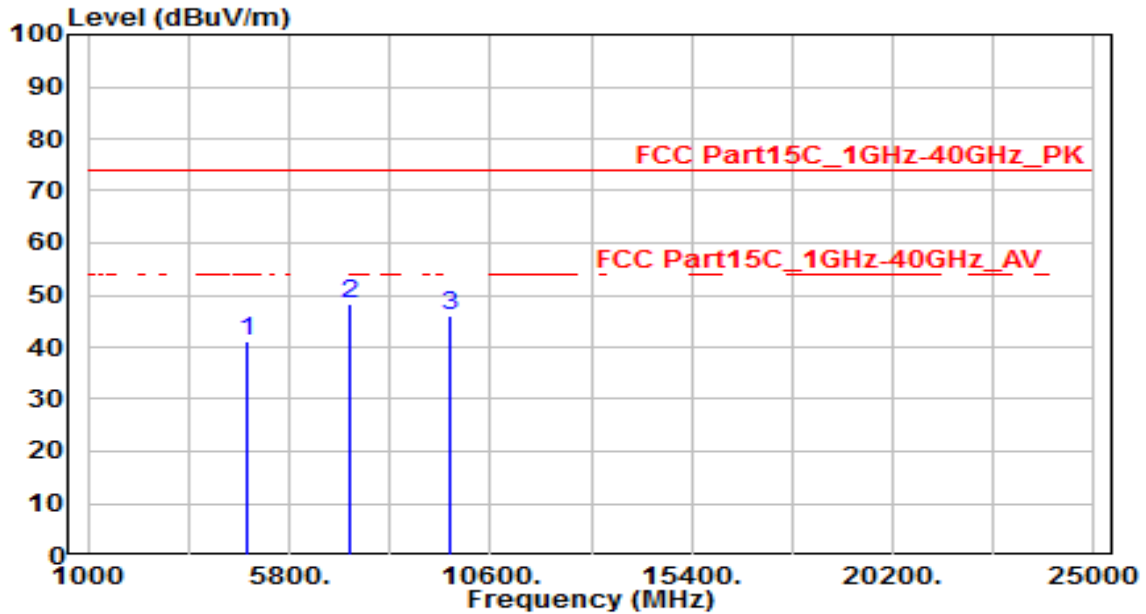


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	37.74	3.33	41.06	-32.94	74.00	150	400	Peak
2	* 7236.000	37.23	10.97	48.20	-25.80	74.00	150	400	Peak
3	9648.000	31.20	14.70	45.90	-28.10	74.00	150	400	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Opus XL	Date of Test	2020-08-06
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /55%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0	Test Voltage	AC 120V/60Hz

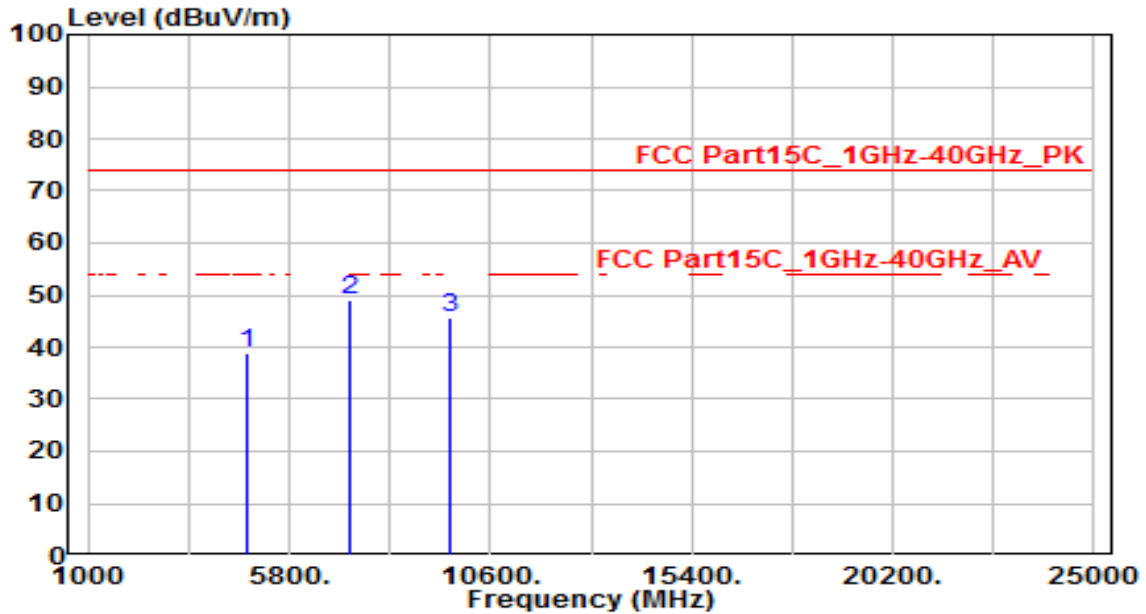


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	35.69	3.33	39.02	-34.98	74.00	150	400	Peak
2	* 7236.000	38.22	10.97	49.19	-24.81	74.00	150	400	Peak
3	9648.000	31.09	14.70	45.79	-28.21	74.00	150	400	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Opus XL	Date of Test	2020-08-06
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /55%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0	Test Voltage	AC 120V/60Hz

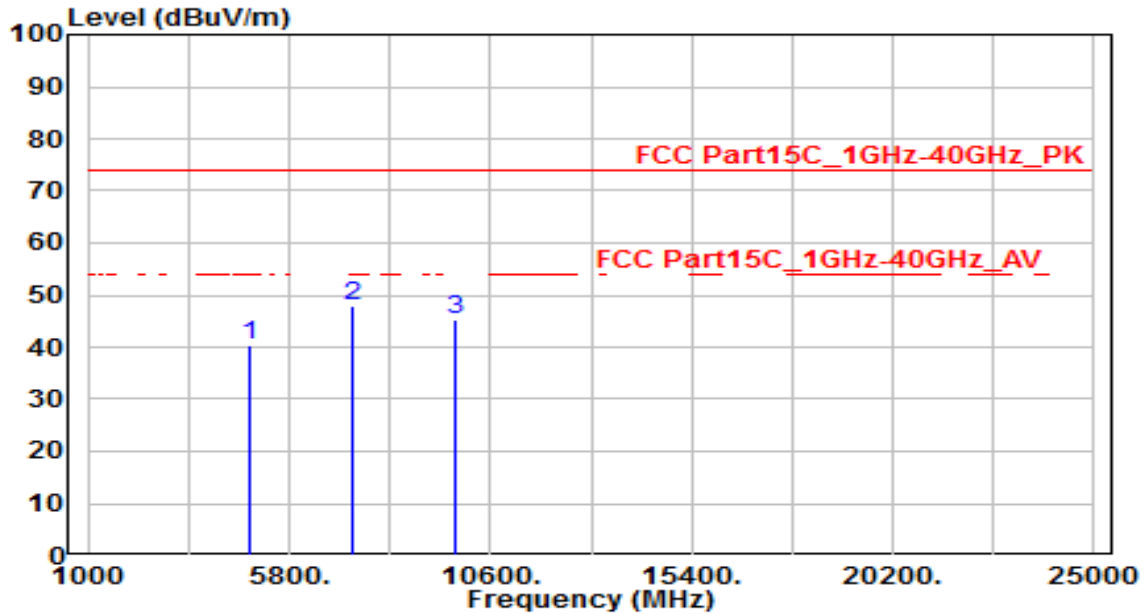


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	36.96	3.45	40.40	-33.60	74.00	150	400	Peak
2	* 7311.000	36.76	11.18	47.94	-26.06	74.00	150	400	Peak
3	9748.000	30.36	14.89	45.24	-28.76	74.00	150	400	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Opus XL	Date of Test	2020-08-06
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /55%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0	Test Voltage	AC 120V/60Hz

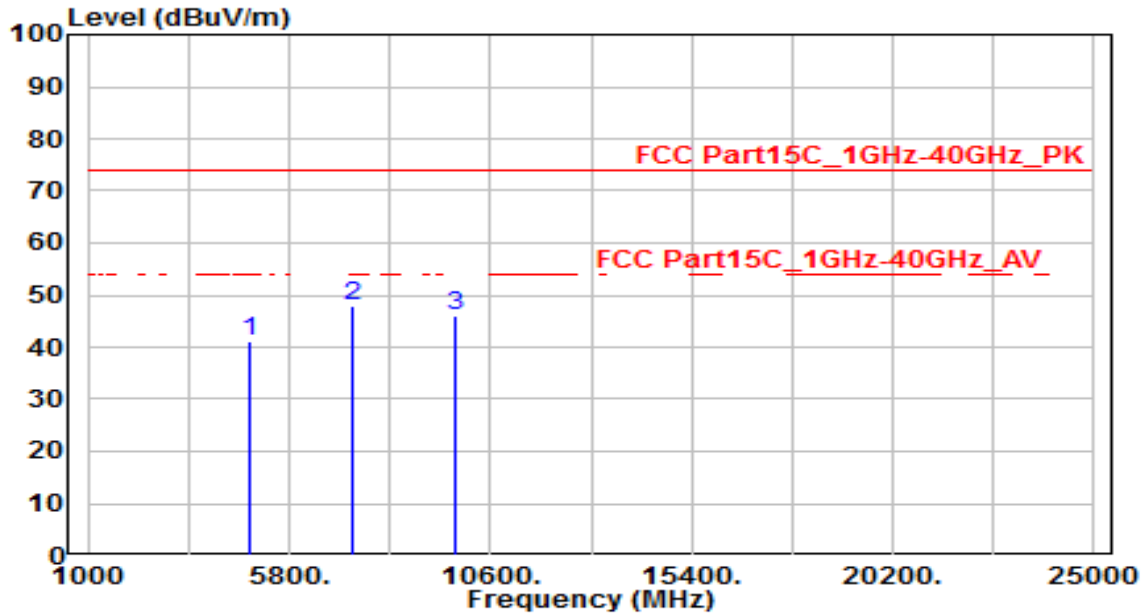


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	37.69	3.45	41.13	-32.87	74.00	150	400	Peak
2	* 7311.000	36.65	11.18	47.83	-26.17	74.00	150	400	Peak
3	9748.000	31.04	14.89	45.92	-28.08	74.00	150	400	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Opus XL	Date of Test	2020-08-06
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /55%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0	Test Voltage	AC 120V/60Hz

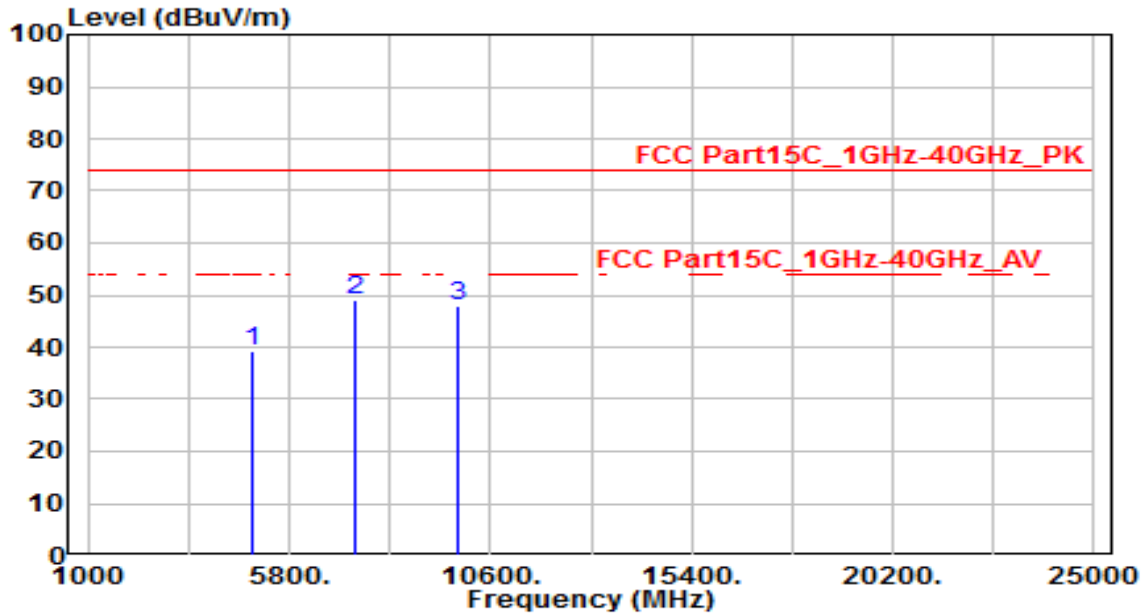


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	35.60	3.57	39.17	-34.83	74.00	150	400	Peak
2	* 7386.000	37.49	11.39	48.88	-25.12	74.00	150	400	Peak
3	9848.000	33.00	15.07	48.08	-25.93	74.00	150	400	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Opus XL	Date of Test	2020-08-06
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /55%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0	Test Voltage	AC 120V/60Hz

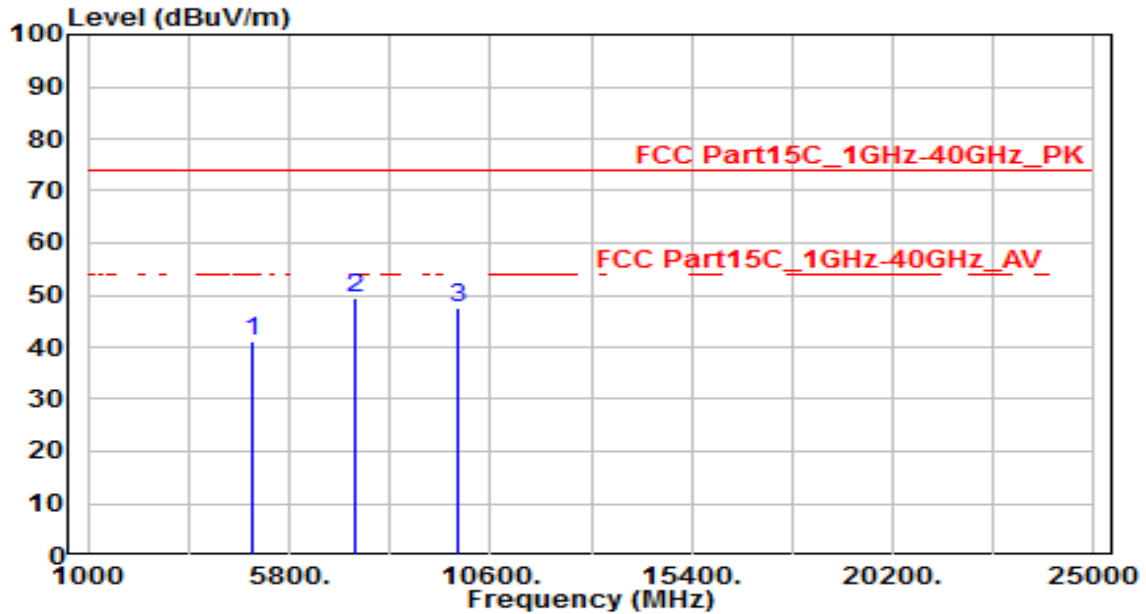


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	37.73	3.57	41.30	-32.70	74.00	150	400	Peak
2	* 7386.000	37.86	11.39	49.25	-24.75	74.00	150	400	Peak
3	9848.000	32.50	15.07	47.57	-26.43	74.00	150	400	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Opus XL	Date of Test	2020-08-06
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /55%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0	Test Voltage	AC 120V/60Hz

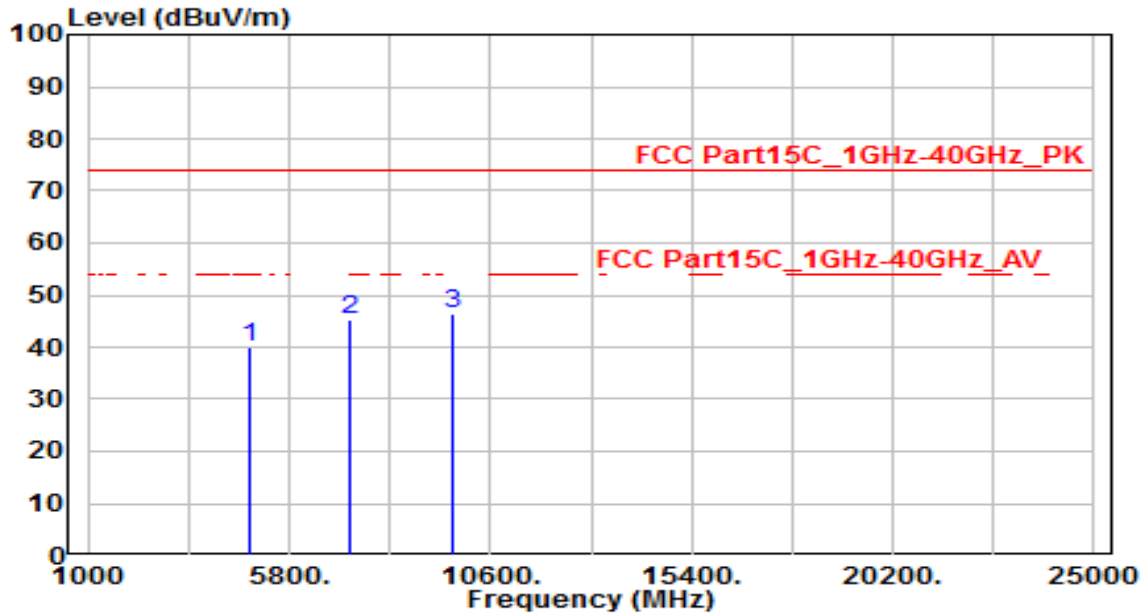


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.125	36.57	3.38	39.95	-34.05	74.00	150	400	Peak
2	7266.000	34.10	11.05	45.16	-28.84	74.00	150	400	Peak
3	* 9688.000	31.64	14.77	46.42	-27.58	74.00	150	400	Peak

Note:

1. " *" , means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Opus XL	Date of Test	2020-08-06
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /55%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0	Test Voltage	AC 120V/60Hz

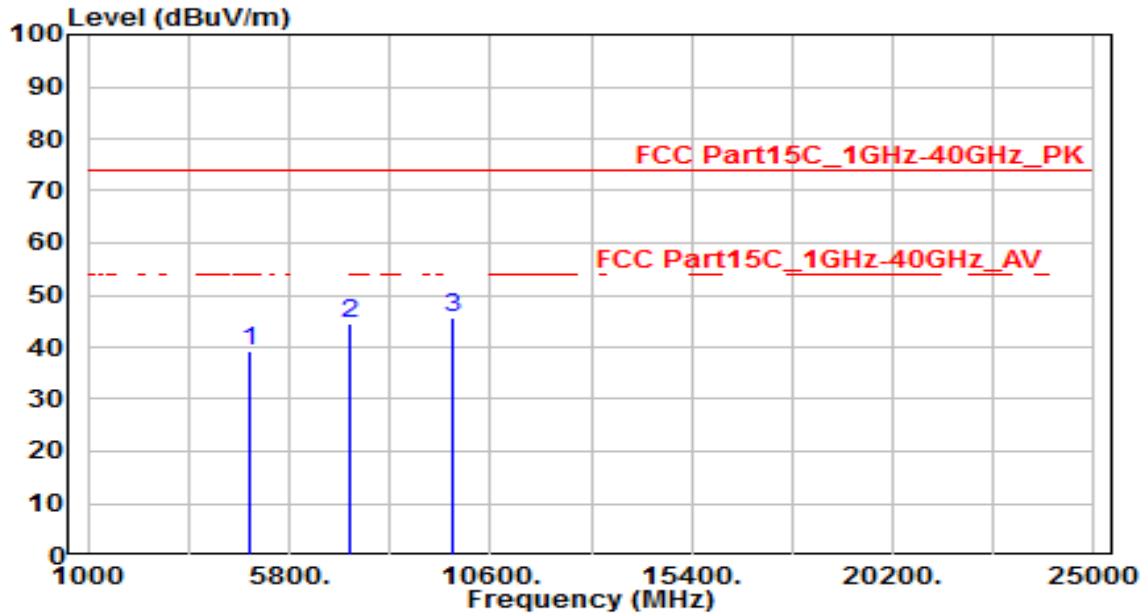


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	35.81	3.38	39.18	-34.82	74.00	150	400	Peak
2	7266.000	33.38	11.05	44.43	-29.57	74.00	150	400	Peak
3	* 9688.000	30.86	14.77	45.63	-28.37	74.00	150	400	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Opus XL	Date of Test	2020-08-06
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /55%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0	Test Voltage	AC 120V/60Hz

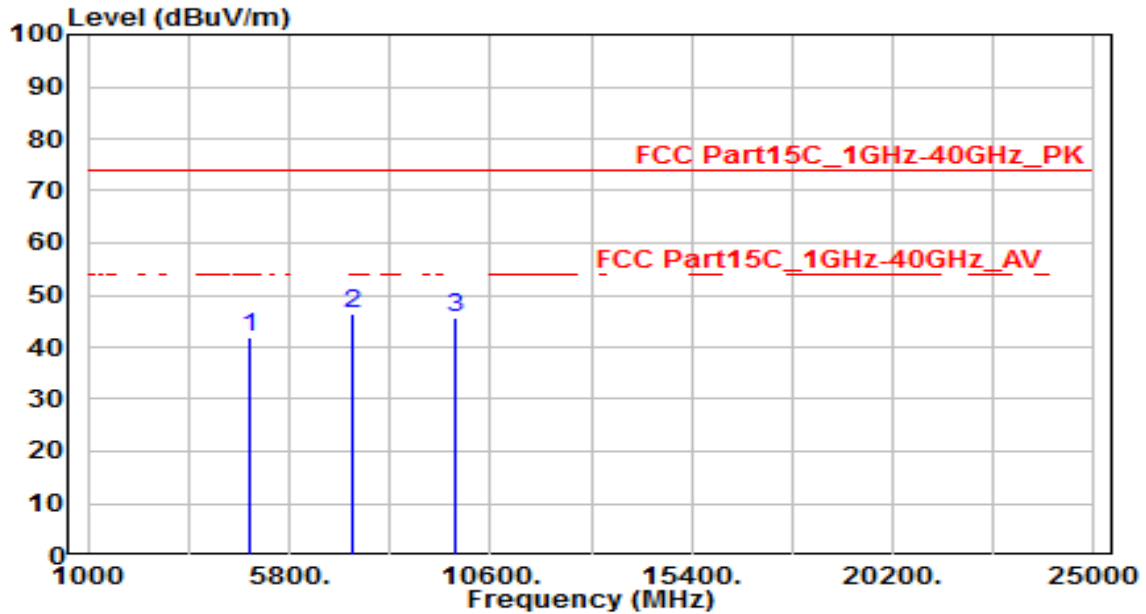


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	38.25	3.45	41.70	-32.30	74.00	150	400	Peak
2	* 7311.000	35.27	11.18	46.45	-27.55	74.00	150	400	Peak
3	9748.000	30.83	14.89	45.71	-28.29	74.00	150	400	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Opus XL	Date of Test	2020-08-06
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /55%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0	Test Voltage	AC 120V/60Hz

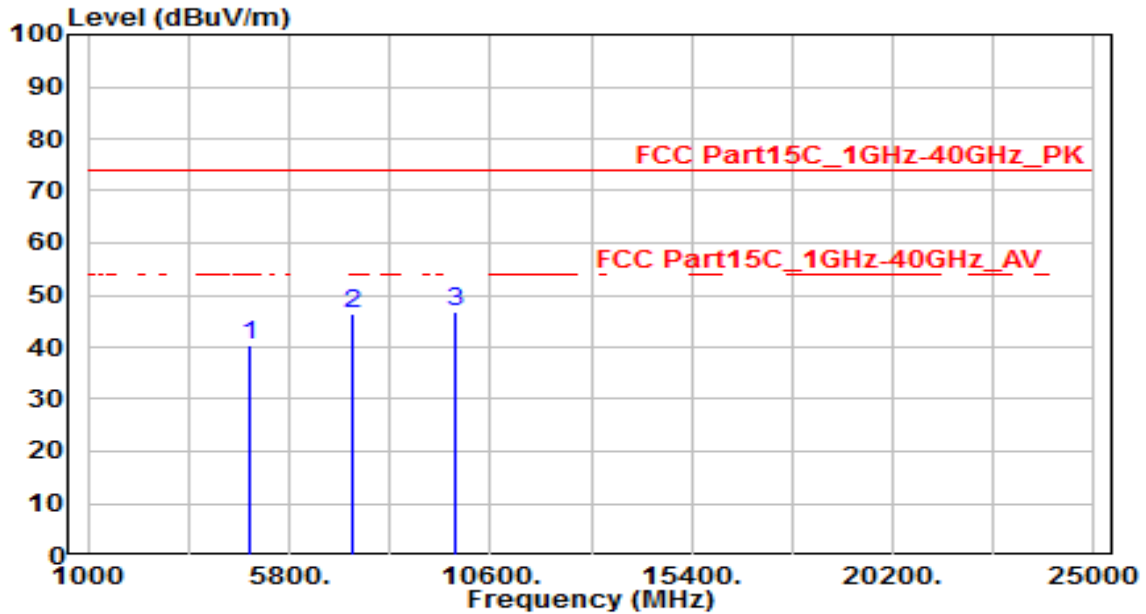


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	36.92	3.45	40.37	-33.63	74.00	150	400	Peak
2	7311.000	35.24	11.18	46.42	-27.58	74.00	150	400	Peak
3	* 9748.000	31.98	14.89	46.86	-27.14	74.00	150	400	Peak

Note:

1. " *" , means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Opus XL	Date of Test	2020-08-06
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /55%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0	Test Voltage	AC 120V/60Hz

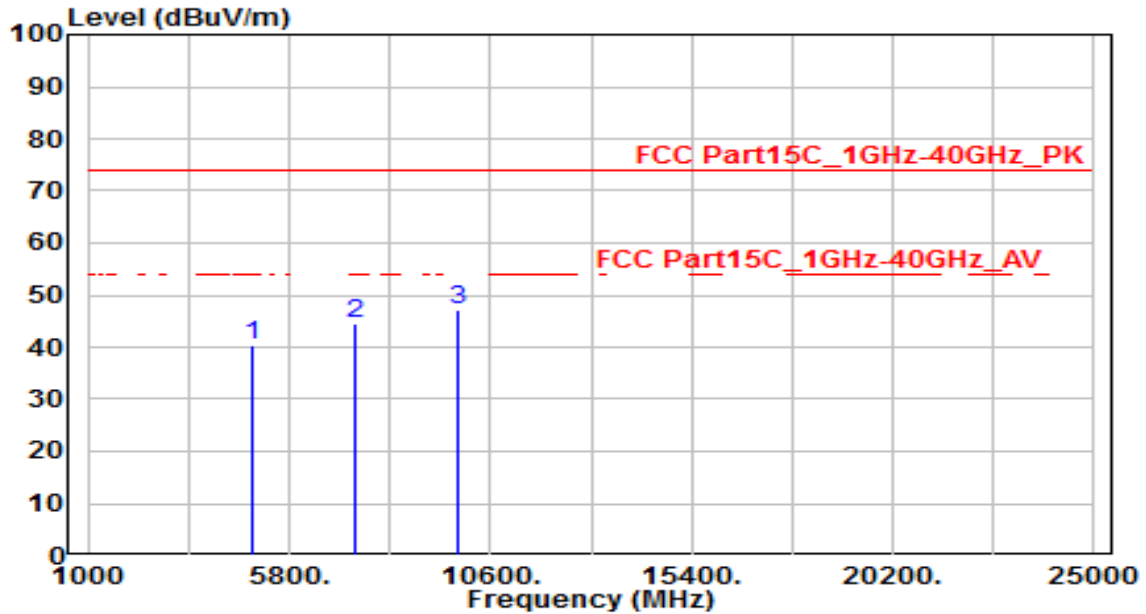


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4904.000	36.80	3.52	40.31	-33.69	74.00	150	400	Peak
2	7356.000	33.33	11.31	44.64	-29.36	74.00	150	400	Peak
3	* 9808.000	32.01	15.00	47.01	-26.99	74.00	150	400	Peak

Note:

1. " *" means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Opus XL	Date of Test	2020-08-06
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /55%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0	Test Voltage	AC 120V/60Hz

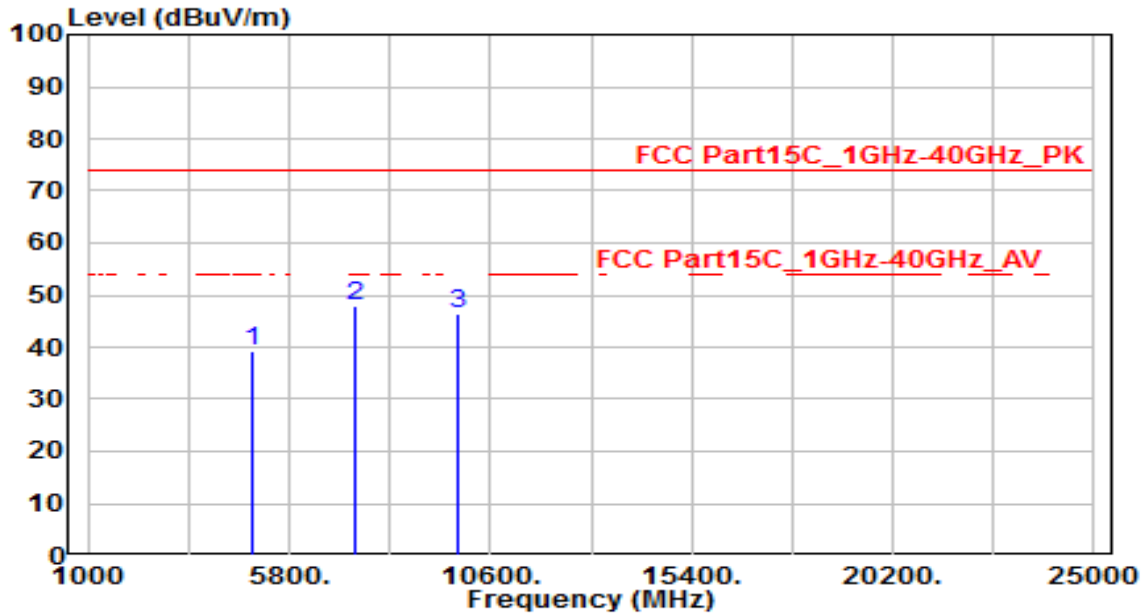

No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4904.000	35.91	3.52	39.43	-34.57	74.00	150	400	Peak
2	* 7356.000	36.49	11.31	47.80	-26.20	74.00	150	400	Peak
3	9808.000	31.59	15.00	46.59	-27.41	74.00	150	400	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.7. Radiated Restricted Band Edge Measurement

7.7.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [V/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 – 30	30	30
30 – 88	100	3
88 – 216	150	3
216 – 960	200	3
Above 960	500	3

7.7.2. Test Procedure Used

ANSI C63.10-2013 - Section 11.12.1

7.7.3. Test Setting

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = as specified in Table 1
3. VBW = 3 * RBW
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold

- Trace was allowed to stabilize

Table 1 - RBW as a function of frequency


Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000 MHz	1 MHz

Average Field Strength Measurements

- Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- RBW = 1MHz
- VBW $\geq 1/T$
- De As an alternative, the instrument may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some instruments require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to "Voltage" regardless of the display mode
- Detector = Peak
- Sweep time = auto
- Trace mode = max hold
- Allow max hold to run for at least 50 times (1/duty cycle) traces


7.7.4. Test Setup

1GHz ~ 18GHz Test Setup:

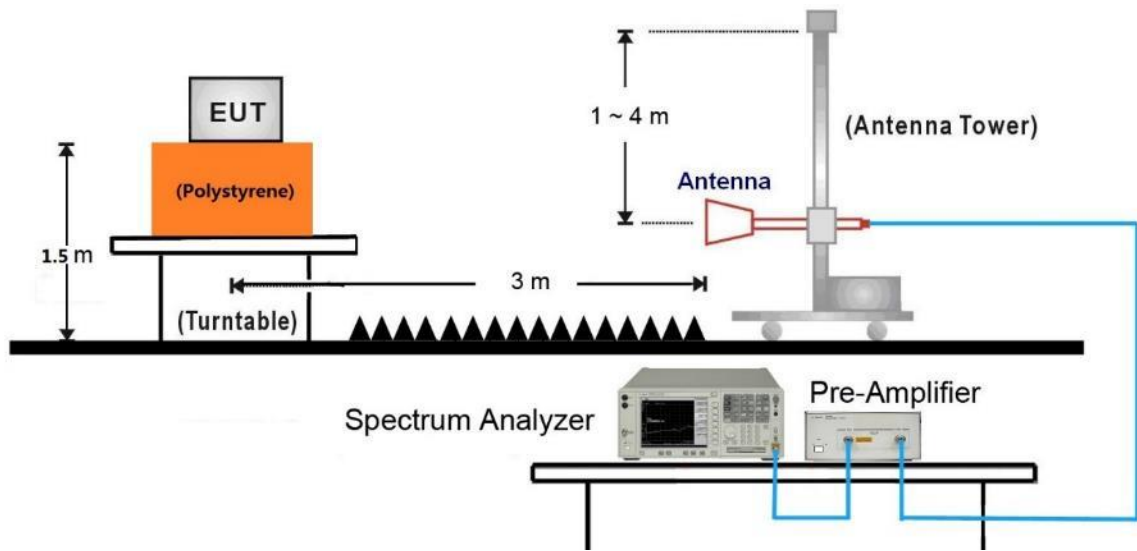

7.7.5. Test Result

EUT	Sonata XL	Date of Test	2020-08-05
Factor	BBHA 9120D	Temp. / Humidity	24°C /55%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11b_TX_CH 1_ANT 0	Test Voltage	AC 120V/60Hz

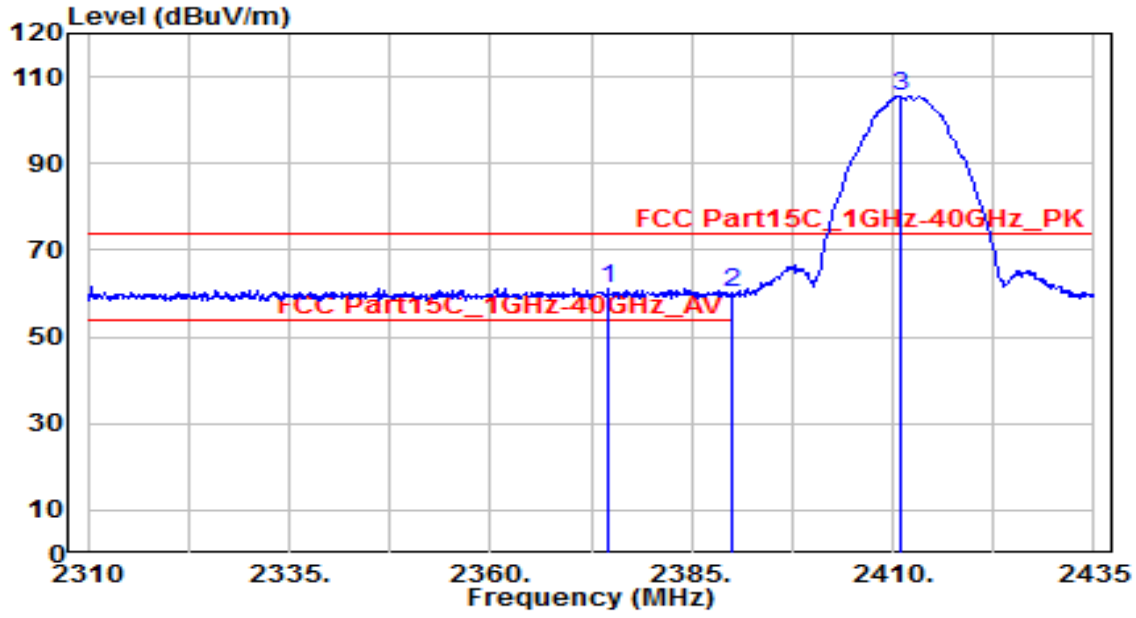


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2374.625	29.02	32.23	61.25	-12.75	74.00	190	10	Peak
2	2390.000	27.92	32.30	60.21	-13.79	74.00	190	10	Peak
3	2410.875	73.25	32.39	105.64	N/A	N/A	190	10	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Sonata XL	Date of Test	2020-08-05
Factor	BBHA 9120D	Temp. / Humidity	24°C /55%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11b_TX_CH 1_ANT 0	Test Voltage	AC 120V/60Hz

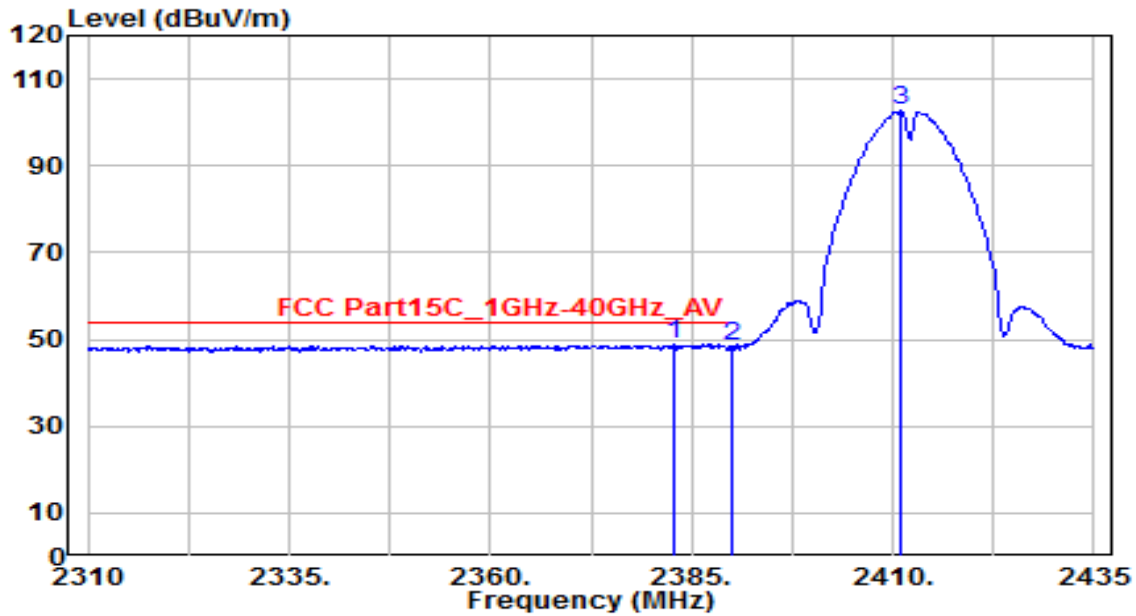


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	2382.875	16.48	32.26	48.75	-5.25	54.00	190	10	Average
2		2390.000	16.02	32.30	48.32	-5.68	54.00	190	10	Average
3		2411.000	70.32	32.39	102.71	N/A	N/A	190	10	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Sonata XL	Date of Test	2020-08-05
Factor	BBHA 9120D	Temp. / Humidity	24°C /55%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11b_TX_CH 1_ANT 0	Test Voltage	AC 120V/60Hz

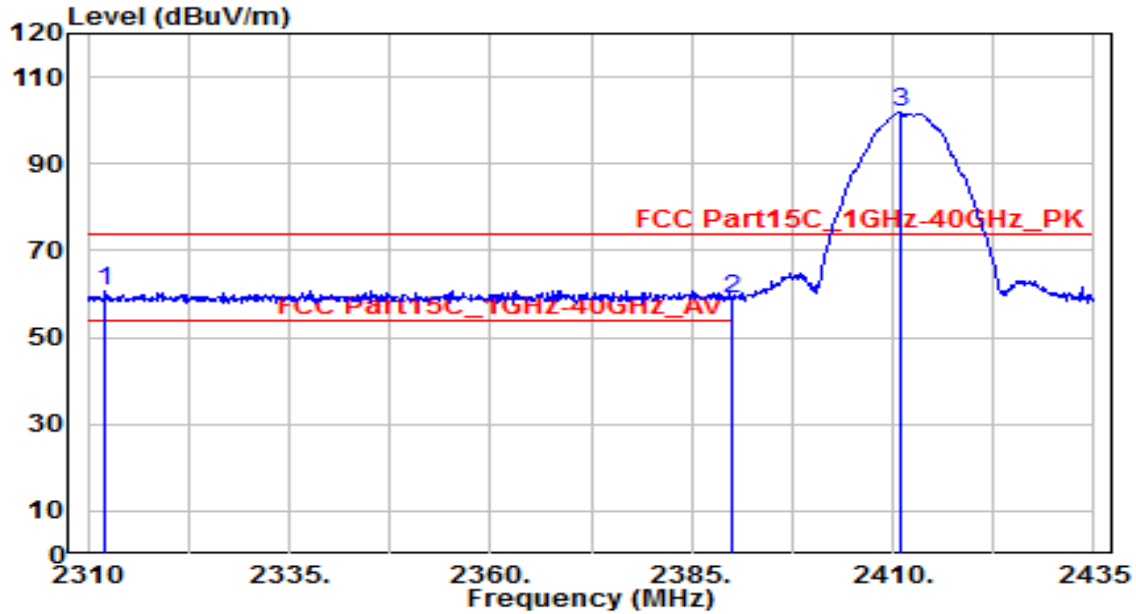


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2312.125	28.94	31.95	60.89	-13.11	74.00	105	265	Peak
2	2390.000	26.53	32.30	58.82	-15.18	74.00	105	265	Peak
3	2410.875	69.43	32.39	101.82	N/A	N/A	105	265	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Sonata XL	Date of Test	2020-08-05
Factor	BBHA 9120D	Temp. / Humidity	24°C /55%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11b_TX_CH 1_ANT 0	Test Voltage	AC 120V/60Hz

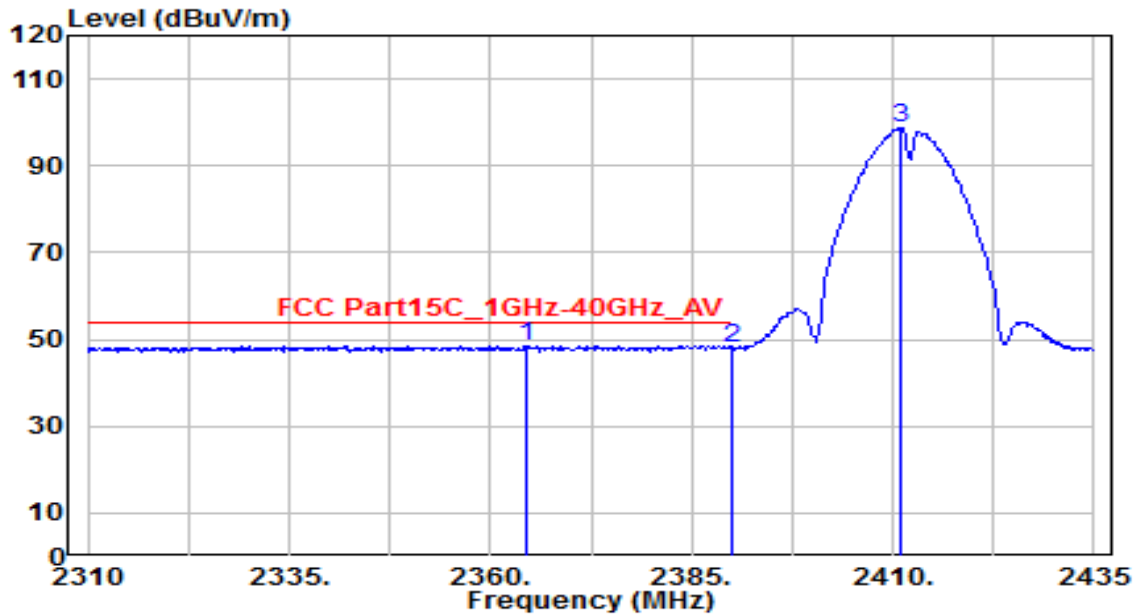


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	2364.375	16.32	32.18	48.51	-5.49	54.00	105	265	Average
2		2390.000	15.73	32.30	48.02	-5.98	54.00	105	265	Average
3		2411.000	66.49	32.39	98.87	N/A	N/A	105	265	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Sonata XL	Date of Test	2020-08-05
Factor	BBHA 9120D	Temp. / Humidity	24°C /55%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11b_TX_CH 11_ANT 0	Test Voltage	AC 120V/60Hz

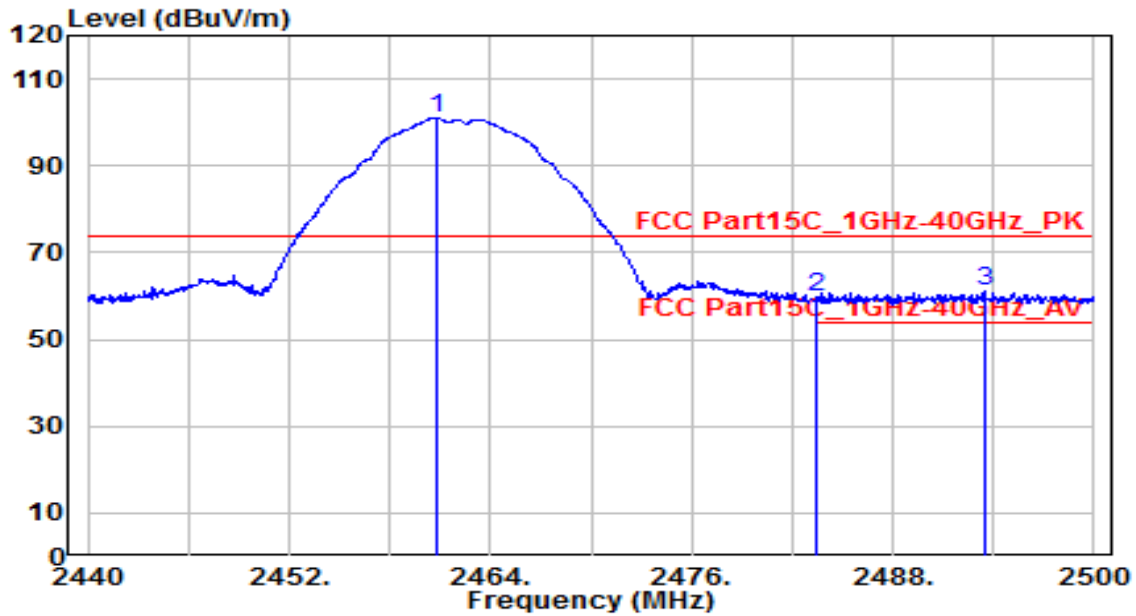


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.760	68.34	32.61	100.95	N/A	N/A	150	5	Peak
2	2483.500	26.92	32.71	59.63	-14.37	74.00	150	5	Peak
3	* 2493.460	28.58	32.75	61.33	-12.67	74.00	150	5	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Sonata XL	Date of Test	2020-08-05
Factor	BBHA 9120D	Temp. / Humidity	24°C /55%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11b_TX_CH 11_ANT 0	Test Voltage	AC 120V/60Hz

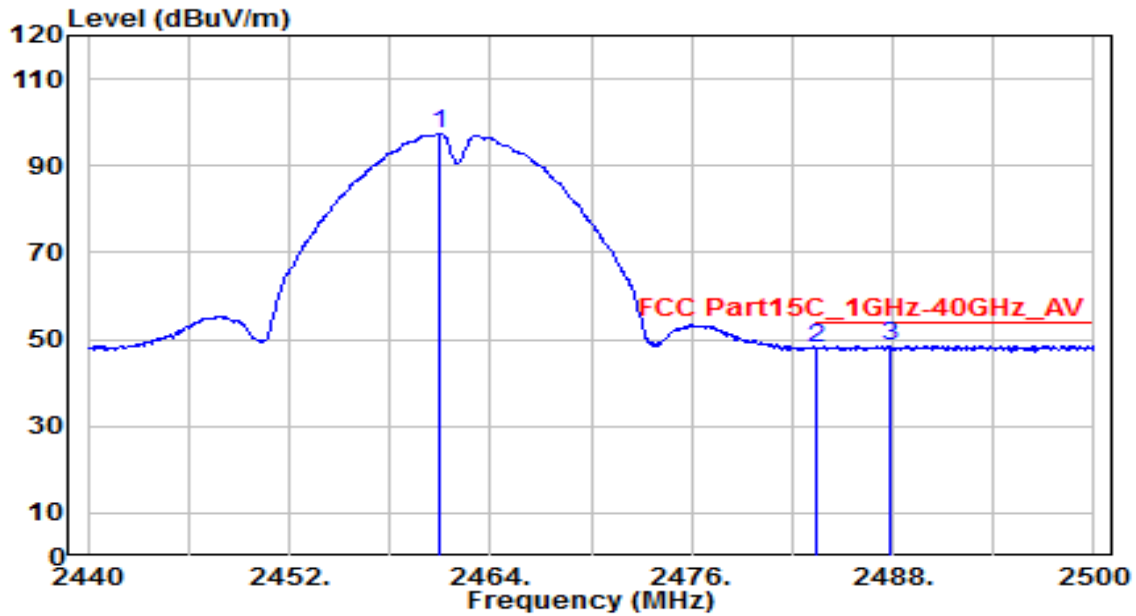


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.940	64.93	32.61	97.54	N/A	N/A	150	5	Average
2	2483.500	15.19	32.71	47.90	-6.10	54.00	150	5	Average
3	* 2487.820	15.85	32.73	48.58	-5.42	54.00	150	5	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Sonata XL	Date of Test	2020-08-05
Factor	BBHA 9120D	Temp. / Humidity	24°C /55%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11b_TX_CH 11_ANT 0	Test Voltage	AC 120V/60Hz

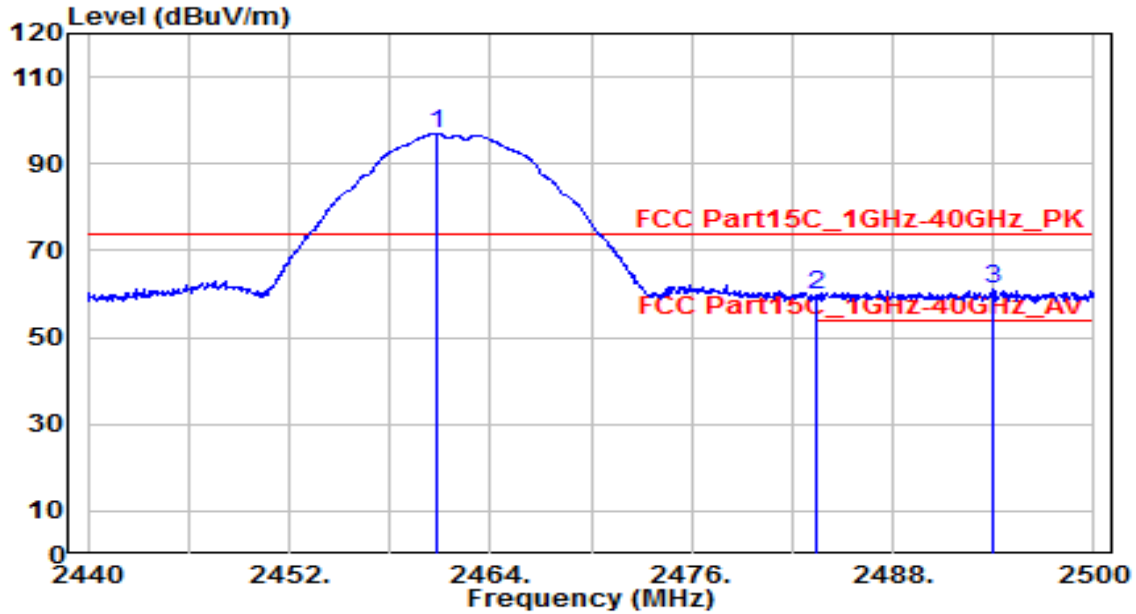


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.820	64.34	32.61	96.95	N/A	N/A	120	400	Peak
2	2483.500	27.00	32.71	59.70	-14.30	74.00	120	400	Peak
3	* 2494.000	28.20	32.75	60.95	-13.05	74.00	120	400	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Sonata XL	Date of Test	2020-08-05
Factor	BBHA 9120D	Temp. / Humidity	24°C /55%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11b_TX_CH 11_ANT 0	Test Voltage	AC 120V/60Hz

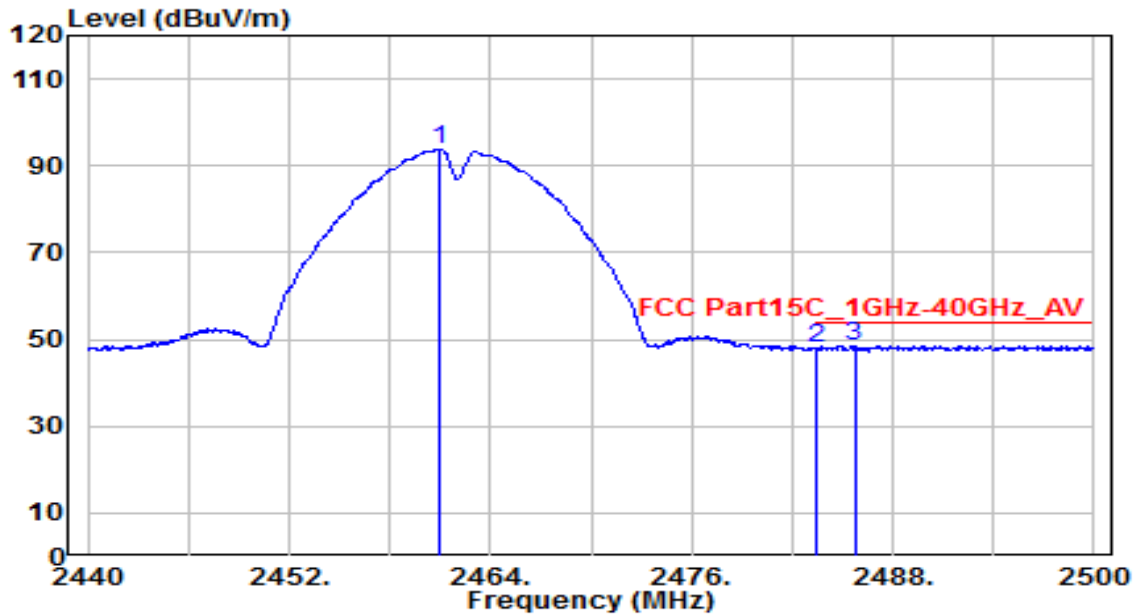


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.940	61.27	32.61	93.88	N/A	N/A	120	400	Average
2	2483.500	15.14	32.71	47.85	-6.15	54.00	120	400	Average
3	* 2485.720	15.87	32.72	48.58	-5.42	54.00	120	400	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Sonata XL	Date of Test	2020-08-05
Factor	BBHA 9120D	Temp. / Humidity	24°C /55%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11g_TX_CH 1_ANT 0	Test Voltage	AC 120V/60Hz

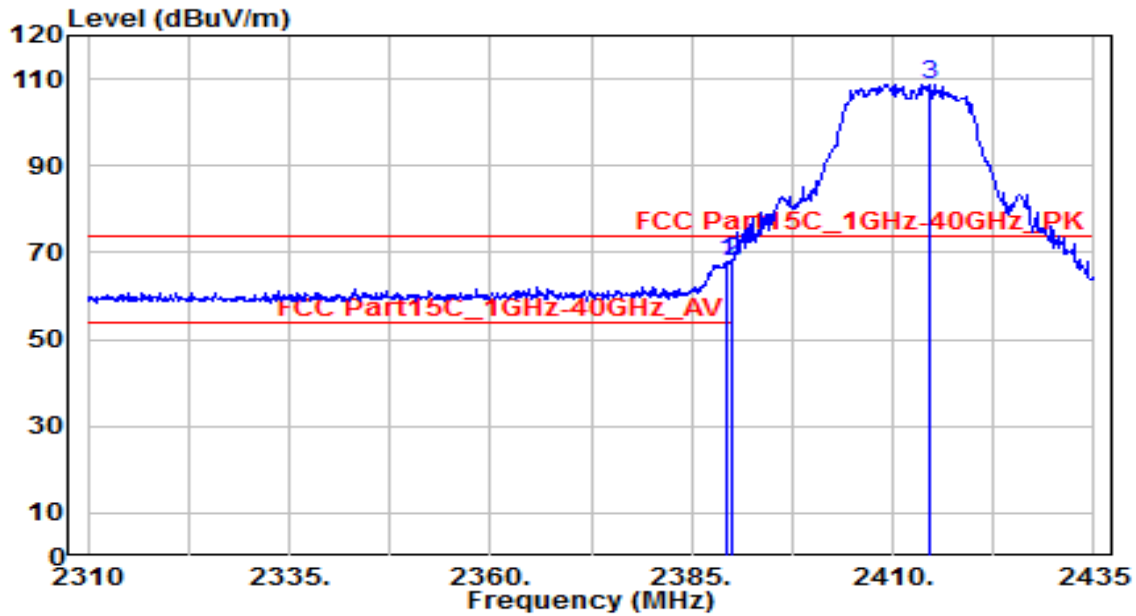


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2389.250	35.49	32.29	67.78	-6.22	74.00	150	15	Peak
2	* 2390.000	35.63	32.30	67.92	-6.08	74.00	150	15	Peak
3	2414.625	76.42	32.40	108.83	N/A	N/A	150	15	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Sonata XL	Date of Test	2020-08-05
Factor	BBHA 9120D	Temp. / Humidity	24°C /55%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11g_TX_CH 1_ANT 0	Test Voltage	AC 120V/60Hz

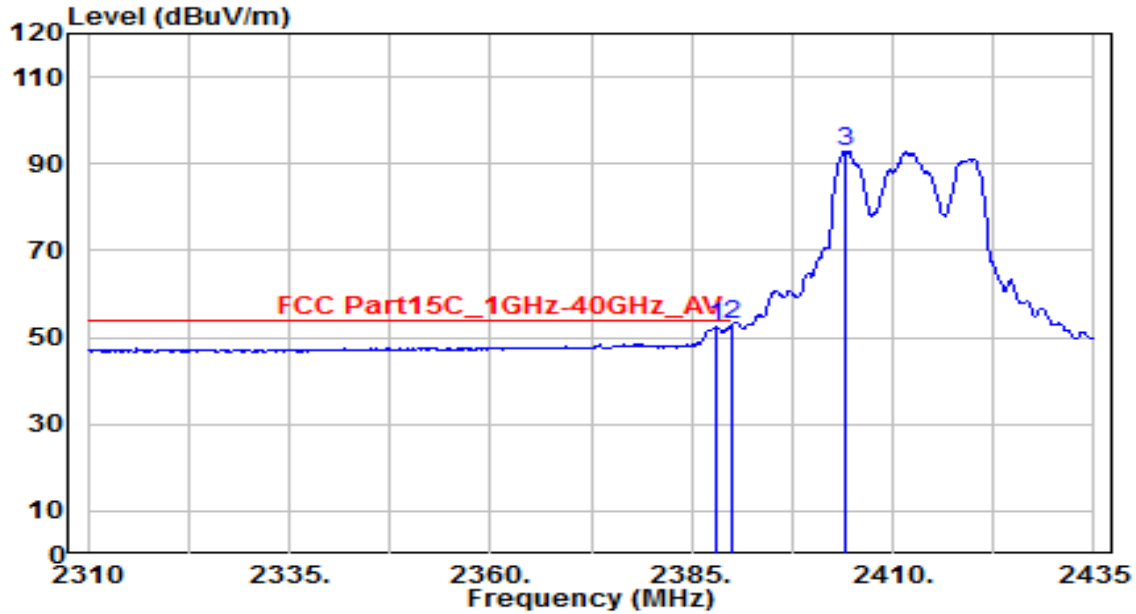


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.125	20.33	32.29	52.61	-1.39	54.00	150	15	Average
2	* 2390.000	20.56	32.30	52.86	-1.14	54.00	150	15	Average
3	2404.000	60.46	32.36	92.82	N/A	N/A	150	15	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Sonata XL	Date of Test	2020-08-05
Factor	BBHA 9120D	Temp. / Humidity	24°C /55%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11g_TX_CH 1_ANT 0	Test Voltage	AC 120V/60Hz

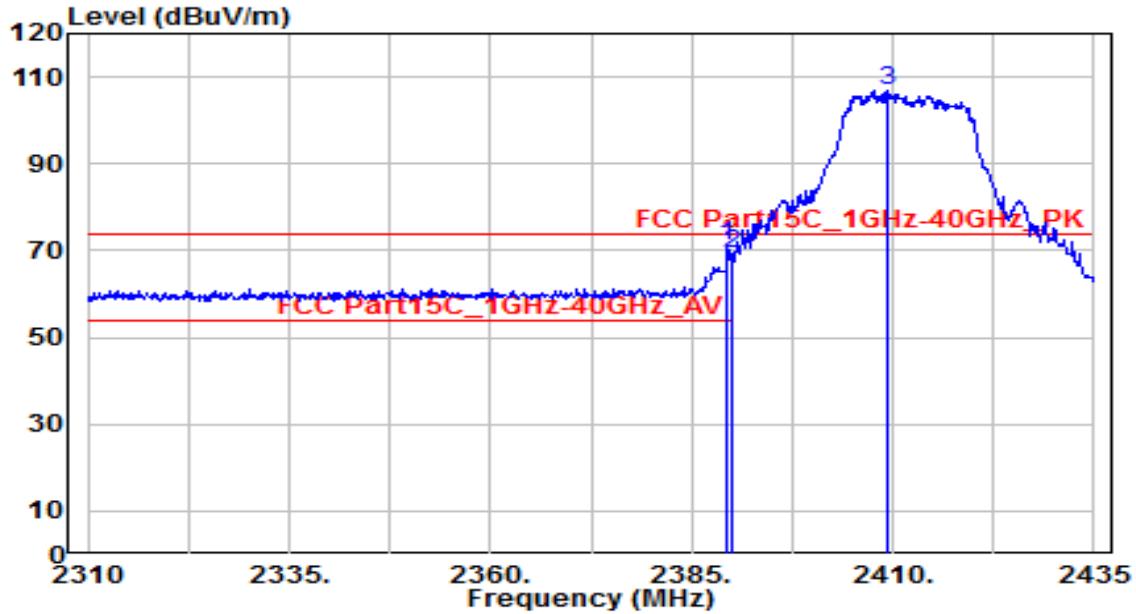


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2389.500	38.73	32.29	71.03	-2.97	74.00	120	110	Peak
2	2390.000	36.91	32.30	69.21	-4.79	74.00	120	110	Peak
3	2409.250	74.50	32.38	106.88	N/A	N/A	120	110	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Sonata XL	Date of Test	2020-08-05
Factor	BBHA 9120D	Temp. / Humidity	24°C /55%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11g_TX_CH 1_ANT 0	Test Voltage	AC 120V/60Hz

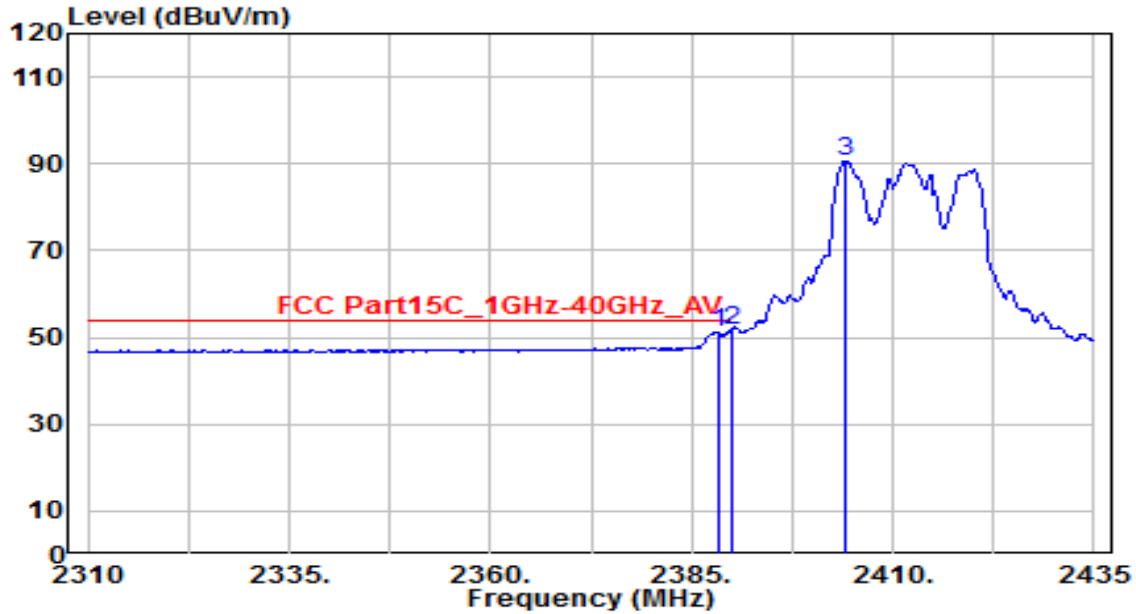


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.250	18.97	32.29	51.26	-2.74	54.00	120	110	Average
2	* 2390.000	19.42	32.30	51.72	-2.28	54.00	120	110	Average
3	2404.000	58.40	32.36	90.75	N/A	N/A	120	110	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Sonata XL	Date of Test	2020-08-06
Factor	BBHA 9120D	Temp. / Humidity	24°C /55%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11g_TX_CH 11_ANT 0	Test Voltage	AC 120V/60Hz

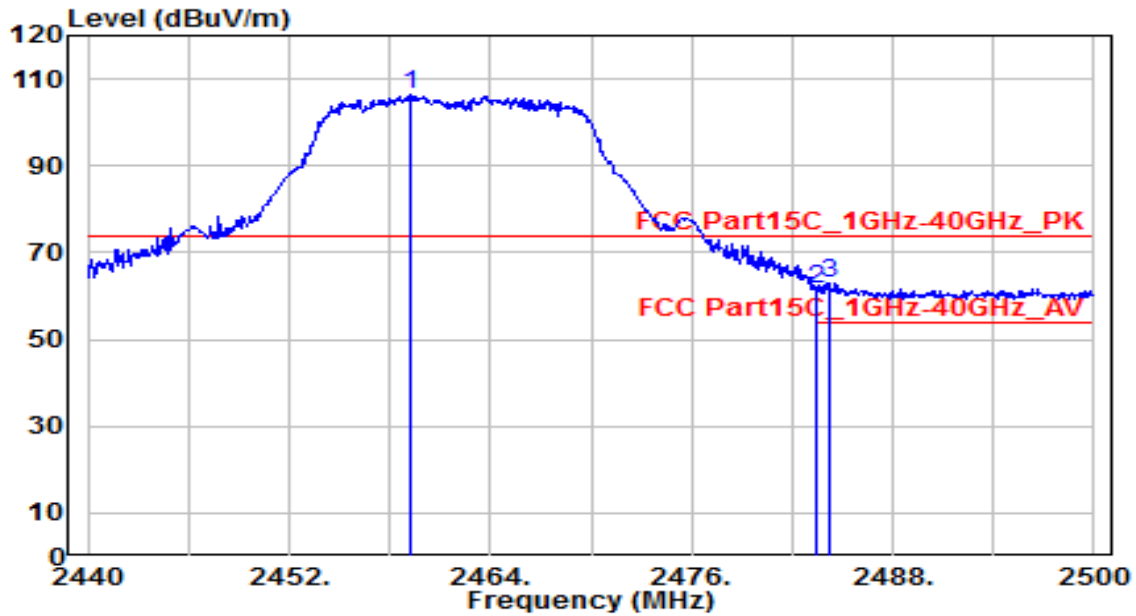


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2459.200	73.65	32.60	106.25	N/A	N/A	150	165	Peak
2	2483.500	28.84	32.71	61.54	-12.46	74.00	150	165	Peak
3	* 2484.220	30.16	32.71	62.87	-11.13	74.00	150	165	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Sonata XL	Date of Test	2020-08-06
Factor	BBHA 9120D	Temp. / Humidity	24°C /55%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11g_TX_CH 11_ANT 0	Test Voltage	AC 120V/60Hz

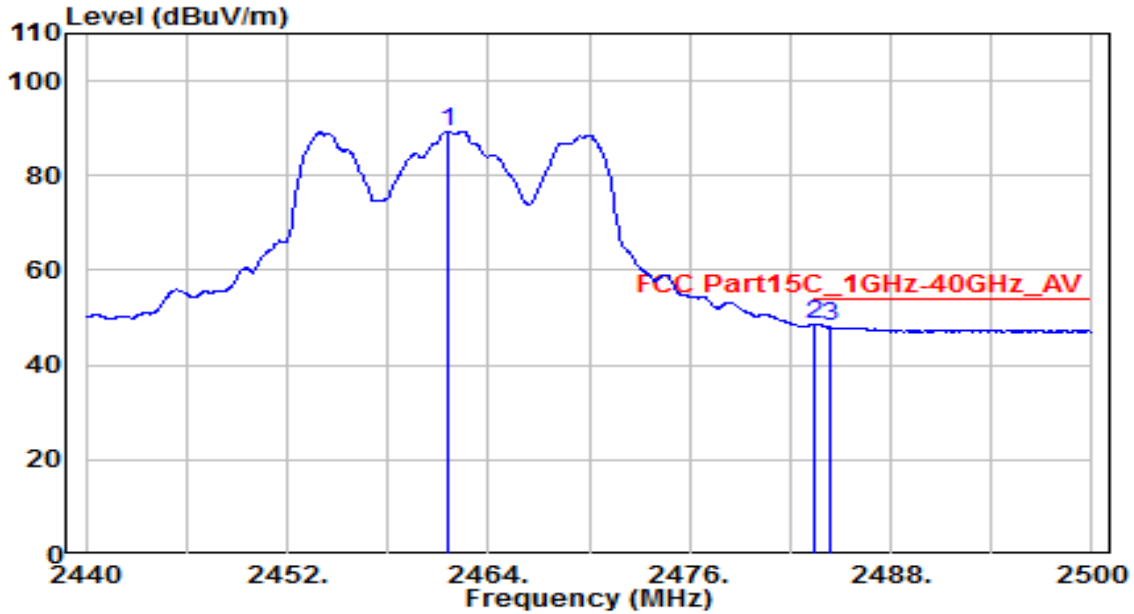


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2461.600	56.78	32.61	89.39	N/A	N/A	150	165	Average
2	* 2483.500	15.80	32.71	48.51	-5.49	54.00	150	165	Average
3	2484.400	15.31	32.71	48.03	-5.97	54.00	150	165	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Sonata XL	Date of Test	2020-08-06
Factor	BBHA 9120D	Temp. / Humidity	24°C /55%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11g_TX_CH 11_ANT 0	Test Voltage	AC 120V/60Hz

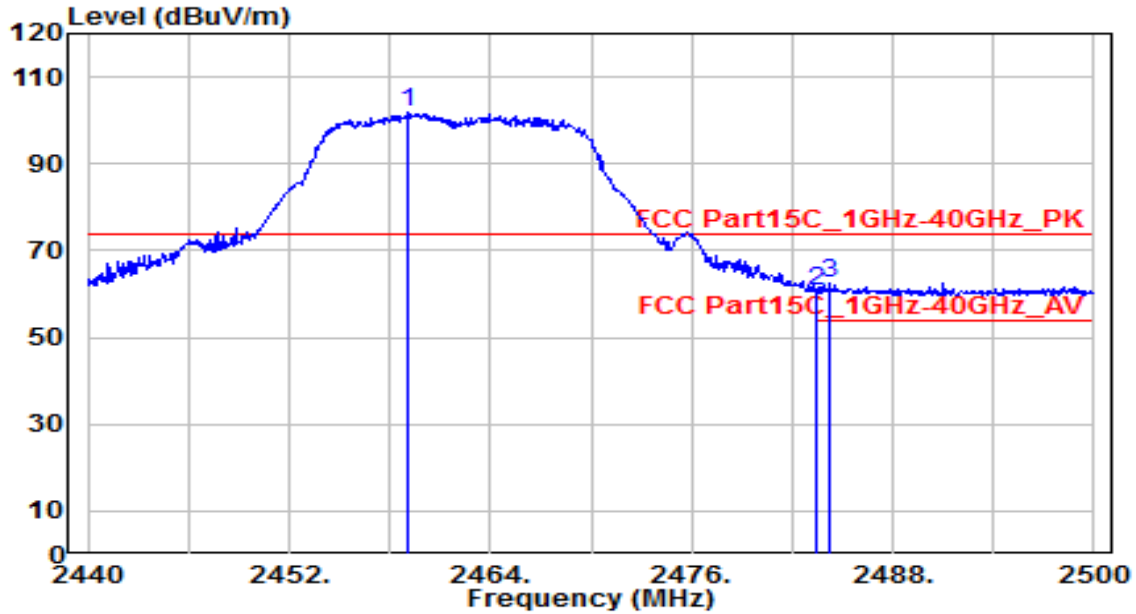


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2459.080	69.13	32.60	101.73	N/A	N/A	120	110	Peak
2	2483.500	27.80	32.71	60.50	-13.50	74.00	120	110	Peak
3	* 2484.280	29.89	32.71	62.60	-11.40	74.00	120	110	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Sonata XL	Date of Test	2020-08-06
Factor	BBHA 9120D	Temp. / Humidity	24°C /55%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11g_TX_CH 11_ANT 0	Test Voltage	AC 120V/60Hz

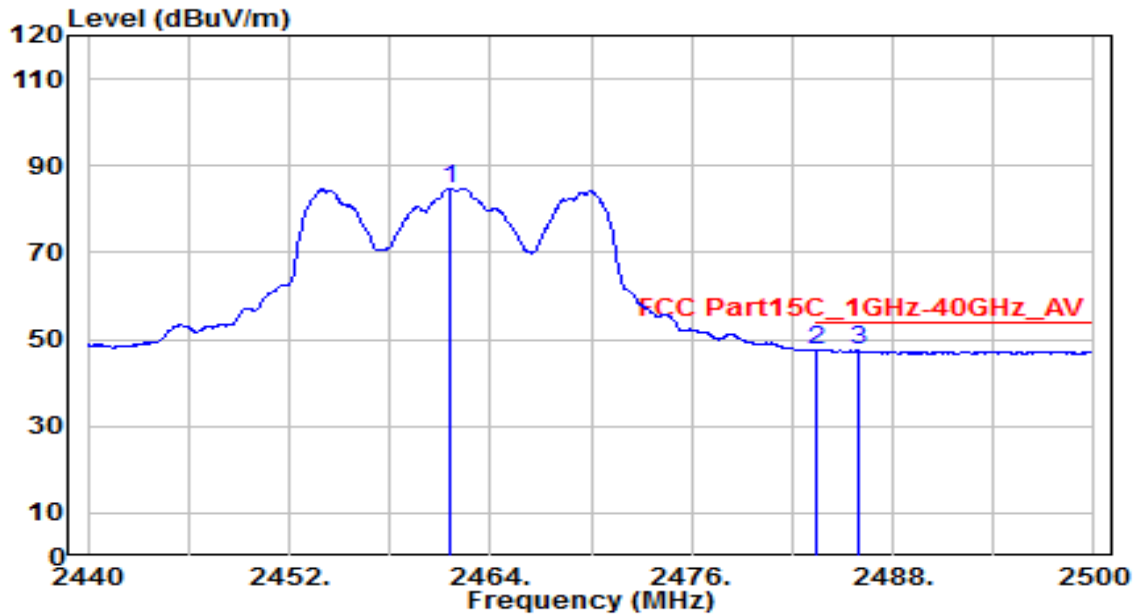


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2461.600	52.26	32.61	84.87	N/A	N/A	120	110	Average
2	* 2483.500	14.90	32.71	47.61	-6.39	54.00	120	110	Average
3	2486.020	14.69	32.72	47.41	-6.59	54.00	120	110	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Sonata XL	Date of Test	2020-08-05
Factor	BBHA 9120D	Temp. / Humidity	24°C /55%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0	Test Voltage	AC 120V/60Hz

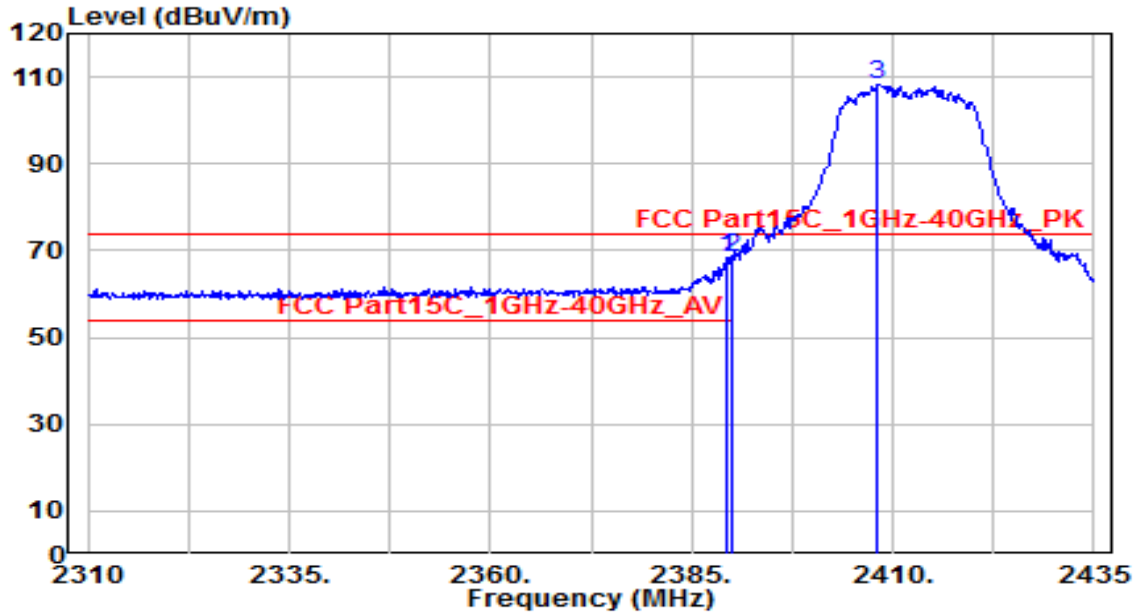


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2389.500	36.23	32.29	68.53	-5.47	74.00	150	15	Peak
2	2390.000	36.17	32.30	68.46	-5.54	74.00	150	15	Peak
3	2408.125	75.73	32.38	108.10	N/A	N/A	150	15	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Sonata XL	Date of Test	2020-08-05
Factor	BBHA 9120D	Temp. / Humidity	24°C /55%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0	Test Voltage	AC 120V/60Hz

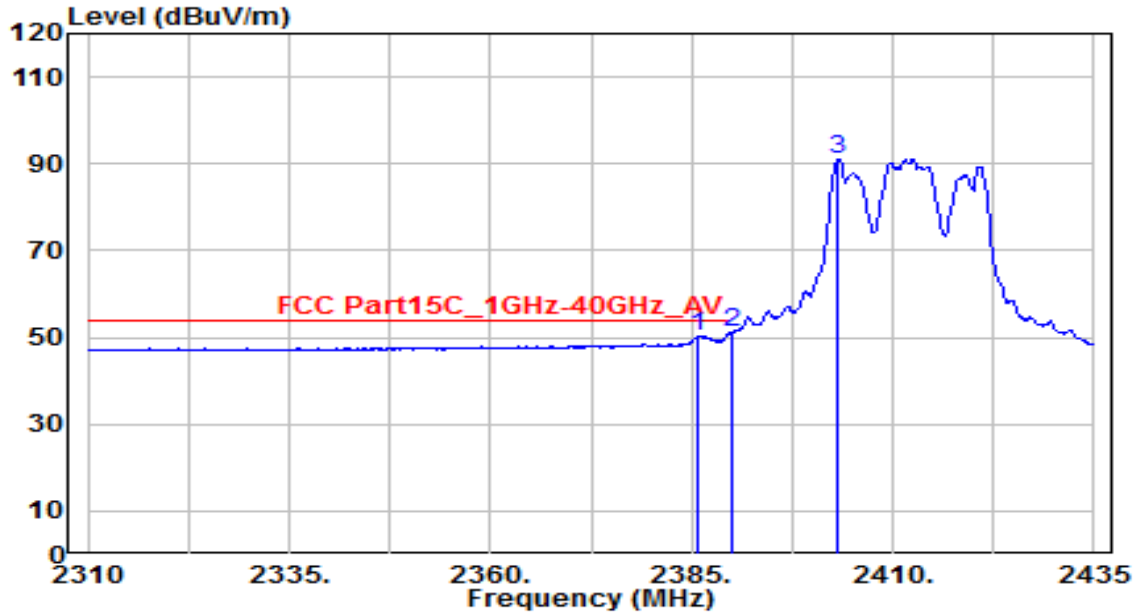


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2385.625	18.09	32.28	50.37	-3.63	54.00	150	15	Average
2	* 2390.000	18.92	32.30	51.22	-2.78	54.00	150	15	Average
3	2403.250	58.73	32.35	91.08	N/A	N/A	150	15	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Sonata XL	Date of Test	2020-08-05
Factor	BBHA 9120D	Temp. / Humidity	24°C /55%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0	Test Voltage	AC 120V/60Hz

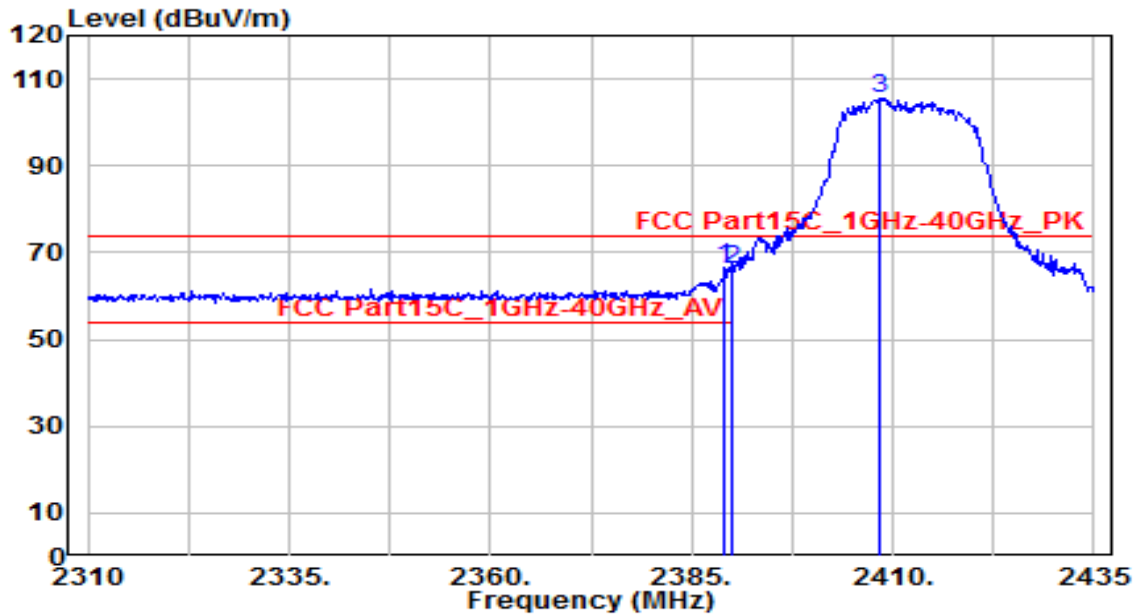


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2389.125	34.47	32.29	66.76	-7.24	74.00	120	110	Peak
2	2390.000	33.72	32.30	66.02	-7.98	74.00	120	110	Peak
3	2408.375	73.06	32.38	105.44	N/A	N/A	120	110	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Sonata XL	Date of Test	2020-08-05
Factor	BBHA 9120D	Temp. / Humidity	24°C /55%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0	Test Voltage	AC 120V/60Hz

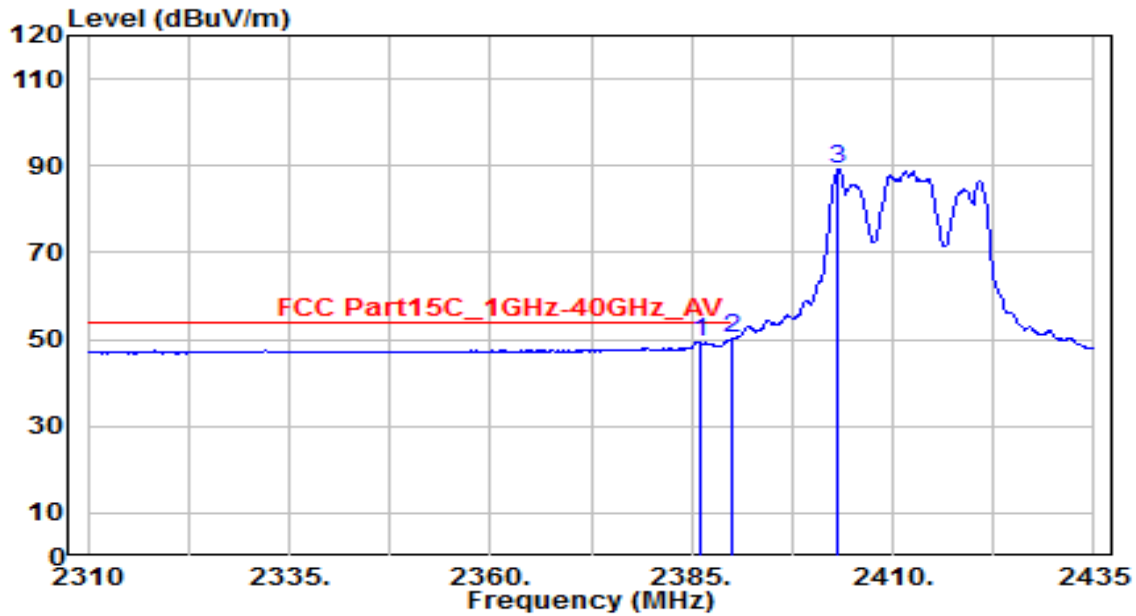


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2386.125	17.29	32.28	49.57	-4.43	54.00	120	110	Average
2	* 2390.000	17.86	32.30	50.16	-3.84	54.00	120	110	Average
3	2403.250	56.69	32.35	89.05	N/A	N/A	120	110	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Sonata XL	Date of Test	2020-08-05
Factor	BBHA 9120D	Temp. / Humidity	24°C /55%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0	Test Voltage	AC 120V/60Hz

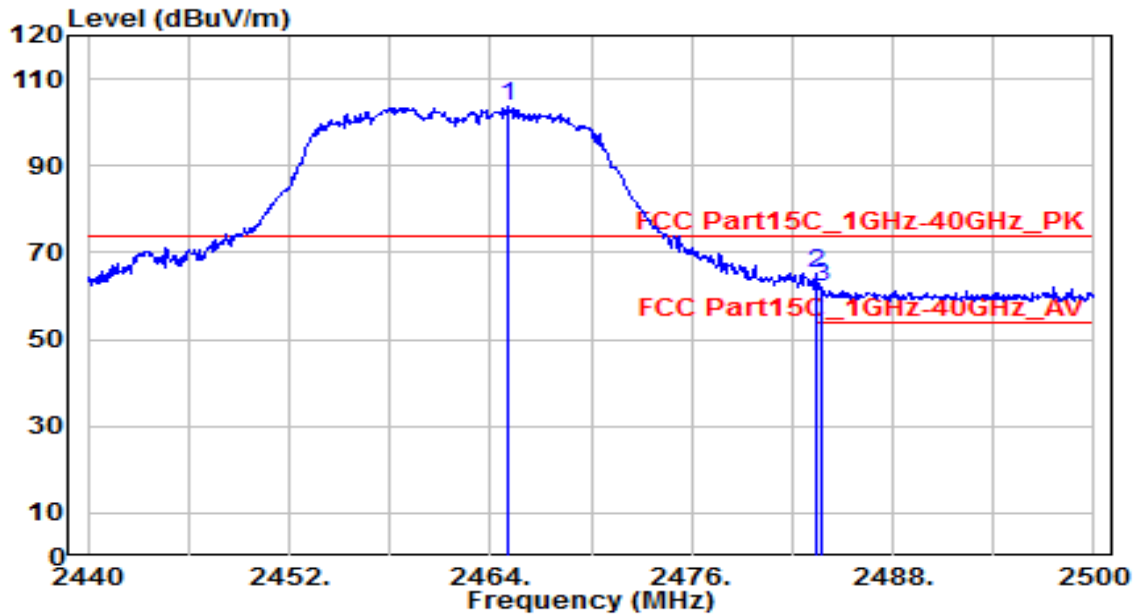


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2465.020	70.94	32.63	103.57	N/A	N/A	150	15	Peak
2	* 2483.500	32.29	32.71	65.00	-9.00	74.00	150	15	Peak
3	2483.740	29.54	32.71	62.25	-11.75	74.00	150	15	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Sonata XL	Date of Test	2020-08-05
Factor	BBHA 9120D	Temp. / Humidity	24°C /55%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0	Test Voltage	AC 120V/60Hz

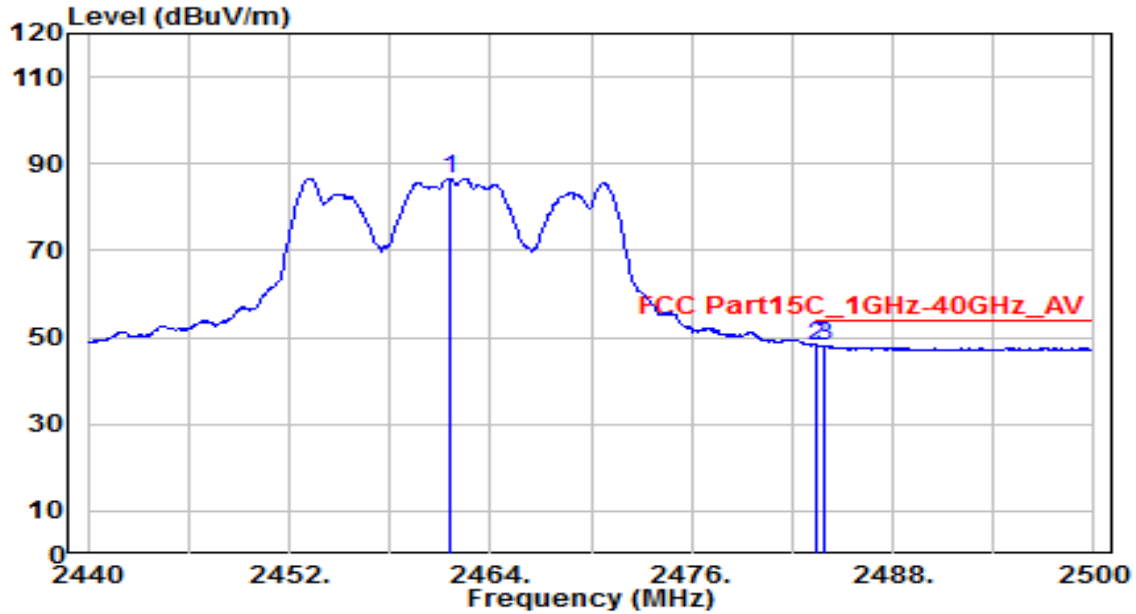


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2461.540	54.00	32.61	86.61	N/A	N/A	150	15	Average
2	* 2483.500	15.46	32.71	48.17	-5.83	54.00	150	15	Average
3	2483.920	15.30	32.71	48.01	-5.99	54.00	150	15	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Sonata XL	Date of Test	2020-08-05
Factor	BBHA 9120D	Temp. / Humidity	24°C /55%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0	Test Voltage	AC 120V/60Hz

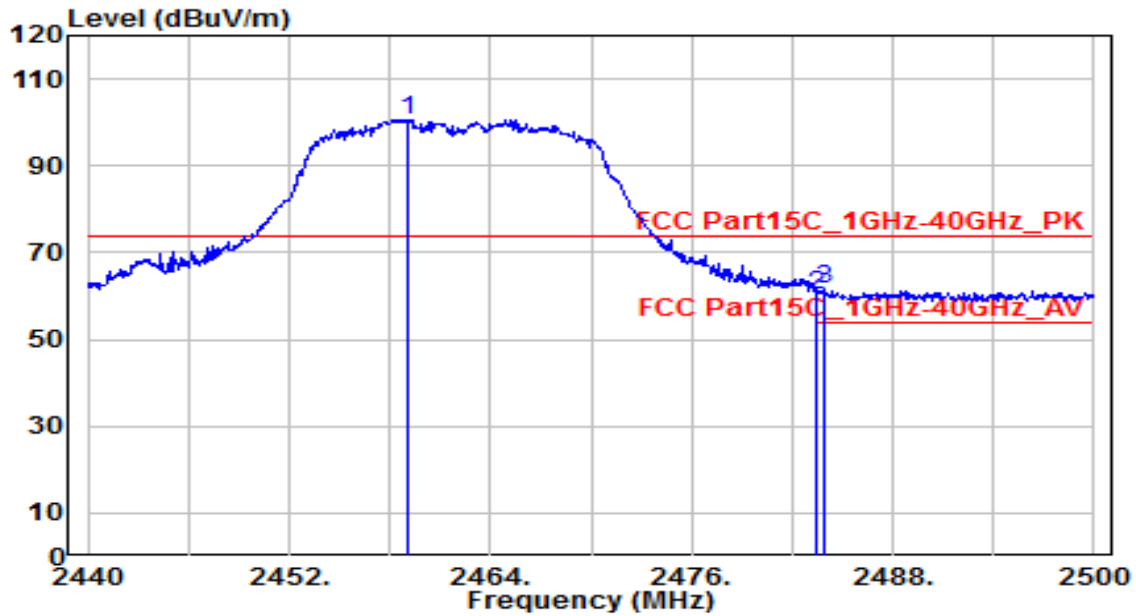


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2459.020	68.08	32.60	100.68	N/A	N/A	120	115	Peak
2	2483.500	27.59	32.71	60.29	-13.71	74.00	120	115	Peak
3	* 2483.920	28.91	32.71	61.62	-12.38	74.00	120	115	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Sonata XL	Date of Test	2020-08-05
Factor	BBHA 9120D	Temp. / Humidity	24°C /55%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0	Test Voltage	AC 120V/60Hz

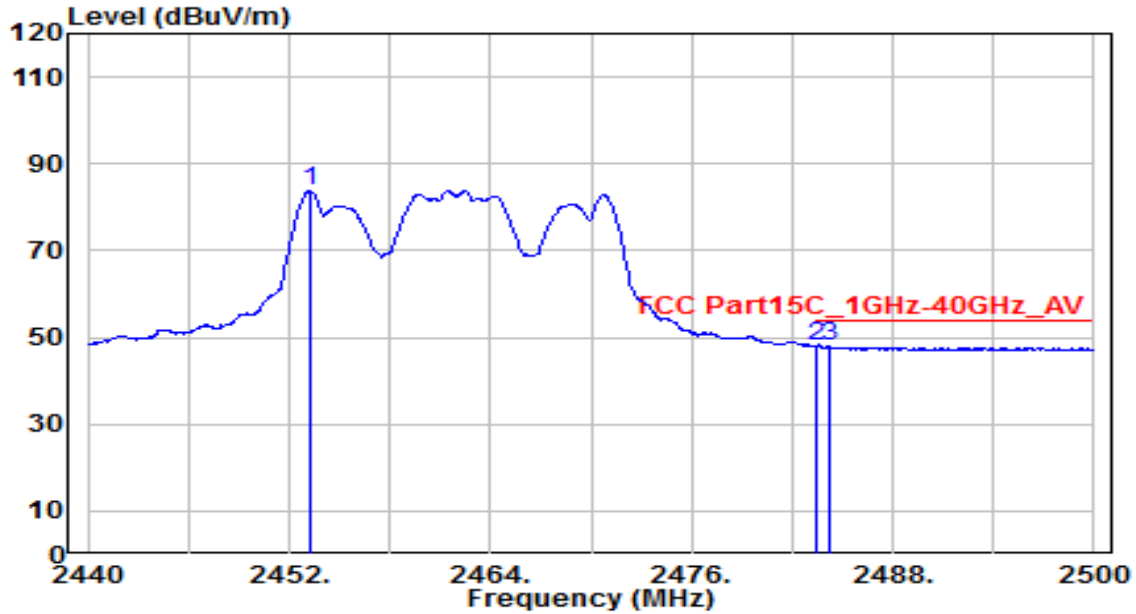


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2453.200	51.15	32.57	83.72	N/A	N/A	120	115	Average
2	* 2483.500	15.39	32.71	48.10	-5.90	54.00	120	115	Average
3	2484.280	15.16	32.71	47.87	-6.13	54.00	120	115	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Sonata XL	Date of Test	2020-08-05
Factor	BBHA 9120D	Temp. / Humidity	24°C /55%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0	Test Voltage	AC 120V/60Hz

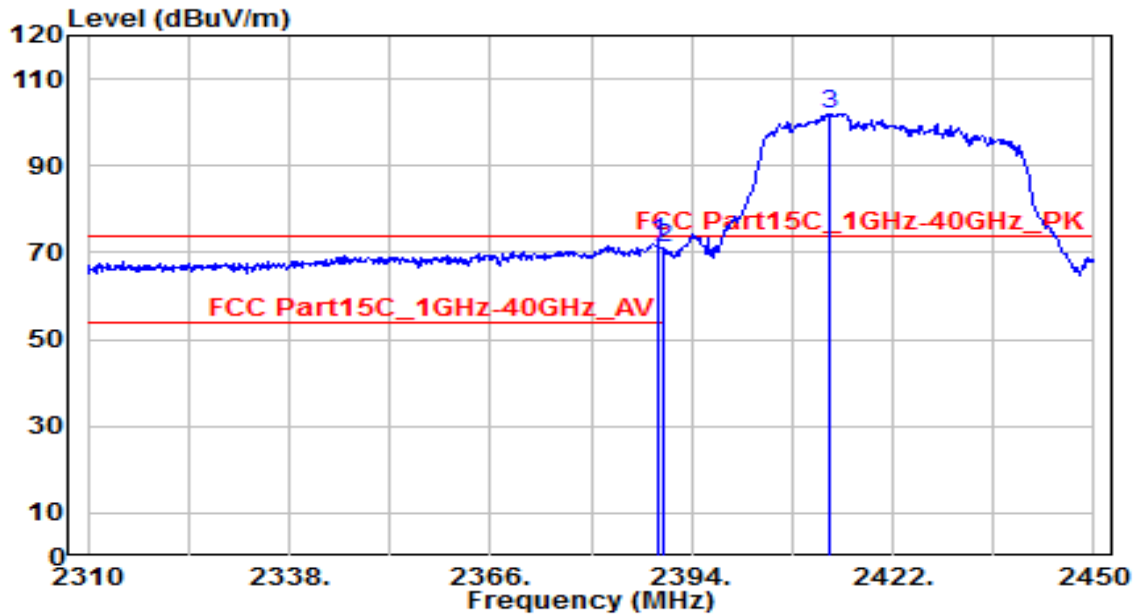


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2389.380	39.95	32.29	72.24	-1.76	74.00	150	370	Peak
2	2390.000	38.57	32.30	70.87	-3.13	74.00	150	370	Peak
3	2413.040	69.63	32.40	102.02	N/A	N/A	150	370	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Sonata XL	Date of Test	2020-08-05
Factor	BBHA 9120D	Temp. / Humidity	24°C /55%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0	Test Voltage	AC 120V/60Hz

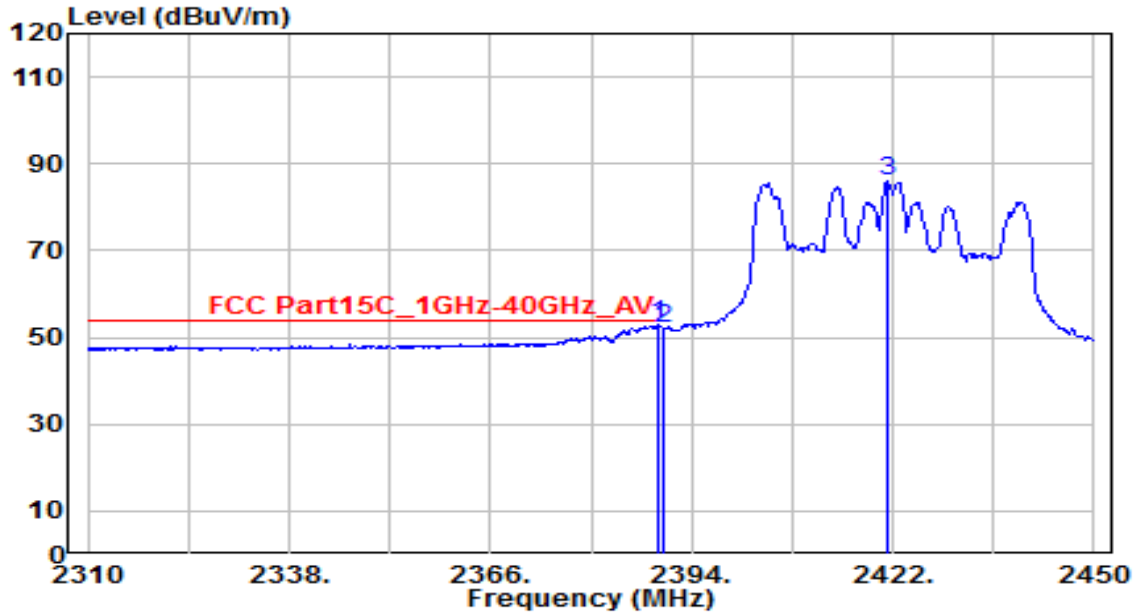


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	20.54	32.29	52.83	-1.17	54.00	150	370	Average
2		19.88	32.30	52.18	-1.82	54.00	150	370	Average
3		53.55	32.43	85.99	N/A	N/A	150	370	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Sonata XL	Date of Test	2020-08-05
Factor	BBHA 9120D	Temp. / Humidity	24°C /55%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0	Test Voltage	AC 120V/60Hz

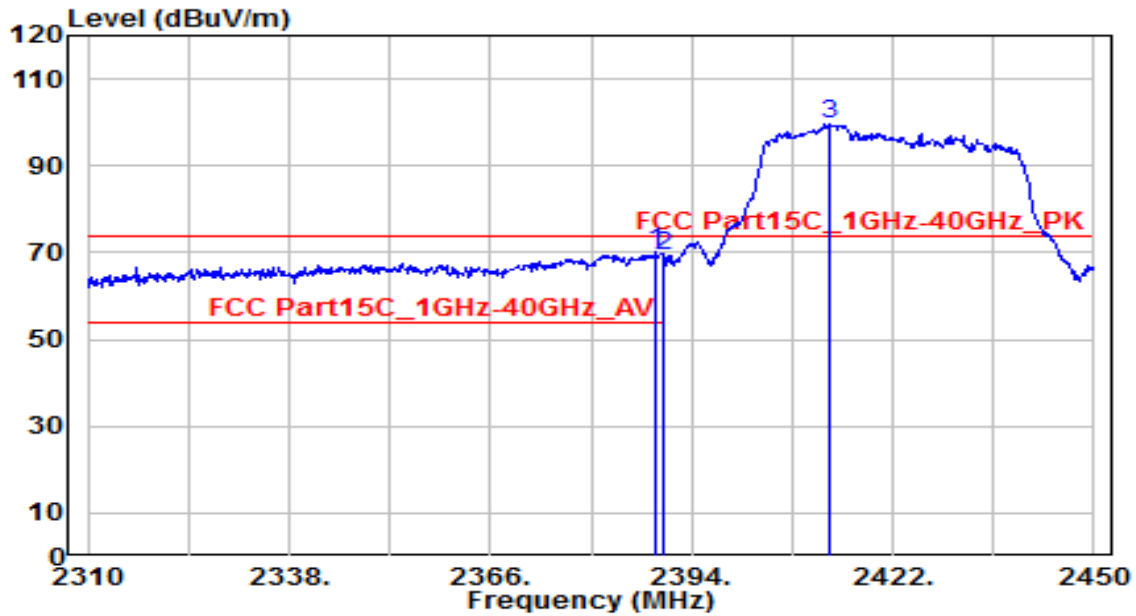


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2389.100	37.95	32.29	70.24	-3.76	74.00	120	115	Peak
2	2390.000	37.09	32.30	69.39	-4.61	74.00	120	115	Peak
3	2413.320	67.20	32.40	99.60	N/A	N/A	120	115	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Sonata XL	Date of Test	2020-08-05
Factor	BBHA 9120D	Temp. / Humidity	24°C /55%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0	Test Voltage	AC 120V/60Hz

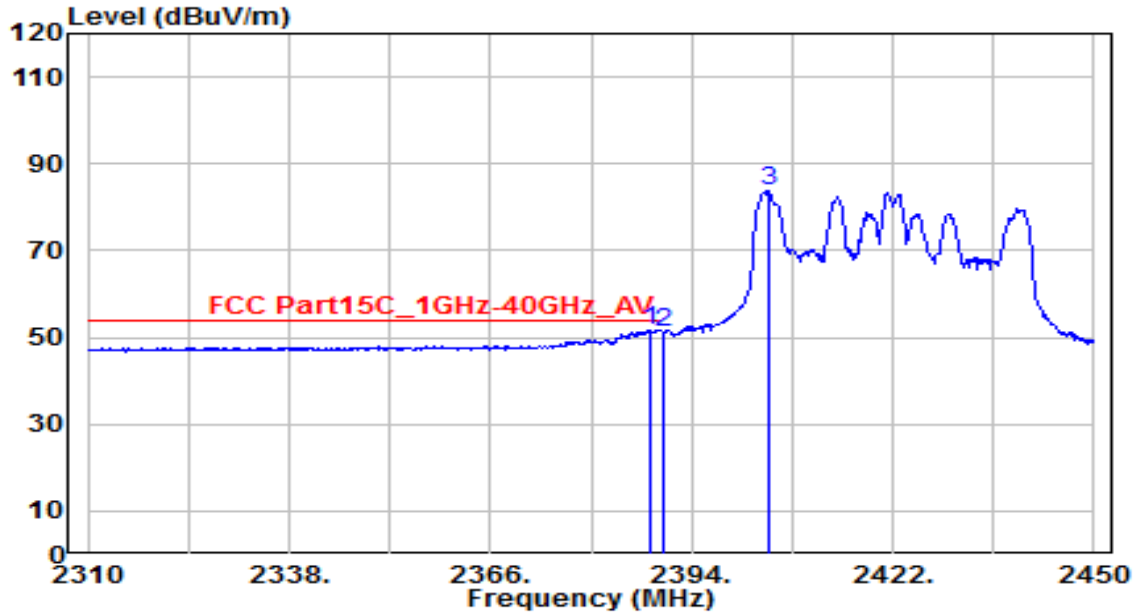


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	2388.400	19.39	32.29	51.68	-2.32	54.00	120	115	Average
2		2390.000	18.96	32.30	51.25	-2.75	54.00	120	115	Average
3		2404.640	51.33	32.36	83.69	N/A	N/A	120	115	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Sonata XL	Date of Test	2020-08-05
Factor	BBHA 9120D	Temp. / Humidity	24°C /55%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0	Test Voltage	AC 120V/60Hz

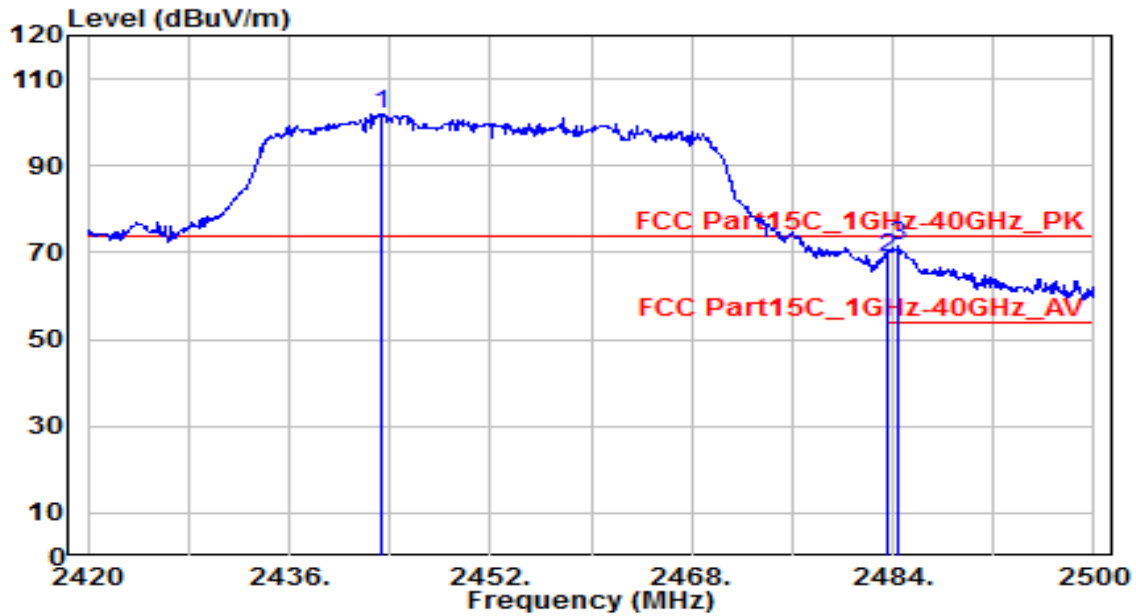


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2443.280	69.39	32.53	101.92	N/A	N/A	150	15	Peak
2	2483.500	36.17	32.71	68.88	-5.12	74.00	150	15	Peak
3	* 2484.480	38.73	32.71	71.44	-2.56	74.00	150	15	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Sonata XL	Date of Test	2020-08-05
Factor	BBHA 9120D	Temp. / Humidity	24°C /55%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0	Test Voltage	AC 120V/60Hz

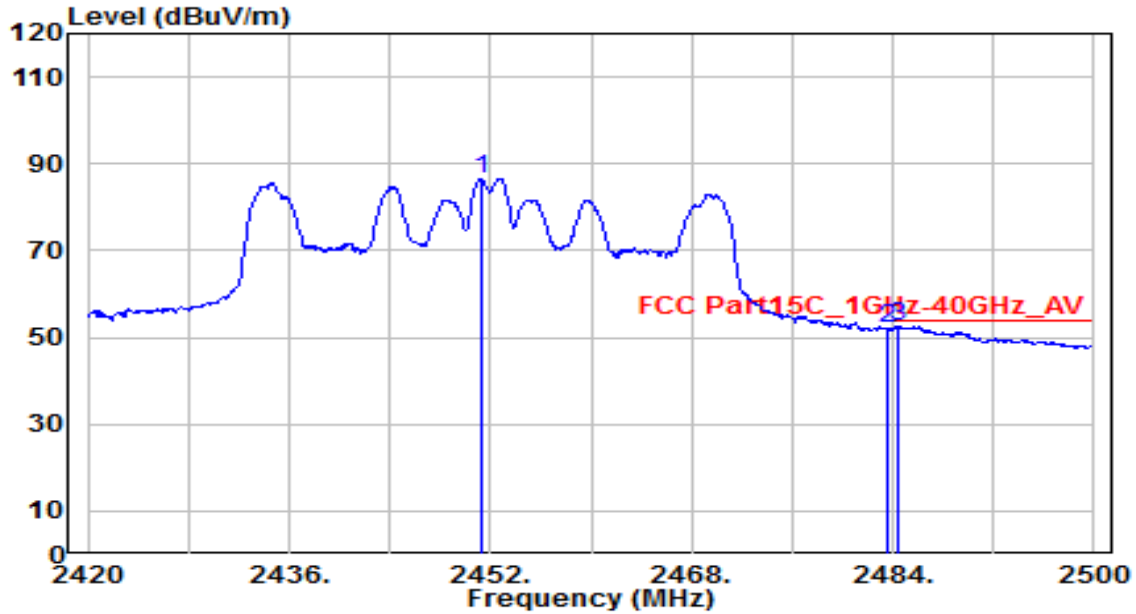


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2451.280	54.05	32.57	86.61	N/A	N/A	150	15	Average
2	2483.500	19.37	32.71	52.08	-1.92	54.00	150	15	Average
3	* 2484.320	19.78	32.71	52.49	-1.51	54.00	150	15	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Sonata XL	Date of Test	2020-08-05
Factor	BBHA 9120D	Temp. / Humidity	24°C /55%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0	Test Voltage	AC 120V/60Hz

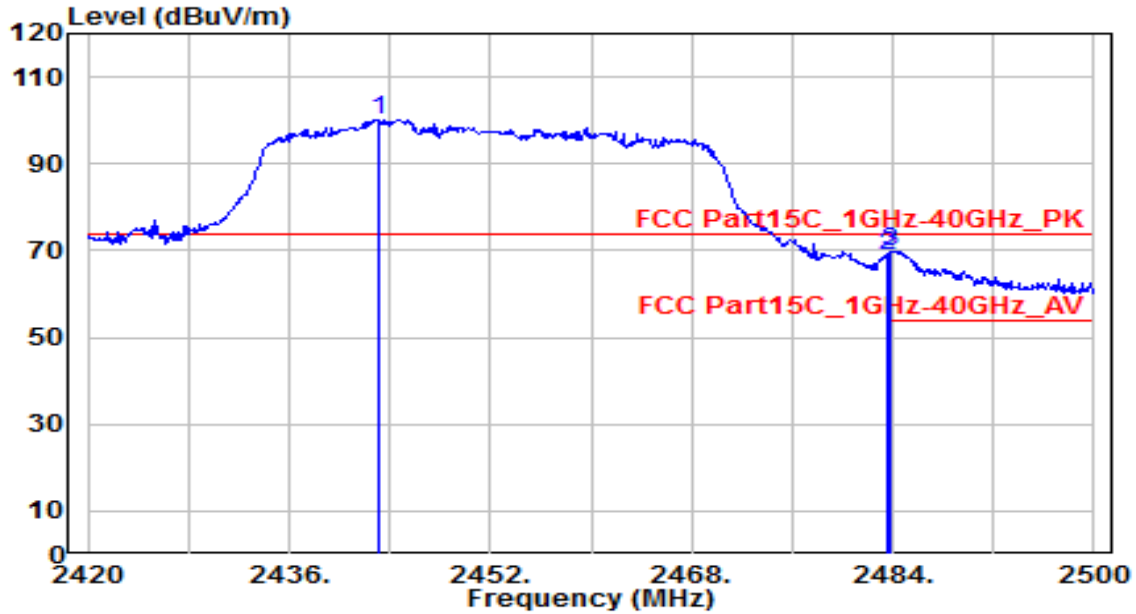


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2443.120	67.72	32.53	100.25	N/A	N/A	110	115	Peak
2	2483.500	36.34	32.71	69.05	-4.95	74.00	110	115	Peak
3	* 2483.840	37.20	32.71	69.91	-4.09	74.00	110	115	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Sonata XL	Date of Test	2020-08-05
Factor	BBHA 9120D	Temp. / Humidity	24°C /55%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0	Test Voltage	AC 120V/60Hz

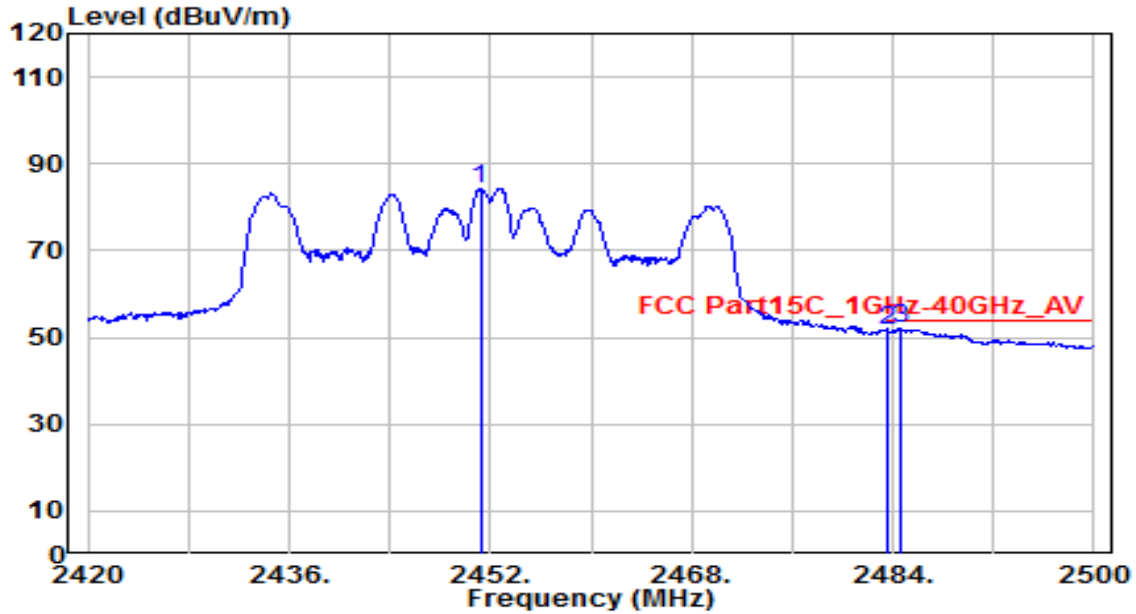


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2451.200	51.75	32.57	84.31	N/A	N/A	110	115	Average
2	2483.520	18.76	32.71	51.47	-2.53	54.00	110	115	Average
3	* 2484.720	19.53	32.71	52.24	-1.76	54.00	110	115	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Opus XL	Date of Test	2020-08-06
Factor	BBHA 9120D	Temp. / Humidity	24°C /55%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11b_TX_CH 1_ANT 0	Test Voltage	AC 120V/60Hz

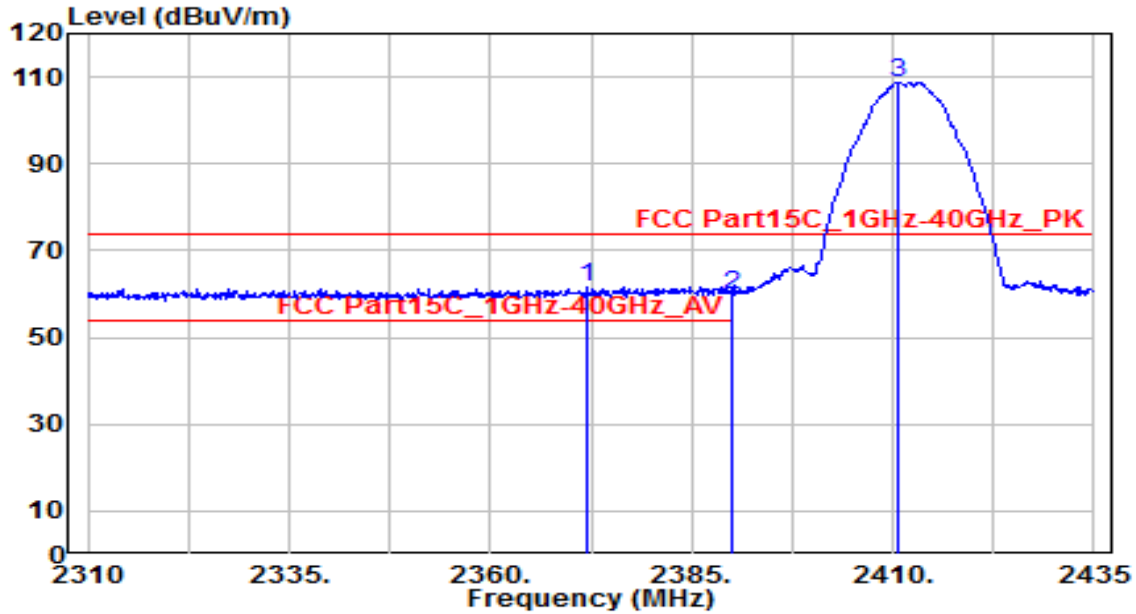


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2372.000	29.56	32.22	61.78	-12.22	74.00	190	180	Peak
2	2390.000	27.59	32.30	59.88	-14.12	74.00	190	180	Peak
3	2410.750	76.49	32.39	108.87	N/A	N/A	190	180	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Opus XL	Date of Test	2020-08-06
Factor	BBHA 9120D	Temp. / Humidity	24°C /55%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11b_TX_CH 1_ANT 0	Test Voltage	AC 120V/60Hz

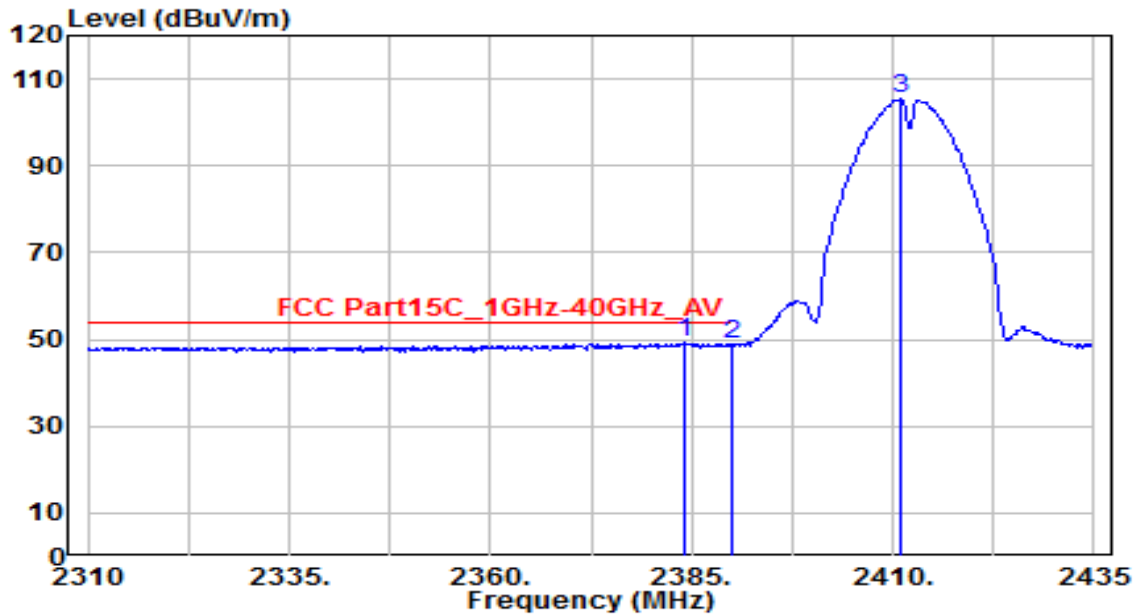


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2384.000	17.14	32.27	49.41	-4.59	54.00	190	180	Average
2	2390.000	16.66	32.30	48.96	-5.04	54.00	190	180	Average
3	2411.000	73.06	32.39	105.45	N/A	N/A	190	180	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Opus XL	Date of Test	2020-08-06
Factor	BBHA 9120D	Temp. / Humidity	24°C /55%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11b_TX_CH 1_ANT 0	Test Voltage	AC 120V/60Hz

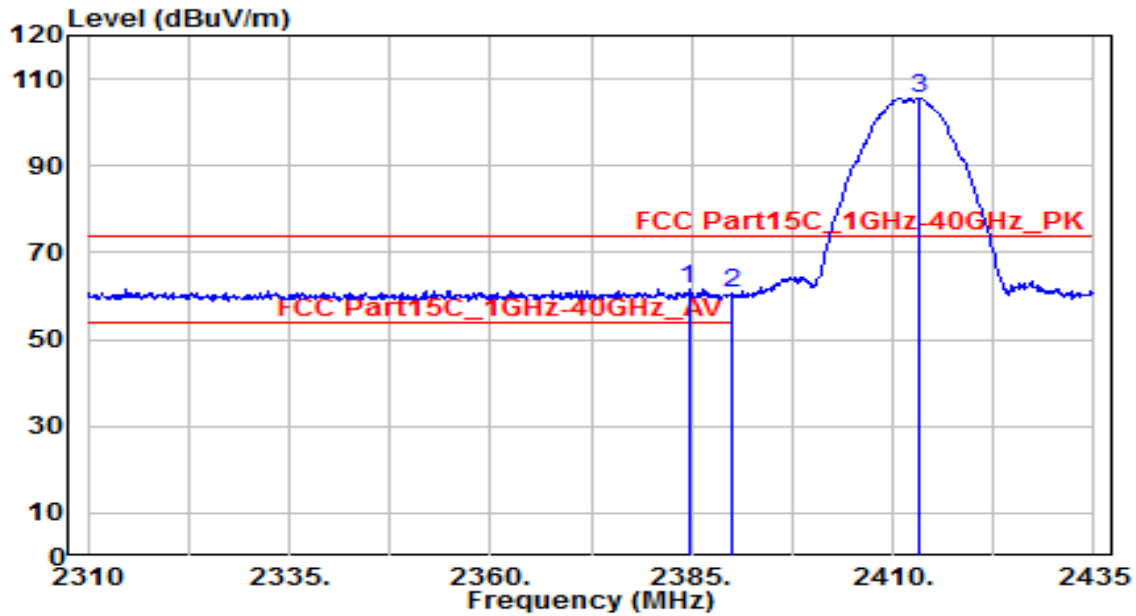


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2384.625	29.49	32.27	61.76	-12.24	74.00	200	240	Peak
2	2390.000	28.48	32.30	60.78	-13.22	74.00	200	240	Peak
3	2413.250	73.23	32.40	105.63	N/A	N/A	200	240	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Opus XL	Date of Test	2020-08-06
Factor	BBHA 9120D	Temp. / Humidity	24°C /55%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11b_TX_CH 1_ANT 0	Test Voltage	AC 120V/60Hz

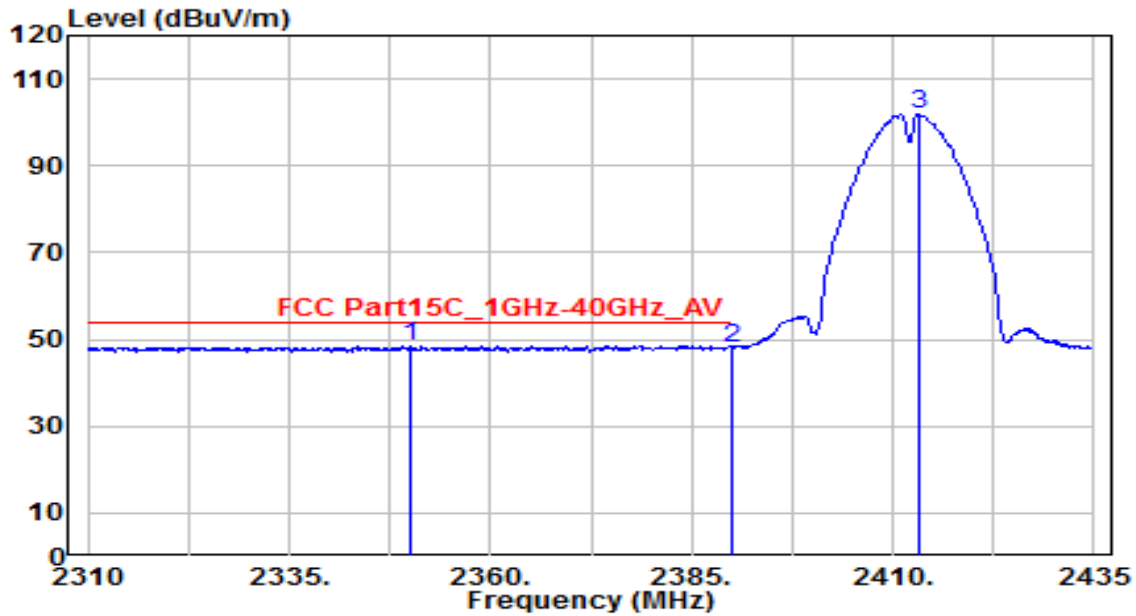


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	2350.000	16.44	32.12	48.56	-5.44	54.00	200	240	Average
2		2390.000	15.77	32.30	48.07	-5.93	54.00	200	240	Average
3		2413.125	69.60	32.40	102.00	N/A	N/A	200	240	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Opus XL	Date of Test	2020-08-06
Factor	BBHA 9120D	Temp. / Humidity	24°C /55%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11b_TX_CH 11_ANT 0	Test Voltage	AC 120V/60Hz

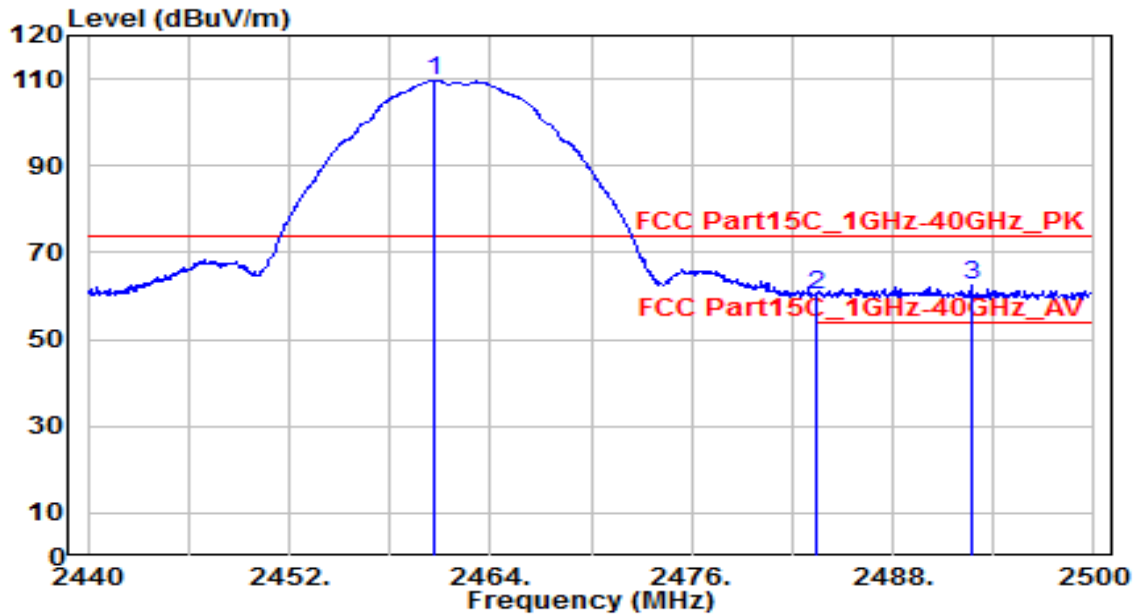


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.700	77.16	32.61	109.77	N/A	N/A	210	175	Peak
2	2483.500	27.58	32.71	60.29	-13.71	74.00	210	175	Peak
3	* 2492.680	29.81	32.75	62.56	-11.44	74.00	210	175	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Opus XL	Date of Test	2020-08-06
Factor	BBHA 9120D	Temp. / Humidity	24°C /55%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11b_TX_CH 11_ANT 0	Test Voltage	AC 120V/60Hz

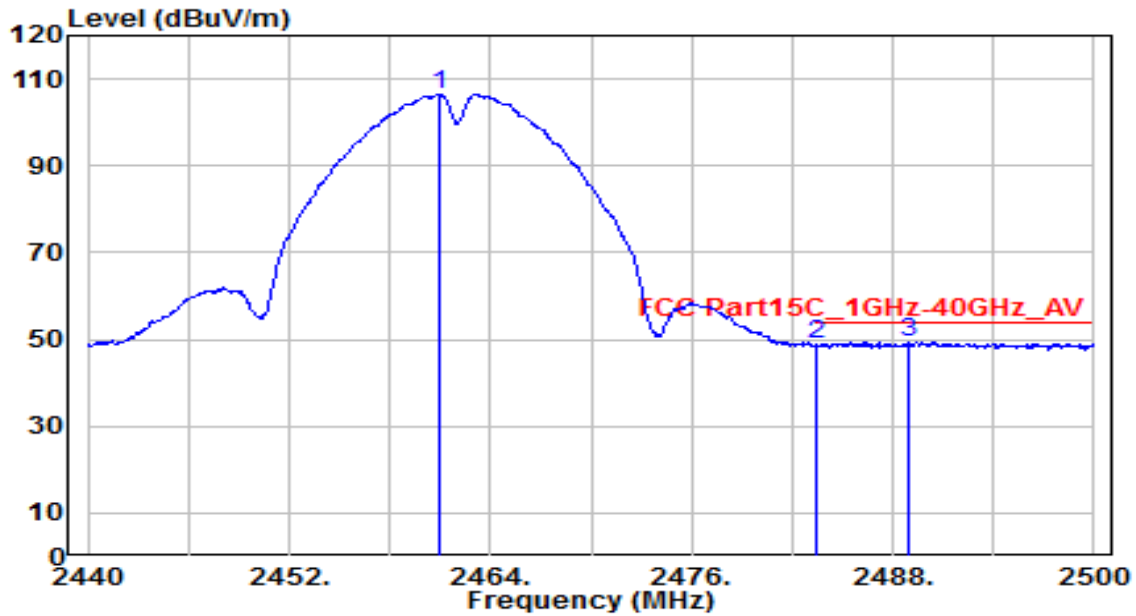


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2461.000	73.90	32.61	106.51	N/A	N/A	210	175	Average
2	2483.500	16.11	32.71	48.82	-5.18	54.00	210	175	Average
3	* 2488.960	16.65	32.73	49.38	-4.62	54.00	210	175	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Opus XL	Date of Test	2020-08-06
Factor	BBHA 9120D	Temp. / Humidity	24°C /55%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11b_TX_CH 11_ANT 0	Test Voltage	AC 120V/60Hz

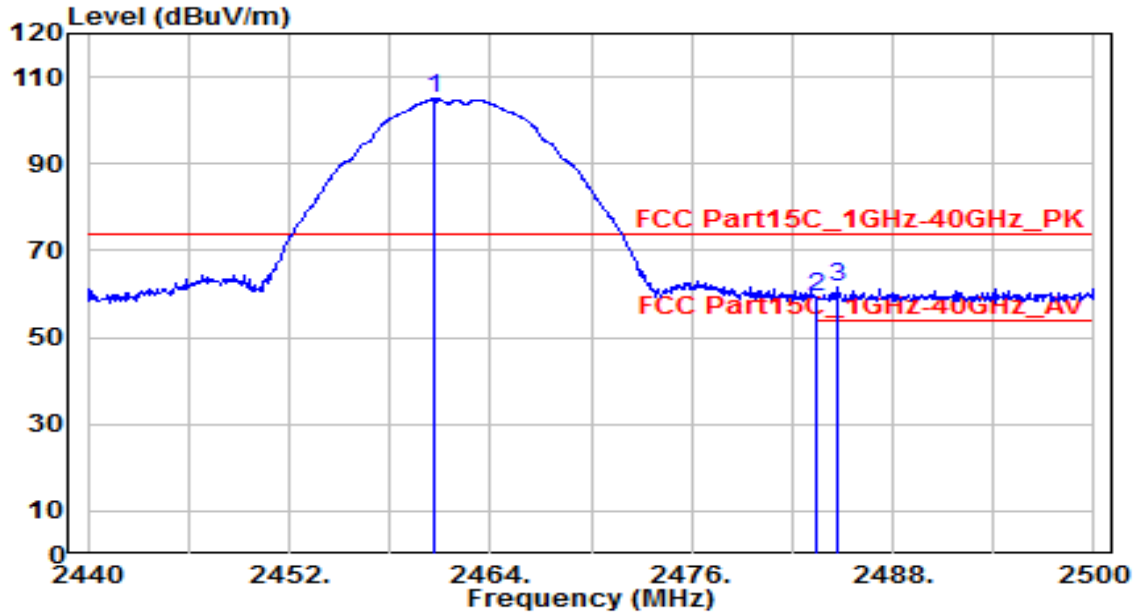


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.700	72.30	32.61	104.91	N/A	N/A	175	280	Peak
2	2483.500	26.55	32.71	59.26	-14.74	74.00	175	280	Peak
3	* 2484.640	28.95	32.71	61.66	-12.34	74.00	175	280	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Opus XL	Date of Test	2020-08-06
Factor	BBHA 9120D	Temp. / Humidity	24°C /55%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11b_TX_CH 11_ANT 0	Test Voltage	AC 120V/60Hz

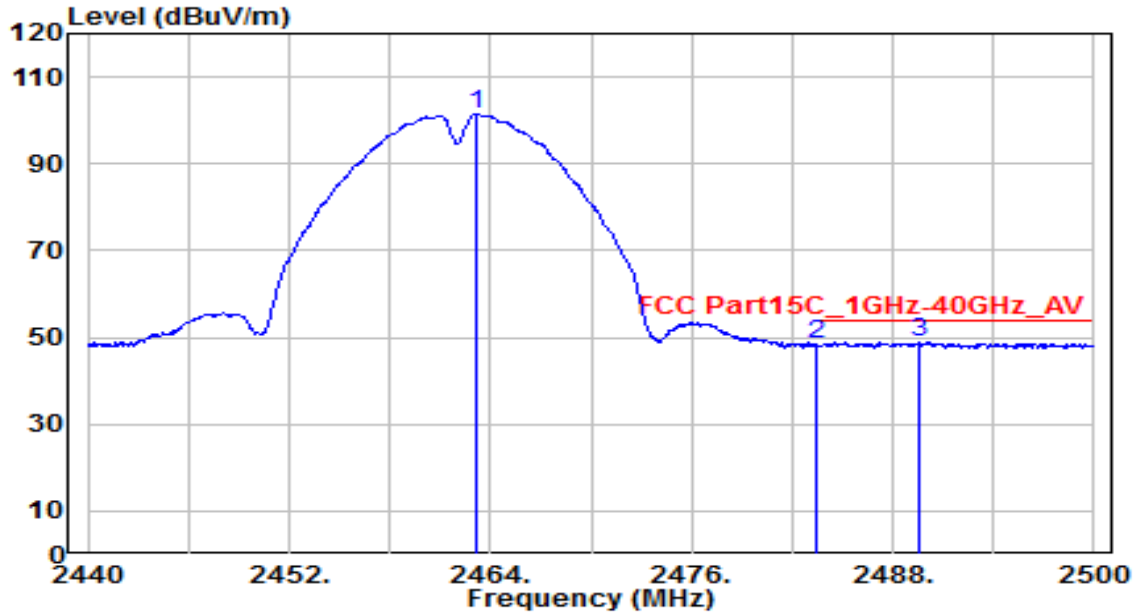


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2463.100	68.94	32.62	101.56	N/A	N/A	175	280	Average
2	2483.500	15.69	32.71	48.40	-5.60	54.00	175	280	Average
3	* 2489.560	16.18	32.73	48.91	-5.09	54.00	175	280	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Opus XL	Date of Test	2020-08-06
Factor	BBHA 9120D	Temp. / Humidity	24°C /55%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11g_TX_CH 1_ANT 0	Test Voltage	AC 120V/60Hz

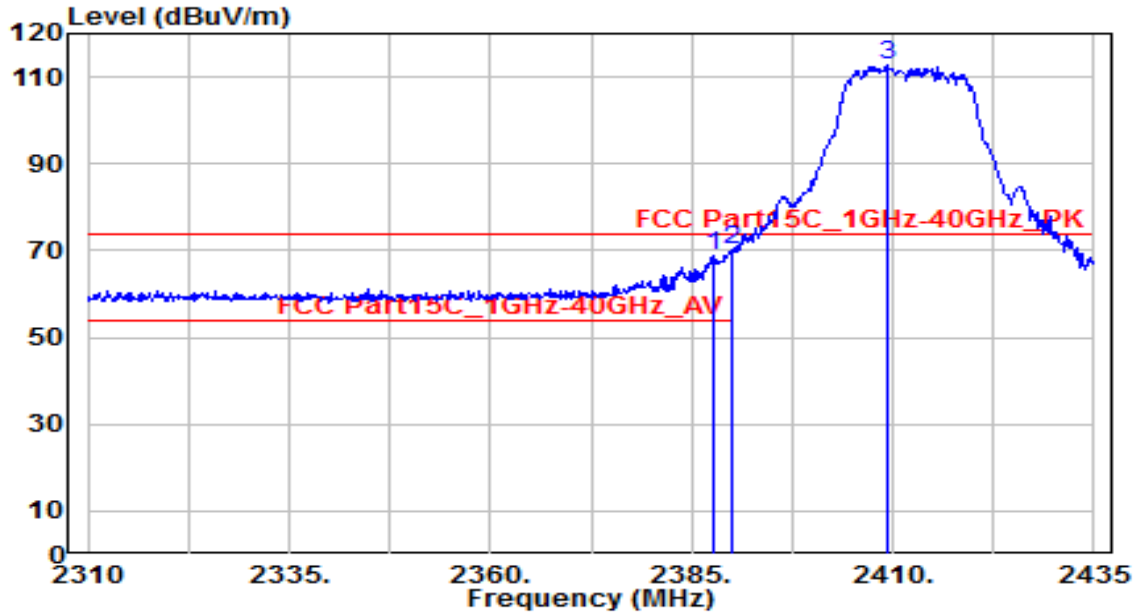


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.750	36.54	32.29	68.82	-5.18	74.00	190	180	Peak
2	* 2390.000	37.68	32.30	69.97	-4.03	74.00	190	180	Peak
3	2409.375	80.24	32.38	112.62	N/A	N/A	190	180	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Opus XL	Date of Test	2020-08-06
Factor	BBHA 9120D	Temp. / Humidity	24°C /55%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11g_TX_CH 1_ANT 0	Test Voltage	AC 120V/60Hz

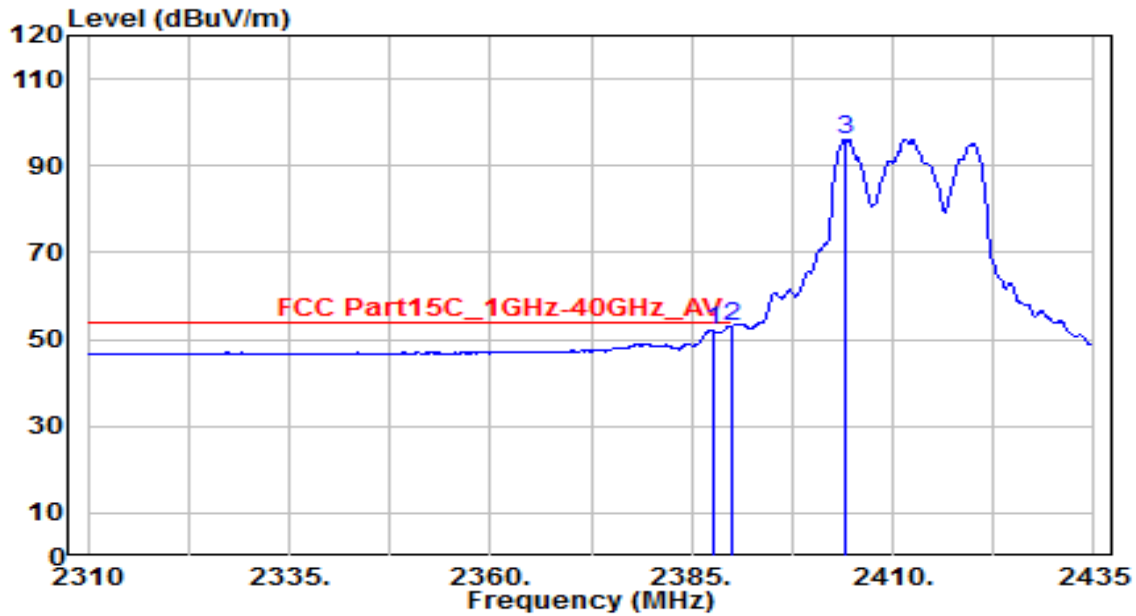


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.875	19.77	32.29	52.06	-1.94	54.00	190	180	Average
2	* 2390.000	20.70	32.30	52.99	-1.01	54.00	190	180	Average
3	2404.000	63.86	32.36	96.21	N/A	N/A	190	180	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Opus XL	Date of Test	2020-08-06
Factor	BBHA 9120D	Temp. / Humidity	24°C /55%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11g_TX_CH 1_ANT 0	Test Voltage	AC 120V/60Hz

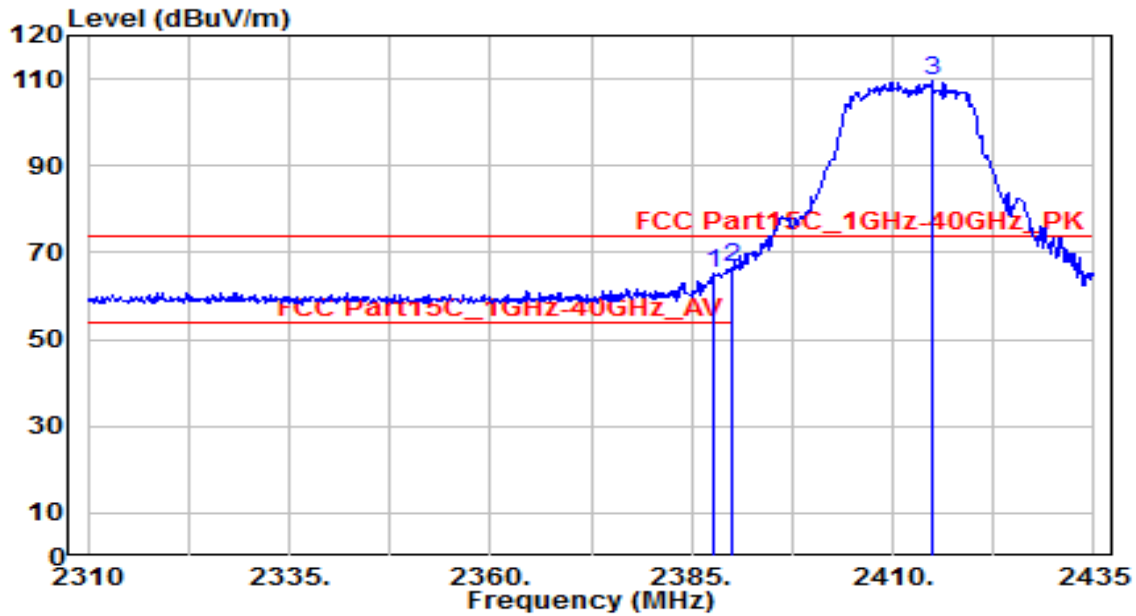


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.625	32.89	32.29	65.18	-8.82	74.00	200	240	Peak
2	* 2390.000	34.17	32.30	66.46	-7.54	74.00	200	240	Peak
3	2414.875	77.27	32.41	109.67	N/A	N/A	200	240	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Opus XL	Date of Test	2020-08-06
Factor	BBHA 9120D	Temp. / Humidity	24°C /55%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11g_TX_CH 1_ANT 0	Test Voltage	AC 120V/60Hz

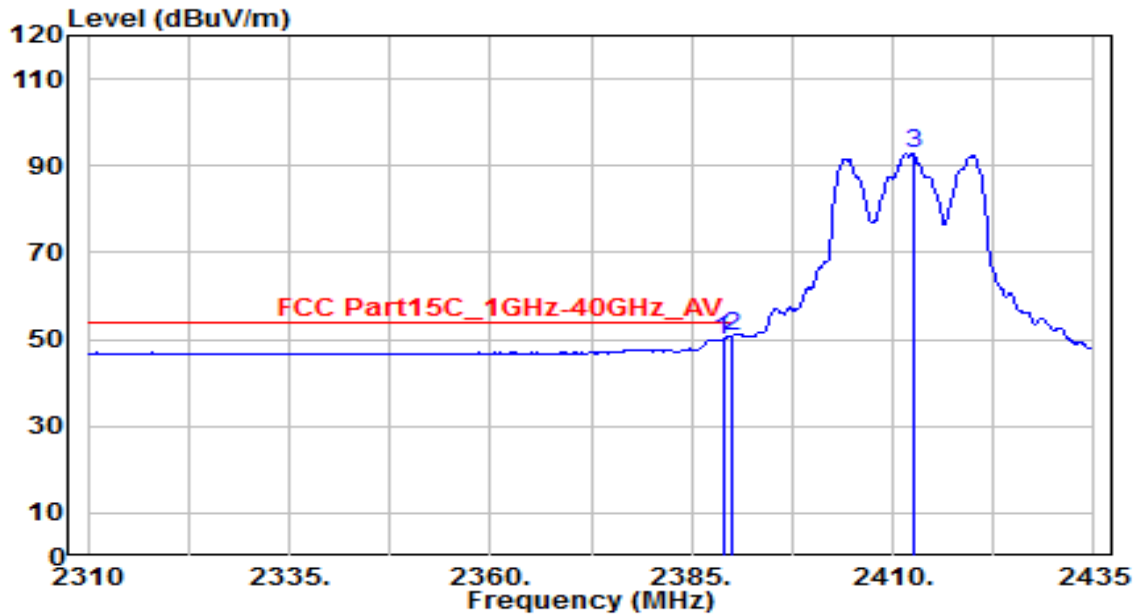


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.875	17.71	32.29	50.00	-4.00	54.00	200	240	Average
2	* 2390.000	18.53	32.30	50.83	-3.17	54.00	200	240	Average
3	2412.500	60.38	32.40	92.77	N/A	N/A	200	240	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Opus XL	Date of Test	2020-08-06
Factor	BBHA 9120D	Temp. / Humidity	24°C /55%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11g_TX_CH 11_ANT 0	Test Voltage	AC 120V/60Hz

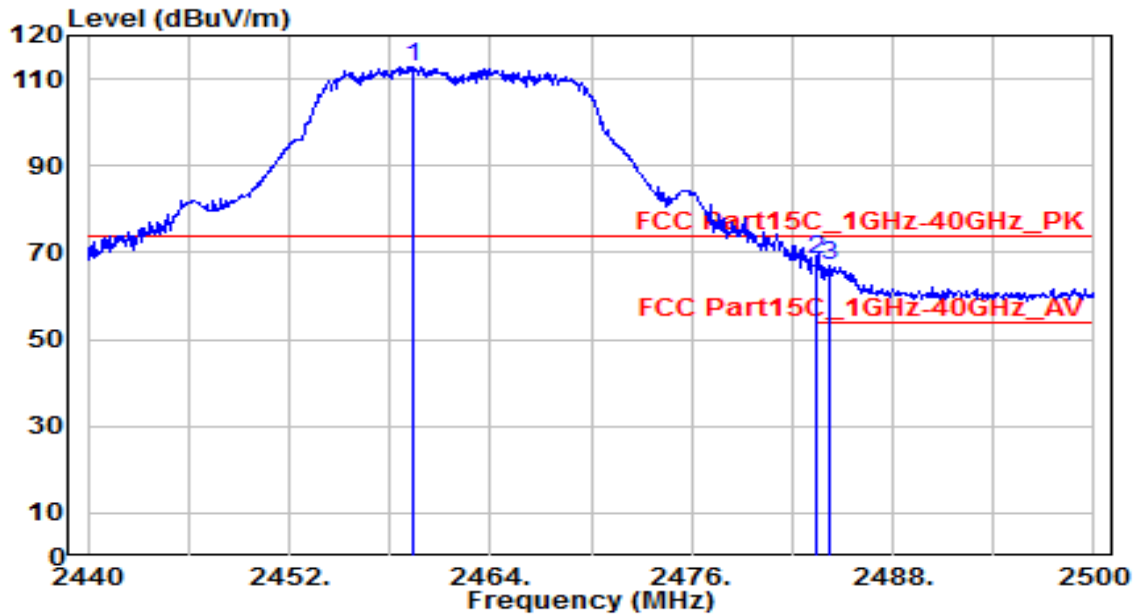


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2459.320	80.26	32.60	112.86	N/A	N/A	210	175	Peak
2	* 2483.500	35.75	32.71	68.46	-5.54	74.00	210	175	Peak
3	2484.160	34.40	32.71	67.11	-6.89	74.00	210	175	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Opus XL	Date of Test	2020-08-06
Factor	BBHA 9120D	Temp. / Humidity	24°C /55%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11g_TX_CH 11_ANT 0	Test Voltage	AC 120V/60Hz

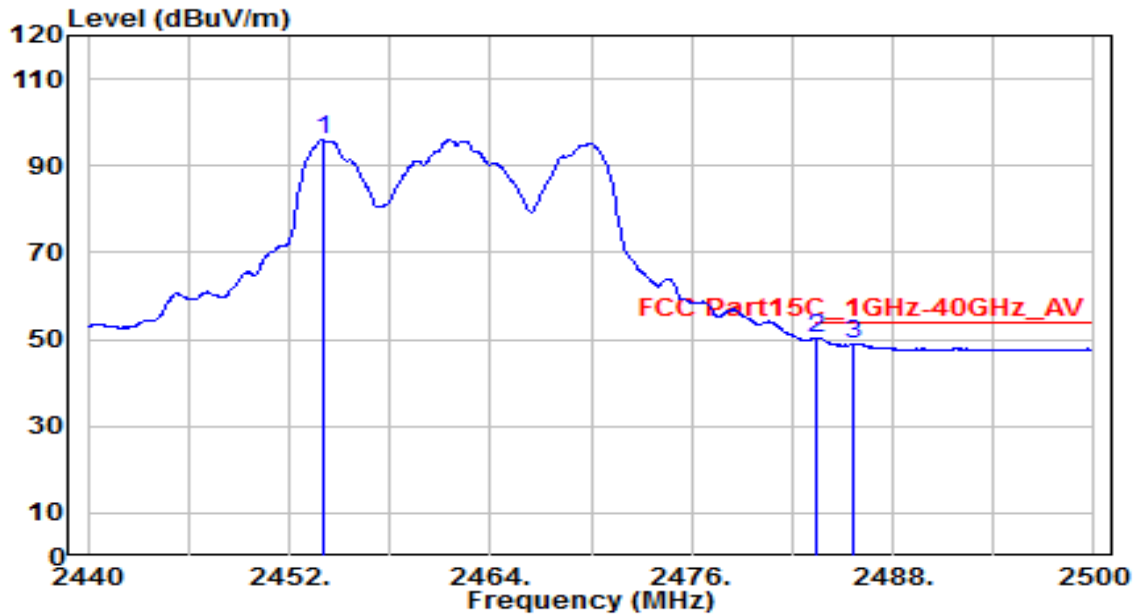


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2453.980	63.40	32.58	95.98	N/A	N/A	210	175	Average
2	* 2483.500	17.48	32.71	50.19	-3.81	54.00	210	175	Average
3	2485.600	16.23	32.72	48.95	-5.05	54.00	210	175	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Opus XL	Date of Test	2020-08-06
Factor	BBHA 9120D	Temp. / Humidity	24°C /55%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11g_TX_CH 11_ANT 0	Test Voltage	AC 120V/60Hz

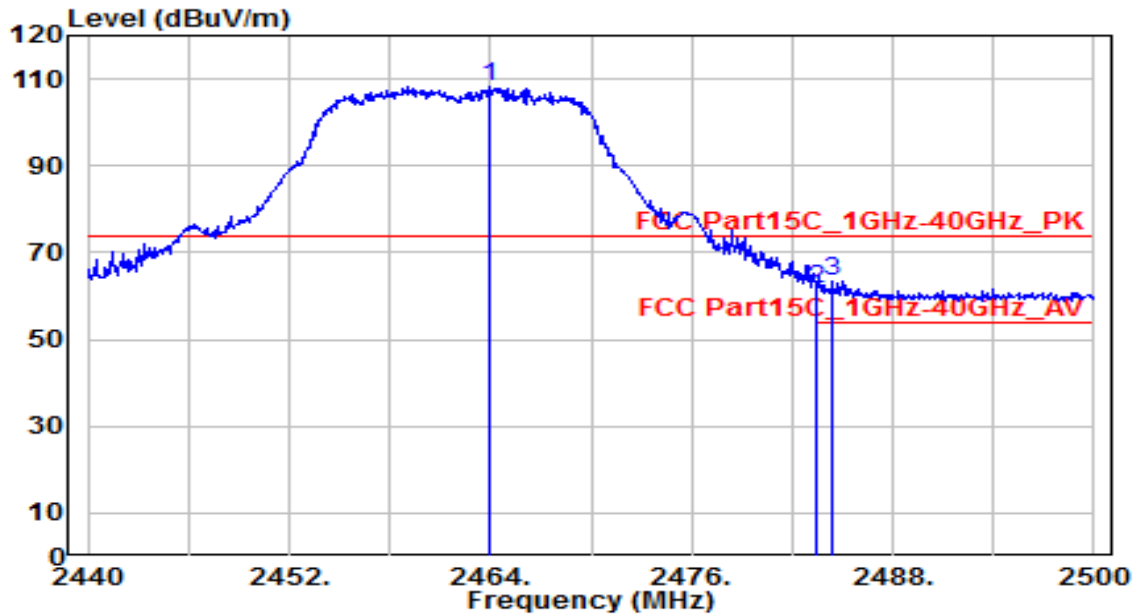


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2463.880	75.53	32.62	108.15	N/A	N/A	175	280	Peak
2	2483.500	28.90	32.71	61.60	-12.40	74.00	175	280	Peak
3	* 2484.460	30.65	32.71	63.36	-10.64	74.00	175	280	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Opus XL	Date of Test	2020-08-06
Factor	BBHA 9120D	Temp. / Humidity	24°C /55%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11g_TX_CH 11_ANT 0	Test Voltage	AC 120V/60Hz

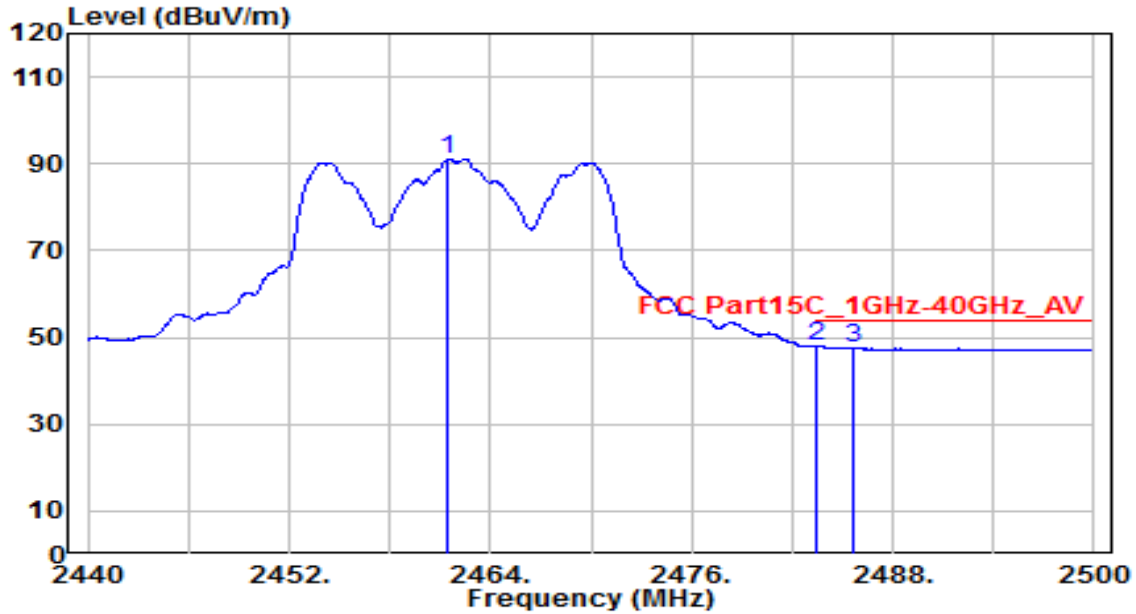


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2461.480	58.43	32.61	91.04	N/A	N/A	175	280	Average
2	* 2483.500	15.29	32.71	47.99	-6.01	54.00	175	280	Average
3	2485.660	14.91	32.72	47.62	-6.38	54.00	175	280	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Opus XL	Date of Test	2020-08-06
Factor	BBHA 9120D	Temp. / Humidity	24°C /55%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0	Test Voltage	AC 120V/60Hz

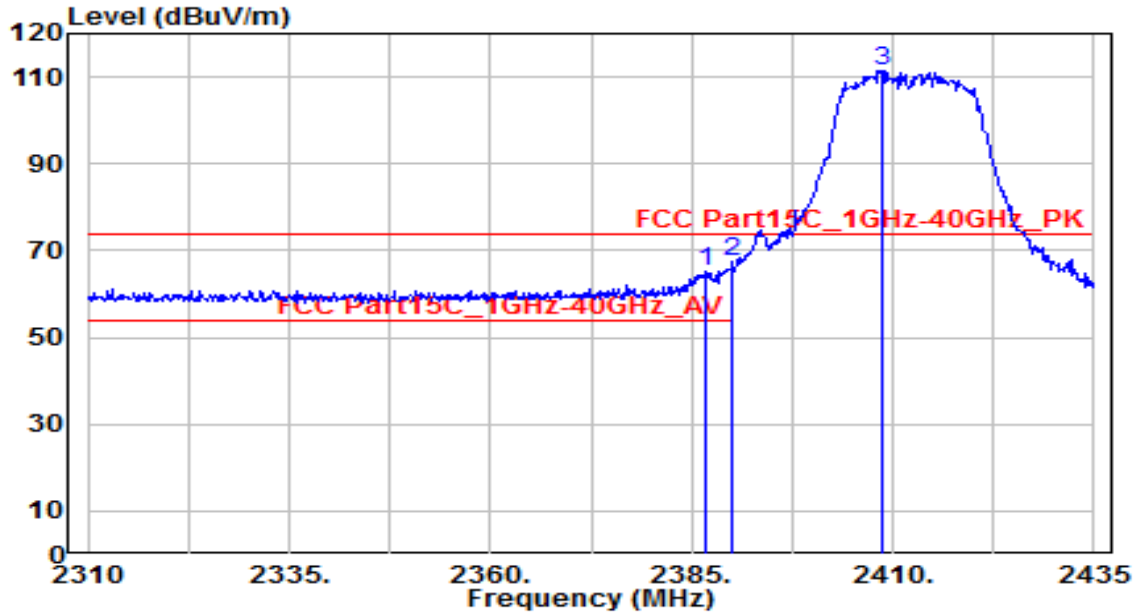


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2386.875	33.12	32.28	65.40	-8.60	74.00	190	180	Peak
2	* 2390.000	35.39	32.30	67.69	-6.31	74.00	190	180	Peak
3	2408.625	79.13	32.38	111.51	N/A	N/A	190	180	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Opus XL	Date of Test	2020-08-06
Factor	BBHA 9120D	Temp. / Humidity	24°C /55%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0	Test Voltage	AC 120V/60Hz

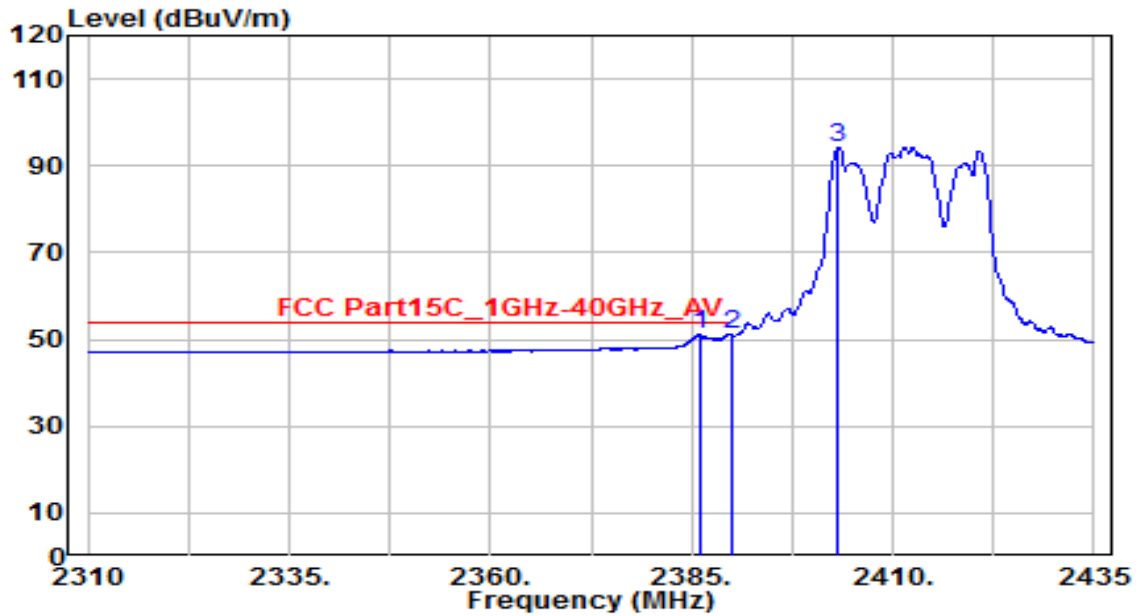


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2386.000	18.82	32.28	51.10	-2.90	54.00	190	180	Average
2	* 2390.000	18.90	32.30	51.20	-2.80	54.00	190	180	Average
3	2403.250	62.04	32.35	94.39	N/A	N/A	190	180	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Opus XL	Date of Test	2020-08-06
Factor	BBHA 9120D	Temp. / Humidity	24°C /55%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0	Test Voltage	AC 120V/60Hz

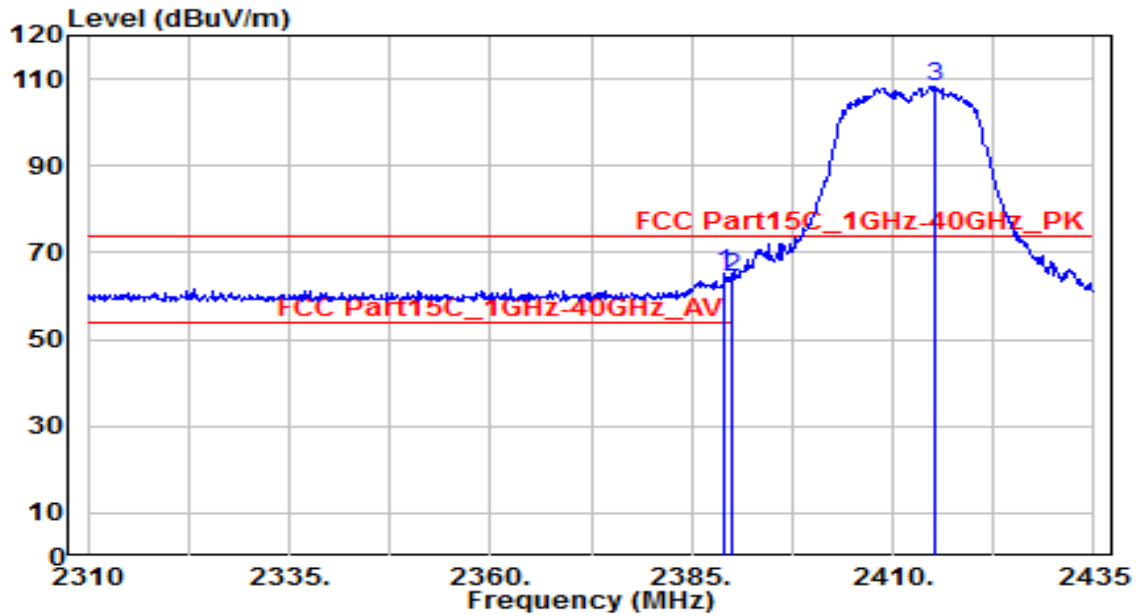


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2389.125	32.98	32.29	65.27	-8.73	74.00	200	240	Peak
2	2390.000	32.10	32.30	64.39	-9.61	74.00	200	240	Peak
3	2415.125	75.93	32.41	108.33	N/A	N/A	200	240	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Opus XL	Date of Test	2020-08-06
Factor	BBHA 9120D	Temp. / Humidity	24°C /55%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0	Test Voltage	AC 120V/60Hz

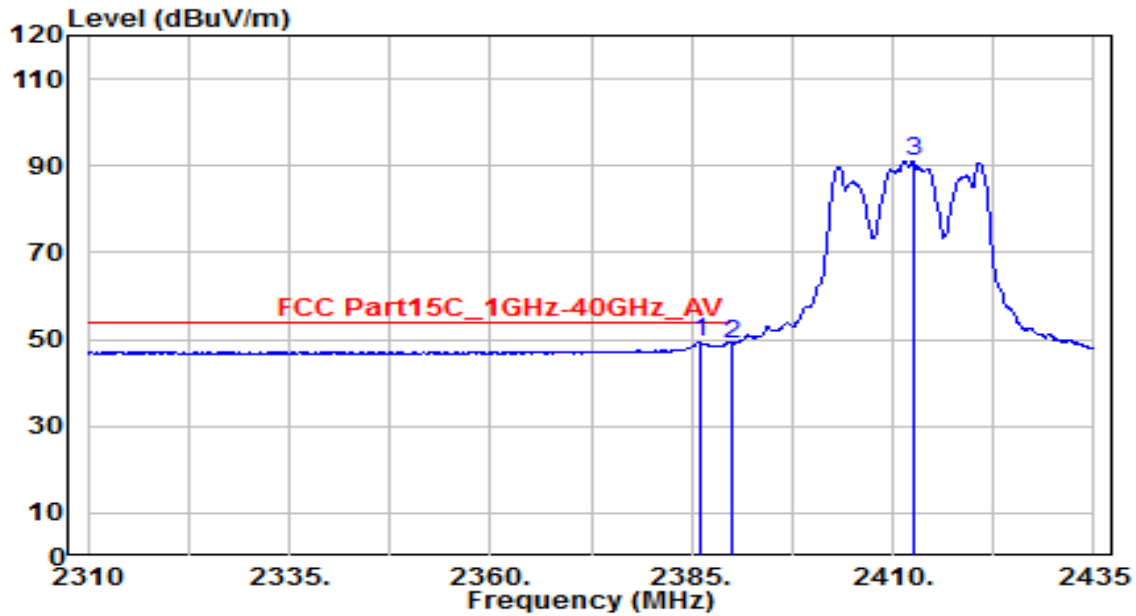


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	2386.000	17.04	32.28	49.32	-4.68	54.00	200	240	Average
2		2390.000	16.78	32.30	49.08	-4.92	54.00	200	240	Average
3		2412.500	58.67	32.40	91.06	N/A	N/A	200	240	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Opus XL	Date of Test	2020-08-06
Factor	BBHA 9120D	Temp. / Humidity	24°C /55%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0	Test Voltage	AC 120V/60Hz

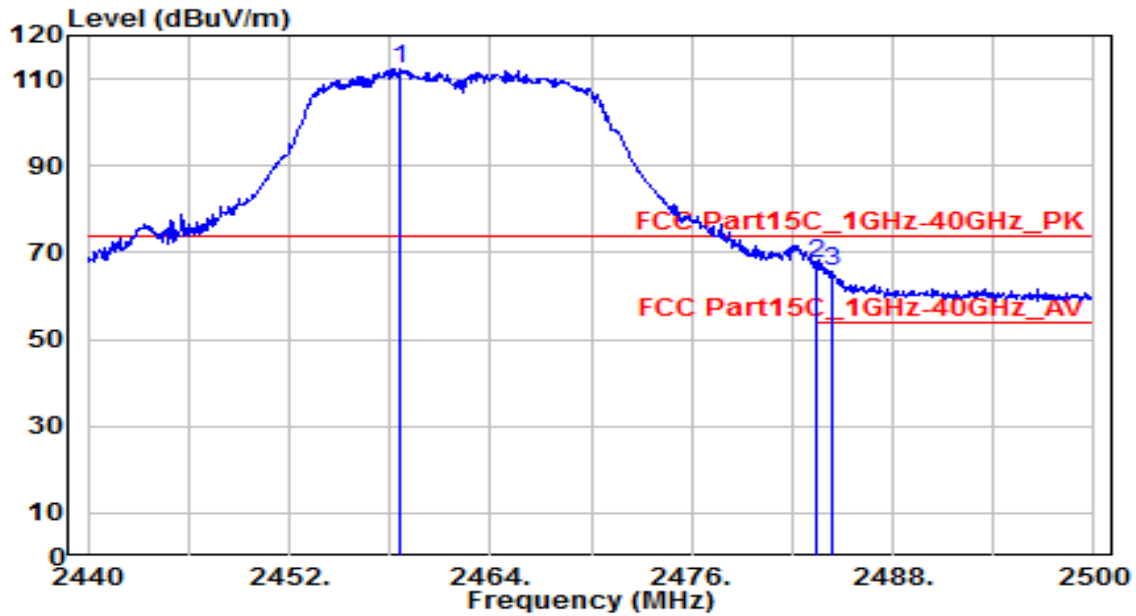


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2458.660	79.65	32.60	112.25	N/A	N/A	210	175	Peak
2	* 2483.500	34.80	32.71	67.51	-6.49	74.00	210	175	Peak
3	2484.340	33.02	32.71	65.73	-8.27	74.00	210	175	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Opus XL	Date of Test	2020-08-06
Factor	BBHA 9120D	Temp. / Humidity	24°C /55%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0	Test Voltage	AC 120V/60Hz

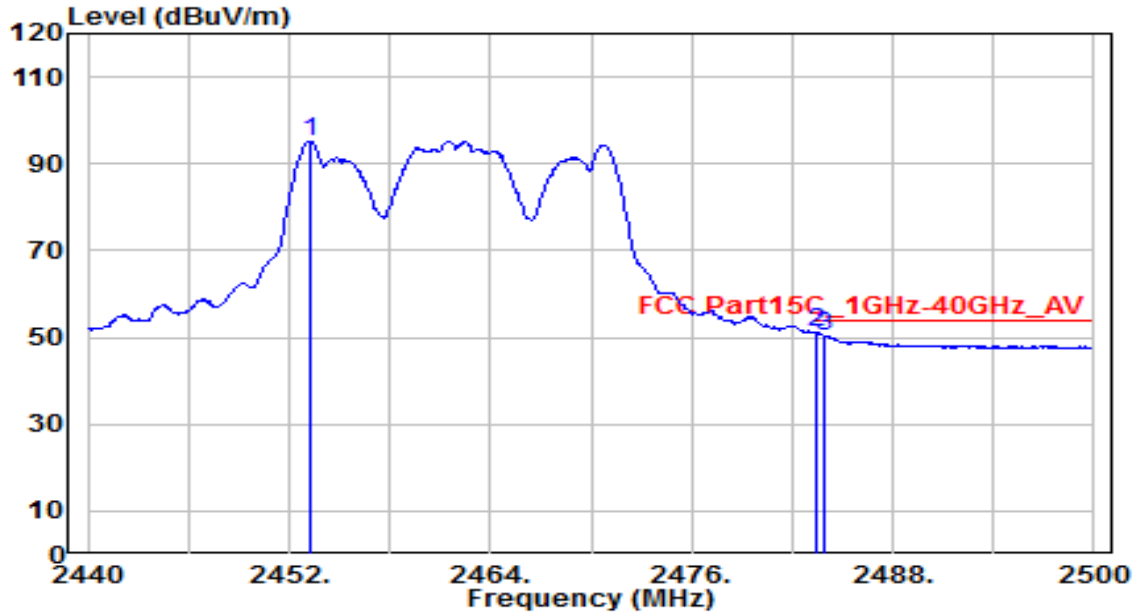


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2453.320	62.53	32.57	95.10	N/A	N/A	210	175	Average
2	* 2483.500	18.31	32.71	51.02	-2.98	54.00	210	175	Average
3	2483.860	17.73	32.71	50.44	-3.56	54.00	210	175	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Opus XL	Date of Test	2020-08-06
Factor	BBHA 9120D	Temp. / Humidity	24°C /55%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0	Test Voltage	AC 120V/60Hz

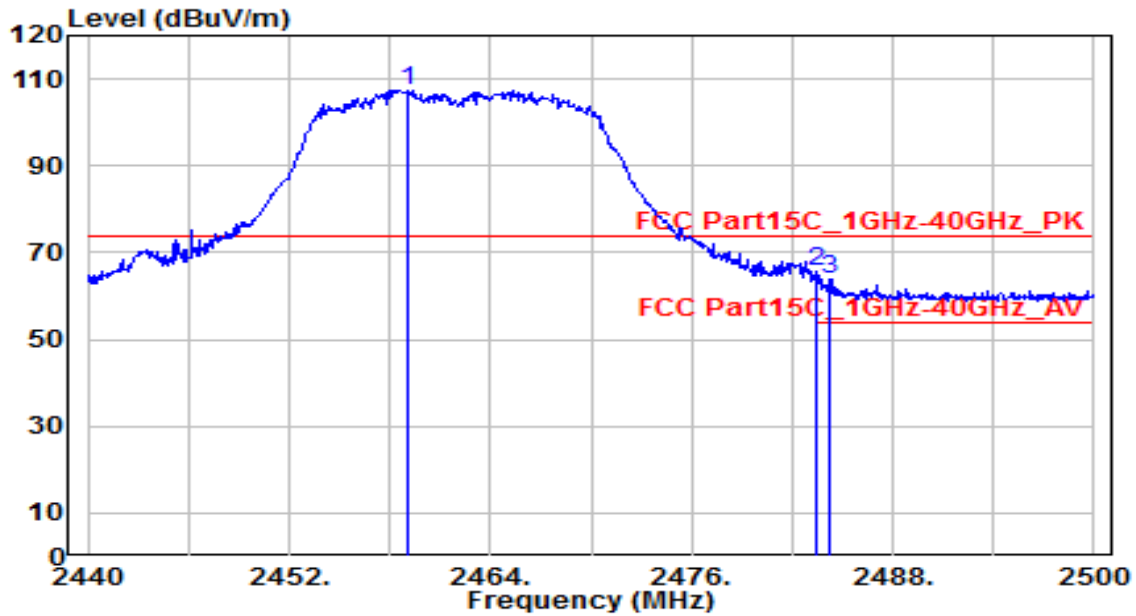


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2459.140	74.81	32.60	107.41	N/A	N/A	175	280	Peak
2	* 2483.500	33.01	32.71	65.71	-8.29	74.00	175	280	Peak
3	2484.280	31.36	32.71	64.07	-9.93	74.00	175	280	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Opus XL	Date of Test	2020-08-06
Factor	BBHA 9120D	Temp. / Humidity	24°C /55%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0	Test Voltage	AC 120V/60Hz

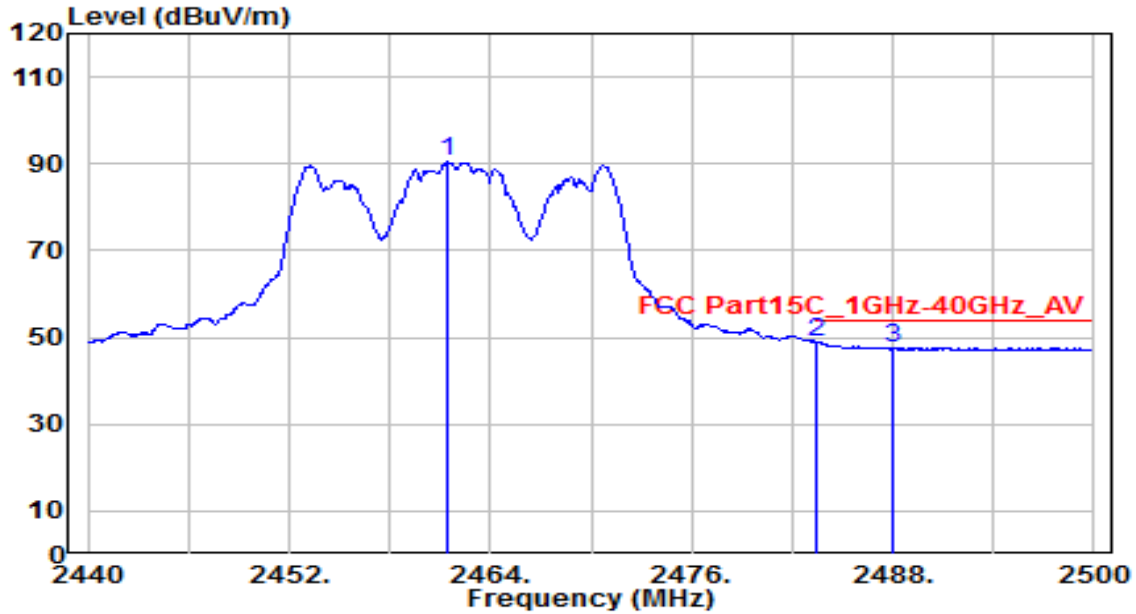


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2461.480	57.75	32.61	90.36	N/A	N/A	175	280	Average
2	* 2483.500	16.20	32.71	48.91	-5.09	54.00	175	280	Average
3	2488.000	14.87	32.73	47.60	-6.40	54.00	175	280	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Opus XL	Date of Test	2020-08-06
Factor	BBHA 9120D	Temp. / Humidity	24°C /55%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0	Test Voltage	AC 120V/60Hz

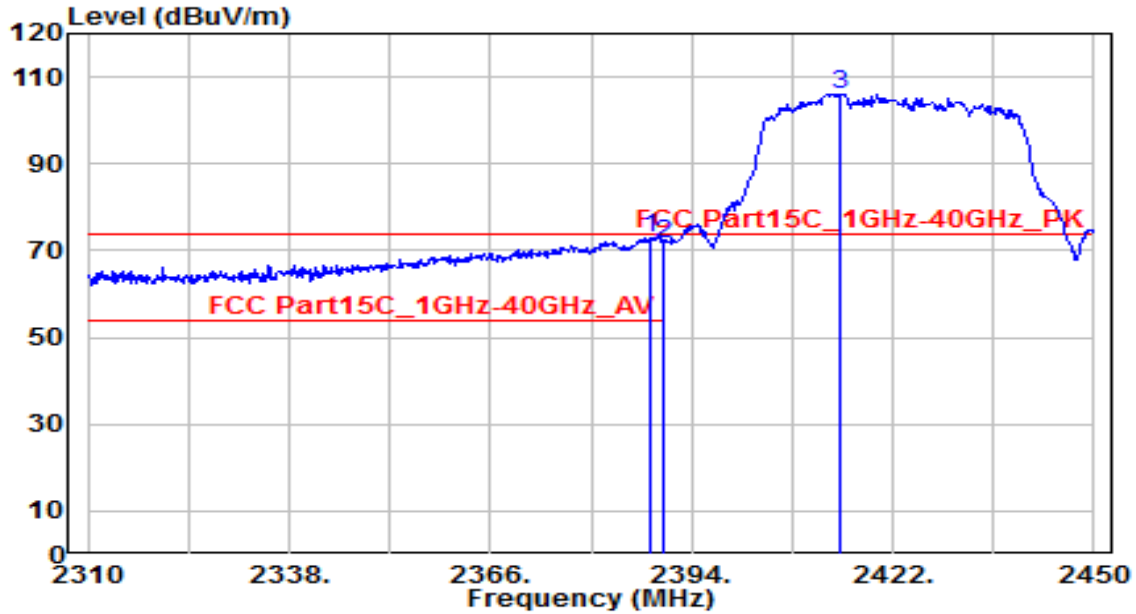


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.120	40.80	32.29	73.09	-0.91	74.00	215	175	Peak
2	2389.940	39.30	32.30	71.60	-2.40	74.00	215	175	Peak
3	* 2414.720	73.78	32.40	106.18	N/A	N/A	215	175	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Opus XL	Date of Test	2020-08-06
Factor	BBHA 9120D	Temp. / Humidity	24°C /55%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0	Test Voltage	AC 120V/60Hz

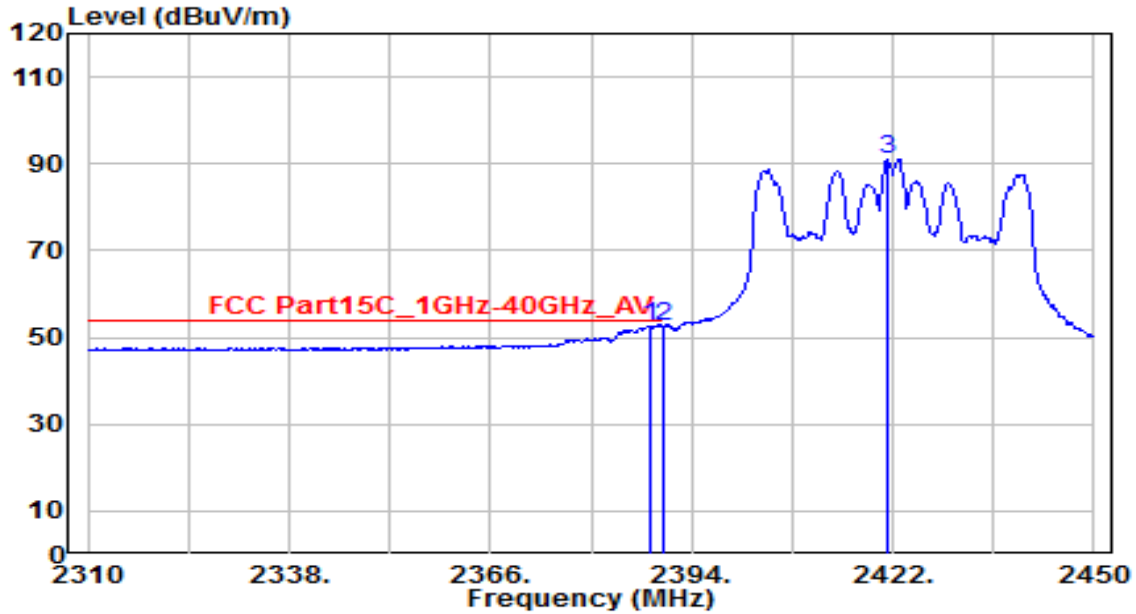


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	20.43	32.29	52.72	-1.28	54.00	215	175	Average
2		20.07	32.30	52.36	-1.64	54.00	215	175	Average
3		58.70	32.43	91.13	N/A	N/A	215	175	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Opus XL	Date of Test	2020-08-06
Factor	BBHA 9120D	Temp. / Humidity	24°C /55%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0	Test Voltage	AC 120V/60Hz

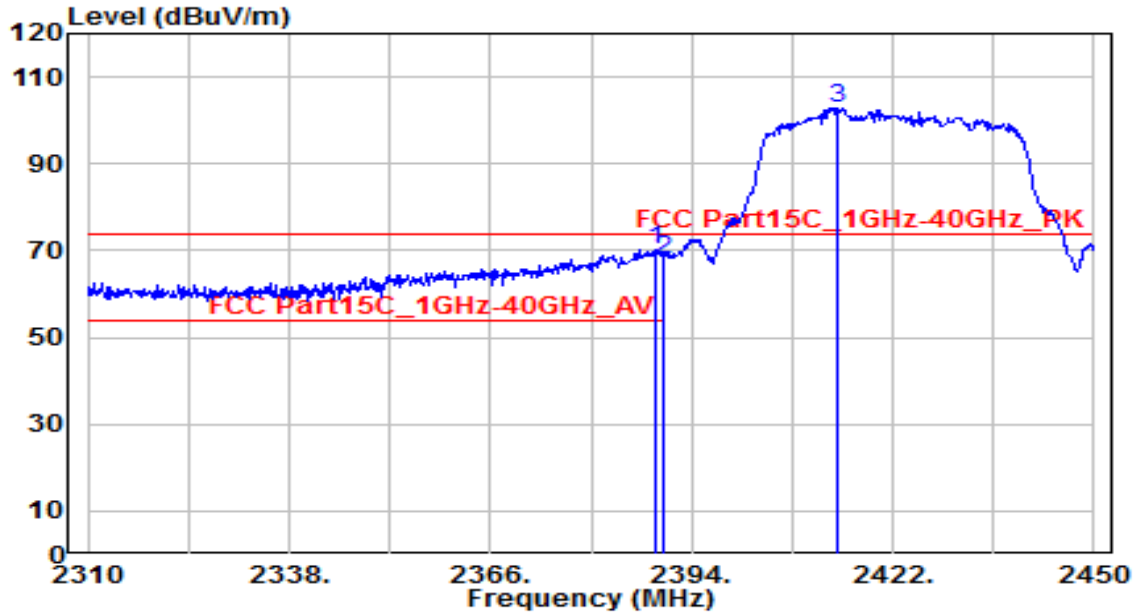


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2388.960	38.01	32.29	70.30	-3.70	74.00	220	245	Peak
2	2390.000	35.42	32.30	67.72	-6.28	74.00	220	245	Peak
3	2414.440	70.44	32.40	102.85	N/A	N/A	220	245	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Opus XL	Date of Test	2020-08-06
Factor	BBHA 9120D	Temp. / Humidity	24°C /55%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0	Test Voltage	AC 120V/60Hz

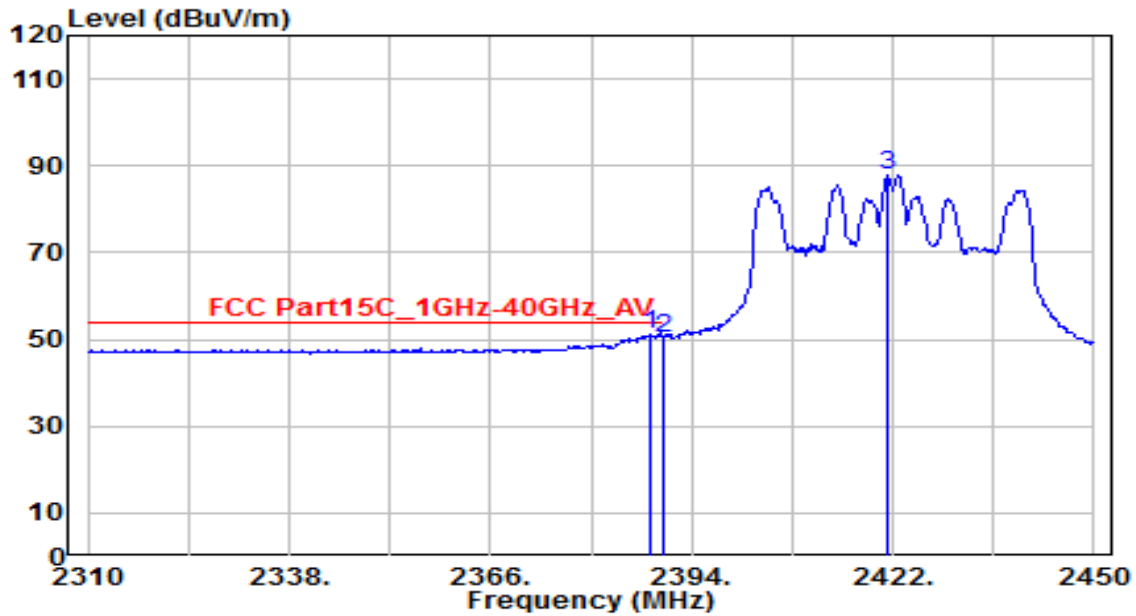


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	2388.260	18.83	32.29	51.12	-2.88	54.00	220	245	Average
2		2390.000	18.17	32.30	50.46	-3.54	54.00	220	245	Average
3		2421.300	55.28	32.43	87.71	N/A	N/A	220	245	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Opus XL	Date of Test	2020-08-06
Factor	BBHA 9120D	Temp. / Humidity	24°C /55%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0	Test Voltage	AC 120V/60Hz

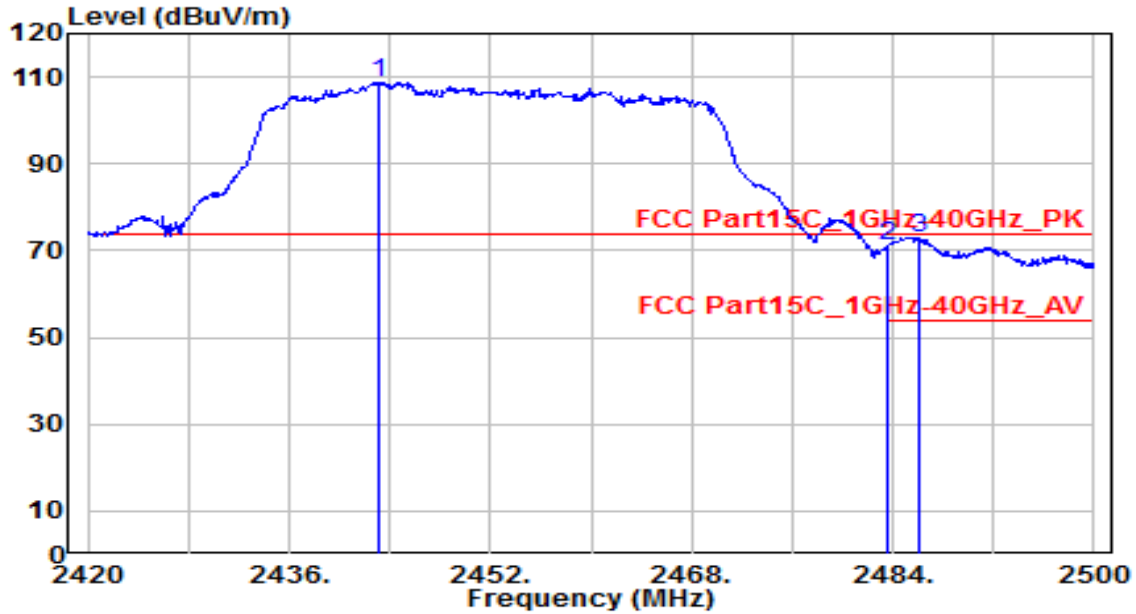


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2443.120	76.23	32.53	108.76	N/A	N/A	210	175	Peak
2	2483.500	38.52	32.71	71.23	-2.77	74.00	210	175	Peak
3	* 2486.080	40.40	32.72	73.12	-0.88	74.00	210	175	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Opus XL	Date of Test	2020-08-06
Factor	BBHA 9120D	Temp. / Humidity	24°C /55%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0	Test Voltage	AC 120V/60Hz

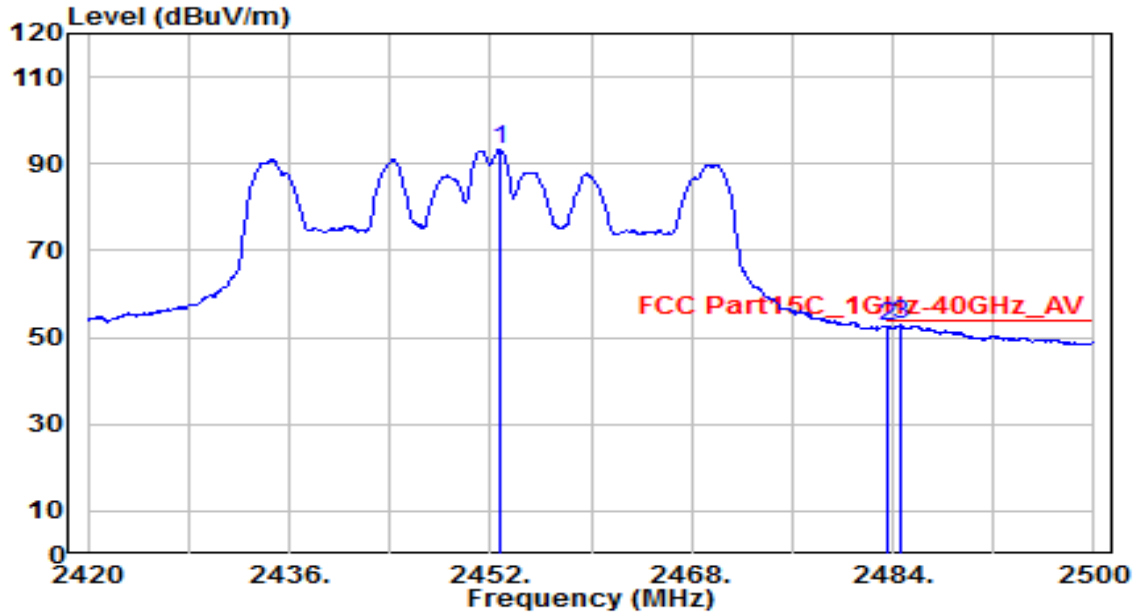


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2452.800	60.56	32.57	93.14	N/A	N/A	210	175	Average
2	2483.500	19.81	32.71	52.52	-1.48	54.00	210	175	Average
3	* 2484.720	20.08	32.71	52.80	-1.20	54.00	210	175	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Opus XL	Date of Test	2020-08-06
Factor	BBHA 9120D	Temp. / Humidity	24°C /55%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0	Test Voltage	AC 120V/60Hz

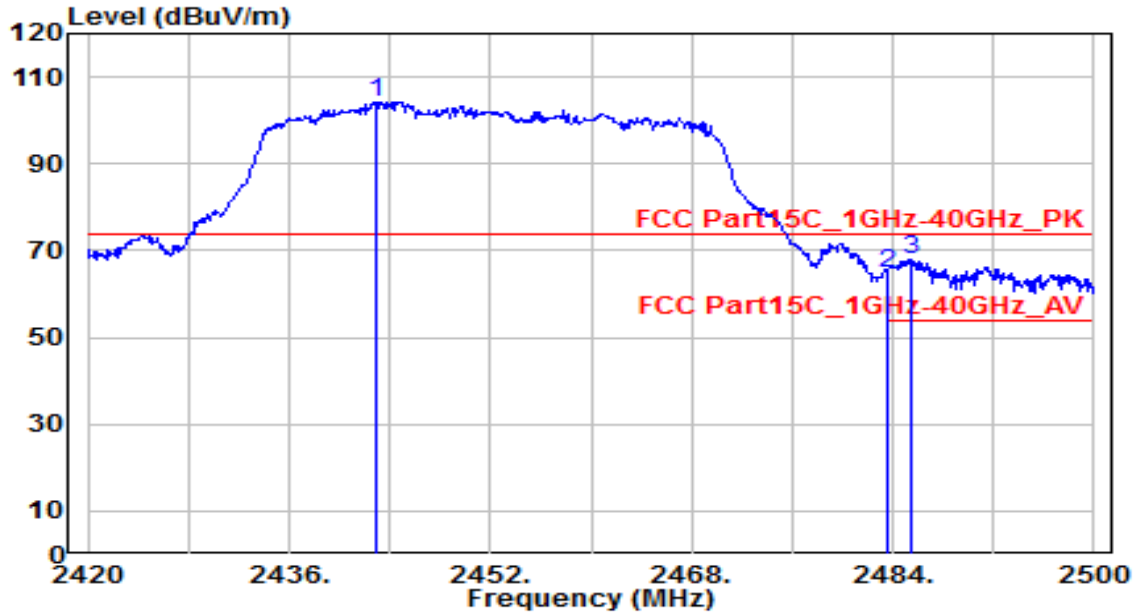


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2442.960	71.73	32.53	104.26	N/A	N/A	180	250	Peak
2	2483.520	32.18	32.71	64.89	-9.11	74.00	180	250	Peak
3	* 2485.440	35.17	32.72	67.89	-6.11	74.00	180	250	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Opus XL	Date of Test	2020-08-06
Factor	BBHA 9120D	Temp. / Humidity	24°C /55%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0	Test Voltage	AC 120V/60Hz

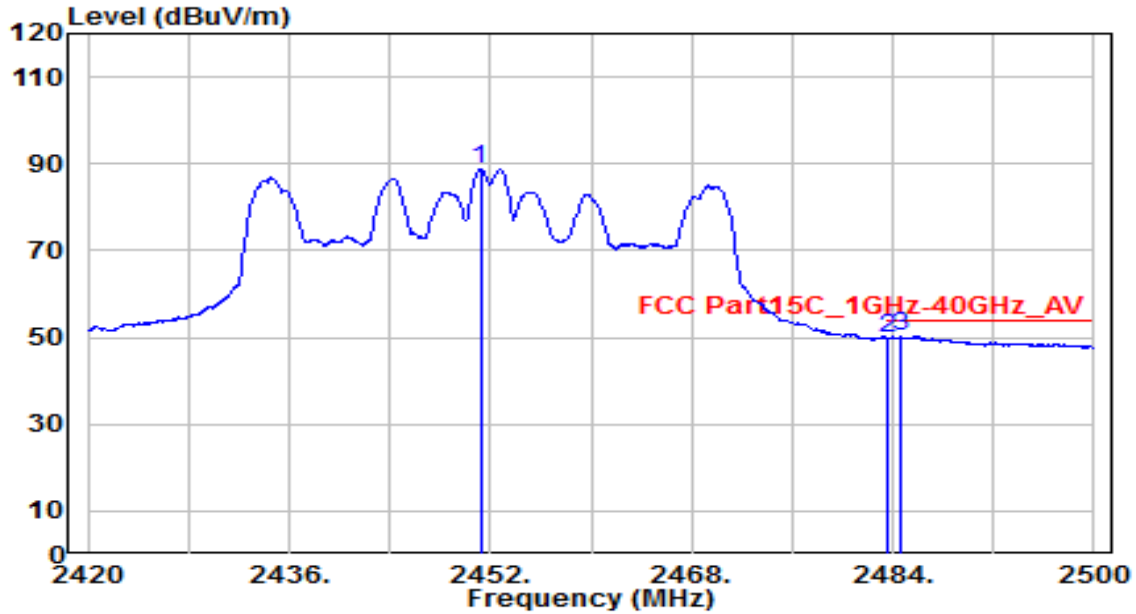

No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2451.200	56.10	32.57	88.67	N/A	N/A	180	250	Average
2	2483.500	17.32	32.71	50.02	-3.98	54.00	180	250	Average
3	* 2484.640	17.40	32.71	50.11	-3.89	54.00	180	250	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

7.8. AC Conducted Emissions Measurement


7.8.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 / RSS-Gen Limits		
Frequency (MHz)	QP (dB μ V)	Average (dB μ V)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

7.8.2. Test Setup

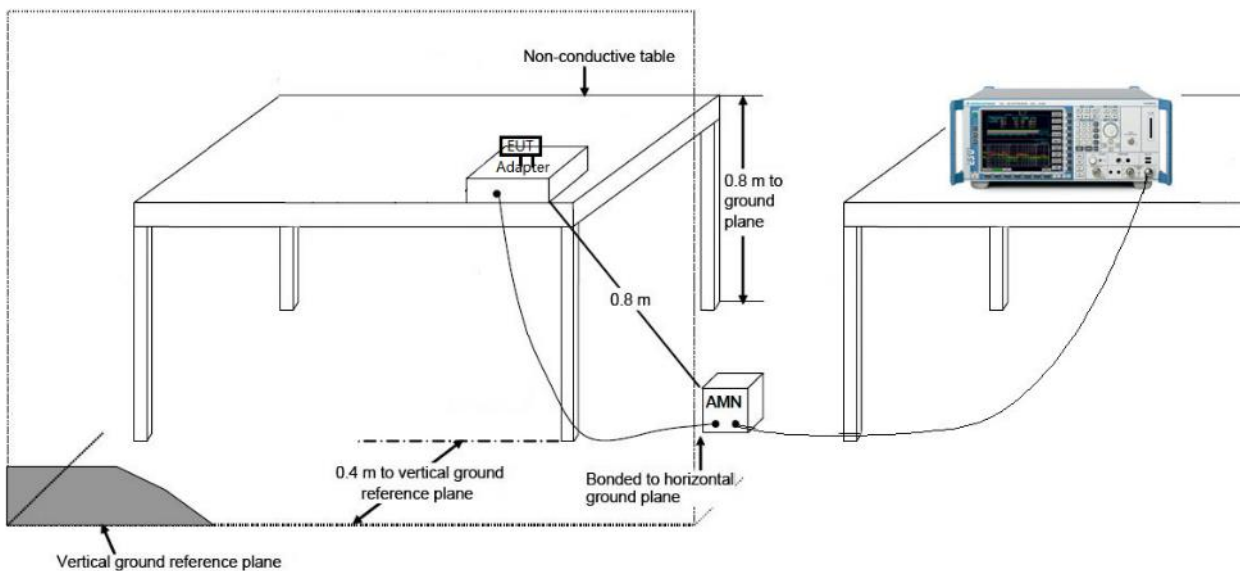

7.8.3. Test Result

EUT	Sonata XL	Date of Test	2020-07-30
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	26.4°C /50%
Polarity	Line1	Site / Test Engineer	SR2 / Kaunaz
Test Mode	802.11n-20_TX_CH 6_ANT 0	Test Voltage	AC 120V/60Hz

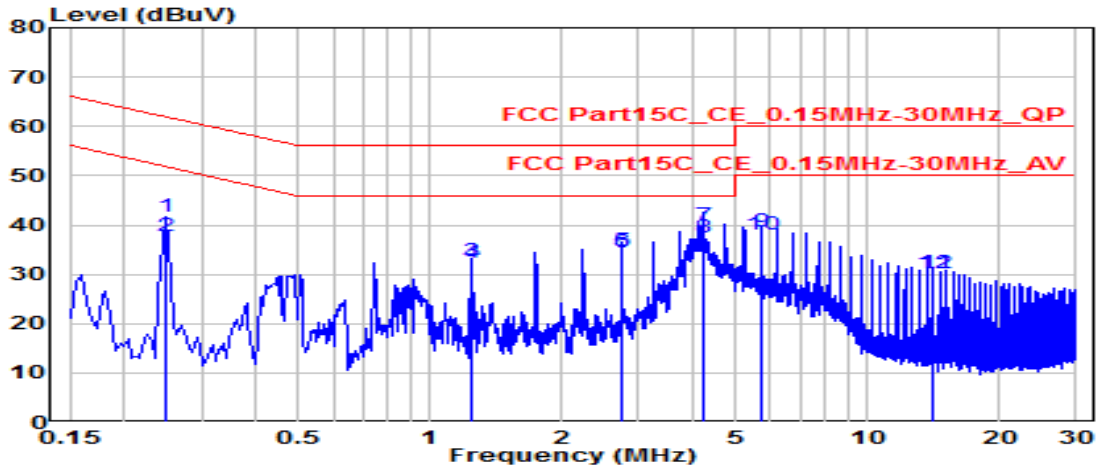


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	0.249	31.90	9.62	41.52	-20.27	61.79	QP
2	0.249	28.10	9.62	37.71	-14.08	51.79	Average
3	1.243	22.89	9.67	32.56	-23.44	56.00	QP
4	1.243	22.75	9.67	32.42	-13.58	46.00	Average
5	2.737	25.09	9.70	34.79	-21.21	56.00	QP
6	2.737	24.72	9.70	34.42	-11.58	46.00	Average
7	* 4.231	30.19	9.72	39.92	-16.08	56.00	QP
8	* 4.231	27.59	9.72	37.32	-8.68	46.00	Average
9	5.725	28.94	9.76	38.70	-21.30	60.00	QP
10	5.725	28.34	9.76	38.10	-11.90	50.00	Average
11	14.189	20.19	9.92	30.11	-29.89	60.00	QP
12	14.189	20.36	9.92	30.29	-19.71	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	Sonata XL	Date of Test	2020-07-30
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	26.4°C /50%
Polarity	Neutral	Site / Test Engineer	SR2 / Kaunaz
Test Mode	802.11n-20_TX_CH 6_ANT 0	Test Voltage	AC 120V/60Hz

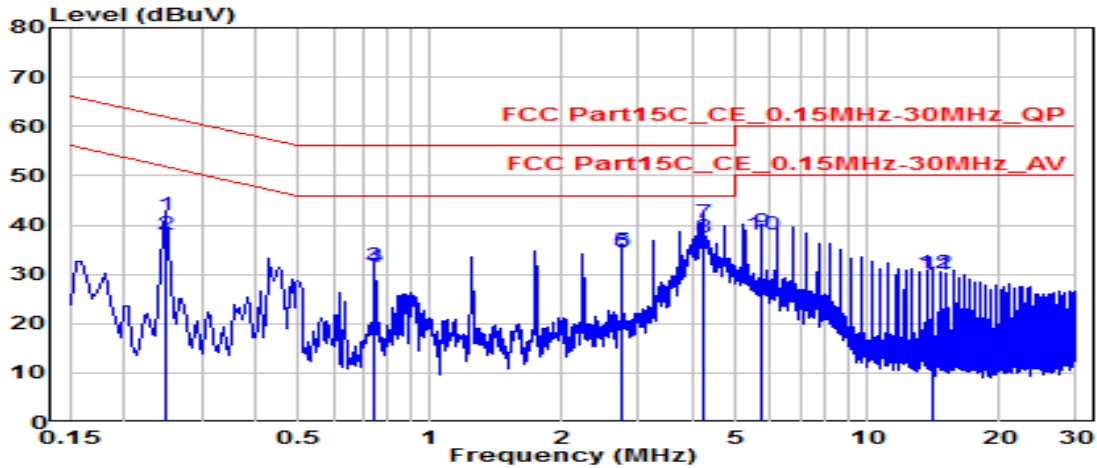


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	0.249	32.37	9.63	42.00	-19.79	61.79	QP
2	0.249	28.29	9.63	37.92	-13.87	51.79	Average
3	0.748	22.04	9.66	31.69	-24.31	56.00	QP
4	0.748	21.61	9.66	31.27	-14.73	46.00	Average
5	2.737	25.16	9.70	34.86	-21.14	56.00	QP
6	2.737	24.83	9.70	34.53	-11.47	46.00	Average
7	* 4.231	30.64	9.73	40.37	-15.63	56.00	QP
8	* 4.231	27.55	9.73	37.29	-8.71	46.00	Average
9	5.725	28.98	9.77	38.75	-21.25	60.00	QP
10	5.725	28.34	9.77	38.11	-11.89	50.00	Average
11	14.189	19.98	9.96	29.94	-30.06	60.00	QP
12	14.189	20.16	9.96	30.12	-19.88	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	Sonata XL	Date of Test	2020-07-30
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	26.4°C /50%
Polarity	Line1	Site / Test Engineer	SR2 / Kaunaz
Test Mode	802.11n-20_TX_CH 6_ANT 0	Test Voltage	AC 240V/60Hz

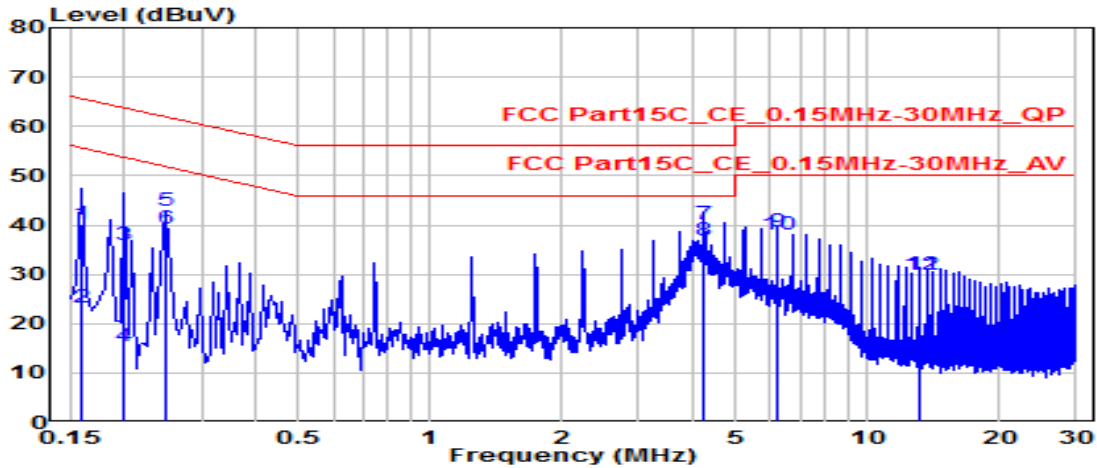


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	0.159	30.59	9.61	40.20	-25.31	65.52	QP
2	0.159	13.66	9.61	23.27	-32.25	55.52	Average
3	0.199	26.17	9.61	35.78	-27.85	63.63	QP
4	0.199	5.87	9.61	15.49	-38.14	53.63	Average
5	0.249	33.11	9.62	42.72	-19.07	61.79	QP
6	0.249	29.73	9.62	39.34	-12.45	51.79	Average
7	* 4.231	30.54	9.72	40.26	-15.74	56.00	QP
8	* 4.231	27.20	9.72	36.92	-9.08	46.00	Average
9	6.224	28.87	9.77	38.64	-21.36	60.00	QP
10	6.224	28.39	9.77	38.17	-11.83	50.00	Average
11	13.194	20.01	9.91	29.92	-30.08	60.00	QP
12	13.194	20.05	9.91	29.96	-20.04	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	Sonata XL	Date of Test	2020-07-30
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	26.4°C /50%
Polarity	Neutral	Site / Test Engineer	SR2 / Kaunaz
Test Mode	802.11n-20_TX_CH 6_ANT 0	Test Voltage	AC 240V/60Hz

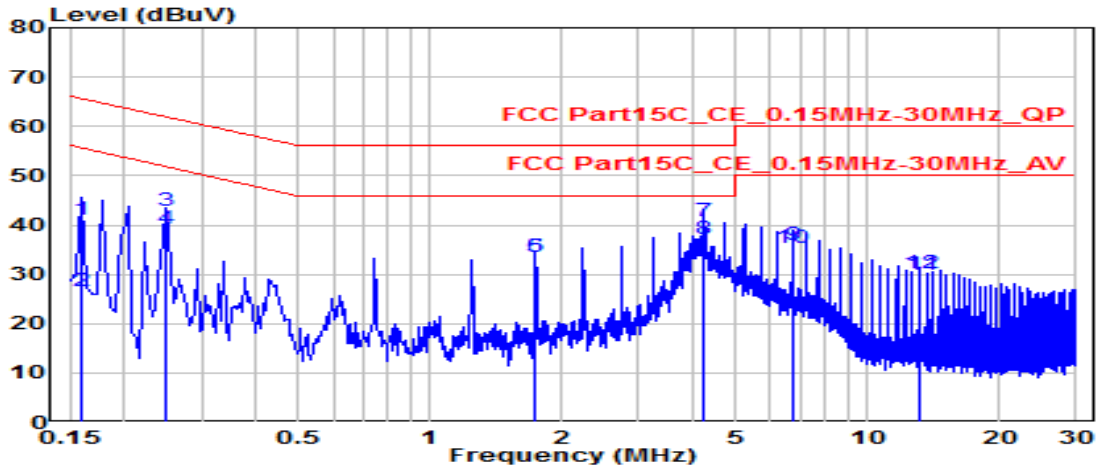


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	0.159	31.33	9.62	40.95	-24.56	65.52	QP
2	0.159	17.08	9.62	26.70	-28.82	55.52	Average
3	0.249	33.29	9.63	42.91	-18.88	61.79	QP
4	0.249	29.77	9.63	39.39	-12.40	51.79	Average
5	1.743	23.96	9.68	33.64	-22.36	56.00	QP
6	1.743	23.91	9.68	33.60	-12.40	46.00	Average
7	* 4.231	30.93	9.73	40.66	-15.34	56.00	QP
8	* 4.231	27.35	9.73	37.08	-8.92	46.00	Average
9	6.719	26.13	9.80	35.93	-24.07	60.00	QP
10	6.719	25.55	9.80	35.34	-14.66	50.00	Average
11	13.194	20.08	9.94	30.02	-29.98	60.00	QP
12	13.194	20.16	9.94	30.11	-19.89	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).

EUT	Opus XL	Date of Test	2020-07-30
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	26.4°C /50%
Polarity	Line1	Site / Test Engineer	SR2 / Kaunaz
Test Mode	802.11n-20_TX_CH 6_ANT 0	Test Voltage	AC 120V/60Hz

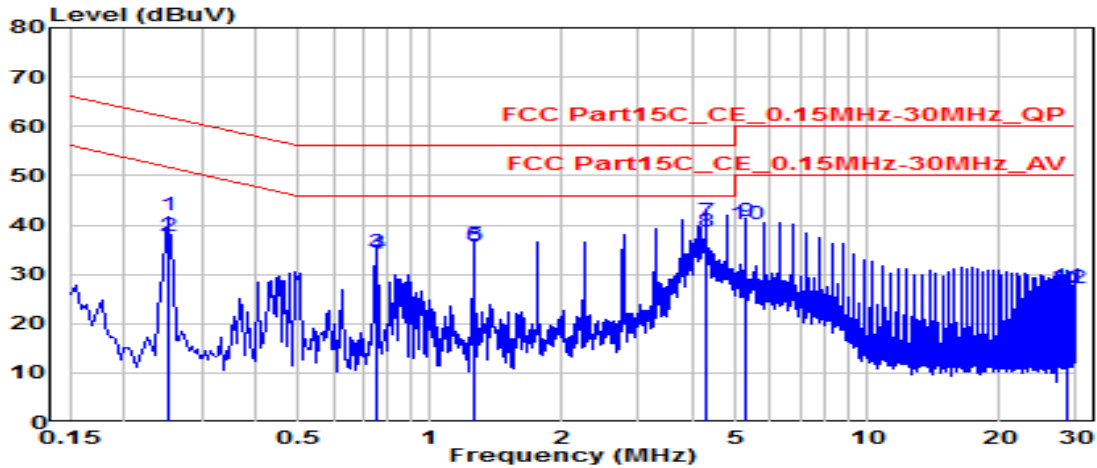


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	0.253	32.34	9.62	41.96	-19.68	61.64	QP
2	0.253	28.19	9.62	37.81	-13.84	51.64	Average
3	0.753	24.66	9.65	34.31	-21.69	56.00	QP
4	0.753	24.47	9.65	34.12	-11.88	46.00	Average
5	1.257	26.12	9.67	35.78	-20.22	56.00	QP
6	1.257	25.96	9.67	35.63	-10.37	46.00	Average
7	* 4.272	30.88	9.73	40.61	-15.39	56.00	QP
8	* 4.272	28.81	9.73	38.53	-7.47	46.00	Average
9	5.279	30.95	9.75	40.70	-19.30	60.00	QP
10	5.279	30.46	9.75	40.21	-9.79	50.00	Average
11	28.655	17.52	10.10	27.62	-32.38	60.00	QP
12	28.655	17.06	10.10	27.16	-22.84	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	Opus XL	Date of Test	2020-07-30
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	26.4°C /50%
Polarity	Neutral	Site / Test Engineer	SR2 / Kaunaz
Test Mode	802.11n-20_TX_CH 6_ANT 0	Test Voltage	AC 120V/60Hz

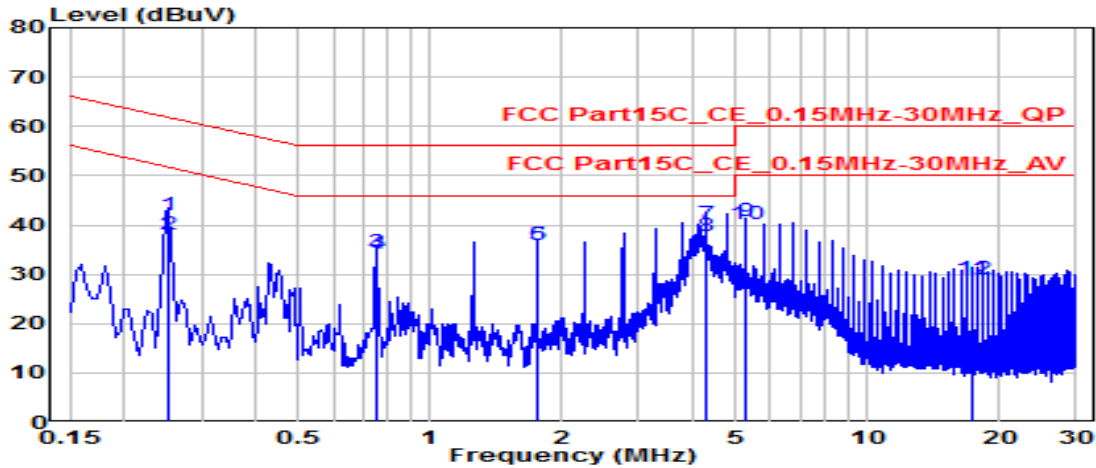


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	0.253	32.46	9.63	42.09	-19.55	61.64	QP
2	0.253	28.34	9.63	37.97	-13.67	51.64	Average
3	0.753	24.67	9.66	34.32	-21.68	56.00	QP
4	0.753	24.51	9.66	34.17	-11.83	46.00	Average
5	1.761	26.27	9.69	35.95	-20.05	56.00	QP
6	1.761	26.19	9.69	35.88	-10.12	46.00	Average
7	* 4.276	30.48	9.74	40.21	-15.79	56.00	QP
8	* 4.276	27.91	9.74	37.64	-8.36	46.00	Average
9	5.279	30.97	9.76	40.72	-19.28	60.00	QP
10	5.279	30.41	9.76	40.17	-9.83	50.00	Average
11	17.343	18.91	10.02	28.93	-31.07	60.00	QP
12	17.343	19.08	10.02	29.10	-20.90	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	Opus XL	Date of Test	2020-07-30
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	26.4°C /50%
Polarity	Line1	Site / Test Engineer	SR2 / Kaunaz
Test Mode	802.11n-20_TX_CH 6_ANT 0	Test Voltage	AC 240V/60Hz

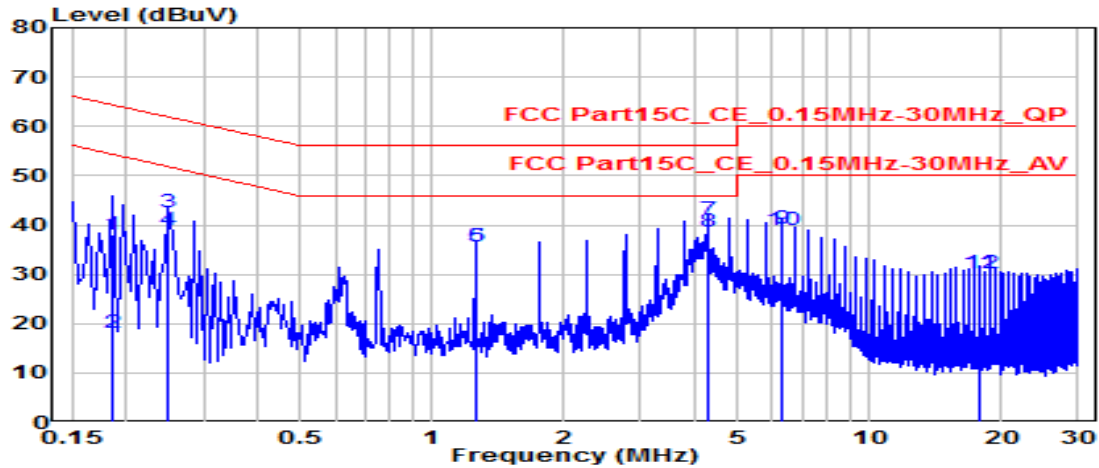


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	0.186	28.57	9.61	38.19	-26.03	64.21	QP
2	0.186	8.46	9.61	18.07	-36.15	54.21	Average
3	0.249	33.09	9.62	42.70	-19.09	61.79	QP
4	0.249	29.23	9.62	38.85	-12.94	51.79	Average
5	1.257	25.85	9.67	35.52	-20.48	56.00	QP
6	1.257	25.86	9.67	35.53	-10.47	46.00	Average
7	* 4.272	31.21	9.73	40.93	-15.07	56.00	QP
8	* 4.272	29.02	9.73	38.75	-7.25	46.00	Average
9	6.283	29.57	9.78	39.35	-20.65	60.00	QP
10	6.283	29.19	9.78	38.96	-11.04	50.00	Average
11	17.847	20.21	9.96	30.18	-29.82	60.00	QP
12	17.847	20.37	9.96	30.33	-19.67	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	Opus XL	Date of Test	2020-07-30
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	26.4°C /50%
Polarity	Neutral	Site / Test Engineer	SR2 / Kaunaz
Test Mode	802.11n-20_TX_CH 6_ANT 0	Test Voltage	AC 240V/60Hz

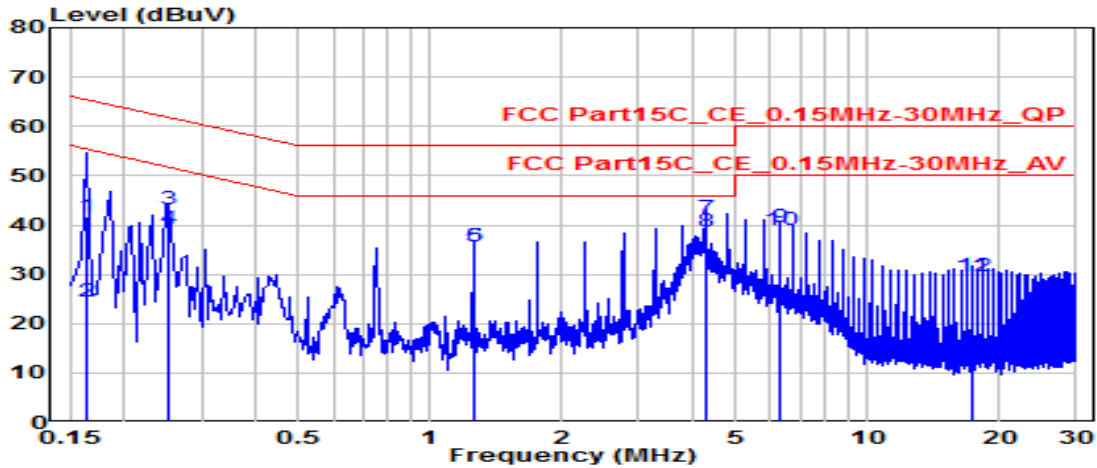

No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	0.163	32.05	9.62	41.67	-23.62	65.28	QP
2	0.163	14.92	9.62	24.54	-30.75	55.28	Average
3	0.253	33.51	9.63	43.14	-18.51	61.64	QP
4	0.253	29.65	9.63	39.28	-12.36	51.64	Average
5	1.257	25.98	9.68	35.65	-20.35	56.00	QP
6	1.257	25.92	9.68	35.59	-10.41	46.00	Average
7	* 4.272	31.49	9.74	41.23	-14.77	56.00	QP
8	* 4.272	29.02	9.74	38.76	-7.24	46.00	Average
9	6.283	29.64	9.79	39.42	-20.58	60.00	QP
10	6.283	29.19	9.79	38.98	-11.02	50.00	Average
11	17.343	19.71	10.02	29.73	-30.27	60.00	QP
12	17.343	19.55	10.02	29.57	-20.43	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

8. CONCLUSION

The data collected relate only the item(s) tested and show that the **8.0" Touch Screen Controller**, **5.7" Touch Screen Controller** is in compliance with Part 15C & RSS-247 of the FCC & IC Rules.

————— The End —————