

InterLab[®]
Final Report on
LISA-U201
FCC ID XPYLISAU201
IC: 8595A-LISAU201

Report Reference: MDE_UBLOX_1519_FCCa
according to FCC Part 22, Subpart H Part 24, subpart E

Date: August 25, 2015

Test Laboratory:
7layers GmbH
Borsigstraße 11
40880 Ratingen
Germany



Note:
The following test results relate only to the devices specified in this document. This report shall not be reproduced in part without the written approval of the test laboratory.

7layers GmbH
Borsigstraße 11
40880 Ratingen, Germany
T +49 (0) 2102 749 0
F +49 (0) 2102 749 350
www.7layers.com

Geschäftsführer /
Managing Director:
Dr. Harald Ansorge

Registergericht registered in:
Düsseldorf, HRB 75554
USt-IdNr VAT No.:
DE203159652
TAX No. 147/5869/0385
A Bureau Veritas Group Company

1 Administrative Data

1.1 Project Data

Project Responsible: Dirk Bratsch
Date Of Test Report: 2015/08/25
Date of first test: 2015/06/30
Date of last test: 2015/08/21

1.2 Applicant Data

Company Name: u-blox AG
Street: Zürcherstrasse 68,
CH-8800 Thalwil
Country: Switzerland
Contact Person: Mr. Giulio Comar
Function: Certification Manager
Department: Cellular Product Certification
Phone: +41 44 722 7462
Fax: +41 44 722 7447
E-Mail: giulio.comar@u-blox.com

1.3 Test Laboratory Data

The following list shows all places and laboratories involved for test result generation:

7 layers DE

Company Name : 7 layers GmbH
Street : Borsigstrasse 11
City : 40880 Ratingen
Country : Germany
Contact Person : Mr. Michael Albert
Phone : +49 2102 749 201
Fax : +49 2102 749 444
E Mail : Michael.Albert@7Layers.com

Laboratory Details

<i>Lab ID</i>	<i>Identification</i>	<i>Responsible</i>	<i>Accreditation Info</i>
Lab 1	Radiated Emissions	Mr. Marco Kullik Mr. Robert Machulec	DAkkS-Registration no. D-PL-12140-01-01
Lab 2	Radio Lab	Mr. Dobrin Dobrinov Mr. Daniel Gall	DAkkS-Registration no. D-PL-12140-01-01

1.4 Signature of the Testing Responsible

.....
 Daniel Gall
 responsible for tests performed in: Lab 1, Lab 2

1.5 Signature of the Accreditation Responsible

.....
 Accreditation scope responsible person
 responsible for Lab 1, Lab 2

2 Test Object Data

2.1 General OUT Description

The following section lists all OUTs (Object's Under Test) involved during testing.

OUT: LISA-U201

Type / Model / Family: LISA-U201
 FCC ID XPYLISAU201
 IC: 8595A-LISAU201

Product Category: Module

Manufacturer:
Company Name: See applicant data:

Contact Person: -

Parameter List:

<i>Parameter name</i>	<i>Value</i>
-----------------------	--------------

2.2 Detailed Description of OUT Samples

Sample : ad01

<i>OUT Identifier</i>	LISA-U201		
<i>Sample Description</i>	FCC Sample		
<i>Serial No.</i>	359486060010277		
<i>HW Status</i>	214001		
<i>SW Status</i>	23.35		
<i>Low Voltage</i>	3.3 V	<i>Low Temp.</i>	-20 °C
<i>High Voltage</i>	4.4 V	<i>High Temp.</i>	55 °C
<i>Nominal Voltage</i>	3.8 V	<i>Normal Temp.</i>	25 °C

Sample : aq01

<i>OUT Identifier</i>	LISA-U201		
<i>Sample Description</i>	FCC Sample		
<i>Serial No.</i>	359486060010434		
<i>HW Status</i>	214001		
<i>SW Status</i>	23.35		
<i>Low Voltage</i>	3.3 V	<i>Low Temp.</i>	-20 °C
<i>High Voltage</i>	4.4 V	<i>High Temp.</i>	55 °C
<i>Nominal Voltage</i>	3.8 V	<i>Normal Temp.</i>	25 °C

2.3 OUT Features

Features for OUT: LISA-U201

<i>Designation</i>	<i>Description</i>	<i>Allowed Values</i>	<i>Supported Value(s)</i>
Features for scope: FCC_v2			
Dant	removable antenna supplied and type tested with the radio equipment, designed as an example part of the equipment		
DC	The OUT is powered by or connected to DC		
FDD2	EUT supports UMTS FDD2 in the band 1850 MHz - 1910 MHz		
FDD5	EUT supports UMTS FDD5 in the band 824 MHz - 849 MHz		
HSDPA-FDD2	EUT supports UMTS FDD2 HSDPA in the band 1850 MHz - 1910 MHz		
HSDPA-FDD5	EUT supports UMTS FDD5 HSDPA in the band 824 MHz - 849 MHz		
HSUPA-FDD2	EUT supports UMTS FDD2 HSUPA in the band 1850 MHz - 1910 MHz		
HSUPA-FDD5	EUT supports UMTS FDD5 HSUPA in the band 824 MHz - 849 MHz		
PantC	permanent fixed antenna connector, which may be built-in, designed as an indispensable part of the equipment		

2.4 Setups used for Testing

For each setup a relation is given to determine if and which samples and auxiliary equipment is used. The left side list all OUT samples and the right side lists all auxiliary equipment for the given setup.

<i>Setup No.</i>	<i>List of OUT samples</i>		<i>List of auxiliary equipment</i>	
	<i>Sample No.</i>	<i>Sample Description</i>	<i>AE No.</i>	<i>AE Description</i>
S01_AD01				
	<i>Sample:</i> ad01	FCC Sample		
S01_AG01				
	<i>Sample:</i> ag01	FCC Sample		

3 Results

3.1 General

Documentation of tested devices:

Available at the test laboratory.

Interpretation of the test results:

The results of the inspection are described on the following pages, where 'Conformity' or 'Passed' means that the certification criteria were verified and that the tested device is conform to the applied standard.

In cases where 'Declaration' is printed, the required documents are available in the manufacturers product documentation.

In cases where 'not applicable' is printed, the test case requirements are not relevant to the specific equipment implementation.

Note:

The environmental conditions are recorded and available in the InterLab system for each performed test.

Not all tests were performed which are applicable to the module LISA-U201, since it is based on the module LISA-U200 which is already certified.

3.2 List of the Applicable Body

(Bodies for Scope: FCC_v2)

<i>Designation</i>	<i>Description</i>
FCC47CFRChIPART22PUBLIC MOBILE SERVICES	Part 22, Subpart H - Cellular Radiotelephone Service
FCC47CFRChIPART24PERSONAL COMMUNICATIONS SERVICES	Part 24, Subpart E - Broadband PCS

3.3 List of Test Specification

Test Specification: **FCC part 2 and 22**
Version: 10-1-13 Edition
Title: PART 2 - GENERAL RULES AND REGULATIONS
 PART 22 - PUBLIC MOBILE SERVICES

Test Specification: **FCC part 2 and 24**
Version: 10-1-13 Edition
Title: PART 2 - GENERAL RULES AND REGULATIONS
 PART 24 - PERSONAL COMMUNICATIONS SERVICES

3.4 Summary

<i>Test Case Identifier / Name</i>	<i>Cat</i>	<i>Result</i>	<i>Date of Test</i>	<i>Lab</i>	<i>Setup</i>
<i>Test (condition)</i>				<i>Ref.</i>	
Test Specification: FCC part 2 and 22					
22.1 RF Power Output §2.1046, §22.913					
22.1; RF Power Output Summary §2.1046, §22.913	-	Passed	2015/07/06	Lab 2	S01_AD01
22.3 Spurious emissions at antenna terminals §2.1051, §22.917					
22.3; Frequency Band = 850, Mode = EDGE, Channel = 128, Frequency = 824.2MHz	-	Passed	2015/08/21	Lab 2	S01_AD01
22.3; Frequency Band = 850, Mode = EDGE, Channel = 190, Frequency = 836.6MHz	-	Passed	2015/08/21	Lab 2	S01_AD01
22.3; Frequency Band = 850, Mode = EDGE, Channel = 251, Frequency = 848.8MHz	-	Passed	2015/08/21	Lab 2	S01_AD01
22.3; Frequency Band = 850, Mode = GSM, Channel = 128, Frequency = 824.2MHz,	-	Passed	2015/08/21	Lab 2	S01_AD01
22.3; Frequency Band = 850, Mode = GSM, Channel = 190, Frequency = 836.6MHz	-	Passed	2015/08/21	Lab 2	S01_AD01
22.3; Frequency Band = 850, Mode = GSM, Channel = 251, Frequency = 848.8MHz	-	Passed	2015/08/21	Lab 2	S01_AD01
22.3; Frequency Band = FDD5, Mode = HSDPA, Channel = 4132, Frequency = 826.4MHz	-	Passed	2015/07/03	Lab 2	S01_AD01
22.3; Frequency Band = FDD5, Mode = HSDPA, Channel = 4183, Frequency = 836.6MHz	-	Passed	2015/07/03	Lab 2	S01_AD01
22.3; Frequency Band = FDD5, Mode = HSDPA, Channel = 4233, Frequency = 846.6MHz	-	Passed	2015/07/03	Lab 2	S01_AD01
22.3; Frequency Band = FDD5, Mode = HSUPA, Channel = 4132, Frequency = 826.4MHz	-	Passed	2015/07/03	Lab 2	S01_AD01
22.3; Frequency Band = FDD5, Mode = HSUPA, Channel = 4183, Frequency = 836.6MHz	-	Passed	2015/07/03	Lab 2	S01_AD01
22.3; Frequency Band = FDD5, Mode = HSUPA, Channel = 4233, Frequency = 846.6MHz	-	Passed	2015/07/03	Lab 2	S01_AD01
22.3; Frequency Band = FDD5, Mode = W-CDMA, Channel = 4132, Frequency = 826.4MHz	-	Passed	2015/07/03	Lab 2	S01_AD01
22.3; Frequency Band = FDD5, Mode = W-CDMA, Channel = 4183, Frequency = 836.6MHz	-	Passed	2015/07/03	Lab 2	S01_AD01
22.3; Frequency Band = FDD5, Mode = W-CDMA, Channel = 4233, Frequency = 846.6MHz	-	Passed	2015/07/03	Lab 2	S01_AD01

<i>Test Case Identifier / Name</i>	<i>Cat</i>	<i>Result</i>	<i>Date of Test</i>	<i>Lab</i>	<i>Setup</i>
<i>Test (condition)</i>				<i>Ref.</i>	
22.4 Field strength of spurious radiation §2.1053, §22.917					
22.4; Frequency Band = FDD5, Mode = HSDPA, Channel = 4132, Frequency = 826.4MHz	-	Passed	2015/06/30	Lab 1	S01_AD01
22.4; Frequency Band = FDD5, Mode = HSDPA, Channel = 4183, Frequency = 836.6MHz	-	Passed	2015/07/07	Lab 1	S01_AG01
22.4; Frequency Band = FDD5, Mode = HSDPA, Channel = 4233, Frequency = 846.6MHz	-	Passed	2015/06/30	Lab 1	S01_AD01
22.4; Frequency Band = FDD5, Mode = HSUPA, Channel = 4132, Frequency = 826.4MHz	-	Passed	2015/06/30	Lab 1	S01_AD01
22.4; Frequency Band = FDD5, Mode = HSUPA, Channel = 4183, Frequency = 836.6MHz	-	Passed	2015/06/30	Lab 1	S01_AD01
22.4; Frequency Band = FDD5, Mode = HSUPA, Channel = 4233, Frequency = 846.6MHz	-	Passed	2015/07/07	Lab 1	S01_AG01
22.4; Frequency Band = FDD5, Mode = W-CDMA, Channel = 4132, Frequency = 826.4MHz	-	Passed	2015/07/07	Lab 1	S01_AG01
22.4; Frequency Band = FDD5, Mode = W-CDMA, Channel = 4183, Frequency = 836.6MHz	-	Passed	2015/07/01	Lab 1	S01_AD01
22.4; Frequency Band = FDD5, Mode = W-CDMA, Channel = 4233, Frequency = 846.6MHz	-	Passed	2015/07/01	Lab 1	S01_AD01
22.5 Emission and Occupied Bandwidth §2.1049, §22.917					
22.5; Frequency Band = FDD5, Mode = HSDPA, Channel = 4132, Frequency = 826.4MHz	-	Passed	2015/07/03	Lab 2	S01_AD01
22.5; Frequency Band = FDD5, Mode = HSDPA, Channel = 4183, Frequency = 836.6MHz	-	Passed	2015/07/03	Lab 2	S01_AD01
22.5; Frequency Band = FDD5, Mode = HSDPA, Channel = 4233, Frequency = 846.6MHz	-	Passed	2015/07/03	Lab 2	S01_AD01
22.5; Frequency Band = FDD5, Mode = HSUPA, Channel = 4132, Frequency = 826.4MHz	-	Passed	2015/07/03	Lab 2	S01_AD01
22.5; Frequency Band = FDD5, Mode = HSUPA, Channel = 4183, Frequency = 836.6MHz	-	Passed	2015/07/03	Lab 2	S01_AD01
22.5; Frequency Band = FDD5, Mode = HSUPA, Channel = 4233, Frequency = 846.6MHz	-	Passed	2015/07/03	Lab 2	S01_AD01
22.5; Frequency Band = FDD5, Mode = W-CDMA, Channel = 4132, Frequency = 826.4MHz	-	Passed	2015/07/03	Lab 2	S01_AD01
22.5; Frequency Band = FDD5, Mode = W-CDMA, Channel = 4183, Frequency = 836.6MHz	-	Passed	2015/07/03	Lab 2	S01_AD01
22.5; Frequency Band = FDD5, Mode = W-CDMA, Channel = 4233, Frequency = 846.6MHz	-	Passed	2015/07/03	Lab 2	S01_AD01

Test Case Identifier / Name	Cat	Result	Date of Test	Lab Ref.	Setup
22.6 Band edge compliance §2.1053, §22.917					
22.6; Frequency Band = FDD5, Mode = HSDPA, Channel = 4132, Frequency = 826.4MHz	-	Passed	2015/07/03	Lab 2	S01_AD01
22.6; Frequency Band = FDD5, Mode = HSDPA, Channel = 4233, Frequency = 846.6MHz	-	Passed	2015/07/03	Lab 2	S01_AD01
22.6; Frequency Band = FDD5, Mode = HSUPA, Channel = 4132, Frequency = 826.4MHz	-	Passed	2015/07/03	Lab 2	S01_AD01
22.6; Frequency Band = FDD5, Mode = HSUPA, Channel = 4233, Frequency = 846.6MHz	-	Passed	2015/07/03	Lab 2	S01_AD01
22.6; Frequency Band = FDD5, Mode = W-CDMA, Channel = 4132, Frequency = 826.4MHz	-	Passed	2015/07/03	Lab 2	S01_AD01
22.6; Frequency Band = FDD5, Mode = W-CDMA, Channel = 4233, Frequency = 846.6MHz	-	Passed	2015/07/03	Lab 2	S01_AD01
Test Specification: FCC part 2 and 24					
24.1 RF Power Output §2.1046, §24.232					
24.1; RF Power Output Summary §2.1046, §24.232	-	Passed	2015/07/06	Lab 2	S01_AD01
24.3 Spurious emissions at antenna terminals §2.1051, §24.238					
24.3; Frequency Band = 1900, Mode = EDGE, Channel = 512, Frequency = 1850.2MHz	-	Passed	2015/08/21	Lab 2	S01_AD01
24.3; Frequency Band = 1900, Mode = EDGE, Channel = 661, Frequency = 1880.0MHz	-	Passed	2015/08/21	Lab 2	S01_AD01
24.3; Frequency Band = 1900, Mode = EDGE, Channel = 810, Frequency = 1909.8MHz	-	Passed	2015/08/21	Lab 2	S01_AD01
24.3; Frequency Band = 1900, Mode = GSM, Channel = 512, Frequency = 1850.2MHz	-	Passed	2015/08/21	Lab 2	S01_AD01
24.3; Frequency Band = 1900, Mode = GSM, Channel = 661, Frequency = 1880.0MHz	-	Passed	2015/08/21	Lab 2	S01_AD01
24.3; Frequency Band = 1900, Mode = GSM, Channel = 810, Frequency = 1909.8MHz	-	Passed	2015/08/21	Lab 2	S01_AD01
24.3; Frequency Band = FDD2, Mode = HSDPA, Channel = 9262, Frequency = 1852.4MHz	-	Passed	2015/07/06	Lab 2	S01_AD01
24.3; Frequency Band = FDD2, Mode = HSDPA, Channel = 9400, Frequency = 1880MHz	-	Passed	2015/07/06	Lab 2	S01_AD01
24.3; Frequency Band = FDD2, Mode = HSDPA, Channel = 9538, Frequency = 1907.6MHz	-	Passed	2015/07/06	Lab 2	S01_AD01
24.3; Frequency Band = FDD2, Mode = HSUPA, Channel = 9262, Frequency = 1852.4MHz	-	Passed	2015/07/06	Lab 2	S01_AD01
24.3; Frequency Band = FDD2, Mode = HSUPA, Channel = 9400, Frequency = 1880MHz	-	Passed	2015/07/06	Lab 2	S01_AD01
24.3; Frequency Band = FDD2, Mode = HSUPA, Channel = 9538, Frequency = 1907.6MHz	-	Passed	2015/07/06	Lab 2	S01_AD01
24.3; Frequency Band = FDD2, Mode = W-CDMA, Channel = 9262, Frequency = 1852.4MHz	-	Passed	2015/07/06	Lab 2	S01_AD01
24.3; Frequency Band = FDD2, Mode = W-CDMA, Channel = 9400, Frequency = 1880MHz	-	Passed	2015/07/06	Lab 2	S01_AD01
24.3; Frequency Band = FDD2, Mode = W-CDMA, Channel = 9538, Frequency = 1907.6MHz	-	Passed	2015/07/06	Lab 2	S01_AD01

<i>Test Case Identifier / Name</i>	<i>Cat</i>	<i>Result</i>	<i>Date of Test</i>	<i>Lab</i>	<i>Setup</i>
<i>Test (condition)</i>				<i>Ref.</i>	
24.4 Field strength of spurious radiation §2.1053, §24.238					
24.4; Frequency Band = FDD2, Mode = HSDPA, Channel = 9262, Frequency = 1852.4MHz	-	Passed	2015/07/01	Lab 1	S01_AD01
24.4; Frequency Band = FDD2, Mode = HSDPA, Channel = 9400, Frequency = 1880MHz	-	Passed	2015/07/01	Lab 1	S01_AD01
24.4; Frequency Band = FDD2, Mode = HSDPA, Channel = 9538, Frequency = 1907.6MHz	-	Passed	2015/07/01	Lab 1	S01_AD01
24.4; Frequency Band = FDD2, Mode = HSUPA, Channel = 9262, Frequency = 1852.4MHz	-	Passed	2015/07/01	Lab 1	S01_AD01
24.4; Frequency Band = FDD2, Mode = HSUPA, Channel = 9400, Frequency = 1880MHz	-	Passed	2015/07/01	Lab 1	S01_AD01
24.4; Frequency Band = FDD2, Mode = HSUPA, Channel = 9538, Frequency = 1907.6MHz	-	Passed	2015/07/01	Lab 1	S01_AD01
24.4; Frequency Band = FDD2, Mode = W-CDMA, Channel = 9262, Frequency = 1852.4MHz	-	Passed	2015/07/01	Lab 1	S01_AD01
24.4; Frequency Band = FDD2, Mode = W-CDMA, Channel = 9400, Frequency = 1880MHz	-	Passed	2015/07/01	Lab 1	S01_AD01
24.4; Frequency Band = FDD2, Mode = W-CDMA, Channel = 9538, Frequency = 1907.6MHz	-	Passed	2015/07/01	Lab 1	S01_AD01
24.5 Emission and Occupied Bandwidth §2.1049, §24.238					
24.5; Frequency Band = FDD2, Mode = HSDPA, Channel = 9262, Frequency = 1852.4MHz	-	Passed	2015/07/06	Lab 2	S01_AD01
24.5; Frequency Band = FDD2, Mode = HSDPA, Channel = 9400, Frequency = 1880MHz	-	Passed	2015/07/06	Lab 2	S01_AD01
24.5; Frequency Band = FDD2, Mode = HSDPA, Channel = 9538, Frequency = 1907.6MHz	-	Passed	2015/07/06	Lab 2	S01_AD01
24.5; Frequency Band = FDD2, Mode = HSUPA, Channel = 9262, Frequency = 1852.4MHz	-	Passed	2015/07/06	Lab 2	S01_AD01
24.5; Frequency Band = FDD2, Mode = HSUPA, Channel = 9400, Frequency = 1880MHz	-	Passed	2015/07/06	Lab 2	S01_AD01
24.5; Frequency Band = FDD2, Mode = HSUPA, Channel = 9538, Frequency = 1907.6MHz	-	Passed	2015/07/06	Lab 2	S01_AD01
24.5; Frequency Band = FDD2, Mode = W-CDMA, Channel = 9262, Frequency = 1852.4MHz	-	Passed	2015/07/06	Lab 2	S01_AD01
24.5; Frequency Band = FDD2, Mode = W-CDMA, Channel = 9400, Frequency = 1880MHz	-	Passed	2015/07/06	Lab 2	S01_AD01
24.5; Frequency Band = FDD2, Mode = W-CDMA, Channel = 9538, Frequency = 1907.6MHz	-	Passed	2015/07/06	Lab 2	S01_AD01

<i>Test Case Identifier / Name</i>	<i>Cat</i>	<i>Result</i>	<i>Date of Test</i>	<i>Lab</i>	<i>Setup</i>
<i>Test (condition)</i>				<i>Ref.</i>	
24.6 Band edge compliance §2.1053, §24.238					
24.6; Frequency Band = FDD2, Mode = HSDPA, Channel = 9262, Frequency = 1852.4MHz	-	Passed	2015/07/06	Lab 2	S01_AD01
24.6; Frequency Band = FDD2, Mode = HSDPA, Channel = 9538, Frequency = 1907.6MHz	-	Passed	2015/07/06	Lab 2	S01_AD01
24.6; Frequency Band = FDD2, Mode = HSUPA, Channel = 9262, Frequency = 1852.4MHz	-	Passed	2015/07/06	Lab 2	S01_AD01
24.6; Frequency Band = FDD2, Mode = HSUPA, Channel = 9538, Frequency = 1907.6MHz	-	Passed	2015/07/06	Lab 2	S01_AD01
24.6; Frequency Band = FDD2, Mode = W-CDMA, Channel = 9262, Frequency = 1852.4MHz	-	Passed	2015/07/06	Lab 2	S01_AD01
24.6; Frequency Band = FDD2, Mode = W-CDMA, Channel = 9538, Frequency = 1907.6MHz	-	Passed	2015/07/06	Lab 2	S01_AD01

3.5 Detailed Results


3.5.1 22.1 RF Power Output §2.1046, §22.913

Test1: 22.1; RF Power Output Summary §2.1046, §22.913

<i>Result:</i>	Passed
<i>Setup No.:</i>	S01_AD01
<i>Date of Test:</i>	2015/07/06 18:53
<i>Body:</i>	FCC47CFRChIPART24PERSONAL COMMUNICATIONS SERVICES
<i>Test Specification:</i>	FCC part 2 and 22


Detailed Results:

Band	Mode	Channel	Frequency (MHZ)	Peak Conducted power	Average Conducted power	RMS Conducted power	FCC EIRP limit (W)	IC EIRP limit per SRSP-503 (W)	Maximum antenna gain (dBi)	Verdict
FDD 5	W-CDMA	Low	826.4	28.47	22.85	23.06	11.48	11.5	17.54	Pass
		Mid	836.6	28.72	22.86	23.05			17.55	Pass
		High	846.6	28.47	22.6	22.75			17.85	Pass
FDD 5	HSDPA Subtest 1	Low	826.4	28.47	22.82	23.06	11.48	11.5	17.54	Pass
		Mid	836.6	28.6	22.81	22.98			17.62	Pass
		High	846.6	28.6	22.67	22.9			17.7	Pass
FDD 5	HSDPA Subtest 2	Low	826.4	29.55	20.59	21.2	11.48	11.5	19.4	Pass
		Mid	836.6	29.1	20.54	21.18			19.42	Pass
		High	846.6	29.81	20.44	21.09			19.51	Pass
FDD 5	HSDPA Subtest 3	Low	826.4	30.2	19.72	20.71	11.48	11.5	19.89	Pass
		Mid	836.6	29.97	19.91	20.65			19.95	Pass
		High	846.6	30.13	19.57	20.54			20.06	Pass
FDD 5	HSDPA Subtest 4	Low	826.4	28.85	19.22	20.36	11.48	11.5	20.24	Pass
		Mid	836.6	29.55	19.2	20.56			20.04	Pass
		High	846.6	28.72	19.11	20.25			20.35	Pass
FDD 5	HSUPA Subtest 1	Low	826.4	29.7	21.82	22.22	11.48	11.5	18.38	Pass
		Mid	836.6	29.7	21.88	22.28			18.32	Pass
		High	846.6	29.81	21.72	22.13			18.47	Pass
FDD 5	HSUPA Subtest 2	Low	826.4	28.09	19.03	19.89	11.48	11.5	20.71	Pass
		Mid	836.6	28.35	19.97	19.82			20.78	Pass
		High	846.6	28.2	18.89	19.76			20.84	Pass
FDD 5	HSUPA Subtest 3	Low	826.4	29.28	20.4	21.14	11.48	11.5	19.46	Pass
		Mid	836.6	29.28	20.36	21.12			19.48	Pass
		High	846.6	29.28	20.25	21.03			19.57	Pass
FDD 5	HSUPA Subtest 4	Low	826.4	28.09	18.73	19.86	11.48	11.5	20.74	Pass
		Mid	836.6	28.6	19.36	20.39			20.21	Pass
		High	846.6	27.84	19.73	20.27			20.33	Pass
FDD 5	HSUPA Subtest 5	Low	826.4	29.7	22.17	22.49	11.48	11.5	18.11	Pass
		Mid	836.6	29.7	22.08	22.46			18.14	Pass
		High	846.6	29.7	22.05	22.41			18.19	Pass
highest value of Mode (WCDMA/HSDPA/HSUPA)						highest value overall				

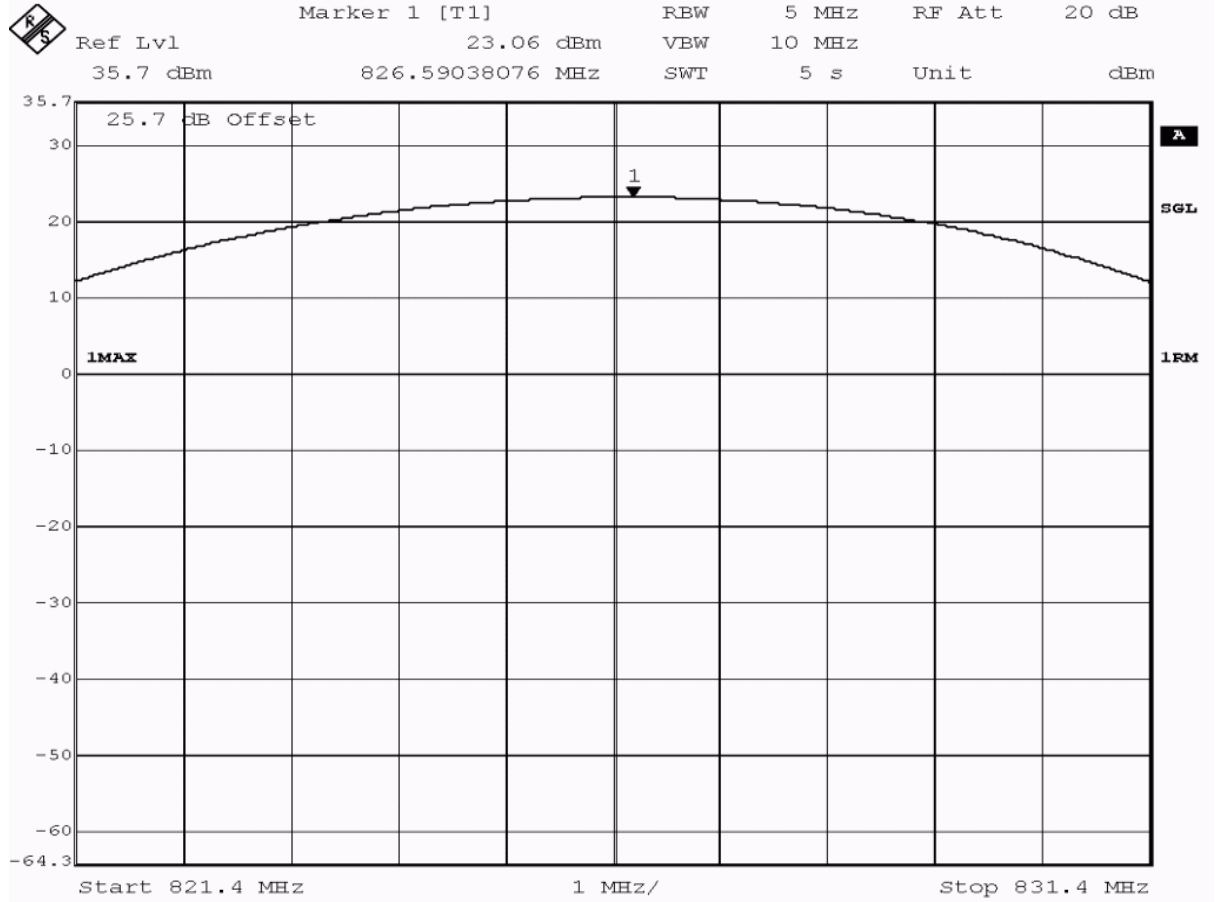

Test2: 22.1; RF Power Output Summary §2.1046, §22.913

<i>Result:</i>	Passed
<i>Setup No.:</i>	S01_AD01
<i>Date of Test:</i>	2015/08/21 17:40
<i>Body:</i>	NO BODY
<i>Test Specification:</i>	FCC part 2 and 22

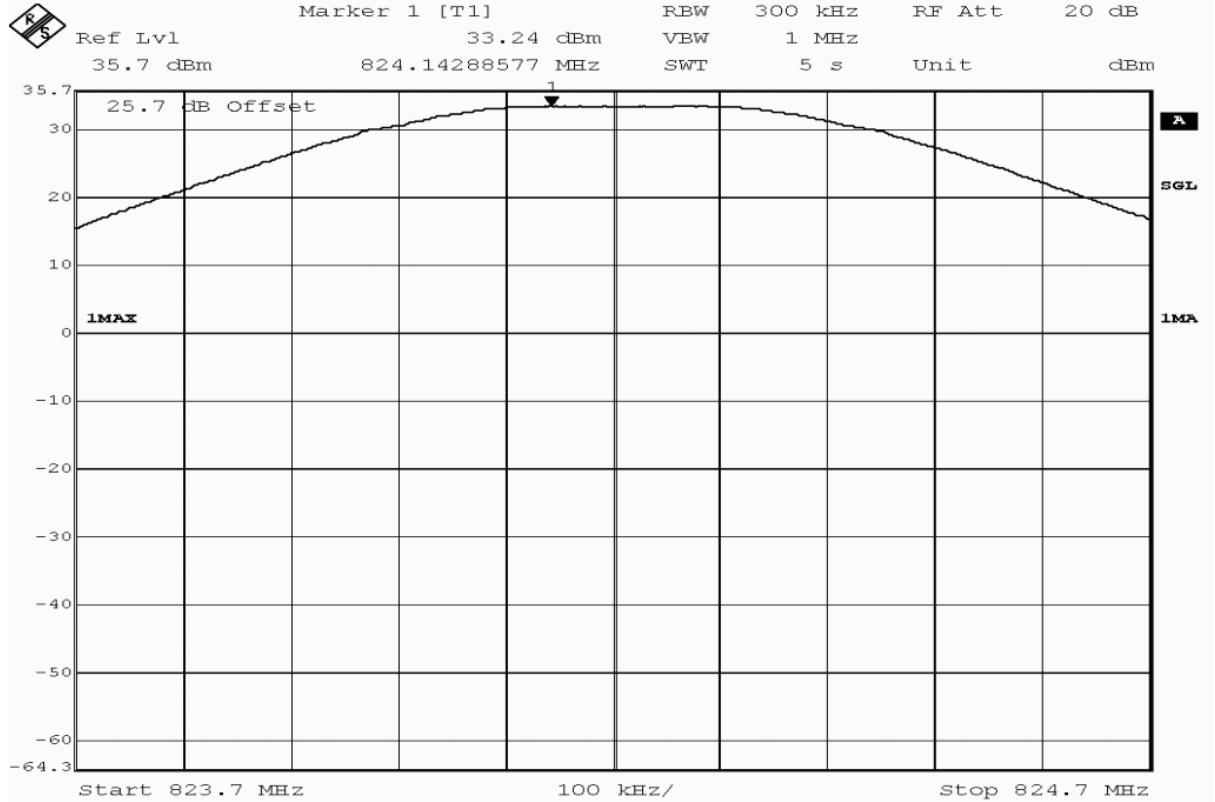


Title: output power measurement
 Comment A: DE1015025, GSM850, output power, channel 128,
 (824.2MHz)
 Date: 21.AUG.2015 13:55:31

3.5.2 22.3 Spurious emissions at antenna terminals §2.1051, §22.917

Test: 22.3; Frequency Band = 850, Mode = EDGE, Channel = 128, Frequency = 824.2MHz

<i>Result:</i>	Passed
<i>Setup No.:</i>	S01_AD01
<i>Date of Test:</i>	2015/08/21 16:02
<i>Body:</i>	NO BODY
<i>Test Specification:</i>	FCC part 2 and 22

Detailed Results:

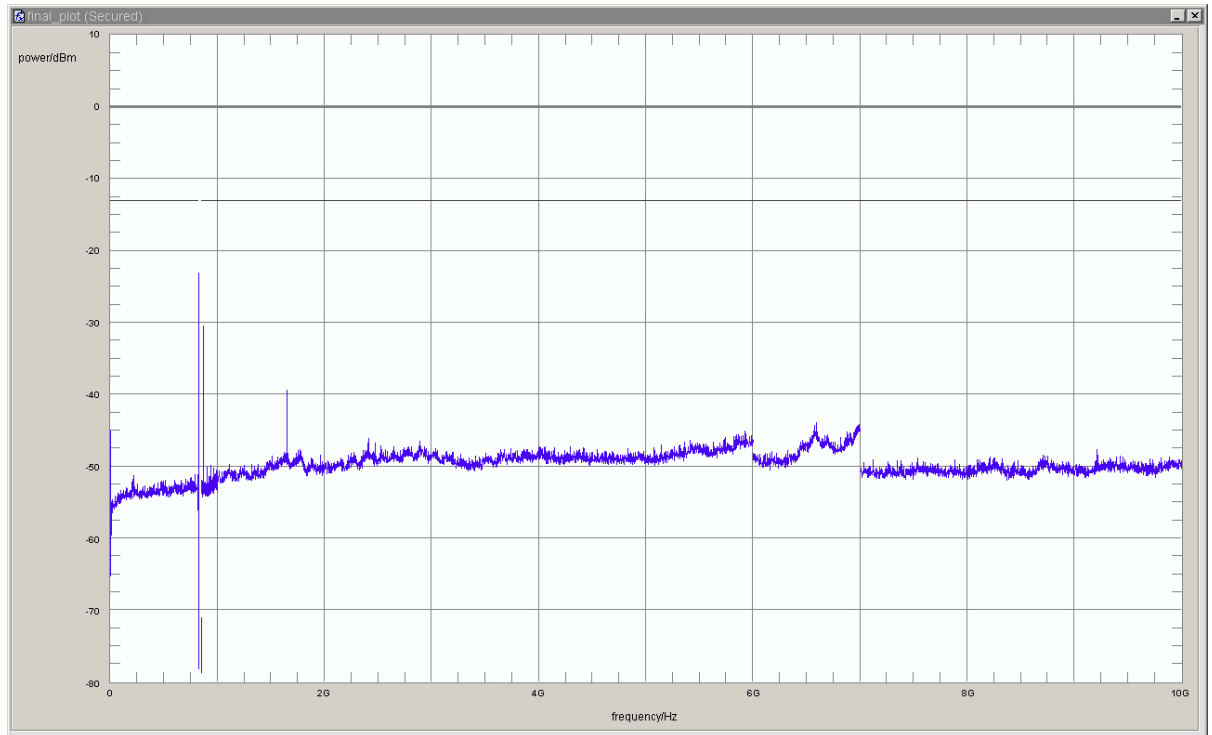


detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	margin to limit /dB	limit /dBm	verdict
peak	maxhold	3	823.9259	-31.9	18.9	-13.0	passed
peak	maxhold	3	823.9379	-30.8	17.8	-13.0	passed
peak	maxhold	3	823.9639	-23.2	10.2	-13.0	passed
peak	maxhold	3	823.9699	-23.1	10.1	-13.0	passed
peak	maxhold	3	823.9880	-25.0	12.0	-13.0	passed
peak	maxhold	3	823.9940	-29.2	16.2	-13.0	passed
peak	maxhold	100	869.24	-30.5	17.5	-13.0	passed

no further values have been found with a margin of less than 20 dB

Test: 22.3; Frequency Band = 850, Mode = EDGE, Channel = 190, Frequency = 836.6MHz

Result: Passed
 Setup No.: S01_AD01
 Date of Test: 2015/08/21 16:31
 Body: NO BODY
 Test Specification: FCC part 2 and 22

Detailed Results:

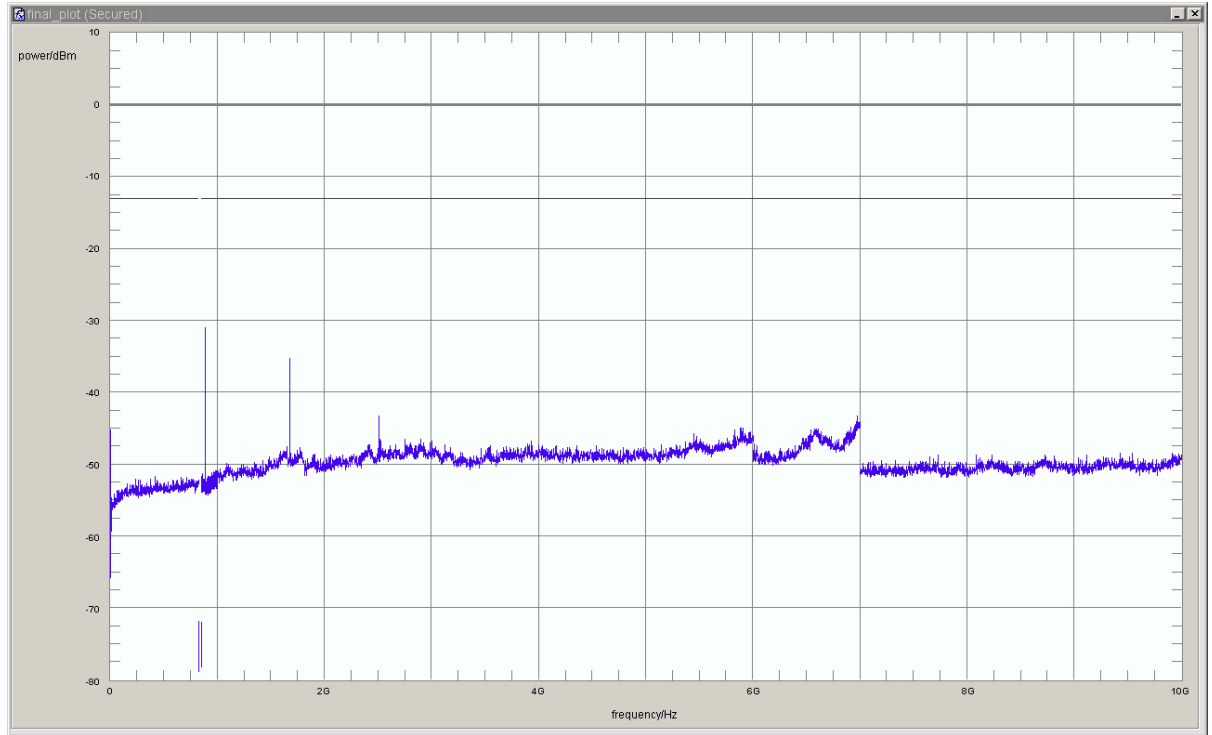


detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	margin to limit /dB	limit /dBm	verdict
peak	maxhold	100	881.56	-31.0	18.0	-13.0	passed

no further values have been found with a margin of less than 20 dB

Test: 22.3; Frequency Band = 850, Mode = EDGE, Channel = 251, Frequency = 848.8MHz

Result: Passed
Setup No.: S01_AD01
Date of Test: 2015/08/21 16:20
Body: NO BODY
Test Specification: FCC part 2 and 22

Detailed Results:

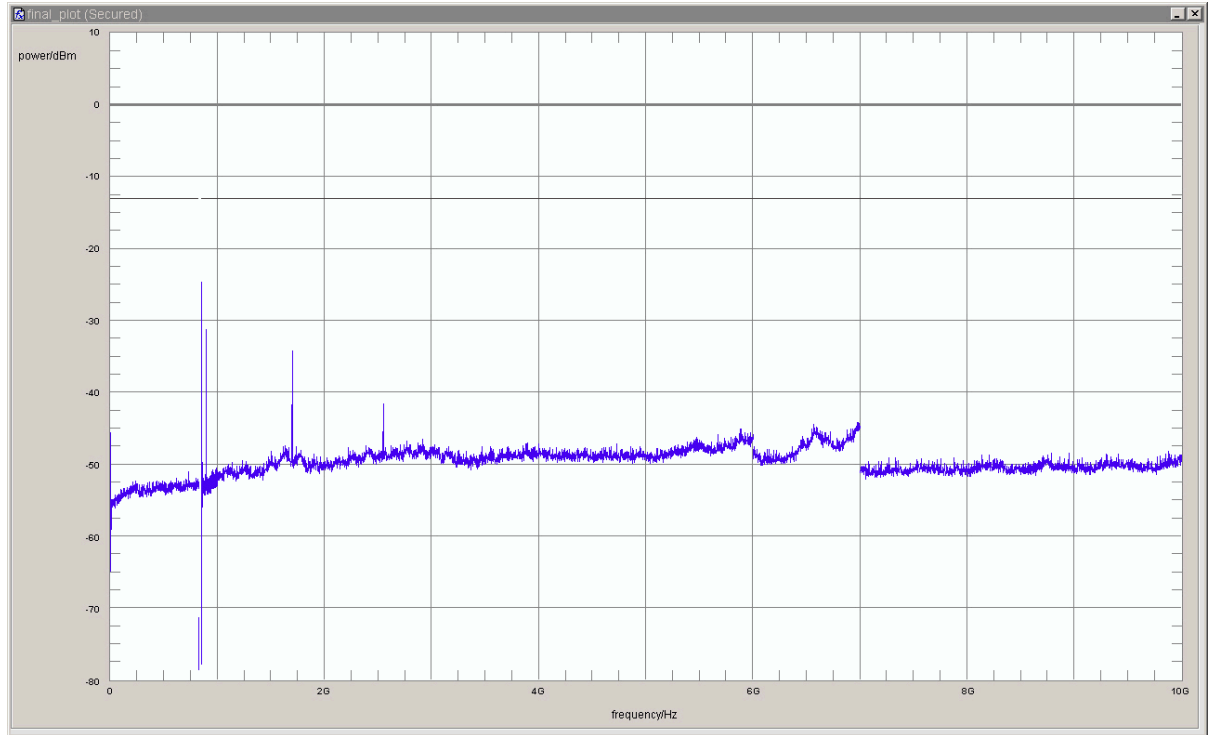


detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	margin to limit /dB	limit /dBm	verdict
peak	maxhold	3	849.0040	-24.6	11.6	-13.0	passed
peak	maxhold	3	849.0140	-27.3	14.3	-13.0	passed
peak	maxhold	3	849.0281	-29.4	16.4	-13.0	passed
peak	maxhold	3	849.0341	-25.2	12.2	-13.0	passed
peak	maxhold	3	849.0501	-28.6	15.6	-13.0	passed
peak	maxhold	3	849.0661	-29.7	16.7	-13.0	passed
peak	maxhold	3	849.0741	-31.8	18.8	-13.0	passed
peak	maxhold	100	893.76	-31.2	18.2	-13.0	passed

no further values have been found with a margin of less than 20 dB

Test: 22.3; Frequency Band = 850, Mode = GSM, Channel = 128, Frequency = 824.2MHz,

Result: Passed
 Setup No.: S01_AD01
 Date of Test: 2015/08/21 14:07
 Body: NO BODY
 Test Specification: FCC part 2 and 22

Detailed Results:

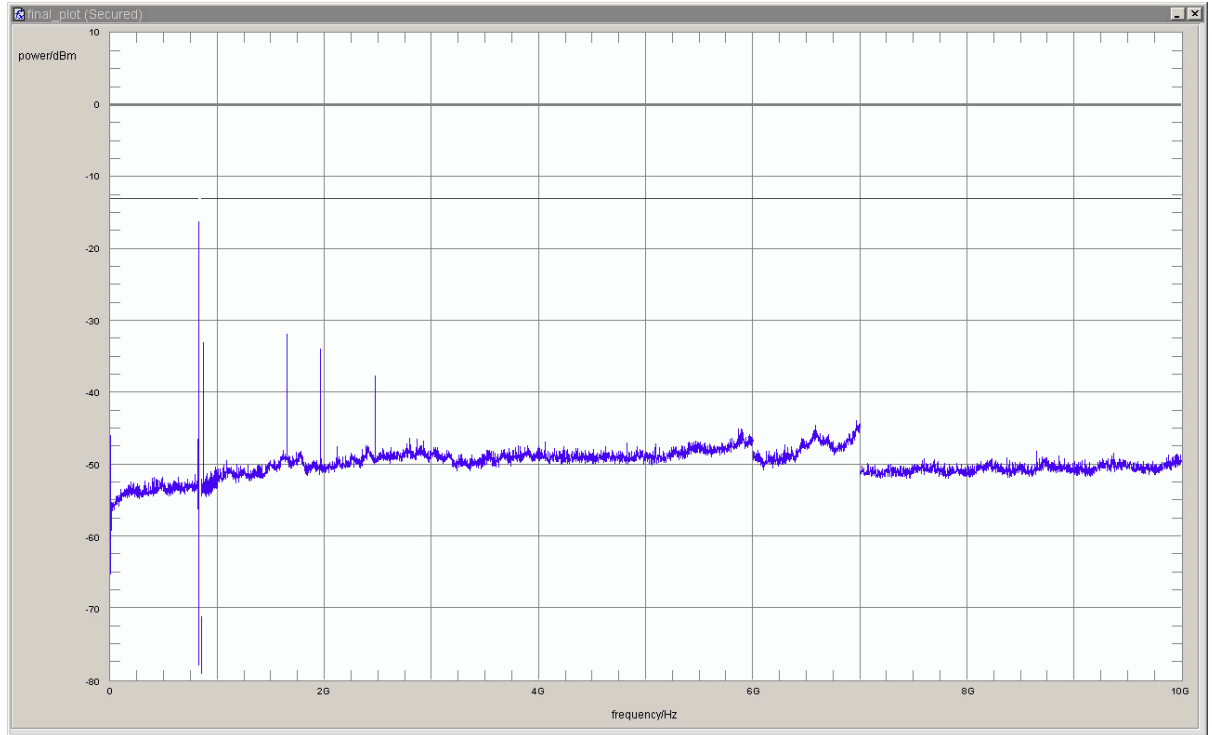


detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	margin to limit /dB	limit /dBm	verdict
peak	maxhold	3	823.9038	-29.9	16.9	-13.0	passed
peak	maxhold	3	823.9178	-28.5	15.5	-13.0	passed
peak	maxhold	3	823.9279	-24.4	11.4	-13.0	passed
peak	maxhold	3	823.9479	-22.7	9.7	-13.0	passed
peak	maxhold	3	823.9780	-16.3	3.3	-13.0	passed
peak	maxhold	3	823.9920	-17.8	4.8	-13.0	passed
peak	maxhold	100	1649.30	-31.9	18.9	-13.0	passed

no further values have been found with a margin of less than 20 dB

Test: 22.3; Frequency Band = 850, Mode = GSM, Channel = 190, Frequency = 836.6MHz

Result: Passed
 Setup No.: S01_AD01
 Date of Test: 2015/08/21 14:22
 Body: NO BODY
 Test Specification: FCC part 2 and 22

Detailed Results:

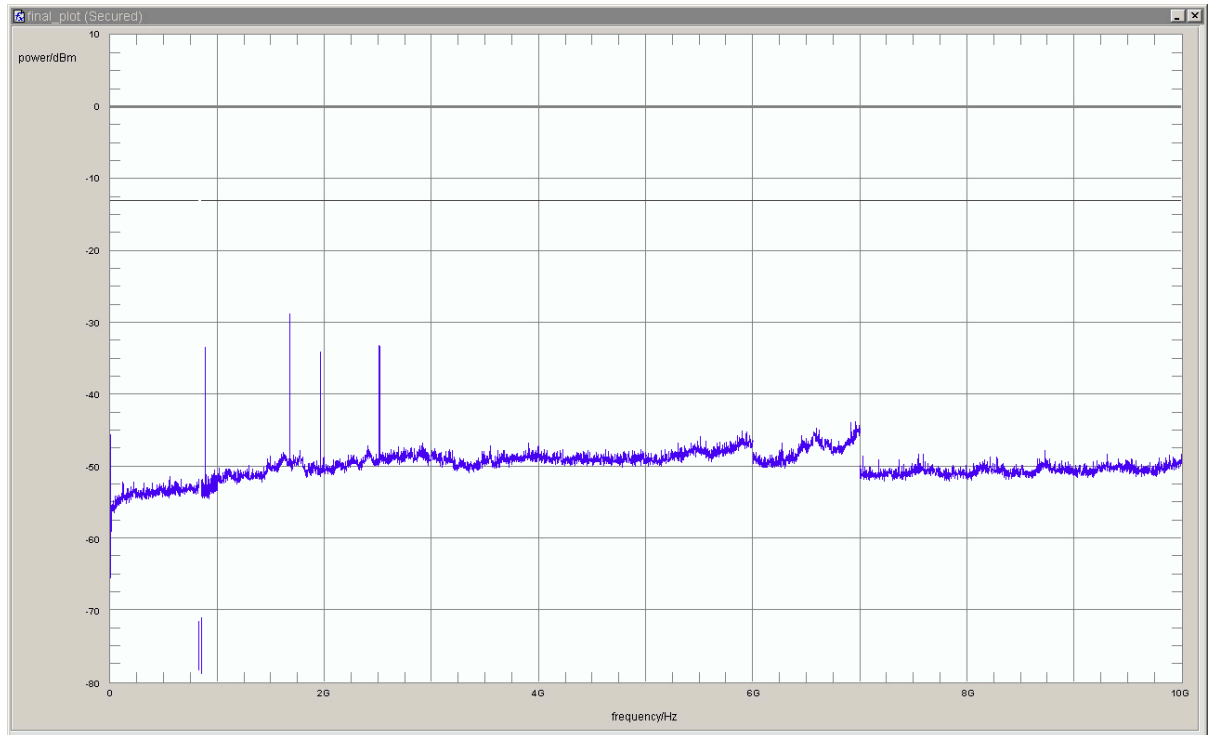


detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	margin to limit /dB	limit /dBm	verdict
peak	maxhold	100	1673.35	-28.8	15.8	-13.0	passed

no further values have been found with a margin of less than 20 dB

Test: 22.3; Frequency Band = 850, Mode = GSM, Channel = 251, Frequency = 848.8MHz

Result: Passed
Setup No.: S01_AD01
Date of Test: 2015/08/21 14:49
Body: NO BODY
Test Specification: FCC part 2 and 22

Detailed Results:

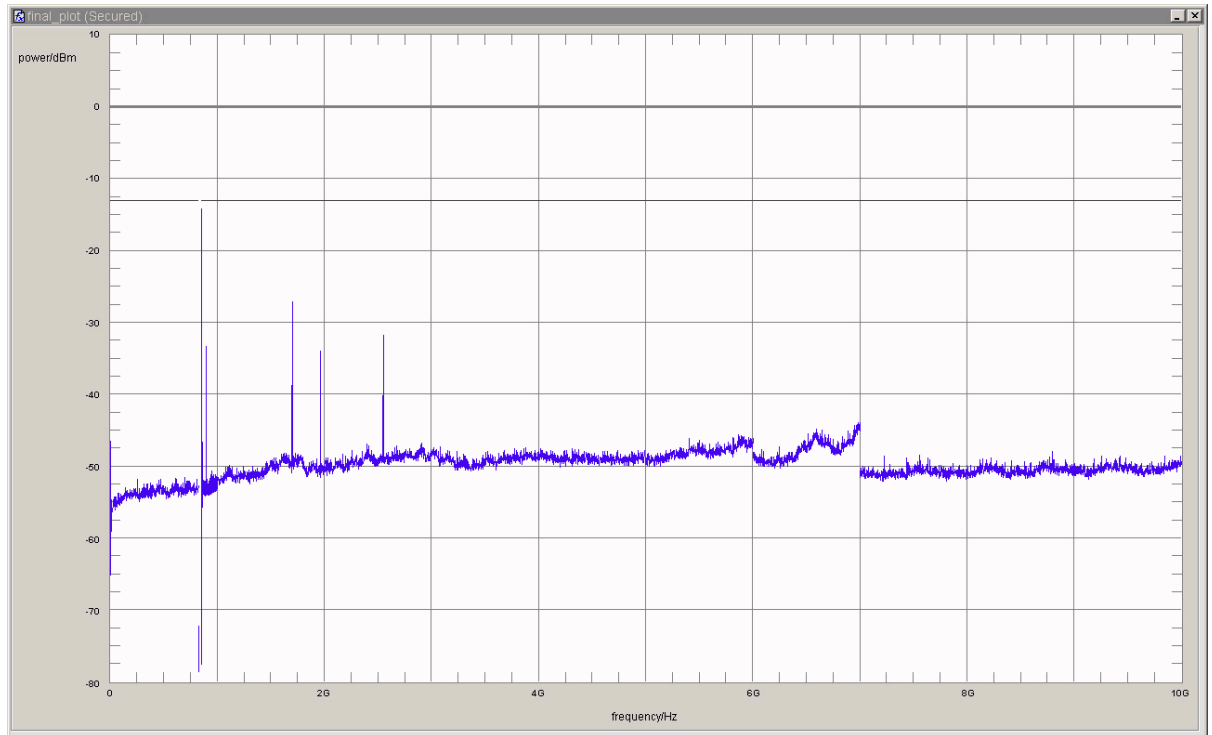

detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	margin to limit /dB	limit /dBm	verdict
peak	maxhold	3	849.0140	-17.3	4.3	-13.0	passed
peak	maxhold	3	849.0200	-14.2	1.2	-13.0	passed
peak	maxhold	3	849.0521	-20.4	7.4	-13.0	passed
peak	maxhold	3	849.0721	-27.2	14.2	-13.0	passed
peak	maxhold	3	849.0782	-27.9	14.9	-13.0	passed
peak	maxhold	3	849.1002	-31.8	18.8	-13.0	passed
peak	maxhold	100	1697.39	-27.1	14.1	-13.0	passed
peak	maxhold	100	2547.09	-31.8	18.8	-13.0	passed

no further values have been found with a margin of less than 20 dB

Test: 22.3; Frequency Band = FDD5, Mode = HSDPA, Channel = 4132, Frequency = 826.4MHz

Result: Passed


Setup No.: S01_AD01

Date of Test: 2015/07/03 22:09

Body: FCC47CFRChIPART22PUBLIC MOBILE SERVICES

Test Specification: FCC part 2 and 22

Detailed Results:

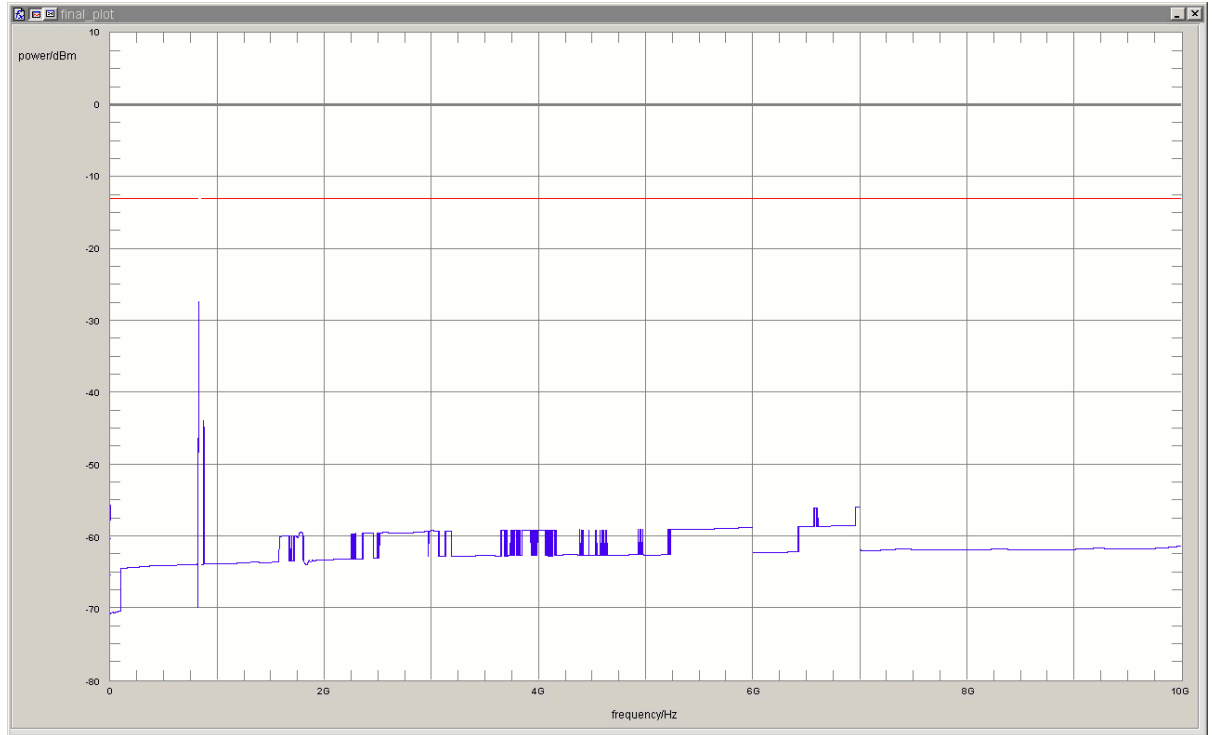

detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	margin to limit /dB	limit /dBm	verdict
rms	maxhold	100	822.15	-32.1	19.1	-13.0	passed
rms	maxhold	100	822.31	-31.1	18.1	-13.0	passed
rms	maxhold	100	822.44	-30.7	17.7	-13.0	passed
rms	maxhold	100	822.51	-32.1	19.1	-13.0	passed
rms	maxhold	100	822.60	-30.8	17.8	-13.0	passed
rms	maxhold	100	822.73	-30.9	17.9	-13.0	passed
rms	maxhold	100	822.80	-30.4	17.4	-13.0	passed
rms	maxhold	100	822.93	-30.0	17.0	-13.0	passed
rms	maxhold	100	823.00	-30.6	17.6	-13.0	passed
rms	maxhold	50	823.01	-32.6	19.6	-13.0	passed
rms	maxhold	50	823.10	-32.6	19.6	-13.0	passed
rms	maxhold	50	823.15	-32.4	19.4	-13.0	passed
rms	maxhold	50	823.19	-32.8	19.8	-13.0	passed
rms	maxhold	50	823.22	-32.2	19.2	-13.0	passed
rms	maxhold	50	823.31	-32.2	19.2	-13.0	passed
rms	maxhold	50	823.46	-31.6	18.6	-13.0	passed
rms	maxhold	50	824.00	-27.4	14.4	-13.0	passed

no further values have been found with a margin of less than 20 dB

Test: 22.3; Frequency Band = FDD5, Mode = HSDPA, Channel = 4183, Frequency = 836.6MHz

<i>Result:</i>	Passed
<i>Setup No.:</i>	S01_AD01
<i>Date of Test:</i>	2015/07/03 22:28
<i>Body:</i>	FCC47CFRChIPART22PUBLIC MOBILE SERVICES
<i>Test Specification:</i>	FCC part 2 and 22

Detailed Results:




detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	margin to limit /dB	limit /dBm	verdict
rms	maxhold	100	881.563	-37.82	24.82	-13	passed

no further values have been found with a margin of less than 20 dB

Test: 22.3; Frequency Band = FDD5, Mode = HSDPA, Channel = 4233, Frequency = 846.6MHz

Result: Passed
Setup No.: S01_AD01
Date of Test: 2015/07/03 22:34
Body: FCC47CFRChIPART22PUBLIC MOBILE SERVICES
Test Specification: FCC part 2 and 22

Detailed Results:

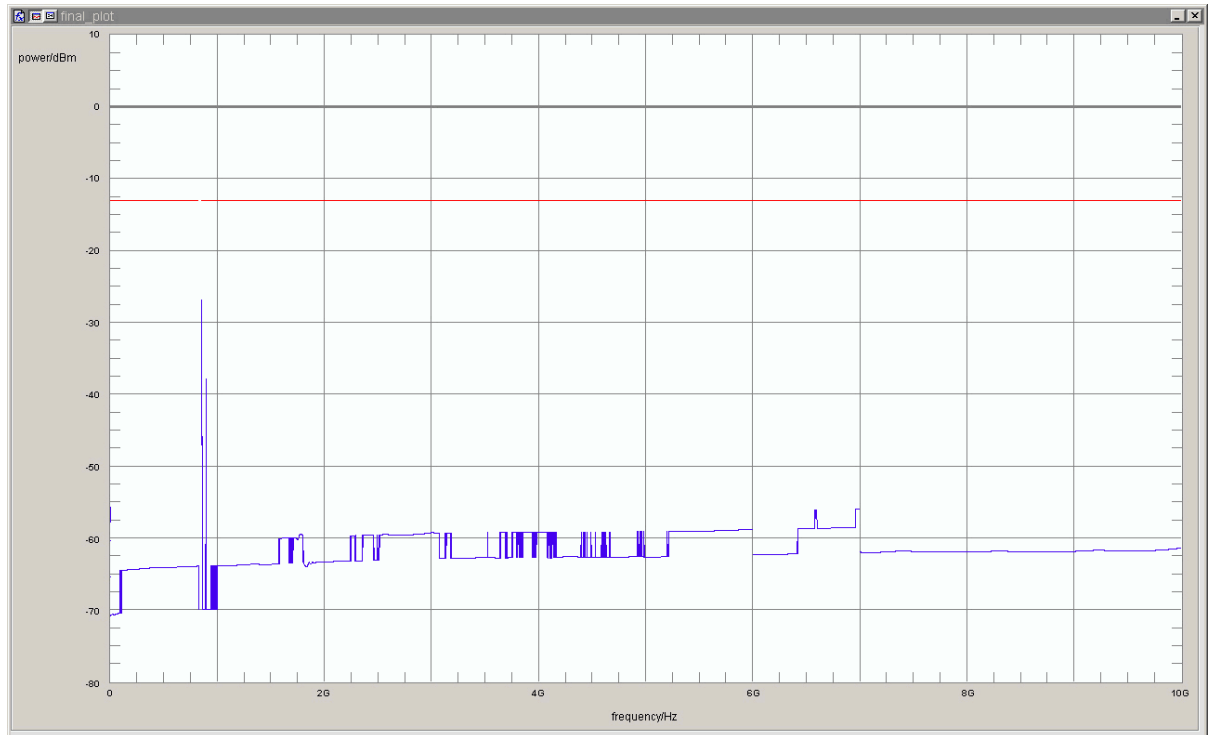

detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	margin to limit /dB	limit /dBm	verdict
rms	maxhold	50	849.00	-26.9	13.9	-13.0	passed
rms	maxhold	50	849.62	-31.1	18.1	-13.0	passed
rms	maxhold	50	849.66	-31.3	18.3	-13.0	passed
rms	maxhold	50	849.76	-31.4	18.4	-13.0	passed
rms	maxhold	50	849.82	-31.5	18.5	-13.0	passed
rms	maxhold	50	849.87	-31.1	18.1	-13.0	passed
rms	maxhold	50	849.92	-31.7	18.7	-13.0	passed
rms	maxhold	50	849.95	-31.6	18.6	-13.0	passed
rms	maxhold	50	849.97	-31.8	18.8	-13.0	passed
rms	maxhold	50	849.99	-32.0	19.0	-13.0	passed
rms	maxhold	100	850.14	-28.8	15.8	-13.0	passed
rms	maxhold	100	850.34	-30.0	17.0	-13.0	passed
rms	maxhold	100	850.43	-29.6	16.6	-13.0	passed
rms	maxhold	100	850.63	-30.1	17.1	-13.0	passed
rms	maxhold	100	850.72	-30.5	17.5	-13.0	passed
rms	maxhold	100	850.85	-31.4	18.4	-13.0	passed

no further values have been found with a margin of less than 20 dB

Test: 22.3; Frequency Band = FDD5, Mode = HSUPA, Channel = 4132, Frequency = 826.4MHz

Result: Passed
 Setup No.: S01_AD01
 Date of Test: 2015/07/03 20:30
 Body: FCC47CFRChIPART22PUBLIC MOBILE SERVICES
 Test Specification: FCC part 2 and 22

Detailed Results:




detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	margin to limit /dB	limit /dBm	verdict
rms	maxhold	50	823.88	-32.7	19.7	-13.0	passed

no further values have been found with a margin of less than 20 dB

Test: 22.3; Frequency Band = FDD5, Mode = HSUPA, Channel = 4183, Frequency = 836.6MHz

Result: Passed
Setup No.: S01_AD01
Date of Test: 2015/07/03 20:42
Body: FCC47CFRChIPART22PUBLIC MOBILE SERVICES
Test Specification: FCC part 2 and 22

Detailed Results:

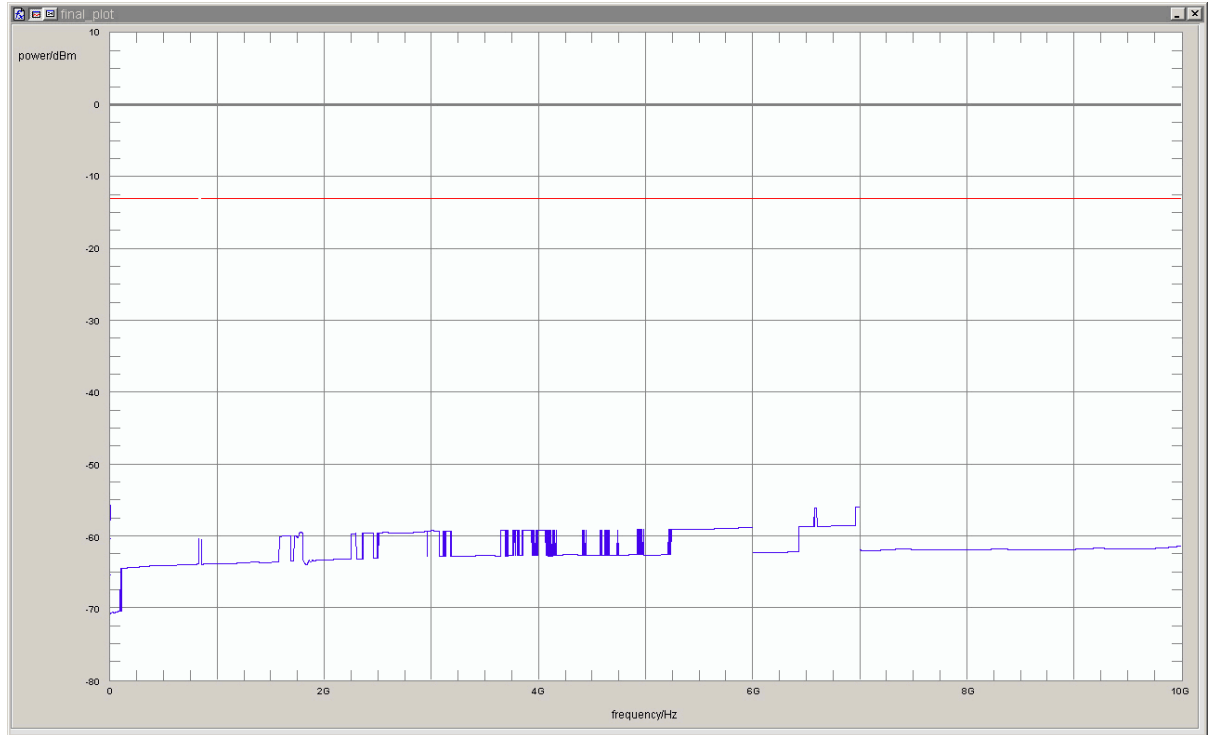


detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	margin to limit /dB	limit /dBm	verdict
rms	maxhold	1	0.030	-55.50	42.50	-13	passed

no further values have been found with a margin of less than 20 dB

Test: 22.3; Frequency Band = FDD5, Mode = HSUPA, Channel = 4233, Frequency = 846.6MHz

Result: Passed
Setup No.: S01_AD01
Date of Test: 2015/07/03 20:55
Body: FCC47CFRChIPART22PUBLIC MOBILE SERVICES
Test Specification: FCC part 2 and 22

Detailed Results:

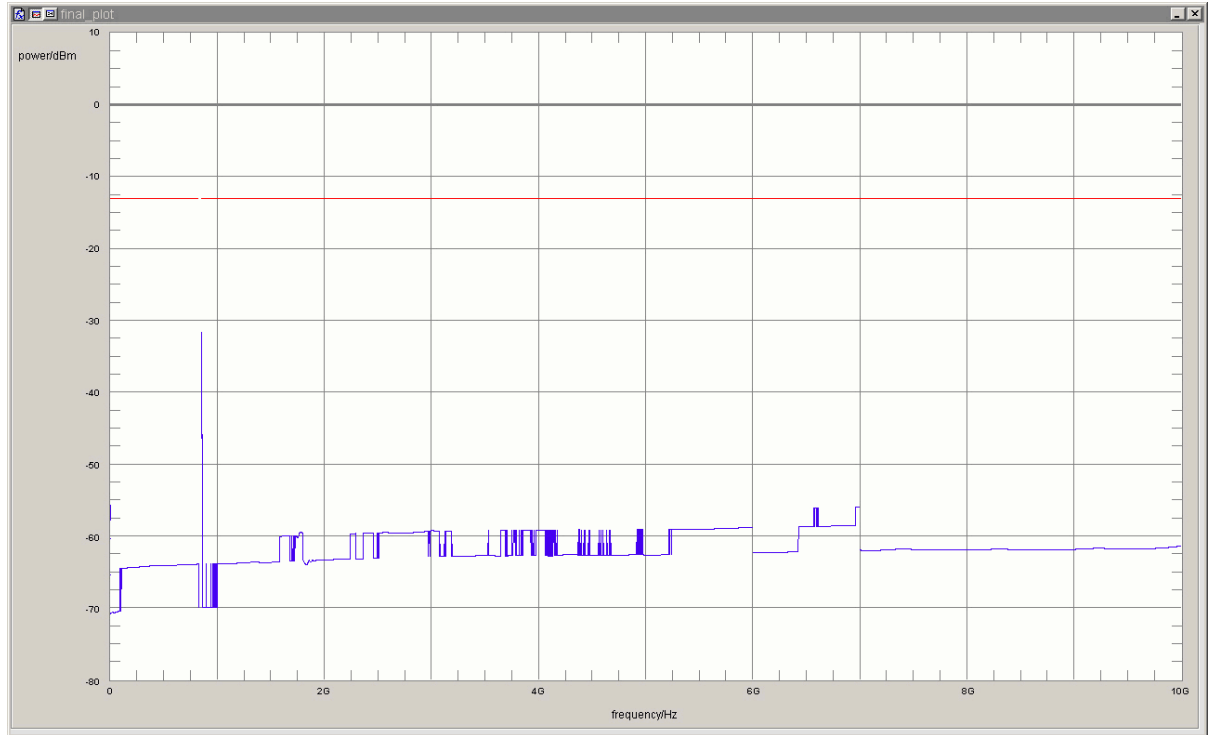


detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	margin to limit /dB	limit /dBm	verdict
rms	maxhold	50	849.00	-31.7	18.7	-13.0	passed

no further values have been found with a margin of less than 20 dB

Test: 22.3; Frequency Band = FDD5, Mode = W-CDMA, Channel = 4132, Frequency = 826.4MHz

Result: Passed
Setup No.: S01_AD01
Date of Test: 2015/07/03 22:47
Body: FCC47CFRChIPART22PUBLIC MOBILE SERVICES
Test Specification: FCC part 2 and 22

Detailed Results:

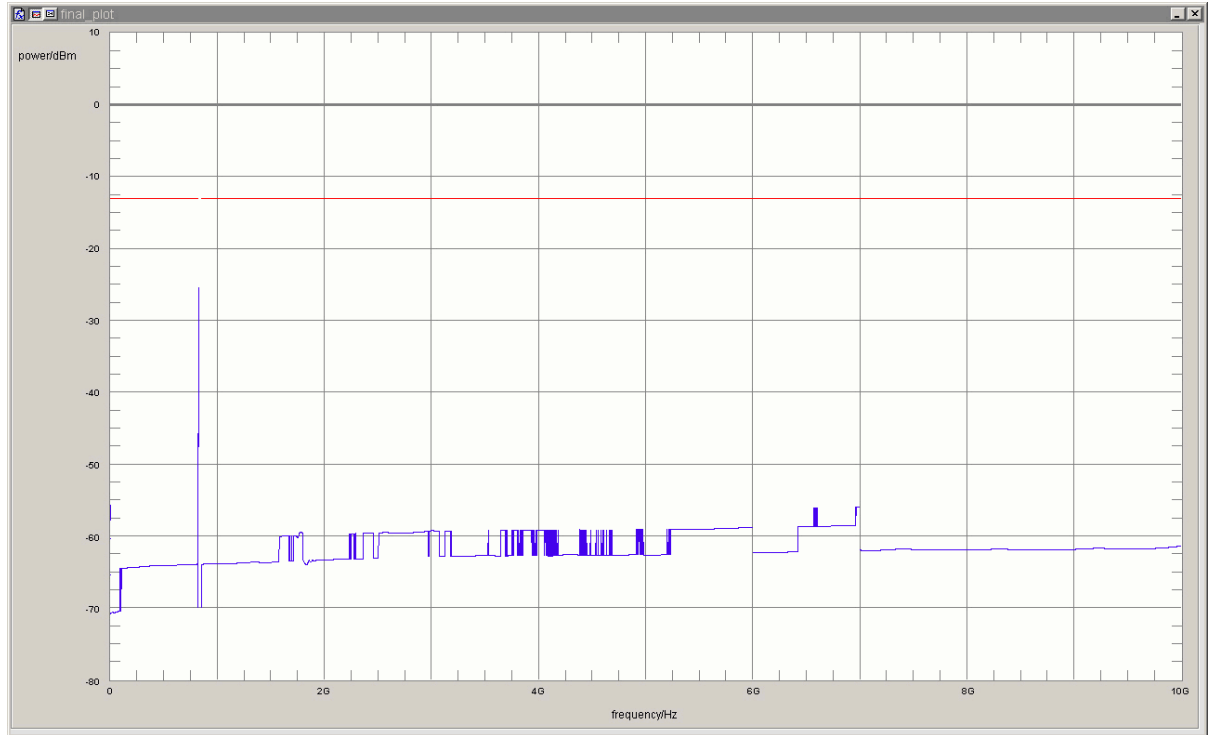


detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	margin to limit /dB	limit /dBm	verdict
rms	maxhold	100	823.00	-28.8	15.8	-13.0	passed
rms	maxhold	50	824.00	-25.3	12.3	-13.0	passed

no further values have been found with a margin of less than 20 dB

Test: 22.3; Frequency Band = FDD5, Mode = W-CDMA, Channel = 4183, Frequency = 836.6MHz

Result: Passed
Setup No.: S01_AD01
Date of Test: 2015/07/03 22:58
Body: FCC47CFRChIPART22PUBLIC MOBILE SERVICES
Test Specification: FCC part 2 and 22

Detailed Results:

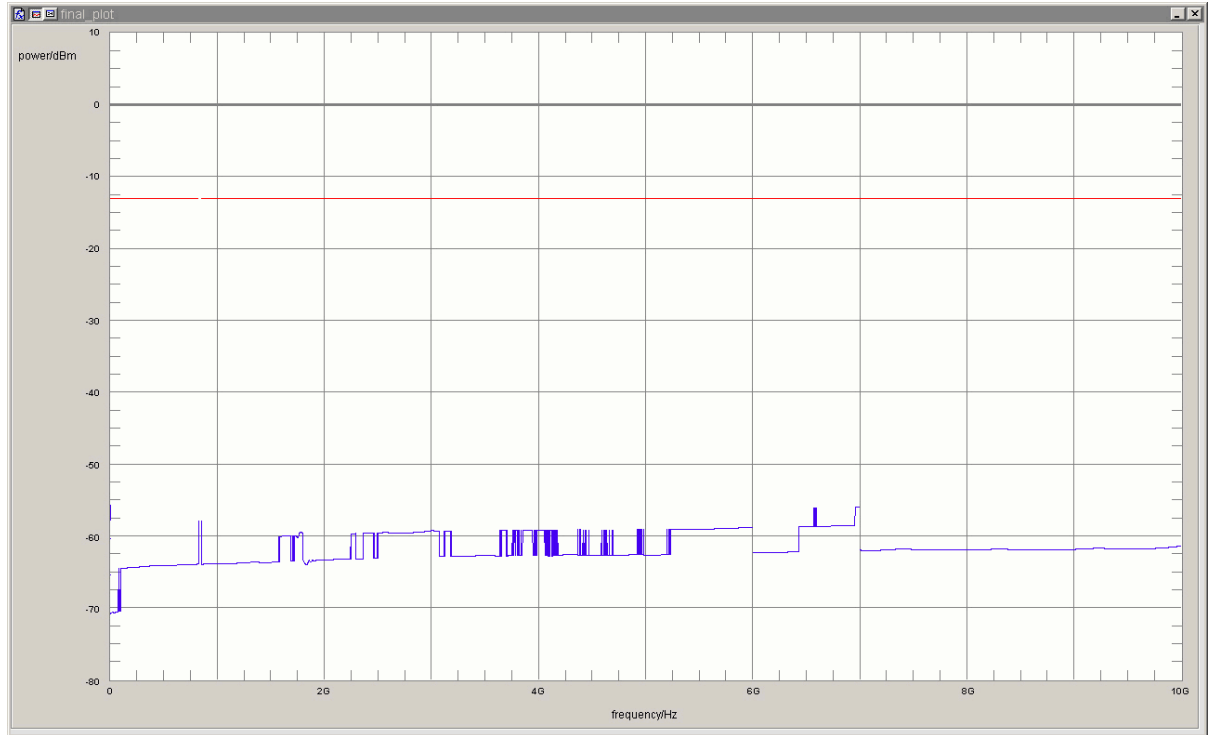


detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	margin to limit /dB	limit /dBm	verdict
rms	maxhold	1	0.030	-55.50	42.50	-13	passed

no further values have been found with a margin of less than 20 dB

Test: 22.3; Frequency Band = FDD5, Mode = W-CDMA, Channel = 4233, Frequency = 846.6MHz

Result: Passed
Setup No.: S01_AD01
Date of Test: 2015/07/03 23:07
Body: FCC47CFRChIPART22PUBLIC MOBILE SERVICES
Test Specification: FCC part 2 and 22

Detailed Results:

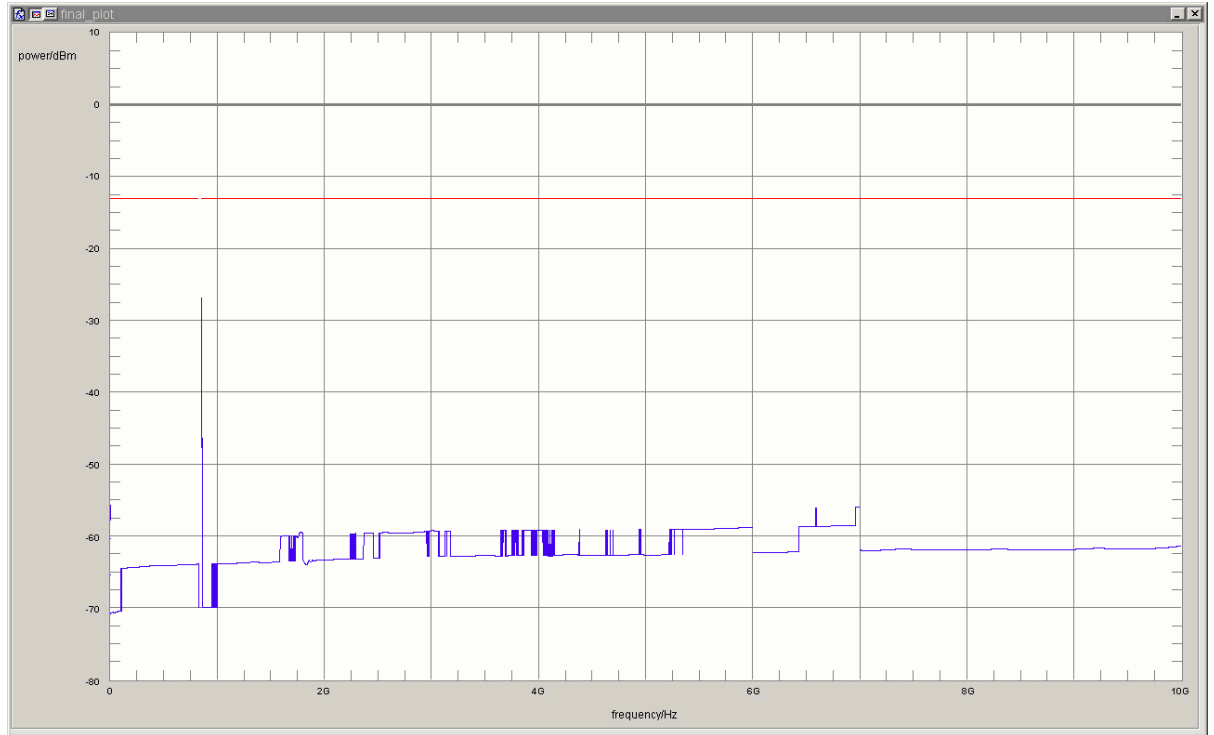

detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	margin to limit /dB	limit /dBm	verdict
rms	maxhold	50	849.00	-26.8	13.8	-13.0	passed
rms	maxhold	100	850.16	-28.2	15.2	-13.0	passed

no further values have been found with a margin of less than 20 dB

3.5.3 22.4 Field strength of spurious radiation §2.1053, §22.917

Test: 22.4; Frequency Band = FDD5, Mode = HSDPA, Channel = 4132, Frequency = 826.4MHz


Result: Passed
Setup No.: S01_AD01
Date of Test: 2015/06/30 19:35
Body: FCC47CFRChIPART22PUBLIC MOBILE SERVICES
Test Specification: FCC part 2 and 22

Detailed Results:

detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	limit /dBm	margin to limit /dB	azimuth /°	antenna polarization	EUT orientation	verdict
peak	maxhold	100	821.70	-31.91	-13.00	18.91	-90.0	vertical	vertical	passed
peak	maxhold	100	821.83	-32.80	-13.00	19.80	0.0	horizontal	horizontal	passed
peak	maxhold	100	822.03	-29.81	-13.00	16.81	-90.0	vertical	vertical	passed
peak	maxhold	100	822.31	-28.04	-13.00	15.04	-90.0	vertical	vertical	passed
peak	maxhold	100	822.49	-27.36	-13.00	14.36	-90.0	vertical	vertical	passed
peak	maxhold	100	822.96	-25.77	-13.00	12.77	-90.0	horizontal	vertical	passed
peak	maxhold	50	823.98	-26.83	-13.00	13.83	-90.0	vertical	vertical	passed

no further values have been found with a margin of less than 20 dB

added by operator

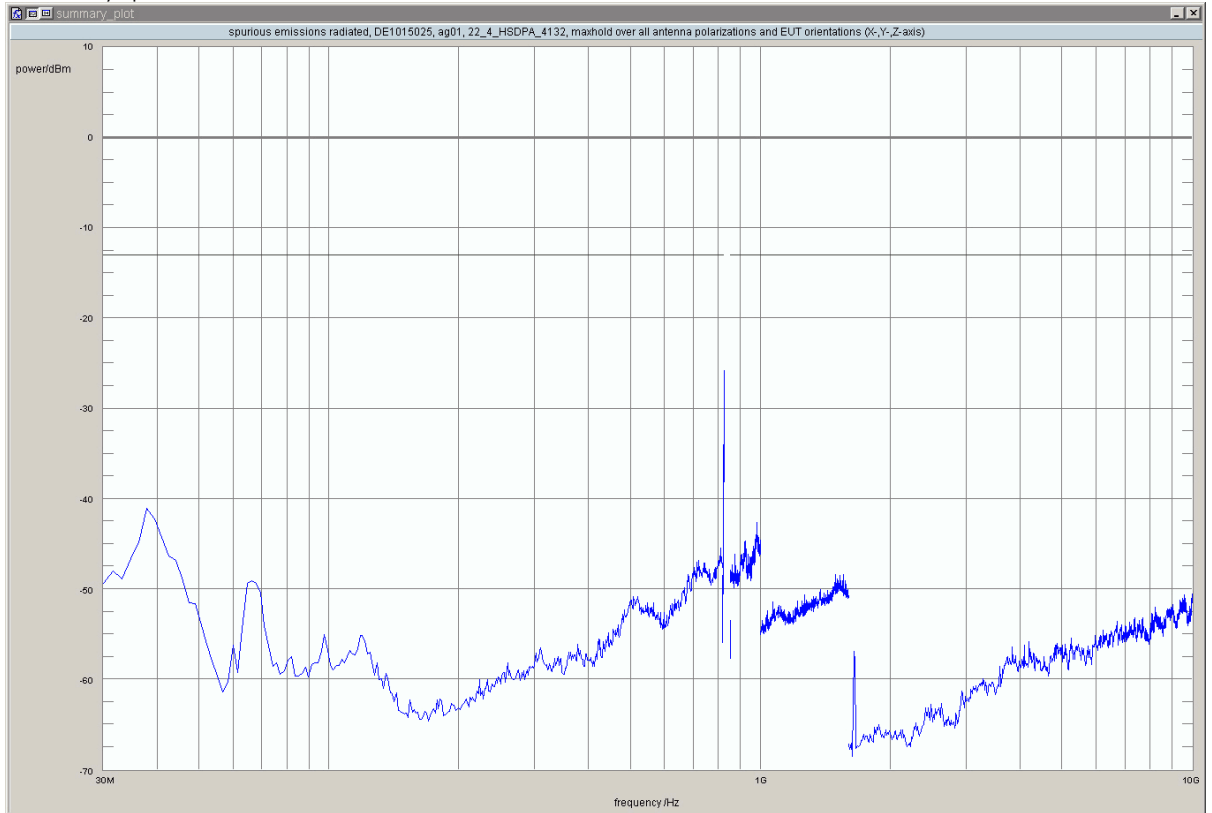


added by operator

Test: 22.4; Frequency Band = FDD5, Mode = HSDPA, Channel = 4183, Frequency = 836.6MHz

Result: Passed
 Setup No.: S01_AG01
 Date of Test: 2015/07/07 15:19
 Body: FCC47CFRChIPART22PUBLIC MOBILE SERVICES
 Test Specification: FCC part 2 and 22

Detailed Results:

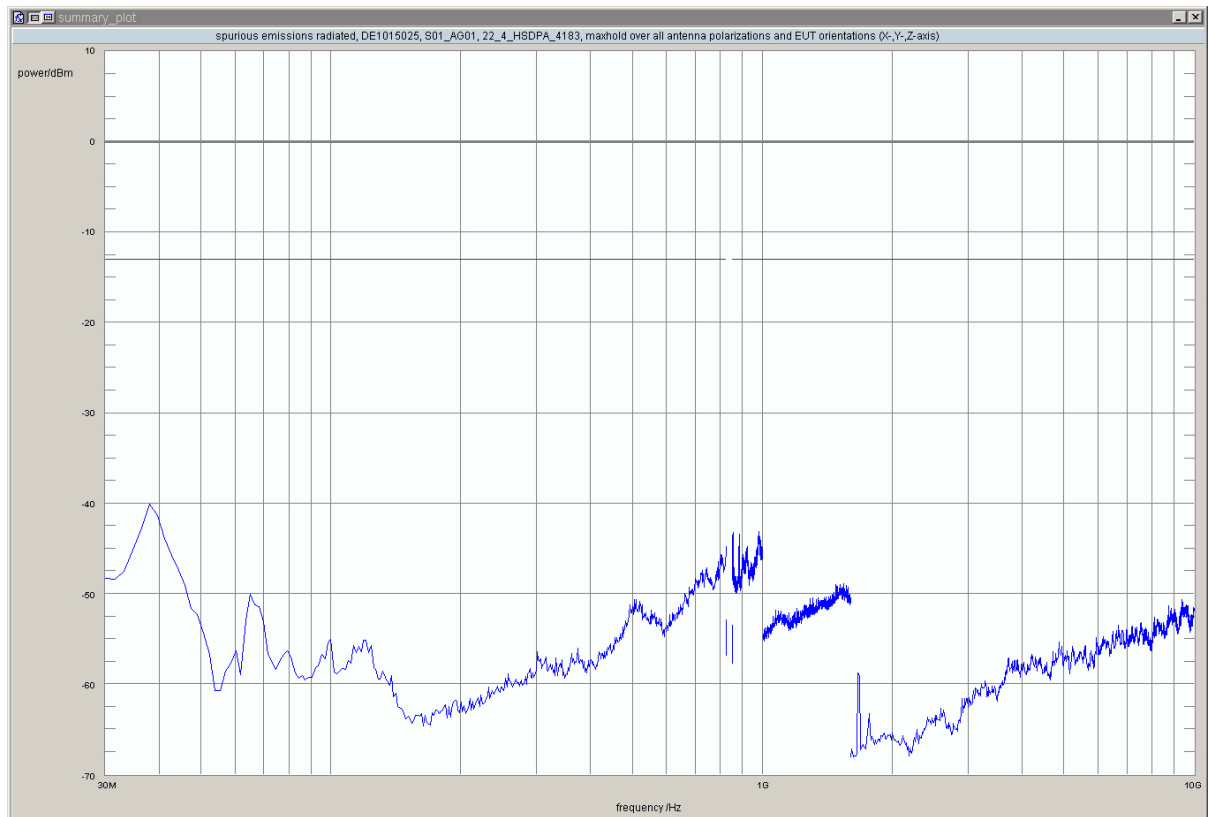

detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	limit /dBm	margin to limit /dB	azimuth /°	antenna polarization	EUT orientation	verdict
peak	maxhold	1000	37.9	-40.07	-13.00	27.07	90.0	vertical	vertical	passed

no further values have been found with a margin of less than 20 dB

Test: 22.4; Frequency Band = FDD5, Mode = HSDPA, Channel = 4233, Frequency = 846.6MHz


Result: Passed
 Setup No.: S01_AD01
 Date of Test: 2015/06/30 20:59
 Body: FCC47CFRChIPART22PUBLIC MOBILE SERVICES
 Test Specification: FCC part 2 and 22

Detailed Results:

detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	limit /dBm	margin to limit /dB	azimuth /°	antenna polarization	EUT orientation	verdict
peak	maxhold	50	849.00	-25.66	-13.00	12.66	-90.0	vertical	vertical	passed
peak	maxhold	50	849.08	-31.13	-13.00	18.13	0.0	horizontal	horizontal	passed
peak	maxhold	50	849.25	-29.02	-13.00	16.02	-90.0	vertical	vertical	passed
peak	maxhold	50	849.38	-32.22	-13.00	19.22	0.0	horizontal	horizontal	passed
peak	maxhold	50	849.48	-29.01	-13.00	16.01	-90.0	vertical	vertical	passed
peak	maxhold	100	850.13	-26.38	-13.00	13.38	-90.0	vertical	vertical	passed
peak	maxhold	100	850.32	-27.65	-13.00	14.65	-90.0	vertical	vertical	passed
peak	maxhold	100	850.60	-28.93	-13.00	15.93	-90.0	vertical	vertical	passed
peak	maxhold	100	850.88	-29.32	-13.00	16.32	-90.0	vertical	vertical	passed
peak	maxhold	100	851.08	-31.31	-13.00	18.31	-90.0	vertical	vertical	passed
peak	maxhold	100	851.30	-31.28	-13.00	18.28	-90.0	vertical	vertical	passed

no further values have been found with a margin of less than 20 dB

added by operator

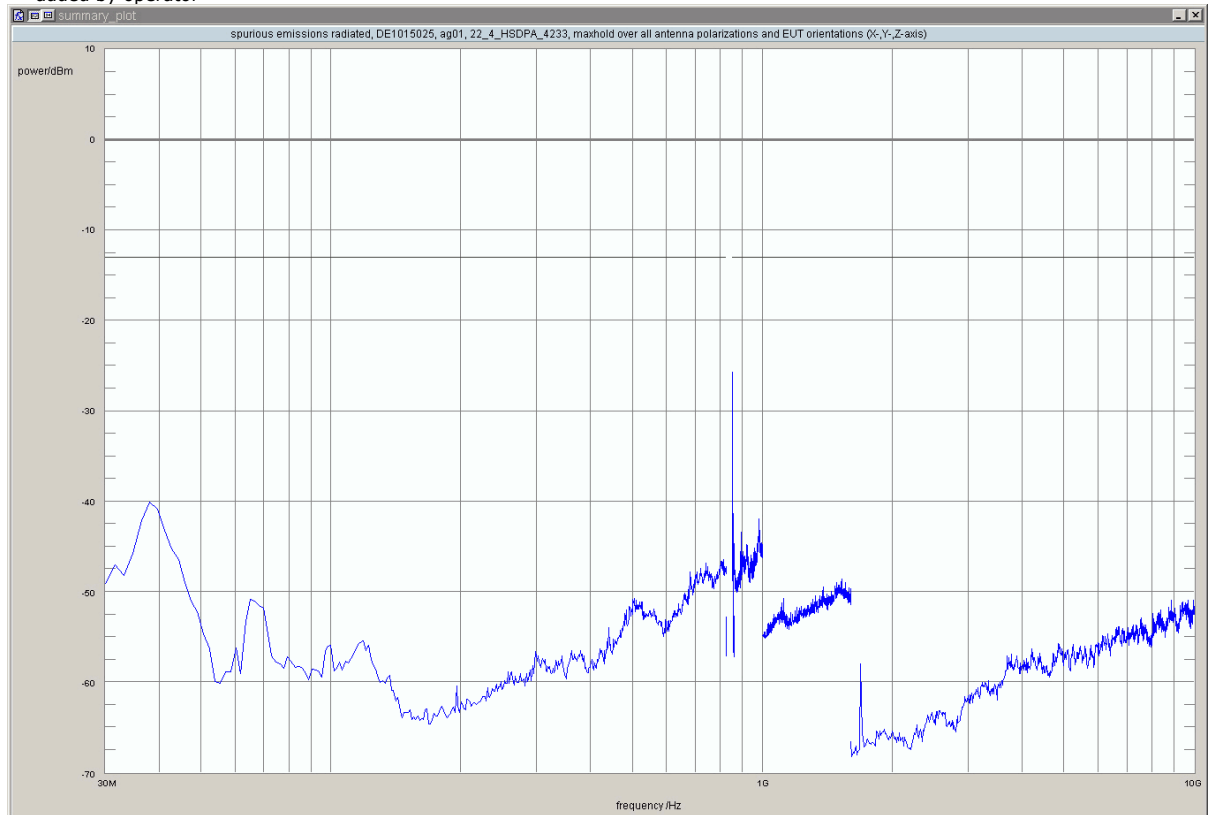

added by operator

Test: 22.4; Frequency Band = FDD5, Mode = HSUPA, Channel = 4132, Frequency = 826.4MHz


Result: Passed
Setup No.: S01_AD01
Date of Test: 2015/06/30 23:34
Body: FCC47CFRChIPART22PUBLIC MOBILE SERVICES
Test Specification: FCC part 2 and 22

Detailed Results:

detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	limit /dBm	margin to limit /dB	azimuth /°	antenna polarization	EUT orientation	verdict
peak	maxhold	50	823.86	-34.80	-13.00	21.80	-180.0	vertical	vertical	passed

no further values have been found with a margin of less than 20 dB

added by operator

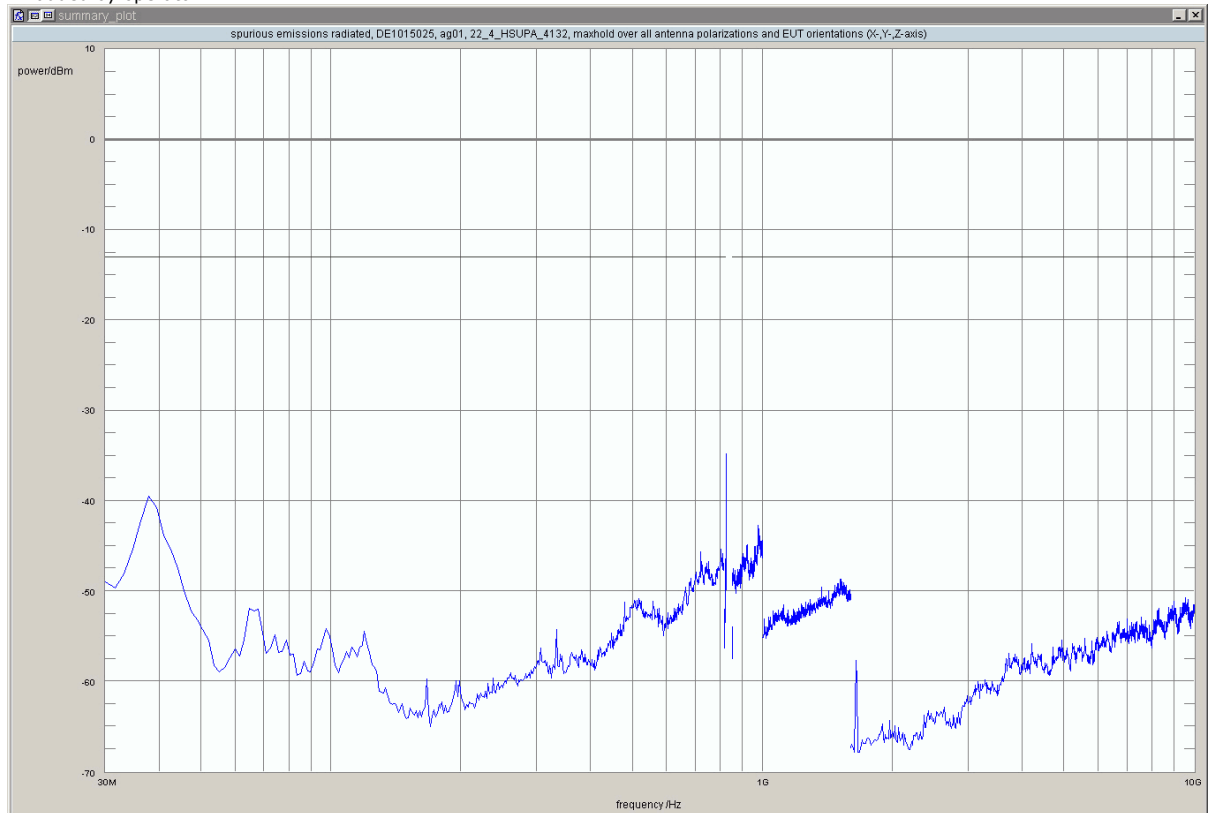

added by operator

Test: 22.4; Frequency Band = FDD5, Mode = HSUPA, Channel = 4183, Frequency = 836.6MHz


Result: Passed
Setup No.: S01_AD01
Date of Test: 2015/06/30 23:34
Body: FCC47CFRChIPART22PUBLIC MOBILE SERVICES
Test Specification: FCC part 2 and 22

Detailed Results:

detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	limit /dBm	margin to limit /dB	azimuth /°	antenna polarization	EUT orientation	verdict
peak	maxhold	1000	37.9	-40.13	-13.00	27.13	90.0	vertical	vertical	passed

no further values have been found with a margin of less than 20 dB

added by operator

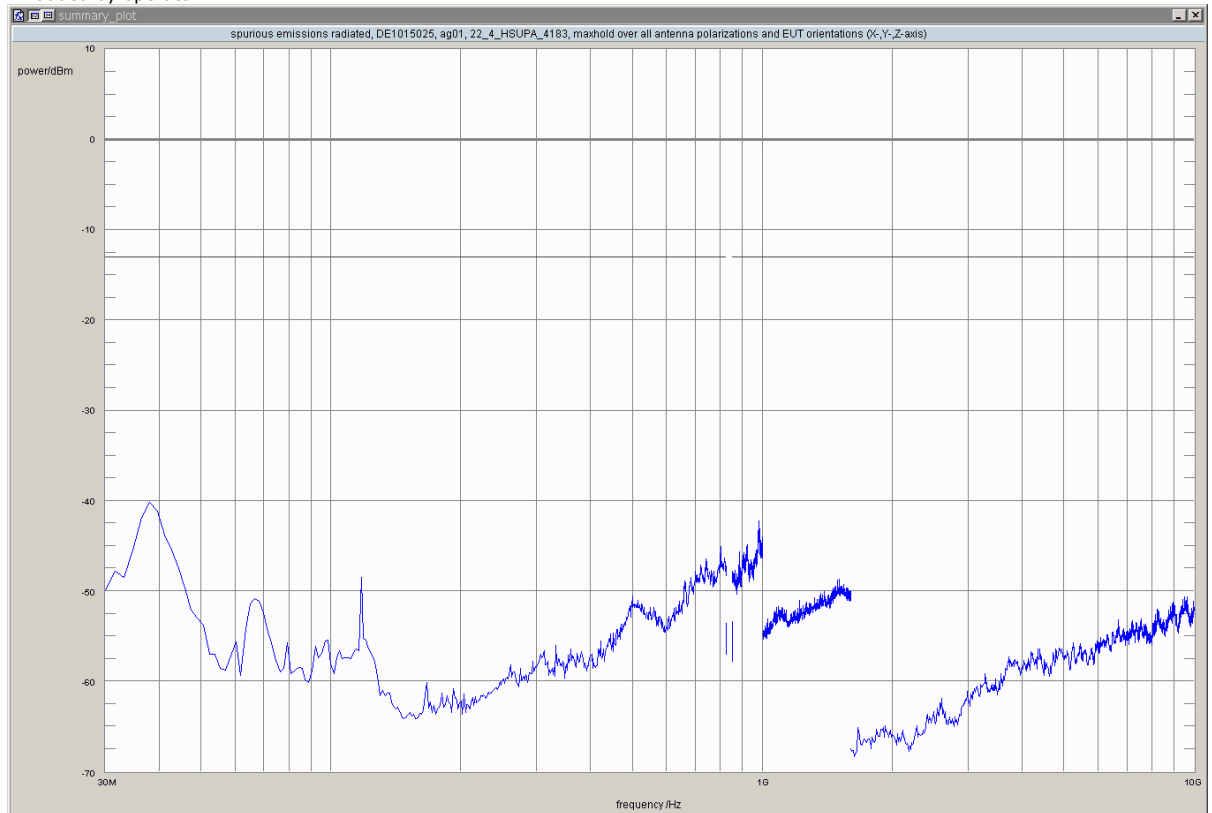


added by operator

Test: 22.4; Frequency Band = FDD5, Mode = HSUPA, Channel = 4233, Frequency = 846.6MHz

Result: Passed
Setup No.: S01_AG01
Date of Test: 2015/07/07 15:31
Body: FCC47CFRChIPART22PUBLIC MOBILE SERVICES
Test Specification: FCC part 2 and 22

Detailed Results:

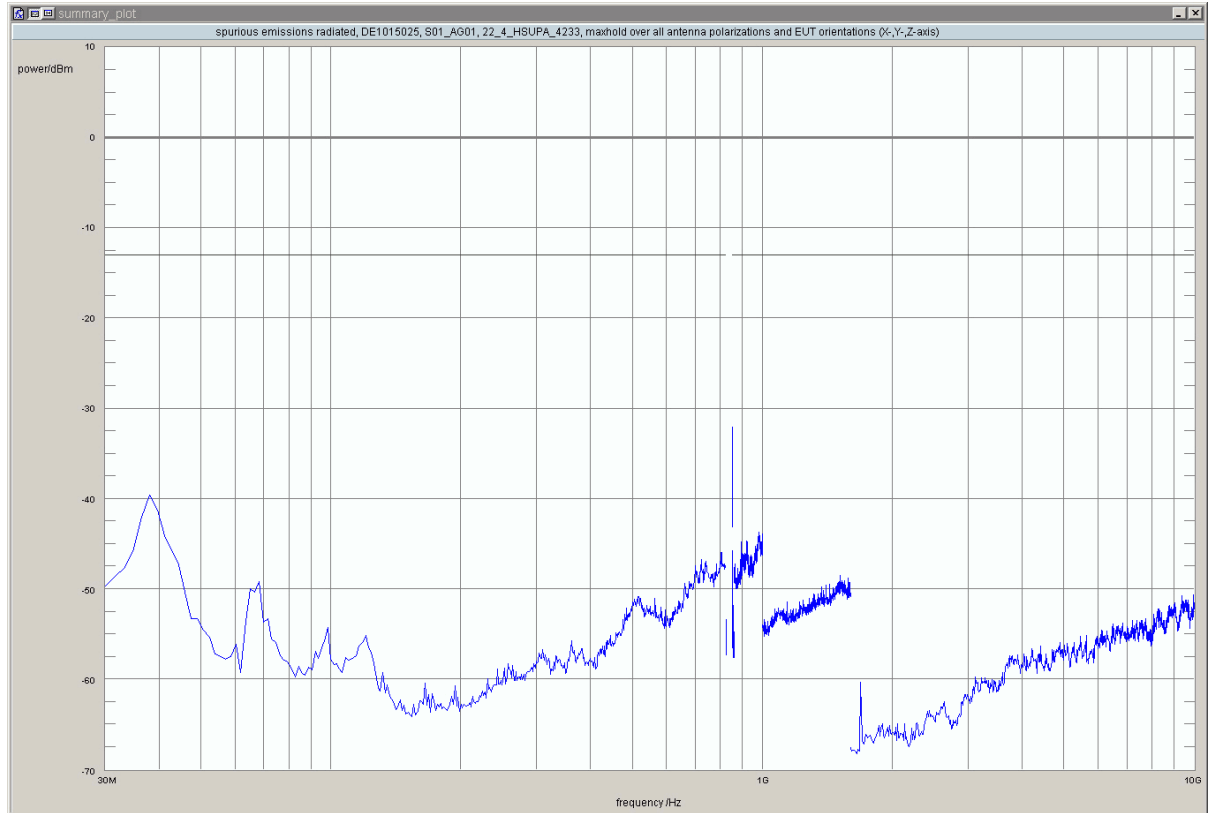

detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	limit /dBm	margin to limit /dB	azimuth /°	antenna polarization	EUT orientation	verdict
peak	maxhold	50	849.00	-32.05	-13.00	19.05	90.0	vertical	vertical	passed

no further values have been found with a margin of less than 20 dB

Test: 22.4; Frequency Band = FDD5, Mode = W-CDMA, Channel = 4132, Frequency = 826.4MHz

Result: Passed


Setup No.: S01_AG01

Date of Test: 2015/07/07 15:04

Body: FCC47CFRChIPART22PUBLIC MOBILE SERVICES

Test Specification: FCC part 2 and 22

Detailed Results:

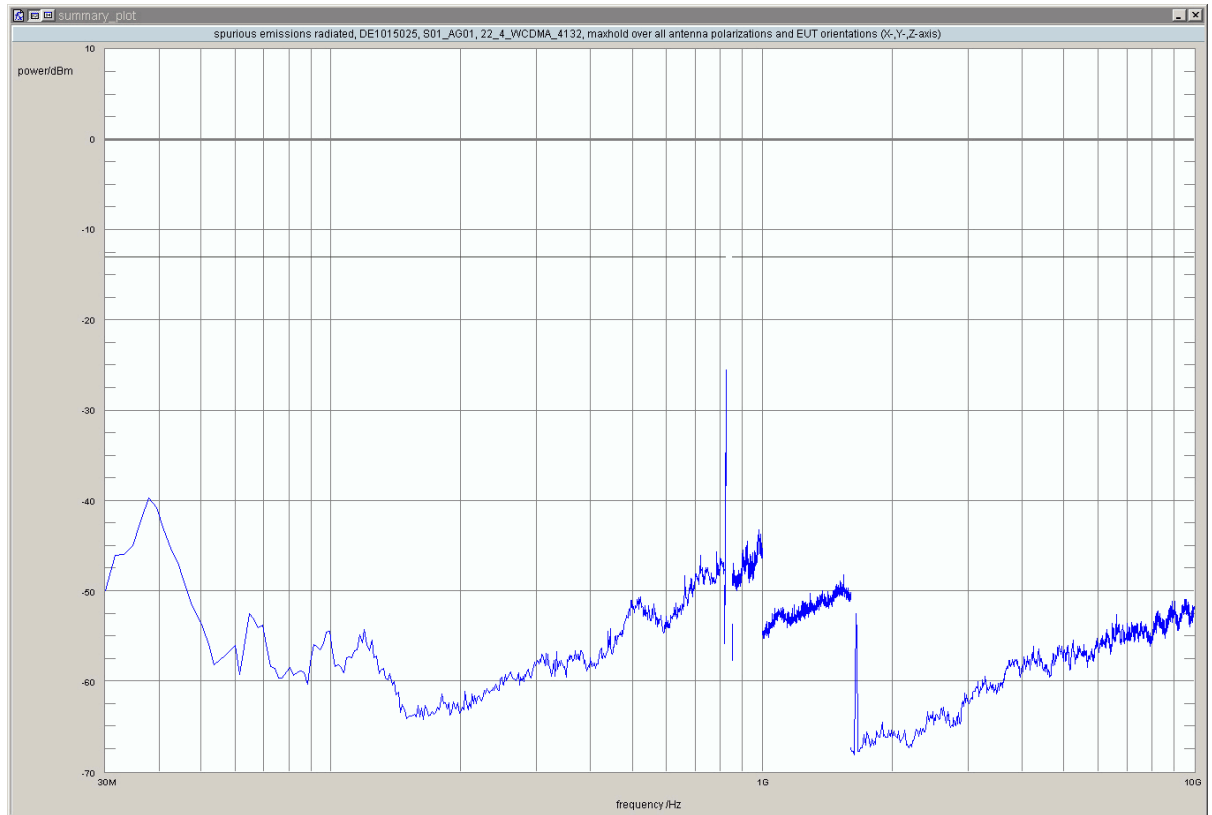

detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	limit /dBm	margin to limit /dB	azimuth /°	antenna polarization	EUT orientation	verdict
peak	maxhold	100	822.04	-30.36	-13.00	17.36	-180.0	horizontal	horizontal	passed
peak	maxhold	100	822.19	-31.21	-13.00	18.21	-180.0	horizontal	horizontal	passed
peak	maxhold	100	822.39	-29.85	-13.00	16.85	0.0	horizontal	horizontal	passed
peak	maxhold	100	822.49	-28.19	-13.00	15.19	-180.0	horizontal	horizontal	passed
peak	maxhold	100	822.66	-25.52	-13.00	12.52	-180.0	horizontal	horizontal	passed
peak	maxhold	100	823.00	-28.98	-13.00	15.98	0.0	horizontal	horizontal	passed
peak	maxhold	50	823.17	-29.50	-13.00	16.50	-180.0	horizontal	horizontal	passed
peak	maxhold	50	823.27	-29.07	-13.00	16.07	-180.0	horizontal	horizontal	passed
peak	maxhold	50	823.37	-29.45	-13.00	16.45	-180.0	horizontal	horizontal	passed
peak	maxhold	50	823.55	-29.11	-13.00	16.11	-180.0	horizontal	horizontal	passed
peak	maxhold	50	823.68	-30.65	-13.00	17.65	0.0	horizontal	horizontal	passed
peak	maxhold	50	823.90	-27.93	-13.00	14.93	-180.0	horizontal	horizontal	passed
peak	maxhold	50	823.99	-27.74	-13.00	14.74	-180.0	horizontal	horizontal	passed

no further values have been found with a margin of less than 20 dB

Test: 22.4; Frequency Band = FDD5, Mode = W-CDMA, Channel = 4183, Frequency = 836.6MHz

Result: Passed

Setup No.: S01_AD01

Date of Test: 2015/07/01 0:12

Body: FCC47CFRChPART22PUBLIC MOBILE SERVICES


Test Specification: FCC part 2 and 22

Detailed Results:

detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	limit /dBm	margin to limit /dB	azimuth /°	antenna polarization	EUT orientation	verdict
peak	maxhold	1000	37.9	-40.08	-13.00	27.08	90.0	vertical	vertical	passed

no further values have been found with a margin of less than 20 dB

added by operator

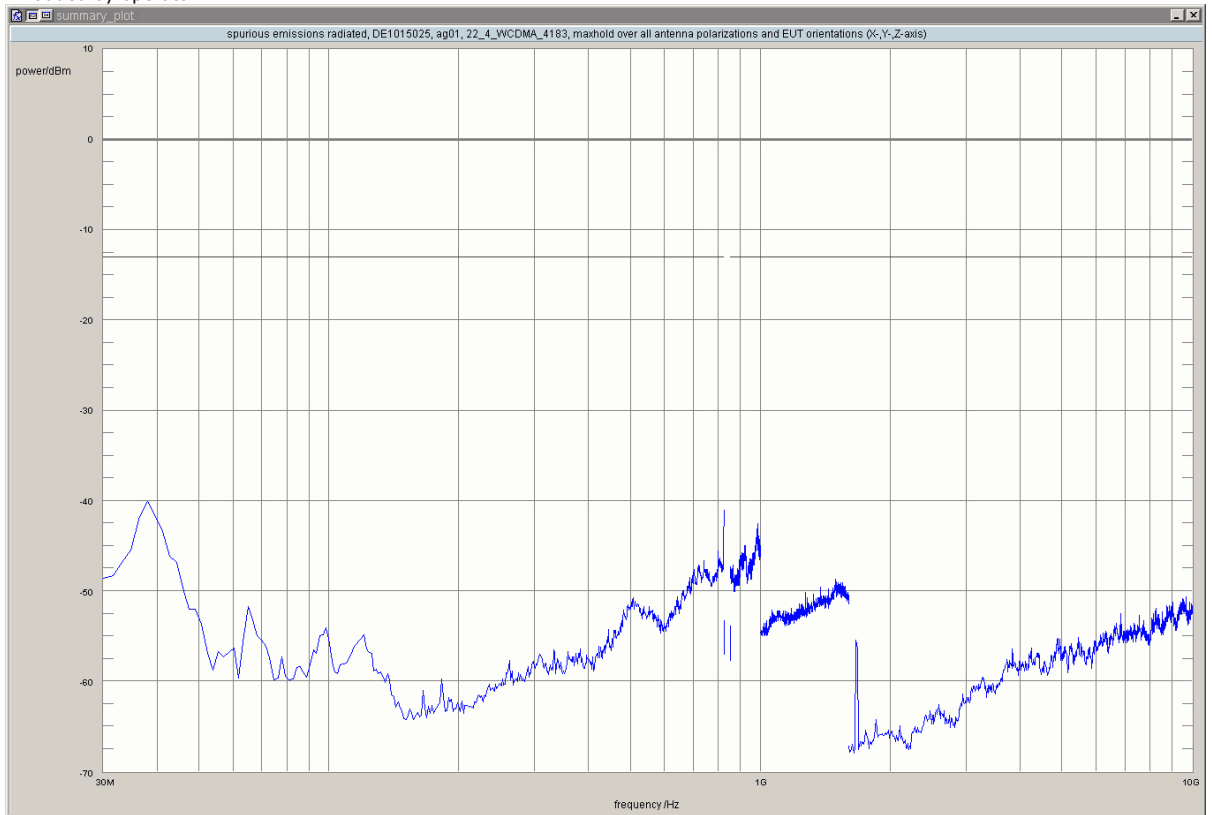

added by operator

Test: 22.4; Frequency Band = FDD5, Mode = W-CDMA, Channel = 4233, Frequency = 846.6MHz


Result: Passed
Setup No.: S01_AD01
Date of Test: 2015/07/01 3:42
Body: FCC47CFRChIPART22PUBLIC MOBILE SERVICES
Test Specification: FCC part 2 and 22

Detailed Results:

detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	limit /dBm	margin to limit /dB	azimuth /°	antenna polarization	EUT orientation	verdict
peak	maxhold	50	849.00	-30.53	-13.00	17.53	-180.0	horizontal	horizontal	passed
peak	maxhold	50	849.06	-32.53	-13.00	19.53	-180.0	horizontal	horizontal	passed
peak	maxhold	100	850.22	-31.78	-13.00	18.78	-180.0	horizontal	horizontal	passed
peak	maxhold	100	850.60	-32.51	-13.00	19.51	-180.0	horizontal	horizontal	passed

no further values have been found with a margin of less than 20 dB

added by operator

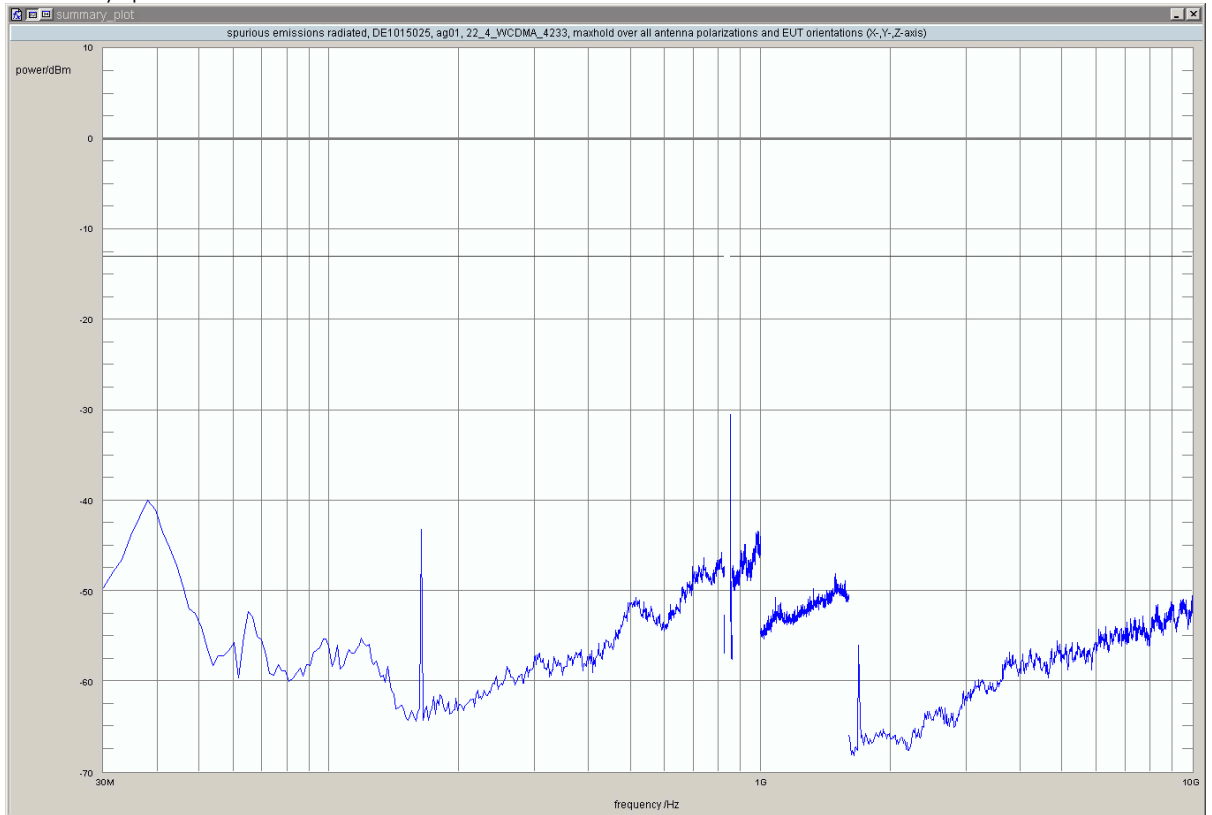


added by operator


3.5.4 22.5 Emission and Occupied Bandwidth §2.1049, §22.917

Test: 22.5; Frequency Band = FDD5, Mode = HSDPA, Channel = 4132, Frequency = 826.4MHz

<i>Result:</i>	Passed
<i>Setup No.:</i>	S01_AD01
<i>Date of Test:</i>	2015/07/03 22:20
<i>Body:</i>	FCC47CFRChIPART22PUBLIC MOBILE SERVICES
<i>Test Specification:</i>	FCC part 2 and 22

Detailed Results:

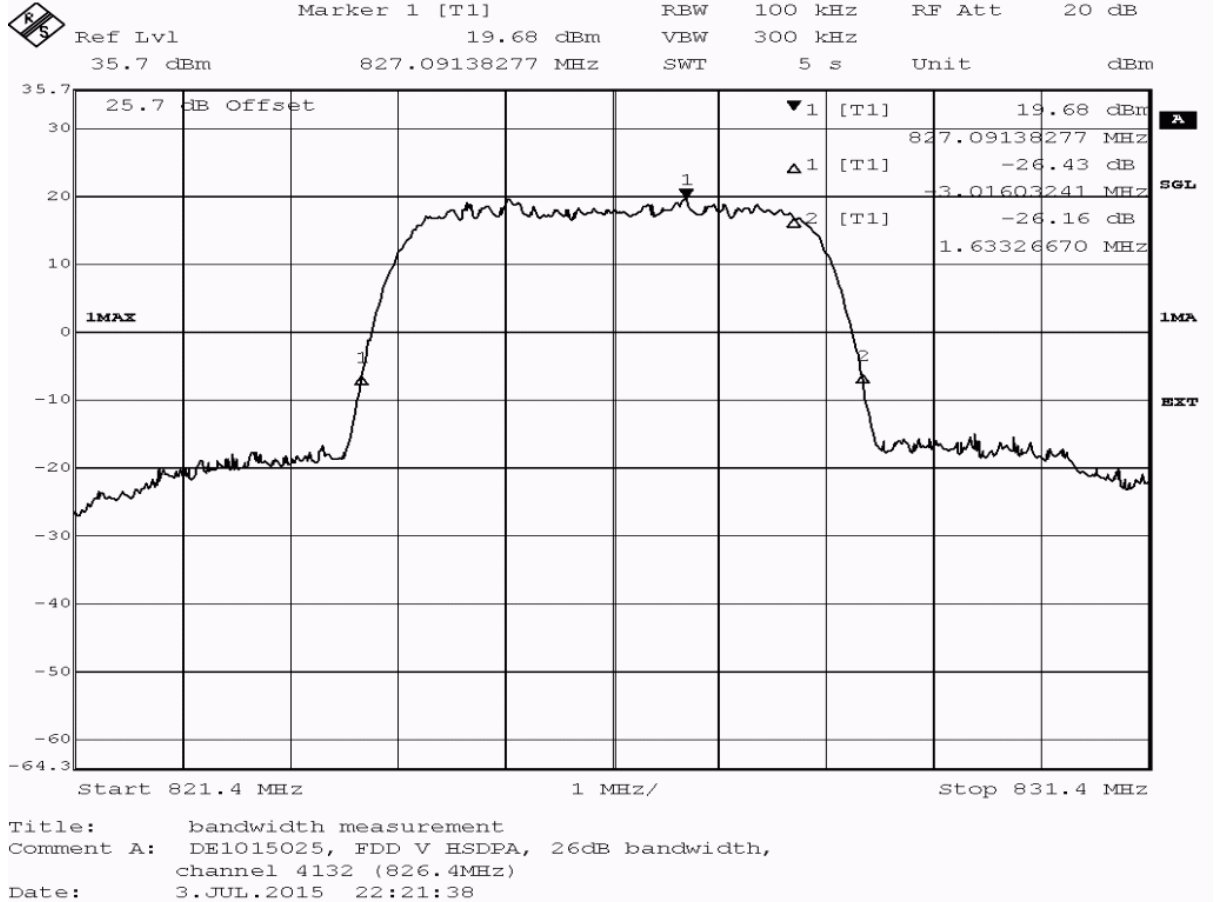

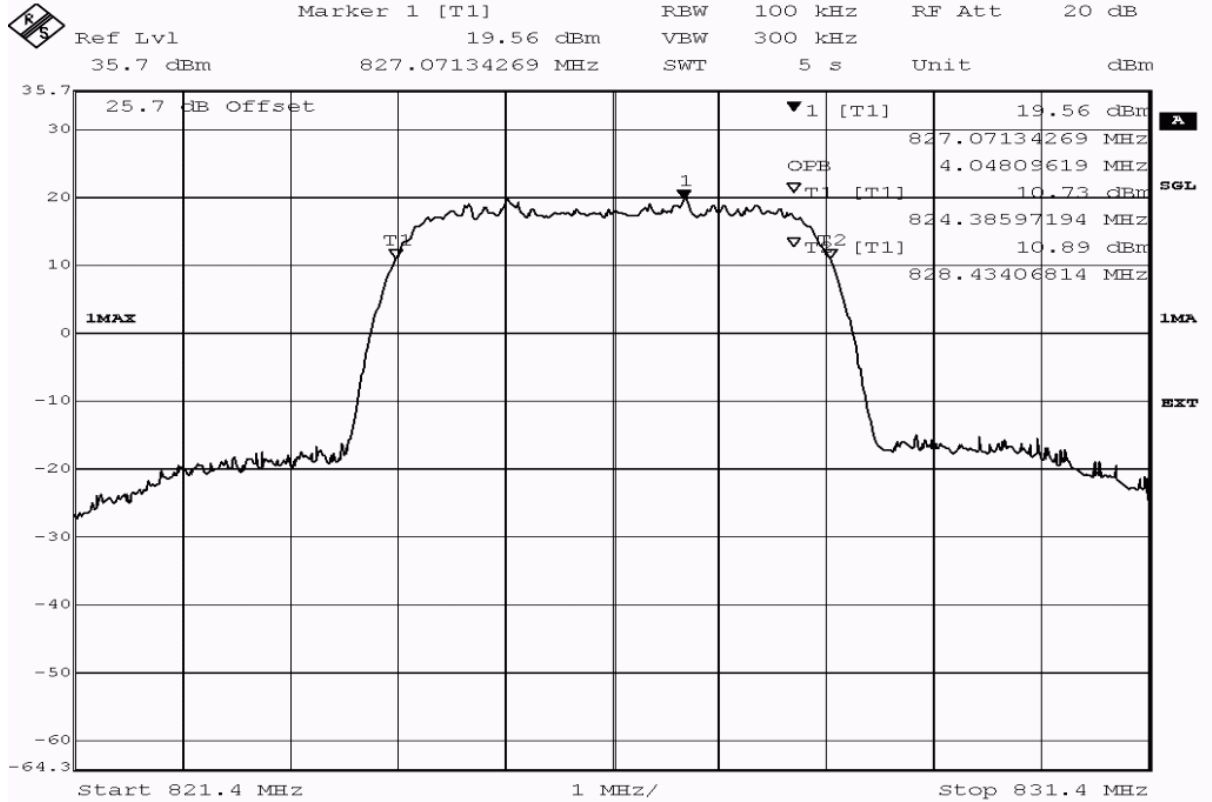


Title: bandwidth measurement
 Comment A: DE1015025, FDD V HSDPA, occupied bandwidth (99%), channel 4132 (826.4MHz)
 Date: 3.JUL.2015 22:22:01


detector	trace	resolution bandwidth /kHz	type of measurement	measured value /kHz	verdict
peak	maxhold	100	-26dB bandwidth	4649.3	passed
peak	maxhold	100	99% bandwidth	4048.1	passed

Test: 22.5; Frequency Band = FDD5, Mode = HSDPA, Channel = 4183, Frequency = 836.6MHz

Result: Passed
 Setup No.: S01_AD01
 Date of Test: 2015/07/03 22:29
 Body: FCC47CFRChIPART22PUBLIC MOBILE SERVICES
 Test Specification: FCC part 2 and 22

Detailed Results:

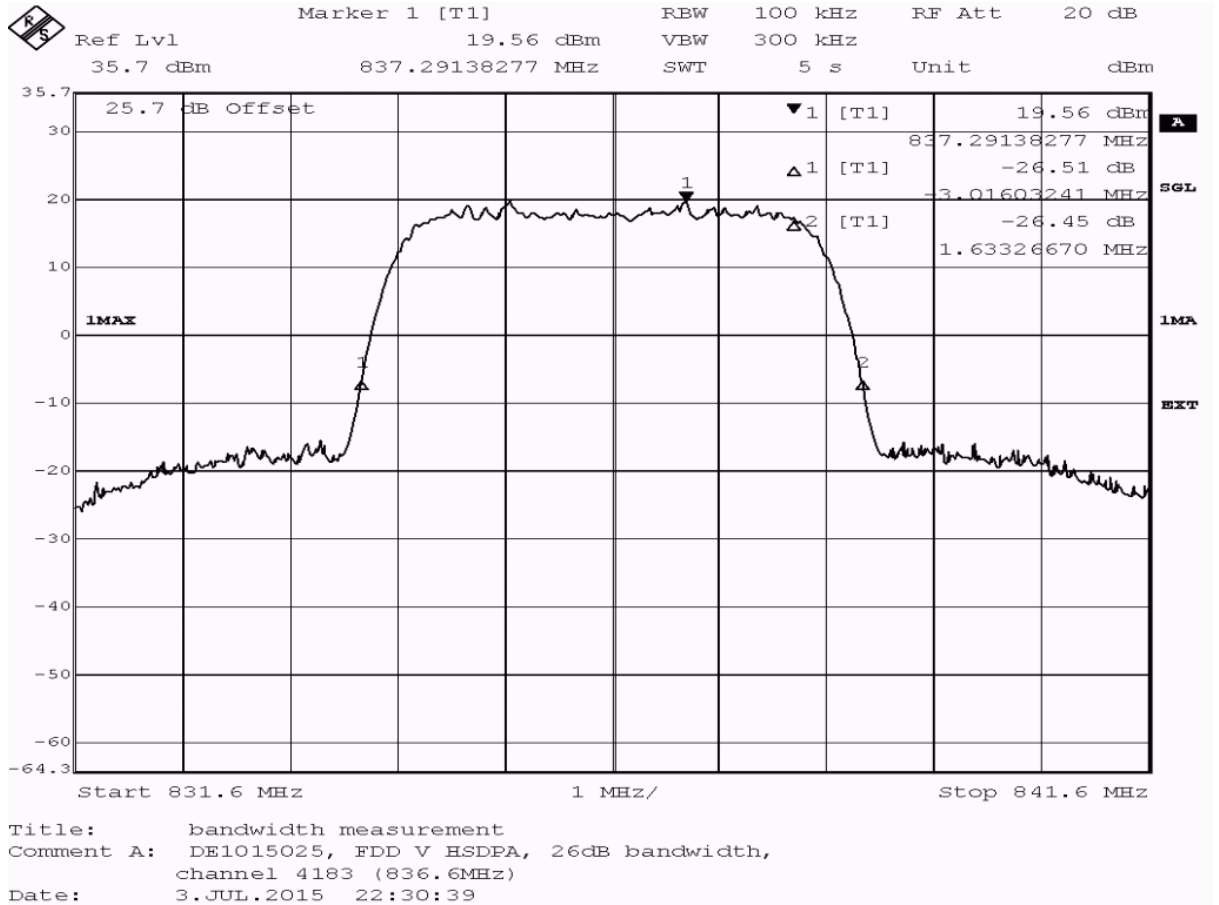

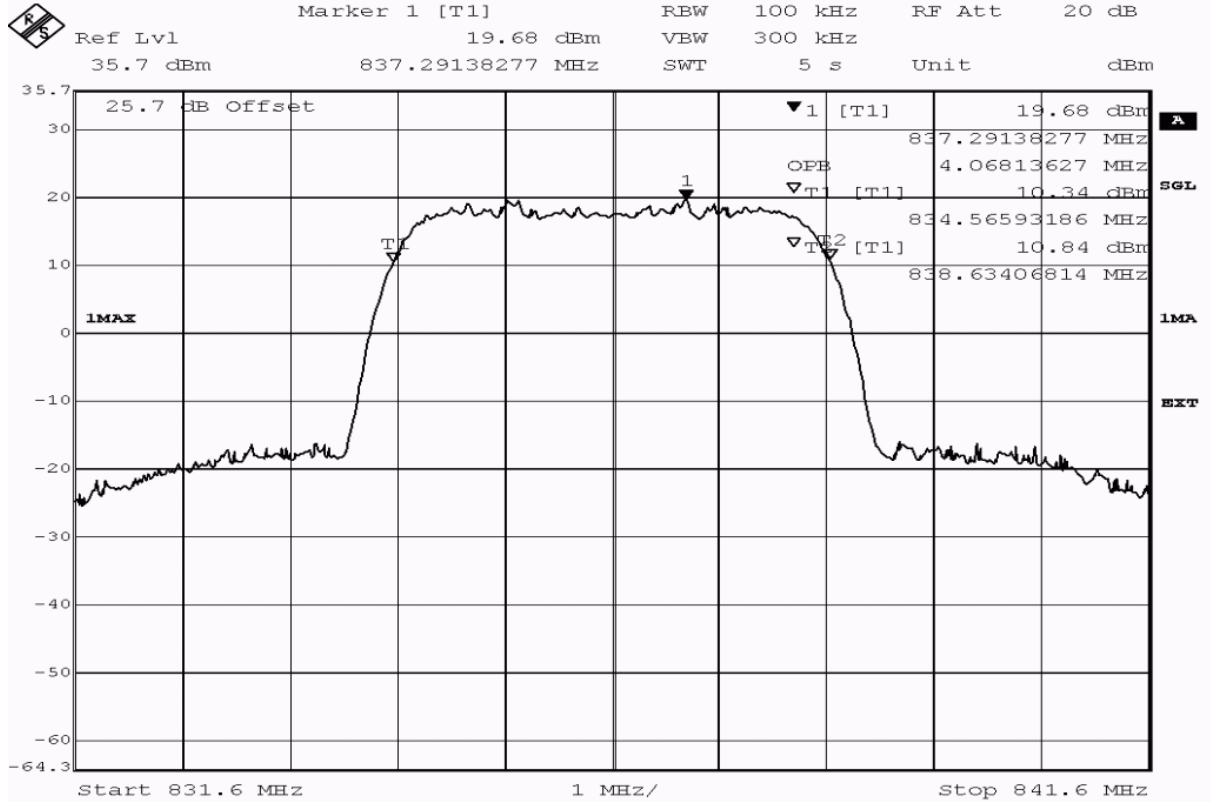


Title: bandwidth measurement
 Comment A: DE1015025, FDD V HSDPA, occupied bandwidth (99%), channel 4183 (836.6MHz)
 Date: 3.JUL.2015 22:31:01


detector	trace	resolution bandwidth /kHz	type of measurement	measured value /kHz	verdict
peak	maxhold	100	-26dB bandwidth	4649.3	passed
peak	maxhold	100	99% bandwidth	4068.1	passed

Test: 22.5; Frequency Band = FDD5, Mode = HSDPA, Channel = 4233, Frequency = 846.6MHz

Result: Passed
 Setup No.: S01_AD01
 Date of Test: 2015/07/03 22:36
 Body: FCC47CFRChIPART22PUBLIC MOBILE SERVICES
 Test Specification: FCC part 2 and 22

Detailed Results:

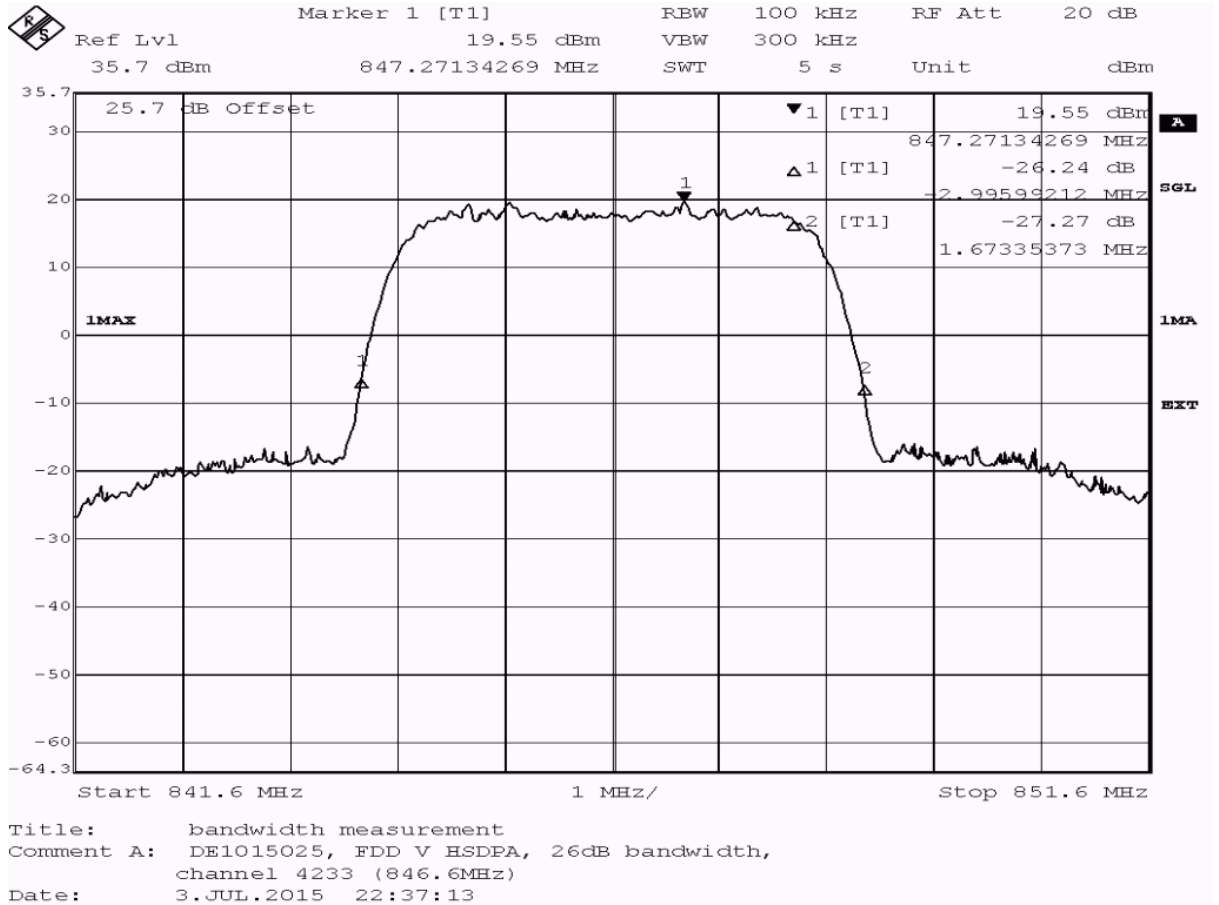

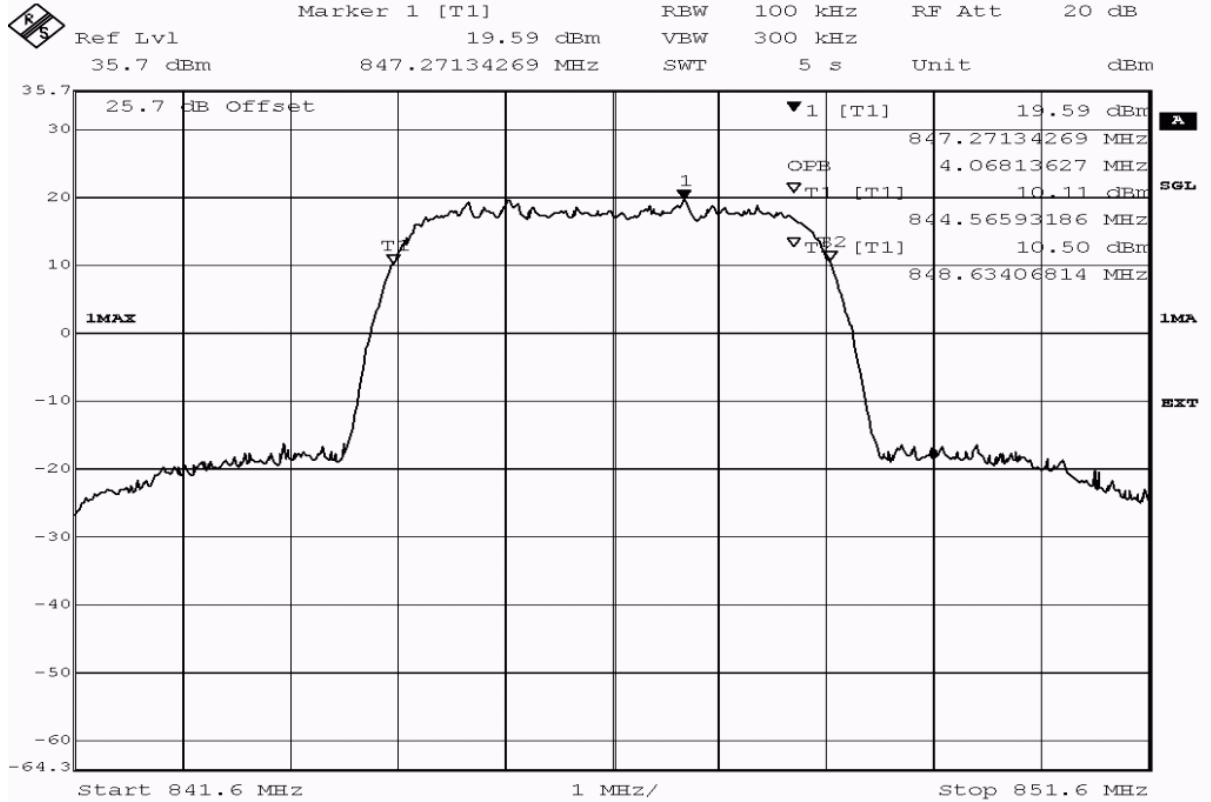


Title: bandwidth measurement
 Comment A: DE1015025, FDD V HSDPA, occupied bandwidth (99%),
 channel 4233 (846.6MHz)
 Date: 3.JUL.2015 22:37:36


detector	trace	resolution bandwidth /kHz	type of measurement	measured value /kHz	verdict
peak	maxhold	100	-26dB bandwidth	4669.3	passed
peak	maxhold	100	99% bandwidth	4068.1	passed

Test: 22.5; Frequency Band = FDD5, Mode = HSUPA, Channel = 4132, Frequency = 826.4MHz

Result: Passed
 Setup No.: S01_AD01
 Date of Test: 2015/07/03 20:31
 Body: FCC47CFRChIPART22PUBLIC MOBILE SERVICES
 Test Specification: FCC part 2 and 22

Detailed Results:

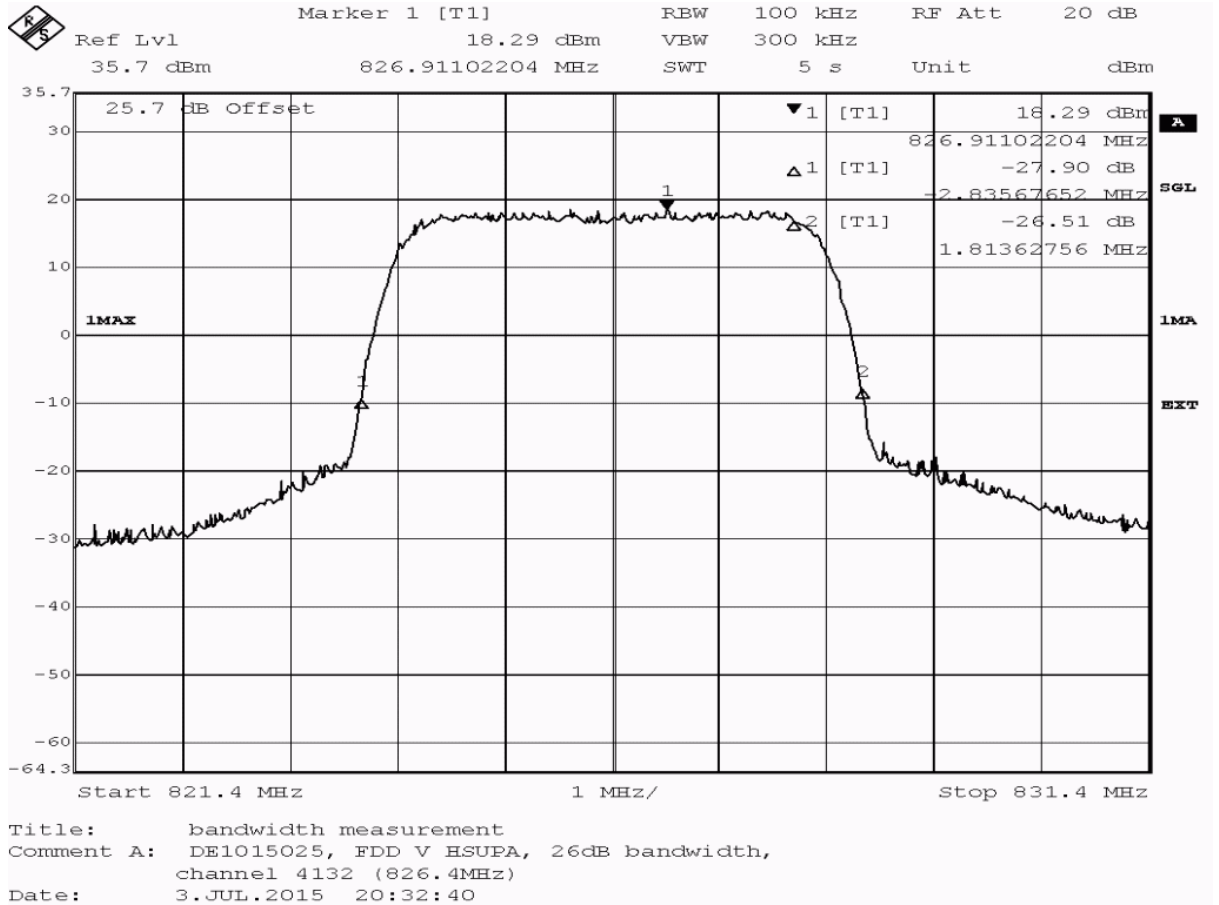

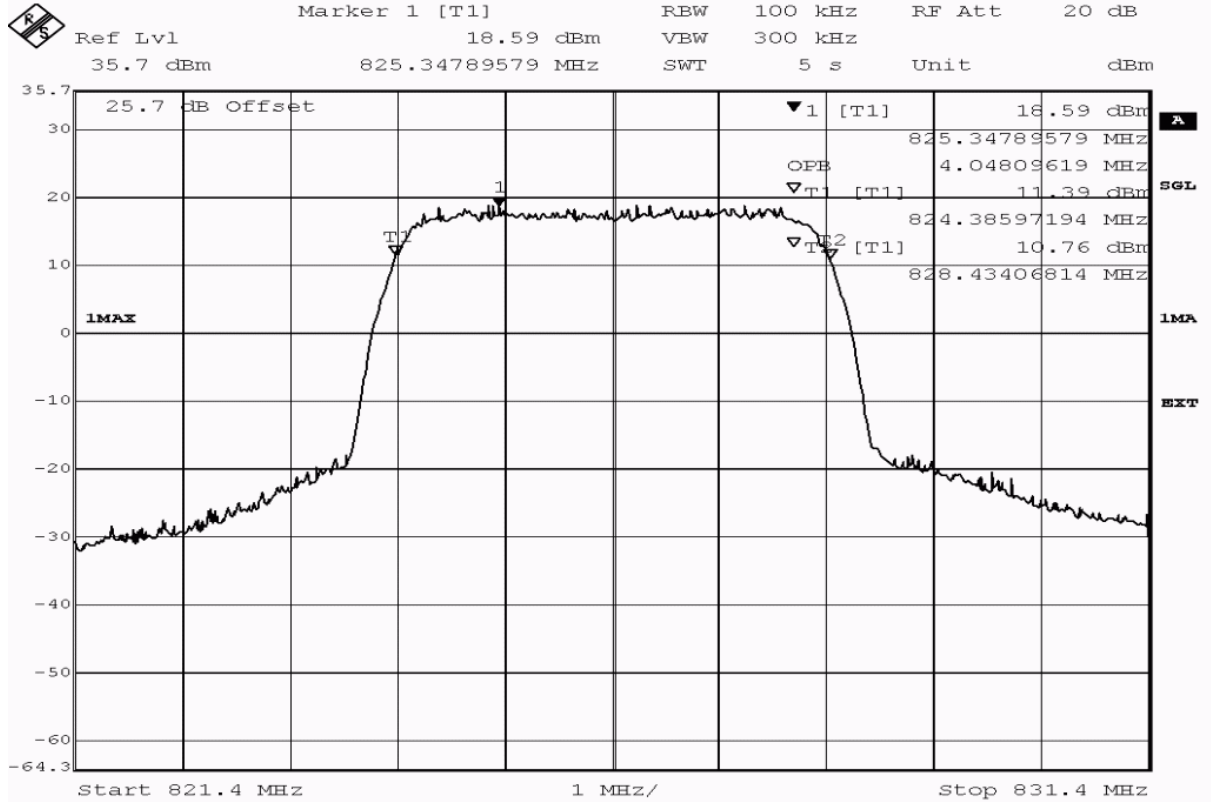


Title: bandwidth measurement
 Comment A: DE1015025, FDD V HSUPA, occupied bandwidth (99%),
 channel 4132 (826.4MHz)
 Date: 3.JUL.2015 20:33:03


detector	trace	resolution bandwidth /kHz	type of measurement	measured value /kHz	verdict
peak	maxhold	100	-26dB bandwidth	4649.3	passed
peak	maxhold	100	99% bandwidth	4048.1	passed

Test: 22.5; Frequency Band = FDD5, Mode = HSUPA, Channel = 4183, Frequency = 836.6MHz

Result: Passed
 Setup No.: S01_AD01
 Date of Test: 2015/07/03 20:49
 Body: FCC47CFRChIPART22PUBLIC MOBILE SERVICES
 Test Specification: FCC part 2 and 22

Detailed Results:

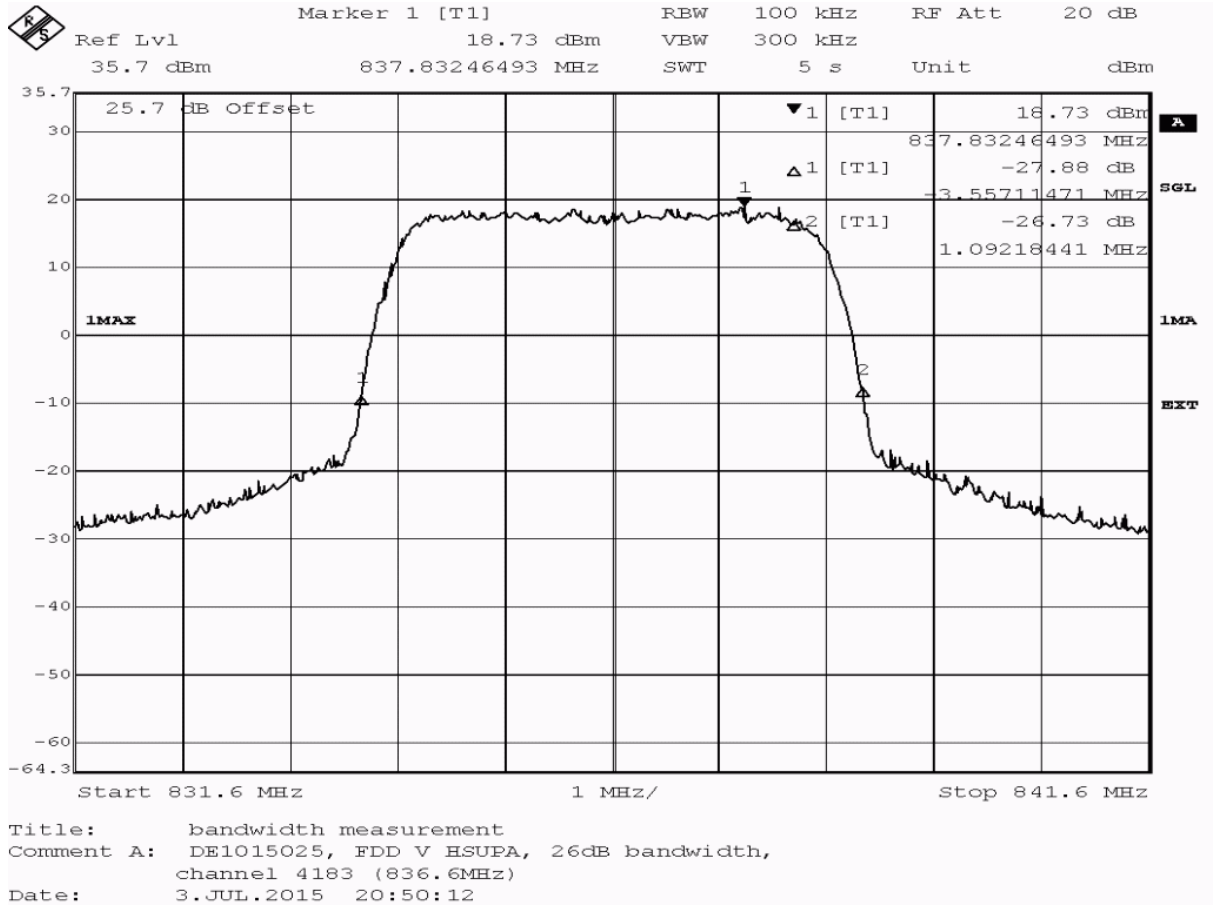

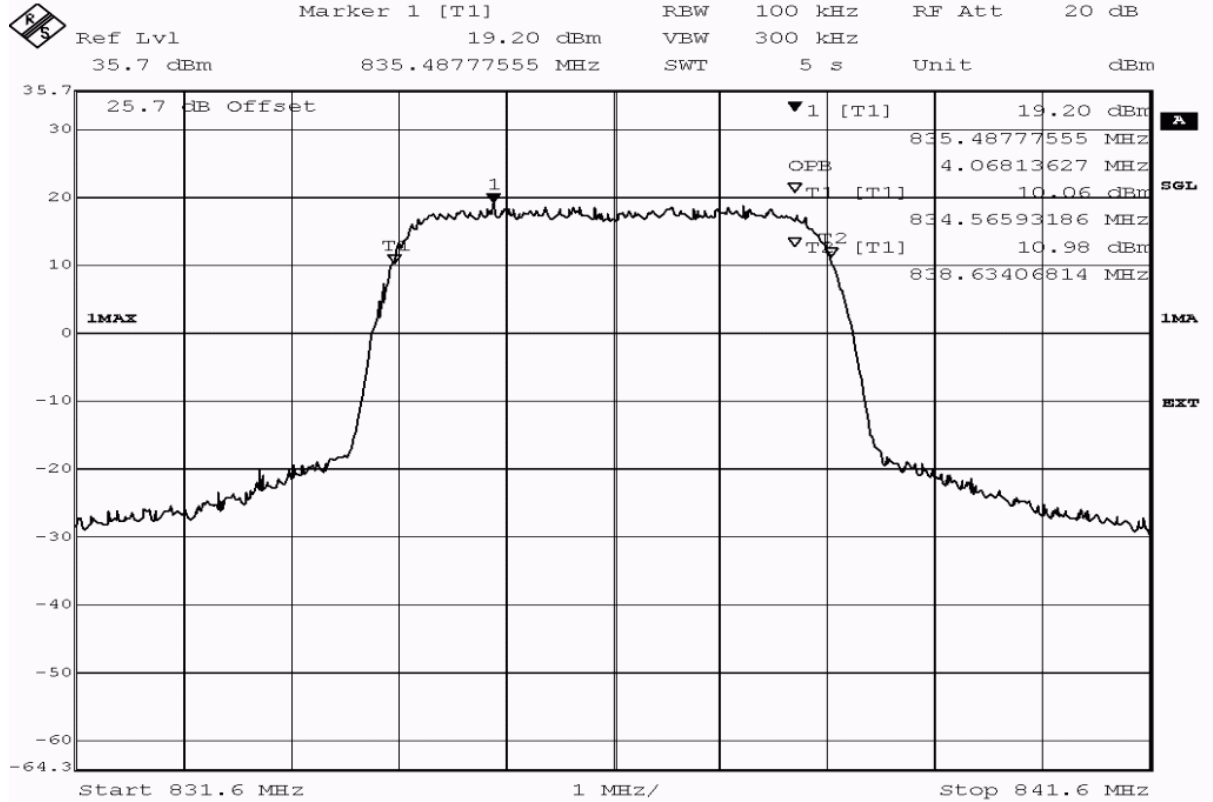


Title: bandwidth measurement
 Comment A: DE1015025, FDD V HSUPA, occupied bandwidth (99%),
 channel 4183 (836.6MHz)
 Date: 3.JUL.2015 20:50:35


detector	trace	resolution bandwidth /kHz	type of measurement	measured value /kHz	verdict
peak	maxhold	100	-26dB bandwidth	4649.3	passed
peak	maxhold	100	99% bandwidth	4068.1	passed

Test: 22.5; Frequency Band = FDD5, Mode = HSUPA, Channel = 4233, Frequency = 846.6MHz

Result: Passed
 Setup No.: S01_AD01
 Date of Test: 2015/07/03 21:20
 Body: FCC47CFRChIPART22PUBLIC MOBILE SERVICES
 Test Specification: FCC part 2 and 22

Detailed Results:

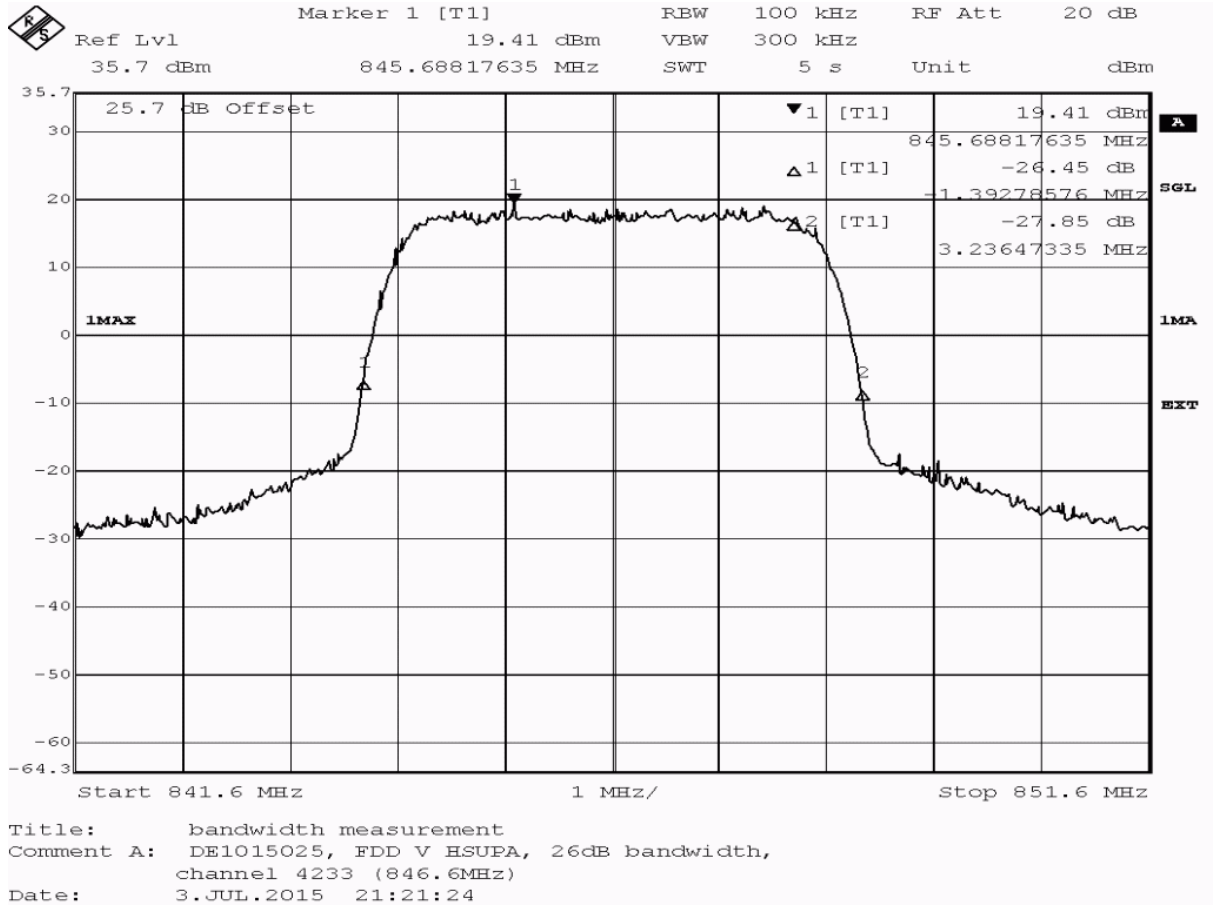

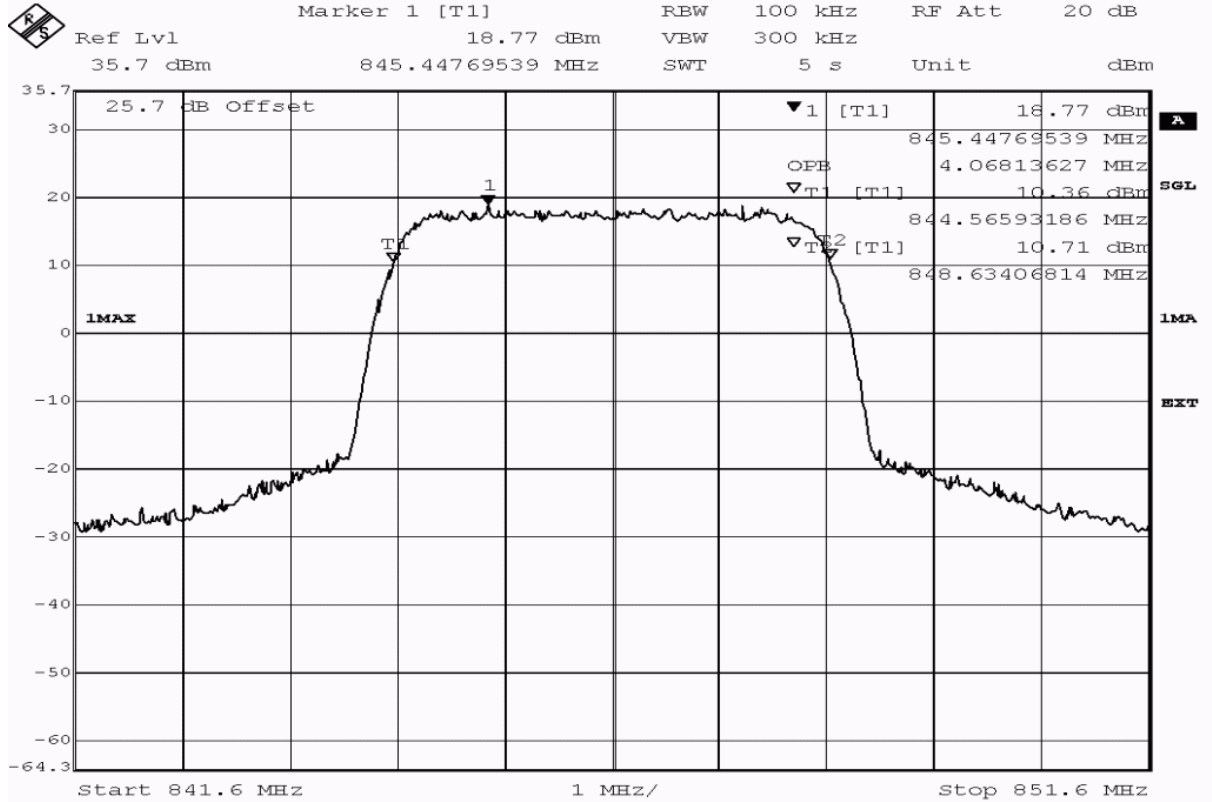


Title: bandwidth measurement
 Comment A: DE1015025, FDD V HSUPA, occupied bandwidth (99%),
 channel 4233 (846.6MHz)
 Date: 3.JUL.2015 21:21:46


detector	trace	resolution bandwidth /kHz	type of measurement	measured value /kHz	verdict
peak	maxhold	100	-26dB bandwidth	4629.3	passed
peak	maxhold	100	99% bandwidth	4068.1	passed

Test: 22.5; Frequency Band = FDD5, Mode = W-CDMA, Channel = 4132, Frequency = 826.4MHz

Result: Passed
 Setup No.: S01_AD01
 Date of Test: 2015/07/03 22:49
 Body: FCC47CFRChIPART22PUBLIC MOBILE SERVICES
 Test Specification: FCC part 2 and 22

Detailed Results:

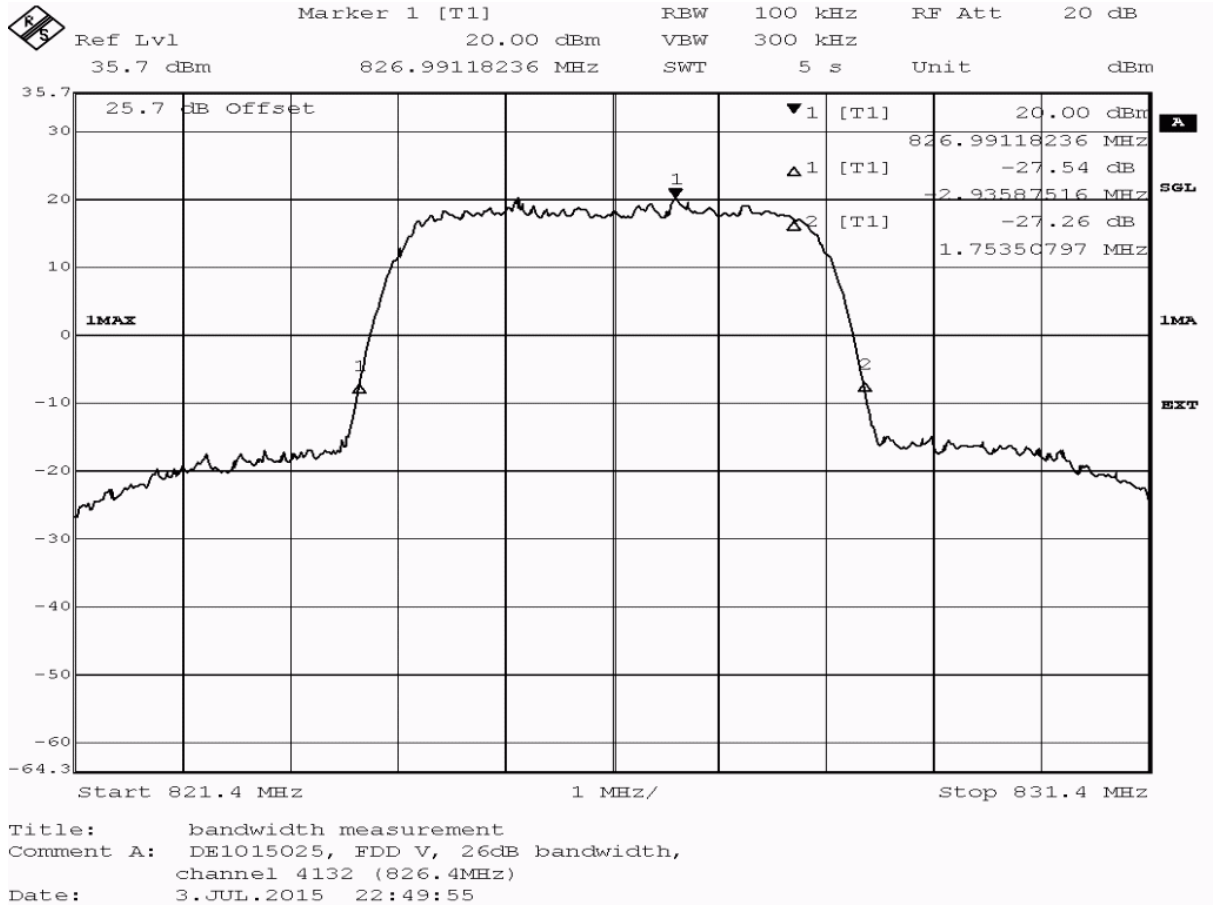

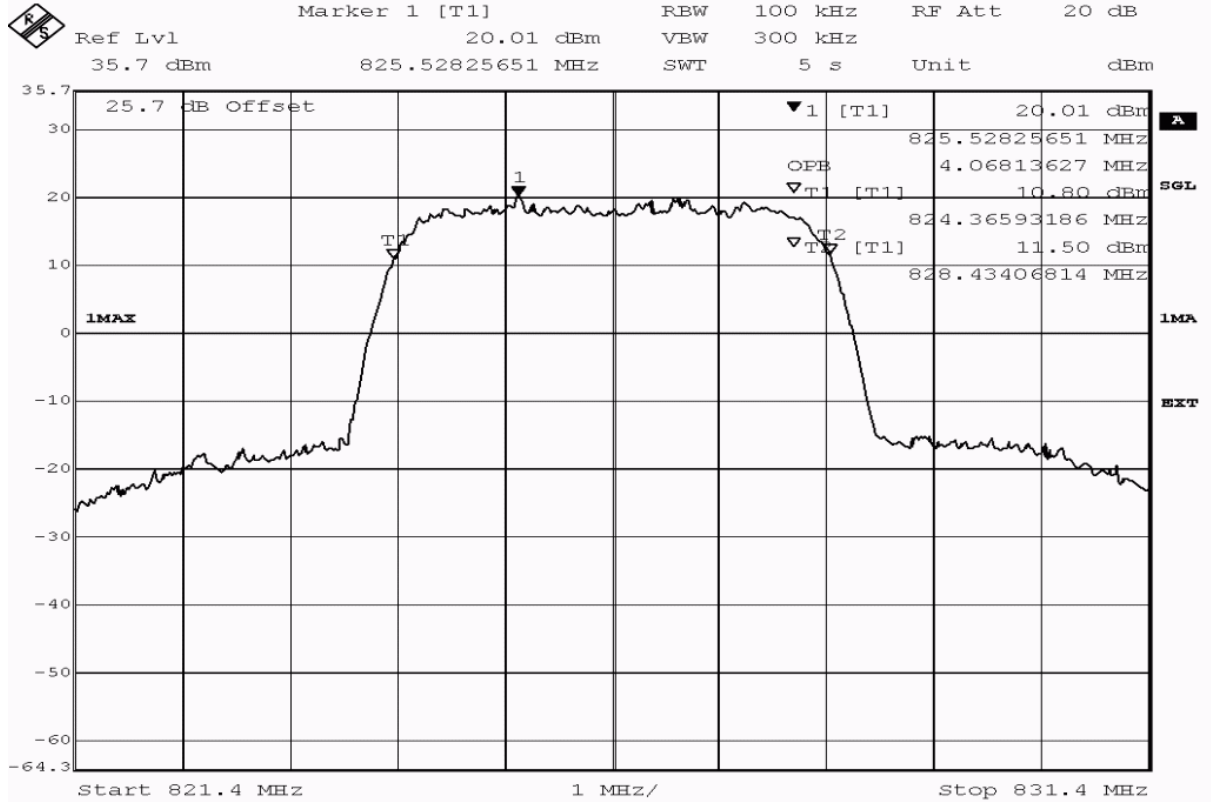


Title: bandwidth measurement
 Comment A: DE1015025, FDD V, occupied bandwidth (99%), channel 4132 (826.4MHz)
 Date: 3.JUL.2015 22:50:17


detector	trace	resolution bandwidth /kHz	type of measurement	measured value /kHz	verdict
peak	maxhold	100	-26dB bandwidth	4689.4	passed
peak	maxhold	100	99% bandwidth	4068.1	passed

Test: 22.5; Frequency Band = FDD5, Mode = W-CDMA, Channel = 4183, Frequency = 836.6MHz

Result: Passed
 Setup No.: S01_AD01
 Date of Test: 2015/07/03 23:01
 Body: FCC47CFRChIPART22PUBLIC MOBILE SERVICES
 Test Specification: FCC part 2 and 22

Detailed Results:

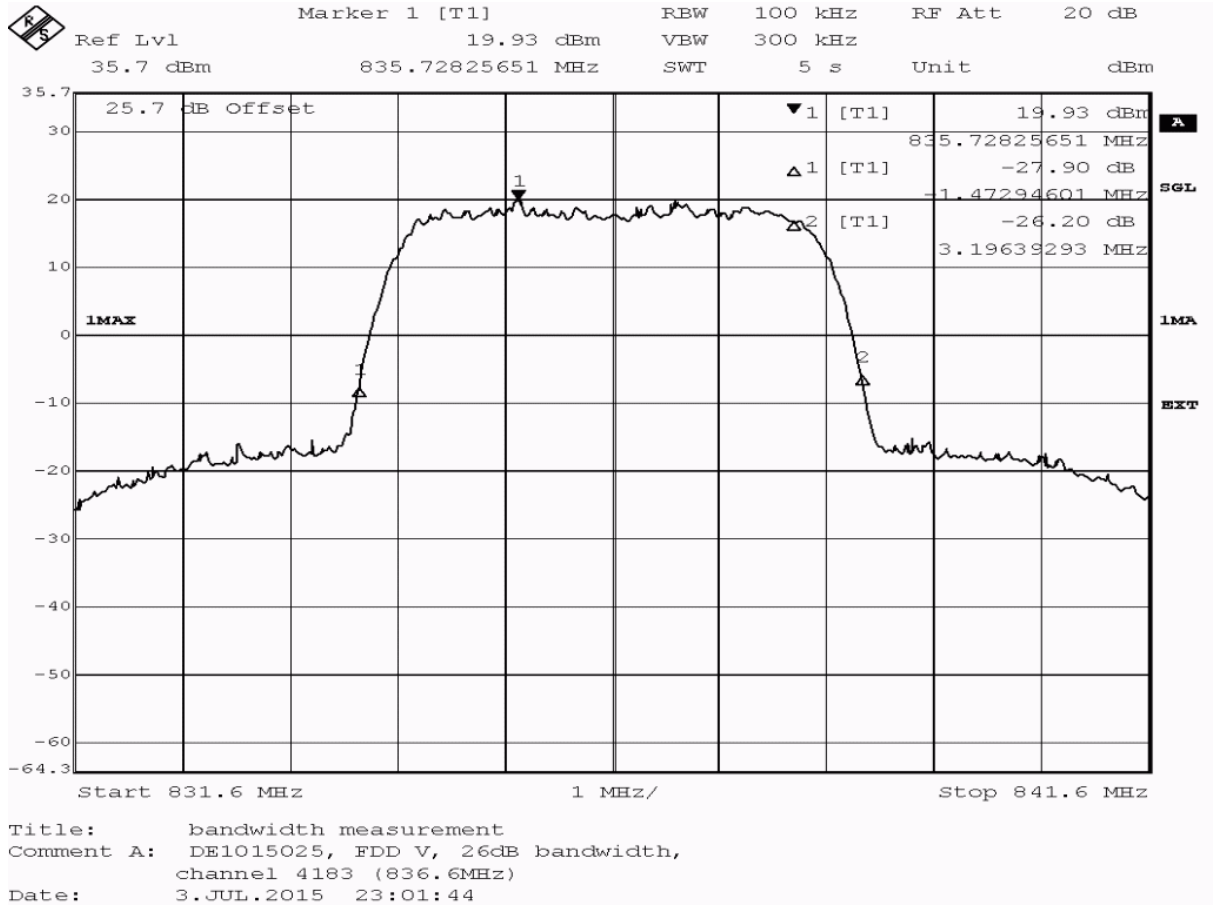

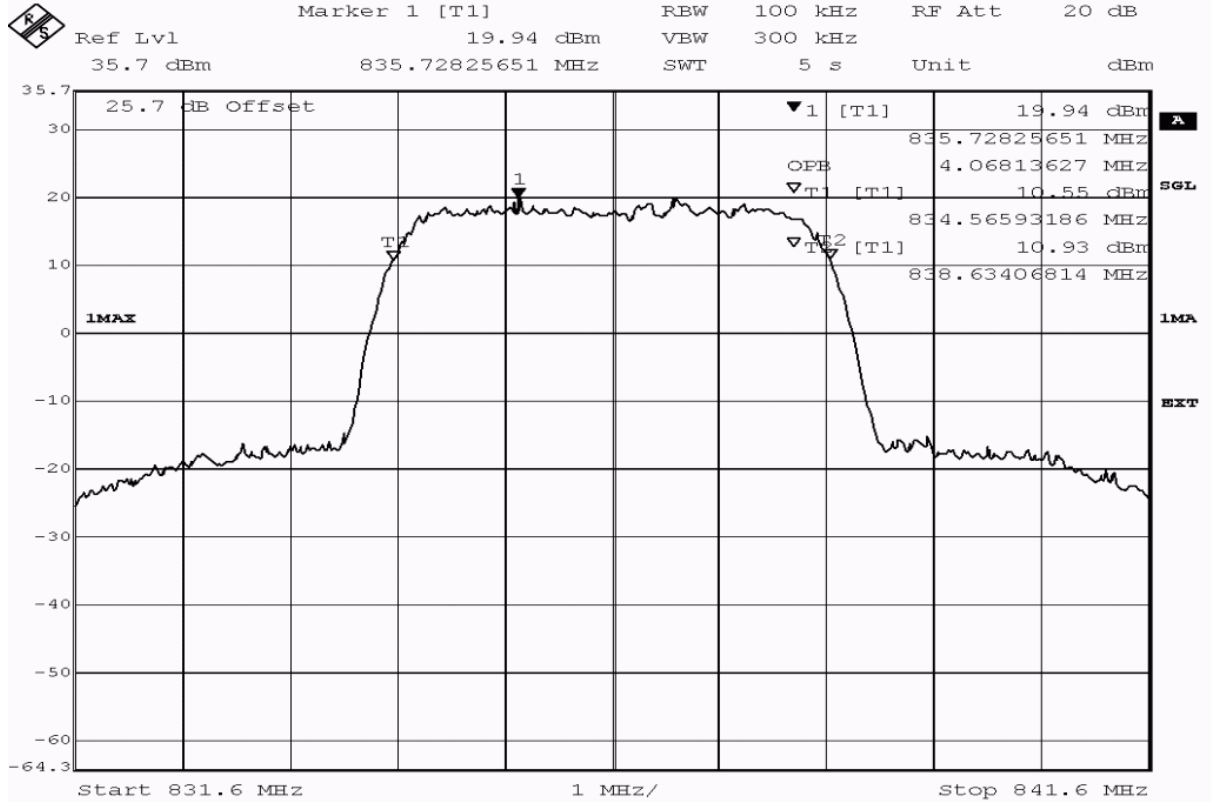


Title: bandwidth measurement
 Comment A: DE1015025, FDD V, occupied bandwidth (99%),
 channel 4183 (836.6MHz)
 Date: 3.JUL.2015 23:02:07


detector	trace	resolution bandwidth /kHz	type of measurement	measured value /kHz	verdict
peak	maxhold	100	-26dB bandwidth	4669.3	passed
peak	maxhold	100	99% bandwidth	4068.1	passed

Test: 22.5; Frequency Band = FDD5, Mode = W-CDMA, Channel = 4233, Frequency = 846.6MHz

Result: Passed
 Setup No.: S01_AD01
 Date of Test: 2015/07/03 23:13
 Body: FCC47CFRChIPART22PUBLIC MOBILE SERVICES
 Test Specification: FCC part 2 and 22

Detailed Results:

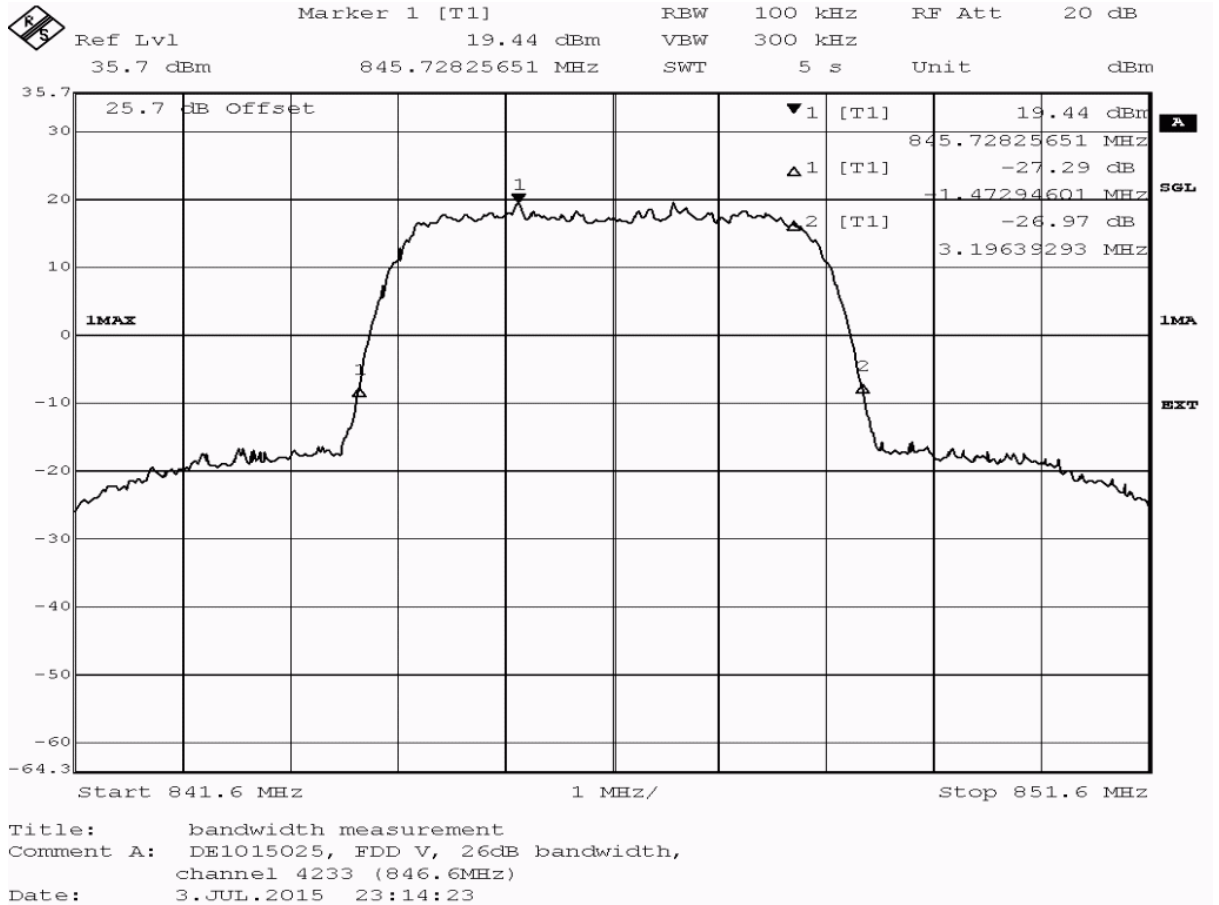

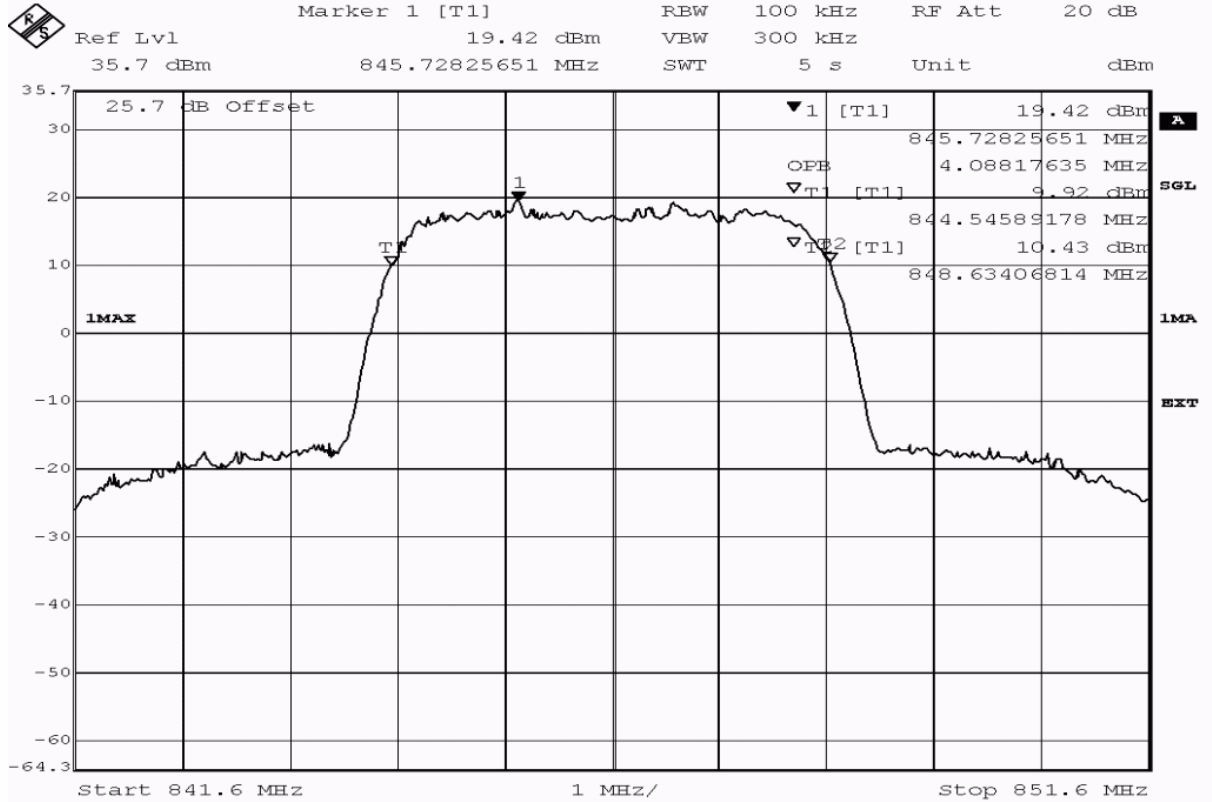

Title: bandwidth measurement
 Comment A: DE1015025, FDD V, occupied bandwidth (99%),
 channel 4233 (846.6MHz)
 Date: 3.JUL.2015 23:14:46


detector	trace	resolution bandwidth /kHz	type of measurement	measured value /kHz	verdict
peak	maxhold	100	-26dB bandwidth	4669.3	passed
peak	maxhold	100	99% bandwidth	4088.2	passed

3.5.5 22.6 Band edge compliance §2.1053, §22.917

Test: 22.6; Frequency Band = FDD5, Mode = HSDPA, Channel = 4132, Frequency = 826.4MHz

<i>Result:</i>	Passed
<i>Setup No.:</i>	S01_AD01
<i>Date of Test:</i>	2015/07/03 22:24
<i>Body:</i>	FCC47CFRChIPART22PUBLIC MOBILE SERVICES
<i>Test Specification:</i>	FCC part 2 and 22

Detailed Results:

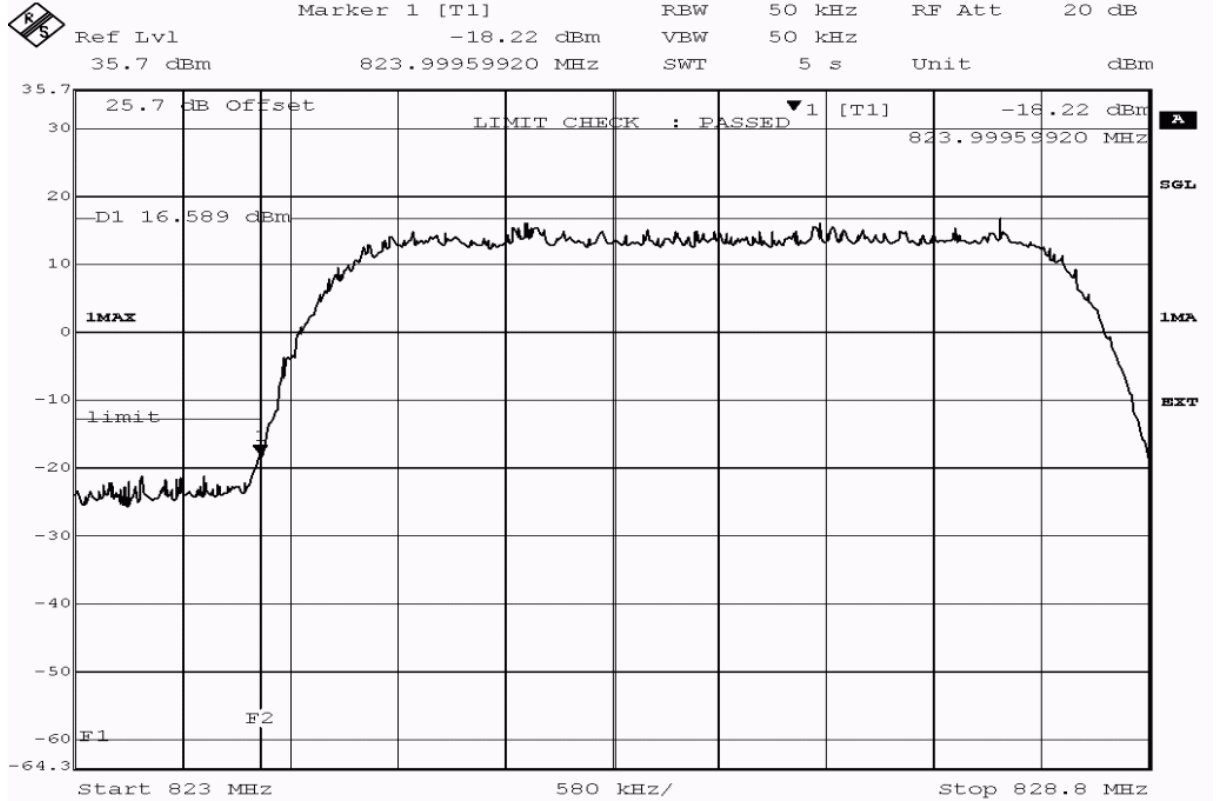

Title: band edge compliance measurement
 Comment A: DE1015025, FDD V HSDPA, band edge compliance,
 channel 4132 (826.4MHz)
 Date: 3.JUL.2015 22:23:59

detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	margin to limit /dB	limit /dBm	verdict
peak	maxhold	50	824.000	-18.22	5.22	-13	passed
average	maxhold	50	824.000	-28.98	15.98	-13	passed
rms	maxhold	50	824.000	-27.82	14.82	-13	passed

no further values have been found by test instrument with a margin of less than 20 dB

Test: 22.6; Frequency Band = FDD5, Mode = HSDPA, Channel = 4233, Frequency = 846.6MHz

Result: Passed


Setup No.: S01_AD01

Date of Test: 2015/07/03 22:38

Body: FCC47CFRChIPART22PUBLIC MOBILE SERVICES

Test Specification: FCC part 2 and 22

Detailed Results:

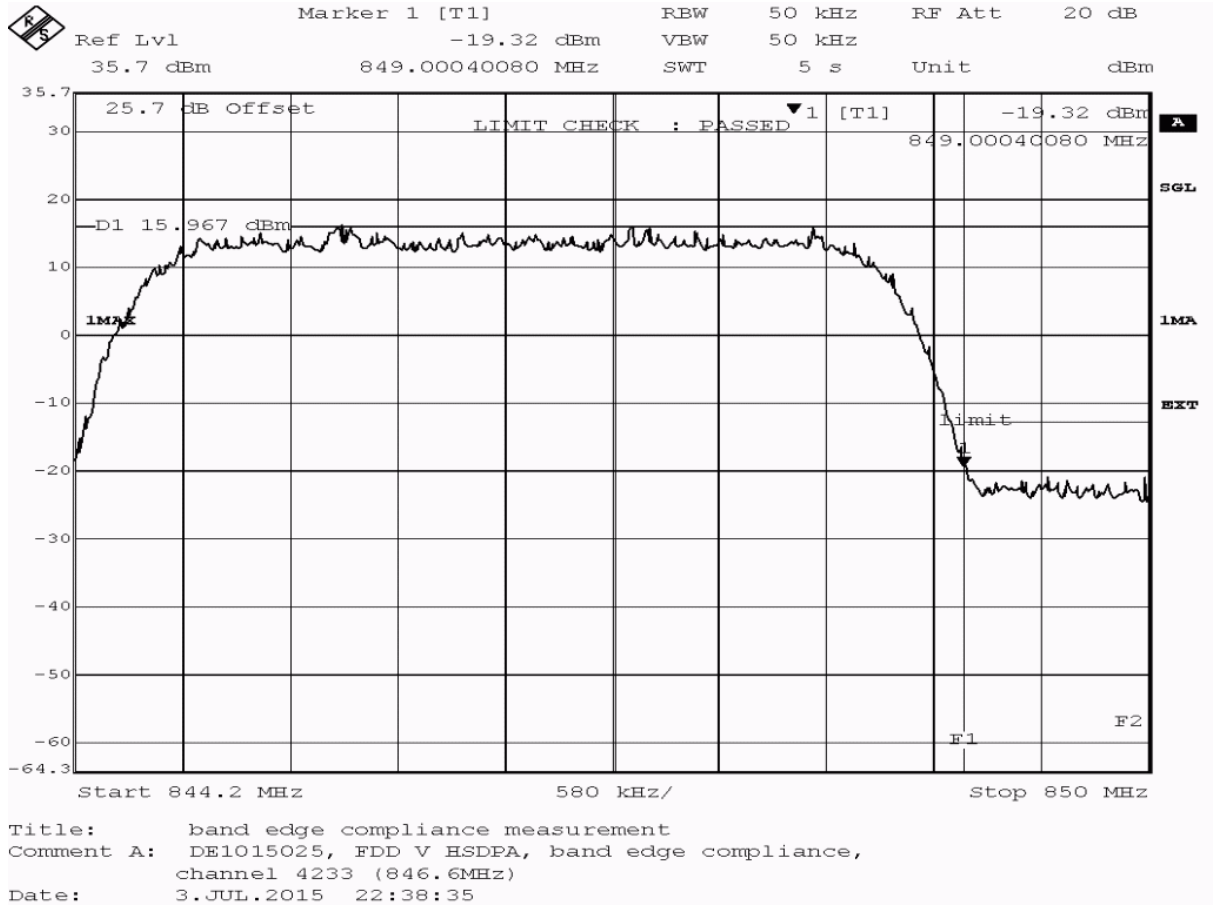

detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	margin to limit /dB	limit /dBm	verdict
peak	maxhold	50	849.000	-19.32	6.32	-13	passed
average	maxhold	50	849.000	-29.24	16.24	-13	passed
rms	maxhold	50	849.000	-28.27	15.27	-13	passed

no further values have been found by test instrument with a margin of less than 20 dB

Test: 22.6; Frequency Band = FDD5, Mode = HSUPA, Channel = 4132, Frequency = 826.4MHz

Result: Passed


Setup No.: S01_AD01

Date of Test: 2015/07/03 20:34

Body: FCC47CFRChIPART22PUBLIC MOBILE SERVICES

Test Specification: FCC part 2 and 22

Detailed Results:

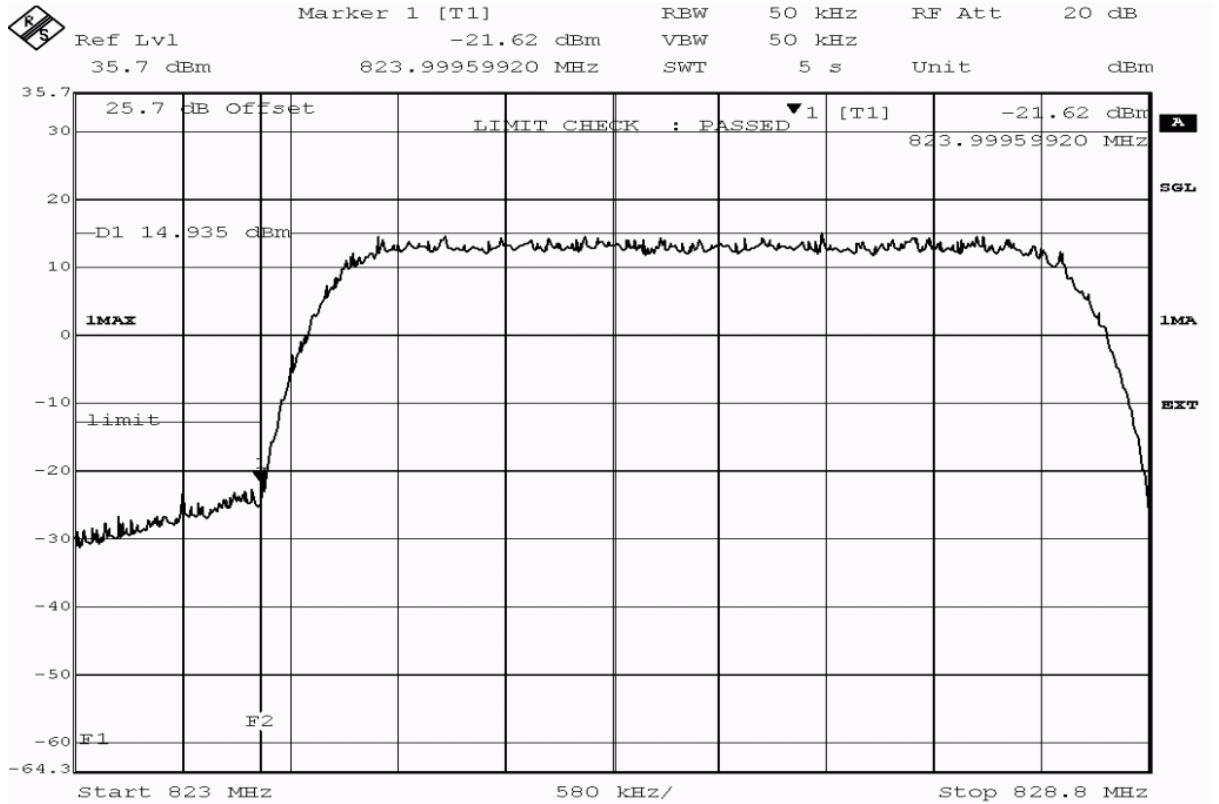

Title: band edge compliance measurement
 Comment A: DE1015025, FDD V HSUPA, band edge compliance,
 channel 4132 (826.4MHz)
 Date: 3.JUL.2015 20:34:03

detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	margin to limit /dB	limit /dBm	verdict
peak	maxhold	50	824.000	-21.62	8.61	-13	passed
average	maxhold	50	824.000	-33.02	20.02	-13	passed
rms	maxhold	50	824.000	-32.26	19.26	-13	passed

no further values have been found by test instrument with a margin of less than 20 dB

Test: 22.6; Frequency Band = FDD5, Mode = HSUPA, Channel = 4233, Frequency = 846.6MHz

Result: Passed


Setup No.: S01_AD01

Date of Test: 2015/07/03 21:22

Body: FCC47CFRChIPART22PUBLIC MOBILE SERVICES

Test Specification: FCC part 2 and 22

Detailed Results:

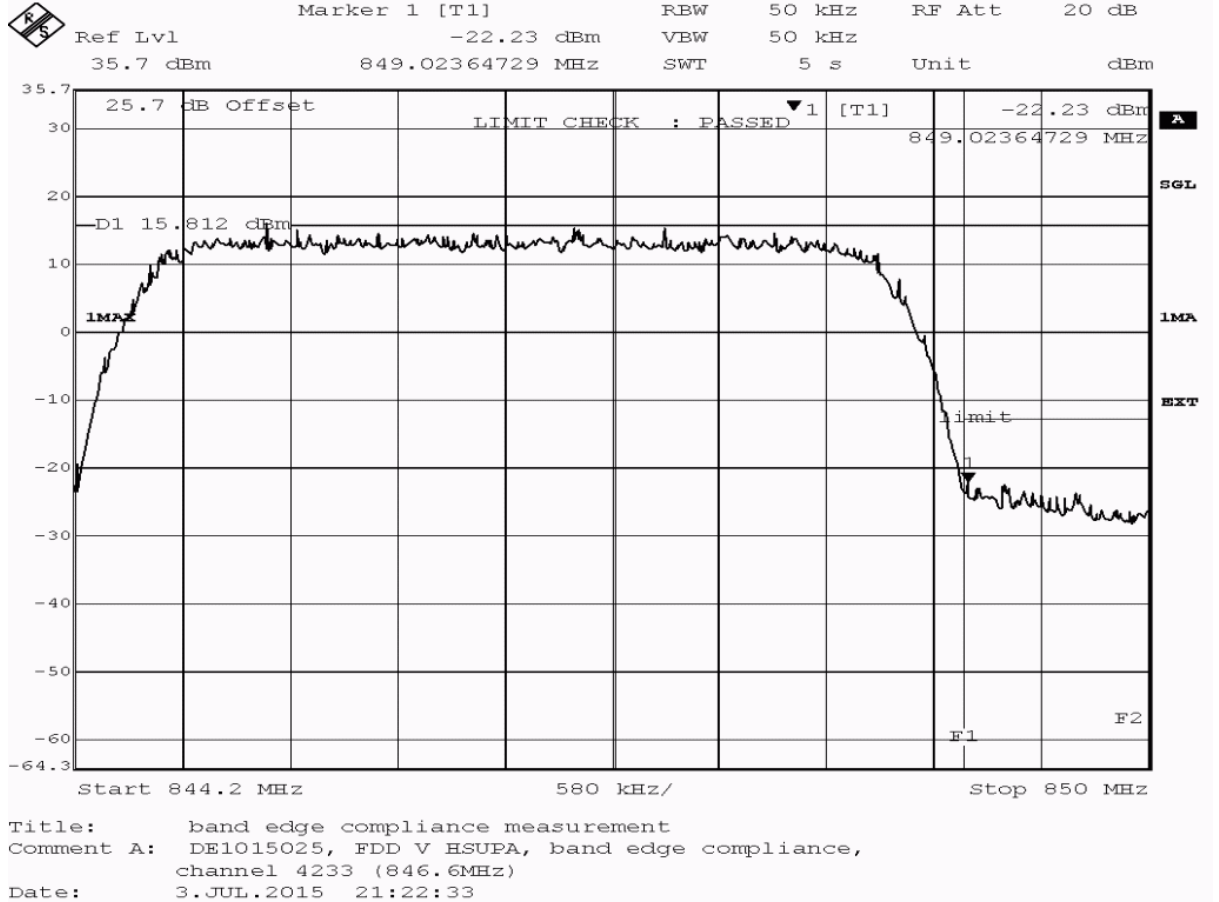

detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	margin to limit /dB	limit /dBm	verdict
peak	maxhold	50	849.024	-22.23	9.23	-13	passed
average	maxhold	50	849.000	-33.02	20.02	-13	passed
rms	maxhold	50	849.000	-32.26	19.26	-13	passed

no further values have been found by test instrument with a margin of less than 20 dB

Test: 22.6; Frequency Band = FDD5, Mode = W-CDMA, Channel = 4132, Frequency = 826.4MHz

Result: Passed


Setup No.: S01_AD01

Date of Test: 2015/07/03 22:52

Body: FCC47CFRChIPART22PUBLIC MOBILE SERVICES

Test Specification: FCC part 2 and 22

Detailed Results:

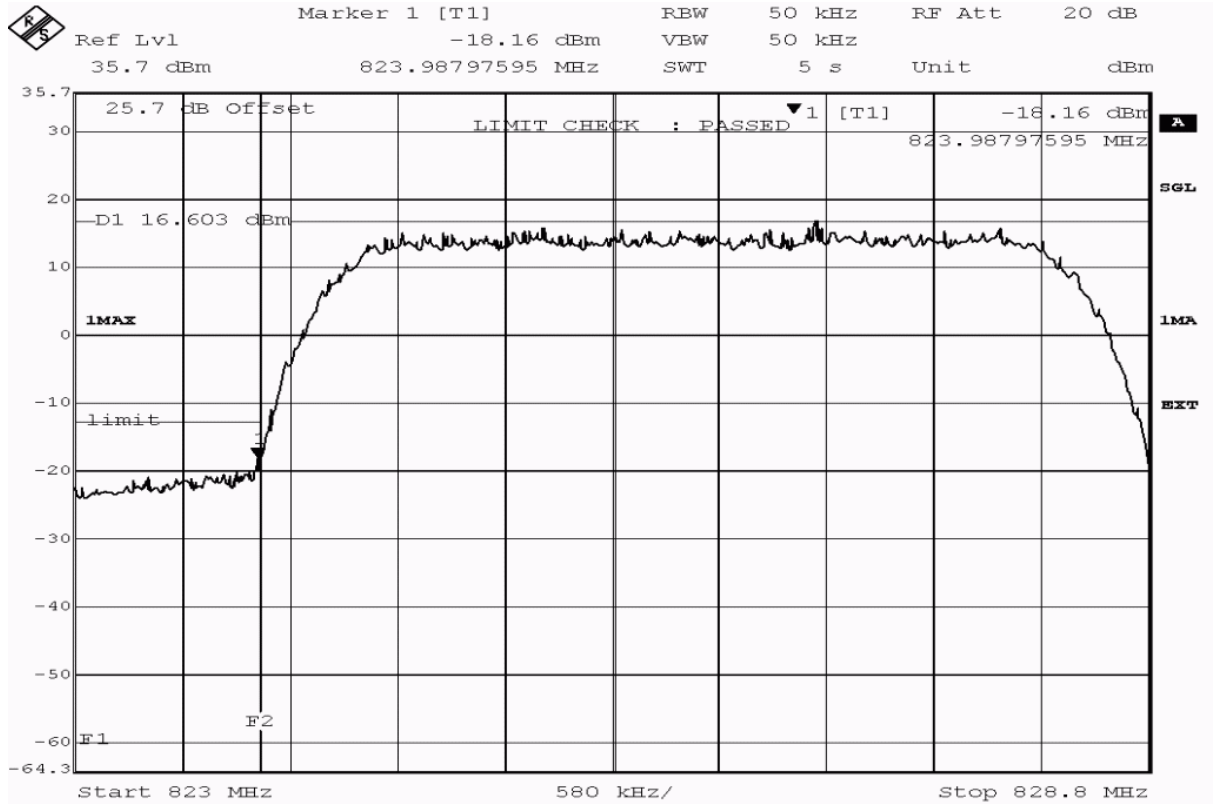

Title: band edge compliance measurement
 Comment A: DE1015025, FDD V, band edge compliance,
 channel 4132 (826.4MHz)
 Date: 3.JUL.2015 22:52:15

detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	margin to limit /dB	limit /dBm	verdict
peak	maxhold	50	823.988	-18.16	5.16	-13	passed
average	maxhold	50	824.000	-26.61	13.61	-13	passed
rms	maxhold	50	824.000	-25.22	12.22	-13	passed

no further values have been found by test instrument with a margin of less than 20 dB

Test: 22.6; Frequency Band = FDD5, Mode = W-CDMA, Channel = 4233, Frequency = 846.6MHz

Result: Passed


Setup No.: S01_AD01

Date of Test: 2015/07/03 23:21

Body: FCC47CFRChIPART22PUBLIC MOBILE SERVICES

Test Specification: FCC part 2 and 22

Detailed Results:

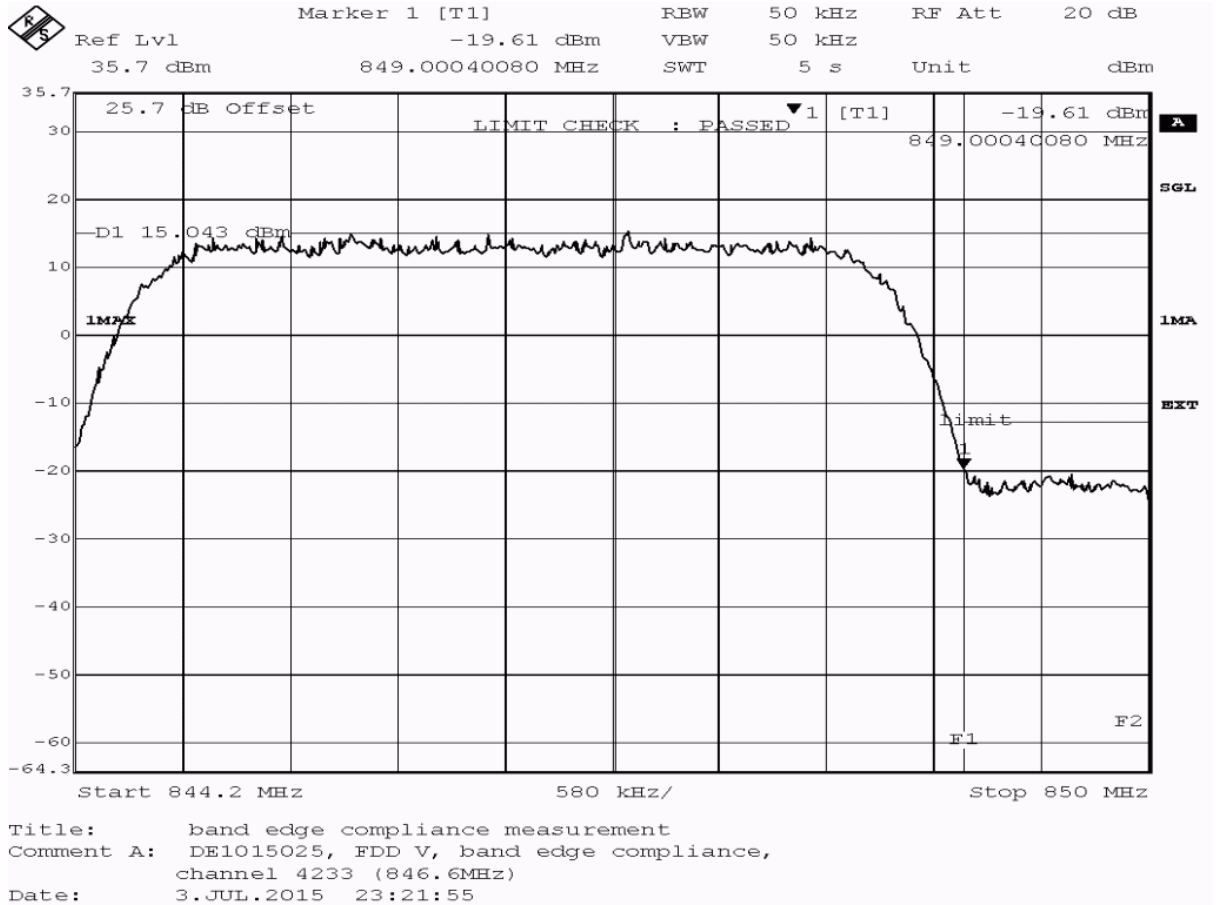

detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	margin to limit /dB	limit /dBm	verdict
peak	maxhold	50	849.000	-19.61	6.61	-13	passed
average	maxhold	50	849.000	-28.04	15.04	-13	passed
rms	maxhold	50	849.000	-27.61	14.61	-13	passed

no further values have been found by test instrument with a margin of less than 20 dB


3.5.6 24.1 RF Power Output §2.1046, §24.232

Test1: 24.1; RF Power Output Summary §2.1046, §24.232

<i>Result:</i>	Passed
<i>Setup No.:</i>	S01_AD01
<i>Date of Test:</i>	2015/07/06 18:53
<i>Body:</i>	FCC47CFRChIPART24PERSONAL COMMUNICATIONS SERVICES
<i>Test Specification:</i>	FCC part 2 and 24

Detailed Results:

Band	Mode	Channel	Frequency (MHZ)	Peak Conducted power	Average Conducted power	RMS Conducted power	FCC EIRP limit (W)	IC EIRP limit per SRSP-503 (W)	Maximum antenna gain (dBi)	Verdict
FDD 2	W-CDMA	Low	1852.4	27.35	21.88	22.1	2	2	10.9	Pass
		Mid	1880	27.47	21.72	21.94			11.06	Pass
		High	1907.6	27.35	21.68	21.89			11.11	Pass
FDD 2	HSDPA	Low	1852.4	27.59	21.95	22.19	2	2	10.81	Pass
		Mid	1880	27.35	21.81	22.04			10.96	Pass
		High	1907.6	27.47	21.8	22.03			10.97	Pass
FDD 2	HSDPA	Low	1852.4	27.89	19.76	20.3	2	2	12.7	Pass
		Mid	1880	28.14	19.59	20.27			12.73	Pass
		High	1907.6	27.47	19.59	20.26			12.74	Pass
FDD 2	HSDPA	Low	1852.4	28.9	18.9	19.84	2	2	13.16	Pass
		Mid	1880	28.14	18.7	19.71			13.29	Pass
		High	1907.6	28.14	18.79	19.55			13.45	Pass
FDD 2	HSDPA	Low	1852.4	27.73	18.46	19.57	2	2	13.43	Pass
		Mid	1880	27.59	17.89	19.43			13.57	Pass
		High	1907.6	28	18.02	19.39			13.61	Pass
FDD 2	HSUPA	Low	1852.4	28	20.92	21.29	2	2	11.71	Pass
		Mid	1880	27.89	20.8	21.18			11.82	Pass
		High	1907.6	27.59	20.84	21.18			11.82	Pass
FDD 2	HSUPA	Low	1852.4	27.47	18.29	19.15	2	2	13.85	Pass
		Mid	1880	26.93	18.18	19			14	Pass
		High	1907.6	27.21	18.18	18.98			14.02	Pass
FDD 2	HSUPA	Low	1852.4	27.89	19.48	20.24	2	2	12.76	Pass
		Mid	1880	28	19.39	20.14			12.86	Pass
		High	1907.6	27.59	19.38	20.12			12.88	Pass
FDD 2	HSUPA	Low	1852.4	27.08	18.9	19.59	2	2	13.41	Pass
		Mid	1880	27.08	18.69	19.38			13.62	Pass
		High	1907.6	27.08	18.75	19.43			13.57	Pass
FDD 2	HSUPA	Low	1852.4	28.14	21.29	21.65	2	2	11.35	Pass
		Mid	1880	28.4	21.03	21.39			11.61	Pass
		High	1907.6	27.73	21.04	21.37			11.63	Pass
highest value of Mode (WCDMA/HSDPA/HSUPA)						highest value overall				

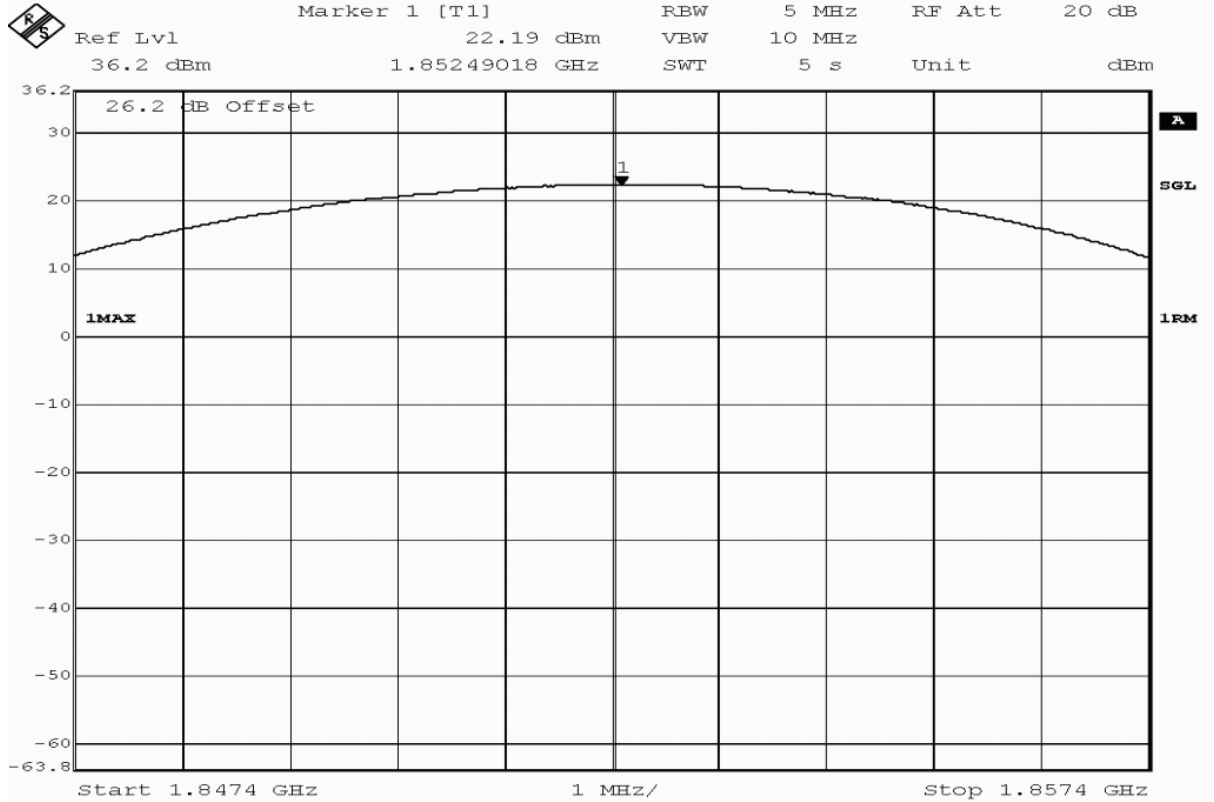


Title: output power measurement
 Comment A: DE1015025, subtest 1 HSDPA FDD II, output power, channel 9262 (1852.4MHz)
 Date: 6.JUL.2015 19:43:19

Test2: 24.1; RF Power Output Summary §2.1046, §24.232

Result: Passed
 Setup No.: S01_AD01
 Date of Test: 2015/08/21 17:36
 Body: NO BODY
 Test Specification: FCC part 2 and 24

Detailed Results:

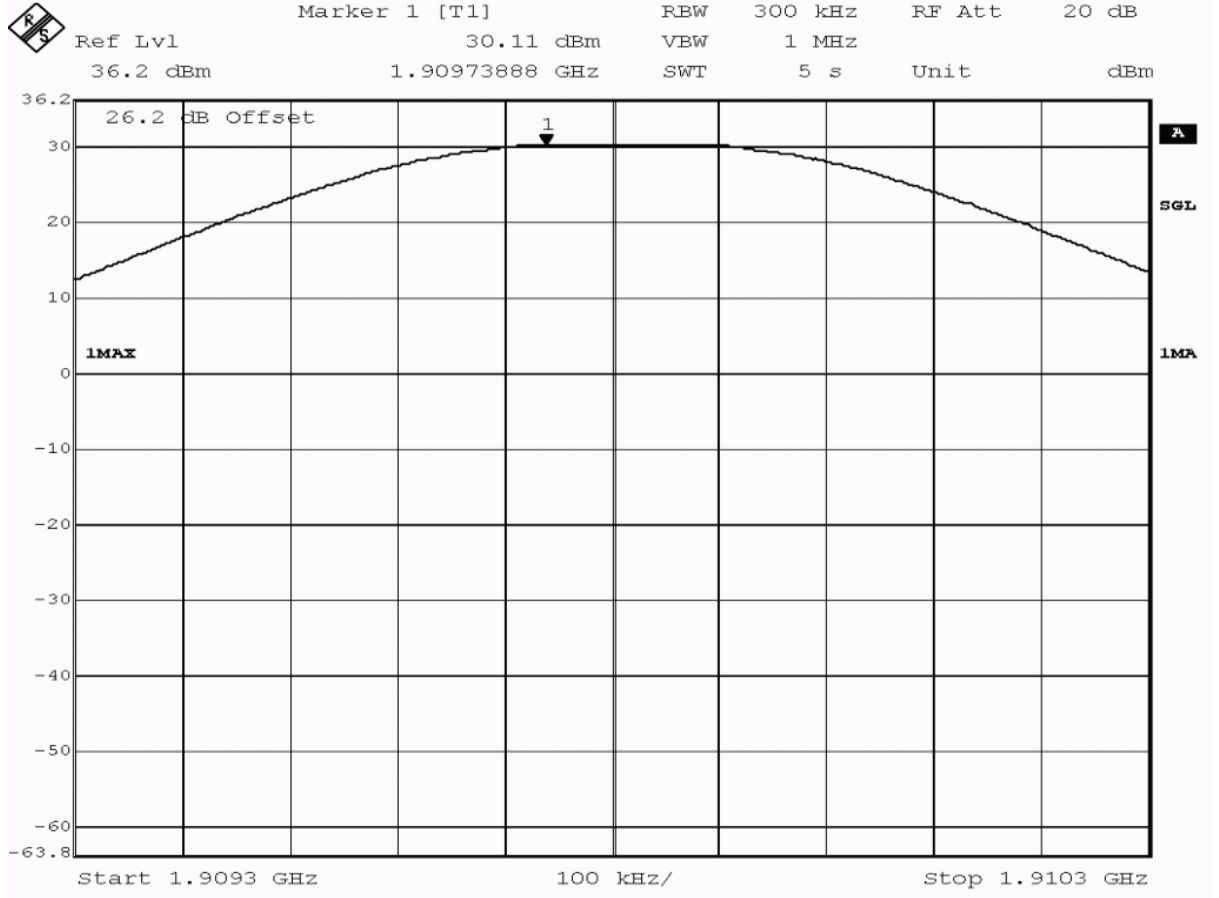


3.5.7 24.3 Spurious emissions at antenna terminals §2.1051, §24.238

Test: 24.3; Frequency Band = 1900, Mode = EDGE, Channel = 512, Frequency = 1850.2MHz

<i>Result:</i>	Passed
<i>Setup No.:</i>	S01_AD01
<i>Date of Test:</i>	2015/08/21 15:47
<i>Body:</i>	NO BODY
<i>Test Specification:</i>	FCC part 2 and 24

Detailed Results:

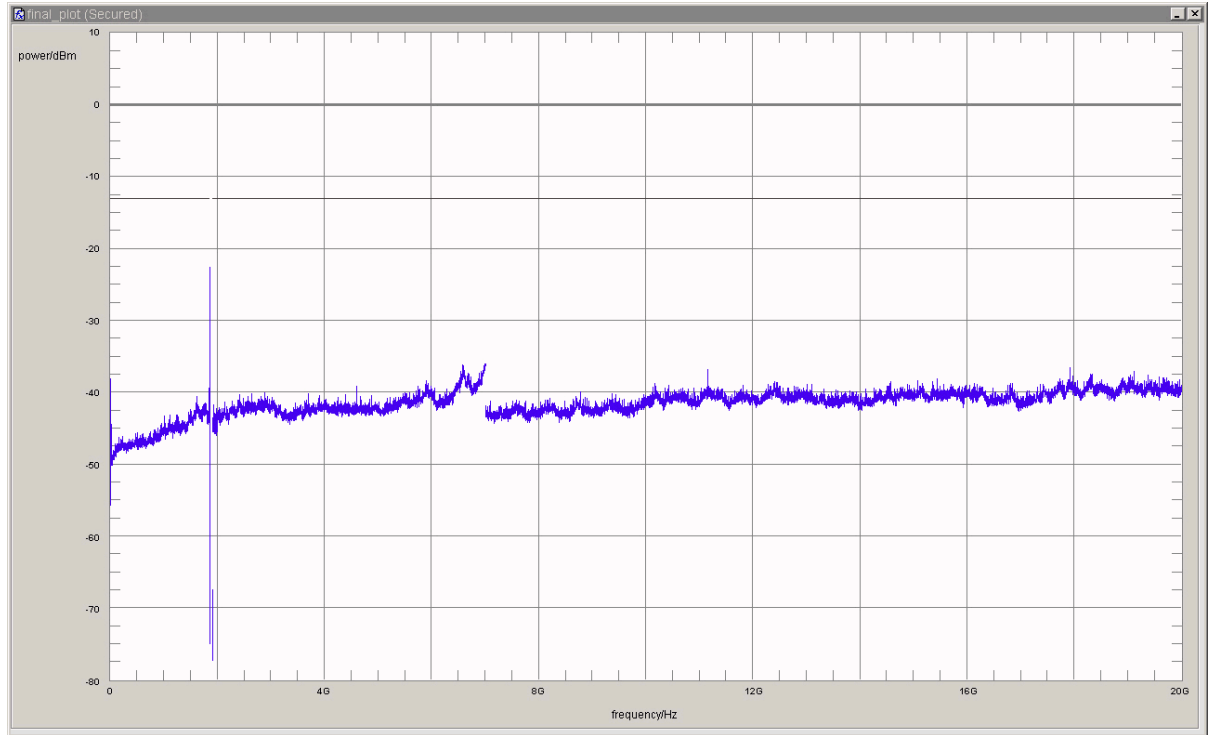


detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	margin to limit /dB	limit /dBm	verdict
peak	maxhold	3	1849.9459	-30.4	17.4	-13.0	passed
peak	maxhold	3	1849.9559	-25.4	12.4	-13.0	passed
peak	maxhold	3	1849.9659	-24.5	11.5	-13.0	passed
peak	maxhold	3	1849.9940	-22.5	9.5	-13.0	passed

no further values have been found with a margin of less than 20 dB

Test: 24.3; Frequency Band = 1900, Mode = EDGE, Channel = 661, Frequency = 1880.0MHz

Result: Passed
Setup No.: S01_AD01
Date of Test: 2015/08/21 15:12
Body: NO BODY
Test Specification: FCC part 2 and 24

Detailed Results:

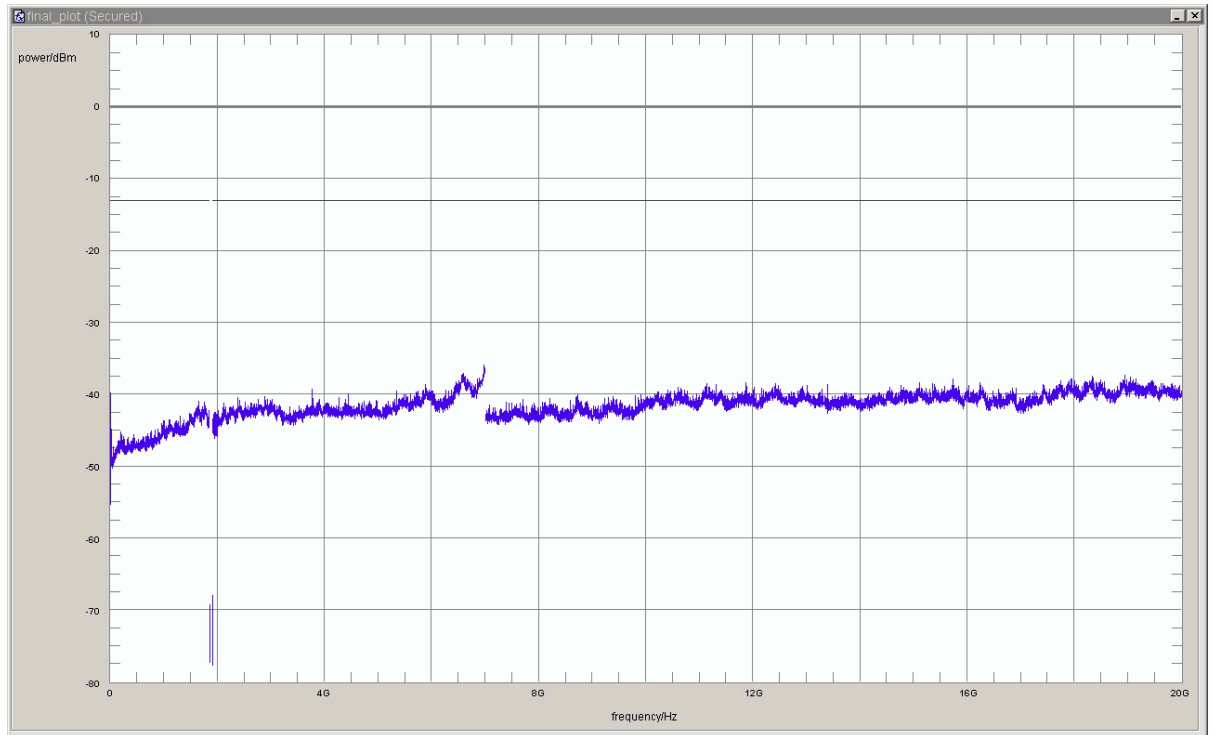

detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	margin to limit /dB	limit /dBm	verdict
peak	maxhold	1000	6979.960	-35.93	22.93	-13	passed

no further values have been found with a margin of less than 20 dB

Test: 24.3; Frequency Band = 1900, Mode = EDGE, Channel = 810, Frequency = 1909.8MHz

Result: Passed


Setup No.: S01_AD01

Date of Test: 2015/08/21 15:35

Body: NO BODY

Test Specification: FCC part 2 and 24

Detailed Results:

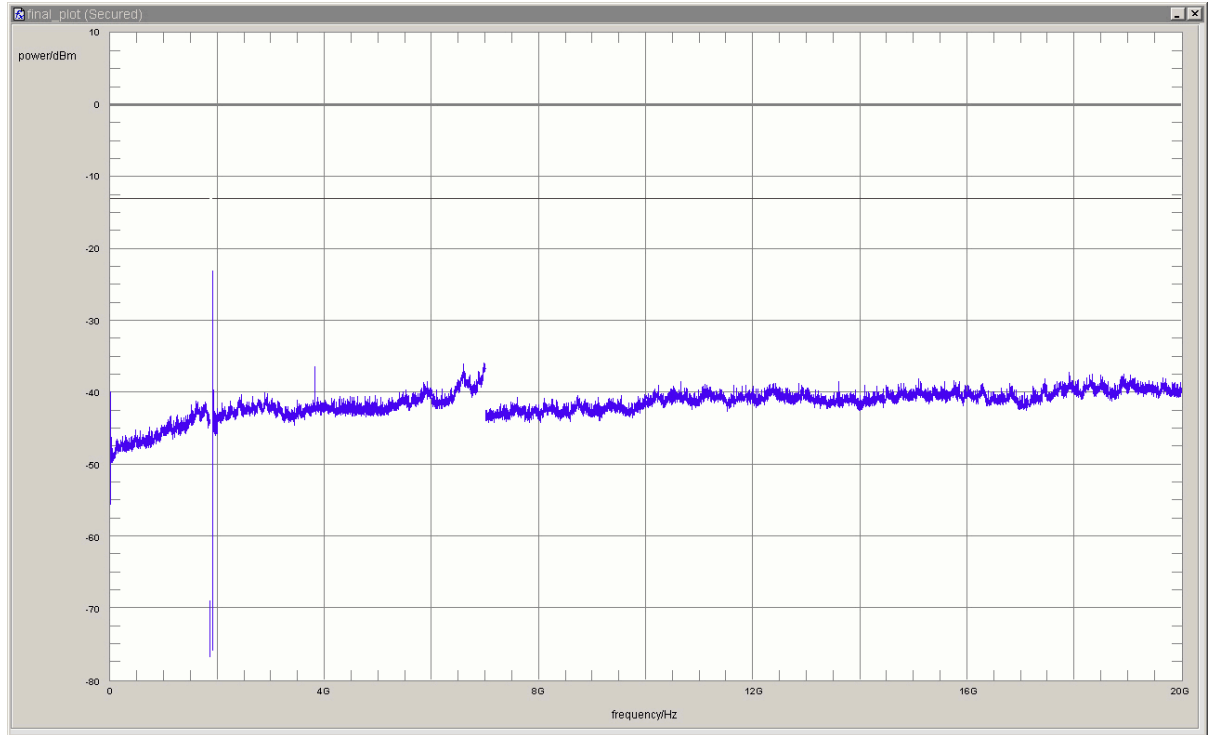


detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	margin to limit /dB	limit /dBm	verdict
peak	maxhold	3	1910.0080	-24.3	11.3	-13.0	passed
peak	maxhold	3	1910.0220	-23.1	10.1	-13.0	passed
peak	maxhold	3	1910.0341	-24.1	11.1	-13.0	passed
peak	maxhold	3	1910.0441	-25.8	12.8	-13.0	passed
peak	maxhold	3	1910.0721	-30.1	17.1	-13.0	passed

no further values have been found with a margin of less than 20 dB

Test: 24.3; Frequency Band = 1900, Mode = GSM, Channel = 512, Frequency = 1850.2MHz

Result: Passed
Setup No.: S01_AD01
Date of Test: 2015/08/21 13:36
Body: NO BODY
Test Specification: FCC part 2 and 24

Detailed Results:

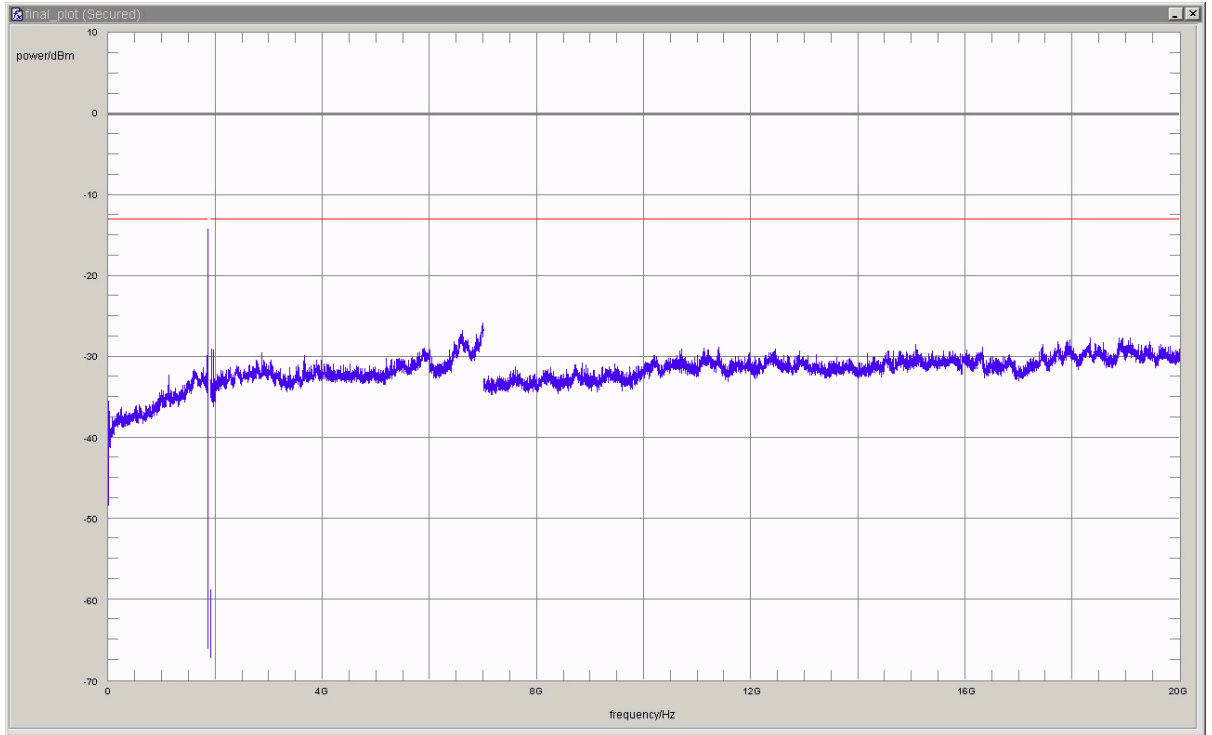


detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	margin to limit /dB	limit /dBm	verdict
peak	maxhold	1000	1772.7	-31.4	18.4	-13.0	passed
peak	maxhold	100	1847.25	-29.9	16.9	-13.0	passed
peak	maxhold	3	1849.9339	-26.5	13.5	-13.0	passed
peak	maxhold	3	1849.9539	-22.6	9.6	-13.0	passed
peak	maxhold	3	1849.9679	-24.6	11.6	-13.0	passed
peak	maxhold	3	1849.9840	-20.1	7.1	-13.0	passed
peak	maxhold	3	1849.9980	-14.3	1.3	-13.0	passed
peak	maxhold	1000	1930.1	-29.1	16.1	-13.0	passed
peak	maxhold	1000	1960.2	-29.2	16.2	-13.0	passed
peak	maxhold	1000	2865.7	-29.5	16.5	-13.0	passed
peak	maxhold	1000	3665.3	-29.9	16.9	-13.0	passed
peak	maxhold	1000	4028.1	-30.9	17.9	-13.0	passed
peak	maxhold	1000	5899.8	-29.0	16.0	-13.0	passed
peak	maxhold	1000	6994.0	-25.8	12.8	-13.0	passed
peak	maxhold	1000	7603.2	-31.2	18.2	-13.0	passed
peak	maxhold	1000	8847.7	-30.8	17.8	-13.0	passed
peak	maxhold	1000	9452.9	-30.9	17.9	-13.0	passed
peak	maxhold	1000	10699.4	-29.1	16.1	-13.0	passed
peak	maxhold	1000	11398.8	-28.8	15.8	-13.0	passed
peak	maxhold	1000	12446.9	-29.1	16.1	-13.0	passed
peak	maxhold	1000	13220.4	-29.8	16.8	-13.0	passed
peak	maxhold	1000	14649.3	-29.3	16.3	-13.0	passed
peak	maxhold	1000	15078.2	-28.5	15.5	-13.0	passed
peak	maxhold	1000	16316.6	-28.8	15.8	-13.0	passed
peak	maxhold	1000	17949.9	-27.9	14.9	-13.0	passed
peak	maxhold	1000	18334.7	-27.7	14.7	-13.0	passed
peak	maxhold	1000	19080.2	-27.7	14.7	-13.0	passed

no further values have been found with a margin of less than 20 dB

Test: 24.3; Frequency Band = 1900, Mode = GSM, Channel = 661, Frequency = 1880.0MHz

Result: Passed
 Setup No.: S01_AD01
 Date of Test: 2015/08/21 13:44
 Body: NO BODY
 Test Specification: FCC part 2 and 24

Detailed Results:

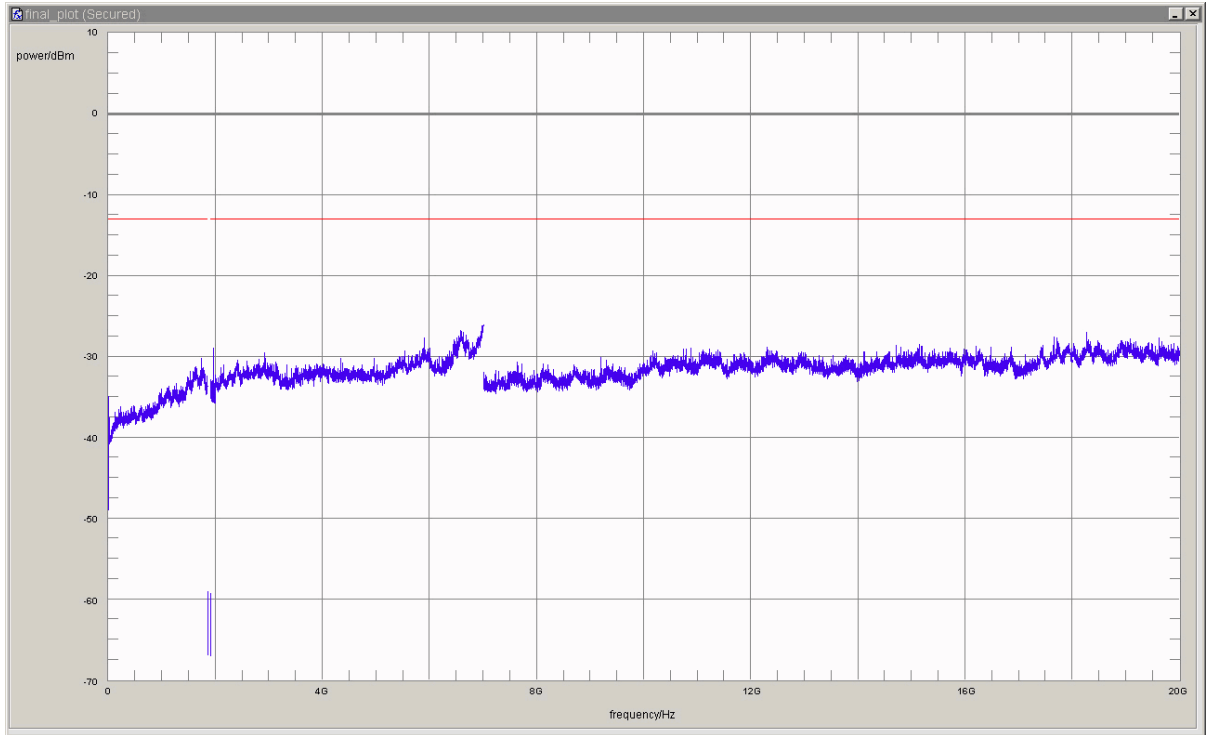

detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	margin to limit /dB	limit /dBm	verdict
peak	maxhold	1000	1726.5	-30.3	17.3	-13.0	passed
peak	maxhold	1000	1959.9	-29.0	16.0	-13.0	passed
peak	maxhold	1000	2907.8	-29.6	16.6	-13.0	passed
peak	maxhold	1000	3128.3	-30.7	17.7	-13.0	passed
peak	maxhold	1000	4330.7	-30.2	17.2	-13.0	passed
peak	maxhold	1000	5891.8	-27.7	14.7	-13.0	passed
peak	maxhold	1000	7000.0	-26.0	13.0	-13.0	passed
peak	maxhold	1000	7627.3	-30.7	17.7	-13.0	passed
peak	maxhold	1000	8110.2	-30.9	17.9	-13.0	passed
peak	maxhold	1000	9200.4	-30.1	17.1	-13.0	passed
peak	maxhold	1000	10867.7	-28.9	15.9	-13.0	passed
peak	maxhold	1000	11230.5	-29.1	16.1	-13.0	passed
peak	maxhold	1000	12302.6	-28.8	15.8	-13.0	passed
peak	maxhold	1000	13012.0	-29.5	16.5	-13.0	passed
peak	maxhold	1000	14705.4	-28.6	15.6	-13.0	passed
peak	maxhold	1000	15136.3	-28.5	15.5	-13.0	passed
peak	maxhold	1000	16200.4	-28.7	15.7	-13.0	passed
peak	maxhold	1000	17651.3	-27.6	14.6	-13.0	passed
peak	maxhold	1000	18270.5	-27.0	14.0	-13.0	passed
peak	maxhold	1000	19625.3	-27.7	14.7	-13.0	passed

no further values have been found with a margin of less than 20 dB

Test: 24.3; Frequency Band = 1900, Mode = GSM, Channel = 810, Frequency = 1909.8MHz

Result: Passed


Setup No.: S01_AD01

Date of Test: 2015/08/21 13:52

Body: NO BODY

Test Specification: FCC part 2 and 24

Detailed Results:

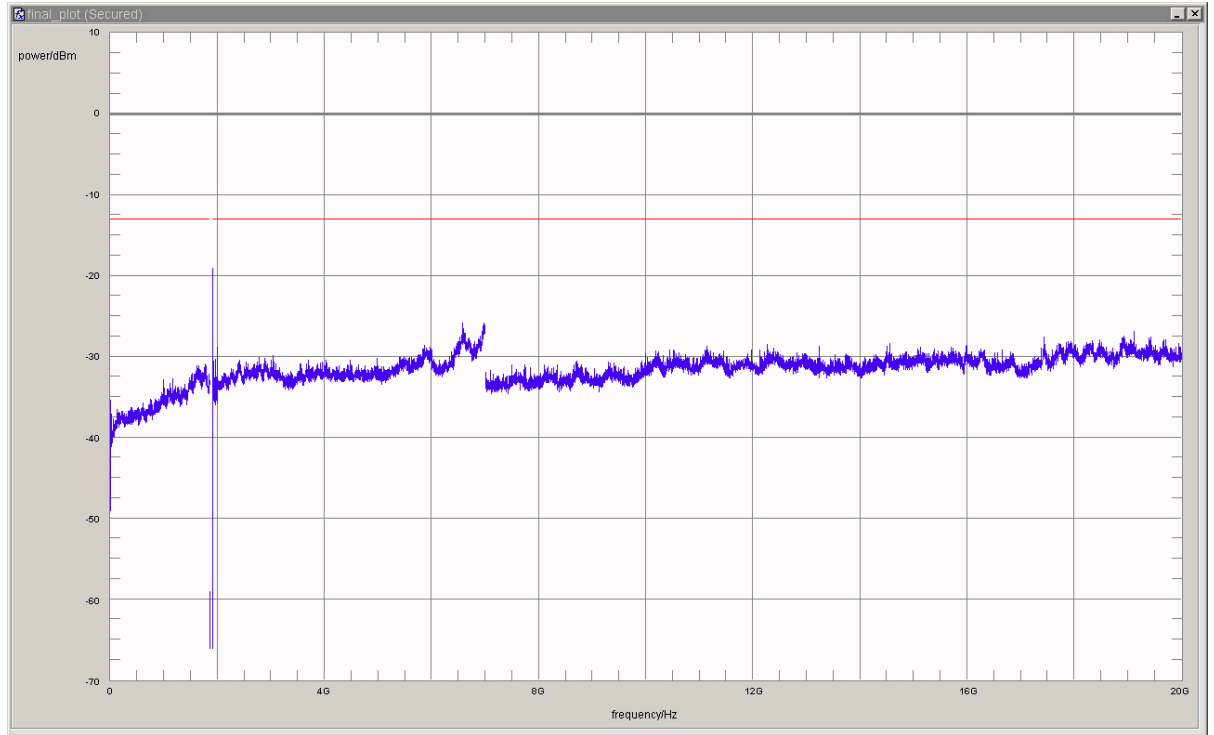

detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	margin to limit /dB	limit /dBm	verdict
peak	maxhold	1000	990.1	-32.8	19.8	-13.0	passed
peak	maxhold	1000	1775.8	-31.0	18.0	-13.0	passed
peak	maxhold	3	1910.0000	-22.9	9.9	-13.0	passed
peak	maxhold	3	1910.0080	-19.6	6.6	-13.0	passed
peak	maxhold	3	1910.0200	-19.1	6.1	-13.0	passed
peak	maxhold	3	1910.0401	-20.1	7.1	-13.0	passed
peak	maxhold	3	1910.0581	-25.9	12.9	-13.0	passed
peak	maxhold	3	1910.0681	-25.3	12.3	-13.0	passed
peak	maxhold	3	1910.0882	-32.2	19.2	-13.0	passed
peak	maxhold	100	1911.07	-29.8	16.8	-13.0	passed
peak	maxhold	1000	1990.1	-28.9	15.9	-13.0	passed
peak	maxhold	1000	2771.5	-30.1	17.1	-13.0	passed
peak	maxhold	1000	3040.1	-29.9	16.9	-13.0	passed
peak	maxhold	1000	4976.0	-30.3	17.3	-13.0	passed
peak	maxhold	1000	5861.7	-28.6	15.6	-13.0	passed
peak	maxhold	1000	6965.9	-25.8	12.8	-13.0	passed
peak	maxhold	1000	7489.0	-31.0	18.0	-13.0	passed
peak	maxhold	1000	8699.4	-30.6	17.6	-13.0	passed
peak	maxhold	1000	9996.0	-29.7	16.7	-13.0	passed
peak	maxhold	1000	10442.9	-29.2	16.2	-13.0	passed
peak	maxhold	1000	11132.3	-28.7	15.7	-13.0	passed
peak	maxhold	1000	12270.5	-28.6	15.6	-13.0	passed
peak	maxhold	1000	13230.5	-28.8	15.8	-13.0	passed
peak	maxhold	1000	14549.1	-28.4	15.4	-13.0	passed
peak	maxhold	1000	15998.0	-28.6	15.6	-13.0	passed
peak	maxhold	1000	16246.5	-29.1	16.1	-13.0	passed
peak	maxhold	1000	17432.9	-27.6	14.6	-13.0	passed
peak	maxhold	1000	18917.8	-27.5	14.5	-13.0	passed
peak	maxhold	1000	19114.2	-26.9	13.9	-13.0	passed

no further values have been found with a margin of less than 20 dB

Test: 24.3; Frequency Band = FDD2, Mode = HSDPA, Channel = 9262, Frequency = 1852.4MHz

Result: Passed


Setup No.: S01_AD01

Date of Test: 2015/07/06 20:23

Body: FCC47CFRChIPART24PERSONAL COMMUNICATIONS SERVICES

Test Specification: FCC part 2 and 24

Detailed Results:

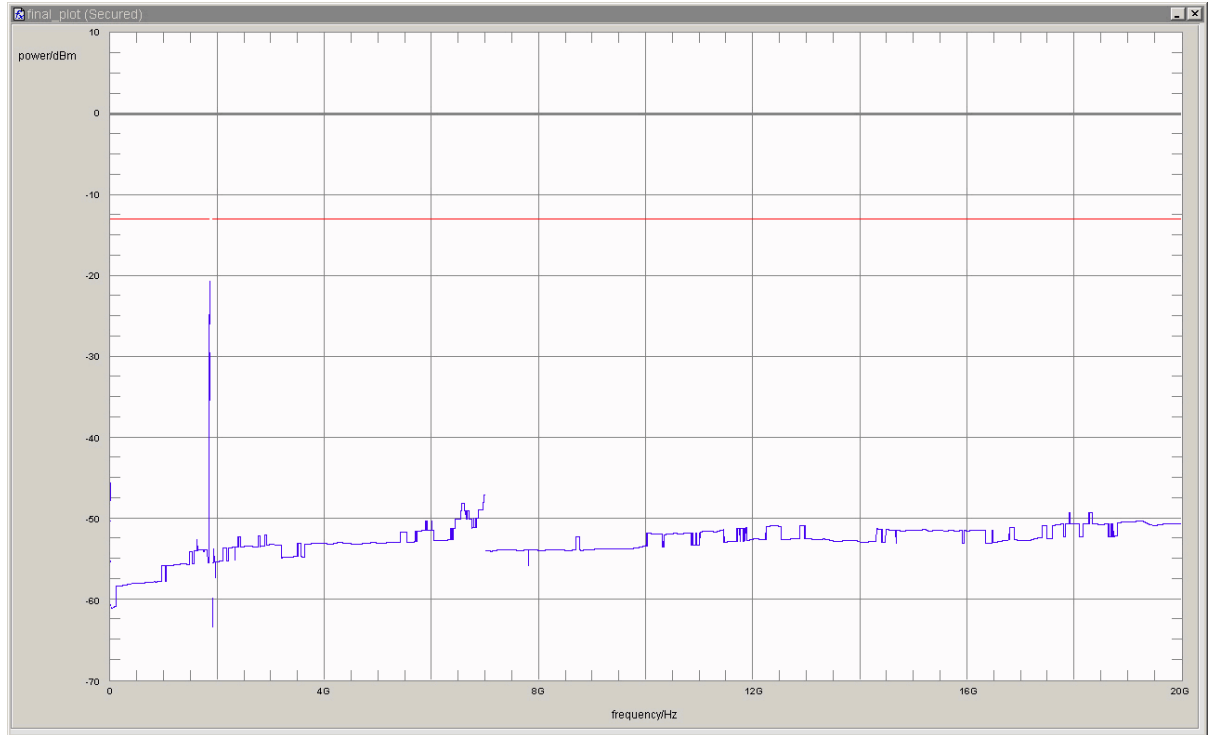


detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	margin to limit /dB	limit /dBm	verdict
rms	maxhold	100	1848.89	-20.7	7.7	-13.0	passed
rms	maxhold	50	1850.00	-29.5	16.5	-13.0	passed

no further values have been found with a margin of less than 20 dB

Test: 24.3; Frequency Band = FDD2, Mode = HSDPA, Channel = 9400, Frequency = 1880MHz

Result: Passed
 Setup No.: S01_AD01
 Date of Test: 2015/07/06 20:17
 Body: FCC47CFRChIPART24PERSONAL COMMUNICATIONS SERVICES
 Test Specification: FCC part 2 and 24

Detailed Results:

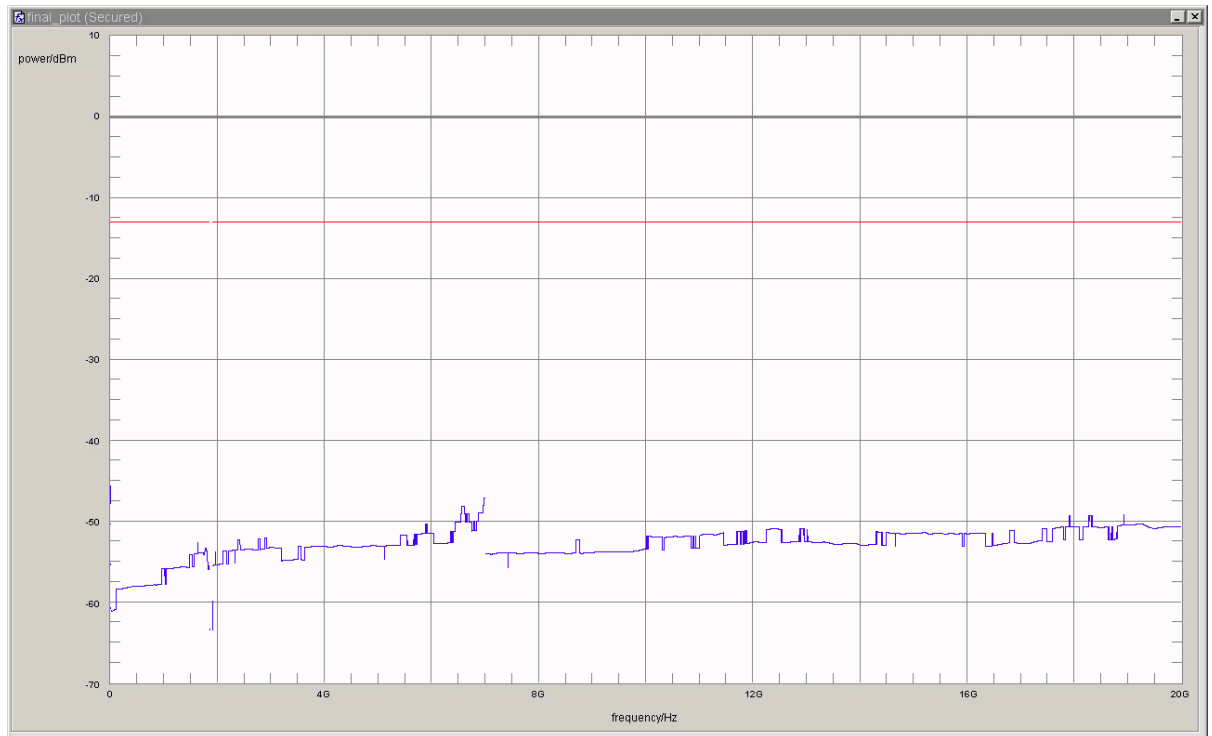


detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	margin to limit /dB	limit /dBm	verdict
rms	maxhold	1	0.030	-45.50	32.50	-13	passed

no further values have been found with a margin of less than 20 dB

Test: 24.3; Frequency Band = FDD2, Mode = HSDPA, Channel = 9538, Frequency = 1907.6MHz

Result: Passed
 Setup No.: S01_AD01
 Date of Test: 2015/07/06 20:29
 Body: FCC47CFRChIPART24PERSONAL COMMUNICATIONS SERVICES
 Test Specification: FCC part 2 and 24

Detailed Results:

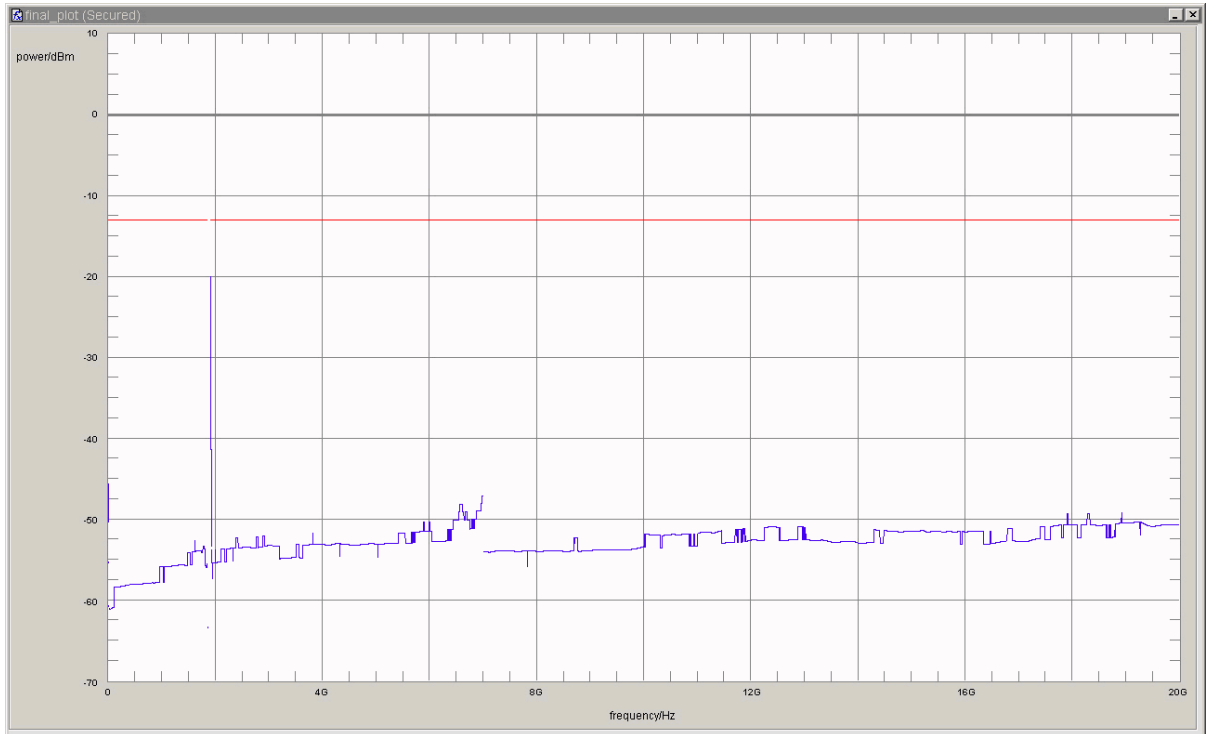


detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	margin to limit /dB	limit /dBm	verdict
rms	maxhold	50	1910.00	-26.4	13.4	-13.0	passed
rms	maxhold	100	1911.07	-20.0	7.0	-13.0	passed

no further values have been found with a margin of less than 20 dB

Test: 24.3; Frequency Band = FDD2, Mode = HSUPA, Channel = 9262, Frequency = 1852.4MHz

Result: Passed
 Setup No.: S01_AD01
 Date of Test: 2015/07/06 19:27
 Body: FCC47CFRChIPART24PERSONAL COMMUNICATIONS SERVICES
 Test Specification: FCC part 2 and 24

Detailed Results:

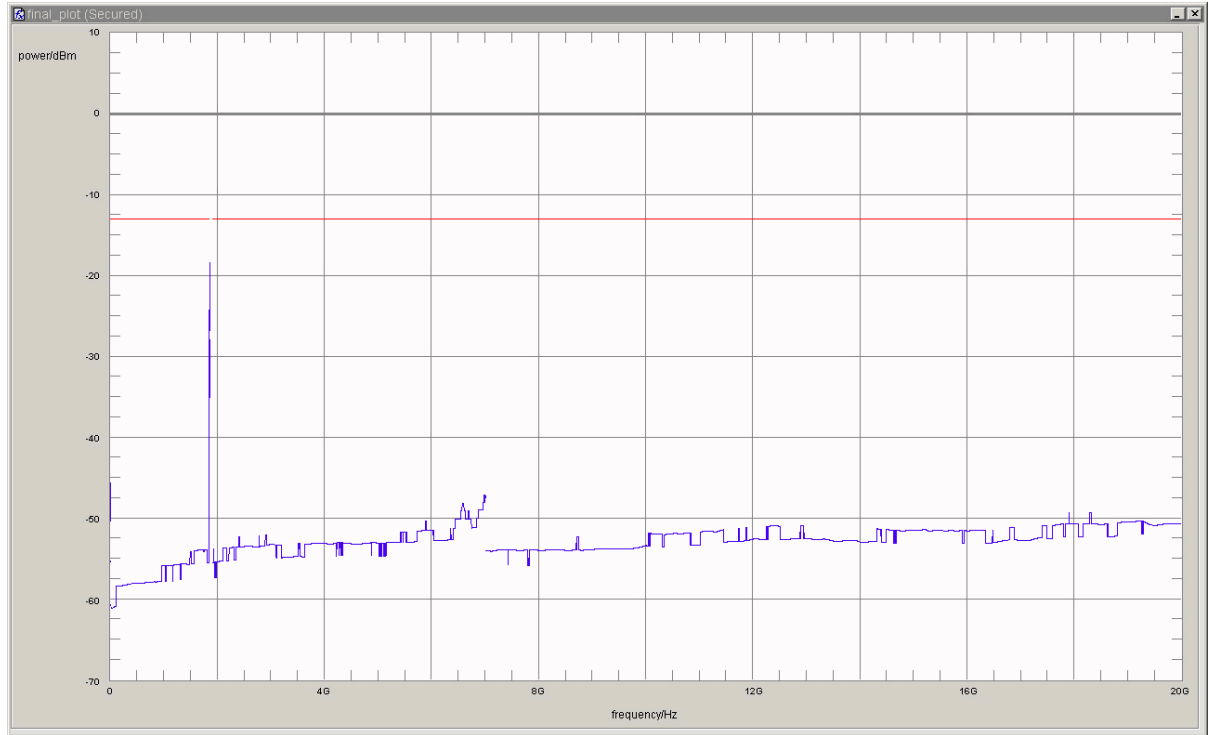

detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	margin to limit /dB	limit /dBm	verdict
rms	maxhold	100	1848.89	-18.4	5.4	-13.0	passed
rms	maxhold	50	1850.00	-27.9	14.9	-13.0	passed

no further values have been found with a margin of less than 20 dB

Test: 24.3; Frequency Band = FDD2, Mode = HSUPA, Channel = 9400, Frequency = 1880MHz

Result: Passed


Setup No.: S01_AD01

Date of Test: 2015/07/06 19:38

Body: FCC47CFRChIPART24PERSONAL COMMUNICATIONS SERVICES

Test Specification: FCC part 2 and 24

Detailed Results:

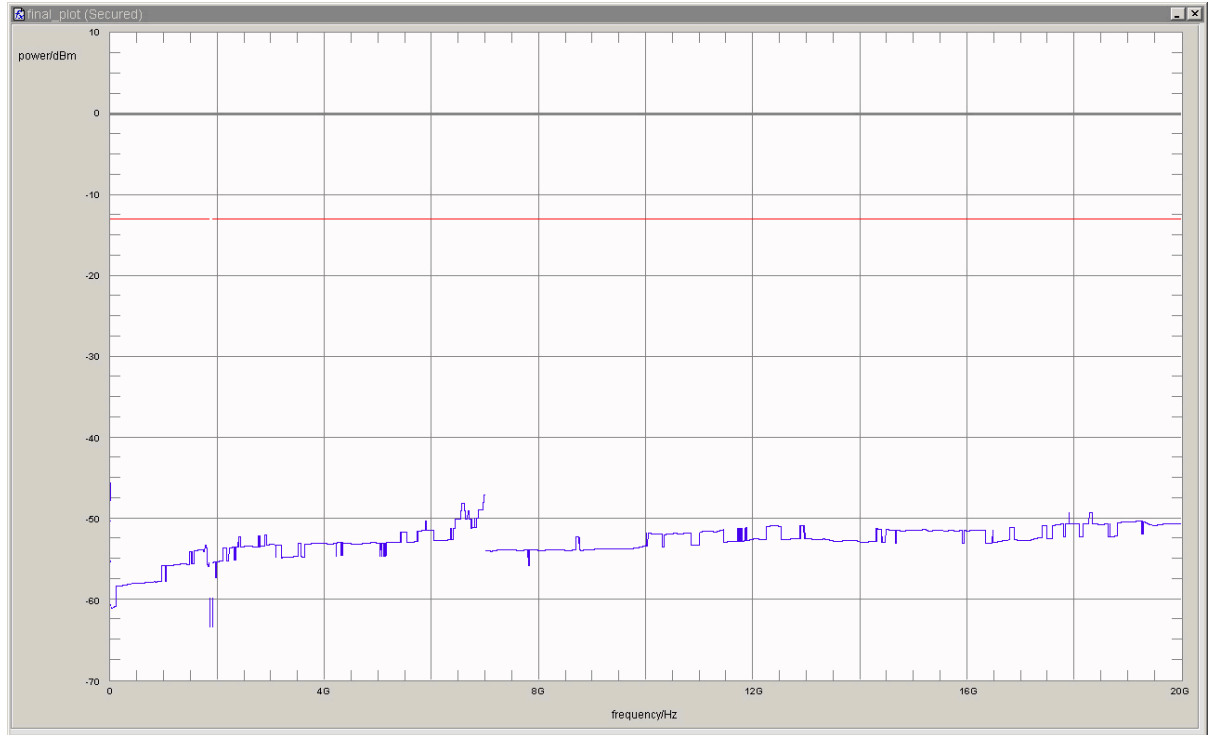


detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	margin to limit /dB	limit /dBm	verdict
rms	maxhold	1	0.030	-45.50	32.50	-13	passed

no further values have been found with a margin of less than 20 dB

Test: 24.3; Frequency Band = FDD2, Mode = HSUPA, Channel = 9538, Frequency = 1907.6MHz

Result: Passed
Setup No.: S01_AD01
Date of Test: 2015/07/06 19:13
Body: FCC47CFRChIPART24PERSONAL COMMUNICATIONS SERVICES
Test Specification: FCC part 2 and 24

Detailed Results:

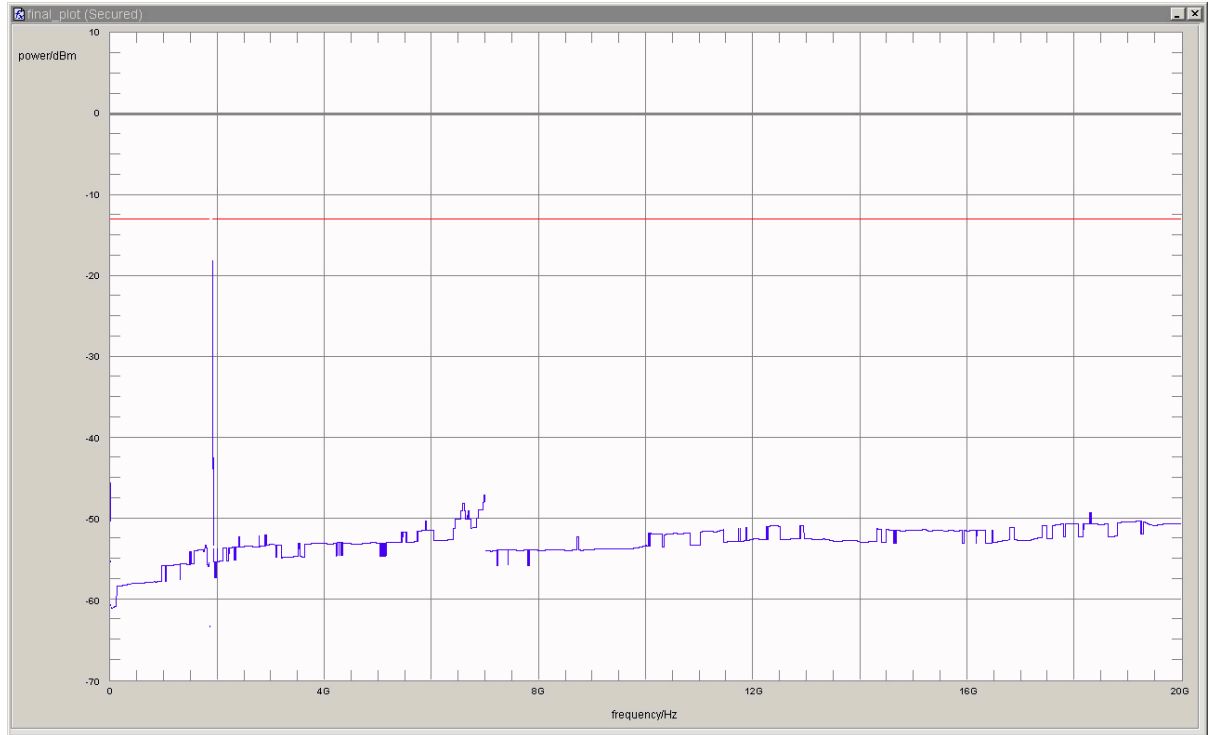


detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	margin to limit /dB	limit /dBm	verdict
rms	maxhold	50	1910.00	-27.4	14.4	-13.0	passed
rms	maxhold	100	1911.02	-18.2	5.2	-13.0	passed

no further values have been found with a margin of less than 20 dB

Test: 24.3; Frequency Band = FDD2, Mode = W-CDMA, Channel = 9262, Frequency = 1852.4MHz

Result: Passed
Setup No.: S01_AD01
Date of Test: 2015/07/06 18:17
Body: FCC47CFRChIPART24PERSONAL COMMUNICATIONS SERVICES
Test Specification: FCC part 2 and 24

Detailed Results:

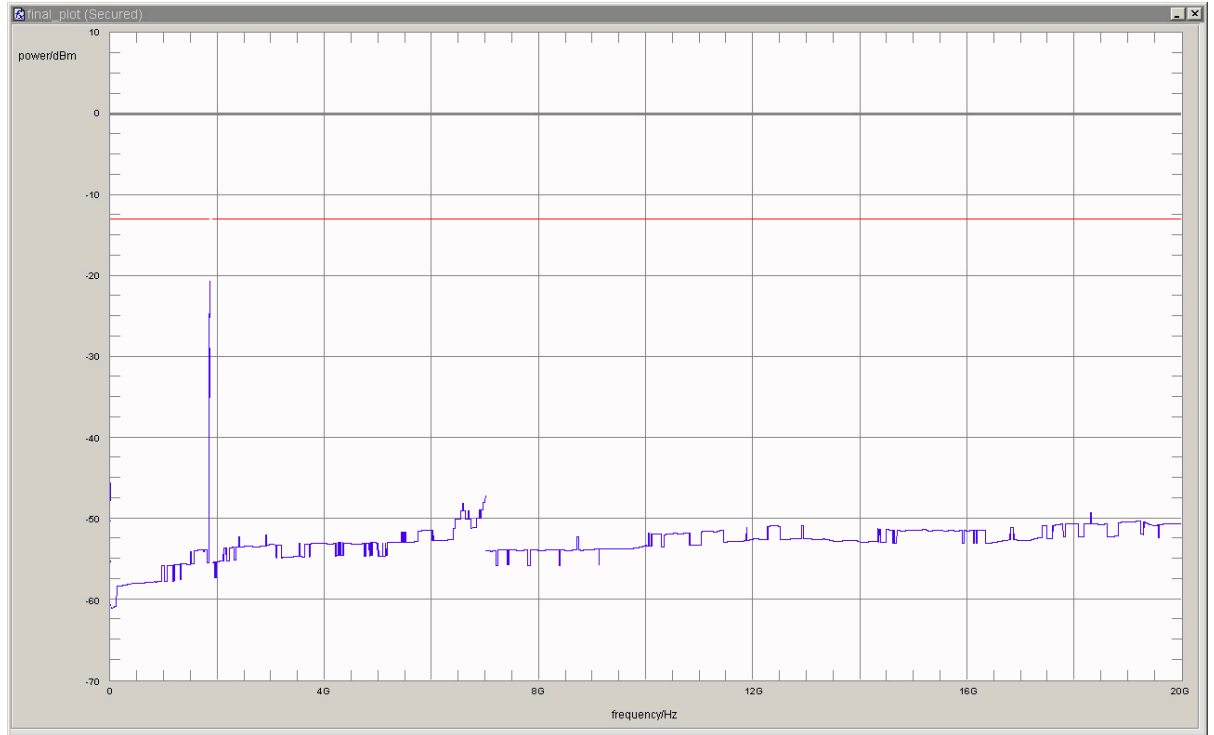


detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	margin to limit /dB	limit /dBm	verdict
rms	maxhold	100	1848.93	-20.7	7.7	-13.0	passed
rms	maxhold	50	1850.00	-28.9	15.9	-13.0	passed

no further values have been found with a margin of less than 20 dB

Test: 24.3; Frequency Band = FDD2, Mode = W-CDMA, Channel = 9400, Frequency = 1880MHz

Result: Passed
 Setup No.: S01_AD01
 Date of Test: 2015/07/06 18:26
 Body: FCC47CFRChIPART24PERSONAL COMMUNICATIONS SERVICES
 Test Specification: FCC part 2 and 24

Detailed Results:

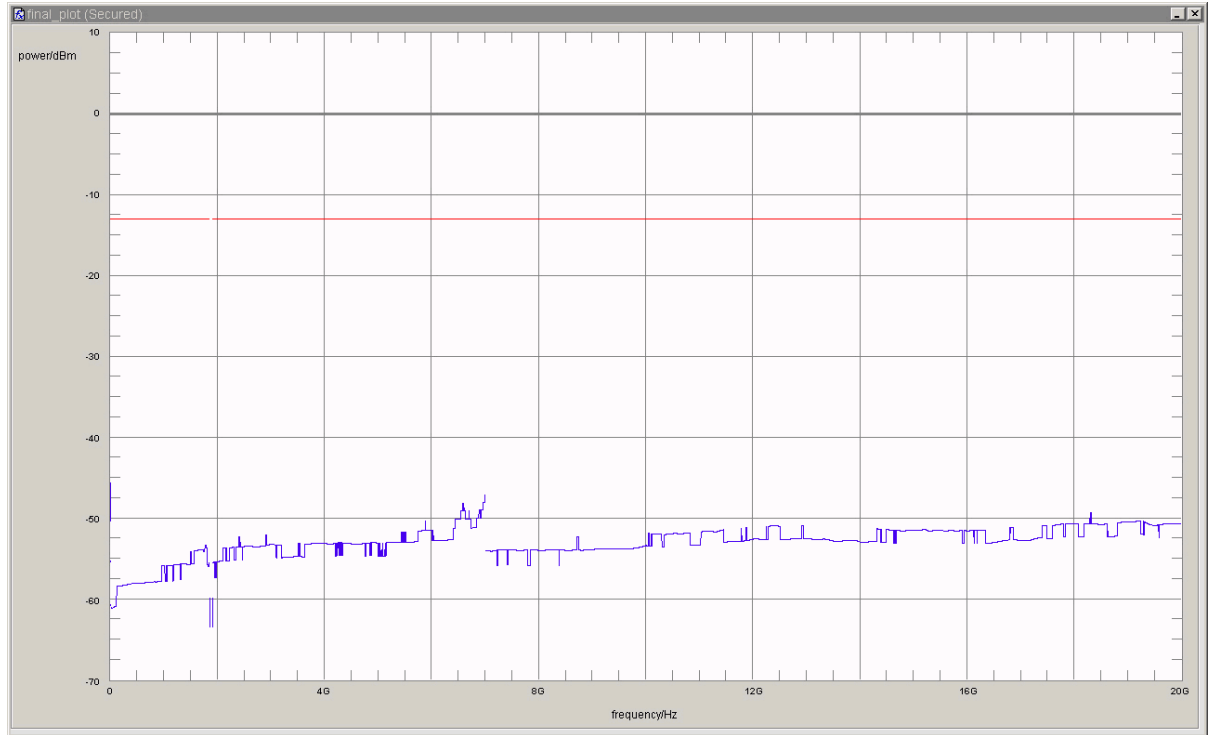


detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	margin to limit /dB	limit /dBm	verdict
rms	maxhold	1	0.030	-45.50	32.50	-13	passed

no further values have been found with a margin of less than 20 dB

Test: 24.3; Frequency Band = FDD2, Mode = W-CDMA, Channel = 9538, Frequency = 1907.6MHz

Result: Passed
Setup No.: S01_AD01
Date of Test: 2015/07/06 18:34
Body: FCC47CFRChIPART24PERSONAL COMMUNICATIONS SERVICES
Test Specification: FCC part 2 and 24

Detailed Results:

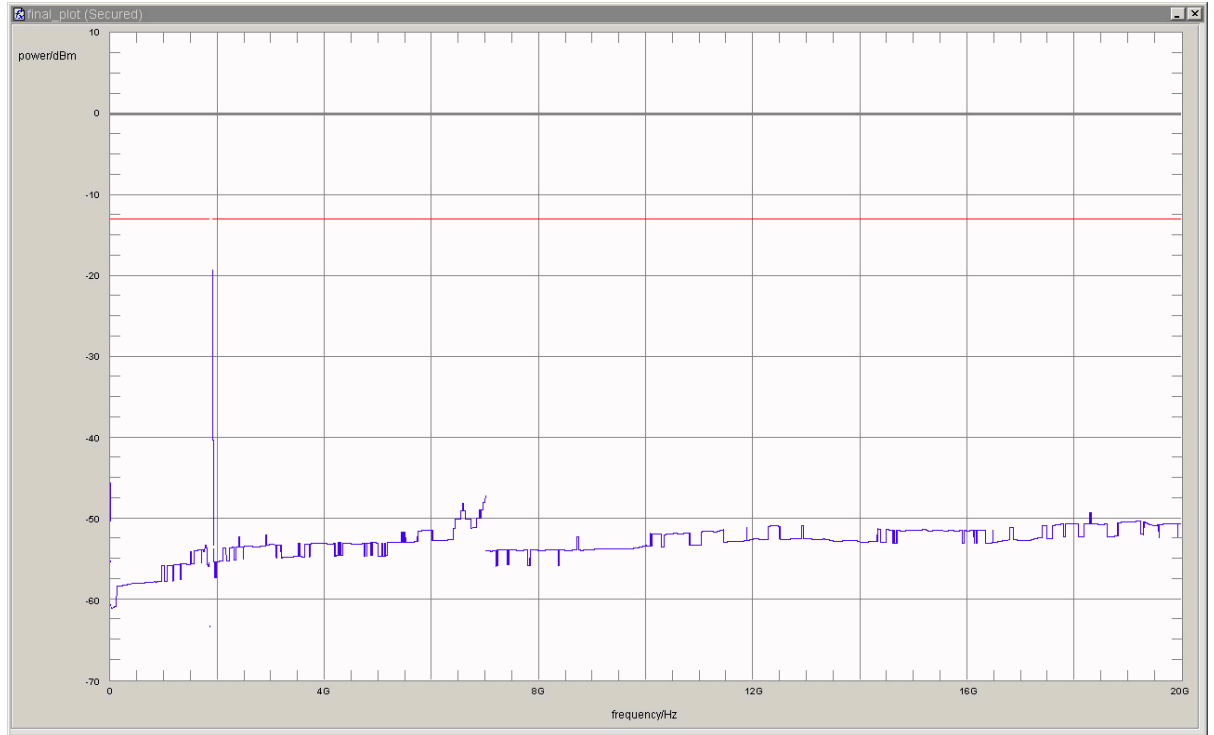

detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	margin to limit /dB	limit /dBm	verdict
rms	maxhold	50	1910.01	-26.7	13.7	-13.0	passed
rms	maxhold	100	1911.02	-19.3	6.3	-13.0	passed

no further values have been found with a margin of less than 20 dB

3.5.8 24.4 Field strength of spurious radiation §2.1053, §24.238

Test: 24.4; Frequency Band = FDD2, Mode = HSDPA, Channel = 9262, Frequency = 1852.4MHz


Result: Passed
 Setup No.: S01_AD01
 Date of Test: 2015/07/01 9:10
 Body: FCC47CFRChIPART24PERSONAL COMMUNICATIONS SERVICES
 Test Specification: FCC part 2 and 24

Detailed Results:

detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	limit /dBm	margin to limit /dB	azimuth /°	antenna polarization	EUT orientation	verdict
peak	maxhold	100	1848.95	-18.48	-13.00	5.48	-45.0	vertical	vertical	passed
peak	maxhold	50	1850.00	-31.14	-13.00	18.14	-45.0	vertical	vertical	passed
peak	maxhold	1000	1931.6	-22.64	-13.00	9.64	-135.0	vertical	vertical	passed
peak	maxhold	1000	1933.1	-18.90	-13.00	5.90	-45.0	vertical	vertical	passed

no further values have been found with a margin of less than 20 dB

added by operator

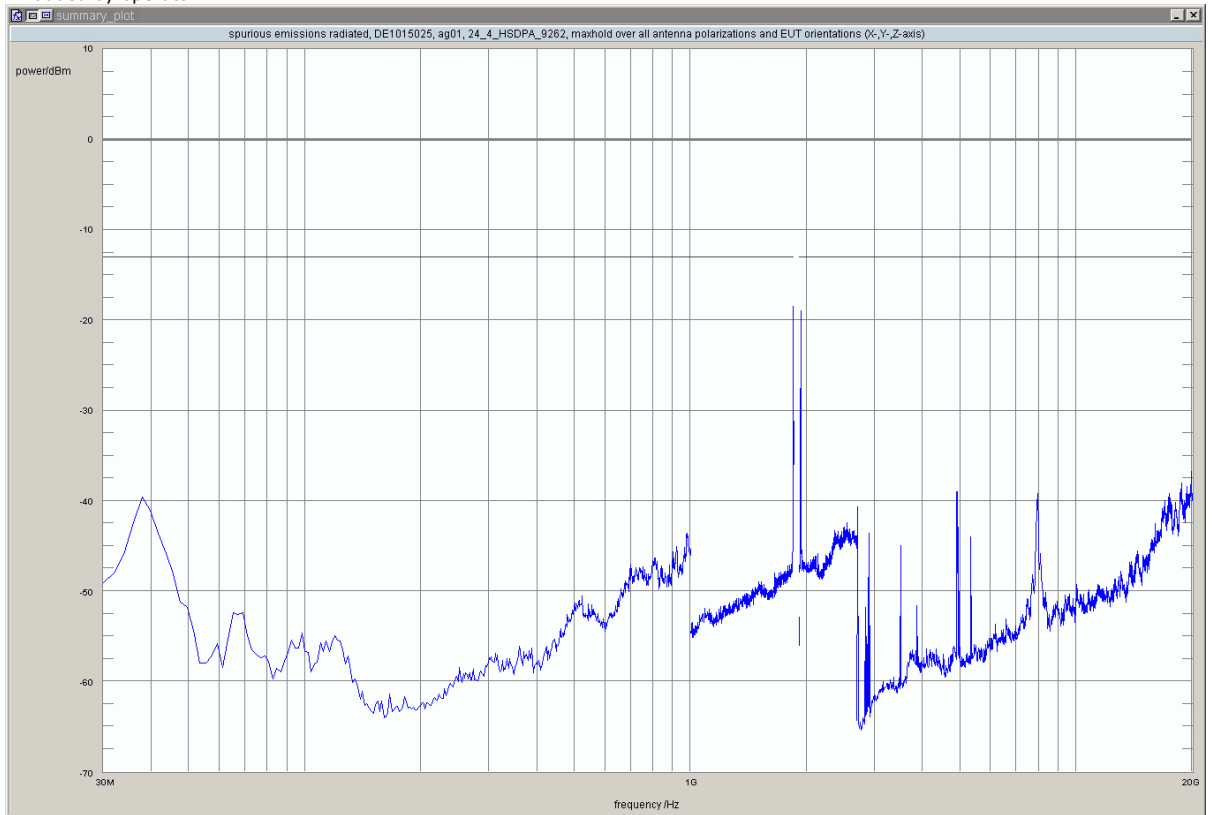

added by operator

Test: 24.4; Frequency Band = FDD2, Mode = HSDPA, Channel = 9400, Frequency = 1880MHz


Result: Passed
 Setup No.: S01_AD01
 Date of Test: 2015/07/01 10:04
 Body: FCC47CFRChIPART24PERSONAL COMMUNICATIONS SERVICES
 Test Specification: FCC part 2 and 24

Detailed Results:

detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	limit /dBm	margin to limit /dB	azimuth /°	antenna polarization	EUT orientation	verdict
peak	maxhold	1000	1958.4	-22.62	-13.00	9.62	135.0	vertical	vertical	passed
peak	maxhold	1000	1960.0	-20.19	-13.00	7.19	-45.0	vertical	vertical	passed

no further values have been found with a margin of less than 20 dB

added by operator

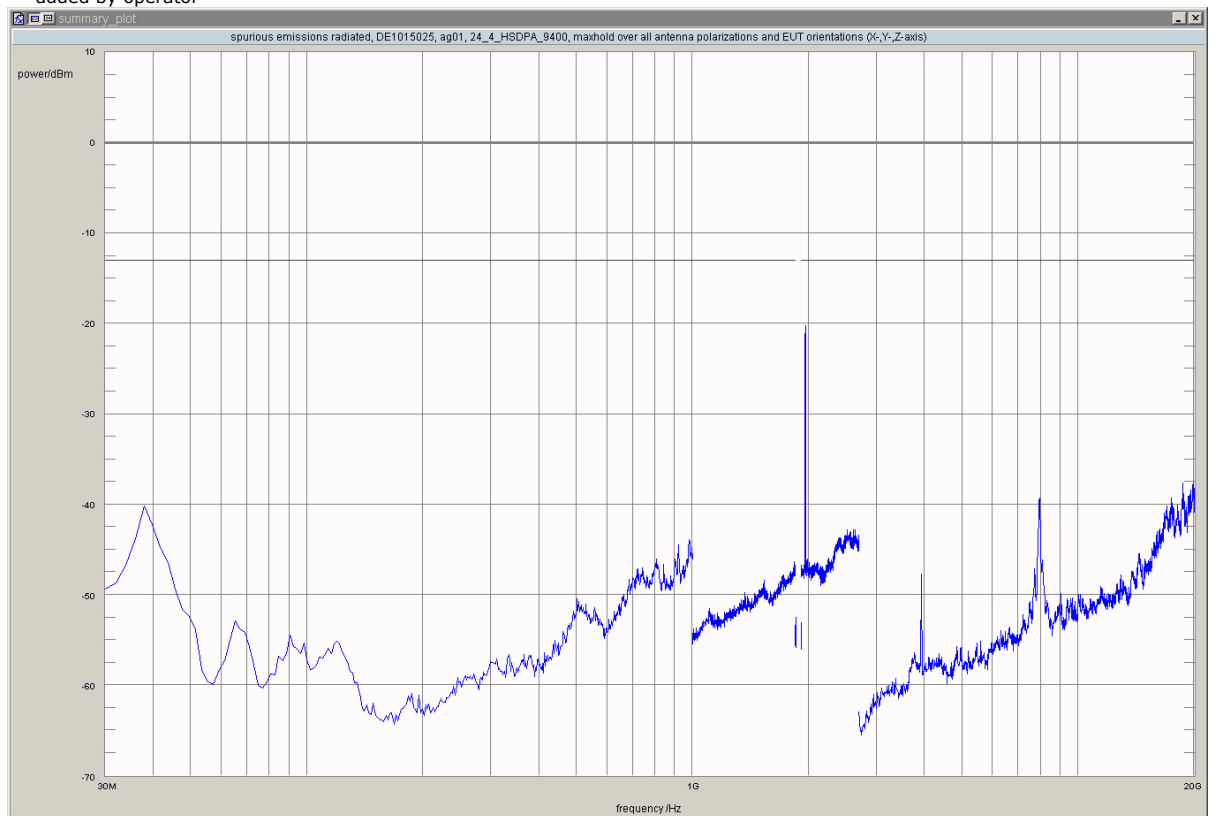

added by operator

Test: 24.4; Frequency Band = FDD2, Mode = HSDPA, Channel = 9538, Frequency = 1907.6MHz


Result: Passed
 Setup No.: S01_AD01
 Date of Test: 2015/07/01 10:59
 Body: FCC47CFRChIPART24PERSONAL COMMUNICATIONS SERVICES
 Test Specification: FCC part 2 and 24

Detailed Results:

detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	limit /dBm	margin to limit /dB	azimuth /°	antenna polarization	EUT orientation	verdict
peak	maxhold	50	1910.00	-23.26	-13.00	10.26	-180.0	vertical	vertical	passed
peak	maxhold	50	1910.53	-27.30	-13.00	14.30	-180.0	vertical	vertical	passed
peak	maxhold	50	1910.82	-29.21	-13.00	16.21	-180.0	horizontal	horizontal	passed
peak	maxhold	100	1911.04	-15.85	-13.00	2.85	0.0	vertical	vertical	passed
peak	maxhold	100	1911.56	-27.18	-13.00	14.18	0.0	horizontal	horizontal	passed
peak	maxhold	100	1915.15	-32.07	-13.00	19.07	0.0	vertical	vertical	passed
peak	maxhold	1000	1985.7	-24.56	-13.00	11.56	45.0	vertical	vertical	passed
peak	maxhold	1000	1987.2	-21.96	-13.00	8.96	0.0	horizontal	horizontal	passed
peak	maxhold	1000	1988.8	-21.94	-13.00	8.94	-45.0	vertical	vertical	passed

no further values have been found with a margin of less than 20 dB

added by operator

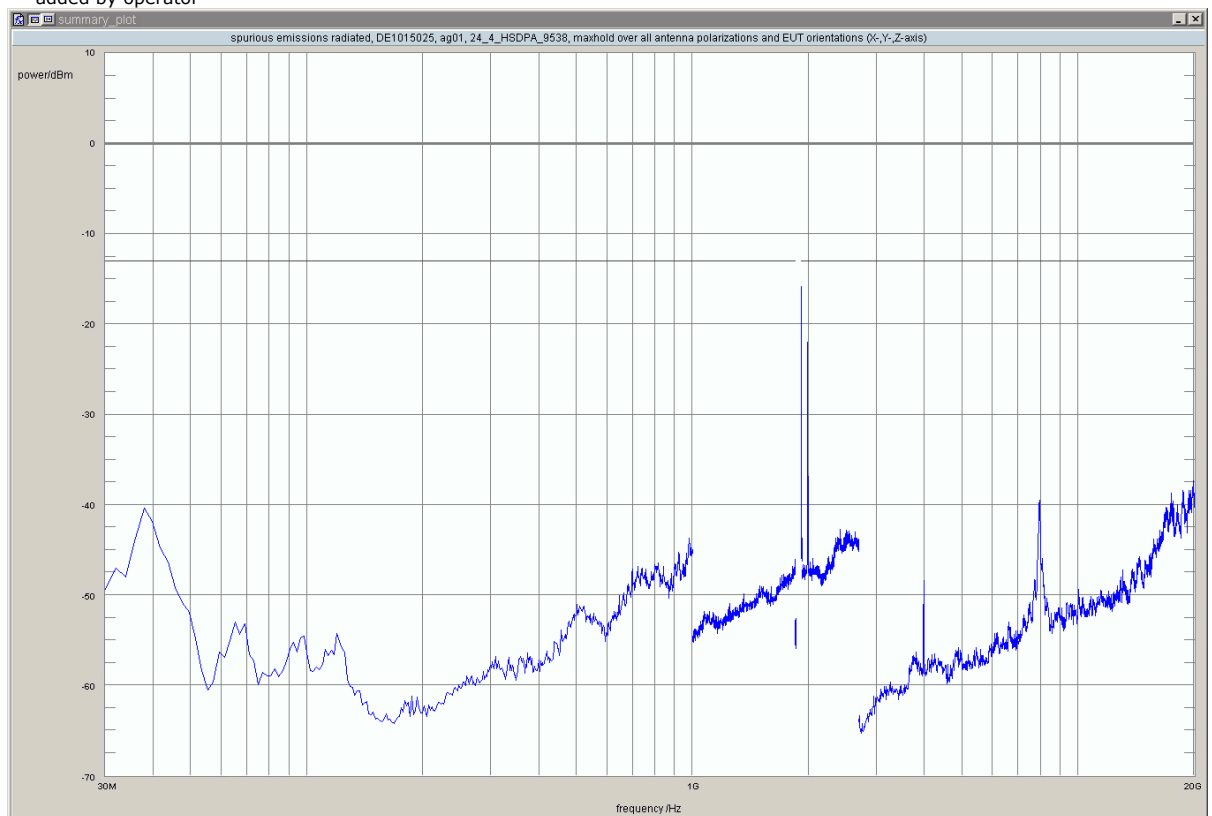

added by operator

Test: 24.4; Frequency Band = FDD2, Mode = HSUPA, Channel = 9262, Frequency = 1852.4MHz

Result: Passed
 Setup No.: S01_AD01
 Date of Test: 2015/07/01 12:04
 Body: FCC47CFRChIPART24PERSONAL COMMUNICATIONS SERVICES
 Test Specification: FCC part 2 and 24

Detailed Results:

detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	limit /dBm	margin to limit /dB	azimuth /°	antenna polarization	EUT orientation	verdict
peak	maxhold	100	1846.67	-28.45	-13.00	15.45	0.0	vertical	vertical	passed
peak	maxhold	100	1848.60	-28.56	-13.00	15.56	-60.0	horizontal	horizontal	passed
peak	maxhold	100	1848.87	-21.66	-13.00	8.66	-45.0	vertical	vertical	passed
peak	maxhold	50	1849.68	-31.87	-13.00	18.87	0.0	vertical	vertical	passed
peak	maxhold	50	1849.91	-30.94	-13.00	17.94	-45.0	vertical	vertical	passed
peak	maxhold	50	1849.97	-32.33	-13.00	19.33	-180.0	horizontal	horizontal	passed

no further values have been found with a margin of less than 20 dB

added by operator



added by operator

Test: 24.4; Frequency Band = FDD2, Mode = HSUPA, Channel = 9400, Frequency = 1880MHz


Result: Passed
Setup No.: S01_AD01
Date of Test: 2015/07/01 13:06
Body: FCC47CFRChIPART24PERSONAL COMMUNICATIONS SERVICES
Test Specification: FCC part 2 and 24

Detailed Results:

detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	limit /dBm	margin to limit /dB	azimuth /°	antenna polarization	EUT orientation	verdict
peak	maxhold	1000	19887.8	-36.38	-13.00	23.38	0.0	vertical	vertical	passed

no further values have been found with a margin of less than 20 dB

added by operator

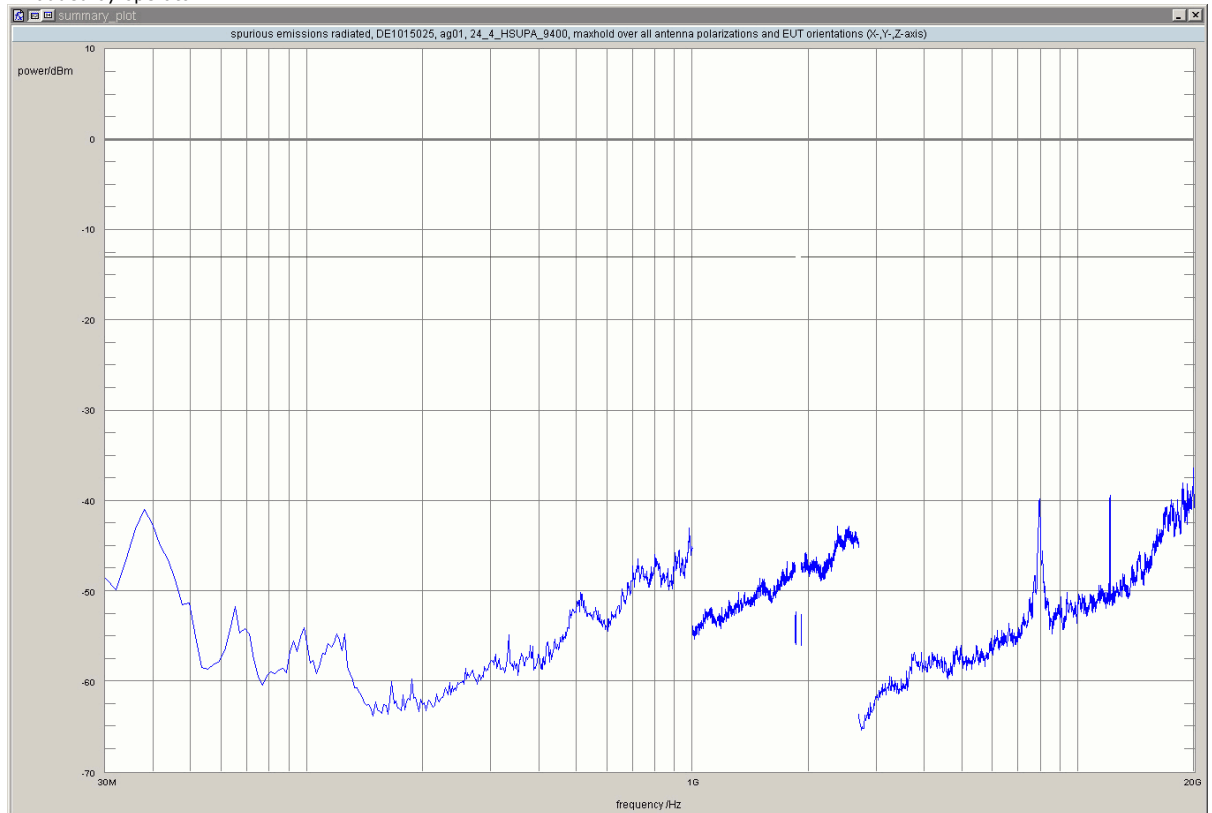

added by operator

Test: 24.4; Frequency Band = FDD2, Mode = HSUPA, Channel = 9538, Frequency = 1907.6MHz


Result: Passed
Setup No.: S01_AD01
Date of Test: 2015/07/01 14:10
Body: FCC47CFRChIPART24PERSONAL COMMUNICATIONS SERVICES
Test Specification: FCC part 2 and 24

Detailed Results:

detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	limit /dBm	margin to limit /dB	azimuth /°	antenna polarization	EUT orientation	verdict
peak	maxhold	1000	19887.8	-37.78	-13.00	24.78	0.0	vertical	horizontal	passed

no further values have been found with a margin of less than 20 dB

added by operator

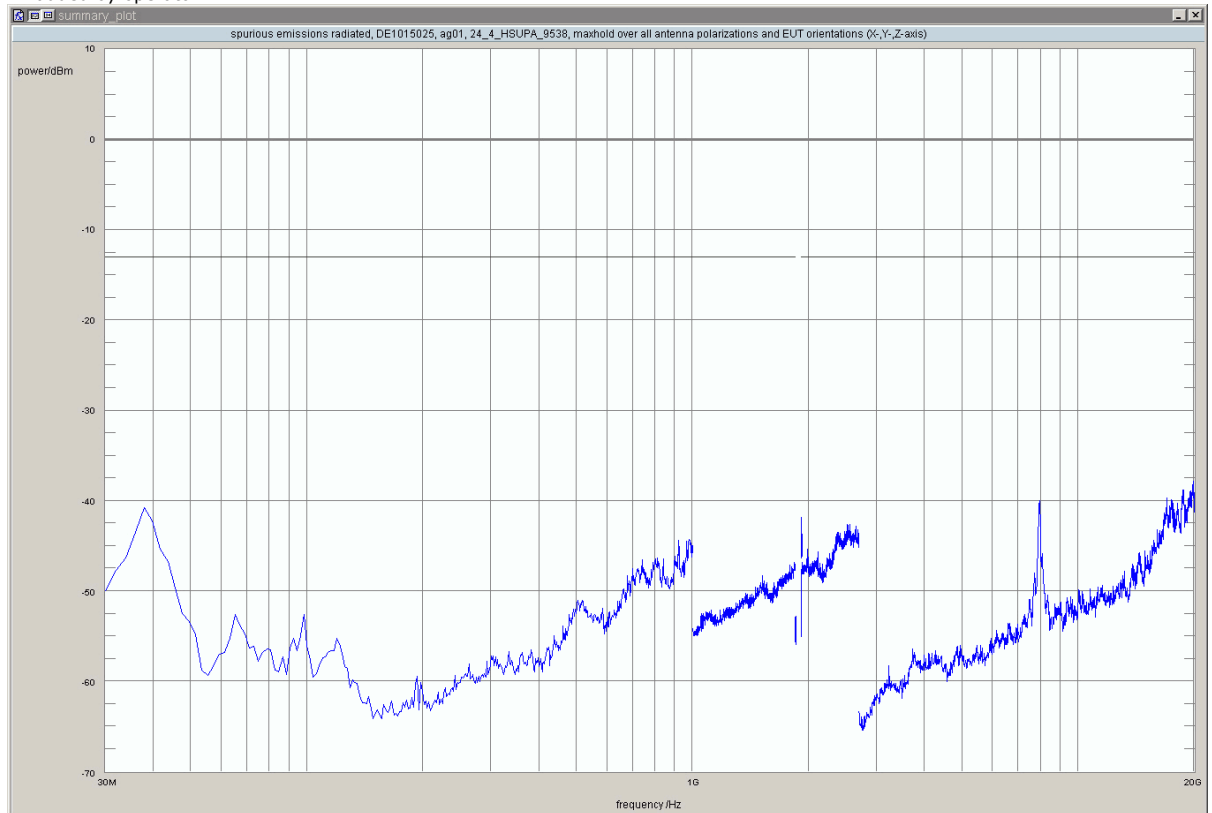

added by operator

Test: 24.4; Frequency Band = FDD2, Mode = W-CDMA, Channel = 9262, Frequency = 1852.4MHz


Result: Passed
Setup No.: S01_AD01
Date of Test: 2015/07/01 4:01
Body: FCC47CFRChIPART24PERSONAL COMMUNICATIONS SERVICES
Test Specification: FCC part 2 and 24

Detailed Results:

detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	limit /dBm	margin to limit /dB	azimuth /°	antenna polarization	EUT orientation	verdict
peak	maxhold	100	1848.60	-20.88	-13.00	7.88	0.0	vertical	vertical	passed
peak	maxhold	50	1849.72	-27.74	-13.00	14.74	0.0	vertical	vertical	passed

no further values have been found with a margin of less than 20 dB

added by operator

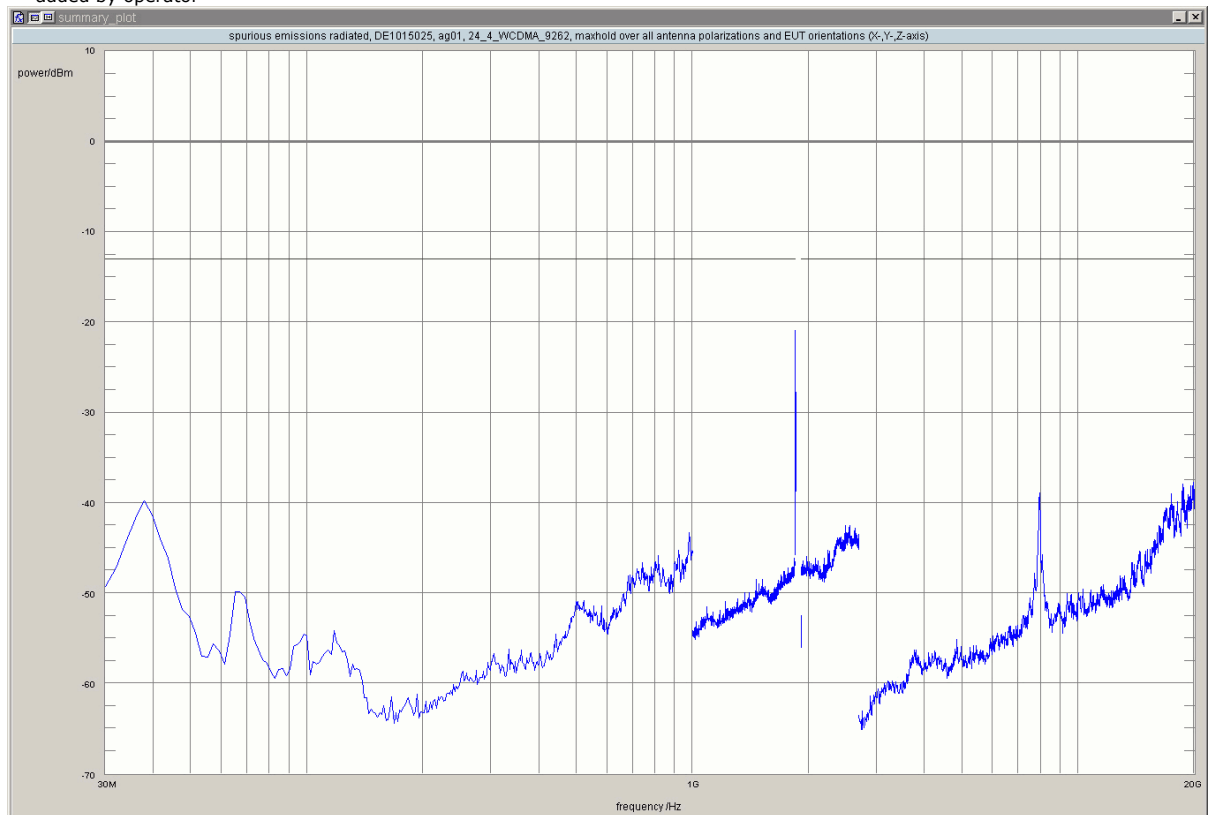

added by operator

Test: 24.4; Frequency Band = FDD2, Mode = W-CDMA, Channel = 9400, Frequency = 1880MHz


Result: Passed
Setup No.: S01_AD01
Date of Test: 2015/07/01 4:43
Body: FCC47CFRChIPART24PERSONAL COMMUNICATIONS SERVICES
Test Specification: FCC part 2 and 24

Detailed Results:

detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	limit /dBm	margin to limit /dB	azimuth /°	antenna polarization	EUT orientation	verdict
peak	maxhold	1000	19915.8	-37.77	-13.00	24.77	45.0	vertical	vertical	passed

no further values have been found with a margin of less than 20 dB

added by operator

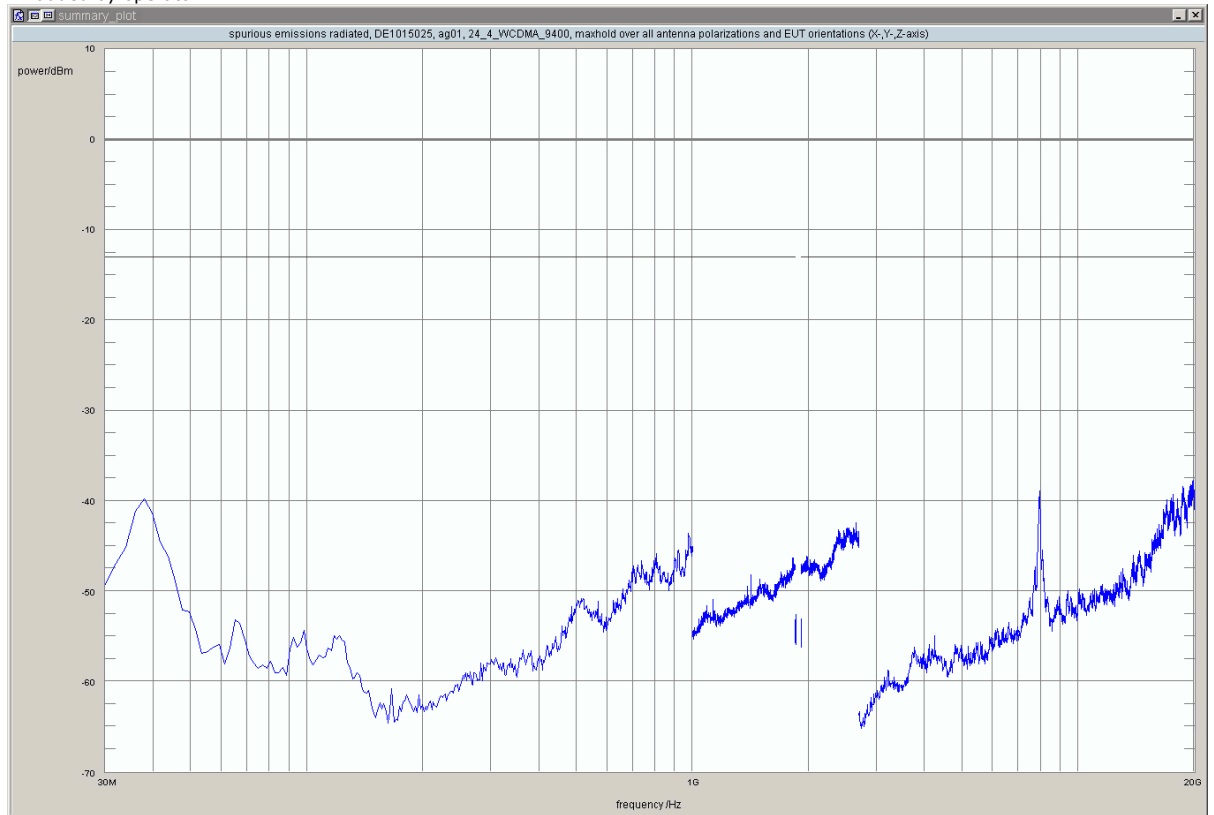

added by operator

Test: 24.4; Frequency Band = FDD2, Mode = W-CDMA, Channel = 9538, Frequency = 1907.6MHz


Result: Passed
Setup No.: S01_AD01
Date of Test: 2015/07/01 8:01
Body: FCC47CFRChIPART24PERSONAL COMMUNICATIONS SERVICES
Test Specification: FCC part 2 and 24

Detailed Results:

detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	limit /dBm	margin to limit /dB	azimuth /°	antenna polarization	EUT orientation	verdict
peak	maxhold	50	1910.00	-23.78	-13.00	10.78	0.0	vertical	vertical	passed
peak	maxhold	50	1910.31	-23.41	-13.00	10.41	0.0	vertical	vertical	passed
peak	maxhold	100	1911.23	-15.22	-13.00	2.22	0.0	vertical	vertical	passed
peak	maxhold	100	1911.45	-28.74	-13.00	15.74	-120.0	horizontal	horizontal	passed
peak	maxhold	100	1912.77	-20.71	-13.00	7.71	0.0	vertical	vertical	passed
peak	maxhold	100	1915.18	-32.17	-13.00	19.17	0.0	vertical	vertical	passed
peak	maxhold	100	1915.44	-32.36	-13.00	19.36	0.0	vertical	vertical	passed

no further values have been found with a margin of less than 20 dB

added by operator

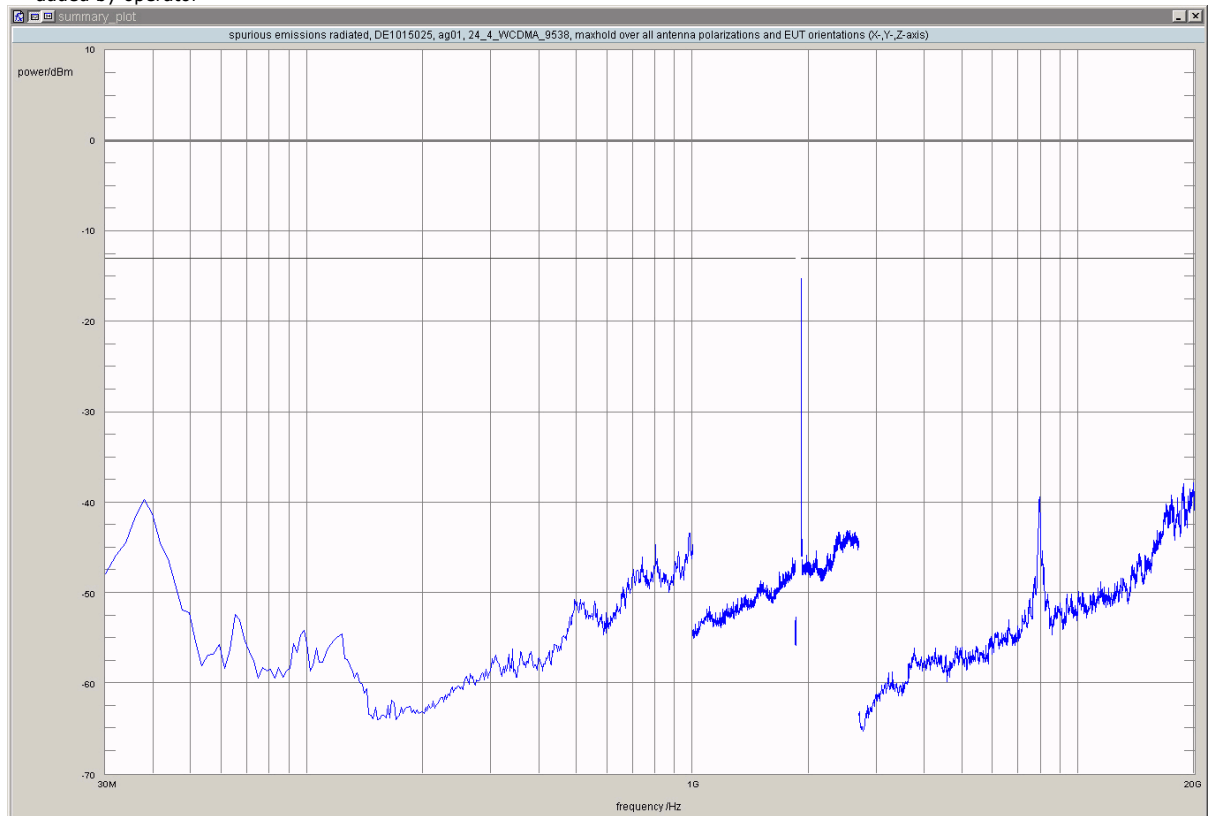


added by operator


3.5.9 24.5 Emission and Occupied Bandwidth §2.1049, §24.238

Test: 24.5; Frequency Band = FDD2, Mode = HSDPA, Channel = 9262, Frequency = 1852.4MHz

<i>Result:</i>	Passed
<i>Setup No.:</i>	S01_AD01
<i>Date of Test:</i>	2015/07/06 20:04
<i>Body:</i>	FCC47CFRChIPART24PERSONAL COMMUNICATIONS SERVICES
<i>Test Specification:</i>	FCC part 2 and 24

Detailed Results:

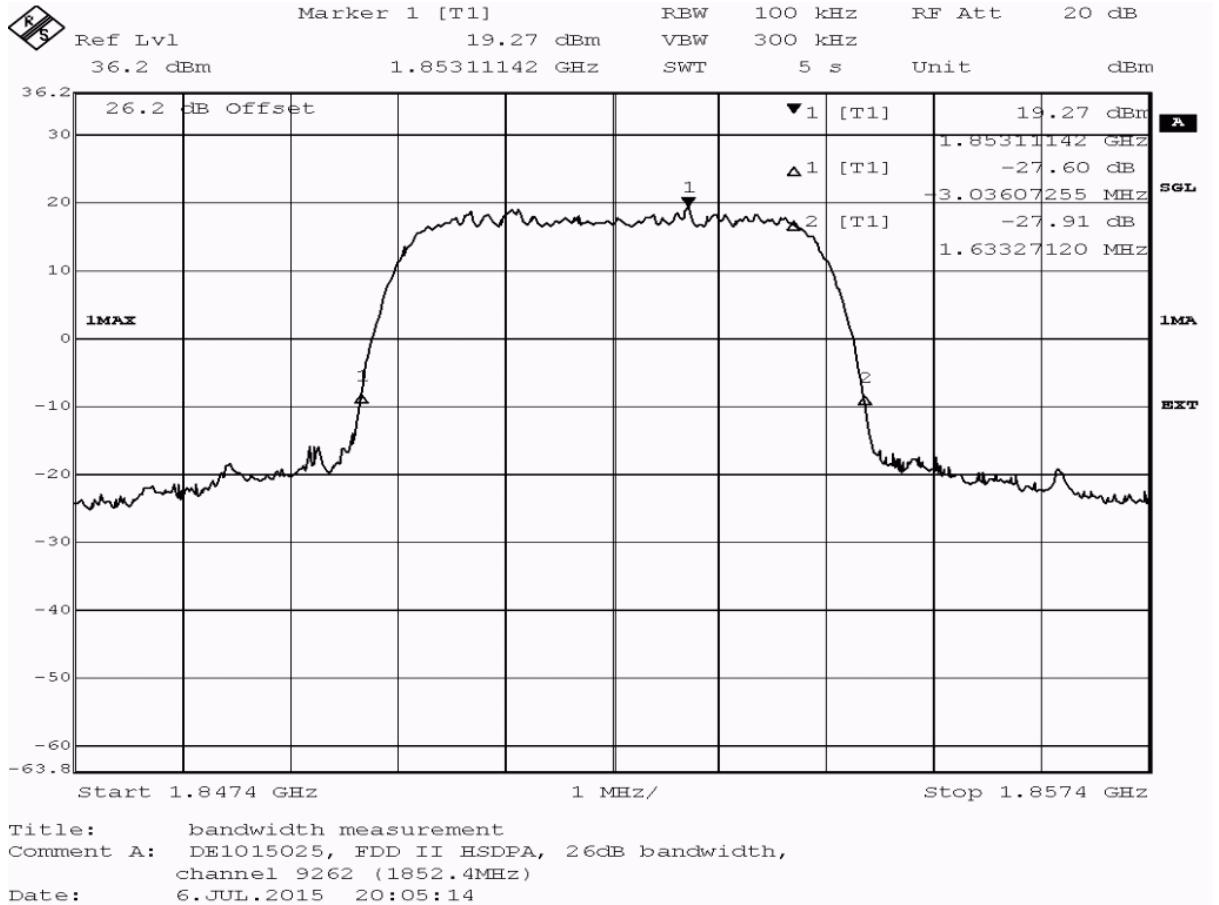

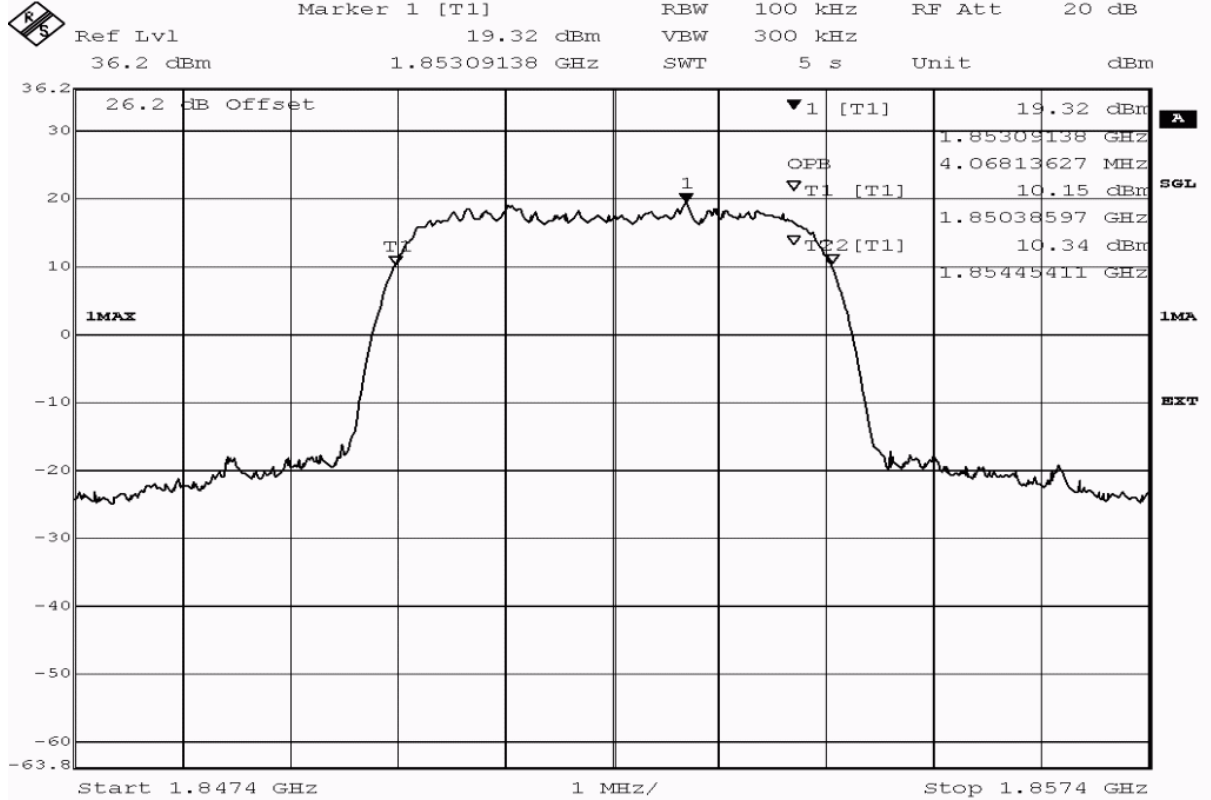


Title: bandwidth measurement
 Comment A: DE1015025, FDD II HSDPA, occupied bandwidth (99%),
 channel 9262 (1852.4MHz)
 Date: 6.JUL.2015 20:05:37


detector	trace	resolution bandwidth /kHz	type of measurement	measured value /kHz	verdict
peak	maxhold	100	-26dB bandwidth	4669.3	passed
peak	maxhold	100	99% bandwidth	4068.1	passed

Test: 24.5; Frequency Band = FDD2, Mode = HSDPA, Channel = 9400, Frequency = 1880MHz

Result: Passed
 Setup No.: S01_AD01
 Date of Test: 2015/07/06 20:11
 Body: FCC47CFRChIPART24PERSONAL COMMUNICATIONS SERVICES
 Test Specification: FCC part 2 and 24

Detailed Results:

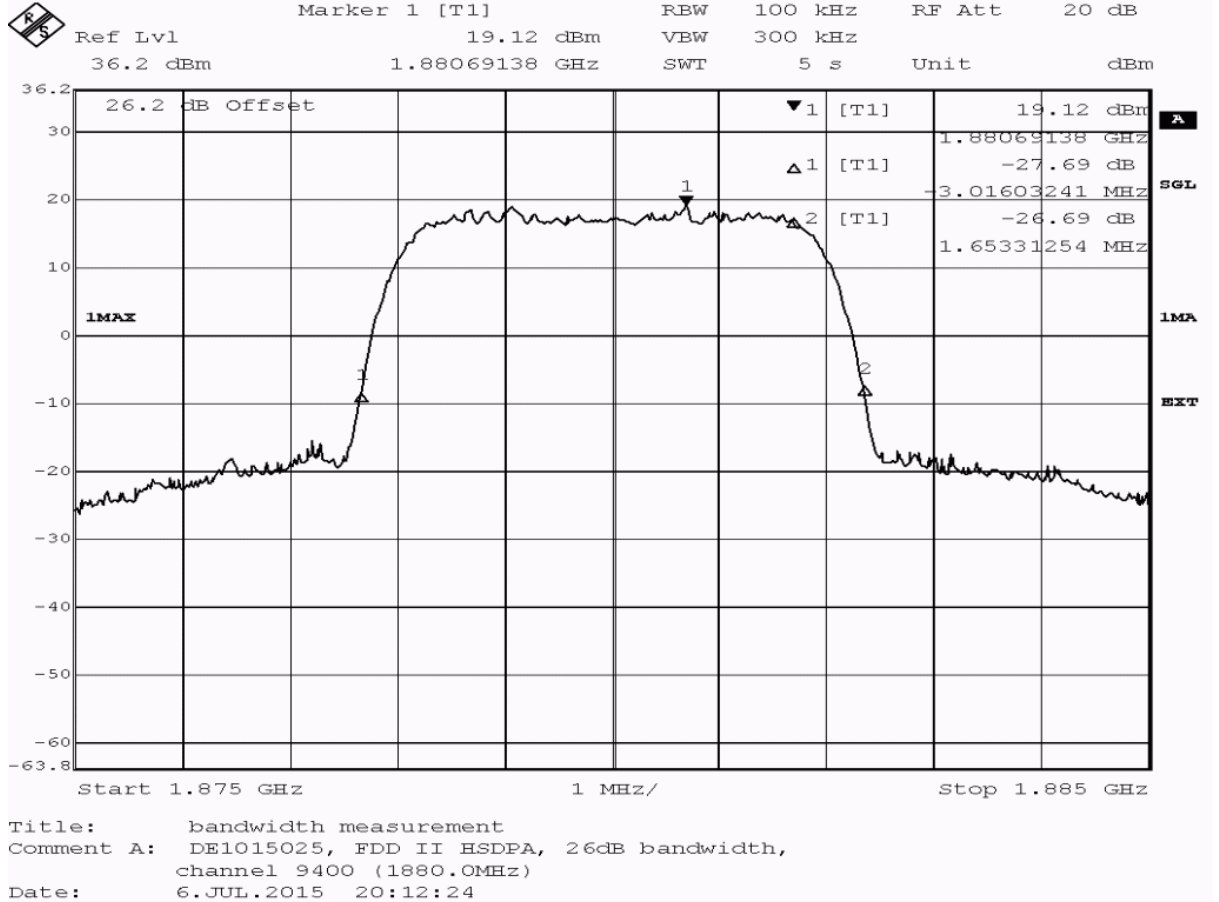

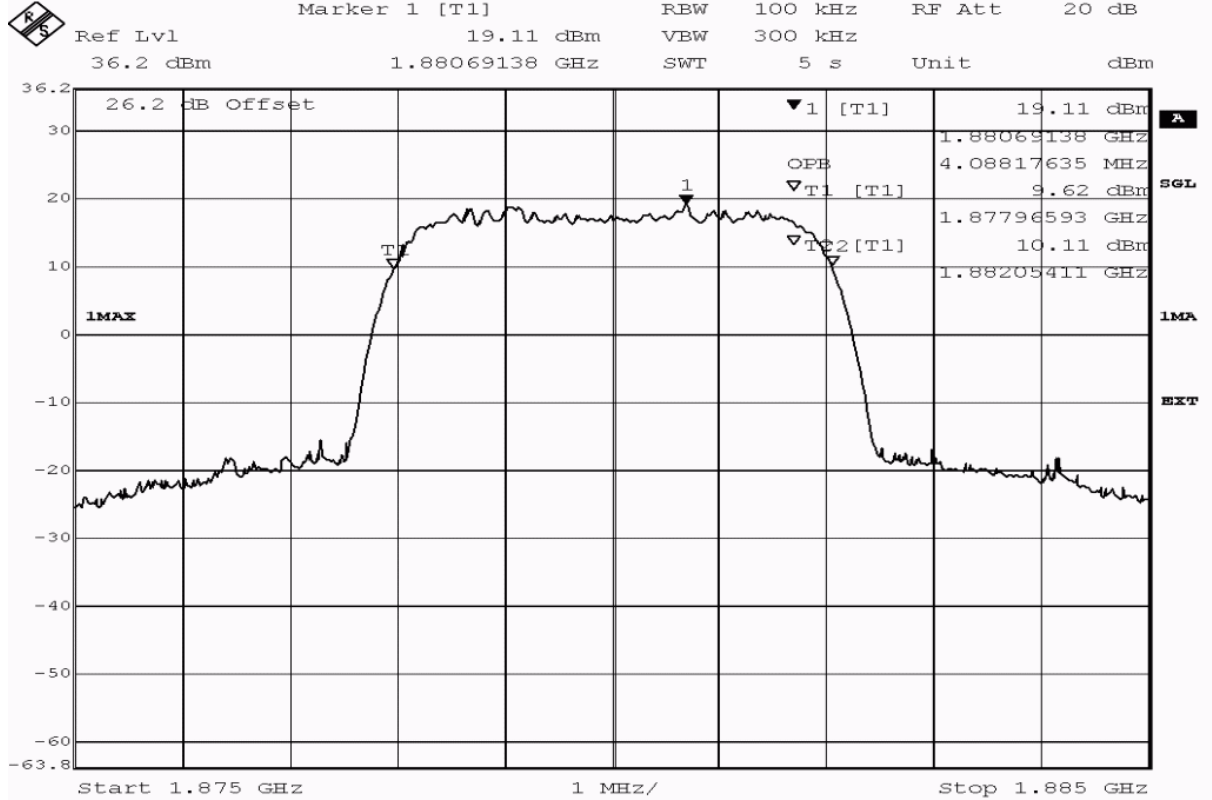


Title: bandwidth measurement
 Comment A: DE1015025, FDD II HSDPA, occupied bandwidth (99%),
 channel 9400 (1880.0MHz)
 Date: 6.JUL.2015 20:12:47


detector	trace	resolution bandwidth /kHz	type of measurement	measured value /kHz	verdict
peak	maxhold	100	-26dB bandwidth	4669.3	passed
peak	maxhold	100	99% bandwidth	4088.2	passed

Test: 24.5; Frequency Band = FDD2, Mode = HSDPA, Channel = 9538, Frequency = 1907.6MHz

Result: Passed
 Setup No.: S01_AD01
 Date of Test: 2015/07/06 20:30
 Body: FCC47CFRChIPART24PERSONAL COMMUNICATIONS SERVICES
 Test Specification: FCC part 2 and 24

Detailed Results:

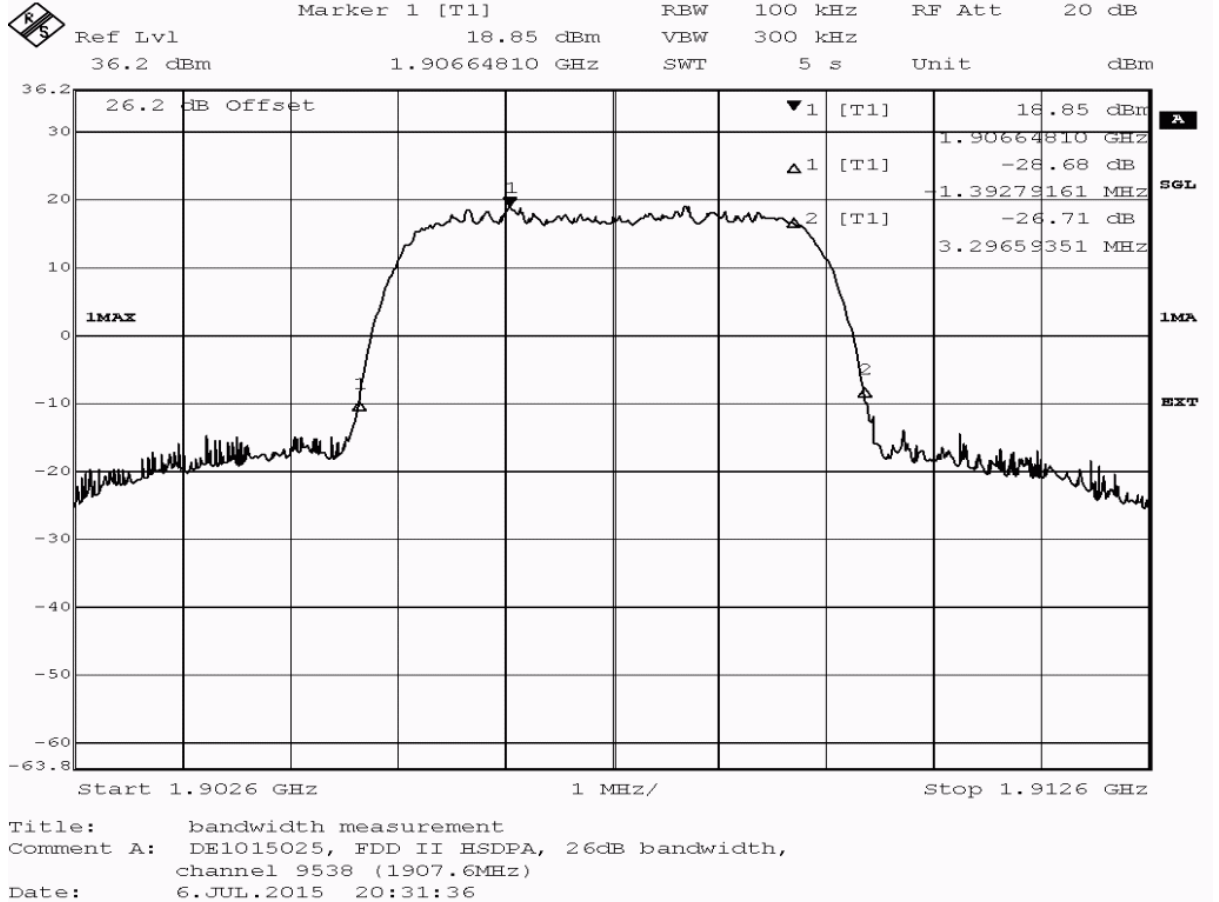

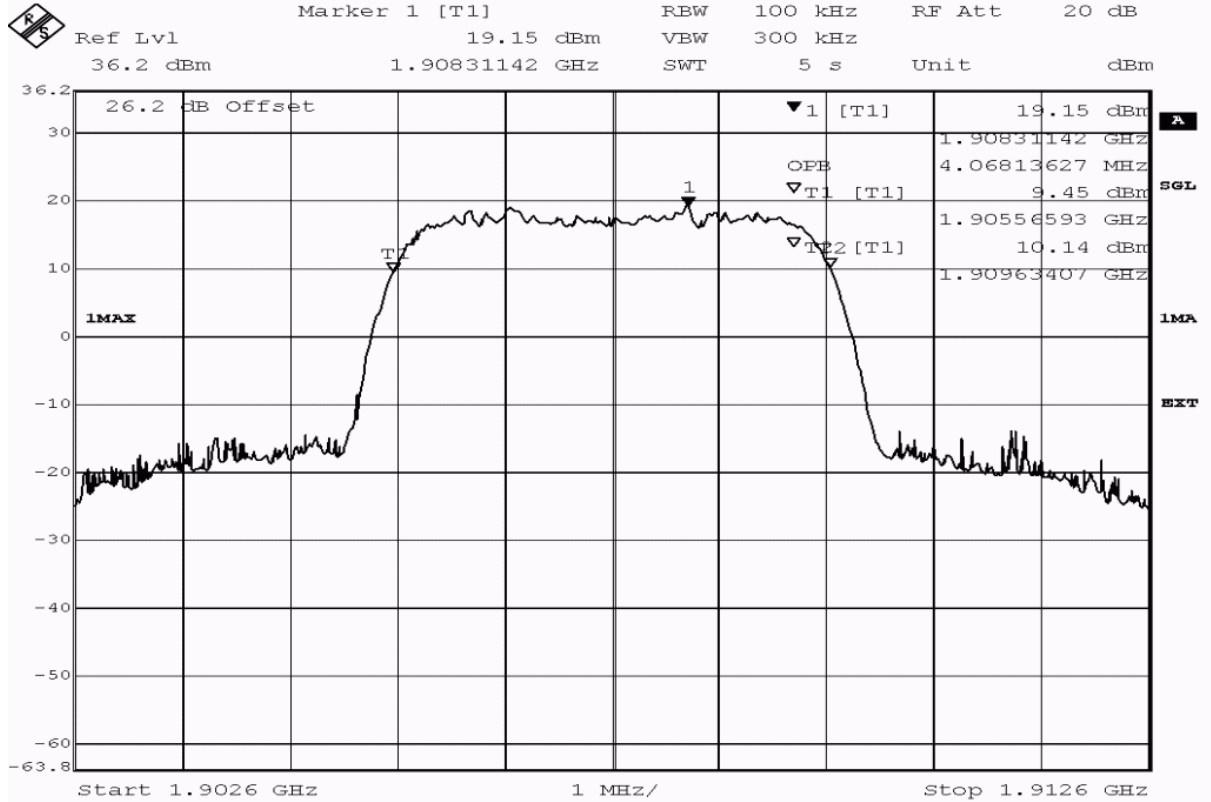


Title: bandwidth measurement
 Comment A: DE1015025, FDD II HSDPA, occupied bandwidth (99%),
 channel 9538 (1907.6MHz)
 Date: 6.JUL.2015 20:31:58


detector	trace	resolution bandwidth /kHz	type of measurement	measured value /kHz	verdict
peak	maxhold	100	-26dB bandwidth	4689.4	passed
peak	maxhold	100	99% bandwidth	4068.1	passed

Test: 24.5; Frequency Band = FDD2, Mode = HSUPA, Channel = 9262, Frequency = 1852.4MHz

Result: Passed
 Setup No.: S01_AD01
 Date of Test: 2015/07/06 19:28
 Body: FCC47CFRChIPART24PERSONAL COMMUNICATIONS SERVICES
 Test Specification: FCC part 2 and 24

Detailed Results:

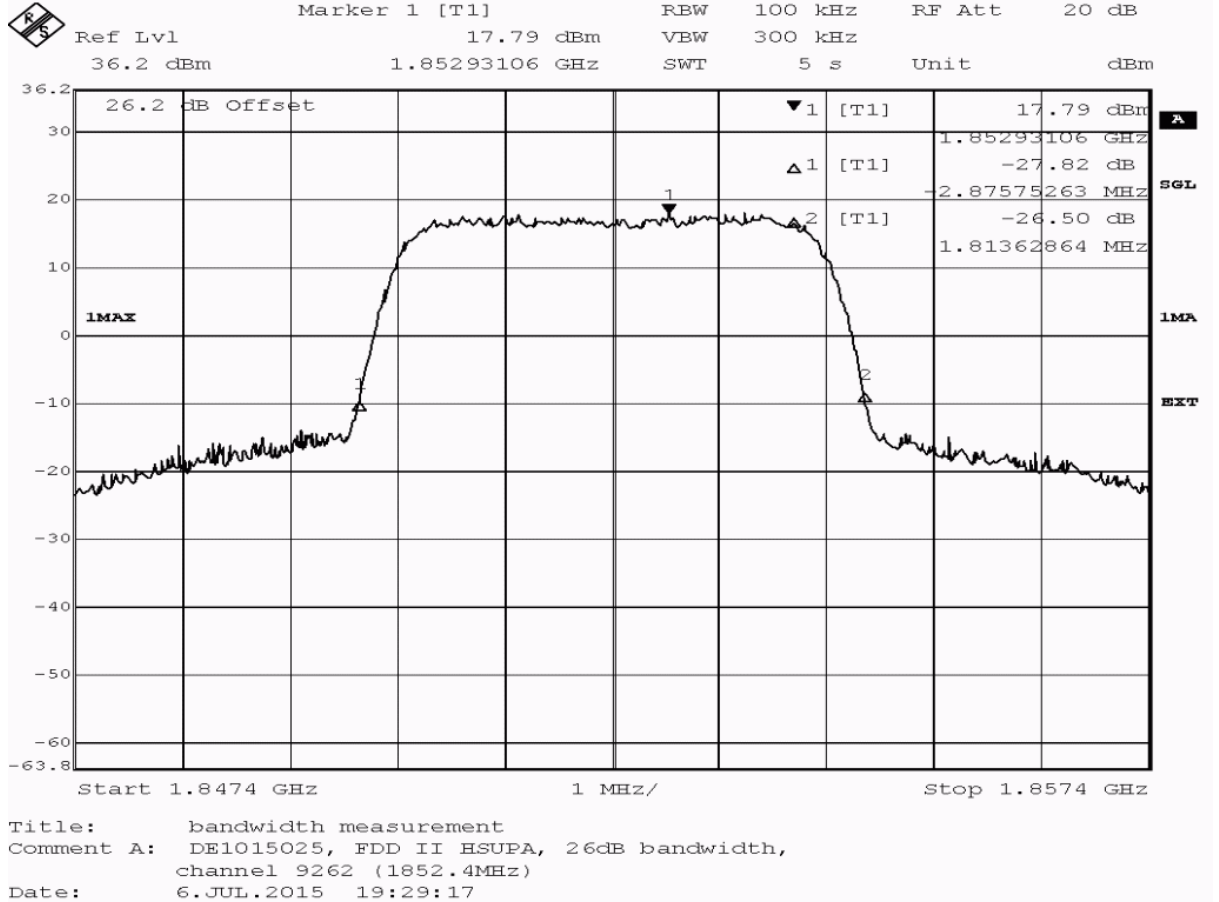

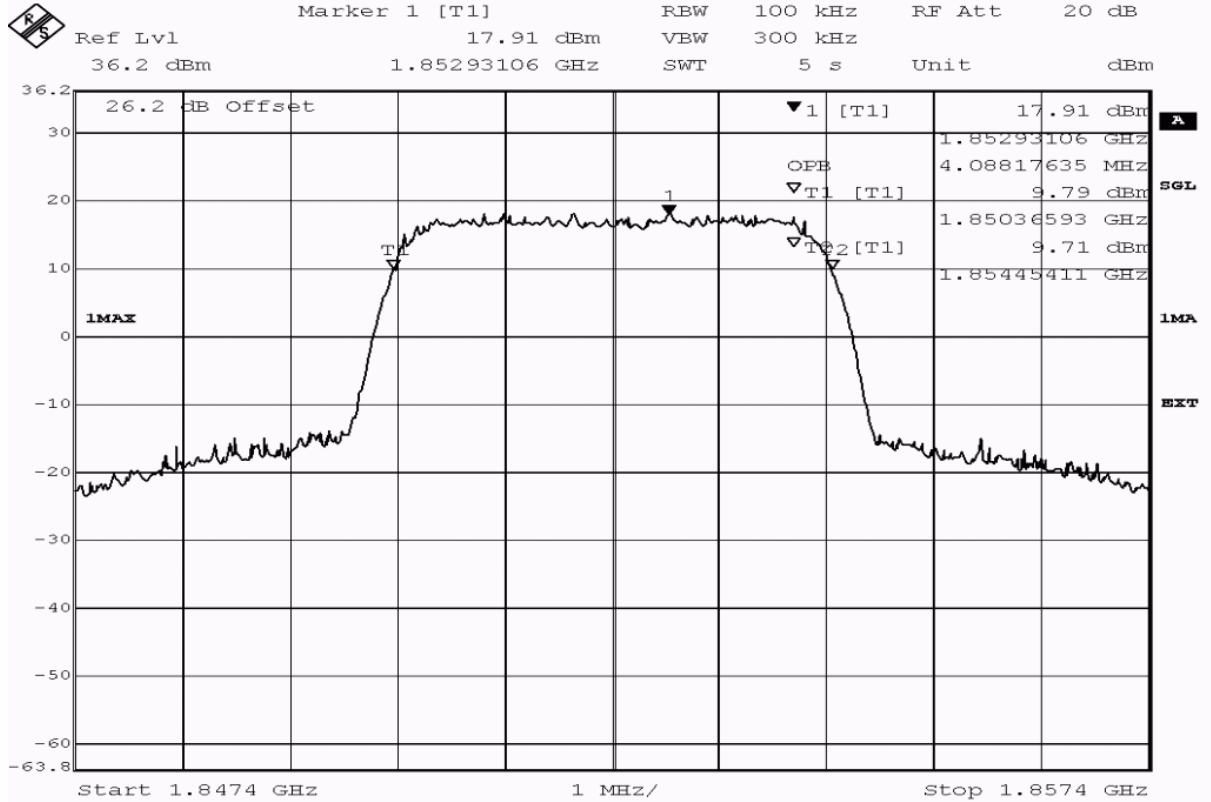


Title: bandwidth measurement
 Comment A: DE1015025, FDD II HSUPA, occupied bandwidth (99%),
 channel 9262 (1852.4MHz)
 Date: 6.JUL.2015 19:29:40


detector	trace	resolution bandwidth /kHz	type of measurement	measured value /kHz	verdict
peak	maxhold	100	-26dB bandwidth	4689.4	passed
peak	maxhold	100	99% bandwidth	4088.2	passed

Test: 24.5; Frequency Band = FDD2, Mode = HSUPA, Channel = 9400, Frequency = 1880MHz

Result: Passed
 Setup No.: S01_AD01
 Date of Test: 2015/07/06 19:39
 Body: FCC47CFRChIPART24PERSONAL COMMUNICATIONS SERVICES
 Test Specification: FCC part 2 and 24

Detailed Results:

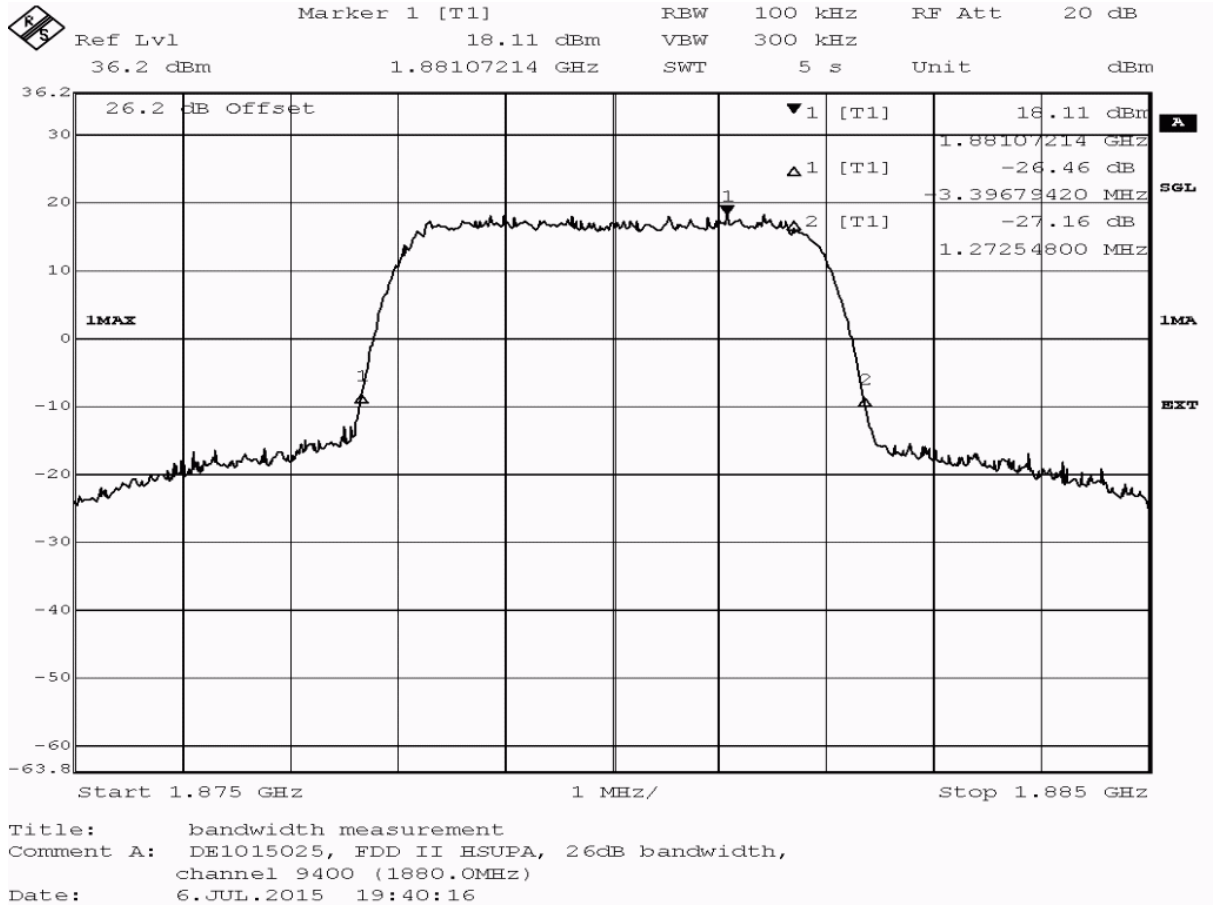

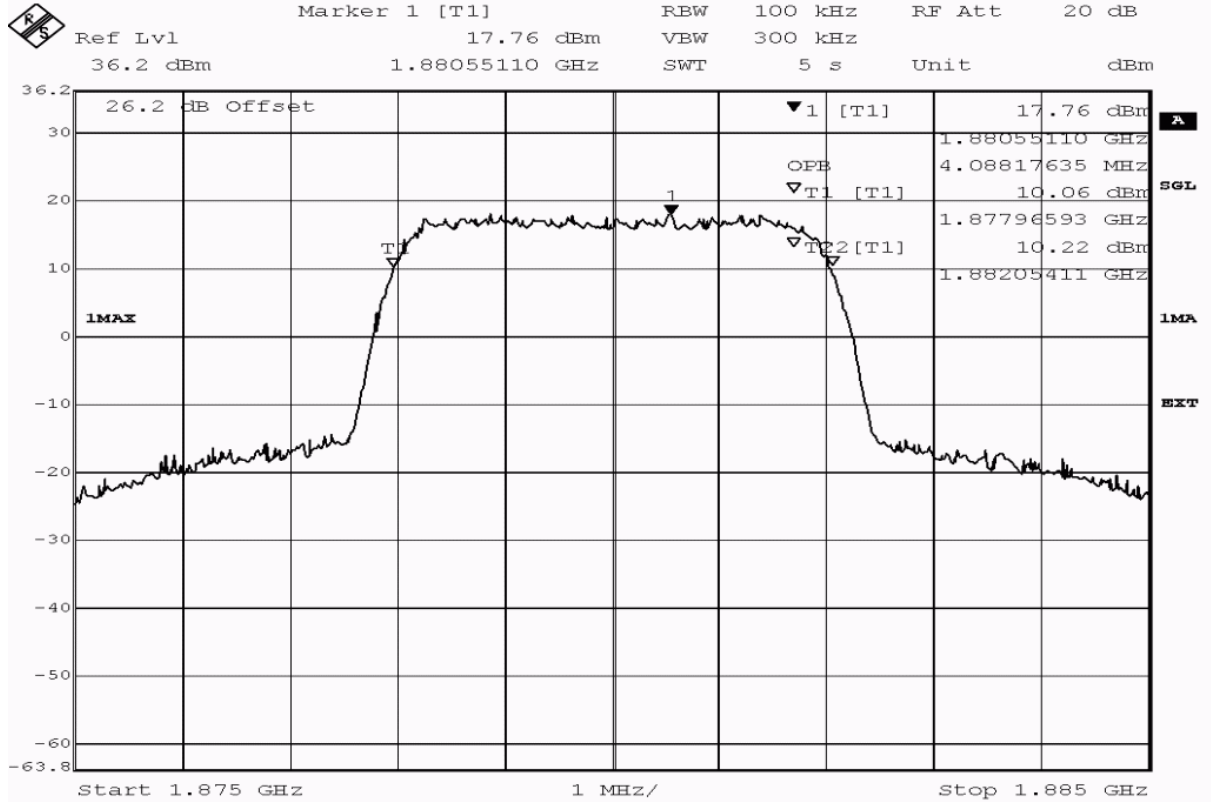


Title: bandwidth measurement
 Comment A: DE1015025, FDD II HSUPA, occupied bandwidth (99%),
 channel 9400 (1880.0MHz)
 Date: 6.JUL.2015 19:40:38


detector	trace	resolution bandwidth /kHz	type of measurement	measured value /kHz	verdict
peak	maxhold	100	-26dB bandwidth	4669.3	passed
peak	maxhold	100	99% bandwidth	4088.2	passed

Test: 24.5; Frequency Band = FDD2, Mode = HSUPA, Channel = 9538, Frequency = 1907.6MHz

Result: Passed
 Setup No.: S01_AD01
 Date of Test: 2015/07/06 19:15
 Body: FCC47CFRChIPART24PERSONAL COMMUNICATIONS SERVICES
 Test Specification: FCC part 2 and 24

Detailed Results:

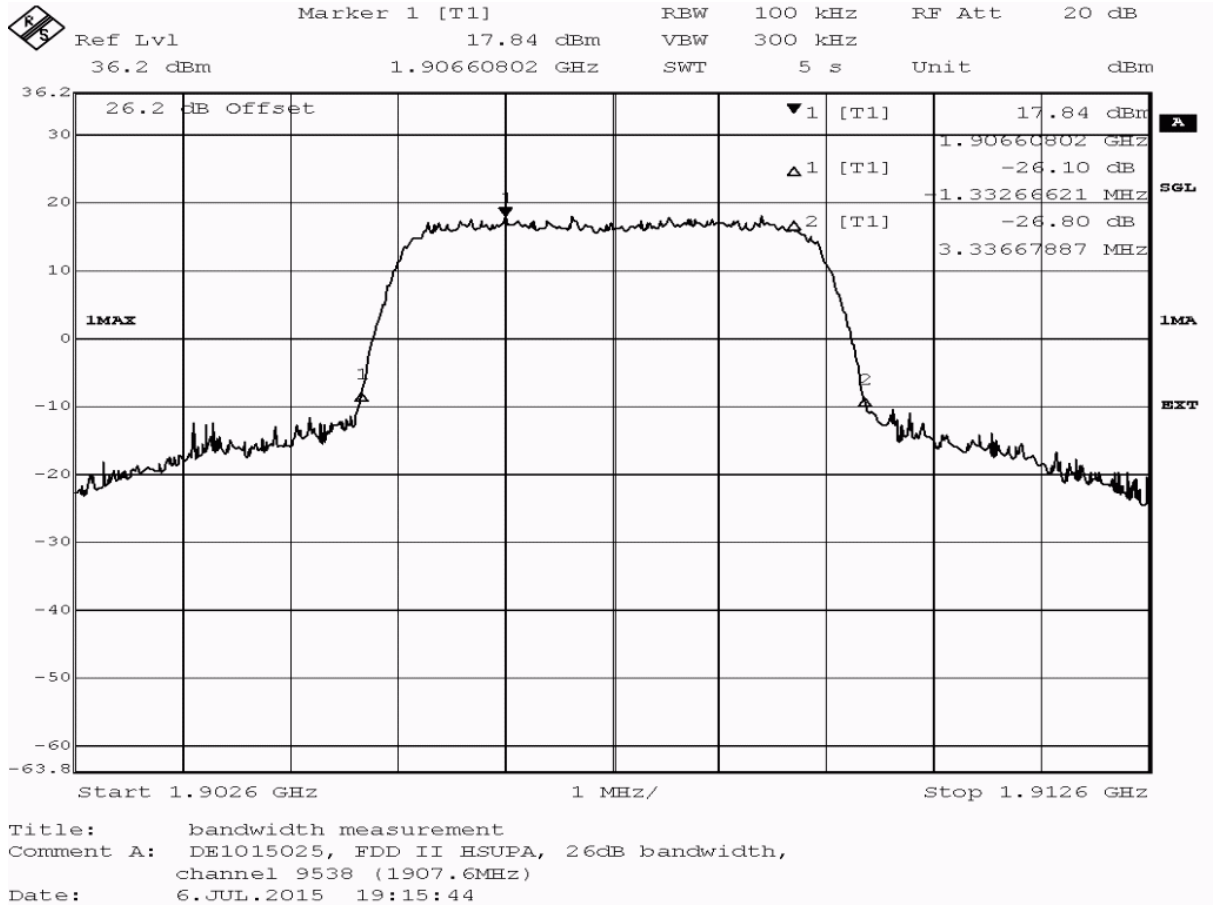

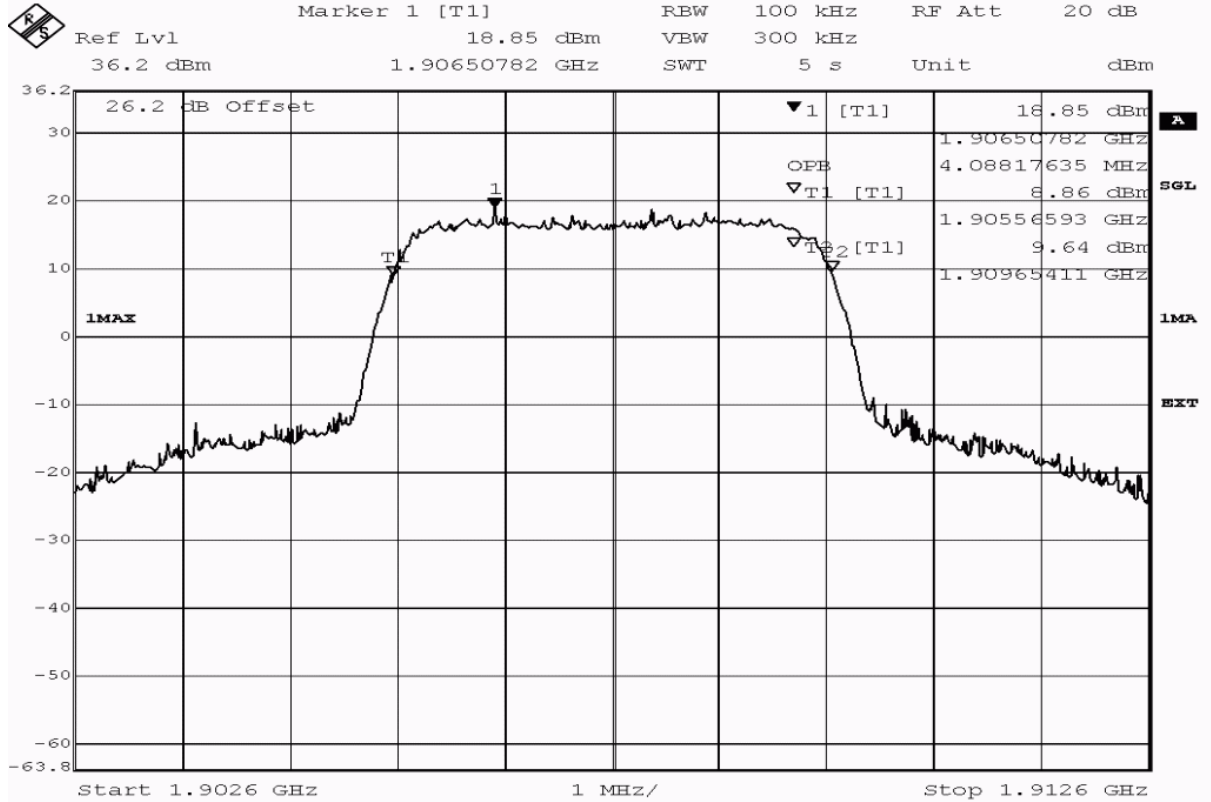


Title: bandwidth measurement
 Comment A: DE1015025, FDD II HSUPA, occupied bandwidth (99%),
 channel 9538 (1907.6MHz)
 Date: 6.JUL.2015 19:16:06


detector	trace	resolution bandwidth /kHz	type of measurement	measured value /kHz	verdict
peak	maxhold	100	-26dB bandwidth	4669.3	passed
peak	maxhold	100	99% bandwidth	4088.2	passed

Test: 24.5; Frequency Band = FDD2, Mode = W-CDMA, Channel = 9262, Frequency = 1852.4MHz

Result: Passed
 Setup No.: S01_AD01
 Date of Test: 2015/07/06 18:18
 Body: FCC47CFRChIPART24PERSONAL COMMUNICATIONS SERVICES
 Test Specification: FCC part 2 and 24

Detailed Results:

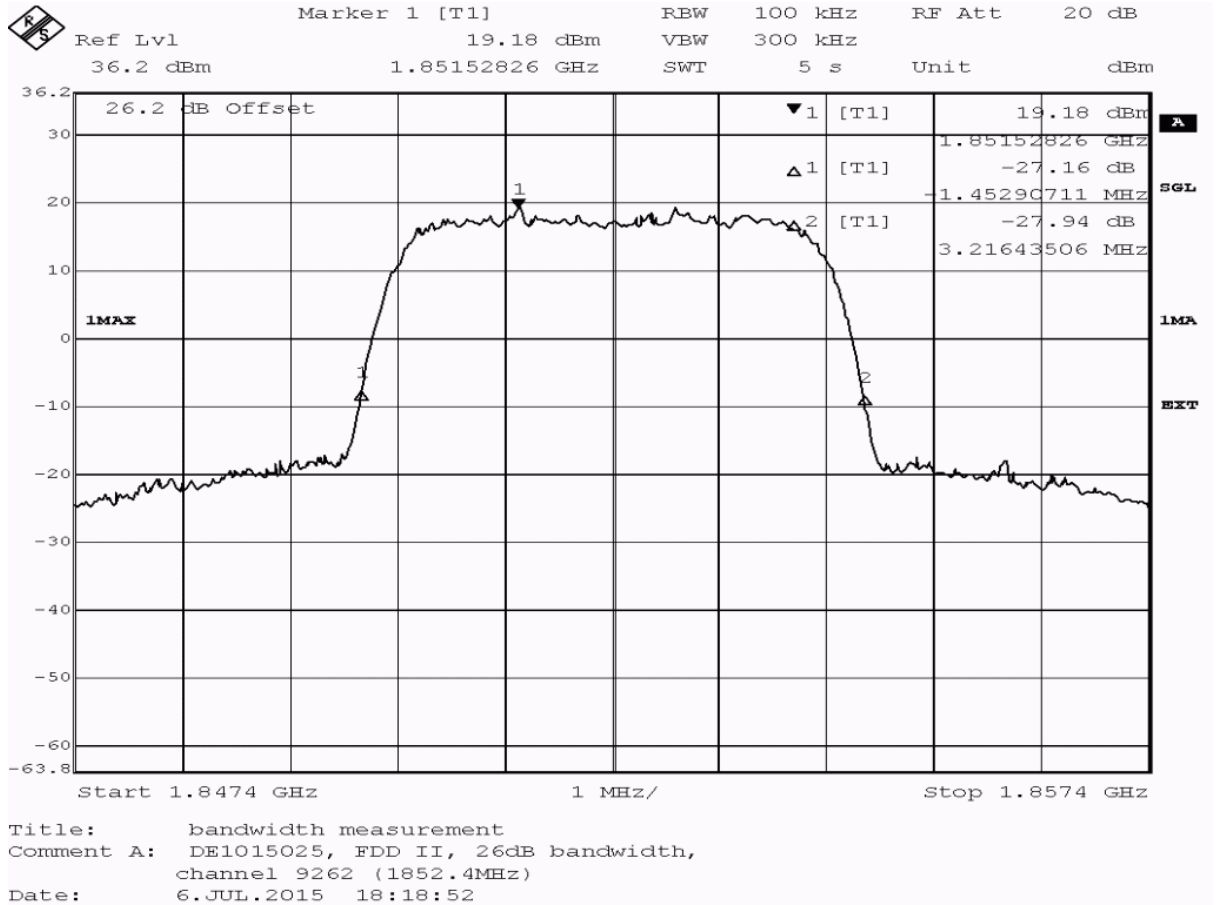

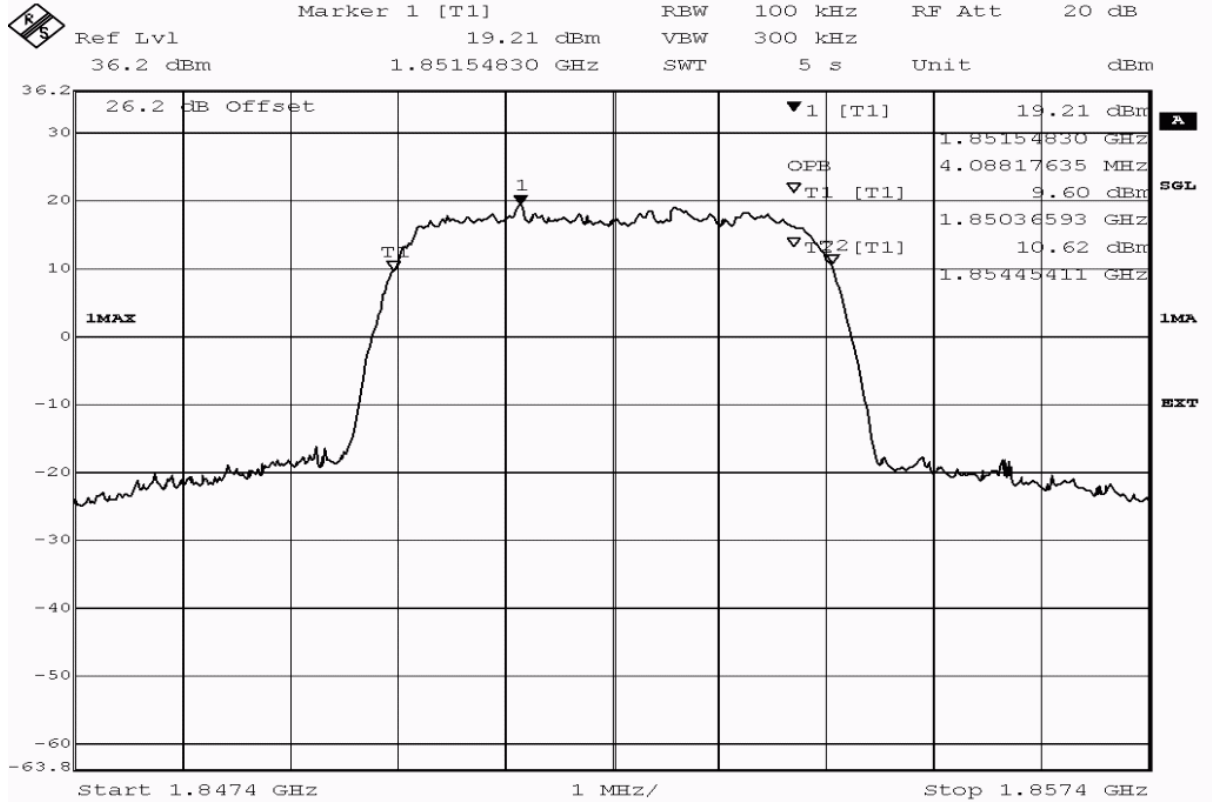


Title: bandwidth measurement
 Comment A: DE1015025, FDD II, occupied bandwidth (99%),
 channel 9262 (1852.4MHz)
 Date: 6.JUL.2015 18:19:15


detector	trace	resolution bandwidth /kHz	type of measurement	measured value /kHz	verdict
peak	maxhold	100	-26dB bandwidth	4669.3	passed
peak	maxhold	100	99% bandwidth	4088.2	passed

Test: 24.5; Frequency Band = FDD2, Mode = W-CDMA, Channel = 9400, Frequency = 1880MHz

Result: Passed
 Setup No.: S01_AD01
 Date of Test: 2015/07/06 18:27
 Body: FCC47CFRChIPART24PERSONAL COMMUNICATIONS SERVICES
 Test Specification: FCC part 2 and 24

Detailed Results:

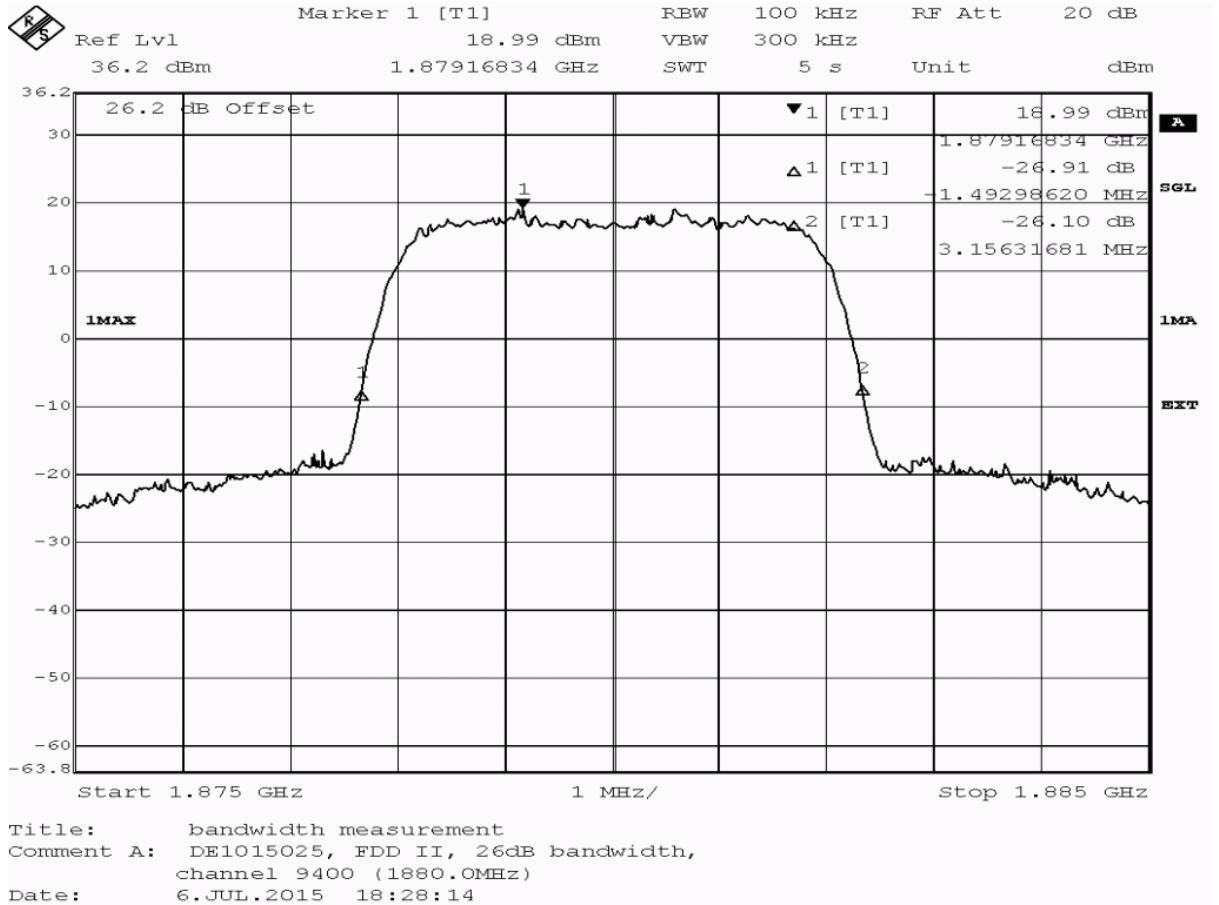

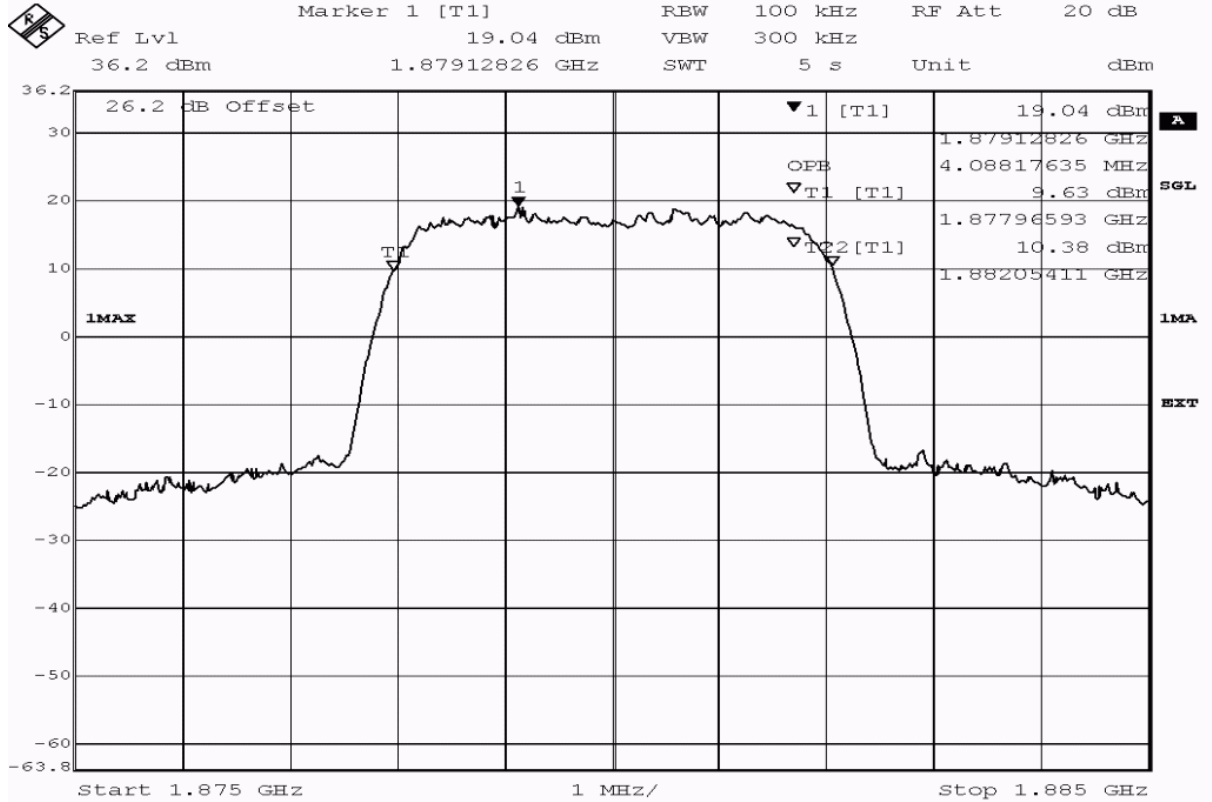


Title: bandwidth measurement
 Comment A: DE1015025, FDD II, occupied bandwidth (99%),
 channel 9400 (1880.0MHz)
 Date: 6.JUL.2015 18:28:36


detector	trace	resolution bandwidth /kHz	type of measurement	measured value /kHz	verdict
peak	maxhold	100	-26dB bandwidth	4649.3	passed
peak	maxhold	100	99% bandwidth	4088.2	passed

Test: 24.5; Frequency Band = FDD2, Mode = W-CDMA, Channel = 9538, Frequency = 1907.6MHz

Result: Passed
 Setup No.: S01_AD01
 Date of Test: 2015/07/06 18:35
 Body: FCC47CFRChIPART24PERSONAL COMMUNICATIONS SERVICES
 Test Specification: FCC part 2 and 24

Detailed Results:

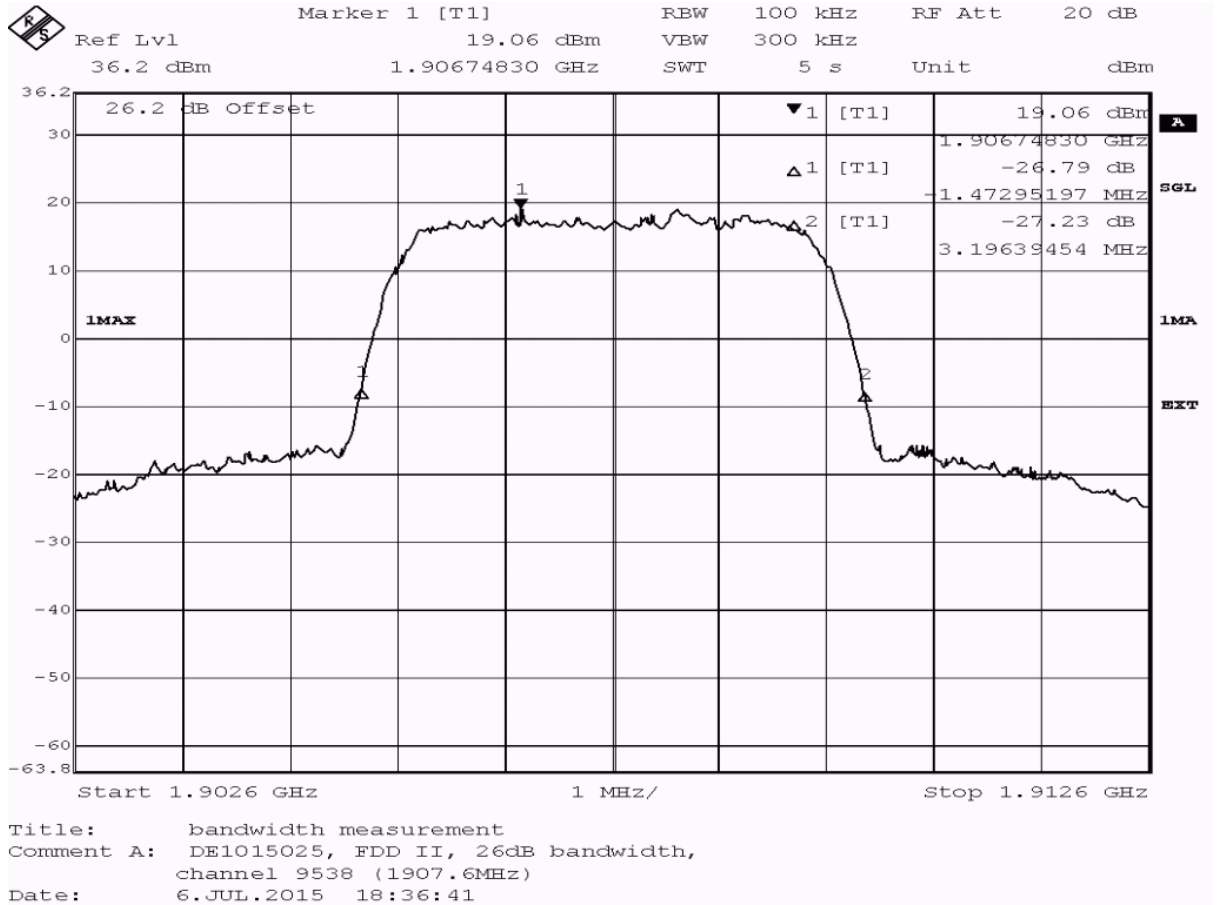

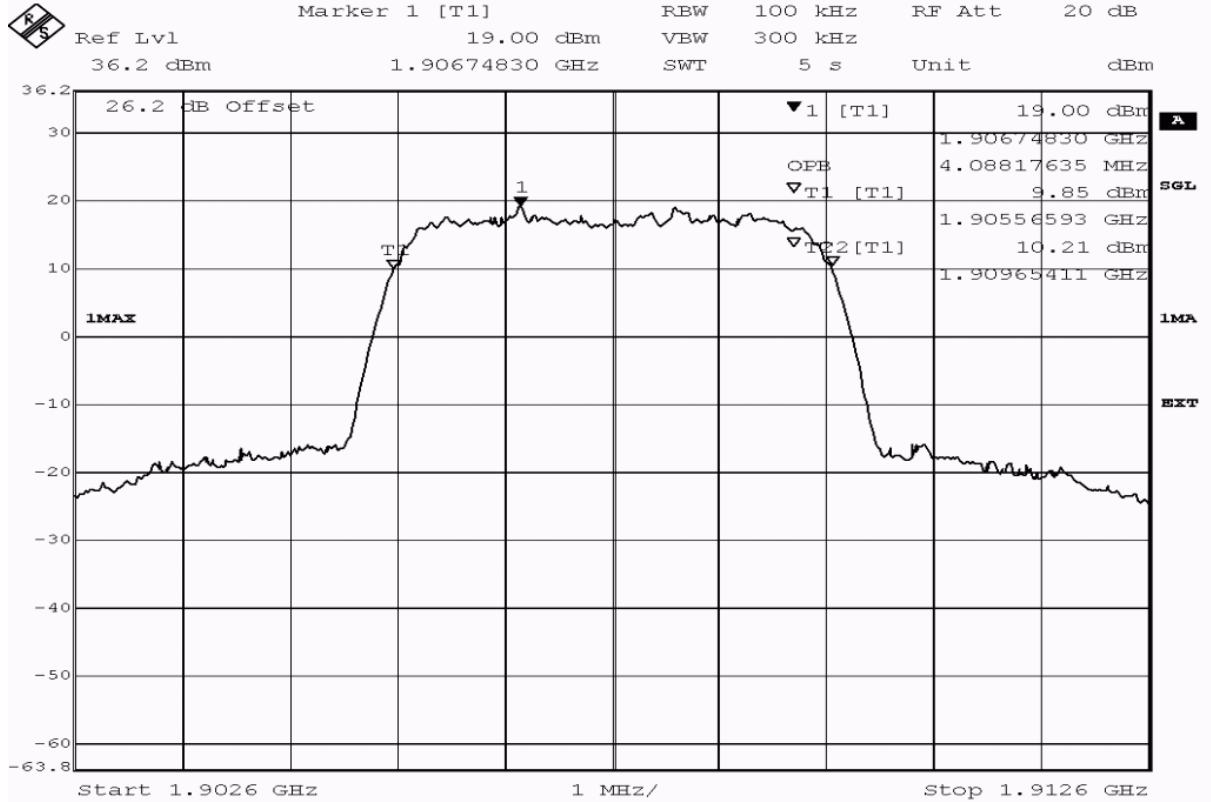

Title: bandwidth measurement
 Comment A: DE1015025, FDD II, occupied bandwidth (99%),
 channel 9538 (1907.6MHz)
 Date: 6.JUL.2015 18:37:04


detector	trace	resolution bandwidth /kHz	type of measurement	measured value /kHz	verdict
peak	maxhold	100	-26dB bandwidth	4669.3	passed
peak	maxhold	100	99% bandwidth	4088.2	passed

3.5.10 24.6 Band edge compliance §2.1053, §24.238

Test: 24.6; Frequency Band = FDD2, Mode = HSDPA, Channel = 9262, Frequency = 1852.4MHz

<i>Result:</i>	Passed
<i>Setup No.:</i>	S01_AD01
<i>Date of Test:</i>	2015/07/06 20:06
<i>Body:</i>	FCC47CFRChIPART24PERSONAL COMMUNICATIONS SERVICES
<i>Test Specification:</i>	FCC part 2 and 24

Detailed Results:

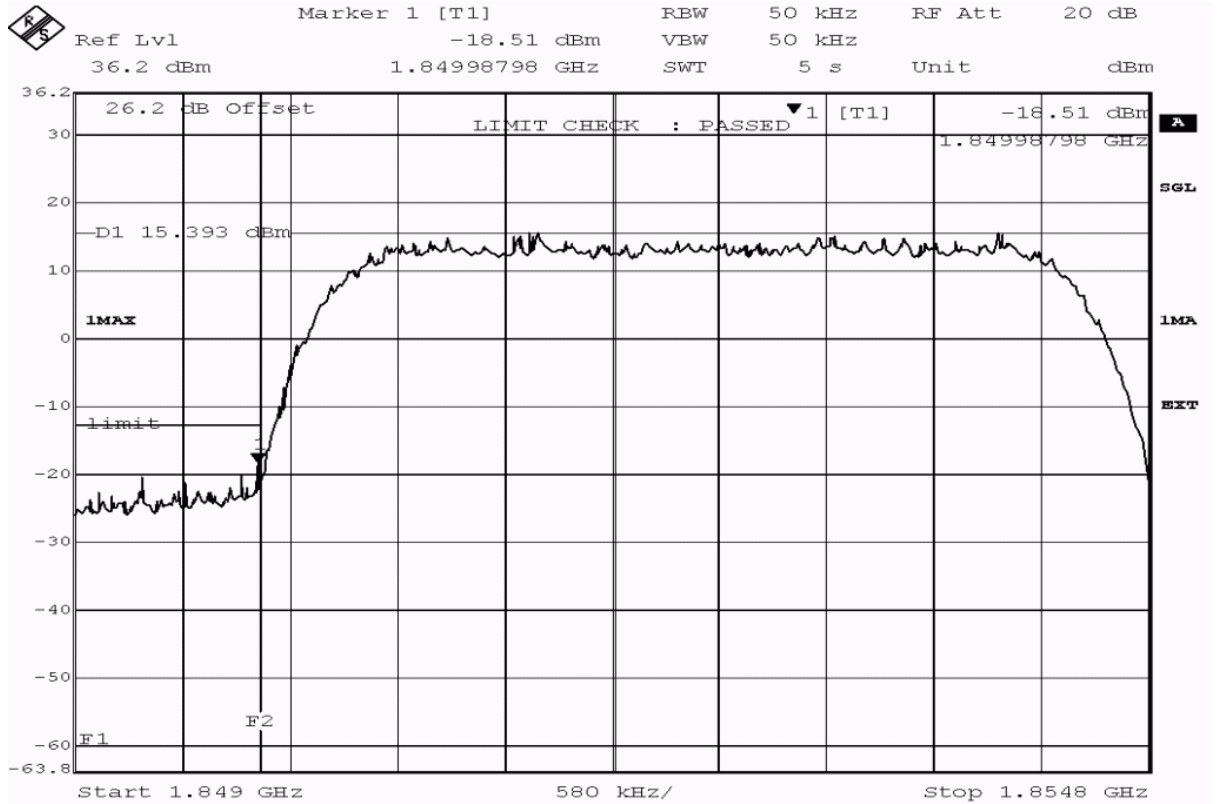

Title: band edge compliance measurement
 Comment A: DE1015025, FDD II HSDPA, band edge compliance,
 channel 9262 (1852.4MHz)
 Date: 6.JUL.2015 20:06:00

detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	margin to limit /dB	limit /dBm	verdict
peak	maxhold	50	1849.988	-18.51	5.51	-13	passed
average	maxhold	50	1850.000	-30.12	17.12	-13	passed
rms	maxhold	50	1850.000	-29.26	16.26	-13	passed

no further values have been found by test instrument with a margin of less than 20 dB

Test: 24.6; Frequency Band = FDD2, Mode = HSDPA, Channel = 9538, Frequency = 1907.6MHz

Result: Passed


Setup No.: S01_AD01

Date of Test: 2015/07/06 20:32

Body: FCC47CFRChIPART24PERSONAL COMMUNICATIONS SERVICES

Test Specification: FCC part 2 and 24

Detailed Results:

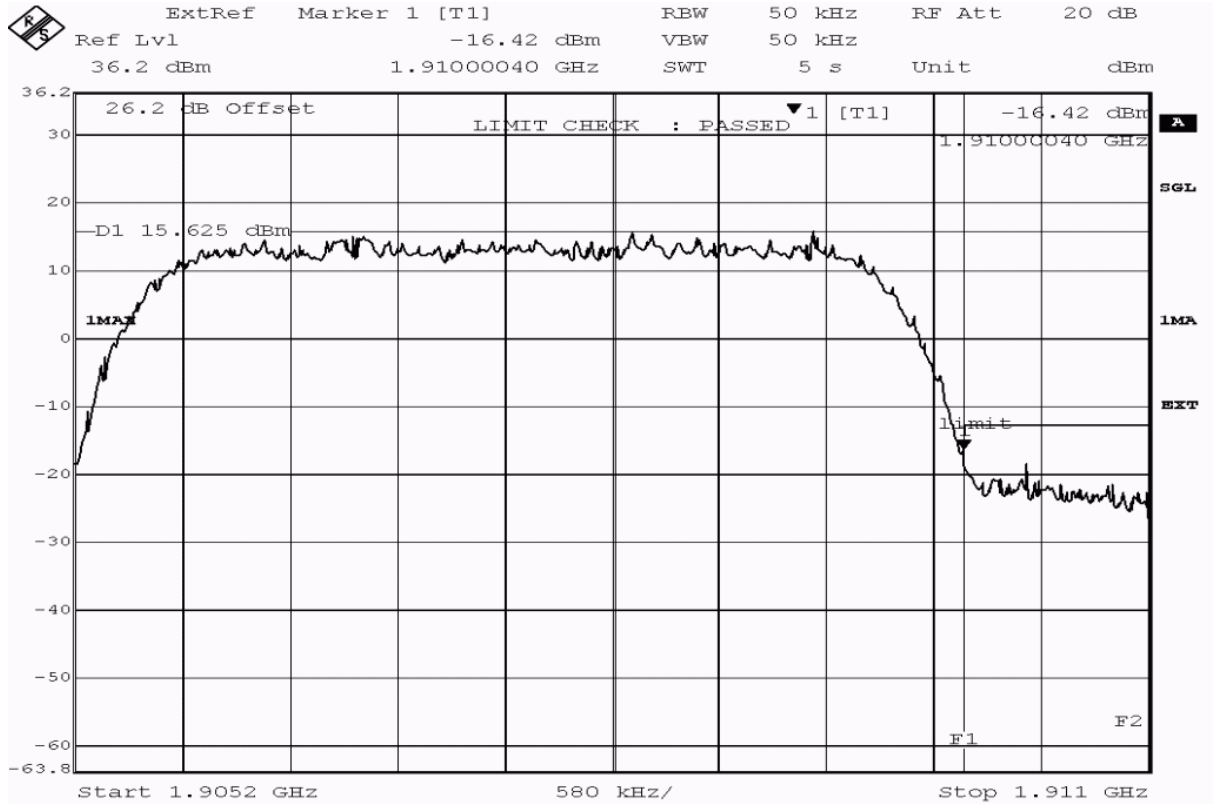

Title: band edge compliance measurement
 Comment A: DE1015025, FDD II HSDPA, band edge compliance,
 channel 9262 (1852.4MHz)
 Date: 6.JUL.2015 20:32:22

detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	margin to limit /dB	limit /dBm	verdict
peak	maxhold	50	1910.000	-16.42	3.42	-13	passed
average	maxhold	50	1910.000	-27.54	14.54	-13	passed
rms	maxhold	50	1910.000	-26.90	13.90	-13	passed

no further values have been found by test instrument with a margin of less than 20 dB

Test: 24.6; Frequency Band = FDD2, Mode = HSUPA, Channel = 9262, Frequency = 1852.4MHz

Result: Passed


Setup No.: S01_AD01

Date of Test: 2015/07/06 19:30

Body: FCC47CFRChIPART24PERSONAL COMMUNICATIONS SERVICES

Test Specification: FCC part 2 and 24

Detailed Results:

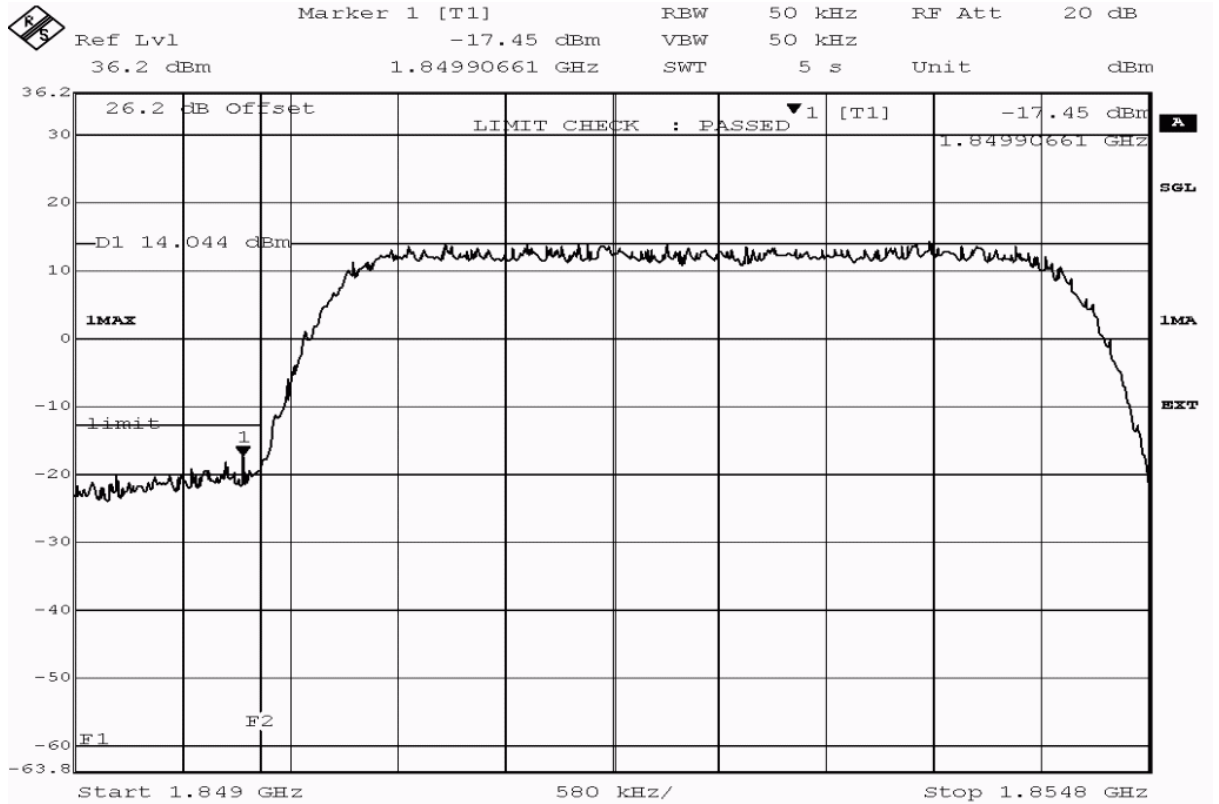

Title: band edge compliance measurement
 Comment A: DE1015025, FDD II HSUPA, band edge compliance,
 channel 9262 (1852.4MHz)
 Date: 6.JUL.2015 19:30:03

detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	margin to limit /dB	limit /dBm	verdict
peak	maxhold	50	1849.907	-17.45	4.45	-13	passed
average	maxhold	50	1850.000	-29.54	16.54	-13	passed
rms	maxhold	50	1850.000	-28.48	15.48	-13	passed

no further values have been found by test instrument with a margin of less than 20 dB

Test: 24.6; Frequency Band = FDD2, Mode = HSUPA, Channel = 9538, Frequency = 1907.6MHz

Result: Passed


Setup No.: S01_AD01

Date of Test: 2015/07/06 19:16

Body: FCC47CFRChIPART24PERSONAL COMMUNICATIONS SERVICES

Test Specification: FCC part 2 and 24

Detailed Results:

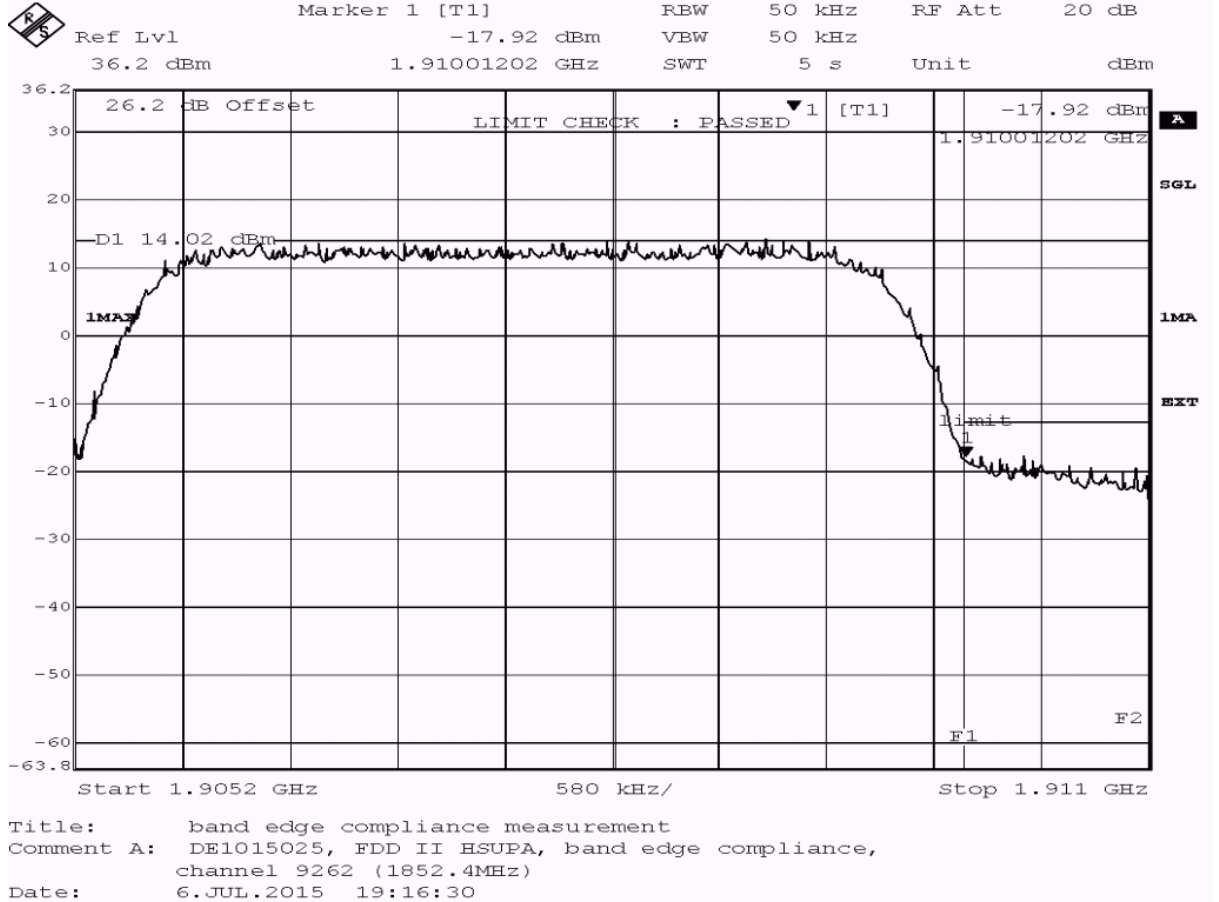

detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	margin to limit /dB	limit /dBm	verdict
peak	maxhold	50	1910.012	-17.92	4.92	-13	passed
average	maxhold	50	1910.000	-28.00	15.00	-13	passed
rms	maxhold	50	1910.000	-27.11	14.11	-13	passed

no further values have been found by test instrument with a margin of less than 20 dB

Test: 24.6; Frequency Band = FDD2, Mode = W-CDMA, Channel = 9262, Frequency = 1852.4MHz

Result: Passed


Setup No.: S01_AD01

Date of Test: 2015/07/06 18:19

Body: FCC47CFRChIPART24PERSONAL COMMUNICATIONS SERVICES

Test Specification: FCC part 2 and 24

Detailed Results:

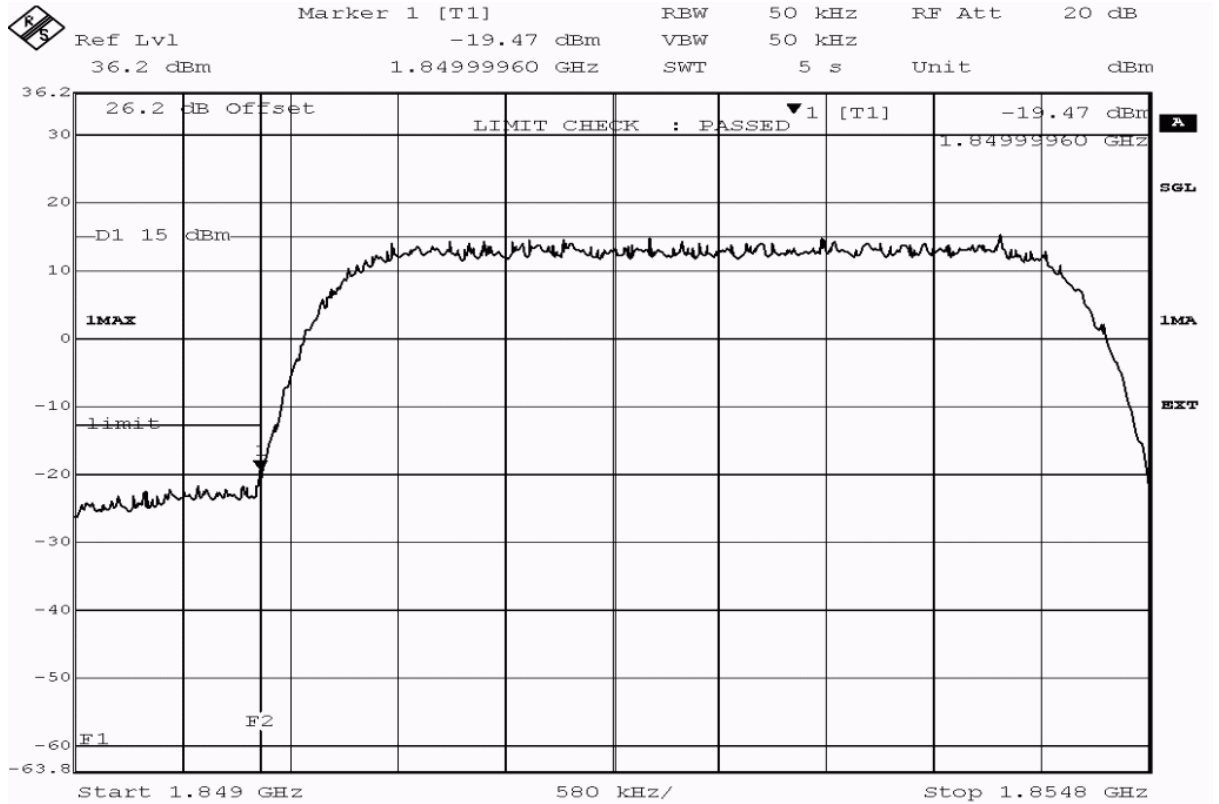

Title: band edge compliance measurement
 Comment A: DE1015025, FDD II, band edge compliance,
 channel 9262 (1852.4MHz)
 Date: 6.JUL.2015 18:19:39

detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	margin to limit /dB	limit /dBm	verdict
peak	maxhold	50	1850.000	-19.47	6.47	-13	passed
average	maxhold	50	1850.000	-29.26	16.26	-13	passed
rms	maxhold	50	1850.000	-28.74	15.74	-13	passed

no further values have been found by test instrument with a margin of less than 20 dB

Test: 24.6; Frequency Band = FDD2, Mode = W-CDMA, Channel = 9538, Frequency = 1907.6MHz

Result: Passed


Setup No.: S01_AD01

Date of Test: 2015/07/06 18:37

Body: FCC47CFRChIPART24PERSONAL COMMUNICATIONS SERVICES

Test Specification: FCC part 2 and 24

Detailed Results:

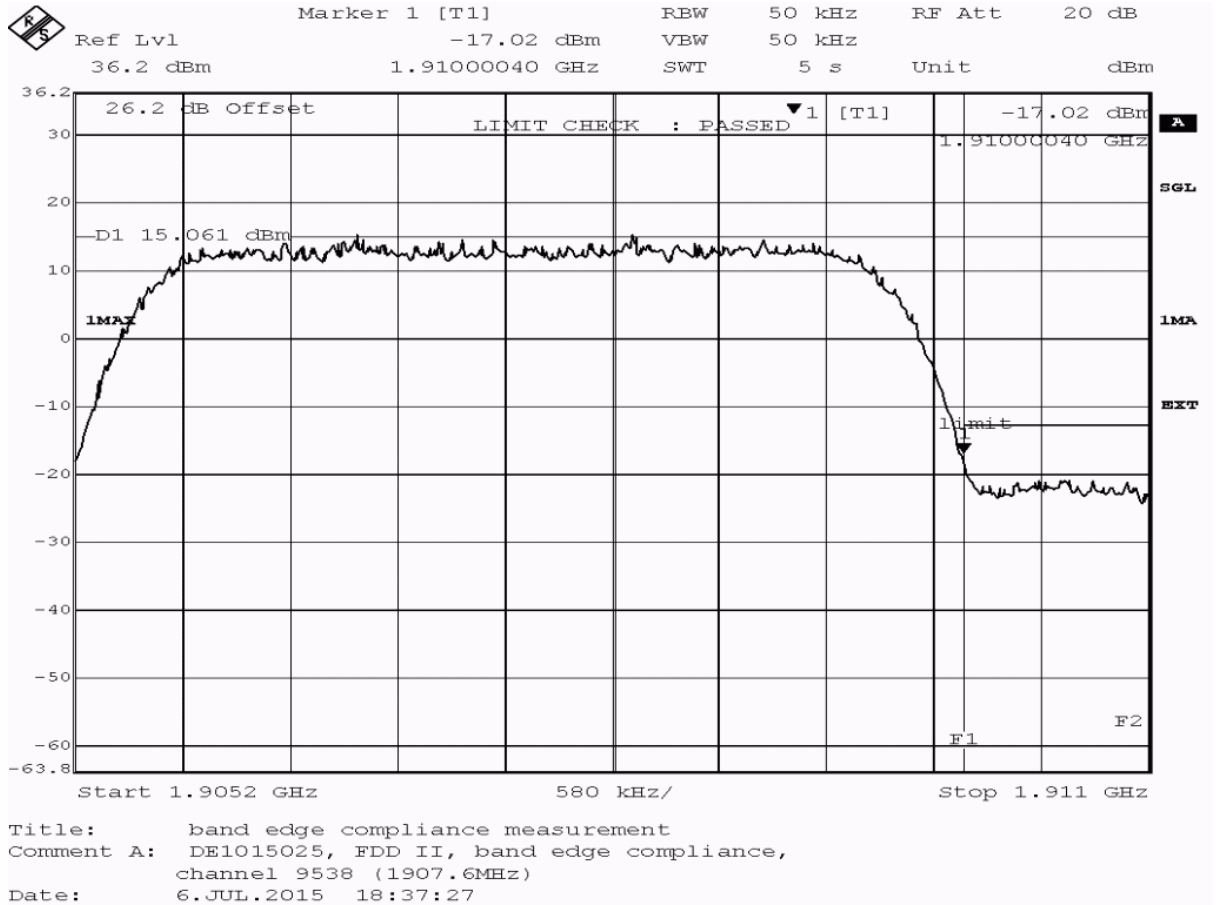

detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	margin to limit /dB	limit /dBm	verdict
peak	maxhold	50	1910.000	-17.02	4.02	-13	passed
average	maxhold	50	1910.000	-26.90	13.90	-13	passed
rms	maxhold	50	1910.000	-26.11	13.11	-13	passed

no further values have been found by test instrument with a margin of less than 20 dB

4 Test Equipment Details

4.1 List of Used Test Equipment

The calibration, hardware and software states are shown for the testing period.

Test Equipment Anechoic Chamber

Lab ID:	Lab 1		
<i>Manufacturer:</i>	Frankonia		
<i>Description:</i>	Anechoic Chamber for radiated testing		
<i>Type:</i>	10.58x6.38x6.00 m ³		
	<i>Calibration Details</i>	<i>Last Execution</i>	<i>Next Execution</i>
	NSA (FCC)	2014/01/09	2017/01/09

Single Devices for Anechoic Chamber

<i>Single Device Name</i>	<i>Type</i>	<i>Serial Number</i>	<i>Manufacturer</i>	
Air compressor	none	-	Atlas Copco	
Anechoic Chamber	10.58 x 6.38 x 6.00 m ³	none	Frankonia	
	<i>Calibration Details</i>		<i>Last Execution</i>	<i>Next Execution</i>
	FCC listing 96716 3m Part15/18		2014/01/09	2017/01/08
Controller Maturo	MCU	961208	Maturo GmbH	
EMC camera	CE-CAM/1	-	CE-SYS	
EMC camera Nr.2	CCD-400E	0005033	Mitsubishi	
Filter ISDN	B84312-C110-E1		Siemens&Matsushita	
Filter Universal 1A	BB4312-C30-H3	-	Siemens&Matsushita	

Test Equipment Auxiliary Equipment for Radiated emissions

Lab ID:	Lab 1
<i>Description:</i>	Equipment for emission measurements
<i>Serial Number:</i>	see single devices

Single Devices for Auxiliary Equipment for Radiated emissions

<i>Single Device Name</i>	<i>Type</i>	<i>Serial Number</i>	<i>Manufacturer</i>		
Antenna mast	AM 4.0	AM4.0/180/11920 513	Maturo GmbH		
Biconical Broadband Antenna	SBA 9119	9119-005	Schwarzbeck Mess-Elektronik OHG		
Biconical dipole	VUBA 9117	9117-108	Schwarzbeck Mess-Elektronik OHG		
Broadband Amplifier 1 GHz - 4 GHz	AFS4-01000400-1Q-10P-4	-	Miteq		
Broadband Amplifier 18 GHz - 26 GHz	JS4-18002600-32-5P	849785	Miteq		
Broadband Amplifier 30 MHz - 18 GHz	JS4-00101800-35-5P	896037	Miteq		
Cable "ESI to EMI Antenna"	EcoFlex10	W18.01- 2+W38.01-2	Kabel Kusch		
Cable "ESI to Horn Antenna"	SucoFlex	W18.02- 2+W38.02-2	HUBER+SUHNER		
Double-ridged horn	HF 906	357357/002	Rohde & Schwarz GmbH & Co. KG		
	<i>Calibration Details</i>			<i>Last Execution</i>	<i>Next Execution</i>
	Standard Calibration			2015/06/23	2018/06/22
Double-ridged horn	HF 907	102444	Rohde & Schwarz GmbH & Co. KG		
	<i>Calibration Details</i>			<i>Last Execution</i>	<i>Next Execution</i>
	Standard Calibration			2015/05/11	2018/05/10
Double-ridged horn- duplicated 2015-07- 15 10:47:55	HF 906	357357/001	Rohde & Schwarz GmbH & Co. KG		
High Pass Filter	4HC1600/12750-1.5-KK	9942011	Trilithic		
High Pass Filter	5HC2700/12750-1.5-KK	9942012	Trilithic		
High Pass Filter	5HC3500/18000-1.2-KK	200035008	Trilithic		
High Pass Filter	WHKX 7.0/18G-8SS	09	Wainwright		
Horn Antenna Schwarzbeck 15-26.5 GHz BBHA 9170	BBHA 9170	BBHA9170262	Schwarzbeck Mess-Elektronik OHG		
Log.-per. Antenna	HL 562 Ultralog	100609	Rohde & Schwarz GmbH & Co. KG		
	<i>Calibration Details</i>			<i>Last Execution</i>	<i>Next Execution</i>
	Standard Calibration			2012/12/18	2015/12/17
Log.-per. Antenna (upgraded)	HL 562 Ultralog new refelector	830547/003	Rohde & Schwarz GmbH & Co. KG		
	<i>Calibration Details</i>			<i>Last Execution</i>	<i>Next Execution</i>
	Standard Calibration			2015/06/30	2018/06/29
Loop Antenna	HFH2-Z2	829324/006	Rohde & Schwarz GmbH & Co. KG		
	<i>Calibration Details</i>			<i>Last Execution</i>	<i>Next Execution</i>
	DKD Calibration			2014/11/27	2017/11/27

Single Devices for Auxiliary Equipment for Radiated emissions (continued)

Single Device Name	Type	Serial Number	Manufacturer
Standard Gain / Pyramidal Horn Antenna 26.5 GHz	3160-09	00083069	EMCO Elektronik GmbH
Standard Gain / Pyramidal Horn Antenna 40 GHz	3160-10	00086675	EMCO Elektronik GmbH
Tilt device Maturo (Rohacell)	Antrieb TD1.5-10kg	TD1.5- 10kg/024/379070 9	Maturo GmbH

Test Equipment Auxiliary Test Equipment

Lab ID:	Lab 1, Lab 2
Manufacturer:	see single devices
Description:	Single Devices for various Test Equipment
Type:	various
Serial Number:	none

Single Devices for Auxiliary Test Equipment

Single Device Name	Type	Serial Number	Manufacturer
Broadband Power Divider N (Aux)	1506A / 93459	LM390	Weinschel Associates
Broadband Power Divider SMA	WA1515	A855	Weinschel Associates
Digital Multimeter 03 (Multimeter)	Fluke 177	86670383	Fluke Europe B.V.
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Execution</i>
	Customized calibration		2013/12/04 2015/12/03
Fibre optic link Satellite (Aux)	FO RS232 Link	181-018	Pontis
Fibre optic link Transceiver (Aux)	FO RS232 Link	182-018	Pontis
Isolating Transformer	LTS 604	1888	Thalheimer Transformatorwerke GmbH
Notch Filter Ultra Stable (Aux)	WRCA800/960-6EEK	24	Wainwright
Signal Analyzer	FSV30	103005	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Execution</i>
	Standard		2014/02/10 2016/02/09
Spectrum Analyser	FSP3	836722/011	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Execution</i>
	DKD calibration		2015/06/23 2018/06/22
Spectrum Analyser	FSU26	200418	Rohde & Schwarz GmbH & Co.KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Execution</i>
	Standard calibration		2014/07/29 2015/07/28
Vector Signal Generator	SMIQ 03B	832492/061	Rohde & Schwarz GmbH & Co.KG

Test Equipment Digital Signalling Devices

Lab ID: Lab 1, Lab 2
Description: Signalling equipment for various wireless technologies.

Single Devices for Digital Signalling Devices

Single Device Name	Type	Serial Number	Manufacturer	
CMW500	CMW500	107500	Rohde & Schwarz GmbH & Co.KG	
	<i>Calibration Details</i>		<i>Last Execution</i>	<i>Next Execution</i>
	Standard calibration		2014/01/27	2016/01/26
Digital Radio Communication Tester	CMD 55	831050/020	Rohde & Schwarz GmbH & Co. KG	
	<i>Calibration Details</i>		<i>Last Execution</i>	<i>Next Execution</i>
	DKD calibration		2014/12/02	2017/12/01
Universal Radio Communication Tester	CMU 200	102366	Rohde & Schwarz GmbH & Co. KG	
	<i>HW/SW Status</i>		<i>Date of Start</i>	<i>Date of End</i>
	Hardware: B11, B21V14, B21-2, B41, B52V14, B52-2, B53-2, B56V14, B68 3v04, PCMCIA, U65V04 Software: K21 4v21, K22 4v21, K23 4v21, K24 4v21, K42 4v21, K43 4v21, K53 4v21, K56 4v22, K57 4v22, K58 4v22, K59 4v22, K61 4v22, K62 4v22, K63 4v22, K64 4v22, K65 4v22, K66 4v22, K67 4v22, K68 4v22, K69 4v22 Firmware: µP1 8v50 02.05.06 ---		2007/07/16	
Universal Radio Communication Tester	CMU 200	837983/052	Rohde & Schwarz GmbH & Co. KG	
	<i>Calibration Details</i>		<i>Last Execution</i>	<i>Next Execution</i>
	DKD calibration		2014/12/03	2017/12/02
	<i>HW/SW Status</i>		<i>Date of Start</i>	<i>Date of End</i>
	HW options: B11, B21V14, B21-2, B41, B52V14, B52-2, B53-2, B54V14, B56V14, B68 3v04, B95, PCMCIA, U65V02 SW options: K21 4v11, K22 4v11, K23 4v11, K24 4v11, K27 4v10, K28 4v10, K42 4v11, K43 4v11, K53 4v10, K65 4v10, K66 4v10, K68 4v10, Firmware: µP1 8v40 01.12.05 --- SW: K62, K69		2008/11/03	
Vector Signal Generator	SMU200A	100912	Rohde & Schwarz GmbH & Co. KG	

Test Equipment Emission measurement devices

Lab ID: Lab 1
Description: Equipment for emission measurements
Serial Number: see single devices

Single Devices for Emission measurement devices

Single Device Name	Type	Serial Number	Manufacturer	Last Execution	Next Execution
EMI Receiver / Spectrum Analyser	ESR 7	101424	Rohde & Schwarz		
	<i>Calibration Details</i>				
	Initial Factory Calibration			2014/11/13	2016/11/12
Personal Computer	Dell	30304832059	Dell		
Power Meter	NRVD	828110/016	Rohde & Schwarz GmbH & Co.KG		
	<i>Calibration Details</i>				
	Standard calibration			2015/05/11	2016/05/10
Sensor Head A	NRV-Z1	827753/005	Rohde & Schwarz GmbH & Co.KG		
	<i>Calibration Details</i>				
	Standard calibration			2015/05/11	2016/05/10
Signal Generator	SMR 20	846834/008	Rohde & Schwarz GmbH & Co. KG		
	<i>Calibration Details</i>				
	Standard Calibration			2014/06/24	2017/06/23
Spectrum Analyser	FSW 43	103779	Rohde & Schwarz		
	<i>Calibration Details</i>				
	Initial Factory Calibration			2014/11/17	2016/11/16
Spectrum Analyzer	ESIB 26	830482/004	Rohde & Schwarz GmbH & Co. KG		
	<i>Calibration Details</i>				
	Standard Calibration			2014/01/07	2016/01/31
	<i>HW/SW Status</i>				
	Firmware-Update 4.34.4 from 3.45 during calibration			2009/12/03	

Test Equipment Multimeter 03

Lab ID: Lab 1, Lab 2
Description: Fluke 177
Serial Number: 86670383

Single Devices for Multimeter 03

Single Device Name	Type	Serial Number	Manufacturer	Last Execution	Next Execution
Digital Multimeter 03 (Multimeter)	Fluke 177	86670383	Fluke Europe B.V.		
	<i>Calibration Details</i>				
	Customized calibration			2013/12/04	2015/12/03

Test Equipment Radio Lab Test Equipment

Lab ID: Lab 2
Description: Radio Lab Test Equipment

Single Devices for Radio Lab Test Equipment

Single Device Name	Type	Serial Number	Manufacturer	
Broadband Power Divider SMA	WA1515	A856	Weinschel Associates	
Coax Attenuator 10dB SMA 2W	4T-10	F9401	Weinschel Associates	
Coax Attenuator 10dB SMA 2W	56-10	W3702	Weinschel Associates	
Coax Attenuator 10dB SMA 2W	56-10	W3711	Weinschel Associates	
Coax Cable Huber&Suhner	Sucotest 2,0m		Huber&Suhner	
Coax Cable Rosenberger Micro Coax FA210A0010003030 SMA/SMA 1,0m	FA210A0010003030	54491-2	Rosenberger Micro-Coax	
Power Meter	NRVD	828110/016	Rohde & Schwarz GmbH & Co.KG	
	<i>Calibration Details</i>		<i>Last Execution</i>	<i>Next Execution</i>
	Standard calibration		2015/05/11	2016/05/10
RF Step Attenuator RSP	RSP	833695/001	Rohde & Schwarz GmbH & Co.KG	
Rubidium Frequency Standard	Datum, Model: MFS	5489/001	Datum-Beverly	
	<i>Calibration Details</i>		<i>Last Execution</i>	<i>Next Execution</i>
	Standard calibration		2014/07/03	2015/07/02
Standard Calibration		2015/06/25	2016/06/24	
Sensor Head A	NRV-Z1	827753/005	Rohde & Schwarz GmbH & Co.KG	
	<i>Calibration Details</i>		<i>Last Execution</i>	<i>Next Execution</i>
	Standard calibration		2015/05/11	2016/05/10
Signal Generator SME	SME03	827460/016	Rohde & Schwarz GmbH & Co.KG	
	<i>Calibration Details</i>		<i>Last Execution</i>	<i>Next Execution</i>
	Standard calibration		2014/12/02	2017/12/01
Signal Generator SMP	SMP02	836402/008	Rohde & Schwarz GmbH & Co. KG	
	<i>Calibration Details</i>		<i>Last Execution</i>	<i>Next Execution</i>
	Standard calibration		2013/05/06	2016/05/05

Test Equipment T/A Logger 13

Lab ID: Lab 1, Lab 2
Description: Lufft Opus10 TPR
Type: Opus10 TPR
Serial Number: 13936

Single Devices for T/A Logger 13

Single Device Name	Type	Serial Number	Manufacturer
ThermoAirpressure Datalogger 13 (Environ)	Opus10 TPR (8253.00)	13936	Lufft Mess- und Regeltechnik GmbH
<i>Calibration Details</i>			<i>Last Execution</i> <i>Next Execution</i>
Customized calibration			2015/02/27 2017/02/26

Test Equipment T/H Logger 03

Lab ID: Lab 2
Description: Lufft Opus10
Serial Number: 7482

Single Devices for T/H Logger 03

Single Device Name	Type	Serial Number	Manufacturer
ThermoHygro Datalogger 03 (Environ)	Opus10 THI (8152.00)	7482	Lufft Mess- und Regeltechnik GmbH
<i>Calibration Details</i>			<i>Last Execution</i> <i>Next Execution</i>
Customized calibration			2015/02/27 2017/02/26

Test Equipment T/H Logger 12

Lab ID: Lab 1
Description: Lufft Opus10
Serial Number: 12482

Single Devices for T/H Logger 12

Single Device Name	Type	Serial Number	Manufacturer
ThermoHygro Datalogger 12 (Environ)	Opus10 THI (8152.00)	12482	Lufft Mess- und Regeltechnik GmbH
<i>Calibration Details</i>			<i>Last Execution</i> <i>Next Execution</i>
Customized calibration			2015/03/10 2017/03/09

Test Equipment Temperature Chamber 05

Lab ID: Lab 2
Manufacturer: see single devices
Description: Temperature Chamber VT4002
Type: Vötsch
Serial Number: see single devices

Single Devices for Temperature Chamber 05

Single Device Name	Type	Serial Number	Manufacturer
Temperature Chamber Vötsch 05	VT 4002	58566080550010	Vötsch
<i>Calibration Details</i>			<i>Last Execution</i> <i>Next Execution</i>
Customized calibration			2014/03/11 2016/03/10

5 Annex

5.1 Additional Information for Report

Correlation of measurement requirements for Cellular Equipment from FCC and IC

Test name – FCC	FCC reference CFR47				Test name – IC	IC reference			
	Part 2	Part 22	Part 24	Part 27		RSS-Gen	RSS-132 SRSP-503	RSS-133 SRSP-510	RSS-139 SRSP-513
					Issue:	4, 2014	3, 2013	6, 2013	2, 2009
RF power output	§ 2.1046	§ 22.913	§ 24.232	§ 27.50	Transmitter output power	6.12	5.4	6.4	6.4
Frequency stability	§ 2.1055	§ 22.355	§ 24.235	§ 27.54	Frequency stability	6.11	5.3	6.3	6.3
Spurious emissions at antenna terminals	§ 2.1051	§ 22.917	§ 24.238	§ 27.53	Transmitter unwanted emissions conducted	6.13	5.5	6.5	6.5
-	-	-	-	-	Receiver unwanted emissions conducted	5/7 *), 7.1.3	5.6	6.6	6.6
Field strength of spurious radiation	§ 2.1053	§ 22.917	§ 24.238	§ 27.53	Transmitter unwanted emissions radiated	6.13	5.5	6.5	6.5
-	-	-	-	-	Receiver unwanted emissions radiated	5/7 *), 7.1.2	5.6	6.6	6.6
Emission and Occupied Bandwidth	§ 2.1049	-	-	-	Emission and Occupied Bandwidth	6.6	5.5	2.3; 6.5	2.3; 6.5
Band edge compliance	§ 2.1053	§ 22.917	§ 24.238	§ 27.53	Band edge compliance	6.13	5.5	6.5	6.5

*) Receivers are exempted from certification besides if operating in stand-alone mode in the frequency range 30-960 MHz or if these are scanner receivers.

This correlation amends the test report referenced by: MDE_UBLOX_1519_FCCa

Summary of Test Results

The EUT complied with all performed tests as listed in the summary section of this report.

Technical Report Summary

Type of Authorization :

Certification for a GSM/WCDMA/CDMA2000 cellular radiotelephone device

Applicable FCC Rules

Prepared in accordance with the requirements of FCC Rules and Regulations as listed in 47 CFR Ch.1 Parts 0 to 69. The following subparts are applicable to the results in this test report.

Part 2, Subpart J - Equipment Authorization Procedures, Certification

- § 2.1046 Measurement required: RF power output
- § 2.1049 Measurement required: Occupied bandwidth
- § 2.1051 Measurement required: Spurious emissions at antenna terminals
- § 2.1053 Measurement required: Field strength of spurious radiation
- § 2.1055 Measurement required: Frequency stability
- § 2.1057 Frequency spectrum to be investigated

Part 22, Subpart C - Operational and Technical Requirements

- § 22.355 Frequency tolerance

Part 22, Subpart H - Cellular Radiotelephone Service

- § 22.913 Effective radiated power limits
- § 22.917 Emission limitations for cellular equipment

additional documents

ANSI TIA-603-C-2004

Description of Methods of Measurements

RF Power Output

Standard FCC Part 22, Subpart H

The test was performed according to: FCC §2.1046

Test Description (conducted measurement procedure)

- 1) The EUT was coupled to a Spectrum Analyser and a Digital Communication Tester through a Power Divider. Refer to chapter "Setup Drawings".
 - 2) The total insertion losses for signal path 1 and signal path 2 were measured. The values were used to correct the readings from the Spectrum Analyser and the Digital Communication Tester.
 - 3) A call was established on a Traffic Channel between the EUT and the Digital Communication Tester.
- Important Settings:
- Channel (Frequency): please refer to the detailed results
- 4) The transmitted power of the EUT was recorded by using a spectrum analyser.

Test Description (radiated measurement procedure)

- 1) The EUT was placed inside an anechoic chamber. Refer to chapter "Setup Drawings". The EUT was coupled to a Digital Communication Tester which was located outside the chamber via a small signalling antenna.
 - 2) A call was established on a Traffic Channel between the EUT and the Digital Communication Tester.
- Important Settings:
- Output Power: Maximum
 - Channel: please refer to the detailed results
- 3) A substitution procedure is used so that the readings from the spectrum analyser are corrected and represent directly the equivalent radiated power (related to a $\lambda/2$ dipole).
 - 4) The output power was measured in both vertical and horizontal antenna polarisation during the call is established on the lowest channel, mid channel and on the highest channel. To find the worst case power all orientations (X, Y, Z) of the EUT have been measured.
 - 5) The test procedure according to TIA-603-C-2004 has been considered.

Test Requirements / Limits

§2.1046 Measurements Required: RF Power Output

(a) For transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, power output shall be measured at the RF output terminals when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in § 2.1033(c)(8). The electrical characteristics of the output terminals when this test is made shall be stated.

§22.913 Effective radiated power limits

(a)(2) Maximum ERP. ... The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.

Emission and Occupied Bandwidth

Standard FCC Part 22, Subpart H

The test was performed according to: FCC §2.1049

Test Description

- 1) The EUT was coupled to a Spectrum Analyser and a Digital Communication Tester through a Power Divider. Refer to chapter "Setup Drawings".
 - 2) The total insertion losses for signal path 1 and signal path 2 were measured. The values were used to correct the readings from the Spectrum Analyser and the Digital Communication Tester.
 - 3) A call was established on a Traffic Channel between the EUT and the Digital Communication Tester.
- Important Settings:
- Output Power: Maximum
 - Channel: please refer to the detailed results
- 4) Important Analyser Settings:
 - Resolution Bandwidth: >1% of the manufacturer's stated occupied bandwidth
 - 5) The maximum spectral level of the modulated signal was recorded as the reference.
 - 6) The emission bandwidth is measured as follows:
the two furthest frequencies above and below the frequency of the maximum reference level where the spectrum is -26 dB down have to be found.
 - 7) The occupied bandwidth (99% Bandwidth) is measured as follows:
the occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5 percent of the total mean power.

Test Requirements / Limits

§ 2.1049 Measurements required: Occupied bandwidth

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured under the following conditions (as applicable):

(h) Transmitters employing digital modulation techniques - when modulated by an input signal such that its amplitude and symbol rate represent the maximum rated conditions under which the equipment will be operated. The signal shall be applied through any filter networks, pseudo-random generators or other devices required in normal service. Additionally, the occupied bandwidth shall be shown for operation with any devices used for modifying the spectrum when such devices are optional at the discretion of the user.

Spurious emissions at antenna terminals

Standard FCC Part 22, Subpart H

The test was performed according to FCC §2.1051

Test Description

- 1) The EUT was coupled to a Spectrum Analyser and a Digital Communication Tester through a Power Divider. Refer to chapter "Setup Drawings".
- 2) The total insertion losses for signal path 1 and signal path 2 were measured. The values were used to correct the readings from the Spectrum Analyser and the Digital Communication Tester.
- 3) A call was established on a Traffic Channel between the EUT and the Digital Communication Tester.
Important Settings:
 - Output Power: Maximum
 - Channel: please refer to the detailed results
- 4) Important Analyser Settings
 - [Resolution Bandwidth]:
 - a) [$\geq 1\%$ of wanted signal bandwidth] in the Span of 1 MHz directly below and above the PCS-Band,
 - b) otherwise [100 kHz] (or [1 MHz] for accelerated sweep times)
 - c) [reduced resolution bandwidth] in case the curve of the analyser IF-Filter or the wanted EUT signal leads to an exceeding of the limit, in this case a correction factor was used
 - Sweep Time: depending on the transmitting signal, the span and the resolution bandwidth
- 5) The spurious emissions peaks were measured in the frequency range from 9 kHz to 10 GHz (up to the 10th harmonic) during the call was established

Test Requirements / Limits

§ 2.1051 Spurious emissions at antenna terminals

The radio frequency voltage or power generated within the equipment and appearing on a spurious frequency shall be checked at the equipment output terminals when properly loaded with a suitable artificial antenna. Curves or equivalent data shall show the magnitude of each harmonic and other spurious emission that can be detected when the equipment is operated under the conditions specified in Sec. 2.1049 as appropriate. The magnitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be specified.

§ 2.1057 Frequency spectrum to be investigated.

- (a) In all of the measurements set forth in Secs. 2.1051 and 2.1053, the spectrum shall be investigated from the lowest radio frequency signal generated in the equipment, without going below 9 kHz, up to at least the frequency shown below:
- (1) If the equipment operates below 10 GHz: to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
 - (b) Particular attention should be paid to harmonics and subharmonics of the carrier frequency as well as to those frequencies removed from the carrier by multiples of the oscillator frequency. Radiation at the frequencies of multiplier stages should also be checked.
 - (c) The amplitude of spurious emissions which are attenuated more than 20 dB below the permissible value

need not be reported.

(d) Unless otherwise specified, measurements above 40 GHz shall be performed using a minimum resolution bandwidth of 1 MHz.

§ 22.917 Emission limitations for cellular equipment

(a) The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

Remark of the test laboratory: This is calculated to be -13 dBm.

(b) Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 100 kHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

(c) Licensees in this service may establish an alternative out of band emission limit to be used at specified band edge(s) in specified geographical areas [...].

(d) If any emission from a transmitter operating in this service results in interference to users of another radio service, the FCC may require a greater attenuation of that emission than specified in this section.

For reporting only spurious emission levels reaching to the 20dB margin to limit were noted.

Field strength of spurious radiation

Standard FCC Part 22, Subpart H

The test was performed according to: FCC §2.1053

Test Description

1) The EUT was placed inside an anechoic chamber. Refer to chapter "Setup Drawings". The EUT was coupled to a Digital Communication Tester which was located outside the chamber via a small signalling antenna.

2) A call was established on a Traffic Channel between the EUT and the Digital Communication Tester.

Important Settings:

- Output Power: Maximum

- Channel: please refer to the detailed results

3) A pre-calibration procedure is used so that the readings from the spectrum analyser are corrected and represent directly the equivalent radiated power (related to a $\lambda/2$ dipole).

4) All spurious radiation measurements were made with spectrum analyser and the appropriate calibrated antennas for the frequency range of 30 MHz to 10 GHz (up to the 10th harmonic of the transmit frequency). The frequency range from 9 kHz to 30 MHz has been examined during the conducted spurious emission measurements.

5) Important Analyser Settings

- [Resolution Bandwidth / Video Bandwidth]:

a) [3 kHz / 10 kHz] in the Span of 1 MHz directly below and above the Band,

b) [10 kHz / 30 kHz] in case the curve of the analyser IF-Filter leads to an exceeding of the limit, in this case a worst case correction factor of 20 dB (1 MHz -> 10 kHz) was used

c) [1 MHz / 3 MHz] otherwise

- Sweep Time: depending on the transmitting signal, the span and the resolution bandwidth

6) The spurious emissions peaks were measured in both vertical and horizontal antenna polarization during the call is established on the lowest channel, mid channel and on the highest channel. To find the worst case peaks all orientations (X, Y, Z) of the EUT have been measured.

7) After this initial test, a final test according to TIA-603-C 2.2.12 Unwanted Emissions is performed on signals which are identified as being close to the limit. For any emissions found to be within 10 dB of the limit, a specific signal substitution measurement is performed at the frequency of the emission to determine the exact e.i.r.p. value.

Test Requirements / Limits

§ 2.1053 Measurements required: Field strength of spurious radiation.

Measurements shall be made to detect spurious emissions that may be radiated directly from the cabinet, control circuits, power leads, or intermediate circuit elements under normal conditions of installation and operation. Curves or equivalent data shall be supplied showing the magnitude of each harmonic and other spurious emission. For this test, single sideband, independent sideband, and controlled carrier transmitters shall be modulated under the conditions specified in paragraph (c) of Sec. 2.1049, as appropriate. For equipment operating on frequencies below 890 MHz, an open field test is normally required, with the measuring instrument antenna located in the far-field at all test frequencies. In the event it is either impractical or impossible to make open field measurements (e.g. a broadcast transmitter installed in a building) measurements will be accepted of the equipment as installed. Such measurements must be accompanied by a description of the site where the measurements were made showing the location of any possible source of reflections which might distort the field strength measurements. Information submitted shall include the relative radiated power of each spurious emission with reference to the rated power output of the transmitter, assuming all emissions are radiated from halfwave dipole antennas.

(b) The measurements specified in paragraph (a) of this section shall be made for the following equipment:
(2) All equipment operating on frequencies higher than 25 MHz.

§ 2.1057 Frequency spectrum to be investigated.

(a) In all of the measurements set forth in Secs. 2.1051 and 2.1053, the spectrum shall be investigated from the lowest radio frequency signal generated in the equipment, without going below 9 kHz, up to at least the frequency shown below:

(1) If the equipment operates below 10 GHz: to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

(b) Particular attention should be paid to harmonics and subharmonics of the carrier frequency as well as to those frequencies removed from the carrier by multiples of the oscillator frequency. Radiation at the frequencies of multiplier stages should also be checked.

(c) The amplitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be reported.

(d) Unless otherwise specified, measurements above 40 GHz shall be performed using a minimum resolution bandwidth of 1 MHz.

§ 22.917 Emission limitations for cellular equipment

(a) The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. This is calculated to be -13 dBm (effective radiated power) which corresponds to 84.6 dB μ V/m (field strength) in a distance of 3 m.

(b) Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 100 kHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

(c) Licensees in this service may establish an alternative out of band emission limit to be used at specified band edge(s) in specified geographical areas [...].

(d) If any emission from a transmitter operating in this service results in interference to users of another radio service, the FCC may require a greater attenuation of that emission than specified in this section.

For reporting only spurious emission levels reaching to the 20dB margin to limit were noted.

Frequency stability

Standard FCC Part 22, Subpart H

The test was performed according to FCC §2.1055

Test Description

- 1) The EUT was placed inside a temperature chamber.
- 2) The EUT was coupled to a Digital Communication Tester. Refer to chapter "Setup Drawings".

3) The climatic chamber was cycled down/up to a certain temperature, starting with the EUT minimum temperature.

4) After the temperature was stabilized the EUT was switched on and a call was established on a Traffic Channel between the EUT and the Digital Communication Tester.

Important Settings:

- Output Power: Maximum
- Mid Channel

5) The frequency error of the EUT was recorded by using an internal measurement function of the Digital Communication Tester immediately after the call was established, five minutes after the call was established and ten minutes after the call was established.

6) This measurement procedure was performed for temperature variation from -30°C to +50°C in increments of 10°C, if not otherwise stated in the detailed results.

When the EUT did not operate at certain temperature levels, these measurements were left out.

Test Requirements / Limits

§2.1055 Measurements required: Frequency stability

(a) The frequency stability shall be measured with variation of ambient temperature as follows:

(1) From -30° to +50° centigrade for all equipment except that specified in paragraphs (a) (2) and (3) of this section.

(b) Frequency measurements shall be made at the extremes of the specified temperature range and at intervals of not more than 10° centigrade through the range. A period of time sufficient to stabilize all of the components of the oscillator circuit at each temperature level shall be allowed prior to frequency measurement. The short term transient effects on the frequency of the transmitter due to keying (except for broadcast transmitters) and any heating element cycling normally occurring at each ambient temperature level also shall be shown. Only the portion or portions of the transmitter containing the frequency determining and stabilizing circuitry need be subjected to the temperature variation test.

(d) The frequency stability shall be measured with variation of primary supply voltage as follows:

(1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

(2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery operating end point which shall be specified by the manufacturer.

(3) The supply voltage shall be measured at the input to the cable normally provided with the equipment, or at the power supply terminals if cables are not normally provided. Effects on frequency of transmitter keying (except for broadcast transmitters) and any heating element cycling at the nominal supply voltage and at each extreme also shall be shown.

§22.355 Frequency tolerance

...the carrier frequency of each transmitter in the Public Mobile Service must be maintained within the tolerances given in table C-1 of this section.

Table C-1.- Frequency Tolerance for Transmitters in the Public Mobile Services

Frequency range (MHz)	Base, fixed (ppm)	Mobile up to 3 watts (ppm)	Mobile above 3 watts (ppm)
25 to 50	20.0	20.0	50.0
50 to 450	5.0	5.0	50.0
450 to 512	2.5	5.0	5.0
821 to 896	1.5	2.5	2.5
928 to 929	5.0	n/a	n/a
929 to 960	1.5	n/a	n/a
2110 to 2220	10.0	n/a	n/a

channel (836.6 MHz) the frequency tolerance is 2.5 ppm (2091.5 Hz).

Band edge compliance

Standard FCC Part 22, Subpart H

The test was performed according to: FCC §22.913

Test Description

1) The EUT was coupled to a Spectrum Analyser and a Digital Communication Tester through a Power

Divider. Refer to chapter "Setup Drawings".

2) The total insertion losses for signal path 1 and signal path 2 were measured. The values were used to correct the readings from the Spectrum Analyser and the Digital Communication Tester.

3) A call was established on a Traffic Channel between the EUT and the Digital Communication Tester.

Important Settings:

- Output Power: Maximum

- Channel: please refer to the detailed results

4) Important Analyser Settings:

- Resolution Bandwidth = Video Bandwidth: >1% of the manufacturer's stated occupied bandwidth

Test Requirements / Limits

§ 22.917 Emission limitations for cellular equipment

Refer to chapter "Field strength of spurious radiation".

Summary of Test Results

The EUT complied with all performed tests as listed in the summary section of this report.

Technical Report Summary

Type of Authorization :

Certification for a GSM/WCDMA/CDMA2000 cellular radiotelephone device

Applicable FCC Rules

Prepared in accordance with the requirements of FCC Rules and Regulations as listed in 47 CFR Ch.1 Parts 0 to 69. The following subparts are applicable to the results in this test report.

Part 2, Subpart J - Equipment Authorization Procedures, Certification

§ 2.1046 Measurement required: RF power output

§ 2.1049 Measurement required: Occupied bandwidth

§ 2.1051 Measurement required: Spurious emissions at antenna terminals

§ 2.1053 Measurement required: Field strength of spurious radiation

§ 2.1055 Measurement required: Frequency stability

§ 2.1057 Frequency spectrum to be investigated

Part 24, Subpart E - Broadband PCS

§ 24.232 Power and antenna height limits

§ 24.235 Frequency stability

§ 24.236 Field strength limits

§ 24.238 Emission limitations for Broadband PCS equipment

additional documents

ANSI TIA-603-C-2004

Description of Methods of Measurements

RF Power Output

Standard: FCC Part 24, Subpart E

The test was performed according to: FCC §2.1046

Test Description (conducted measurement procedure)

- 1) The EUT was coupled to a Spectrum Analyser and a Digital Communication Tester through a Power Divider. Refer to chapter "Setup Drawings".
- 2) The total insertion losses for signal path 1 and signal path 2 were measured. The values were used to correct the readings from the Spectrum Analyser and the Digital Communication Tester.
- 3) A call was established on a Traffic Channel between the EUT and the Digital Communication Tester.
Important Settings:
 - Channel (Frequency): please refer to the detailed results
- 4) The transmitted power of the EUT was recorded by using a spectrum analyser.

Test Description (radiated measurement procedure)

- 1) The EUT was placed inside an anechoic chamber. Refer to chapter "Setup Drawings". The EUT was coupled to a Digital Communication Tester which was located outside the chamber via a small signalling antenna.
- 2) A call was established on a Traffic Channel between the EUT and the Digital Communication Tester.
Important Settings:
 - Output Power: Maximum
 - Channel: please refer to the detailed results
- 3) A substitution procedure is used so that the readings from the spectrum analyser are corrected and represent directly the equivalent radiated power (related to a $\lambda/2$ dipole).
- 4) The output power was measured in both vertical and horizontal antenna polarisation during the call is established on the lowest channel, mid channel and on the highest channel. To find the worst case power all orientations (X, Y, Z) of the EUT have been measured.
- 5) The test procedure according to TIA-603-C-2004 has been considered.

Test Requirements / Limits

§2.1046 Measurements Required: RF Power Output

(a) For transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, power output shall be measured at the RF output terminals when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in § 2.1033(c)(8). The electrical characteristics of the output terminals when this test is made shall be stated.

§24.232 Power and antenna height limits

(c) Mobile/portable stations are limited to 2 watts EIRP peak power and the equipment must employ means to limit the power to the minimum necessary for successful communications.

(e) Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage. The measurement results shall be properly adjusted for any instrument limitations, such as detector response times, limited resolution bandwidth capability when compared to the emission bandwidth, sensitivity, etc., so as to obtain a true peak measurement for the emission in question over the full bandwidth of the channel.

Emission and Occupied Bandwidth

Standard: FCC Part 24, Subpart E

The test was performed according to: FCC §2.1049

Test Description

- 1) The EUT was coupled to a Spectrum Analyser and a Digital Communication Tester through a Power Divider. Refer to chapter "Setup Drawings".
 - 2) The total insertion losses for signal path 1 and signal path 2 were measured. The values were used to correct the readings from the Spectrum Analyser and the Digital Communication Tester.
 - 3) A call was established on a Traffic Channel between the EUT and the Digital Communication Tester.
- Important Settings:
- Output Power: Maximum
 - Channel: please refer to the detailed results
- 4) Important Analyser Settings:
 - Resolution Bandwidth: >1% of the manufacturer's stated occupied bandwidth
 - 5) The maximum spectral level of the modulated signal was recorded as the reference.
 - 6) The emission bandwidth is measured as follows:
the two furthest frequencies above and below the frequency of the maximum reference level where the spectrum is -26 dB down have to be found.
 - 7) The occupied bandwidth (99% Bandwidth) is measured as follows:
the occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5 percent of the total mean power.

Test Requirements / Limits

§ 2.1049 Measurements required: Occupied bandwidth

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured under the following conditions (as applicable):

(h) Transmitters employing digital modulation techniques - when modulated by an input signal such that its amplitude and symbol rate represent the maximum rated conditions under which the equipment will be operated. The signal shall be applied through any filter networks, pseudo-random generators or other devices required in normal service. Additionally, the occupied bandwidth shall be shown for operation with any devices used for modifying the spectrum when such devices are optional at the discretion of the user.

Spurious emissions at antenna terminals

Standard: FCC Part 24, Subpart E

The test was performed according to FCC §2.1051

Test Description

- 1) The EUT was coupled to a Spectrum Analyser and a Digital Communication Tester through a Power Divider. Refer to chapter "Setup Drawings".
 - 2) The total insertion losses for signal path 1 and signal path 2 were measured. The values were used to correct the readings from the Spectrum Analyser and the Digital Communication Tester.
 - 3) A call was established on a Traffic Channel between the EUT and the Digital Communication Tester.
- Important Settings:
- Output Power: Maximum
 - Channel: please refer to the detailed results
- 4) Important Analyser Settings:
 - [Resolution Bandwidth]:
 - a) [$\geq 1\%$ of wanted signal bandwidth] in the Span of 1 MHz directly below and above the Band,
 - b) otherwise [1 MHz]
 - c) [reduced resolution bandwidth] in case the curve of the analyser IF-Filter or the wanted EUT signal leads to an exceeding of the limit, in this case a correction factor was used
 - Sweep Time: depending on the transmitting signal, the span and the resolution bandwidth
 - 5) The spurious emissions peaks were measured in the frequency range from 9 kHz to 20 GHz (up to the 10th harmonic) during the call was established

Test Requirements / Limits

§ 2.1051 Spurious emissions at antenna terminals

The radio frequency voltage or power generated within the equipment and appearing on a spurious frequency shall be checked at the equipment output terminals when properly loaded with a suitable artificial antenna. Curves or equivalent data shall show the magnitude of each harmonic and other spurious emission that can be detected when the equipment is operated under the conditions specified in Sec. 2.1049 as appropriate. The magnitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be specified.

§ 2.1057 Frequency spectrum to be investigated.

(a) In all of the measurements set forth in Secs. 2.1051 and 2.1053, the spectrum shall be investigated from the lowest radio frequency signal generated in the equipment, without going below 9 kHz, up to at least the frequency shown below:

(1) If the equipment operates below 10 GHz: to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

(b) Particular attention should be paid to harmonics and subharmonics of the carrier frequency as well as to those frequencies removed from the carrier by multiples of the oscillator frequency. Radiation at the frequencies of multiplier stages should also be checked.

(c) The amplitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be reported.

(d) Unless otherwise specified, measurements above 40 GHz shall be performed using a minimum resolution bandwidth of 1 MHz.

§ 24.238 Emission limitations for Broadband PCS equipment

(a) The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

Remark of the test laboratory: This is calculated to be -13 dBm.

(b) Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 1 MHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

(c) Licensees in this service may establish an alternative out of band emission limit to be used at specified band edge(s) in specified geographical areas [...].

(d) If any emission from a transmitter operating in this service results in interference to users of another radio service, the FCC may require a greater attenuation of that emission than specified in this section.

For reporting only spurious emission levels reaching to the 20dB margin to limit were noted.

Field strength of spurious radiation

Standard: FCC Part 24, Subpart E

The test was performed according to: FCC §2.1053

Test Description

1) The EUT was placed inside an anechoic chamber. Refer to chapter "Setup Drawings". The EUT was coupled to a Digital Communication Tester which was located outside the chamber via a small signalling antenna.

2) A call was established on a Traffic Channel between the EUT and the Digital Communication Tester.

Important Settings:

- Output Power: Maximum

- Channel: please refer to the detailed results

3) A pre-calibration procedure is used so that the readings from the spectrum analyser are corrected and represent directly the equivalent radiated power (related to a $\lambda/2$ dipole).

4) All spurious radiation measurements were made with spectrum analyser and the appropriate calibrated antennas for the frequency range of 30 MHz to 20 GHz (up to the 10th harmonic of the transmit frequency). The frequency range from 9 kHz to 30 MHz has been examined during the conducted spurious emission measurements.

5) Important Analyser Settings

- [Resolution Bandwidth / Video Bandwidth]:

a) [3 kHz / 10 kHz] in the Span of 1 MHz directly below and above the Band,

b) [10 kHz / 30 kHz] in case the curve of the analyser IF-Filter leads to an exceeding of the limit, in this case a worst case correction factor of 20 dB (1 MHz -> 10 kHz) was used

c) [1 MHz / 3 MHz] otherwise

- Sweep Time: depending on the transmitting signal, the span and the resolution bandwidth

6) The spurious emissions peaks were measured in both vertical and horizontal antenna polarisation during the call is established on the lowest channel, mid channel and on the highest channel. To find the worst case peaks all orientations (X, Y, Z) of the EUT have been measured.

7) After this initial test, a final test according to TIA-603-C 2.2.12 Unwanted Emissions is performed on signals which are identified as being close to the limit. For any emissions found to be within 10 dB of the limit, a specific signal substitution measurement is performed at the frequency of the emission to determine the exact e.i.r.p. value.

Test Requirements / Limits

§ 2.1053 Measurements required: Field strength of spurious radiation.

Measurements shall be made to detect spurious emissions that may be radiated directly from the cabinet, control circuits, power leads, or intermediate circuit elements under normal conditions of installation and operation. Curves or equivalent data shall be supplied showing the magnitude of each harmonic and other spurious emission. For this test, single sideband, independent sideband, and controlled carrier transmitters shall be modulated under the conditions specified in paragraph (c) of Sec. 2.1049, as appropriate. For equipment operating on frequencies below 890 MHz, an open field test is normally required, with the measuring instrument antenna located in the far-field at all test frequencies. In the event it is either impractical or impossible to make open field measurements (e.g. a broadcast transmitter installed in a building) measurements will be accepted of the equipment as installed. Such measurements must be accompanied by a description of the site where the measurements were made showing the location of any possible source of reflections which might distort the field strength measurements. Information submitted shall include the relative radiated power of each spurious emission with reference to the rated power output of the transmitter, assuming all emissions are radiated from halfwave dipole antennas.

(b) The measurements specified in paragraph (a) of this section shall be made for the following equipment:

(2) All equipment operating on frequencies higher than 25 MHz.

§ 2.1057 Frequency spectrum to be investigated.

(a) In all of the measurements set forth in Secs. 2.1051 and 2.1053, the spectrum shall be investigated from the lowest radio frequency signal generated in the equipment, without going below 9 kHz, up to at least the frequency shown below:

(1) If the equipment operates below 10 GHz: to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

(b) Particular attention should be paid to harmonics and subharmonics of the carrier frequency as well as to those frequencies removed from the carrier by multiples of the oscillator frequency. Radiation at the frequencies of multiplier stages should also be checked.

(c) The amplitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be reported.

(d) Unless otherwise specified, measurements above 40 GHz shall be performed using a minimum resolution bandwidth of 1 MHz.

§ 24.238 Emission limitations for Broadband PCS equipment

(a) The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

This is calculated to be -13 dBm (effective radiated power) which corresponds to 84.6 dB μ V/m (field strength) in a distance of 3 m.

(b) Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 1 MHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB

below the transmitter power.

(c) Licensees in this service may establish an alternative out of band emission limit to be used at specified band edge(s) in specified geographical areas [...].

(d) If any emission from a transmitter operating in this service results in interference to users of another radio service, the FCC may require a greater attenuation of that emission than specified in this section.

For reporting only spurious emission levels reaching to the 20dB margin to limit were noted.

Frequency stability

Standard: FCC Part 24, Subpart E

The test was performed according to FCC §2.1055

Test Description

1) The EUT was placed inside a temperature chamber.

2) The EUT was coupled to a Digital Communication Tester. Refer to chapter "Setup Drawings".

3) The climatic chamber was cycled down/up to a certain temperature, starting with the EUT minimum temperature.

4) After the temperature was stabilized the EUT was switched on and a call was established on a Traffic Channel between the EUT and the Digital Communication Tester.

Important Settings:

- Output Power: Maximum

- Mid Channel

5) The frequency error of the EUT was recorded by using an internal measurement function of the Digital Communication Tester immediately after the call was established, five minutes after the call was established and ten minutes after the call was established.

6) This measurement procedure was performed for temperature variation from -30°C to +50°C in increments of 10°C, if not otherwise stated in the detailed results.

When the EUT did not operate at certain temperature levels, these measurements were left out.

Test Requirements / Limits

§2.1055 Measurements required: Frequency stability

(a) The frequency stability shall be measured with variation of ambient temperature as follows:

(1) From -30° to +50° centigrade for all equipment except that specified in paragraphs

(a) (2) and (3) of this section.

(b) Frequency measurements shall be made at the extremes of the specified temperature range and at intervals of not more than 10° centigrade through the range. A period of time sufficient to stabilize all of the components of the oscillator circuit at each temperature level shall be allowed prior to frequency measurement. The short term transient effects on the frequency of the transmitter due to keying (except for broadcast transmitters) and any heating element cycling normally occurring at each ambient temperature level also shall be shown. Only the portion or portions of the transmitter containing the frequency determining and stabilizing circuitry need be subjected to the temperature variation test.

(d) The frequency stability shall be measured with variation of primary supply voltage as follows:

(1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

(2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery operating end point which shall be specified by the manufacturer.

(3) The supply voltage shall be measured at the input to the cable normally provided with the equipment, or at the power supply terminals if cables are not normally provided. Effects on frequency of transmitter keying (except for broadcast transmitters) and any heating element cycling at the nominal supply voltage and at each extreme also shall be shown.

§24.235 Frequency stability

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

7Layers interpretation of limit:

To ensure that the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block following limit was used:

+/- 2.5 ppm = 4700 Hz for a frequency of 1880.0 MHz

in accordance with FCC Part 22, Subpart H, §22.355, table C-1: Frequency tolerance for the carrier frequency of mobile transmitters in the Public Mobile Service in the frequency range 821 to 896 MHz.

Band edge compliance

Standard: FCC Part 24, Subpart E

The test was performed according to: FCC §24.238

Test Description

- 1) The EUT was coupled to a Spectrum Analyser and a Digital Communication Tester through a Power Divider. Refer to chapter "Setup Drawings".
- 2) The total insertion losses for signal path 1 and signal path 2 were measured. The values were used to correct the readings from the Spectrum Analyser and the Digital Communication Tester.
- 3) A call was established on a Traffic Channel between the EUT and the Digital Communication Tester.

Important Settings:

- Output Power: Maximum
- Channel: please refer to the detailed results

4) Important Analyser Settings:

- Resolution Bandwidth = Video Bandwidth: >1% of the manufacturer's stated occupied bandwidth

Test Requirements / Limits

§ 24.238 Effective radiated power limits

Refer to chapter "Field strength of spurious radiation".

Subtests HSDPA

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1: $?_{ACK}, ?_{NACK}$ and $?_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$.

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, $?_{ACK}$ and $?_{NACK} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$, and $?_{CQI} = 24/15$ with $\beta_{hs} = 24/15 * \beta_c$.

Note 3: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.


Note 4: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

Subtests HSUPA

Subtest	Mode	Loopback Mode	Rel99 RMC	HSDPA FRC	HSUPA Test	Number of E-DPDCH Channels
1	Rel6 HSUPA	Test Mode 1	12.2kbps RMC	H-Set1	HSUPA Loopback	1
2	Rel6 HSUPA	Test Mode 1	12.2kbps RMC	H-Set1	HSUPA Loopback	1
3	Rel6 HSUPA	Test Mode 1	12.2kbps RMC	H-Set1	HSUPA Loopback	2
4	Rel6 HSUPA	Test Mode 1	12.2kbps RMC	H-Set1	HSUPA Loopback	1
5	Rel6 HSUPA	Test Mode 1	12.2kbps RMC	H-Set1	HSUPA Loopback	1


Subtest	Max UL Data Rate (kb/s)	β_c/β_d	β_{hs}	β_d	CM
1	242.1	11/15	22/15	1309/225	1
2	161.3	6/15	12/15	94/75	3
3	524.7	15/9	30/15	47/15	2
4	197.6	2/15	4/15	56/75	3
5	299.6	15/15	30/15	134/15	1

Setup Drawings

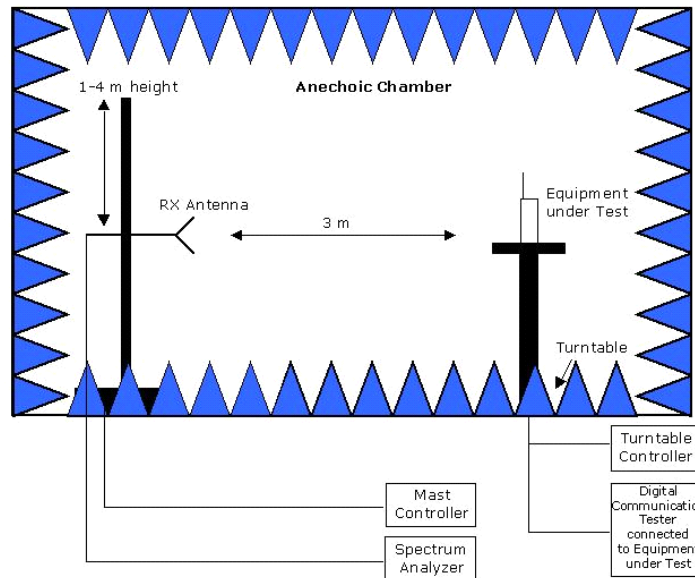


Remark: Depending on the frequency range suitable antenna types, attenuators or preamplifiers are used.

Principle set-up for radiated measurements

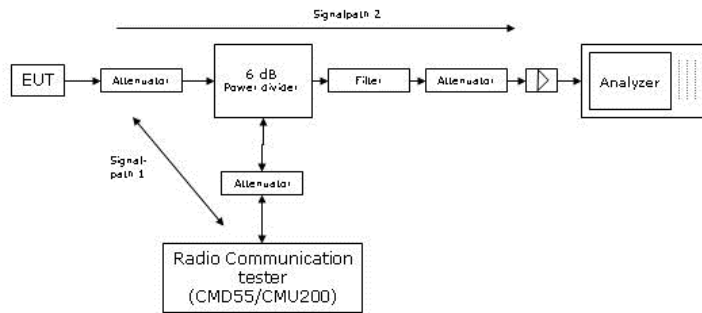

Remark: Depending on the frequency range suitable attenuators and/or filters and/or amplifiers are used.

Principle set-up for conducted measurements under nominal conditions

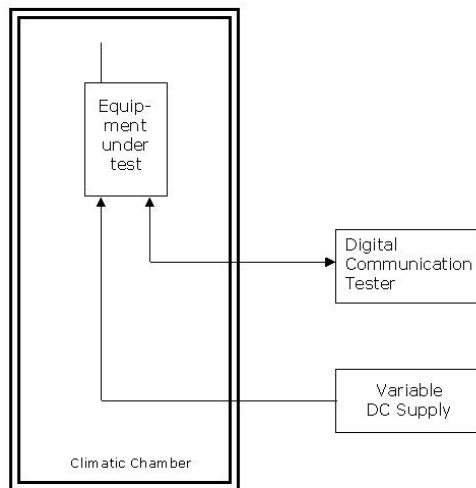

Principle set-up for tests under extreme test conditions

6 Index

1	Administrative Data	2
1.1	Project Data	2
1.2	Applicant Data	2
1.3	Test Laboratory Data	2
1.4	Signature of the Testing Responsible	3
1.5	Signature of the Accreditation Responsible	3
2	Test Object Data	3
2.1	General OUT Description	3
2.2	Detailed Description of OUT Samples	4
2.3	OUT Features	5
2.4	Setups used for Testing	5
3	Results	6
3.1	General	6
3.2	List of the Applicable Body	6
3.3	List of Test Specification	6
3.4	Summary	7
3.5	Detailed Results	12
3.5.1	22.1 RF Power Output §2.1046, §22.913	12
3.5.2	22.3 Spurious emissions at antenna terminals §2.1051, §22.917	17
3.5.3	22.4 Field strength of spurious radiation §2.1053, §22.917	34
3.5.4	22.5 Emission and Occupied Bandwidth §2.1049, §22.917	43
3.5.5	22.6 Band edge compliance §2.1053, §22.917	62
3.5.6	24.1 RF Power Output §2.1046, §24.232	75
3.5.7	24.3 Spurious emissions at antenna terminals §2.1051, §24.238	80
3.5.8	24.4 Field strength of spurious radiation §2.1053, §24.238	99
3.5.9	24.5 Emission and Occupied Bandwidth §2.1049, §24.238	108
3.5.10	24.6 Band edge compliance §2.1053, §24.238	127
4	Test Equipment Details	140
4.1	List of Used Test Equipment	140
5	Annex	147
5.1	Additional Information for Report	147
6	Index	164