
FCC Test Report

Report No.: AGC04925170303FE03

FCC ID : 2AGZXGV68
APPLICATION PURPOSE : Original Equipment
PRODUCT DESIGNATION : Smart Watch
BRAND NAME : KING-WEAR
MODEL NAME : GV68
CLIENT : Shenzhen KingWear Intelligent Technology Co.,Ltd
DATE OF ISSUE : Mar.31, 2017
STANDARD(S)
TEST PROCEDURE(S) : FCC Part 15 Subpart C Section 15.249
REPORT VERSION : V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd



CAUTION:

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Mar.31, 2017	Valid	Original Report

TABLE OF CONTENTS

1. VERIFICATION OF CONFORMITY	4
2. GENERAL INFORMATION	5
2.1. PRODUCT DESCRIPTION	5
2.2. TABLE OF CARRIER FREQUENCYS	5
3. MEASUREMENT UNCERTAINTY.....	7
4. DESCRIPTION OF TEST MODES.....	7
5. SYSTEM TEST CONFIGURATION	9
5.1. CONFIGURATION OF EUT SYSTEM.....	9
5.2. EQUIPMENT USED IN EUT SYSTEM.....	9
5.3. SUMMARY OF TEST RESULTS.....	9
6. TEST FACILITY	10
7. TEST METHOD	10
8. ALL TEST EQUIPMENT LIST	10
9. RADIATED EMISSION	12
9.1TEST LIMIT.....	12
9.2. MEASUREMENT PROCEDURE.....	13
9.3. TEST SETUP.....	15
9.4. TEST RESULT	17
10. BAND EDGE EMISSION	46
10.1. MEASUREMENT PROCEDURE.....	46
10.2 TEST SETUP	46
10.3 RADIATED TEST RESULT	47
11. 20DB BANDWIDTH.....	55
11.1. MEASUREMENT PROCEDURE	55
11.2. TEST SET-UP	55
11.3. LIMITS AND MEASUREMENT RESULTS.....	55
12. FCC LINE CONDUCTED EMISSION TEST	64
12.1. LIMITS OF LINE CONDUCTED EMISSION TEST.....	64
12.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST.....	64
12.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	65
12.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST.....	65
12.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST.....	66
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	70
APPENDIX B: PHOTOGRAPHS OF EUT	73

1. VERIFICATION OF CONFORMITY

Applicant	Shenzhen KingWear Intelligent Technology Co.,Ltd
Address	The 21st floor, building C, Block No.9, Baoneng Hi-Tech Industrial Park, Qingxiang Road, Qinghu, Longhua district, Shenzhen, China
Manufacturer	Shenzhen KingWear Intelligent Technology Co.,Ltd
Address	The 21st floor, building C, Block No.9, Baoneng Hi-Tech Industrial Park, Qingxiang Road, Qinghu, Longhua district, Shenzhen, China
Product Designation	Smart Watch
Brand Name	KING-WEAR
Test Model	GV68
Date of test	Mar.28, 2017 to Mar.30, 2017
Deviation	None
Condition of Test Sample	Normal
Report Template	AGCRT-US-BR/RF

We hereby certify that:

The above equipment was tested by Dongguan Precise Testing Service Co., Ltd. The test data, the energy emitted by the sample tested as described in this report is in compliance with the requirements of FCC Rules Part 15.249.

Tested By 
Time Huang(Huang Nanhui) Mar.30, 2017

Reviewed By 
Forrest Lei(Lei Yonggang) Mar.31, 2017

Approved By 
Solger Zhang(Zhang Hongyi)
Authorized Officer Mar.31, 2017

2. GENERAL INFORMATION

2.1. PRODUCT DESCRIPTION

A major technical description of EUT is described as following

Operation Frequency	2.402 GHz to 2.480GHz
RF Output Power	-1.58dBm(Max EIRP Power=Max radiation field-95.2)
Bluetooth Version	V4.0
Modulation	GFSK, $\pi/4$ -DQPSK, 8DPSK for BR/EDR, GFSK for BLE
Number of channels	79 for BR/EDR, 40 for BLE
Hardware Version	GV68_V1.1
Software Version	GV68_V1.1_B_17030041334
Antenna Designation	Ceramic Antenna
Antenna Gain	0.8dBi
Power Supply	DC 3.7V by battery
Note: The charging port only be used for charging and can't be used to transfer data with PC.	

2.2. TABLE OF CARRIER FREQUENCIES

BR/EDR Channel List

Frequency Band	Channel Number	Frequency
2400~2483.5MHz	0	2402MHz
	1	2403MHz
	:	:
	38	2440 MHz
	39	2441 MHz
	40	2442 MHz
	:	:
	77	2479 MHz
	78	2480 MHz

BLE Channel List

Frequency Band	Channel Number	Frequency
2400~2483.5MHz	0	2402MHz
	1	2404MHz
	:	:
	38	2478 MHz
	39	2480 MHz

3. MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	± 3.18 dB
2	All emissions, radiated	± 3.91 dB
3	Temperature	± 0.5 °C
4	Humidity	± 2 %

4. DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION
1	Low channel TX(GFSK)
2	Middle channel TX (GFSK)
3	High channel TX (GFSK)
4	Low channel TX($\pi/4$ -DQPSK)
5	Middle channel TX($\pi/4$ -DQPSK)
6	High channel TX ($\pi/4$ -DQPSK)
7	Low channel TX(8DPSK)
8	Middle channel TX (8DPSK)
9	High channel TX (8DPSK)
10	BT Link with charging
11	BT Link

Note:

1. All the test modes can be supply by battery, only the result of the worst case was recorded in the report, if no other cases.
2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
3. The EUT used fully-charged battery when tested.


Software Setting

The screenshot displays the 'MediaTek BT Tool' software interface. The window title is 'MediaTek BT Tool'. The main menu includes 'RF Test', 'Packet Test', 'Throughput Test', 'Connection Test', 'BLE Test Mode', and 'BLE Normal Mode'. The 'RF Test' tab is active, showing a 'Misc' section with 'BD Address' (0x 00:00:00:00:5A:AD), 'Update Access Code' (unchecked), and buttons for 'Query BD Address', 'Get BT Chip ID', 'Get BT FW version', 'Clear log', and 'HCI Reset'. Below this is the 'TX/RX Test' section, with 'Non-Signal RX Test' selected. The 'Transmit' section includes a 'Pattern' dropdown (0000), 'TX' and 'RX' radio buttons (TX selected), 'Start' and 'Stop' buttons, 'Single Frequency' (78) and 'Frequency Hopping' (selected) options, 'Power Control' (checked) with 'Level' (7) and 'Change Level' button, and 'Whiten' (unchecked). The 'Packet Type' is set to 'NULL', 'Data Length' is 0, and 'Poll Period' is 2. An 'Enter Test Mode' button is at the bottom right. A log window shows the following entries: [14:58:09] TX: D1, FC, 4, 8, 0, 0, 80 and [14:58:10] RX: E, 8, 1, D1, FC, 0, 0, 0, 0, 0. A status bar at the bottom indicates 'Get BT Chip ID successfully'.

5. SYSTEM TEST CONFIGURATION


5.1. CONFIGURATION OF EUT SYSTEM

Configure 1: (Normal hopping)

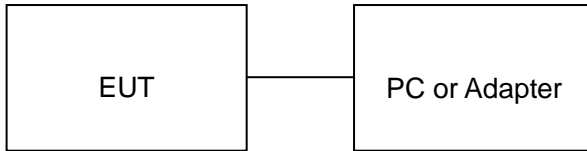

Note: Owing to the EUT has own battery, Testing will be performed while PC or adapter remove.

Configure 2: (Control continuous TX)

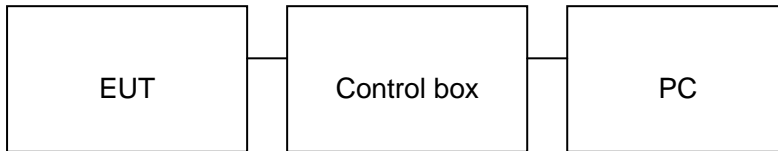

5.2. EQUIPMENT USED IN EUT SYSTEM

ITEM	EQUIPMENT	MFR/BRAND	MODEL/TYPE NO.	REMARK
1	Smart Watch	KING-WEAR	GV68	EUT
2	Battery	ZWD	641S27	Accessory
3	PC	Sony	E1412AYCW	A.E
4	PC Adapter	Sony	AC-L100	A.E
5	Control box	N/A	N/A	A.E
6	Adapter	IPRO	NTR-S01	A.E

5.3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.249(a) §15.209	Radiated Emission	Compliant
§15.249(d)	Band Edges	Compliant
§15.207	Conduction Emission	Compliant
§15.215	Bandwidth	Compliant

6. TEST FACILITY

Site	Dongguan Precise Testing Service Co., Ltd.
Location	Building D,Baoding Technology Park,Guangming Road2,Dongcheng District, Dongguan, Guangdong, China,
FCC Registration No.	371540
Description	The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.4:2014.

7. TEST METHOD

All measurements contained in this report were conducted with ANSI C63.10-2013

8. ALL TEST EQUIPMENT LIST

FOR RADIATED EMISSION TEST (BELOW 1GHz)

Radiated Emission Test Site					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
EMI Test Receiver	ROHDE & SCHWARZBECK	ESCI	101417	July 4, 2016	July 3, 2017
Trilog Broadband Antenna (25M-1GHz)	SCHWARZBECK	VULB9160	9160-3355	July 4, 2016	July 3, 2017
Signal Amplifier	SCHWARZBECK	BBV 9475	9745-0013	July 4, 2016	July 3, 2017
RF Cable	SCHWARZBECK	AK9515E	96221	July 4, 2016	July 3, 2017
3m Anechoic Chamber	CHENGYU	966	PTS-001	June 6, 2016	June 5, 2017
MULTI-DEVICE Positioning Controller	MAX-FULL	MF-7802	MF780208339	N/A	N/A
Active loop antenna (9K-30MHz)	SCHWARZBECK	FMZB1519	1519-038	June 6, 2016	June 5, 2017
Spectrum analyzer	AGILENT	E4407B	MY46185649	June 6, 2016	June 5, 2017
Radiation Cable 1	MXT	RS1	R005	June 6, 2016	June 5, 2017
Radiation Cable 2	MXT	RS1	R006	June 6, 2016	June 5, 2017
temporary antenna connector	N/A	S100	--	July 4, 2016	July 3, 2017

FOR RADIATED EMISSION TEST (1GHz ABOVE)

Radiated Emission Test Site					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
EMI Test Receiver	ROHDE & SCHWARZBECK	ESCI	101417	July 4, 2016	July 3, 2017
Horn Antenna (1G-18GHz)	SCHWARZBECK	BBHA9120D	9120D-1246	July 11, 2016	July 10, 2017
Spectrum Analyzer	AGILENT	E4411B	MY4511453	July 4, 2016	July 3, 2017
Signal Amplifier	SCHWARZBECK	BBV 9718	9718-269	July 7, 2016	July 6, 2017
RF Cable	SCHWARZBECK	AK9515H	96220	July 8, 2016	July 7, 2017
3m Anechoic Chamber	CHENGYU	966	PTS-001	June 6, 2016	June 5, 2017
MULTI-DEVICE Positioning Controller	MAX-FULL	MF-7802	MF780208339	N/A	N/A
Horn Ant (18G-40GHz)	SCHWARZBECK	BBHA 9170	9170-181	June 6, 2016	June 5, 2017
Radiation Cable 1	MXT	RS1	R005	June 6, 2016	June 5, 2017
Radiation Cable 2	MXT	RS1	R006	June 6, 2016	June 5, 2017

Conducted Emission Test Site					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
EMI Test Receiver	ROHDE & SCHWARZBECK	ESCI	101417	July 4, 2016	July 3, 2017
Artificial Mains Network	NARDA	L2-16B	000WX31025	July 8, 2016	July 7, 2017
Artificial Mains Network (AUX)	NARDA	L2-16B	000WX31026	July 8, 2016	July 7, 2017
RF Cable	SCHWARZBECK	AK9515E	96222	July 4, 2016	July 3, 2017
Shielded Room	CHENGYU	843	PTS-002	June 6, 2016	June 5, 2017
Conduction Cable	MXT	SE1	S003	June 6, 2016	June 5, 2017

9. RADIATED EMISSION

9.1 TEST LIMIT

Standard FCC15.249

Fundamental Frequency	Field Strength of Fundamental (millivolts/meter)	Field Strength of Harmonics (microvolts/meter)
900-928MHz	50	500
2400-2483.5MHz	50	500
5725-5875MHz	50	500
24.0-24.25GHz	250	2500

Standard FCC 15.209

Frequency (MHz)	Distance Meters	Field Strengths Limit	
		μ V/m	dB(μ V)/m
0.009 ~ 0.490	300	2400/F(kHz)	---
0.490 ~ 1.705	30	24000/F(kHz)	---
1.705 ~ 30	30	30	---
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	Other:74.0 dB(μ V)/m (Peak) 54.0 dB(μ V)/m (Average)	

Remark: (1) Emission level $\text{dB}\mu\text{V} = 20 \log \text{Emission level } \mu\text{V/m}$
(2) The smaller limit shall apply at the cross point between two frequency bands.
(3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

9.2. MEASUREMENT PROCEDURE


1. The measuring distance of 3m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation(Below 1GHz)
2. The measuring distance of 3m shall used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation(Above 1GHz)
3. The height of the test antenna shall vary between 1m to 4m.Both horizontal and vertical polarization Of the antenna are set to make the measurement.
4. The initial step in collecting radiated emission data is a receive peak detector mode. Pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
5. All readings are peak unless otherwise stated QP in column of Note. Peak denoted that the Peak reading compliance with the QP limits and then QP Mode measurement didn't perform(Below 1GHz)
6. All readings are Peak mode value unless otherwise stated AVG in column of Note. If the Peak mode measured value compliance with the Peak limits and lower than AVG Limits, the EUT shall be deemed to meet Peak & AVG limits and then only Peak mode was measured, but AVG mode didn't perform.(Above 1GHz)

The following table is the setting of spectrum analyzer and receiver.


Spectrum Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP
Start ~Stop Frequency	1GHz~26.5GHz 1MHz/3MHz for Peak, 1MHz/10Hz for Average
Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP

9.3. TEST SETUP


RADIATED EMISSION TEST SETUP BELOW 30MHz

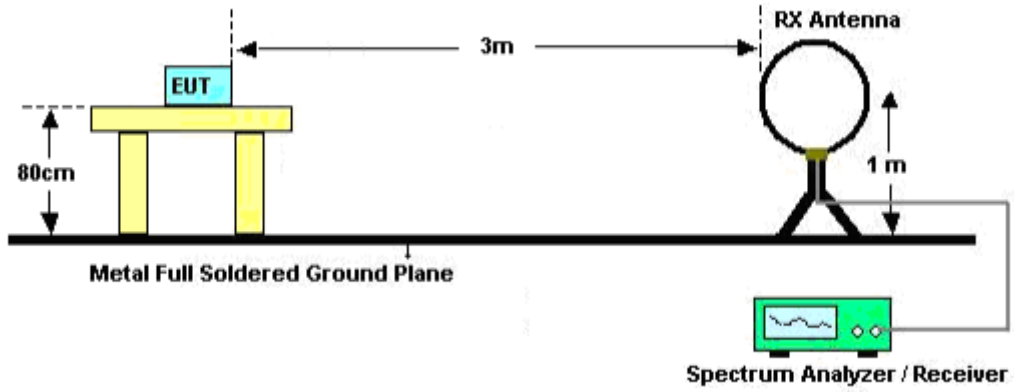

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

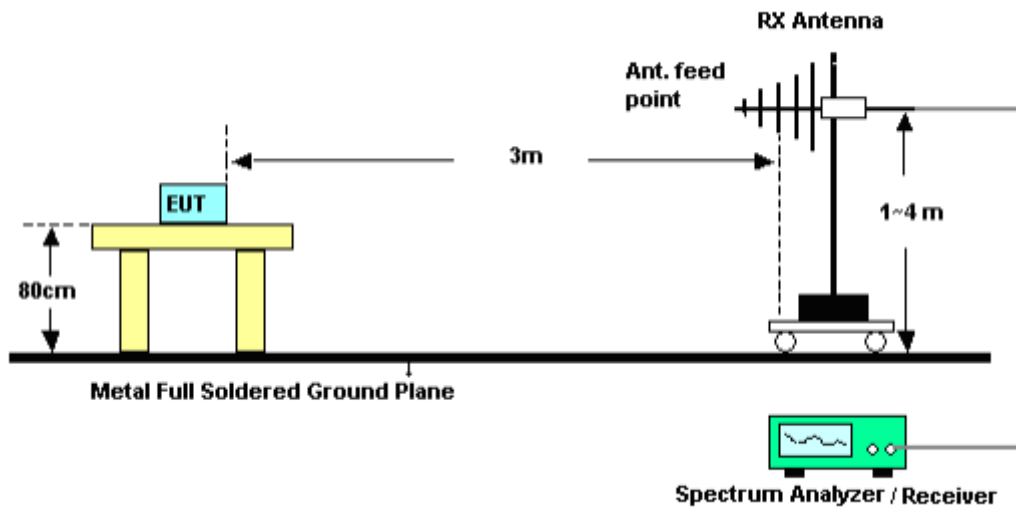

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

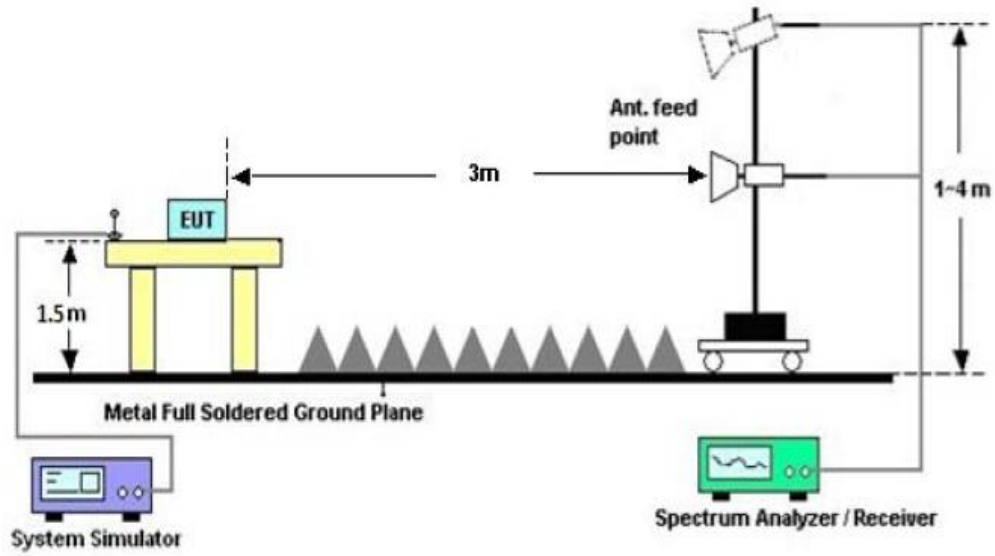

9.4. TEST RESULT

(Worst modulation:GFSK)


FOR BR/EDR

RADIATED EMISSION BELOW 30MHz

No emission found between lowest internal used/generated frequencies to 30MHz.

RADIATED EMISSION BELOW 1GHz

RADIATED EMISSION TEST- (30MHz-1GHz)-LOW CHANNEL-HORIZONTAL

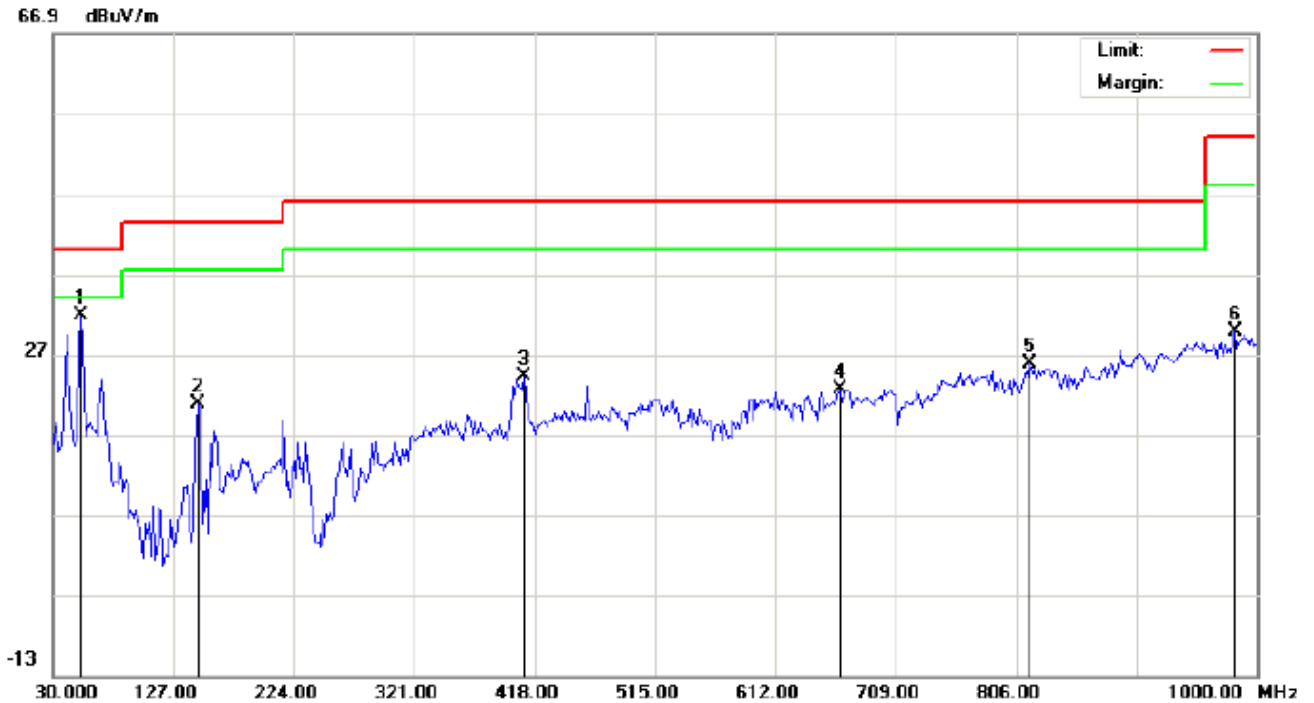

Site: site #1
Limit: FCC Class B 3M Radiation
EUT: Smart Watch
M/N: GV68
Mode: Low Channel TX
Note:


Polarization: *Horizontal*
Power:
Distance:

Temperature: 23.6
Humidity: 52.7 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	52.6333	23.39	8.41	31.80	40.00	-8.20	peak			
2		146.4000	7.16	13.64	20.80	43.50	-22.70	peak			
3		409.9166	4.87	19.37	24.24	46.00	-21.76	peak			
4		663.7333	-1.69	24.22	22.53	46.00	-23.47	peak			
5		817.3167	-1.43	27.32	25.89	46.00	-20.11	peak			
6		982.2167	0.12	29.69	29.81	54.00	-24.19	peak			

RESULT: PASS

RADIATED EMISSION TEST- (30MHz-1GHz)-LOW CHANNEL -VERTICAL

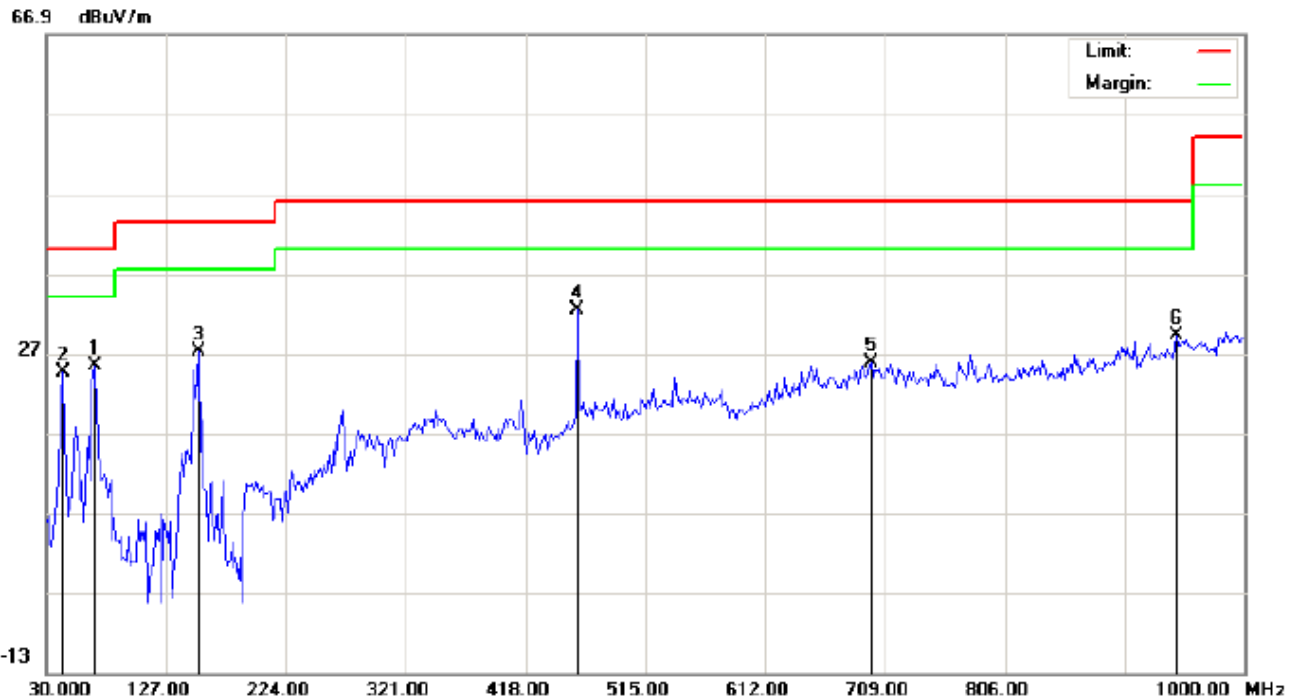

Site: site #1
 Limit: FCC Class B 3M Radiation
 EUT: Smart Watch
 M/N: GV68
 Mode: Low Channel TX
 Note:

Polarization: *Vertical*
 Power:
 Distance:

Temperature: 23.6
 Humidity: 52.7 %


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna	Table	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		Height	Degree	
									cm	degree	
1		68.8000	20.67	4.73	25.40	40.00	-14.60	peak			
2		42.9333	15.93	8.71	24.64	40.00	-15.36	peak			
3		152.8667	11.99	15.28	27.27	43.50	-16.23	peak			
4	*	460.0333	11.67	20.70	32.37	46.00	-13.63	peak			
5		697.6833	0.70	25.13	25.83	46.00	-20.17	peak			
6		945.0333	-0.65	29.86	29.21	46.00	-16.79	peak			

RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

RADIATED EMISSION TEST- (30MHz-1GHz)-MIDDLE CHANNEL-HORIZONTAL

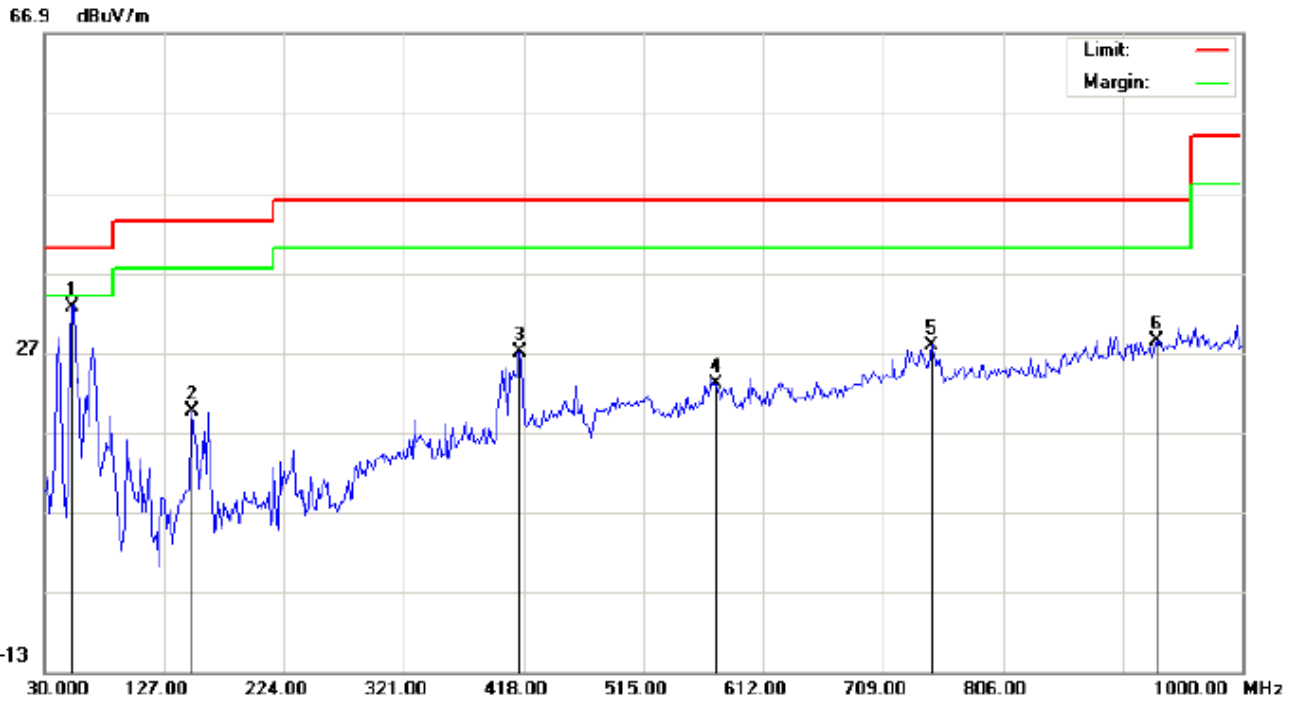

Site: site #1
 Limit: FCC Class B 3M Radiation
 EUT: Smart Watch
 M/N: GV68
 Mode: Middle Channel TX
 Note:


Polarization: *Horizontal*
 Power:
 Distance:

Temperature: 23.6
 Humidity: 52.7 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	52.6333	24.22	8.41	32.63	40.00	-7.37	peak			
2		149.6333	6.75	12.85	19.60	43.50	-23.90	peak			
3		414.7667	7.55	19.52	27.07	46.00	-18.93	peak			
4		573.2000	0.00	23.06	23.06	46.00	-22.94	peak			
5		747.8000	1.33	26.57	27.90	46.00	-18.10	peak			
6		930.4833	-1.14	29.46	28.32	46.00	-17.68	peak			

RESULT: PASS

RADIATED EMISSION TEST- (30MHz-1GHz)- MIDDLE CHANNEL –VERTICAL

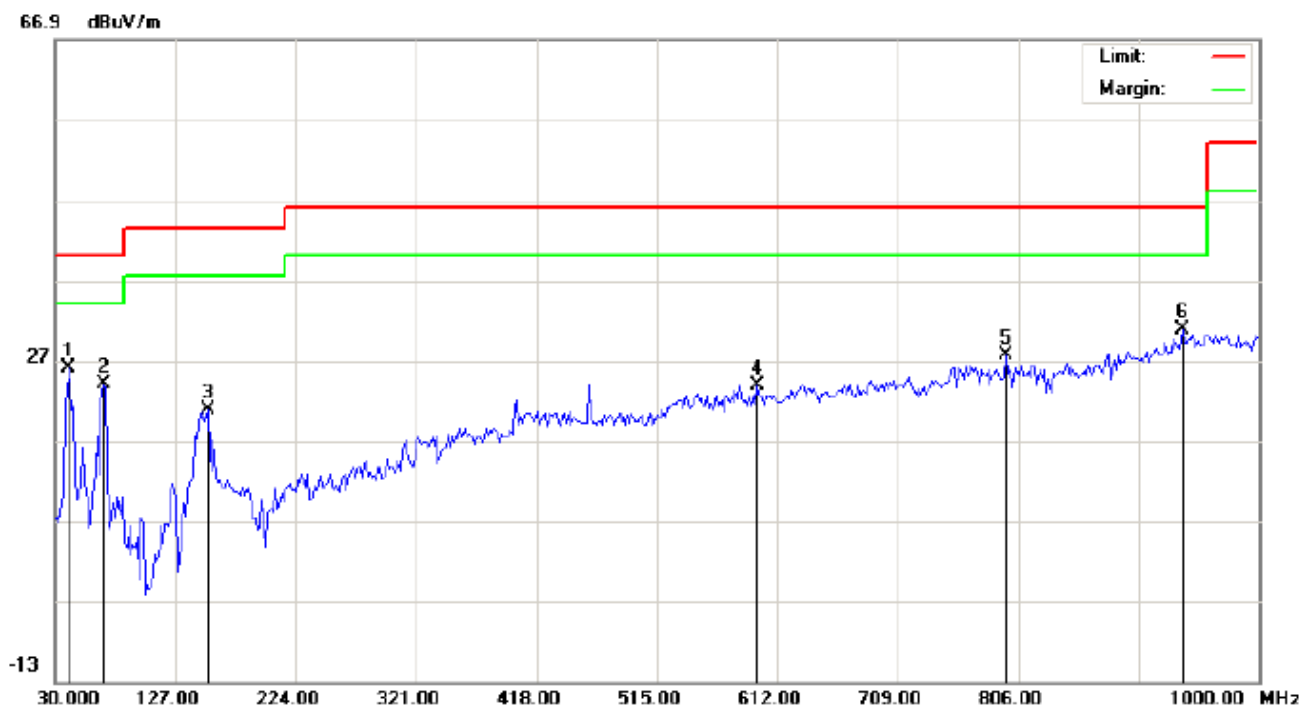

Site: site #1 Polarization: **Vertical** Temperature: 23.6
 Limit: FCC Class B 3M Radiation Power: Humidity: 52.7 %
 EUT: Smart Watch Distance:
 M/N: GV68
 Mode: Middle Channel TX
 Note:


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	41.3167	17.18	8.81	25.99	40.00	-14.01	peak			
2		68.8000	19.32	4.73	24.05	40.00	-15.95	peak			
3		152.8667	5.51	15.28	20.79	43.50	-22.71	peak			
4		595.8333	1.10	22.71	23.81	46.00	-22.19	peak			
5		796.3000	0.28	27.27	27.55	46.00	-18.45	peak			
6		938.5667	1.20	29.68	30.88	46.00	-15.12	peak			

RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

RADIATED EMISSION TEST- (30MHz-1GHz)-HIGH CHANNEL-HORIZONTAL

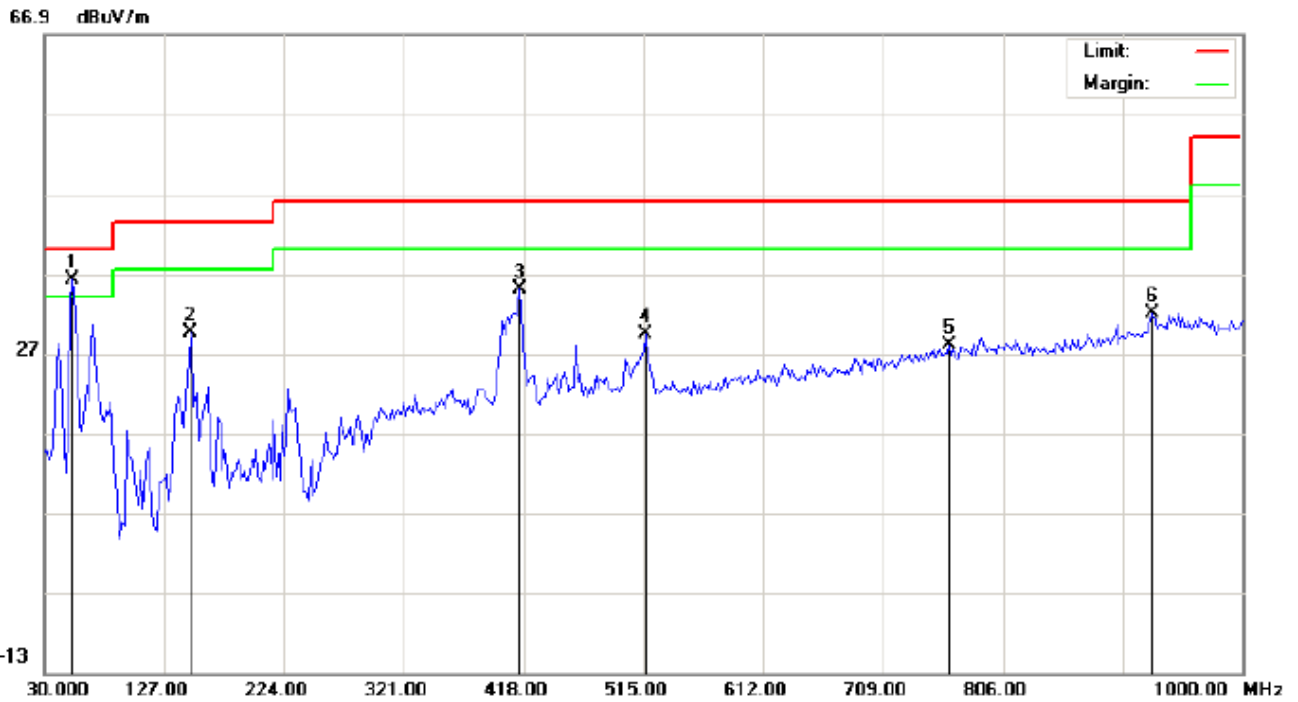


Site: site #1 Polarization: *Horizontal* Temperature: 23.6
 Limit: FCC Class B 3M Radiation Power: Humidity: 52.7 %
 EUT: Smart Watch Distance:
 M/N: GV68
 Mode: High Channel TX
 Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	52.6332	27.86	8.41	36.27	40.00	-3.73	peak			
2		148.0166	16.36	13.25	29.61	43.50	-13.89	peak			
3		414.7667	15.43	19.52	34.95	46.00	-11.05	peak			
4		516.6167	7.84	21.58	29.42	46.00	-16.58	peak			
5		762.3500	1.19	26.80	27.99	46.00	-18.01	peak			
6		927.2500	2.72	29.37	32.09	46.00	-13.91	peak			

RESULT: PASS

RADIATED EMISSION TEST- (30MHz-1GHz)-HIGH CHANNEL -VERTICAL

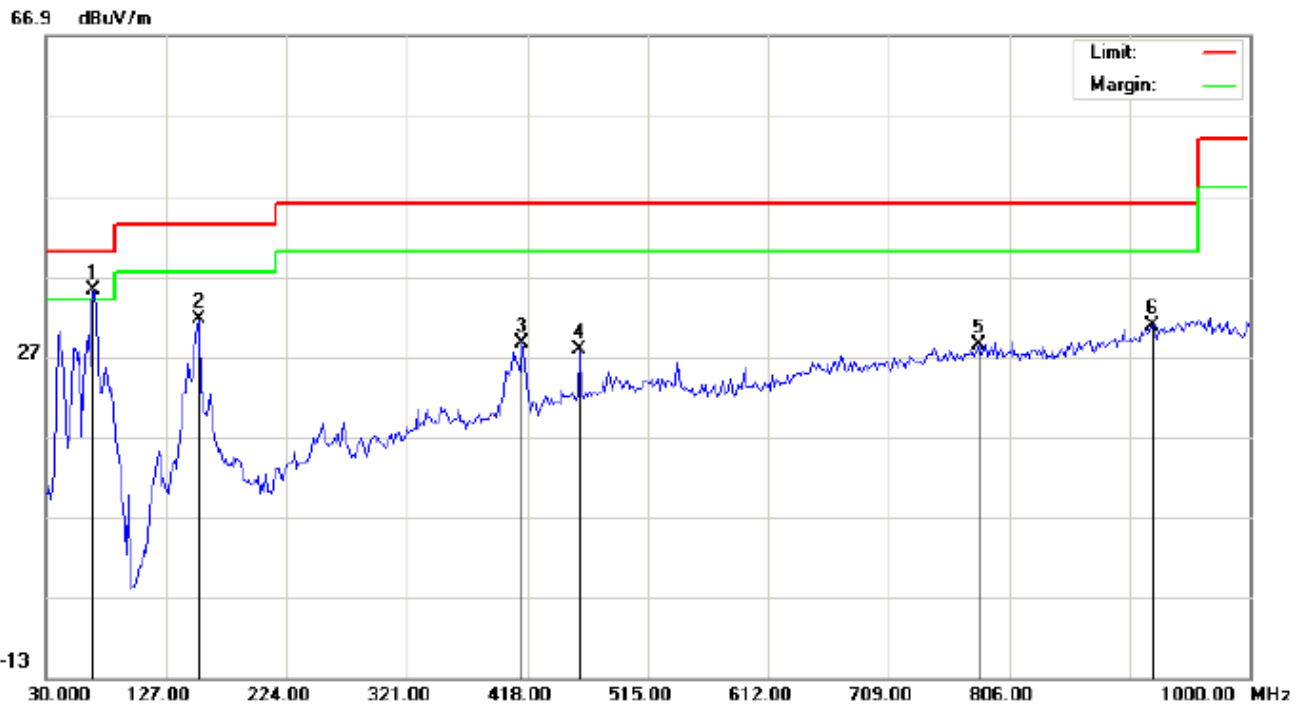

Site: site #1
Limit: FCC Class B 3M Radiation
EUT: Smart Watch
M/N: GV68
Mode: High Channel TX
Note:

Polarization: *Vertical*
Power:
Distance:

Temperature: 23.6
Humidity: 52.7 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna	Table	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		Height	Degree	
									cm	degree	
1	*	68.7997	30.45	4.73	35.18	40.00	-4.82	peak			
2		152.8667	16.41	15.28	31.69	43.50	-11.81	peak			
3		413.1499	9.23	19.47	28.70	46.00	-17.30	peak			
4		460.0332	7.05	20.70	27.75	46.00	-18.25	peak			
5		781.7500	1.25	27.07	28.32	46.00	-17.68	peak			
6		922.3999	1.62	29.23	30.85	46.00	-15.15	peak			

RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.


FOR BLE

RADIATED EMISSION BELOW 30MHz

No emission found between lowest internal used/generated frequencies to 30MHz.

RADIATED EMISSION BELOW 1GHz

RADIATED EMISSION TEST- (30MHz-1GHz)-LOW CHANNEL-HORIZONTAL

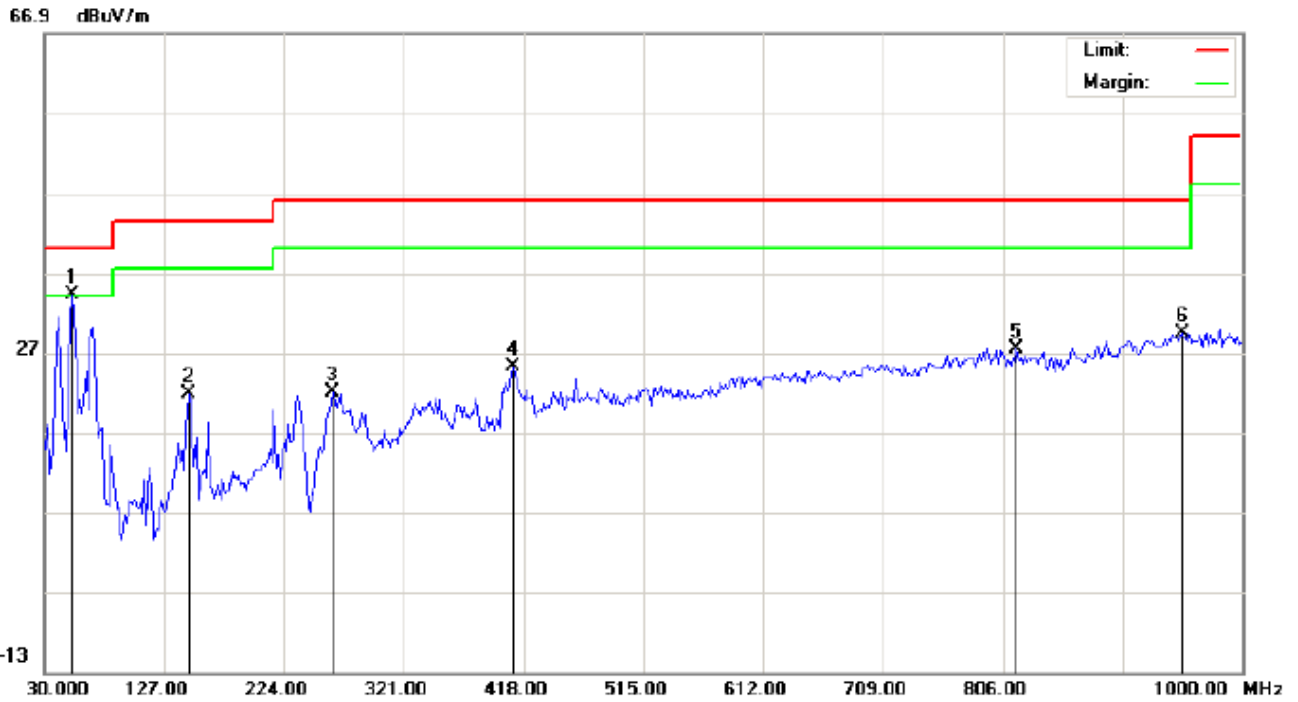


Site: site #1	Polarization: <i>Horizontal</i>	Temperature: 23.6
Limit: FCC Class B 3M Radiation	Power:	Humidity: 52.7 %
EUT: Smart Watch	Distance:	
M/N: GV68		
Mode: Low Channel TX		
Note:		

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	52.6333	25.89	8.41	34.30	40.00	-5.70	peak			
2		146.4000	8.16	13.64	21.80	43.50	-21.70	peak			
3		262.8000	12.95	9.08	22.03	46.00	-23.97	peak			
4		409.9166	5.87	19.37	25.24	46.00	-20.76	peak			
5		817.3167	0.07	27.32	27.39	46.00	-18.61	peak			
6		951.5000	-0.53	29.99	29.46	46.00	-16.54	peak			

RESULT: PASS

RADIATED EMISSION TEST- (30MHz-1GHz)-LOW CHANNEL -VERTICAL

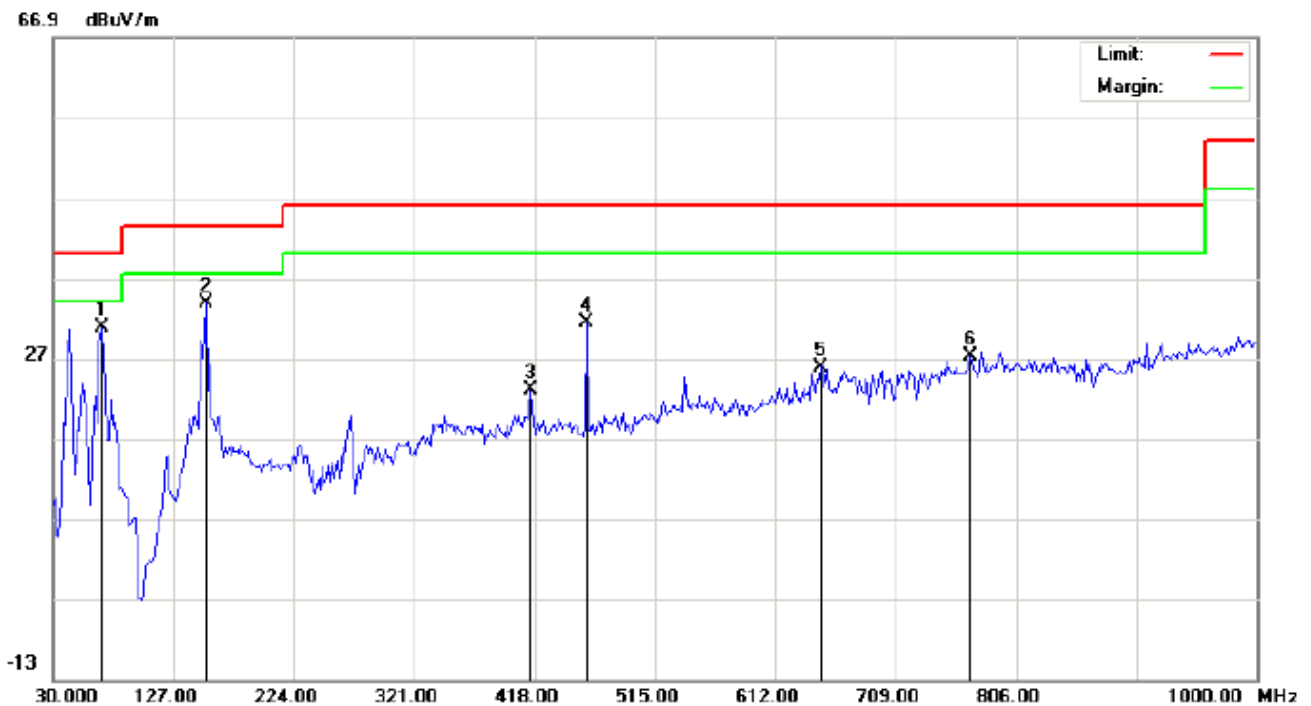

Site: site #1
Limit: FCC Class B 3M Radiation
EUT: Smart Watch
M/N: GV68
Mode: Low Channel TX
Note:

Polarization: **Vertical**
Power:
Distance:

Temperature: 23.6
Humidity: 52.7 %


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	68.8000	26.17	4.73	30.90	40.00	-9.10	peak			
2		152.8667	18.49	15.28	33.77	43.50	-9.73	peak			
3		414.7667	3.44	19.52	22.96	46.00	-23.04	peak			
4		460.0333	10.67	20.70	31.37	46.00	-14.63	peak			
5		649.1833	2.07	23.83	25.90	46.00	-20.10	peak			
6		768.8167	0.35	26.89	27.24	46.00	-18.76	peak			

RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

RADIATED EMISSION TEST- (30MHz-1GHz)-MIDDLE CHANNEL-HORIZONTAL

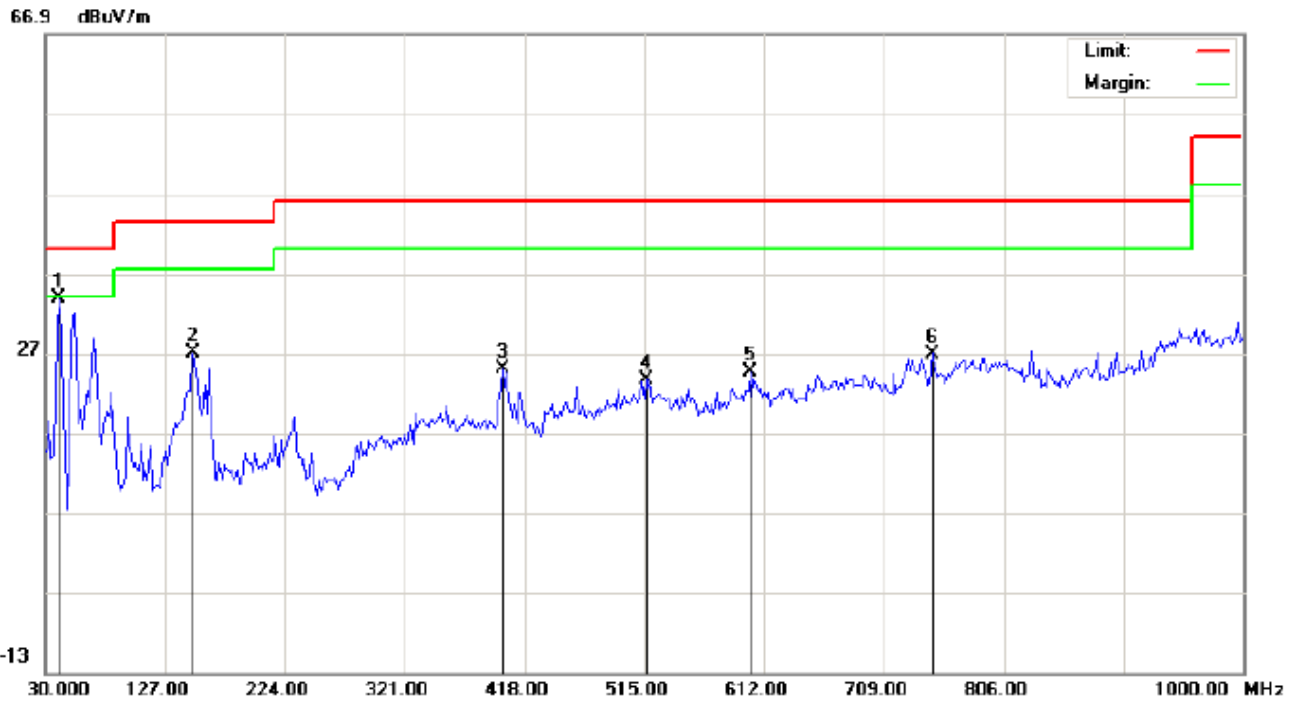


Site: site #1 Polarization: *Horizontal* Temperature: 23.6
 Limit: FCC Class B 3M Radiation Power: Humidity: 52.7 %
 EUT: Smart Watch Distance:
 M/N: GV68
 Mode: Middle Channel TX
 Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	41.3167	22.06	11.81	33.87	40.00	-6.13	peak			
2		149.6333	14.25	12.85	27.10	43.50	-16.40	peak			
3		400.2167	5.94	19.08	25.02	46.00	-20.98	peak			
4		516.6167	2.04	21.58	23.62	46.00	-22.38	peak			
5		600.6833	0.95	23.73	24.68	46.00	-21.32	peak			
6		747.8000	0.33	26.57	26.90	46.00	-19.10	peak			

RESULT: PASS

RADIATED EMISSION TEST- (30MHz-1GHz)- MIDDLE CHANNEL -VERTICAL

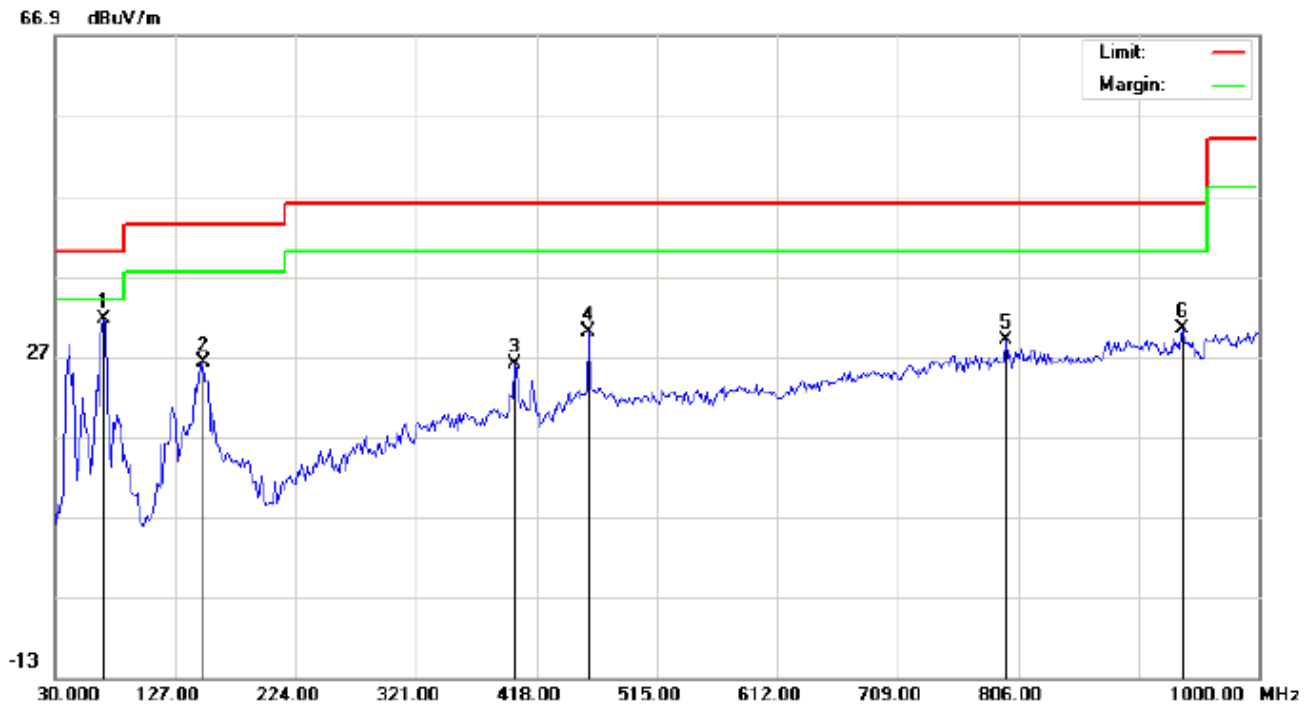

Site: site #1
Limit: FCC Class B 3M Radiation
EUT: Smart Watch
M/N: GV68
Mode: Middle Channel TX
Note:

Polarization: **Vertical**
Power:
Distance:

Temperature: 23.6
Humidity: 52.7 %


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	68.8000	26.82	4.73	31.55	40.00	-8.45	peak			
2		149.6333	10.88	15.26	26.14	43.50	-17.36	peak			
3		400.2167	6.87	19.08	25.95	46.00	-20.05	peak			
4		460.0333	9.30	20.70	30.00	46.00	-16.00	peak			
5		796.3000	1.78	27.27	29.05	46.00	-16.95	peak			
6		938.5667	0.70	29.68	30.38	46.00	-15.62	peak			

RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

RADIATED EMISSION TEST- (30MHz-1GHz)-HIGH CHANNEL-HORIZONTAL

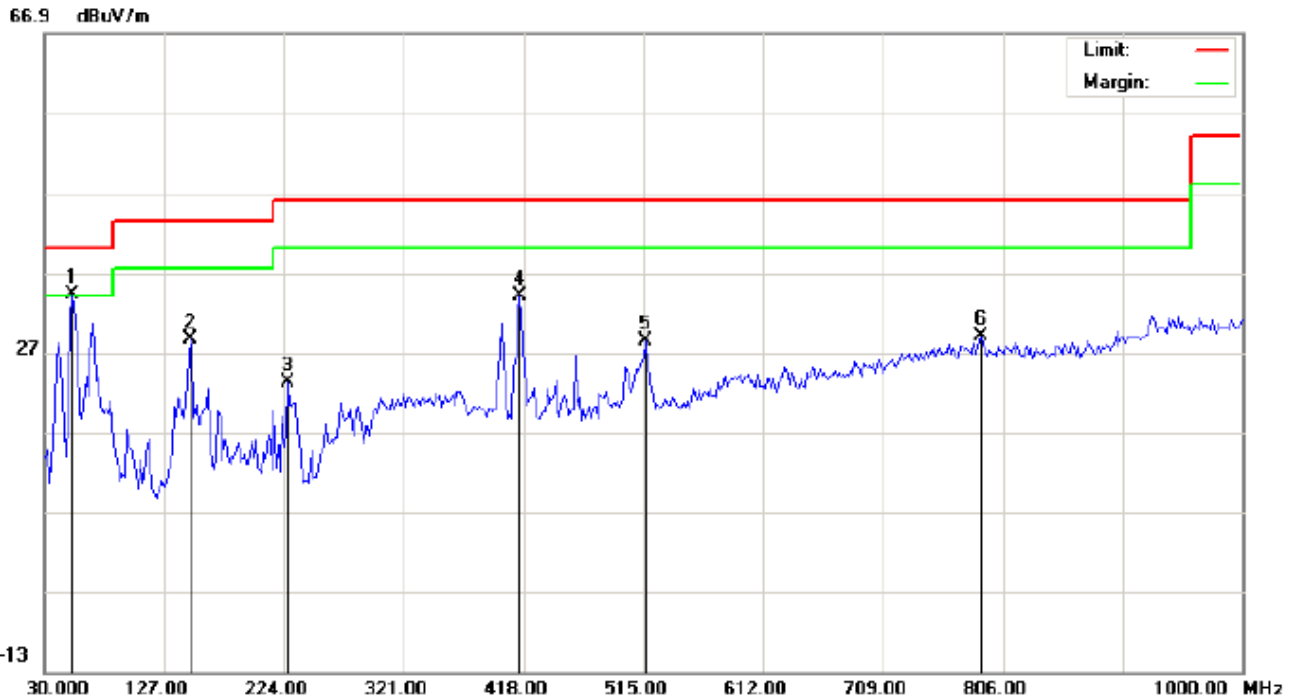

Site: site #1
Limit: FCC Class B 3M Radiation
EUT: Smart Watch
M/N: GV68
Mode: High Channel TX
Note:


Polarization: *Horizontal*
Power:
Distance:

Temperature: 23.6
Humidity: 52.7 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	52.6332	25.86	8.41	34.27	40.00	-5.73	peak			
2		148.0166	15.36	13.25	28.61	43.50	-14.89	peak			
3		227.2333	13.98	9.22	23.20	46.00	-22.80	peak			
4		414.7667	14.43	19.52	33.95	46.00	-12.05	peak			
5		516.6167	6.84	21.58	28.42	46.00	-17.58	peak			
6		788.2166	1.90	27.16	29.06	46.00	-16.94	peak			

RESULT: PASS

RADIATED EMISSION TEST- (30MHz-1GHz)-HIGH CHANNEL -VERTICAL

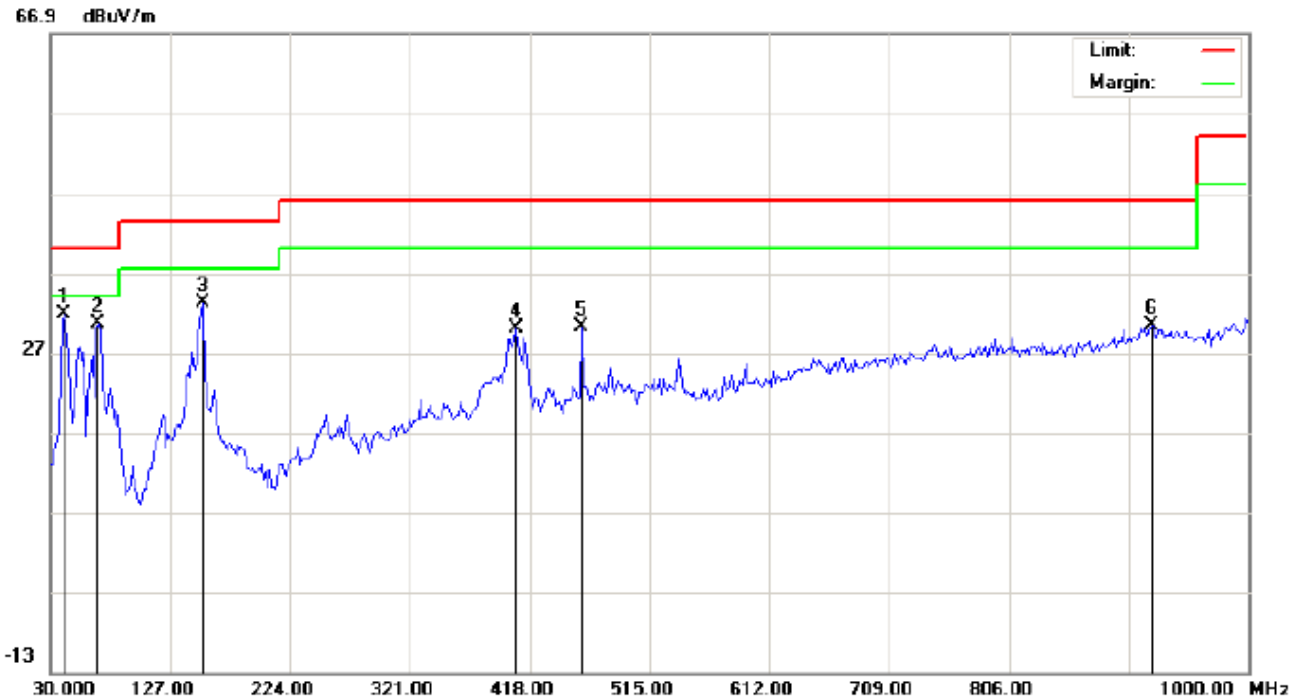

Site: site #1
 Limit: FCC Class B 3M Radiation
 EUT: Smart Watch
 M/N: GV68
 Mode: High Channel TX
 Note:

Polarization: *Vertical*
 Power:
 Distance:

Temperature: 23.6
 Humidity: 52.7 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	41.3166	22.94	8.81	31.75	40.00	-8.25	peak			
2		68.7997	25.95	4.73	30.68	40.00	-9.32	peak			
3		152.8667	17.91	15.28	33.19	43.50	-10.31	peak			
4		406.6832	10.72	19.27	29.99	46.00	-16.01	peak			
5		460.0332	9.55	20.70	30.25	46.00	-15.75	peak			
6		922.3999	1.12	29.23	30.35	46.00	-15.65	peak			

RESULT: PASS


Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

RADIATED EMISSION ABOVE 1GHz

**(Worst modulation: GFSK)
FOR BR/EDR**

RADIATED EMISSION TEST- (ABOVE 1GHz)-LOW CHANNEL-HORIZONTAL

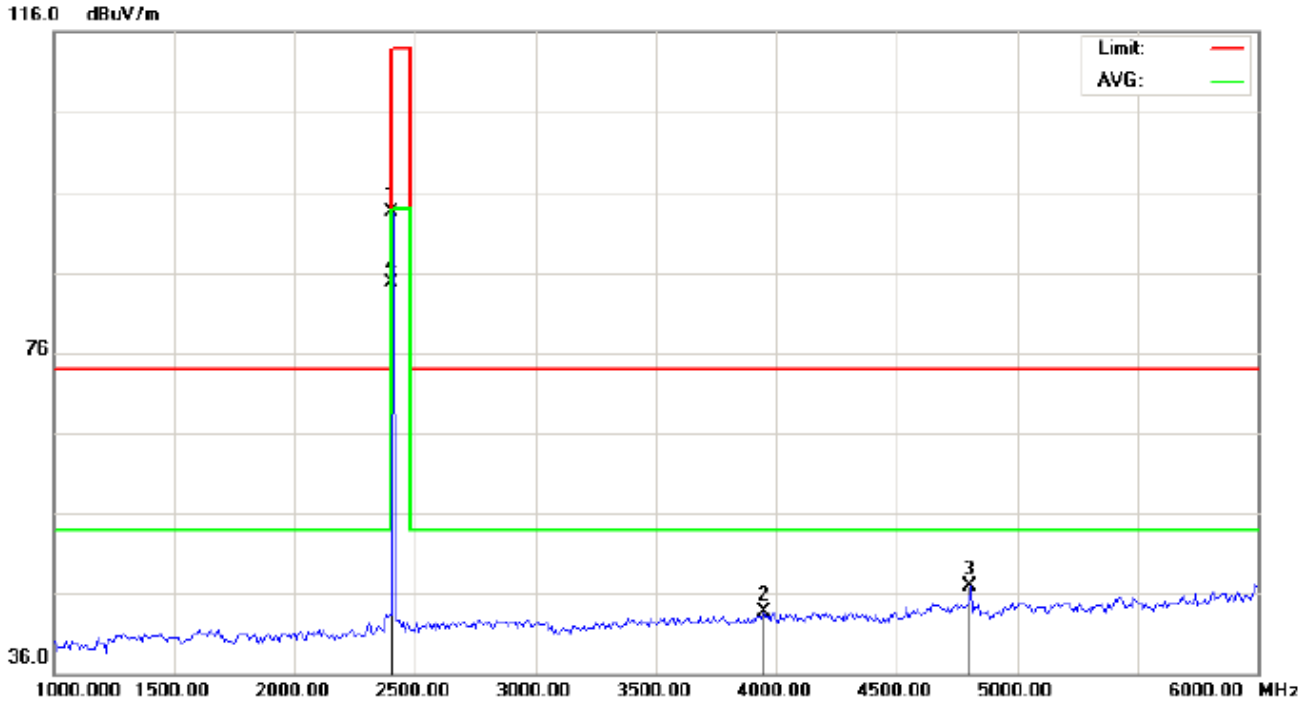


Site: site #1 Polarization: *Horizontal* Temperature: 22.7
 Limit: FCC Class B 3M Radiation above 1GHz(PK)- Power: Humidity: 53.6 %
 EUT: Smart Watch Distance:
 M/N: GV68
 Mode: Low Channel TX
 Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2402.000	83.22	10.32	93.54	114.00	-20.46	peak			
2		3950.000	28.88	14.88	43.76	74.00	-30.24	peak			
3		4804.000	39.24	7.69	46.93	74.00	-27.07	peak			
4	*	2402.000	74.42	10.32	84.74	94.00	-9.26	AVG	100	255	

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHz)-LOW CHANNEL- VERTICAL

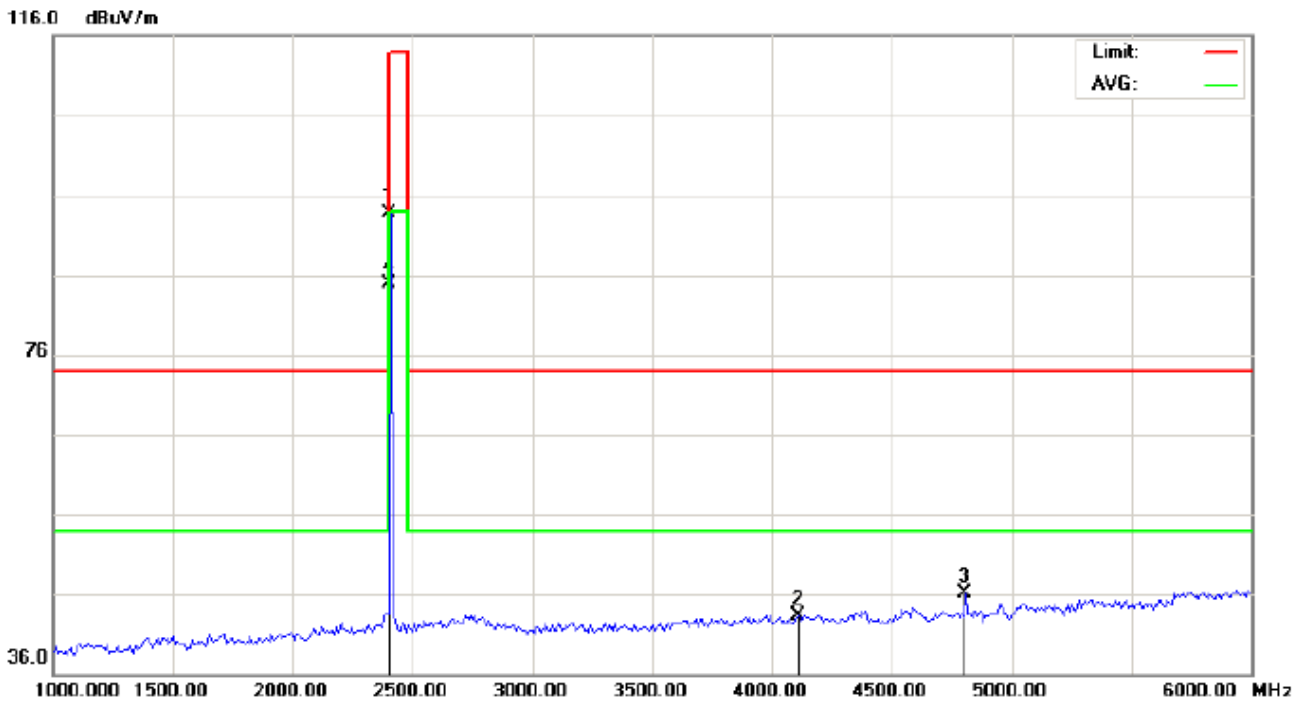


Site: site #1	Polarization: <i>Vertical</i>	Temperature: 22.7
Limit: FCC Class B 3M Radiation above 1GHz(PK)-	Power:	Humidity: 53.6 %
EUT: Smart Watch	Distance:	
M/N: GV68		
Mode: Low Channel TX		
Note:		

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna	Table	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		Height	Degree	
1		2402.000	83.29	10.32	93.61	114.00	-20.39	peak			
2		4108.333	29.90	13.39	43.29	74.00	-30.71	peak			
3		4804.000	38.38	7.69	46.07	74.00	-27.93	peak			
4	*	2402.000	74.54	10.32	84.86	94.00	-9.14	AVG	100	94	

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHZ)-MIDDLE CHANNEL-HORIZONTAL

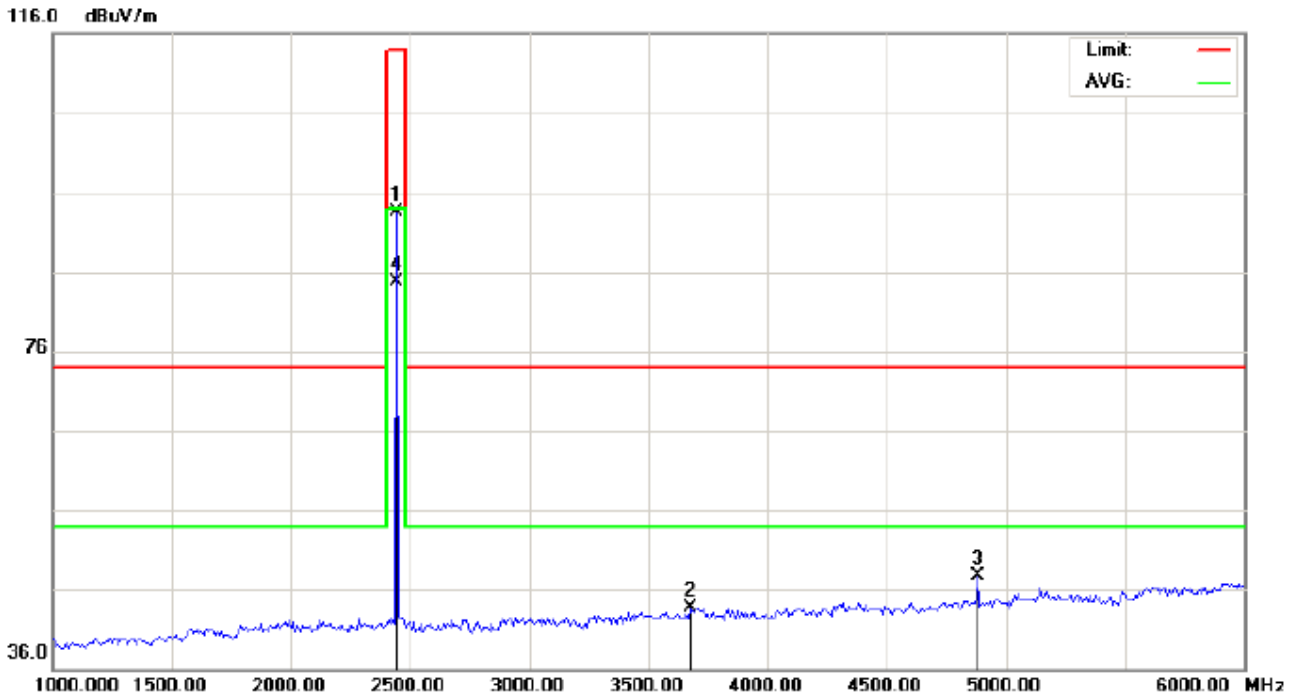

Site: site #1
Limit: FCC Class B 3M Radiation above 1GHz(PK)-
EUT: Smart Watch
M/N: GV68
Mode: Middle Channel TX
Note:


Polarization: *Horizontal*
Power:
Distance:

Temperature: 22.7
Humidity: 53.6 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2441.000	83.23	10.36	93.59	114.00	-20.41	peak			
2		3675.000	30.58	13.19	43.77	74.00	-30.23	peak			
3		4882.000	39.88	7.89	47.77	74.00	-26.23	peak			
4	*	2441.000	74.35	10.36	84.71	94.00	-9.29	AVG	100	257	

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHz)-MIDDLE CHANNEL- VERTICAL

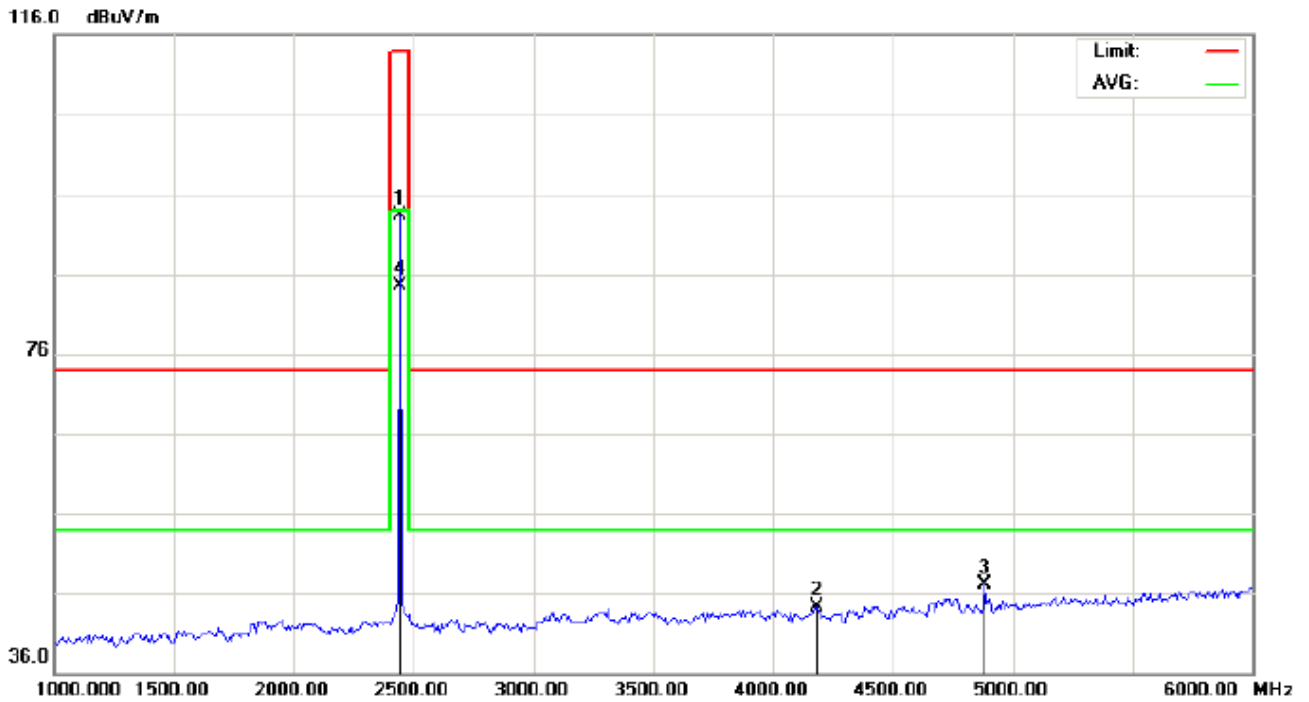

Site: site #1
 Limit: FCC Class B 3M Radiation above 1GHz(PK)-
 EUT: Smart Watch
 M/N: GV68
 Mode: Middle Channel TX
 Note:


Polarization: *Vertical*
 Power:
 Distance:

Temperature: 22.7
 Humidity: 53.6 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna	Table	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		Height	Degree	
									cm	degree	
1		2441.000	83.01	10.36	93.37	114.00	-20.63	peak			
2		4183.333	32.22	12.15	44.37	74.00	-29.63	peak			
3		4882.000	39.31	7.89	47.20	74.00	-26.80	peak			
4	*	2441.000	74.23	10.36	84.59	94.00	-9.41	AVG	100	98	

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHz)-HIGH CHANNEL-HORIZONTAL

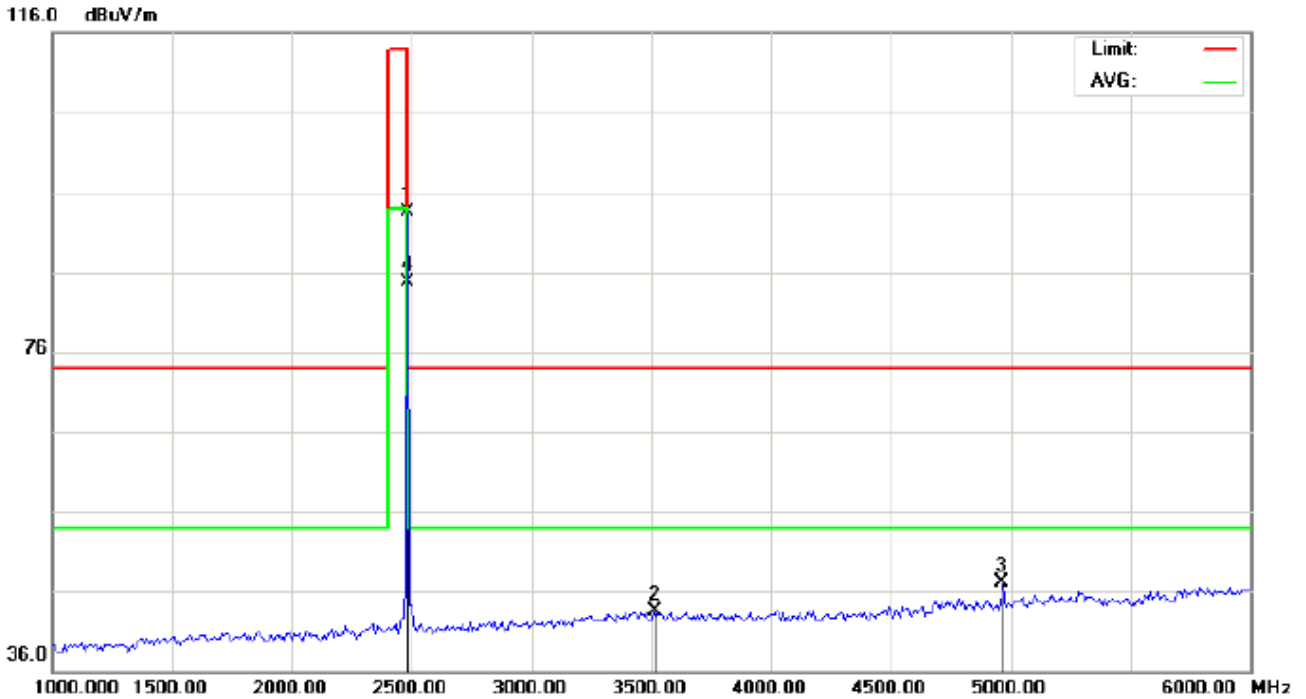


Site: site #1 Polarization: *Horizontal* Temperature: 22.7
Limit: FCC Class B 3M Radiation above 1GHz(PK)- Power: Humidity: 53.6 %
EUT: Smart Watch Distance:
M/N: GV68
Mode: High Channel TX
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2480.000	83.00	10.41	93.41	114.00	-20.59	peak			
2		3516.667	31.29	12.21	43.50	74.00	-30.50	peak			
3		4960.000	39.01	8.09	47.10	74.00	-26.90	peak			
4	*	2480.000	74.24	10.41	84.65	94.00	-9.35	AVG	100	261	

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHz)-HIGH CHANNEL- VERTICAL

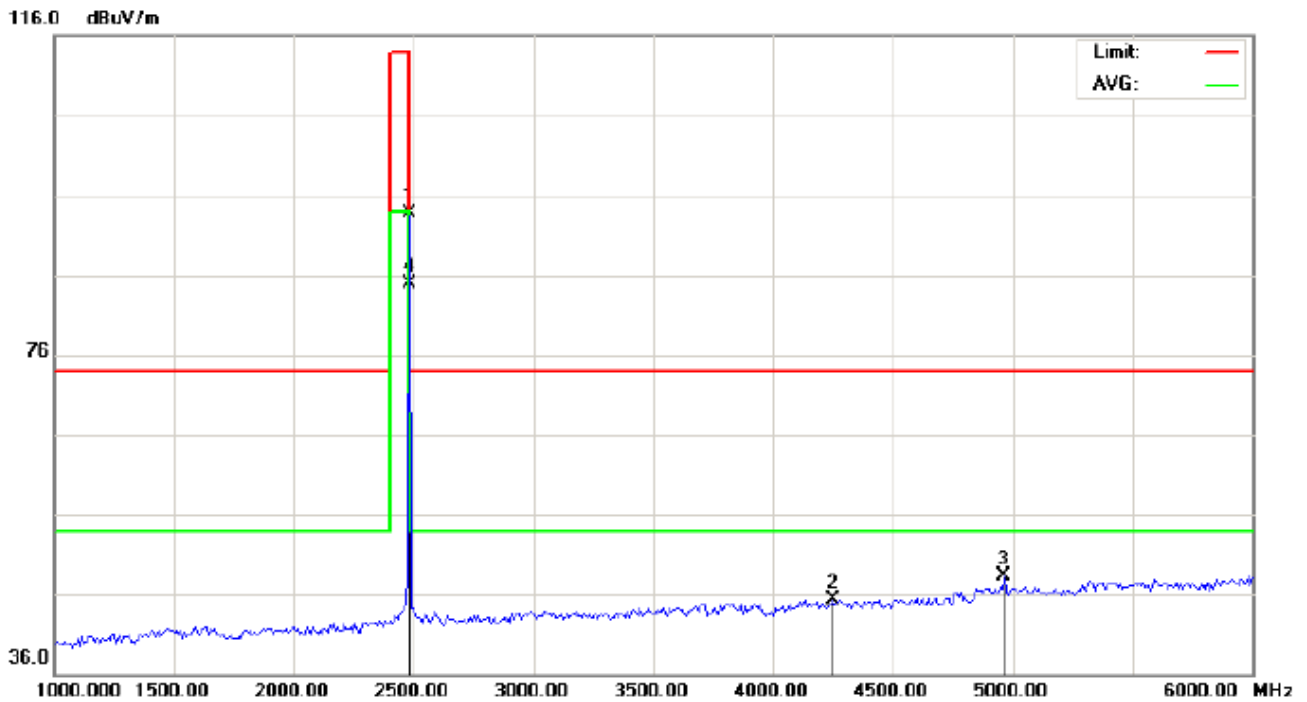

Site: site #1 Polarization: *Vertical* Temperature: 22.7
 Limit: FCC Class B 3M Radiation above 1GHz(PK)- Power: Humidity: 53.6 %
 EUT: Smart Watch Distance:
 M/N: GV68
 Mode: High Channel TX
 Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2480.000	83.21	10.41	93.62	114.00	-20.38	peak			
2		4250.000	34.28	11.04	45.32	74.00	-28.68	peak			
3		4960.000	40.16	8.09	48.25	74.00	-25.75	peak			
4	*	2480.000	74.46	10.41	84.87	94.00	-9.13	AVG	100	101	

RESULT: PASS

Note: 6~25GHz at least have 20dB margin. No recording in the test report.

Factor=Antenna Factor + Cable loss - Amplifier gain, Margin=Measurement-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

Field strength of the fundamental signal**1Mbps Result:****Peak value**

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	83.22	10.32	93.54	114	-20.46	Horizontal
2402	83.29	10.32	93.61	114	-20.39	Vertical
2441	83.23	10.36	93.59	114	-20.41	Horizontal
2441	83.01	10.36	93.37	114	-20.63	Vertical
2480	83.00	10.41	93.41	114	-20.59	Horizontal
2480	83.21	10.41	93.62	114	-20.38	Vertical

Average value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	74.42	10.32	84.74	94	-9.26	Horizontal
2402	74.54	10.32	84.86	94	-9.14	Vertical
2441	74.35	10.36	84.71	94	-9.29	Horizontal
2441	74.23	10.36	84.59	94	-9.41	Vertical
2480	74.24	10.41	84.65	94	-9.35	Horizontal
2480	74.46	10.41	84.87	94	-9.13	Vertical

2Mbps Result:**Peak value**

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	83.24	10.32	93.56	114	-20.44	Horizontal
2402	83.17	10.32	93.49	114	-20.51	Vertical
2441	83.16	10.36	93.52	114	-20.48	Horizontal
2441	83.09	10.36	93.45	114	-20.55	Vertical
2480	83.14	10.41	93.55	114	-20.45	Horizontal
2480	83.10	10.41	93.51	114	-20.49	Vertical

Average value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	74.44	10.32	84.76	94	-9.24	Horizontal
2402	74.37	10.32	84.69	94	-9.31	Vertical
2441	74.23	10.36	84.59	94	-9.41	Horizontal
2441	74.16	10.36	84.52	94	-9.48	Vertical
2480	74.32	10.41	84.73	94	-9.27	Horizontal
2480	74.20	10.41	84.61	94	-9.39	Vertical

3Mbps Result:**Peak value**


Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	83.10	10.32	93.42	114	-20.58	Horizontal
2402	83.03	10.32	93.35	114	-20.65	Vertical
2441	83.01	10.36	93.37	114	-20.63	Horizontal
2441	82.95	10.36	93.31	114	-20.69	Vertical
2480	83.00	10.41	93.41	114	-20.59	Horizontal
2480	82.92	10.41	93.33	114	-20.67	Vertical

Average value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	74.29	10.32	84.61	94	-9.39	Horizontal
2402	74.23	10.32	84.55	94	-9.45	Vertical
2441	74.08	10.36	84.44	94	-9.56	Horizontal
2441	74.02	10.36	84.38	94	-9.62	Vertical
2480	74.12	10.41	84.53	94	-9.47	Horizontal
2480	74.08	10.41	84.49	94	-9.51	Vertical

FOR BLE

RADIATED EMISSION TEST- (ABOVE 1GHz)-LOW CHANNEL-HORIZONTAL

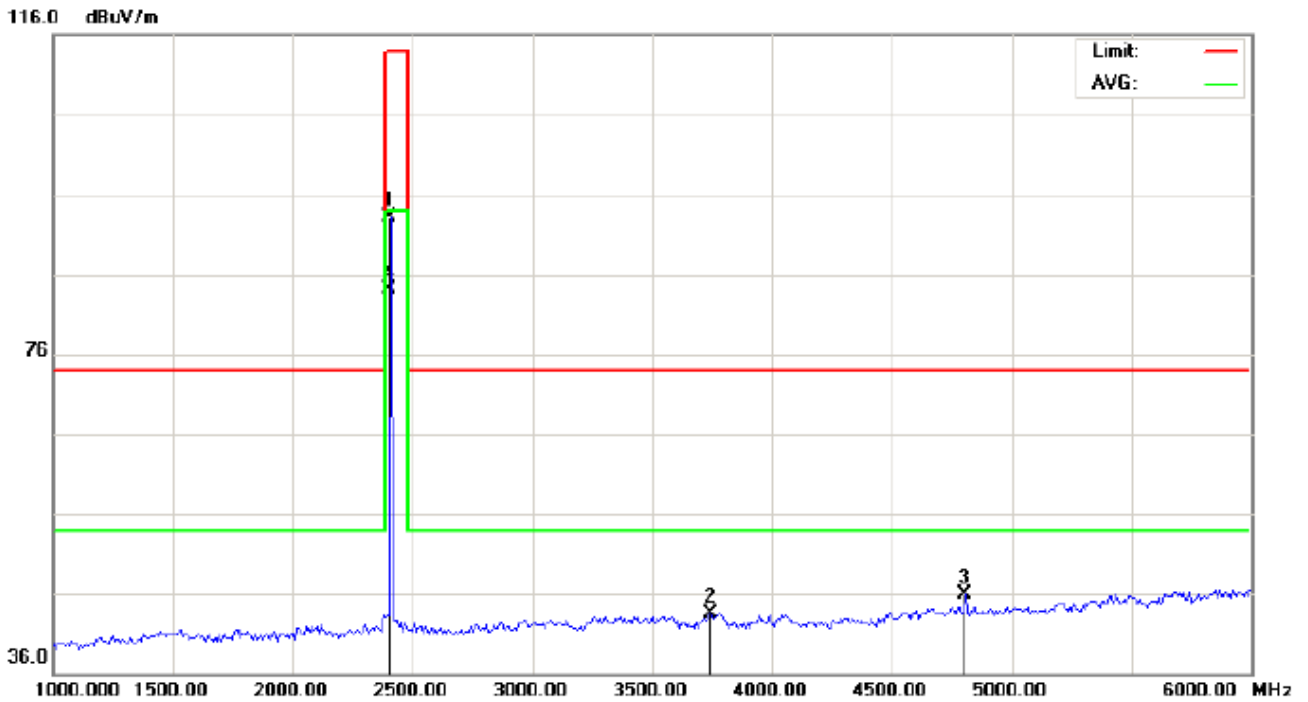


Site: site #1 Polarization: *Horizontal* Temperature: 22.7
Limit: FCC Class B 3M Radiation above 1GHz(PK)- Power: Humidity: 53.6 %
EUT: Smart Watch Distance:
M/N: GV68
Mode: Low Channel TX
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB				
1		2402.000	82.76	10.32	93.08	114.00	-20.92	peak			
2		3741.667	29.97	13.60	43.57	74.00	-30.43	peak			
3		4804.000	38.24	7.69	45.93	74.00	-28.07	peak			
4	*	2402.000	73.84	10.32	84.16	94.00	-9.84	AVG	100	316	

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHz)-LOW CHANNEL- VERTICAL

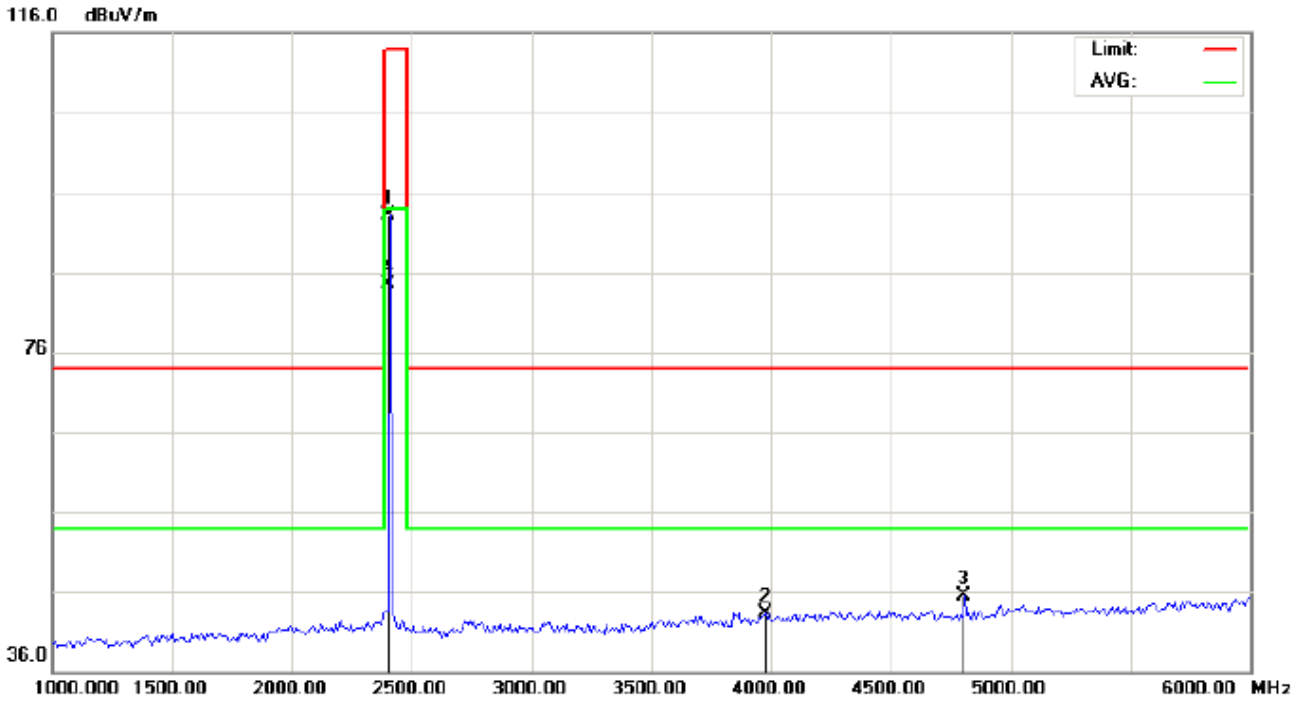


Site: site #1 Polarization: **Vertical** Temperature: 22.7
 Limit: FCC Class B 3M Radiation above 1GHz(PK)- Power: Humidity: 53.6 %
 EUT: Smart Watch Distance:
 M/N: GV68
 Mode: Low Channel TX
 Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2402.000	82.87	10.32	93.19	114.00	-20.81	peak			
2		3975.000	28.24	15.04	43.28	74.00	-30.72	peak			
3		4804.000	37.88	7.69	45.57	74.00	-28.43	peak			
4	*	2402.000	74.14	10.32	84.46	94.00	-9.54	AVG	100	148	

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHz)-MIDDLE CHANNEL-HORIZONTAL

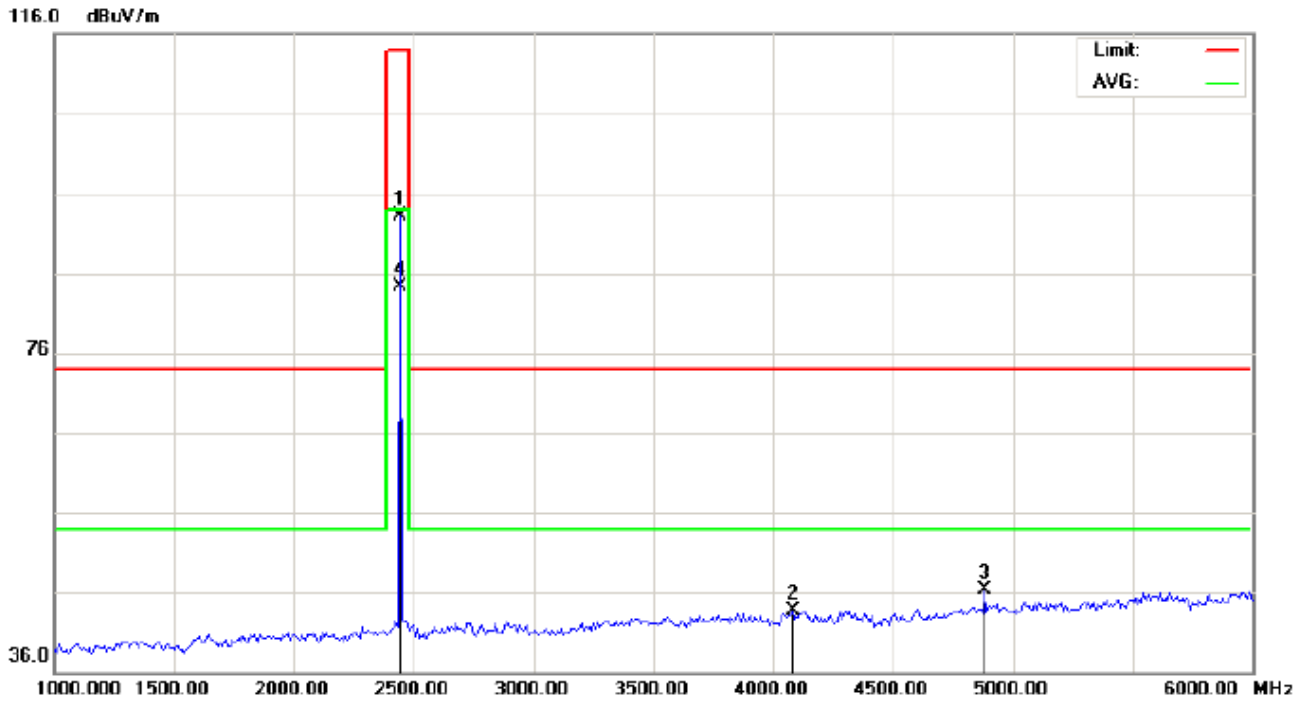

Site: site #1
Limit: FCC Class B 3M Radiation above 1GHz(PK)-
EUT: Smart Watch
M/N: GV68
Mode: Middle Channel TX
Note:


Polarization: *Horizontal*
Power:
Distance:

Temperature: 22.7
Humidity: 53.6 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2440.000	82.76	10.36	93.12	114.00	-20.88	peak			
2		4083.333	29.79	13.81	43.60	74.00	-30.40	peak			
3		4882.000	38.38	7.89	46.27	74.00	-27.73	peak			
4	*	2440.000	73.98	10.36	84.34	94.00	-9.66	AVG	100	311	

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHz)-MIDDLE CHANNEL- VERTICAL

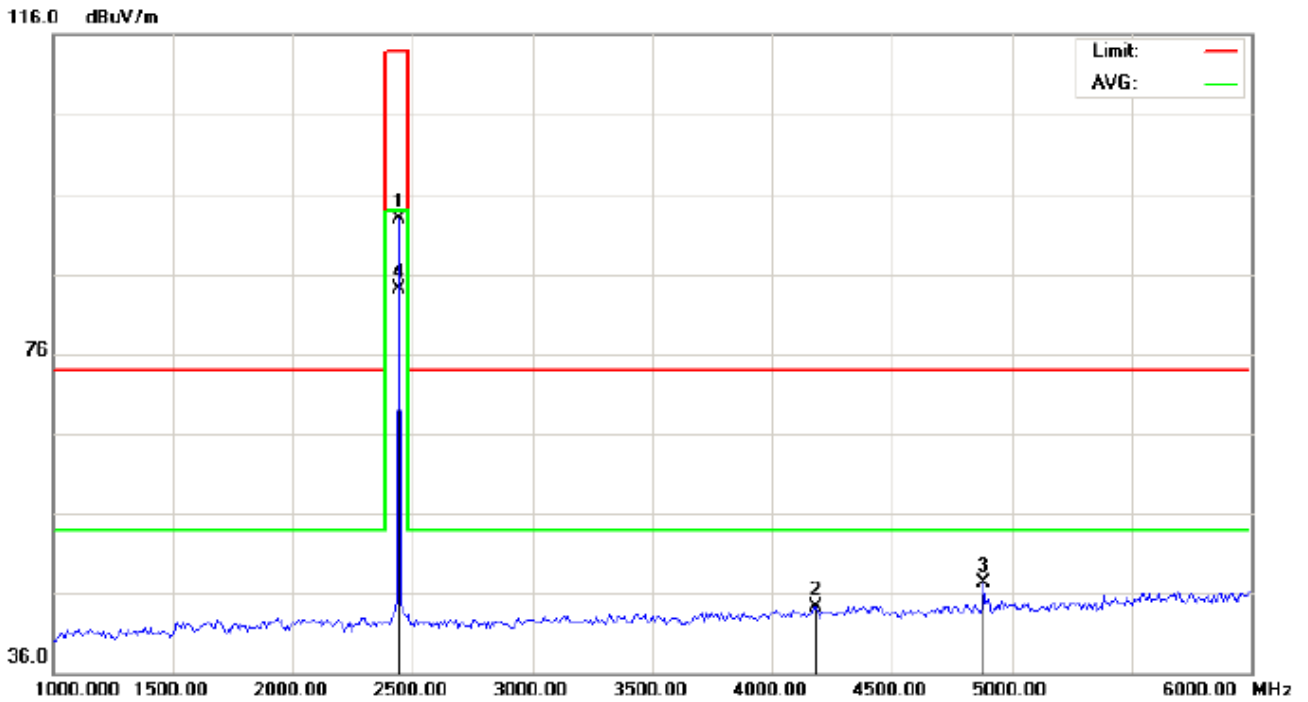

Site: site #1
 Limit: FCC Class B 3M Radiation above 1GHz(PK)-
 EUT: Smart Watch
 M/N: GV68
 Mode: Middle Channel TX
 Note:


Polarization: *Vertical*
 Power:
 Distance:

Temperature: 22.7
 Humidity: 53.6 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2440.000	82.55	10.36	92.91	114.00	-21.09	peak			
2		4183.333	32.22	12.15	44.37	74.00	-29.63	peak			
3		4882.000	39.31	7.89	47.20	74.00	-26.80	peak			
4	*	2440.000	73.72	10.36	84.08	94.00	-9.92	AVG	100	151	

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHz)-HIGH CHANNEL-HORIZONTAL

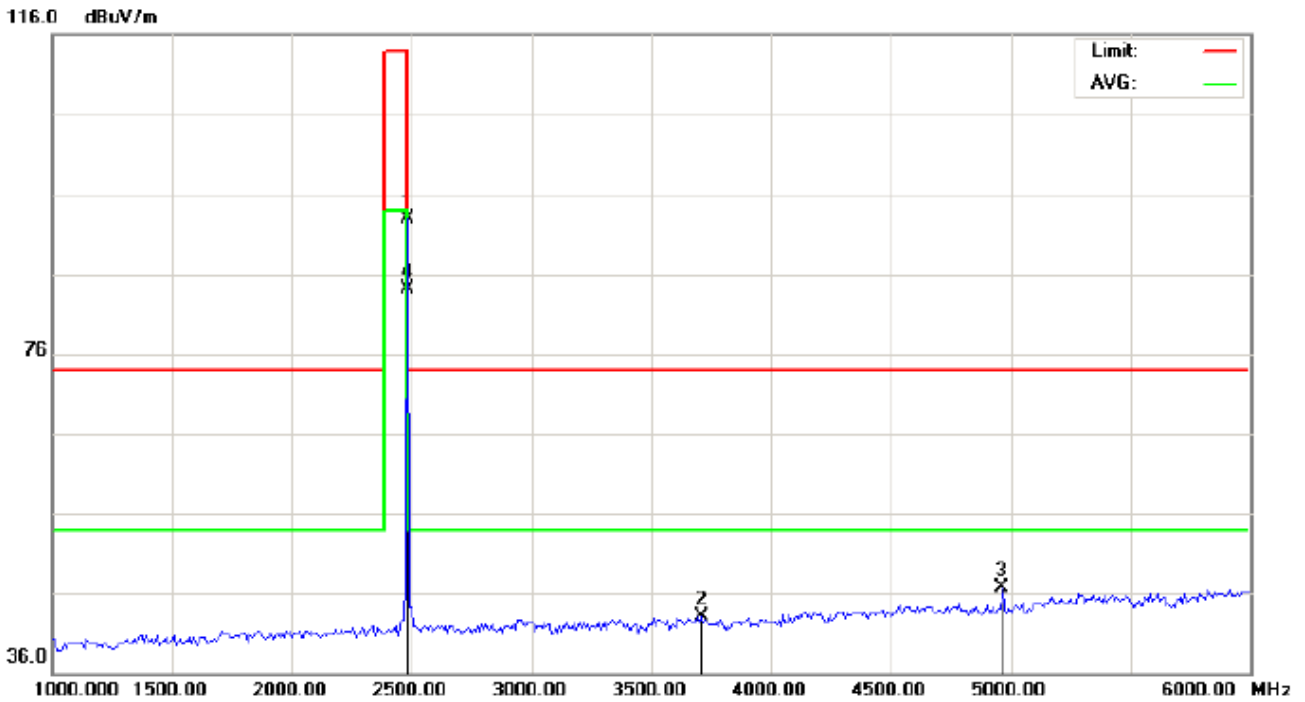


Site: site #1 Polarization: *Horizontal* Temperature: 22.7
 Limit: FCC Class B 3M Radiation above 1GHz(PK)- Power: Humidity: 53.6 %
 EUT: Smart Watch Distance:
 M/N: GV68
 Mode: High Channel TX
 Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2480.000	82.52	10.41	92.93	114.00	-21.07	peak			
2		3708.333	29.67	13.39	43.06	74.00	-30.94	peak			
3		4960.000	38.51	8.09	46.60	74.00	-27.40	peak			
4	*	2480.000	73.71	10.41	84.12	94.00	-9.88	AVG	100	312	

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHz)-HIGH CHANNEL- VERTICAL

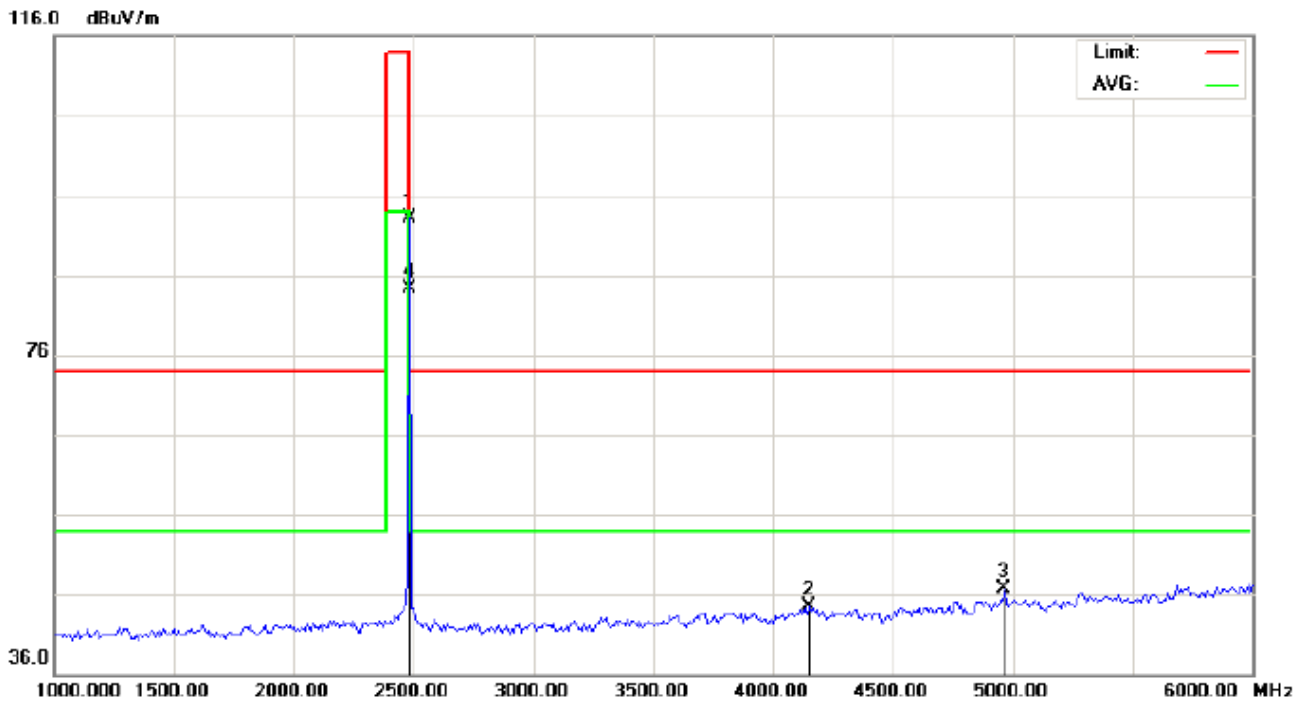

Site: site #1
 Limit: FCC Class B 3M Radiation above 1GHz(PK)-
 EUT: Smart Watch
 M/N: GV68
 Mode: High Channel TX
 Note:

Polarization: *Vertical*
 Power:
 Distance:

Temperature: 22.7
 Humidity: 53.6 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2480.000	82.71	10.41	93.12	114.00	-20.88	peak			
2		4150.000	31.75	12.70	44.45	74.00	-29.55	peak			
3		4960.000	38.66	8.09	46.75	74.00	-27.25	peak			
4	*	2480.000	73.95	10.41	84.36	94.00	-9.64	AVG	100	153	

RESULT: PASS

Note: 6~25GHz at least have 20dB margin. No recording in the test report.

Factor=Antenna Factor + Cable loss - Amplifier gain, Margin=Measurement-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

Field strength of the fundamental signal**Peak value**

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	82.76	10.32	93.08	114.00	-20.92	Horizontal
2402	82.87	10.32	93.19	114.00	-20.81	Vertical
2440	82.76	10.36	93.12	114.00	-20.88	Horizontal
2440	82.55	10.36	92.91	114.00	-21.09	Vertical
2480	82.52	10.41	92.93	114.00	-21.07	Horizontal
2480	82.71	10.41	93.12	114.00	-20.88	Vertical

Average value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	73.84	10.32	84.16	94.00	-9.84	Horizontal
2402	74.14	10.32	84.46	94.00	-9.54	Vertical
2440	73.98	10.36	84.34	94.00	-9.66	Horizontal
2440	73.72	10.36	84.08	94.00	-9.92	Vertical
2480	73.71	10.41	84.12	94.00	-9.88	Horizontal
2480	73.95	10.41	84.36	94.00	-9.64	Vertical


10. BAND EDGE EMISSION

10.1. MEASUREMENT PROCEDURE

1. The EUT operates at hopping-off test mode. The lowest or highest channels are tested to verify the largest transmission and spurious emissions power at the continuous transmission mode.
2. Max hold the trace of the setup1, and the EUT operates at hopping-on test mode to verify the largest spurious emissions power.
3. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission

10.2 TEST SETUP

RADIATED EMISSION TEST SETUP

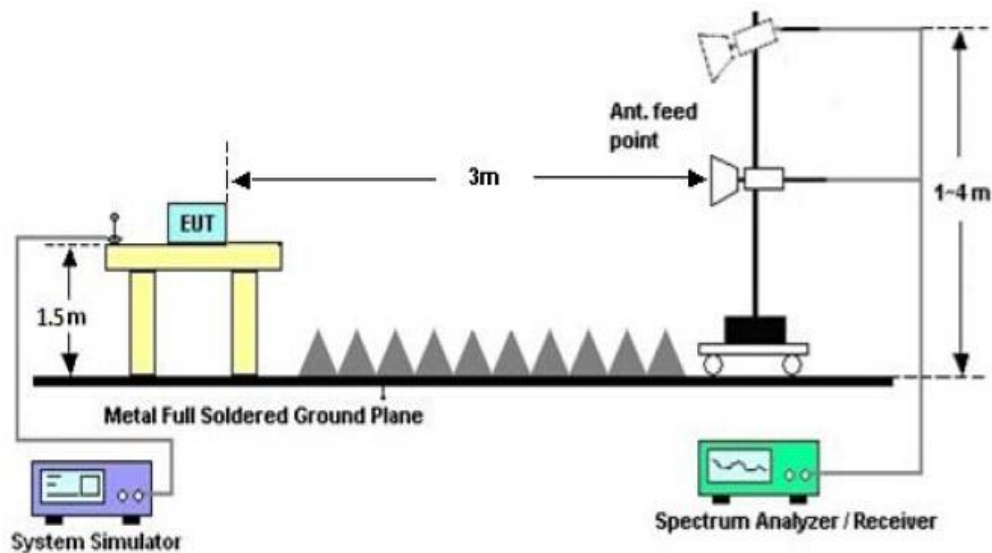


10.3 RADIATED TEST RESULT

(Worst modulation: GFSK)

FOR BR/EDR


TEST PLOT OF BAND EDGE FOR LOW CHANNEL-Horizontal

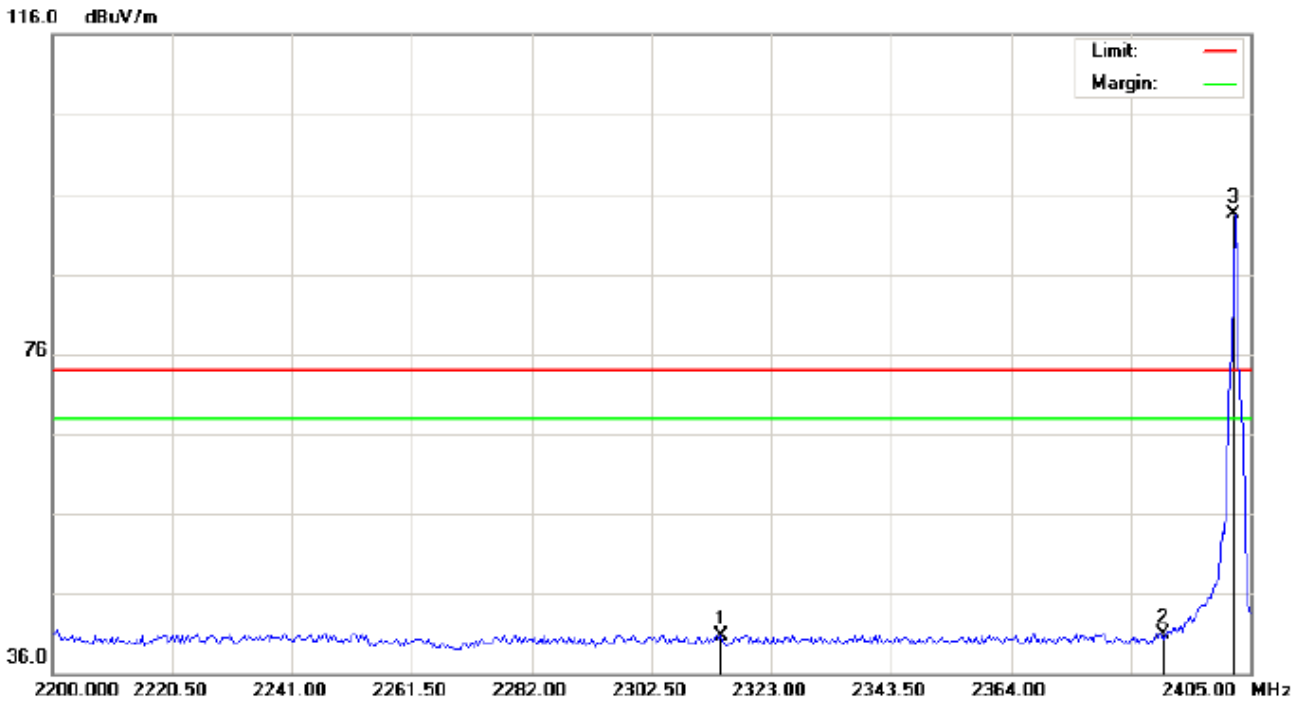

Site: site #1	Polarization: <i>Horizontal</i>	Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHz(PK)	Power:	Humidity: 60 %
EUT: Smart Watch	Distance:	
M/N: GV68		
Mode: Low Channel TX		
Note:		

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2314.458	30.45	10.23	40.68	74.00	-33.32	peak			
2		2390.000	30.50	10.31	40.81	74.00	-33.19	peak			
3	*	2402.000	83.22	10.32	93.54	74.00	19.54	peak			


TEST PLOT OF BAND EDGE FOR LOW CHANNEL -Vertical

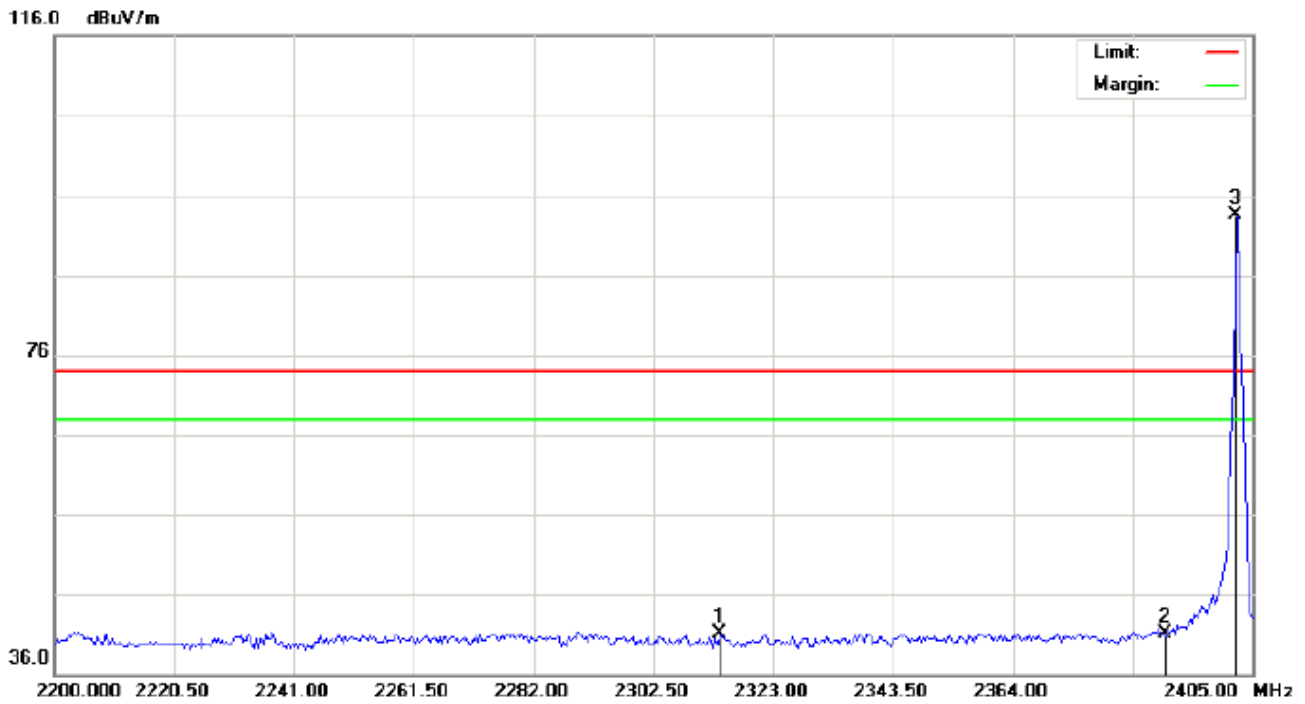

Site: site #1 Polarization: *Vertical* Temperature: 26
 Limit: FCC Class B 3M Radiation above 1GHz(PK) Power: Humidity: 60 %
 EUT: Smart Watch Distance:
 M/N: GV68
 Mode: Low Channel TX
 Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2313.775	30.83	10.23	41.06	74.00	-32.94	peak			
2		2390.000	30.71	10.31	41.02	74.00	-32.98	peak			
3	*	2402.000	83.09	10.32	93.41	74.00	19.41	peak			


TEST PLOT OF BAND EDGE FOR HIGH CHANNEL -Horizontal

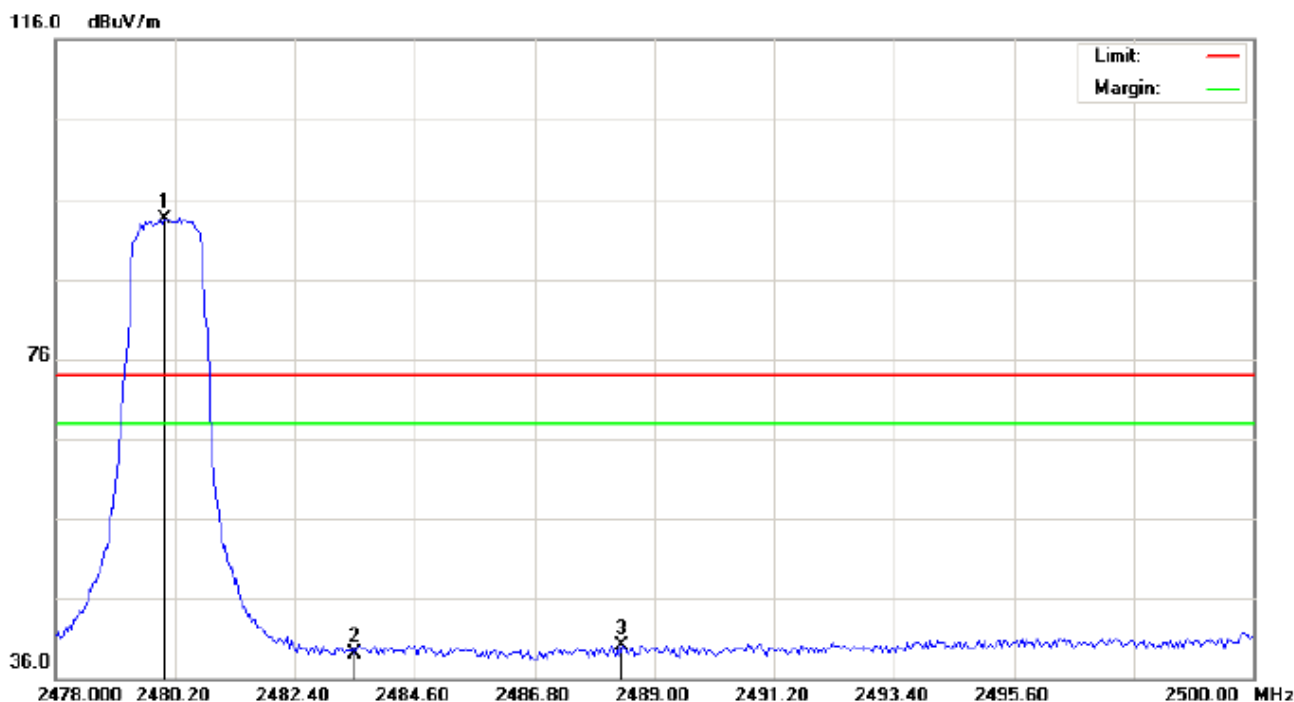

Site: site #1	Polarization: Horizontal	Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHz(PK)	Power:	Humidity: 60 %
EUT: Smart Watch	Distance:	
M/N: GV68		
Mode: High Channel TX		
Note:		

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2480.000	83.05	10.41	93.46	74.00	19.46	peak			
2		2483.500	28.69	10.41	39.10	74.00	-34.90	peak			
3		2488.413	29.67	10.42	40.09	74.00	-33.91	peak			

TEST PLOT OF BAND EDGE FOR HIGH CHANNEL-Vertical

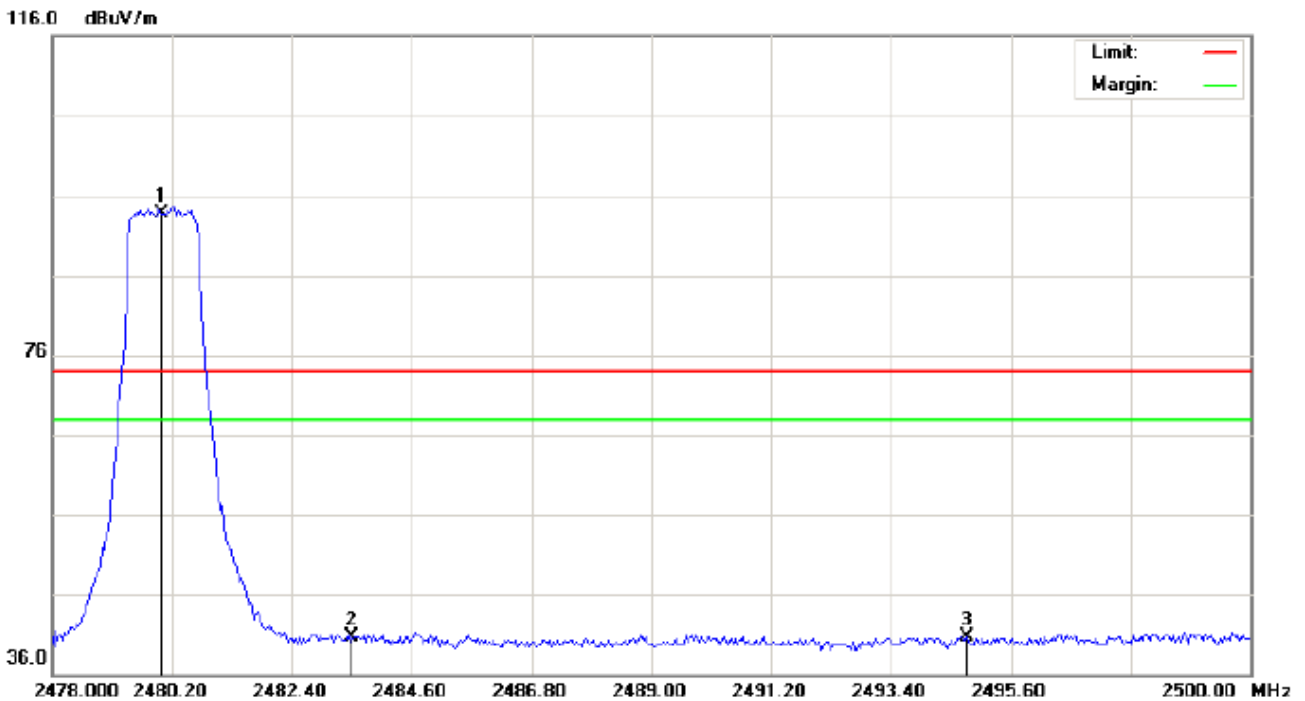

Site: site #1 Polarization: *Vertical* Temperature: 26
 Limit: FCC Class B 3M Radiation above 1GHz(PK) Power: Humidity: 60 %
 EUT: Smart Watch Distance:
 M/N: GV68
 Mode: High Channel TX
 Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2480.000	83.32	10.41	93.73	74.00	19.73	peak			
2		2483.500	30.26	10.41	40.67	74.00	-33.33	peak			
3		2494.793	30.24	10.42	40.66	74.00	-33.34	peak			

RESULT: PASS


Note: Factor=Antenna Factor + Cable loss - Amplifier gain, Over=Measure-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

Hopping on mode and Hopping off mode have been tested, but only worst case reported.

FOR BLE


TEST PLOT OF BAND EDGE FOR LOW CHANNEL-Horizontal

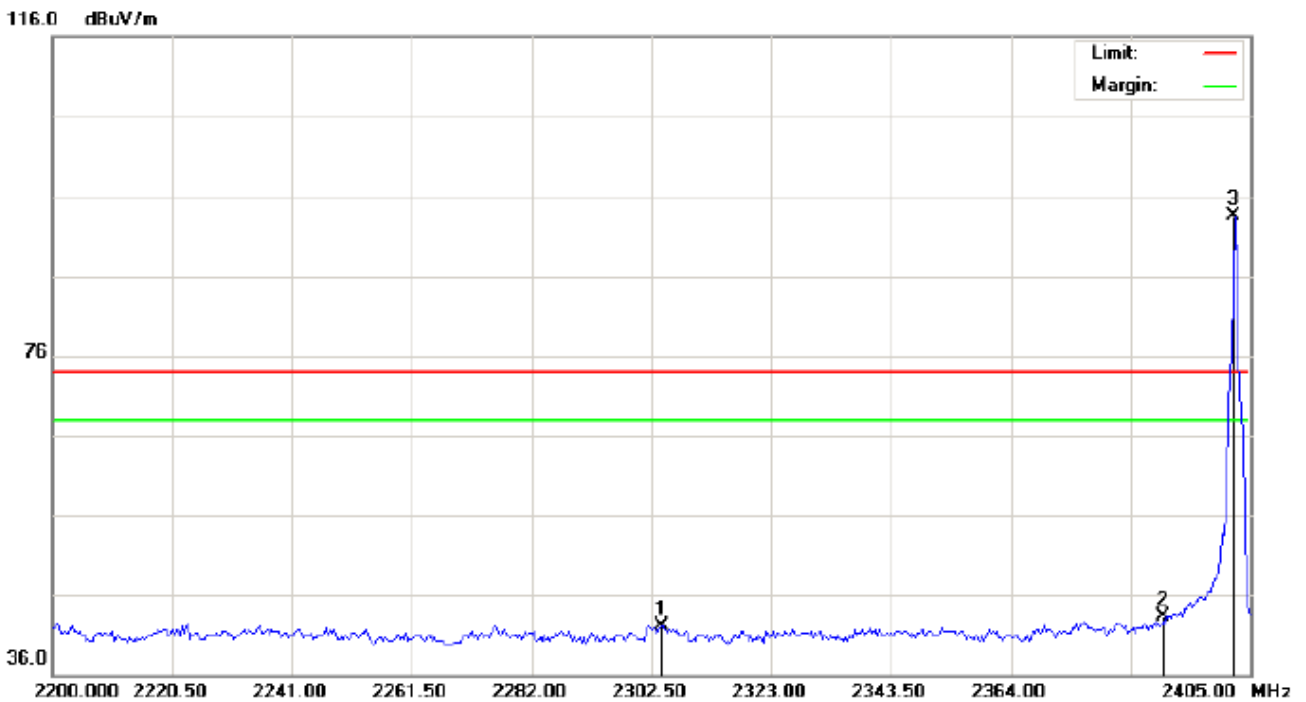

Site: site #1	Polarization: <i>Horizontal</i>	Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHz(PK)	Power:	Humidity: 60 %
EUT: Smart Watch	Distance:	
M/N: GV68		
Mode: Low Channel TX		
Note:		

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2304.208	31.94	10.21	42.15	74.00	-31.85	peak			
2		2390.000	33.00	10.31	43.31	74.00	-30.69	peak			
3	*	2402.000	83.26	10.32	93.58	74.00	19.58	peak			


TEST PLOT OF BAND EDGE FOR LOW CHANNEL -Vertical

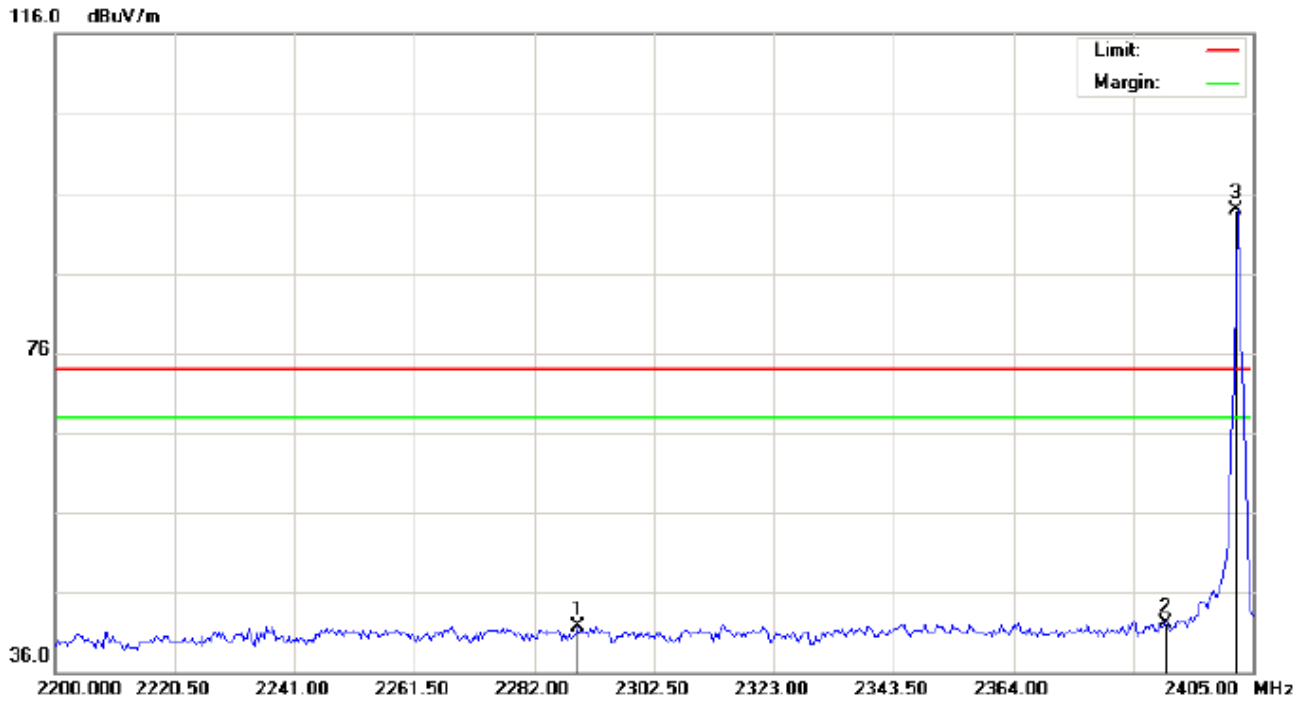

Site: site #1 Polarization: **Vertical** Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHz(PK) Power: Humidity: 60 %
EUT: Smart Watch Distance:
M/N: GV68
Mode: Low Channel TX
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2289.517	31.52	10.20	41.72	74.00	-32.28	peak			
2		2390.000	31.71	10.31	42.02	74.00	-31.98	peak			
3	*	2402.000	83.59	10.32	93.91	74.00	19.91	peak			

TEST PLOT OF BAND EDGE FOR HIGH CHANNEL -Horizontal

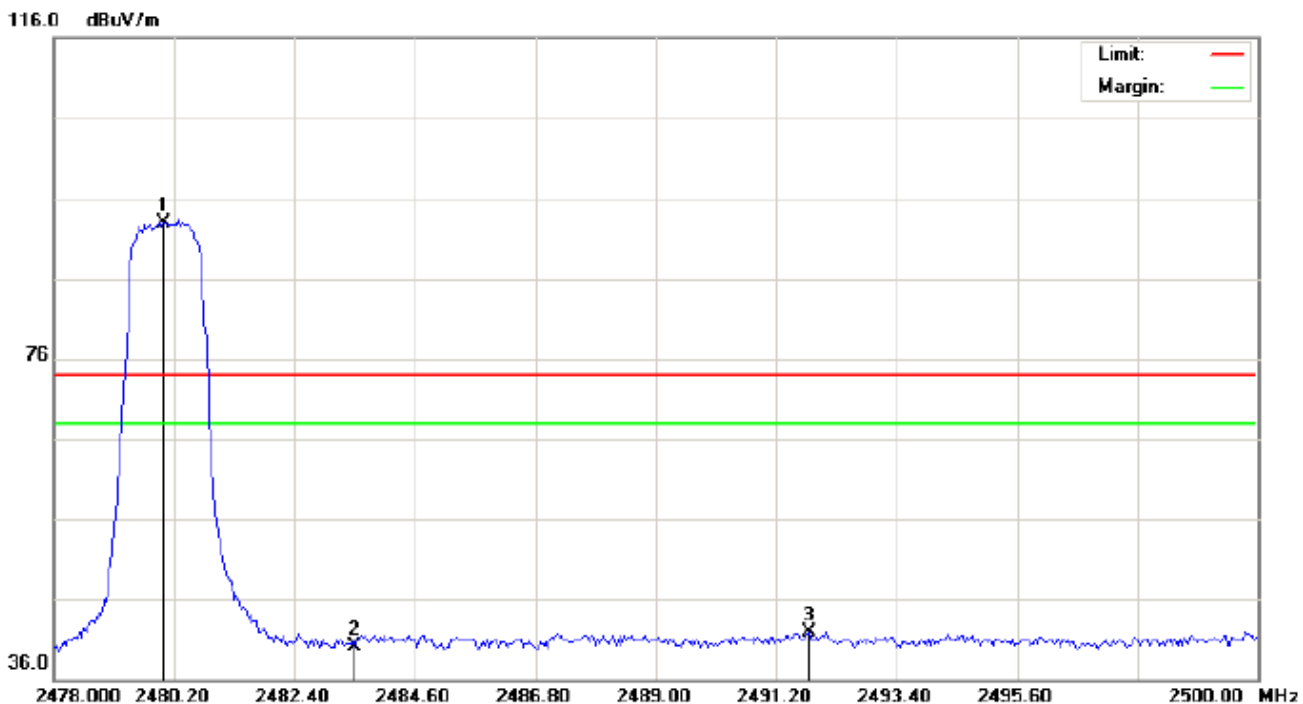


Site: site #1
 Limit: FCC Class B 3M Radiation above 1GHz(PK)
 EUT: Smart Watch
 M/N: GV68
 Mode: High Channel TX
 Note:

Polarization: *Horizontal*
 Power:
 Distance:

Temperature: 26
 Humidity: 60 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2480.000	82.55	10.41	92.96	74.00	18.96	peak			
2		2483.500	29.69	10.41	40.10	74.00	-33.90	peak			
3		2491.787	31.46	10.42	41.88	74.00	-32.12	peak			

TEST PLOT OF BAND EDGE FOR HIGH CHANNEL-Vertical

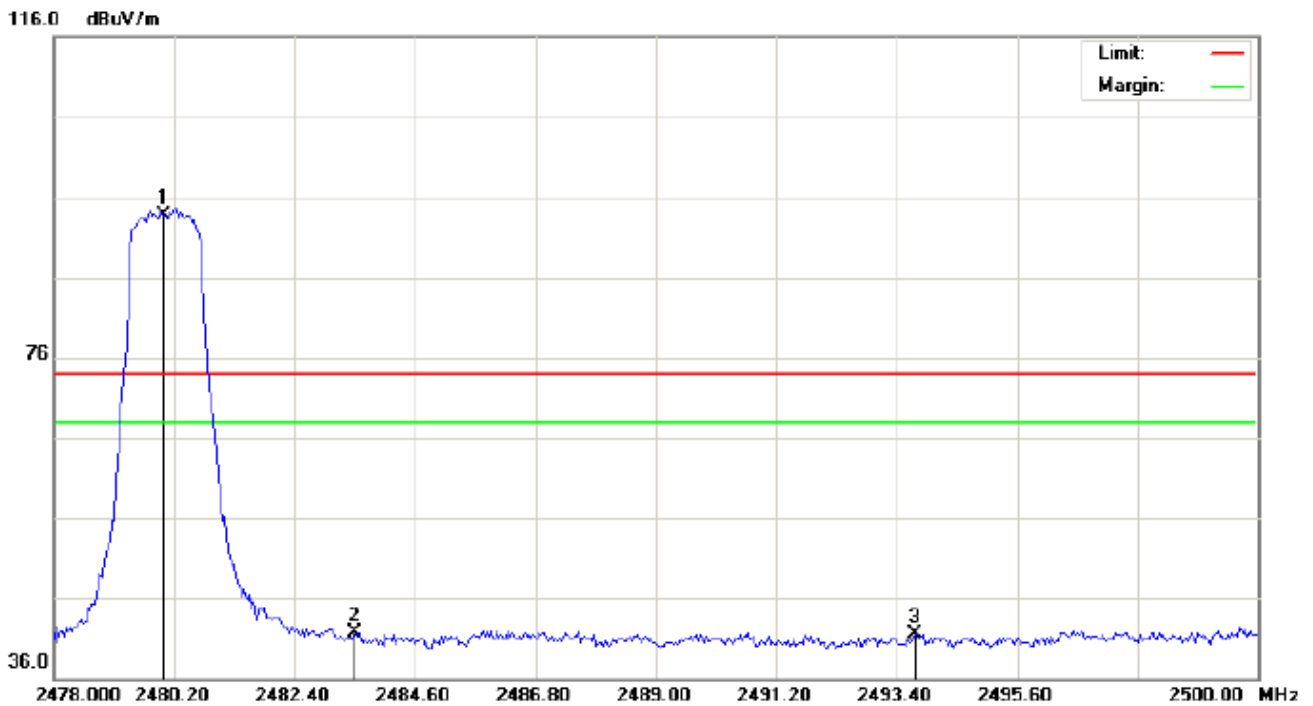

Site: site #1 Polarization: *Vertical* Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHz(PK) Power: Humidity: 60 %
EUT: Smart Watch Distance:
M/N: GV68
Mode: High Channel TX
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2480.000	83.32	10.41	93.73	74.00	19.73	peak			
2		2483.500	31.26	10.41	41.67	74.00	-32.33	peak			
3		2493.730	31.05	10.42	41.47	74.00	-32.53	peak			

RESULT: PASS

Note: The other modes radiation emission have enough 20dB margin.

Factor=Antenna Factor + Cable loss - Amplifier gain, Over=Measure-Limit.


The "Factor" value can be calculated automatically by software of measurement system.

11. 20DB BANDWIDTH

11.1. MEASUREMENT PROCEDURE

1. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
2. Set Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel
 $RBW \geq 1\%$ of the 20 dB bandwidth, $VBW \geq RBW$; Sweep = auto; Detector function = peak
3. Set SPA Trace 1 Max hold, then View.

11.2. TEST SET-UP

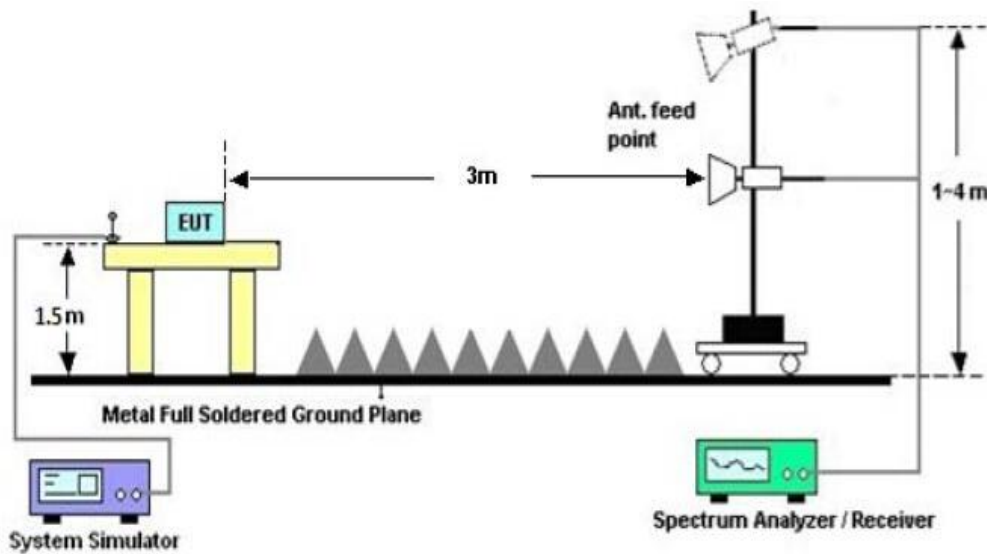


11.3. LIMITS AND MEASUREMENT RESULTS


FOR BR/EDR

BLUETOOTH 1MBPS LIMITS AND MEASUREMENT RESULT				
Applicable Limits	Measurement Result			
	Test Data (MHz)			Result
		99%OBW (MHz)	-20dB BW(MHz)	
N/A	Low Channel	0.925	1.062	PASS
	Middle Channel	0.917	1.081	PASS
	High Channel	0.926	1.080	PASS


TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

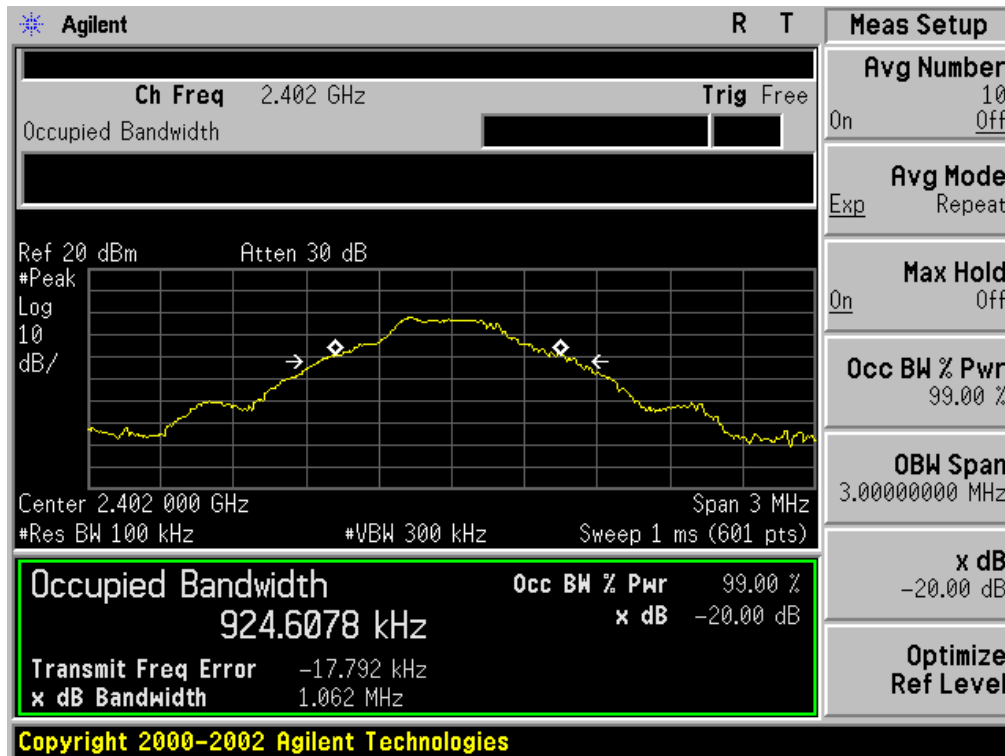

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

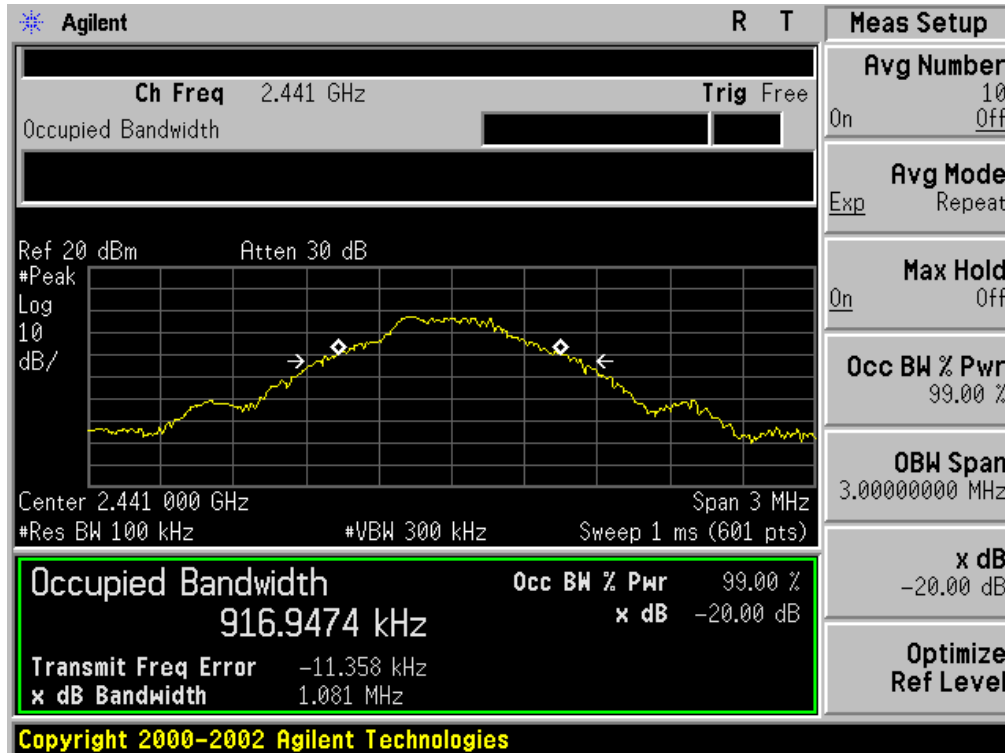


TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

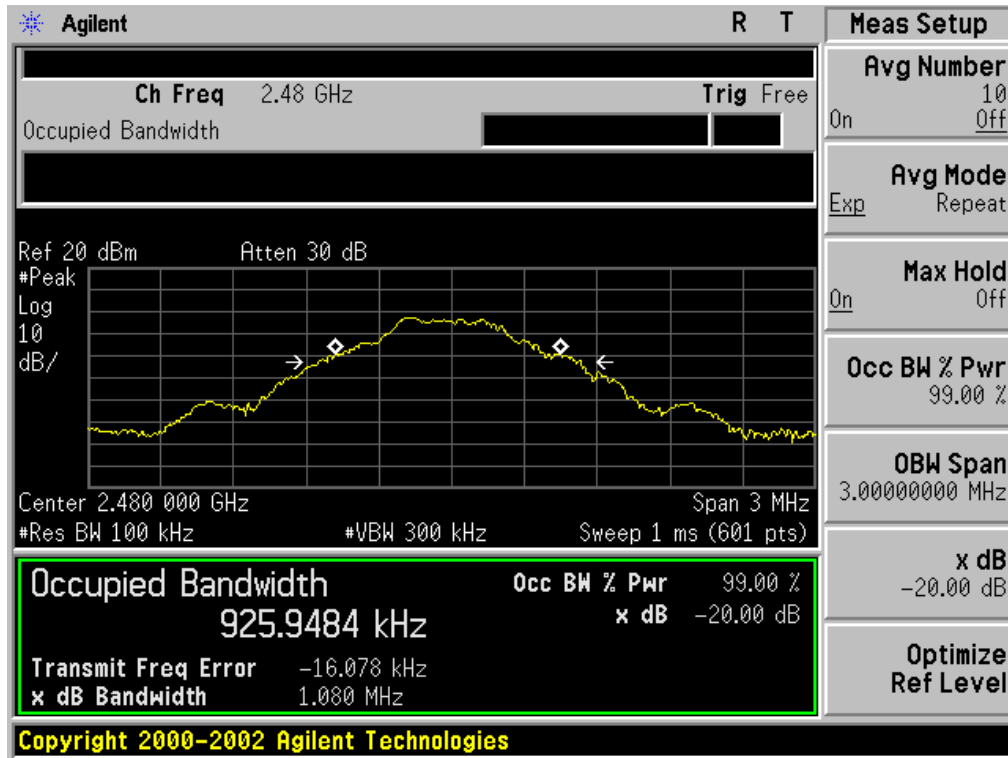


BLUETOOTH 2MBPS LIMITS AND MEASUREMENT RESULT				
Applicable Limits	Measurement Result			
	Test Data (MHz)			Result
		99%OBW (MHz)	-20dB BW(MHz)	
N/A	Low Channel	1.166	1.279	PASS
	Middle Channel	1.173	1.313	PASS
	High Channel	1.170	1.295	PASS


TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

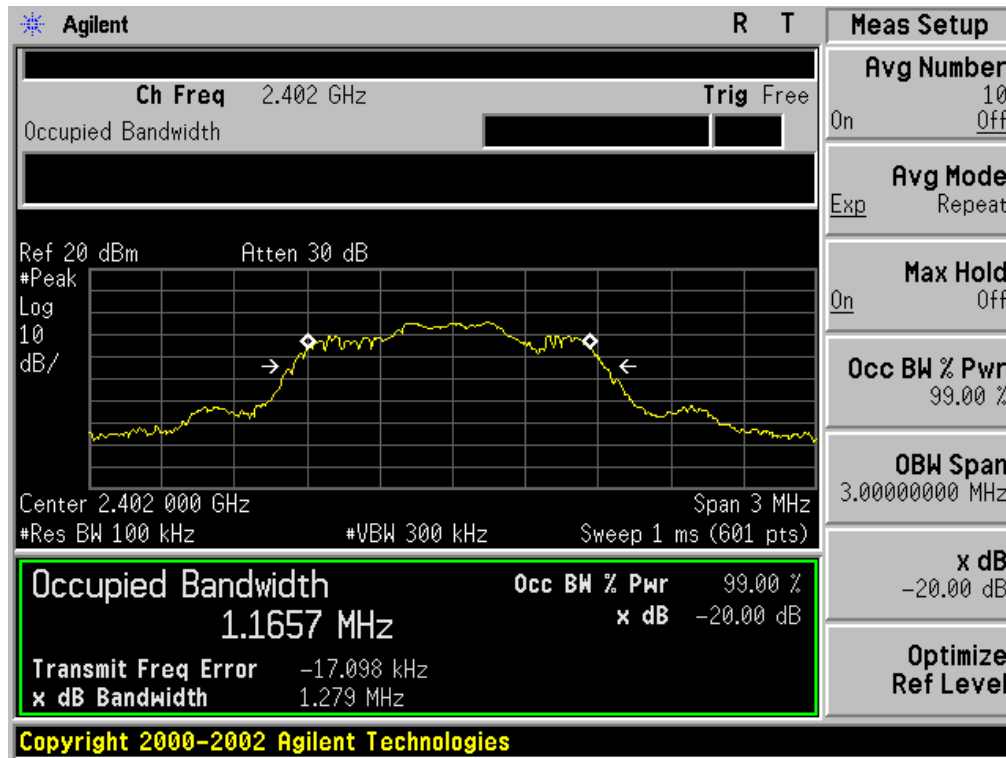

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

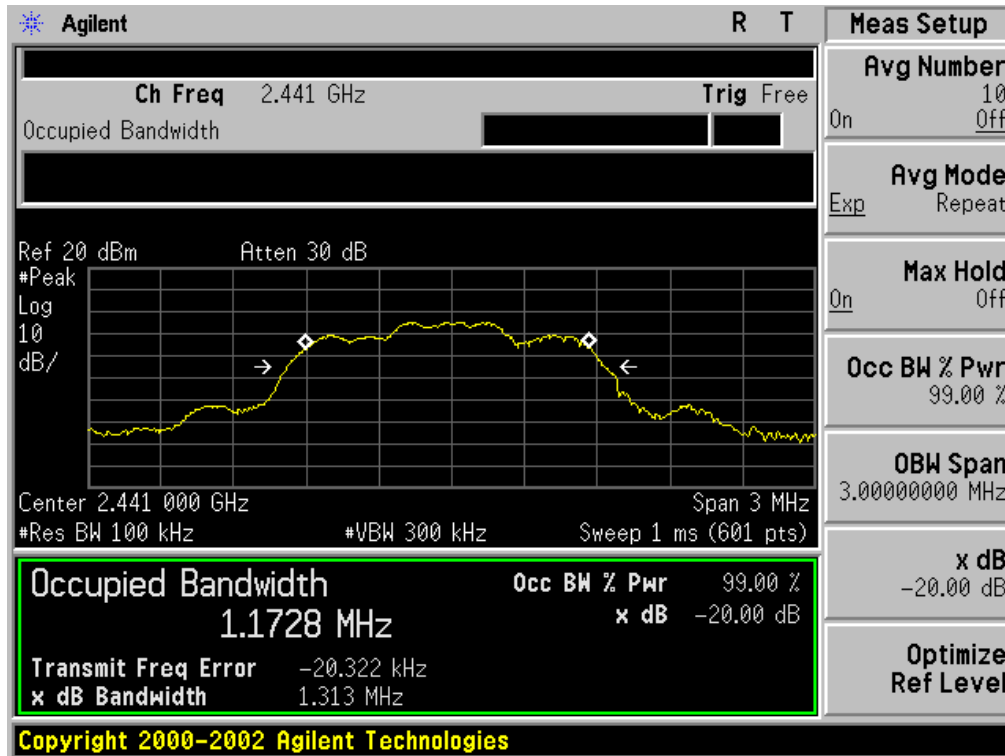


TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

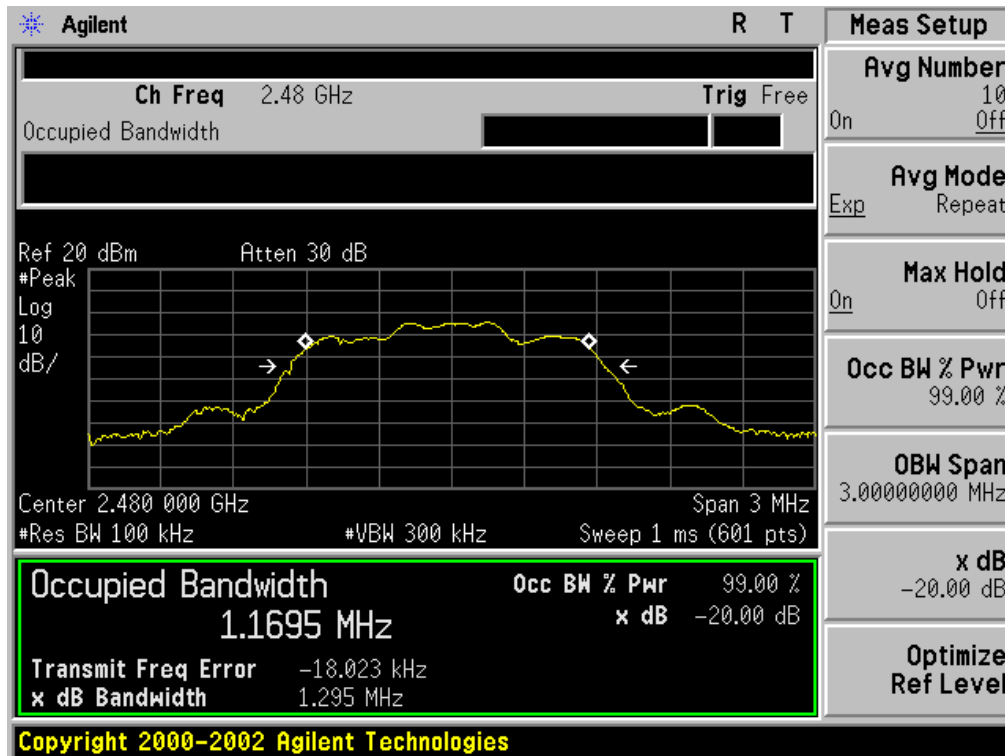


BLUETOOTH 3MBPS LIMITS AND MEASUREMENT RESULT				
Applicable Limits	Measurement Result			
	Test Data (MHz)			Result
		99%OBW (MHz)	-20dB BW(MHz)	
N/A	Low Channel	1.149	1.271	PASS
	Middle Channel	1.151	1.278	PASS
	High Channel	1.152	1.274	PASS


TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

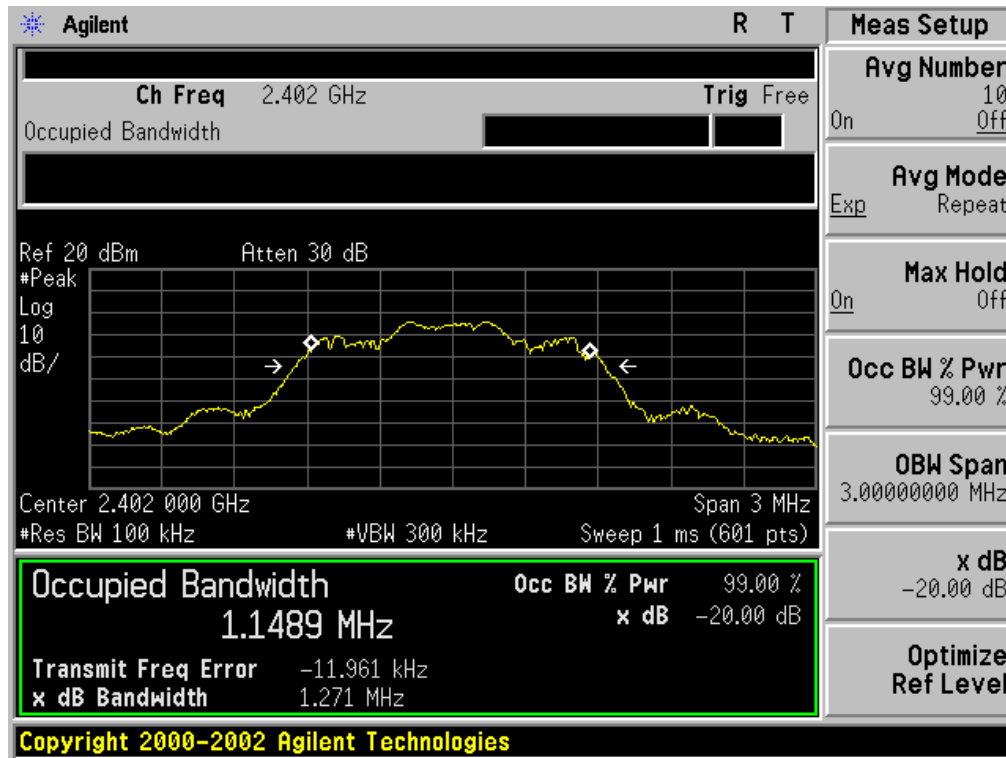

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

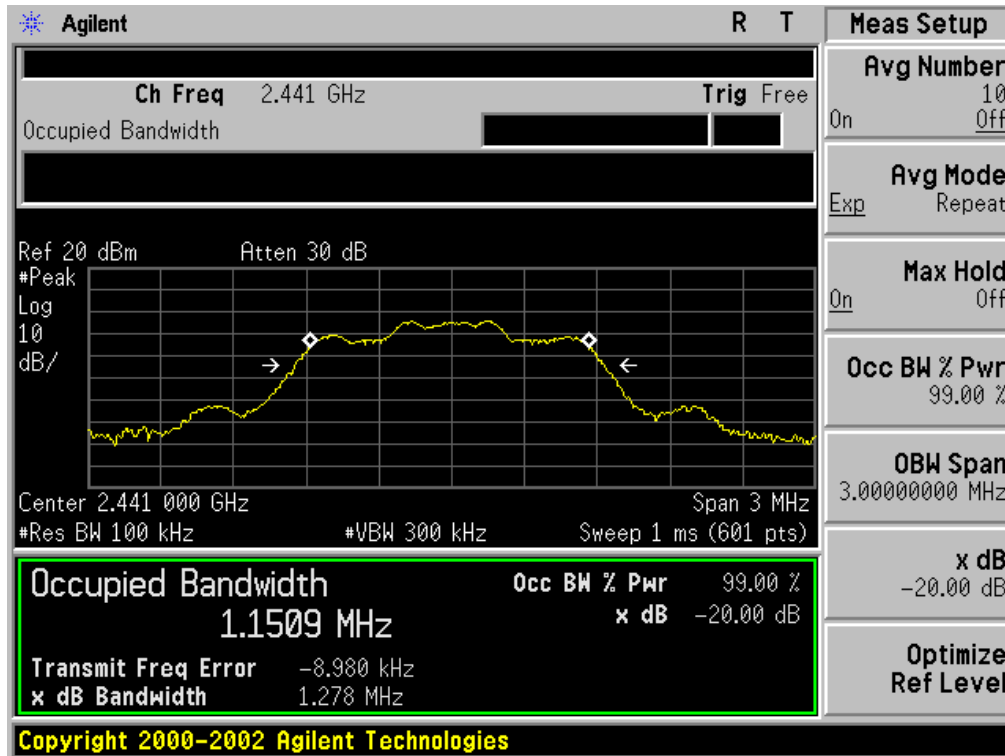


TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

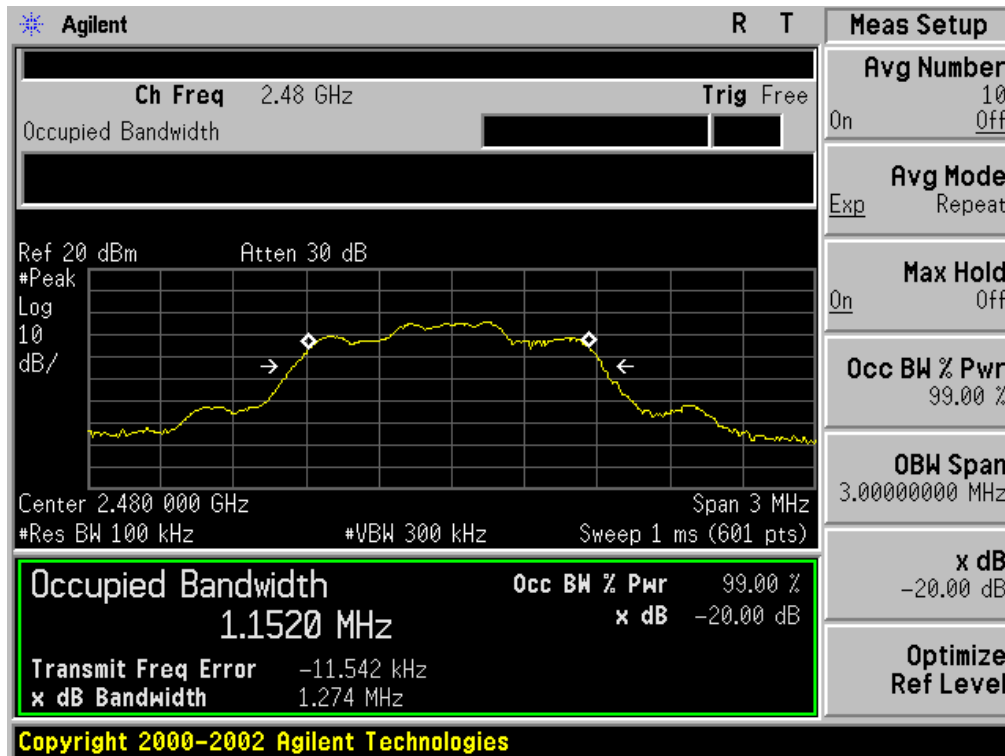


FOR BLE

BLUETOOTH 1MBPS LIMITS AND MEASUREMENT RESULT				
Applicable Limits	Measurement Result			
	Test Data (MHz)			Result
		99%OBW (MHz)	-20dB BW(MHz)	
N/A	Low Channel	1.044	1.221	PASS
	Middle Channel	1.043	1.222	PASS
	High Channel	1.038	1.215	PASS


TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

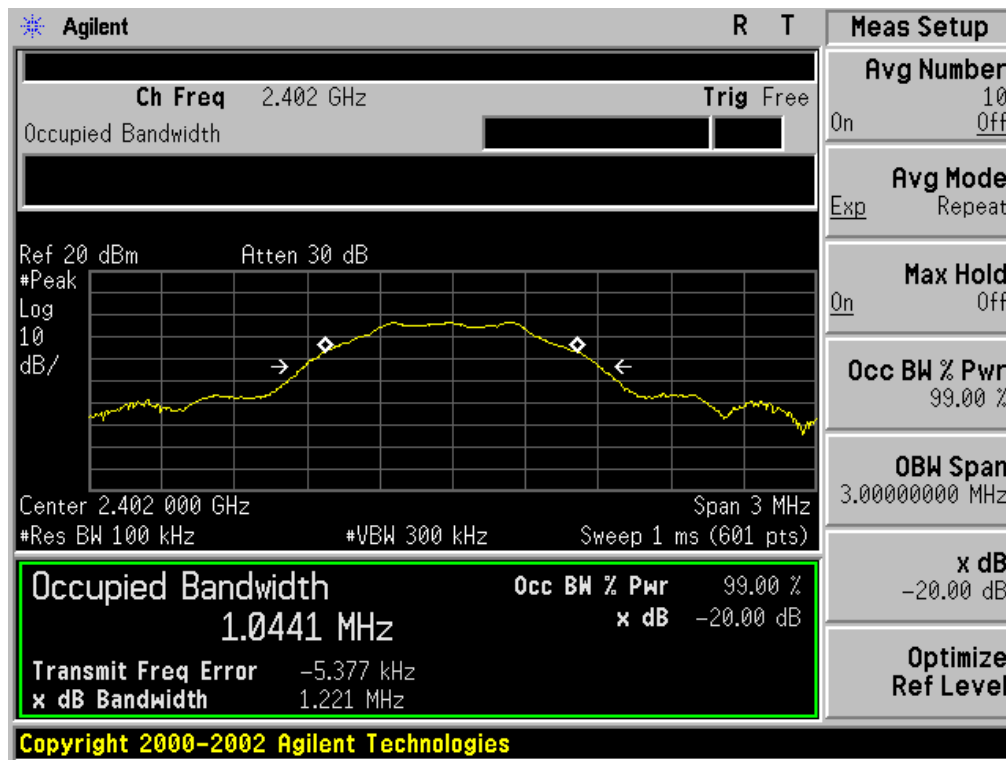

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

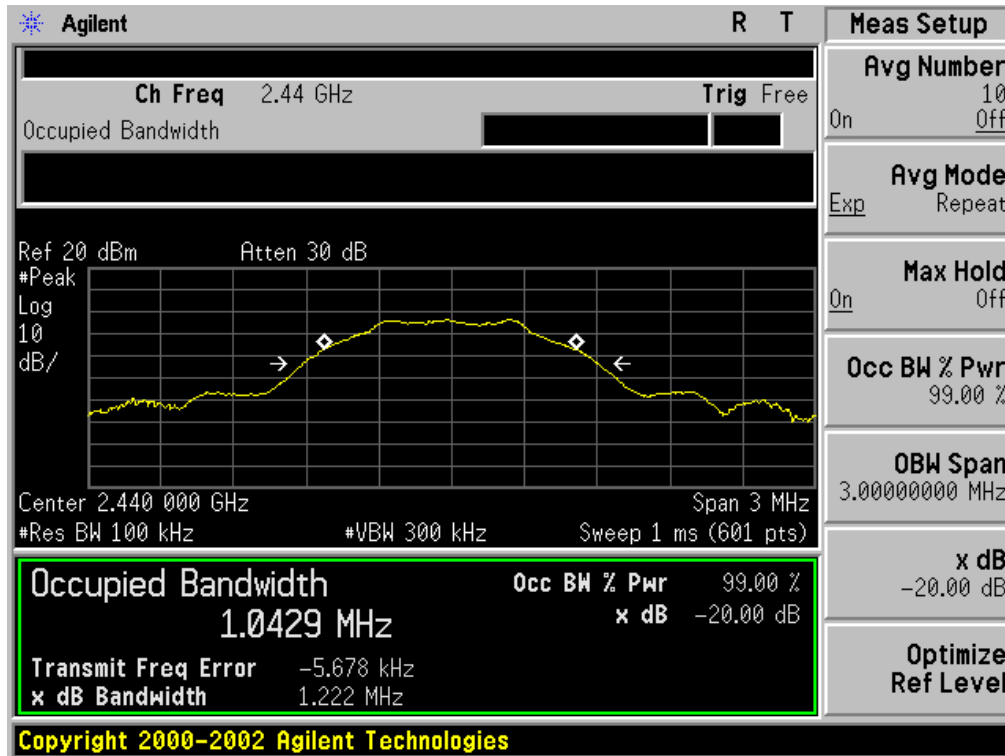

TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

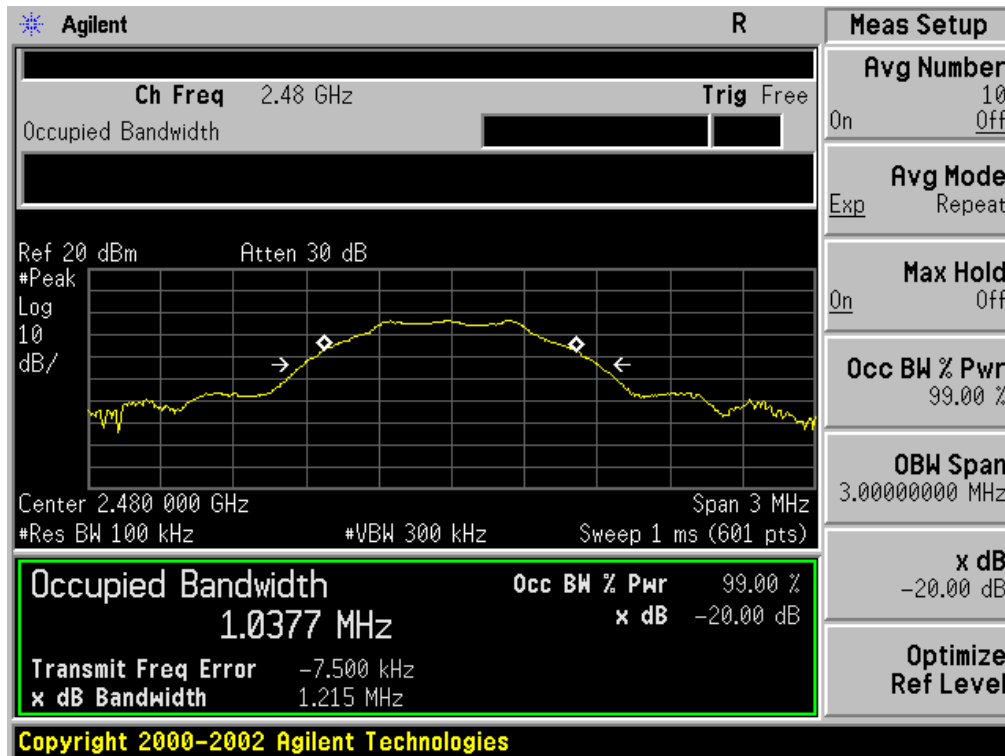

12. FCC LINE CONDUCTED EMISSION TEST


12.1. LIMITS OF LINE CONDUCTED EMISSION TEST

Frequency	Maximum RF Line Voltage	
	Q.P.(dBuV)	Average(dBuV)
150kHz~500kHz	66-56	56-46
500kHz~5MHz	56	46
5MHz~30MHz	60	50

Note:

1. The lower limit shall apply at the transition frequency.
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

12.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

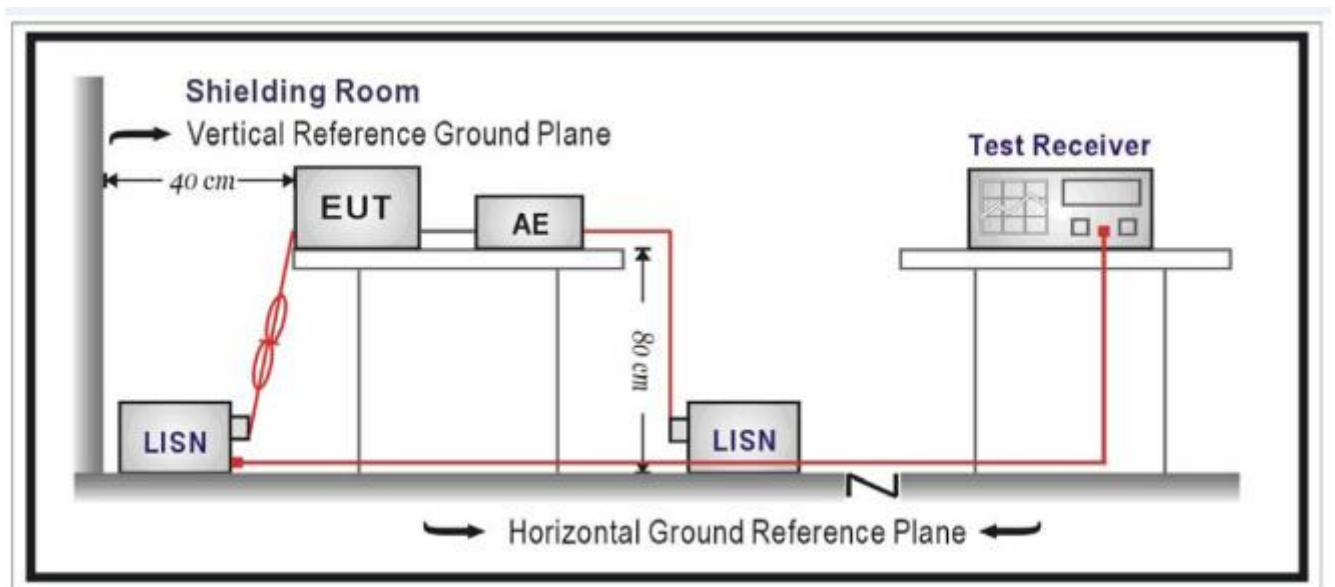

12.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
2. Support equipment, if needed, was placed as per ANSI C63.10.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
4. All support equipments received AC120V/60Hz power from a LISN, if any.
5. The EUT received DC charging voltage by adapter or PC which received 120V/60Hz power by a LISN.
6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.
9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

12.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST


1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less -2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
3. The test data of the worst case condition(s) was reported on the Summary Data page.

12.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST

By adapter(worst case)

FOR BR/EDR


Line Conducted Emission Test Line 1-L

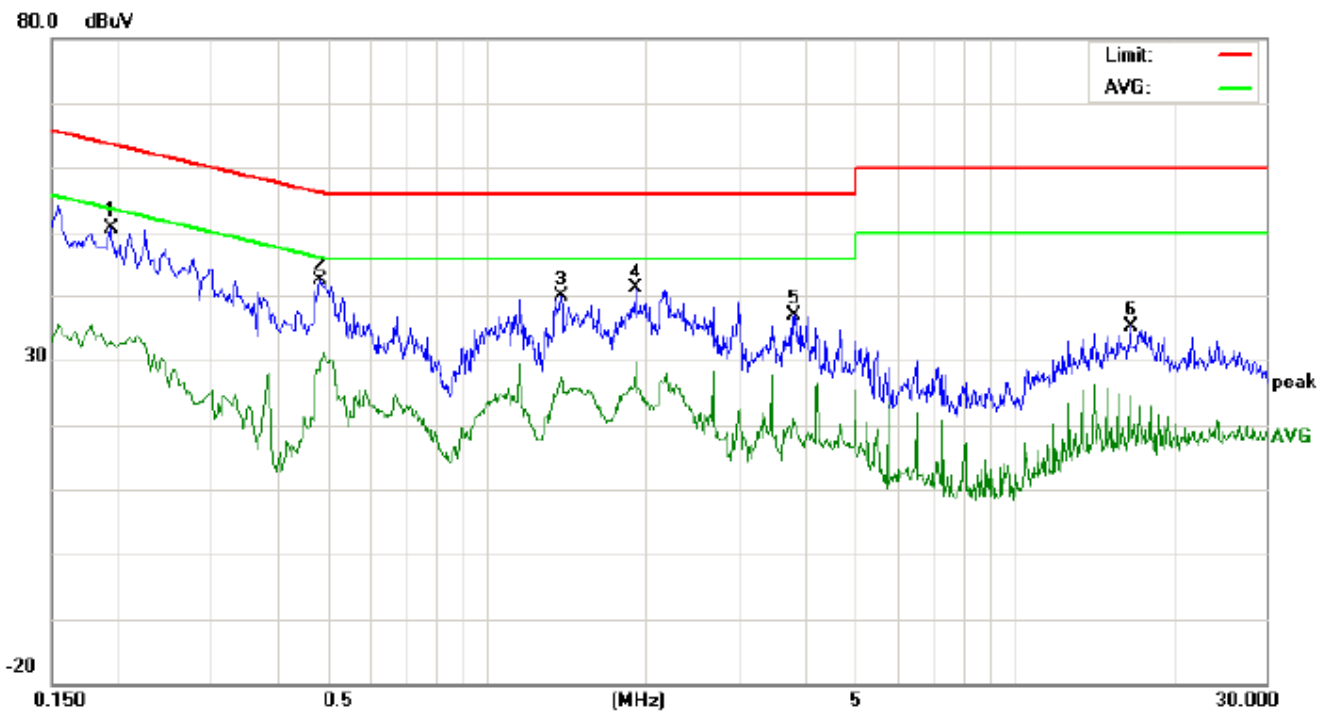

Site: Conduction Phase: **L1** Temperature: 24.4
 Limit: FCC Class B Conduction(QP) Power: Humidity: 56.7 %
 EUT: Smart Watch
 M/N: GV68
 Mode: BT Link with charging
 Note:

No.	Freq. (MHz)	Reading_Level (dBuV)			Correct Factor (dB)	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.1940	40.38		22.63	10.21	50.59		32.84	63.86	53.86	-13.27	-21.02	P	
2	0.4819	32.03		18.04	10.39	42.42		28.43	56.31	46.31	-13.89	-17.88	P	
3	1.3859	29.61		16.90	10.38	39.99		27.28	56.00	46.00	-16.01	-18.72	P	
4	1.9219	30.81		19.30	10.24	41.05		29.54	56.00	46.00	-14.95	-16.46	P	
5	3.8380	26.48		9.83	10.46	36.94		20.29	56.00	46.00	-19.06	-25.71	P	
6	16.6259	24.93		8.70	10.12	35.05		18.82	60.00	50.00	-24.95	-31.18	P	

Line Conducted Emission Test Line 2-N

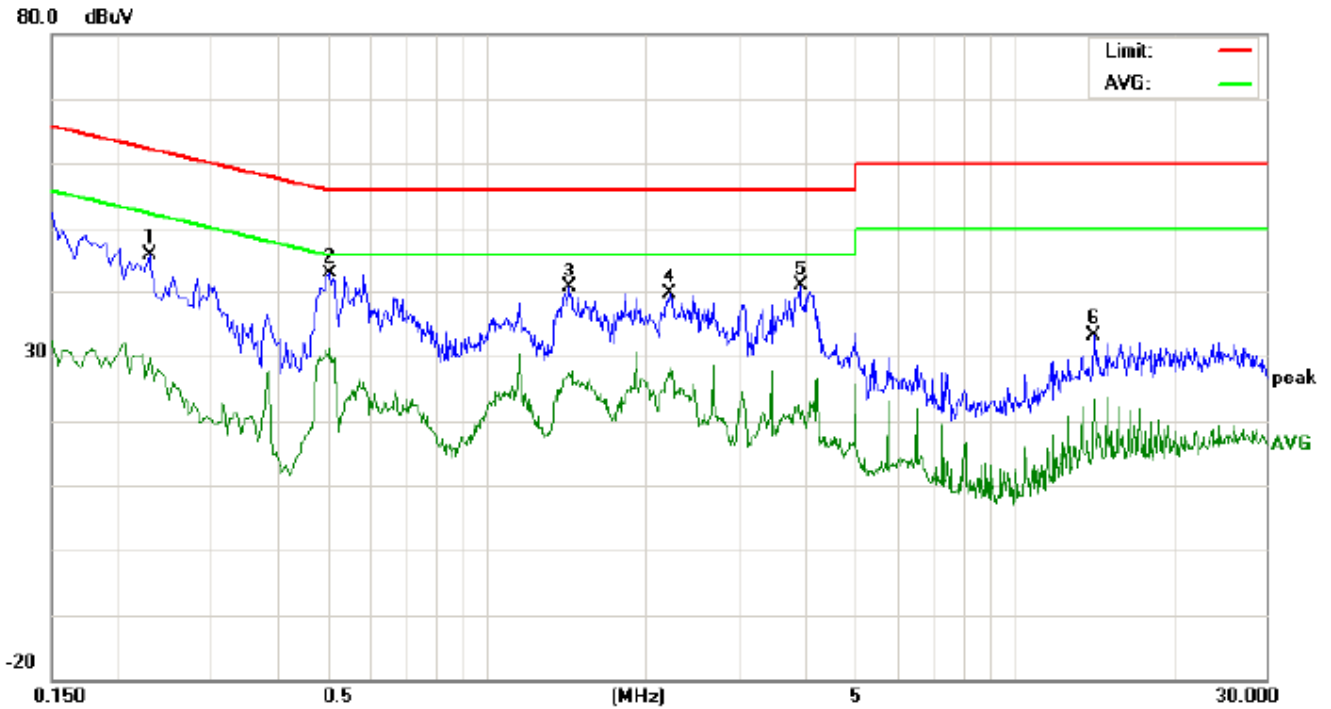


Site: Conduction Phase: **N** Temperature: 24.4
 Limit: FCC Class B Conduction(QP) Power: Humidity: 56.7 %
 EUT: Smart Watch
 M/N: GV68
 Mode: BT Link with charging
 Note:

No.	Freq. (MHz)	Reading_Level (dBuV)			Correct Factor (dB)	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.2300	35.72		19.49	10.25	45.97		29.74	62.45	52.45	-16.48	-22.71	P	
2	0.5020	32.42		19.26	10.40	42.82		29.66	56.00	46.00	-13.18	-16.34	P	
3	1.4340	30.21		16.96	10.38	40.59		27.34	56.00	46.00	-15.41	-18.66	P	
4	2.2180	29.43		17.90	10.31	39.74		28.21	56.00	46.00	-16.26	-17.79	P	
5	3.9260	30.49		10.03	10.44	40.93		20.47	56.00	46.00	-15.07	-25.53	P	
6	14.2099	23.02		13.27	10.12	33.14		23.39	60.00	50.00	-26.86	-26.61	P	

FOR BLE


Line Conducted Emission Test Line 1-L

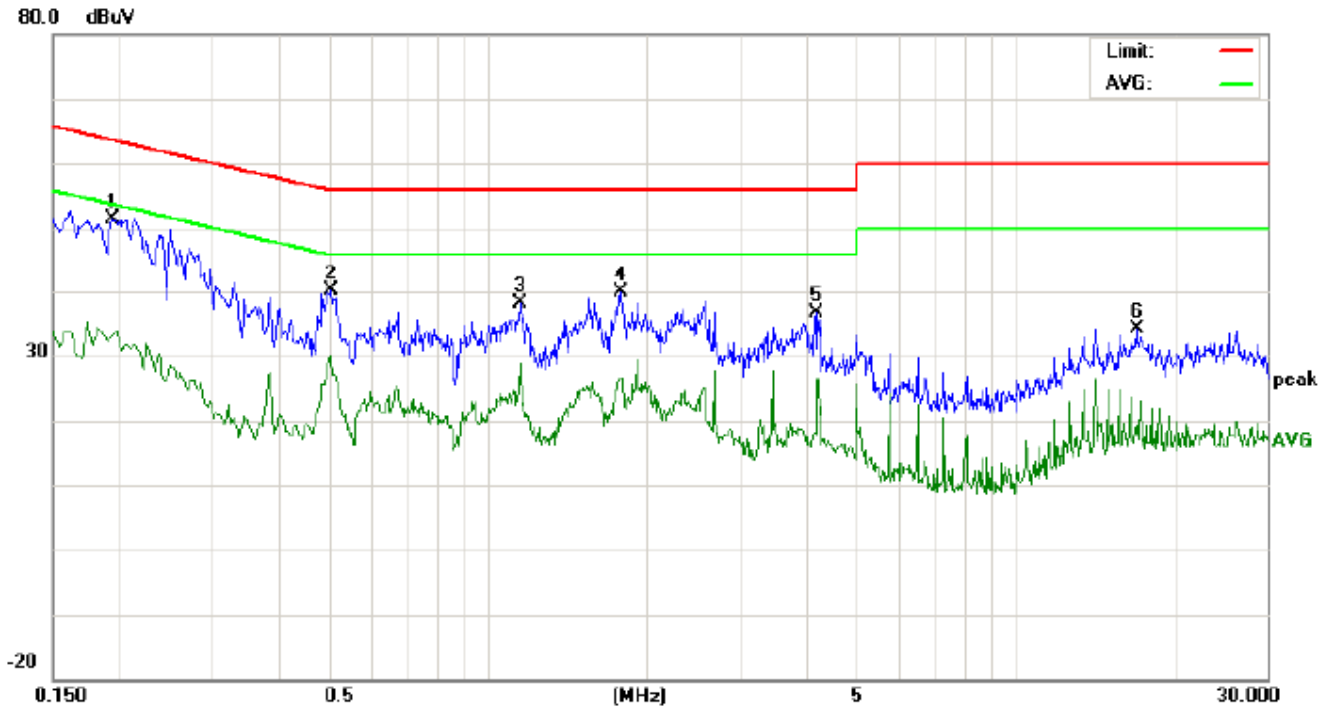

Site: Conduction Phase: **L1** Temperature: 24.4
 Limit: FCC Class B Conduction(QP) Power: Humidity: 56.7 %
 EUT: Smart Watch
 M/N: GV68
 Mode: BT Link with charging
 Note:

No.	Freq. (MHz)	Reading_Level (dBuV)			Correct Factor (dB)	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.1940	41.12		22.94	10.21	51.33		33.15	63.86	53.86	-12.53	-20.71	P	
2	0.5060	29.66		18.87	10.39	40.05		29.26	56.00	46.00	-15.95	-16.74	P	
3	1.1500	27.64		18.50	10.37	38.01		28.87	56.00	46.00	-17.99	-17.13	P	
4	1.7900	29.63		16.03	10.29	39.92		26.32	56.00	46.00	-16.08	-19.68	P	
5	4.2219	26.32		16.11	10.33	36.65		26.44	56.00	46.00	-19.35	-19.56	P	
6	17.0099	24.01		9.05	10.13	34.14		19.18	60.00	50.00	-25.86	-30.82	P	

Line Conducted Emission Test Line 2-N

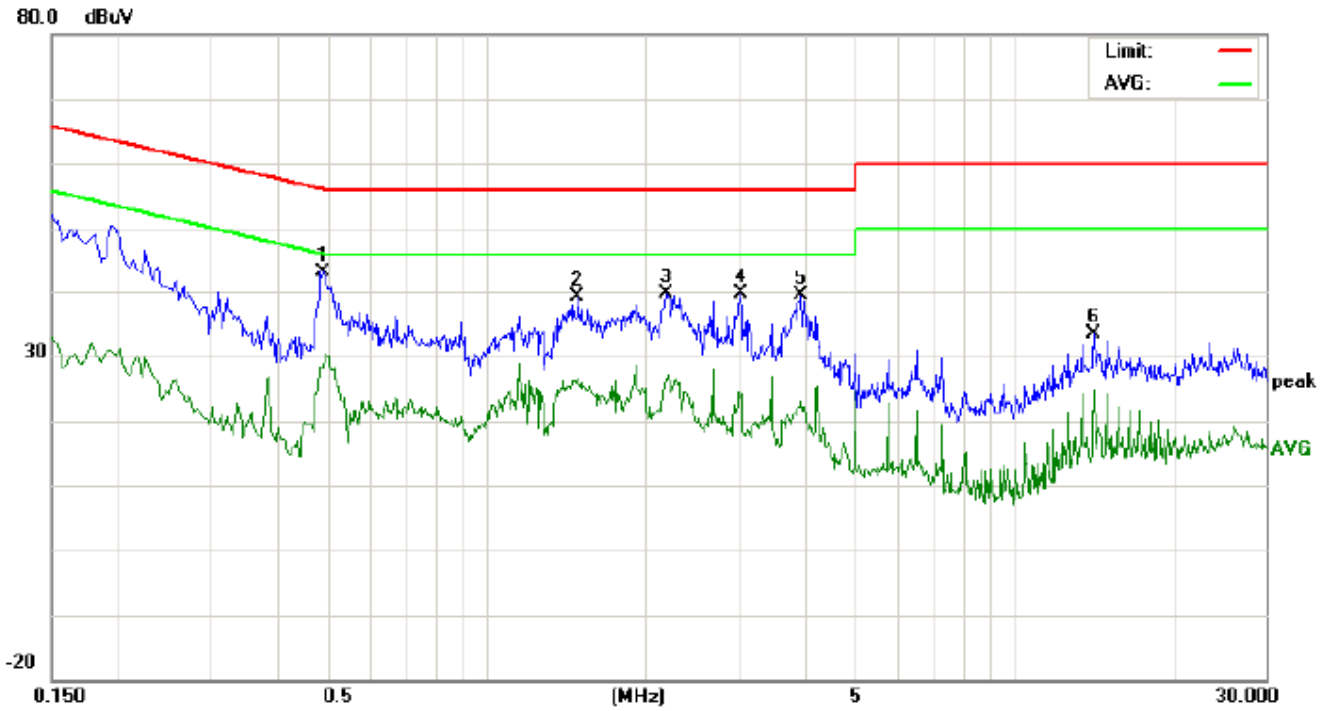


Site: Conduction Phase: **N** Temperature: 24.4
Limit: FCC Class B Conduction(QP) Power: Humidity: 56.7 %
EUT: Smart Watch
M/N: GV68
Mode: BT Link with charging
Note:


No.	Freq. (MHz)	Reading_Level (dBuV)			Correct Factor (dB)	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.4900	32.69		17.85	10.39	43.08		28.24	56.17	46.17	-13.09	-17.93	P	
2	1.4940	28.79		16.31	10.38	39.17		26.69	56.00	46.00	-16.83	-19.31	P	
3	2.1980	29.20		15.84	10.30	39.50		26.14	56.00	46.00	-16.50	-19.86	P	
4	3.0380	29.14		12.97	10.55	39.69		23.52	56.00	46.00	-16.31	-22.48	P	
5	3.9540	28.98		12.81	10.44	39.42		23.25	56.00	46.00	-16.58	-22.75	P	
6	14.2099	23.17		14.66	10.12	33.29		24.78	60.00	50.00	-26.71	-25.22	P	



APPENDIX A: PHOTOGRAPHS OF TEST SETUP


FCC LINE CONDUCTED EMISSION TEST SETUP

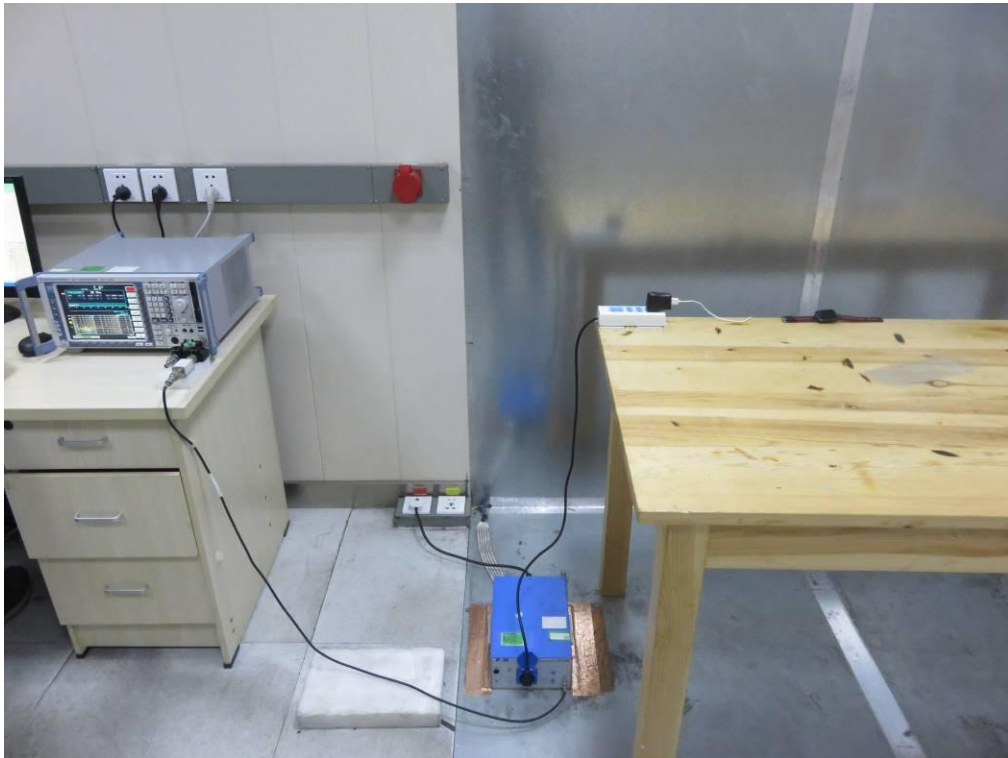

FCC RADIATED EMISSION TEST SETUP

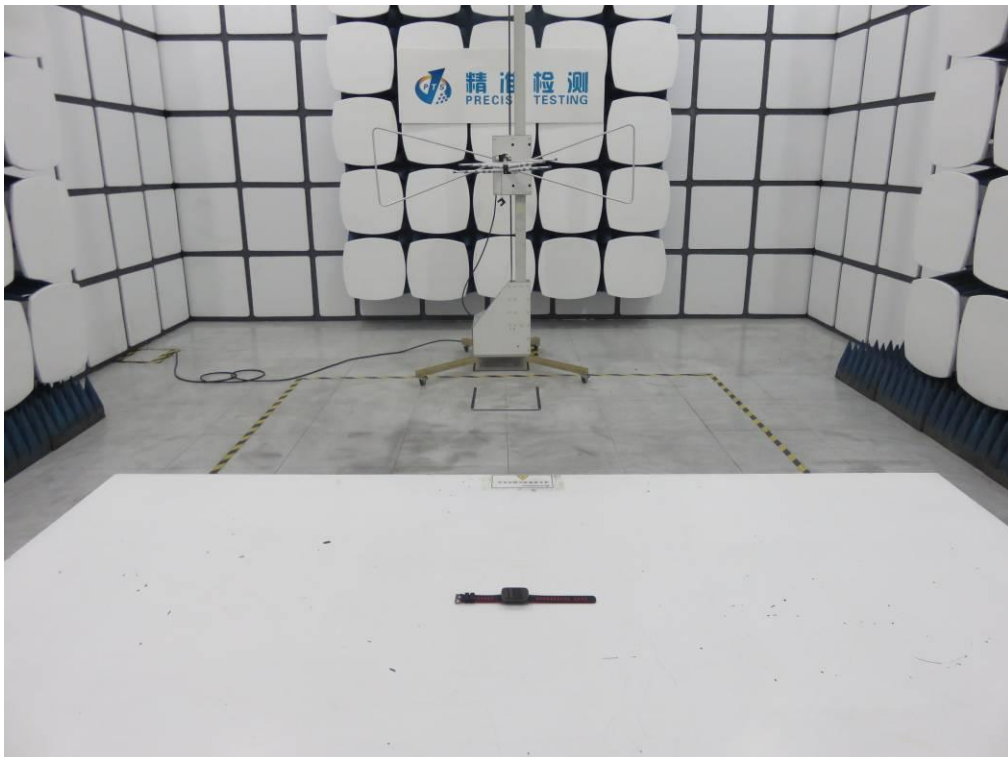

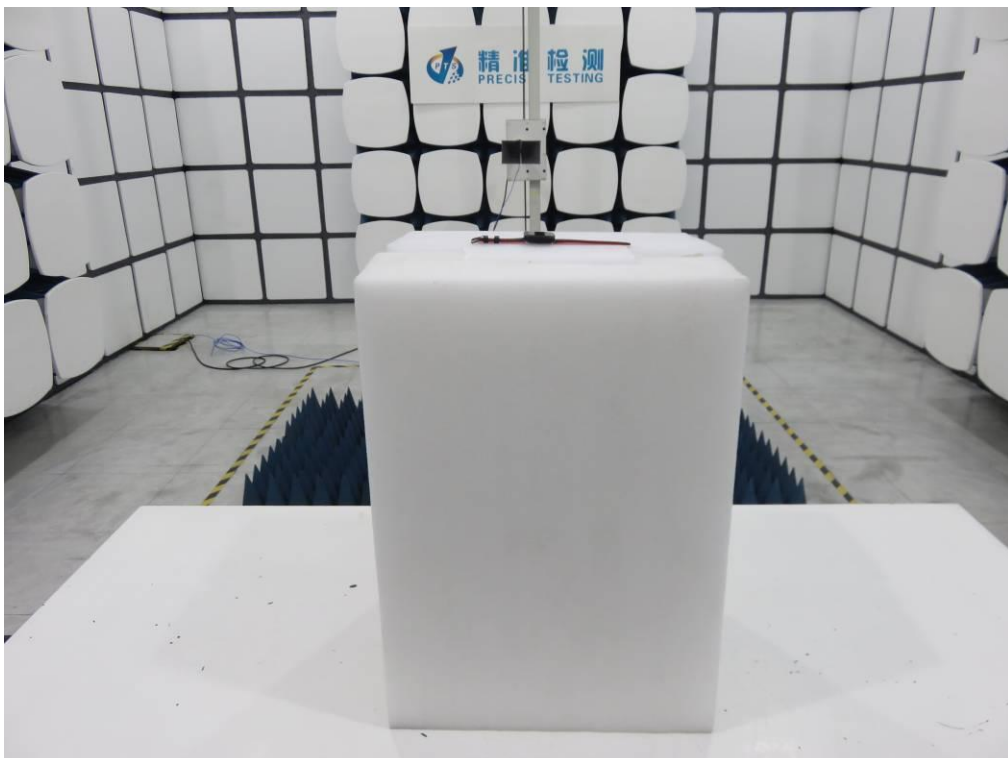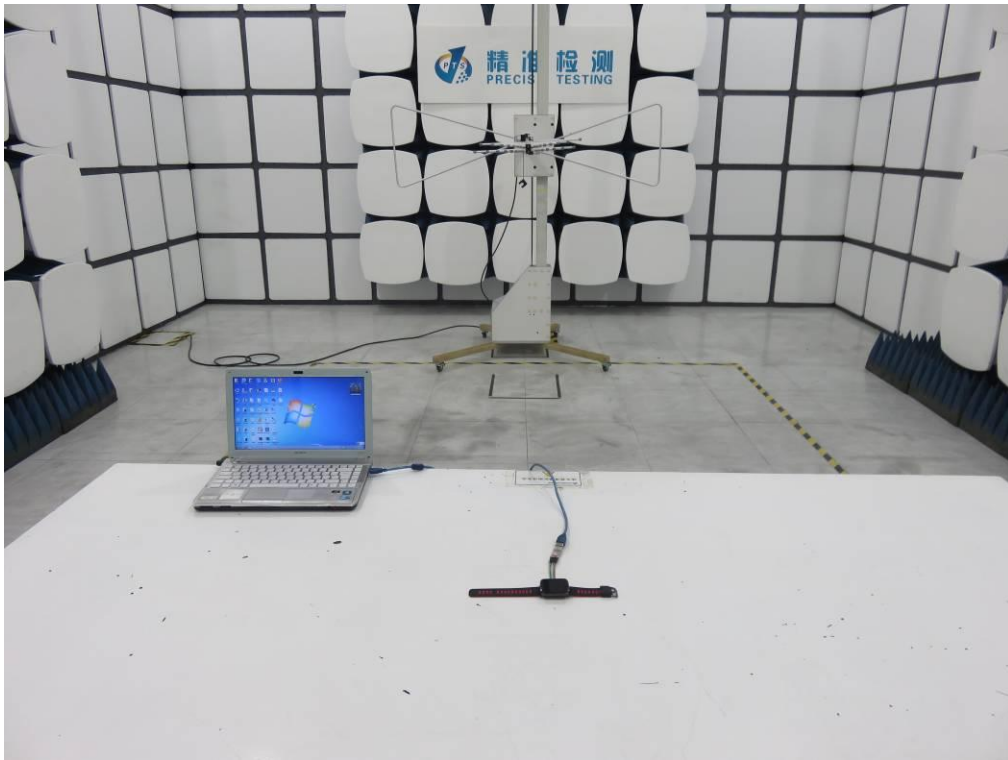

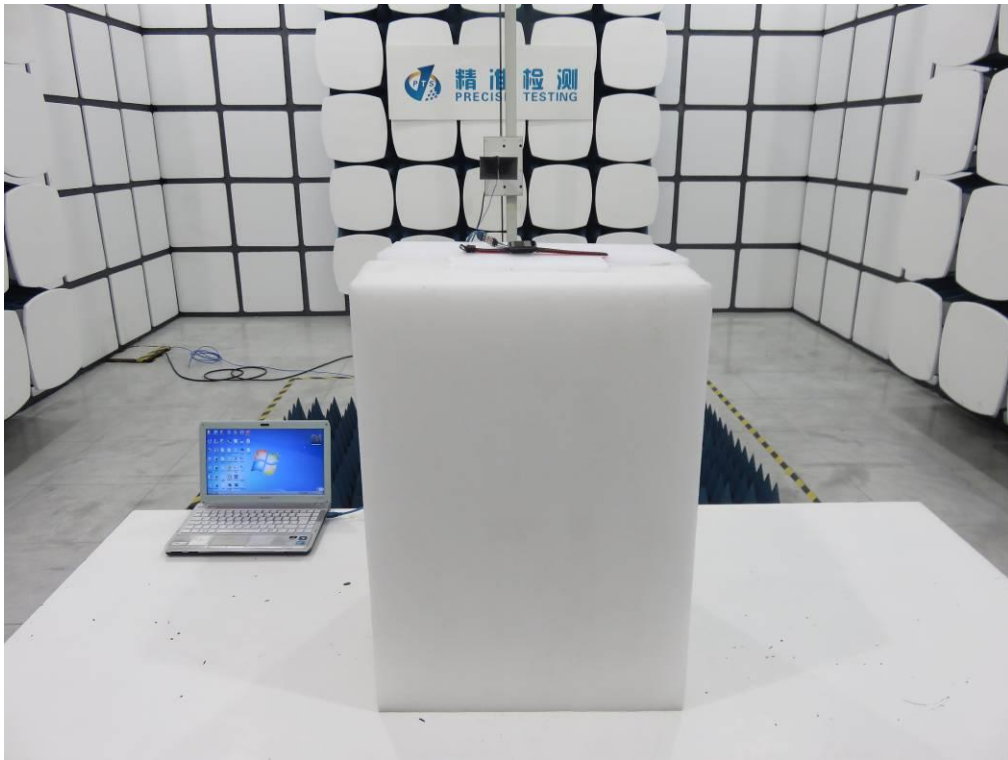

APPENDIX B: PHOTOGRAPHS OF EUT
ALL VIEW OF EUT




VIEW OF CHARGING CABLE



TOP VIEW OF EUT



BOTTOM VIEW OF EUT

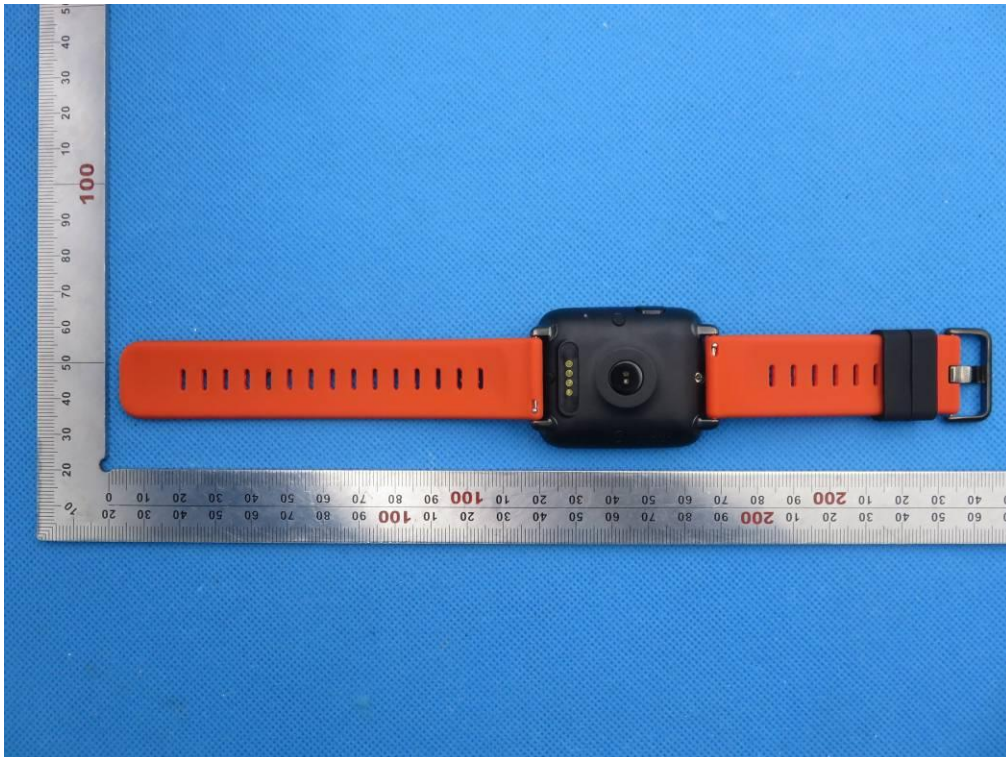

FRONT VIEW OF EUT



BACK VIEW OF EUT



LEFT VIEW OF EUT



RIGHT VIEW OF EUT




VIEW OF EUT (PORT)




OPEN VIEW OF EUT




INTERNAL VIEW OF EUT-1

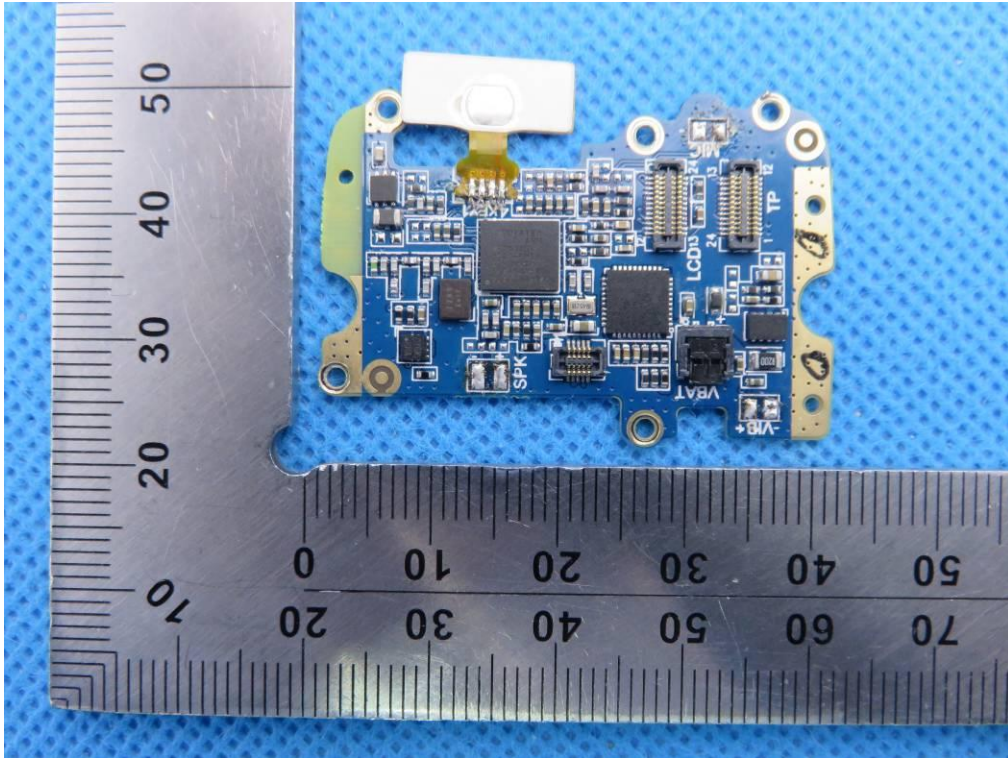

INTERNAL VIEW OF EUT-2

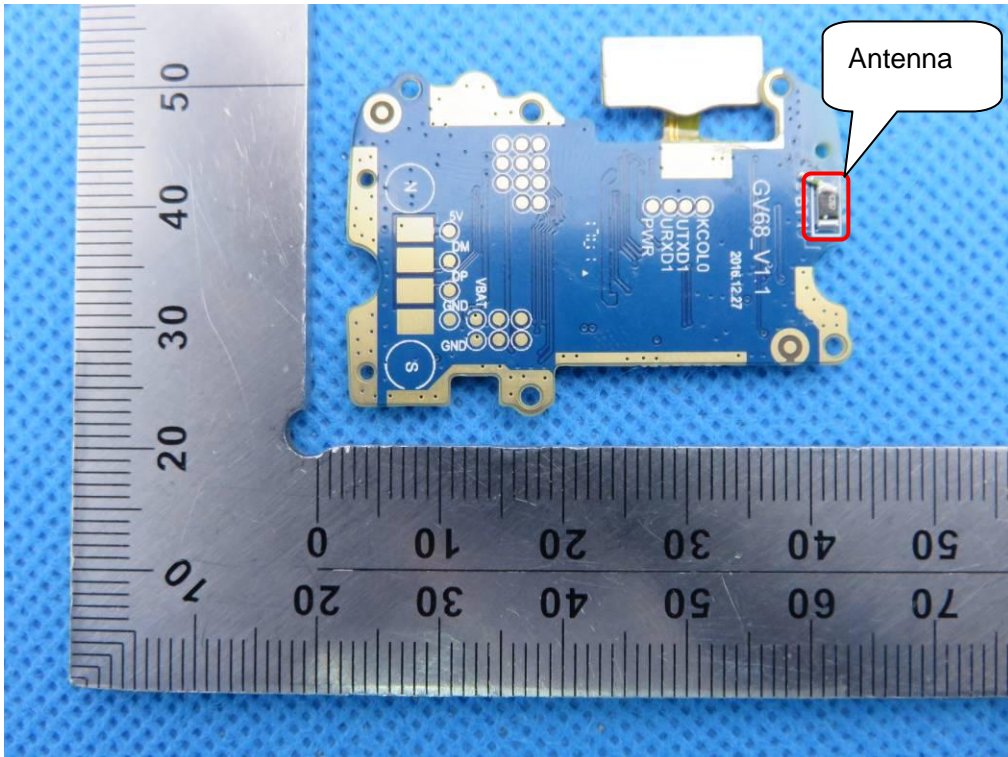

INTERNAL VIEW OF EUT-3

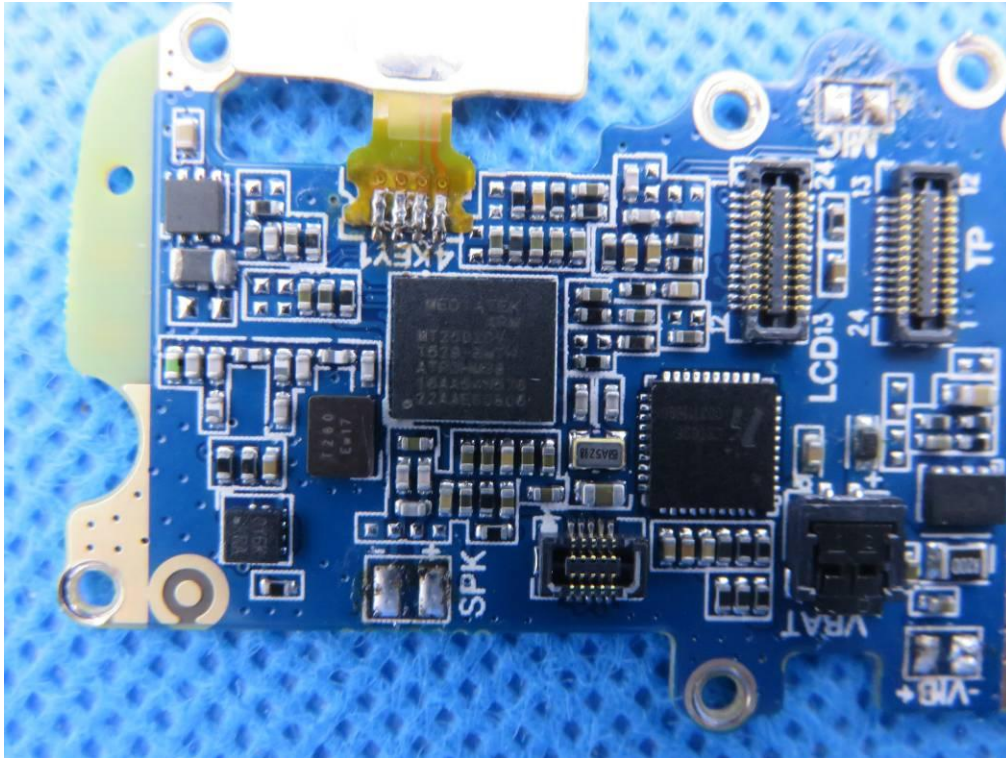

VIEW OF ADAPTER (AE)



THE ADAPTER SUPPLIED BY AGC

----END OF REPORT----