






TEST REPORT

Report Number: C21T00142-EMC01-V00

Applicant	Shanghai Sunmi Technology Co.,Ltd.
Product Name	Data Processing Terminal
Model Name	L3561
Brand Name	SUNMI
FCC ID	2AH25D2SKDS
IC	22621-D2SKDS

Industrial Internet Innovation Center (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in FCC Part 15, Subpart B, ANSI C63.4-2014, ICES-003 Issue 7.

Prepared by		Reviewed by	
Approved by		Issue Date	2022-01-14

Industrial Internet Innovation Center (Shanghai) Co., Ltd.



NOTE

1. This report is invalid without the signature of the writer, reviewer and authorizer.
2. This report is invalid if altered.
3. For the benefit of clients, if you have any objection to the report, please inform the testing laboratory within 15 days from the date of receiving this report.
4. Samples in the test report are provided by the client. The test results are only applicable to the samples received by the laboratory. The source information of samples (such as sample sender, manufacturer, etc.) in the test report is provided by the client, and the laboratory is not responsible for its authenticity and the measurement accuracy.
5. The test report does not represent the identification of a product by a certification body or an authorized body.
6. This report is only valid as a whole, and no part of the report can be reproduced without the written approval of Industrial Internet Innovation Center (Shanghai) Co., Ltd.
7. Without the written permission of testing institutions and accreditation bodies, this report cannot be used in part or in whole for publicity or product introduction.
8. "N/A" is used in this report to indicate that it is not applicable or available.
9. Industrial Internet Innovation Center (Shanghai) Co., Ltd. assumes the legal responsibility for the report.
10. The measurement uncertainty is not taken into account when deciding conformity, and the results of measurement (or the average of measurement results) are directly used as the criterion for the stating conformity.

Test Laboratory:

Industrial Internet Innovation Center (Shanghai) Co., Ltd.

Add: Building 4, No. 766 Jingang Rd, Pudong, Shanghai, China

Tel: +86 21 68866880



Revision Version

Report Number	Revision	Date	Memo
C21T00142-EMC01-V00	00	2022-01-14	Initial creation of test report



CONTENTS

1. TEST LABORATORY	6
1.1. TESTING LOCATION	6
1.2. TESTING ENVIRONMENT	6
1.3. PROJECT INFORMATION	6
2. CLIENT INFORMATION	7
2.1. APPLICANT INFORMATION	7
2.2. MANUFACTURER INFORMATION	7
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	8
3.1. ABOUT EUT	8
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	8
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST	8
4. REFERENCE DOCUMENTS	9
4.1. REFERENCE DOCUMENTS FOR TESTING	9
5. TEST SUMMARY	10
5.1. SUMMARY OF TEST RESULTS	10
5.2. STATEMENTS	10
5.3. DECISION OF FINAL TEST MODE	11
5.4. EUT SYSTEM OPERATION	11
5.5. EUT CONNECTION DIAGRAM OF TEST SYSTEM	12
6. MEASUREMENT RESULTS	13
6.1. RADIATED EMISSION	13
6.2. AC CONDUCTED EMISSION	17
7. TEST EQUIPMENT LIST	19
ANNEX A: MEASUREMENT UNCERTAIN	20





1. Test Laboratory

1.1. Testing Location

Primary Lab:

Company Name	Industrial Internet Innovation Center (Shanghai) Co., Ltd.
Address	Building 4, No. 766 Jingang Rd, Pudong, Shanghai, China
FCC Registration No.	958356
FCC Designation No.	CN1177
IC designation No.	CN0067

Subcontracting Lab #1:

Company Name	N/A
Address	N/A

1.2. Testing Environment

Normal Temperature	15°C~35°C
Relative Humidity	30%RH~60%RH
Supply Voltage	120V/60Hz

1.3. Project Information

Project Leader	Wang Wenwen
Testing Start Date	2021-12-22
Testing End Date	2022-01-13



2. Client Information

2.1. Applicant Information

Company Name	Shanghai Sunmi Technology Co.,Ltd.
Address	Room 505, KIC Plaza, No.388 Song Hu Road, Yang Pu District, Shanghai, China
Telephone	+86 18501703215

2.2. Manufacturer Information

Company Name	Shanghai Sunmi Technology Co.,Ltd.
Address	Room 505, KIC Plaza, No.388 Song Hu Road, Yang Pu District, Shanghai, China
Telephone	+86 18501703215

3. Equipment under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Product Name	Data Processing Terminal
Model name	L3561
Supported Radio Technology and Bands	BT4.2 WLAN 802.11b,g,n WLAN 802.11a,n,ac
Hardware Version	Athens_MB_V1.1
Software Version	d2-userdebug 11 RQ1D.210105.003 97 release-keys

Note: Photographs of EUT are shown in ANNEX B of this test report.

3.2. Internal Identification of EUT used during the test

EUT ID*	SN or IMEI	HW Version	SW Version	Date of Receipt
N02	DK03D1B240033	Athens_MB_V1.1	d2-userdebug 11 RQ1D.210105.003 97 release-keys	2021/12/06

*EUT ID: is internally used to identify the test sample in the lab.

3.3. Internal Identification of AE used during the test

AE ID*	Description	Model	SN/Remark
CA02	Adapter	CYZS36-240150	N/A
UB01	Serial port line	N/A	N/A
AE1	Notebook PC	DELL Latitude E6510	N/A
AE2	LAN Cable	N/A	N/A
AE3	USB Cable	N/A	N/A
AE4	Keyboard	KB212-B	CN-0Y88XT-65890-12I-005Q-A00
AE5	Mouse	MS111-P	CN-011D3V-71581-19J-1A64
AE6	Micro SD Card	Kingston SDC4/4GB 77	N/A
AE7	U-disk	DataTraveler 100 G3 64GB	N/A
AE8	Earphone	N/A	N/A

*AE ID: is internally used to identify the test sample in the lab.

*The AE is provided by the lab.

4. Reference Documents

4.1. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part 15, Subpart B	Radio frequency devices	2020/10/1
ANSI C63.4	Method of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2014
ICES-003	Information Technology Equipment (Including Digital Apparatus)-Limits and Methods of Measurement	Issue 7

5. Test Summary

5.1. Summary of Test Results

Items	Test List	Standard	Verdict
1	Radiated Emission	15.109(a)	Pass
2	AC Conducted Emission	15.107(a)	Pass

5.2. Statements

The L3561, manufactured by Shanghai Sunmi Technology Co.,Ltd. is a new product for testing.

Industrial Internet Innovation Center (Shanghai) Co., Ltd. only performed test cases which identified with Pass/Fail/Inc result in section 5.1.

Industrial Internet Innovation Center (Shanghai) Co., Ltd. has verified that the compliance of the tested device specified in section 3 of this test report is successfully evaluated according to the procedure and test methods as defined in type certification requirement listed in section 4 of this test report.

5.3. Decision of final test mode

The EUT was tested together with the above additional components, and a configuration, which produced the worst emission levels, was selected and recorded in this report.


The test configuration modes are as the following:

Test Item	Test setup and operating modes
Radiated emission	Mode 1: Working mode (Full system) + Data Link (PC TO SD) + CA02+ UB01 Mode 2: Working mode (Full system) + Data Link (SD TO PC) + CA02+ UB01 Mode 3: Working mode (Full system) + Data Link (PC TO EUT) + CA02+ UB01 Mode 4: Working mode (Full system) + Data Link (EUT TO PC) + CA02+ UB01
AC Conducted Emission	Mode 1: Working mode (Full system) + Data Link (PC TO SD) + CA02+ UB01 Mode 2: Working mode (Full system) + Data Link (SD TO PC) + CA02+ UB01 Mode 3: Working mode (Full system) + Data Link (PC TO EUT) + CA02+ UB01 Mode 4: Working mode (Full system) + Data Link (EUT TO PC) + CA02+ UB01
Remark: The worst case of radiated emission for 30MHz-1GHz is mode 2 and for 1GHz -18GHz is mode 2. The worst case for conducted emission is mode 2.	

5.4. EUT System Operation

1. Connect the EUT with AE.
2. Setup the EUT according to the standard.
3. Full system mode: The EUT is powered by a power adapter. The EUT is connected to a PC through a serial cable, network cable, and USB cable. Other EUT ports are connected to a mouse, keyboard, USB flash drive, headset, and SD card. etc, and through LAN cable to PC for data exchange of PING command, keep working at maximum load.

5.5. EUT Connection Diagram of Test System

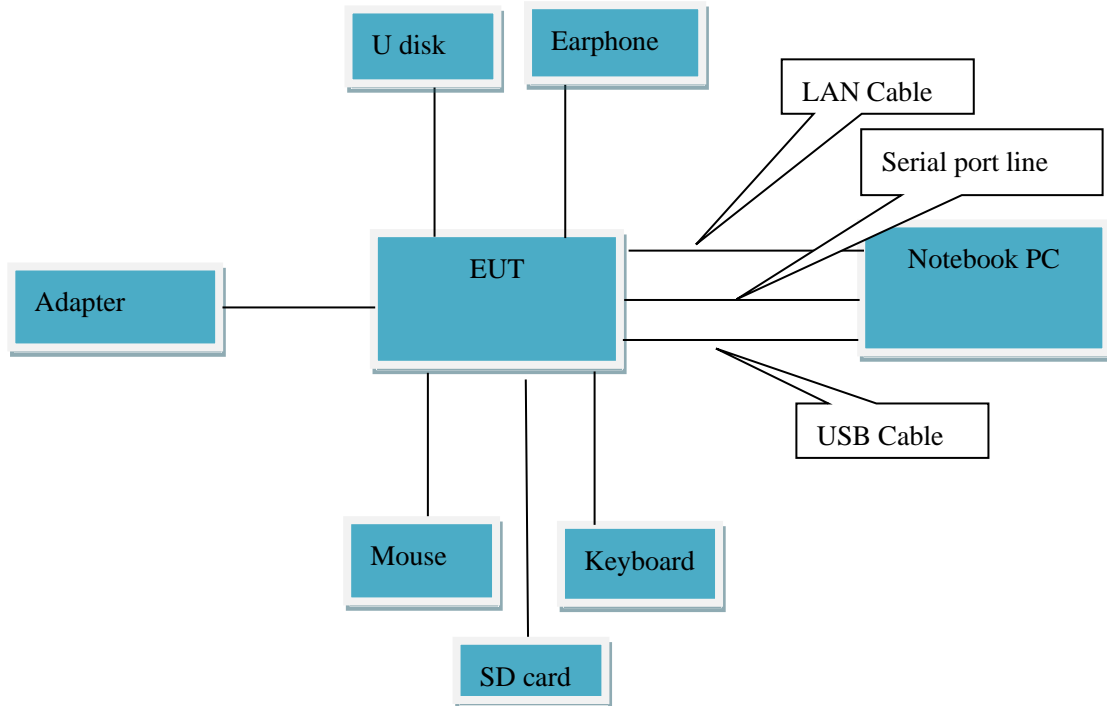

<Figure 1> Mode 1~4

6. Measurement Results

6.1. Radiated Emission

Method of Measurement

- a. For 30MHz -1000MHz, the EUT was placed on the top of a rotating 0.8m table above the ground at a semi-anechoic chamber. The distance between the EUT and the received antenna was 3 meters. The table was rotated 360 degree and the received antenna mounted on a variable-height antenna tower was varied from 1m to 4m to find the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna were set during the measurement.
- b. For 1000MHz-18000MHz, the maximal emission value was acquired by adjusting the antenna height, the table was rotated 360 degree to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna were set during the measurement.

Limits for Radiated Emission at a measuring distance of 3m

Table 1:

Frequency Range (MHz)	Quasi-Peak (dB μ V/m)
30-88	40
88-216	43.5
216-960	46
Above 960	54

Table 2:

Frequency Range (MHz)	Peak (dB μ V/m)	Average (dB μ V/m)
Above 1000	74	54

Table 3:


Test conditions

Frequency Range (MHz)	RBW/VBW	Sweep Time (s)
30-1000	120kHz/300kHz	Auto
1000-18000	1MHz/3MHz	Auto

Test Results

Sweep the whole frequency band through the range from 30MHz to the 5th harmonic of the carrier, the Emissions in the frequency band 18GHz-40GHz is more than 20dB below the limit are not report.

Mode 2: Working mode (Full system) + Data Link (SD TO PC) + CA02+ UB01 (30M-1GHz)

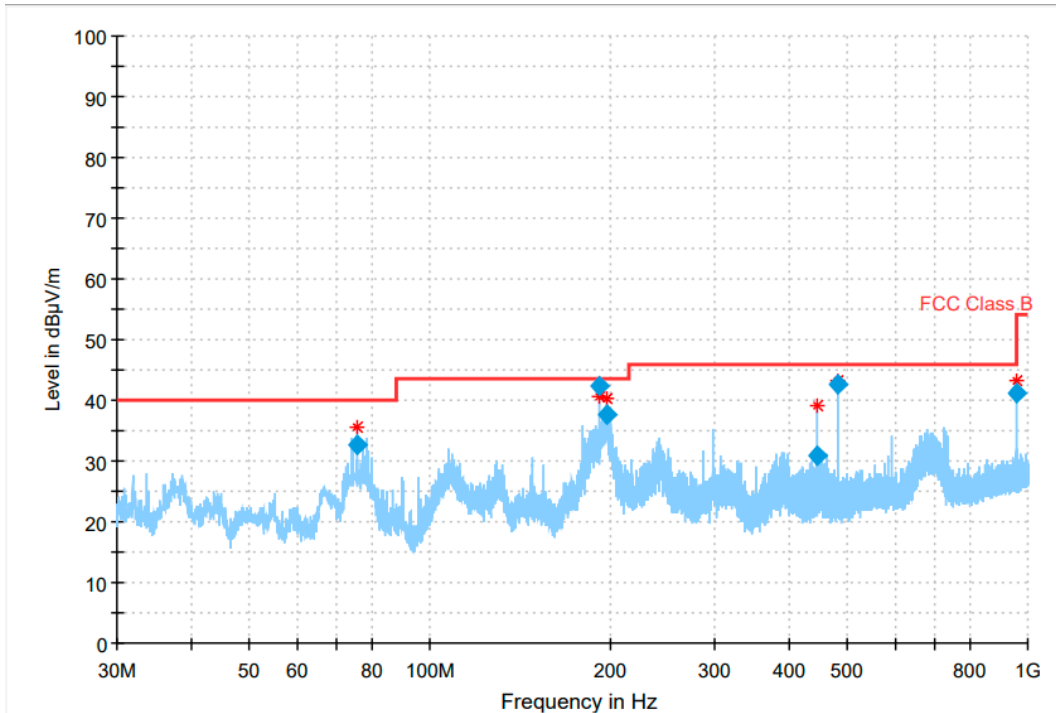


Final Result 1

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
75.740611	32.60	40.00	7.40	1000.0	120.000	225.0	H	92.0	-17.3
191.995784	42.48	43.50	1.02	1000.0	120.000	175.0	H	105.0	-14.3
197.255232	37.51	43.50	5.99	1000.0	120.000	125.0	H	109.0	-14.0
445.459851	30.80	46.00	15.20	1000.0	120.000	100.0	H	-28.0	-7.6
479.993184	42.60	46.00	3.40	1000.0	120.000	100.0	H	171.0	-7.1
959.972299	41.26	46.00	4.74	1000.0	120.000	100.0	H	122.0	0.3

Note:

1. Emission level(QP)=Raw value by receiver + Corr(Antenna factor + cable loss - preamplifier gain)
2. The raw value is used to calculate by software which is not shown in the sheet.
3. Margin=limit value – emission level.
4. Horizontal and vertical polarity is all have been tested, the result of them is synthesized in the above data diagram.

Mode 2: Working mode (Full system) + Data Link (SD TO PC) + CA02+ UB01 (1GHz-18GHz)

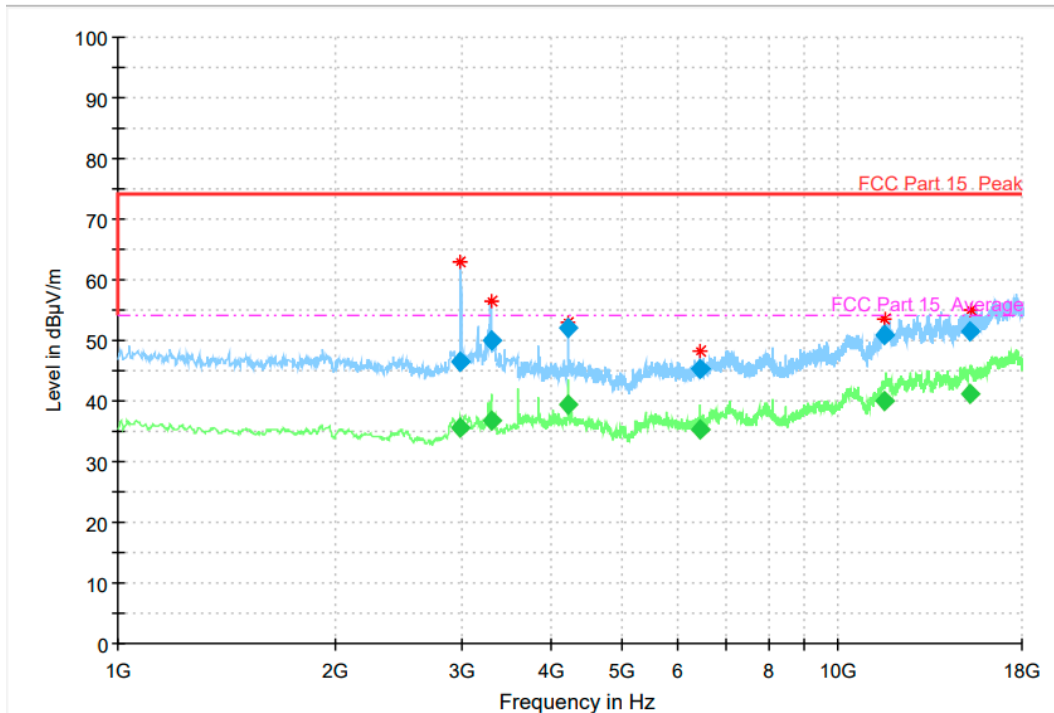


Final Result 1

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
2992.000000	46.50	---	74.00	27.50	1.0	1000.000	200.0	H	158.0	1.8
2992.000000	---	35.53	54.00	18.47	1.0	1000.000	200.0	H	158.0	1.8
3298.800000	---	36.87	54.00	17.13	1.0	1000.000	100.0	H	88.0	0.6
3298.800000	50.04	---	74.00	23.96	1.0	1000.000	100.0	H	88.0	0.6
4223.800000	52.18	---	74.00	21.82	1.0	1000.000	200.0	H	132.0	1.2
4223.800000	---	39.36	54.00	14.64	1.0	1000.000	200.0	H	132.0	1.2
6429.600000	45.43	---	74.00	28.57	1.0	1000.000	100.0	H	96.0	2.9
6429.600000	---	35.35	54.00	18.65	1.0	1000.000	100.0	H	96.0	2.9
11574.800000	50.91	---	74.00	23.09	1.0	1000.000	100.0	H	79.0	9.7
11574.800000	---	40.13	54.00	13.87	1.0	1000.000	100.0	H	79.0	9.7
15195.200000	---	41.29	54.00	12.71	1.0	1000.000	100.0	H	343.0	13.9
15195.200000	51.50	---	74.00	22.50	1.0	1000.000	100.0	H	343.0	13.9

Note:

1. Emission level (peak or average)=Raw value by receiver + Corr (Antenna factor+ cable loss- preamplifier gain)
2. The raw value is used to calculate by software which is not shown in the sheet.
3. Margin=limit value – emission level.

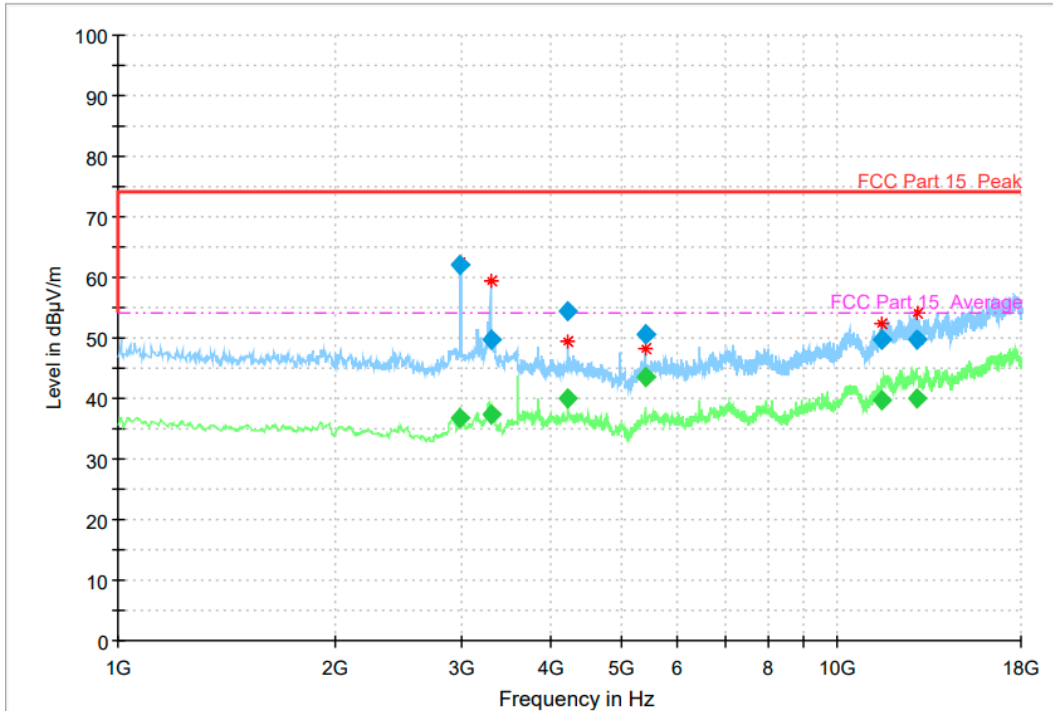

Final Result 1

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Po l	Azim uth (deg)	Corr. (dB)
2989.800000	62.11	---	74.00	11.89	1.0	1000.000	100.0	V	153.0	1.9
2989.800000	---	36.62	54.00	17.38	1.0	1000.000	100.0	V	153.0	1.9
3297.400000	49.77	---	74.00	24.23	1.0	1000.000	100.0	V	95.0	0.7
3297.400000	---	37.42	54.00	16.58	1.0	1000.000	100.0	V	95.0	0.7
4224.000000	54.38	---	74.00	19.62	1.0	1000.000	100.0	V	210.0	1.2
4224.000000	---	40.07	54.00	13.93	1.0	1000.000	100.0	V	210.0	1.2
5400.000000	---	43.64	54.00	10.36	1.0	1000.000	100.0	V	202.0	2.0
5400.000000	50.64	---	74.00	23.36	1.0	1000.000	100.0	V	202.0	2.0
11547.000000	---	39.62	54.00	14.38	1.0	1000.000	200.0	V	328.0	9.6
11547.000000	49.74	---	74.00	24.26	1.0	1000.000	200.0	V	328.0	9.6
12889.400000	49.60	---	74.00	24.40	1.0	1000.000	100.0	V	170.0	11.2
12889.400000	---	39.94	54.00	14.06	1.0	1000.000	100.0	V	170.0	11.2

Note:

1. Emission level (peak or average) = Raw value by receiver + Corr (Antenna factor+ cable loss- preamplifier gain)
2. The raw value is used to calculate by software which is not shown in the sheet.
3. Margin=limit value – emission level.

6.2. AC Conducted Emission

Method of Measurement

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies with the band 150 kHz to 30MHz shall not exceed the limits. Both lines of the power mains connected to the EUT were checked for maximum conducted interference. Tested in accordance with the procedures of ANSI C63.4-2014, section 7.3

Limit of AC Conducted Emission

Frequency Range (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50


*Decreases with the logarithm of the frequency

Test Condition in Charging Mode

Voltage (V)	Frequency (Hz)	RBW	Sweep Time (s)
120	60	9 kHz	Auto

Test Results

Mode 2: Working mode (Full system) + Data Link (SD TO PC) + CA02+ UB01

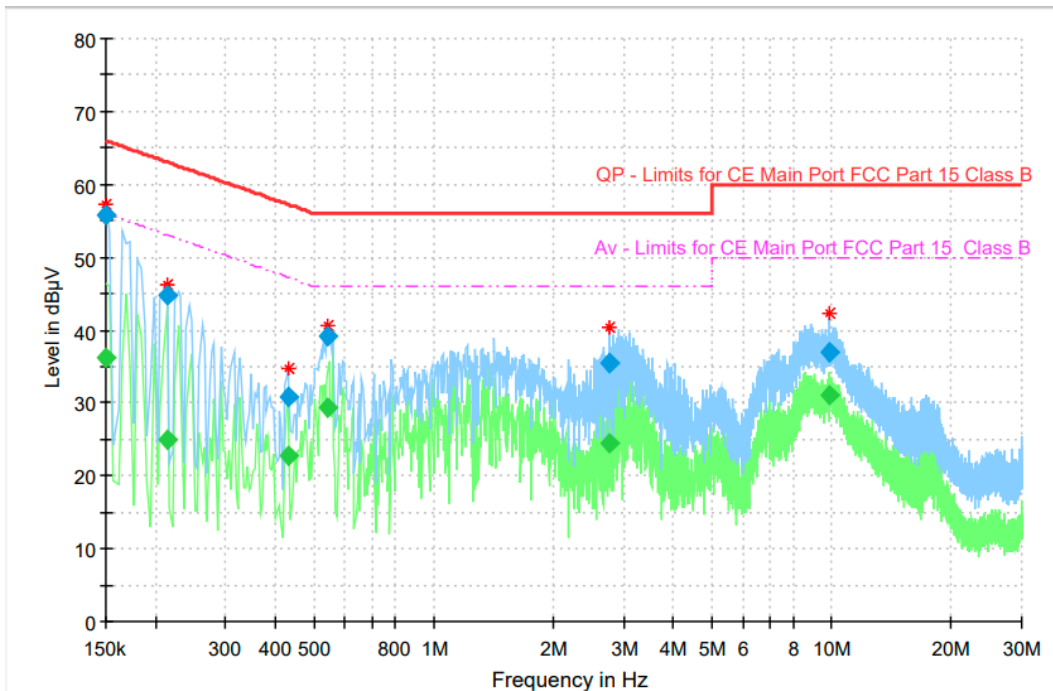

Final Result 1

Frequency (MHz)	QuasiPeak (dB µ V)	Average (dB µ V)	Limit (dB µ V)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.150000	---	36.20	56.00	19.80	15000.0	9.000	L1	ON	9.6
0.150000	55.71	---	66.00	10.29	15000.0	9.000	L1	ON	9.6
0.213431	---	25.06	53.07	28.01	15000.0	9.000	L1	ON	9.6
0.213431	44.67	---	63.07	18.40	15000.0	9.000	L1	ON	9.6
0.429844	---	22.72	47.26	24.54	15000.0	9.000	N	ON	9.6
0.429844	30.94	---	57.26	26.31	15000.0	9.000	N	ON	9.6
0.541781	---	29.43	46.00	16.57	15000.0	9.000	N	ON	9.6
0.541781	39.19	---	56.00	16.81	15000.0	9.000	N	ON	9.6
2.765606	---	24.36	46.00	21.64	15000.0	9.000	N	ON	9.7
2.765606	35.51	---	56.00	20.49	15000.0	9.000	N	ON	9.7
9.892294	---	31.14	50.00	18.86	15000.0	9.000	N	ON	9.9
9.892294	37.05	---	60.00	22.95	15000.0	9.000	N	ON	9.9

Note:

1. Emission level(quasi-peak or Average peak)=Raw value by receiver + Corr(Insertion loss+ cable loss)
2. The raw value is used to calculate by software which is not shown in the sheet.
3. Margin=limit value – emission level.
4. L1 and N line is all have been tested, the result of them is synthesized in the above data diagram.

7. Test Equipment List

7.1. Radiated Emission Equipment list

Item	Equipment Name	Type	Serial Number	Manufacturer	Cal. Date	Cal. interval
1	Test Receiver	ESU40	100307	R&S	2021-03-03	1 year
2	Universal Radio Communication Tester	CMU200	123102	R&S	2021-05-10	1 year
3	Universal Radio Communication Tester	CMW500	104178	R&S	2021-05-10	1 year
4	Trilog Antenna	VULB9163	VULB9163-515	Schwarzbeck	2021-02-03	2 years
5	Double Ridged Guide Antenna	ETS-3117	00135890	ETS	2020-02-28	2 years
6	EMI Test Software	EMC32 V9.15	N/A	R&S	N/A	N/A
7	Signal Generator	SMBV100A	257984	R&S	2021-03-03	1 year

7.2. AC Conducted Emission Equipment list

Item	Equipment Name	Type	Serial Number	Manufacturer	Cal. Date	Cal. interval
1	Test Receiver	ESCI	101235	R&S	2021-05-10	1 year
2	Universal Radio Communication Tester	CMU200	123102	R&S	2021-05-10	1 year
3	Universal Radio Communication Tester	CMW500	104178	R&S	2021-05-10	1 year
4	2-Line V-Network	ENV216	101380	R&S	2021-03-20	1 year
5	EMI Test Software	EMC32 V10.35.02	N/A	R&S	N/A	N/A
6	Signal Generator	SMBV100A	257984	R&S	2021-03-03	1 year



Annex A: Measurement Uncertain

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Case	Uncertainty
Radiated Emission 30MHz-1000MHz	4.96 dB
Radiated Emission 1000MHz-18000MHz	5.18 dB
AC Conducted Emission	3.66 dB

Annex B: Accreditation Certificate



Accredited Laboratory

A2LA has accredited

INDUSTRIAL INTERNET INNOVATION CENTER (SHANGHAI) CO., LTD.

Shanghai, People's Republic of China

for technical competence in the field of

Electrical Testing

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 General requirements for the competence of testing and calibration laboratories. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated April 2017).



Presented this 12th day of April 2021.

Vice President, Accreditation Services
For the Accreditation Council
Certificate Number 3682.01
Valid to February 28, 2023

For the tests to which this accreditation applies, please refer to the laboratory's Electrical Scope of Accreditation.

*****END OF REPORT*****