



Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 1 of 852

TEST REPORT

Application No.: KSCR2308001524AT
FCC ID: 2AH25K2MINI660
IC: 22621-K2MINI660
Applicant: Shanghai Sunmi Technology Co.,Ltd.
Address of Applicant: Room 505, No.388 Song Hu Road, Yang Pu District, Shanghai, China
Manufacturer: Shanghai Sunmi Technology Co.,Ltd.
Address of Manufacturer: Room 505, No.388 Song Hu Road, Yang Pu District, Shanghai, China
Equipment Under Test (EUT):
EUT Name: Self-Checkout Kiosk
Model No.: F4503,F4504 ♣
♣ Please refer to section 2 of this report which indicates which model was actually tested and which were electrically identical.
Trade Mark: SUNMI
Standard(s) : 47 CFR Part 15, Subpart E 15.407
RSS-247 Issue 2, February 2017
RSS-Gen Issue 5 Amendment 2 (February 2021)
Date of Receipt: 2023-08-29
Date of Test: 2023-10-03 to 2023-10-04
Date of Issue: 2023-11-17

Test Result:	Pass*
---------------------	--------------

* In the configuration tested, the EUT complied with the standards specified above.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein.

Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 2 of 852

Revision Record			
Version	Description	Date	Remark
00	Original	2023-11-17	/

Authorized for issue by:			
Tested By		Damon Zhou	
		Damon_Zhou/Project Engineer	
Approved By		Terry Hou	
		Terry Hou /Reviewer	



Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 3 of 852

2 Test Summary

Radio Spectrum Technical Requirement				
Item	FCC Requirement	IC Requirement	Method	Result
Antenna Requirement	47 CFR Part 15, Subpart C 15.203	RSS-Gen Clause 6.8	N/A	Pass
Transmission in the Absence of Data	47 CFR Part 15, Subpart E 15.407 (c)	RSS-247 Section 6.4(a)	N/A	Pass

N/A: Not applicable

Radio Spectrum Matter Part				
Item	FCC Requirement	IC Requirement	Method	Result
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart C 15.207 & Subpart E 15.407 b(6)	RSS-Gen Section 8.8	ANSI C63.10 (2013) Section 6.2	Pass
99% Bandwidth	N/A	RSS-Gen Section 6.7	ANSI C63.10 Section 6.9.3	Pass
26dB Emission bandwidth	47 CFR Part 15, Subpart E 15.407 (a)	RSS-247 Section 6.2.1(1)	KDB 789033 D02 II C 1	Pass
Minimum 6 dB bandwidth (5.725-5.85 GHz band)	47 CFR Part 15, Subpart E 15.407 (e)	RSS-247 Section 6.2.4	KDB 789033 D02 II C 2	Pass
Maximum Conducted output power	47 CFR Part 15, Subpart E 15.407 (a)	RSS-247 Section 6.2.1&6.2.2&6.2.3&6.2.4	KDB 789033 D02 II E	Pass
Peak Power spectrum density	47 CFR Part 15, Subpart E 15.407 (a)	RSS-247 Section 6.2.1&6.2.2&6.2.3&6.2.4	KDB 789033 D02 II F	Pass
Radiated Emissions	47 CFR Part 15, Subpart C 15.209 & 15.407(b)	RSS-247 Section 3.3 & RSS-Gen Section 8.9	KDB 789033 D02 II G	Pass
Radiated Emissions which fall in the restricted bands	47 CFR Part 15, Subpart C 15.209 & Subpart E 15.407(b)	RSS-247 Section 3.3 & RSS-Gen Section 8.9	KDB 789033 D02 II G	Pass
Frequency Stability	47 CFR Part 15, Subpart E 15.407 (g)	RSS-Gen Section 8.11	ANSI C63.10 (2013) Section 6.8& RSS-Gen Section 6.11	Pass
Channel Move Time	47 CFR Part 15, Subpart E 15.407	RSS-247	KDB 905462 D02 Section 7.8.3	Pass
Channel Closing Transmission Time	47 CFR Part 15, Subpart E 15.407	RSS-247	KDB 905462 D02 Section 7.8.3	Pass
Non-occupancy period	47 CFR Part 15, Subpart E 15.407	RSS-247	KDB 905462 D02 Section 7.8.3	Pass

Note: There are series models mentioned in this report, and they are identical in electrical and electronic characters. After Pre-scan all configurations, Only the model F4504 was the worst and recorded, since their differences were the model number and appearance (F4504 with dual screen, F4503 with single screen).

3 Contents

	Page
1 COVER PAGE.....	1
2 Test Summary	3
3 Contents	4
4 General Information	5
4.1 Details of E.U.T.....	5
4.2 Description of Support Units	5
4.3 Measurement Uncertainty.....	6
4.4 Test Location	7
4.5 Test Facility.....	7
4.6 Deviation from Standards	7
4.7 Abnormalities from Standard Conditions	7
5 Equipment List.....	8
6 Radio Spectrum Technical Requirement	9
6.1 Antenna Requirement	9
6.2 Transmission in the Absence of Data	10
7 Radio Spectrum Matter Test Results.....	11
7.1 Conducted Emissions at AC Power Line (150kHz-30MHz).....	11
7.2 Duty Cycle.....	15
7.3 99% Bandwidth	16
7.4 26dB Emission bandwidth	17
7.5 Minimum 6 dB bandwidth (5.725-5.85 GHz band)	18
7.6 Maximum Conducted output power.....	19
7.7 Peak Power spectrum density	21
7.8 Radiated Emissions (Above 1GHz)	23
7.9 Radiated Emissions which fall in the restricted bands.....	144
7.10 Frequency Stability	236
7.11 Non-occupancy period	237
7.12 Channel Move Time.....	240
7.13 Channel Closing Transmission Time	243
7.14 Radiated Emissions (Below 1GHz).....	246
8 Test Setup Photo	250
9 EUT Constructional Details (EUT Photos)	250
10 Appendix	251

4 General Information

4.1 Details of E.U.T.

Power supply:	DC 24V,2.5A by AC Adapter Adapter model: CYSE65-240250 INPUT:AC 100-240V,50/60Hz,1.7A OUTPUT: DC 24V,2.5A,60W
Operation Frequency/Number of channels (20MHz):	U-NII-1: 5180-5240MHz (4 Channels); U-NII-2A: 5260-5320MHz (4 Channels); U-NII-2C: 5500-5700MHz (11 Channels); U-NII-3: 5745-5825MHz (5 Channels)
Operation Frequency/Number of channels/(40MHz):	U-NII-1: 5190-5230MHz (2 Channels); U-NII-2A: 5270-5310MHz (2 Channels); U-NII-2C: 5510-5670MHz (5 Channels); U-NII-3: 5755-5795MHz (2 Channels)
Operation Frequency/Number of channels (80MHz):	U-NII-1: 5210MHz (1 Channel); U-NII-2A: 5290MHz (1 Channels); U-NII-2C: 5530-5610MHz (2 Channels); U-NII-3: 5775MHz (1 Channel)
Modulation Type:	802.11a: OFDM (64QAM, 16QAM, QPSK, BPSK); 802.11n: OFDM (BPSK, QPSK, 16QAM, 64QAM); 802.11ac: OFDM (BPSK, QPSK, 16QAM, 64QAM, 256QAM)
Channel Spacing:	802.11a/n/ac 20: 20MHz; 802.11n/ac 40: 40MHz; 802.11ac 80: 80MHz
DFS Function:	Slave without Radar detection
Antenna Type:	PIFA Antenna
Antenna Gain:	Ant 1:2.71dBi; (Provided by the manufacturer) Ant 2:2.19dBi (Provided by the manufacturer) Directional gain:5.46dBi
Serial Number:	KM62D37M40011
Firmware Version:	1.5.3

4.2 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
Notebook	Lenovo	/	/

4.3 Measurement Uncertainty

No.	Item	Measurement Uncertainty
1	Radio Frequency	8.4×10^{-8}
2	Timeout	2s
3	Duty Cycle	0.37%
4	Occupied Bandwidth	3%
5	RF Conducted Power	0.6dB
6	RF Power Density	2.9dB
7	Conducted Spurious Emissions	0.75dB
8	RF Radiated Power	5.2dB (Below 1GHz)
		5.9dB (Above 1GHz)
9	Radiated Spurious Emission Test	4.2dB (Below 30MHz)
		4.5dB (30MHz-1GHz)
		5.1dB (1GHz-18GHz)
		5.4dB (Above 18GHz)
10	Temperature Test	1°C
11	Humidity Test	3%
12	Supply Voltages	1.5%
13	Time	3%

Note: The measurement uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

4.4 Test Location

All tests were performed at:

Compliance Certification Services (Kunshan) Inc.

No.10 Weiye Rd, Innovation park, Eco&Tec, Development Zone, Kunshan City, Jiangsu, China.

Tel: +86 512 5735 5888 Fax: +86 512 5737 0818

No tests were sub-contracted.

Note:

1. SGS is not responsible for wrong test results due to incorrect information (e.g., max. internal working frequency, antenna gain, cable loss, etc) is provided by the applicant. (If applicable).
2. SGS is not responsible for the authenticity, integrity and the validity of the conclusion based on results of the data provided by applicant. (If applicable).
3. Sample source: sent by customer.

4.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **A2LA**

Compliance Certification Services (Kunshan) Inc. is accredited by the American Association for Laboratory Accreditation (A2LA). Certificate No. 2541.01.

- **FCC**

Compliance Certification Services (Kunshan) Inc. has been recognized as an accredited testing laboratory. Designation Number: CN1172.

- **ISED**

Compliance Certification Services (Kunshan) Inc. has been recognized by Innovation, Science and Economic Development Canada (ISED) as an accredited testing laboratory. Company Number: 2324E

- **VCCI**

The 3m and 10m Semi-anechoic chamber and Shielded Room of Compliance Certification Services (Kunshan) Inc. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-20134, R-11600, C-11707, T-11499, G-10216 respectively.

4.6 Deviation from Standards

None

4.7 Abnormalities from Standard Conditions

None



Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 8 of 852

5 Equipment List

Item	Equipment	Manufacturer	Model	Inventory No	Cal Date	Cal. Due Date
Conducted Emission at Mains Terminals (150kHz-30MHz)						
1	EMI Test Receive	R&S	ESCI	KS301101	02/03/2023	02/02/2024
2	LISN	R&S	ENV216	KS301197	01/17/2023	01/16/2024
3	LISN	Schwarzbeck	NNLK 8129	KS301091	01/17/2023	01/16/2024
4	Pulse Limiter	R&S	ESH3-Z2	KUS1902E001	01/17/2023	01/16/2024
5	CE test Cable	Thermax	/	CZ301102	01/17/2023	01/16/2024
6	Test Software	Farad	EZ-EMC	/	N.C.R	N.C.R
RF Conducted Test						
1	Spectrum Analyzer	Keysight	N9020A	KUS1911E004-2	08/24/2023	08/23/2024
2	Spectrum Analyzer	Keysight	N9020A	KUS2001M001-2	08/24/2023	08/23/2024
3	Spectrum Analyzer	Keysight	N9030B	KSEM021-1	02/03/2023	02/02/2024
4	Signal Generator	R&S	SMBV100B	KSEM032	03/16/2023	03/15/2024
5	Signal Generator	R&S	SMW200A	KSEM020-1	08/24/2023	08/23/2024
6	Signal Generator	Agilent	N5182A	KUS2001M001-1	08/24/2023	08/23/2024
7	Radio Communication Test Station	Anritsu	MT8000A	KSEM001-1	08/24/2023	08/23/2024
8	Radio Communication Analyzer	Anritsu	MT8821C	KSEM002-1	03/16/2023	03/15/2024
9	Universal Radio Communication Tester	R&S	CMW500	KUS1911E004-1	08/24/2023	08/23/2024
10	Switcher	CCSRF	FY562	KUS2001M001-3	08/24/2023	08/23/2024
11	AC Power Source	EXTECH	6605	KS301178	N.C.R	N.C.R
12	DC Power Supply	Aglient	E3632A	KS301180	N.C.R	N.C.R
13	Conducted Test Cable	Thermax	RF01-RF04	CZ301111-CZ301120	02/03/2023	02/02/2024
14	Temp. / Humidity Chamber	TERCHY	MHK-120AK	KS301190	08/24/2023	08/23/2024
15	Temperature & Humidity Recorder	Renke Control	RS-WS-N01-6J	KSEM024-5	03/22/2023	03/21/2024
16	Software	BST	TST-PASS	/	N/A	N/A
RF Radiated Test						
1	Spectrum Analyzer	R&S	FSV40	KUS1806E003	08/24/2023	08/23/2024
2	Universal Radio Communication Tester	R&S	CMW500	KSEM009-1	03/16/2023	03/15/2024
3	Signal Generator	Agilent	E8257C	KS301066	08/24/2023	08/23/2024
4	Loop Antenna	COM-POWER	AL-130R	KUS1806E001	03/18/2023	03/17/2025
5	Bilog Antenna	TESEQ	CBL 6112D	KUS1806E005	06/29/2023	06/28/2025
6	Bilog Antenna	SCHWARZBECK	VULB9160	CZ301016	04/13/2021	04/12/2024
7	Horn-antenna(1-18GHz)	Schwarzbeck	BBHA9120D	KS301079	08/24/2023	08/23/2024
8	Horn-antenna(1-18GHz)	ETS-LINDGREN	3117	KS301186	02/21/2023	02/20/2024
9	Horn Antenna(18-40GHz)	Schwarzbeck	BBHA9170	CZ301058	02/26/2023	02/25/2024
10	Amplifier(30MHz~18GHz)	PANSHAN TECHNOLOGY	LNA:1~18G	KSEM010-1	01/17/2023	01/16/2024
11	Amplifier(18~40GHz)	COM-POWER	PAM-840A	KUS1710E001	01/21/2023	01/20/2024
12	RE Test Cable	REBES MICROWAVE	/	CZ301097	08/24/2023	08/23/2024
13	Temperature & Humidity Recorder	Renke Control	RS-WS-N01-6J	KSEM024-4	03/22/2023	03/21/2024
14	Software	ESE	E3	/	N/A	N/A
15	Software	Faratronic	EZ_EMC-v3A1	/	N/A	N/A



Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 9 of 852

6 Radio Spectrum Technical Requirement

6.1 Antenna Requirement

6.1.1 Test Requirement:

47 CFR Part 15, Subpart C 15.203

6.1.2 Conclusion

Standard Requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit permanently attached antenna or of an so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT Antenna:

The antenna 1 is PIFA antenna and antenna 2 is PIFA antenna, and all no consideration of replacement. The best case gain of the antenna 1 is 2.71dBi. and antenna 2 is 2.19dBi.

Antenna location: Refer to internal photo.



Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 10 of 852

6.2 Transmission in the Absence of Data

6.2.1 Test Requirement:

47 CFR Part 15, Subpart E 15.407 (c)

6.2.2 Conclusion

ConclusionStandard Requirement:The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signalling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals.Applicants shall include in their application for equipment authorization a description of how this requirement is met.EUT Details:WIFI chip support automatically discontinue transmission in case of either absence of information to transmit or operational failure, if the chip detect absence of information to transmit or operational failure, it will be automatically shut off.

7 Radio Spectrum Matter Test Results

7.1 Conducted Emissions at AC Power Line (150kHz-30MHz)

Test Requirement 47 CFR Part 15, Subpart C 15.207 & Subpart E 15.407 b(9)

Test Method: ANSI C63.10 (2013) Section 6.2

Limit:

Frequency of emission(MHz)	Conducted limit(dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

7.1.1 E.U.T. Operation

Operating Environment:

Temperature: 25.4 °C


Humidity: 48.0 % RH

Atmospheric Pressure: 1010 mbar

7.1.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	05	TX mode (U-NII-1)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ 20/40/80, Only the data of worst case is recorded in the report.

7.1.3 Test Setup Diagram

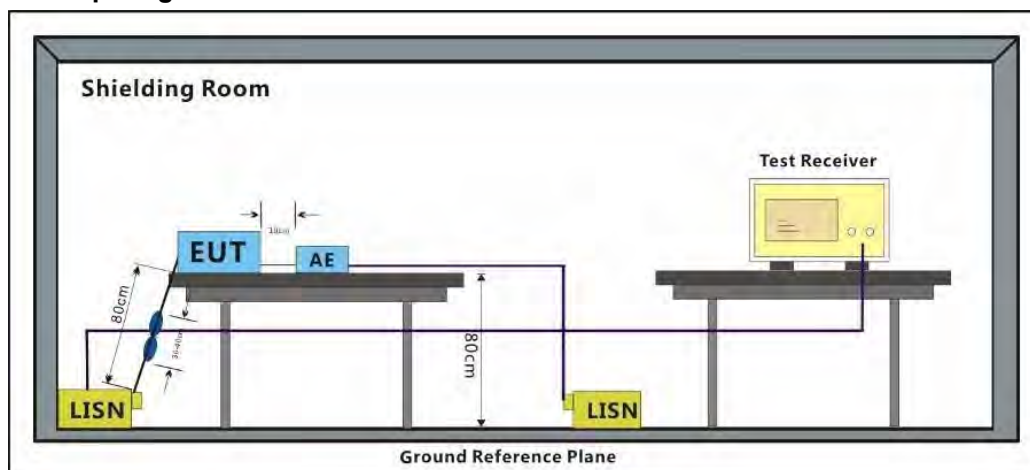

7.1.4 Measurement Procedure and Data

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50μH + 5ohm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

Remark: Level=Read Level+ Cable Loss+ LISN Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 13 of 852

Test Mode: 05; Line: Live line

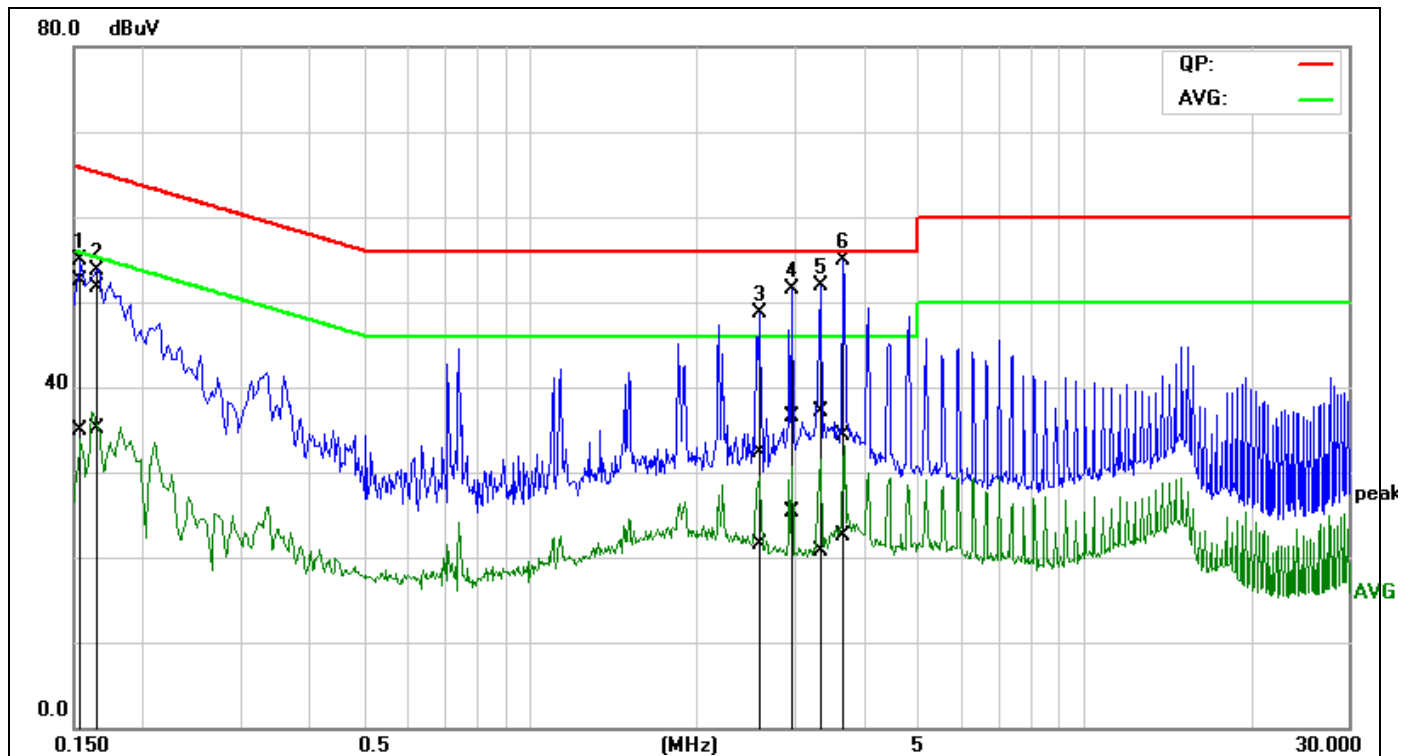

No.	Frequency	QuasiPeak reading	Average reading	Correction factor	QuasiPeak result	Average result	QuasiPeak limit	Average limit	QuasiPeak margin	Average margin	Remark
	(MHz)	(dBuV)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dBuV)	(dBuV)	(dB)	(dB)	
1*	0.1526	32.22	14.77	20.19	52.41	34.96	65.86	55.86	-13.45	-20.90	Pass
2	0.1622	31.48	15.00	20.16	51.64	35.16	65.35	55.35	-13.71	-20.19	Pass
3	2.5555	12.26	1.40	20.04	32.30	21.44	56.00	46.00	-23.70	-24.56	Pass
4	2.9740	16.54	5.38	19.98	36.52	25.36	56.00	46.00	-19.48	-20.64	Pass
5	3.2937	17.12	0.79	19.98	37.10	20.77	56.00	46.00	-18.90	-25.23	Pass
6	3.6250	14.36	2.44	19.97	34.33	22.41	56.00	46.00	-21.67	-23.59	Pass


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 14 of 852

Test Mode: 05; Line: Neutral Line

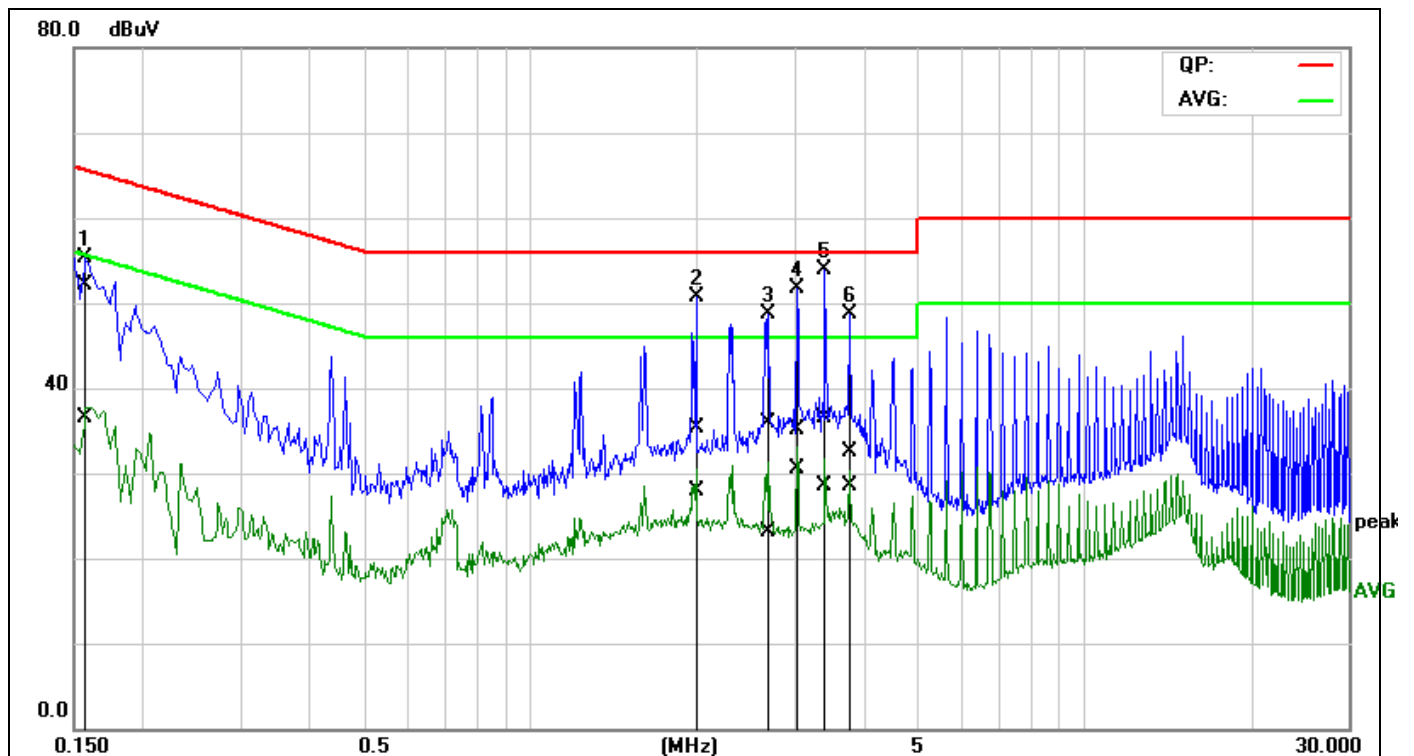

No.	Frequency (MHz)	QuasiPeak reading (dBuV)	Average reading (dBuV)	Correction factor (dB)	QuasiPeak result (dBuV)	Average result (dBuV)	QuasiPeak limit (dBuV)	Average limit (dBuV)	QuasiPeak margin (dB)	Average margin (dB)	Remark
1*	0.1572	31.96	16.29	20.24	52.20	36.53	65.61	55.61	-13.41	-19.08	Pass
2	1.9940	15.25	7.84	20.01	35.26	27.85	56.00	46.00	-20.74	-18.15	Pass
3	2.7190	15.96	3.17	19.99	35.95	23.16	56.00	46.00	-20.05	-22.84	Pass
4	3.0340	15.13	10.46	19.99	35.12	30.45	56.00	46.00	-20.88	-15.55	Pass
5	3.4140	16.61	8.54	19.98	36.59	28.52	56.00	46.00	-19.41	-17.48	Pass
6	3.7780	12.51	8.58	19.95	32.46	28.53	56.00	46.00	-23.54	-17.47	Pass

7.2 Duty Cycle

Test Requirement KDB 789033 D02 II B 1
Test Method: KDB 789033 II B 1

7.2.1 E.U.T. Operation


Operating Environment:

Temperature: 25.4 °C Humidity: 48.0 % RH Atmospheric Pressure: 1010 mbar

7.2.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	05	TX mode (U-NII-1) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ 20/40/80, Only the data of worst case is recorded in the report.
Final test	06	TX mode (U-NII-2A) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ 20/40/80, Only the data of worst case is recorded in the report.
Final test	07	TX mode (U-NII-2C) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ 20/40/80, Only the data of worst case is recorded in the report.
Final test	08	TX mode (U-NII-3) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ 20/40/80, Only the data of worst case is recorded in the report.

7.2.3 Test Setup Diagram

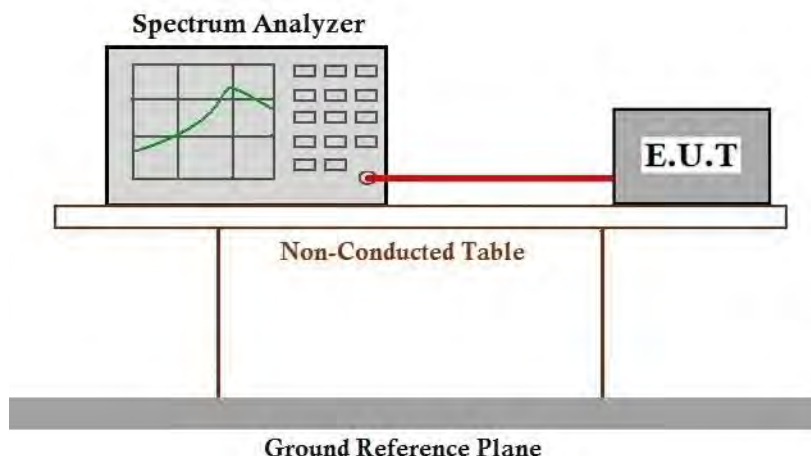

7.2.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.3 99% Bandwidth

Test Requirement N/A
Test Method: KDB 789033 II D

7.3.1 E.U.T. Operation


Operating Environment:

Temperature: 25.4 °C Humidity: 48.0 % RH Atmospheric Pressure: 1010 mbar

7.3.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	05	TX mode (U-NII-1) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ 20/40/80, Only the data of worst case is recorded in the report.
Final test	06	TX mode (U-NII-2A) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ 20/40/80, Only the data of worst case is recorded in the report.
Final test	07	TX mode (U-NII-2C) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ 20/40/80, Only the data of worst case is recorded in the report.
Final test	08	TX mode (U-NII-3) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ 20/40/80, Only the data of worst case is recorded in the report.

7.3.3 Test Setup Diagram

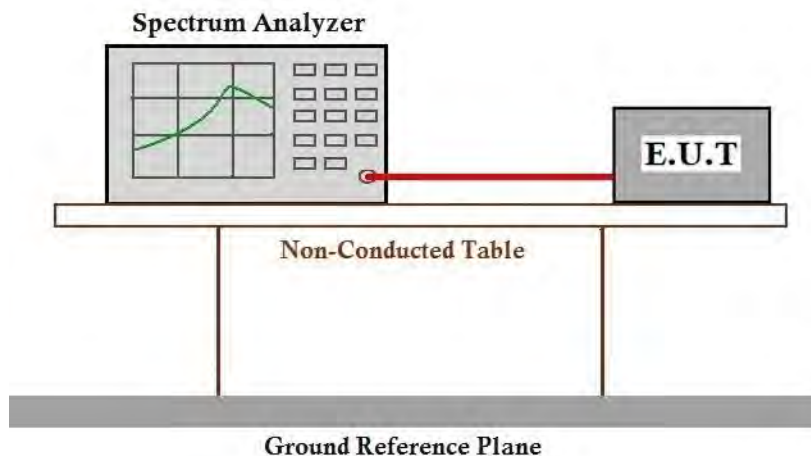

7.3.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.4 26dB Emission bandwidth

Test Requirement 47 CFR Part 15, Subpart E 15.407 (a)

Test Method: KDB 789033 D02 II C 1

7.4.1 E.U.T. Operation

Operating Environment:

Temperature: 25.4 °C


Humidity: 48.0 % RH

Atmospheric Pressure: 1010 mbar

7.4.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	05	TX mode (U-NII-1) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ 20/40/80, Only the data of worst case is recorded in the report.
Final test	06	TX mode (U-NII-2A) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ 20/40/80, Only the data of worst case is recorded in the report.
Final test	07	TX mode (U-NII-2C) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ 20/40/80, Only the data of worst case is recorded in the report.
Final test	08	TX mode (U-NII-3) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ 20/40/80, Only the data of worst case is recorded in the report.

7.4.3 Test Setup Diagram

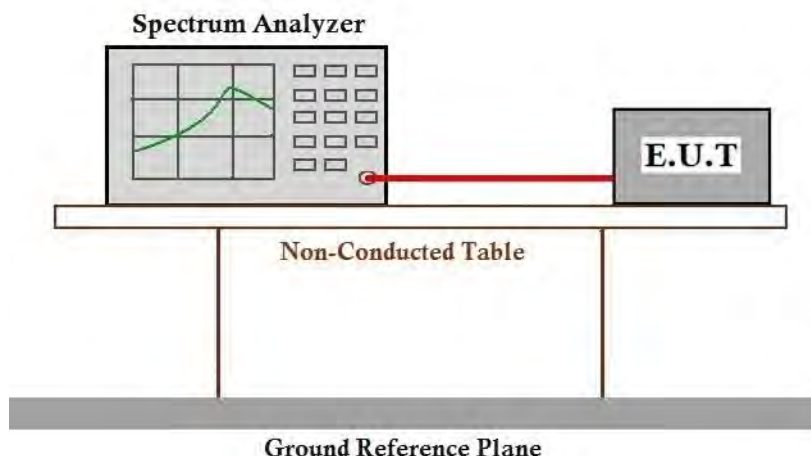

7.4.4 Measurement Procedure and Data

Please Refer to Appendix for Details

Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 18 of 852

7.5 Minimum 6 dB bandwidth (5.725-5.85 GHz band)

Test Requirement 47 CFR Part 15, Subpart E 15.407 (e)

Test Method: KDB 789033 D02 II C 2

Limit:

Frequency band(MHz)	Limit
5725-5850	≥500 kHz

7.5.1 E.U.T. Operation

Operating Environment:

Temperature: 25.4 °C


Humidity: 48.0 % RH

Atmospheric Pressure: 1010 mbar

7.5.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	08	TX mode (U-NII-3) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ 20/40/80, Only the data of worst case is recorded in the report.

7.5.3 Test Setup Diagram

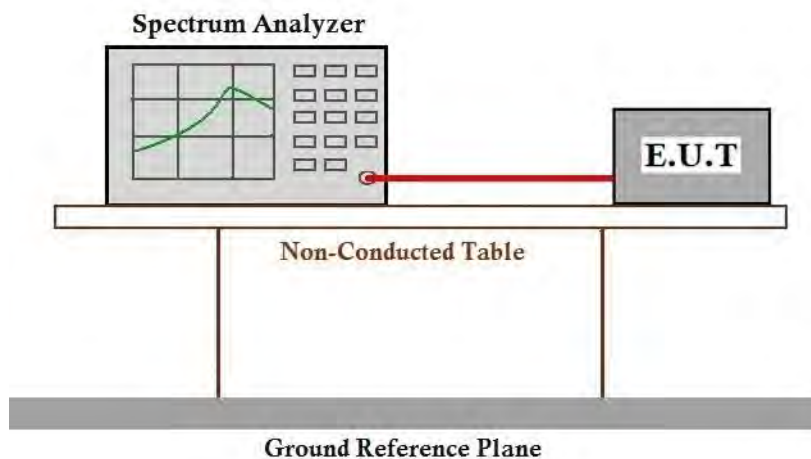

7.5.4 Measurement Procedure and Data

Please Refer to Appendix for Details

Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 19 of 852

7.6 Maximum Conducted output power

Test Requirement 47 CFR Part 15, Subpart E 15.407 (a)

Test Method: KDB 789033 D02 II E

Limit:

Frequency band(MHz)	Limit
5150-5250	≤1W(30dBm) for master device
	≤250mW(24dBm) for client device
5250-5350	≤250mW(24dBm) or 11dBm+10logB*
5470-5725	≤250mW(24dBm) or 11dBm+10logB*
5725-5850	≤1W(30dBm)
Remark:	<p>* Where B is the 26dB emission bandwidth in MHz.</p> <p>The maximum conducted output power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage.</p>

7.6.1 E.U.T. Operation

Operating Environment:

Temperature: 25.4 °C


Humidity: 48.0 % RH

Atmospheric Pressure: 1010 mbar

7.6.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	05	TX mode (U-NII-1)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ 20/40/80, Only the data of worst case is recorded in the report.
Final test	06	TX mode (U-NII-2A) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ 20/40/80, Only the data of worst case is recorded in the report.
Final test	07	TX mode (U-NII-2C) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ 20/40/80, Only the data of worst case is recorded in the report.
Final test	08	TX mode (U-NII-3) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ 20/40/80, Only the data of worst case is recorded in the report.

7.6.3 Test Setup Diagram

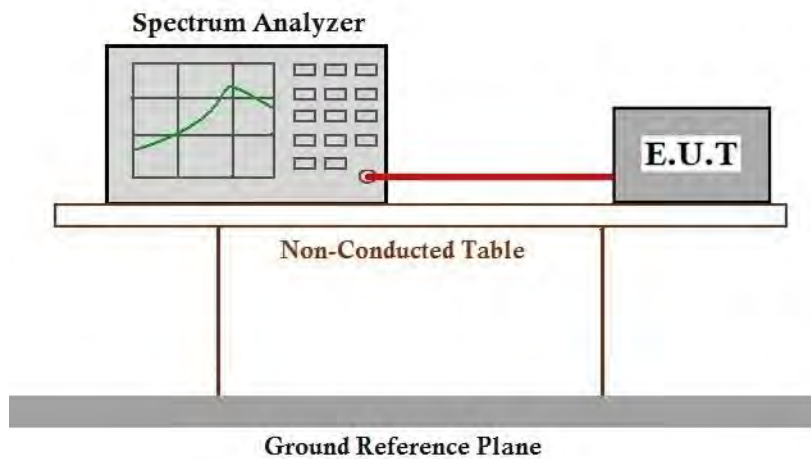

7.6.4 Measurement Procedure and Data

Note: Since the verify power the same operating range bandwidth and smaller power can be covered by the higher power.

Please Refer to Appendix for Details

Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 21 of 852

7.7 Peak Power spectrum density

Test Requirement 47 CFR Part 15, Subpart E 15.407 (a)

Test Method: KDB 789033 D02 II F

Limit:

Frequency band(MHz)	Limit
5150-5250	≤17dBm in 1MHz for master device
	≤11dBm in 1MHz for client device
5250-5350	≤11dBm in 1MHz for client device
5470-5725	≤11dBm in 1MHz for client device
5725-5850	≤30dBm in 500 kHz
Remark:	The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test.

7.7.1 E.U.T. Operation

Operating Environment:

Temperature: 25.4 °C


Humidity: 48.0 % RH

Atmospheric Pressure: 1010 mbar

7.7.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	05	TX mode (U-NII-1) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ 20/40/80, Only the data of worst case is recorded in the report.
Final test	06	TX mode (U-NII-2A) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ 20/40/80, Only the data of worst case is recorded in the report.
Final test	07	TX mode (U-NII-2C) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ 20/40/80, Only the data of worst case is recorded in the report.
Final test	08	TX mode (U-NII-3) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ 20/40/80, Only the data of worst case is recorded in the report.

7.7.3 Test Setup Diagram

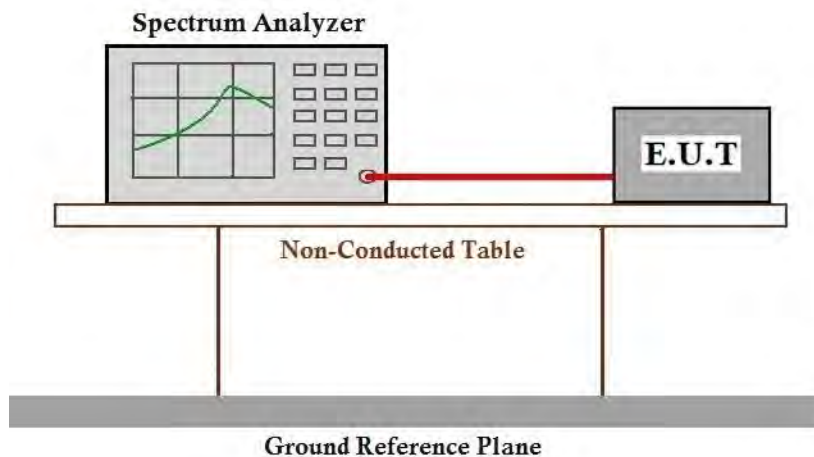

7.7.4 Measurement Procedure and Data

Please Refer to Appendix for Details

Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 23 of 852

7.8 Radiated Emissions (Above 1GHz)

Test Requirement 47 CFR Part 15, Subpart C 15.209 & Subpart E 15.407(b)

Test Method: KDB 789033 D02 II G

Measurement Distance: 3m

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
Above 1GHz	500	3
<p>*(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.</p> <p>(2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.</p> <p>(3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.</p> <p>(4) For transmitters operating in the 5.725-5.85 GHz band:</p> <p>(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.</p> <p>Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.</p>		

7.8.1 E.U.T. Operation


Operating Environment:

Temperature: °C Humidity: % RH Atmospheric Pressure: 1010 mbar

7.8.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	05	TX mode (U-NII-1) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ 20/40/80, Only the data of worst case is recorded in the report.
Final test	06	TX mode (U-NII-2A) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ 20/40/80, Only the data of worst case is recorded in the report.
Final test	07	TX mode (U-NII-2C) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ 20/40/80, Only the data of worst case is recorded in the report.
Final test	08	TX mode (U-NII-3) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ 20/40/80, Only the data of worst case is recorded in the report.

7.8.3 Test Setup Diagram

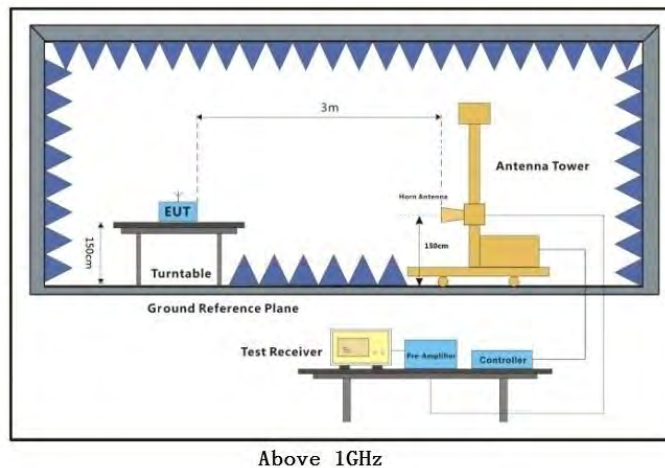

7.8.4 Measurement Procedure and Data

- a. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- i. Repeat above procedures until all frequencies measured was complete.

Remark:

1. $\text{Level} = \text{Read Level} + \text{Cable Loss} + \text{Antenna Factor} - \text{Preamplifier Factor}$
2. Scan from 18GHz to 40GHz, the disturbance above 18GHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
3. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.
4. The disturbance above 18GHz were very low and the harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.
5. For devices with multiple operating modes, measurements on the middle channel is used to determine the worst-case mode(s). Only the worst case mode with the highest output power and the mode with the highest output power spectral density for each modulation family (e.g., OFDM and direct sequence spread spectrum) is recorded in the test report.


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 26 of 852

Test Mode: 05; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

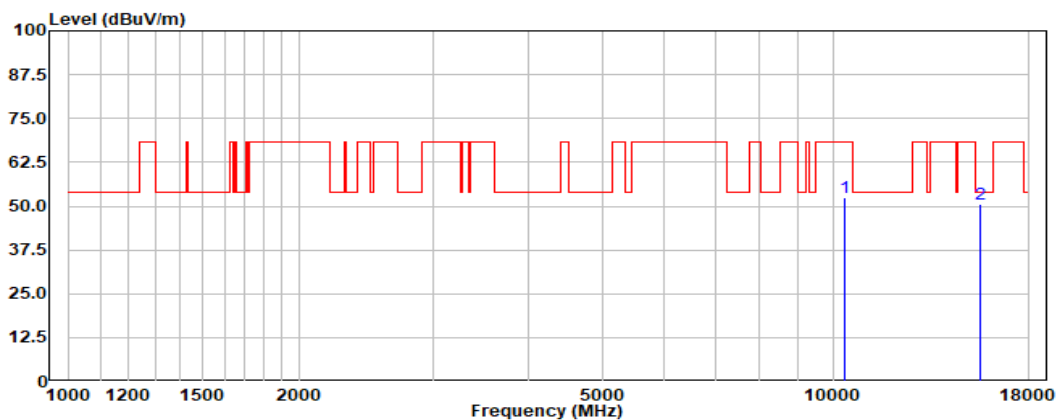

Antenna Polarity :Horizontal

No.	Freq	Read level	Antenna Factor	Cable Loss	Preamplifier Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
10360.00		52.85	37.51	7.99	45.72	52.63	68.30	-15.67	Peak
15540.00		45.83	39.91	9.96	45.03	50.67	54.00	-3.33	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamplifier Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 27 of 852

Test Mode: 05; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

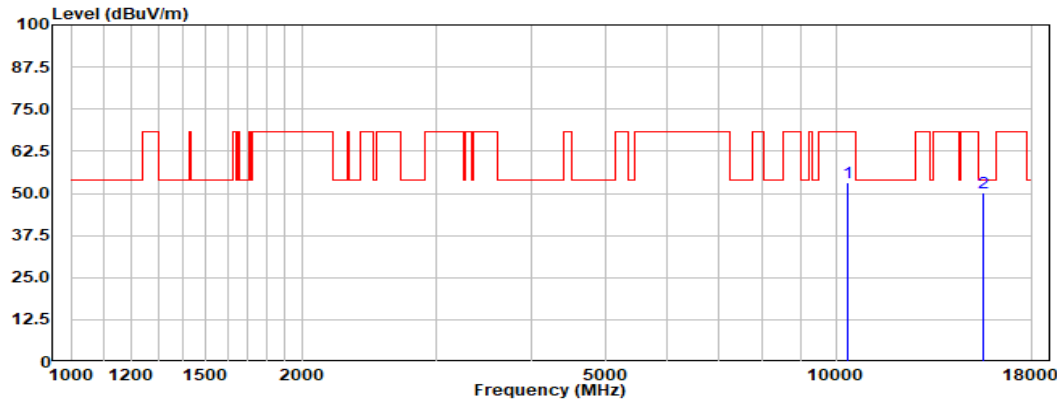

Antenna Polarity :Vertical

No.	Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
10360.00		53.50	37.51	7.99	45.72	53.28	68.30	-15.02	Peak
15540.00		45.28	39.91	9.96	45.03	50.12	54.00	-3.88	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 28 of 852

Test Mode: 05; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

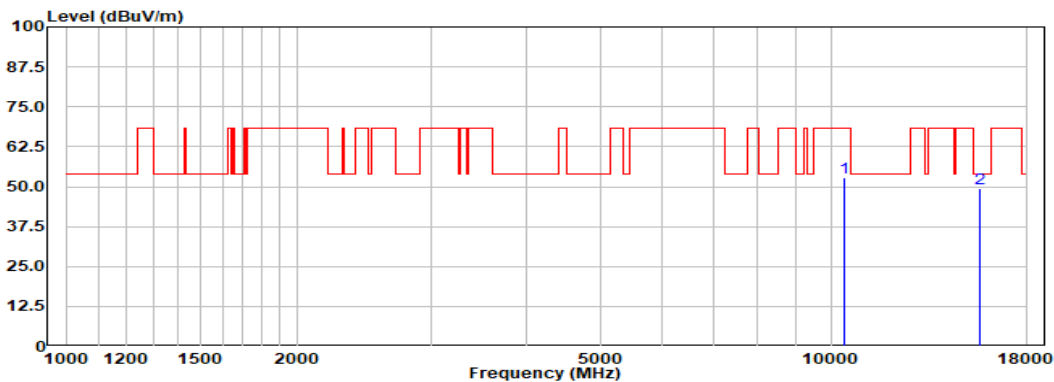

Antenna Polarity :Horizontal

No.	Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
10400.00		52.88	37.63	8.00	45.69	52.82	68.30	-15.48	Peak
15600.00		44.64	39.93	9.98	45.00	49.55	54.00	-4.45	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 29 of 852

Test Mode: 05; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

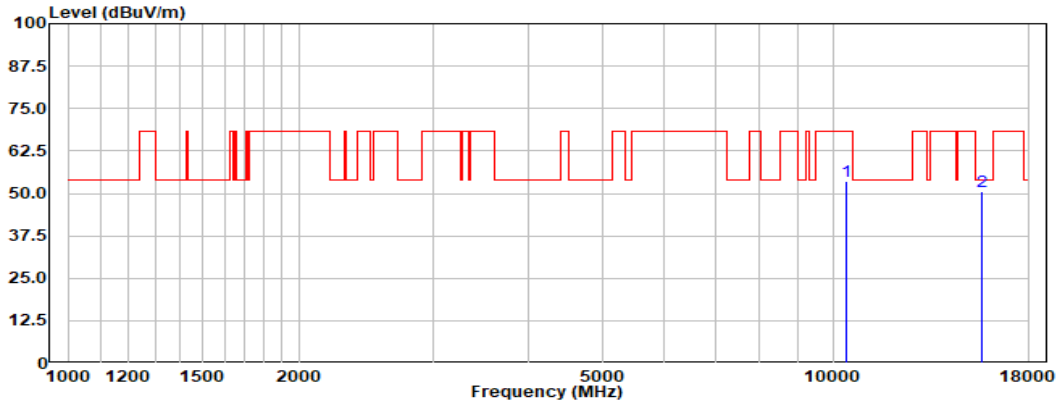

Antenna Polarity :Vertical

No.	Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
	10400.00	53.69	37.63	8.00	45.69	53.63	68.30	-14.67	Peak
	15600.00	45.79	39.93	9.98	45.00	50.70	54.00	-3.30	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 30 of 852

Test Mode: 05; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

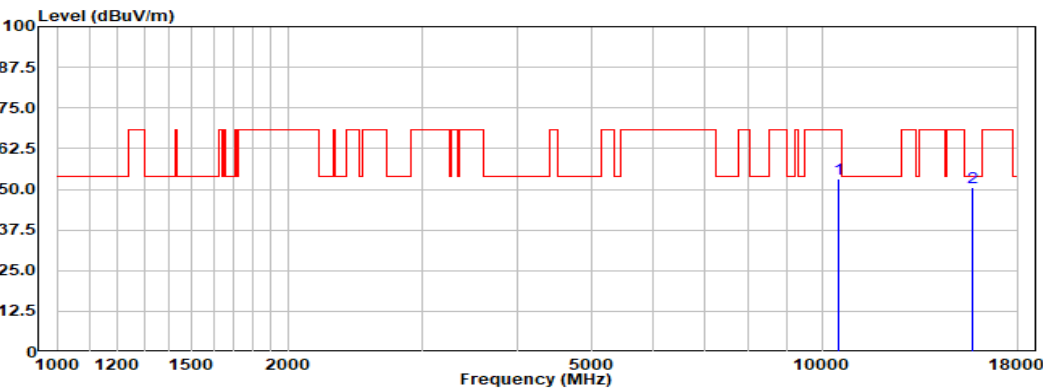

Antenna Polarity :Horizontal

No.	Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
10480.00		52.95	37.68	8.02	45.63	53.02	68.30	-15.28	Peak
15720.00		45.46	40.09	10.02	44.95	50.62	54.00	-3.38	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 31 of 852

Test Mode: 05; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

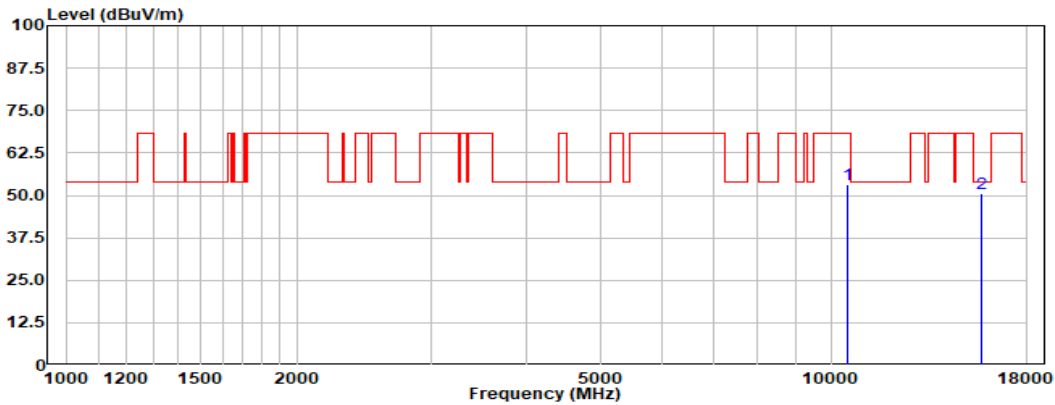

Antenna Polarity :Vertical

No.	Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	-----	-----	-----	-----	-----	-----	-----	-----	-----
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
10480.00		53.02	37.68	8.02	45.63	53.09	68.30	-15.21	Peak
15720.00		45.36	40.09	10.02	44.95	50.52	54.00	-3.48	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 32 of 852

Test Mode: 05; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

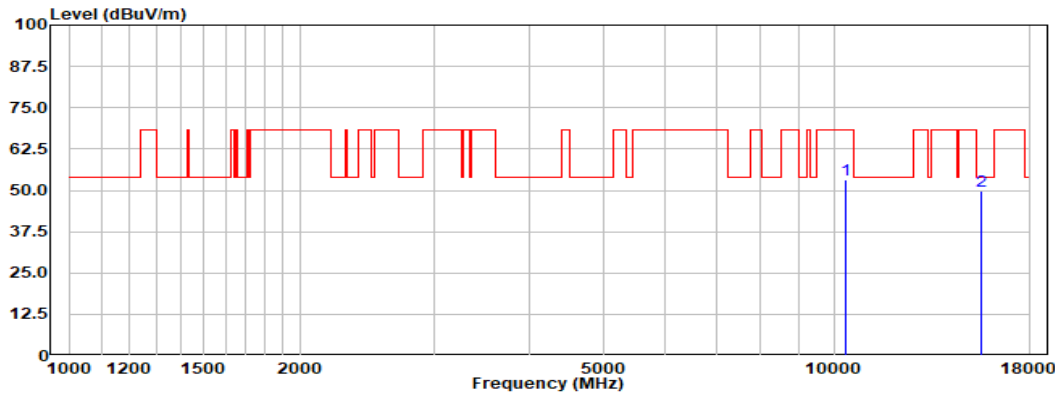

Antenna Polarity :Horizontal

No.	Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
10360.00		53.27	37.51	7.99	45.72	53.05	68.30	-15.25	Peak
15540.00		44.85	39.91	9.96	45.03	49.69	54.00	-4.31	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 33 of 852

Test Mode: 05; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

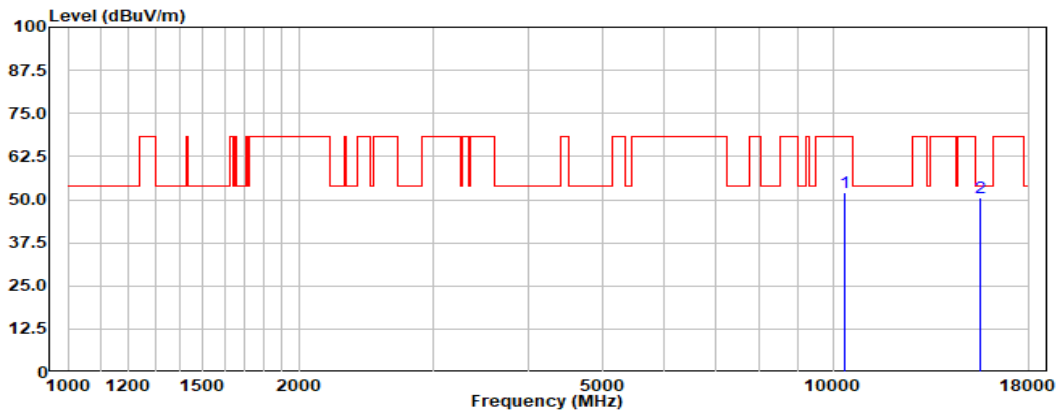

Antenna Polarity :Vertical

No.	Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
	10360.00	52.45	37.51	7.99	45.72	52.23	68.30	-16.07	Peak
	15540.00	45.70	39.91	9.96	45.03	50.54	54.00	-3.46	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 34 of 852

Test Mode: 05; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:middle

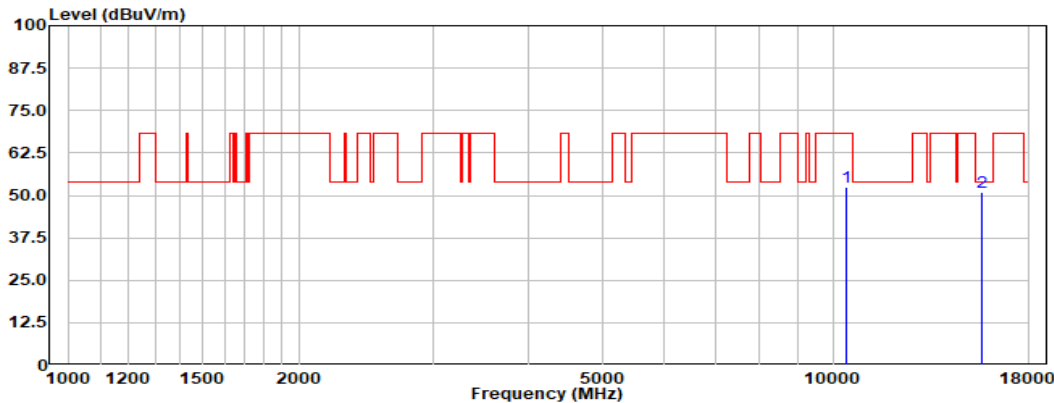

Antenna Polarity :Horizontal

No.	Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
	10400.00	52.69	37.63	8.00	45.69	52.63	68.30	-15.67	Peak
	15600.00	46.01	39.93	9.98	45.00	50.92	54.00	-3.08	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 35 of 852

Test Mode: 05; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:middle

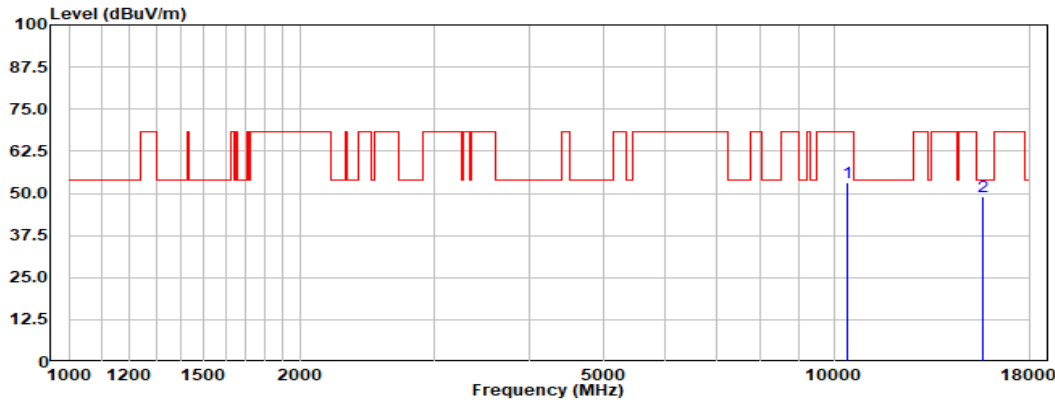

Antenna Polarity :Vertical

No.	Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
10400.00		53.15	37.63	8.00	45.69	53.09	68.30	-15.21	Peak
15600.00		44.26	39.93	9.98	45.00	49.17	54.00	-4.83	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 36 of 852

Test Mode: 05; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:High

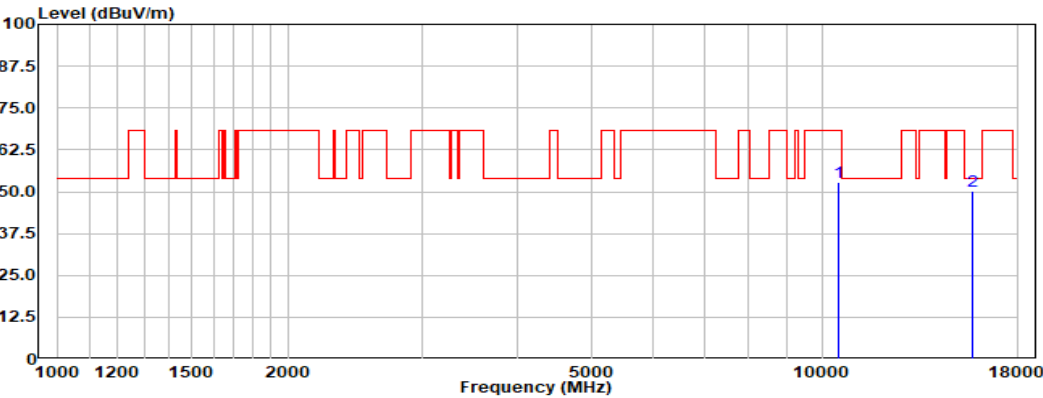

Antenna Polarity :Horizontal

No.	Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	-----	-----	-----	-----	-----	-----	-----	-----	-----
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
10480.00		52.90	37.68	8.02	45.63	52.97	68.30	-15.33	Peak
15720.00		44.86	40.09	10.02	44.95	50.02	54.00	-3.98	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 37 of 852

Test Mode: 05; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:High

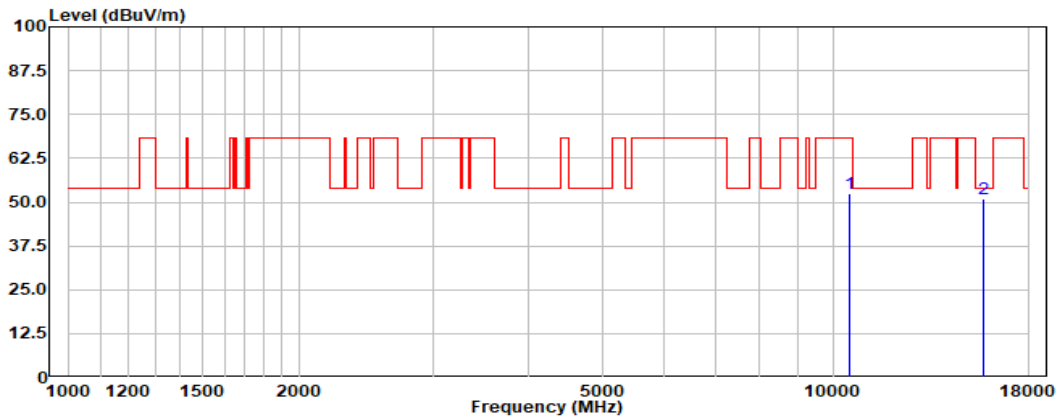

Antenna Polarity :Vertical

No.	Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
10480.00		52.37	37.68	8.02	45.63	52.44	68.30	-15.86	Peak
15720.00		45.80	40.09	10.02	44.95	50.96	54.00	-3.04	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 38 of 852

Test Mode: 05; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

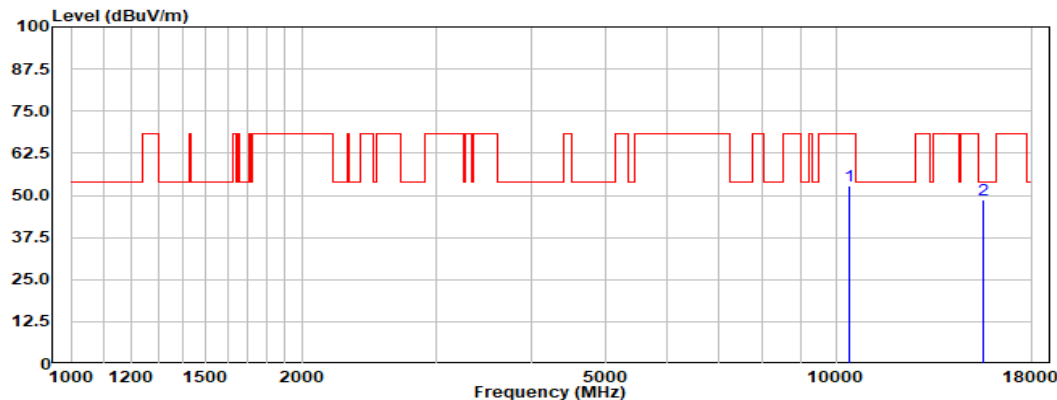

Antenna Polarity :Horizontal

No.	Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
10380.00		53.07	37.57	8.00	45.71	52.93	68.30	-15.37	Peak
15570.00		43.73	39.92	9.97	45.02	48.60	54.00	-5.40	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 39 of 852

Test Mode: 05; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

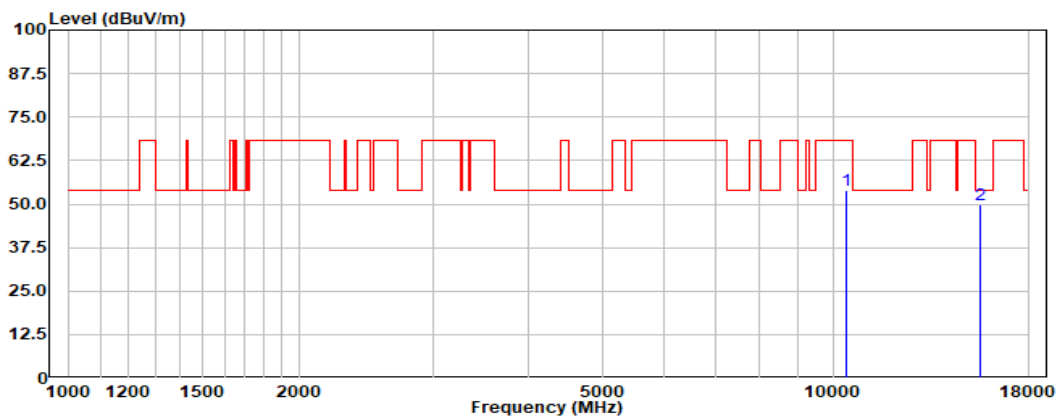

Antenna Polarity :Vertical

No.	Freq	Read level	Antenna Factor	Cable Loss	Preamplifier Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
10380.00		53.99	37.57	8.00	45.71	53.85	68.30	-14.45	Peak
15570.00		44.86	39.92	9.97	45.02	49.73	54.00	-4.27	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamplifier Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 40 of 852

Test Mode: 05; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:High

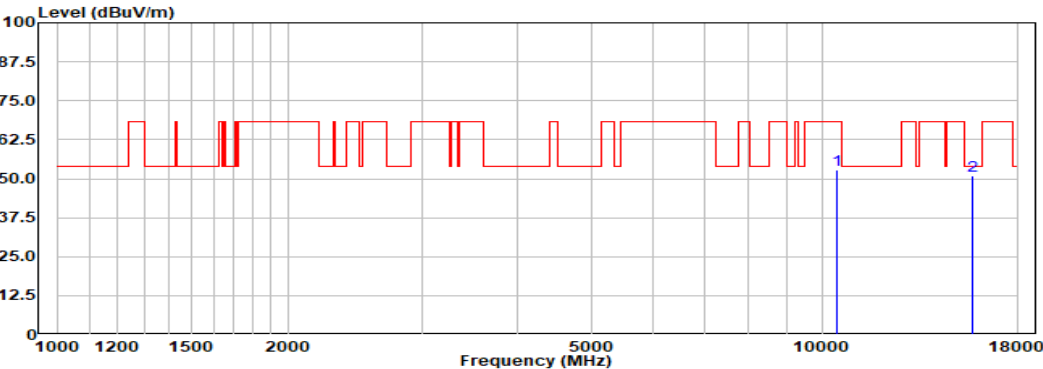

Antenna Polarity :Horizontal

No.	Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
	10460.00	52.71	37.67	8.02	45.65	52.75	68.30	-15.55	Peak
	15690.00	45.65	40.08	10.01	44.96	50.78	54.00	-3.22	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 41 of 852

Test Mode: 05; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:High

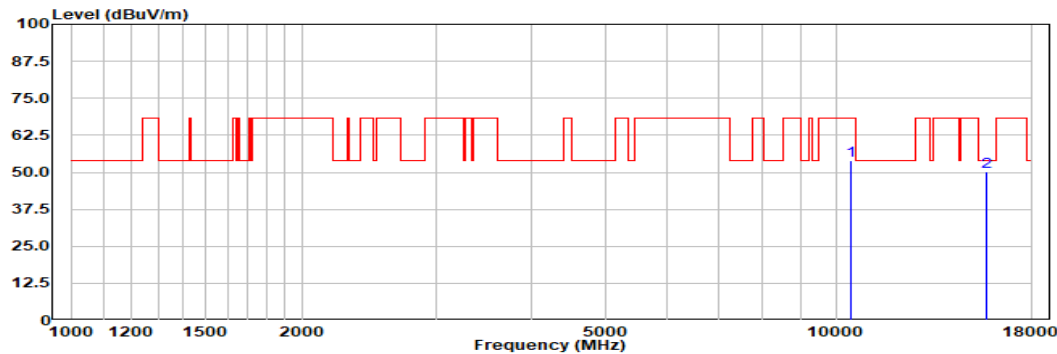

Antenna Polarity :Vertical

No.	Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
10460.00		54.10	37.67	8.02	45.65	54.14	68.30	-14.16	Peak
15690.00		45.19	40.08	10.01	44.96	50.32	54.00	-3.68	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 42 of 852

Test Mode: 05; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

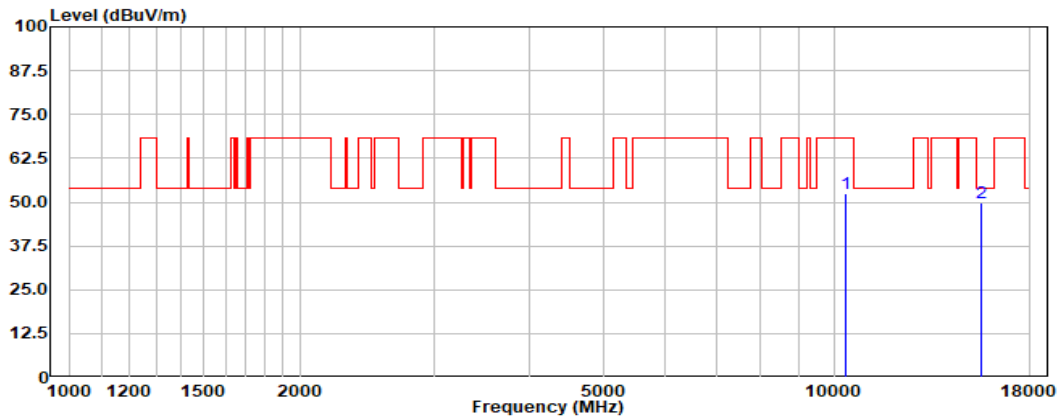

Antenna Polarity :Horizontal

No.	Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
	10360.00	52.81	37.51	7.99	45.72	52.59	68.30	-15.71	Peak
	15540.00	45.15	39.91	9.96	45.03	49.99	54.00	-4.01	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 43 of 852

Test Mode: 05; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

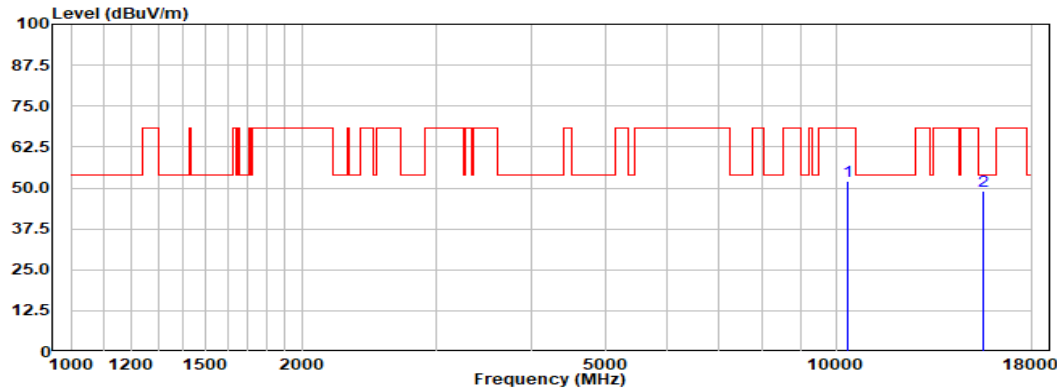

Antenna Polarity :Vertical

No.	Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
10360.00		52.28	37.51	7.99	45.72	52.06	68.30	-16.24	Peak
15540.00		44.15	39.91	9.96	45.03	48.99	54.00	-5.01	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 44 of 852

Test Mode: 05; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:middle

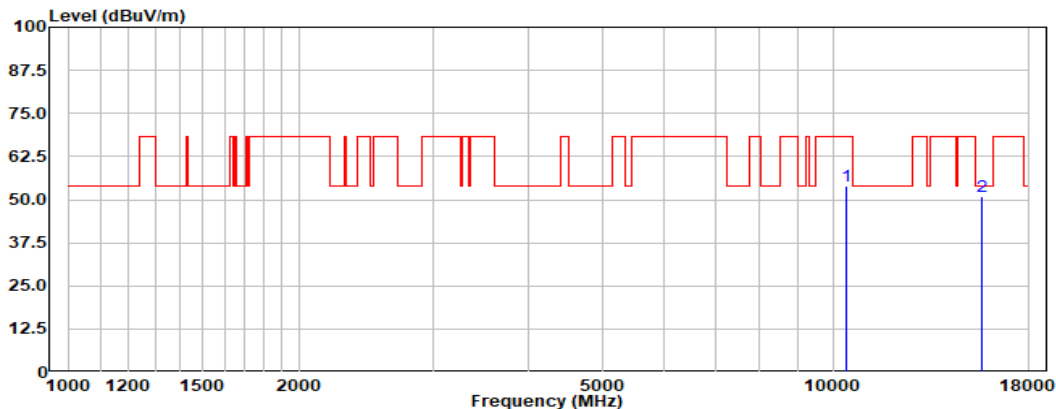

Antenna Polarity :Horizontal

No.	Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
	10400.00	53.86	37.63	8.00	45.69	53.80	68.30	-14.50	Peak
	15600.00	45.95	39.93	9.98	45.00	50.86	54.00	-3.14	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 45 of 852

Test Mode: 05; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:middle

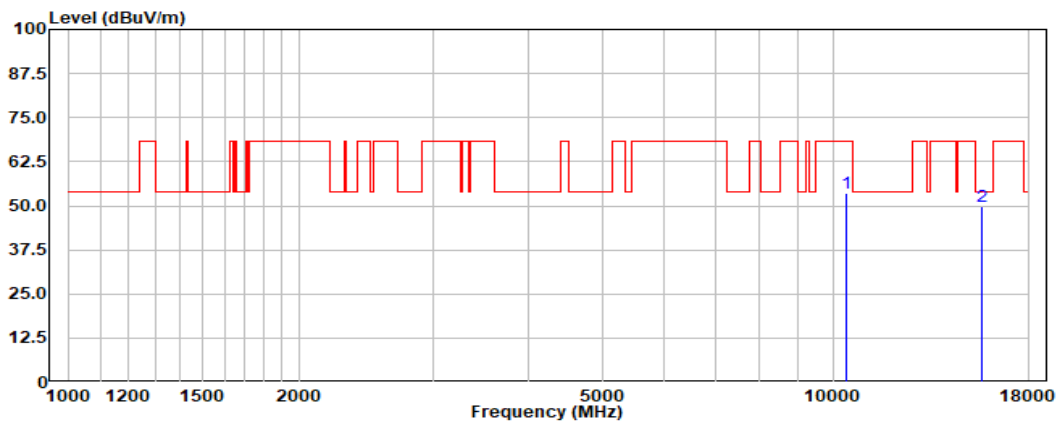

Antenna Polarity :Vertical

No.	Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
10400.00		53.62	37.63	8.00	45.69	53.56	68.30	-14.74	Peak
15600.00		45.04	39.93	9.98	45.00	49.95	54.00	-4.05	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 46 of 852

Test Mode: 05; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:High

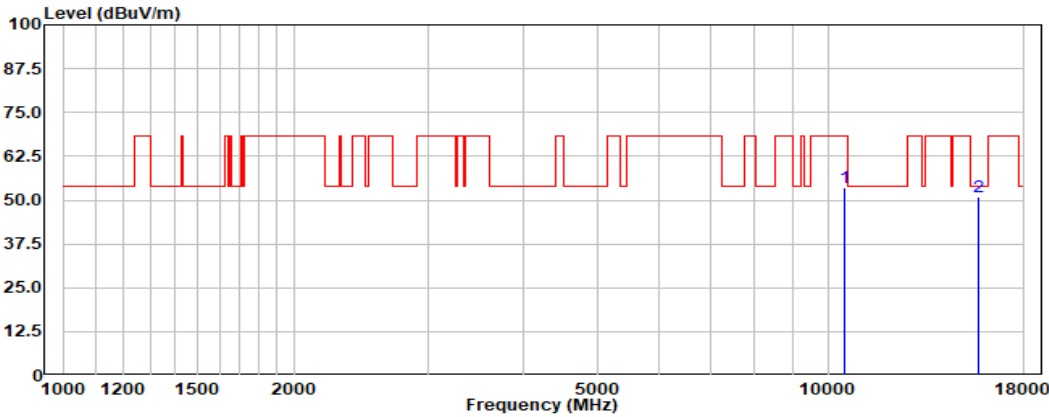

Antenna Polarity :Horizontal

No.	Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
	10480.00	53.34	37.68	8.02	45.63	53.41	68.30	-14.89	Peak
	15720.00	45.75	40.09	10.02	44.95	50.91	54.00	-3.09	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 47 of 852

Test Mode: 05; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:High

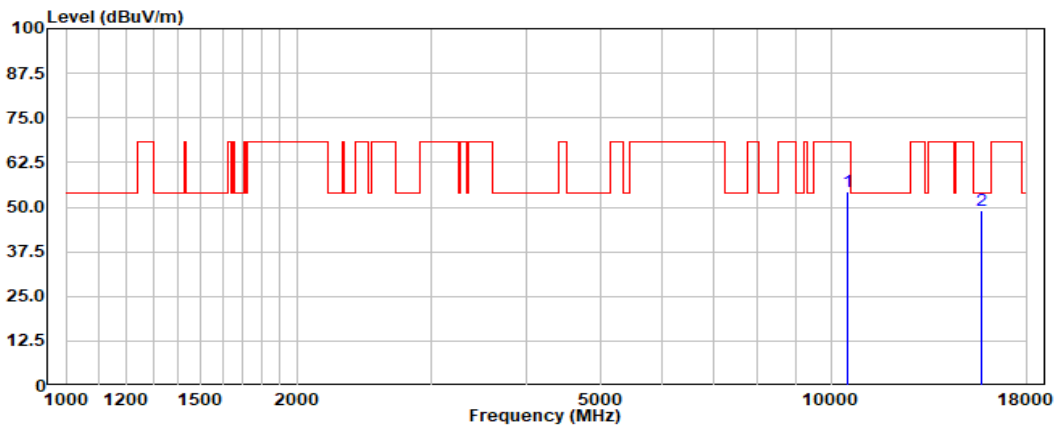

Antenna Polarity :Vertical

No.	Freq	Read level	Antenna Factor	Cable Loss	Preamplifier Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
	10480.00	54.26	37.68	8.02	45.63	54.33	68.30	-13.97	Peak
	15720.00	44.08	40.09	10.02	44.95	49.24	54.00	-4.76	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamplifier Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 48 of 852

Test Mode: 05; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:40MHz; Channel:Low

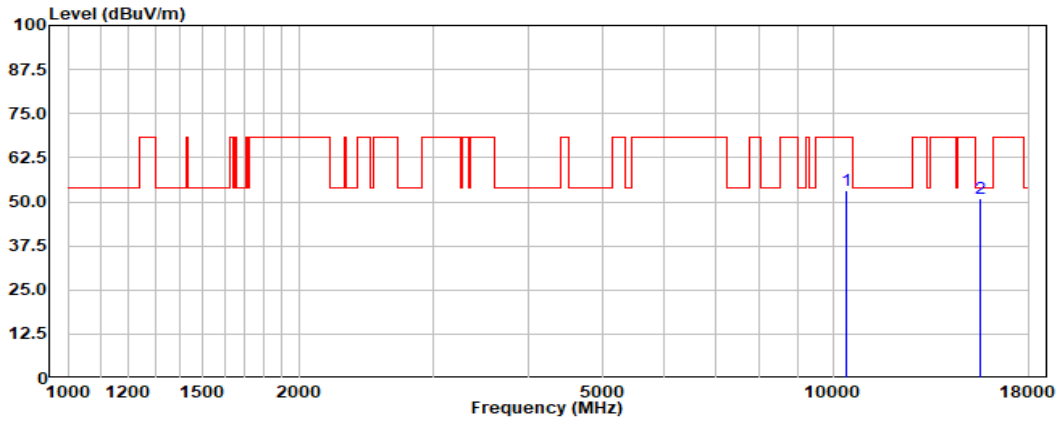

Antenna Polarity :Horizontal

No.	Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
	10380.00	53.31	37.57	8.00	45.71	53.17	68.30	-15.13	Peak
	15570.00	45.99	39.92	9.97	45.02	50.86	54.00	-3.14	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 49 of 852

Test Mode: 05; Polarity: Vertical; Modulation:802.11ac; Bandwidth:40MHz; Channel:Low

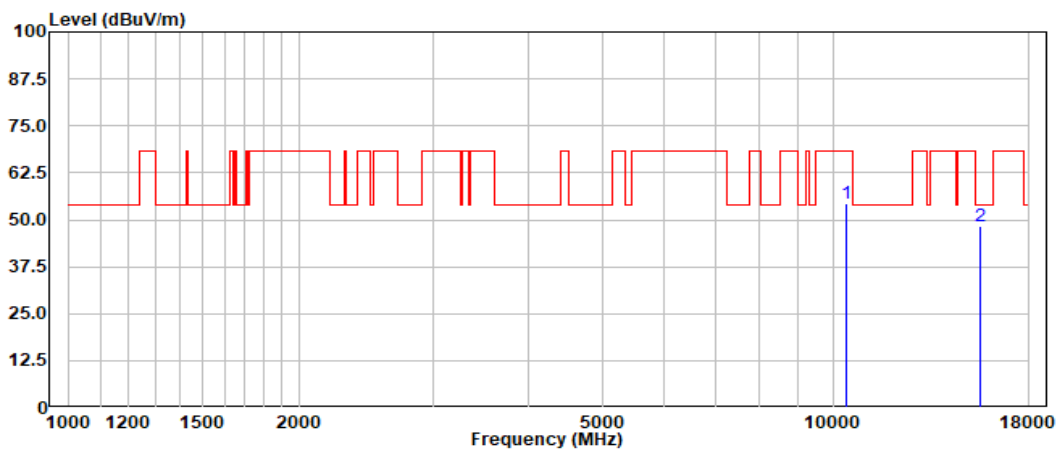

Antenna Polarity :Vertical

No.	Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
10380.00		54.50	37.57	8.00	45.71	54.36	68.30	-13.94	Peak
15570.00		43.40	39.92	9.97	45.02	48.27	54.00	-5.73	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor




Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 50 of 852

Test Mode: 05; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:40MHz; Channel:High

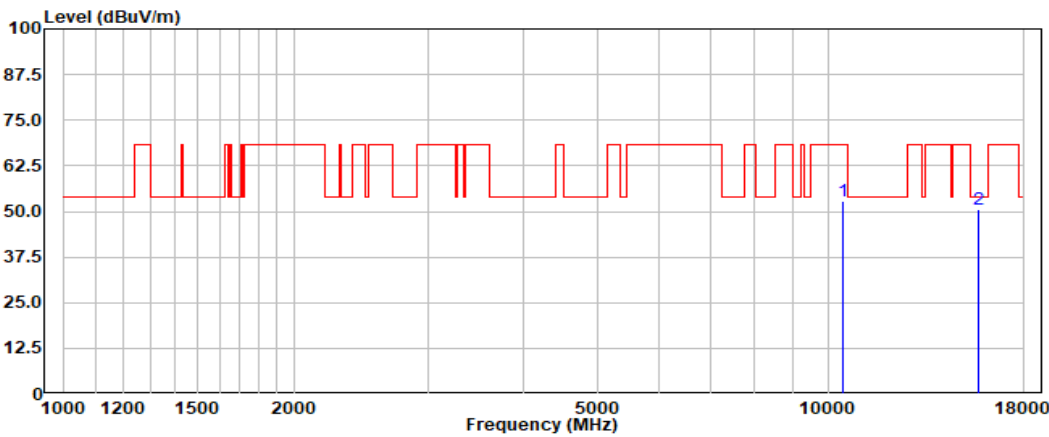

Antenna Polarity :Horizontal

No.	Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
10460.00		52.82	37.67	8.02	45.65	52.86	68.30	-15.44	Peak
15690.00		45.57	40.08	10.01	44.96	50.70	54.00	-3.30	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 51 of 852

Test Mode: 05; Polarity: Vertical; Modulation:802.11ac; Bandwidth:40MHz; Channel:High

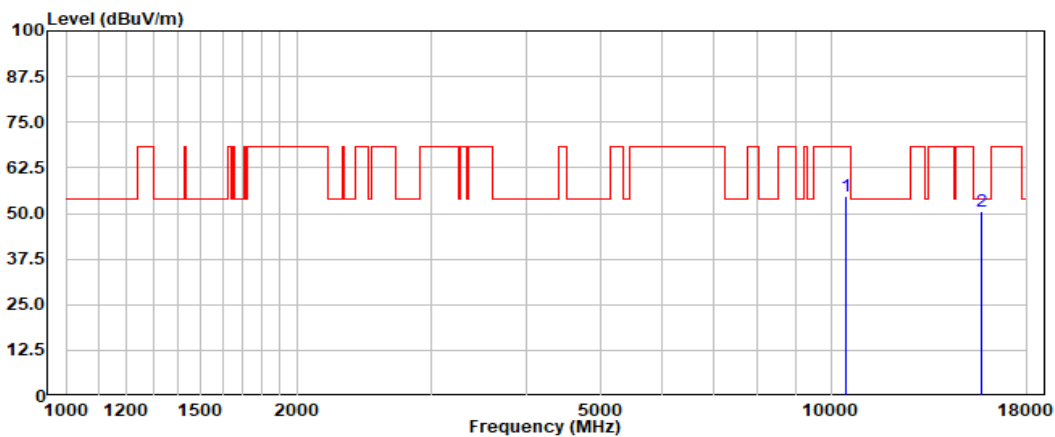

Antenna Polarity :Vertical

No.	Freq	Read level	Antenna Factor	Cable Loss	Preamplifier Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
10460.00		54.84	37.67	8.02	45.65	54.88	68.30	-13.42	Peak
15690.00		45.58	40.08	10.01	44.96	50.71	54.00	-3.29	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamplifier Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 52 of 852

Test Mode: 05; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:80MHz; Channel:Low

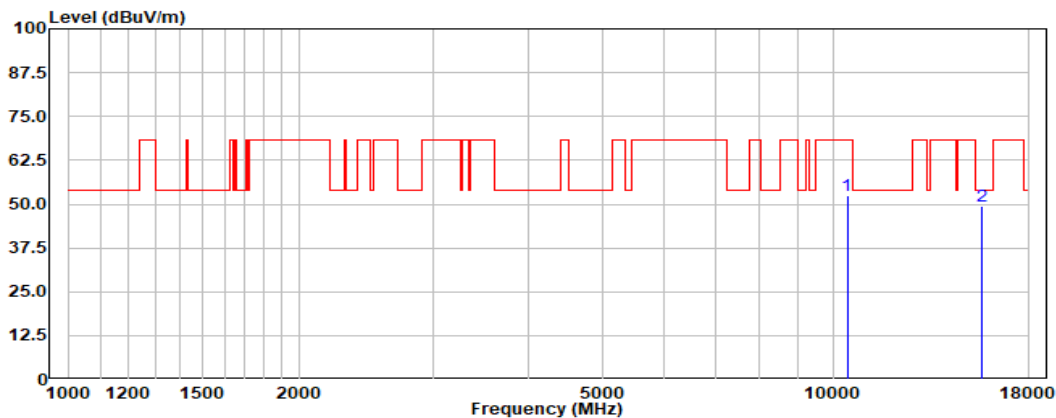

Antenna Polarity :Horizontal

No.	Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
	10420.00	52.43	37.64	8.01	45.68	52.40	68.30	-15.90	Peak
	15630.00	44.46	39.98	9.99	44.99	49.44	54.00	-4.56	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 53 of 852

Test Mode: 05; Polarity: Vertical; Modulation:802.11ac; Bandwidth:80MHz; Channel:Low

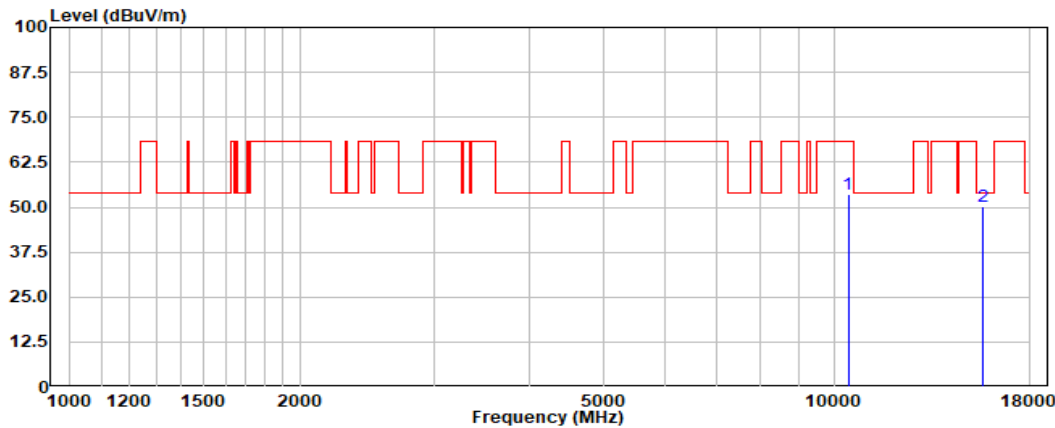

Antenna Polarity :Vertical

No.	Freq	Read level	Antenna Factor	Cable Loss	Preamplifier Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
	10420.00	53.69	37.64	8.01	45.68	53.66	68.30	-14.64	Peak
	15630.00	45.35	39.98	9.99	44.99	50.33	54.00	-3.67	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamplifier Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 54 of 852

Test Mode: 06; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

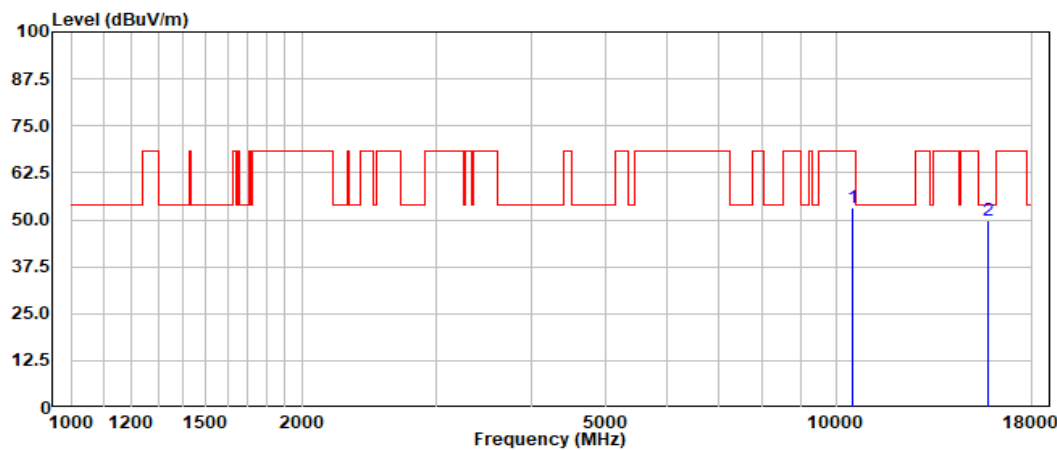

Antenna Polarity :Vertical

No.	Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
10520.00		53.09	37.70	8.03	45.67	53.15	68.30	-15.15	Peak
15780.00		44.77	40.05	10.03	44.92	49.93	54.00	-4.07	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 55 of 852

Test Mode: 06; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

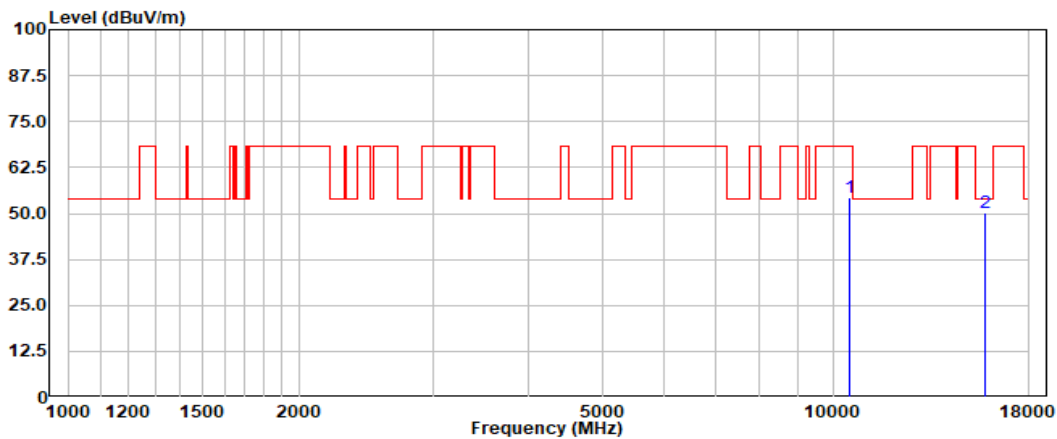

Antenna Polarity :Horizontal

No.	Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
10520.00		54.16	37.70	8.03	45.67	54.22	68.30	-14.08	Peak
15780.00		44.85	40.05	10.03	44.92	50.01	54.00	-3.99	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 56 of 852

Test Mode: 06; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

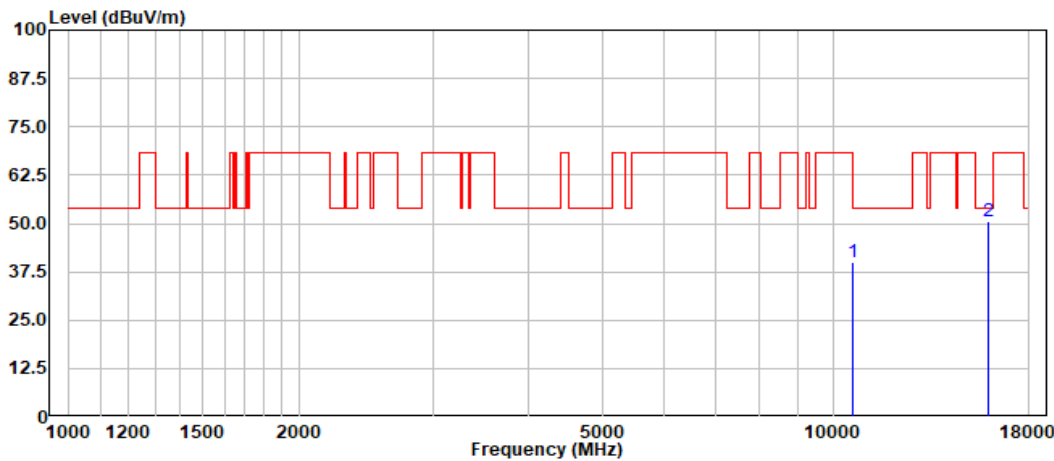

Antenna Polarity :Horizontal

No.	Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
	10600.00	40.19	37.74	8.06	45.86	40.13	54.00	-13.87	Peak
	15900.00	45.05	40.13	10.07	44.87	50.38	54.00	-3.62	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 57 of 852

Test Mode: 06; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

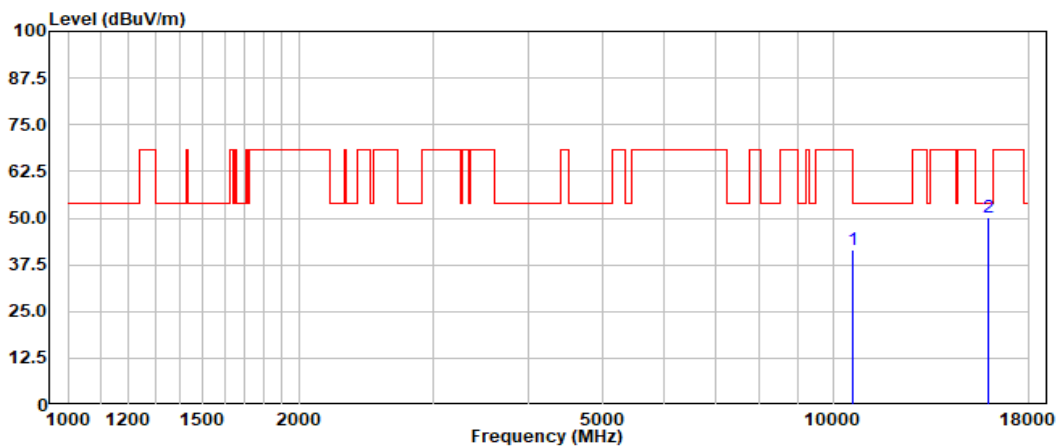

Antenna Polarity :Vertical

No.	Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
	10600.00	41.62	37.74	8.06	45.86	41.56	54.00	-12.44	Peak
	15900.00	44.70	40.13	10.07	44.87	50.03	54.00	-3.97	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor




Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 58 of 852

Test Mode: 06; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

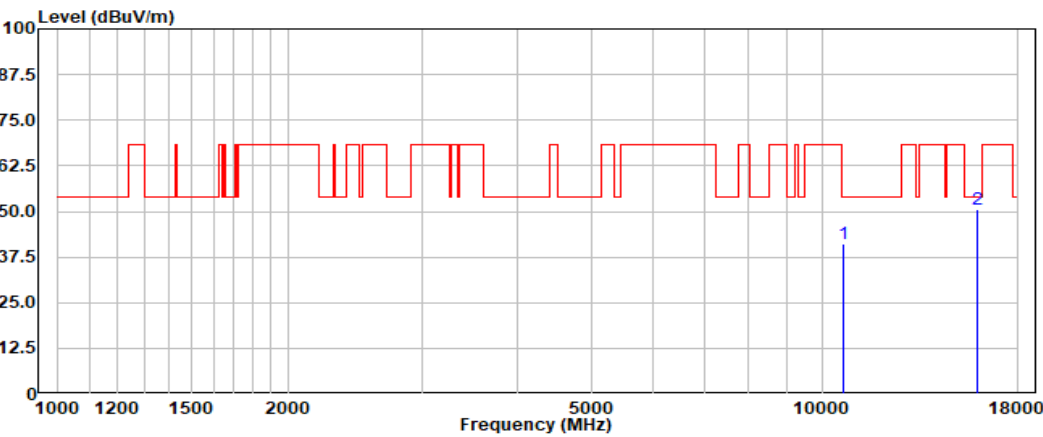

Antenna Polarity :Horizontal

No.	Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	-----	-----	-----	-----	-----	-----	-----	-----	-----
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
10640.00		41.12	37.75	8.07	45.95	40.99	54.00	-13.01	Peak
15960.00		45.23	40.11	10.09	44.84	50.59	54.00	-3.41	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor




Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 59 of 852

Test Mode: 06; Polarity: Vertical; Modulation: 802.11a; Bandwidth: 20MHz; Channel: High

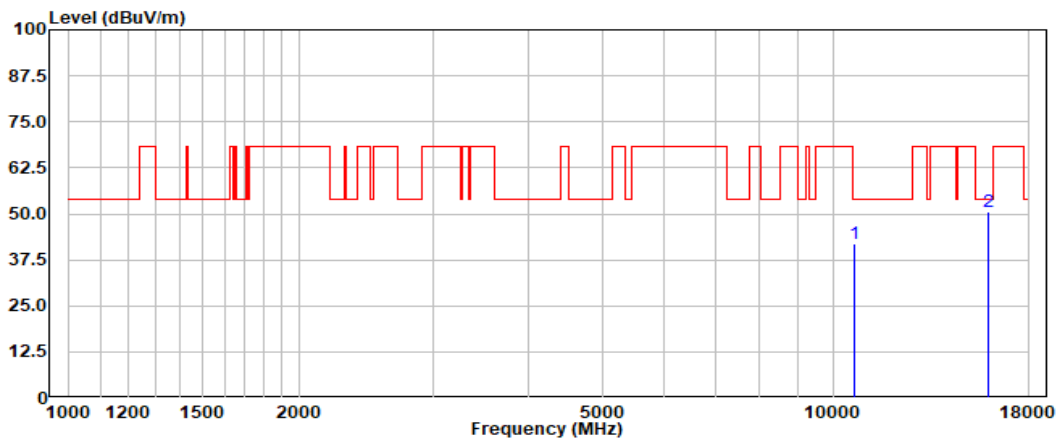

Antenna Polarity :Vertical

No.	Freq	Read level	Antenna Factor	Cable Loss	Preamplifier Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
10640.00		41.89	37.75	8.07	45.95	41.76	54.00	-12.24	Peak
15960.00		45.28	40.11	10.09	44.84	50.64	54.00	-3.36	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamplifier Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 60 of 852

Test Mode: 06; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

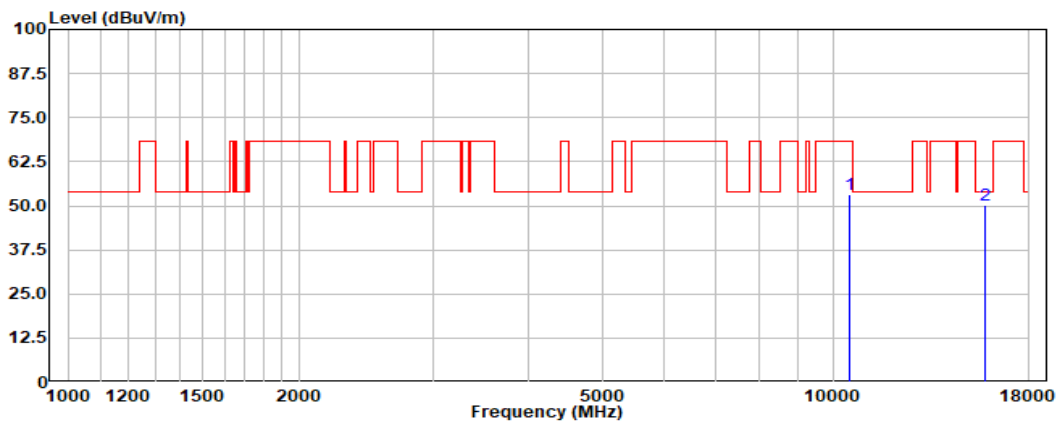

Antenna Polarity :Horizontal

No.	Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
10520.00		53.17	37.70	8.03	45.67	53.23	68.30	-15.07	Peak
15780.00		44.90	40.05	10.03	44.92	50.06	54.00	-3.94	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 61 of 852

Test Mode: 06; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

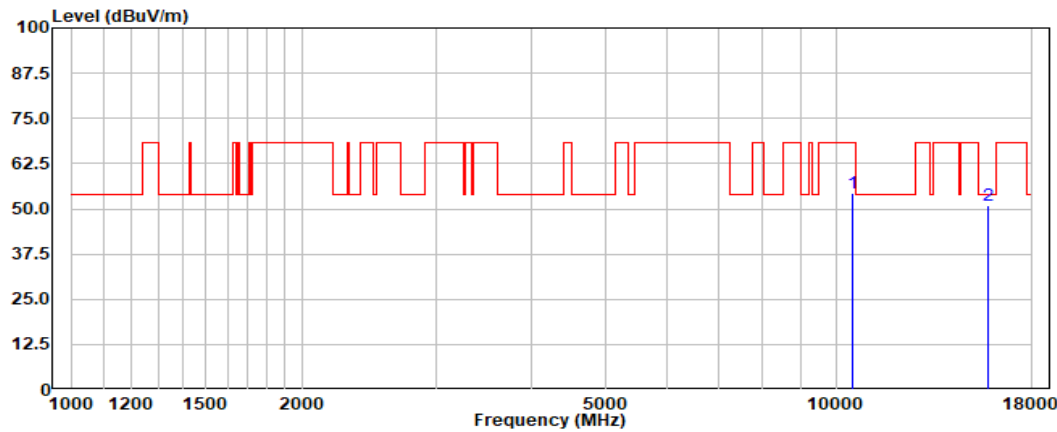

Antenna Polarity :Vertical

No.	Freq	Read level	Antenna Factor	Cable Loss	Preamplifier Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
10520.00		54.12	37.70	8.03	45.67	54.18	68.30	-14.12	Peak
15780.00		45.65	40.05	10.03	44.92	50.81	54.00	-3.19	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamplifier Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 62 of 852

Test Mode: 06; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:middle

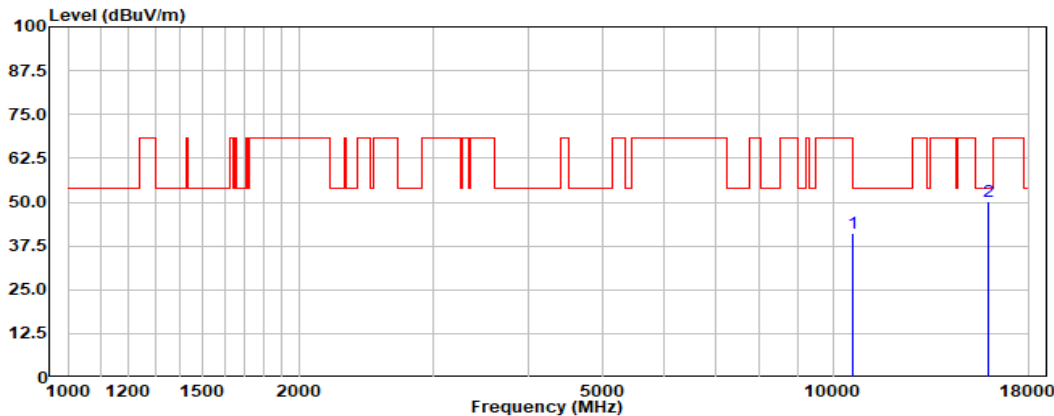

Antenna Polarity :Horizontal

No.	Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	----- MHz	----- dBuv	----- dB/m	----- dB	----- dB	----- dBuv/m	----- dBuv/m	----- dB	-----
	10600.00	41.08	37.74	8.06	45.86	41.02	54.00	-12.98	Peak
	15900.00	45.02	40.13	10.07	44.87	50.35	54.00	-3.65	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 63 of 852

Test Mode: 06; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:middle

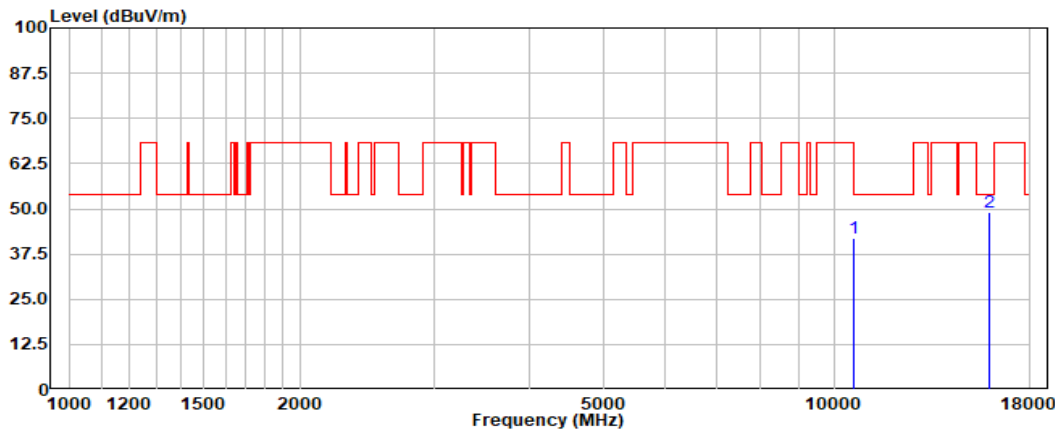

Antenna Polarity :Vertical

No.	Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
	10600.00	41.95	37.74	8.06	45.86	41.89	54.00	-12.11	Peak
	15900.00	43.83	40.13	10.07	44.87	49.16	54.00	-4.84	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 64 of 852

Test Mode: 06; Polarity: Horizontal; Modulation: 802.11n; Bandwidth: 20MHz; Channel: High

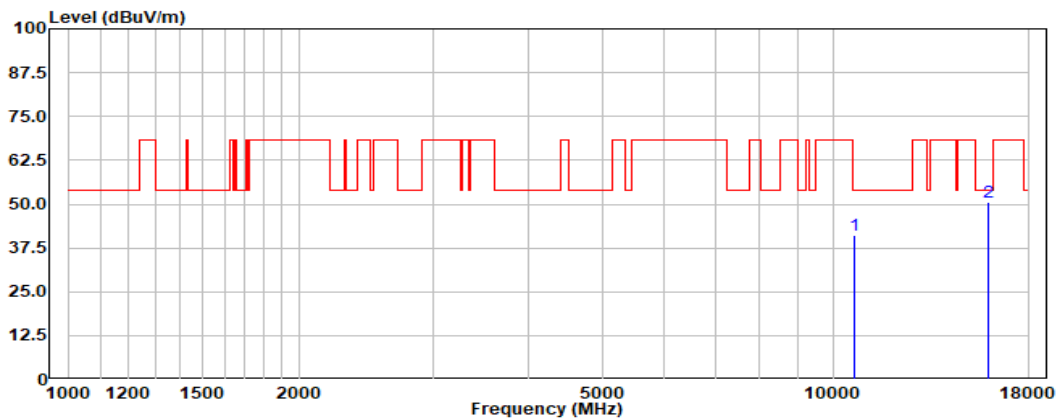

Antenna Polarity :Horizontal

No.	Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
10640.00		41.33	37.75	8.07	45.95	41.20	54.00	-12.80	Peak
15960.00		45.03	40.11	10.09	44.84	50.39	54.00	-3.61	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 65 of 852

Test Mode: 06; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:High

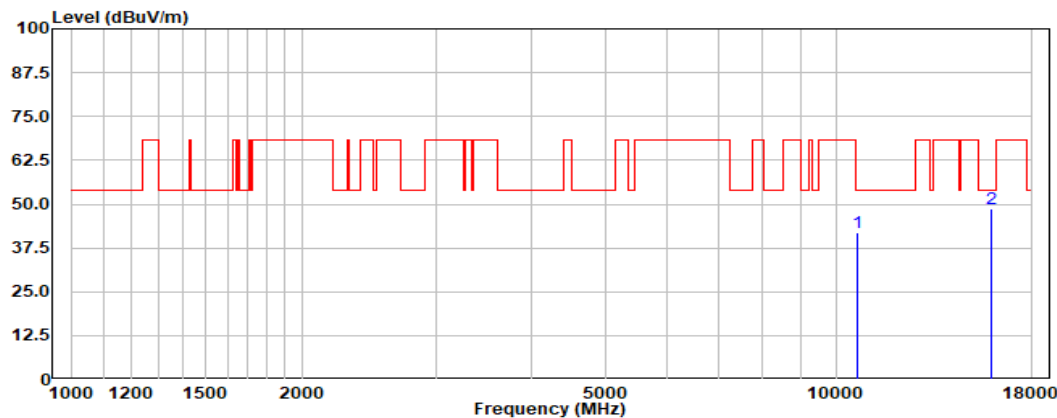


Antenna Polarity :Vertical

No.	Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
10640.00		41.98	37.75	8.07	45.95	41.85	54.00	-12.15	Peak
15960.00		43.28	40.11	10.09	44.84	48.64	54.00	-5.36	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Compliance Certification Services (Kunshan) Inc.

Test Mode: 06; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

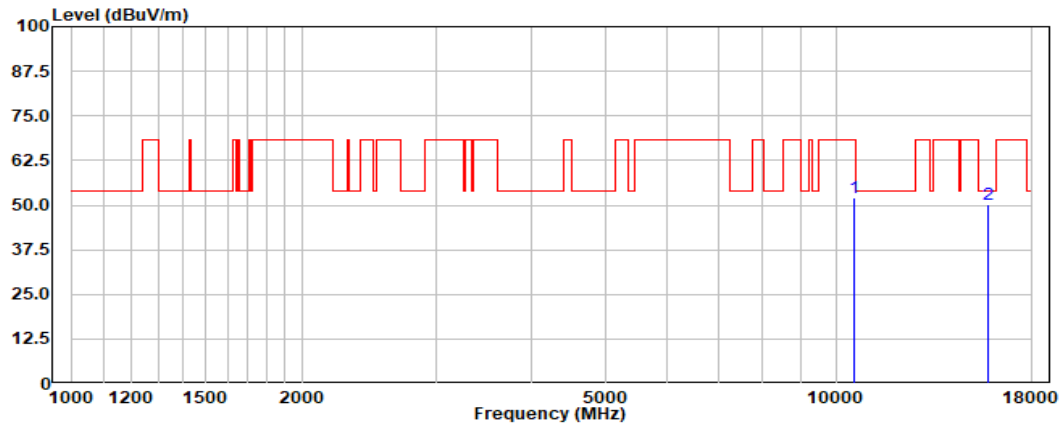

Antenna Polarity :Horizontal

No.	Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	-----	-----	-----	-----	-----	-----	-----	-----	-----
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
	10540.00	51.87	37.71	8.04	45.72	51.90	68.30	-16.40	Peak
	15810.00	44.95	40.05	10.04	44.91	50.13	54.00	-3.87	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 67 of 852

Test Mode: 06; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

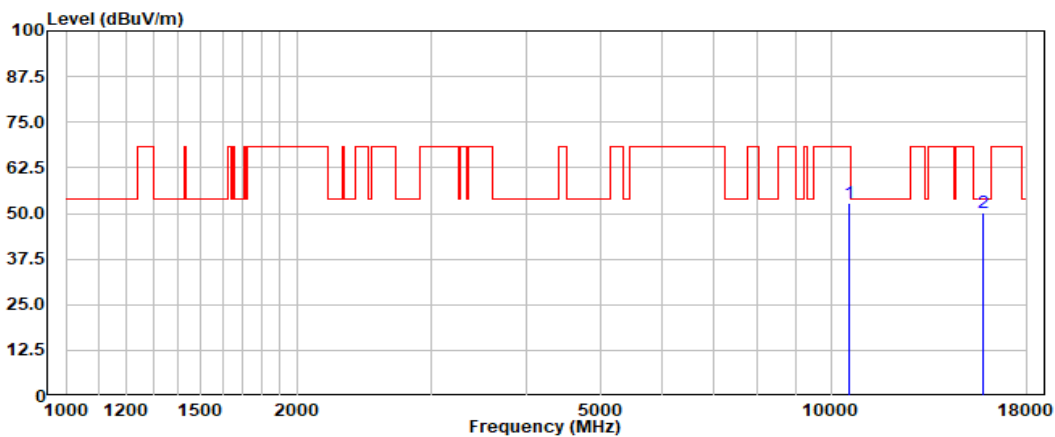

Antenna Polarity :Vertical

No.	Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
10540.00		52.89	37.71	8.04	45.72	52.92	68.30	-15.38	Peak
15810.00		44.95	40.05	10.04	44.91	50.13	54.00	-3.87	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 68 of 852

Test Mode: 06; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:High

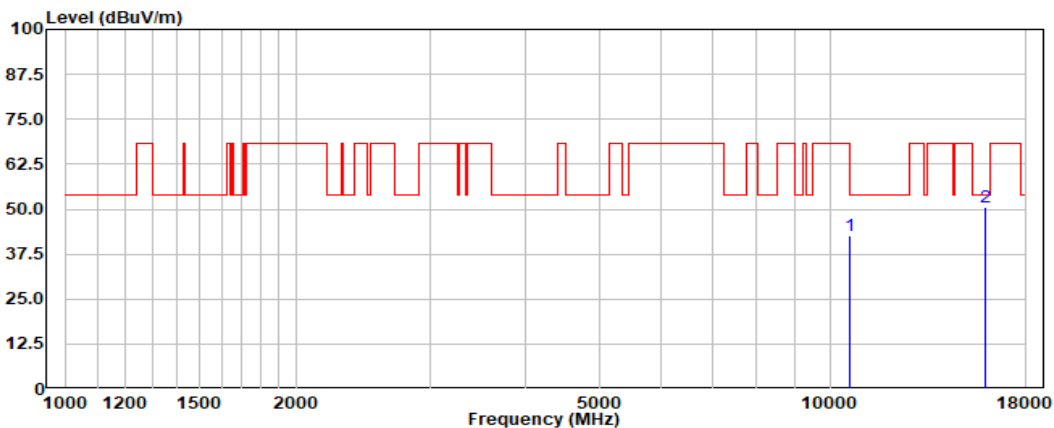

Antenna Polarity :Horizontal

No.	Freq	Read level	Antenna Factor	Cable Loss	Preamplifier Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
10620.00		42.74	37.75	8.06	45.91	42.64	54.00	-11.36	Peak
15930.00		45.36	40.12	10.08	44.85	50.71	54.00	-3.29	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamplifier Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 69 of 852

Test Mode: 06; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:High

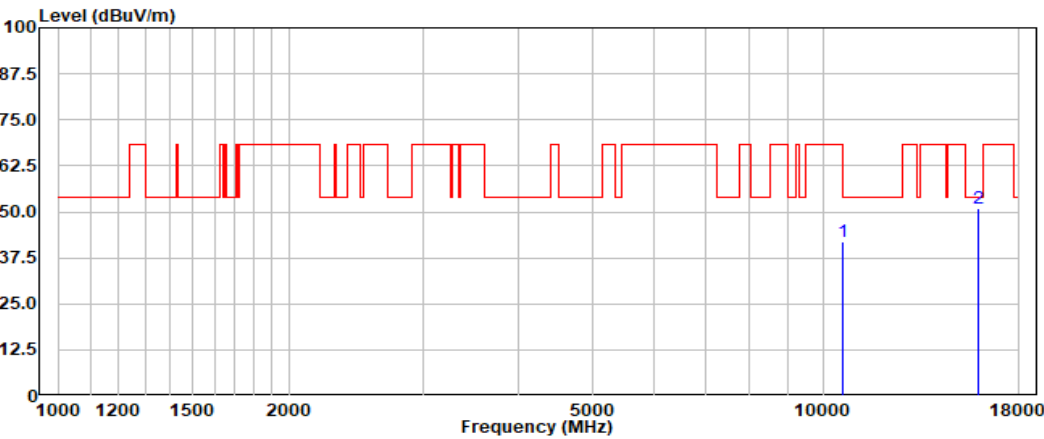

Antenna Polarity :Vertical

No.	Freq	Read level	Antenna Factor	Cable Loss	Preamplifier Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
10620.00		41.92	37.75	8.06	45.91	41.82	54.00	-12.18	Peak
15930.00		45.64	40.12	10.08	44.85	50.99	54.00	-3.01	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamplifier Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 70 of 852

Test Mode: 06; Polarity: Horizontal; Modulation: 802.11ac; Bandwidth: 20MHz; Channel: Low

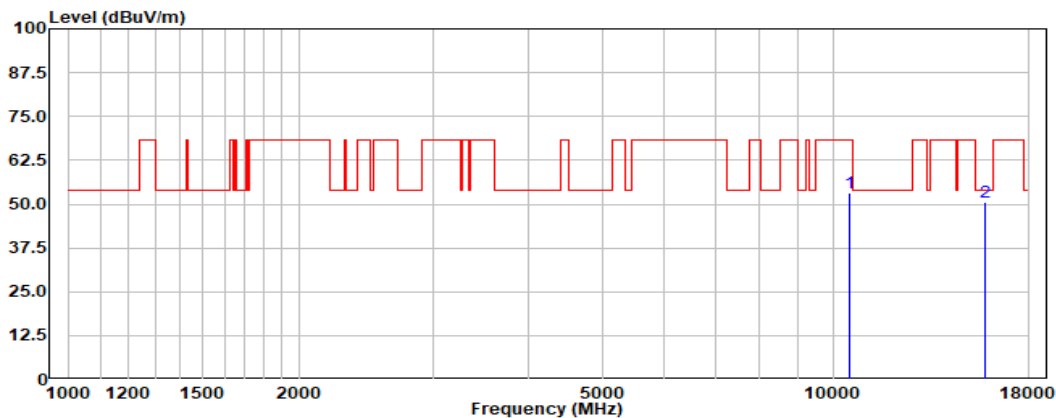

Antenna Polarity :Horizontal

No.	Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
	10520.00	53.14	37.70	8.03	45.67	53.20	68.30	-15.10	Peak
	15780.00	45.31	40.05	10.03	44.92	50.47	54.00	-3.53	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 71 of 852

Test Mode: 06; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

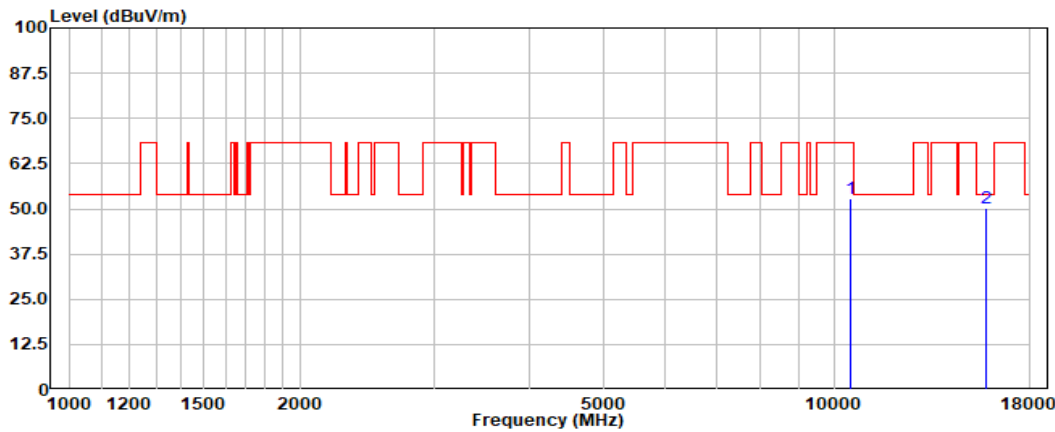

Antenna Polarity :Vertical

No.	Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
	10520.00	52.72	37.70	8.03	45.67	52.78	68.30	-15.52	Peak
	15780.00	45.14	40.05	10.03	44.92	50.30	54.00	-3.70	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 72 of 852

Test Mode: 06; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:middle

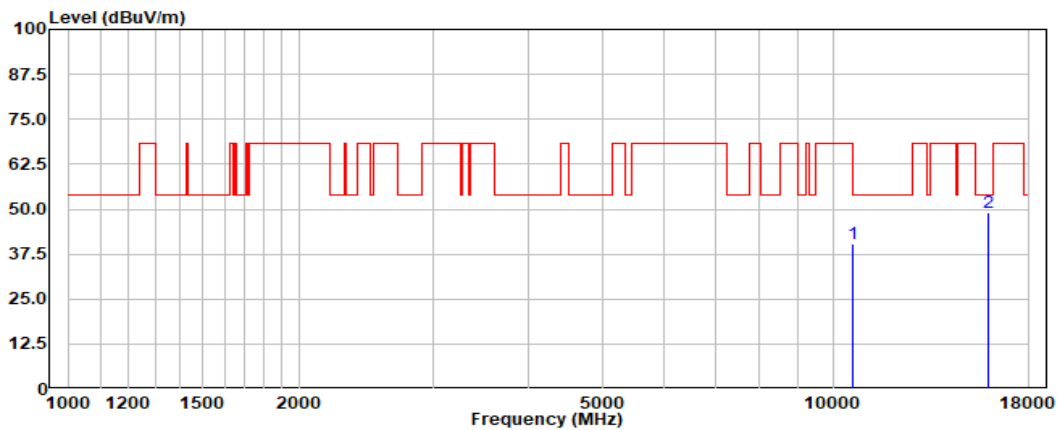

Antenna Polarity :Horizontal

No.	Freq	Read level	Antenna Factor	Cable Loss	Preamplifier Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
	10600.00	40.41	37.74	8.06	45.86	40.35	54.00	-13.65	Peak
	15900.00	43.79	40.13	10.07	44.87	49.12	54.00	-4.88	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamplifier Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 73 of 852

Test Mode: 06; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:middle

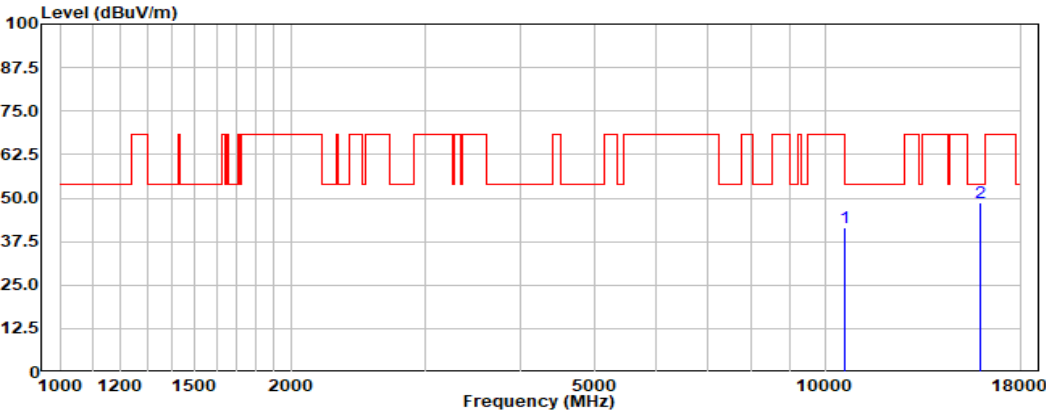

Antenna Polarity :Vertical

No.	Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
	10600.00	41.42	37.74	8.06	45.86	41.36	54.00	-12.64	Peak
	15900.00	43.28	40.13	10.07	44.87	48.61	54.00	-5.39	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 74 of 852

Test Mode: 06; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:High

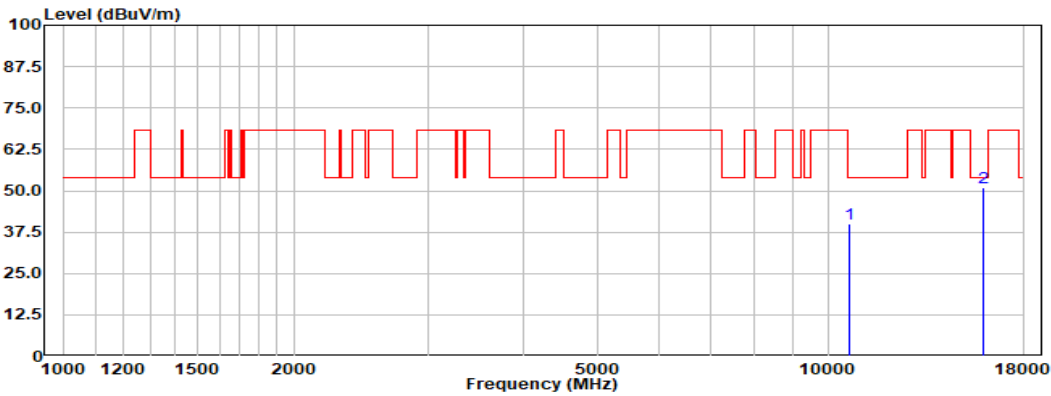

Antenna Polarity :Horizontal

No.	Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
10640.00		40.25	37.75	8.07	45.95	40.12	54.00	-13.88	Peak
15960.00		45.58	40.11	10.09	44.84	50.94	54.00	-3.06	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 75 of 852

Test Mode: 06; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:High

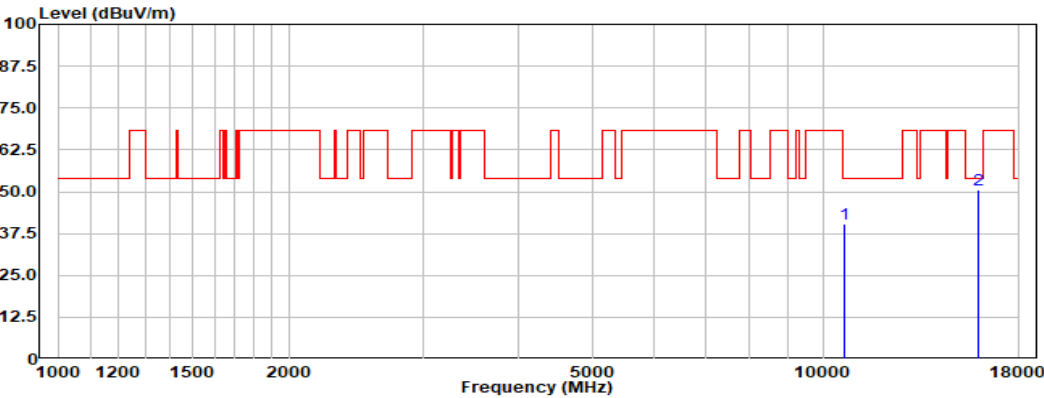

Antenna Polarity :Vertical

No.	Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
10640.00		40.49	37.75	8.07	45.95	40.36	54.00	-13.64	Peak
15960.00		45.23	40.11	10.09	44.84	50.59	54.00	-3.41	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 76 of 852

Test Mode: 06; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:40MHz; Channel:Low

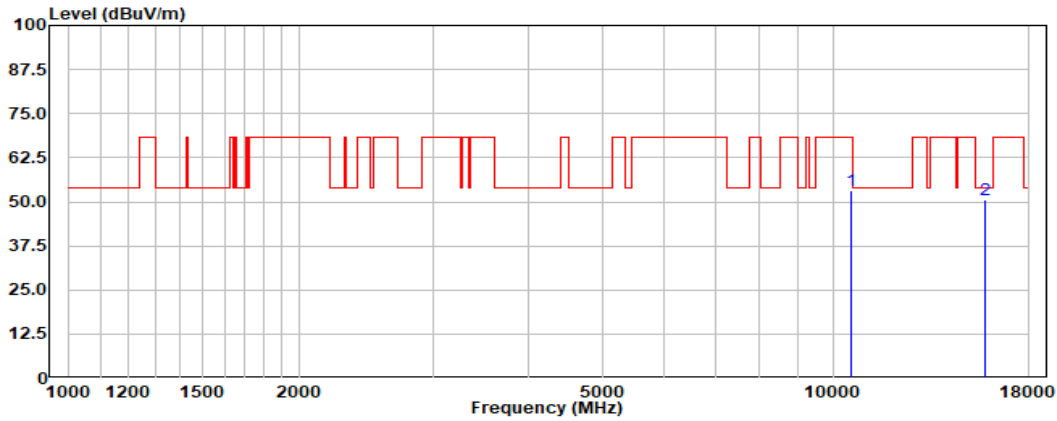

Antenna Polarity :Horizontal

No.	Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
10540.00		53.26	37.71	8.04	45.72	53.29	68.30	-15.01	Peak
15810.00		45.45	40.05	10.04	44.91	50.63	54.00	-3.37	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 77 of 852

Test Mode: 06; Polarity: Vertical; Modulation:802.11ac; Bandwidth:40MHz; Channel:Low

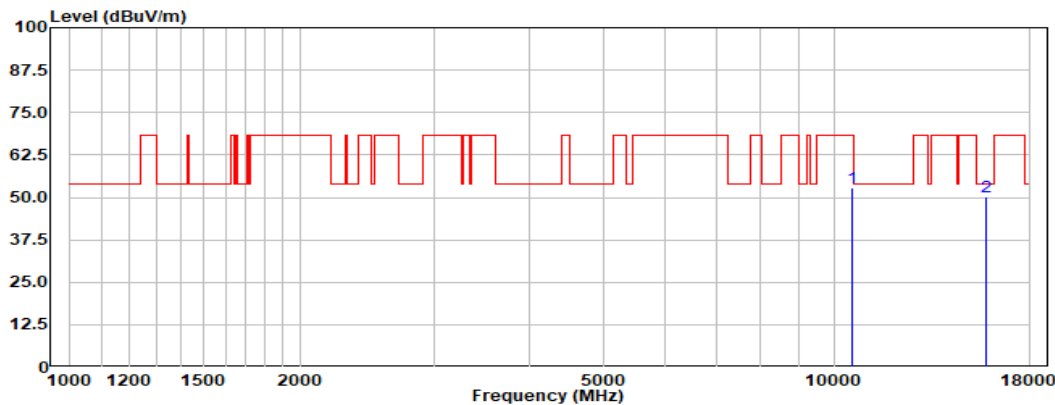

Antenna Polarity :Vertical


No.	Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
10540.00		52.75	37.71	8.04	45.72	52.78	68.30	-15.52	Peak
15810.00		44.96	40.05	10.04	44.91	50.14	54.00	-3.86	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor



Compliance Certification Services (Kunshan) Inc.

Test Mode: 06; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:40MHz; Channel:High

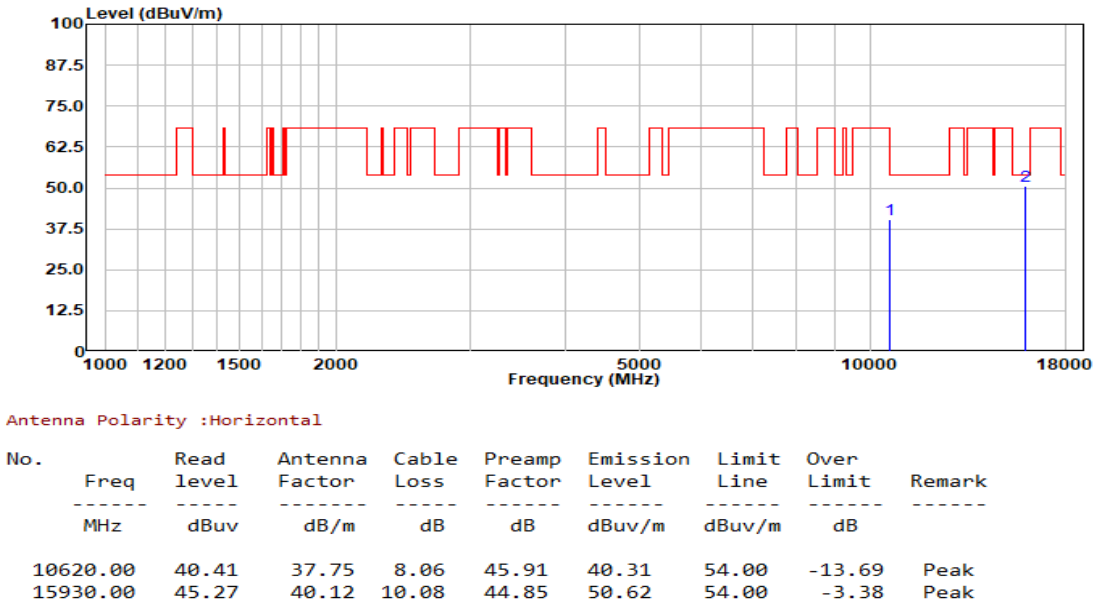

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 79 of 852

Test Mode: 06; Polarity: Vertical; Modulation:802.11ac; Bandwidth:40MHz; Channel:High

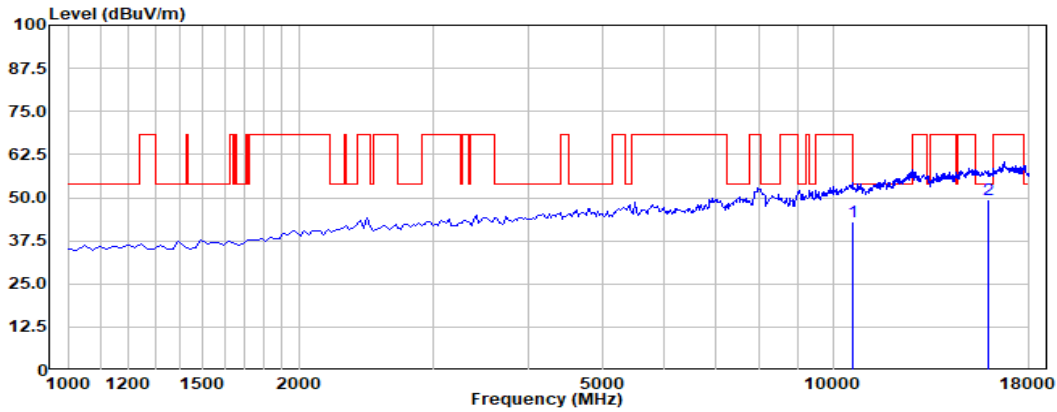

Antenna Polarity :Vertical

No.	Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
10620.00		42.94	37.75	8.06	45.91	42.84	54.00	-11.16	Peak
15930.00		44.03	40.12	10.08	44.85	49.38	54.00	-4.62	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 80 of 852

Test Mode: 06; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:80MHz; Channel:Low

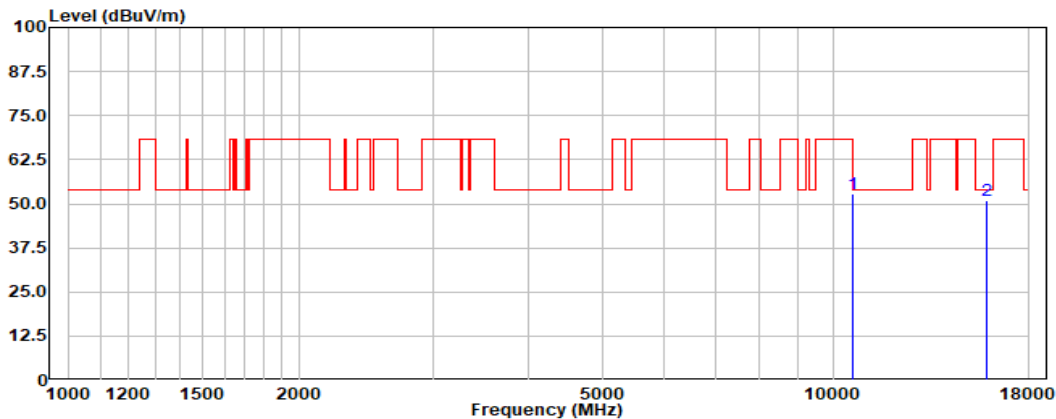

Antenna Polarity :Horizontal

No.	Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
10580.00		52.85	37.73	8.05	45.81	52.82	68.30	-15.48	Peak
15870.00		45.67	40.10	10.06	44.88	50.95	54.00	-3.05	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 81 of 852

Test Mode: 06; Polarity: Vertical; Modulation:802.11ac; Bandwidth:80MHz; Channel:Low

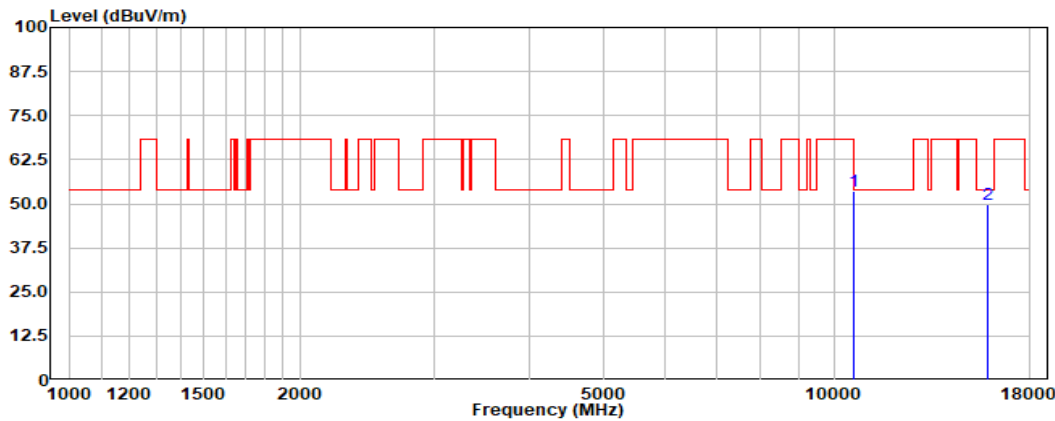

Antenna Polarity :Vertical

No.	Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
10580.00		53.46	37.73	8.05	45.81	53.43	68.30	-14.87	Peak
15870.00		44.37	40.10	10.06	44.88	49.65	54.00	-4.35	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 82 of 852

Test Mode: 07; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

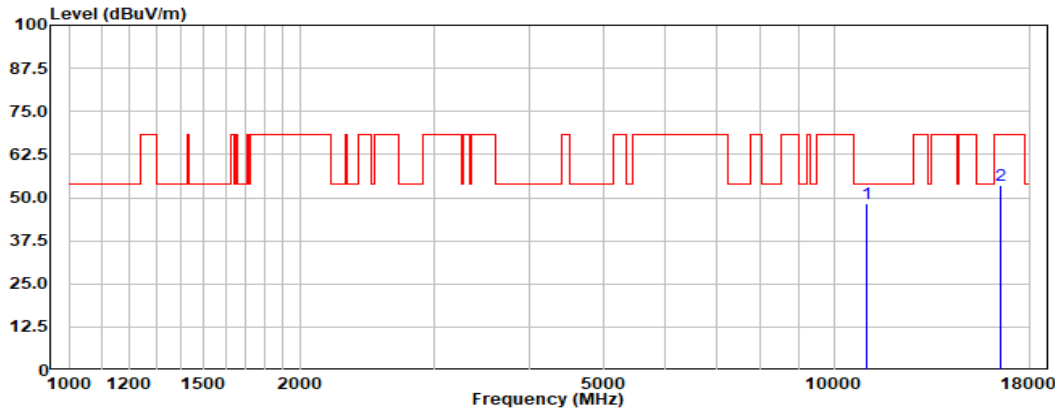

Antenna Polarity :Horizontal

No.	Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
	11000.00	48.81	38.01	8.20	46.81	48.21	54.00	-5.79	Peak
	16500.00	46.37	40.78	10.25	43.68	53.72	68.30	-14.58	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor




Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 83 of 852

Test Mode: 07; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

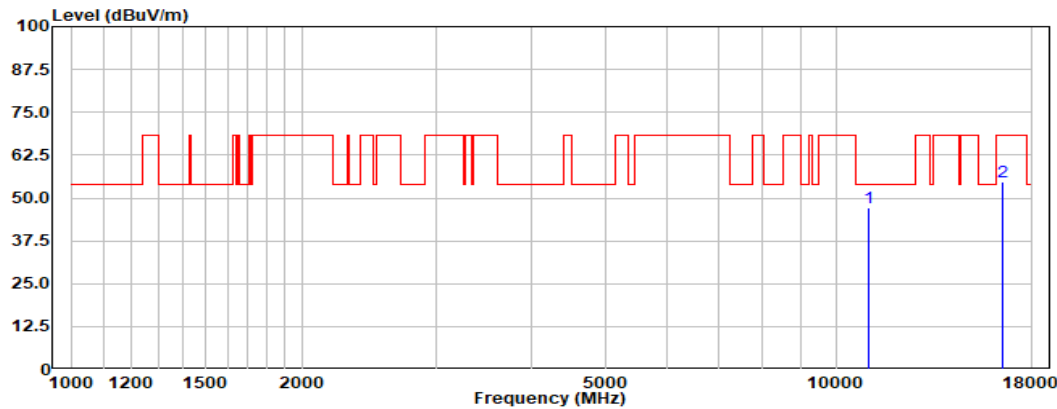

Antenna Polarity :Vertical

No.	Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	-----	-----	-----	-----	-----	-----	-----	-----	-----
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
	11000.00	47.70	38.01	8.20	46.81	47.10	54.00	-6.90	Peak
	16500.00	47.54	40.78	10.25	43.68	54.89	68.30	-13.41	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 84 of 852

Test Mode: 07; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

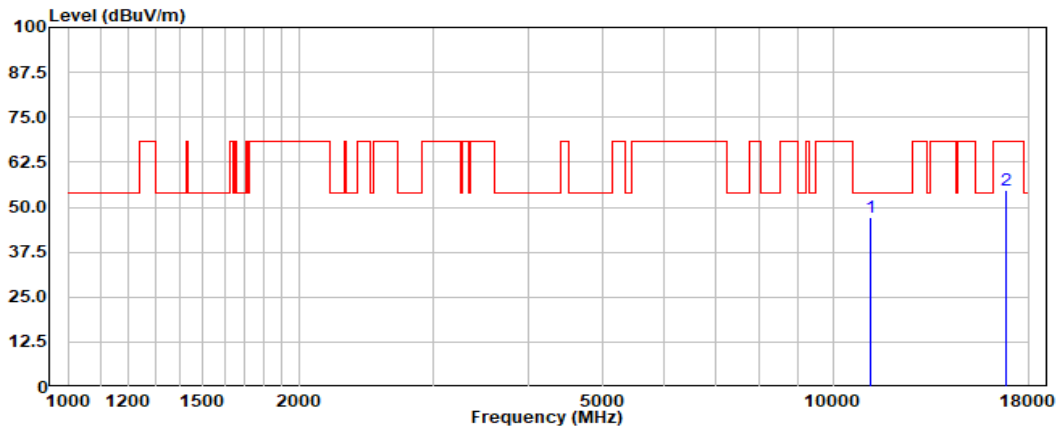

Antenna Polarity :Horizontal

No.	Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
	11200.00	47.22	38.12	8.29	46.36	47.27	54.00	-6.73	Peak
	16800.00	47.02	41.60	10.34	44.09	54.87	68.30	-13.43	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor




Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 85 of 852

Test Mode: 07; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

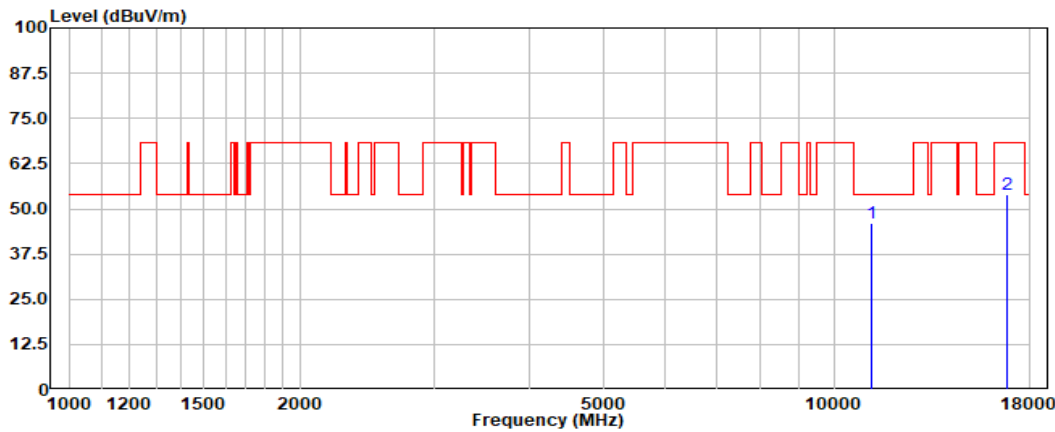

Antenna Polarity :Vertical

No.	Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
	11200.00	45.98	38.12	8.29	46.36	46.03	54.00	-7.97	Peak
	16800.00	46.05	41.60	10.34	44.09	53.90	68.30	-14.40	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 86 of 852

Test Mode: 07; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

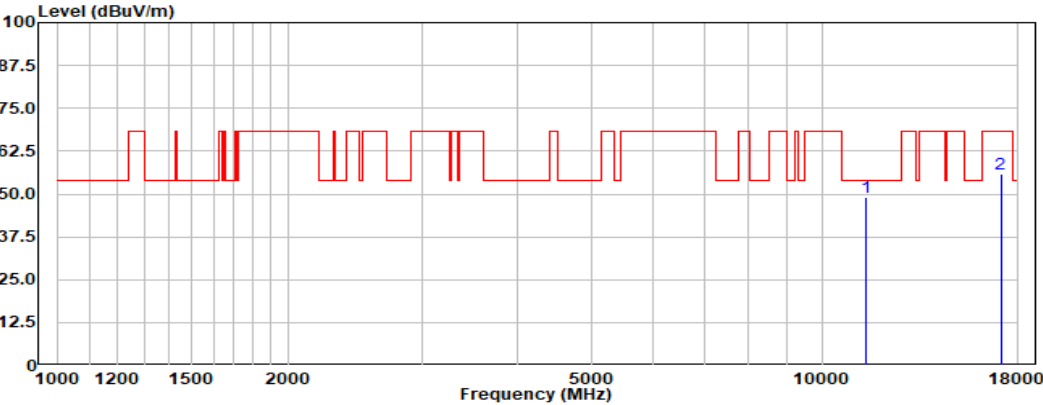

Antenna Polarity :Horizontal

No.	Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	-----	-----	-----	-----	-----	-----	-----	-----	-----
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
11400.00		48.18	38.25	8.38	45.91	48.90	54.00	-5.10	Peak
17100.00		48.55	41.21	10.43	44.32	55.87	68.30	-12.43	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 87 of 852

Test Mode: 07; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

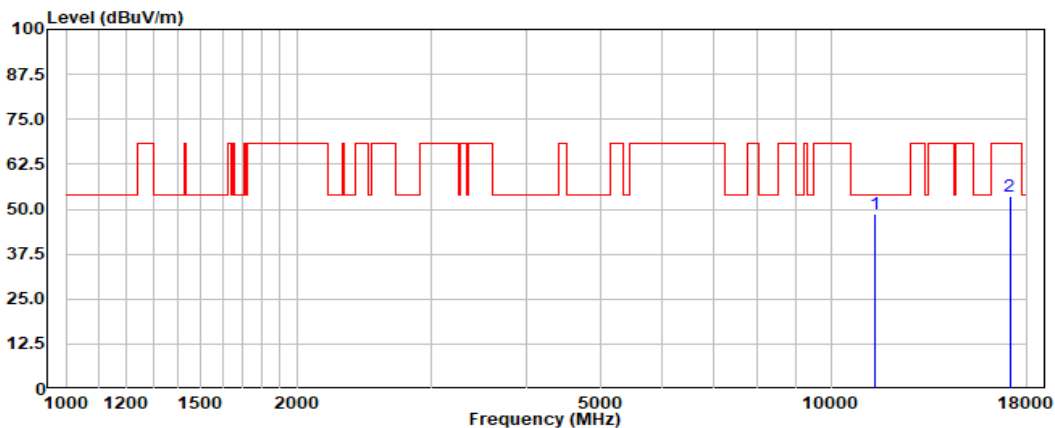

Antenna Polarity :Vertical

No.	Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
	11400.00	48.14	38.25	8.38	45.91	48.86	54.00	-5.14	Peak
	17100.00	46.32	41.21	10.43	44.32	53.64	68.30	-14.66	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 88 of 852

Test Mode: 07; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

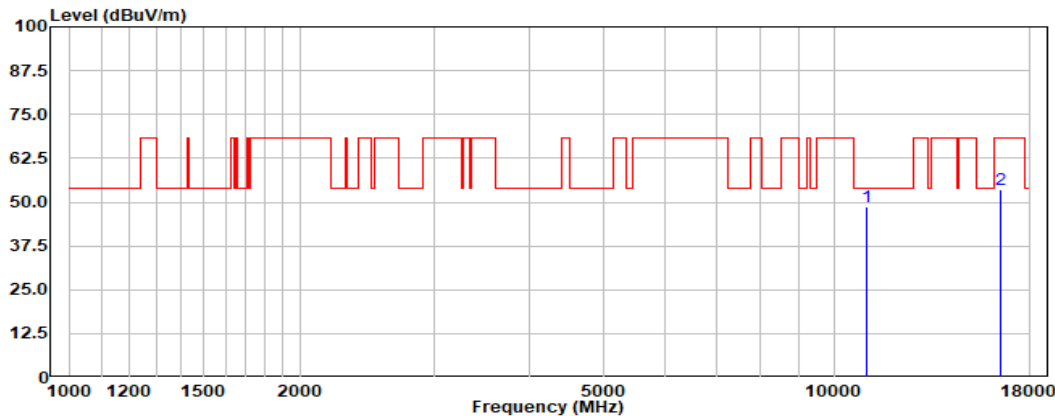

Antenna Polarity :Horizontal

No.	Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	-----	-----	-----	-----	-----	-----	-----	-----	-----
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
	11000.00	49.20	38.01	8.20	46.81	48.60	54.00	-5.40	Peak
	16500.00	46.30	40.78	10.25	43.68	53.65	68.30	-14.65	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 89 of 852

Test Mode: 07; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

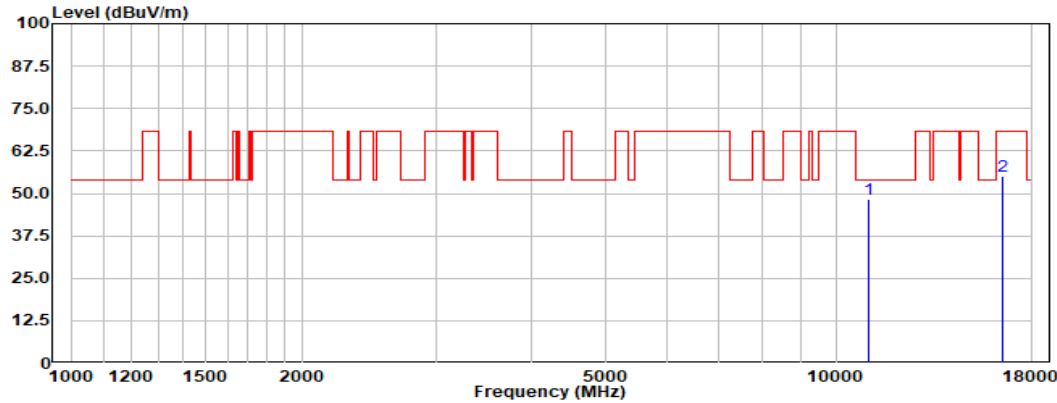

Antenna Polarity :Vertical

No.	Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
	11000.00	48.93	38.01	8.20	46.81	48.33	54.00	-5.67	Peak
	16500.00	47.59	40.78	10.25	43.68	54.94	68.30	-13.36	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 90 of 852

Test Mode: 07; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:middle

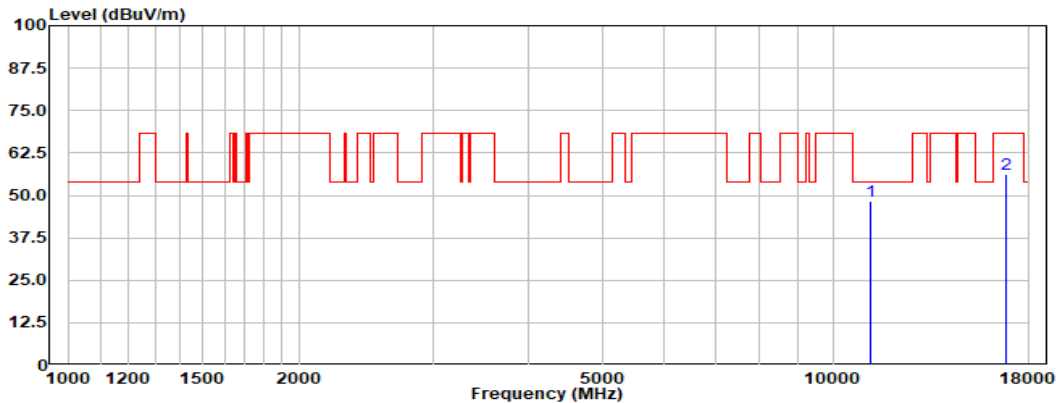

Antenna Polarity :Horizontal

No.	Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
	11200.00	48.20	38.12	8.29	46.36	48.25	54.00	-5.75	Peak
	16800.00	48.35	41.60	10.34	44.09	56.20	68.30	-12.10	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 91 of 852

Test Mode: 07; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:middle

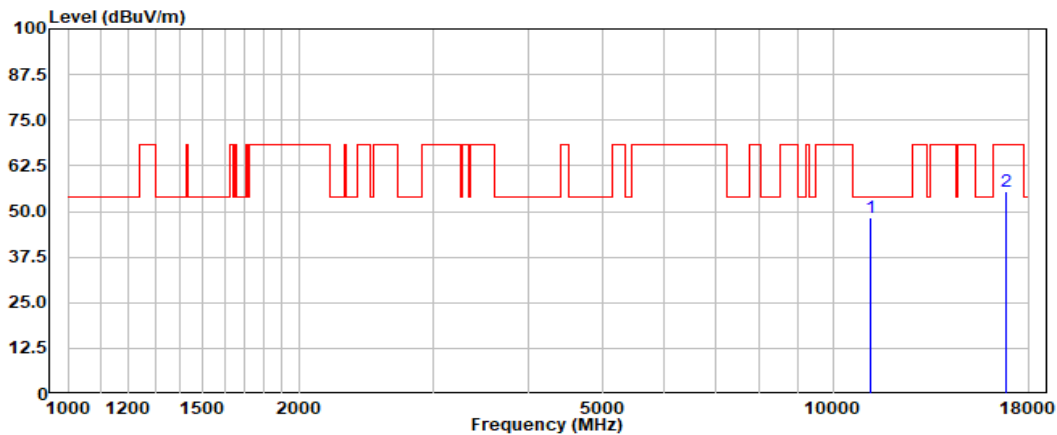

Antenna Polarity :Vertical

No.	Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
	11200.00	48.19	38.12	8.29	46.36	48.24	54.00	-5.76	Peak
	16800.00	47.44	41.60	10.34	44.09	55.29	68.30	-13.01	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 92 of 852

Test Mode: 07; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:High

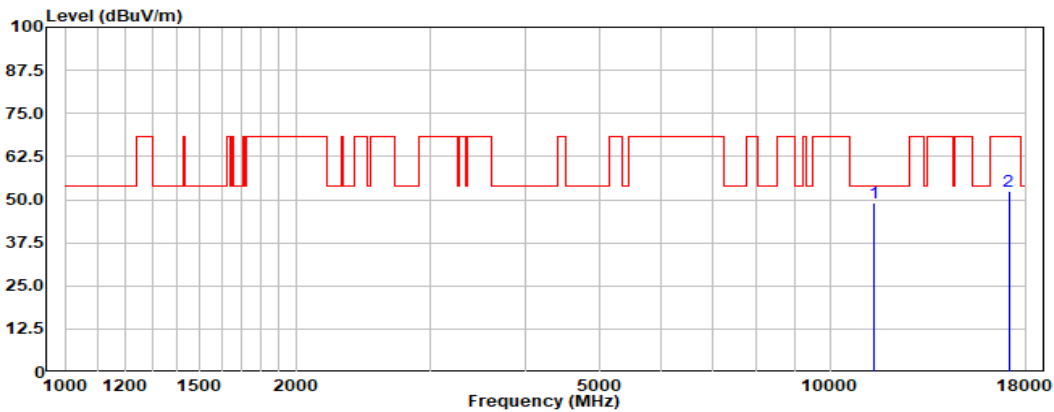

Antenna Polarity :Horizontal

No.	Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
11400.00		48.21	38.25	8.38	45.91	48.93	54.00	-5.07	Peak
17100.00		45.16	41.21	10.43	44.32	52.48	68.30	-15.82	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 93 of 852

Test Mode: 07; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:High

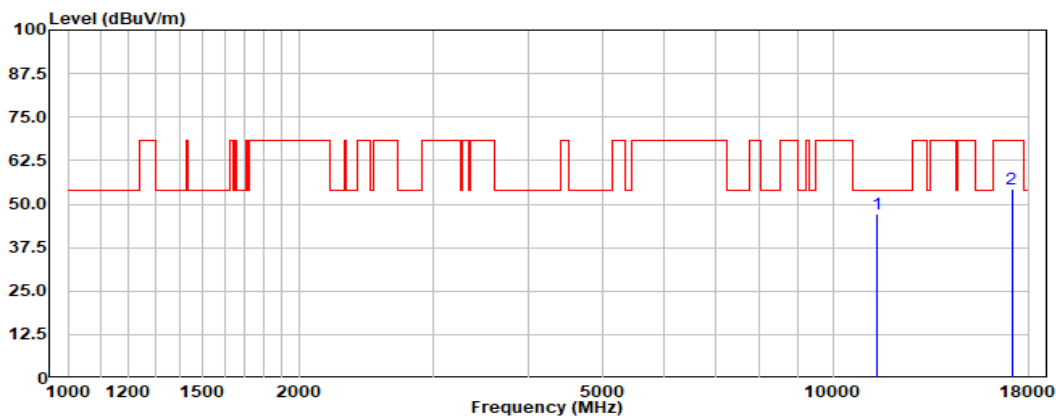

Antenna Polarity :Vertical


No.	Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
	11400.00	46.60	38.25	8.38	45.91	47.32	54.00	-6.68	Peak
	17100.00	46.86	41.21	10.43	44.32	54.18	68.30	-14.12	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor



Compliance Certification Services (Kunshan) Inc.

Test Mode: 07; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

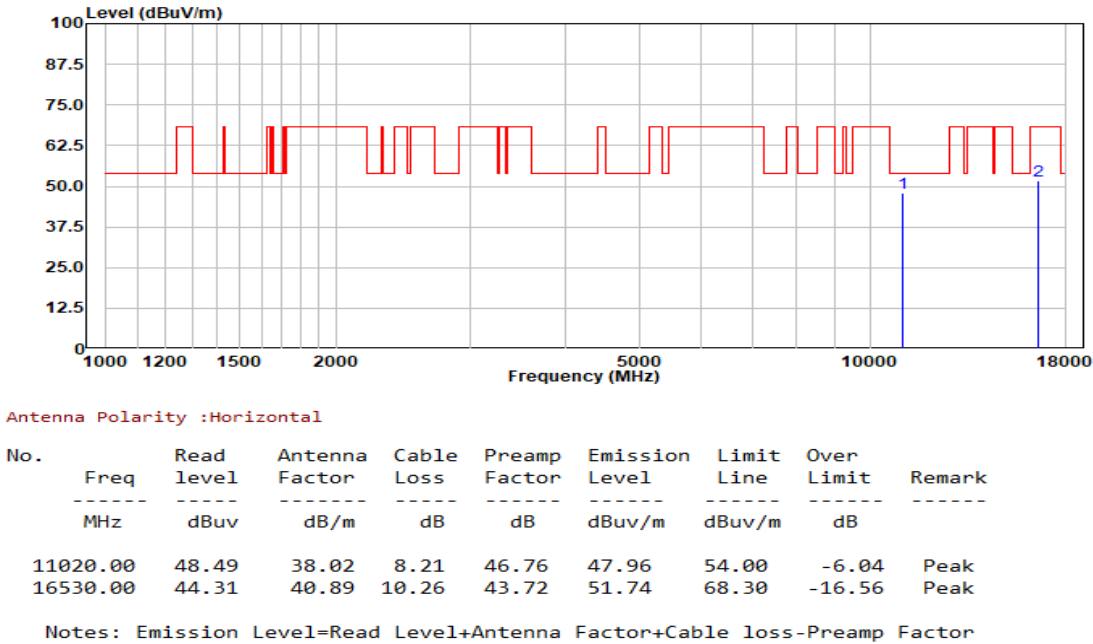


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 95 of 852

Test Mode: 07; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

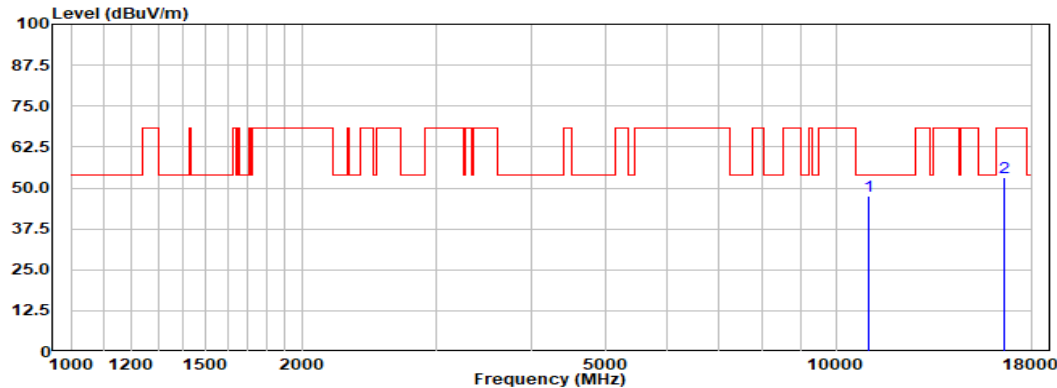

Antenna Polarity :Vertical

No.	Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
	11020.00	48.06	38.02	8.21	46.76	47.53	54.00	-6.47	Peak
	16530.00	45.89	40.89	10.26	43.72	53.32	68.30	-14.98	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 96 of 852

Test Mode: 07; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:middle

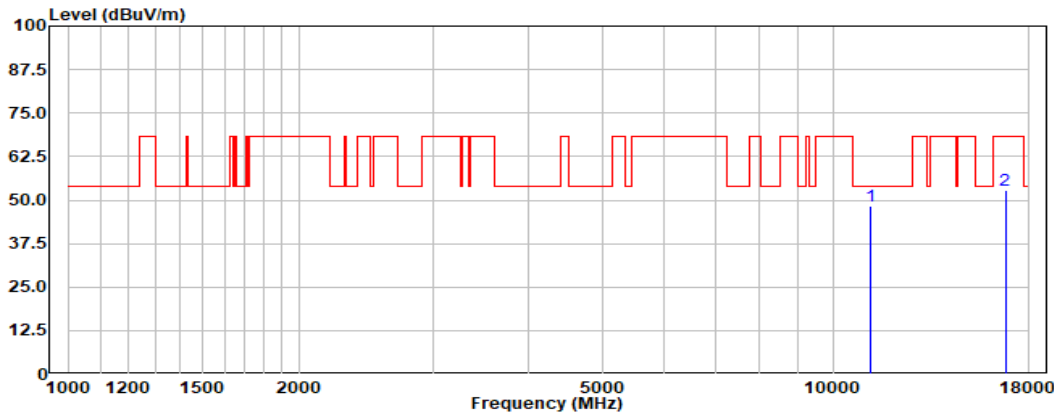

Antenna Polarity :Horizontal

No.	Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
	11180.00	48.50	38.11	8.28	46.40	48.49	54.00	-5.51	Peak
	16770.00	45.03	41.52	10.33	44.05	52.83	68.30	-15.47	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 97 of 852

Test Mode: 07; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:middle

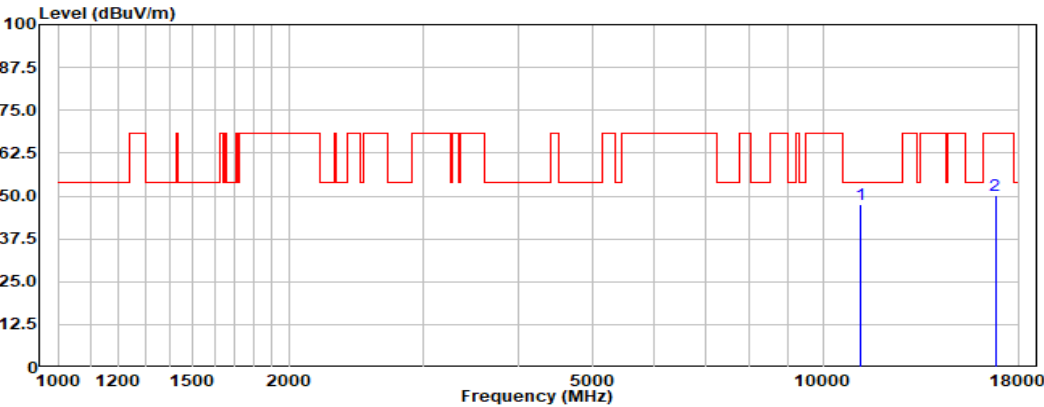

Antenna Polarity :Vertical

No.	Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	-----	-----	-----	-----	-----	-----	-----	-----	-----
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
11180.00		47.50	38.11	8.28	46.40	47.49	54.00	-6.51	Peak
16770.00		42.41	41.52	10.33	44.05	50.21	68.30	-18.09	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 98 of 852

Test Mode: 07; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:High

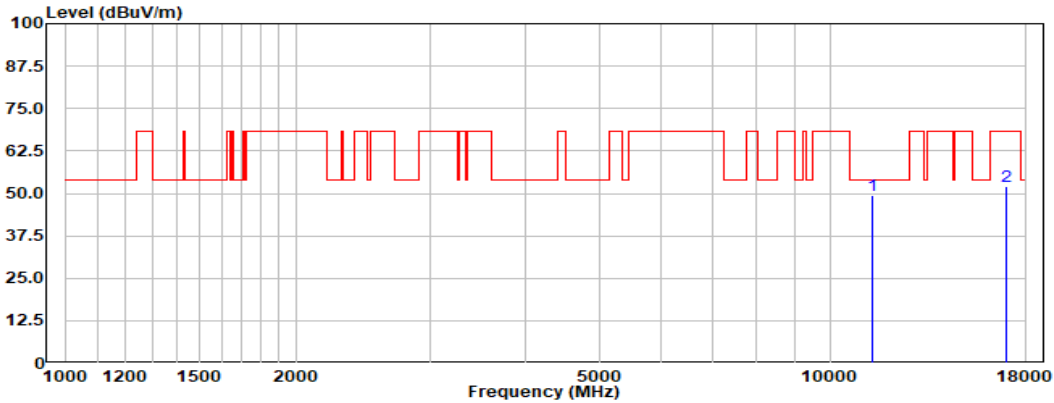

Antenna Polarity :Horizontal

No.	Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
11340.00		49.12	38.18	8.35	46.04	49.61	54.00	-4.39	Peak
17010.00		44.56	41.35	10.40	44.36	51.95	68.30	-16.35	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 99 of 852

Test Mode: 07; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:High

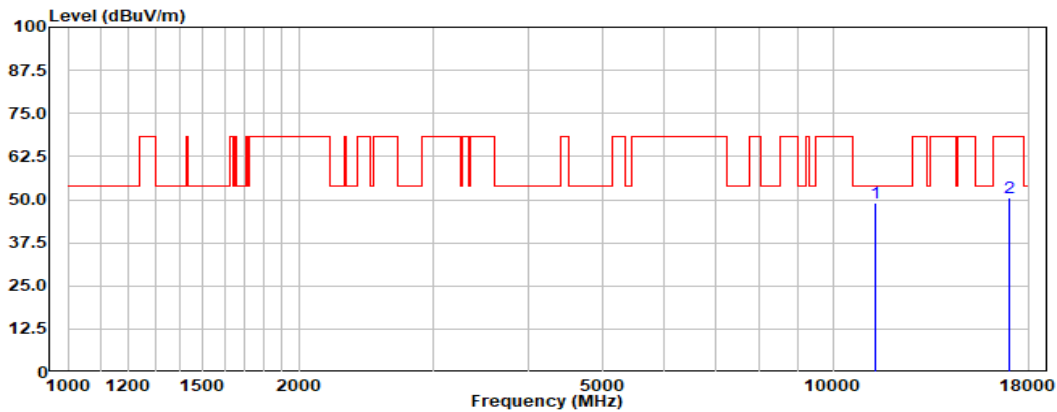

Antenna Polarity :Vertical

No.	Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
11340.00		48.73	38.18	8.35	46.04	49.22	54.00	-4.78	Peak
17010.00		42.99	41.35	10.40	44.36	50.38	68.30	-17.92	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 100 of 852

Test Mode: 07; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

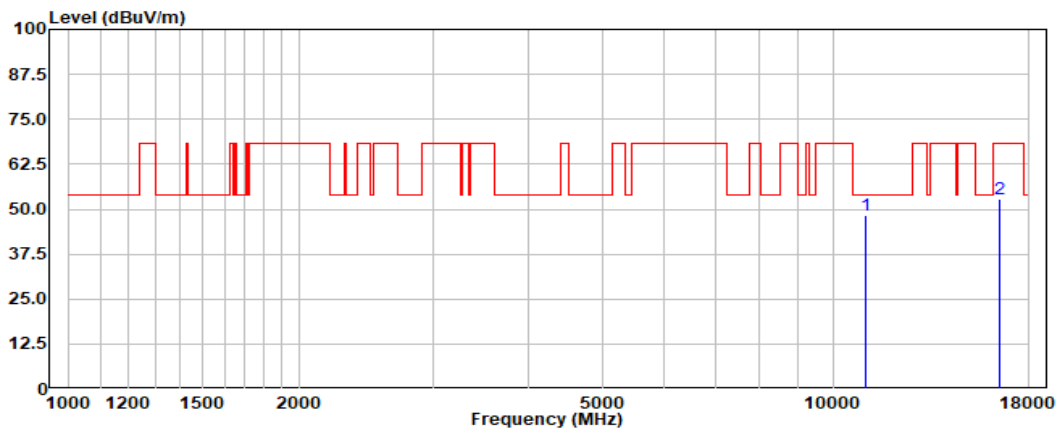

Antenna Polarity :Horizontal

No.	Freq	Read level	Antenna Factor	Cable Loss	Preamplifier Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
	11000.00	48.84	38.01	8.20	46.81	48.24	54.00	-5.76	Peak
	16500.00	45.42	40.78	10.25	43.68	52.77	68.30	-15.53	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamplifier Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 101 of 852

Test Mode: 07; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

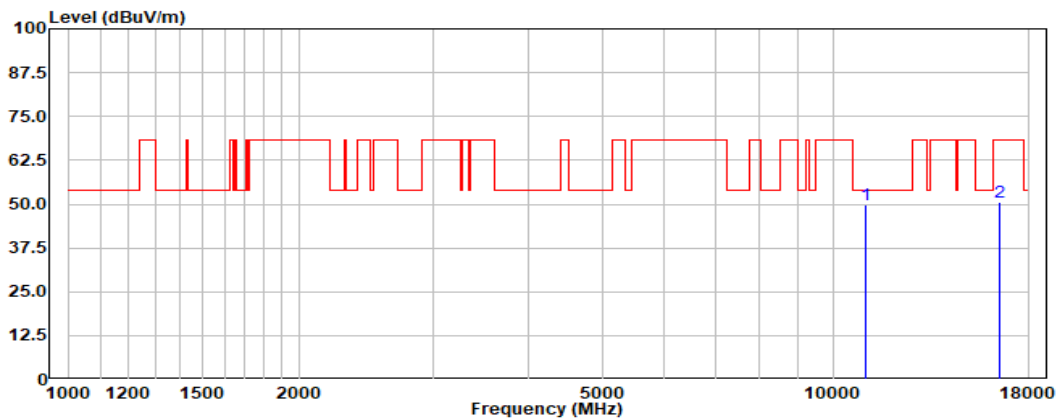

Antenna Polarity :Vertical

No.	Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
	11000.00	50.34	38.01	8.20	46.81	49.74	54.00	-4.26	Peak
	16500.00	43.31	40.78	10.25	43.68	50.66	68.30	-17.64	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 102 of 852

Test Mode: 07; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:middle

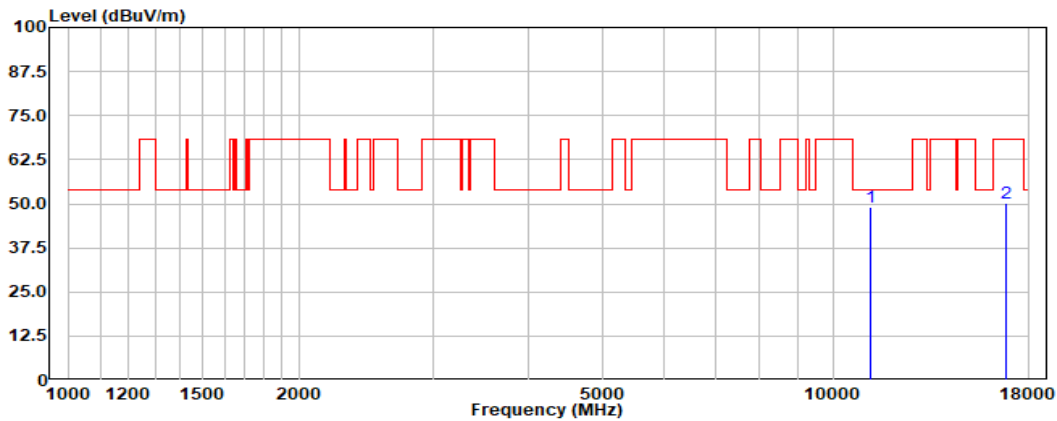

Antenna Polarity :Horizontal

No.	Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
	11200.00	49.02	38.12	8.29	46.36	49.07	54.00	-4.93	Peak
	16800.00	42.43	41.60	10.34	44.09	50.28	68.30	-18.02	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 103 of 852

Test Mode: 07; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:middle

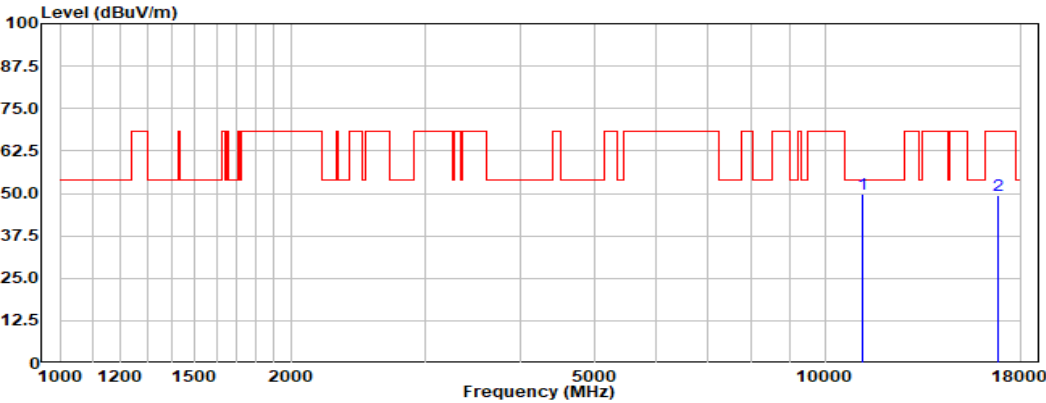

Antenna Polarity :Vertical

No.	Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
	11200.00	49.94	38.12	8.29	46.36	49.99	54.00	-4.01	Peak
	16800.00	41.72	41.60	10.34	44.09	49.57	68.30	-18.73	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor




Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 104 of 852

Test Mode: 07; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:High

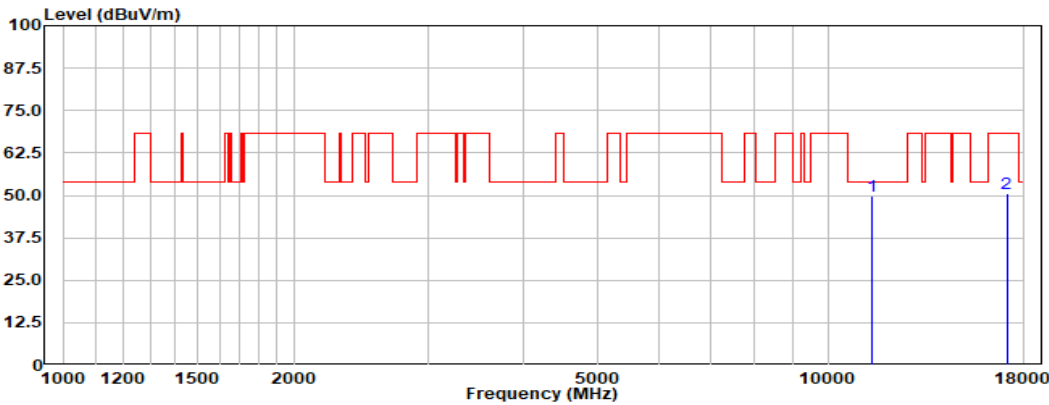

Antenna Polarity :Horizontal

No.	Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	-----	-----	-----	-----	-----	-----	-----	-----	-----
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
	11400.00	49.15	38.25	8.38	45.91	49.87	54.00	-4.13	Peak
	17100.00	43.08	41.21	10.43	44.32	50.40	68.30	-17.90	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 105 of 852

Test Mode: 07; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:High

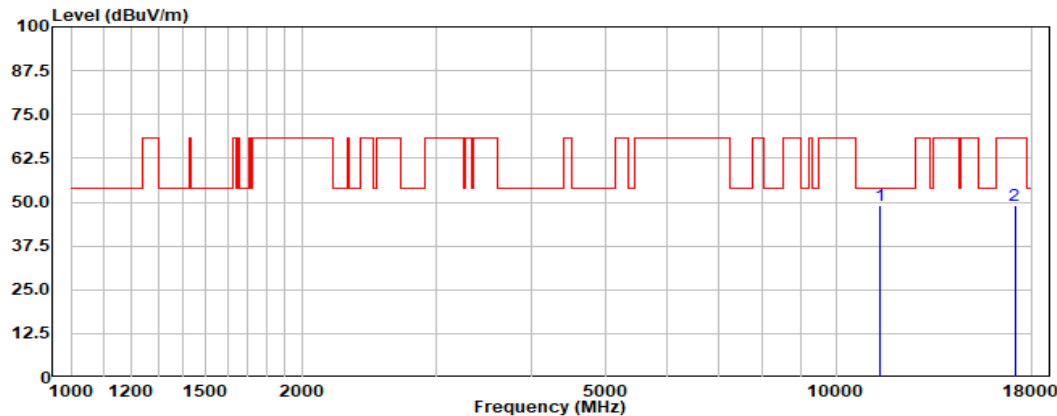

Antenna Polarity :Vertical

No.	Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	-----	-----	-----	-----	-----	-----	-----	-----	-----
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
	11400.00	48.34	38.25	8.38	45.91	49.06	54.00	-4.94	Peak
	17100.00	41.84	41.21	10.43	44.32	49.16	68.30	-19.14	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 106 of 852

Test Mode: 07; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:40MHz; Channel:Low

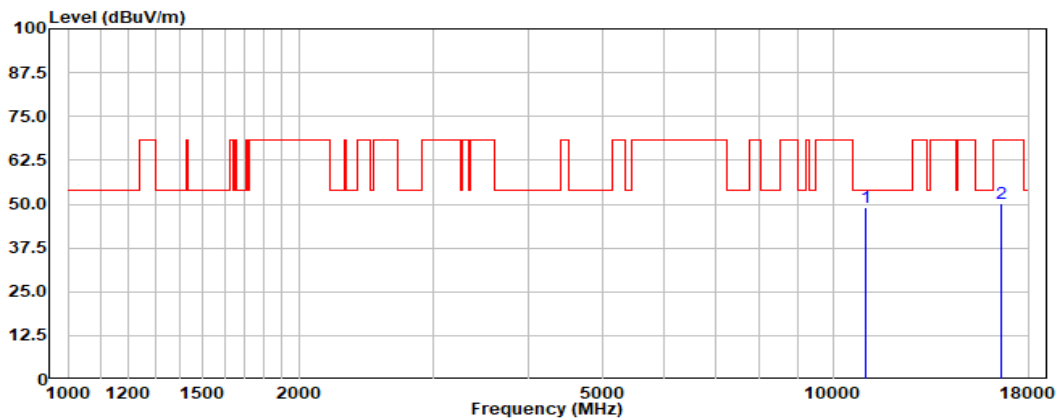

Antenna Polarity :Horizontal

No.	Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	-----	-----	-----	-----	-----	-----	-----	-----	-----
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
	11020.00	49.45	38.02	8.21	46.76	48.92	54.00	-5.08	Peak
	16530.00	42.73	40.89	10.26	43.72	50.16	68.30	-18.14	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor




Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 107 of 852

Test Mode: 07; Polarity: Vertical; Modulation:802.11ac; Bandwidth:40MHz; Channel:Low

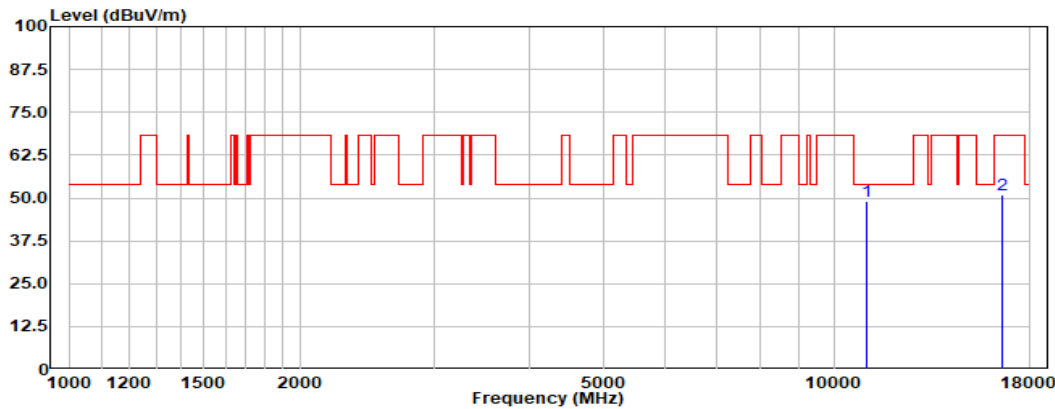

Antenna Polarity :Vertical

No.	Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	-----	-----	-----	-----	-----	-----	-----	-----	-----
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
11020.00		49.45	38.02	8.21	46.76	48.92	54.00	-5.08	Peak
16530.00		43.42	40.89	10.26	43.72	50.85	68.30	-17.45	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 108 of 852

Test Mode: 07; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:40MHz; Channel:middle

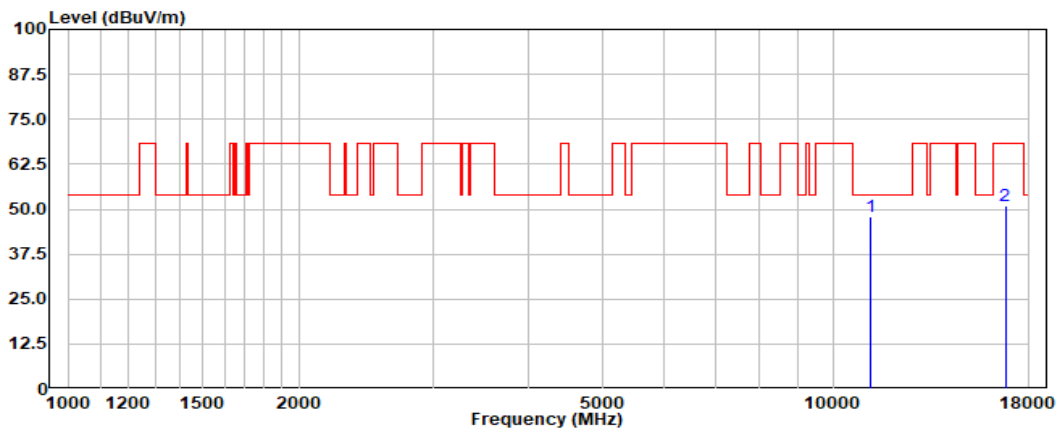

Antenna Polarity :Horizontal

No.	Freq	Read level	Antenna Factor	Cable Loss	Preamplifier Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
11180.00		48.06	38.11	8.28	46.40	48.05	54.00	-5.95	Peak
16770.00		43.19	41.52	10.33	44.05	50.99	68.30	-17.31	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamplifier Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 109 of 852

Test Mode: 07; Polarity: Vertical; Modulation:802.11ac; Bandwidth:40MHz; Channel:middle

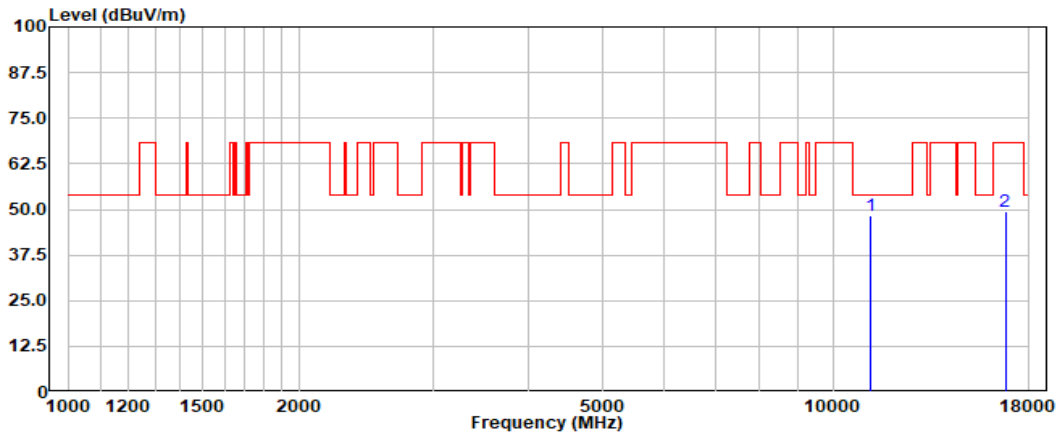

Antenna Polarity :Vertical

No.	Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
11180.00		48.33	38.11	8.28	46.40	48.32	54.00	-5.68	Peak
16770.00		41.57	41.52	10.33	44.05	49.37	68.30	-18.93	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 110 of 852

Test Mode: 07; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:40MHz; Channel:High

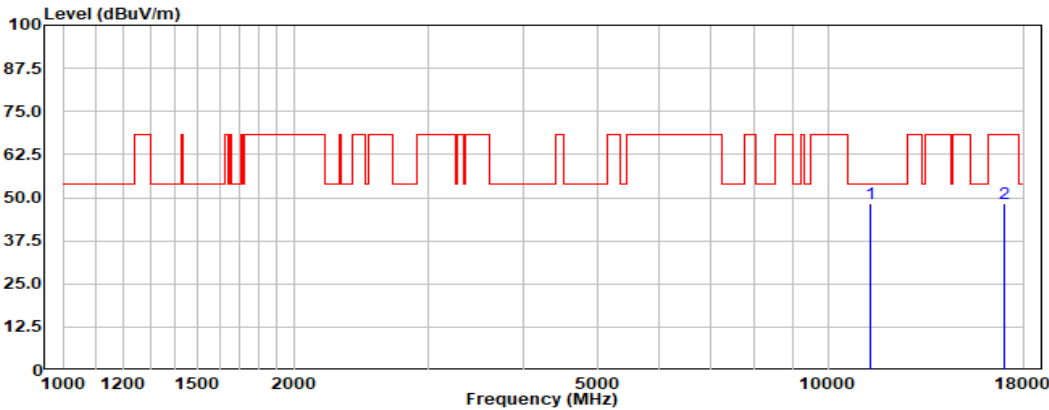

Antenna Polarity :Horizontal

No.	Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
	11340.00	47.64	38.18	8.35	46.04	48.13	54.00	-5.87	Peak
	17010.00	41.10	41.35	10.40	44.36	48.49	68.30	-19.81	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 111 of 852

Test Mode: 07; Polarity: Vertical; Modulation:802.11ac; Bandwidth:40MHz; Channel:High

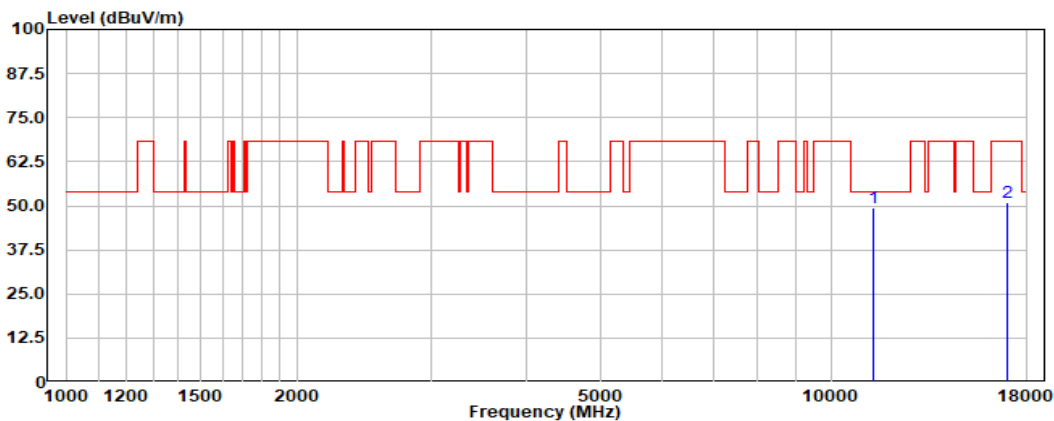

Antenna Polarity :Vertical

No.	Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
11340.00		48.76	38.18	8.35	46.04	49.25	54.00	-4.75	Peak
17010.00		43.47	41.35	10.40	44.36	50.86	68.30	-17.44	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 112 of 852

Test Mode: 07; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:80MHz; Channel:Low

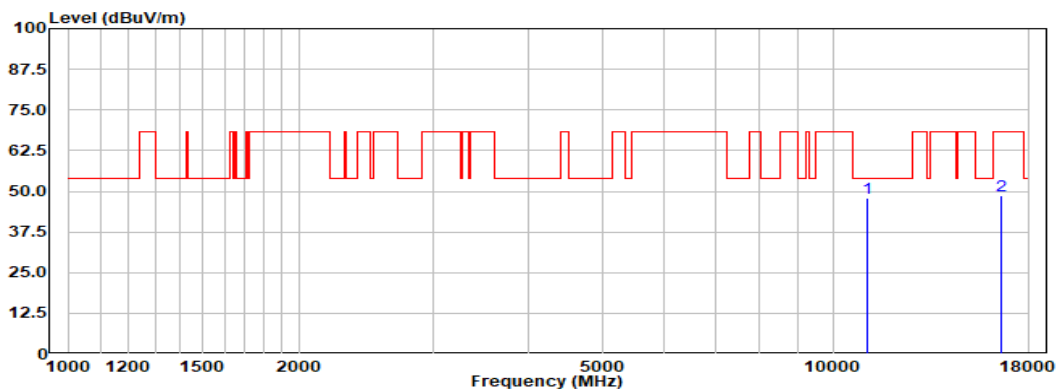

Antenna Polarity :Horizontal

No.	Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
11060.00		48.21	38.05	8.22	46.67	47.81	54.00	-6.19	Peak
16590.00		41.28	41.10	10.28	43.80	48.86	68.30	-19.44	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor




Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 113 of 852

Test Mode: 07; Polarity: Vertical; Modulation:802.11ac; Bandwidth:80MHz; Channel:Low

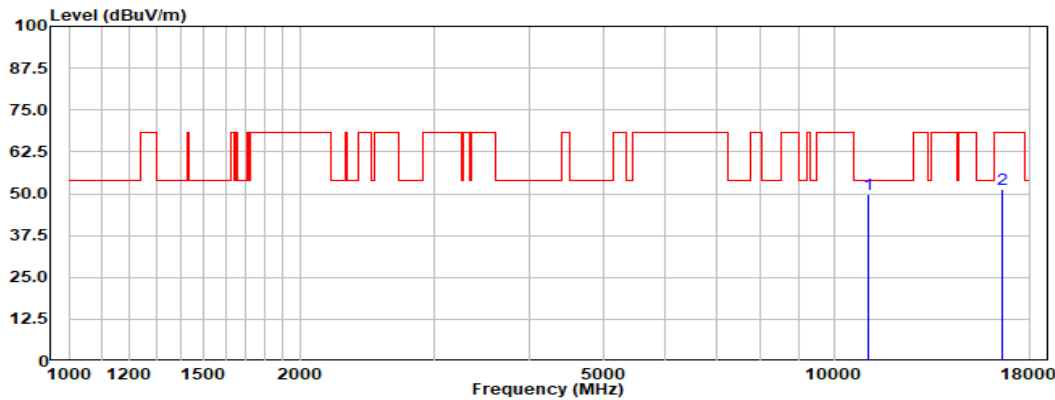

Antenna Polarity :Vertical

No.	Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	-----	-----	-----	-----	-----	-----	-----	-----	-----
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
11060.00		50.07	38.05	8.22	46.67	49.67	54.00	-4.33	Peak
16590.00		43.60	41.10	10.28	43.80	51.18	68.30	-17.12	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 114 of 852

Test Mode: 07; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:80MHz; Channel:High

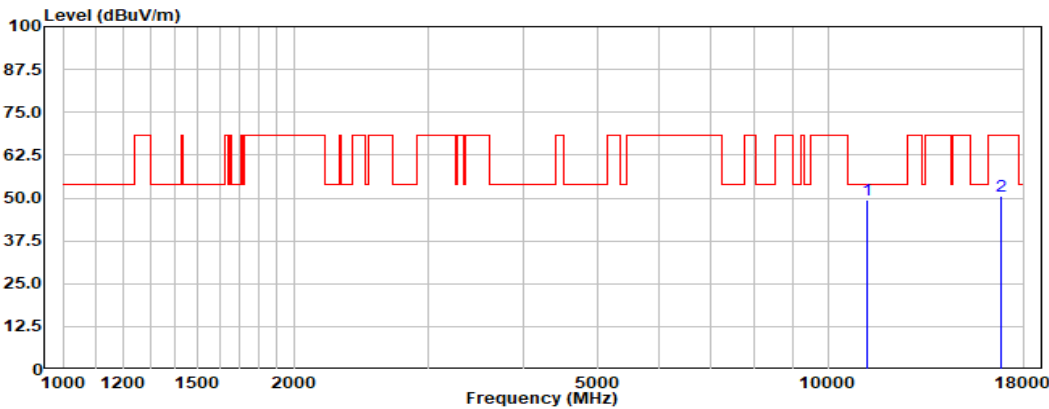

Antenna Polarity :Horizontal

No.	Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	-----	-----	-----	-----	-----	-----	-----	-----	-----
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
11220.00		49.46	38.12	8.30	46.31	49.57	54.00	-4.43	Peak
16830.00		42.93	41.57	10.35	44.13	50.72	68.30	-17.58	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 115 of 852

Test Mode: 07; Polarity: Vertical; Modulation:802.11ac; Bandwidth:80MHz; Channel:High

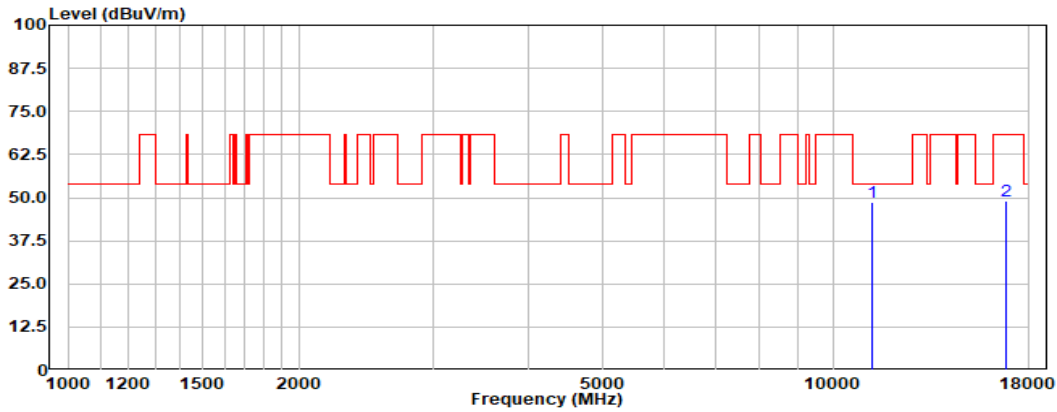

Antenna Polarity :Vertical

No.	Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
	11220.00	48.52	38.12	8.30	46.31	48.63	54.00	-5.37	Peak
	16830.00	41.23	41.57	10.35	44.13	49.02	68.30	-19.28	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 116 of 852

Test Mode: 08; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

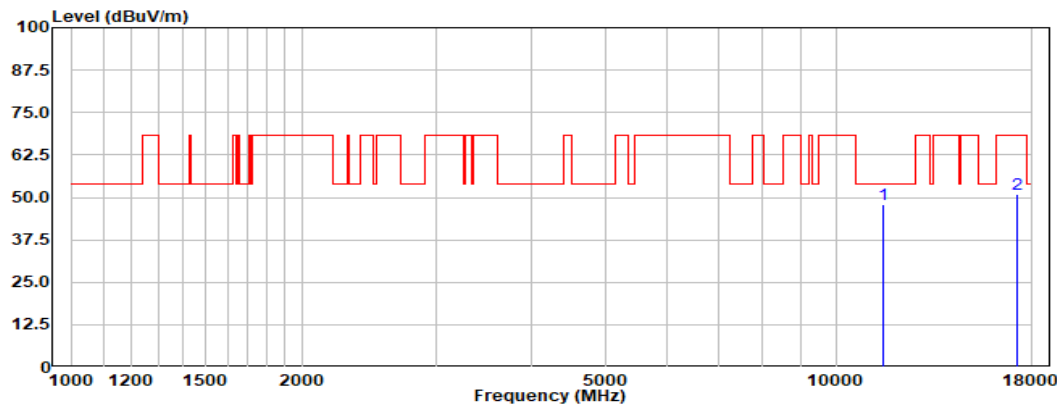

Antenna Polarity :Horizontal

No.	Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
	11490.00	46.89	38.41	8.42	45.70	48.02	54.00	-5.98	Peak
	17235.00	43.82	40.82	10.47	44.27	50.84	68.30	-17.46	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 117 of 852

Test Mode: 08; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

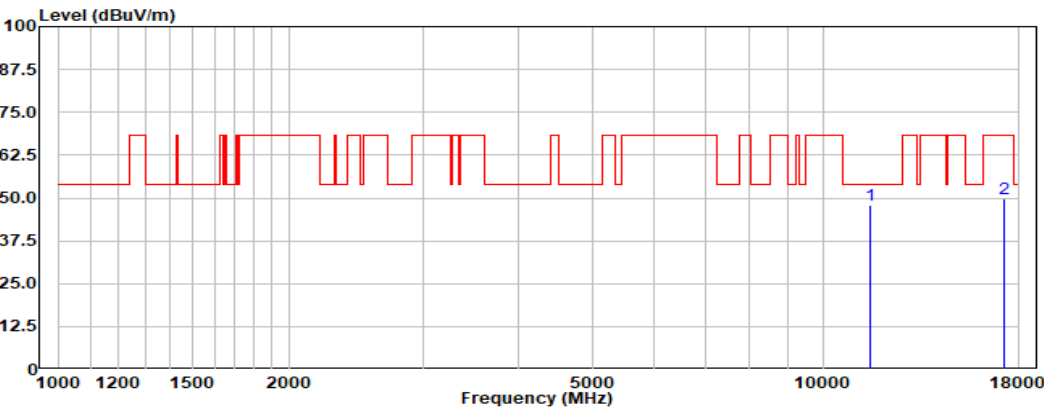

Antenna Polarity :Vertical

No.	Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	-----	-----	-----	-----	-----	-----	-----	-----	-----
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
11490.00		46.83	38.41	8.42	45.70	47.96	54.00	-6.04	Peak
17235.00		42.93	40.82	10.47	44.27	49.95	68.30	-18.35	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 118 of 852

Test Mode: 08; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

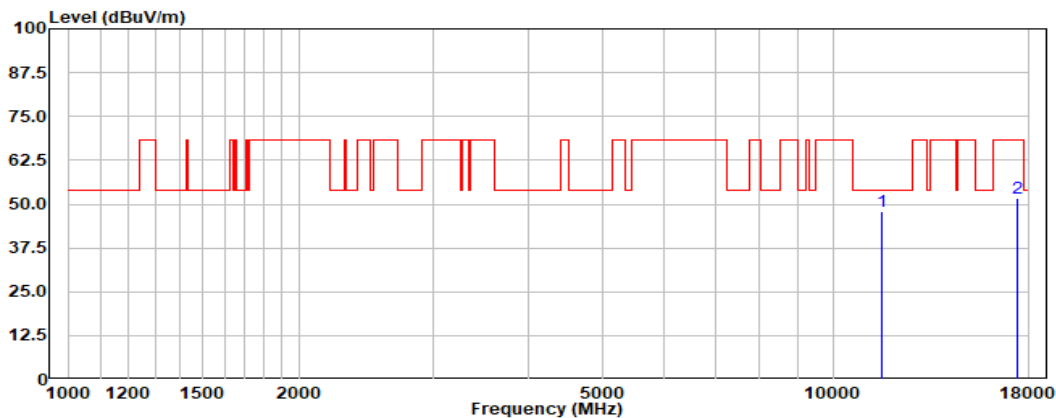

Antenna Polarity :Horizontal

No.	Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	-----	-----	-----	-----	-----	-----	-----	-----	-----
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
	11570.00	46.73	38.49	8.46	45.71	47.97	54.00	-6.03	Peak
	17355.00	44.49	40.85	10.50	44.23	51.61	68.30	-16.69	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 119 of 852

Test Mode: 08; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

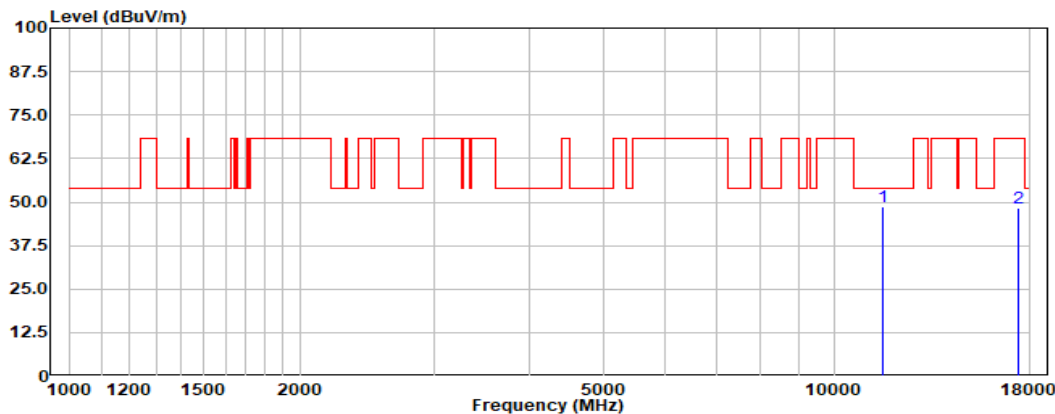

Antenna Polarity :Vertical

No.	Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
	11570.00	47.42	38.49	8.46	45.71	48.66	54.00	-5.34	Peak
	17355.00	41.36	40.85	10.50	44.23	48.48	68.30	-19.82	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 120 of 852

Test Mode: 08; Polarity: Horizontal; Modulation: 802.11a; Bandwidth: 20MHz; Channel: High

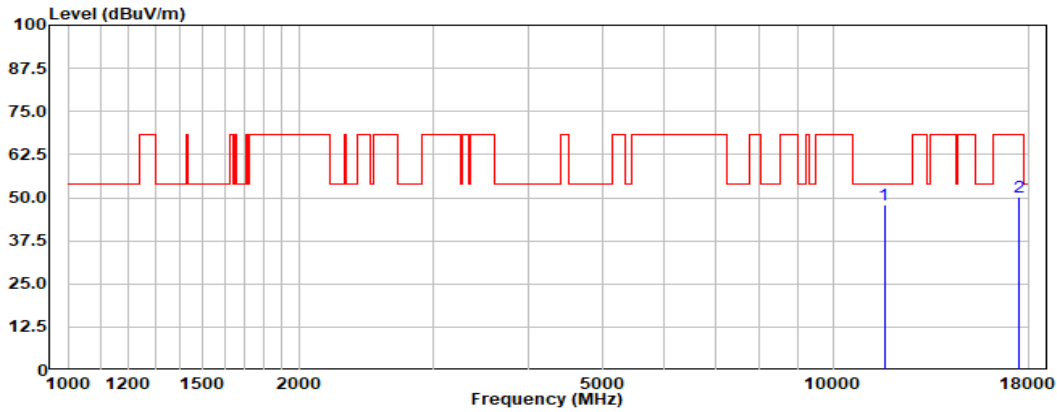

Antenna Polarity :Horizontal

No.	Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
11650.00		46.73	38.60	8.50	45.75	48.08	54.00	-5.92	Peak
17475.00		42.96	40.94	10.54	44.18	50.26	68.30	-18.04	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor




Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 121 of 852

Test Mode: 08; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

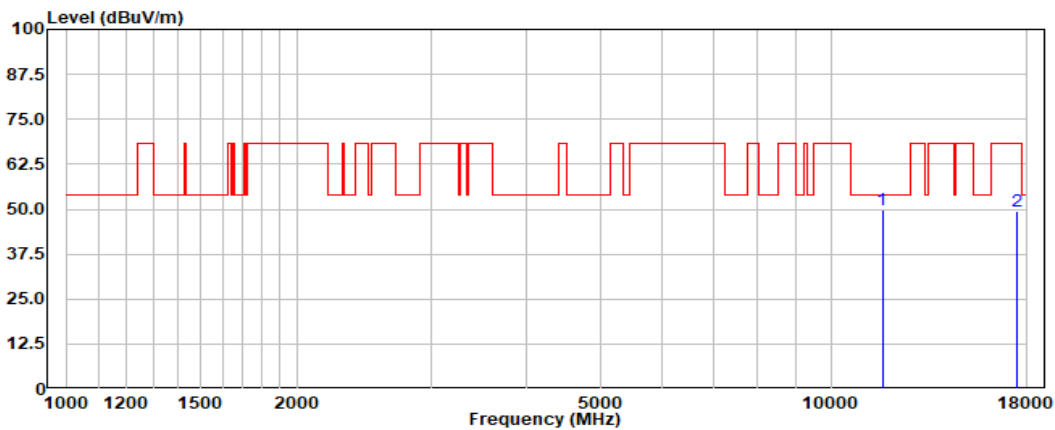

Antenna Polarity :Vertical

No.	Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
	11650.00	48.28	38.60	8.50	45.75	49.63	54.00	-4.37	Peak
	17475.00	42.16	40.94	10.54	44.18	49.46	68.30	-18.84	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 122 of 852

Test Mode: 08; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

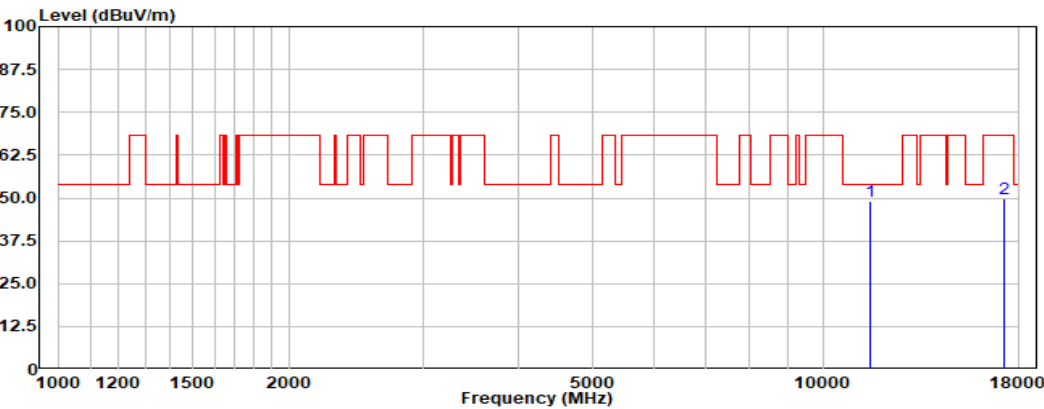

Antenna Polarity :Horizontal

No.	Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	-----	-----	-----	-----	-----	-----	-----	-----	-----
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
11490.00		47.91	38.41	8.42	45.70	49.04	54.00	-4.96	Peak
17235.00		42.86	40.82	10.47	44.27	49.88	68.30	-18.42	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 123 of 852

Test Mode: 08; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

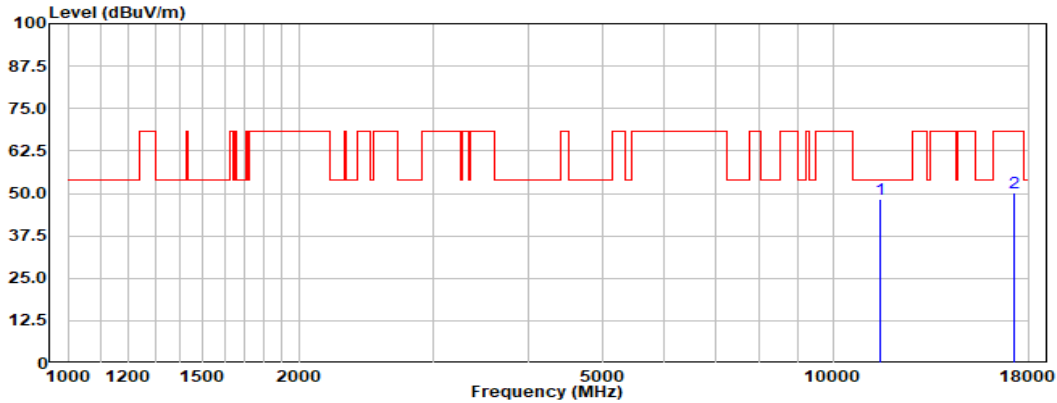

Antenna Polarity :Vertical

No.	Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
	11490.00	47.12	38.41	8.42	45.70	48.25	54.00	-5.75	Peak
	17235.00	42.99	40.82	10.47	44.27	50.01	68.30	-18.29	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 124 of 852

Test Mode: 08; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:middle

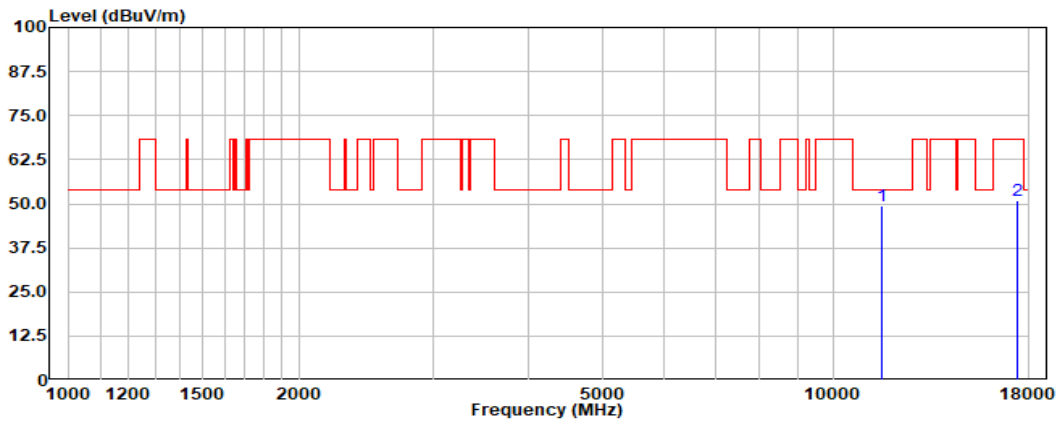

Antenna Polarity :Horizontal

No.	Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
11570.00		48.27	38.49	8.46	45.71	49.51	54.00	-4.49	Peak
17355.00		43.80	40.85	10.50	44.23	50.92	68.30	-17.38	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 125 of 852

Test Mode: 08; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:middle

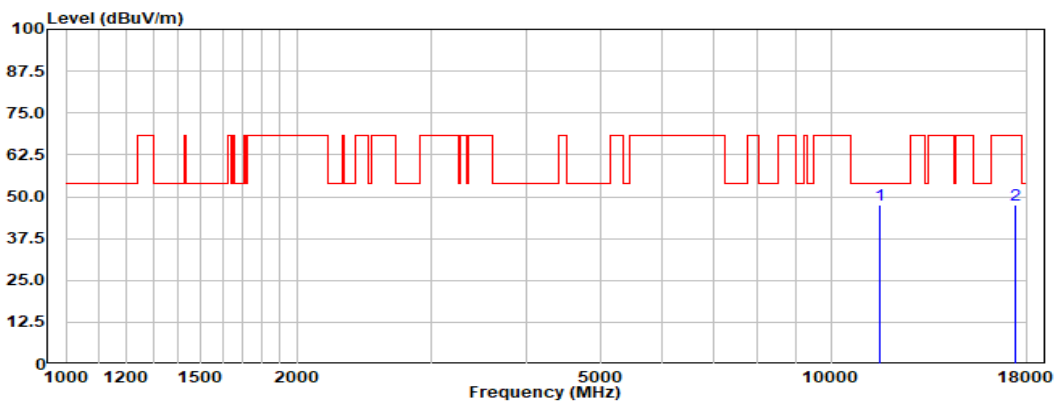

Antenna Polarity :Vertical

No.	Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
11570.00		46.18	38.49	8.46	45.71	47.42	54.00	-6.58	Peak
17355.00		40.46	40.85	10.50	44.23	47.58	68.30	-20.72	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 126 of 852

Test Mode: 08; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:High

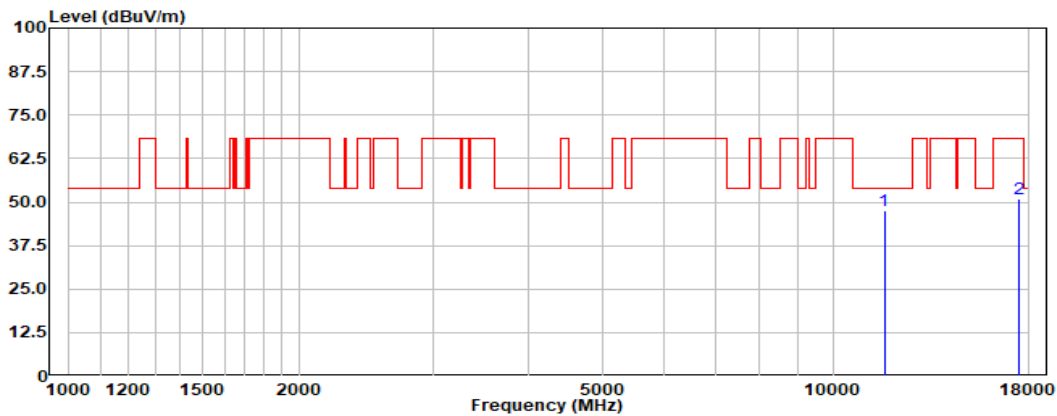


Antenna Polarity :Horizontal

No.	Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
11650.00		46.19	38.60	8.50	45.75	47.54	54.00	-6.46	Peak
17475.00		43.51	40.94	10.54	44.18	50.81	68.30	-17.49	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Compliance Certification Services (Kunshan) Inc.

Test Mode: 08; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:High

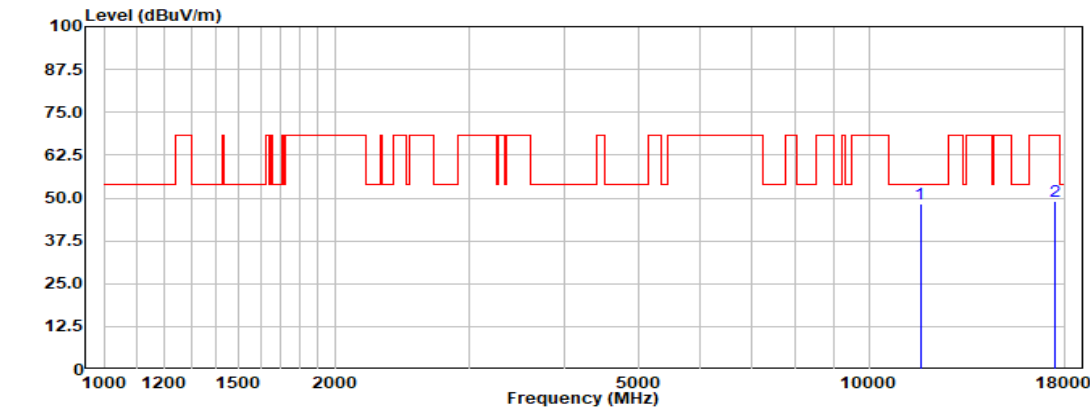

Antenna Polarity :Vertical

No.	Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	-----	-----	-----	-----	-----	-----	-----	-----	-----
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
11650.00		46.83	38.60	8.50	45.75	48.18	54.00	-5.82	Peak
17475.00		41.74	40.94	10.54	44.18	49.04	68.30	-19.26	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 128 of 852

Test Mode: 08; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

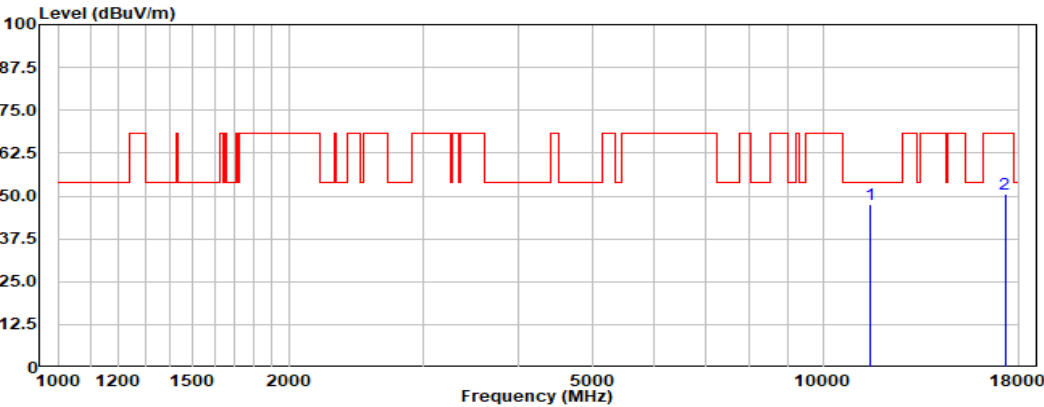

Antenna Polarity :Horizontal

No.	Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	-----	-----	-----	-----	-----	-----	-----	-----	-----
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
11510.00		46.38	38.44	8.43	45.68	47.57	54.00	-6.43	Peak
17265.00		43.52	40.80	10.48	44.26	50.54	68.30	-17.76	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 129 of 852

Test Mode: 08; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

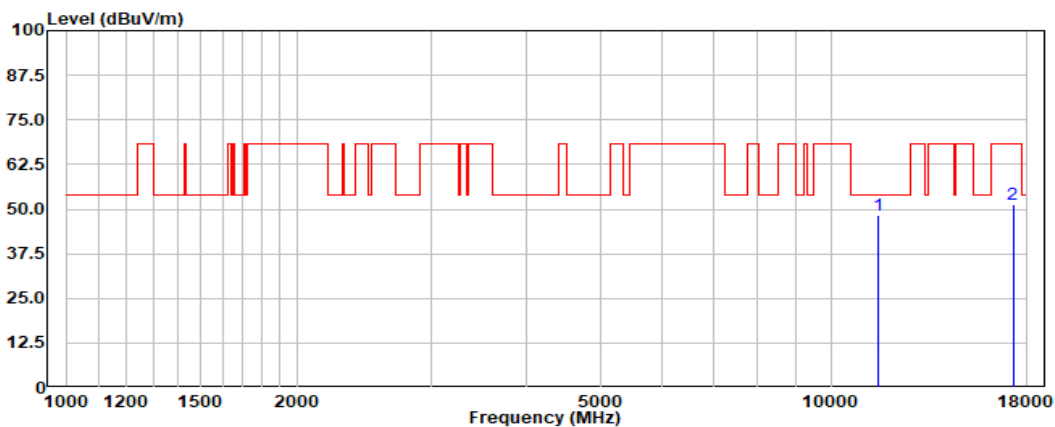

Antenna Polarity :Vertical

No.	Freq	Read level	Antenna Factor	Cable Loss	Preamplifier Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
	11510.00	47.08	38.44	8.43	45.68	48.27	54.00	-5.73	Peak
	17265.00	44.16	40.80	10.48	44.26	51.18	68.30	-17.12	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamplifier Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 130 of 852

Test Mode: 08; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:High

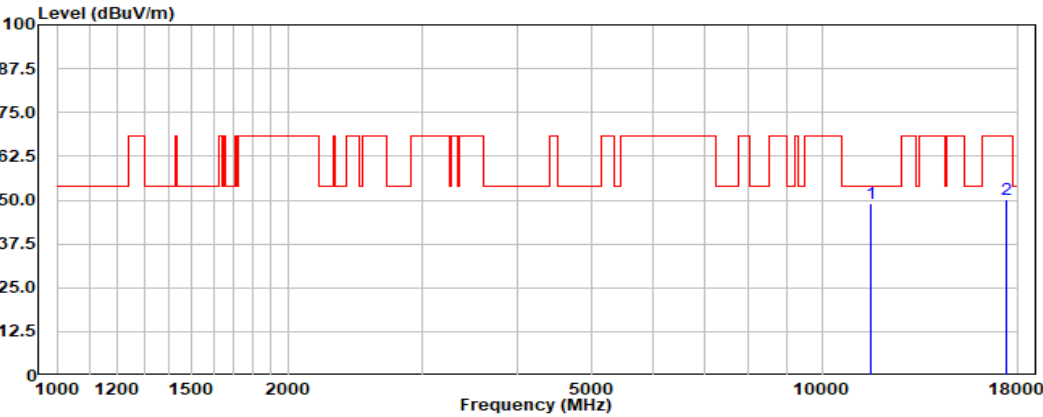

Antenna Polarity :Horizontal

No.	Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
	11590.00	47.70	38.51	8.47	45.72	48.96	54.00	-5.04	Peak
	17385.00	43.14	40.88	10.51	44.21	50.32	68.30	-17.98	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 131 of 852

Test Mode: 08; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:High

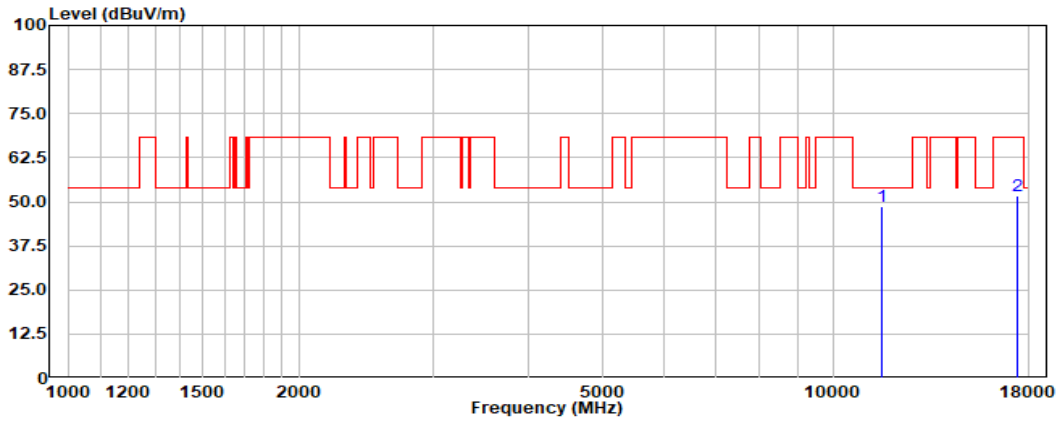

Antenna Polarity :Vertical

No.	Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
11590.00		47.59	38.51	8.47	45.72	48.85	54.00	-5.15	Peak
17385.00		44.54	40.88	10.51	44.21	51.72	68.30	-16.58	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor




Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 132 of 852

Test Mode: 08; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

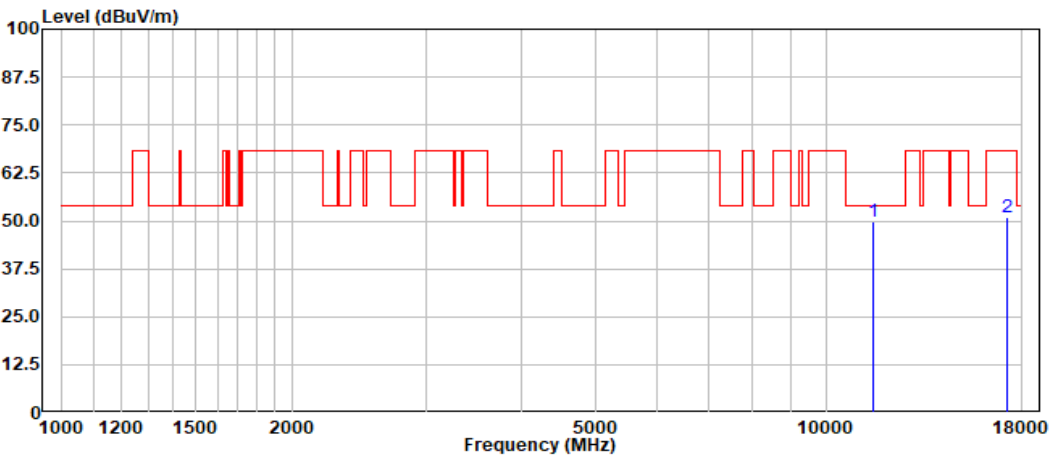

Antenna Polarity :Horizontal

No.	Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
11490.00		48.74	38.41	8.42	45.70	49.87	54.00	-4.13	Peak
17235.00		44.08	40.82	10.47	44.27	51.10	68.30	-17.20	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 133 of 852

Test Mode: 08; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

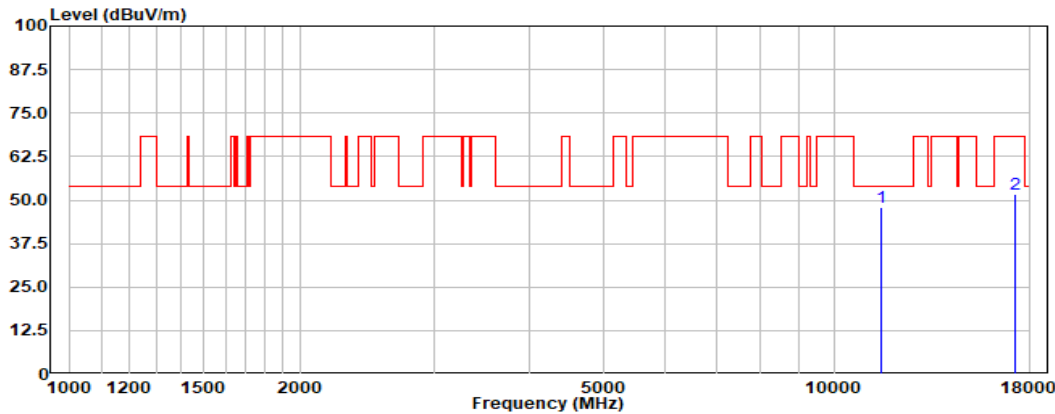

Antenna Polarity :Vertical

No.	Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
11490.00		46.85	38.41	8.42	45.70	47.98	54.00	-6.02	Peak
17235.00		44.78	40.82	10.47	44.27	51.80	68.30	-16.50	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 134 of 852

Test Mode: 08; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:middle

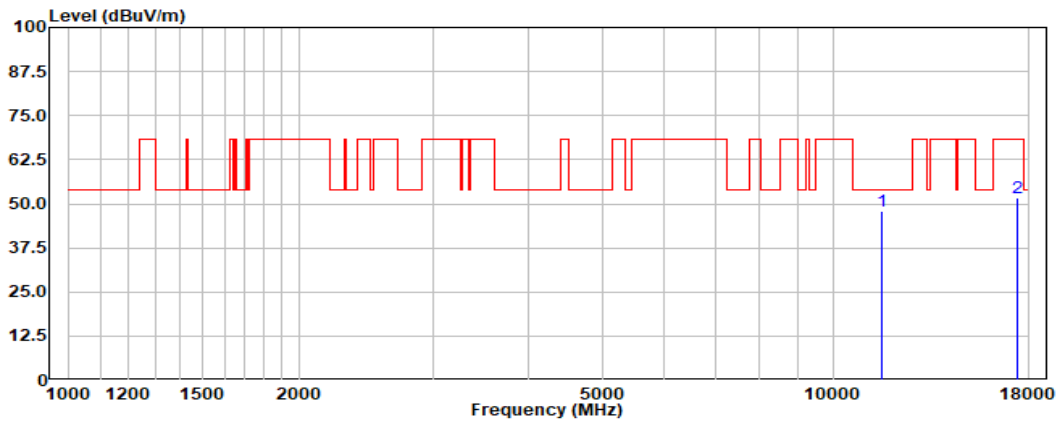

Antenna Polarity :Horizontal

No.	Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
11570.00		46.78	38.49	8.46	45.71	48.02	54.00	-5.98	Peak
17355.00		44.56	40.85	10.50	44.23	51.68	68.30	-16.62	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 135 of 852

Test Mode: 08; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:middle

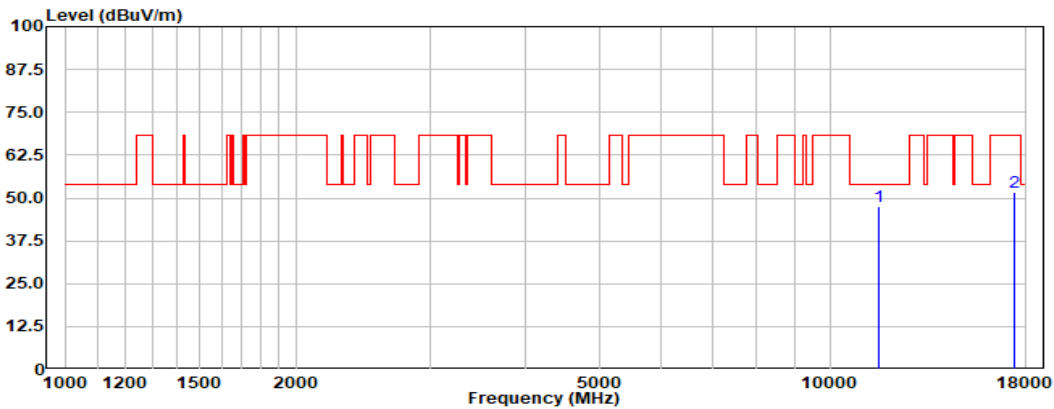

Antenna Polarity :Vertical

No.	Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	-----	-----	-----	-----	-----	-----	-----	-----	-----
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
11570.00		46.14	38.49	8.46	45.71	47.38	54.00	-6.62	Peak
17355.00		44.50	40.85	10.50	44.23	51.62	68.30	-16.68	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 136 of 852

Test Mode: 08; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:High

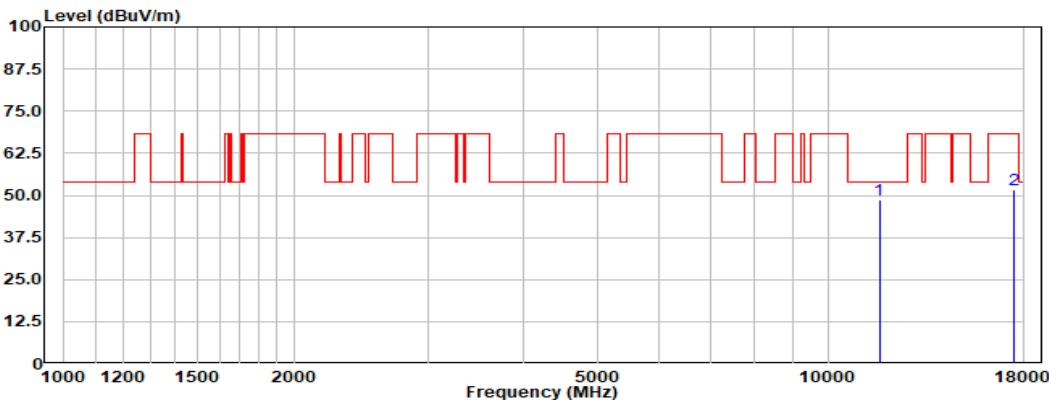

Antenna Polarity :Horizontal

No.	Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
11650.00		47.29	38.60	8.50	45.75	48.64	54.00	-5.36	Peak
17475.00		44.21	40.94	10.54	44.18	51.51	68.30	-16.79	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 137 of 852

Test Mode: 08; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:High

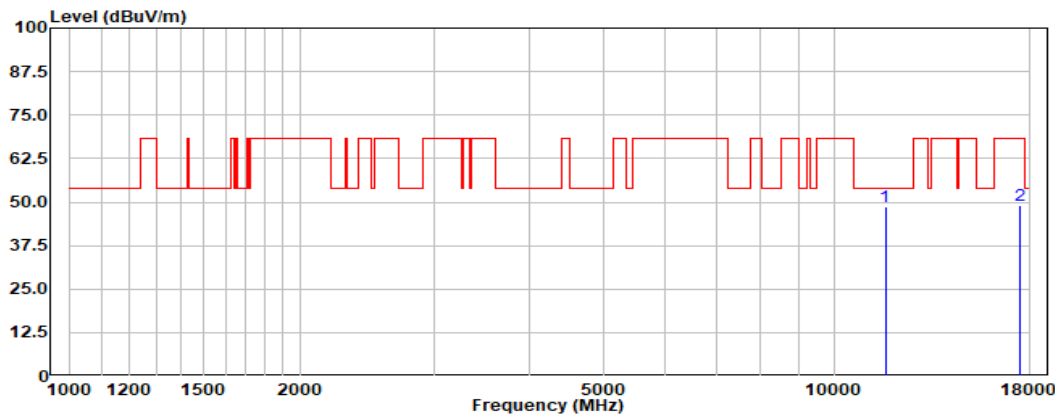

Antenna Polarity :Vertical

No.	Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
11650.00		47.15	38.60	8.50	45.75	48.50	54.00	-5.50	Peak
17475.00		41.75	40.94	10.54	44.18	49.05	68.30	-19.25	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 138 of 852

Test Mode: 08; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:40MHz; Channel:Low

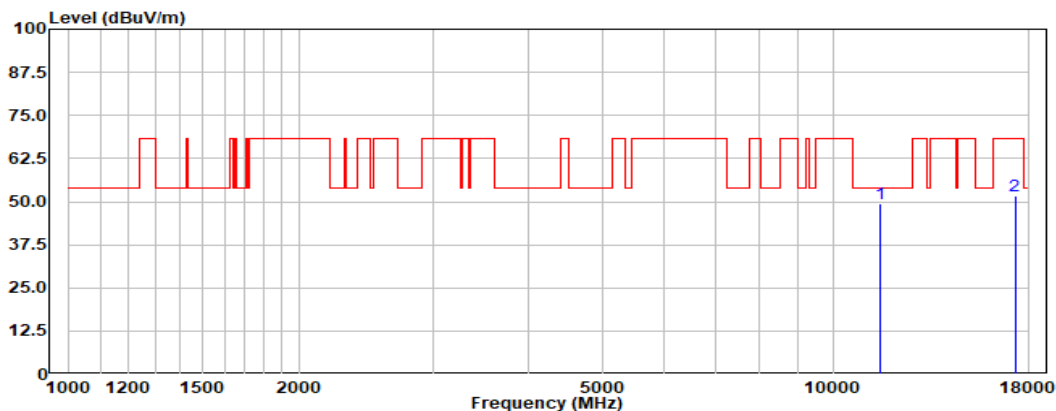

Antenna Polarity :Horizontal

No.	Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
11510.00		48.08	38.44	8.43	45.68	49.27	54.00	-4.73	Peak
17265.00		44.81	40.80	10.48	44.26	51.83	68.30	-16.47	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 139 of 852

Test Mode: 08; Polarity: Vertical; Modulation:802.11ac; Bandwidth:40MHz; Channel:Low

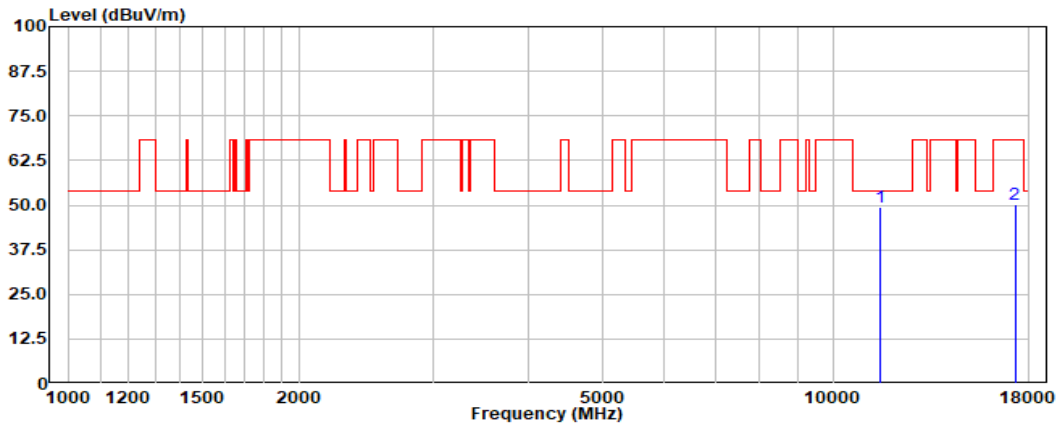

Antenna Polarity :Vertical

No.	Freq	Read level	Antenna Factor	Cable Loss	Preamplifier Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
11510.00		48.20	38.44	8.43	45.68	49.39	54.00	-4.61	Peak
17265.00		43.19	40.80	10.48	44.26	50.21	68.30	-18.09	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamplifier Factor




Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 140 of 852

Test Mode: 08; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:40MHz; Channel:High

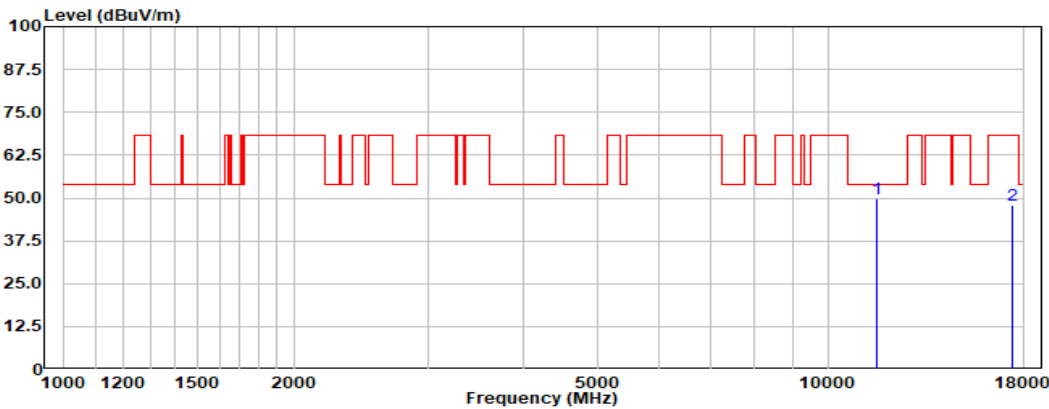

Antenna Polarity :Horizontal

No.	Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	-----	-----	-----	-----	-----	-----	-----	-----	-----
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
11590.00		48.48	38.51	8.47	45.72	49.74	54.00	-4.26	Peak
17385.00		40.64	40.88	10.51	44.21	47.82	68.30	-20.48	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 141 of 852

Test Mode: 08; Polarity: Vertical; Modulation:802.11ac; Bandwidth:40MHz; Channel:High

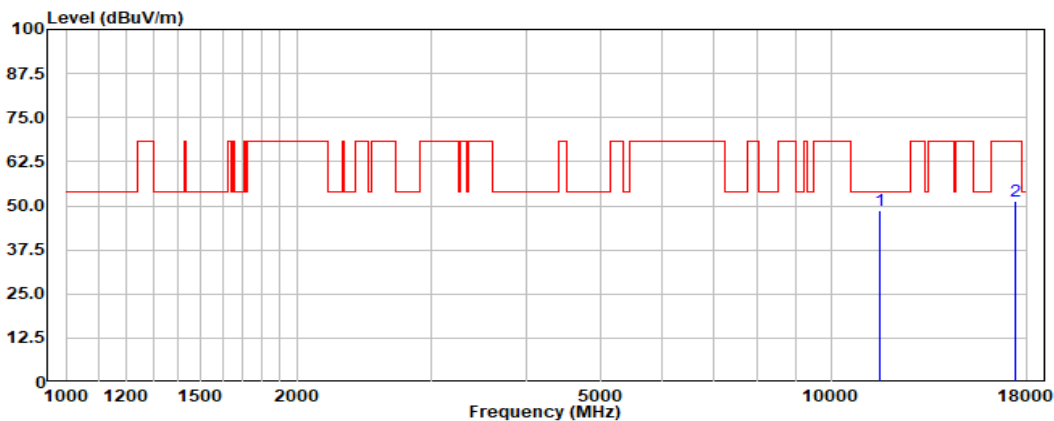

Antenna Polarity :Vertical

No.	Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
11590.00		47.39	38.51	8.47	45.72	48.65	54.00	-5.35	Peak
17385.00		44.07	40.88	10.51	44.21	51.25	68.30	-17.05	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 142 of 852

Test Mode: 08; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:80MHz; Channel:Low

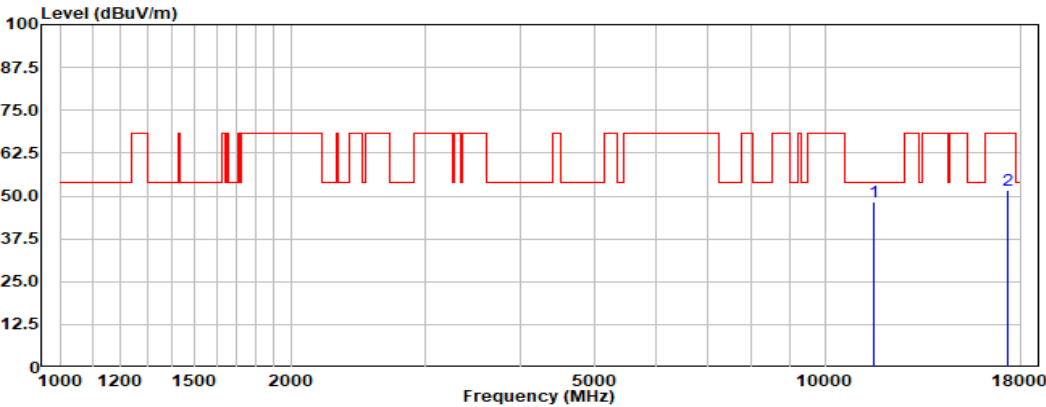

Antenna Polarity :Horizontal

No.	Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	-----	-----	-----	-----	-----	-----	-----	-----	-----
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
11550.00		47.02	38.47	8.45	45.70	48.24	54.00	-5.76	Peak
17325.00		44.76	40.82	10.49	44.24	51.83	68.30	-16.47	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 143 of 852

Test Mode: 08; Polarity: Vertical; Modulation:802.11ac; Bandwidth:80MHz; Channel:Low

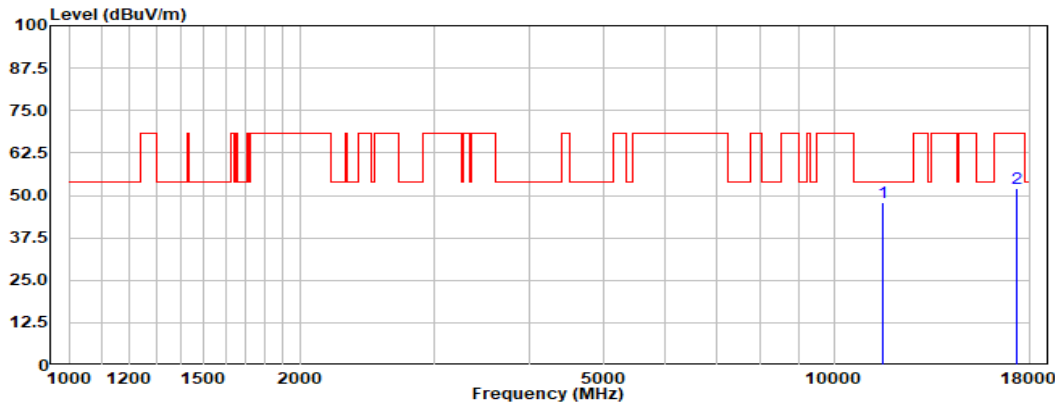

Antenna Polarity :Vertical

No.	Freq	Read level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
	11550.00	46.72	38.47	8.45	45.70	47.94	54.00	-6.06	Peak
	17325.00	45.00	40.82	10.49	44.24	52.07	68.30	-16.23	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 144 of 852

7.9 Radiated Emissions which fall in the restricted bands

Test Requirement 47 CFR Part 15, Subpart C 15.209 & Subpart E 15.407(b)

Test Method: KDB 789033 D02 II G

Measurement Distance: 3m

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

*(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(4) For transmitters operating in the 5.725-5.85 GHz band:

(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

7.9.1 E.U.T. Operation

Operating Environment:


Temperature: °C Humidity: % RH Atmospheric Pressure: 1010 mbar

7.9.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	05	TX mode (U-NII-1)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ 20/40/80, Only the data of worst case is

		recorded in the report.
Final test	06	TX mode (U-NII-2A) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ 20/40/80, Only the data of worst case is recorded in the report.
Final test	07	TX mode (U-NII-2C) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ 20/40/80, Only the data of worst case is recorded in the report.
Final test	08	TX mode (U-NII-3) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ 20/40/80, Only the data of worst case is recorded in the report.

7.9.3 Test Setup Diagram

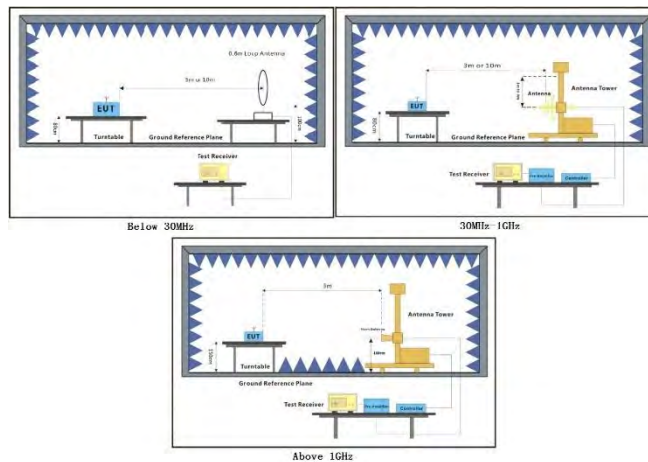

7.9.4 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark: $\text{Level} = \text{Read Level} + \text{Cable Loss} + \text{Antenna Factor} - \text{Preamp Factor}$


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 147 of 852

Test Mode: 05; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

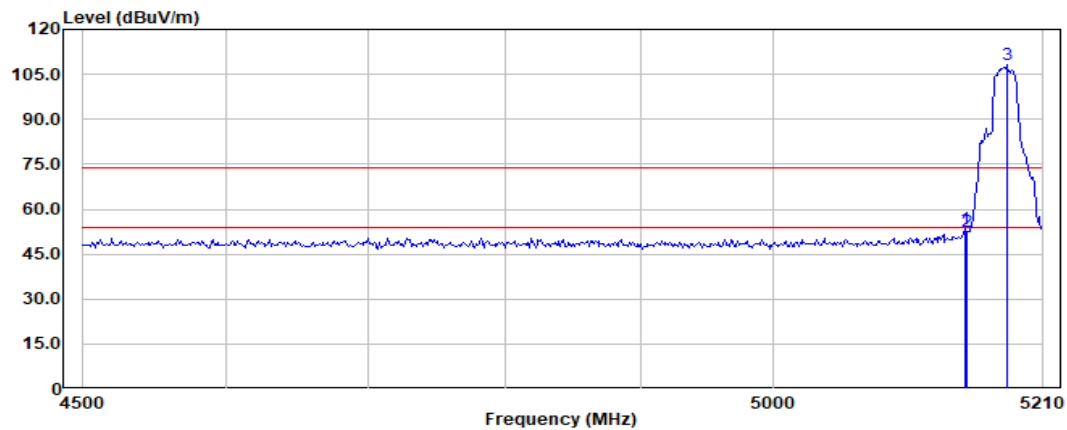

Antenna Polarity :Horizontal

No.	Freq (MHz)	Read level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Emission Level (dBuV)	Limit (dBuV)	Over Limit (dB)	Remark
1	5148.26	56.17	34.32	15.56	53.41	74.00	-20.59	Peak
2	5150.00	55.07	34.33	15.56	52.32	74.00	-21.68	Peak
3	5181.19	110.80	34.45	15.58	108.21	74.00	34.21	Peak

Notes: Emission Level = Read Level +Antenna Factor + Cable loss


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 148 of 852

Test Mode: 05; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

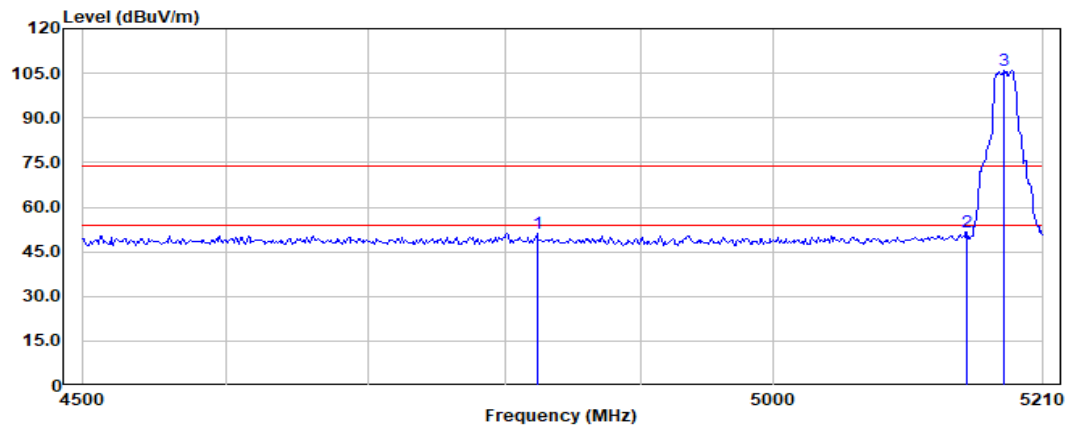

Antenna Polarity :Vertical

No.	Freq (MHz)	Read level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Emission Level (dBuV)	Limit (dBuV)	Over Limit (dB)	Remark
1	4823.10	54.95	33.83	15.41	51.32	74.00	-22.68	Peak
2	5150.00	54.50	34.33	15.56	51.75	74.00	-22.25	Peak
3	5179.13	108.79	34.44	15.58	106.19	74.00	32.19	Peak

Notes: Emission Level = Read Level +Antenna Factor + Cable loss


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 149 of 852

Test Mode: 05; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

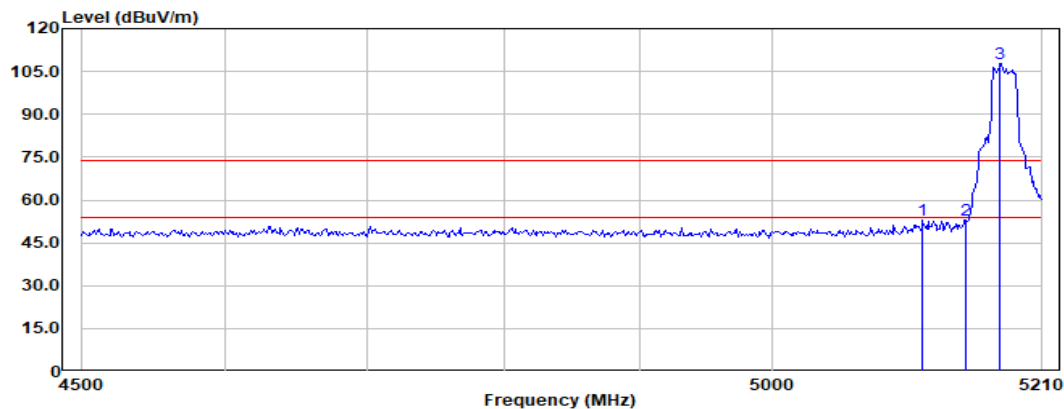

Antenna Polarity :Horizontal

No.	Freq (MHz)	Read level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Emission Level (dBuV)	Limit (dBuV)	Over Limit (dB)	Remark
1	5116.36	55.77	34.20	15.54	52.85	74.00	-21.15	Peak
2	5150.00	55.85	34.33	15.56	53.10	74.00	-20.90	Peak
3	5177.07	110.56	34.43	15.58	107.95	74.00	33.95	Peak

Notes: Emission Level = Read Level +Antenna Factor + Cable loss


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 150 of 852

Test Mode: 05; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

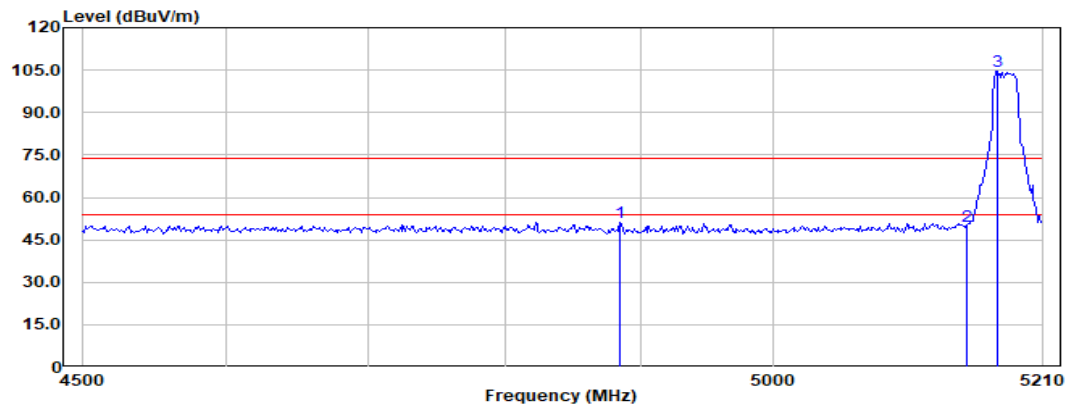

Antenna Polarity :Vertical

No.	Freq (MHz)	Read level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Emission Level (dBuV)	Limit (dBuV)	Over Limit (dB)	Remark
1	4884.84	54.83	33.67	15.44	51.12	74.00	-22.88	Peak
2	5150.00	52.38	34.33	15.56	49.63	74.00	-24.37	Peak
3	5173.99	107.29	34.42	15.58	104.67	74.00	30.67	Peak

Notes: Emission Level = Read Level +Antenna Factor + Cable loss


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 151 of 852

Test Mode: 05; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

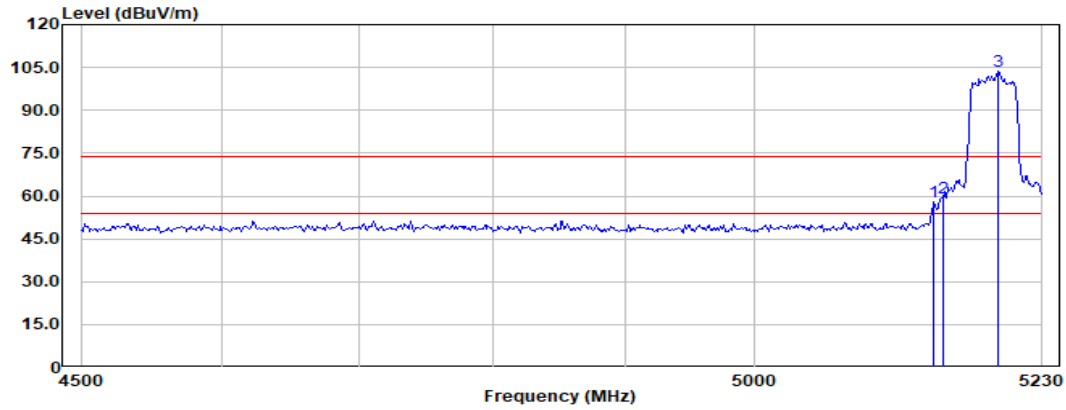

Antenna Polarity :Horizontal

No.	Freq (MHz)	Read level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Emission Level (dBuV)	Limit (dBuV)	Over Limit (dB)	Remark
1	5142.19	60.59	34.30	15.56	57.81	74.00	-16.19	Peak
2	5150.00	62.27	34.33	15.56	59.52	74.00	-14.48	Peak
3	5194.03	106.19	34.50	15.59	103.67	74.00	29.67	Peak

Notes: Emission Level = Read Level +Antenna Factor + Cable loss


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 152 of 852

Test Mode: 05; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

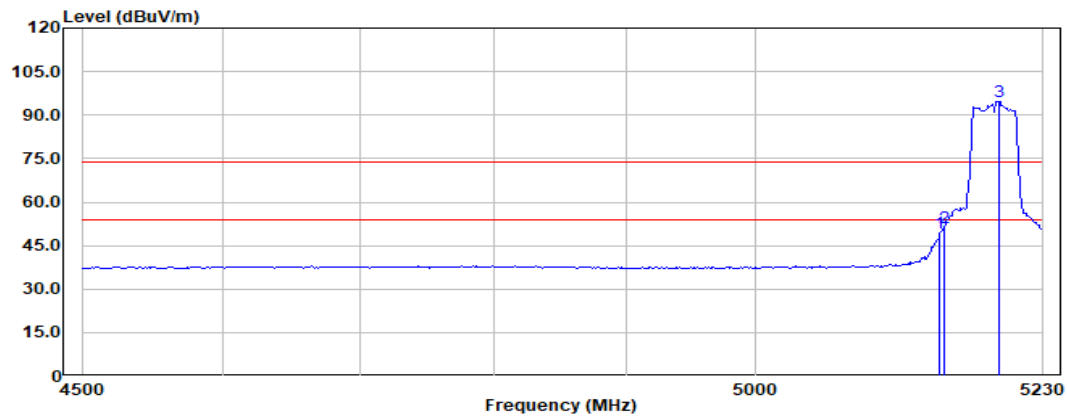

Antenna Polarity :Horizontal

No.	Freq (MHz)	Read level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Emission Level (dBuV)	Limit (dBuV)	Over Limit (dB)	Remark
1	5146.42	51.95	34.32	15.56	49.19	54.00	-4.81	Average
2	5150.00	54.13	34.33	15.56	51.38	54.00	-2.62	Average
3	5194.03	97.31	34.50	15.59	94.79	54.00	40.79	Average

Notes: Emission Level = Read Level +Antenna Factor + Cable loss


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 153 of 852

Test Mode: 05; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

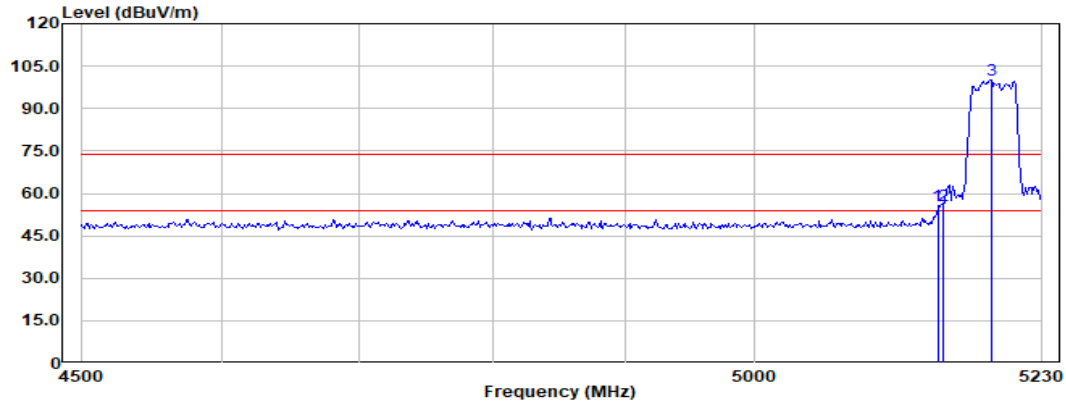

Antenna Polarity :Vertical

No.	Freq (MHz)	Read level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Emission Level (dBuV)	Limit (dBuV)	Over Limit (dB)	Remark
1	5145.36	58.47	34.31	15.56	55.70	74.00	-18.30	Peak
2	5150.00	58.30	34.33	15.56	55.55	74.00	-18.45	Peak
3	5188.74	102.67	34.48	15.59	100.13	74.00	26.13	Peak

Notes: Emission Level = Read Level +Antenna Factor + Cable loss


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 154 of 852

Test Mode: 05; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

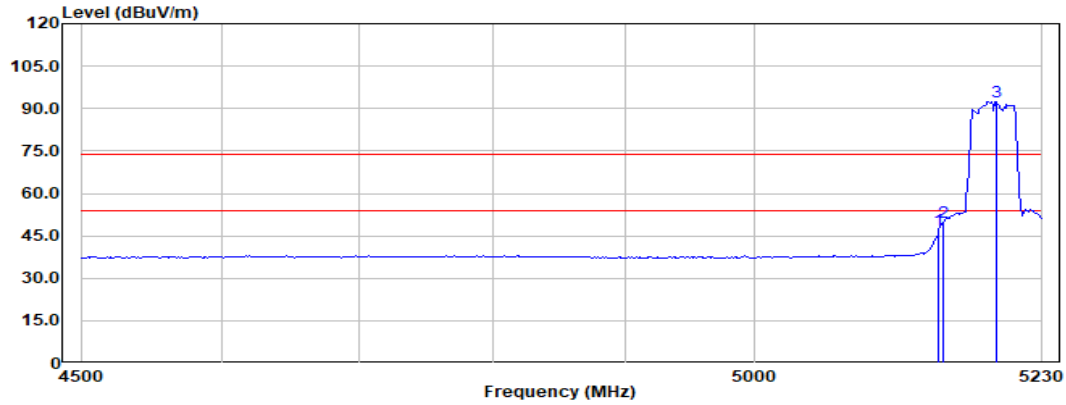

Antenna Polarity :Vertical

No.	Freq (MHz)	Read level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Emission Level (dBuV)	Limit (dBuV)	Over Limit (dB)	Remark
1	5146.42	49.75	34.32	15.56	46.99	54.00	-7.01	Average
2	5150.00	52.50	34.33	15.56	49.75	54.00	-4.25	Average
3	5192.97	95.11	34.49	15.59	92.58	54.00	38.58	Average

Notes: Emission Level = Read Level +Antenna Factor + Cable loss


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 155 of 852

Test Mode: 05; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

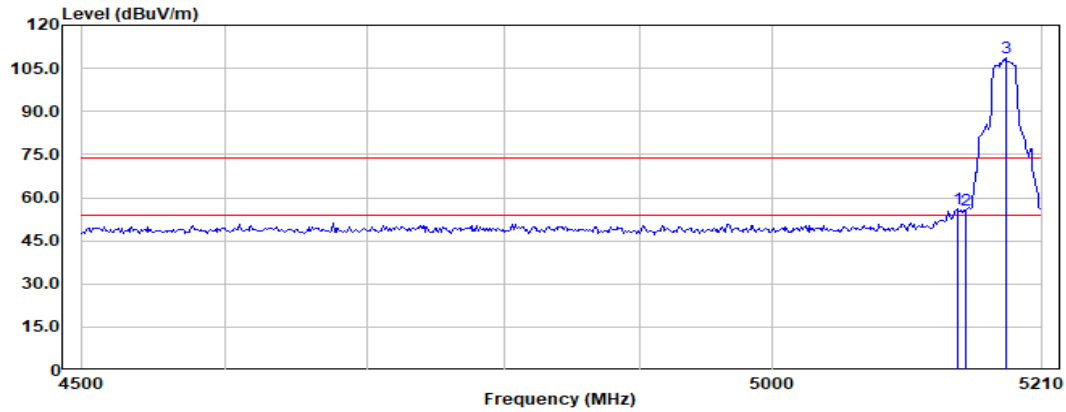

Antenna Polarity :Horizontal

No.	Freq (MHz)	Read level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Emission Level (dBuV)	Limit (dBuV)	Over Limit (dB)	Remark
1	5143.12	58.86	34.30	15.56	56.08	74.00	-17.92	Peak
2	5150.00	58.45	34.33	15.56	55.70	74.00	-18.30	Peak
3	5181.19	111.47	34.45	15.58	108.88	74.00	34.88	Peak

Notes: Emission Level = Read Level +Antenna Factor + Cable loss


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 156 of 852

Test Mode: 05; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

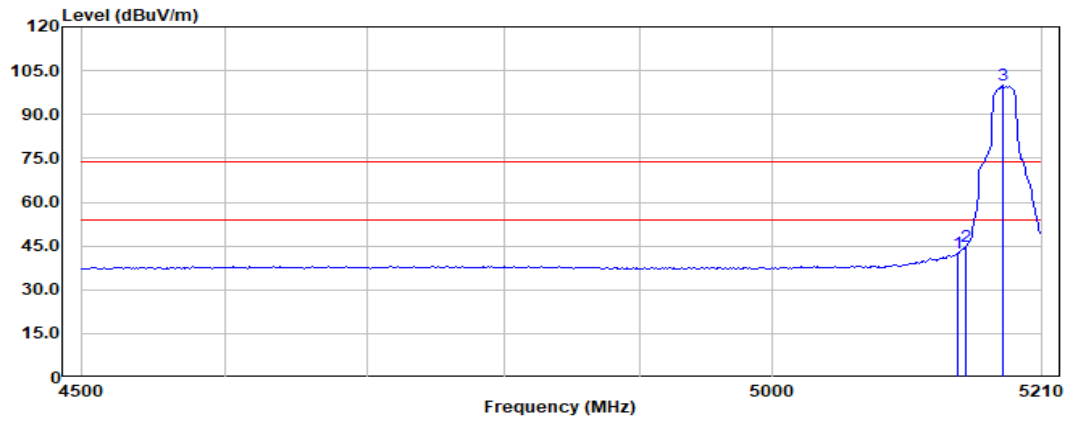

Antenna Polarity :Horizontal

No.	Freq (MHz)	Read level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Emission Level (dBuV)	Limit (dBuV)	Over Limit (dB)	Remark
1	5144.15	45.27	34.31	15.56	42.50	54.00	-11.50	Average
2	5150.00	47.43	34.33	15.56	44.68	54.00	-9.32	Average
3	5179.13	102.52	34.44	15.58	99.92	54.00	45.92	Average

Notes: Emission Level = Read Level +Antenna Factor + Cable loss


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 157 of 852

Test Mode: 05; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

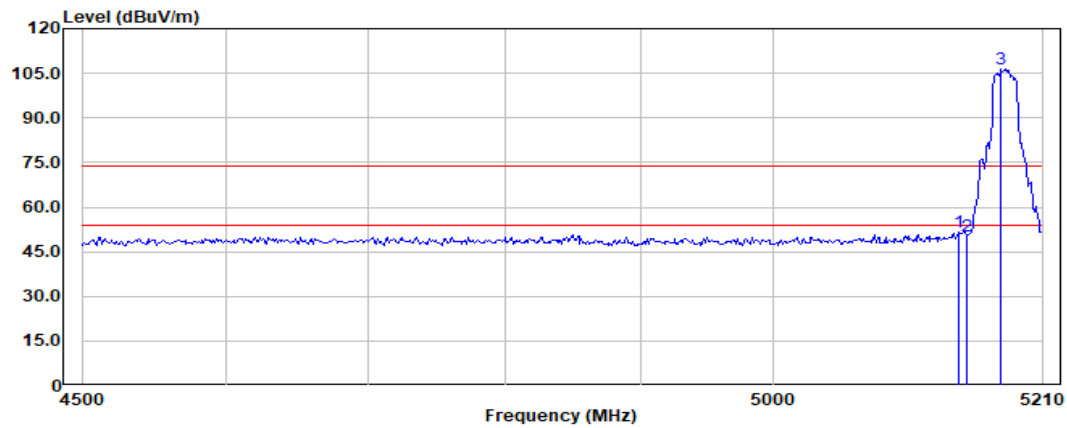

Antenna Polarity :Vertical

No.	Freq (MHz)	Read level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Emission Level (dBuV)	Limit (dBuV)	Over Limit (dB)	Remark
1	5143.12	54.44	34.30	15.56	51.66	74.00	-22.34	Peak
2	5150.00	53.07	34.33	15.56	50.32	74.00	-23.68	Peak
3	5177.07	109.19	34.43	15.58	106.58	74.00	32.58	Peak

Notes: Emission Level = Read Level +Antenna Factor + Cable loss


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 158 of 852

Test Mode: 05; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:40MHz; Channel:Low

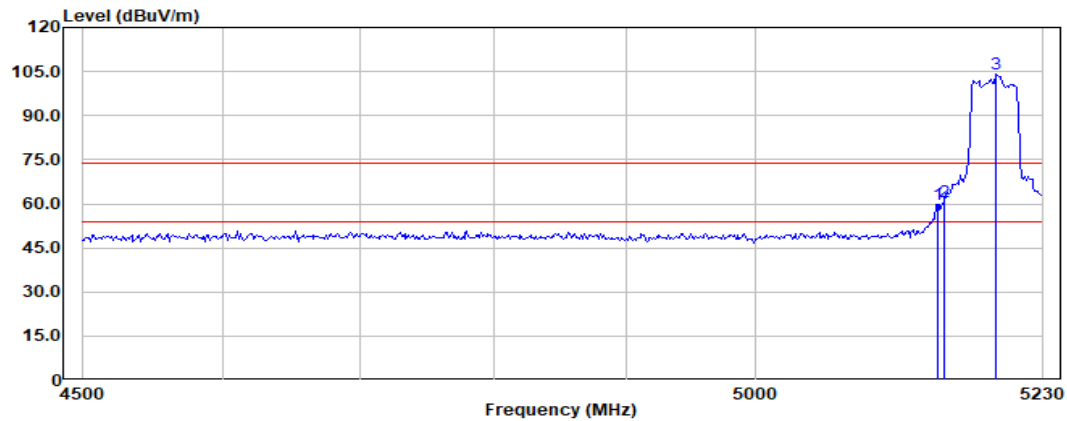

Antenna Polarity :Horizontal

No.	Freq (MHz)	Read level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Emission Level (dBuV)	Limit (dBuV)	Over Limit (dB)	Remark
1	5144.30	62.76	34.31	15.56	59.99	74.00	-14.01	Peak
2	5150.00	63.43	34.33	15.56	60.68	74.00	-13.32	Peak
3	5191.91	106.79	34.49	15.59	104.26	74.00	30.26	Peak

Notes: Emission Level = Read Level +Antenna Factor + Cable loss


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 159 of 852

Test Mode: 05; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:40MHz; Channel:Low

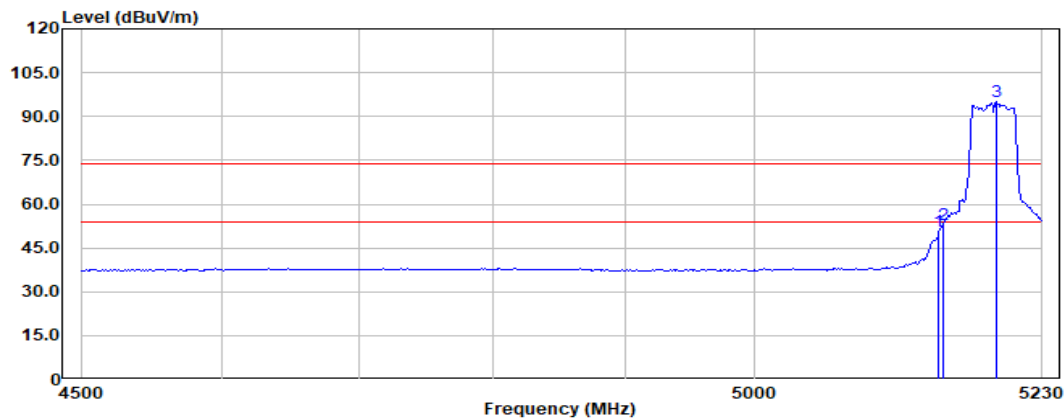

Antenna Polarity :Horizontal

No.	Freq (MHz)	Read level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Emission Level (dBuV)	Limit (dBuV)	Over Limit (dB)	Remark
1	5146.42	53.36	34.32	15.56	50.60	54.00	-3.40	Average
2	5150.00	55.81	34.33	15.56	53.06	54.00	-0.94	Average
3	5192.97	97.44	34.49	15.59	94.91	54.00	40.91	Average

Notes: Emission Level = Read Level +Antenna Factor + Cable loss


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 160 of 852

Test Mode: 05; Polarity: Vertical; Modulation:802.11ac; Bandwidth:40MHz; Channel:Low

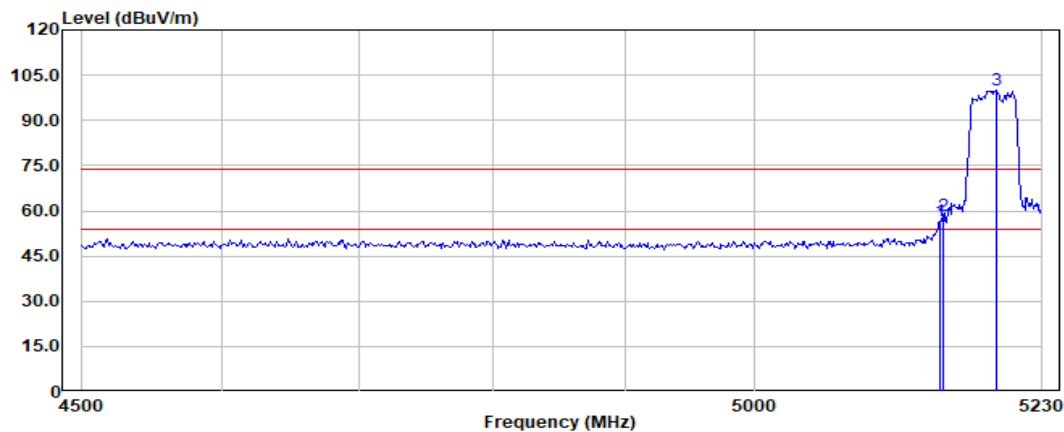

Antenna Polarity :Vertical

No.	Freq (MHz)	Read level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Emission Level (dBuV)	Limit (dBuV)	Over Limit (dB)	Remark
1	5147.48	59.14	34.32	15.56	56.38	74.00	-17.62	Peak
2	5150.00	61.06	34.33	15.56	58.31	74.00	-15.69	Peak
3	5192.97	102.79	34.49	15.59	100.26	74.00	26.26	Peak

Notes: Emission Level = Read Level +Antenna Factor + Cable loss


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 161 of 852

Test Mode: 05; Polarity: Vertical; Modulation:802.11ac; Bandwidth:40MHz; Channel:Low

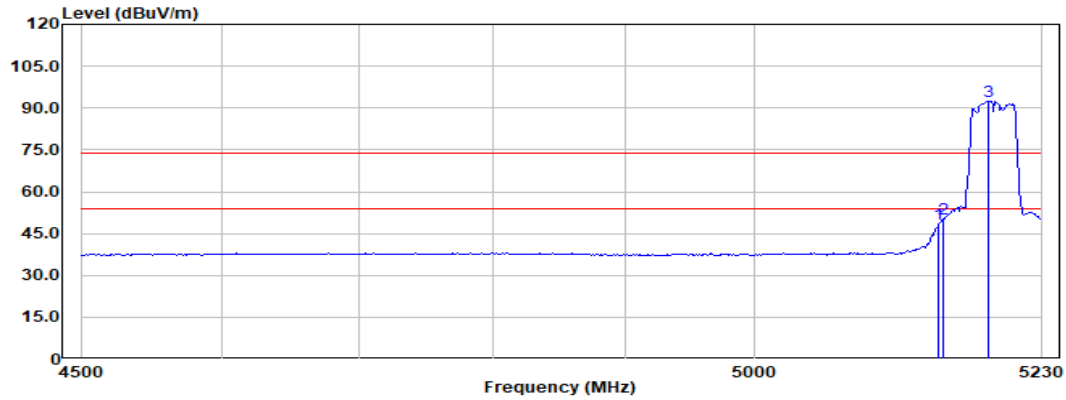

Antenna Polarity :Vertical

No.	Freq (MHz)	Read level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Emission Level (dBuV)	Limit (dBuV)	Over Limit (dB)	Remark
1	5146.42	51.35	34.32	15.56	48.59	54.00	-5.41	Average
2	5150.00	52.99	34.33	15.56	50.24	54.00	-3.76	Average
3	5186.62	95.12	34.47	15.58	92.56	54.00	38.56	Average

Notes: Emission Level = Read Level +Antenna Factor + Cable loss


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 162 of 852

Test Mode: 05; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:80MHz; Channel:Low

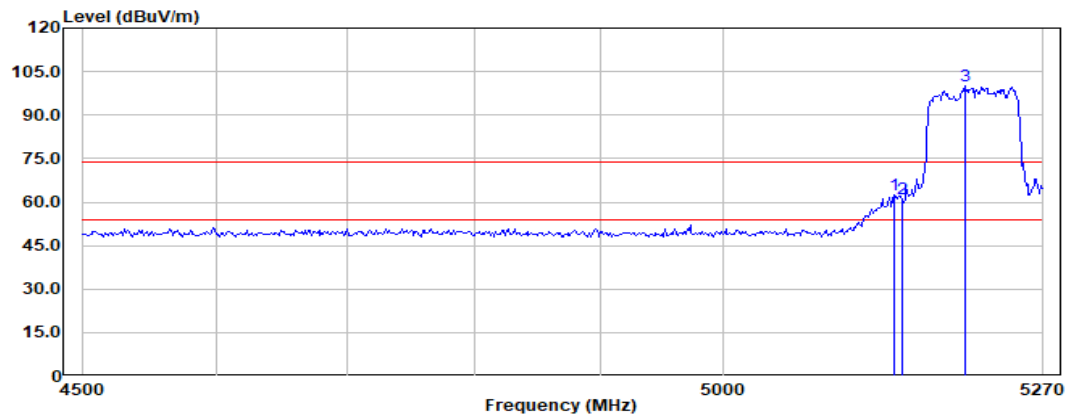

Antenna Polarity :Horizontal

No.	Freq (MHz)	Read level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Emission Level (dBuV)	Limit (dBuV)	Over Limit (dB)	Remark
1	5142.78	65.26	34.30	15.56	62.48	74.00	-11.52	Peak
2	5150.00	64.05	34.33	15.56	61.30	74.00	-12.70	Peak
3	5203.04	102.65	34.52	15.59	100.16	74.00	26.16	Peak

Notes: Emission Level = Read Level +Antenna Factor + Cable loss


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 163 of 852

Test Mode: 05; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:80MHz; Channel:Low

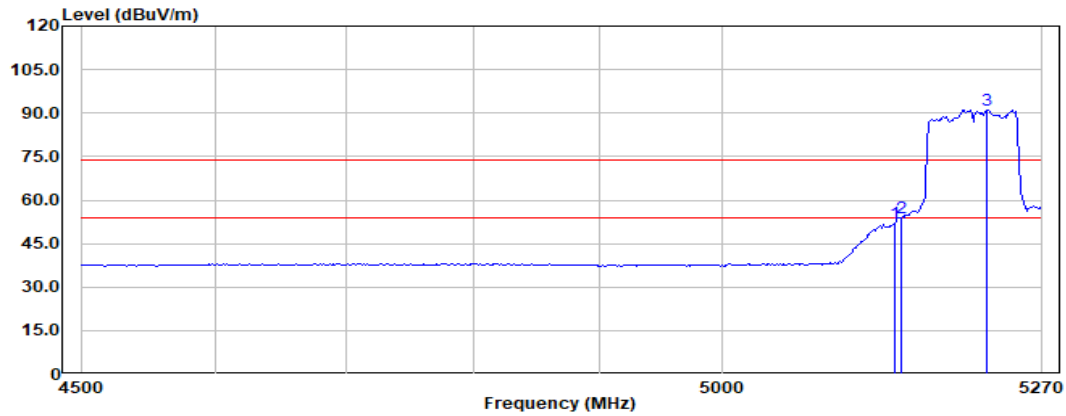

Antenna Polarity :Horizontal

No.	Freq (MHz)	Read level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Emission Level (dBuV)	Limit (dBuV)	Over Limit (dB)	Remark
1	5143.90	54.72	34.31	15.56	51.95	54.00	-2.05	Average
2	5150.00	56.59	34.33	15.56	53.84	54.00	-0.16	Average
3	5222.02	93.61	34.52	15.61	91.15	54.00	37.15	Average

Notes: Emission Level = Read Level +Antenna Factor + Cable loss


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 164 of 852

Test Mode: 05; Polarity: Vertical; Modulation:802.11ac; Bandwidth:80MHz; Channel:Low

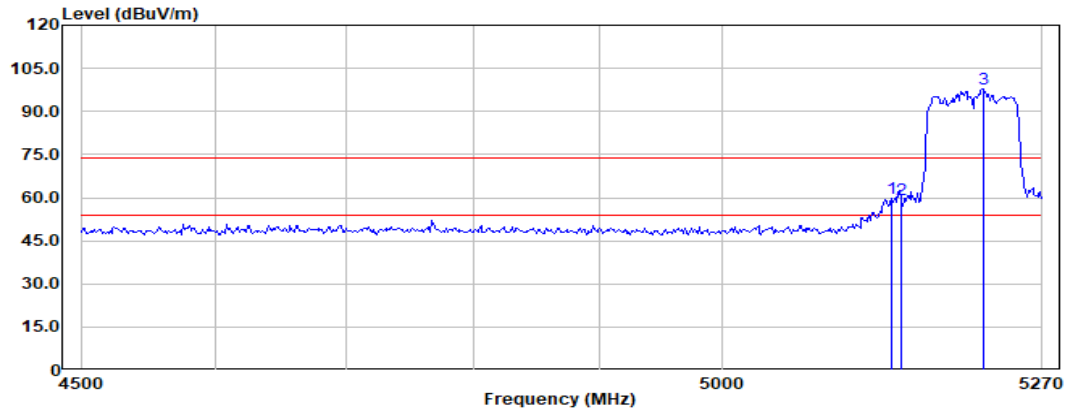

Antenna Polarity :Vertical

No.	Freq (MHz)	Read level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Emission Level (dBuV)	Limit (dBuV)	Over Limit (dB)	Remark
1	5141.67	62.59	34.30	15.56	59.81	74.00	-14.19	Peak
2	5150.00	62.11	34.33	15.56	59.36	74.00	-14.64	Peak
3	5219.78	100.25	34.52	15.60	97.78	74.00	23.78	Peak

Notes: Emission Level = Read Level +Antenna Factor + Cable loss


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 165 of 852

Test Mode: 05; Polarity: Vertical; Modulation:802.11ac; Bandwidth:80MHz; Channel:Low

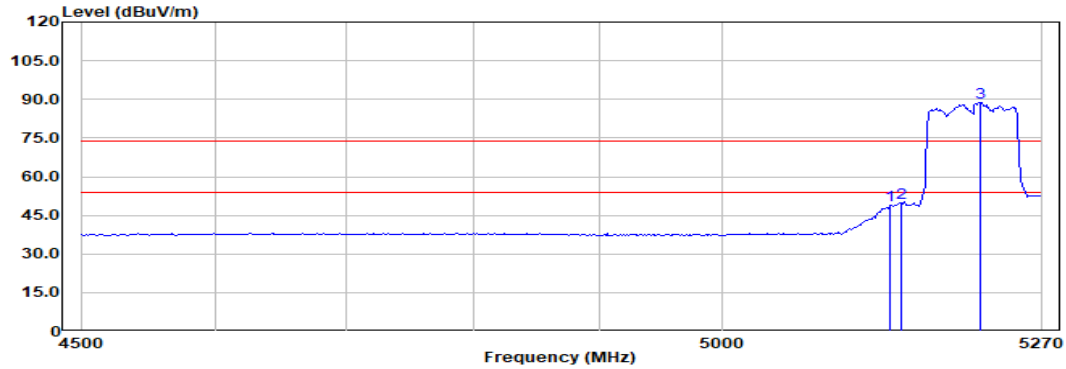

Antenna Polarity :Vertical

No.	Freq (MHz)	Read level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Emission Level (dBuV)	Limit (dBuV)	Over Limit (dB)	Remark
1	5139.44	51.50	34.29	15.55	48.70	54.00	-5.30	Average
2	5150.00	52.56	34.33	15.56	49.81	54.00	-4.19	Average
3	5216.44	91.32	34.52	15.60	88.85	54.00	34.85	Average

Notes: Emission Level = Read Level +Antenna Factor + Cable loss


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 166 of 852

Test Mode: 06; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

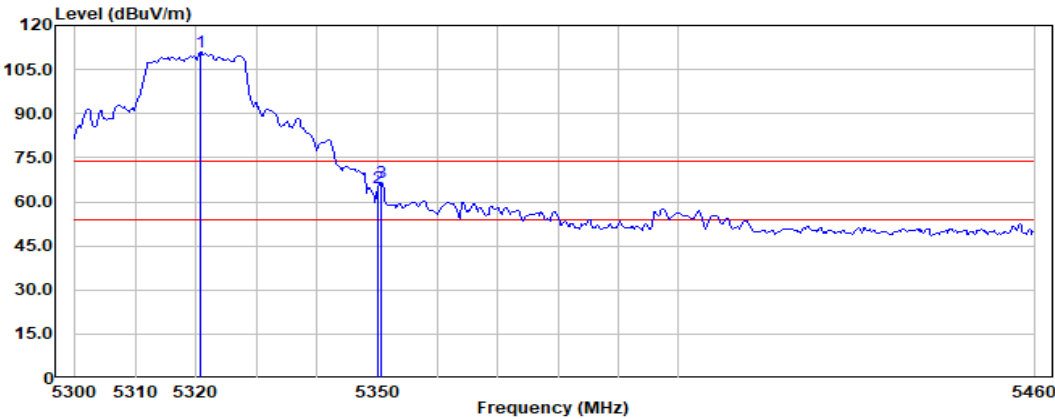

Antenna Polarity :Horizontal

No.	Freq (MHz)	Read level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Emission Level (dBuV)	Limit (dBuV)	Over Limit (dB)	Remark
1	5320.64	113.13	34.47	15.67	110.74	74.00	36.74	Peak
2	5350.00	66.99	34.41	15.69	64.58	74.00	-9.42	Peak
3	5350.55	68.94	34.41	15.69	66.53	74.00	-7.47	Peak

Notes: Emission Level = Read Level +Antenna Factor + Cable loss


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 167 of 852

Test Mode: 06; Polarity: Horizontal; Modulation: 802.11a; Bandwidth: 20MHz; Channel: High

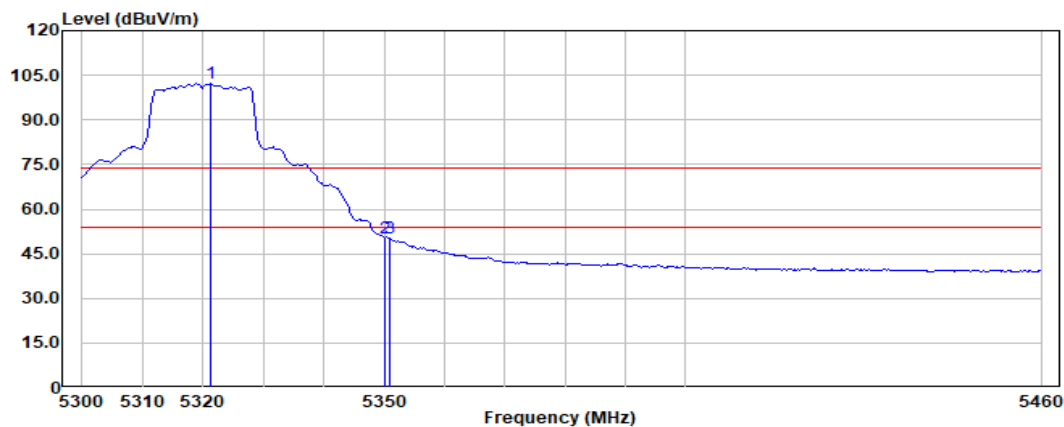

Antenna Polarity :Horizontal

No.	Freq (MHz)	Read level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Emission Level (dBuV)	Limit (dBuV)	Over Limit (dB)	Remark
1	5321.33	104.64	34.47	15.67	102.25	54.00	48.25	Average
2	5350.00	52.89	34.41	15.69	50.48	54.00	-3.52	Average
3	5350.78	52.83	34.41	15.69	50.42	54.00	-3.58	Average

Notes: Emission Level = Read Level +Antenna Factor + Cable loss


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 168 of 852

Test Mode: 06; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

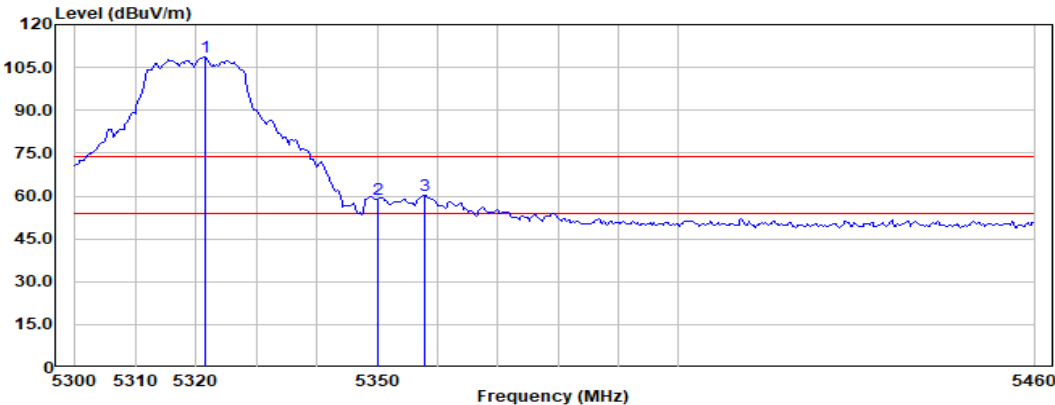

Antenna Polarity :Vertical

No.	Freq (MHz)	Read level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Emission Level (dBuV)	Limit (dBuV)	Over Limit (dB)	Remark
1	5321.57	111.00	34.47	15.67	108.61	74.00	34.61	Peak
2	5350.00	61.48	34.41	15.69	59.07	74.00	-14.93	Peak
3	5357.74	62.53	34.39	15.69	60.11	74.00	-13.89	Peak

Notes: Emission Level = Read Level +Antenna Factor + Cable loss


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 169 of 852

Test Mode: 06; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

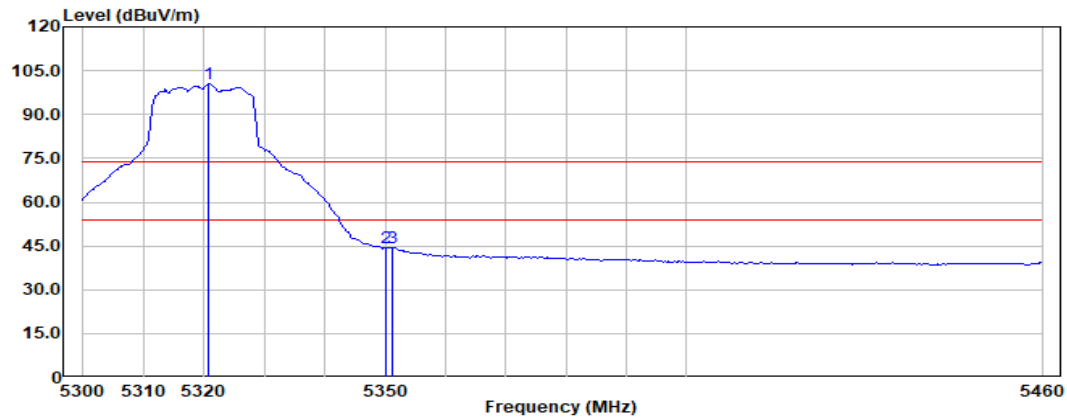

Antenna Polarity :Vertical

No.	Freq (MHz)	Read level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Emission Level (dBuV)	Limit (dBuV)	Over Limit (dB)	Remark
1	5320.64	102.87	34.47	15.67	100.48	54.00	46.48	Average
2	5350.00	46.98	34.41	15.69	44.57	54.00	-9.43	Average
3	5351.25	46.77	34.41	15.69	44.36	54.00	-9.64	Average

Notes: Emission Level = Read Level +Antenna Factor + Cable loss


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 170 of 852

Test Mode: 06; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:High

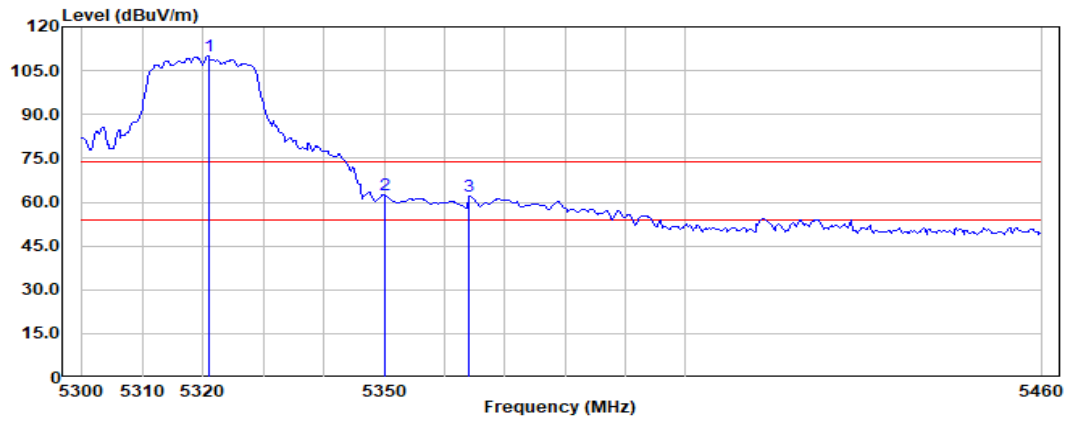

Antenna Polarity :Horizontal

No.	Freq (MHz)	Read level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Emission Level (dBuV)	Limit (dBuV)	Over Limit (dB)	Remark
1	5320.87	112.55	34.47	15.67	110.16	74.00	36.16	Peak
2	5350.00	64.89	34.41	15.69	62.48	74.00	-11.52	Peak
3	5364.00	64.39	34.38	15.70	61.97	74.00	-12.03	Peak

Notes: Emission Level = Read Level +Antenna Factor + Cable loss


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 171 of 852

Test Mode: 06; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:High

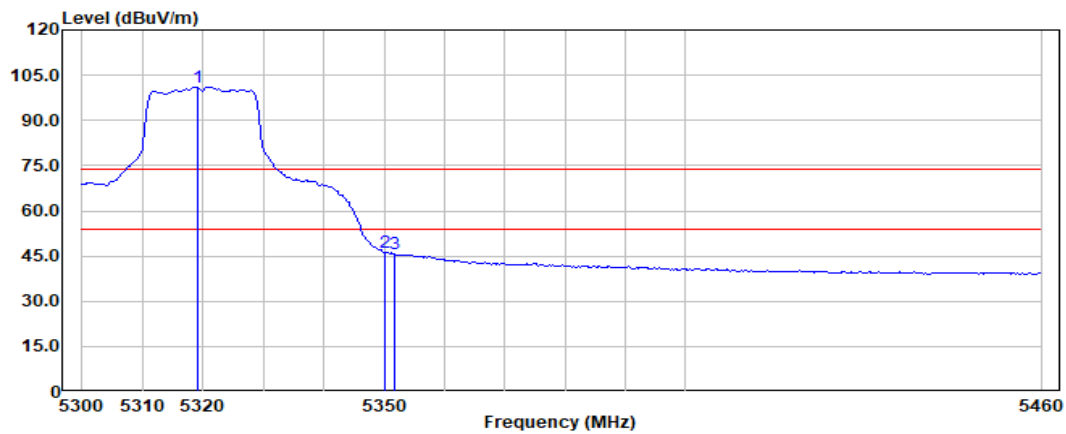

Antenna Polarity :Horizontal

No.	Freq (MHz)	Read level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Emission Level (dBuV)	Limit (dBuV)	Over Limit (dB)	Remark
1	5319.25	103.59	34.47	15.67	101.20	54.00	47.20	Average
2	5350.00	48.58	34.41	15.69	46.17	54.00	-7.83	Average
3	5351.71	48.01	34.41	15.69	45.60	54.00	-8.40	Average

Notes: Emission Level = Read Level +Antenna Factor + Cable loss


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 172 of 852

Test Mode: 06; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:High

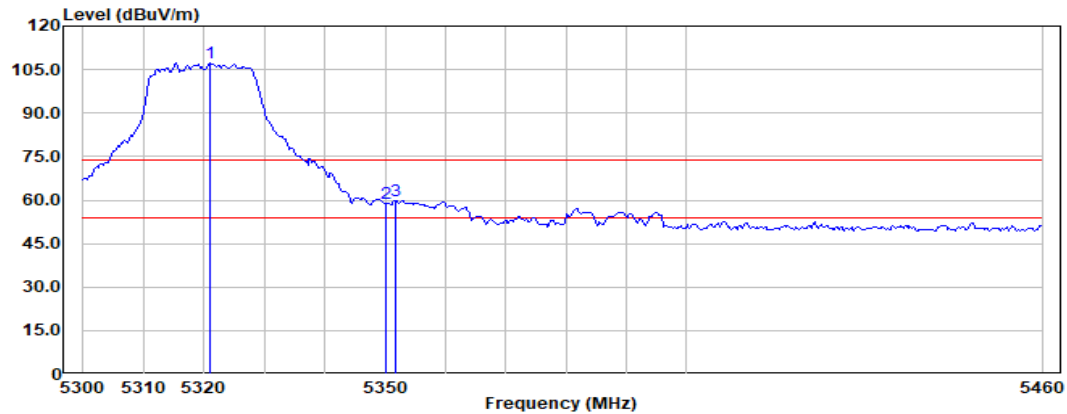

Antenna Polarity :Vertical

No.	Freq (MHz)	Read level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Emission Level (dBuV)	Limit (dBuV)	Over Limit (dB)	Remark
1	5320.87	109.58	34.47	15.67	107.19	74.00	33.19	Peak
2	5350.00	61.23	34.41	15.69	58.82	74.00	-15.18	Peak
3	5351.71	62.30	34.41	15.69	59.89	74.00	-14.11	Peak

Notes: Emission Level = Read Level +Antenna Factor + Cable loss


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 173 of 852

Test Mode: 06; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:High

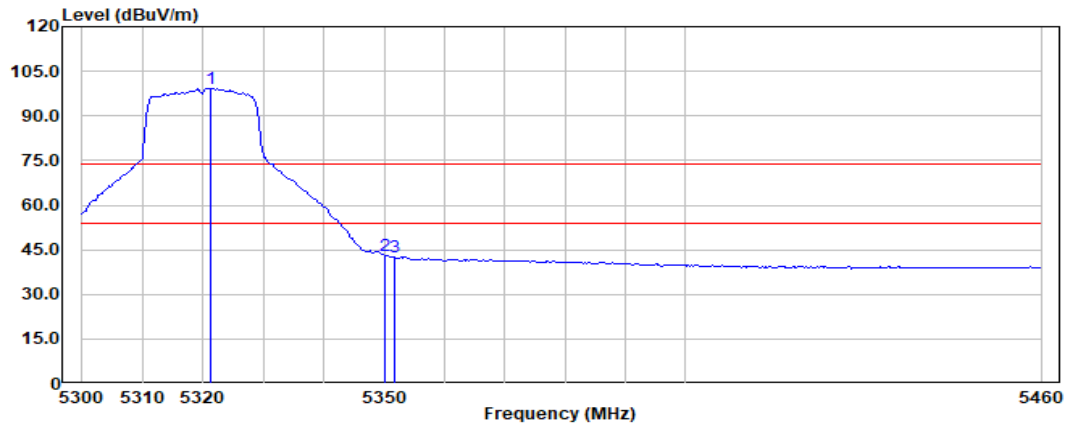

Antenna Polarity :Vertical

No.	Freq (MHz)	Read level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Emission Level (dBuV)	Limit (dBuV)	Over Limit (dB)	Remark
1	5321.33	101.75	34.47	15.67	99.36	54.00	45.36	Average
2	5350.00	45.43	34.41	15.69	43.02	54.00	-10.98	Average
3	5351.71	44.98	34.41	15.69	42.57	54.00	-11.43	Average

Notes: Emission Level = Read Level +Antenna Factor + Cable loss


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 174 of 852

Test Mode:

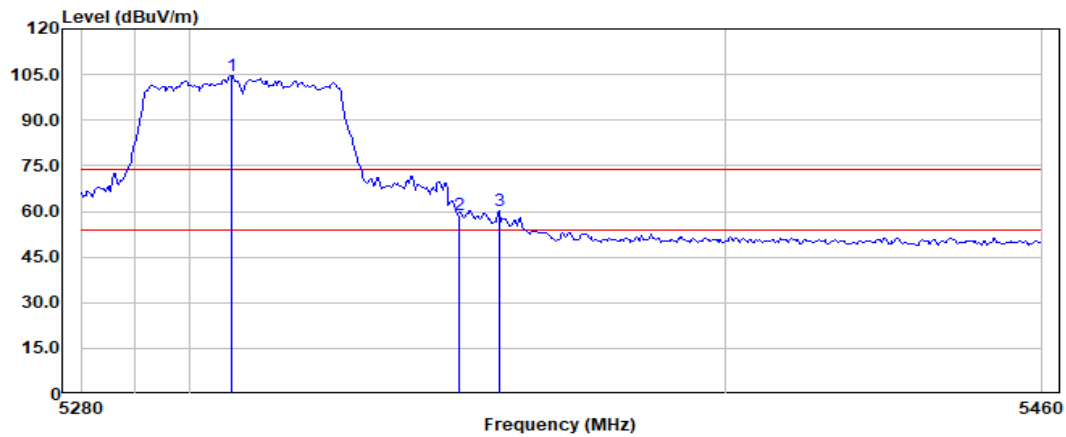

Antenna Polarity :Horizontal

No.	Freq (MHz)	Read level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Emission Level (dBuV)	Limit (dBuV)	Over Limit (dB)	Remark
1	5307.65	107.14	34.49	15.66	104.76	74.00	30.76	Peak
2	5350.00	61.30	34.41	15.69	58.89	74.00	-15.11	Peak
3	5357.48	62.86	34.40	15.69	60.45	74.00	-13.55	Peak

Notes: Emission Level = Read Level +Antenna Factor + Cable loss


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 175 of 852

Test Mode:

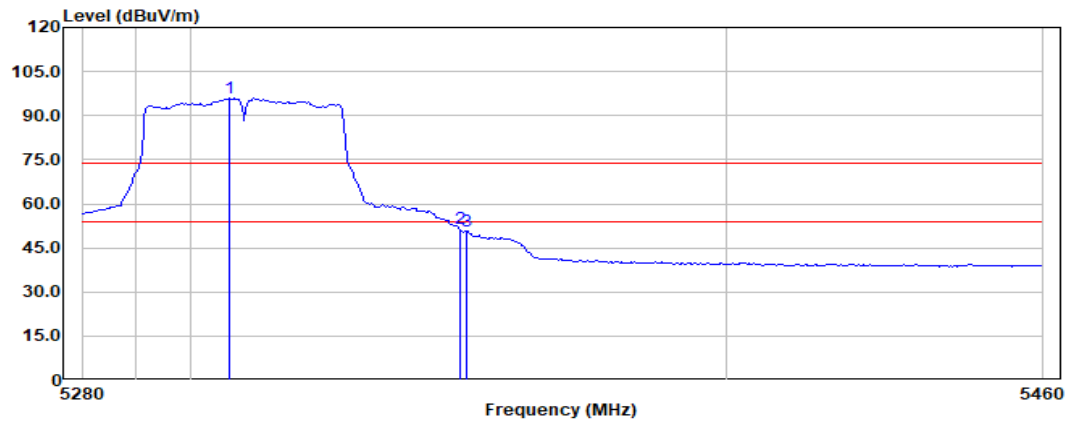

Antenna Polarity :Horizontal

No.	Freq (MHz)	Read level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Emission Level (dBuV)	Limit (dBuV)	Over Limit (dB)	Remark
1	5307.13	98.33	34.50	15.66	95.95	54.00	41.95	Average
2	5350.00	53.87	34.41	15.69	51.46	54.00	-2.54	Average
3	5351.22	53.20	34.41	15.69	50.79	54.00	-3.21	Average

Notes: Emission Level = Read Level +Antenna Factor + Cable loss


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 176 of 852

Test Mode:

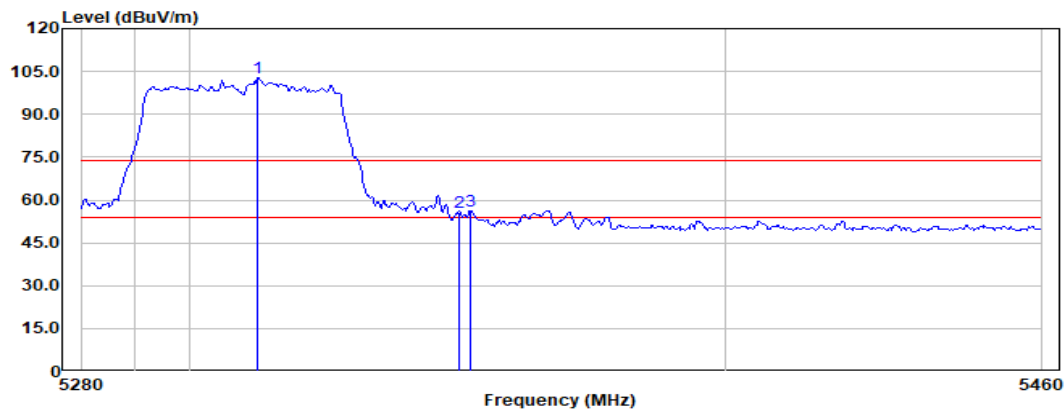

Antenna Polarity :Vertical

No.	Freq (MHz)	Read level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Emission Level (dBuV)	Limit (dBuV)	Over Limit (dB)	Remark
1	5312.61	105.12	34.48	15.66	102.73	74.00	28.73	Peak
2	5350.00	58.02	34.41	15.69	55.61	74.00	-18.39	Peak
3	5352.26	58.76	34.41	15.69	56.35	74.00	-17.65	Peak

Notes: Emission Level = Read Level +Antenna Factor + Cable loss


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 177 of 852

Test Mode:

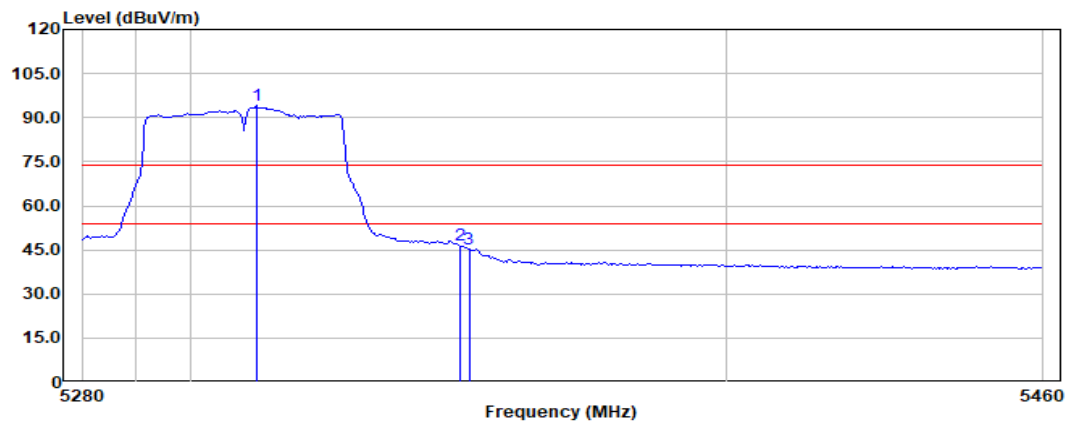

Antenna Polarity :Vertical

No.	Freq (MHz)	Read level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Emission Level (dBuV)	Limit (dBuV)	Over Limit (dB)	Remark
1	5312.35	96.35	34.49	15.66	93.97	54.00	39.97	Average
2	5350.00	49.06	34.41	15.69	46.65	54.00	-7.35	Average
3	5351.74	47.71	34.41	15.69	45.30	54.00	-8.70	Average

Notes: Emission Level = Read Level +Antenna Factor + Cable loss


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 178 of 852

Test Mode:

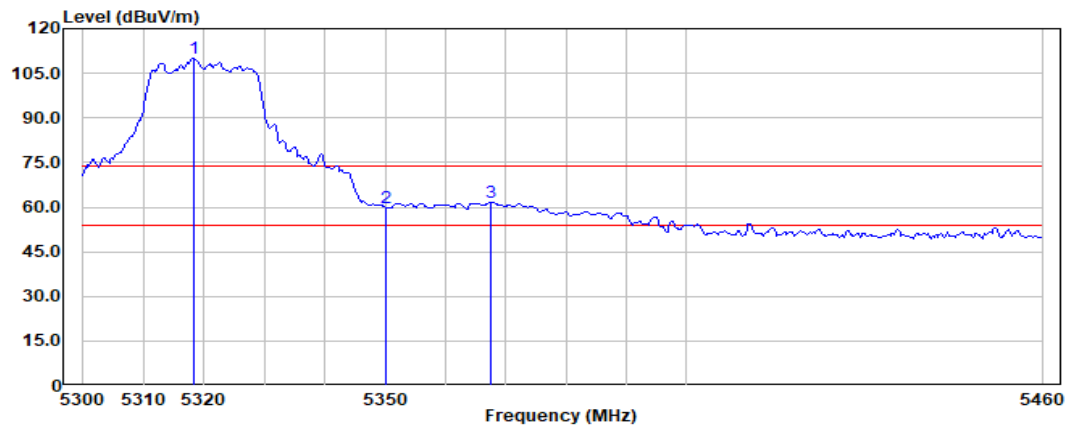

Antenna Polarity :Horizontal

No.	Freq (MHz)	Read level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Emission Level (dBuV)	Limit (dBuV)	Over Limit (dB)	Remark
1	5318.32	112.26	34.47	15.67	109.87	74.00	35.87	Peak
2	5350.00	62.39	34.41	15.69	59.98	74.00	-14.02	Peak
3	5367.48	64.07	34.38	15.70	61.65	74.00	-12.35	Peak

Notes: Emission Level = Read Level +Antenna Factor + Cable loss


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 179 of 852

Test Mode:

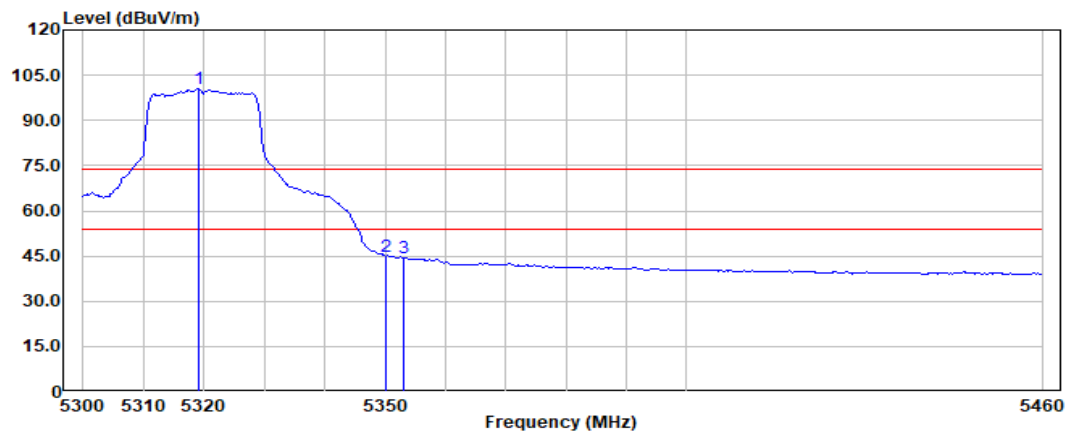

Antenna Polarity :Horizontal

No.	Freq (MHz)	Read level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Emission Level (dBuV)	Limit (dBuV)	Over Limit (dB)	Remark
1	5319.02	102.79	34.47	15.67	100.40	54.00	46.40	Average
2	5350.00	47.33	34.41	15.69	44.92	54.00	-9.08	Average
3	5353.10	46.94	34.40	15.69	44.52	54.00	-9.48	Average

Notes: Emission Level = Read Level +Antenna Factor + Cable loss


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 180 of 852

Test Mode:

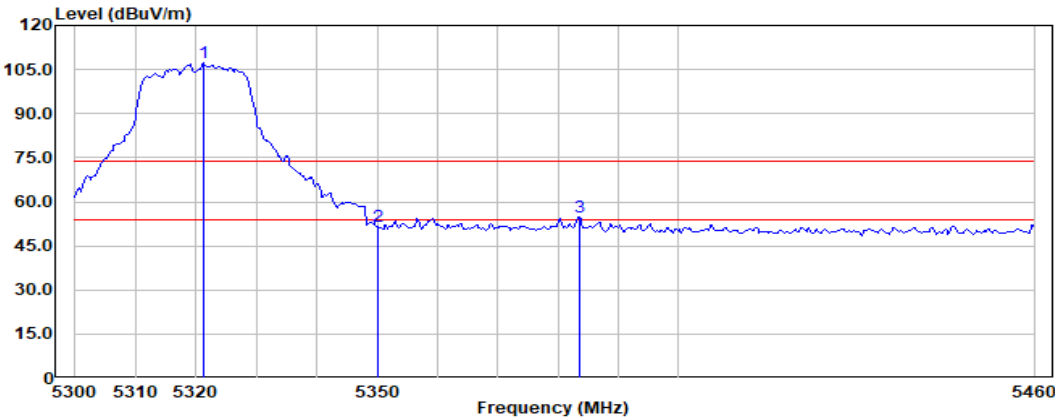

Antenna Polarity :Vertical

No.	Freq (MHz)	Read level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Emission Level (dBuV)	Limit (dBuV)	Over Limit (dB)	Remark
1	5321.33	109.55	34.47	15.67	107.16	74.00	33.16	Peak
2	5350.00	54.17	34.41	15.69	51.76	74.00	-22.24	Peak
3	5383.48	57.14	34.34	15.71	54.70	74.00	-19.30	Peak

Notes: Emission Level = Read Level +Antenna Factor + Cable loss


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 181 of 852

Test Mode:

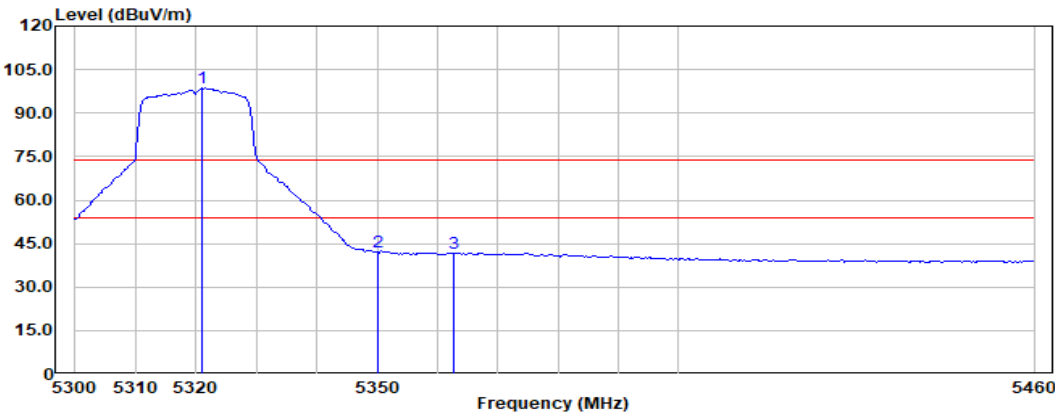

Antenna Polarity :Vertical

No.	Freq (MHz)	Read level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Emission Level (dBuV)	Limit (dBuV)	Over Limit (dB)	Remark
1	5320.87	101.00	34.47	15.67	98.61	54.00	44.61	Average
2	5350.00	44.33	34.41	15.69	41.92	54.00	-12.08	Average
3	5362.61	44.25	34.38	15.70	41.83	54.00	-12.17	Average

Notes: Emission Level = Read Level +Antenna Factor + Cable loss


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 182 of 852

Test Mode: 06; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:40MHz; Channel:High

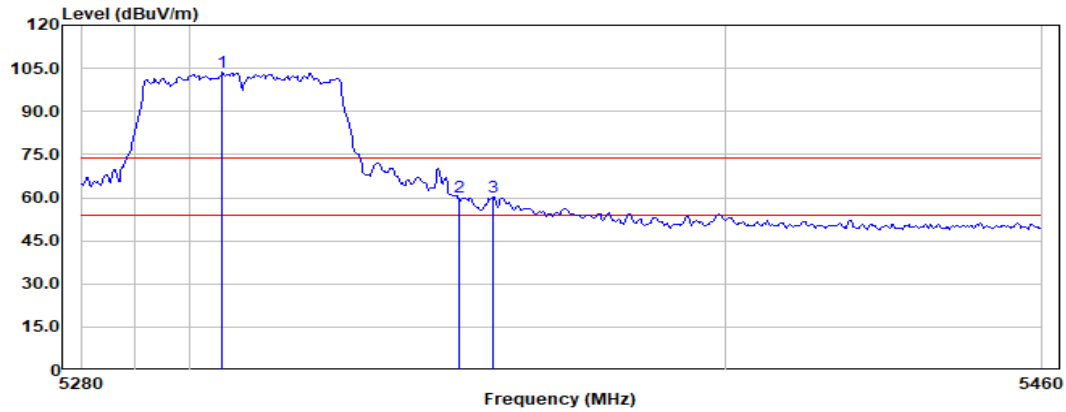

Antenna Polarity :Horizontal

No.	Freq (MHz)	Read level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Emission Level (dBuV)	Limit (dBuV)	Over Limit (dB)	Remark
1	5306.09	106.02	34.50	15.66	103.64	74.00	29.64	Peak
2	5350.00	62.79	34.41	15.69	60.38	74.00	-13.62	Peak
3	5356.44	62.70	34.40	15.69	60.29	74.00	-13.71	Peak

Notes: Emission Level = Read Level +Antenna Factor + Cable loss


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 183 of 852

Test Mode: 06; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:40MHz; Channel:High

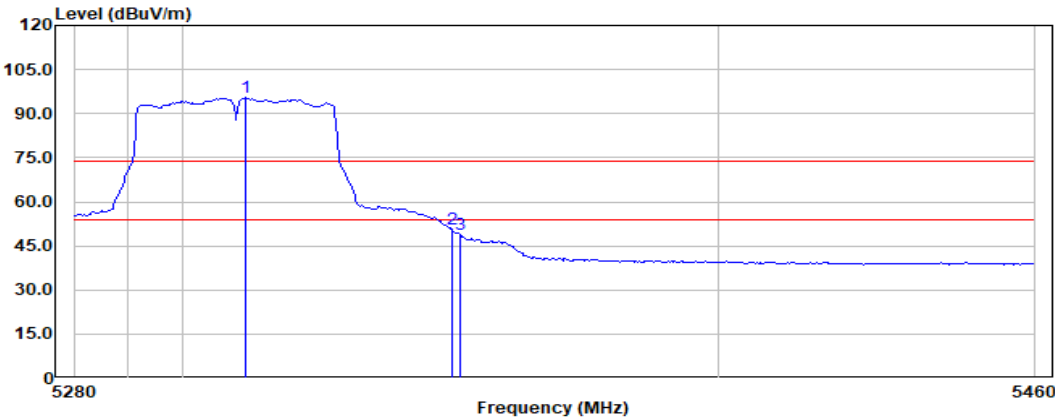

Antenna Polarity :Horizontal

No.	Freq (MHz)	Read level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Emission Level (dBuV)	Limit (dBuV)	Over Limit (dB)	Remark
1	5311.57	97.87	34.49	15.66	95.49	54.00	41.49	Average
2	5350.00	53.11	34.41	15.69	50.70	54.00	-3.30	Average
3	5351.48	51.20	34.41	15.69	48.79	54.00	-5.21	Average

Notes: Emission Level = Read Level +Antenna Factor + Cable loss


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 184 of 852

Test Mode: 06; Polarity: Vertical; Modulation:802.11ac; Bandwidth:40MHz; Channel:High

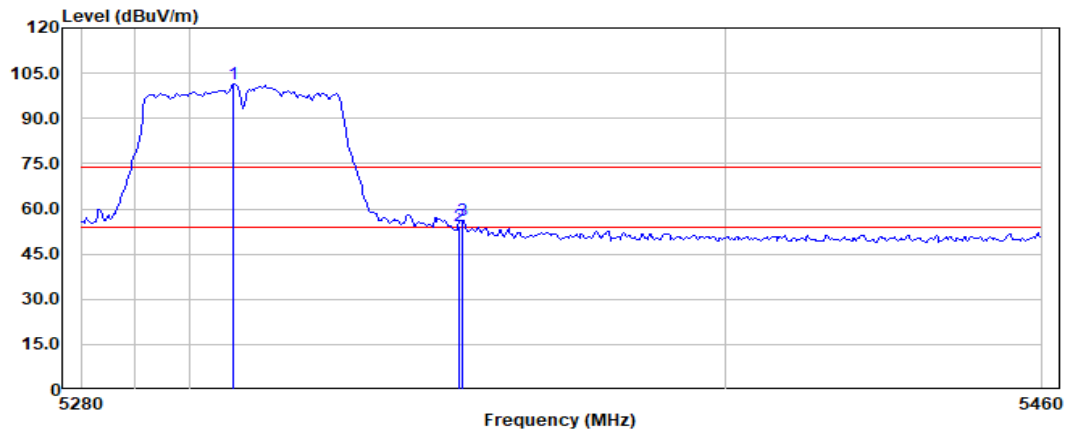

Antenna Polarity :Vertical

No.	Freq (MHz)	Read level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Emission Level (dBuV)	Limit (dBuV)	Over Limit (dB)	Remark
1	5308.17	103.87	34.49	15.66	101.49	74.00	27.49	Peak
2	5350.00	56.68	34.41	15.69	54.27	74.00	-19.73	Peak
3	5350.70	58.70	34.41	15.69	56.29	74.00	-17.71	Peak

Notes: Emission Level = Read Level +Antenna Factor + Cable loss


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 185 of 852

Test Mode: 06; Polarity: Vertical; Modulation:802.11ac; Bandwidth:40MHz; Channel:High

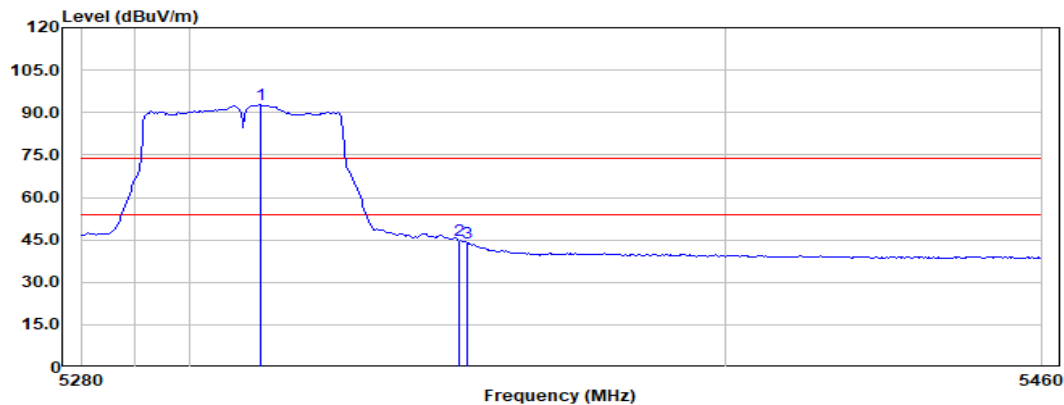

Antenna Polarity :Vertical

No.	Freq (MHz)	Read level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Emission Level (dBuV)	Limit (dBuV)	Over Limit (dB)	Remark
1	5313.13	95.31	34.48	15.66	92.92	54.00	38.92	Average
2	5350.00	47.28	34.41	15.69	44.87	54.00	-9.13	Average
3	5351.48	46.49	34.41	15.69	44.08	54.00	-9.92	Average

Notes: Emission Level = Read Level +Antenna Factor + Cable loss


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 186 of 852

Test Mode: 06; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:80MHz; Channel:High

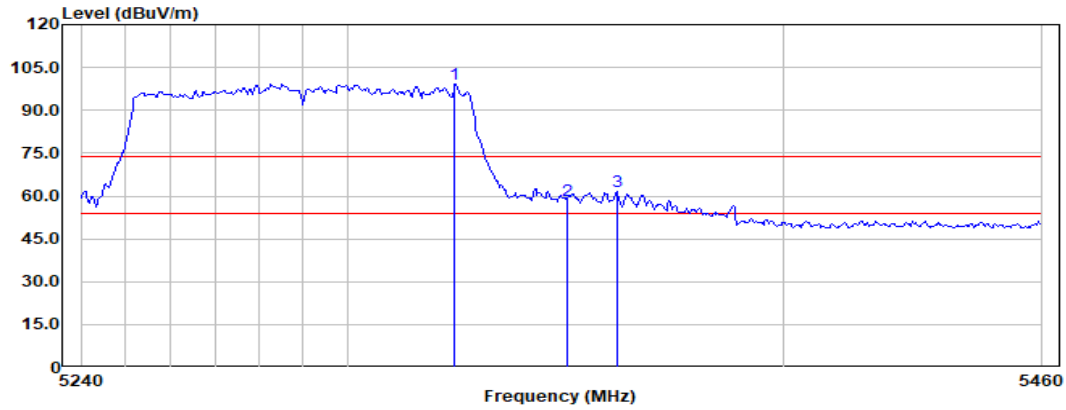

Antenna Polarity :Horizontal

No.	Freq (MHz)	Read level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Emission Level (dBuV)	Limit (dBuV)	Over Limit (dB)	Remark
1	5324.49	101.51	34.46	15.67	99.12	74.00	25.12	Peak
2	5350.00	60.60	34.41	15.69	58.19	74.00	-15.81	Peak
3	5361.48	63.86	34.39	15.69	61.44	74.00	-12.56	Peak

Notes: Emission Level = Read Level +Antenna Factor + Cable loss


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 187 of 852

Test Mode: 06; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:80MHz; Channel:High

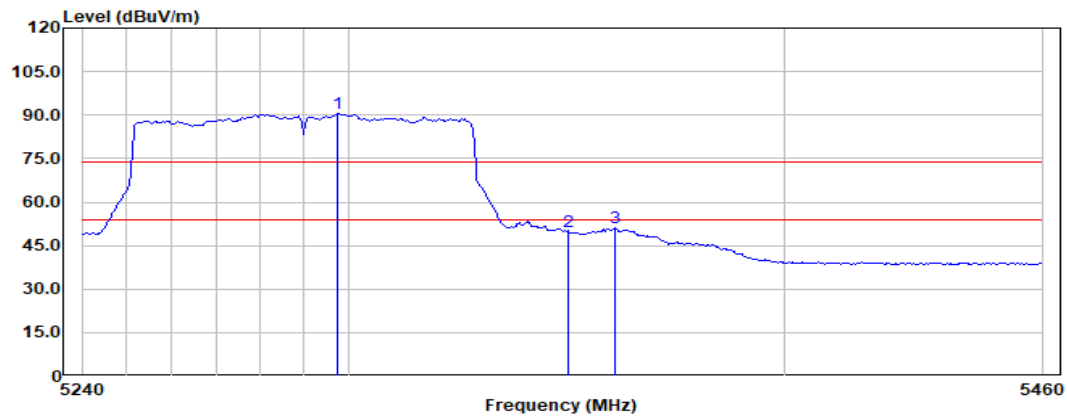

Antenna Polarity :Horizontal

No.	Freq (MHz)	Read level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Emission Level (dBuV)	Limit (dBuV)	Over Limit (dB)	Remark
1	5297.71	93.09	34.51	15.65	90.71	54.00	36.71	Average
2	5350.00	52.33	34.41	15.69	49.92	54.00	-4.08	Average
3	5360.84	53.37	34.39	15.69	50.95	54.00	-3.05	Average

Notes: Emission Level = Read Level +Antenna Factor + Cable loss


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 188 of 852

Test Mode: 06; Polarity: Vertical; Modulation:802.11ac; Bandwidth:80MHz; Channel:High

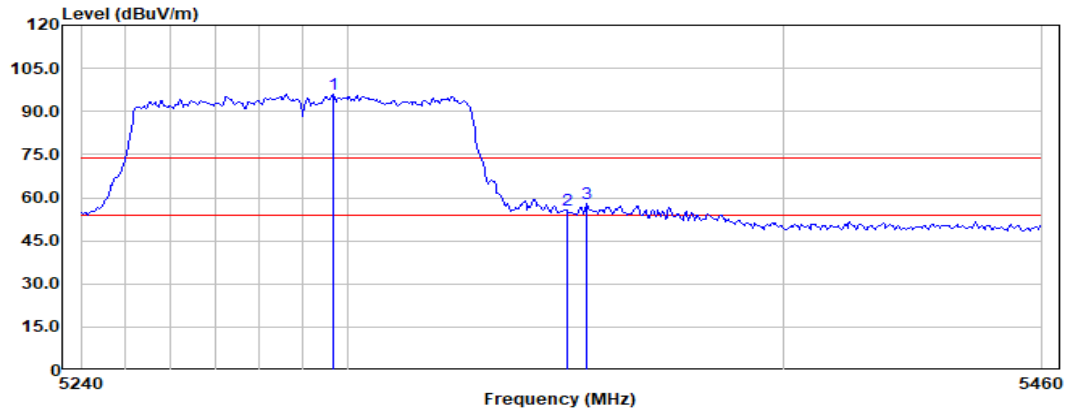

Antenna Polarity :Vertical

No.	Freq (MHz)	Read level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Emission Level (dBuV)	Limit (dBuV)	Over Limit (dB)	Remark
1	5296.75	98.37	34.51	15.65	95.99	74.00	21.99	Peak
2	5350.00	58.04	34.41	15.69	55.63	74.00	-18.37	Peak
3	5354.46	60.56	34.40	15.69	58.15	74.00	-15.85	Peak

Notes: Emission Level = Read Level +Antenna Factor + Cable loss


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 189 of 852

Test Mode: 06; Polarity: Vertical; Modulation:802.11ac; Bandwidth:80MHz; Channel:High

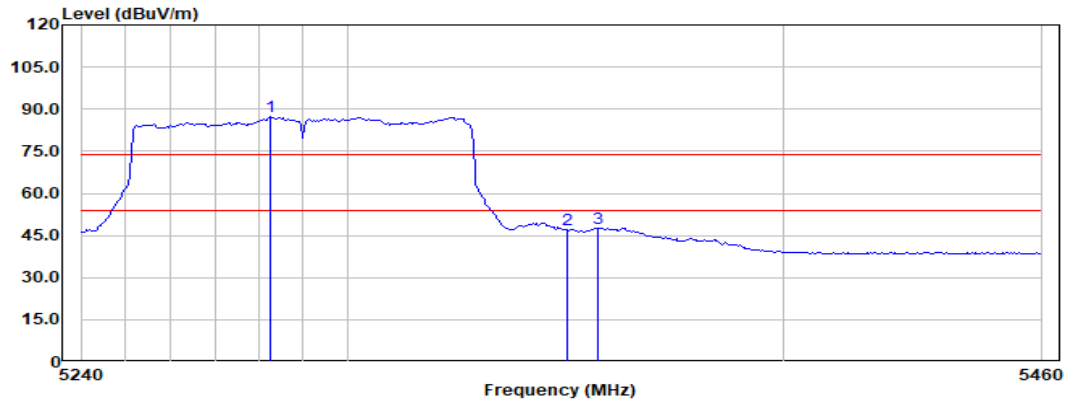

Antenna Polarity :Vertical

No.	Freq (MHz)	Read level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Emission Level (dBuV)	Limit (dBuV)	Over Limit (dB)	Remark
1	5282.73	89.57	34.51	15.64	87.17	54.00	33.17	Average
2	5350.00	49.61	34.41	15.69	47.20	54.00	-6.80	Average
3	5357.33	50.15	34.40	15.69	47.74	54.00	-6.26	Average

Notes: Emission Level = Read Level +Antenna Factor + Cable loss


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 190 of 852

Test Mode: 07; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

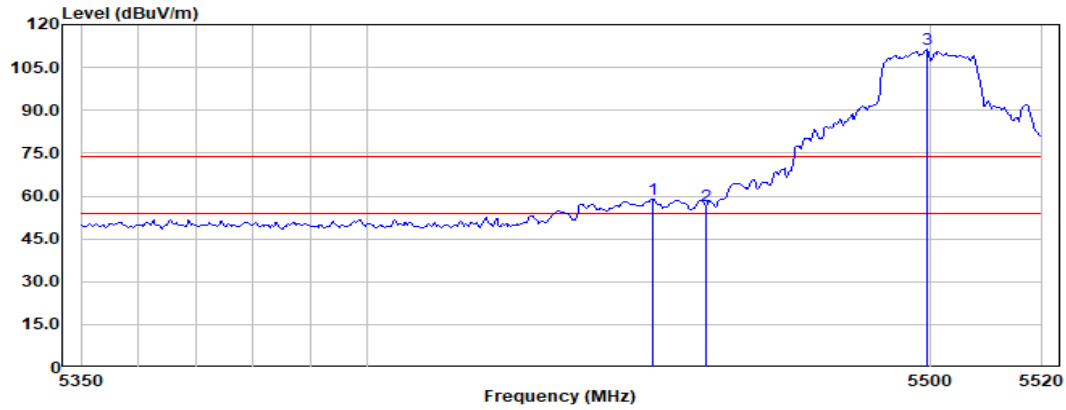

Antenna Polarity :Horizontal

No.	Freq (MHz)	Read level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Emission Level (dBuV)	Limit (dBuV)	Over Limit (dB)	Remark
1	5450.52	61.44	34.26	15.75	59.01	74.00	-14.99	Peak
2	5460.00	58.83	34.26	15.76	56.41	74.00	-17.59	Peak
3	5499.30	113.77	34.22	15.78	111.36	74.00	37.36	Peak

Notes: Emission Level = Read Level +Antenna Factor + Cable loss


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 191 of 852

Test Mode: 07; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

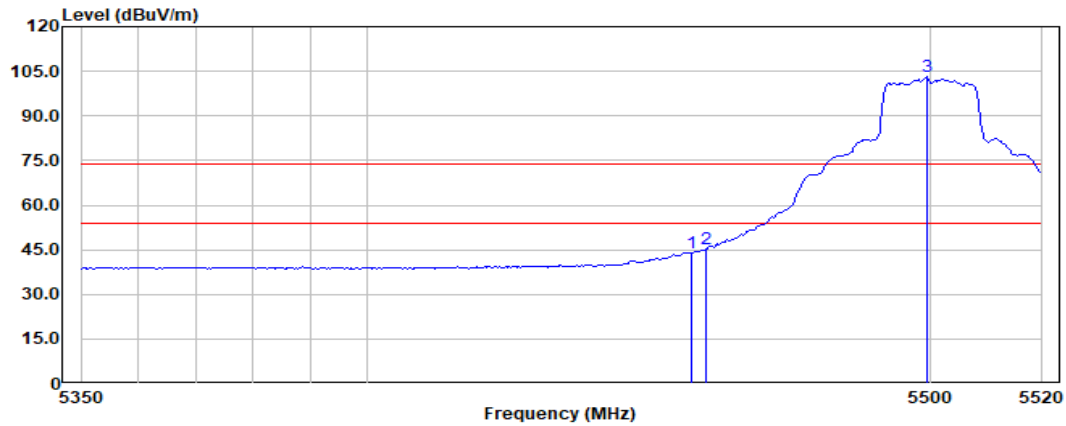

Antenna Polarity :Horizontal

No.	Freq (MHz)	Read level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Emission Level (dBuV)	Limit (dBuV)	Over Limit (dB)	Remark
1	5457.42	46.51	34.26	15.76	44.09	54.00	-9.91	Average
2	5460.00	47.78	34.26	15.76	45.36	54.00	-8.64	Average
3	5499.55	105.51	34.22	15.78	103.10	54.00	49.10	Average

Notes: Emission Level = Read Level +Antenna Factor + Cable loss


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 192 of 852

Test Mode: 07; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

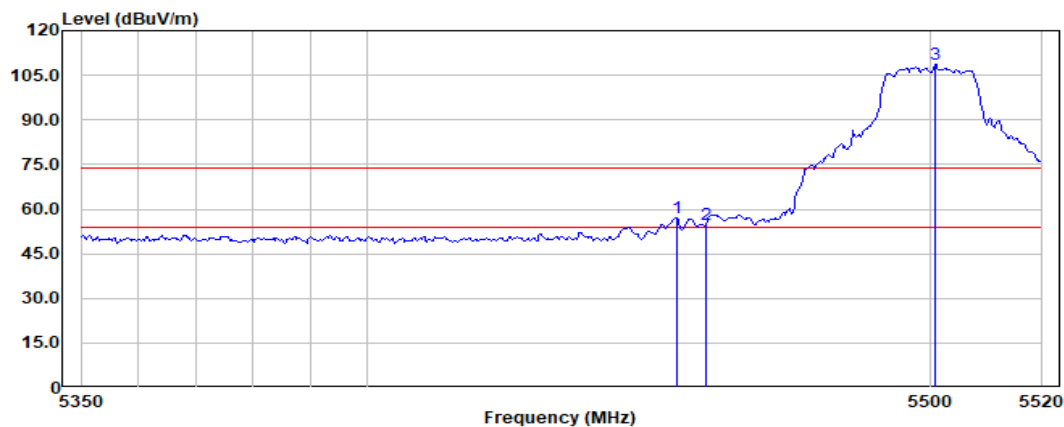

Antenna Polarity :Vertical

No.	Freq (MHz)	Read level (dBUV)	Antenna Factor (dB)	Cable Loss (dB)	Emission Level (dBUV)	Limit (dBUV)	Over Limit (dB)	Remark
1	5454.71	59.40	34.26	15.75	56.97	74.00	-17.03	Peak
2	5460.00	57.25	34.26	15.76	54.83	74.00	-19.17	Peak
3	5500.78	110.93	34.22	15.78	108.52	74.00	34.52	Peak

Notes: Emission Level = Read Level +Antenna Factor + Cable loss


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 193 of 852

Test Mode: 07; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

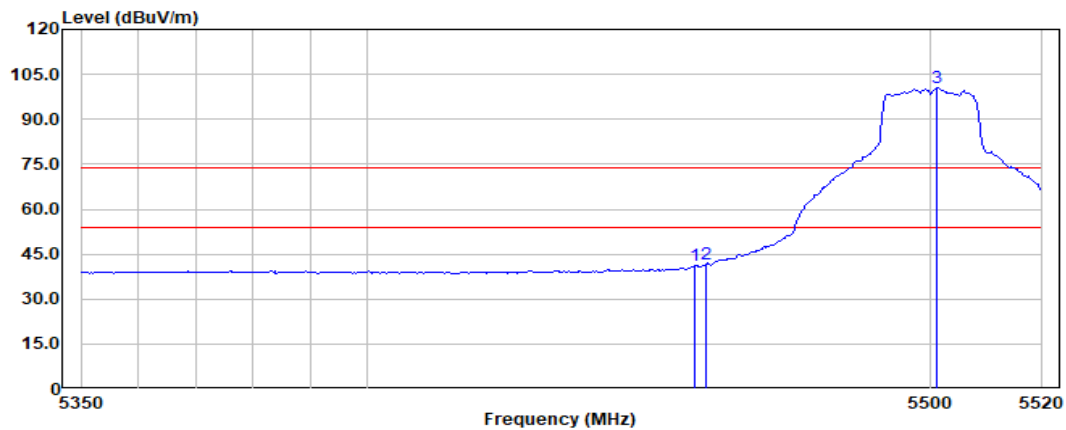

Antenna Polarity :Vertical

No.	Freq (MHz)	Read level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Emission Level (dBuV)	Limit (dBuV)	Over Limit (dB)	Remark
1	5457.91	43.48	34.26	15.76	41.06	54.00	-12.94	Average
2	5460.00	43.89	34.26	15.76	41.47	54.00	-12.53	Average
3	5501.28	103.07	34.22	15.78	100.66	54.00	46.66	Average

Notes: Emission Level = Read Level +Antenna Factor + Cable loss


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 194 of 852

Test Mode: 07; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

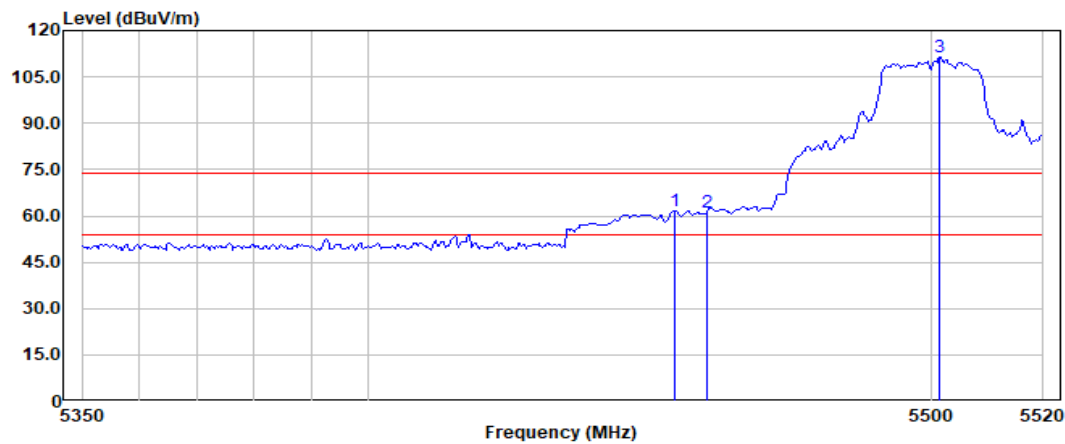

Antenna Polarity :Horizontal

No.	Freq (MHz)	Read level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Emission Level (dBuV)	Limit (dBuV)	Over Limit (dB)	Remark
1	5454.22	64.10	34.26	15.75	61.67	74.00	-12.33	Peak
2	5460.00	63.72	34.26	15.76	61.30	74.00	-12.70	Peak
3	5501.52	113.67	34.22	15.78	111.26	74.00	37.26	Peak

Notes: Emission Level = Read Level +Antenna Factor + Cable loss


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 195 of 852

Test Mode: 07; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

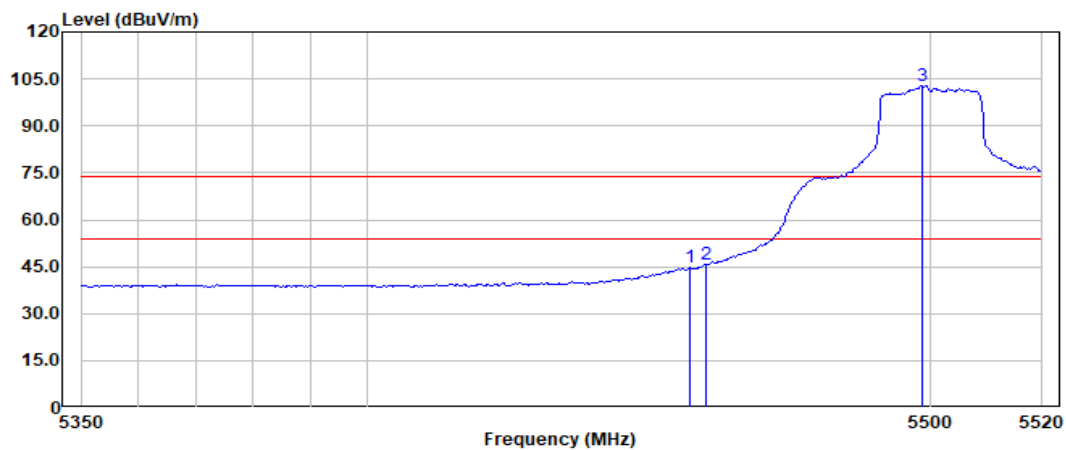

Antenna Polarity :Horizontal

No.	Freq (MHz)	Read level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Emission Level (dBuV)	Limit (dBuV)	Over Limit (dB)	Remark
1	5457.17	47.12	34.26	15.75	44.69	54.00	-9.31	Average
2	5460.00	48.24	34.26	15.76	45.82	54.00	-8.18	Average
3	5498.57	105.07	34.22	15.78	102.66	54.00	48.66	Average

Notes: Emission Level = Read Level +Antenna Factor + Cable loss


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 196 of 852

Test Mode: 07; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

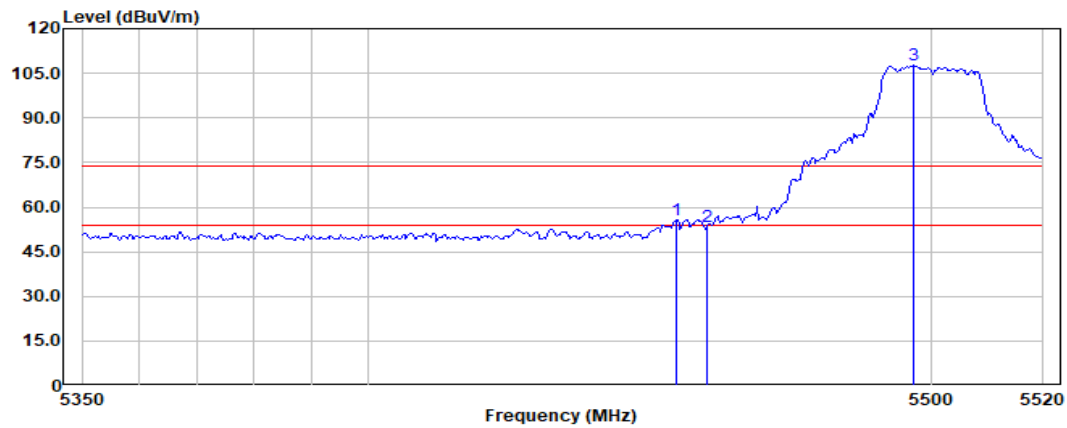

Antenna Polarity :Vertical

No.	Freq (MHz)	Read level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Emission Level (dBuV)	Limit (dBuV)	Over Limit (dB)	Remark
1	5454.46	58.23	34.26	15.75	55.80	74.00	-18.20	Peak
2	5460.00	55.77	34.26	15.76	53.35	74.00	-20.65	Peak
3	5496.84	110.04	34.22	15.78	107.63	74.00	33.63	Peak

Notes: Emission Level = Read Level +Antenna Factor + Cable loss


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 197 of 852

Test Mode: 07; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

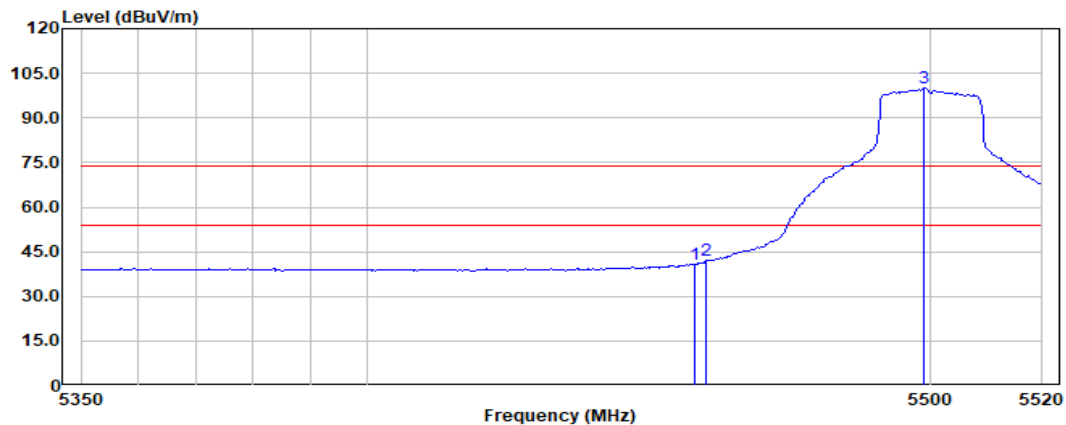

Antenna Polarity :Vertical

No.	Freq (MHz)	Read level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Emission Level (dBuV)	Limit (dBuV)	Over Limit (dB)	Remark
1	5457.91	43.39	34.26	15.76	40.97	54.00	-13.03	Average
2	5460.00	44.47	34.26	15.76	42.05	54.00	-11.95	Average
3	5498.81	102.49	34.22	15.78	100.08	54.00	46.08	Average

Notes: Emission Level = Read Level +Antenna Factor + Cable loss


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 198 of 852

Test Mode: 07; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

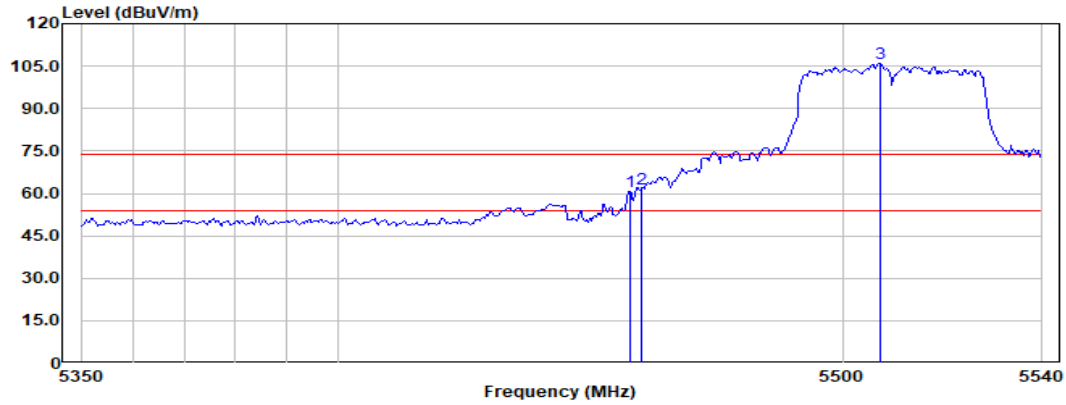

Antenna Polarity :Horizontal

No.	Freq (MHz)	Read level (dBUV)	Antenna Factor (dB)	Cable Loss (dB)	Emission Level (dBUV)	Limit (dBUV)	Over Limit (dB)	Remark
1	5457.67	63.27	34.26	15.76	60.85	74.00	-13.15	Peak
2	5460.00	63.88	34.26	15.76	61.46	74.00	-12.54	Peak
3	5507.51	108.56	34.21	15.79	106.16	74.00	32.16	Peak

Notes: Emission Level = Read Level +Antenna Factor + Cable loss


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 199 of 852

Test Mode: 07; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

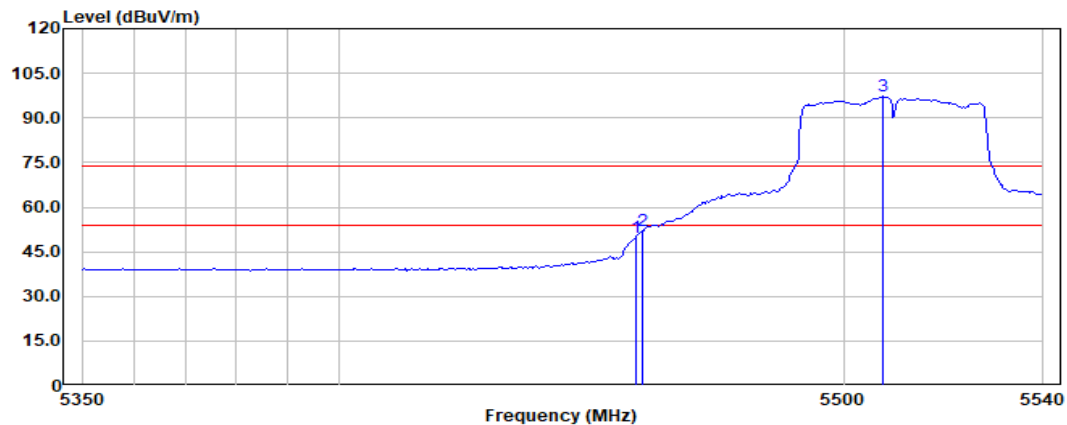

Antenna Polarity :Horizontal

No.	Freq (MHz)	Read level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Emission Level (dBuV)	Limit (dBuV)	Over Limit (dB)	Remark
1	5458.77	52.30	34.26	15.76	49.88	54.00	-4.12	Average
2	5460.00	54.30	34.26	15.76	51.88	54.00	-2.12	Average
3	5508.06	99.83	34.21	15.79	97.43	54.00	43.43	Average

Notes: Emission Level = Read Level +Antenna Factor + Cable loss


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 200 of 852

Test Mode: 07; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

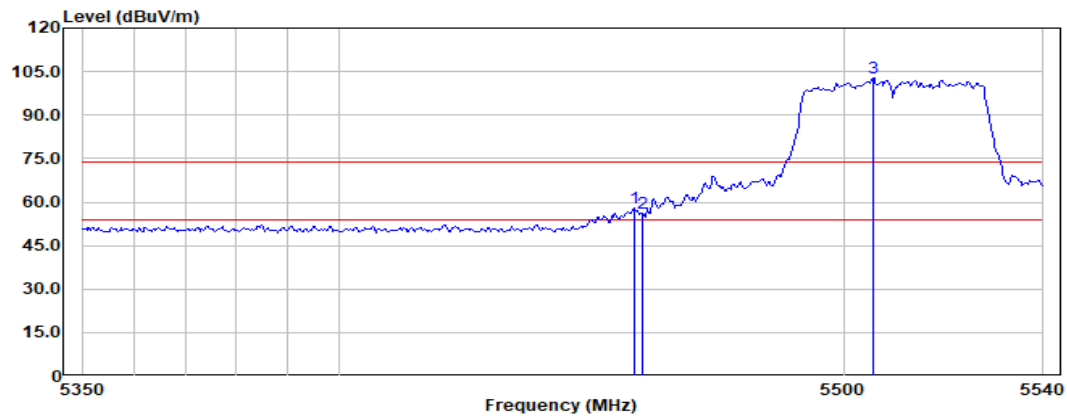

Antenna Polarity :Vertical

No.	Freq (MHz)	Read level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Emission Level (dBuV)	Limit (dBuV)	Over Limit (dB)	Remark
1	5458.49	60.45	34.26	15.76	58.03	74.00	-15.97	Peak
2	5460.00	58.35	34.26	15.76	55.93	74.00	-18.07	Peak
3	5505.86	105.38	34.21	15.79	102.97	74.00	28.97	Peak

Notes: Emission Level = Read Level +Antenna Factor + Cable loss


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 201 of 852

Test Mode: 07; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

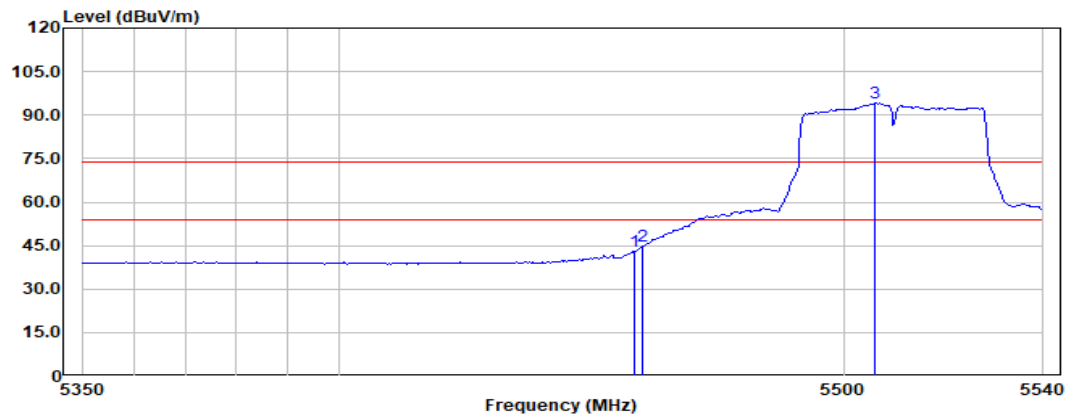

Antenna Polarity :Vertical

No.	Freq (MHz)	Read level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Emission Level (dBuV)	Limit (dBuV)	Over Limit (dB)	Remark
1	5458.49	45.36	34.26	15.76	42.94	54.00	-11.06	Average
2	5460.00	47.31	34.26	15.76	44.89	54.00	-9.11	Average
3	5506.41	96.51	34.21	15.79	94.11	54.00	40.11	Average

Notes: Emission Level = Read Level +Antenna Factor + Cable loss


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 202 of 852

Test Mode: 07; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

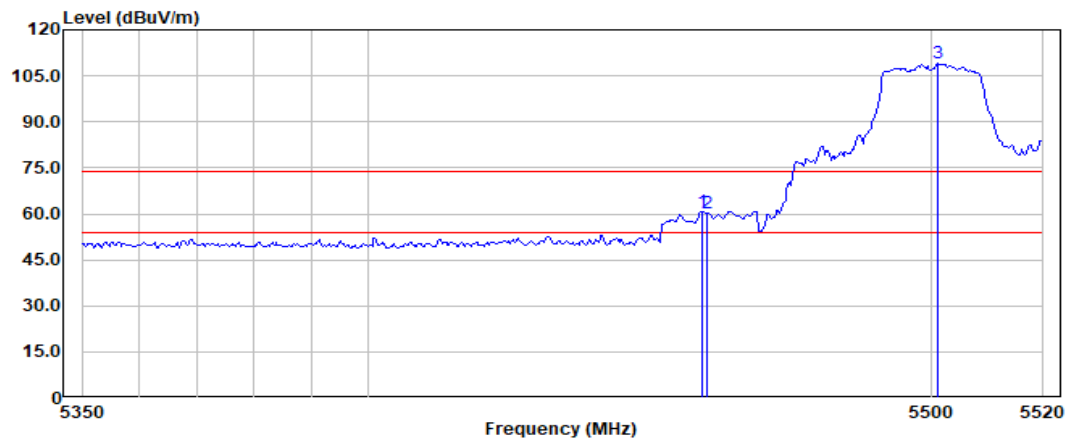

Antenna Polarity :Horizontal

No.	Freq (MHz)	Read level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Emission Level (dBuV)	Limit (dBuV)	Over Limit (dB)	Remark
1	5459.15	63.18	34.26	15.76	60.76	74.00	-13.24	Peak
2	5460.00	62.55	34.26	15.76	60.13	74.00	-13.87	Peak
3	5501.03	111.50	34.22	15.78	109.09	74.00	35.09	Peak

Notes: Emission Level = Read Level +Antenna Factor + Cable loss


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 203 of 852

Test Mode: 07; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

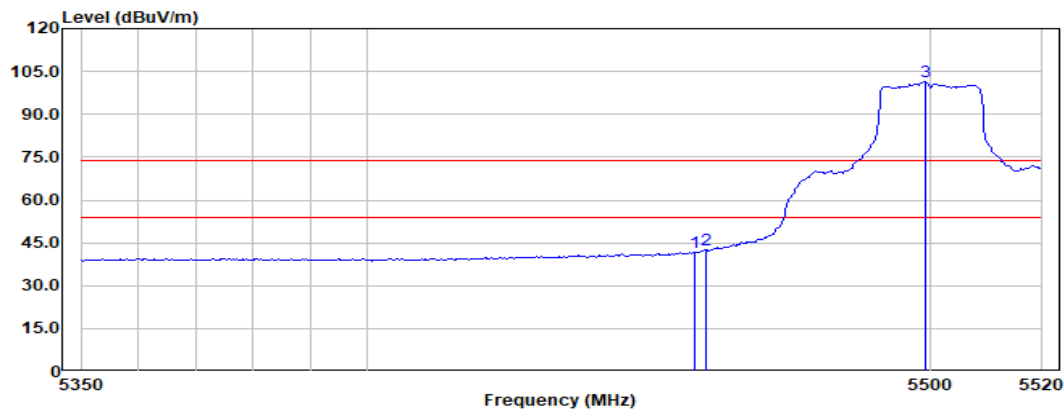

Antenna Polarity :Horizontal

No.	Freq (MHz)	Read level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Emission Level (dBuV)	Limit (dBuV)	Over Limit (dB)	Remark
1	5457.91	44.28	34.26	15.76	41.86	54.00	-12.14	Average
2	5460.00	44.82	34.26	15.76	42.40	54.00	-11.60	Average
3	5499.06	103.89	34.22	15.78	101.48	54.00	47.48	Average

Notes: Emission Level = Read Level +Antenna Factor + Cable loss


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 204 of 852

Test Mode: 07; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

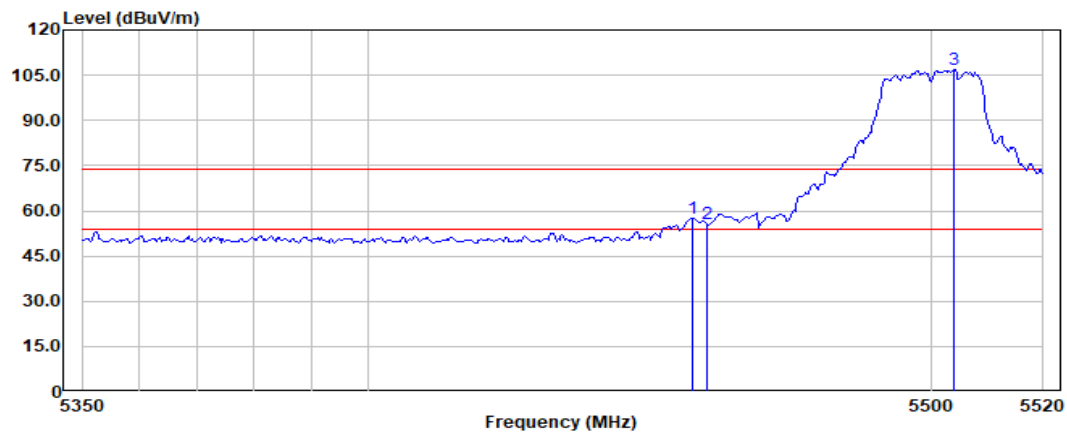

Antenna Polarity :Vertical

No.	Freq (MHz)	Read level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Emission Level (dBuV)	Limit (dBuV)	Over Limit (dB)	Remark
1	5457.42	59.99	34.26	15.76	57.57	74.00	-16.43	Peak
2	5460.00	58.18	34.26	15.76	55.76	74.00	-18.24	Peak
3	5503.99	109.14	34.21	15.78	106.72	74.00	32.72	Peak

Notes: Emission Level = Read Level +Antenna Factor + Cable loss


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 205 of 852

Test Mode: 07; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

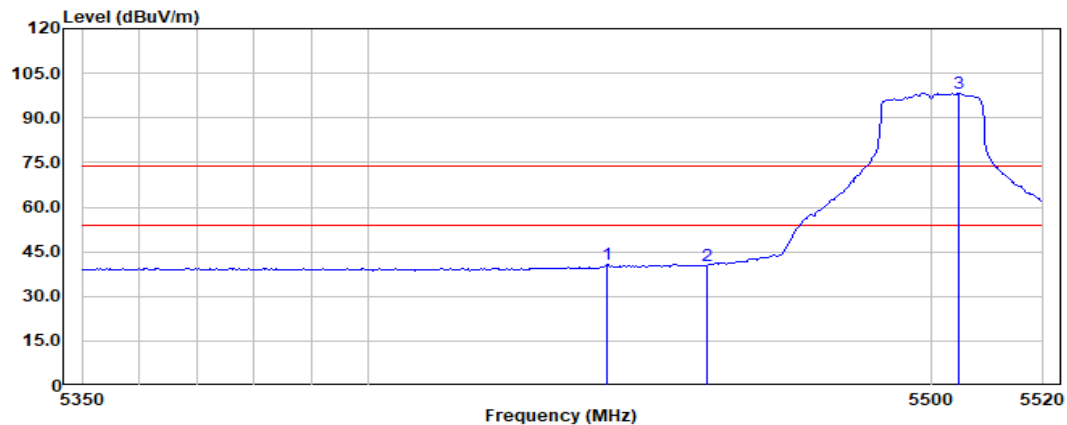

Antenna Polarity :Vertical

No.	Freq (MHz)	Read level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Emission Level (dBuV)	Limit (dBuV)	Over Limit (dB)	Remark
1	5442.15	43.29	34.27	15.75	40.86	54.00	-13.14	Average
2	5460.00	42.94	34.26	15.76	40.52	54.00	-13.48	Average
3	5504.97	100.68	34.21	15.79	98.27	54.00	44.27	Average

Notes: Emission Level = Read Level +Antenna Factor + Cable loss


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 206 of 852

Test Mode: 07; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:40MHz; Channel:Low

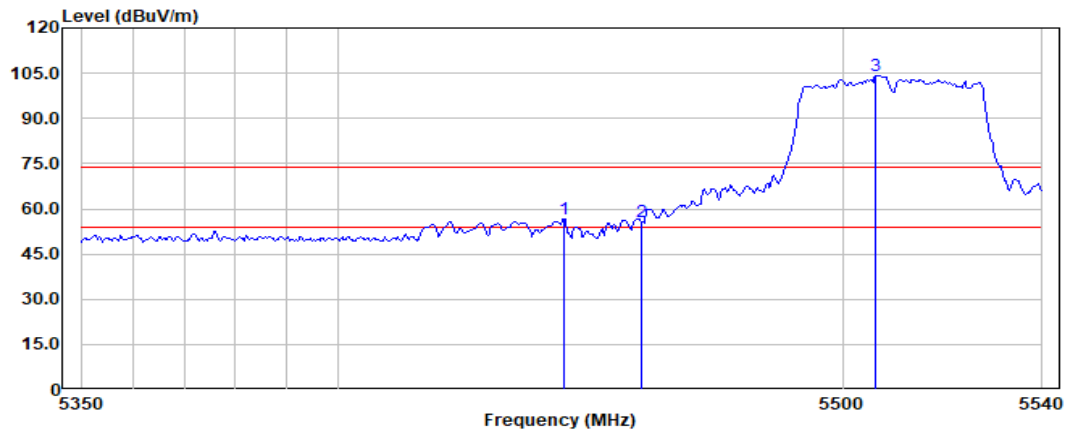

Antenna Polarity :Horizontal

No.	Freq (MHz)	Read level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Emission Level (dBuV)	Limit (dBuV)	Over Limit (dB)	Remark
1	5444.73	59.09	34.27	15.75	56.66	74.00	-17.34	Peak
2	5460.00	58.00	34.26	15.76	55.58	74.00	-18.42	Peak
3	5506.68	106.64	34.21	15.79	104.24	74.00	30.24	Peak

Notes: Emission Level = Read Level +Antenna Factor + Cable loss


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 207 of 852

Test Mode: 07; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:40MHz; Channel:Low

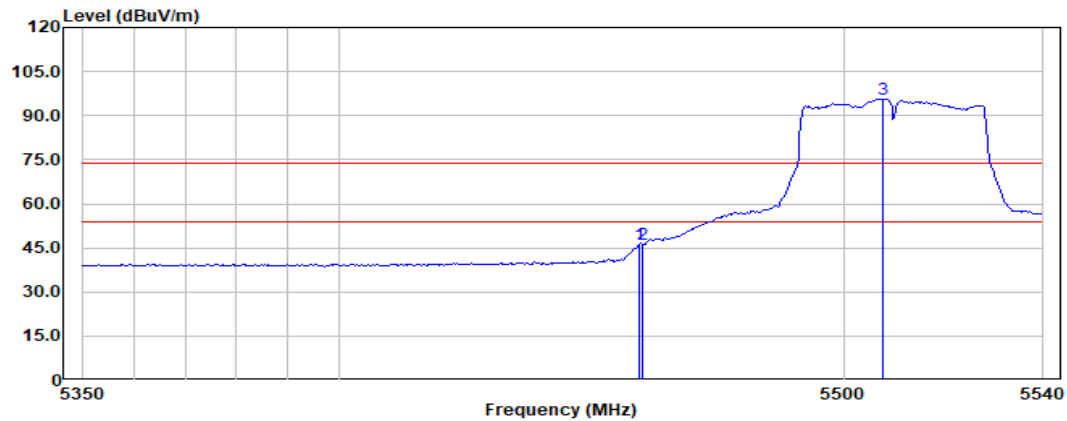

Antenna Polarity :Horizontal

No.	Freq (MHz)	Read level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Emission Level (dBuV)	Limit (dBuV)	Over Limit (dB)	Remark
1	5459.32	48.45	34.26	15.76	46.03	54.00	-7.97	Average
2	5460.00	48.72	34.26	15.76	46.30	54.00	-7.70	Average
3	5508.06	98.07	34.21	15.79	95.67	54.00	41.67	Average

Notes: Emission Level = Read Level +Antenna Factor + Cable loss


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 208 of 852

Test Mode: 07; Polarity: Vertical; Modulation:802.11ac; Bandwidth:40MHz; Channel:Low

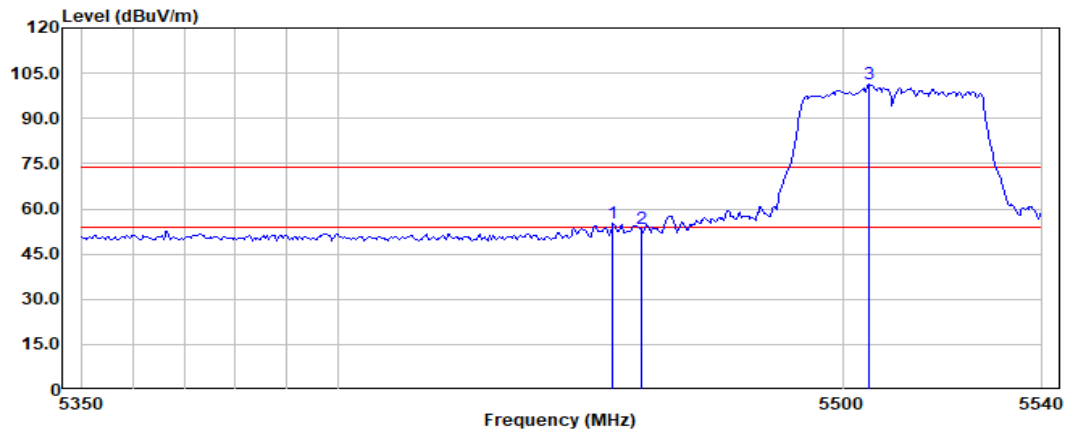

Antenna Polarity :Vertical

No.	Freq (MHz)	Read level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Emission Level (dBuV)	Limit (dBuV)	Over Limit (dB)	Remark
1	5454.36	57.46	34.26	15.75	55.03	74.00	-18.97	Peak
2	5460.00	55.67	34.26	15.76	53.25	74.00	-20.75	Peak
3	5505.30	103.83	34.21	15.79	101.42	74.00	27.42	Peak

Notes: Emission Level = Read Level +Antenna Factor + Cable loss


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 209 of 852

Test Mode: 07; Polarity: Vertical; Modulation:802.11ac; Bandwidth:40MHz; Channel:Low

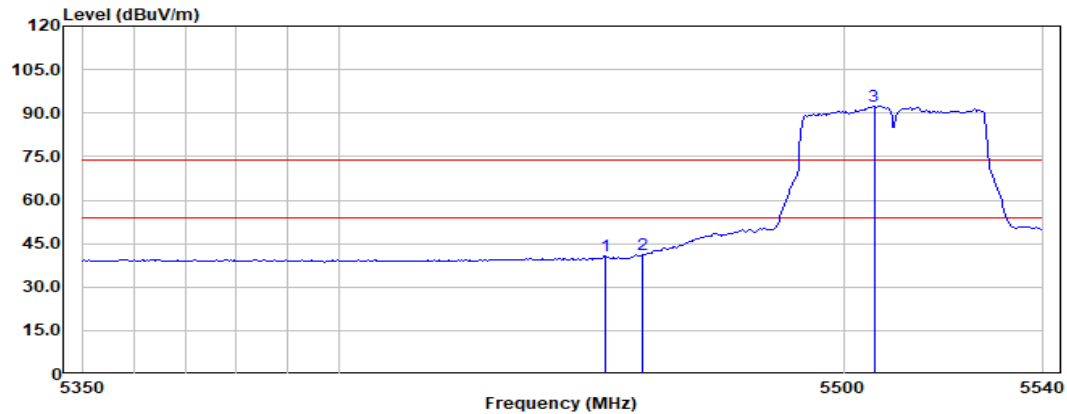

Antenna Polarity :Vertical

No.	Freq (MHz)	Read level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Emission Level (dBuV)	Limit (dBuV)	Over Limit (dB)	Remark
1	5452.71	43.15	34.26	15.75	40.72	54.00	-13.28	Average
2	5460.00	43.43	34.26	15.76	41.01	54.00	-12.99	Average
3	5506.13	94.78	34.21	15.79	92.37	54.00	38.37	Average

Notes: Emission Level = Read Level +Antenna Factor + Cable loss


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 210 of 852

Test Mode: 07; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:80MHz; Channel:Low

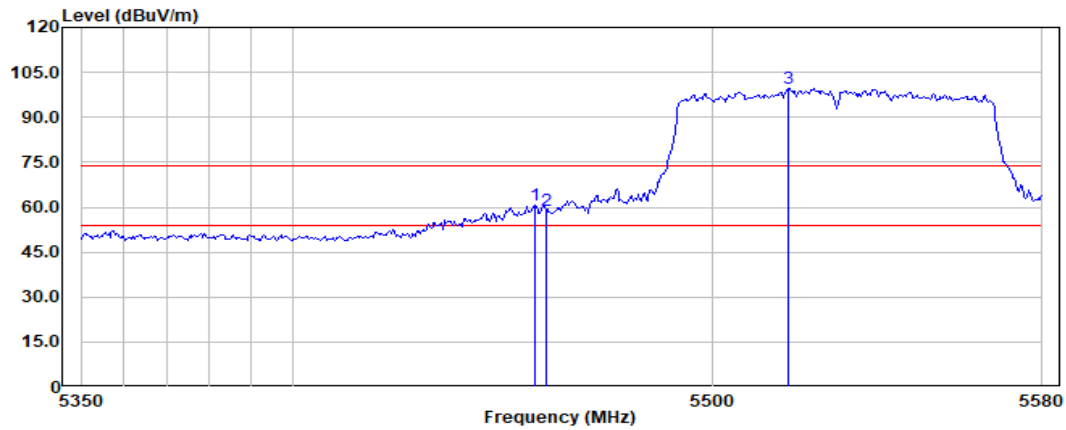

Antenna Polarity :Horizontal

No.	Freq (MHz)	Read level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Emission Level (dBuV)	Limit (dBuV)	Over Limit (dB)	Remark
1	5457.33	62.90	34.26	15.76	60.48	74.00	-13.52	Peak
2	5460.00	61.38	34.26	15.76	58.96	74.00	-15.04	Peak
3	5518.33	101.89	34.20	15.79	99.48	74.00	25.48	Peak

Notes: Emission Level = Read Level +Antenna Factor + Cable loss


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 211 of 852

Test Mode: 07; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:80MHz; Channel:Low

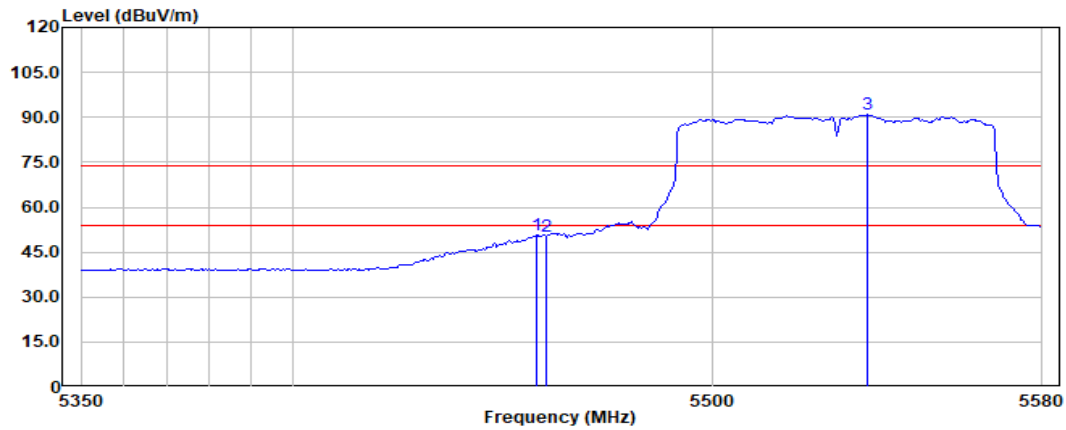

Antenna Polarity :Horizontal

No.	Freq (MHz)	Read level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Emission Level (dBuV)	Limit (dBuV)	Over Limit (dB)	Remark
1	5457.67	53.07	34.26	15.76	50.65	54.00	-3.35	Average
2	5460.00	52.85	34.26	15.76	50.43	54.00	-3.57	Average
3	5537.33	93.28	34.17	15.81	90.88	54.00	36.88	Average

Notes: Emission Level = Read Level +Antenna Factor + Cable loss


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 212 of 852

Test Mode: 07; Polarity: Vertical; Modulation:802.11ac; Bandwidth:80MHz; Channel:Low

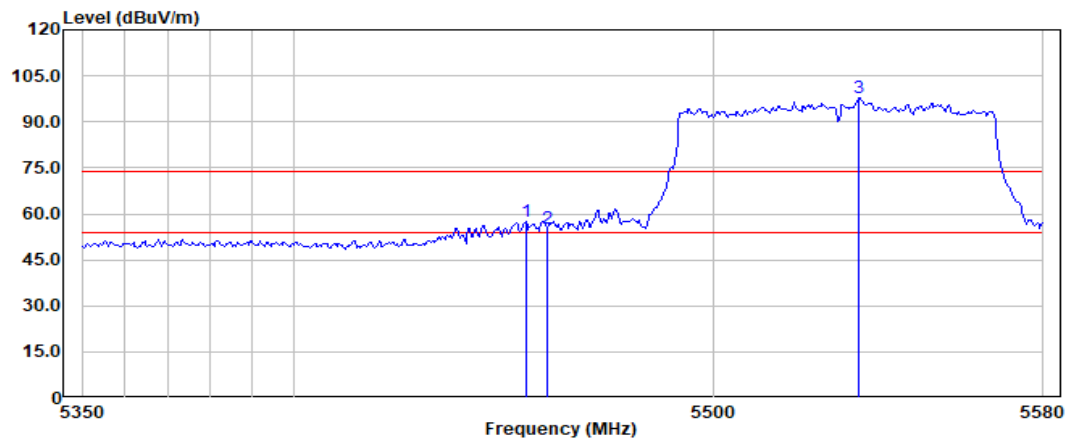

Antenna Polarity :Vertical

No.	Freq (MHz)	Read level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Emission Level (dBuV)	Limit (dBuV)	Over Limit (dB)	Remark
1	5455.00	60.12	34.26	15.75	57.69	74.00	-16.31	Peak
2	5460.00	57.85	34.26	15.76	55.43	74.00	-18.57	Peak
3	5535.33	100.28	34.17	15.80	97.86	74.00	23.86	Peak

Notes: Emission Level = Read Level +Antenna Factor + Cable loss


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 213 of 852

Test Mode: 07; Polarity: Vertical; Modulation:802.11ac; Bandwidth:80MHz; Channel:Low

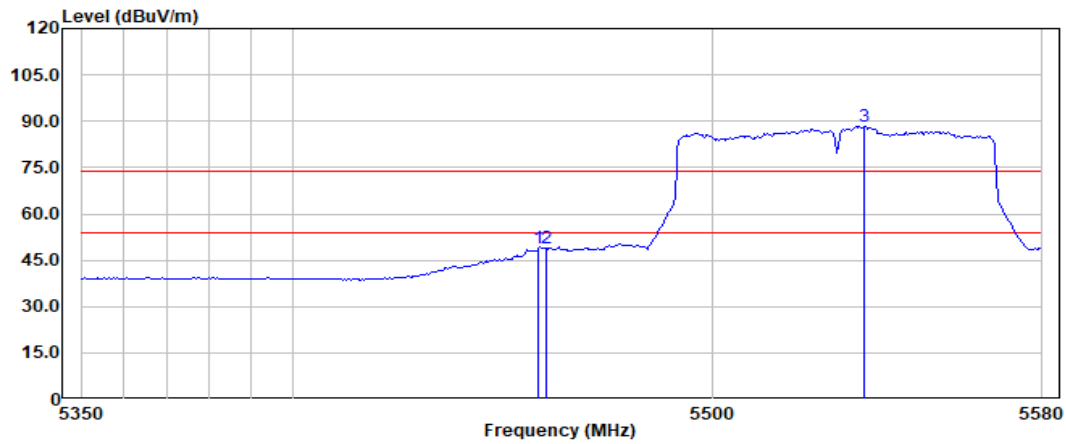

Antenna Polarity :Vertical

No.	Freq (MHz)	Read level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Emission Level (dBuV)	Limit (dBuV)	Over Limit (dB)	Remark
1	5458.33	51.45	34.26	15.76	49.03	54.00	-4.97	Average
2	5460.00	51.17	34.26	15.76	48.75	54.00	-5.25	Average
3	5536.67	90.86	34.17	15.81	88.45	54.00	34.45	Average

Notes: Emission Level = Read Level +Antenna Factor + Cable loss


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 214 of 852

Test Mode: 08; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

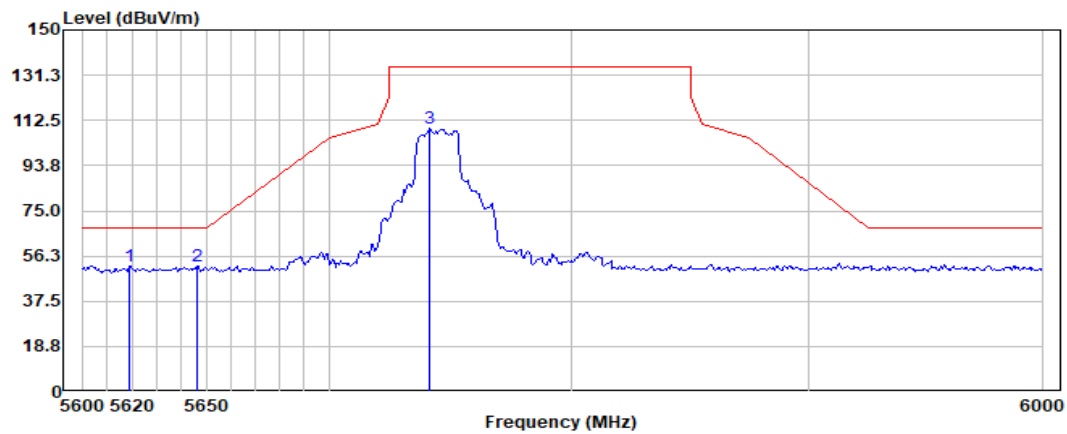

Antenna Polarity :Horizontal

No.	Freq (MHz)	Read level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Emission Level (dBuV)	Limit (dBuV)	Over Limit (dB)	Remark
1	5619.13	54.76	34.12	15.85	52.34	68.20	-15.86	Peak
2	5646.38	54.71	34.15	15.87	52.34	68.20	-15.86	Peak
3	5741.45	111.25	34.29	15.92	109.04	135.00	-25.96	Peak

Notes: Emission Level = Read Level +Antenna Factor + Cable loss


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 215 of 852

Test Mode:

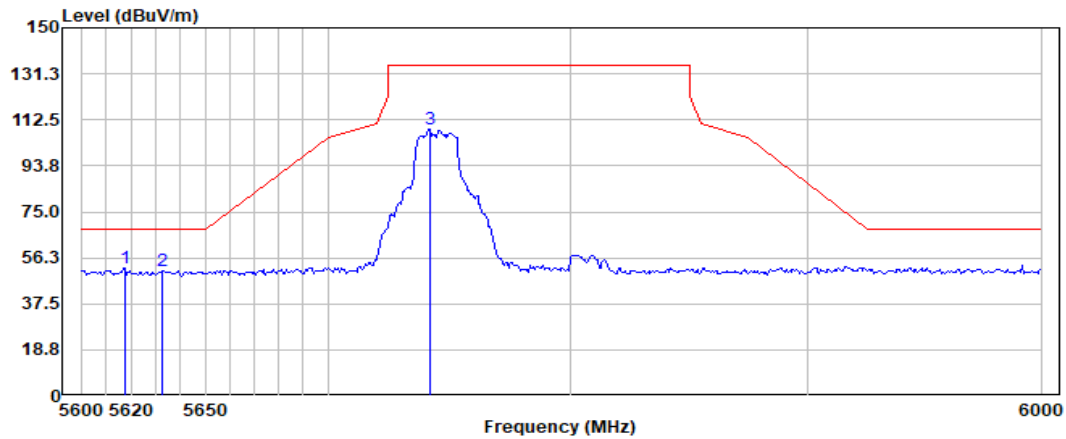

Antenna Polarity :Vertical

No.	Freq (MHz)	Read level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Emission Level (dBuV)	Limit (dBuV)	Over Limit (dB)	Remark
1	5617.39	54.28	34.11	15.85	51.85	68.20	-16.35	Peak
2	5632.46	53.41	34.14	15.86	51.02	68.20	-17.18	Peak
3	5742.03	110.86	34.29	15.92	108.65	135.00	-26.35	Peak

Notes: Emission Level = Read Level +Antenna Factor + Cable loss


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 216 of 852

Test Mode: 08; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

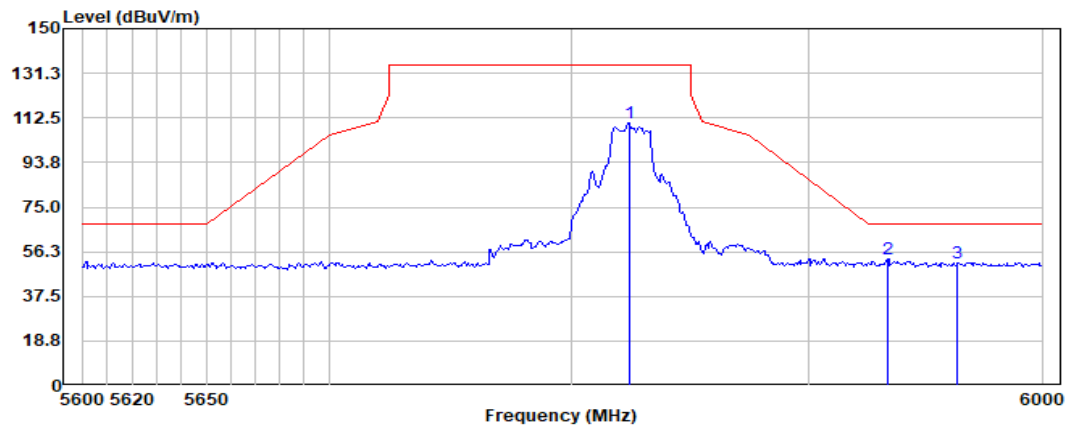

Antenna Polarity :Horizontal

No.	Freq (MHz)	Read level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Emission Level (dBuV)	Limit (dBuV)	Over Limit (dB)	Remark
1	5824.35	112.55	34.49	15.96	110.55	135.00	-24.45	Peak
2	5933.33	54.89	34.85	16.02	53.28	68.20	-14.92	Peak
3	5963.48	53.28	34.84	16.04	51.67	68.20	-16.53	Peak

Notes: Emission Level = Read Level +Antenna Factor + Cable loss


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 217 of 852

Test Mode: 08; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

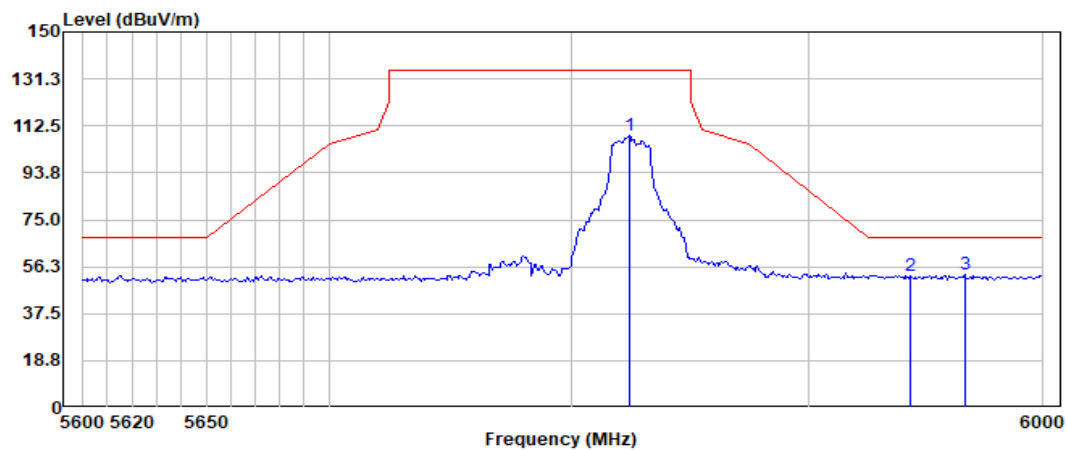

Antenna Polarity :Vertical

No.	Freq (MHz)	Read level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Emission Level (dBuV)	Limit (dBuV)	Over Limit (dB)	Remark
1	5824.35	110.52	34.49	15.96	108.52	135.00	-26.48	Peak
2	5943.19	54.41	34.85	16.03	52.81	68.20	-15.39	Peak
3	5966.38	54.61	34.84	16.04	53.00	68.20	-15.20	Peak

Notes: Emission Level = Read Level +Antenna Factor + Cable loss


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 218 of 852

Test Mode: 08; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

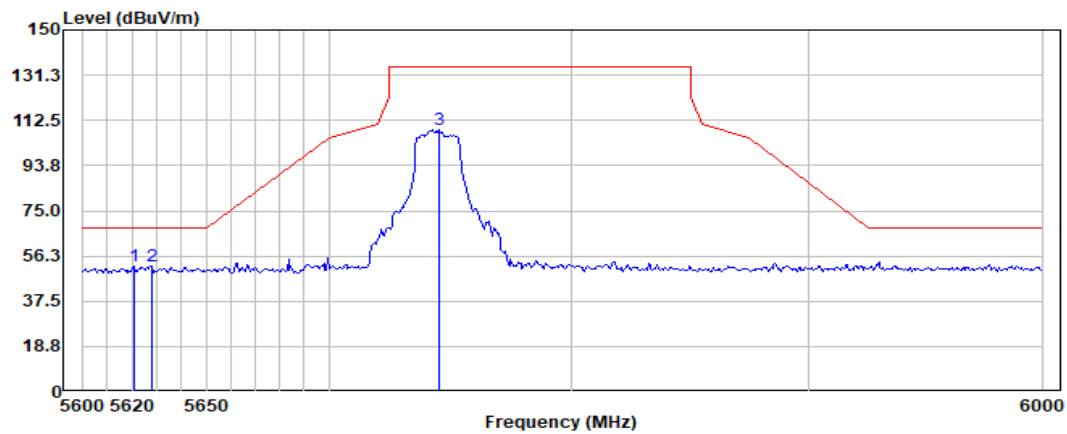

Antenna Polarity :Horizontal

No.	Freq (MHz)	Read level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Emission Level (dBuV)	Limit (dBuV)	Over Limit (dB)	Remark
1	5620.87	54.40	34.12	15.85	51.98	68.20	-16.22	Peak
2	5627.83	54.49	34.13	15.86	52.09	68.20	-16.11	Peak
3	5745.51	110.87	34.29	15.92	108.66	135.00	-26.34	Peak

Notes: Emission Level = Read Level +Antenna Factor + Cable loss


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 219 of 852

Test Mode: 08; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

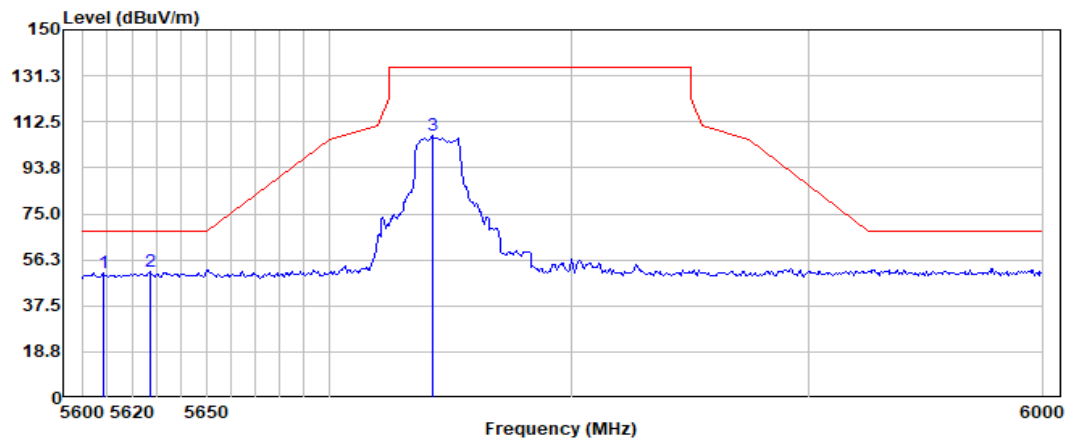

Antenna Polarity :Vertical

No.	Freq (MHz)	Read level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Emission Level (dBuV)	Limit (dBuV)	Over Limit (dB)	Remark
1	5608.70	53.10	34.10	15.85	50.67	68.20	-17.53	Peak
2	5627.25	53.66	34.13	15.86	51.26	68.20	-16.94	Peak
3	5742.61	108.96	34.29	15.92	106.75	135.00	-28.25	Peak

Notes: Emission Level = Read Level +Antenna Factor + Cable loss


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 220 of 852

Test Mode: 08; Polarity: Horizontal; Modulation: 802.11n; Bandwidth: 20MHz; Channel: High

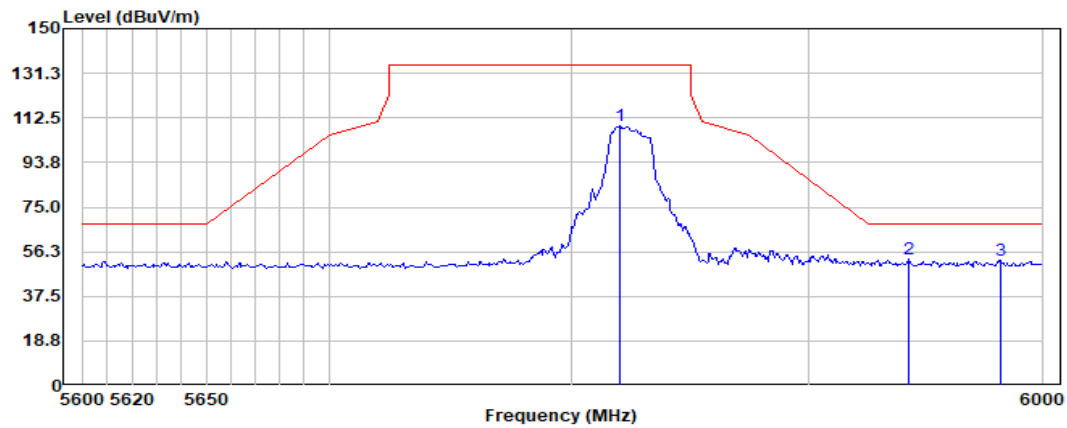

Antenna Polarity :Horizontal

No.	Freq (MHz)	Read level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Emission Level (dBuV)	Limit (dBuV)	Over Limit (dB)	Remark
1	5820.29	110.99	34.47	15.96	108.98	135.00	-26.02	Peak
2	5942.61	54.56	34.85	16.03	52.96	68.20	-15.24	Peak
3	5982.03	54.25	34.84	16.05	52.65	68.20	-15.55	Peak

Notes: Emission Level = Read Level +Antenna Factor + Cable loss


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 221 of 852

Test Mode: 08; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:High

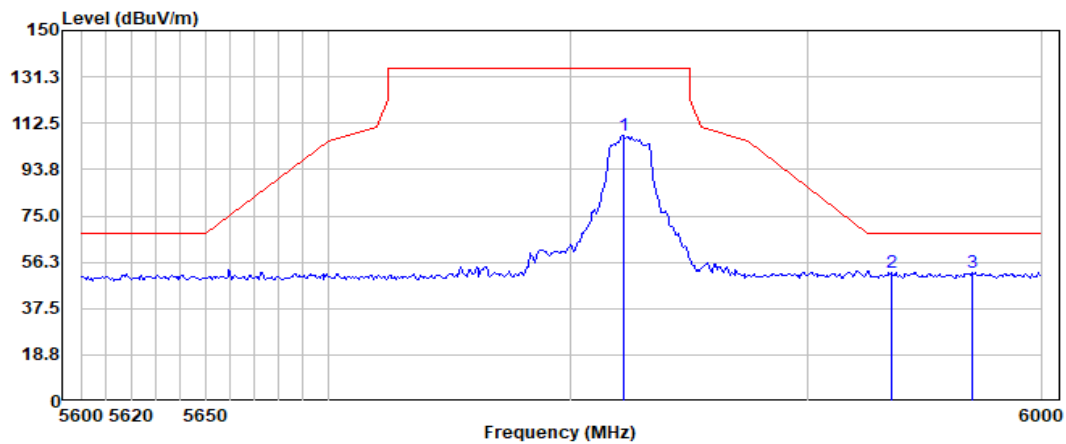

Antenna Polarity :Vertical

No.	Freq (MHz)	Read level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Emission Level (dBuV)	Limit (dBuV)	Over Limit (dB)	Remark
1	5822.61	109.57	34.48	15.96	107.56	135.00	-27.44	Peak
2	5935.65	53.69	34.85	16.02	52.08	68.20	-16.12	Peak
3	5969.86	53.84	34.84	16.04	52.23	68.20	-15.97	Peak

Notes: Emission Level = Read Level +Antenna Factor + Cable loss


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 222 of 852

Test Mode: 08; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

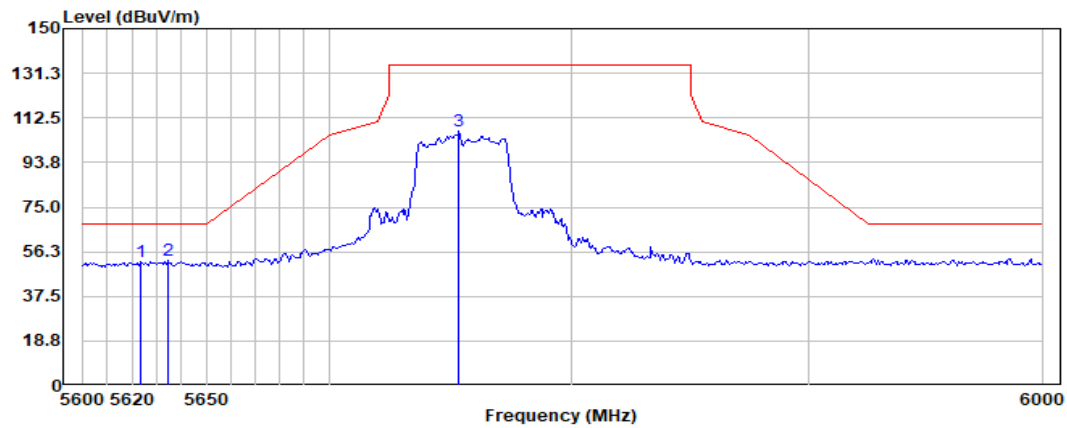

Antenna Polarity :Horizontal

No.	Freq (MHz)	Read level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Emission Level (dBuV)	Limit (dBuV)	Over Limit (dB)	Remark
1	5623.77	54.26	34.12	15.85	51.84	68.20	-16.36	Peak
2	5634.78	54.80	34.14	15.86	52.41	68.20	-15.79	Peak
3	5753.62	109.14	34.31	15.92	106.94	135.00	-28.06	Peak

Notes: Emission Level = Read Level +Antenna Factor + Cable loss


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 223 of 852

Test Mode: 08; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

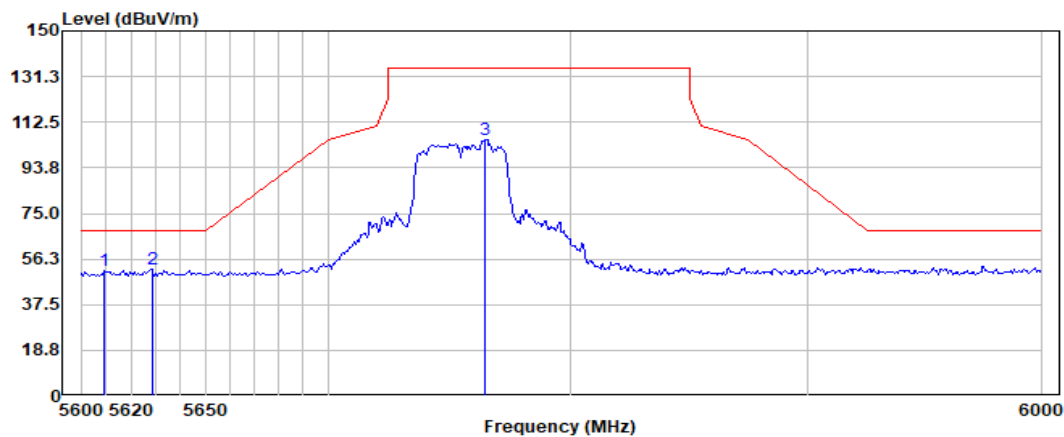

Antenna Polarity :Vertical

No.	Freq (MHz)	Read level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Emission Level (dBuV)	Limit (dBuV)	Over Limit (dB)	Remark
1	5609.28	53.93	34.10	15.85	51.50	68.20	-16.70	Peak
2	5628.41	54.60	34.13	15.86	52.20	68.20	-16.00	Peak
3	5764.64	107.65	34.32	15.93	105.47	135.00	-29.53	Peak

Notes: Emission Level = Read Level +Antenna Factor + Cable loss


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 224 of 852

Test Mode: 08; Polarity: Horizontal; Modulation: 802.11n; Bandwidth: 40MHz; Channel: High

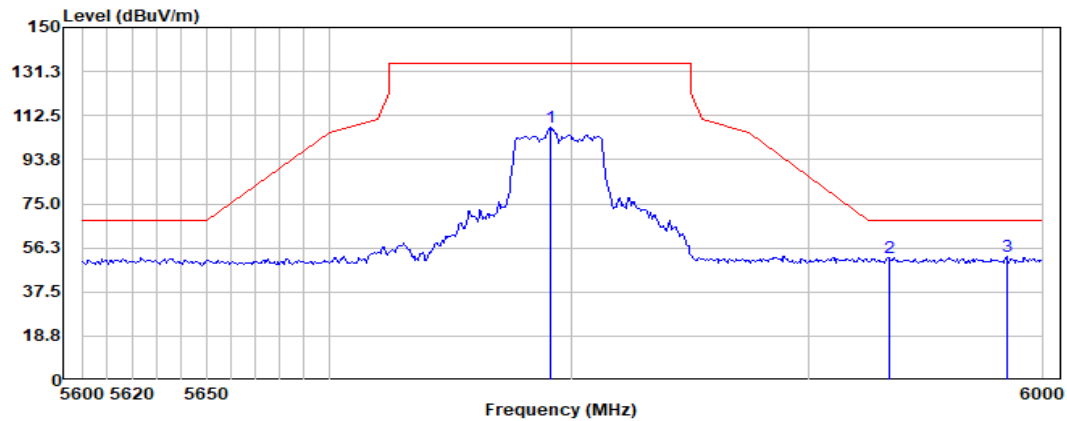

Antenna Polarity :Horizontal

No.	Freq (MHz)	Read level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Emission Level (dBuV)	Limit (dBuV)	Over Limit (dB)	Remark
1	5791.30	109.81	34.36	15.94	107.67	135.00	-27.33	Peak
2	5933.91	53.84	34.85	16.02	52.23	68.20	-15.97	Peak
3	5984.35	54.13	34.83	16.05	52.52	68.20	-15.68	Peak

Notes: Emission Level = Read Level +Antenna Factor + Cable loss


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 225 of 852

Test Mode: 08; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:High

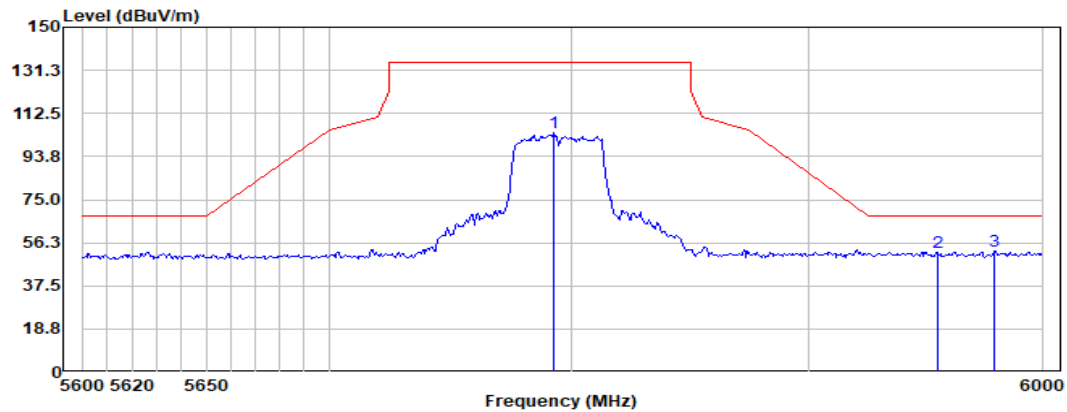

Antenna Polarity :Vertical

No.	Freq (MHz)	Read level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Emission Level (dBuV)	Limit (dBuV)	Over Limit (dB)	Remark
1	5793.04	106.04	34.36	15.95	103.91	135.00	-31.09	Peak
2	5954.78	53.96	34.84	16.03	52.35	68.20	-15.85	Peak
3	5979.13	54.47	34.84	16.05	52.87	68.20	-15.33	Peak

Notes: Emission Level = Read Level +Antenna Factor + Cable loss


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 226 of 852

Test Mode: 08; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

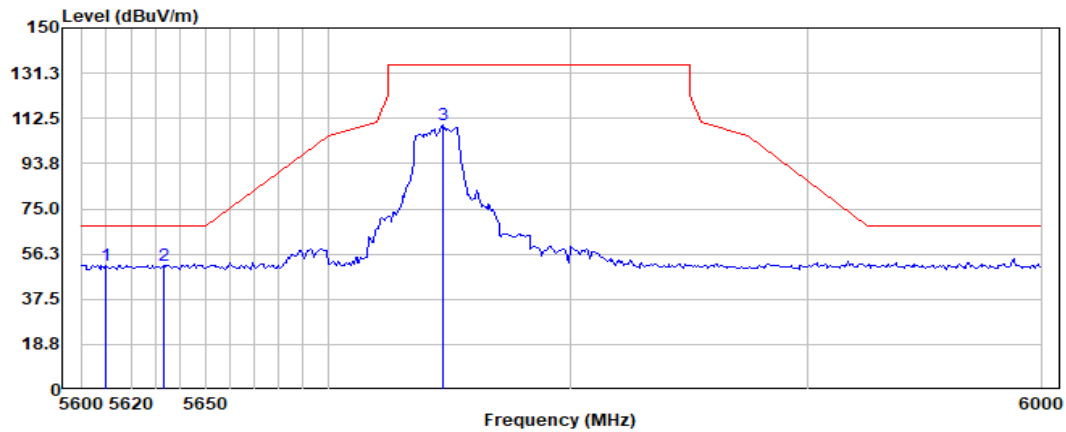

Antenna Polarity :Horizontal

No.	Freq (MHz)	Read level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Emission Level (dBuV)	Limit (dBuV)	Over Limit (dB)	Remark
1	5609.86	54.05	34.10	15.85	51.62	68.20	-16.58	Peak
2	5633.04	54.01	34.14	15.86	51.62	68.20	-16.58	Peak
3	5747.25	111.96	34.30	15.92	109.76	135.00	-25.24	Peak

Notes: Emission Level = Read Level +Antenna Factor + Cable loss


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 227 of 852

Test Mode: 08; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

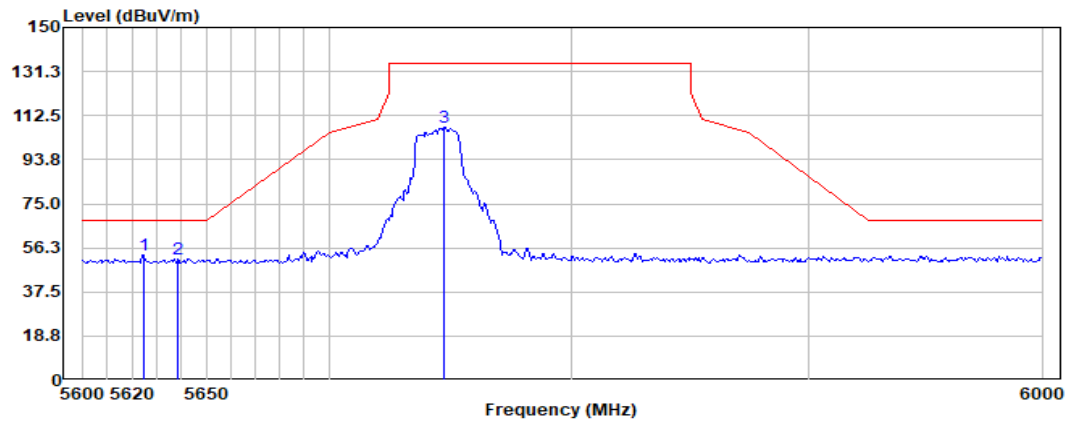

Antenna Polarity :Vertical

No.	Freq (MHz)	Read level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Emission Level (dBuV)	Limit (dBuV)	Over Limit (dB)	Remark
1	5624.93	55.83	34.12	15.86	53.42	68.20	-14.78	Peak
2	5638.26	54.11	34.14	15.86	51.72	68.20	-16.48	Peak
3	5747.25	109.67	34.30	15.92	107.47	135.00	-27.53	Peak

Notes: Emission Level = Read Level +Antenna Factor + Cable loss


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 228 of 852

Test Mode: 08; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:High

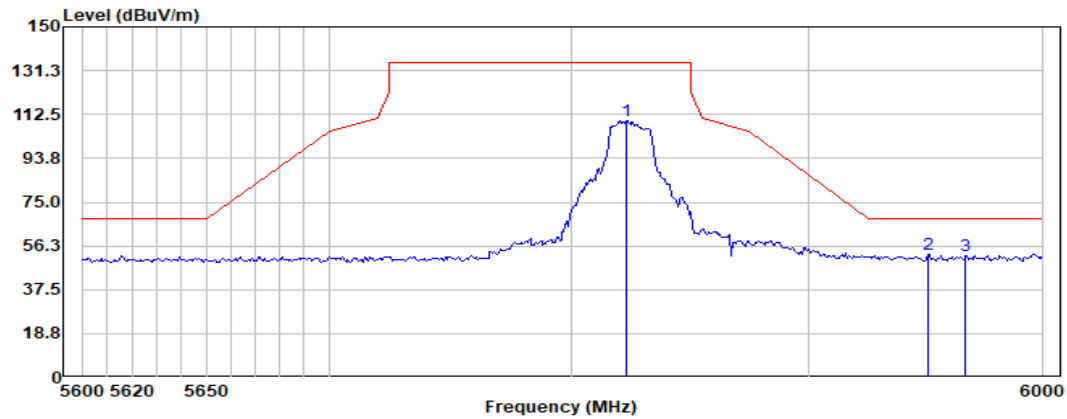

Antenna Polarity :Horizontal

No.	Freq (MHz)	Read level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Emission Level (dBuV)	Limit (dBuV)	Over Limit (dB)	Remark
1	5823.19	112.03	34.48	15.96	110.02	135.00	-24.98	Peak
2	5950.73	54.05	34.84	16.03	52.44	68.20	-15.76	Peak
3	5966.96	53.92	34.84	16.04	52.31	68.20	-15.89	Peak

Notes: Emission Level = Read Level +Antenna Factor + Cable loss


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 229 of 852

Test Mode: 08; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:High

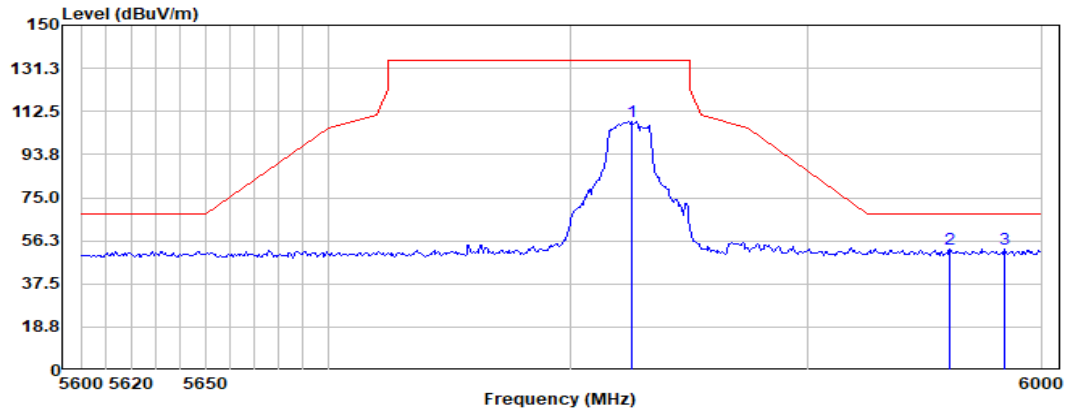

Antenna Polarity :Vertical

No.	Freq (MHz)	Read level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Emission Level (dBuV)	Limit (dBuV)	Over Limit (dB)	Remark
1	5826.09	110.29	34.50	15.96	108.30	135.00	-26.70	Peak
2	5960.58	54.17	34.84	16.04	52.56	68.20	-15.64	Peak
3	5983.77	54.24	34.83	16.05	52.63	68.20	-15.57	Peak

Notes: Emission Level = Read Level +Antenna Factor + Cable loss


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 230 of 852

Test Mode: 08; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:40MHz; Channel:Low

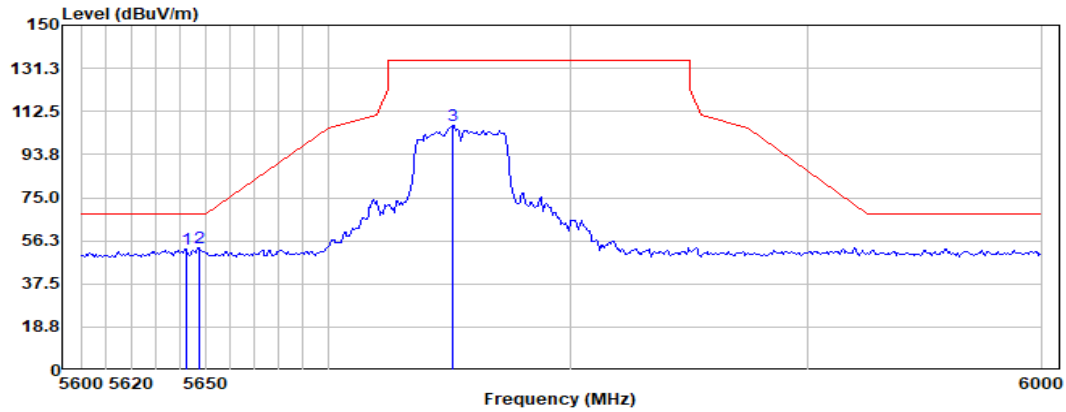

Antenna Polarity :Horizontal

No.	Freq (MHz)	Read level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Emission Level (dBuV)	Limit (dBuV)	Over Limit (dB)	Remark
1	5642.32	55.11	34.15	15.86	52.73	68.20	-15.47	Peak
2	5647.54	55.41	34.16	15.87	53.04	68.20	-15.16	Peak
3	5751.30	108.43	34.30	15.92	106.22	135.00	-28.78	Peak

Notes: Emission Level = Read Level +Antenna Factor + Cable loss


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 231 of 852

Test Mode: 08; Polarity: Vertical; Modulation:802.11ac; Bandwidth:40MHz; Channel:Low

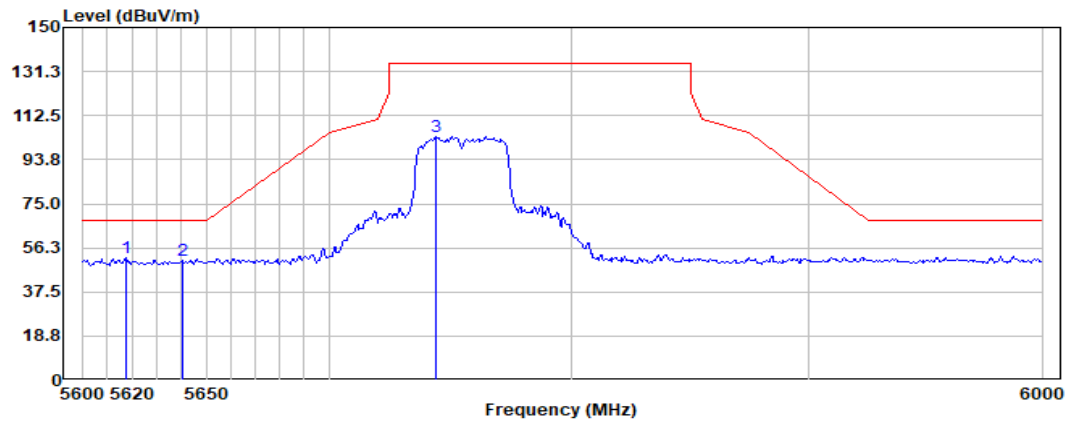

Antenna Polarity :Vertical

No.	Freq (MHz)	Read level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Emission Level (dBuV)	Limit (dBuV)	Over Limit (dB)	Remark
1	5617.39	54.60	34.11	15.85	52.17	68.20	-16.03	Peak
2	5640.58	53.38	34.15	15.86	51.00	68.20	-17.20	Peak
3	5743.77	106.07	34.29	15.92	103.86	135.00	-31.14	Peak

Notes: Emission Level = Read Level +Antenna Factor + Cable loss


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 232 of 852

Test Mode: 08

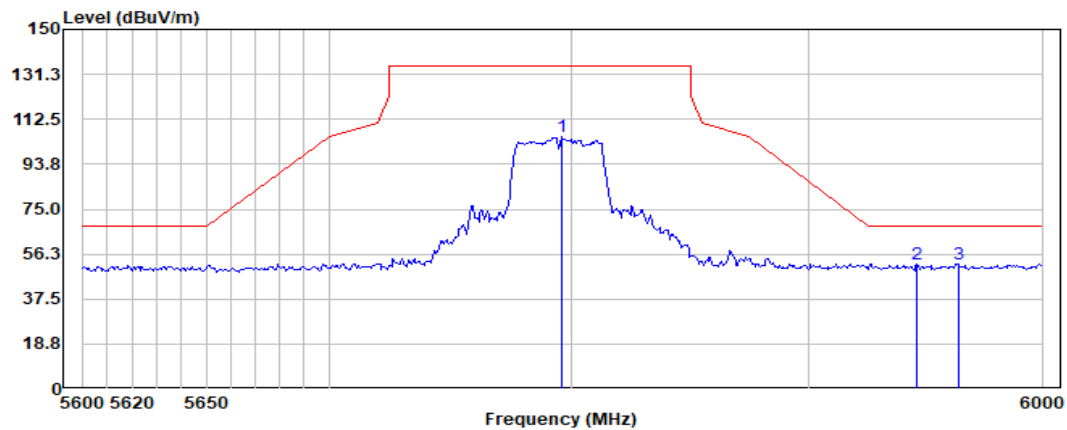

Antenna Polarity :Horizontal

No.	Freq (MHz)	Read level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Emission Level (dBuV)	Limit (dBuV)	Over Limit (dB)	Remark
1	5796.52	107.40	34.37	15.95	105.28	135.00	-29.72	Peak
2	5946.09	53.41	34.85	16.03	51.81	68.20	-16.39	Peak
3	5964.06	53.61	34.84	16.04	52.00	68.20	-16.20	Peak

Notes: Emission Level = Read Level +Antenna Factor + Cable loss


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 233 of 852

Test Mode: 08

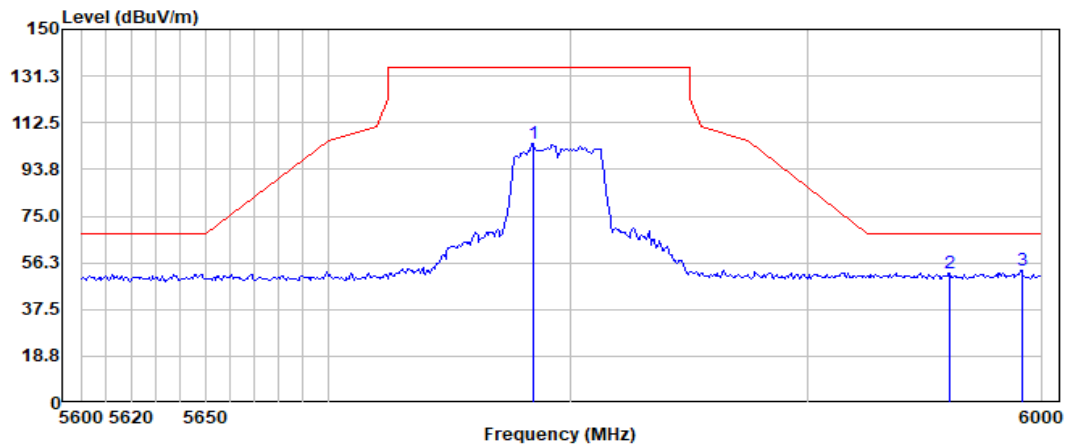

Antenna Polarity :Vertical

No.	Freq (MHz)	Read level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Emission Level (dBuV)	Limit (dBuV)	Over Limit (dB)	Remark
1	5784.93	106.06	34.35	15.94	103.92	135.00	-31.08	Peak
2	5960.58	53.80	34.84	16.04	52.19	68.20	-16.01	Peak
3	5991.30	54.67	34.83	16.05	53.06	68.20	-15.14	Peak

Notes: Emission Level = Read Level +Antenna Factor + Cable loss


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 234 of 852

Test Mode: 08; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:80MHz; Channel:Low

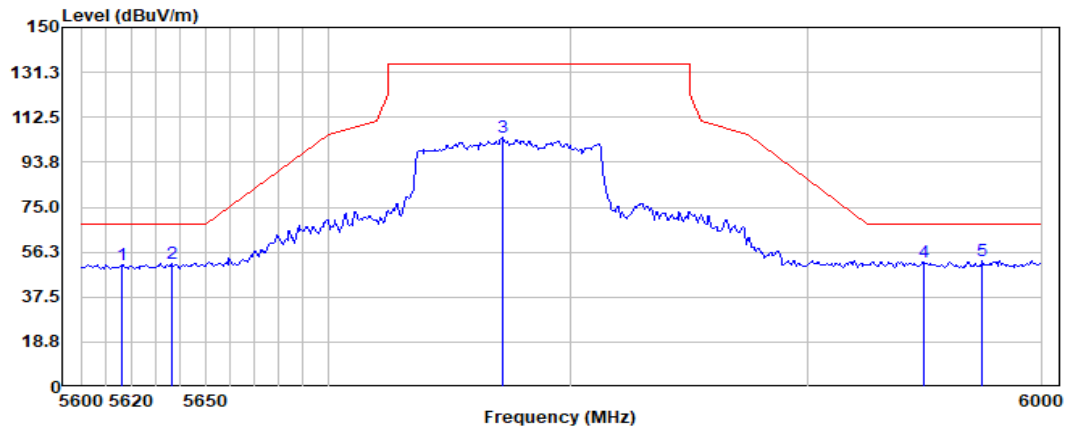

Antenna Polarity :Horizontal

No.	Freq (MHz)	Read level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Emission Level (dBuV)	Limit (dBuV)	Over Limit (dB)	Remark
1	5616.23	53.51	34.11	15.85	51.08	68.20	-17.12	Peak
2	5636.52	53.95	34.14	15.86	51.56	68.20	-16.64	Peak
3	5772.17	106.04	34.33	15.93	103.87	135.00	-31.13	Peak
4	5949.57	53.52	34.85	16.03	51.92	68.20	-16.28	Peak
5	5974.49	54.14	34.84	16.04	52.53	68.20	-15.67	Peak

Notes: Emission Level = Read Level +Antenna Factor + Cable loss


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 235 of 852

Test Mode: 08; Polarity: Vertical; Modulation:802.11ac; Bandwidth:80MHz; Channel:Low

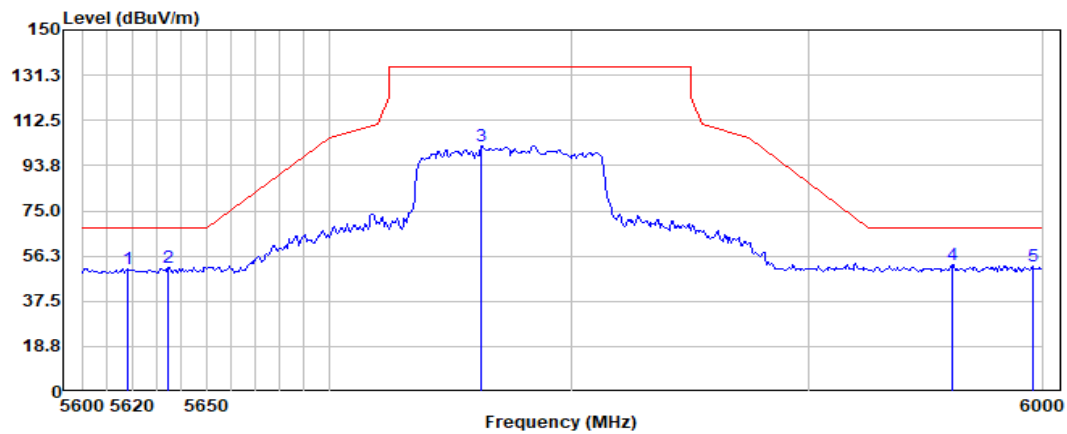

Antenna Polarity :Vertical

No.	Freq (MHz)	Read level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Emission Level (dBuV)	Limit (dBuV)	Over Limit (dB)	Remark
1	5617.97	53.35	34.12	15.85	50.93	68.20	-17.27	Peak
2	5634.78	53.80	34.14	15.86	51.41	68.20	-16.79	Peak
3	5762.90	104.25	34.32	15.93	102.07	135.00	-32.93	Peak
4	5961.16	54.27	34.84	16.04	52.66	68.20	-15.54	Peak
5	5995.94	53.92	34.83	16.06	52.31	68.20	-15.89	Peak

Notes: Emission Level = Read Level +Antenna Factor + Cable loss



Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 236 of 852

7.10 Frequency Stability

Test Requirement 47 CFR Part 15, Subpart E 15.407 (g)

Test Method: ANSI C63.10 (2013) Section 6.8

7.10.1 E.U.T. Operation

Operating Environment:

Temperature: 25.4 °C

Humidity: 48.0 % RH

Atmospheric Pressure: 1010 mbar

7.10.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	05	TX mode (U-NII-1)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ 20/40/80, Only the data of worst case is recorded in the report.
Final test	06	TX mode (U-NII-2A) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ 20/40/80, Only the data of worst case is recorded in the report.
Final test	07	TX mode (U-NII-2C) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ 20/40/80, Only the data of worst case is recorded in the report.
Final test	08	TX mode (U-NII-3) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ 20/40/80, Only the data of worst case is recorded in the report.

7.10.3 Measurement Procedure and Data

Please Refer to Appendix for Details

Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 237 of 852

7.11 Non-occupancy period

Test Requirement KDB 905462 D02 Section 5.1

Test Method: KDB 905462 D02 Section 7.8.3

Limit:

Test item	Limit	Applicability	
		Master Device or client with Radar Detection	Client without Radar Detection
Non-occupancy period	Minimum 30 minutes	Yes	Not required
Channel Availability Check Time	60 seconds	Yes	Not required
Channel Move Time	10 seconds See Note 1.	Yes	Yes
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.	Yes	Yes
U-NII Detection Bandwidth	Minimum 100% of the U-NII 99% transmission power bandwidth. See Note 3.	Yes	Not required

Note 1: Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst.

Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

Note 3: During the U-NII Detection Bandwidth detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.

7.11.1 E.U.T. Operation

Operating Environment:

Temperature: 25.4 °C


Humidity: 48.0 % RH

Atmospheric Pressure: 1010 mbar

7.11.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	06	TX mode (U-NII-2A) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ 20/40/80, Only the data of worst case is recorded in the report.
Final test	07	TX mode (U-NII-2C) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ 20/40/80, Only the data of worst case is recorded in the report.

7.11.3 Test Setup Diagram

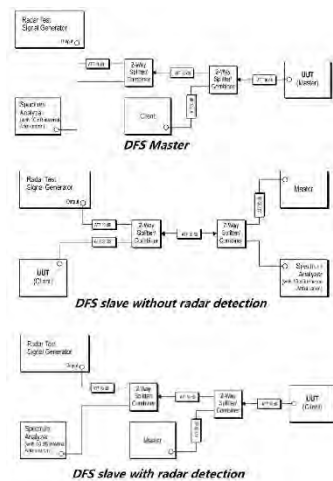

7.11.4 Measurement Procedure and Data

- 1) The radar pulse generator is setup to provide a pulse at frequency that the master and client are operating. A type 0 radar pulse with a 1us pulse width and a 1428us PRI is used for the testing.
- 2) The vector signal generator is adjusted to provide the radar burst (18 pulses) at the level of approximately -61dBm at the antenna port of the master device.
- 3) A trigger is provided from the pulse generator to the DFS monitoring system in order to capture the traffic and the occurrence of the radar pulse.
- 4) EUT will associate with the master at channel. The file "iperf.exe" specified by the FCC is streamed from the PC 2 through the master and the client device to the PC 1 and played in full motion video using Media Player Classic Ver. 6.4.8.6 in order to properly load the network for the entire period of the test.
- 5) When radar burst with a level equal to the DFS Detection Threshold +1dB is generated on the operating channel of the U-NII device. At time T0 the radar waveform generator sends a burst of pulse of the radar waveform at Detection Threshold +1dB.
- 6) Observe the transmissions of the EUT at the end of the radar Burst on the Operating Channel. Measure and record the transmissions from the UUT during the observation time (Channel Move Time). One 15 seconds plot is reported for the Short Pulse Radar Type 0. The plot for the Short Pulse Radar Types start at the end of the radar burst. The Channel Move Time will be calculated based on the zoom in 600ms plot of the Short Pulse Radar Type.
- 7) Measurement of the aggregate duration of the Channel Closed Transmission Time method. With the spectrum analyzer set to zero span tuned to the center frequency of the EUT operating channel at the radar simulated frequency, peak detection, and max hold, the dwell time per bin is given by: $Dwell (0.3ms) = S (12000ms) / B (4000)$; where Dwell is the dwell time per spectrum analyzer sampling bin, S is sweep time and B is the number of spectrum analyzer sampling bins. An upper bound of the aggregate duration of the intermittent control signals of Channel Closing Transmission Time is calculated by: $C (ms) = N \times Dwell (0.3ms)$; where C is the Closing Time, N is the number of spectrum analyzer sampling bins (intermittent control signals) showing a U-NII transmission and Dwell is the dwell time per bin.
- 8) Measurement the EUT for more than 30 minutes following the channel move time to verify that no transmission or beacons occur on this channel.

Please Refer to Appendix for Details



Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 240 of 852

7.12 Channel Move Time

Test Requirement KDB 905462 D02 Section 5.1

Test Method: KDB 905462 D02 Section 7.8.3

Limit:

Test item	Limit	Applicability	
		Master Device or client with Radar Detection	Client without Radar Detection
Non-occupancy period	Minimum 30 minutes	Yes	Not required
Channel Availability Check Time	60 seconds	Yes	Not required
Channel Move Time	10 seconds See Note 1.	Yes	Yes
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.	Yes	Yes
U-NII Detection Bandwidth	Minimum 100% of the U-NII 99% transmission power bandwidth. See Note 3.	Yes	Not required

Note 1: Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst.

Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

Note 3: During the U-NII Detection Bandwidth detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.

7.12.1 E.U.T. Operation

Operating Environment:

Temperature: 25.4 °C


Humidity: 48.0 % RH

Atmospheric Pressure: 1010 mbar

7.12.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	06	TX mode (U-NII-2A) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ 20/40/80, Only the data of worst case is recorded in the report.
Final test	07	TX mode (U-NII-2C) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ 20/40/80, Only the data of worst case is recorded in the report.

7.12.3 Test Setup Diagram

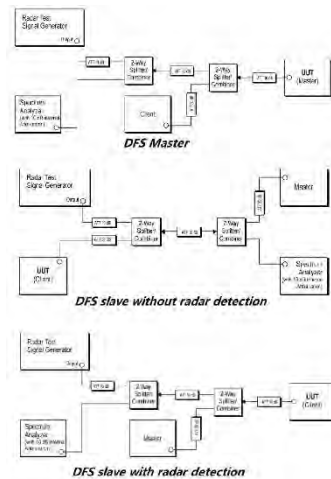

7.12.4 Measurement Procedure and Data

- 1) The radar pulse generator is setup to provide a pulse at frequency that the master and client are operating. A type 0 radar pulse with a 1us pulse width and a 1428us PRI is used for the testing.
- 2) The vector signal generator is adjusted to provide the radar burst (18 pulses) at the level of approximately -61dBm at the antenna port of the master device.
- 3) A trigger is provided from the pulse generator to the DFS monitoring system in order to capture the traffic and the occurrence of the radar pulse.
- 4) EUT will associate with the master at channel. The file "iperf.exe" specified by the FCC is streamed from the PC 2 through the master and the client device to the PC 1 and played in full motion video using Media Player Classic Ver. 6.4.8.6 in order to properly load the network for the entire period of the test.
- 5) When radar burst with a level equal to the DFS Detection Threshold +1dB is generated on the operating channel of the U-NII device. At time T0 the radar waveform generator sends a burst of pulse of the radar waveform at Detection Threshold +1dB.
- 6) Observe the transmissions of the EUT at the end of the radar Burst on the Operating Channel. Measure and record the transmissions from the UUT during the observation time (Channel Move Time). One 15 seconds plot is reported for the Short Pulse Radar Type 0. The plot for the Short Pulse Radar Types start at the end of the radar burst. The Channel Move Time will be calculated based on the zoom in 600ms plot of the Short Pulse Radar Type.
- 7) Measurement of the aggregate duration of the Channel Closed Transmission Time method. With the spectrum analyzer set to zero span tuned to the center frequency of the EUT operating channel at the radar simulated frequency, peak detection, and max hold, the dwell time per bin is given by: $Dwell (0.3ms) = S (12000ms) / B (4000)$; where Dwell is the dwell time per spectrum analyzer sampling bin, S is sweep time and B is the number of spectrum analyzer sampling bins. An upper bound of the aggregate duration of the intermittent control signals of Channel Closing Transmission Time is calculated by: $C (ms) = N \times Dwell (0.3ms)$; where C is the Closing Time, N is the number of spectrum analyzer sampling bins (intermittent control signals) showing a U-NII transmission and Dwell is the dwell time per bin.
- 8) Measurement the EUT for more than 30 minutes following the channel move time to verify that no transmission or beacons occur on this channel.

Please Refer to Appendix for Details

Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 243 of 852

7.13 Channel Closing Transmission Time

Test Requirement KDB 905462 D02 Section 5.1
Test Method: KDB 905462 D02 Section 7.8.3

Limit:

Test item	Limit	Applicability	
		Master Device or client with Radar Detection	Client without Radar Detection
Non-occupancy period	Minimum 30 minutes	Yes	Not required
Channel Availability Check Time	60 seconds	Yes	Not required
Channel Move Time	10 seconds See Note 1.	Yes	Yes
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.	Yes	Yes
U-NII Detection Bandwidth	Minimum 100% of the U-NII 99% transmission power bandwidth. See Note 3.	Yes	Not required

Note 1: Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst.

Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

Note 3: During the U-NII Detection Bandwidth detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.


7.13.1 E.U.T. Operation

Operating Environment:

Temperature: 25.4 °C

Humidity: 48.0 % RH

Atmospheric Pressure: 1010 mbar

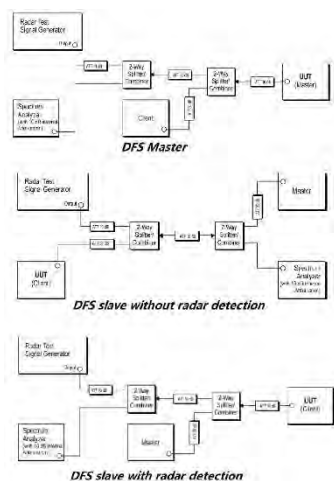

7.13.4 Measurement Procedure and Data

- 1) The radar pulse generator is setup to provide a pulse at frequency that the master and client are operating. A type 0 radar pulse with a 1us pulse width and a 1428us PRI is used for the testing.
- 2) The vector signal generator is adjusted to provide the radar burst (18 pulses) at the level of approximately -61dBm at the antenna port of the master device.
- 3) A trigger is provided from the pulse generator to the DFS monitoring system in order to capture the traffic and the occurrence of the radar pulse.
- 4) EUT will associate with the master at channel. The file "iperf.exe" specified by the FCC is streamed from the PC 2 through the master and the client device to the PC 1 and played in full motion video using Media Player Classic Ver. 6.4.8.6 in order to properly load the network for the entire period of the test.
- 5) When radar burst with a level equal to the DFS Detection Threshold +1dB is generated on the operating channel of the U-NII device. At time T0 the radar waveform generator sends a burst of pulse of the radar waveform at Detection Threshold +1dB.
- 6) Observe the transmissions of the EUT at the end of the radar Burst on the Operating Channel. Measure and record the transmissions from the UUT during the observation time (Channel Move Time). One 15 seconds plot is reported for the Short Pulse Radar Type 0. The plot for the Short Pulse Radar Types start at the end of the radar burst. The Channel Move Time will be calculated based on the zoom in 600ms plot of the Short Pulse Radar Type.
- 7) Measurement of the aggregate duration of the Channel Closed Transmission Time method. With the spectrum analyzer set to zero span tuned to the center frequency of the EUT operating channel at the radar simulated frequency, peak detection, and max hold, the dwell time per bin is given by: $Dwell (0.3ms) = S (12000ms) / B (4000)$; where Dwell is the dwell time per spectrum analyzer sampling bin, S is sweep time and B is the number of spectrum analyzer sampling bins. An upper bound of the aggregate duration of the intermittent control signals of Channel Closing Transmission Time is calculated by: $C (ms) = N \times Dwell (0.3ms)$; where C is the Closing Time, N is the number of spectrum analyzer sampling bins (intermittent control signals) showing a U-NII transmission and Dwell is the dwell time per bin.
- 8) Measurement the EUT for more than 30 minutes following the channel move time to verify that no transmission or beacons occur on this channel.

Please Refer to Appendix for Details

7.14 Radiated Emissions (Below 1GHz)

Test Requirement 47 CFR Part 15, Subpart C 15.209 & Subpart E 15.407(b)

Test Method: KDB 789033 D02 II G

Measurement Distance: 3m

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
960-1000	500	3

7.14.1 E.U.T. Operation


Operating Environment:

Temperature: °C Humidity: % RH Atmospheric Pressure: 1010 mbar

7.14.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	05	TX mode (U-NII-1)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ 20/40/80, Only the data of worst case is recorded in the report.

7.14.3 Test Setup Diagram

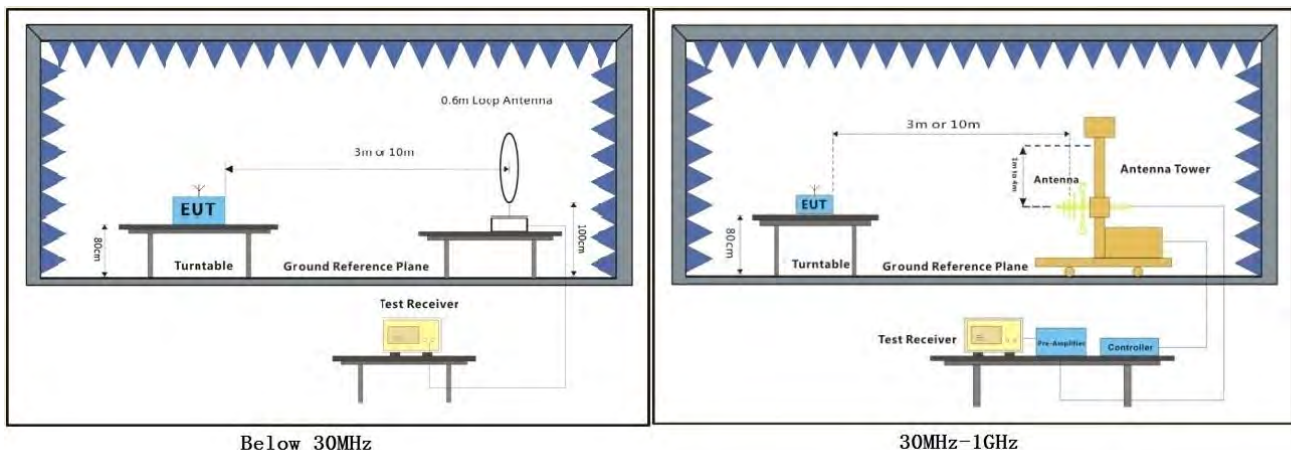

Below 30MHz

30MHz-1GHz

7.14.4 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using quasi-peak method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- i. Repeat above procedures until all frequencies measured was complete.

Remark:

1. Level= Read Level+ Cable Loss+ Antenna Factor- Preamplifier Factor
2. For emission below 1GHz, through the pre-scan found the worst case is the lowest channel of 802.11a. Only the worst case is recorded in the report.
3. Scan from 9kHz to 30MHz, the disturbance below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
4. The disturbance below 1GHz was very low and the harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 248 of 852

Test Mode: 05; Polarity: Horizontal

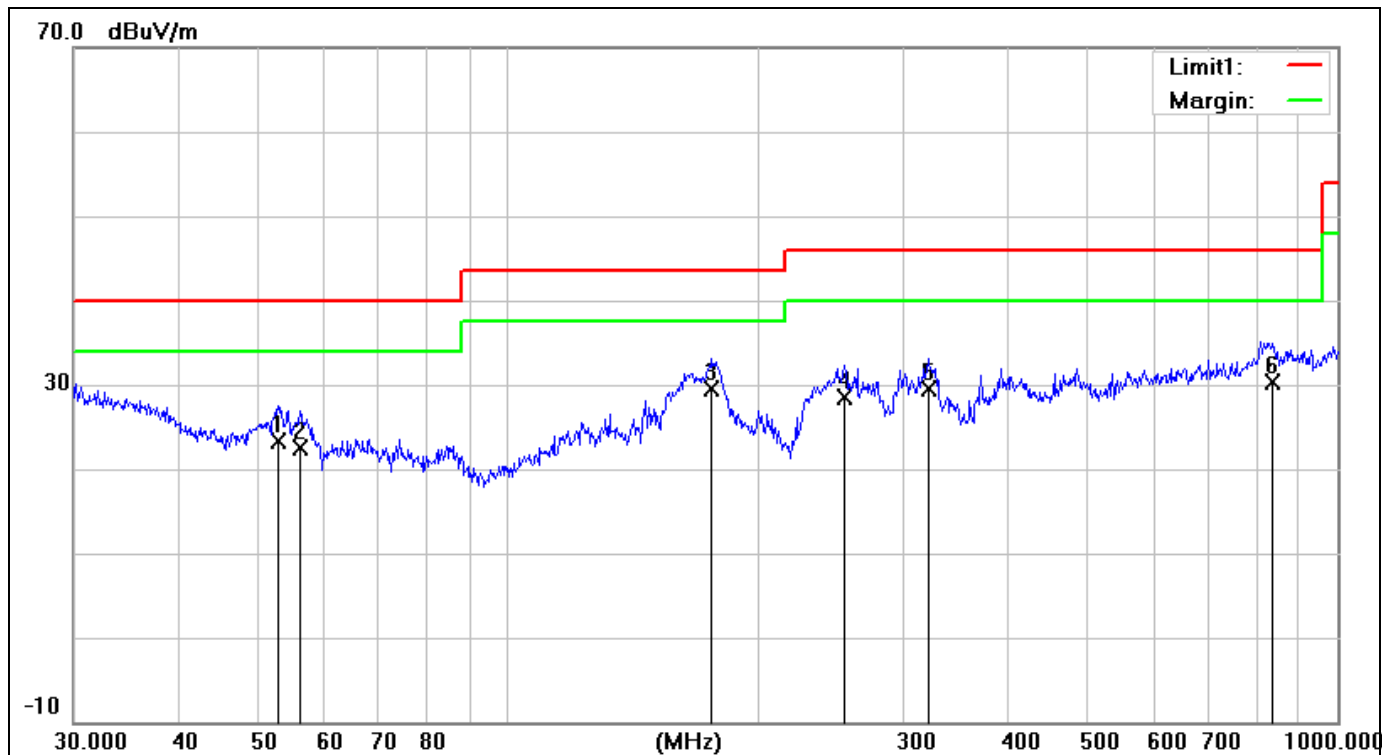

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	52.9453	6.48	16.77	23.25	40.00	-16.75	200	115	QP
2	56.1974	6.65	15.76	22.41	40.00	-17.59	200	28	QP
3	176.2684	12.75	16.77	29.52	43.50	-13.98	100	129	QP
4	254.7282	8.34	20.15	28.49	46.00	-17.51	100	335	QP
5	321.0606	8.37	21.04	29.41	46.00	-16.59	100	327	QP
6	836.2441	28.13	2.15	30.28	46.00	-15.72	100	157	QP


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 249 of 852

Test Mode: 05; Polarity: Vertical

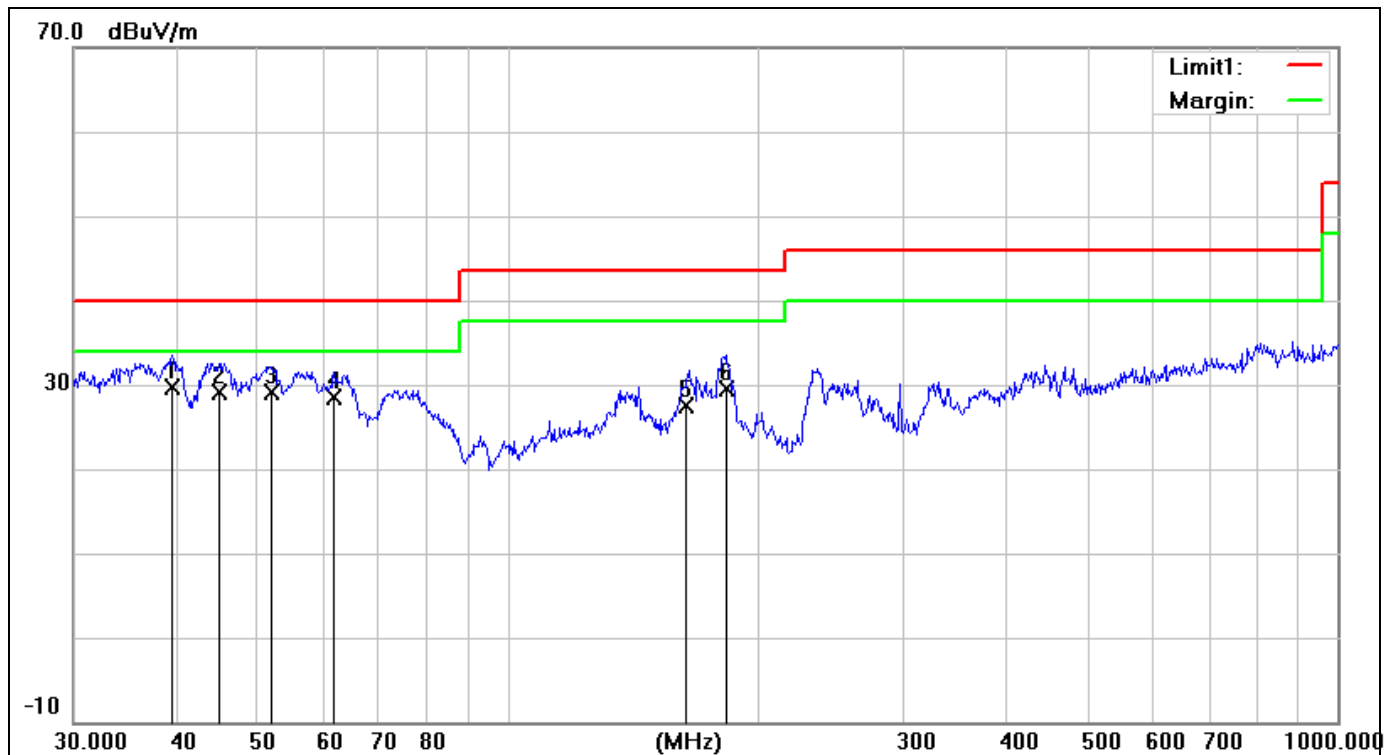

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	39.4371	7.16	22.49	29.65	40.00	-10.35	252	158	QP
2	44.9005	9.27	19.87	29.14	40.00	-10.86	115	166	QP
3	52.0251	11.94	17.10	29.04	40.00	-10.96	100	154	QP
4	61.7781	13.69	14.75	28.44	40.00	-11.56	100	225	QP
5	164.3300	10.12	17.29	27.41	43.50	-16.09	100	76	QP
6	183.2005	13.00	16.54	29.54	43.50	-13.96	100	79	QP



Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 250 of 852

8 Test Setup Photo

Refer to Appendix - Test Setup Photo for KSCR2308001524AT

9 EUT Constructional Details (EUT Photos)

Refer to Appendix - Photographs of EUT Constructional Details for KSCR2308001524AT

10 Appendix

Power level setting using in test:

Channel	802.11a		802.11n(HT20)		802.11ac(VHT20)	
	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2
36	16.5	16.5	15.5	15.5	15	17
40	17	17	15.5	17.5	15	17
48	17	17	15.5	17.5	15	17
52	17	18.5	16	18	15	17
60	17	17	16	18	15	17
64	17	17	16	18	15	17
100	17.5	18.5	16.5	17.5	15.5	16.5
116	17	17	16.5	18	15.5	17
140	17	17	15.5	17.5	15.5	17
149	16.5	18	15.5	17.5	16	17
157	17	16.5	16	17	17	17
165	17.5	17	16.5	17.5	18	17
Channel	802.11n(HT40)		802.11ac(VHT40)			
	Ant 1	Ant 2	Ant 1	Ant 2		
38	11.5	12.5	11.5	12.5		
46	14.5	16.5	14.5	15.5		
54	14.5	16.5	14.5	15.5		
62	12.5	13.5	12	14		
102	13.5	14.5	15.5	15.5		
110	15	16	15.5	15.5		
134	14	16.5	14.5	15.5		
151	14.5	16	14.5	15.5		
159	14.5	16	14.5	15.5		
Channel	802.11ac(VHT80)					
	Ant 1	Ant 2				
42	11.5	12.5				
58	10.5	12.5				
106	15	15.5				
122	15.5	16.5				
155	15.5	16				

Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 252 of 852

1. Duty Cycle

1.1 Ant1

1.1.1 Test Result

Ant1							
Mode	TX Type	Frequency (MHz)	T_on (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	Max. DC Variation (%)
802.11a	SISO	5180	2.030	2.120	95.75	0.19	0.30
		5200	2.030	2.120	95.75	0.19	0.30
		5240	2.030	2.120	95.75	0.19	0.37
		5260	2.030	2.120	95.75	0.19	0.37
		5300	2.030	2.120	95.75	0.19	0.23
		5320	2.030	2.117	95.89	0.18	0.30
		5500	2.030	2.117	95.89	0.18	0.20
		5580	2.030	2.118	95.85	0.18	0.20
		5700	2.030	2.116	95.94	0.18	0.23
		5745	2.029	2.117	95.84	0.18	0.13
		5785	2.029	2.119	95.75	0.19	0.30
		5825	2.030	2.120	95.75	0.19	0.30
802.11n (HT20)	SISO	5180	1.890	1.975	95.70	0.19	0.39
		5200	1.890	1.977	95.60	0.20	0.52
		5240	1.889	1.982	95.31	0.21	0.74
		5260	1.890	1.981	95.41	0.20	0.74
		5300	1.890	1.976	95.65	0.19	0.45
		5320	1.890	1.977	95.60	0.20	0.49
		5500	1.890	1.978	95.55	0.20	0.55
		5580	1.890	1.979	95.50	0.20	0.58
		5700	1.890	1.976	95.65	0.19	0.49
		5745	1.890	1.977	95.60	0.20	0.49
		5785	1.890	1.976	95.65	0.19	0.52
		5825	1.890	1.976	95.65	0.19	0.45
802.11n (HT40)	SISO	5190	0.929	1.018	91.26	0.40	1.18
		5230	0.930	1.021	91.09	0.41	1.45
		5270	0.930	1.018	91.36	0.39	1.18
		5310	0.950	1.035	91.79	0.37	4.76
		5510	0.950	1.037	91.61	0.38	4.93
		5550	0.929	1.018	91.26	0.40	1.18
		5670	0.930	1.018	91.36	0.39	1.18
		5755	0.930	1.020	91.18	0.40	1.36
		5795	0.930	1.017	91.45	0.39	1.09
802.11n (HT20)	MIMO	5180	1.889	1.976	95.60	0.20	0.42
		5200	1.890	1.977	95.60	0.20	0.49

Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 253 of 852

		5240	1.889	1.976	95.60	0.20	0.49
		5260	1.890	1.976	95.65	0.19	0.49
		5300	1.890	1.976	95.65	0.19	0.49
		5320	1.889	1.976	95.60	0.20	0.49
		5500	1.890	1.976	95.65	0.19	0.49
		5580	1.890	1.979	95.50	0.20	0.58
		5700	1.890	1.976	95.65	0.19	0.42
		5745	1.890	1.976	95.65	0.19	0.42
		5785	1.890	1.978	95.55	0.20	0.55
		5825	1.890	1.978	95.55	0.20	0.49
802.11n (HT40)	MIMO	5190	0.930	1.018	91.36	0.39	1.09
		5230	0.930	1.020	91.18	0.40	1.45
		5270	0.930	1.018	91.36	0.39	1.18
		5310	0.950	1.036	91.70	0.38	4.85
		5510	0.950	1.037	91.61	0.38	4.93
		5550	0.930	1.018	91.36	0.39	1.18
		5670	0.930	1.017	91.45	0.39	1.09
		5755	0.930	1.020	91.18	0.40	1.45
		5795	0.930	1.018	91.36	0.39	1.18
802.11ac (VHT20)	SISO	5180	1.902	1.990	95.58	0.20	0.52
		5200	1.902	1.988	95.67	0.19	0.35
		5240	1.902	1.987	95.72	0.19	0.35
		5260	1.902	1.989	95.63	0.19	0.42
		5300	1.902	1.988	95.67	0.19	0.39
		5320	1.902	1.990	95.58	0.20	0.45
		5500	1.902	1.990	95.58	0.20	0.48
		5580	1.902	1.989	95.63	0.19	0.42
		5700	1.934	2.024	95.55	0.20	0.25
		5745	1.934	2.023	95.60	0.20	0.25
		5785	1.933	2.025	95.46	0.20	0.31
		5825	1.933	2.022	95.60	0.20	0.24
802.11ac (VHT40)	SISO	5190	0.954	1.041	91.64	0.38	1.07
		5230	0.954	1.041	91.64	0.38	1.11
		5270	0.954	1.040	91.73	0.37	0.98
		5310	0.954	1.042	91.55	0.38	1.16
		5510	0.954	1.041	91.64	0.38	1.07
		5550	0.954	1.043	91.47	0.39	1.33
		5670	0.954	1.045	91.29	0.40	1.43
		5755	0.954	1.043	91.47	0.39	1.24
		5795	0.954	1.041	91.64	0.38	1.04
802.11ac (VHT80)	SISO	5210	0.466	0.553	84.27	0.74	2.03
		5290	0.465	0.543	85.64	0.67	7.40
		5530	0.465	0.553	84.09	0.75	2.00
		5610	0.465	0.549	84.70	0.72	1.41



Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR230800152404

Page: 254 of 852


		5775	0.466	0.552	84.42	0.74	1.91
802.11ac (VHT20)	MIMO	5180	1.902	1.988	95.67	0.19	0.42
		5200	1.901	1.988	95.62	0.19	0.42
		5240	1.902	1.988	95.67	0.19	0.45
		5260	1.902	1.988	95.67	0.19	0.42
		5300	1.902	1.989	95.63	0.19	0.45
		5320	1.902	1.990	95.58	0.20	0.52
		5500	1.901	1.989	95.58	0.20	0.45
		5580	1.901	1.990	95.53	0.20	0.52
		5700	1.935	2.024	95.60	0.20	0.31
		5745	1.934	2.025	95.51	0.20	0.38
		5785	1.933	2.025	95.46	0.20	0.31
		5825	1.934	2.024	95.55	0.20	0.35
802.11ac (VHT40)	MIMO	5190	0.954	1.041	91.64	0.38	1.05
		5230	0.953	1.042	91.46	0.39	1.16
		5270	0.953	1.039	91.72	0.38	0.95
		5310	0.954	1.044	91.38	0.39	1.37
		5510	0.954	1.043	91.47	0.39	1.24
		5550	0.953	1.044	91.28	0.40	1.34
		5670	0.953	1.044	91.28	0.40	1.34
		5755	0.953	1.043	91.37	0.39	1.28
		5795	0.954	1.048	91.03	0.41	1.68
802.11ac (VHT80)	MIMO	5210	0.465	0.551	84.39	0.74	1.72
		5290	0.465	0.543	85.64	0.67	7.41
		5530	0.465	0.552	84.24	0.74	1.90
		5610	0.466	0.552	84.42	0.74	1.87
		5775	0.466	0.550	84.73	0.72	1.60

1.1.2 Test Graph


802.11a_LCH_5180MHz_Ant1_NTNV

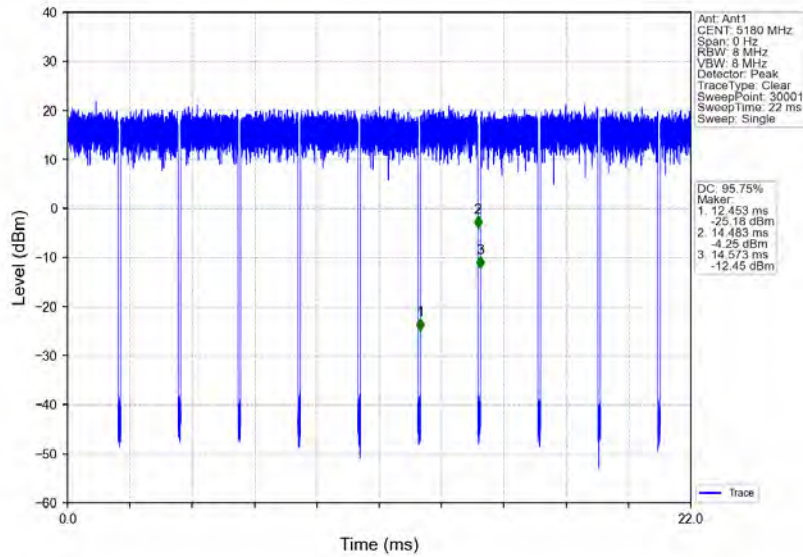


802.11a_MCH_5200MHz_Ant1_NTNV

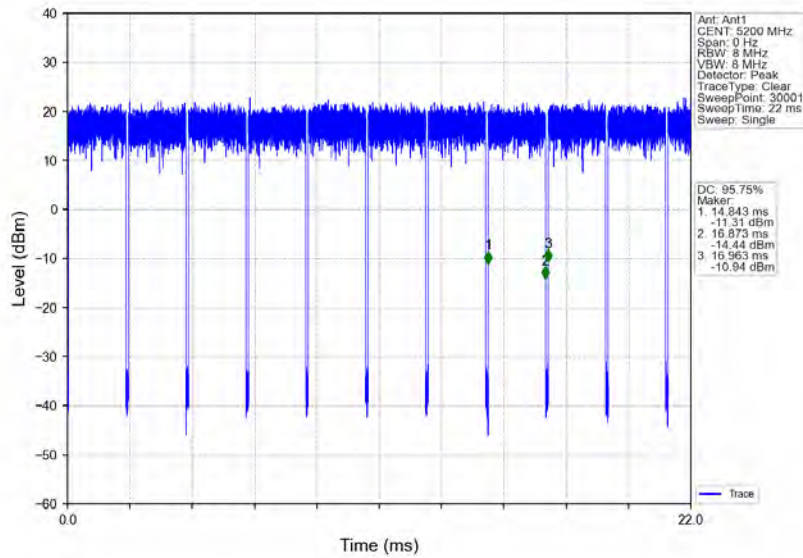

802.11a_HCH_5240MHz_Ant1_NTNV

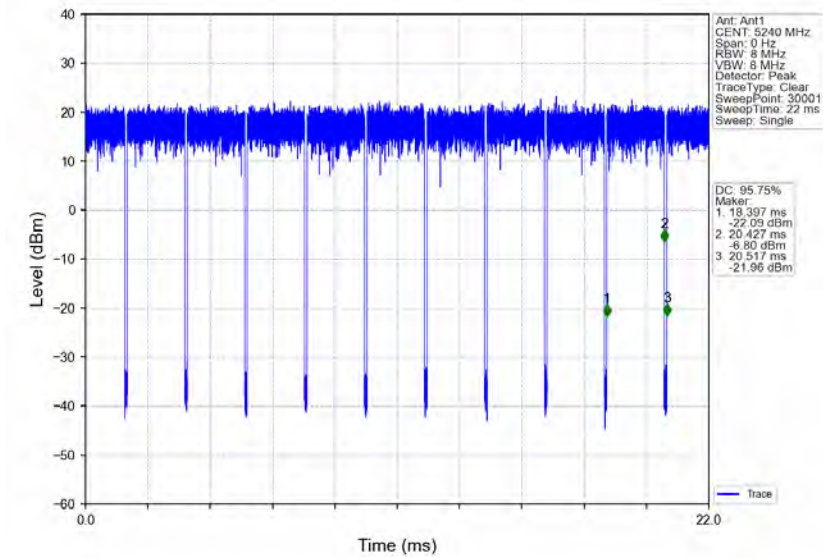

802.11a_LCH_5260MHz_Ant1_NTNV

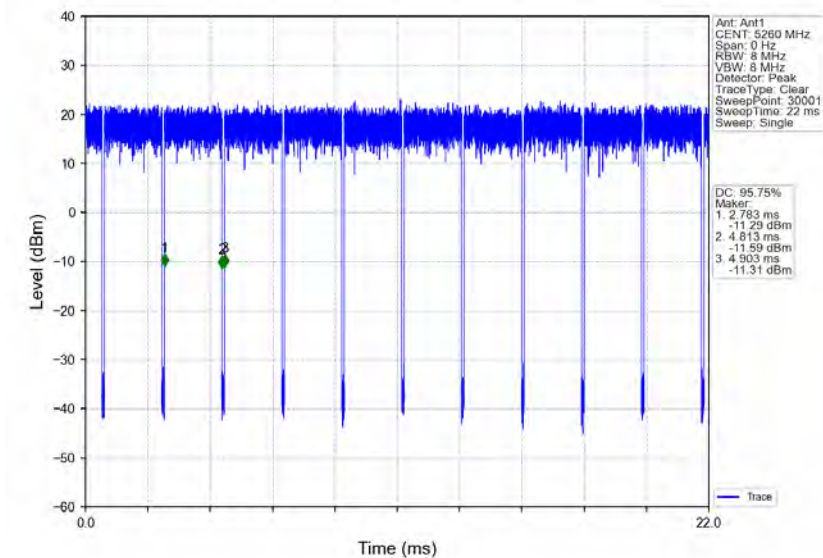


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230800152404

Page: 257 of 852

802.11a_MCH_5300MHz_Ant1_NTNV

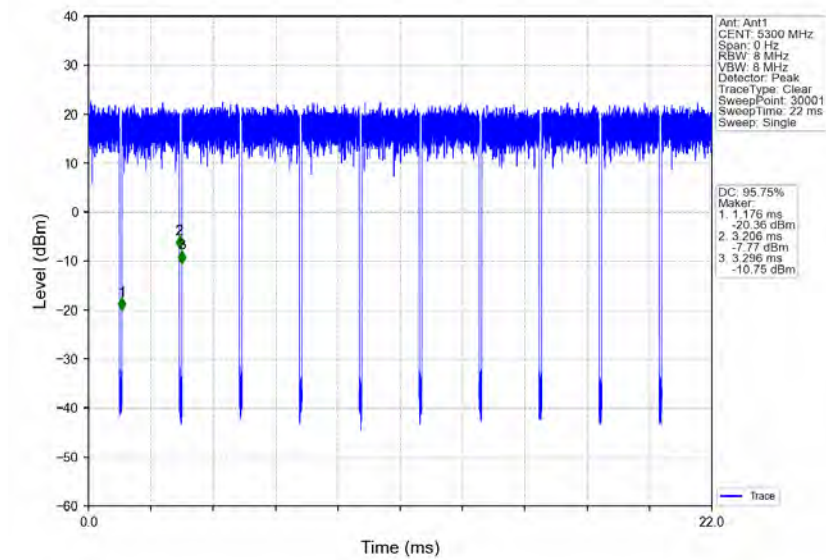

802.11a_HCH_5320MHz_Ant1_NTNV

