



TESTING LABORATORY  
CERTIFICATE#4323.01



## FCC PART 15B



## TEST REPORT

For

### Shanghai Sunmi Technology Co.,Ltd.

Room 605, Block 7, KIC Plaza, No.388 Song Hu Road, Yang Pu District, Shanghai 200433 China

**FCC ID: 2AH25NT210**

<b>Report Type:</b> Original Report	<b>Product Type:</b> Thermal POS Printer
<b>Test Engineer:</b> Jett Zhao	
<b>Report Number:</b> RKSA191118001-00A	
<b>Report Date:</b> 2019-11-30	
<b>Reviewed By:</b> Oscar Ye EMC Manager	
<b>Prepared By:</b> Bay Area Compliance Laboratories Corp. (Kunshan) No.248 Chenghu Road, Kunshan, Jiangsu province, China Tel: +86-0512-86175000 Fax: +86-0512-88934268 <a href="http://www.baclcorp.com.cn">www.baclcorp.com.cn</a>	

**Note:** This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

## TABLE OF CONTENTS

<b>GENERAL INFORMATION.....</b>	<b>3</b>
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....	3
OBJECTIVE .....	3
RELATED SUBMITTAL(S)/GRANT(S).....	3
TEST METHODOLOGY .....	3
TEST FACILITY .....	3
<b>SYSTEM TEST CONFIGURATION.....</b>	<b>4</b>
JUSTIFICATION .....	4
EUT EXERCISE SOFTWARE .....	4
SPECIAL ACCESSORIES .....	4
EQUIPMENT MODIFICATIONS .....	4
SUPPORT EQUIPMENT LIST AND DETAILS .....	4
EXTERNAL I/O CABLE.....	4
BLOCK DIAGRAM OF RADIATED TEST SETUP.....	5
<b>SUMMARY OF TEST RESULTS .....</b>	<b>6</b>
<b>FCC §15.107 – CONDUCTED EMISSIONS .....</b>	<b>7</b>
APPLICABLE STANDARD .....	7
MEASUREMENT UNCERTAINTY .....	7
EUT SETUP .....	7
EMI TEST RECEIVER SETUP.....	8
TEST PROCEDURE .....	8
TEST EQUIPMENT LIST AND DETAILS.....	8
FACTOR & OVER LIMIT CALCULATION .....	8
TEST DATA .....	9
<b>FCC §15.109 - RADIATED EMISSIONS .....</b>	<b>11</b>
APPLICABLE STANDARD .....	11
MEASUREMENT UNCERTAINTY .....	11
TEST SYSTEM SETUP.....	11
EMI TEST RECEIVER SETUP.....	12
TEST EQUIPMENT LIST AND DETAILS.....	12
TEST PROCEDURE .....	12
CORRECTED AMPLITUDE & MARGIN CALCULATION .....	12
TEST DATA .....	13

## GENERAL INFORMATION

### Product Description for Equipment under Test (EUT)

Applicant	Shanghai Sunmi Technology Co.,Ltd.
Test Model	NT210
Product	Thermal POS Printer
Highest Operation Frequency	84MHz
Rate Voltage	AC 110V~240V

*\*All measurement and test data in this report was gathered from production sample serial number: 20191118001. (Assigned by the BACL. The EUT supplied by the applicant was received on 2019-11-18)*

### Objective

This report is prepared on behalf of *Shanghai Sunmi Technology Co.,Ltd.* in accordance with Part 2-Subpart J, and Part 15-Subparts A and B of the Federal Communication Commission's rules.

The objective of the manufacturer is to determine the compliance of EUT with FCC Part 15, Class B device.

### Related Submittal(s)/Grant(s)

No related submittal(s).

### Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2014, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All radiated and conducted emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Kunshan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

### Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the No.248 Chenghu Road, Kunshan, Jiangsu province, China.

Bay Area Compliance Laboratories Corp. (Kunshan) Lab is accredited to ISO/IEC 17025 by A2LA (Lab code: 4323.01) and the FCC designation No. CN1185 under the FCC KDB 974614 D01 and CAB identifier CN0004 under the ISED requirement. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2014.

## SYSTEM TEST CONFIGURATION

### Justification

The system was configured for testing in a typical fashion (as normally used by a typical user).

*Test mode: Printing and data transmission*

### EUT Exercise Software

No software was used to test

### Special Accessories

No special accessory was used.

### Equipment Modifications

No modification was made to the EUT tested.

### Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
Shanghai Sumi Technology Co.,Ltd	Cash box	/	/
HP	Adapter	PA-1900-32HN	PPP012L-E
HP	Notebook	4441s	2CE3130VWY
TP-LINK	Router	EC26CA652860	1153145002998
DELL	Mouse	MS116	2136538

### External I/O Cable

Cable Description	Length (m)	From/Port	To
USB Cable	1.2	EUT	Notebook
Power Cable 1	1.0	AC source	Adapter
Power Cable 2	1.0	EUT	Cash box
Power Cable 3	0.8	Notebook	Adapter
RJ45 Cable	10	Notebook	Router
Power cable 4	1.0	Cash Box	AC Source

### Block Diagram of Radiated Test Setup

*Test mode: Printing and data transmission*

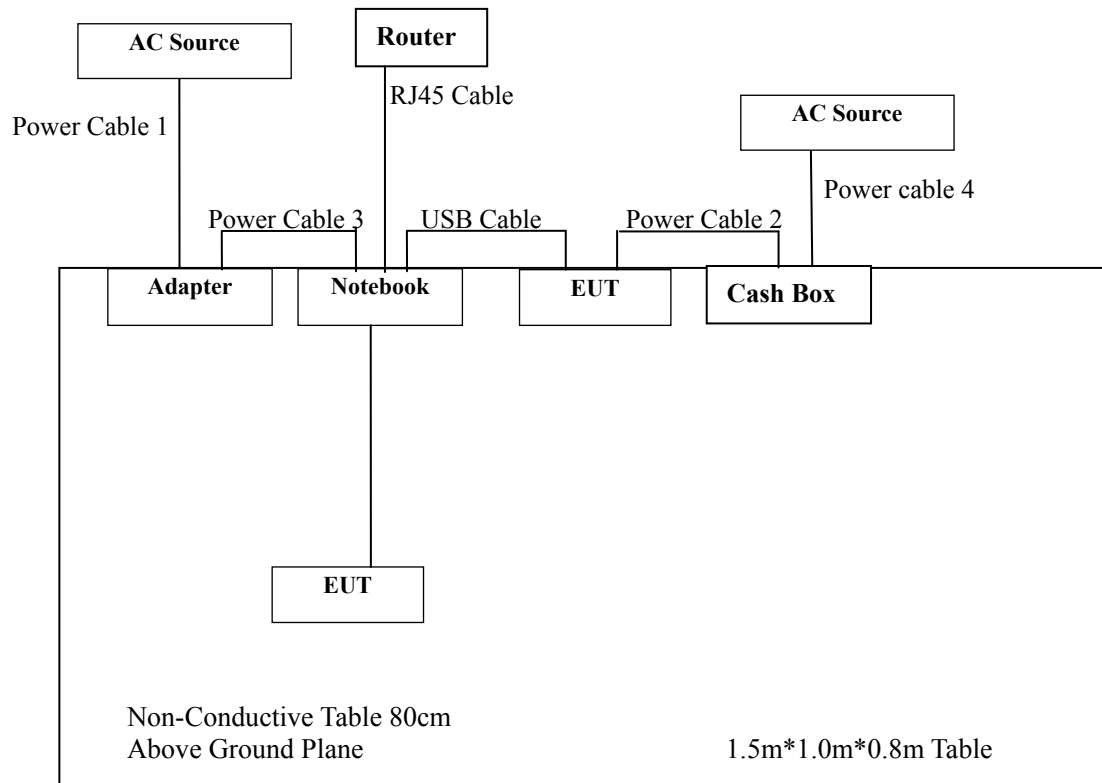

---

## SUMMARY OF TEST RESULTS

---

FCC Rules	Description of Test	Results
§15.107	Conducted Emissions	Compliant
§15.109	Radiated Emissions	Compliant

## FCC §15.107 – CONDUCTED EMISSIONS

### Applicable Standard

According to FCC§15.107


### Measurement Uncertainty

Input quantities to be considered for conducted disturbance measurements maybe receiver reading, attenuation of the connection between LISN and receiver, LISN voltage division factor, LISN VDF frequency interpolation and receiver related input quantities, etc.

Item	Measurement Uncertainty	$U_{cispr}$
AMN	150kHz~30MHz	3.19 dB
		3.4 dB

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

### EUT Setup

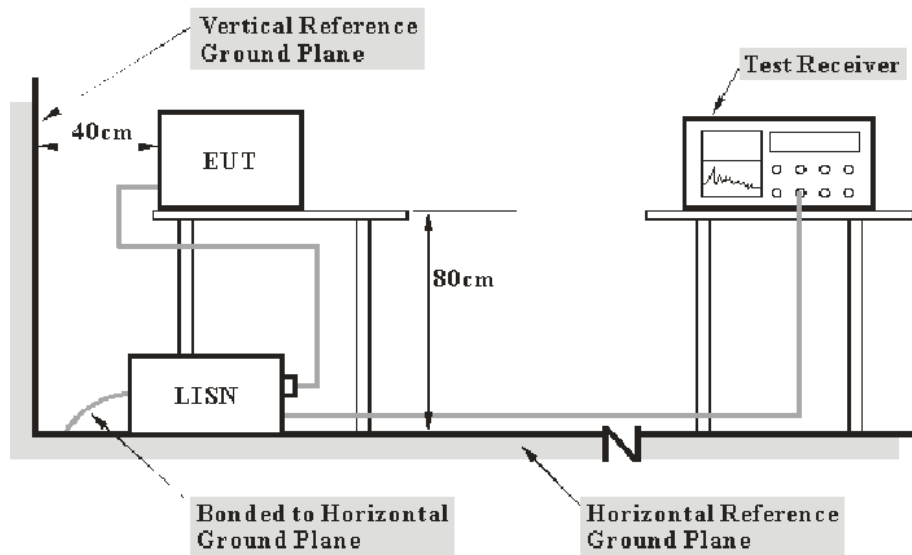

- Note: 1. Support units were connected to second LISN.  
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.4-2014. The related limit was specified in FCC Part 15.107 Class B limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

## EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

## Test Procedure

During the conducted emission test, the Adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

## Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESR	1316.3003K03 -101746-zn	2019-08-05	2020-08-04
Rohde & Schwarz	LISN	ENV216	3560655016	2018-11-30	2019-11-29
Audix	Test Software	e3	V9	--	--
MICRO-COAX	Coaxial Cable	Cable-6	006	2019-09-08	2020-09-07

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

## Factor & Over Limit Calculation

The Corrected Factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Factor (dB)} = \text{LISN VDF (dB)} + \text{Cable Loss (dB)} + \text{Transient Limiter Attenuation (dB)}$$

The “**Over Limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit of 7 dB means the emission is 7 dB above the limit. The equation for Over Limit calculation is as follows:

$$\text{Over Limit (dB)} = \text{Read level (dB}\mu\text{V)} + \text{Factor (dB)} - \text{Limit (dB}\mu\text{V)}$$



**Test Data**


**Environmental Conditions**

<b>Temperature:</b>	22 °C
<b>Relative Humidity:</b>	50 %
<b>ATM Pressure:</b>	101.1 kPa

The testing was performed by Jett Zhao on 2019-11-25.


Test mode: Printing and data transmission

**Line:**

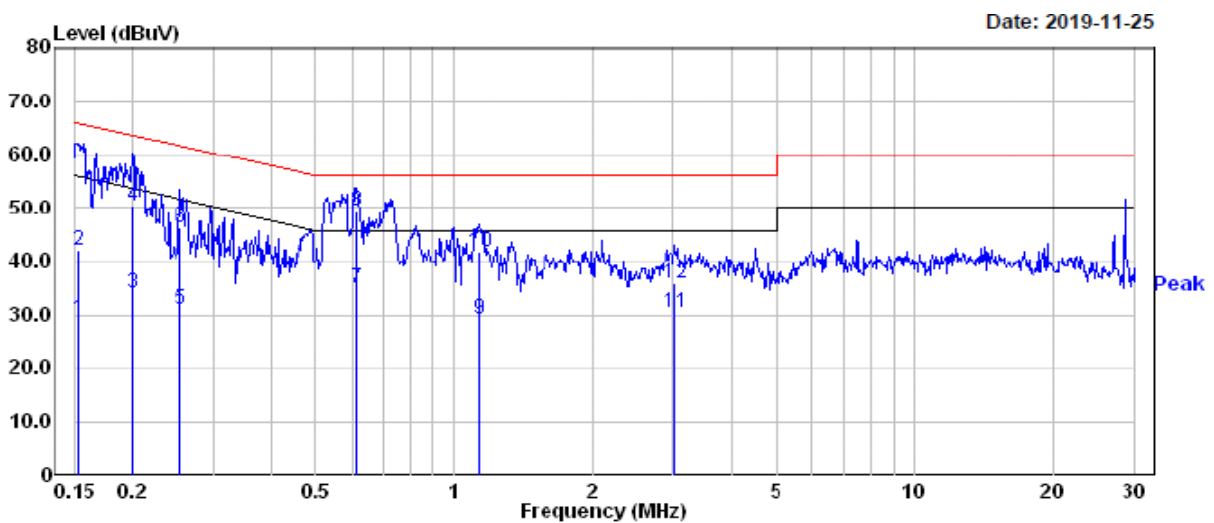

	Read		Limit	Over			
	Freq	Level	Factor	Level	Line	Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.153	9.60	19.82	29.42	55.82	-26.40	Average
2	0.153	22.30	19.82	42.12	65.82	-23.70	QP
3	0.200	14.20	19.82	34.02	53.62	-19.60	Average
4	0.200	30.50	19.82	50.32	63.62	-13.30	QP
5	0.255	11.40	19.82	31.22	51.60	-20.38	Average
6	0.255	26.80	19.82	46.62	61.60	-14.98	QP
7	0.611	15.40	19.75	35.15	46.00	-10.85	Average
8	0.611	29.80	19.75	49.55	56.00	-6.45	QP
9	1.129	9.50	19.81	29.31	46.00	-16.69	Average
10	1.129	22.30	19.81	42.11	56.00	-13.89	QP
11	3.009	11.00	19.46	30.46	46.00	-15.54	Average
12	3.009	16.50	19.46	35.96	56.00	-20.04	QP

Neutral:

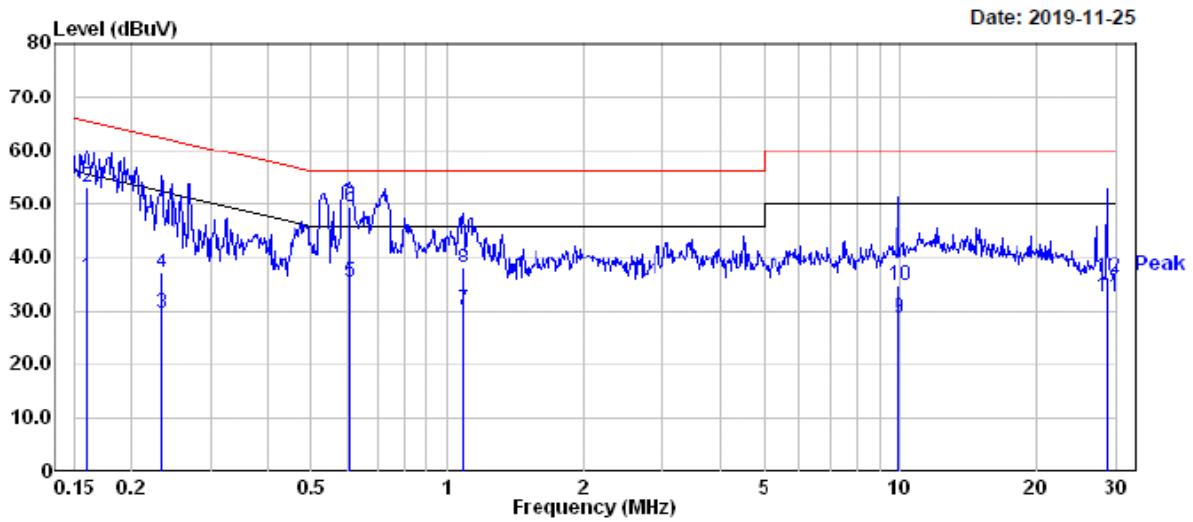

	Read Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.160	16.50	19.83	36.33	55.47	-19.14	Average
2	0.160	33.40	19.83	53.23	65.47	-12.24	QP
3	0.233	9.90	19.82	29.72	52.35	-22.63	Average
4	0.233	17.30	19.82	37.12	62.35	-25.23	QP
5	0.608	15.50	19.75	35.25	46.00	-10.75	Average
6	0.608	29.90	19.75	49.65	56.00	-6.35	QP
7	1.082	10.50	19.82	30.32	46.00	-15.68	Average
8	1.082	18.20	19.82	38.02	56.00	-17.98	QP
9	9.913	9.10	19.55	28.65	50.00	-21.35	Average
10	9.913	15.30	19.55	34.85	60.00	-25.15	QP
11	28.603	12.80	19.76	32.56	50.00	-17.44	Average
12	28.603	16.50	19.76	36.26	60.00	-23.74	QP

## FCC §15.109 - RADIATED EMISSIONS

### Applicable Standard

FCC §15.109

### Measurement Uncertainty


All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average) and system repeatability.

Item		Measurement Uncertainty	$U_{cispr}$
Radiated Emission	30MHz~1GHz	6.11dB	6.3 dB

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

### Test System Setup

Below 1GHz:

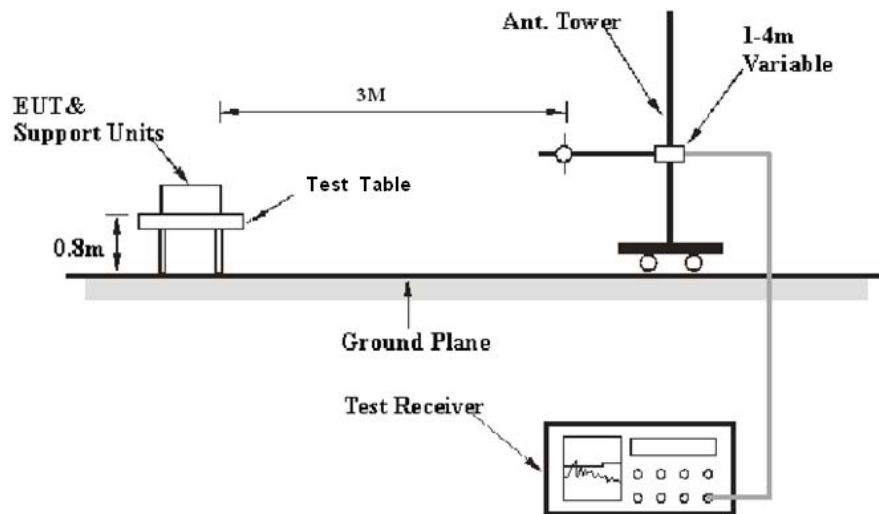

The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.4-2014. The specification used was the FCC Part 15.109 Class B limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

## EMI Test Receiver Setup

The system was investigated from 30 MHz to 1 GHz.

During the radiated emission test, the EMI test receiver Setup was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector Type
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP

## Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Sonoma Instrument	Amplifier	310N	185700	2019-08-14	2020-08-13
Rohde & Schwarz	EMI Test Receiver	ESCI	100195	2019-07-30	2020-08-29
Sunol Sciences	Broadband Antenna	JB3	A090413-1	2017-12-26	2020-12-25
Champrotek	Chamber	Chamber A	T-KSEMC049	-	-
Rohde & Schwarz	Auto test Software	EMC32	100361	-	-
A.H.Systems, inc	Amplifier	2641-1	491	2019-02-20	2020-02-19
MICRO-COAX	Coaxial Cable	Cable-8	008	2019-08-15	2020-08-14
MICRO-COAX	Coaxial Cable	Cable-9	009	2019-08-15	2020-08-14

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

## Test Procedure

During the radiated emissions, the adapter was connected to the first AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All data was recorded in the Quasi-peak detection mode from 30MHz to 1GHz, Peak and average detection mode above 1 GHz.

## Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

**Test Data**


**Environmental Conditions**

<b>Temperature:</b>	20.5°C
<b>Relative Humidity:</b>	52 %
<b>ATM Pressure:</b>	102.0 kPa

The testing was performed by Jett Zhao on 2019-12-10.

Test mode: Printing and data transmission

**1) 30MHz ~ 1GHz:**

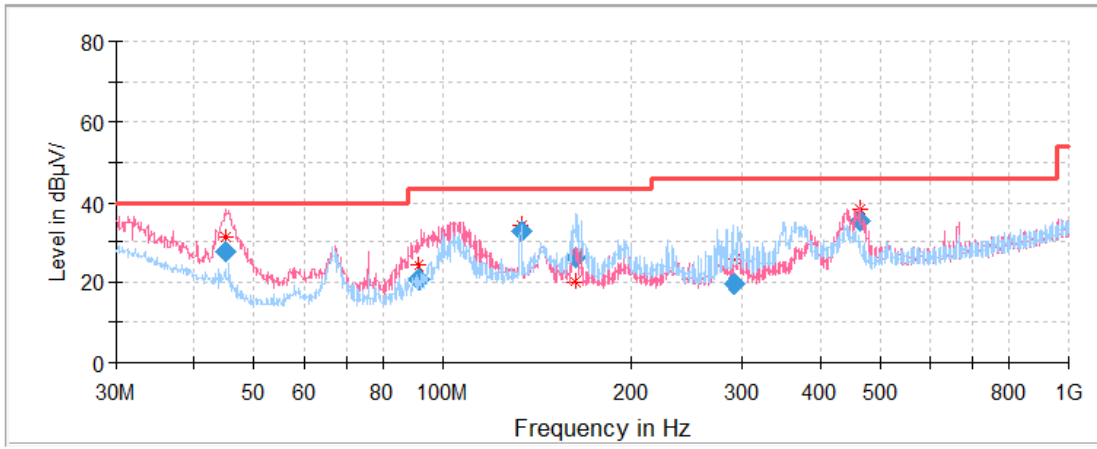

Frequency (MHz)	Quasi-Peak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
45.133100	27.56	40.00	12.44	100.0	V	98.0	-14.2
91.310200	20.55	43.50	22.95	100.0	V	98.0	-17.1
133.245850	32.79	43.50	10.71	200.0	H	163.0	-11.7
162.438900	26.10	43.50	17.40	200.0	H	18.0	-12.8
292.088250	19.54	46.00	26.46	100.0	H	341.0	-10.7
462.911350	35.23	46.00	10.77	100.0	V	13.0	-7.1

**\*\*\*\*\*END OF REPORT\*\*\*\*\***