

TEST REPORT

Application No.: KSEM2008000932CR
FCC.: 2AH25NT312
Applicant: Shanghai Sunmi Technology Co.,Ltd.
Address of Applicant: Room 605,Block 7,KIC Plaza,No.388 Song Hu Road Yang Pu District,Shanghai,China
Manufacturer: Shanghai Sunmi Technology Co.,Ltd.
Address of Manufacturer: Room 605,Block 7,KIC Plaza,No.388 Song Hu Road Yang Pu District,Shanghai,China
Factory: Kang Zhun Electronical Technology(Kunshan)Co.,Ltd.Wu Song Jiang Branch
Address of Factory: No.299,Nansong Road,Yushan Town,Kunshan City,Jiangsu Province,China
Equipment Under Test (EUT):
EUT Name: Cloud POS Printer
Model No.: NT312
Standard(s) : 47 CFR Part 2
 47 CFR Part 22
 47 CFR Part 24
 47 CFR Part 27
Date of Receipt: 2020-08-03
Date of Test: 2020-08-14 to 2020-09-14
Date of Issue: 2020-09-22

Test Result:	Pass
---------------------	-------------

* In the configuration tested, the EUT complied with the standards specified above.

Eric Lin
EMC Lab Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300
 中国·江苏·昆山市留学院创业园伟业路10号 邮编 215300

t(86-512)57355888 f(86-512)57370818 www.sgsgroup.com.cn
 t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com

Revision Record			
Version	Description	Date	Remark
00	Original	2020-09-22	/

Authorized for issue by:			
		 <hr/> Damon Zhou / Project Engineer	
		 <hr/> Eric Lin / Reviewer	

2 Test Summary

Test Item	FCC Rule No.	Requirements	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §22.913, §24.232 §27.50(b) §27.50(c) §27.50(d)	ERP≤7W(LTE Band 5) EIRP≤ 3W(LTE Band 12,13) EIRP≤ 2W(LTE Band 2) EIRP≤ 1W(LTE Band 4)	PASS
Peak-Average Ratio	§24.232 §27.50(c) §27.50(d)	≤13dB	PASS
Modulation Characteristics	§2.1047	Digital modulation	PASS
Bandwidth	§2.1049(h)	OBW:No limit EBW: No limit	PASS
Band Edge Compliance	§2.1051, §22.917, §24.238 §27.53(c) §27.53(h) §27.53(g)	≤ -13dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block(LTE Band2,4,5,12) LTE Band 13 should follow FCC §27.53(c): On any frequency outside the 776-788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least 43 + 10 log (P) dB. On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than 65 + 10 log (P) dB in a 6.25 kHz band segment, for mobile and portable stations.	PASS
Spurious emissions at antenna terminals	§2.1051, §22.917, §24.238 §27.53(h) §27.53(g)	≤ -13dBm(LTE Band2,4,5,12,13)	PASS
Field strength of spurious radiation	§2.1051, §22.917, §24.238 §27.53(h) §27.53(g)	≤ -13dBm(LTE Band2,4,5,12,13)	PASS
Frequency stability	§2.1055, §22.355, §24.235 §27.54	≤ ±2.5ppm.	PASS

3 Contents

	Page
1 COVER PAGE	1
2 TEST SUMMARY	3
3 CONTENTS	4
4 GENERAL INFORMATION	6
4.1 Details of E.U.T.	6
4.2 Test Frequency	7
4.3 Test Environment	8
4.4 Description of Support Units	8
4.5 Measurement Uncertainty	8
4.6 Test Location	9
4.7 Test Facility	9
4.8 Deviation from Standards	9
4.9 Abnormalities from Standard Conditions	9
5 EQUIPMENT LIST	10
6 RADIO SPECTRUM MATTER TEST RESULTS	11
6.1 Effective (Isotropic) Radiated Power Output Data	11
6.1.1 E.U.T. Operation	11
6.1.2 Test Setup Diagram	11
6.1.3 Measurement Data	11
6.2 Peak-Average Ratio	12
6.2.1 E.U.T. Operation	12
6.2.2 Test Setup Diagram	12
6.2.3 Measurement Data	12
6.3 Bandwidth	13
6.3.1 E.U.T. Operation	13
6.3.2 Test Setup Diagram	13
6.3.3 Measurement Data	13
6.4 Band Edge Compliance	14
6.4.1 E.U.T. Operation	14
6.4.2 Test Setup Diagram	14
6.4.3 Measurement Data	14
6.5 Spurious emissions at antenna terminals	15
6.5.1 E.U.T. Operation	15
6.5.2 Test Setup Diagram	15
6.5.3 Measurement Data	15
6.6 Field strength of spurious radiation	16
6.6.1 E.U.T. Operation	16
6.6.2 Test Setup Diagram	16
6.6.3 Measurement Procedure and Data	17
6.7 Frequency stability	23
6.7.1 E.U.T. Operation	23
6.7.2 Test Setup Diagram	23
6.7.3 Measurement Data	23
6.8 Modulation Characteristics	24
6.8.1 E.U.T. Operation	24
6.8.2 Test Setup Diagram	24
6.8.3 Measurement Data	24



7 TEST SETUP PHOTOGRAPHS25

8 EUT CONSTRUCTIONAL DETAILS25

4 General Information

4.1 Details of E.U.T.

Power supply:	DC 24V by Adapter Adapter Model:CYSE65-240250 INPUT:100-240V,50/60Hz 1.7A OUTPUT:24V,2.5A
Test voltage:	AC 120V, 60Hz
Sample Type:	Portable production
LTE Operation Frequency Band:	LTE FDD Band 2, 4, 5, 12,13
Modulation Type:	QPSK, 16QAM
Antenna Type:	PIFA
Antenna Gain:	Band 2: 0.96dBi Band 4:-0.39dBi Band 5:-0.63dBi Band 12:-0.89dBi Band 13:-2.33dBi
Extreme temp. Tolerance:	0°C to +45°C
Extreme vol. Limits:	102VAC to 138VAC (nominal: 120V AC)
IMEI:	P4K41005010050

4.2 Test Frequency

Test mode:	Nominal Bandwidth (MHz)	RF Channel		
		Low (L)	Middle (M)	High (H)
		MHz	MHz	MHz
LTE FDD Band 2	1.4	1850.7	1880	1909.3
	3	1851.5	1880	1908.5
	5	1852.5	1880	1907.5
	10	1855.0	1880	1905.0
	15	1857.5	1880	1902.5
	20	1860.0	1880	1900.0
Test mode:	Nominal Bandwidth (MHz)	RF Channel		
		Low (L)	Middle (M)	High (H)
		MHz	MHz	MHz
LTE FDD Band 4	1.4	1710.7	1732.5	1754.3
	3	1711.5	1732.5	1753.5
	5	1712.5	1732.5	1752.5
	10	1715.0	1732.5	1750.0
	15	1717.5	1732.5	1747.5
	20	1720.0	1732.5	1745.0
Test mode:	Nominal Bandwidth (MHz)	RF Channel		
		Low (L)	Middle (M)	High (H)
		MHz	MHz	MHz
LTE FDD Band 5	1.4	824.7	836.5	848.3
	3	825.5	836.5	847.5
	5	826.5	836.5	846.5
	10	829.0	836.5	844.0
Test mode:	Nominal Bandwidth (MHz)	RF Channel		
		Low (L)	Middle (M)	High (H)
		MHz	MHz	MHz
LTE FDD Band 12	1.4	699.7	707.5	715.3
	3	700.5	707.5	714.5
	5	701.5	707.5	713.5
	10	704	707.5	711
Test mode:	Nominal Bandwidth (MHz)	RF Channel		
		Low (L)	Middle (M)	High (H)
		MHz	MHz	MHz
LTE FDD Band 13	5	779.5	782	784.5
	10	/	782	/

4.3 Test Environment

Environment Parameter	Selected Values During Tests	
Relative Humidity	48%	
Atmospheric Pressure:	1015Pa	
Temperature:	TN	25 °C
Voltage:	VL	102 V
	VN	120 V
	VH	138 V

NOTE: VL= lower extreme test voltage
 VN= nominal voltage
 VH= upper extreme test voltage
 TN= normal temperature

4.4 Description of Support Units

The EUT has been tested independent unit.

4.5 Measurement Uncertainty

No.	Item	Measurement Uncertainty
1	Radio Frequency	8.4×10^{-8}
2	Timeout	2s
3	Duty cycle	0.37%
4	Occupied Bandwidth	3%
5	RF conducted power	0.6dB
6	RF power density	2.84dB
7	Conducted Spurious emissions	0.75dB
8	RF Radiated power	4.6dB (Below 1GHz)
		4.1dB (Above 1GHz)
9	Radiated Spurious emission test	4.2dB (Below 30MHz)
		4.4dB (30MHz-1GHz)
		4.8dB (1GHz-18GHz)
		5.2dB (Above 18GHz)
10	Temperature test	1°C
11	Humidity test	3%
12	Supply voltages	1.5%
13	Time	3%

Note: The measurement uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

4.6 Test Location

All tests were performed at:

Compliance Certification Services (Kunshan) Inc.

No.10 Weiye Rd, Innovation park, Eco&Tec, Development Zone, Kunshan City, Jiangsu, China.

Tel: +86 512 5735 5888 Fax: +86 512 5737 0818

No tests were sub-contracted.

4.7 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **CNAS (No. CNAS L4354)**

CNAS has accredited Compliance Certification Services (Kunshan) Inc. to ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

- **A2LA (Certificate No. 2541.01)**

Compliance Certification Services (Kunshan) Inc. is accredited by the American Association for Laboratory Accreditation (A2LA). Certificate No. 2541.01.

- **FCC (Designation Number: CN1172)**

Compliance Certification Services Inc. has been recognized as an accredited testing laboratory.

Designation Number: CN1172.

- **ISED (CAB Identifier: CN0072)**

Compliance Certification Services (Kunshan) Inc. has been recognized by Innovation, Science and Economic Development (ISED) Canada as an accredited testing laboratory.

CAB Identifier: CN0072.

- **VCCI (Member No.: 1938)**

The 3m and 10m Semi-anechoic chamber and Shielded Room of Compliance Certification Services (Kunshan) Inc. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-1600, C-1707, T-1499, G-10216 respectively.

4.8 Deviation from Standards

None

4.9 Abnormalities from Standard Conditions

None

5 Equipment List

Item	Equipment	Manufacturer	Model	Serial Number	Cal Date	Cal. Due Date
Conducted Emission at Mains Terminals (150kHz-30MHz)						
1	EMI Test Receive	R&S	ESCI	100781	02/24/2020	02/23/2021
2	LISN	R&S	ENV216	101604	10/24/2019	10/23/2020
3	LISN	Schwarzbeck	NNLK 8129	8129-143	10/24/2019	10/23/2020
4	Pulse Limiter	R&S	ESH3-Z2	100609	02/24/2020	02/23/2021
5	CE test Cable	Thermax	/	14	02/24/2020	02/23/2021
RF Conducted Test						
1	Spectrum Analyzer	Agilent	E4446A	MY44020154	04/22/2020	04/21/2021
2	Spectrum Analyzer	Keysight	N9020A	MY55370209	12/19/2019	12/18/2020
3	Signal Generator	Agilent	E8257C	MY43321570	10/24/2019	10/23/2020
4	Vector Signal Generator	R&S	SMU 200A	102744	02/24/2020	02/23/2021
5	Universal Radio Communication Tester	R&S	CMU200	109525	12/19/2019	12/18/2020
6	Universal Radio Communication Tester	R&S	CMW500	159275	12/19/2019	12/18/2020
7	Power Meter	Anritsu	ML2495A	1445010	04/21/2020	04/20/2021
8	Switcher	CCSRF	FY562	KS301219	12/20/2019	12/19/2020
9	AC Power Source	EXTECH	6605	1570106	N.C.R	N.C.R
10	DC Power Supply	Agilent	E3632A	MY50340053	N.C.R	N.C.R
11	6dB Attenuator	Mini-Circuits	NAT-6-2W	15542-1	N.C.R	N.C.R
12	Power Divider	AISI	IOWOPE2068	PE2068	N.C.R	N.C.R
13	Filter	MICRO-TRONICS	BRM50701	5	N.C.R	N.C.R
14	Conducted test cable	/	RF01-RF04	/	04/21/2020	04/22/2021
15	Temp. / Humidity Chamber	TERCHY	MHK-120AK	X30109	04/21/2020	04/20/2021
RF Radiated Test						
1	Spectrum Analyzer	R&S	FSV40	101493	01/08/2020	01/07/2021
2	Signal Generator	Agilent	E8257C	MY43321570	10/24/2019	10/23/2020
3	Loop Antenna	Schwarzbeck	HXYZ9170	9170-108	02/24/2020	02/23/2021
4	Bilog Antenna	TESEQ	CBL 6112D	35403	06/22/2019	06/21/2021
5	Bilog Antenna	SCHWARZBECK	VULB9160	9160-3342	04/29/2019	04/28/2021
6	Horn-antenna(1-18GHz)	Schwarzbeck	BBHA9120D	267	11/04/2018	11/03/2020
7	Horn-antenna(1-18GHz)	ETS-LINDGREN	3117	00143290	02/25/2019	02/24/2021
8	Horn Antenna(18-40GHz)	Schwarzbeck	BBHA9170	BBHA9170171	02/27/2018	02/26/2021
9	Pre-Amplifier(30MHz~18GHz)	CCSRF	AMP1277	1	12/19/2019	12/18/2020
10	Pre-Amplifier(0.1~26.5GHz)	EMCI	EMC012645	980060	04/21/2020	04/20/2021
11	Low Pass Filter	MICRO-TRONICS	VLFX-950	RV142900829	N.C.R	N.C.R
12	High Pass Filter	Mini-Circuits	VHF-1200	15542	N.C.R	N.C.R
13	Filter (5450MHz~5770 MHz)	MICRO-TRONICS	BRC50704-01	2	N.C.R	N.C.R
14	Filter (5690 MHz~5930 MHz)	MICRO-TRONICS	BRC50705-01	4	N.C.R	N.C.R
15	Filter (5150 MHz~5350 MHz)	MICRO-TRONICS	BRC50703-01	2	N.C.R	N.C.R
16	Filter (885 MHz~915 MHz)	MICRO-TRONICS	BRM14698	1	N.C.R	N.C.R
17	Filter (815 MHz~860 MHz)	MICRO-TRONICS	BRM14697	1	N.C.R	N.C.R
18	Filter (1745 MHz~1910 MHz)	MICRO-TRONICS	BRM14700	1	N.C.R	N.C.R
19	Filter (1922 MHz~1977 MHz)	MICRO-TRONICS	BRM50715	1	N.C.R	N.C.R
20	Filter (2550 MHz)	MICRO-TRONICS	HPM13362	5	N.C.R	N.C.R
21	Filter (1532 MHz~1845 MHz)	MICRO-TRONICS	BRM50713	1	N.C.R	N.C.R
22	Filter (2.4GHz)	MICRO-TRONICS	BRM50701	5	N.C.R	N.C.R
23	RE test cable	/	RE01-RE04	/	04/21/2020	04/22/2021

6 Radio Spectrum Matter Test Results

6.1 Effective (Isotropic) Radiated Power Output Data

Test Requirement: §2.1046, §22.913, §24.232, §27.50(b), §27.50(c), §27.50(d)
 Test Method: ANSI C63.26, KDB 971168 D01 v03
 Limit: ERP ≤ 7W (LTE Band 5)
 EIRP ≤ 3W (LTE Band 12, 13)
 EIRP ≤ 2W (LTE Band 2)
 EIRP ≤ 1W (LTE Band 4)


6.1.1 E.U.T. Operation

Operating Environment:

Temperature: 22.7 °C Humidity: 68.2 % RH Atmospheric Pressure: 1030 mbar

Test mode: a: Tx mode, Keep the EUT in transmitting mode.

6.1.2 Test Setup Diagram

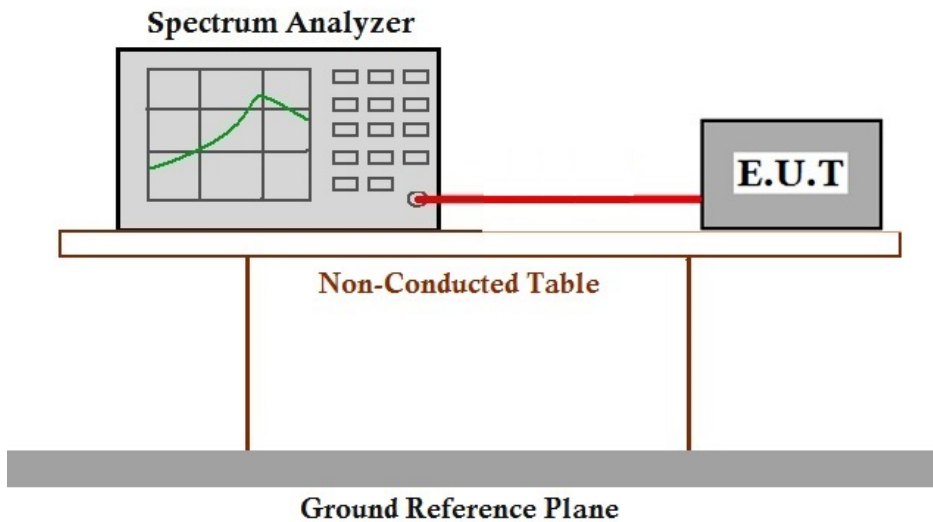

6.1.3 Measurement Data

Please refer to Appendix A for Effective (Isotropic) Radiated Power Output Data-LTE


6.2 Peak-Average Ratio

Test Requirement: §2.1046
 Test Method: ANSI C63.26, KDB 971168 D01 v03
 Limit: ≤13dB

6.2.1 E.U.T. Operation

Operating Environment:
 Temperature: 22.7 °C Humidity: 68.2 % RH Atmospheric Pressure: 1030 mbar
 Test mode: a: Tx mode, Keep the EUT in transmitting mode.

6.2.2 Test Setup Diagram

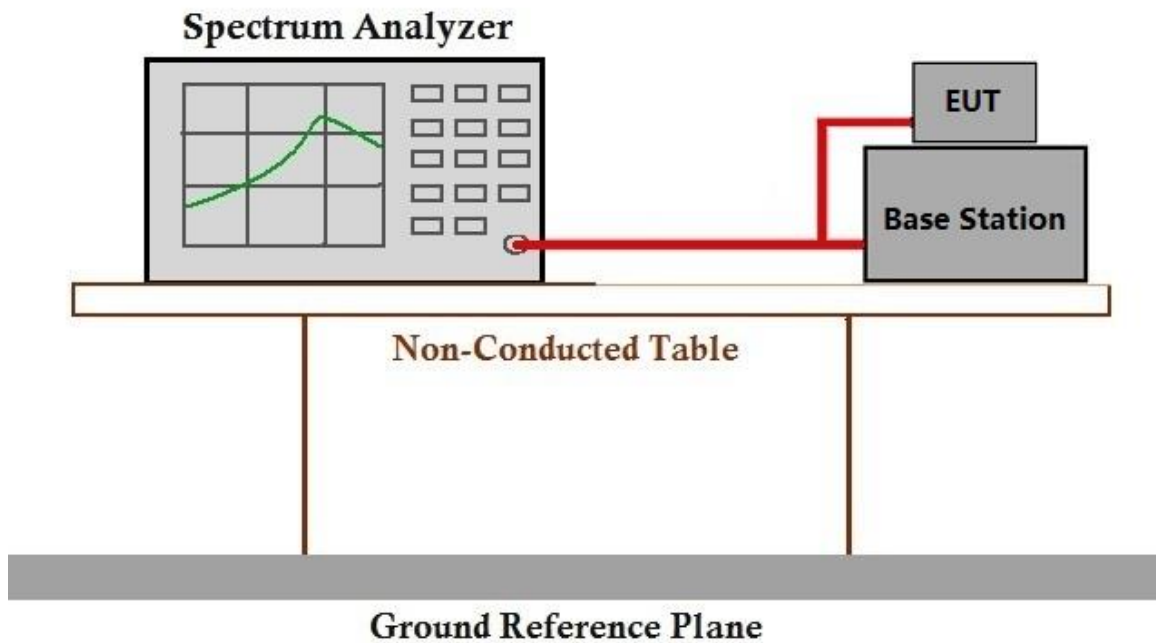

6.2.3 Measurement Data

Please refer to Appendix B- Peak-Average Ratio-LTE


6.3 Bandwidth

Test Requirement: §2.1049(h)
 Test Method: ANSI C63.26, KDB 971168 D01 v03
 Limit: OBW: No limit
 EBW: No limit

6.3.1 E.U.T. Operation

Operating Environment:
 Temperature: 22.7 °C Humidity: 68.2 % RH Atmospheric Pressure: 1030 mbar
 Test mode: a: Tx mode, Keep the EUT in transmitting mode.

6.3.2 Test Setup Diagram

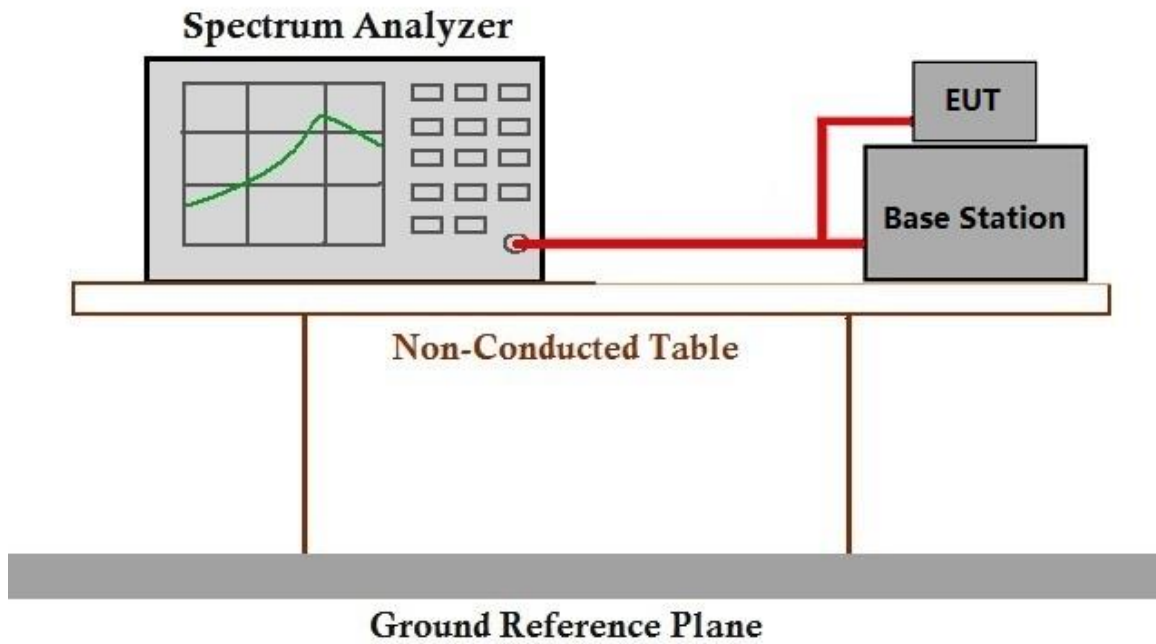

6.3.3 Measurement Data

Please refer to Appendix C- Bandwidth-LTE


6.4 Band Edge Compliance

Test Requirement: §2.1051
 Test Method: ANSI C63.26, KDB 971168 D01 v03
 Limit: $\leq -13\text{dBm}/1\% \cdot \text{EBW}$, in 1 MHz bands immediately outside and adjacent to the frequency block(LTE Band2,4,5,12)
 LTE Band 13 should follow FCC §27.53(c): On any frequency outside the 776-788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log (P)$ dB.
 On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than $65 + 10 \log (P)$ dB in a 6.25 kHz band segment, for mobile and portable stations.

6.4.1 E.U.T. Operation

Operating Environment:
 Temperature: 22.7 °C Humidity: 68.2 % RH Atmospheric Pressure: 1030 mbar
 Test mode: a: Tx mode, Keep the EUT in transmitting mode.

6.4.2 Test Setup Diagram

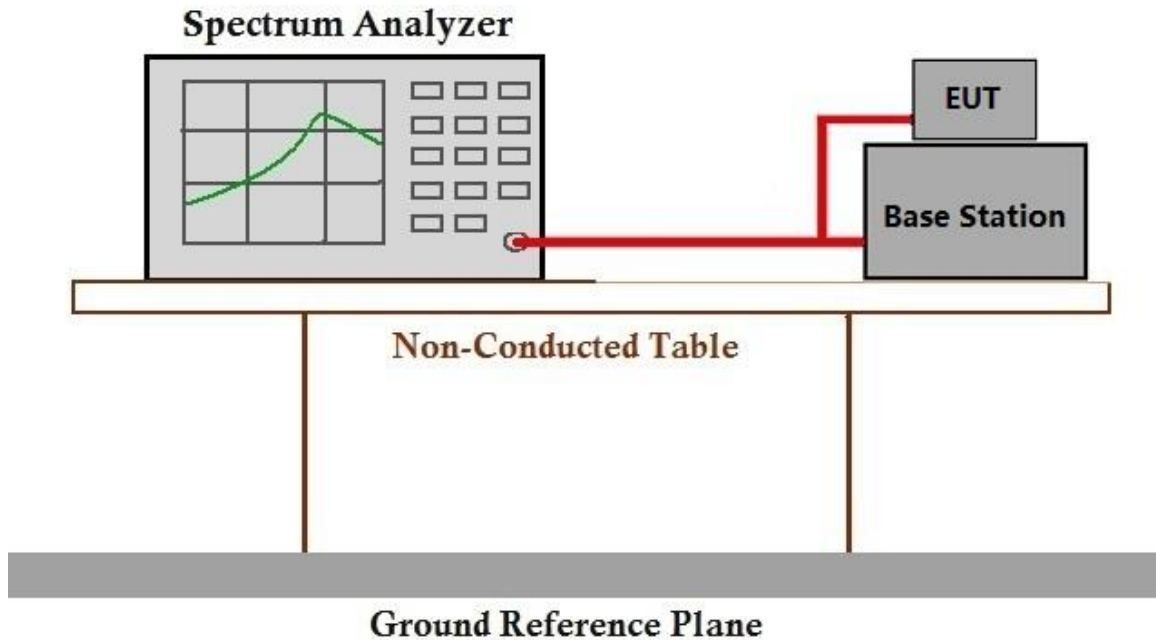

6.4.3 Measurement Data

Please refer to Appendix D- Band Edge-LTE
 Remark: The emission of frequencies between 793MHz-805MHz meets the requirements of FCC, test plots don't reflected in the report.

6.5 Spurious emissions at antenna terminals


Test Requirement: §2.1051
 Test Method: ANSI C63.26, KDB 971168 D01 v03
 Limit: ≤ -13dBm(LTE Band2,4,5,12,13)

For operations in the 775-788MHz, emissions in the 1559-1610MHz shall be limited to -70dBW/MHz, The limit of emissions is equal to -40dBm.

6.5.1 E.U.T. Operation

Operating Environment:
 Temperature: 22.7 °C Humidity: 68.2 % RH Atmospheric Pressure: 1030 mbar
 Test mode: a: Tx mode, Keep the EUT in transmitting mode.

6.5.2 Test Setup Diagram

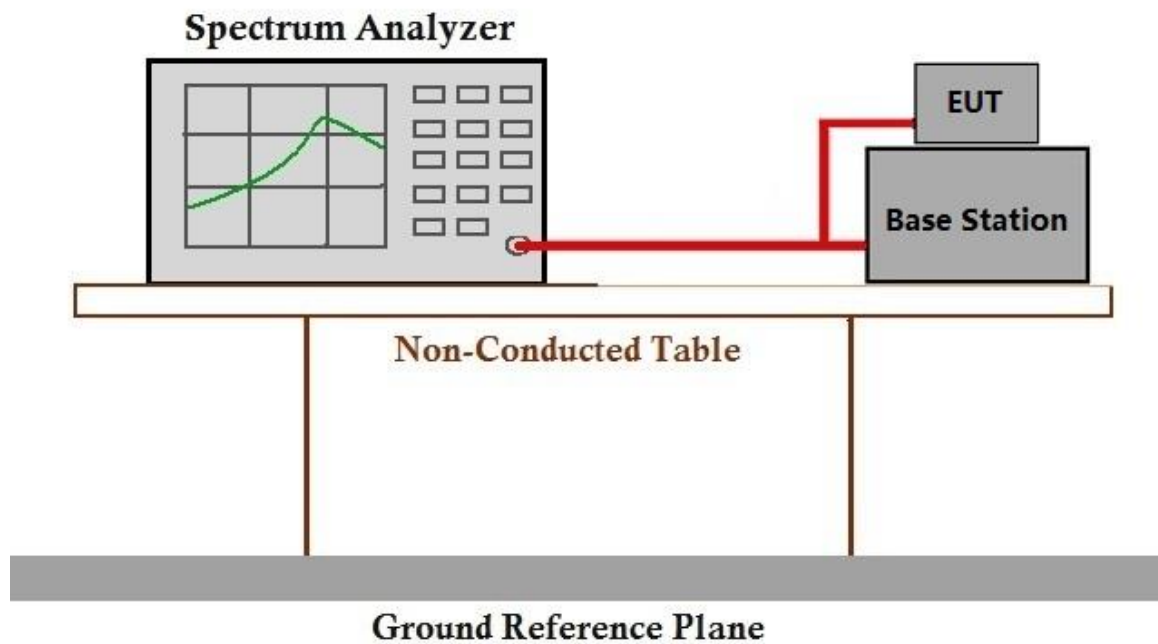

6.5.3 Measurement Data

Please refer to Appendix E- Spurious emissions at antenna terminals-LTE


6.6 Field strength of spurious radiation

Test Requirement: §2.1051
 Test Method: ANSI C63.26, KDB 971168 D01 v03
 Limit: $\leq -13\text{dBm}$ (LTE Band2,4,5,12,13)

6.6.1 E.U.T. Operation

Operating Environment:
 Temperature: 22.7 °C Humidity: 68.2 % RH Atmospheric Pressure: 1030 mbar
 Test mode: a: Tx mode, Keep the EUT in transmitting mode.

6.6.2 Test Setup Diagram

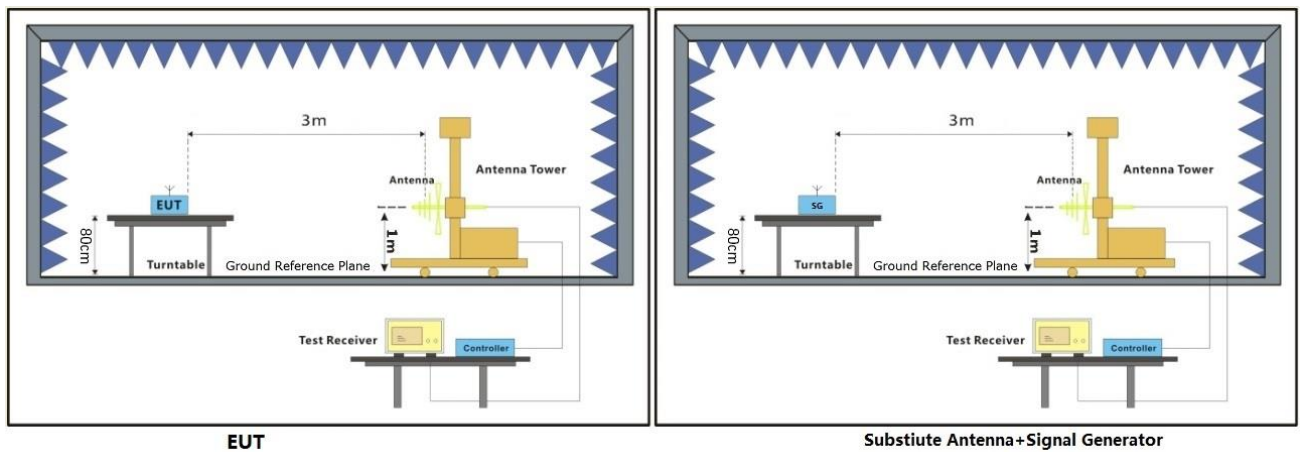

EUT

Substiute Antenna+Signal Generator

6.6.3 Measurement Procedure and Data

Test Procedure:

- (1) On a test site, the EUT shall be placed on a turntable and in the position closest to the normal use as declared by the user.
- (2) The test antenna shall be oriented initially for vertical polarization located 3m from the EUT to correspond to the transmitter.
- (3) The output of the antenna shall be connected to the measuring receiver and either a peak or quasi-peak detector was used for the measurement as indicated on the report. The detector selection is based on how close the emission level was approaching the limit.
- (4) The transmitter shall be switched on; if possible, without the modulation and the measurement receiver shall be tuned to the frequency of the transmitter under test.
- (5) The test antenna shall be raised and lowered through the specified range of height until the measuring receiver detects a maximum signal level.
- (6) The transmitter shall then be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
- (7) The test antenna shall be raised and lowered again through the specified range of height until the measuring receiver detects a maximum signal level.
- (8) The maximum signal level detected by the measuring receiver shall be noted.
- (9) The measurement shall be repeated with the test antenna set to horizontal polarization.
- (10) Replace the antenna with a proper Antenna (substitution antenna).
- (11) The substitution antenna shall be oriented for vertical polarization and, if necessary, the length of the substitution antenna shall be adjusted to correspond to the frequency of transmitting.
- (12) The substitution antenna shall be connected to a calibrated signal generator.
- (13) If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
- (14) The test antenna shall be raised and lowered through the specified range of the height to ensure that the maximum signal is received.
- (15) The input signal to substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuation setting of the measuring receiver.
- (16) The input level to the substitution antenna shall be recorded as power level in dBm, corrected for any change of input attenuator setting of the measuring receiver.
- (17) The measurement shall be repeated with the test antenna and the substitution antenna oriented for horizontal polarization.

LTE BAND 2-Low channel				
Frequency (MHz)	Level (dBm)	Limit (dBm)	Over Limit (dB)	Polarization
3720.000	-57.94	-13	-44.94	Horizontal
5580.000	-57.07	-13	-44.07	Horizontal
7440.000	-53.36	-13	-40.36	Horizontal
3720.000	-53.12	-13	-40.12	Vertical
5580.000	-59.41	-13	-46.41	Vertical
7440.000	-55.71	-13	-42.71	Vertical

LTE BAND 2-Middle channel				
Frequency (MHz)	Level (dBm)	Limit (dBm)	Over Limit (dB)	Polarization
3760.000	-55.20	-13	-42.20	Horizontal
5640.000	-58.99	-13	-45.99	Horizontal
7520.000	-58.67	-13	-45.67	Horizontal
3760.000	-57.98	-13	-44.98	Vertical
5640.000	-60.08	-13	-47.08	Vertical
7520.000	-55.66	-13	-42.66	Vertical

LTE BAND 2-High channel				
Frequency (MHz)	Level (dBm)	Limit (dBm)	Over Limit (dB)	Polarization
3800.000	-55.32	-13	-42.32	Horizontal
5700.000	-60.17	-13	-47.17	Horizontal
7600.000	-55.28	-13	-42.28	Horizontal
3800.000	-59.91	-13	-46.91	Vertical
5700.000	-61.43	-13	-48.43	Vertical
7600.000	-55.36	-13	-42.36	Vertical

LTE BAND 4-Low channel				
Frequency (MHz)	Level (dBm)	Limit (dBm)	Over Limit (dB)	Polarization
3440.000	-58.72	-13	-45.72	Horizontal
5160.000	-58.51	-13	-45.51	Horizontal
6880.000	-54.74	-13	-41.74	Horizontal
3440.000	-55.55	-13	-42.55	Vertical
5160.000	-59.60	-13	-46.60	Vertical
6880.000	-55.29	-13	-42.29	Vertical

LTE BAND 4-Middle channel				
Frequency (MHz)	Level (dBm)	Limit (dBm)	Over Limit (dB)	Polarization
3465.000	-59.10	-13	-46.10	Horizontal
5197.500	-57.43	-13	-44.43	Horizontal
6930.000	-58.51	-13	-45.51	Horizontal
3465.000	-56.91	-13	-43.91	Vertical
5197.500	-62.06	-13	-49.06	Vertical
6930.000	-57.84	-13	-44.84	Vertical

LTE BAND 4-High channel				
Frequency (MHz)	Level (dBm)	Limit (dBm)	Over Limit (dB)	Polarization
3490.000	-60.13	-13	-47.13	Horizontal
5235.000	-59.02	-13	-46.02	Horizontal
6980.000	-55.31	-13	-42.31	Horizontal
3490.000	-53.06	-13	-40.06	Vertical
5235.000	-62.43	-13	-49.43	Vertical
6980.000	-54.55	-13	-41.55	Vertical

LTE BAND 5-Low channel				
Frequency (MHz)	Level (dBm)	Limit (dBm)	Over Limit (dB)	Polarization
1658.000	-54.27	-13	-41.27	Horizontal
2487.000	-57.87	-13	-44.87	Horizontal
3316.000	-54.21	-13	-41.21	Horizontal
1658.000	-59.11	-13	-46.11	Vertical
2487.000	-59.70	-13	-46.70	Vertical
3316.000	-52.87	-13	-39.87	Vertical

LTE BAND 5-Middle channel				
Frequency (MHz)	Level (dBm)	Limit (dBm)	Over Limit (dB)	Polarization
1673.000	-53.07	-13	-40.07	Horizontal
2509.500	-62.07	-13	-49.07	Horizontal
3346.000	-59.62	-13	-46.62	Horizontal
1673.000	-59.21	-13	-46.21	Vertical
2509.500	-57.86	-13	-44.86	Vertical
3346.000	-55.35	-13	-42.35	Vertical

LTE BAND 5-High channel				
Frequency (MHz)	Level (dBm)	Limit (dBm)	Over Limit (dB)	Polarization
1688.000	-53.02	-13	-40.02	Horizontal
2532.000	-63.54	-13	-50.54	Horizontal
3376.000	-57.04	-13	-44.04	Horizontal
1688.000	-51.55	-13	-38.55	Vertical
2532.000	-61.18	-13	-48.18	Vertical
3376.000	-56.99	-13	-43.99	Vertical

LTE BAND 12-Low channel				
Frequency (MHz)	Level (dBm)	Limit (dBm)	Over Limit (dB)	Polarization
1559.000	-52.22	-40	-12.22	Horizontal
2338.500	-57.33	-13	-44.33	Horizontal
3118.000	-57.58	-13	-44.58	Horizontal
1559.000	-56.90	-40	-16.90	Vertical
2338.500	-59.28	-13	-46.28	Vertical
3118.000	-55.16	-13	-42.16	Vertical

LTE BAND 12-Middle channel				
Frequency (MHz)	Level (dBm)	Limit (dBm)	Over Limit (dB)	Polarization
1564.000	-58.07	-40	-18.07	Horizontal
2346.000	-58.71	-13	-45.71	Horizontal
3128.000	-55.14	-13	-42.14	Horizontal
1564.000	-57.36	-40	-17.36	Vertical
2346.000	-58.31	-13	-45.31	Vertical
3128.000	-56.81	-13	-43.81	Vertical

LTE BAND 12-High channel				
Frequency (MHz)	Level (dBm)	Limit (dBm)	Over Limit (dB)	Polarization
1569.000	-59.67	-40	-19.67	Horizontal
2353.500	-60.09	-13	-47.09	Horizontal
3138.000	-57.37	-13	-44.37	Horizontal
1569.000	-56.52	-40	-16.52	Vertical
2353.500	-60.02	-13	-47.02	Vertical
3138.000	-56.77	-13	-43.77	Vertical

LTE BAND 13-Low channel				
Frequency (MHz)	Level (dBm)	Limit (dBm)	Over Limit (dB)	Polarization
1418.000	-54.42	-13	-41.42	Horizontal
1587.000	-53.22	-40	-13.22	Horizontal
2127.000	-60.58	-13	-47.58	Horizontal
2836.000	-57.75	-13	-44.75	Horizontal
1418.000	-53.91	-13	-40.91	Vertical
1602.000	-51.29	-40	-11.29	Vertical
2127.000	-56.86	-13	-43.86	Vertical
2836.000	-57.68	-13	-44.68	Vertical

LTE BAND 13-Middle channel				
Frequency (MHz)	Level (dBm)	Limit (dBm)	Over Limit (dB)	Polarization
1420.000	-53.46	-13	-40.46	Horizontal
1566.000	-56.74	-40	-16.74	Horizontal
2130.000	-61.52	-13	-48.52	Horizontal
2840.000	-57.49	-13	-44.49	Horizontal
1420.000	-59.10	-13	-46.10	Vertical
1588.000	-54.29	-40	-14.29	Vertical
2130.000	-58.08	-13	-45.08	Vertical
2840.000	-58.83	-13	-45.83	Vertical

LTE BAND 13-High channel				
Frequency (MHz)	Level (dBm)	Limit (dBm)	Over Limit (dB)	Polarization
1422.000	-60.90	-13	-47.90	Horizontal
1577.000	-56.42	-40	-16.42	Horizontal
2133.000	-63.06	-13	-50.06	Horizontal
2844.000	-57.22	-13	-44.22	Horizontal
1422.000	-58.00	-13	-45.00	Vertical
1583.000	-57.49	-40	-17.49	Vertical
2133.000	-58.78	-13	-45.78	Vertical
2844.000	-57.30	-13	-44.30	Vertical

Remark:

We have tested all modulation and all Bandwidth , but only the worst case data presented in this report.


6.7 Frequency stability

Test Requirement: §2.1055
 Test Method: ANSI C63.26, KDB 971168 D01 v03
 Limit: $\leq \pm 2.5\text{ppm}$.

6.7.1 E.U.T. Operation

Operating Environment:
 Temperature: 22.7 °C Humidity: 68.2 % RH Atmospheric Pressure: 1030 mbar
 Test mode: a: Tx mode, Keep the EUT in transmitting mode.

6.7.2 Test Setup Diagram

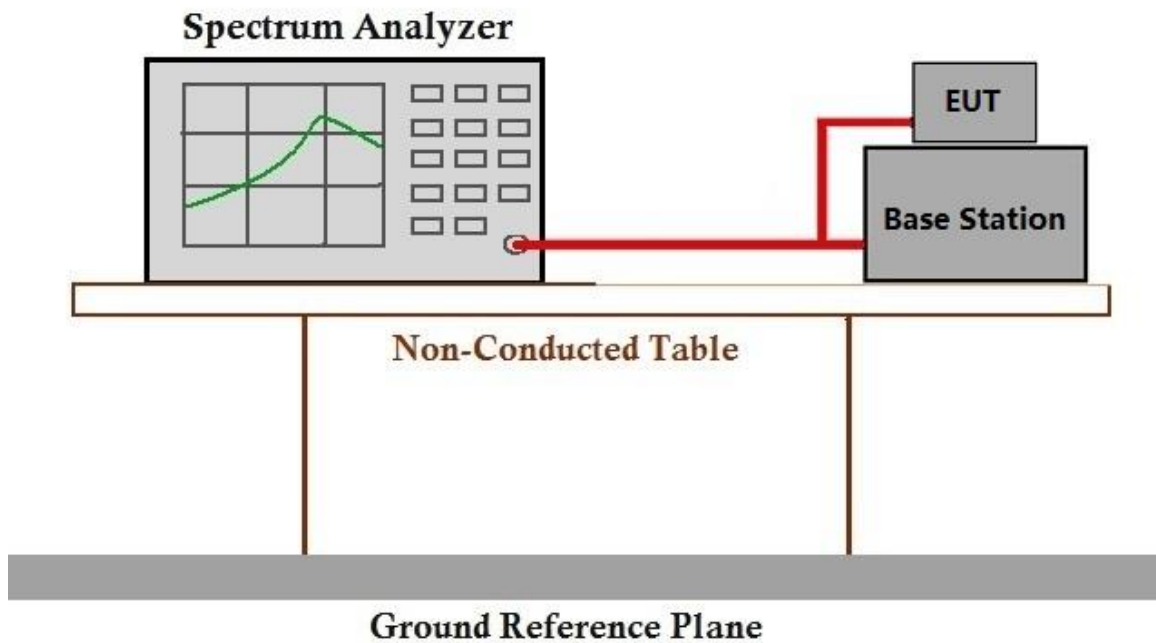

6.7.3 Measurement Data

Please refer to Appendix F- Frequency stability-LTE


6.8 Modulation Characteristics

Test Requirement: §2.1047
Test Method: ANSI C63.26
Limit: Digital modulation

6.8.1 E.U.T. Operation

Operating Environment:
Temperature: 22.7 °C Humidity: 68.2 % RH Atmospheric Pressure: 1030 mbar
Test mode: a: Tx mode, Keep the EUT in transmitting mode.

6.8.2 Test Setup Diagram

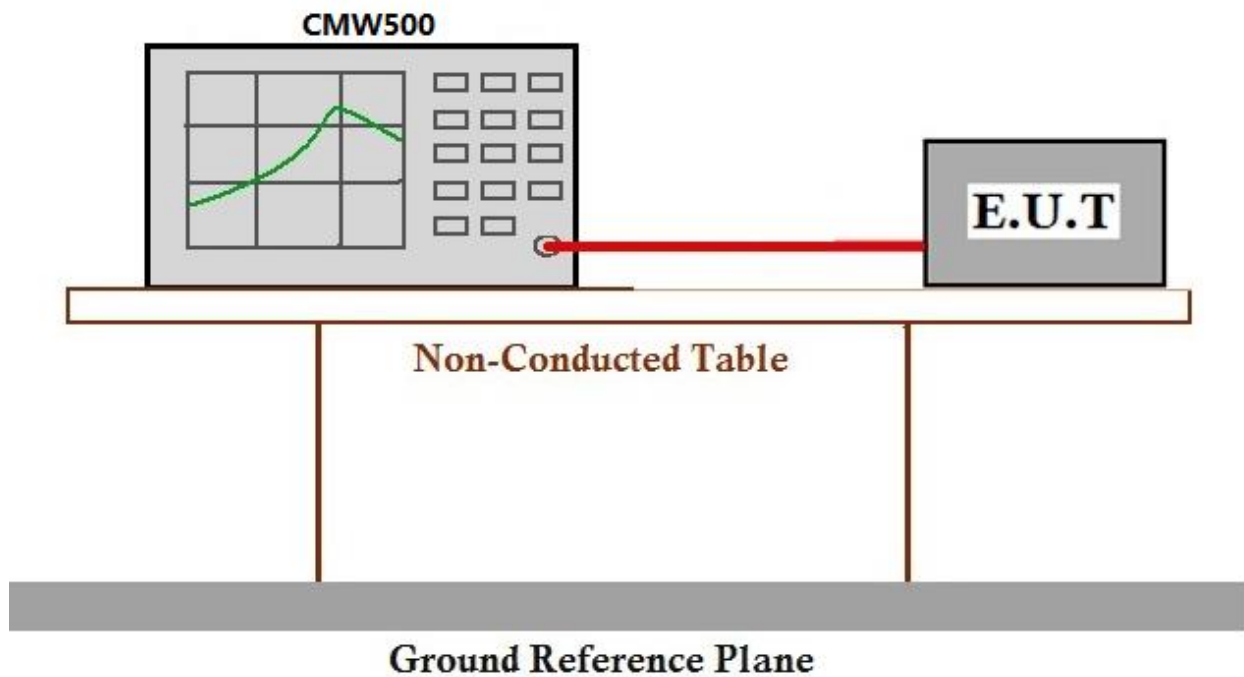

6.8.3 Measurement Data

Please refer to Appendix H- Modulation Characteristics-LTE



7 Test Setup Photographs

Refer to the < Test Setup photos-FCC>.

8 EUT Constructional Details

Refer to the < External Photos > & < Internal Photos >.

- End of the Report -