

**FCC PART 15 SUBPART C SECTION 15.247**

&amp;

**RSS 247, RSS GEN  
TEST REPORT***for***BLUETOOTH BEACON****Model: BTM-150-B**

Prepared for

**MOBILOGIX, INC.**  
1 SPECTRUM POINTE DR., SUITE 225  
LAKE FOREST, CA 92630

Prepared by: \_\_\_\_\_

**MATT HARRISON**

Reviewed by: \_\_\_\_\_

**TOREY OLIVER****COMPATIBLE ELECTRONICS INC.**  
20621 PASCAL WAY  
LAKE FOREST, CALIFORNIA 92630  
(949) 587-0400

DATE: APRIL 25, 2016

	REPORT BODY	APPENDICES					TOTAL
		A	B	C	D	E	
PAGES	19	2	2	2	13	31	<b>69</b>

This report shall not be reproduced except in full, without the written approval of Compatible Electronics.

**Brea Division**  
114 Olinda Drive  
Brea, CA 92823  
(714) 579-0500**Agoura Division**  
2337 Troutdale Drive  
Agoura, CA 91301  
(818) 597-0600**Silverado Division**  
19121 El Toro Road  
Silverado, CA 92676  
(949) 589-0700**Lake Forest Division**  
20621 Pascal Way  
Lake Forest, CA 92630  
(949) 587-0400

**TABLE OF CONTENTS**

<b>Section / Title</b>	<b>PAGE</b>
<b>GENERAL REPORT SUMMARY</b>	<b>4</b>
<b>1. PURPOSE</b>	<b>6</b>
<b>2. ADMINISTRATIVE DATA</b>	<b>7</b>
2.1 Location of Testing	7
2.2 Traceability Statement	7
2.3 Cognizant Personnel	7
2.4 Date Test Sample was Received	7
2.5 Disposition of the Test Sample	7
2.6 Abbreviations and Acronyms	7
<b>3. APPLICABLE DOCUMENTS</b>	<b>8</b>
<b>4. DESCRIPTION OF TEST CONFIGURATION</b>	<b>9</b>
4.1 Description of Test Configuration	9
4.1.1 Photograph Test Configuration (Z-Axis Shown)	9
4.1.2 Cable Construction and Termination	10
<b>5. LISTS OF EUT, ACCESSORIES AND TEST EQUIPMENT</b>	<b>11</b>
5.1 EUT and Accessory List	11
5.2 EMI Test Equipment	12
<b>6. TEST SITE DESCRIPTION</b>	<b>13</b>
6.1 Test Facility Description	13
6.2 EUT Mounting, Bonding and Grounding	13
6.3 Facility Environmental Characteristics	13
<b>7. CHARACTERISTICS OF THE TRANSMITTER</b>	<b>14</b>
7.1 Channel Number and Frequencies	14
7.2 Antenna	14
<b>8. TEST PROCEDURES</b>	<b>15</b>
8.1 RF Emissions	15
8.1.1 Conducted Emissions Test	15
8.1.2 Radiated Emissions (Spurious and Harmonics) Test	16
8.1.3 DTS Bandwidth	17
8.1.4 Maximum Peak Conducted Output Power	17
8.1.5 Maximum Peak Power Spectral Density Level In The Fundamental Emission	17
8.1.6 Emissions in Non-Restricted Frequency Bands (in 100kHz Bandwidth)	18
8.1.7 Emissions in the Restricted Bands (Radiated)	18
8.1.8 Emissions Radiated Outside of the Fundamental Frequency Band	18
<b>9. TEST PROCEDURE DEVIATIONS</b>	<b>19</b>
<b>10. CONCLUSIONS</b>	<b>19</b>



**LIST OF APPENDICES**

<b>APPENDIX</b>	<b>TITLE</b>
A	Laboratory Accreditations and Recognitions
B	Modifications to the EUT
C	Additional Models Covered Under This Report
D	Diagrams, Factors, Charts, and Photos <ul style="list-style-type: none"><li>• Test Setup Diagrams</li><li>• Antenna and Amplifier Factors</li><li>• Radiated Emissions Photos</li></ul>
E	Radiated Emissions Data Sheets

**LIST OF FIGURES**

<b>FIGURE</b>	<b>TITLE</b>
1	Plot Map And Layout of Test Site Below 1GHz
2	Plot Map And Layout of Test Site Above 1GHz



## GENERAL REPORT SUMMARY

This electromagnetic emission test report is generated by Compatible Electronics Inc., which is an independent testing and consulting firm. The test report is based on testing performed by Compatible Electronics personnel according to the measurement procedures described in the test specifications given below and in the "Test Procedures" section of this report.

The measurement data and conclusions appearing herein relate only to the sample tested and this report may not be reproduced in any form unless done so in full with the written permission of Compatible Electronics.

This report must not be used to claim product certification, approval or endorsement by NVLAP, NIST, or any agency of the federal government.

Device Tested: Bluetooth Beacon  
Model: BTM-150-B  
S/N: None

Product Description: The device is a battery powered (coin cell) Bluetooth beacon. There is only one mode of operation. In this mode of operation the unit transmits advertisements on the 3 designated advertising channels per the Bluetooth specification. Under normal operation, the time between advertisements will range from every 100milliseconds to several seconds.

Modifications: The EUT was not modified in order to comply with specifications.

Manufacturer: Mobilogix, Inc.  
1 Spectrum Pointe Dr., Suite 225  
Lake Forest, CA 92630

Test Dates: April 18, 25, 2016

Test Specifications: EMI requirements  
CFR Title 47, Part 15 Subpart C Sections 15.205, 15.209, & 15.247.  
RSS 247 & RSS GEN

Test Procedure: ANSI C63.4 & C63.10, and KDB 558074 D01 v03r05.



## SUMMARY OF TEST RESULTS

TEST	DESCRIPTION	RESULTS
1	Conducted RF Emissions, 150 kHz - 30 MHz	The EUT is battery powered; therefore this test was not performed
2	Radiated RF Emissions & Harmonics, 9 kHz – 25,000 MHz	Complies with the limits of CFR Title 47 Part 15 Subpart C Sections 15.205, 15.209, and RSS GEN
3	DTS Bandwidth	Complies with CFR Title 47 Part 15 Subpart C Section 15.247 and RSS 247
4	Maximum Peak Conducted Output Power	Complies with CFR Title 47 Part 15 Subpart C Section 15.247 and RSS 247
5	Maximum Peak Power Spectral Density Level In The Fundamental Emission	Complies with CFR Title 47 Part 15 Subpart C Section 15.247 and RSS 247
6	Emissions in Non-Restricted Frequency Bands (in 100kHz Bandwidth)	Complies with CFR Title 47 Part 15 Subpart C Section 15.247 and RSS 247
7	Emissions in the Restricted Bands	Complies with CFR Title 47 Part 15 Subpart C Section 15.247 and RSS 247

**TABLE 1:  
SIX HIGHEST RADIATED EMISSIONS READINGS**

	Reading Type (PK / QP / AV)	Polarization (Vert / Horz)	Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Delta (dB)	Test Distance
1	AV	V	7440.00	53.10	53.98	-0.88	3-Meter
2	AV	V	7320.00	52.38	53.98	-1.60	3-Meter
3	AV	H	7440.00	49.31	53.98	-4.67	3-Meter
4	AV	H	12010.00	44.65	53.98	-9.33	3-Meter
5	AV	V	12400.00	44.55	53.98	-9.43	3-Meter
6	AV	V	12010.00	44.53	53.98	-9.45	3-Meter



## 1. PURPOSE

This document is a qualification test report based on the Electromagnetic Interference (EMI) tests performed on the Bluetooth Beacon Model: BTM-150-B. The EMI measurements were performed according to the measurement procedure described in ANSI C63.10 & C63.4. The tests were performed in order to determine whether the electromagnetic emissions from the equipment under test, referred to as EUT (equipment under test) hereafter, are within the specification limits defined by the Code of Federal Regulations Title 47, Part 15 Subpart C sections 15.205, 15.209, 15.247, RSS GEN, and RSS 247.





### 3. APPLICABLE DOCUMENTS

The following documents are referenced or used in the preparation of this Test Report.

SPEC	TITLE
CFR Title 47, Part 15	FCC Rules – Radio frequency devices (including digital devices)
ANSI C63.4 2014	Methods of measurement of radio-noise emissions from low-voltage electrical and electronic equipment in the range of 9 kHz to 40 GHz.
RSS 247	Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices
RSS GEN	General Requirements for Compliance of Radio Apparatus
ANSI C63.10: 2013	American National Standard for Testing Unlicensed Wireless Devices
KDB 558074 D01 v03r05	Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247





#### 4. DESCRIPTION OF TEST CONFIGURATION


##### 4.1 Description of Test Configuration

The Bluetooth Beacon Model: BTM-150-B (EUT) was setup in a tabletop configuration. The EUT was powered by a coin cell battery. The EUT was continuously transmitting a data stream. The EUT was checked in all axes and the Z-Axis was found to be the worst case.

The tests were performed with a new battery.

It was determined that the emissions were at their highest level when the EUT was transmitting in the configuration described above for Radiated Emissions. The final radiated data was taken in the above configuration. Please see Appendix E for the test data.

##### 4.1.1 Photograph Test Configuration (Z-Axis Shown)

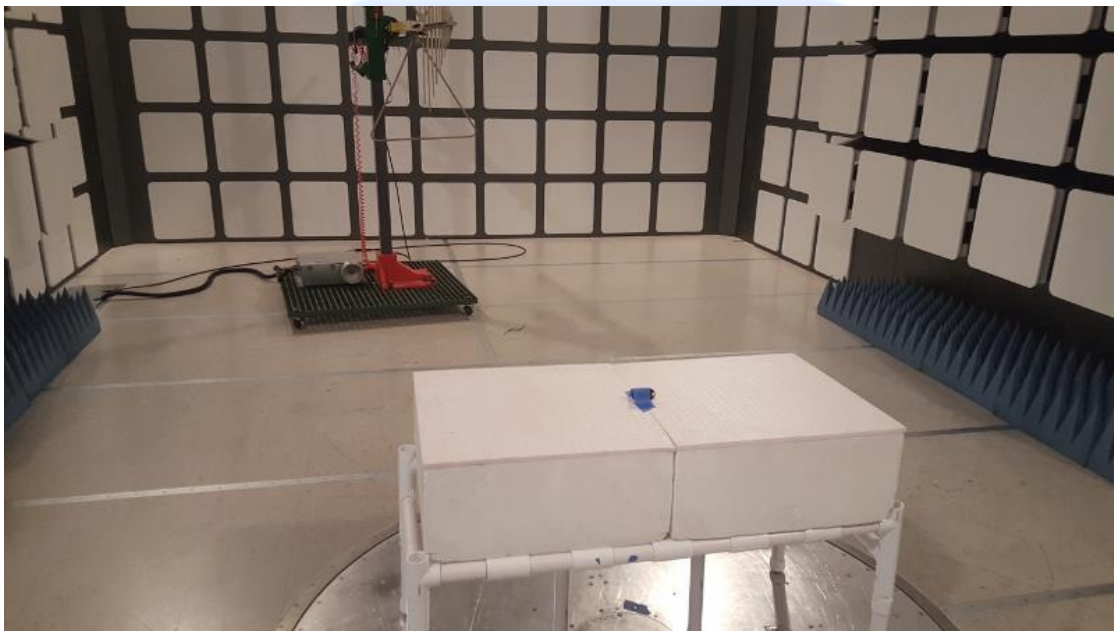

#### 4.1.2 Cable Construction and Termination

*There were no interconnecting cables.*



**5. LISTS OF EUT, ACCESSORIES AND TEST EQUIPMENT****5.1 EUT and Accessory List**

#	EQUIPMENT TYPE	MANUFACTURER	MODEL	SERIAL NUMBER
1	BLUETOOTH BEACON(EUT)	MOBILOGIX, INC.	BTM-150-B	NONE
2	BATTERY	PANASONIC	CR2450	NONE



## 5.2 EMI Test Equipment

EQUIPMENT TYPE	MANUFACTURER	MODEL NUMBER	SERIAL NUMBER	CAL. DATE	CAL. DUE DATE
Computer	Compatible Electronics	NONE	NONE	N/A	N/A
EMI Receiver	Rohde & Schwarz	ESIB40	100219	9/3/2015	9/3/2016
Antenna, Loop	Com Power	AL-130	121049	12/06/2013	12/06/2016
Antenna, CombiLog	Com Power	AC-220	25857	5/21/2014	5/21/2016
Antenna, Horn 1-18GHz	Com Power	AH-118	071250	7/1/2014	7/1/2016
Antenna, Horn 18-26 GHz	Com Power	AH-826	081033	NCR	NCR
Pre-Amp, 1-18GHz	Com Power	PAM-118A	551034	8/25/2015	8/25/2016
Pre-Amp, 18-40GHz	Com Power	PA-840	181289	6/16/2014	6/16/2016
RF Peak Power Meter/Analyzer	Boonton	4500A	1282	12/2/2014	12/2/2016
Peak Power Sensor	Boonton	57318	3723	12/2/2014	12/2/2016
High Pass Filter	AMTI Microwave Circuits	H3G020G4	481230	6/4/2015	6/4/2016
Mast, Antenna Positioner	Sunol Science Corporation	TWR 95-4	020808-3	N/A	N/A
Antenna Mast	Sunol Science Corporation	TWR 95-4	020808-3	N/A	N/A
Turntable	Sunol Science Corporation	FM 2001	N/A	N/A	N/A
Mast and Turntable Controller	Sunol Science Corporation	SC104V	020808-1	N/A	N/A



## 6. TEST SITE DESCRIPTION

### 6.1 Test Facility Description

Please refer to section 2.1 and the figures in Appendix D of this report for test location.

### 6.2 EUT Mounting, Bonding and Grounding


The EUT was mounted on a 1.0 by 1.5 by 0.8 meters high non-conductive table, which was placed on the ground plane.

For testing above 1 GHz the EUT was mounted 1.5 meter above the ground plane.

The EUT was grounded through the USB Cable.

### 6.3 Facility Environmental Characteristics

When applicable refer to the data sheets in Appendix E for the relative humidity, air temperature, and barometric pressure.

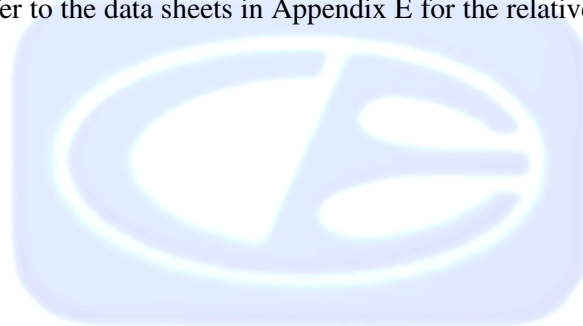

## 7. CHARACTERISTICS OF THE TRANSMITTER

### 7.1 Channel Number and Frequencies

There are a total of 40 channels. The low channel is at 2402.0 MHz and the high channel is at 2480.0 MHz. There is approximately 2 MHz separation between channels and the EUT uses GFSK modulation.

### 7.2 Antenna

The antenna is a chip antenna located on the PCB.



## 8. TEST PROCEDURES

The following sections describe the test methods and the specifications for the tests. Test results are also included in this section.

### 8.1 RF Emissions

#### 8.1.1 Conducted Emissions Test

*Test Results: The EUT is battery powered; therefore this test was not performed.*

The EMI receiver was used as a measuring meter. A quasi-peak and/or average reading was taken only where indicated in the data sheets. The LISN output was measured using the EMI receiver. The output of the second LISN was terminated by a 50-ohm termination. The effective measurement bandwidth used for this test was 9 kHz.

Please see section 6.2 of this report for mounting, bonding, and grounding of the EUT. The EUT received its power through the LISN, which was bonded to the ground plane. The EUT was set up with the minimum distances from any conductive surfaces as specified in ANSI 63.4. The excess power cord was wrapped in a figure eight pattern to form a bundle not exceeding 0.4 meters in length.

The conducted emissions from the EUT were maximized for operating mode as well as cable placement. The final data was collected under program control by the computer software. The final qualification data is located in Appendix E.



### 8.1.2 Radiated Emissions (Spurious and Harmonics) Test

The R&S receiver was used as a measuring meter. The receiver was used in the peak detect mode with the "Max Hold" feature activated. In this mode, the receiver records the highest measured reading over all the sweeps. Amplifiers were used to increase the sensitivity of the instrument. There were two Microwave Preampifier used for frequencies above 1 GHz.

For spurious emissions the quasi-peak detector was used for frequencies below 1GHz and the average detector was used for frequencies above 1 GHz.

For the radiated Harmonic emissions and Band Edges a duty cycle average was used.

The measurement bandwidths and transducers used for the radiated emissions test were:

FREQUENCY RANGE (MHz)	TRANSDUCER	EFFECTIVE MEASUREMENT BANDWIDTH
.009 to .150	Active Loop Antenna	200 Hz
.150 to 30	Active Loop Antenna	9 kHz
30 to 1000	Combilog Antenna	100 kHz (120kHz for QP Measurements)
1000 to 25000	Horn Antenna	1 MHz

The TDK FAC-3 shielded test chamber of Compatible Electronics, Inc. was used for radiated emissions testing. This test site is in full compliance with ANSI, EN 50147-2, and CISPR 22. Please see section 6.2 of this report for mounting, bonding and grounding of the EUT. The turntable supporting the EUT is remote controlled using a motor. The turntable permits EUT rotation of 360 degrees in order to maximize emissions. Also, the antenna mast allows height variation of the antenna from 1 meter to 4 meters. Data was collected in the worst case (highest emission) configuration of the EUT. At each reading, the EUT was rotated 360 degrees and the antenna height was varied from 1 to 4 meters in both vertical and horizontal polarizations (for E field radiated field strength).

#### Test Results:

The EUT complies with the limits of CFR Title 47 Part 15 Subpart C sections 15.205, 15.209, 15.247, RSS 247, and RSS GEN.





### 8.1.3 DTS Bandwidth

The DTS Bandwidth was measured directly connected to the EMI Receiver using a RBW of 100 kHz and a VBW of 300 kHz. A peak detector and a max hold trace were used with auto sweep time. The trace was allowed to fully maximize. We measured the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission. The automatic bandwidth measurement capability of the EMI Receiver was employed using the n dB bandwidth mode with n set to 6 dB. The final qualification data sheets are located in Appendix E.

#### Test Results:

The EUT complies with Part 15, Subpart C, Section 15.247 and RSS 247.

### 8.1.4 Maximum Peak Conducted Output Power

The maximum peak conducted output power was measured using a Peak Power Meter. The Peak Power Meter used a resolution bandwidth that is greater than the DTS bandwidth and a video bandwidth greater than 3 x RBW. The final qualification data sheets are located in Appendix E.

#### Test Results:

The EUT complies with Part 15, Subpart C, Section 15.247 and RSS 247.

### 8.1.5 Maximum Peak Power Spectral Density Level In The Fundamental Emission

The Maximum Peak Power Spectral Density Level in the Fundamental Emission was measured directly connected to the EMI Receiver. Tuned to the center frequency of the DTS channel and set the span to 1.5 times the DTS bandwidth. RBW was set to minimum 3 kHz but not > 100kHz and VBW 3 \* RBW. A peak detector was used with the sweep time set to auto. A max hold trace was used and allowed to fully stabilize. The peak marker function was used to determine the maximum amplitude level within the RBW. The final qualification data sheets are located in Appendix E.

#### Test Results:

The EUT complies with Part 15, Subpart C, Section 15.247 and RSS 247.



### 8.1.6 Emissions in Non-Restricted Frequency Bands (in 100kHz Bandwidth)

The Emissions in Non-Restricted Frequency Bands (in 100kHz Bandwidth) measurements were performed using the EMI Receiver directly connected to the EUT. A reference level was established by setting the instrument center frequency to DTS channel center frequency. The span was set to  $\geq 1.5$  times the DTS bandwidth. The RBW was 100 kHz and VBW 300 kHz. A peak detector was used with a sweep time set to auto. A max hold trace was used and allowed to fully stabilize. The peak marker function was used to determine the level and 20dB below that was the reference level. For Emission Level Measurement the center frequency and span were set to encompass the frequency range to be measured. RBW was set to 100 kHz and VBW to 300 kHz. A peak detector was used with a sweep time set to auto. The number of measurement points were greater than span/RBW. A max hold trace was used and allowed to fully stabilize. The peak marker function was used to determine the maximum amplitude level. The final qualification data sheets are located in Appendix E.

#### Test Results:

The EUT complies with Part 15, Subpart C, Section 15.247 and RSS 247.

### 8.1.7 Emissions in the Restricted Bands (Radiated)

The Emissions in the Restricted Bands measurement was performed using the EMI Receiver at a 3-meter test distance to obtain the final test data. The final qualification data sheets are located in Appendix E.

#### Test Results:

The EUT complies with Part 15 Subpart C, Section 15.205 and RSS GEN.

### 8.1.8 Emissions Radiated Outside of the Fundamental Frequency Band

The Band Edge measurement was performed using the EMI Receiver at a 3-meter test distance to obtain the final test data. The low and high channels were tuned to during the low and high band edge tests. The final qualification data sheets are located in Appendix E.

#### Test Results:

The EUT complies with Part 15, Subpart C, Section 15.247 and RSS 247.



### 8.1.9 Fundamental Field Strength (Duty Cycle Calculations)

The Peak Transmit Radiated Field Strength was measured at a 3-meter test distance. The EMI Receiver was used to obtain the final test data. The final qualification data sheets are located in Appendix E.

Where

$$\delta(\text{dB}) = 20 \log \left[ \frac{\sum (nt_1 + mt_2 + \dots + \xi t_x)}{T} \right]$$

$n$  is the number of pulses of duration  $t_1$

$m$  is the number of pulses of duration  $t_2$

$\xi$  is the number of pulses of duration  $t_x$

$T$  is the period of the pulse train or 100 ms if the pulse train length is greater than 100 ms

Duty Cycle Correction Factor = -20.00dB

Pulse = 1 \* 396.993988 uS

Total On Time = 0.396993988 mS

Duty Cycle Train was longer than 100mS; therefore 100mS span was used.

0.396993988 mS / 100 mS = 0.00396993988

20 log (0.00396993988) = -48.02 dB correction factor

**Max Duty Cycle Correction Factor = -20.00dB**

#### Test Results:

The EUT complies with Part 15 Subpart C, Section 15.249.

## 9. TEST PROCEDURE DEVIATIONS

The test procedures were not deviated from throughout all tests.

## 10. CONCLUSIONS

The Bluetooth Beacon Model: BTM-150-B meets all of the relevant specification requirements defined in the Code of Federal Regulations Title 47, Part 15 Subpart C sections 15.205, 15.207, 15.209, 15.247, RSS GEN & RSS 247.



**APPENDIX A**

***LABORATORY ACCREDITATIONS AND  
RECOGNITIONS***



---

**Brea Division**  
114 Olinda Drive  
Brea, CA 92823  
(714) 579-0500

**Agoura Division**  
2337 Troutdale Drive  
Agoura, CA 91301  
(818) 597-0600

**Silverado Division**  
19121 El Toro Road  
Silverado, CA 92676  
(949) 589-0700

**Lake Forest Division**  
20621 Pascal Way  
Lake Forest, CA 92630  
(949) 587-0400

## LABORATORY ACCREDITATIONS AND RECOGNITIONS

NVLAP LAB CODES 200063-0,  
200528-0, 200527-0

For US, Canada, Australia/New Zealand, Taiwan and the European Union, Compatible Electronics is currently accredited by NVLAP to ISO/IEC 17025 an ISO 9002 equivalent. Please follow the link to the NIST site for each of our facilities NVLAP certificate and scope of accreditation.

### NVLAP listing links

Agoura Division - <http://ts.nist.gov/Standards/scopes/2000630.htm>Brea Division - <http://ts.nist.gov/Standards/scopes/2005280.htm>Silverado/Lake Forest Division - <http://ts.nist.gov/Standards/scopes/2005270.htm>

### ANSI listing

[CETCB](#)<https://www.ansica.org/wwwversion2/outside/ALLdirectoryDetails.asp?menuID=1&prgID=3&orgID=123&status=4>

Compatible Electronics has been nominated as a Conformity Assessment Body (CAB) for EMC under the US/EU Mutual Recognition Agreement (MRA).



Compatible Electronics has been nominated as a Conformity Assessment Body (CAB) for Taiwan/BSMI under the US/APEC (Asia-Pacific Economic Cooperation) Mutual Recognition Agreement (MRA).

We are also certified/listed for IT products by the following country/agency:



### VCCI Listing, from VCCI site

[Enter "Compatible" in search form](http://www.vcci.or.jp/vcci_e/activity/registration/setsubi.html) [http://www.vcci.or.jp/vcci\\_e/activity/registration/setsubi.html](http://www.vcci.or.jp/vcci_e/activity/registration/setsubi.html)

### FCC Listing, from FCC OET site

[FCC test lab search](https://fjallfoss.fcc.gov/oetcf/eas/reports/TestFirmSearch.cfm) <https://fjallfoss.fcc.gov/oetcf/eas/reports/TestFirmSearch.cfm>

Compatible Electronics IC listing can be found at:

<http://www.ic.gc.ca/eic/site/ic1.nsf/eng/home>

**Brea Division**  
114 Olinda Drive  
Brea, CA 92823  
(714) 579-0500

**Agoura Division**  
2337 Troutdale Drive  
Agoura, CA 91301  
(818) 597-0600

**Silverado Division**  
19121 El Toro Road  
Silverado, CA 92676  
(949) 589-0700

**Lake Forest Division**  
20621 Pascal Way  
Lake Forest, CA 92630  
(949) 587-0400

**APPENDIX B**

***MODIFICATIONS TO THE EUT***



---

**Brea Division**  
114 Olinda Drive  
Brea, CA 92823  
(714) 579-0500

**Agoura Division**  
2337 Troutdale Drive  
Agoura, CA 91301  
(818) 597-0600

**Silverado Division**  
19121 El Toro Road  
Silverado, CA 92676  
(949) 589-0700

**Lake Forest Division**  
20621 Pascal Way  
Lake Forest, CA 92630  
(949) 587-0400

---

## MODIFICATIONS TO THE EUT

There were no modifications made during testing.



**APPENDIX C**

***ADDITIONAL MODELS COVERED  
UNDER THIS REPORT***



---

**Brea Division**  
114 Olinda Drive  
Brea, CA 92823  
(714) 579-0500

**Agoura Division**  
2337 Troutdale Drive  
Agoura, CA 91301  
(818) 597-0600

**Silverado Division**  
19121 El Toro Road  
Silverado, CA 92676  
(949) 589-0700

**Lake Forest Division**  
20621 Pascal Way  
Lake Forest, CA 92630  
(949) 587-0400



## ADDITIONAL MODELS COVERED UNDER THIS REPORT

USED FOR THE PRIMARY TEST

Bluetooth Beacon  
Model: BTM-150-B  
S/N: None

No additional models were tested.




**APPENDIX D**


***DIAGRAMS, FACTORS, CHARTS, AND PHOTOS***




# FIGURE 1: PLOT MAP AND LAYOUT OF TEST SITE BELOW 1GHZ

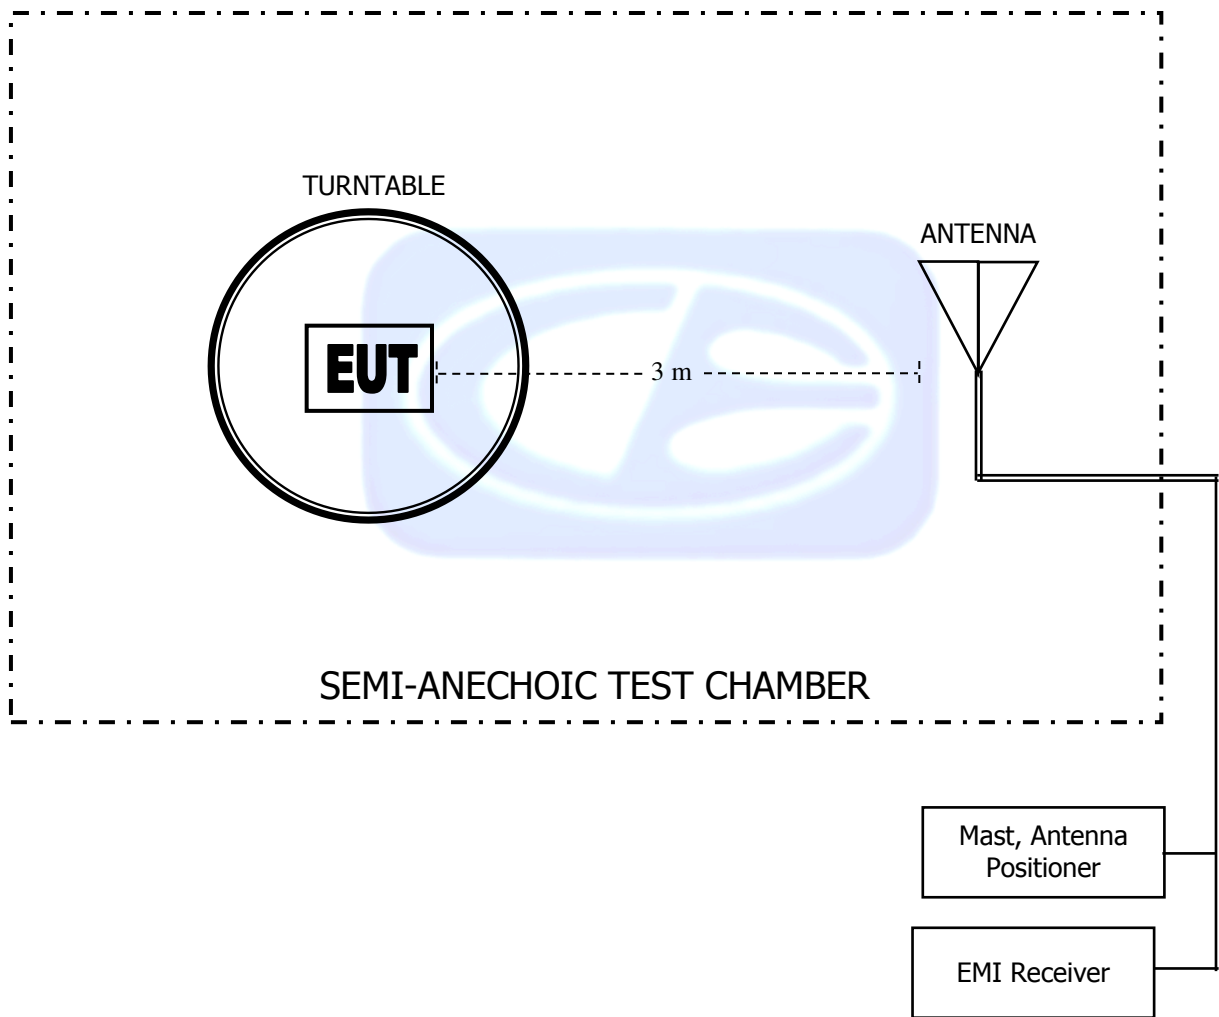

## FIGURE 2: PLOT MAP AND LAYOUT OF TEST SITE ABOVE 1GHZ

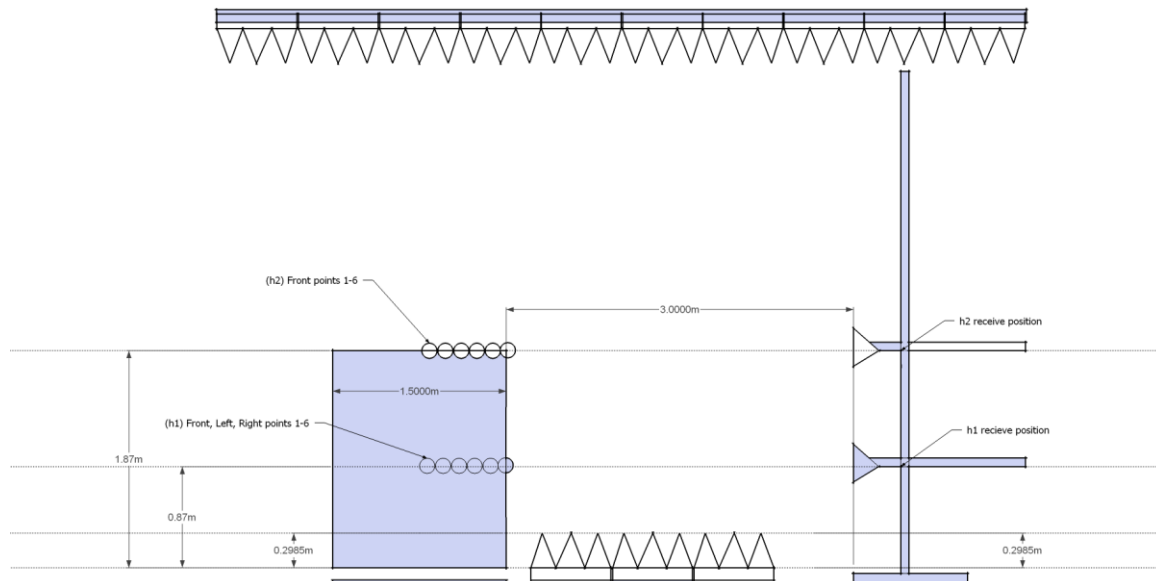

**FIGURE 3: CONDUCTED EMISSIONS TEST SETUP**

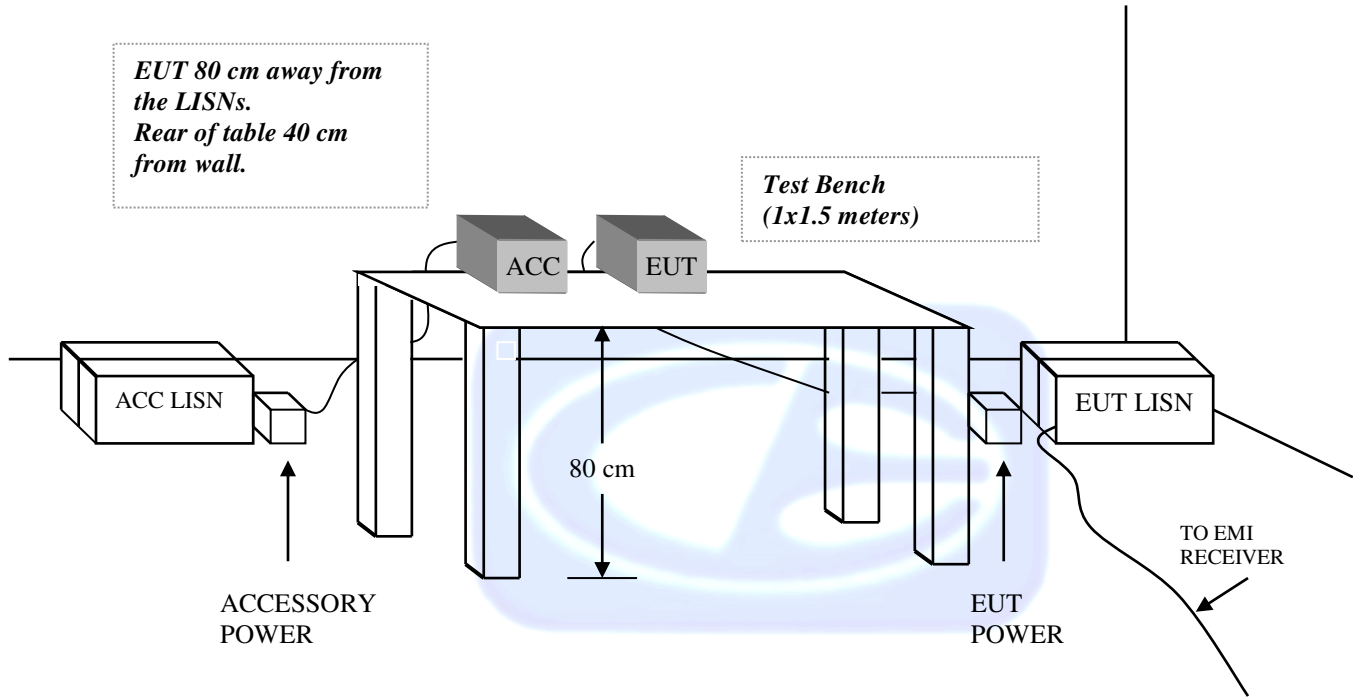

**COM-POWER AL-130****LOOP ANTENNA**

S/N: 121049

CALIBRATION DUE: DECEMBER 6, 2016

<b>FREQUENCY (MHz)</b>	<b>MAGNETIC (dB/m)</b>	<b>ELECTRIC (dB/m)</b>	<b>FREQUENCY (MHz)</b>	<b>MAGNETIC (dB/m)</b>	<b>ELECTRIC (dB/m)</b>
<b>0.009</b>	-34.64	16.86	<b>0.8</b>	-36.32	15.18
<b>0.01</b>	-34.78	16.72	<b>0.9</b>	-36.22	15.28
<b>0.02</b>	-35.91	15.59	<b>1.0</b>	-36.22	15.28
<b>0.03</b>	-35.48	16.02	<b>2.0</b>	-35.91	15.59
<b>0.04</b>	-35.82	15.68	<b>3.0</b>	-35.91	15.59
<b>0.05</b>	-36.49	15.01	<b>4.0</b>	-36.01	15.49
<b>0.06</b>	-36.30	15.20	<b>5.0</b>	-35.80	15.70
<b>0.07</b>	-36.43	15.07	<b>6.0</b>	-36.00	15.50
<b>0.08</b>	-36.30	15.20	<b>7.0</b>	-35.90	15.60
<b>0.09</b>	-36.39	15.11	<b>8.0</b>	-35.70	15.80
<b>0.1</b>	-36.41	15.09	<b>9.0</b>	-35.70	15.80
<b>0.2</b>	-36.61	14.89	<b>10.0</b>	-35.60	15.90
<b>0.3</b>	-36.63	14.87	<b>15.0</b>	-36.52	14.98
<b>0.4</b>	-36.52	14.99	<b>20.0</b>	-35.75	15.75
<b>0.5</b>	-36.63	14.87	<b>25.0</b>	-37.78	13.72
<b>0.6</b>	-36.62	14.88	<b>30.0</b>	-38.62	12.88
<b>0.7</b>	-36.53	14.97			



**COM-POWER AC-220****LAB R - COMBILOG ANTENNA**

S/N: 25857

CALIBRATION DUE: MAY 21, 2016

<b>FREQUENCY (MHz)</b>	<b>FACTOR (dB)</b>	<b>FREQUENCY (MHz)</b>	<b>FACTOR (dB)</b>
<b>30</b>	22.5	<b>160</b>	13.3
<b>35</b>	22.5	<b>180</b>	15.0
<b>40</b>	23.0	<b>200</b>	14.6
<b>45</b>	21.5	<b>250</b>	16.5
<b>50</b>	21.3	<b>300</b>	18.1
<b>60</b>	18.2	<b>400</b>	19.4
<b>70</b>	13.2	<b>500</b>	21.4
<b>80</b>	11.6	<b>600</b>	21.6
<b>90</b>	11.9	<b>700</b>	23.7
<b>100</b>	12.6	<b>800</b>	26.0
<b>120</b>	15.1	<b>900</b>	26.6
<b>140</b>	13.6	<b>1000</b>	28.5



**COM-POWER AH-118****HORN ANTENNA**

S/N: 071250

**CALIBRATION DUE: JULY 1, 2016**

<b>FREQUENCY (MHz)</b>	<b>FACTOR (dB)</b>	<b>FREQUENCY (MHz)</b>	<b>FACTOR (dB)</b>
1000	30.1	9500	44.2
1500	29.2	10000	43.4
2000	31.6	10500	44.6
2500	35.5	11000	45.1
3000	33.7	11500	45.7
3500	36.0	12000	46.2
4000	35.4	12500	45.4
4500	35.5	13000	44.8
5000	40.1	13500	46.7
5500	37.8	14000	47.8
6000	39.0	14500	46.4
6500	39.9	15000	47.2
7000	40.4	15500	45.5
7500	44.4	16000	45.0
8000	44.1	16500	44.5
8500	43.1	17000	47.0
9000	43.0	17500	47.8
		18000	44.2





**COM-POWER PAM-118A****1-18GHz - PREAMPLIFIER**

S/N: 551034

CALIBRATION DUE: FEBRUARY 6, 2016

<b>FREQUENCY (MHz)</b>	<b>FACTOR (dB)</b>	<b>FREQUENCY (MHz)</b>	<b>FACTOR (dB)</b>
500	36.77	5500	39.82
1000	38.63	6000	38.74
1100	38.72	6500	39.60
1200	38.97	7000	35.52
1300	38.59	7500	36.61
1400	39.18	8000	36.92
1500	38.71	8500	37.13
1600	39.28	9000	36.50
1700	39.25	9500	38.92
1800	39.06	10000	38.74
1900	40.34	11000	35.23
2000	40.07	12000	35.64
2500	39.69	13000	36.73
3000	40.94	14000	36.48
3500	40.41	15000	37.57
4000	40.44	16000	38.10
4500	41.20	17000	37.34
5000	39.35	18000	36.80




**COM-POWER PA-840****18-40 GHz PREAMPLIFIER**

S/N: 181289

CALIBRATION DUE: JUNE 16, 2016

FREQUENCY (MHz)	FACTOR (dB)	FREQUENCY (MHz)	FACTOR (dB)
<b>18000</b>	29.4	<b>31500</b>	28.2
<b>19000</b>	28.8	<b>32000</b>	28.6
<b>20000</b>	30.5	<b>32500</b>	28.8
<b>21000</b>	31.4	<b>33000</b>	28.2
<b>22000</b>	31.2	<b>33500</b>	27.7
<b>23000</b>	30.1	<b>34000</b>	27.2
<b>24000</b>	30.3	<b>34500</b>	28.2
<b>25000</b>	29.8	<b>35000</b>	27.3
<b>26000</b>	30.5	<b>35500</b>	27.2
<b>26500</b>	30.7	<b>36000</b>	27.2
<b>27000</b>	30.8	<b>36500</b>	27.5
<b>27500</b>	30.2	<b>37000</b>	27.0
<b>28000</b>	30.1	<b>37500</b>	26.7
<b>28500</b>	30.2	<b>38000</b>	26.2
<b>29000</b>	30.1	<b>38500</b>	26.5
<b>29500</b>	29.8	<b>39000</b>	26.3
<b>30000</b>	29.2	<b>39500</b>	26.9
<b>30500</b>	28.4	<b>40000</b>	27.6
<b>31000</b>	29.8		



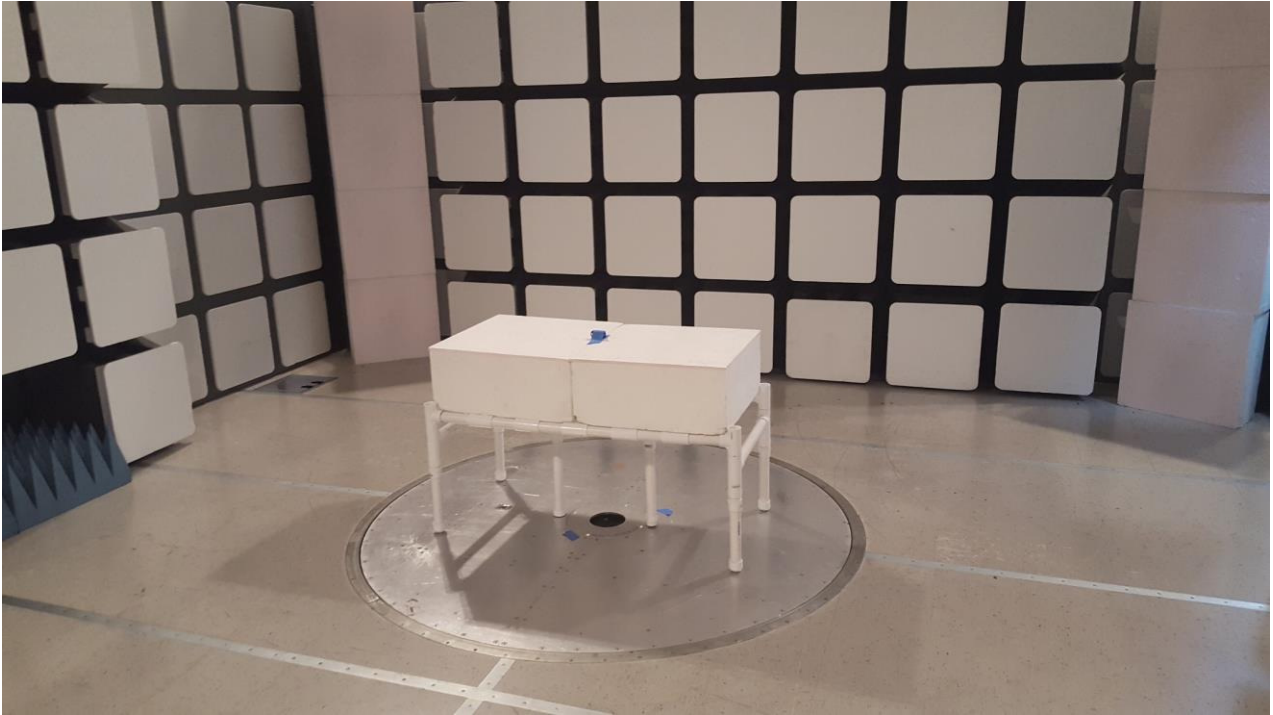


**FRONT VIEW**

MOBILOGIX, INC.  
BLUETOOTH BEACON  
Model: BTM-150-B

FCC SUBPART C - RADIATED EMISSIONS < 1GHz

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION  
FOR MAXIMUM EMISSIONS**



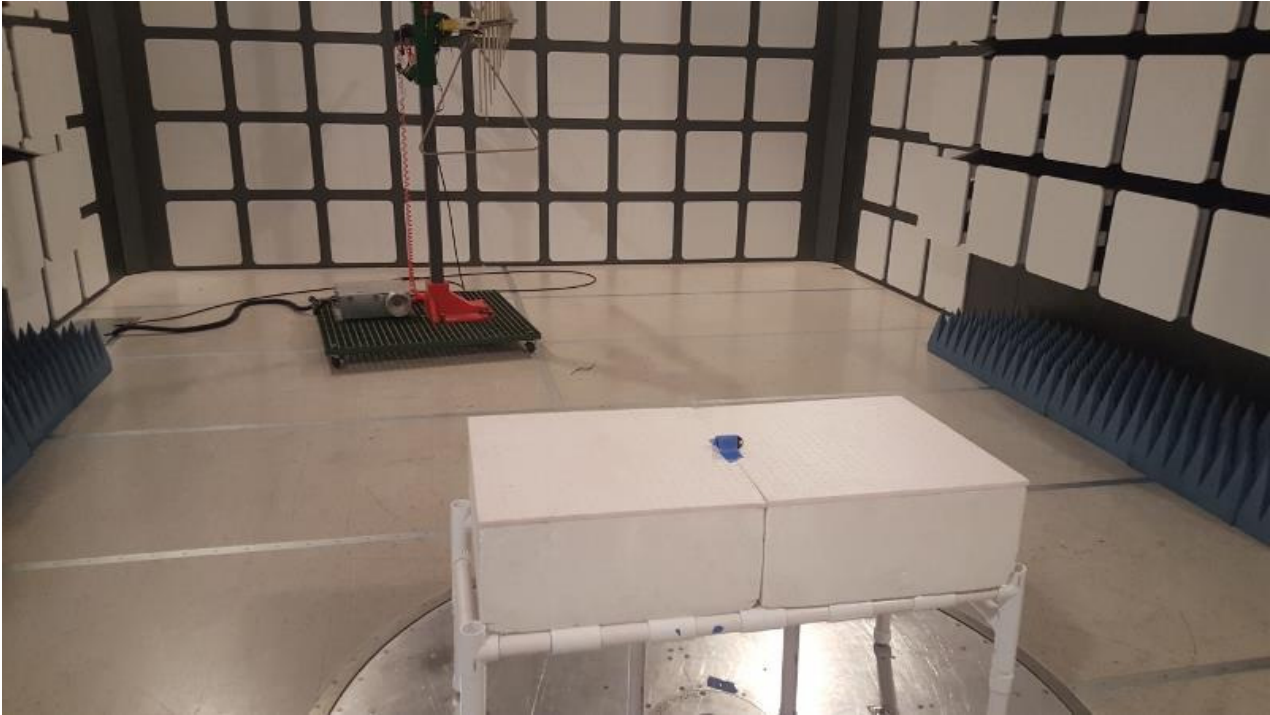

**REAR VIEW**

MOBILOGIX, INC.  
BLUETOOTH BEACON  
Model: BTM-150-B

FCC SUBPART C - RADIATED EMISSIONS < 1GHz

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION  
FOR MAXIMUM EMISSIONS**






**FRONT VIEW**

MOBILOGIX, INC.  
BLUETOOTH BEACON  
Model: BTM-150-B

FCC SUBPART C - RADIATED EMISSIONS > 1GHz

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION  
FOR MAXIMUM EMISSIONS**



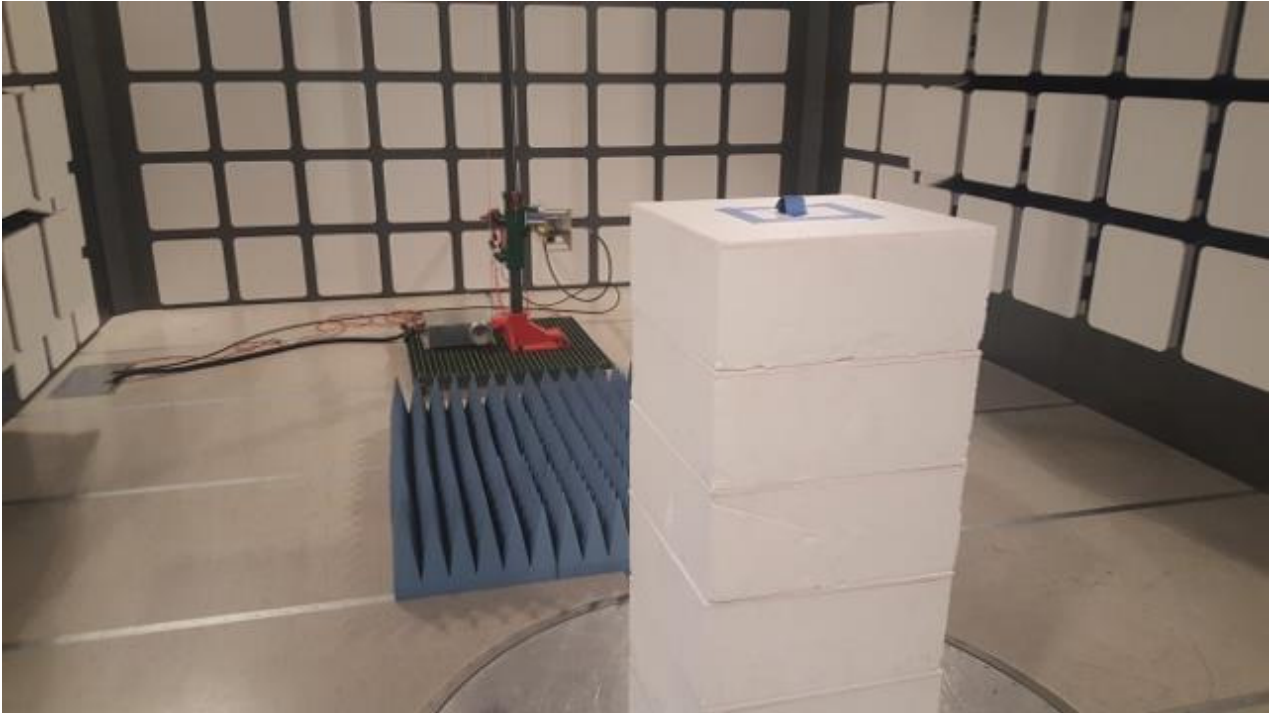

**REAR VIEW**

MOBILOGIX, INC.  
BLUETOOTH BEACON  
Model: BTM-150-B

FCC SUBPART C - RADIATED EMISSIONS > 1GHz

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION  
FOR MAXIMUM EMISSIONS**



**APPENDIX E**

***RADIATED EMISSIONS DATA SHEETS***



---

**Brea Division**  
114 Olinda Drive  
Brea, CA 92823  
(714) 579-0500

**Agoura Division**  
2337 Troutdale Drive  
Agoura, CA 91301  
(818) 597-0600

**Silverado Division**  
19121 El Toro Road  
Silverado, CA 92676  
(949) 589-0700


**Lake Forest Division**  
20621 Pascal Way  
Lake Forest, CA 92630  
(949) 587-0400



Title: FCC 15.209 & RSS GEN  
 File: Radiated Pre-Scan 30-1000Mhz.set  
 Operator: Torey Oliver  
 EUT Type: BTM-150-B  
 EUT Condition: The EUT is constantly transmitting 2402 MHz.  
 Comments: Z Axis  
 Temp: 72f  
 Hum: 33%  
 Battery Powered

4/24/2016 4:29:41 PM  
 Sequence: Preliminary Scan

**Compatible Electronics, Inc. FAC-3 (Lab R)**

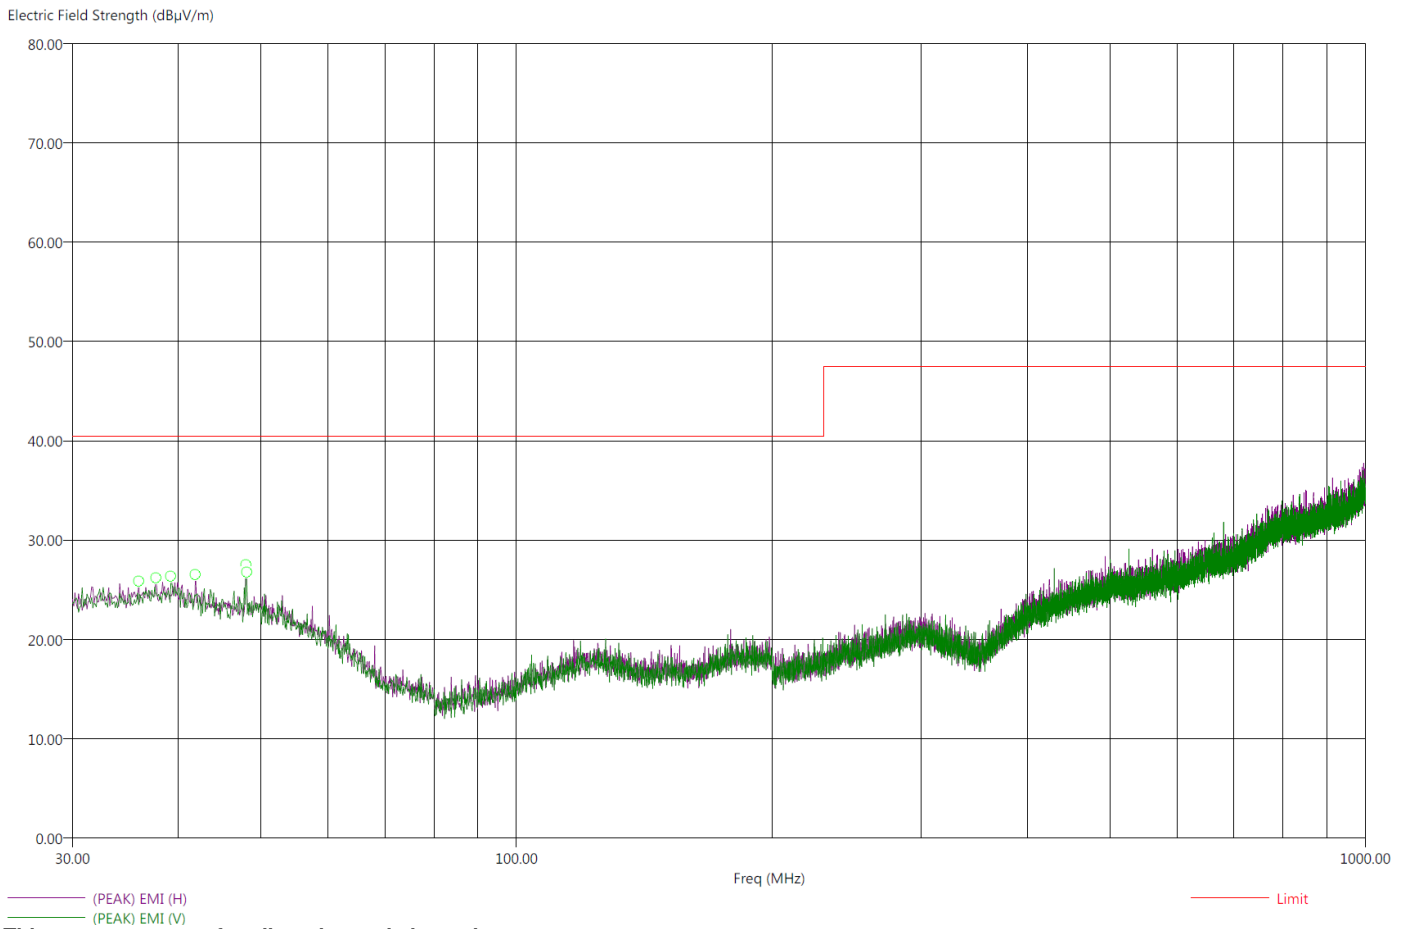

**This was worst case for all modes and channels**  
**There were no radiated emissions besides harmonics found between 9kHz-30 MHz or 1GHz-25GHz.**



**Brea Division**  
 114 Olinda Drive  
 Brea, CA 92823  
 (714) 579-0500

**Agoura Division**  
 2337 Troutdale Drive  
 Agoura, CA 91301  
 (818) 597-0600

**Silverado Division**  
 19121 El Toro Road  
 Silverado, CA 92676  
 (949) 589-0700

**Lake Forest Division**  
 20621 Pascal Way  
 Lake Forest, CA 92630  
 (949) 587-0400



Title: FCC 15.209  
 File: Radiated Final 30-1000Mhz.set  
 Operator: Torey Oliver  
 EUT Type: BTM-150-B  
 EUT Condition: The EUT is constantly transmitting 2402 MHz.  
 Comments: Z Axis  
 Temp: 72f  
 Hum: 33%  
 Battery Powered

4/24/2016 4:52:16 PM  
 Sequence: Final Measurements

Compatible Electronics, Inc. FAC-3 (Lab R)

Freq (MHz)	(QP) Margin (dB)	(QP) EMI (dBµV/m)	(PEAK) EMI (dBµV/m)	Limit (dBµV/m)	Pol	Ttbl Agl (deg)	Twr Ht (cm)	Transducer(dB)	Cable(dB)
35.90	-20.86	19.59	25.42	40.45	H	97.25	302.29	22.59	0.56
37.60	-20.60	19.85	25.78	40.45	H	340.75	213.28	22.76	0.58
39.20	-20.42	20.03	25.28	40.45	V	81.50	315.25	22.93	0.59
41.90	-20.74	19.71	25.21	40.45	H	125.00	204.56	22.44	0.62
48.00	-16.84	23.61	27.19	40.45	H	119.25	272.32	21.38	0.68
48.10	-16.00	24.45	28.62	40.45	V	328.00	180.14	21.38	0.68

*This was worst case for all modes and channels  
 There were no radiated emissions besides harmonics found between 9kHz-30 MHz or 1GHz-25GHz.*



***DTS BANDWIDTH***



***DATA SHEETS***



## DTS BANDWIDTH

**FCC 15.247 & RSS 247**Company: Mobilogix, Inc.  
EUT: Bluetooth Beacon  
Model: BTM-150-BDate: 4/25/2016  
Lab: R  
Test Eng: Torey Oliver**Compatible Electronics, Inc. FAC-3 ( Lab R )**


## DTS Bandwidth

Freq. (MHz)	Measured BW (kHz)	Limit (Min) (kHz)	Margin (kHz)	Peak / QP / Avg	Comments
2402	715.43	500.00	215.43	Peak	
2440	727.45	500.00	227.45	Peak	
2480	727.45	500.00	227.45	Peak	





Max/Ref Lvl	Marker 1 [T2 ndB]	RBW	100 kHz	RF Att	0 dB
102 dB $\mu$ V	ndB	6.00 dB	VBW	300 kHz	
72 dB $\mu$ V	BW 715.43086172 kHz	SWT	5 ms	Unit	dB $\mu$ V

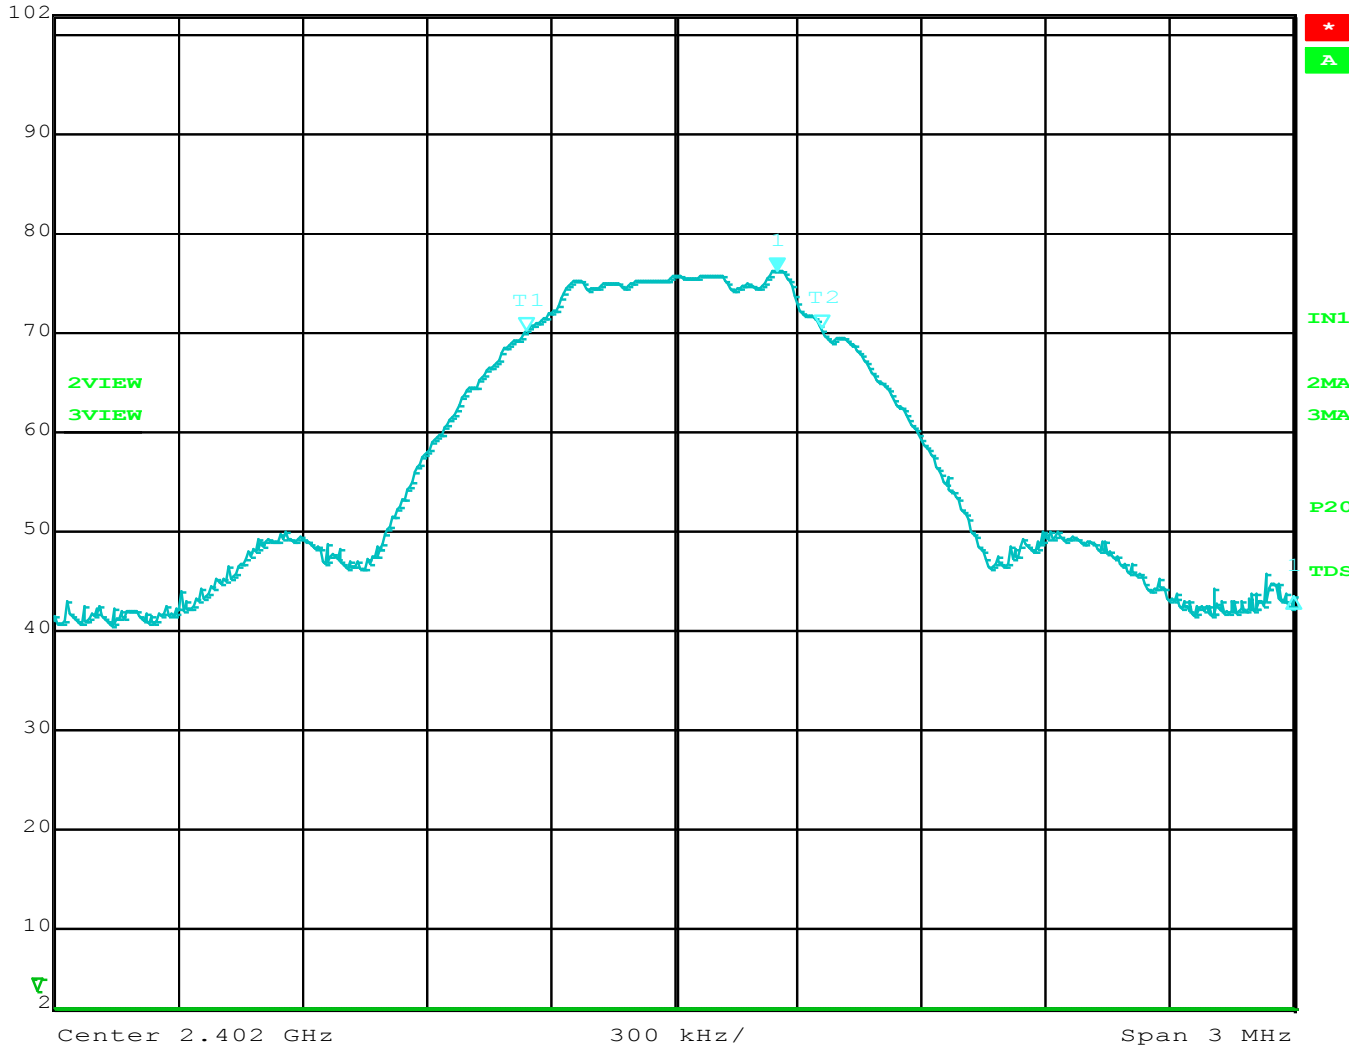

Comment A: DTS Bandwidth 2402MHz

Date: 25.APR.2016 08:22:15



**Brea Division**  
 114 Olinda Drive  
 Brea, CA 92823  
 (714) 579-0500


**Agoura Division**  
 2337 Troutdale Drive  
 Agoura, CA 91301  
 (818) 597-0600

**Silverado Division**  
 19121 El Toro Road  
 Silverado, CA 92676  
 (949) 589-0700

**Lake Forest Division**  
 20621 Pascal Way  
 Lake Forest, CA 92630  
 (949) 587-0400



Max/Ref Lvl	Marker 1 [T2 ndB]	RBW	100 kHz	RF Att	0 dB
102 dB $\mu$ V	ndB	6.00 dB	VBW	300 kHz	
72 dB $\mu$ V	BW 727.45490982 kHz	SWT	5 ms	Unit	dB $\mu$ V

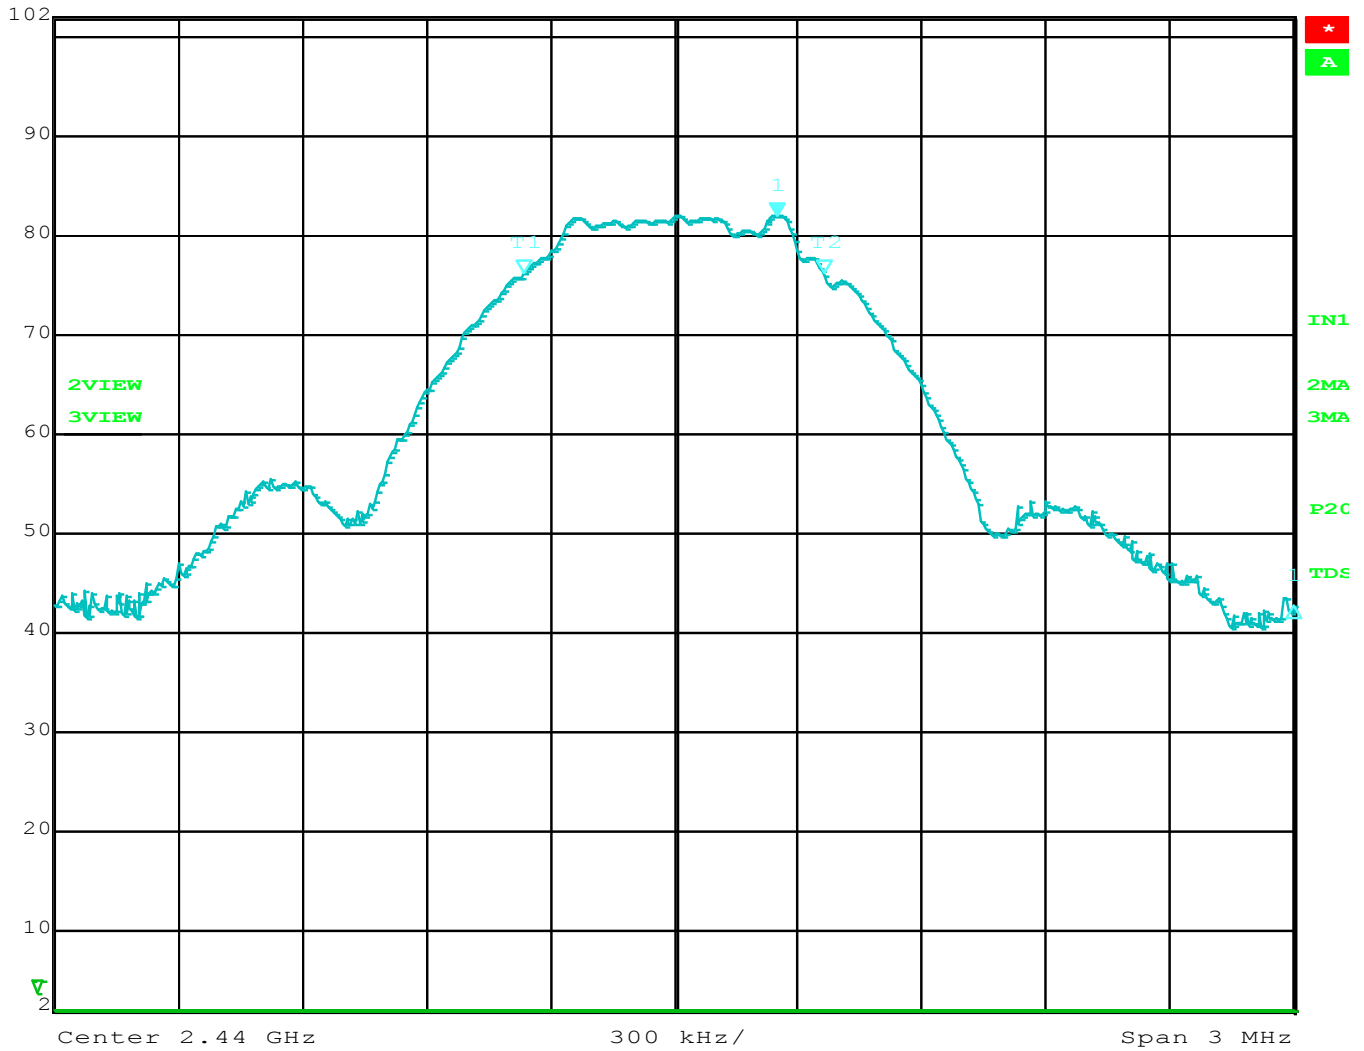

Comment A: DTS Bandwidth 2440MHz  
 Date: 25.APR.2016 08:20:19



**Brea Division**  
 114 Olinda Drive  
 Brea, CA 92823  
 (714) 579-0500


**Agoura Division**  
 2337 Troutdale Drive  
 Agoura, CA 91301  
 (818) 597-0600

**Silverado Division**  
 19121 El Toro Road  
 Silverado, CA 92676  
 (949) 589-0700

**Lake Forest Division**  
 20621 Pascal Way  
 Lake Forest, CA 92630  
 (949) 587-0400



Max/Ref Lvl	Marker 1 [T2 ndB]	RBW	100 kHz	RF Att	0 dB
102 dB $\mu$ V	ndB	6.00 dB	VBW	300 kHz	
72 dB $\mu$ V	BW 727.45490982 kHz	SWT	5 ms	Unit	dB $\mu$ V

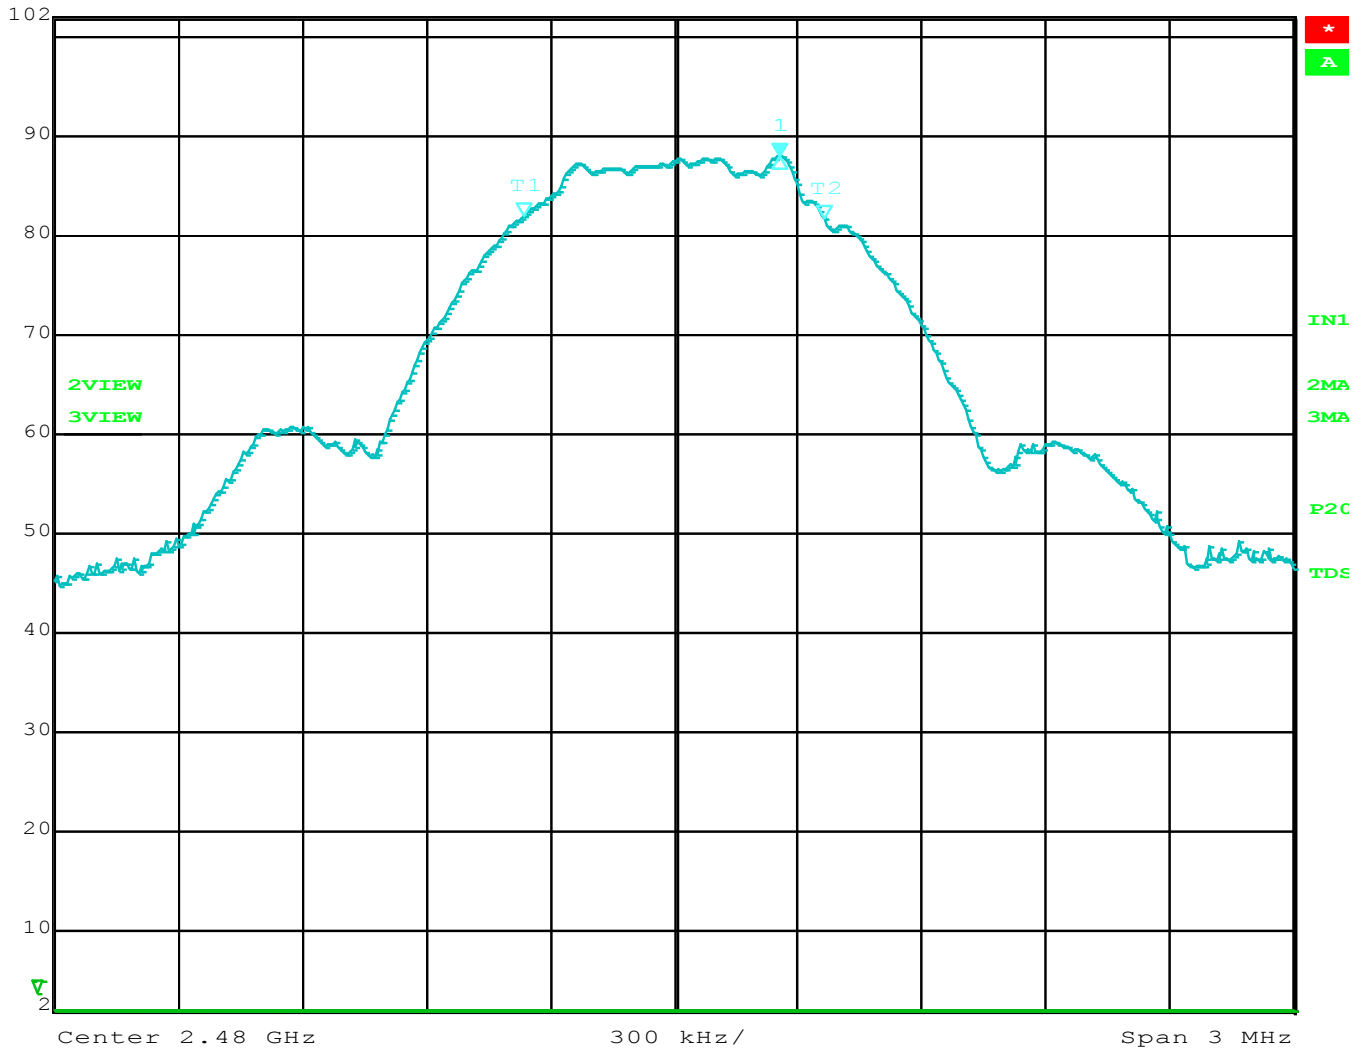

Comment A: DTS Bandwidth 2480MHz  
 Date: 25.APR.2016 08:12:55



**Brea Division**  
 114 Olinda Drive  
 Brea, CA 92823  
 (714) 579-0500

**Agoura Division**  
 2337 Troutdale Drive  
 Agoura, CA 91301  
 (818) 597-0600

**Silverado Division**  
 19121 El Toro Road  
 Silverado, CA 92676  
 (949) 589-0700

**Lake Forest Division**  
 20621 Pascal Way  
 Lake Forest, CA 92630  
 (949) 587-0400

***MAXIMUM PEAK CONDUCTED OUTPUT POWER***

***DATA SHEETS***



---

**Brea Division**  
114 Olinda Drive  
Brea, CA 92823  
(714) 579-0500

**Agoura Division**  
2337 Troutdale Drive  
Agoura, CA 91301  
(818) 597-0600

**Silverado Division**  
19121 El Toro Road  
Silverado, CA 92676  
(949) 589-0700

**Lake Forest Division**  
20621 Pascal Way  
Lake Forest, CA 92630  
(949) 587-0400

## MAXIMUM PEAK CONDUCTED OUTPUT POWER

**FCC 15.247**

Company: Mobilogix, Inc.  
EUT: Bluetooth Beacon  
Model: BTM-150-B  
Mode: BLE

Date: 4/25/2016  
Lab: R  
Test Eng: Torey Oliver

**Compatible Electronics, Inc. FAC-3 ( Lab R )**

Freq. (MHz)	Level (dBm)	Limit (dBm)	Margin (dB)	Peak / QP / Avg	Comments
2402	-0.09	30.00	-30.09	Peak	
2440	-0.11	30.00	-30.11	Peak	
2480	-0.22	30.00	-30.22	Peak	





***MAXIMUM PEAK POWER SPECTRAL DENSITY LEVEL IN THE  
FUNDAMENTAL EMISSION***

***DATA SHEETS***



---

**Brea Division**  
114 Olinda Drive  
Brea, CA 92823  
(714) 579-0500

**Agoura Division**  
2337 Troutdale Drive  
Agoura, CA 91301  
(818) 597-0600

**Silverado Division**  
19121 El Toro Road  
Silverado, CA 92676  
(949) 589-0700

**Lake Forest Division**  
20621 Pascal Way  
Lake Forest, CA 92630  
(949) 587-0400

## PEAK POWER SPECTRAL DENSITY


**FCC 15.247**Company: Mobilogix, Inc.  
EUT: Bluetooth Beacon  
Model: BTM-150-BDate: 4/25/2016  
Lab: R  
Test ENG: Torey Oliver**Compatible Electronics, Inc. FAC-3 ( Lab R )**

Freq. (MHz)	Peak (dBm)	Limit (dBm)	Margin (dB)	Peak / QP / Avg	Comments
2402	-2.20	8.00	-10.20	Peak	
2440	-2.21	8.00	-10.21	Peak	
2480	-2.35	8.00	-10.35	Peak	





Marker 1 [T2] RBW 100 kHz RF Att 30 dB  
 Ref Lvl -2.20 dBm VBW 300 kHz  
 20 dBm 2.40224409 GHz SWT 5 ms Unit dBm

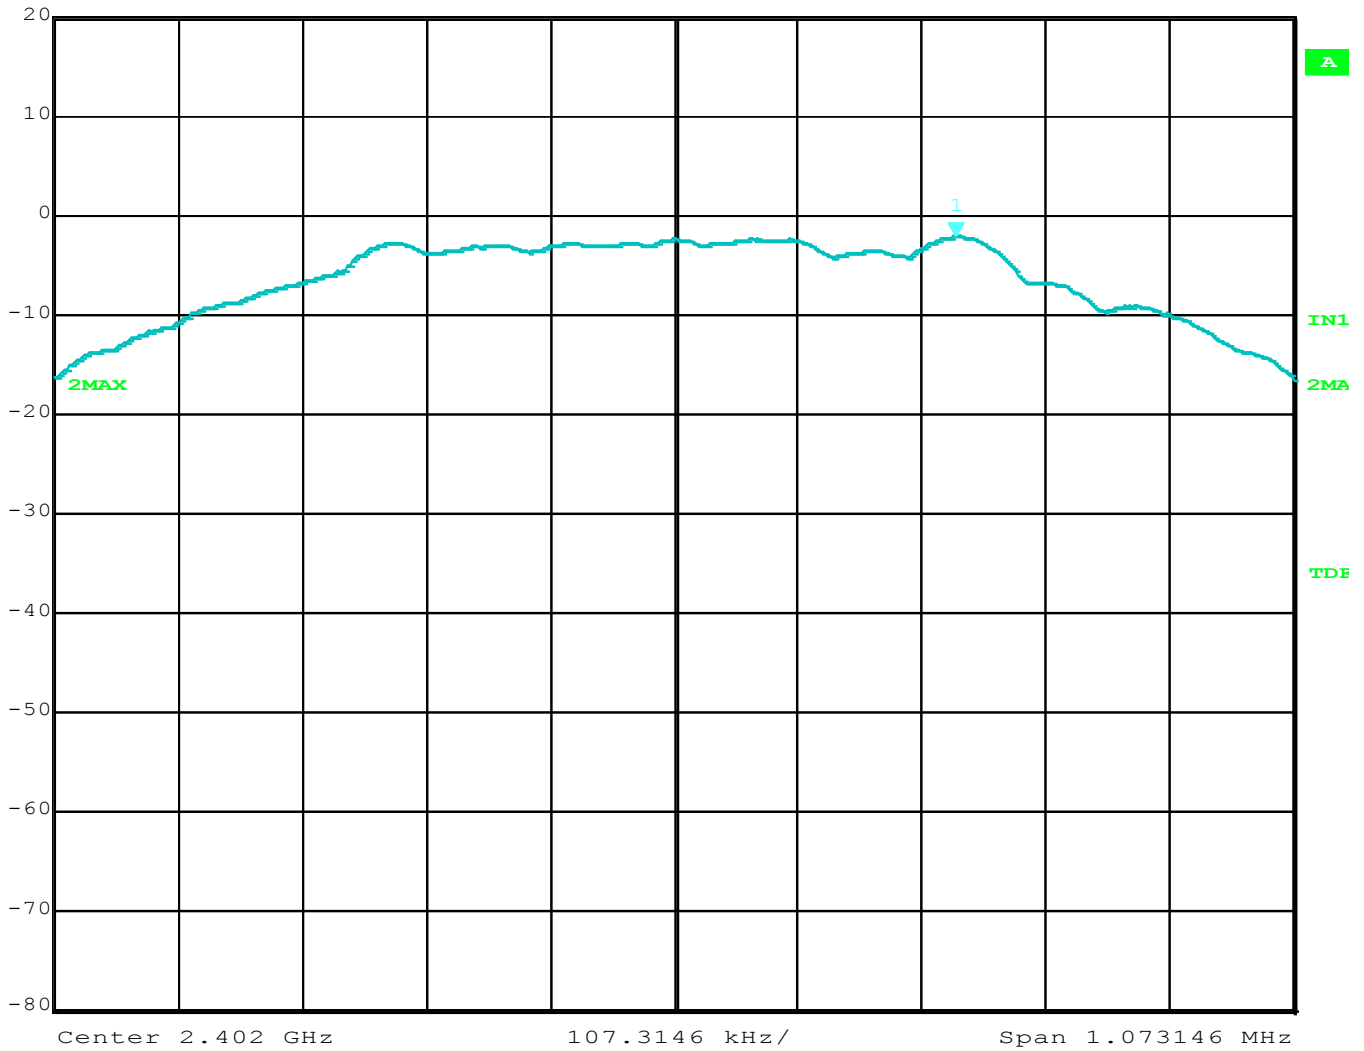

Comment A: Power Spectral Density 2402MHz  
 Date: 25.APR.2016 09:06:51



**Brea Division**  
 114 Olinda Drive  
 Brea, CA 92823  
 (714) 579-0500


**Agoura Division**  
 2337 Troutdale Drive  
 Agoura, CA 91301  
 (818) 597-0600

**Silverado Division**  
 19121 El Toro Road  
 Silverado, CA 92676  
 (949) 589-0700

**Lake Forest Division**  
 20621 Pascal Way  
 Lake Forest, CA 92630  
 (949) 587-0400



Ref Lvl	20 dBm	Marker 1 [T2]	2.44024382 GHz	RBW	100 kHz	RF Att	30 dB
				VBW	300 kHz		
				SWT	5 ms	Unit	dBm

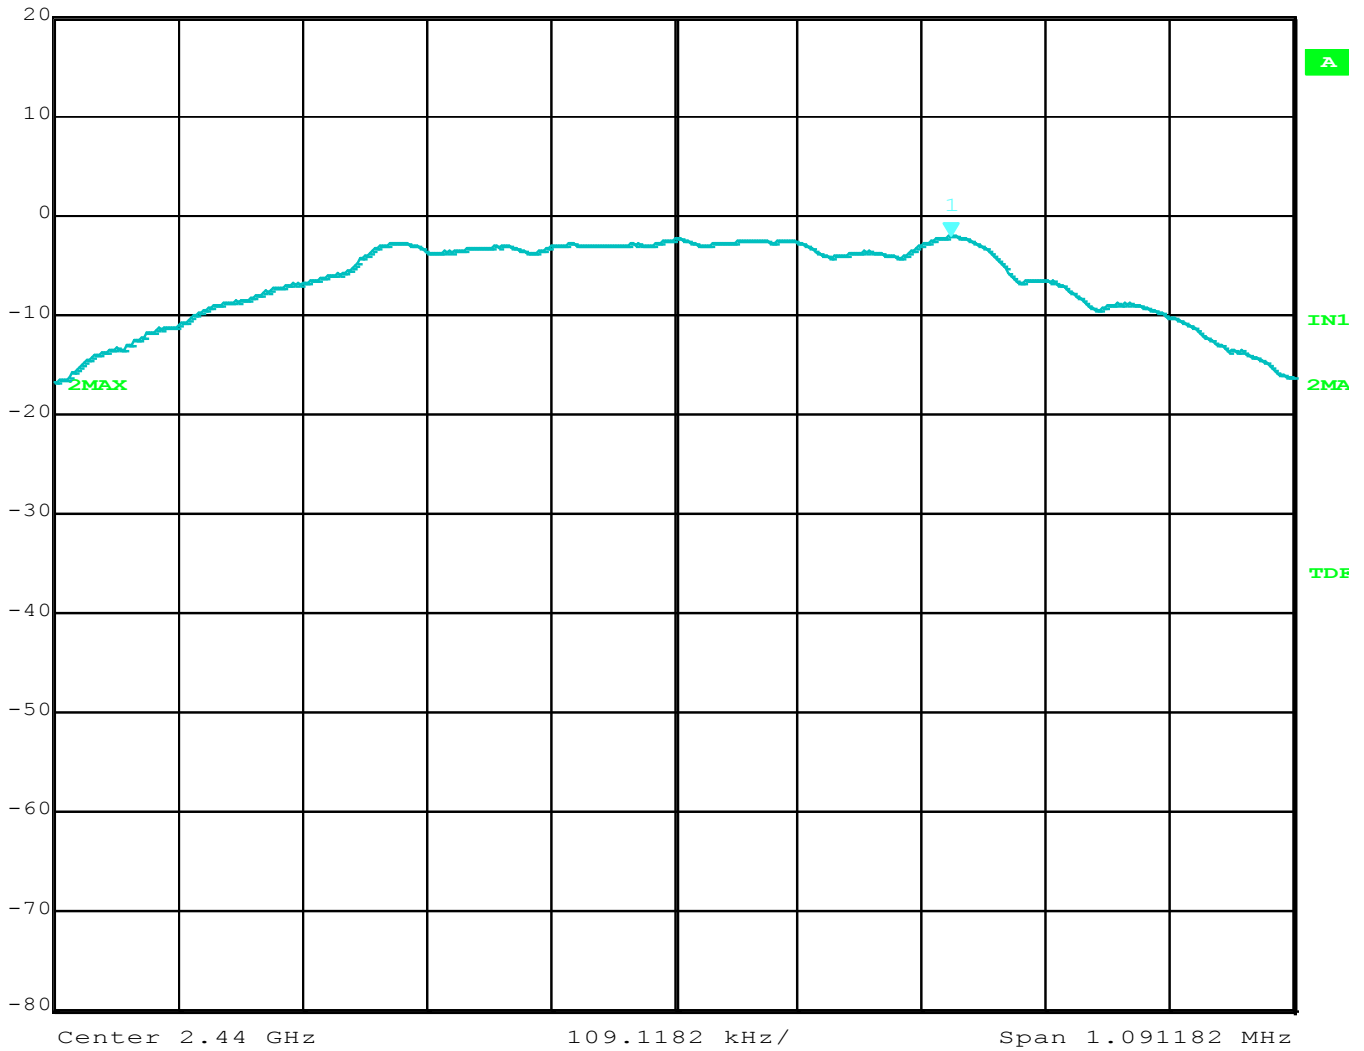

Comment A: Power Spectral Density 2440MHz  
 Date: 25.APR.2016 09:05:28



**Brea Division**  
 114 Olinda Drive  
 Brea, CA 92823  
 (714) 579-0500


**Agoura Division**  
 2337 Troutdale Drive  
 Agoura, CA 91301  
 (818) 597-0600

**Silverado Division**  
 19121 El Toro Road  
 Silverado, CA 92676  
 (949) 589-0700

**Lake Forest Division**  
 20621 Pascal Way  
 Lake Forest, CA 92630  
 (949) 587-0400



Marker 1 [T2] RBW 100 kHz RF Att 30 dB  
 Ref Lvl -2.35 dBm VBW 300 kHz  
 20 dBm 2.48024382 GHz SWT 5 ms Unit dBm

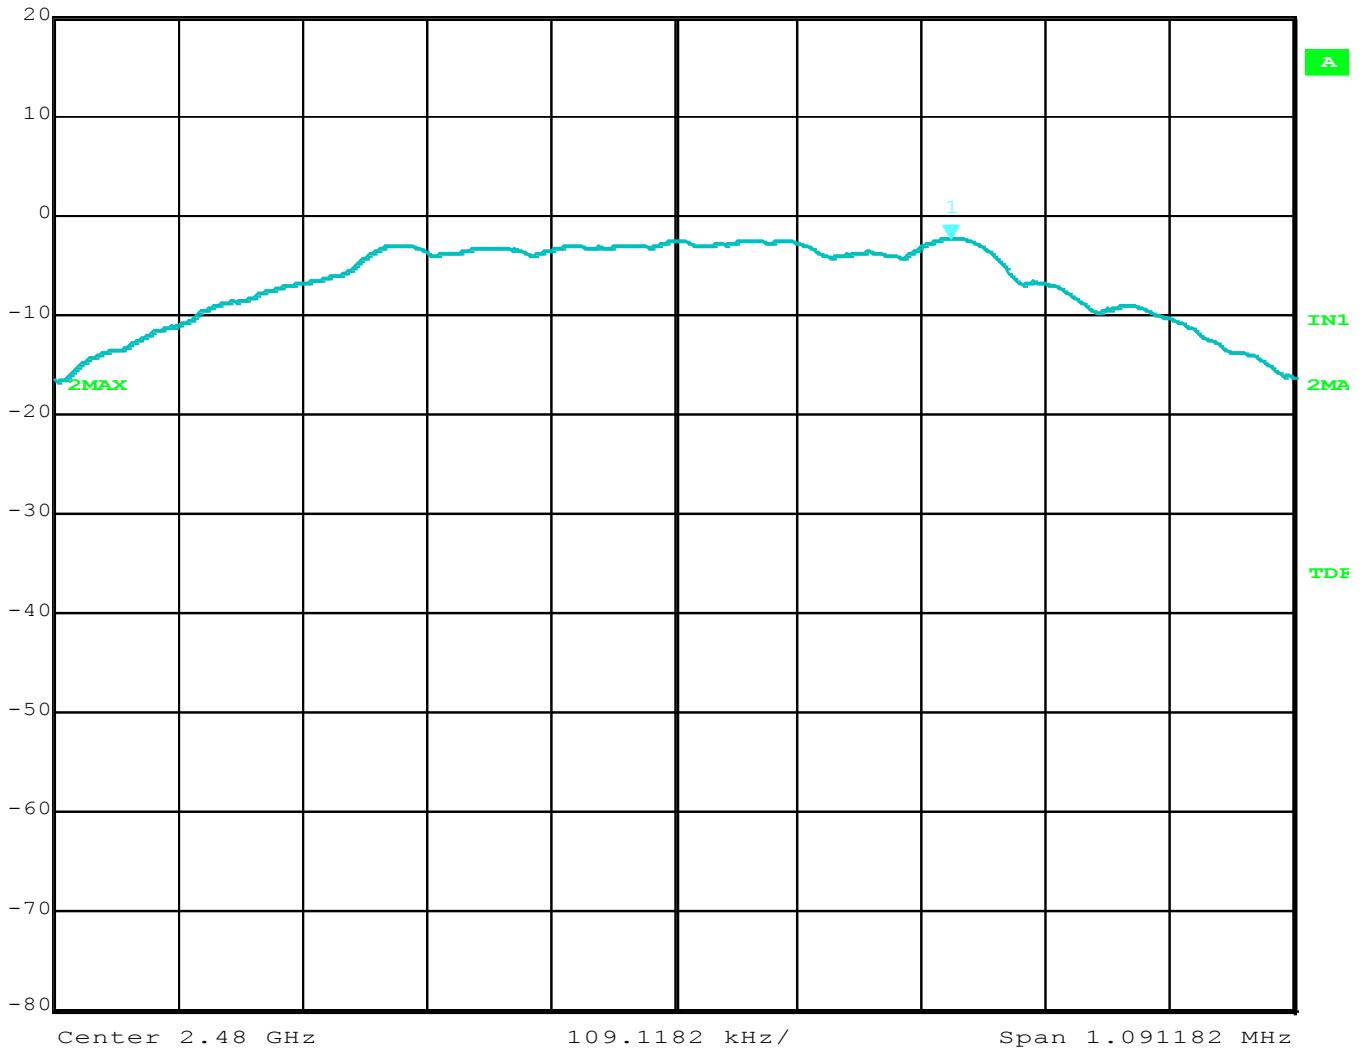

Comment A: Power Spectral Density 2480MHz  
 Date: 25.APR.2016 09:04:24



**Brea Division**  
 114 Olinda Drive  
 Brea, CA 92823  
 (714) 579-0500

**Agoura Division**  
 2337 Troutdale Drive  
 Agoura, CA 91301  
 (818) 597-0600

**Silverado Division**  
 19121 El Toro Road  
 Silverado, CA 92676  
 (949) 589-0700

**Lake Forest Division**  
 20621 Pascal Way  
 Lake Forest, CA 92630  
 (949) 587-0400

***HARMONIC EMISSIONS IN NON-RESTRICTED FREQUENCY  
BANDS (IN 100KHZ BANDWIDTH) / CONDUCTED***

***DATA SHEETS***



---

**Brea Division**  
114 Olinda Drive  
Brea, CA 92823  
(714) 579-0500

**Agoura Division**  
2337 Troutdale Drive  
Agoura, CA 91301  
(818) 597-0600

**Silverado Division**  
19121 El Toro Road  
Silverado, CA 92676  
(949) 589-0700

**Lake Forest Division**  
20621 Pascal Way  
Lake Forest, CA 92630  
(949) 587-0400

## *HARMONIC EMISSIONS IN NON-RESTRICTED FREQUENCY BANDS*

**FCC 15.247**

Company: Mobilogix, Inc.  
EUT: Bluetooth Beacon  
Model: BTM-150-B  
Mode: BLE

Date: 4/25/2016  
Lab: R  
Test Eng: Torey Oliver

**Compatible Electronics, Inc. FAC-3 ( Lab R )**

Freq. (MHz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Peak / QP / Avg	Comments
7208.42	56.65	84.80	-28.15	Peak	Low Channel
17094.19	52.34	84.79	-32.45	Peak	Mid Channel
17364.73	53.39	84.65	-31.26	Peak	High Channel



***EMISSIONS IN RESTRICTED FREQUENCY BANDS (RADIATED  
FIELD STRENGTH)***

***DATA SHEETS***



---

**Brea Division**  
114 Olinda Drive  
Brea, CA 92823  
(714) 579-0500

**Agoura Division**  
2337 Troutdale Drive  
Agoura, CA 91301  
(818) 597-0600

**Silverado Division**  
19121 El Toro Road  
Silverado, CA 92676  
(949) 589-0700

**Lake Forest Division**  
20621 Pascal Way  
Lake Forest, CA 92630  
(949) 587-0400



# HARMONIC EMISSIONS IN RESTRICTED FREQUENCY BANDS

## Low Channel, Horizontal & Vertical

**FCC 15.247**

Company: Mobilogix, Inc.  
 EUT: Bluetooth Beacon  
 Model: BTM-150-B

Date: 4/25/2016  
 Lab: R  
 Test ENG: T. Oliver

**Compatible Electronics, Inc. FAC-3 ( Lab R )**

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
4804.00	49.36	H	73.98	-24.62	Peak	1.32	341	In Restricted Band
4804.00	29.36	H	53.98	-24.62	Avg	1.32	341	
12010.00	64.65	H	73.98	-9.33	Peak	1.06	32	In Restricted Band
12010.00	44.65	H	53.98	-9.33	Avg	1.06	32	
19216.00		H	73.98		Peak			In Restricted Band
19216.00		H	53.98		Avg			No Emissions Found
4804.00	43.76	V	73.98	-30.22	Peak	1.85	345	In Restricted Band
4804.00	23.76	V	53.98	-30.22	Avg	1.85	345	
12010.00	64.53	V	73.98	-9.45	Peak	1.01	10.00	In Restricted Band
12010.00	44.53	V	53.98	-9.45	Avg	1.01	10.00	
19216.00		V	73.98		Peak			In Restricted Band
19216.00		V	53.98		Avg			No Emissions Found

Test distance  
 3 meter



# HARMONIC EMISSIONS IN RESTRICTED FREQUENCY BANDS

## Mid Channel, Horizontal & Vertical

**FCC 15.247**

Company: Mobilogix, Inc.  
 EUT: Bluetooth Beacon  
 Model: BTM-150-B

Date: 4/25/2016  
 Lab: R  
 Test ENG: Torey Oliver

**Compatible Electronics, Inc. FAC-3 ( Lab R )**

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
4880.00	51.21	H	73.98	-22.77	Peak	1.20	342	In Restricted Band
4880.00	31.21	H	53.98	-22.77	Avg	1.20	342	
7320.00	63.44	H	73.98	-10.54	Peak	1.11	9	In Restricted Band
7320.00	43.44	H	53.98	-10.54	Avg	1.11	9	
12200.00	59.35	H	73.98	-14.63	Peak	1.05	28	In Restricted Band
12200.00	39.35	H	53.98	-14.63	Avg	1.05	28	
19520.00		H	73.98		Peak			In Restricted Band
19520.00		H	53.98		Avg			No Emission Found
4880.00	47.67	V	73.98	-26.31	Peak	1.50	280	In Restricted Band
4880.00	27.67	V	53.98	-26.31	Avg	1.50	280	
7320.00	72.38	V	73.98	-1.60	Peak	1.00	29	In Restricted Band
7320.00	52.38	V	53.98	-1.60	Avg	1.00	29	
12200.00	63.82	V	73.98	-10.16	Peak	1.09	0	In Restricted Band
12200.00	43.82	V	53.98	-10.16	Avg	1.09	0	
19520.00		V	73.98		Peak			In Restricted Band
19520.00		V	53.98		Avg			No emissions found

Test distance  
 3 meter



# HARMONIC EMISSIONS IN RESTRICTED FREQUENCY BANDS

## High Channel, Horizontal & Vertical

**FCC 15.247**


Company: Mobilogix, Inc.  
 EUT: Bluetooth Beacon  
 Model: BTM-150-B

Date: 4/25/2016  
 Lab: R  
 Test ENG: Torey Oliver

**Compatible Electronics, Inc. FAC-3 ( Lab R )**

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
4960.00	49.55	H	73.98	-24.43	Peak	1.26	325	In Restricted Band
4960.00	29.55	H	53.98	-24.43	Avg	1.26	325	
7440.00	69.31	H	73.98	-4.67	Peak	1.06	10	In Restricted Band
7440.00	49.31	H	53.98	-4.67	Avg	1.06	10	
12400.00	63.80	H	73.98	-10.18	Peak	1.13	9	In Restricted Band
12400.00	43.80	H	53.98	-10.18	Avg	1.13	9	
19840.00		H	73.98		Peak			In Restricted Band
19840.00		H	53.98		Avg			No Emission Found
22320.00		H	73.98		Peak			In Restricted Band
22320.00		H	53.98		Avg			No Emission Found
4960.00	48.68	V	73.98	-25.30	Peak	1.32	106	In Restricted Band
4960.00	28.68	V	53.98	-25.30	Avg	1.32	106	
7440.00	73.10	V	73.98	-0.88	Peak	1.06	22	In Restricted Band
7440.00	53.10	V	53.98	-0.88	Avg	1.06	22	
12400.00	64.55	V	73.98	-9.43	Peak	1.00	5	In Restricted Band
12400.00	44.55	V	53.98	-9.43	Avg	1.00	5	
19840.00		V	73.98		Peak			In Restricted Band
19840.00		V	53.98		Avg			No Emission Found
22320.00		V	73.98		Peak			In Restricted Band
22320.00		V	53.98		Avg			No Emission Found

Test distance  
 3 meter



***EMISSIONS RADIATED OUTSIDE OF THE FUNDAMENTAL  
FREQUENCY BAND AT BAND EDGES***

***DATA SHEETS***



---

**Brea Division**  
114 Olinda Drive  
Brea, CA 92823  
(714) 579-0500

**Agoura Division**  
2337 Troutdale Drive  
Agoura, CA 91301  
(818) 597-0600

**Silverado Division**  
19121 El Toro Road  
Silverado, CA 92676  
(949) 589-0700

**Lake Forest Division**  
20621 Pascal Way  
Lake Forest, CA 92630  
(949) 587-0400

## BAND EDGES- VERTICAL

**FCC 15.247**

Company: Mobilogix  
 EUT: Bluetooth Beacon  
 Model: BTM-150-B

Date: 4/18/2016  
 Lab: R  
 Test ENG: Torey Oliver

**Compatible Electronics, Inc. FAC-3 ( Lab R )**

Freq. (MHz)	Level (dBµV/m)	Pol	Limit (dBµV)	Margin (dB)	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
2402.00	85.11	V	--	--	Peak	3.02	118	Fundamental of Low Channel
2400.00	53.63	V	65.11	-11.48	Delta	3.02	118	From Peak
2378.34	51.32	V	73.98	-22.66	Peak	3.02	118	No Marker Delta Method Used
2378.34	31.32	V	53.98	-22.66	Avg	3.02	118	<b>Z Axis</b>
2480.00	90.00	V	--	--	Peak	2.87	231	Fundamental of High Channel
2497.83	52.56	V	73.98	-21.42	Peak	2.87	231	No Marker Delta Method Used
2497.83	32.56	V	53.98	-21.42	Avg	2.87	231	<b>Z Axis</b>

Test Distance  
 3 Meters



## BAND EDGES- HORIZONTAL

**FCC 15.247**

Company

: Mobilogix  
 EUT: Bluetooth Beacon  
 Model: BTM-150-B

Date: 4/18/2016

Lab: R

Test ENG: Torey Oliver

**Compatible Electronics, Inc. FAC-3 ( Lab R )**


Freq. (MHz)	Level (dBµV/m)	Pol	Limit (dBµV)	Margin (dB)	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
2402.00	99.41	H	--	--	Peak	1.13	354	Fundamental of Low Channel
2400.00	63.99	H	79.41	-15.42	Delta	1.13	354	From Peak
2385.91	52.45	H	73.98	-21.53	Peak	1.13	354	No Marker Delta Method Used
2385.91	32.45	H	53.98	-21.53	Avg	1.13	354	Z Axis
2480.00	99.21	H	--	--	Peak	1.00	356	Fundamental of High Channel
2483.86	54.62	H	73.98	-19.36	Peak	1.00	356	No Marker Delta Method Used
2483.86	34.62	H	53.98	-19.36	Avg	1.00	356	Z Axis

Test Distance  
 3 Meters



## LOWER BAND EDGE (Horizontal)

	Max/Ref Lvl	Marker 1 [T2]	RBW	1 MHz	RF Att	0 dB
	102 dB $\mu$ V	99.41 dB $\mu$ V	VBW	3 MHz		
	72 dB $\mu$ V	2.40179158 GHz	SWT	5 ms	Unit	dB $\mu$ V

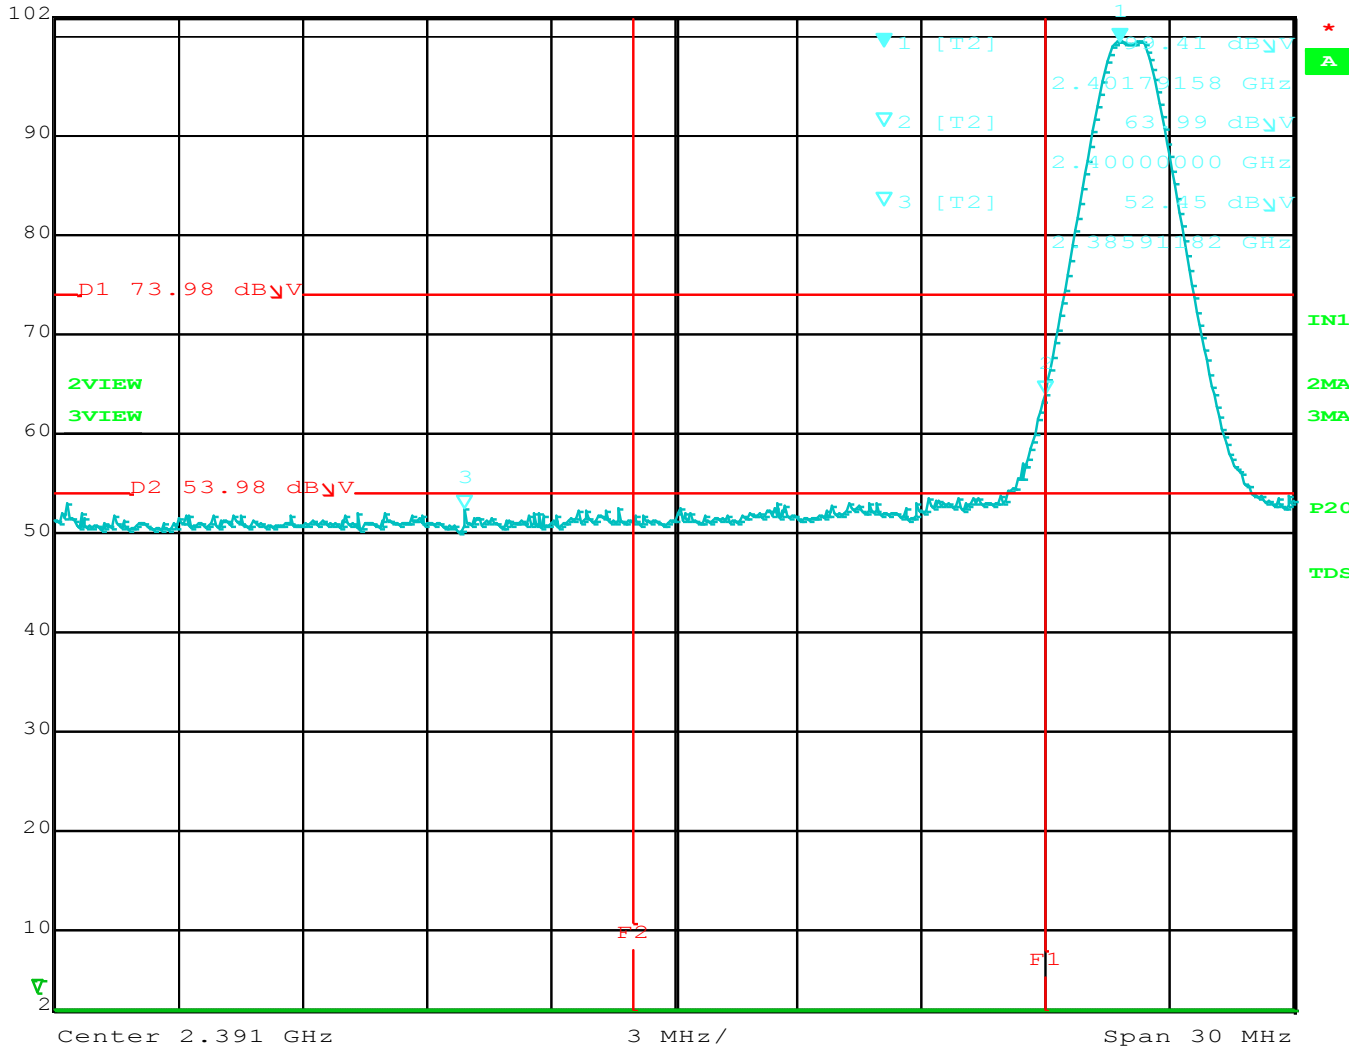


Comment A: Lower Band Edge Horizontal  
 Date: 19.APR.2016 16:01:24



## LOWER BAND EDGE (Vertical)



Max/Ref Lvl	Marker 1 [T3]	RBW	1 MHz	RF Att	0 dB
102 dB $\mu$ V	85.11 dB $\mu$ V	VBW	3 MHz		
72 dB $\mu$ V	2.40227255 GHz	SWT	5 ms	Unit	dB $\mu$ V

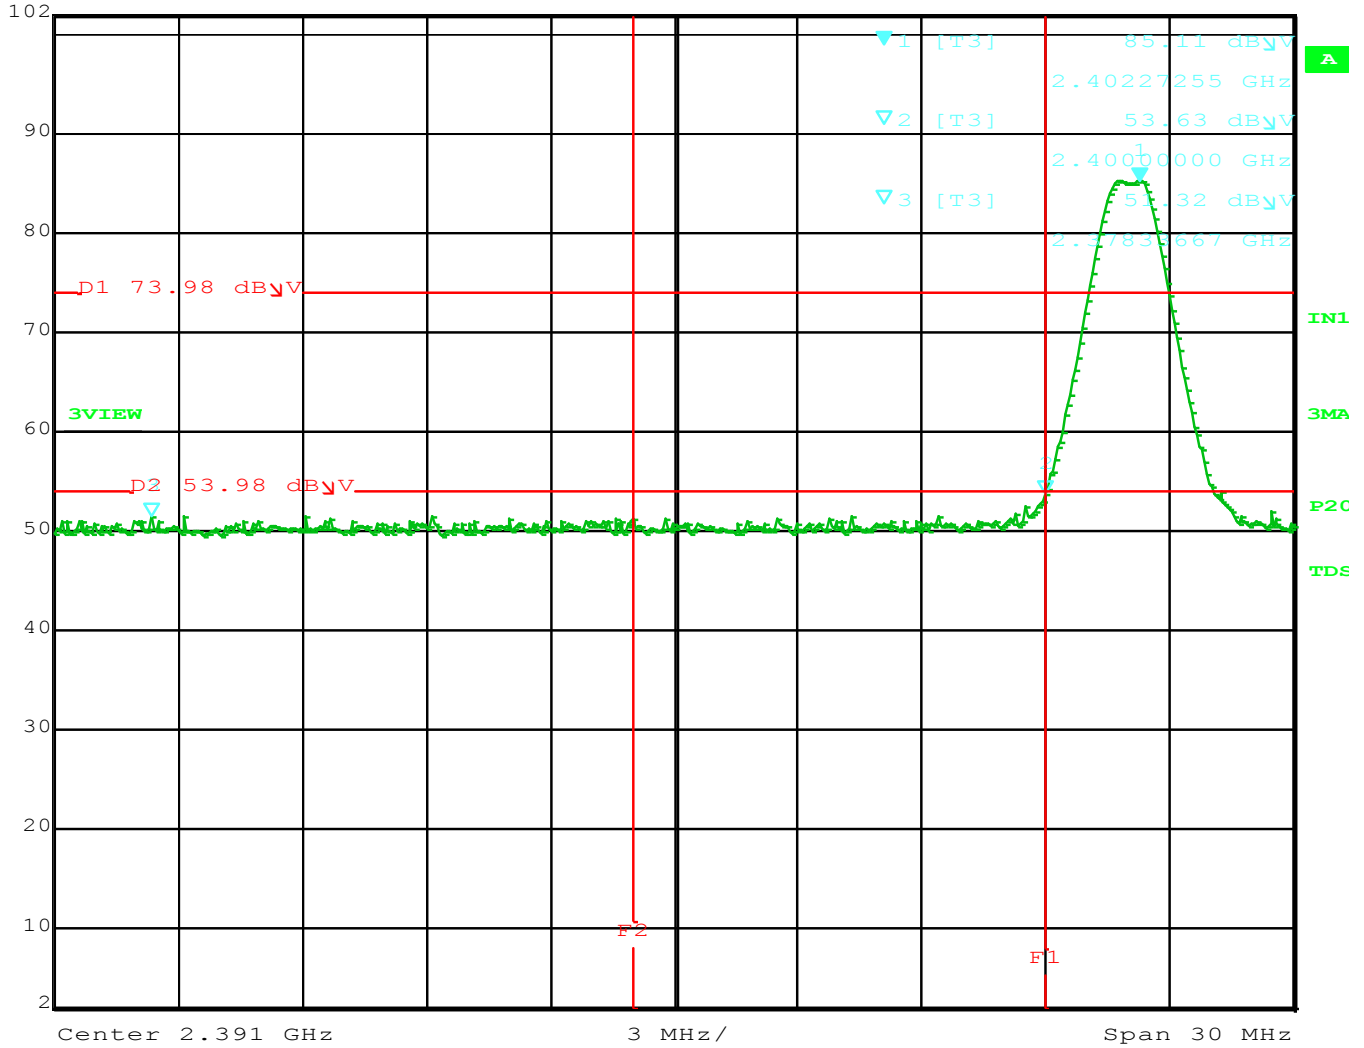


Comment A: Lower Band Edge Vertical  
 Date: 19.APR.2016 16:08:11





## UPPER BAND EDGE (Horizontal)

	Max/Ref Lvl	Marker 1 [T2]	RBW	1 MHz	RF Att	0 dB
	102 dB $\mu$ V	99.21 dB $\mu$ V	VBW	3 MHz		
	72 dB $\mu$ V	2.47976673 GHz	SWT	5 ms	Unit	dB $\mu$ V

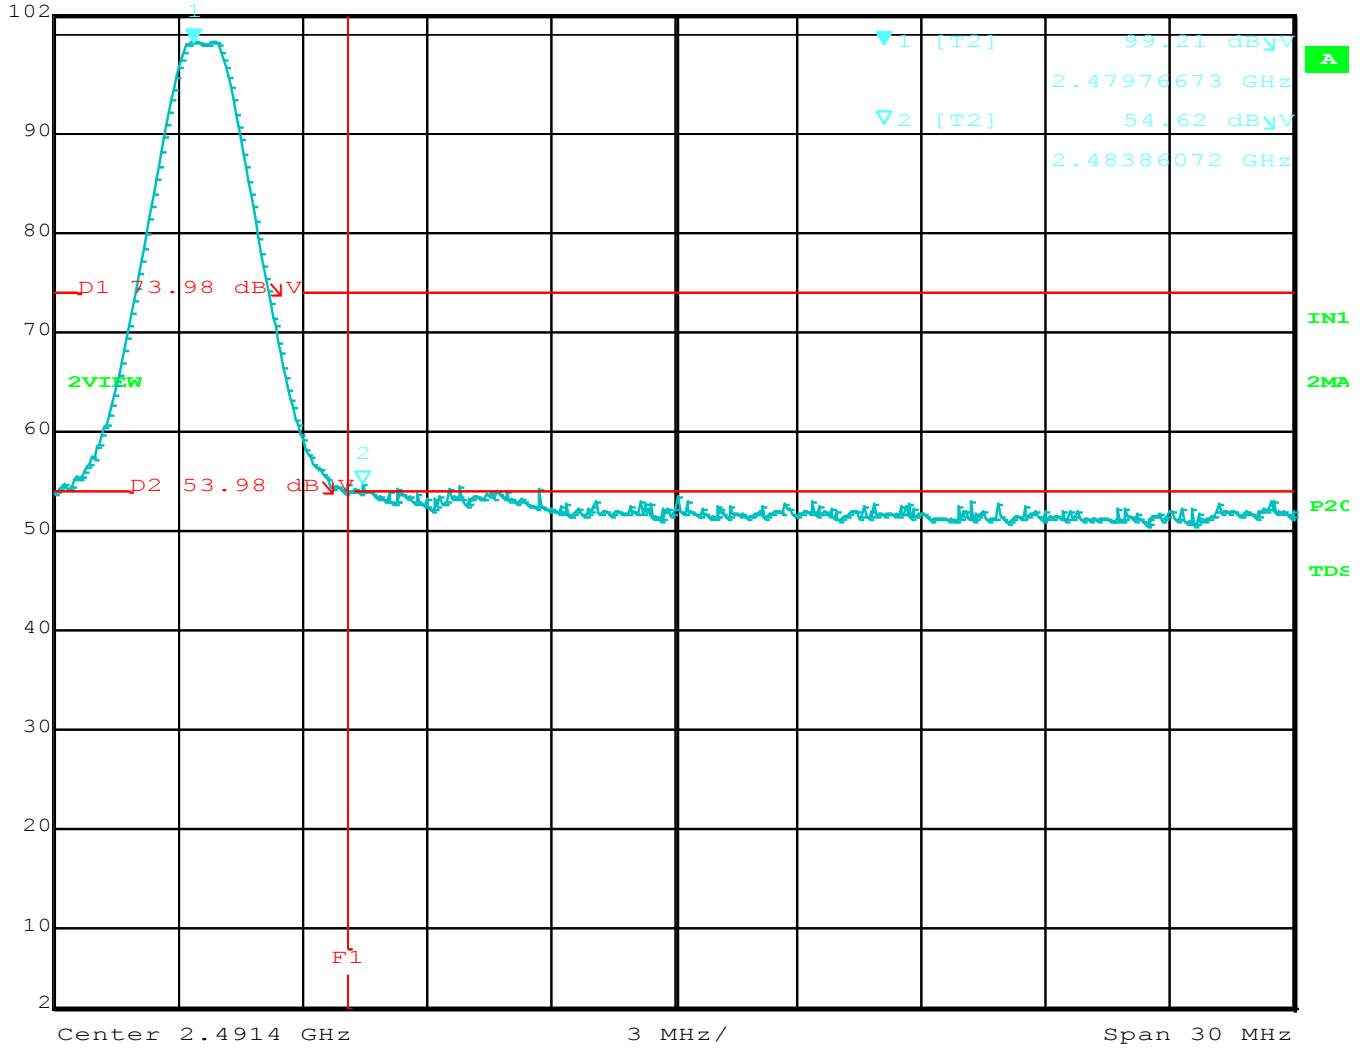


Comment A: Upper Band Edge Horizontal  
 Date: 25.APR.2016 07:59:57



## UPPER BAND EDGE (Vertical)


	Max/Ref Lvl	Marker 1 [T3]	RBW	1 MHz	RF Att	0 dB
	102 dB $\mu$ V	90.00 dB $\mu$ V	VBW	3 MHz		
	72 dB $\mu$ V	2.47976673 GHz	SWT	5 ms	Unit	dB $\mu$ V

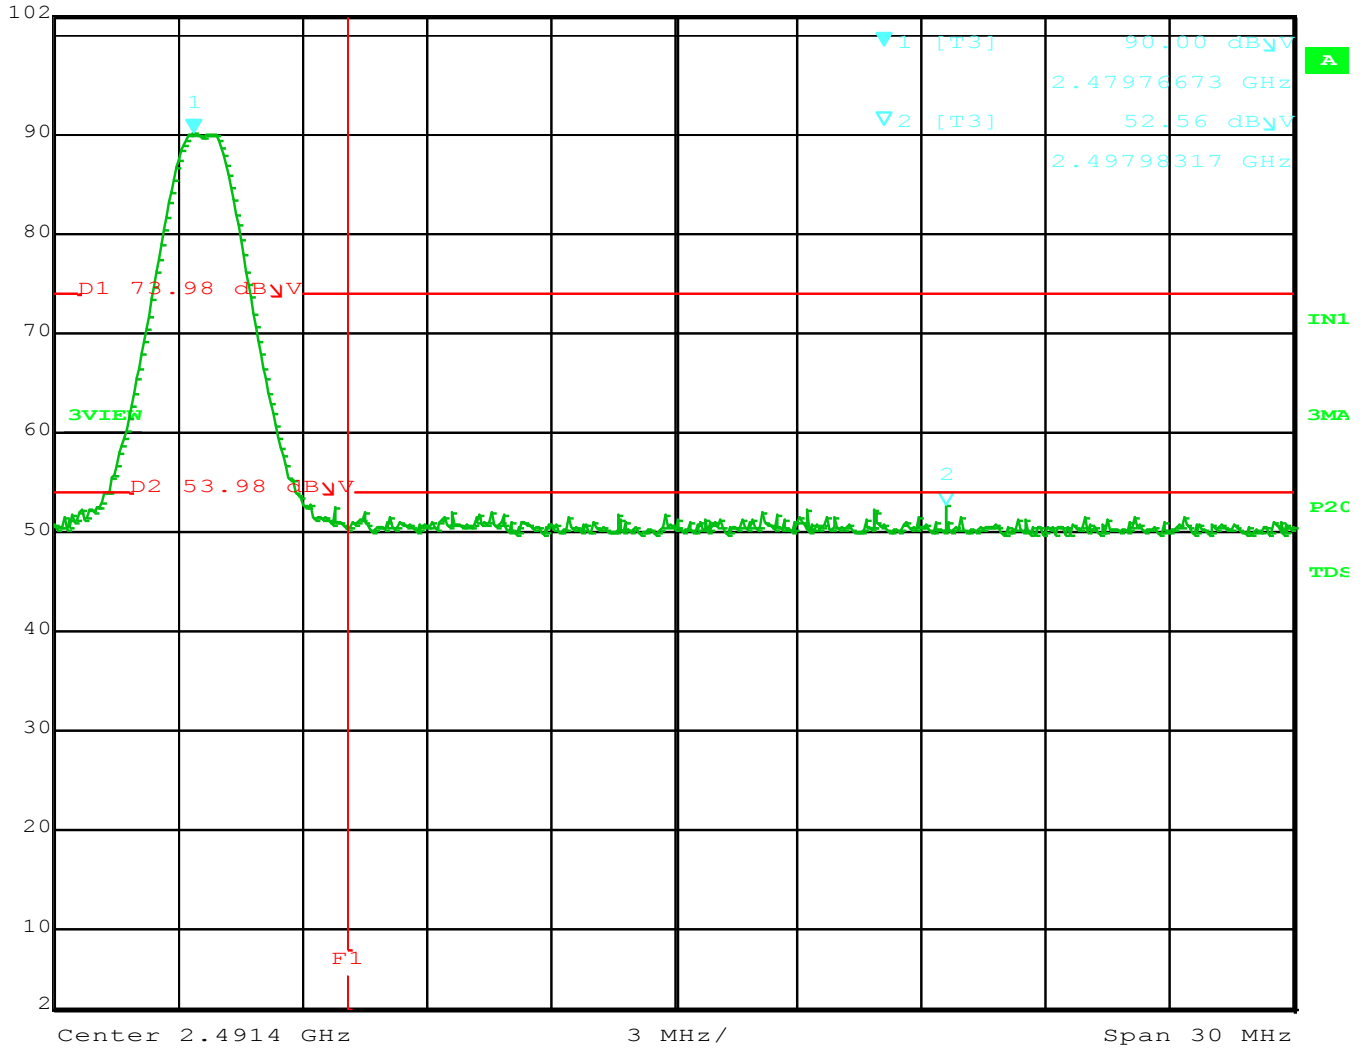

Comment A: Upper Band Edge Vertical  
 Date: 25.APR.2016 11:09:00



***DUTY CYCLE  
DATA SHEETS***

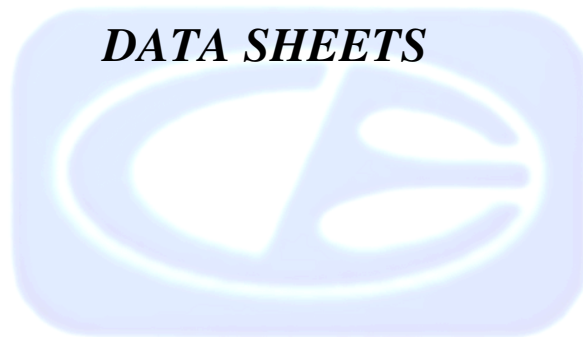

---

**Brea Division**  
114 Olinda Drive  
Brea, CA 92823  
(714) 579-0500

**Agoura Division**  
2337 Troutdale Drive  
Agoura, CA 91301  
(818) 597-0600


**Silverado Division**  
19121 El Toro Road  
Silverado, CA 92676  
(949) 589-0700

**Lake Forest Division**  
20621 Pascal Way  
Lake Forest, CA 92630  
(949) 587-0400

## DUTY CYCLE

Pulse Time (ms)	# of Pulses	Total on Time (ms)	period (ms)	Duty Cycle	Correction (db)	Applied Correction (db)
0.396993988	1	0.396993988	100	0.004	-48.02	-20.00

✘ Delta 1 [T1] RBW 1 MHz RF Att 0 dB  
 Ref Lvl 4.02 dB VBW 3 MHz  
 87 dB $\mu$ V 396.993988  $\mu$ s SWT 2 ms Unit dB $\mu$ V

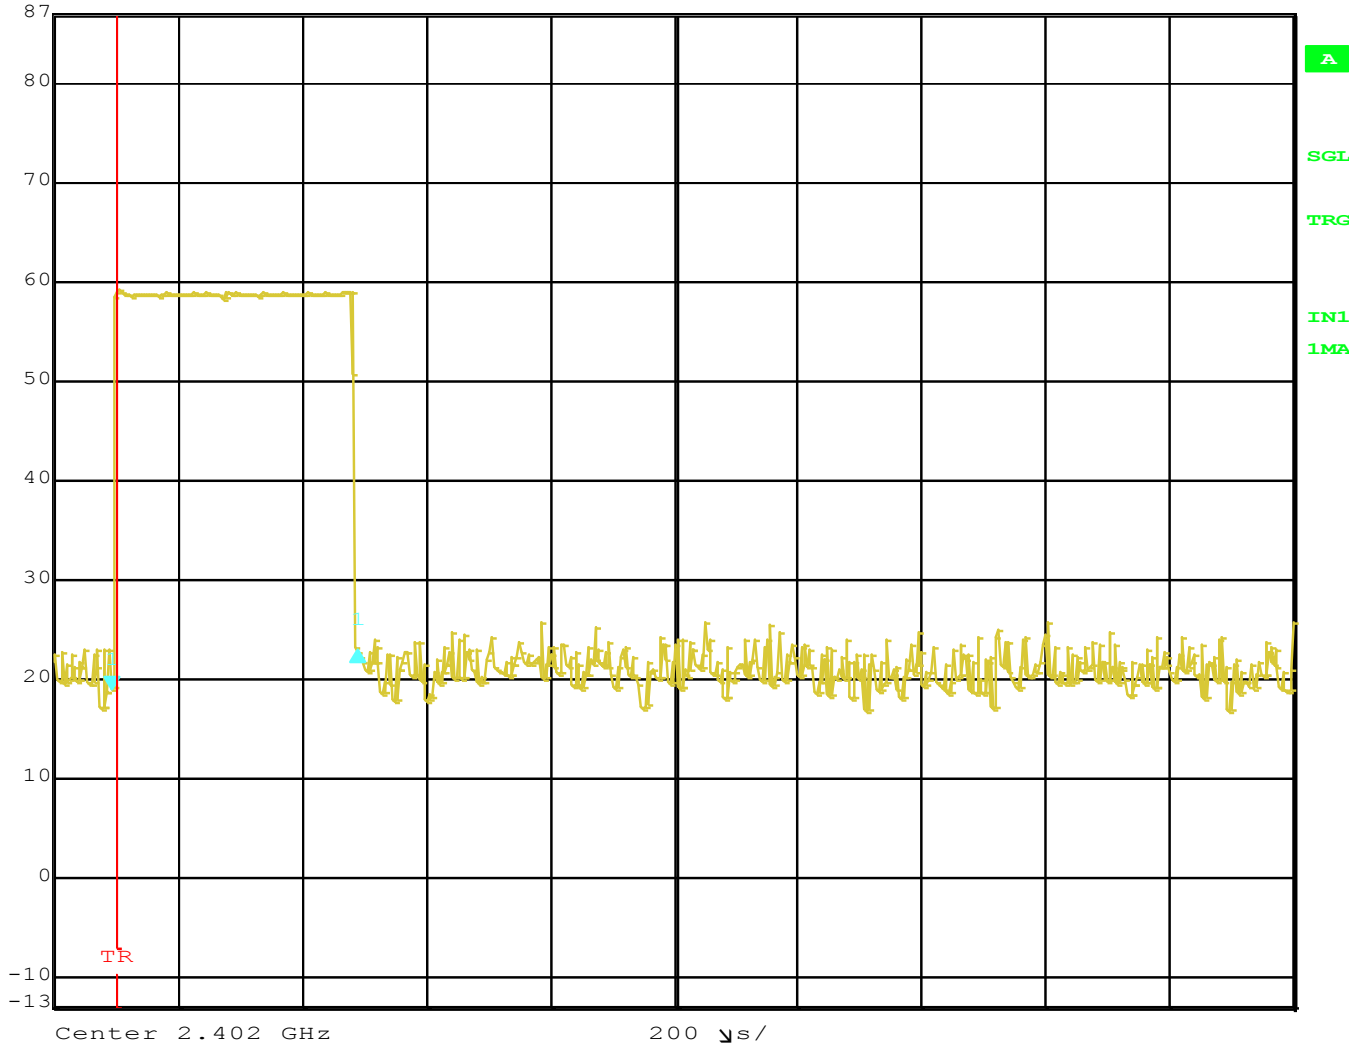


Comment A: Duty Cycle Pulse  
 Date: 18.APR.2016 15:24:47

# DUTY CYCLE



Ref Lvl  
 87 dB $\mu$ V

RBW 1 MHz RF Att 0 dB  
 VBW 3 MHz  
 SWT 110 ms Unit dB $\mu$ V

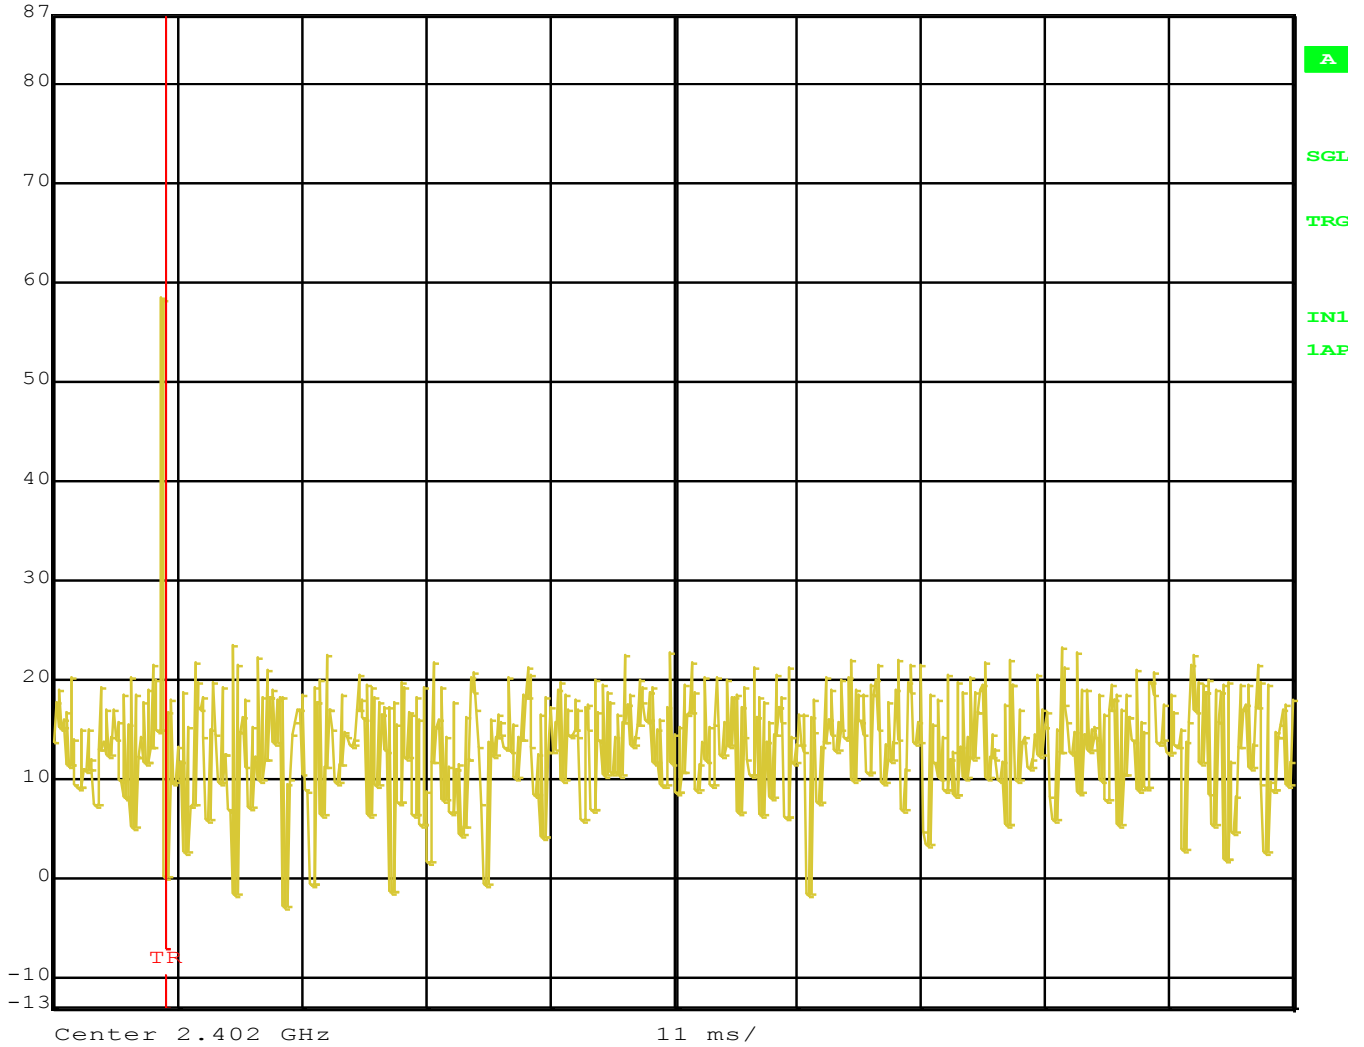

Comment A: Duty Cycle 100ms  
 Date: 18.APR.2016 15:25:27

**This is the worst case duty cycle.**

