

FCC TEST REPORT  
FOR  
Shenzhen light year New Technology Co., Ltd  
Music Player  
TEST Model No.: DSER107  
Additional Model No.: DSER106

Prepared for : Shenzhen light year New Technology Co., Ltd  
Address : RM868,8/f Tower A Tianjing Building, Tian'an Cyber Park, che gong  
Miao, Futian District, Shenzhen, China

Prepared by : Shenzhen LCS Compliance Testing Laboratory Ltd.  
Address : 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing  
Street, Baoan District, Shenzhen, 518000, China

Tel : (+86)755-82591330  
Fax : (+86)755-82591332  
Web : www.LCS-cert.com  
Mail : webmaster@LCS-cert.com

Date of receipt of test sample : March 02, 2021  
Number of tested samples : 2  
Serial number : Prototype  
Date of Test : March 02, 2021~March 25, 2021  
Date of Report : March 25, 2021

FCC TEST REPORT
FCC CFR 47 PART 15.239

Report Reference No. : LCS210301038AEA

Date of Issue : March 25, 2021

Testing Laboratory Name : Shenzhen LCS Compliance Testing Laboratory Ltd.

Address : 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Testing Location/ Procedure : Full application of Harmonised standards [X]
Partial application of Harmonised standards [ ]
Other standard testing method [ ]

Applicant's Name : Shenzhen light year New Technology Co., Ltd

Address : RM868,8/f Tower A Tianjing Building, Tian'an Cyber Park, che gong Miao, Futian District, Shenzhen, China

Test Specification

Standard : FCC CFR 47 PART 15.239 / ANSI C63.10: 2013

Test Report Form No. : LCSEMC-1.0

TRF Originator : Shenzhen LCS Compliance Testing Laboratory Ltd.

Master TRF : Dated 2011-03

Shenzhen LCS Compliance Testing Laboratory Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen LCS Compliance Testing Laboratory Ltd. is acknowledged as copyright owner and source of the material. Shenzhen LCS Compliance Testing Laboratory Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test Item Description : Music Player

Trade Mark : N/A

Model/ Type reference : DSER107

Ratings : DC 5V/200mA

Result : Positive

Compiled by:

Jack Liu

Jack Liu/ Administrators

Supervised by:

Jin Wang

Jin Wang/ Technique principal

Approved by:

Gavin Liang

Gavin Liang/ Manager

### FCC -- TEST REPORT

<b>Test Report No. :</b>	<b>LCS210301038AEA</b>	<u>March 25, 2021</u> Date of issue
--------------------------	------------------------	--

Type / Model.....	: DSER107
EUT.....	: Music Player
<b>Applicant.....</b>	<b>: Shenzhen light year New Technology Co., Ltd</b>
Address.....	: RM868,8/f Tower A Tianjing Building,Tian'an Cyber Park,che gong Miao,Futian District,Shenzhen,China
Telephone.....	: /
Fax.....	: /
<b>Manufacturer.....</b>	<b>: Shenzhen MiQiang Technology Co.,Ltd</b>
Address.....	: 3rd Floor, Builing 1, Haixinguan High-Tech Park,Interchange between Fengxin Road and Zhenmei Village, Guangming District, Shenzhen
Telephone.....	: /
Fax.....	: /
<b>Factory.....</b>	<b>: Shenzhen MiQiang Technology Co.,Ltd</b>
Address.....	: 3rd Floor, Builing 1, Haixinguan High-Tech Park,Interchange between Fengxin Road and Zhenmei Village, Guangming District, Shenzhen
Telephone.....	: /
Fax.....	: /

<b>Test Result</b>	<b>Positive</b>
--------------------	-----------------

The test report merely corresponds to the test sample.  
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

### Revision History

Revision	Issue Date	Revisions	Revised By
000	March 25, 2021	Initial Issue	Gavin Liang

## TABLE OF CONTENTS

Description	Page
<b>1. GENERAL INFORMATION.....</b>	<b>6</b>
1.1 Description of Device (EUT).....	6
1.2 Support equipment List.....	6
1.3 External I/O Cable.....	6
1.4 Description of Test Facility.....	6
1.5 Statement of The Measurement Uncertainty.....	7
1.6 Measurement Uncertainty.....	7
1.7 Description Of Test Modes.....	7
<b>2. TEST METHODOLOGY.....</b>	<b>8</b>
2.1 EUT Configuration.....	8
2.2 EUT Exercise.....	8
2.3 General Test Procedures.....	8
<b>3. SYSTEM TEST CONFIGURATION.....</b>	<b>9</b>
3.1 Justification.....	9
3.2 EUT Exercise Software.....	9
3.3 Special Accessories.....	9
3.4 Block Diagram/Schematics.....	9
3.5 Equipment Modifications.....	9
3.6 Test Setup.....	9
<b>4. 20 DB BANDWIDTH.....</b>	<b>10</b>
4.1 Limit.....	11
4.2 Block Diagram of Test Setup.....	11
4.3 Test Procedure.....	11
4.4 Test Results.....	11
<b>5. RADIATED MEASUREMENT.....</b>	<b>13</b>
5.1 Block Diagram of Test Setup.....	13
5.2 Radiated Emission Limit 30~1000MHz.....	13
5.3 Instruments Setting.....	14
<b>6. POWER LINE CONDUCTED EMISSIONS.....</b>	<b>26</b>
6.1 Standard Applicable.....	26
6.2 Block Diagram of Test Setup.....	26
<b>7. ANTENNA REQUIREMENT.....</b>	<b>28</b>
<b>8. LIST OF TEST EQUIPMENT.....</b>	<b>29</b>
<b>9. TEST SETUP PHOTOGRAPHS OF EUT.....</b>	<b>30</b>
<b>10. EXTERIOR PHOTOGRAPHS OF THE EUT.....</b>	<b>30</b>
<b>11. INTERIOR PHOTOGRAPHS OF THE EUT.....</b>	<b>30</b>

## 1. GENERAL INFORMATION

### 1.1 Description of Device (EUT)

EUT	: Music Player
Test Model	: DSER107
Additional Model No.	: DSER106
Model Declaration	: PCB board, structure and internal of these model(s) are the same, So no additional models were tested.
Hardware Version	: /
Software Version	: /
Power Supply	: DC 5V/200mA
Music Player	
Frequency Range	: 88 MHz~108 MHz
Channel Number	: 199
Channel Spacing	: 100 KHz
Channel frequency	: 88MHz~108MHz (Channel Number: 199, Channel Frequency=88.1+0.1*(K-1), K=1, 2, 3, 4, ..., 199)
Modulation Type	: FM
Antenna Type	: Internal Antenne
Antenna Gain	: 0dBi (Max.)
Extreme temp. Tolerance	: -10°C to +45°C

### 1.2 Support equipment List

Manufacturer	Description	Model	Serial Number	Certificate
--	--	--	--	--

### 1.3 External I/O Cable

I/O Port Description	Quantity	Cable
USB	1	N/A

### 1.4 Description of Test Facility

NVLAP Accreditation Code is 600167-0.  
 FCC Designation Number is CN5024.  
 CAB identifier is CN0071.  
 CNAS Registration Number is L4595.

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.4:2014 and CISPR 16-1-4:2010 SVSWR requirement for radiated emission above 1GHz.

## 1.5 Statement of the Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. To CISPR 16 – 4 “Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements” and is documented in the LCS quality system acc. To DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

## 1.6 Measurement Uncertainty

Test Item	Frequency Range	Uncertainty	Note
Radiation Uncertainty	9KHz~30MHz	3.10dB	(1)
	30MHz~200MHz	2.96dB	(1)
	200MHz~1000MHz	3.10dB	(1)
	1GHz~26.5GHz	3.80dB	(1)
	26.5GHz~40GHz	3.90dB	(1)
Conduction Uncertainty	150kHz~30MHz	1.63dB	(1)
Power disturbance	30MHz~300MHz	1.60dB	(1)

(1). This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .

## 1.7 Description of Test Modes

The Music Player is powered by DC 5V. In the audio port and MIC port give a 2.5 kHz tone at a level 16 dB higher than that required to produce a frequency deviation of 75 KHz and make it works in TX mode (88.1 MHz, 98.0 MHz and 107.9 MHz).

Worst-case mode and channel used for 9 KHz-1000 MHz radiated emissions was the mode and channel with the highest output power, that was determined to be TX.

Radiated emission performed at both DC power supply and AC power adapter, recorded worst case;

AC conducted emission only perform at power adapter mode, pre-check both at AC 120V/60 Hz and AC 240V/50Hz. Recorded worse case;

## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10-2013, FCC CFR PART 15C 15.207, 15.209 and 15.239.

### 2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

### 2.2 EUT Exercise

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209, 15.239 under the FCC Rules Part 15 Subpart C.

### 2.3 General Test Procedures

#### 2.3.1 Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2.1 of ANSI C63.10-2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using Quasi-peak and average detector modes.

#### 2.3.2 Radiated Emissions

The EUT is placed on a turn table 0.8 meter above ground for below 1GHz and 1.5m for above 1GHz. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 6.3 of ANSI C63.10-2013.



### **3. SYSTEM TEST CONFIGURATION**

#### **3.1 Justification**

The system was configured for testing in a continuous transmit condition.

#### **3.2 EUT Exercise Software**

N/A.

#### **3.3 Special Accessories**

N/A.

#### **3.4 Block Diagram/Schematics**

Please refer to the related document.

#### **3.5 Equipment Modifications**

Shenzhen LCS Compliance Testing Laboratory Ltd. has not done any modification on the EUT.

#### **3.6 Test Setup**

Please refer to the test setup photo.

#### 4. SUMMARY OF TEST RESULTS


<b>Applied Standard: FCC CFR 47 PART 15.239</b>		
FCC Rules	Description of Test	Result
15.239 (a)	Occupied Bandwidth	Compliant
15.239 (b)	Field Strength of Fundamental frequency	Compliant
15.205 (a) 15.209 (a)	Radiated Spurious Emissions	Compliant
15.207 (a)	AC Conducted Emissions	Compliant
15.203	Antenna Requirements	Compliant

## 5. 99% BANDWIDTH

### 5.1 Limit

According to §15.239 (a) Emissions from the intentional radiator shall be confined within a band 200 kHz wide centered on the operating frequency. The 200 kHz band shall lie wholly within the frequency range of 88-108MHz.

### 5.2 Block Diagram of Test Setup

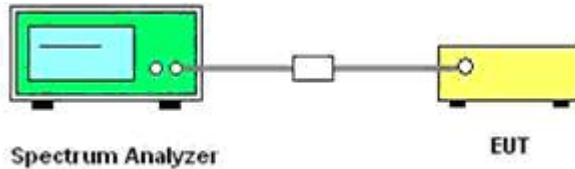

### 5.3 Test Procedure

- 1) The transmitter shall be operated at its maximum carrier power measured under normal test conditions
- 2) The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts.
- 4) Detector function = peak.
- 5) Trace = max hold.



### 5.4 Test Results

Frequency (MHz)	20dB Bandwidth (KHz)	99% Bandwidth (KHz)	Limit (KHz)	Conclusion
88.1	51.98	47.403	200.00	PASS
98.1	51.98	47.433	200.00	PASS
107.9	52.09	47.786	200.00	PASS

*Remark:*


1. Test results including cable loss;
2. Please refer to the following page.

99% and 20dB Bandwidth

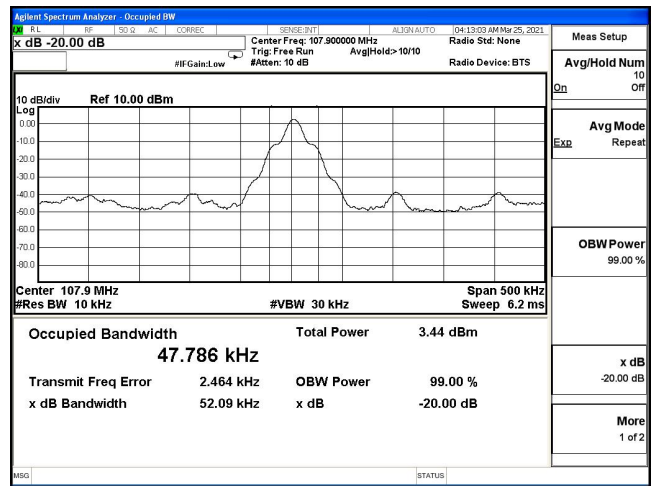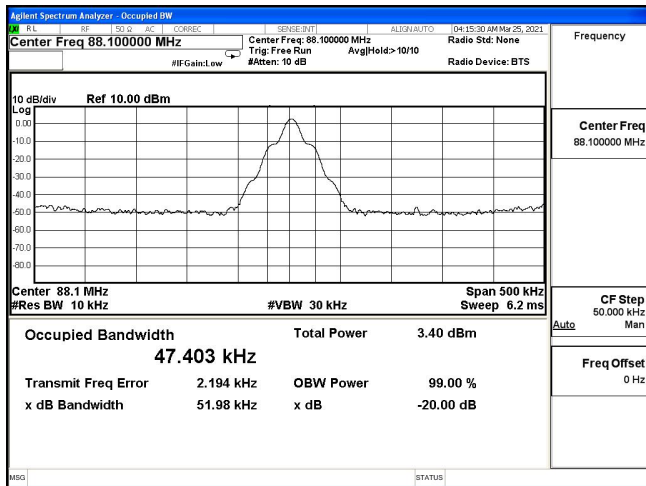

Low Channel / 88.1 MHz


Middle Channel / 107.9 MHz

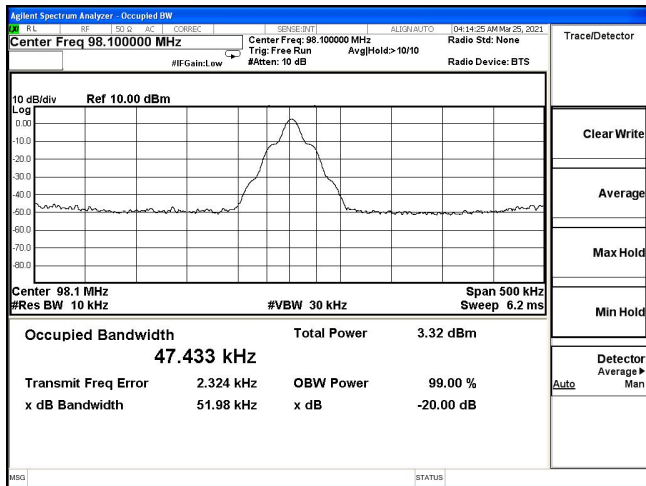

High Channel / 98.1 MHz

## 6. RADIATED MEASUREMENT

### 6.1 Block Diagram of Test Setup

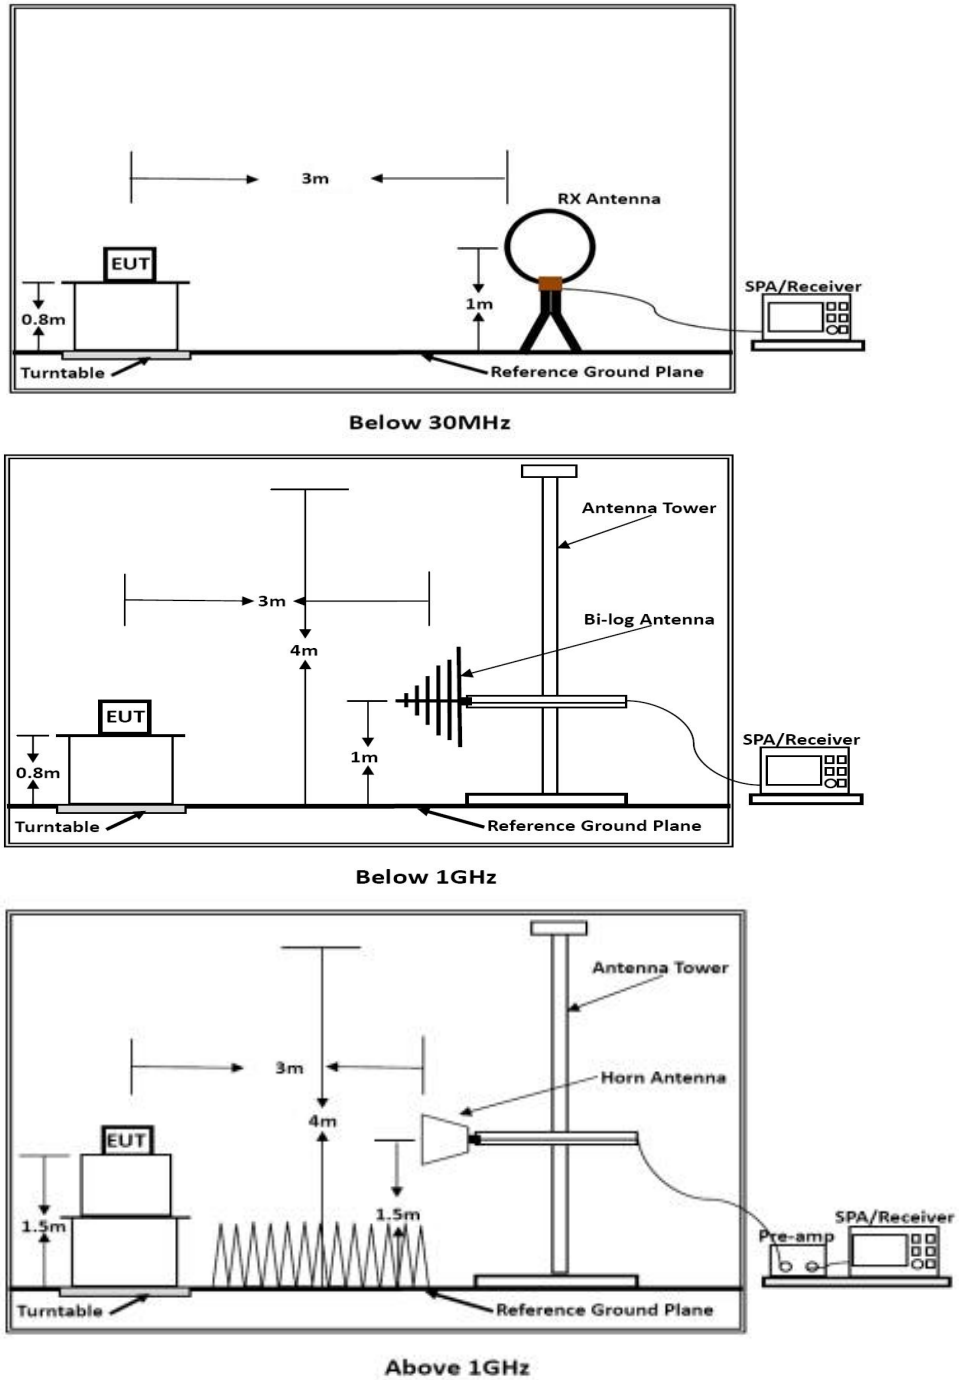

### 6.2 Radiated Fundamental Frequency Limit

*This report shall not be reproduced except in full, without the written approval of Shenzhen LCS Compliance Testing Laboratory Ltd.*

According to §15.239 (b): The field strength of any emissions within the permitted 200 kHz band shall not exceed 250 microvolts/meter at 3 meters. The emission limit in this paragraph is based on measurement instrumentation employing an average detector.

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Remark: (1) Emission level  $\text{dB}\mu\text{V} = 20 \log \text{Emission level } \mu\text{V/m}$ ;

(2) The smaller limit shall apply at the cross point between two frequency bands;

(3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

### 5.3 Instruments Setting

The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	30 MHz
Stop Frequency	1000 MHz
RB / VB (Emission in restricted band)	120KHz / 1MHz for Peak, 120 KHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	120KHz / 1MHz for Peak, 120 KHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

## 5.4 Test Procedures

### 1) Sequence of testing 9 kHz to 30 MHz

#### Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 0.8 m height is used.
- If the EUT is a floor standing device, it is placed on the ground.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

#### Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna height is 1.0 meter.
- At each turntable position the analyzer sweeps with peak detection to find the maximum of all emissions

#### Final measurement:

- Identified emissions during the premeasurement the software maximizes by rotating the turntable position (0° to 360°) and by rotating the elevation axes (0° to 360°).
- The final measurement will be done in the position (turntable and elevation) causing the highest emissions with QPK detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.

## 2) Sequence of testing 30 MHz to 1 GHz

### Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

### Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height changes from 1 to 3 meter.
- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

### Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ( $\pm 45^\circ$ ) and antenna movement between 1 and 4 meter.
- The final measurement will be done with QP detector with an EMI receiver.
- The final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.



### 3) Sequence of testing 1 GHz to 18 GHz

#### Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

#### Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height scan range is 1 meter to 2.5 meter.
- At each turntable position and antenna polarization the analyzer sweeps with peak detection to find the maximum of all emissions.

#### Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ( $\pm 45^\circ$ ) and antenna movement between 1 and 4 meter. This procedure is repeated for both antenna polarizations.
- The final measurement will be done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna polarization, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

#### 4) Sequence of testing above 18 GHz

##### Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 1 meter.
- The EUT was set into operation.

##### Premeasurement:

- The antenna is moved spherical over the EUT in different polarizations of the antenna.

##### Final measurement:

- The final measurement will be performed at the position and antenna orientation for all detected emissions that were found during the premeasurements with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.

#### 5.5 Results for Radiated Emissions

##### PASS.


Only record the worst test result in this report.

The test data please refer to following page:


**Below 1GHz**

**TX-88.1MHz**

Horizontal

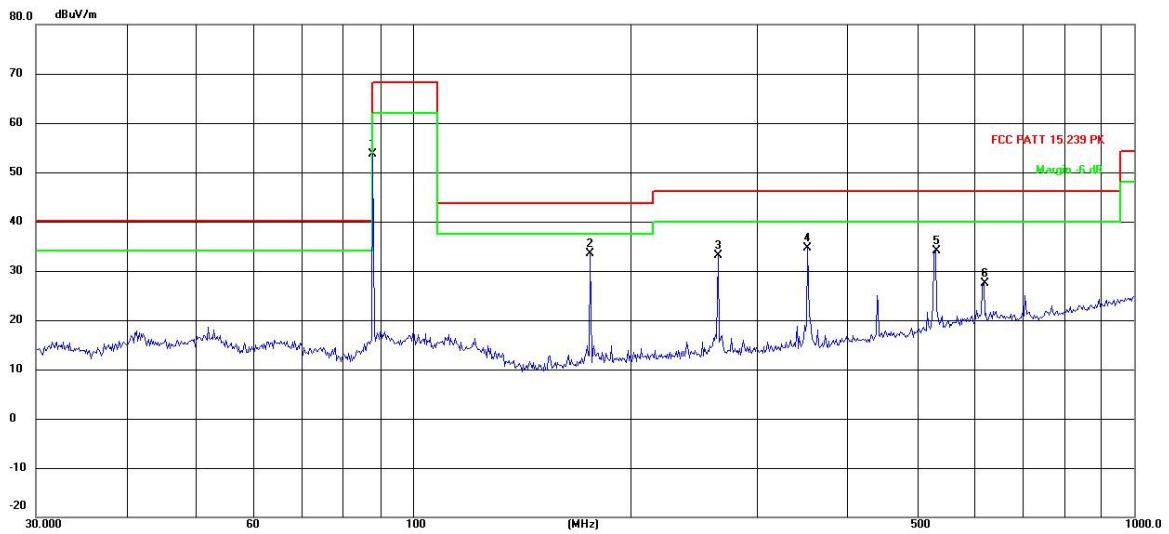


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1 *	88.0329	83.60	-29.86	53.74	68.00	-14.26	peak
2	176.2686	65.80	-32.30	33.50	43.50	-10.00	peak
3	264.7457	62.16	-29.00	33.16	46.00	-12.84	peak
4	352.9433	61.55	-26.99	34.56	46.00	-11.44	peak
5	530.1014	57.35	-23.31	34.04	46.00	-11.96	peak
6	618.5369	48.99	-21.60	27.39	46.00	-18.61	peak

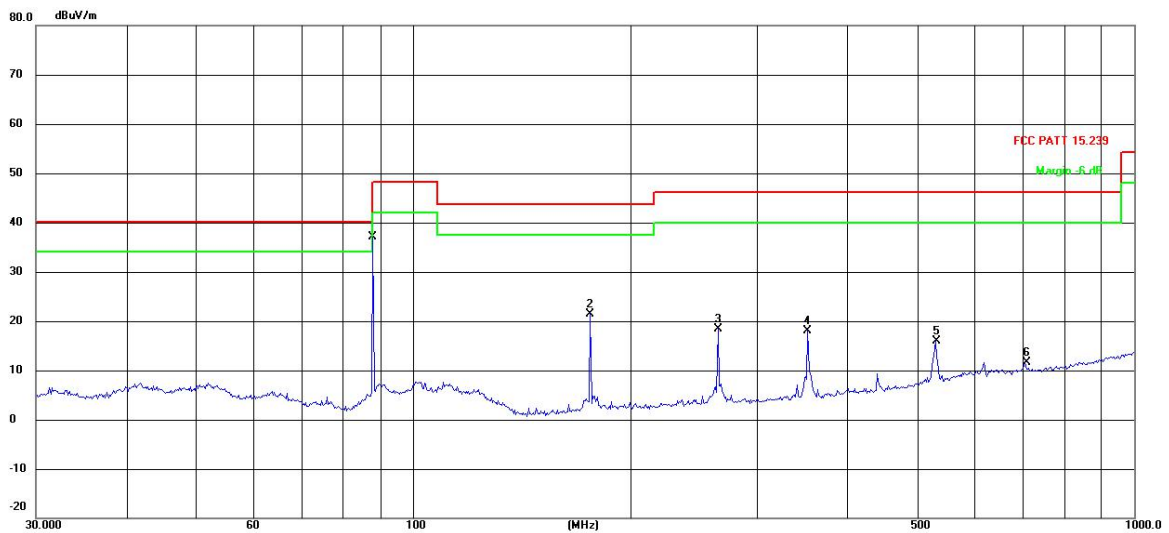


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1 *	88.0329	66.96	-29.86	37.10	48.00	-10.90	AVG
2	176.2686	53.79	-32.30	21.49	43.50	-22.01	AVG
3	264.7457	47.41	-29.00	18.41	46.00	-27.59	AVG
4	352.9433	44.94	-26.99	17.95	46.00	-28.05	AVG
5	530.1014	39.27	-23.31	15.96	46.00	-30.04	AVG
6	706.6999	32.40	-20.77	11.63	46.00	-34.37	AVG

Vertical

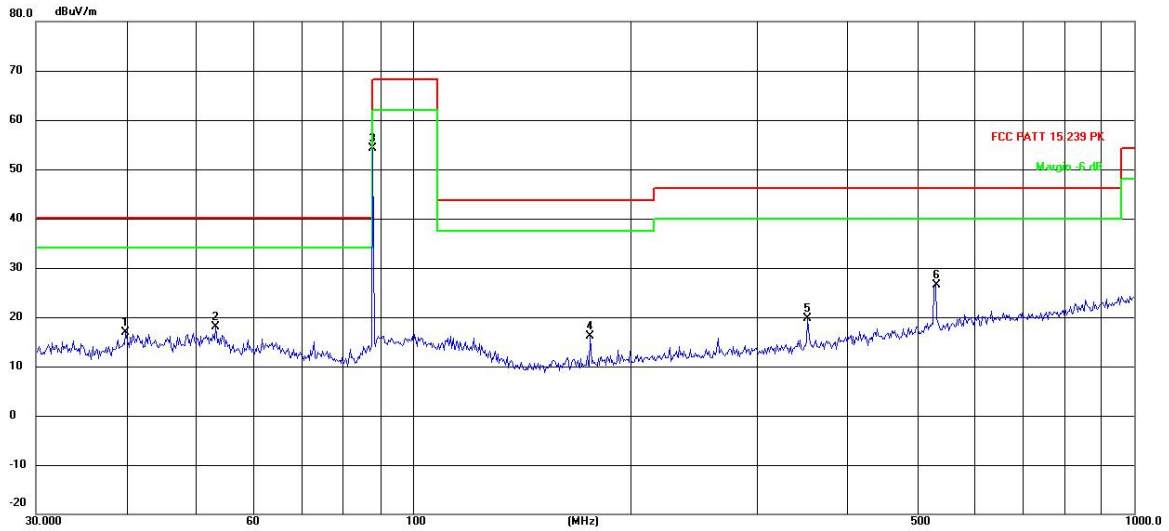


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	39.9942	46.65	-29.85	16.80	40.00	-23.20	peak
2	53.3179	47.28	-29.24	18.04	40.00	-21.96	peak
3 *	88.0329	84.03	-29.86	54.17	68.00	-13.83	peak
4	176.2686	48.40	-32.30	16.10	43.50	-27.40	peak
5	352.9433	46.69	-26.99	19.70	46.00	-26.30	peak
6	530.1014	49.78	-23.31	26.47	46.00	-19.53	peak

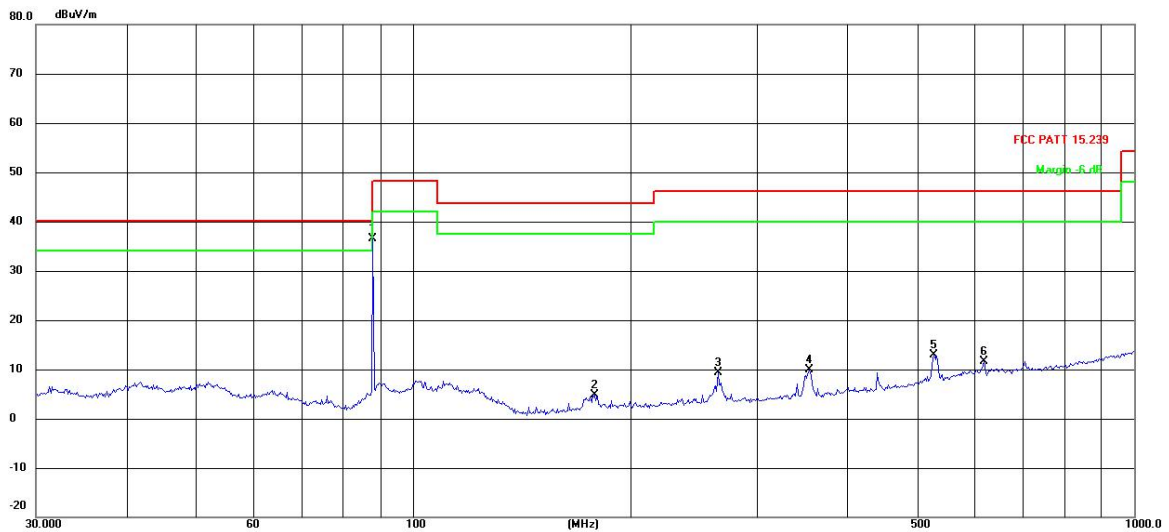


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1 *	88.0329	66.46	-29.86	36.60	48.00	-11.40	AVG
2	178.7584	37.08	-32.20	4.88	43.50	-38.62	AVG
3	264.7457	38.41	-29.00	9.41	46.00	-36.59	AVG
4	354.1831	36.95	-26.95	10.00	46.00	-36.00	AVG
5	528.2458	36.29	-23.35	12.94	46.00	-33.06	AVG
6	618.5368	33.14	-21.60	11.54	46.00	-34.46	AVG

TX-98MHz

Horizontal

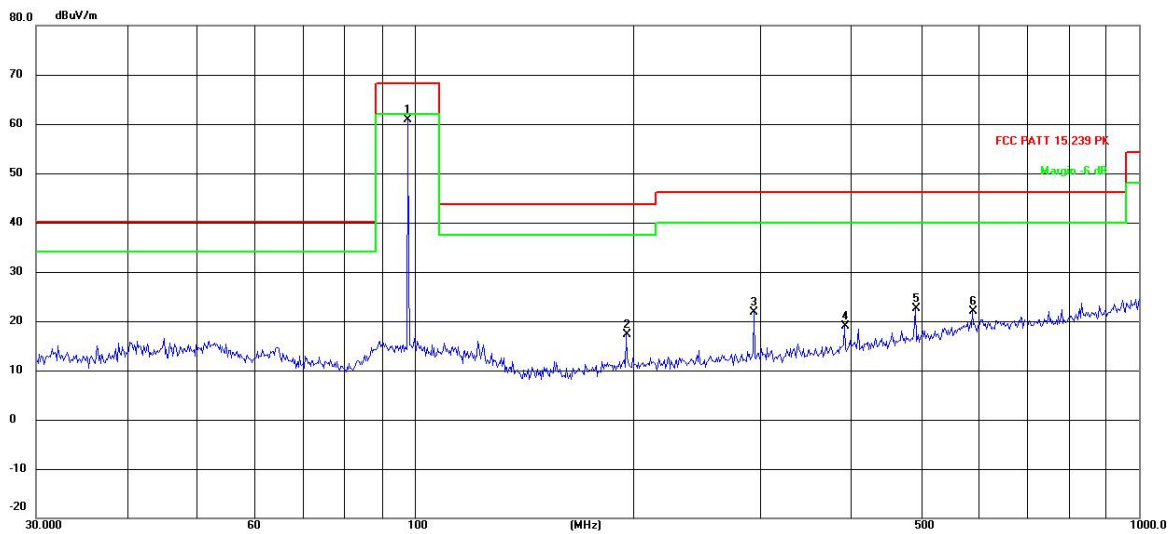


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1 *	97.7983	88.64	-27.72	60.92	68.00	-7.08	peak
2	195.8220	48.11	-30.87	17.24	43.50	-26.26	peak
3	294.1137	50.19	-28.35	21.84	46.00	-24.16	peak
4	392.0951	45.07	-26.03	19.04	46.00	-26.96	peak
5	490.7447	46.80	-24.16	22.64	46.00	-23.36	peak
6	588.9051	44.01	-22.02	21.99	46.00	-24.01	peak

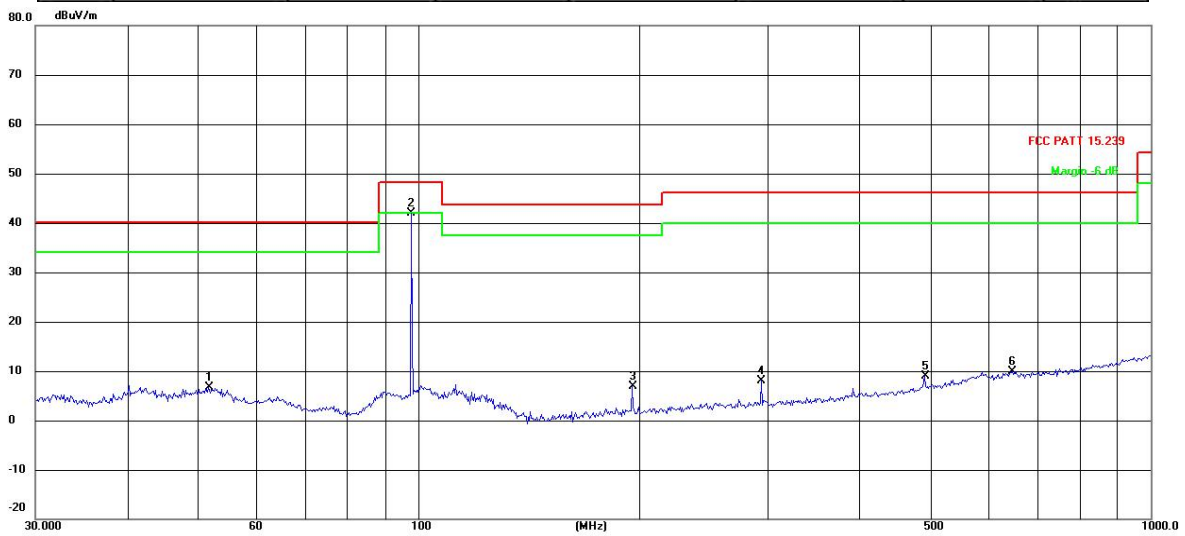


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	51.6616	35.75	-29.02	6.73	40.00	-33.27	AVG
2 *	97.7983	69.63	-27.72	41.91	48.00	-6.09	AVG
3	195.8220	37.84	-30.87	6.97	43.50	-36.53	AVG
4	294.1137	36.35	-28.35	8.00	46.00	-38.00	AVG
5	490.7447	33.08	-24.16	8.92	46.00	-37.08	AVG
6	647.3856	31.20	-21.33	9.87	46.00	-36.13	AVG



Vertical

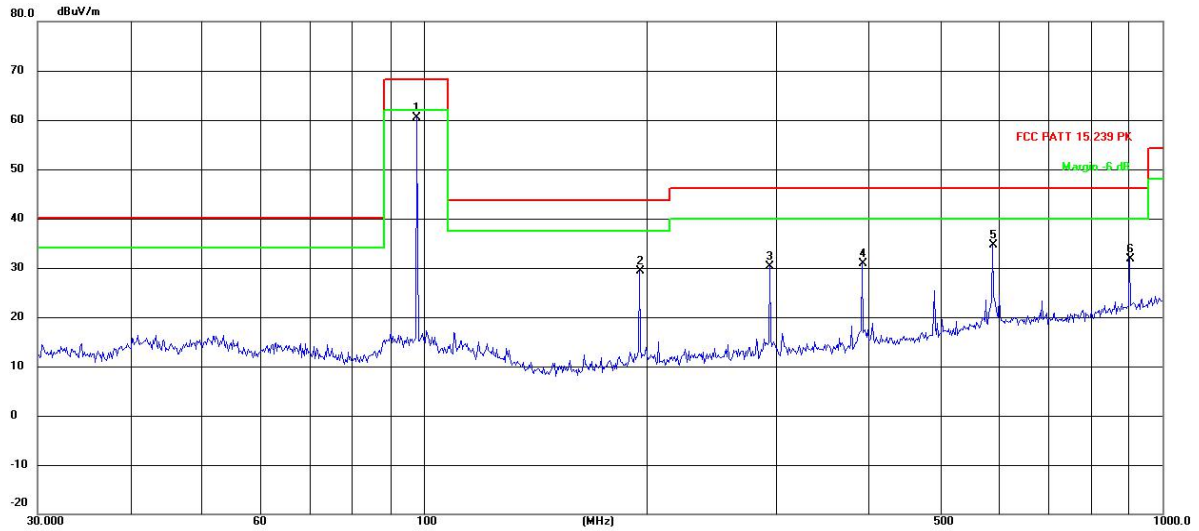


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1 *	97.7983	88.14	-27.72	60.42	68.00	-7.58	peak
2	195.8220	60.18	-30.87	29.31	43.50	-14.19	peak
3	294.1137	58.72	-28.35	30.37	46.00	-15.63	peak
4	392.0951	56.91	-26.03	30.88	46.00	-15.12	peak
5	588.9051	56.56	-22.02	34.54	46.00	-11.46	peak
6	903.3094	50.10	-18.25	31.85	46.00	-14.15	peak

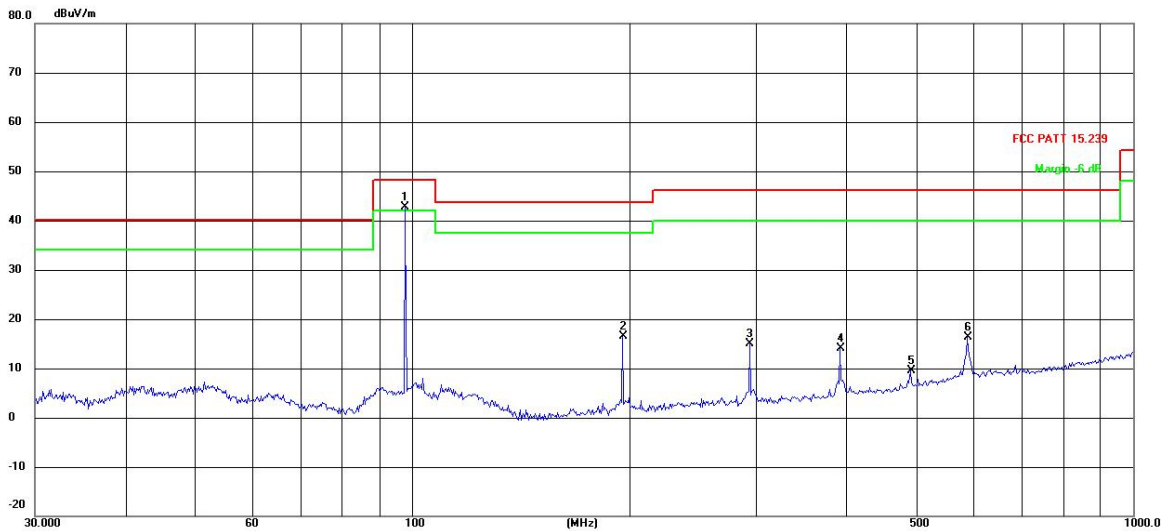


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1 *	97.7983	70.45	-27.72	42.73	48.00	-5.27	AVG
2	195.8220	47.33	-30.87	16.46	43.50	-27.04	AVG
3	294.1137	43.26	-28.35	14.91	46.00	-31.09	AVG
4	392.0951	40.11	-26.03	14.08	46.00	-31.92	AVG
5	490.7447	33.70	-24.16	9.54	46.00	-36.46	AVG
6	588.9051	38.29	-22.02	16.27	46.00	-29.73	AVG

TX-107.9MHz

Horizontal

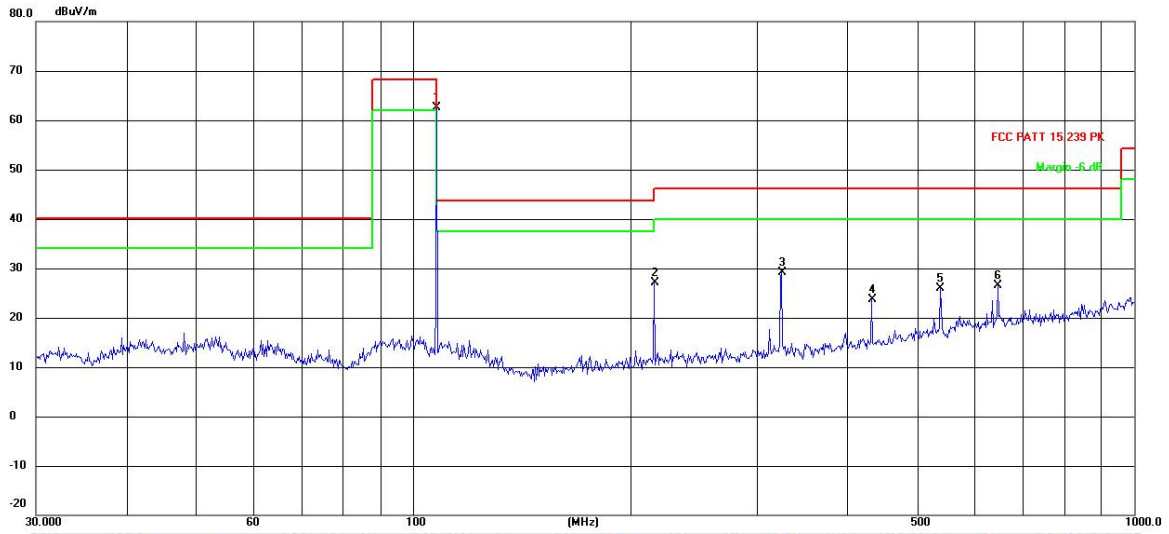


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1 *	107.8877	90.22	-27.61	62.61	68.00	-5.39	peak
2	216.0240	57.27	-30.15	27.12	46.00	-18.88	peak
3	324.4561	56.77	-27.66	29.11	46.00	-16.89	peak
4	432.5457	48.85	-25.25	23.60	46.00	-22.40	peak
5	539.4775	49.10	-23.10	26.00	46.00	-20.00	peak
6	647.3856	47.93	-21.33	26.60	46.00	-19.40	peak

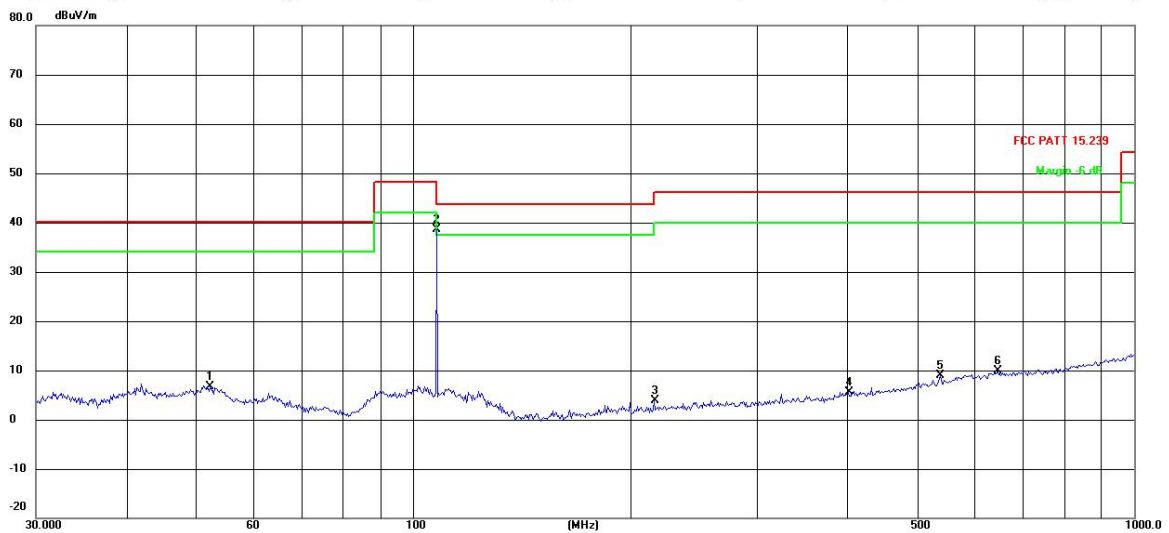


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	52.3912	35.74	-29.11	6.63	40.00	-33.37	AVG
2 *	107.8877	66.28	-27.61	38.67	48.00	-9.33	AVG
3	216.0240	34.08	-30.15	3.93	46.00	-42.07	AVG
4	401.8385	31.39	-25.81	5.58	46.00	-40.42	AVG
5	539.4775	32.15	-23.10	9.05	46.00	-36.95	AVG
6	647.3856	31.24	-21.33	9.91	46.00	-36.09	AVG

Vertical

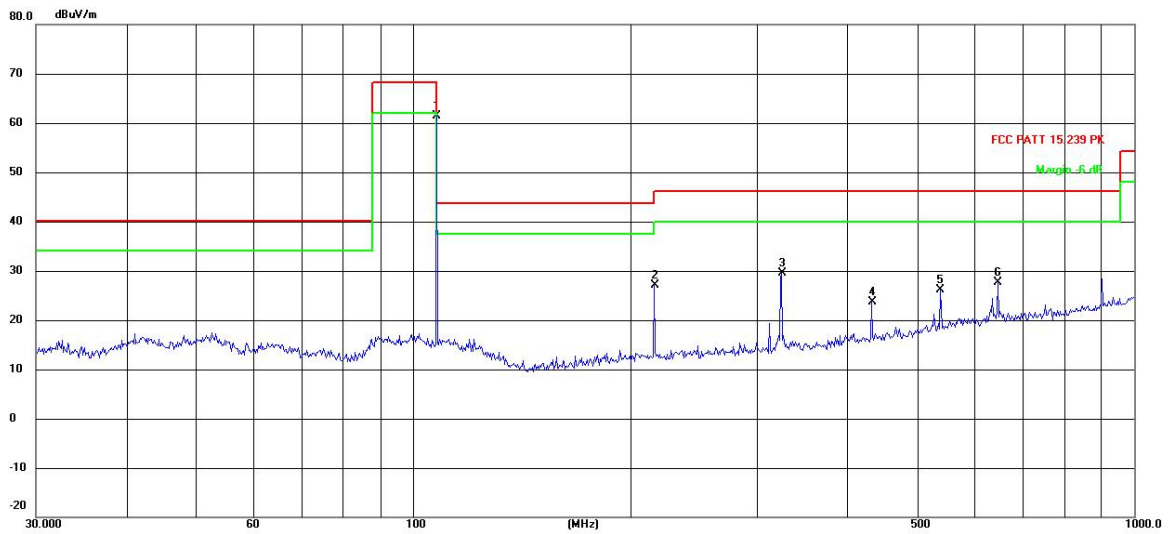

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1 *	107.8877	88.94	-27.61	61.33	68.00	-6.67	peak
2	216.0240	57.27	-30.15	27.12	46.00	-18.88	peak
3	324.4561	57.19	-27.66	29.53	46.00	-16.47	peak
4	432.5457	48.90	-25.25	23.65	46.00	-22.35	peak
5	539.4775	49.26	-23.10	26.16	46.00	-19.84	peak
6	647.3856	48.94	-21.33	27.61	46.00	-18.39	peak

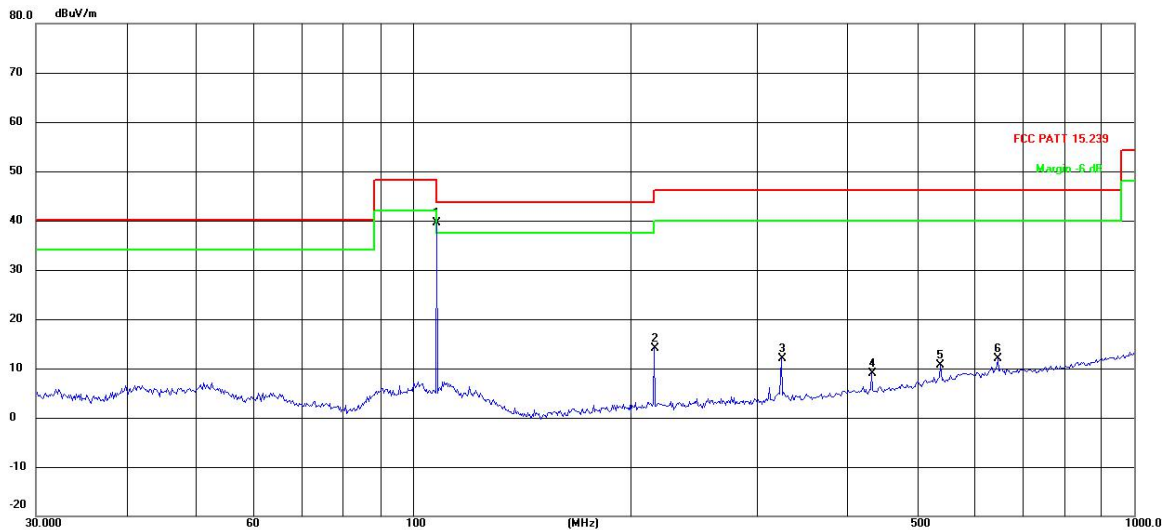

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1 *	107.8877	67.07	-27.61	39.46	48.00	-8.54	AVG
2	216.0240	44.16	-30.15	14.01	46.00	-31.99	AVG
3	324.4561	39.67	-27.66	12.01	46.00	-33.99	AVG
4	432.5457	34.25	-25.25	9.00	46.00	-37.00	AVG
5	539.4775	33.80	-23.10	10.70	46.00	-35.30	AVG
6	647.3856	33.30	-21.33	11.97	46.00	-34.03	AVG



*Note: The result below 30MHz and above 1GHz is too low so there is no record. The test setup show in the test setup photograph is the worst case.*

## 6. POWER LINE CONDUCTED EMISSIONS


### 6.1 Standard Applicable

According to §15.207 (a): For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range are listed as follows:

Frequency Range (MHz)	Limits (dBµV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

\* Decreasing linearly with the logarithm of the frequency

### 6.2 Block Diagram of Test Setup

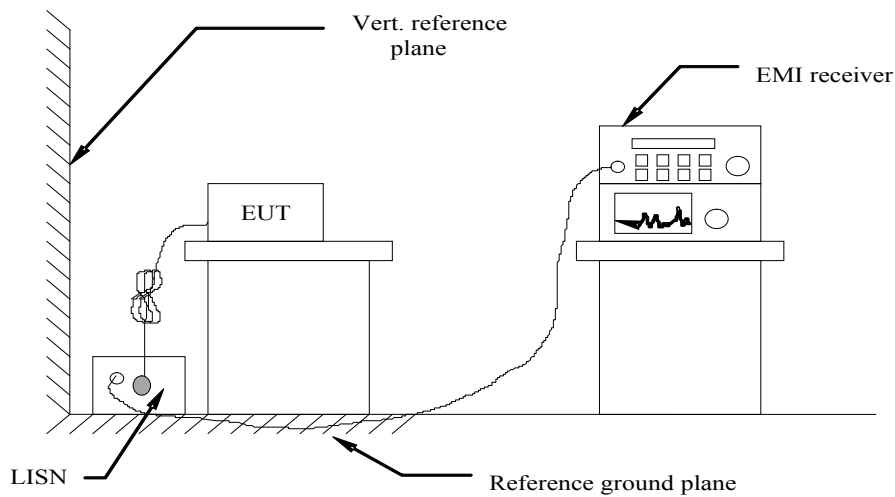


### 6.3 Test Results

**PASS.**

The test data please refer to following page.


**AC Conducted Emission of power adapter @ AC 120V/60Hz (worst case)**

Line:

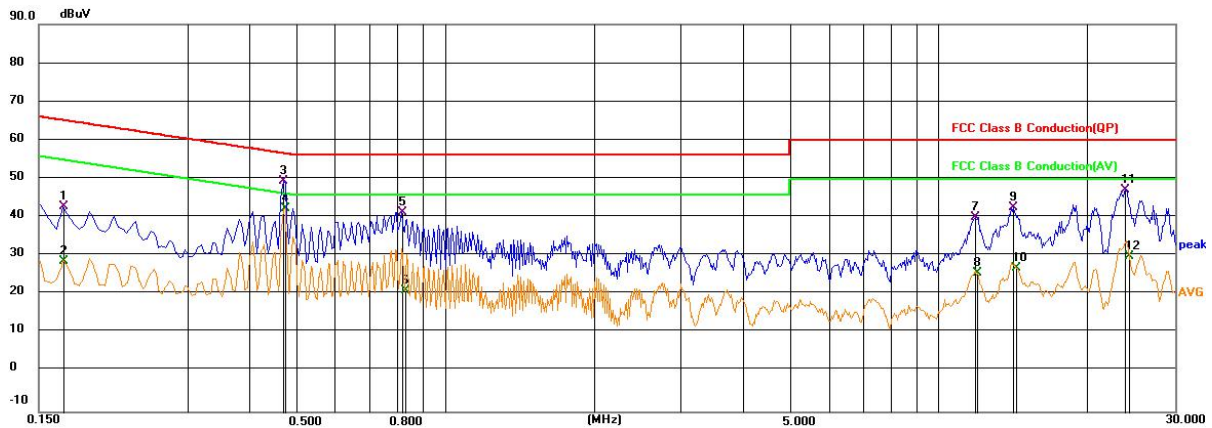

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1681	21.94	21.03	42.97	65.05	-22.08	QP
2	0.1685	7.89	21.03	28.92	55.03	-26.11	AVG
3	0.4696	28.64	21.05	49.69	56.52	-6.83	QP
4	0.4741	21.56	21.03	42.59	46.44	-3.85	AVG
5	0.8161	21.27	20.32	41.59	56.00	-14.41	QP
6	0.8296	0.97	20.31	21.28	46.00	-24.72	AVG
7	11.8501	20.51	19.85	40.36	60.00	-19.64	QP
8	11.9446	6.13	19.85	25.98	50.00	-24.02	AVG
9	14.1586	22.77	20.04	42.81	60.00	-17.19	QP
10	14.2891	7.17	20.05	27.22	50.00	-22.78	AVG
11	23.8336	26.96	20.24	47.20	60.00	-12.80	QP
12	24.2746	9.90	20.24	30.14	50.00	-19.86	AVG

Neutral:

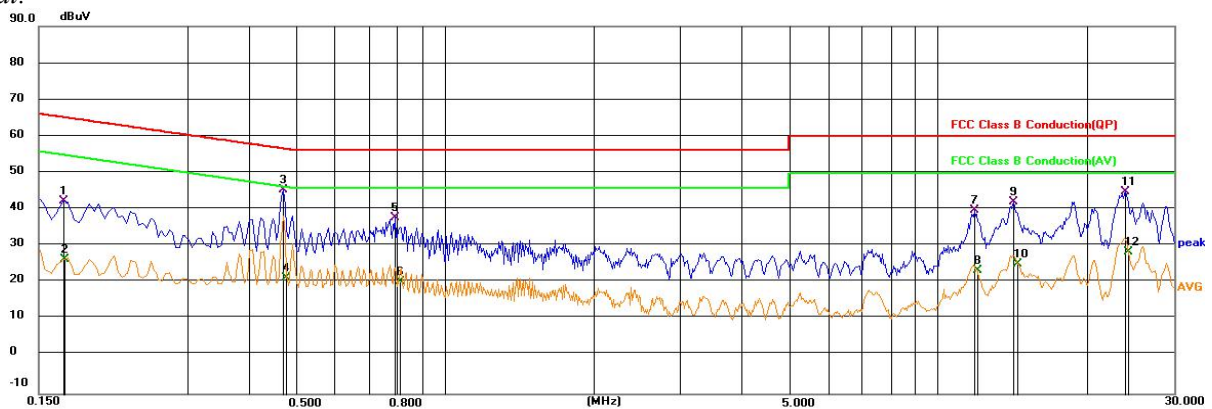

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1685	21.45	21.03	42.48	65.03	-22.55	QP
2	0.1694	5.74	21.02	26.76	54.99	-28.23	AVG
3	0.4696	24.44	21.05	45.49	56.52	-11.03	QP
4	0.4786	0.51	21.01	21.52	46.36	-24.84	AVG
5	0.7935	17.53	20.35	37.88	56.00	-18.12	QP
6	0.8071	0.20	20.33	20.53	46.00	-25.47	AVG
7	11.8456	20.14	19.85	39.99	60.00	-20.01	QP
8	12.0346	3.77	19.86	23.63	50.00	-26.37	AVG
9	14.2756	22.34	20.05	42.39	60.00	-17.61	QP
10	14.4556	5.36	20.07	25.43	50.00	-24.57	AVG
11	23.9011	24.76	20.24	45.00	60.00	-15.00	QP
12	24.2746	8.47	20.24	28.71	50.00	-21.29	AVG

\*\*\*Note: Pre-scan all modes and recorded the worst case results in this report;

## 7. ANTENNA REQUIREMENT

### 7.1 Standard Applicable

According to antenna requirement of §15.203.

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be re-placed by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

### 7.2 Antenna Connected Construction

#### 7.2.1. Standard Applicable

According to § 15.203 & RSS-Gen Issue 4, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

#### 7.2.2. Antenna Connector Construction

The directional gains of antenna used for transmitting is 0dBi, and the antenna is an Internal antenna connect to PCB board and no consideration of replacement. Please see EUT photo for details.

#### 7.2.3. Results: Compliance.

## 8. LIST OF TEST EQUIPMENT

Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	Power Meter	R&S	NRVS	100444	2020-06-22	2021-06-21
2	Power Sensor	R&S	NRV-Z81	100458	2020-06-22	2021-06-21
3	Power Sensor	R&S	NRV-Z32	10057	2020-06-22	2021-06-21
4	Test Software	Tonscend	JS1120-2	/	N/A	N/A
5	RF Control Unit	Tonscend	JS0806-2	N/A	2020-06-22	2021-06-21
6	MXA Signal Analyzer	Agilent	N9020A	MY50510140	2020-11-21	2021-11-20
7	DC Power Supply	Agilent	E3642A	N/A	2020-11-13	2021-11-12
8	EMI Test Software	AUDIX	E3	/	N/A	N/A
9	EMI Test Software	Farad	EZ	/	N/A	N/A
9	3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	2020-06-22	2021-06-21
10	Positioning Controller	MF	MF7082	MF78020803	2020-06-22	2021-06-21
11	Active Loop Antenna	SCHWARZBEC K	FMZB 1519B	00005	2018-07-26	2021-07-25
12	By-log Antenna	SCHWARZBEC K	VULB9163	9163-470	2018-07-26	2021-07-25
13	Horn Antenna	SCHWARZBEC K	BBHA 9120D	9120D-1925	2018-07-02	2021-07-01
14	Broadband Horn Antenna	SCHWARZBEC K	BBHA 9170	791	2020-09-20	2021-09-19
15	Broadband Preamplifier	SCHWARZBEC K	BBV9745	9719-025	2020-06-22	2021-06-21
16	EMI Test Receiver	R&S	ESR 7	101181	2020-06-22	2021-06-21
17	RS SPECTRUM ANALYZER	R&S	FSP40	100503	2020-11-13	2021-11-12
18	Broadband Preamplifier	/	BP-01M18G	P190501	2020-06-22	2021-06-21
19	RF Cable-R03m	Jye Bao	RG142	CB021	2020-06-22	2021-06-21
20	RF Cable-HIGH	SUHNER	SUCOFLEX 106	03CH03-HY	2020-06-22	2021-06-21
21	6dB Attenuator	/	100W/6dB	1172040	2020-06-22	2021-06-21
22	3dB Attenuator	/	2N-3dB	/	2020-06-22	2021-06-21
23	EMI Test Receiver	R&S	ESPI	101840	2020-06-22	2021-06-21
24	Artificial Mains	R&S	ENV216	101288	2020-06-22	2021-06-21
25	10dB Attenuator	SCHWARZBEC K	MTS-IMP-136	261115-001-0032	2020-06-22	2021-06-21
26	Audio Analyzer	R&S	UPV	1146.2003K02-101 721-UW	2020-06-22	2021-06-21
27	Signal Generator	Agilent	E4438C	MY49072627(3G)	2020-06-22	2021-06-21

Note: All equipment is calibrated through CHINA CEPREI LABORATORY and GUANGZHOU LISAI CALIBRATION AND TEST CO., LTD.

## **9. TEST SETUP PHOTOGRAPHS OF EUT**

Please refer to separated files for Test Setup Photos of the EUT.

## **10. EXTERIOR PHOTOGRAPHS OF THE EUT**

Please refer to separated files for External Photos of the EUT.

## **11. INTERIOR PHOTOGRAPHS OF THE EUT**

Please refer to separated files for Internal Photos of the EUT.

-----THE END OF REPORT-----