

# TEST REPORT

Reference No..... : WTX20X11088233W-1  
FCC ID ..... : 2AHAF-MDT760  
Applicant ..... : TOPICON HK LIMITED  
Address..... : Room 2314-2316, Tower C, Huangdu Plaza, Yitian Road, Futian District,  
Shenzhen, China  
Product Name ..... : GPS  
Test Model. .... : MDT760  
Standards ..... : FCC Part 22H, FCC Part 24E, FCC Part 27  
Date of Receipt sample .... : Nov.20, 2020  
Date of Test..... : Nov.20, 2020 to Jan.04, 2021  
Date of Issue ..... : Jan.04, 2021  
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

**Prepared By:**

**Waltek Testing Group (Shenzhen) Co., Ltd.**

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,  
Block 70 Bao'an District, Shenzhen, Guangdong, China

Tel.: +86-755-33663308

Fax.: +86-755-33663309


Tested by:

Reviewed By:

Approved & Authorized By:



Jason Su / Project Engineer

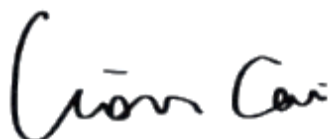

Lion Cai / RF Manager



Silin Chen / Manager

**TABLE OF CONTENTS**

<b>1. GENERAL INFORMATION</b> .....	<b>4</b>
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
1.2 TEST STANDARDS.....	6
1.3 TEST METHODOLOGY.....	6
1.4 TEST FACILITY.....	6
1.5 EUT SETUP AND TEST MODE.....	7
1.6 MEASUREMENT UNCERTAINTY.....	8
1.7 TEST EQUIPMENT LIST AND DETAILS.....	9
<b>2. SUMMARY OF TEST RESULTS</b> .....	<b>11</b>
<b>3. RF OUTPUT POWER</b> .....	<b>12</b>
3.1 STANDARD APPLICABLE.....	12
3.2 TEST PROCEDURE.....	12
3.3 SUMMARY OF TEST RESULTS/PLOTS.....	12
<b>4. PEAK-TO-AVERAGE RATIO (PAR) OF TRANSMITTER</b> .....	<b>16</b>
4.1 STANDARD APPLICABLE.....	16
4.2 TEST PROCEDURE.....	16
4.3 SUMMARY OF TEST RESULTS.....	16
<b>5. EMISSION BANDWIDTH</b> .....	<b>17</b>
5.1 STANDARD APPLICABLE.....	17
5.2 TEST PROCEDURE.....	17
5.3 SUMMARY OF TEST RESULTS/PLOTS.....	17
<b>6. OUT OF BAND EMISSIONS AT ANTENNA TERMINAL</b> .....	<b>18</b>
6.1 STANDARD APPLICABLE.....	18
6.2 TEST PROCEDURE.....	18
6.3 SUMMARY OF TEST RESULTS/PLOTS.....	18
<b>7. SPURIOUS RADIATED EMISSIONS</b> .....	<b>19</b>
7.1 STANDARD APPLICABLE.....	19
7.2 TEST PROCEDURE.....	19
7.3 SUMMARY OF TEST RESULTS/PLOTS.....	19
<b>8. FREQUENCY STABILITY</b> .....	<b>45</b>
8.1 STANDARD APPLICABLE.....	45
8.2 TEST PROCEDURE.....	45
8.3 SUMMARY OF TEST RESULTS/PLOTS.....	45
<b>9. MODULATION CHARACTERISTICS</b> .....	<b>46</b>
9.1 STANDARD APPLICABLE.....	46
9.2 TEST PROCEDURE.....	46
9.3 SUMMARY OF TEST RESULTS/PLOTS.....	46
<b>APPENDIX SUMMARY</b> .....	<b>47</b>
<b>APPENDIX A</b> .....	<b>48</b>
<b>APPENDIX B</b> .....	<b>50</b>
<b>APPENDIX C</b> .....	<b>51</b>
<b>APPENDIX D</b> .....	<b>68</b>
<b>APPENDIX E</b> .....	<b>122</b>
<b>APPENDIX F</b> .....	<b>126</b>
<b>APPENDIX PHOTOGRAPHS</b> .....	<b>129</b>

**Report version**

Version No.	Date of issue	Description
Rev.00	Jan.04, 2021	Original
/	/	/

## 1. GENERAL INFORMATION

---

### 1.1 Product Description for Equipment Under Test (EUT)

#### Client Information

Applicant: TOPICON HK LIMITED  
 Address of applicant: Room 2314-2316, Tower C, Huangdu Plaza, Yitian Road,  
 Futian District, Shenzhen, China

Manufacturer: TOPICON HK LIMITED  
 Address of manufacturer: Room 2314-2316, Tower C, Huangdu Plaza, Yitian Road,  
 Futian District, Shenzhen, China

General Description of EUT:	
Product Name:	GPS
Trade Name:	/
Model No.:	MDT760
Adding Model(s):	MDT860, MDT761, MDT740, MDT741, MDT770, MDT780, OBC740, OBC760, MDT714D, MDT715D, M710A, M710AG, M710AB, M710AKB, M720A, M720AG, M720AB, M720AKB, MDT840, MDT841, MDT861, MDT870, MDT871, MDT880, MDTT881
Rated Voltage:	MDT760:DC3.7V MDT860:DC3.7V
Battery Capacity:	MDT760:4300mAh MDT860: 6300mAh
Adapter Model:	/
Software Version:	MDT760: mdt760_gms_0.9.2 MDT860: mdt860_gms_0.8.5
Hardware Version:	MDT760: MDT760_V20 MDT860: mdt760_v20
<p><i>Note: The test data is gathered from a production sample provided by the manufacturer. The appearance of others models listed in the report is different from main-test model MDT760, but the circuit and the electronic construction do not change, declared by the manufacturer.</i></p>	

<b>Technical Characteristics of EUT:</b>	
<b>2G</b>	
Support Networks:	GSM, GPRS, EDGE
Support Band:	GSM850/PCS1900
Uplink Frequency:	GSM/GPRS/EDGE 850: 824~849MHz GSM/GPRS/EDGE 1900: 1850~1910MHz
Downlink Frequency:	GSM/GPRS/EDGE 850: 869~894MHz GSM/GPRS/EDGE 1900: 1930~1990MHz
Max RF Output Power:	GSM850: 33.19dBm, GSM1900:30.65dBm EDGE850: 27.16dBm, EDGE1900: 26.67dBm
Type of Emission:	GSM850: 250KGXW, GSM1900: 250KGXW EDGE850: 251KG7W, EDGE1900: 257KG7W
Type of Modulation:	GMSK, 8PSK
Type of Antenna:	Integral Antenna
Antenna Gain:	GSM850: 3dBi; GSM1900: 3dBi
GPRS/EDGE Class:	Class 12
<b>3G</b>	
Support Networks:	WCDMA, HSDPA, HSUPA
Support Band:	WCDMA Band 2, WCDMA Band 4, WCDMA Band 5
Uplink Frequency:	WCDMA Band 2: 1850~1910MHz WCDMA Band 4: 1710~1755MHz WCDMA Band 5: 824~849MHz
Downlink Frequency:	WCDMA Band 2: 1930~1990MHz WCDMA Band 4: 2110~2155MHz WCDMA Band 5: 869~894MHz
RF Output Power:	WCDMA Band 2: 23.81dBm, WCDMA Band 4: 23.41dBm WCDMA Band 5: 23.58dBm
Type of Emission:	WCDMA Band 2: 4M20F9W WCDMA Band 4: 4M20F9W WCDMA Band 5: 4M19F9W
Type of Modulation:	BPSK
Antenna Type:	Integral Antenna
Antenna Gain:	WCDMA Band 2: 3dBi, WCDMA Band 4: 3dBi, WCDMA Band 5: 3dBi

## 1.2 Test Standards

The tests were performed according to following standards:

**FCC Rules Part 2:** FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS.

**FCC Rules Part 22:** PRIVATE LAND MOBILE RADIO SERVICES.

**FCC Rules Part 24:** PUBLIC MOBILE SERVICES.

**FCC Rules Part 27:** MISCELLANEOUS WIRELESS COMMUNICATIONS SERVICES.

**TIA/EIA 603 E March 2016:** Land Mobile FM or PM Communications Equipment Measurement and Performance Standards.

**ANSI C63.26-2015:** American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services

**KDB 971168 D01 Power Meas License Digital Systems v03r01:** MEASUREMENT GUIDANCE FOR CERTIFICATION OF LICENSED DIGITAL TRANSMITTERS.

**Maintenance of compliance** is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

## 1.3 Test Methodology

All measurements contained in this report were conducted with TIA/EIA 603 E/ KDB 971168/ ANSI C63.26. The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

## 1.4 Test Facility

### Address of the test laboratory

Laboratory: Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road, Block 70 Bao'an District, Shenzhen, Guangdong, China

### FCC – Registration No.: 125990

Waltek Testing Group (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010, and Test Firm Registration Number is 125990.

### Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Waltek Testing Group (Shenzhen) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

### 1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	GSM 850	Low, Middle, High Channels
TM2	GPRS 850	Low, Middle, High Channels
TM3	EDGE 850	Low, Middle, High Channels
TM4	GSM 1900	Low, Middle, High Channels
TM5	GPRS 1900	Low, Middle, High Channels
TM6	EDGE 1900	Low, Middle, High Channels
TM7	WCDMA Band 5	Low, Middle, High Channels
TM8	HSDPA Band 5	Low, Middle, High Channels
TM9	HSUPA Band 5	Low, Middle, High Channels
TM10	WCDMA Band 4	Low, Middle, High Channels
TM11	HSDPA Band 4	Low, Middle, High Channels
TM12	HSUPA Band 4	Low, Middle, High Channels
TM13	WCDMA Band 2	Low, Middle, High Channels
TM14	HSDPA Band 2	Low, Middle, High Channels
TM15	HSUPA Band 2	Low, Middle, High Channels

Testing Configure			
Support Band	Support Standard	Channel Frequency	Channel Number
GSM 850	GSM/GPRS/EDGE	824.2 MHz	128
		836.6 MHz	190
		848.8 MHz	251
PCS 1900	GSM/GPRS/EDGE	1850.2 MHz	512
		1880.0 MHz	661
		1909.8 MHz	810
WCDMA Band 5	WCDMA/HSDPA/HSUPA	826.4 MHz	4132
		836.6 MHz	4183
		846.6 MHz	4233
WCDMA Band 4	WCDMA/HSDPA/HSUPA	1712.4 MHz	1312
		1732.4 MHz	1412
		1752.6 MHz	1513
WCDMA Band 2	WCDMA/HSDPA/HSUPA	1852.4 MHz	9262
		1880.0 MHz	9400
		1907.6 MHz	9538

Note: the transmitter has been tested on the communications mode of GSM, GPRS, EDGE, WCDMA, HSDPA, HSUPA compliance test and record the worst case.

<b>Test Conditions</b>	
Temperature:	22~25 °C
Relative Humidity:	50~55 %.
ATM Pressure:	1019 mbar

<b>EUT Cable List and Details</b>			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
USB Cable	1.0	Shielded	Without Ferrite
DC Cable	1.45	Unshielded	Without Ferrite
Camera Cable	0.8	Unshielded	Without Ferrite

<b>Special Cable List and Details</b>			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

<b>Auxiliary Equipment List and Details</b>			
Description	Manufacturer	Model	Serial Number
Notebook	Lenovo	TianYi310-14ISK	/
Battery	JADE	DC12V	/

## 1.6 Measurement Uncertainty

<b>Measurement uncertainty</b>			
Parameter	Conditions	Uncertainty	
RF Output Power	Conducted	$\pm 0.42\text{dB}$	
Occupied Bandwidth	Conducted	$\pm 1.5\%$	
Frequency Stability	Conducted	2.3%	
Transmitter Spurious Emissions	Conducted	$\pm 0.42\text{dB}$	
Transmitter Spurious Emissions	Radiated	30-200MHz $\pm 4.52\text{dB}$	
		0.2-1GHz $\pm 5.56\text{dB}$	
		1-6GHz $\pm 3.84\text{dB}$	
		6-18GHz $\pm 3.92\text{dB}$	



**1.7 Test Equipment List and Details**

No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due. Date
SEMT-1075	Communication Tester	Rohde & Schwarz	CMW500	148650	2020-04-28	2021-04-27
SEMT-1063	GSM Tester	Rohde & Schwarz	CMU200	114403	2020-04-28	2021-04-27
SEMT-1072	Spectrum Analyzer	Agilent	E4407B	MY41440400	2020-04-28	2021-04-27
SEMT-1079	Spectrum Analyzer	Agilent	N9020A	US47140102	2020-04-28	2021-04-27
SEMT-1080	Signal Generator	Agilent	83752A	3610A01453	2020-04-28	2021-04-27
SEMT-1081	Vector Signal Generator	Agilent	N5182A	MY47070202	2020-04-28	2021-04-27
SEMT-1028	Power Divider	Weinschel	1506A	PM204	2020-04-28	2021-04-27
SEMT-1082	Power Divider	RF-Lambda	RFLT4W5M18G	14110400027	2020-04-28	2021-04-27
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2020-04-28	2021-04-27
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2020-04-28	2021-04-27
SEMT-1008	Amplifier	Agilent	8447F	3113A06717	2020-04-28	2021-04-27
SEMT-1043	Amplifier	C&D	PAP-1G18	2002	2020-04-28	2021-04-27
SEMT-1069	Loop Antenna	Schwarz beck	FMZB 1516	9773	2019-05-05	2021-05-04
SEMT-1068	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2019-05-05	2021-05-04
SEMT-1042	Horn Antenna	ETS	3117	00086197	2019-05-05	2021-05-04
SEMT-1121	Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170582	2019-05-05	2021-05-04
SEMT-1168	Pre-amplifier	Direction Systems Inc.	PAP-0126	14141-12838	2020-04-28	2021-04-27
SEMT-1169	Pre-amplifier	Direction Systems Inc.	PAP-2640	14145-14153	2020-04-28	2021-04-27
SEMT-1163	Spectrum Analyzer	Rohde & Schwarz	FSP40	100612	2020-04-28	2021-04-27
SEMT-1170	DRG Horn Antenna	A.H. SYSTEMS	SAS-574	571	2019-05-05	2021-05-04
SEMT-1166	Power Limiter	Agilent	N9356B	MY45450376	2020-04-28	2021-04-27
SEMT-1048	RF Limiter	ATTEN	AT-BSF-2400~2500	/	2020-04-28	2021-04-27
SEMT-1076	RF Switcher	Top Precision	RCS03-A2	/	2020-04-28	2021-04-27
SEMT-C001	Cable	Zheng DI	LL142-07-07-10M(A)	/	2020-03-17	2021-03-16
SEMT-C002	Cable	Zheng DI	ZT40-2.92J-2.92J-6M	/	2020-03-17	2021-03-16
SEMT-C003	Cable	Zheng DI	ZT40-2.92J-2.92J-2.5M	/	2020-03-17	2021-03-16
SEMT-C004	Cable	Zheng DI	2M0RFC	/	2020-03-17	2021-03-16

SEMT-C005	Cable	Zheng DI	1M0RFC	/	2020-03-17	2021-03-16
SEMT-C006	Cable	Zheng DI	1M0RFC	/	2020-03-17	2021-03-16

<b>Software List</b>			
<b>Description</b>	<b>Manufacturer</b>	<b>Model</b>	<b>Version</b>
EMI Test Software (Radiated Emission)*	Farad	EZ-EMC	RA-03A1

\*Remark: indicates software version used in the compliance certification testing

## 2. SUMMARY OF TEST RESULTS

---

<b>FCC Rules</b>	<b>Description of Test Item</b>	<b>Result</b>
§22.913(a), §24.232(c), §27.50(d)	RF Output Power	Compliant
§24.51, §27.50	Peak-to-average Ratio (PAR) of Transmitter	Compliant
§22.917(b), §24.238(b), §27.53	Emission Bandwidth	Compliant
§22.917(a), §24.238(a), §27.53(h)	Spurious Emissions at Antenna Terminal	Compliant
§22.917(a), §24.238(a), §27.53(h)	Spurious Radiation Emissions	Compliant
§22.917(a), §24.238(a), §27.53(h)	Out of Band Emissions	Compliant
§22.355, §24.235, §27.54	Frequency Stability	Compliant

### 3. RF Output Power

---

#### 3.1 Standard Applicable


According to §22.913(a)(2), the ERP of mobile and portable stations transmitters and auxiliary test transmitters must not exceed 7 Watts.

According to §24.232(c), mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

According to §27.50(d)(4), fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP.

#### 3.2 Test Procedure

- Conducted output power test method:

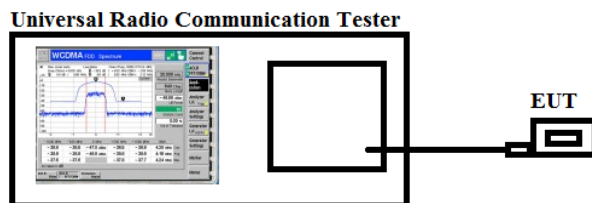

- Radiated power test method:

1. The setup of EUT is according with per ANSI/TIA Standard 603E and ANSI C63.26 measurement procedure.
2. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.
3. The frequency range up to tenth harmonic of the fundamental frequency was investigated.
4. Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

#### 3.3 Summary of Test Results/Plots

➤ **Max. Radiated Power**

Mode	Channel	Antenna Polar	ERP (dBm)	Limit (dBm)	Result
GSM850	128	V	30.18	<38.45	Pass
		H	25.28		
	190	V	30.45		
		H	25.39		
	251	V	30.27		
		H	24.97		
GPRS850	128	V	29.71	<38.45	Pass
		H	24.28		
	190	V	29.49		
		H	24.02		
	251	V	29.97		
		H	24.15		
EGPRS850	128	V	25.35	<38.45	Pass
		H	21.02		
	190	V	25.79		
		H	21.42		
	251	V	25.54		
		H	21.47		

Mode	Channel	Antenna Polar	EIRP (dBm)	Limit (dBm)	Result
PCS1900	512	V	28.01	<33.00	Pass
		H	23.24		
	661	V	28.43		
		H	23.97		
	810	V	28.14		
		H	23.39		
GPRS1900	512	V	28.49	<33.00	Pass
		H	23.36		
	661	V	28.79		
		H	23.31		
	810	V	28.49		
		H	23.31		
EGPRS1900	512	V	23.08	<33.00	Pass
		H	19.32		
	661	V	23.45		
		H	19.98		
	810	V	23.02		
		H	19.82		

Mode	Channel	Antenna Polar	ERP	Limit (dBm)	Result
WCDMA Band V	4132	V	20.14	<38.45	Pass
		H	16.32		
	4183	V	20.75		
		H	16.87		
	4233	V	20.25		
		H	16.54		

Mode	Channel	Antenna Polar	EIRP	Limit (dBm)	Result
WCDMA Band IV	1312	V	20.79	<30.00	Pass
		H	16.11		
	1412	V	20.52		
		H	16.09		
	1513	V	20.49		
		H	16.36		

Mode	Channel	Antenna Polar	EIRP	Limit (dBm)	Result
WCDMA Band II	9262	V	20.47	<33.00	Pass
		H	16.05		
	9400	V	20.85		
		H	16.31		
	9538	V	20.71		
		H	16.31		

➤ **Max. Conducted Power (Average power)**

**Please refer to Appendix A**

## 4. Peak-to-average Ratio (PAR) of Transmitter

---

### 4.1 Standard Applicable

According to §24.232(d), power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (e) of this section. In both instances, equipment employed must be authorized in accordance with the provisions of §24.51, in measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.


According to §27.50(B), the peak-to-average power ratio (PAPR) of the transmitter output power must not exceed 13 dB. The PAPR measurements should be made using either an instrument with complementary cumulative distribution function (CCDF) capabilities to determine that PAPR will not exceed 13 dB for more than 0.1 percent of the time or other Commission approved procedure. The measurement must be performed using a signal corresponding to the highest PAPR expected during periods of continuous transmission.

### 4.2 Test Procedure

According with KDB 971168

1. The signal analyzer's CCDF measurement profile is enabled
2. Frequency = carrier center frequency
3. Measurement BW > Emission bandwidth of signal
4. The signal analyzer was set to collect one million samples to generate the CCDF curve
5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms. For burst transmissions, the spectrum analyzer is set to use an internal "RF Burst" trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the "on time" of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power

Test Configuration for the emission bandwidth testing:

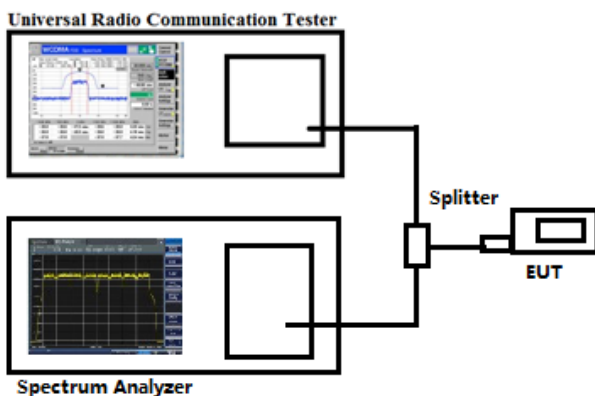

### 4.3 Summary of Test Results

Please refer to Appendix B.

Waltek Testing Group (Shenzhen) Co., Ltd.

<http://www.semtest.com.cn>



## 5. Emission Bandwidth

---

### 5.1 Standard Applicable

According to §22.917(b), the emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.


According to §24.238(b), the emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

According to §27.53, the emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

### 5.2 Test Procedure

The RF output terminal of the transmitter was connected to the input of the spectrum analyzer via a suitable attenuation. The RBW of the spectrum analyzer was set to 10kHz for GSM mode and 100kHz for WCDMA mode, VBW shall be at least 3 times the RBW, and the 26dB bandwidth was recorded.

Test Configuration for the emission bandwidth testing:

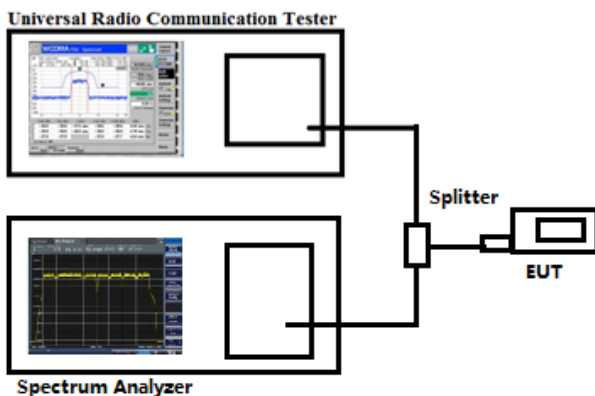

### 5.3 Summary of Test Results/Plots

Please refer to Appendix C.

## 6. Out of Band Emissions at Antenna Terminal

---

### 6.1 Standard Applicable

According to §22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.


According to §24.238(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

According to §27.53 (h), the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least  $43 + 10 \log_{10}(P)$  dB.

### 6.2 Test Procedure

The RF output terminal of the transmitter was connected to the input of the spectrum analyzer via a suitable attenuation. The RBW of the spectrum analyzer was set to 100kHz and 1MHz for the scan frequency from 30MHz to 1GHz and the scan frequency from 1GHz to up to 10<sup>th</sup> harmonic.

Test Configuration for the out of band emissions testing:

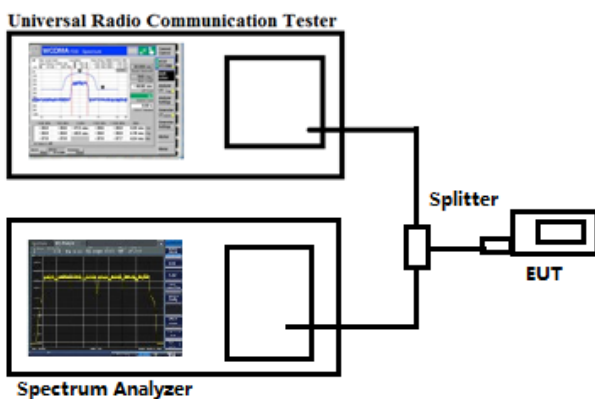

### 6.3 Summary of Test Results/Plots

Please refer to Appendix D.

## 7. Spurious Radiated Emissions

---

### 7.1 Standard Applicable

According to §22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

According to §24.238(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

According to §27.53 (h), the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least  $43 + 10 \log_{10}(P)$  dB.

### 7.2 Test Procedure

1. The setup of EUT is according with per ANSI/TIA Standard 603E and ANSI C63.26 measurement procedure.
2. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.
3. The frequency range up to tenth harmonic of the fundamental frequency was investigated.
4. Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.


$$\text{Spurious attenuation limit in dB} = 43 + 10 \log_{10}(\text{power out in Watts})$$

### 7.3 Summary of Test Results/Plots

*Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.*


- Spurious Emissions Below 1GHz
- MDT760

For Cellular Band			
Test Channel	GSM850	Polarity:	Horizontal

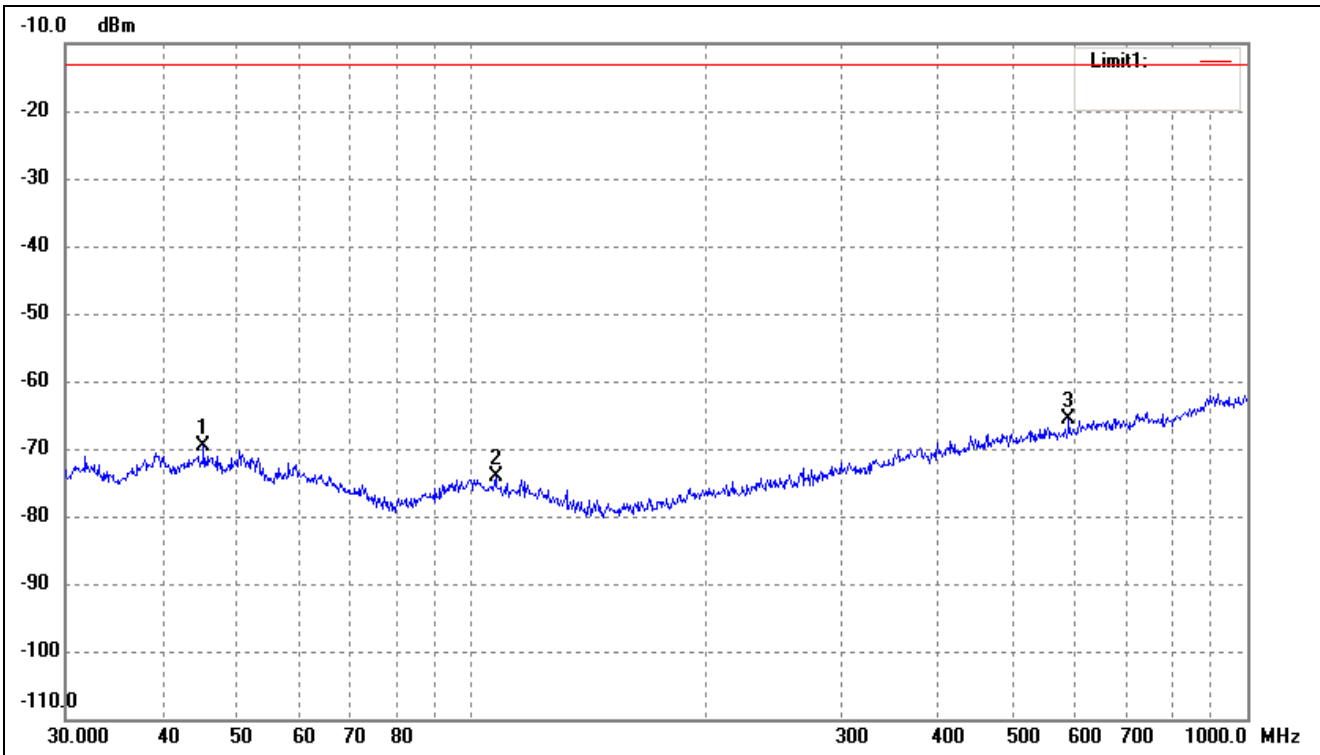


No.	Frequency (MHz)	Reading (dBm)	Correct Factor(dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	45.2166	-69.56	0.01	-69.55	-13.00	-56.55	ERP
2	107.5101	-72.70	-1.52	-74.22	-13.00	-61.22	ERP
3	588.9051	-75.25	9.58	-65.67	-13.00	-52.67	ERP

For Cellular Band			
Test Channel	GSM850	Polarity:	Vertical

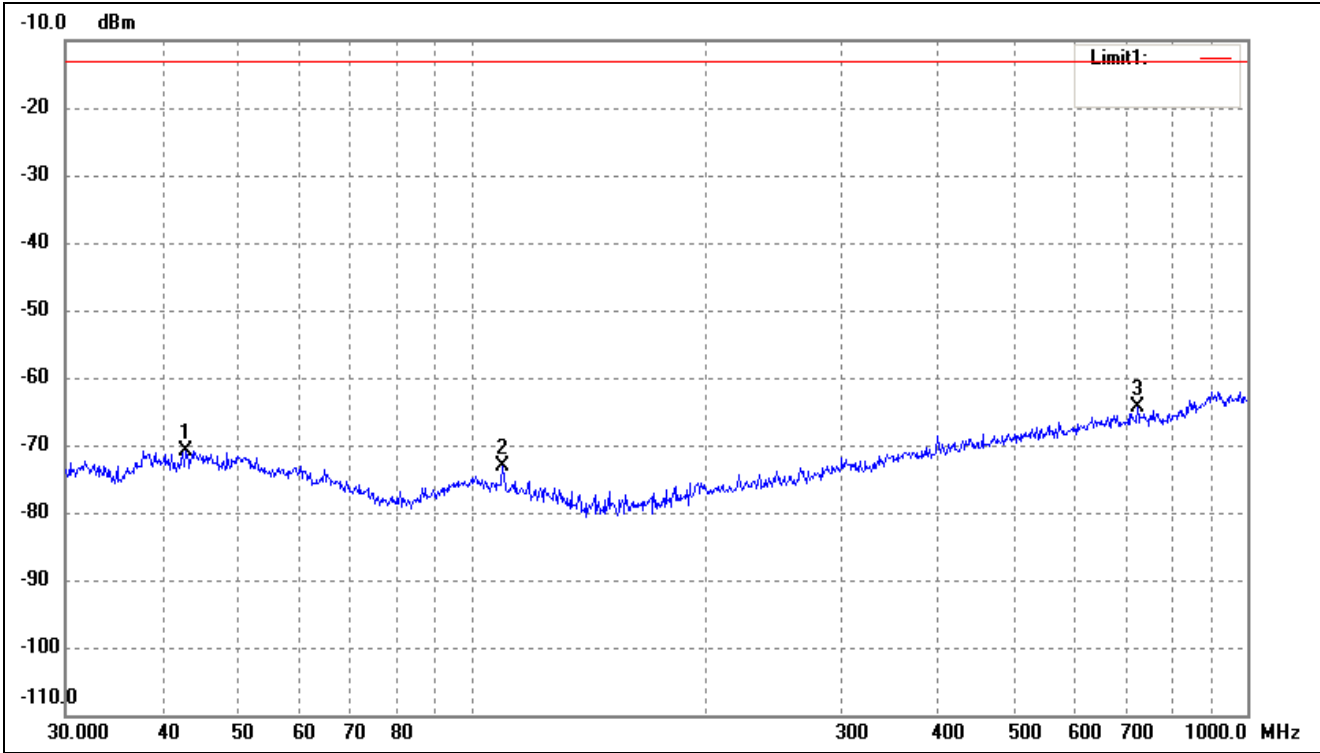


No.	Frequency (MHz)	Reading (dBm)	Correct Factor(dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	42.8998	-70.77	-0.07	-70.84	-13.00	-57.84	ERP
2	109.7960	-71.67	-1.52	-73.19	-13.00	-60.19	ERP
3	721.7259	-75.09	10.70	-64.39	-13.00	-51.39	ERP

For Cellular Band			
Test Channel	GSM1900	Polarity:	Horizontal

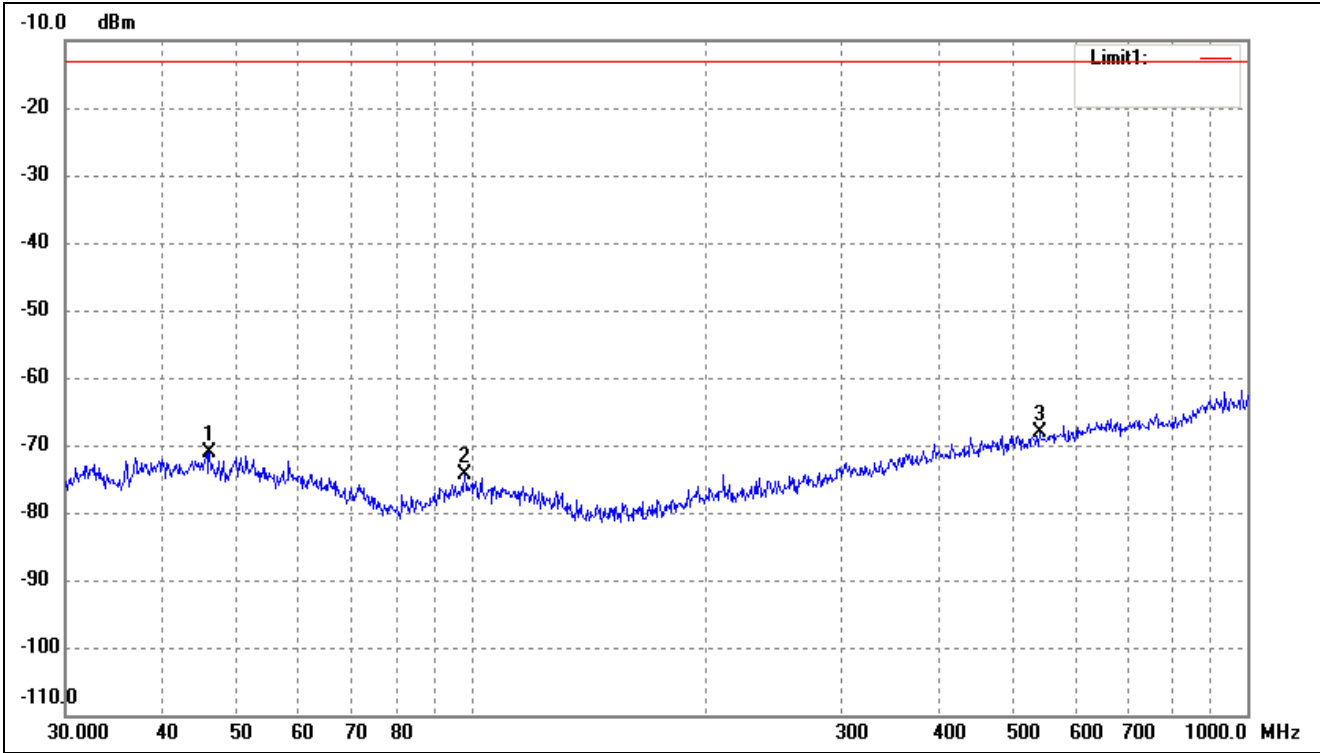

No.	Frequency (MHz)	Reading (dBm)	Correct Factor(dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	46.0164	-71.22	0.06	-71.16	-13.00	-58.16	ERP
2	98.1419	-72.62	-1.82	-74.44	-13.00	-61.44	ERP
3	539.4775	-75.84	7.84	-68.00	-13.00	-55.00	ERP


For Cellular Band			
Test Channel	GSM1900	Polarity:	Vertical

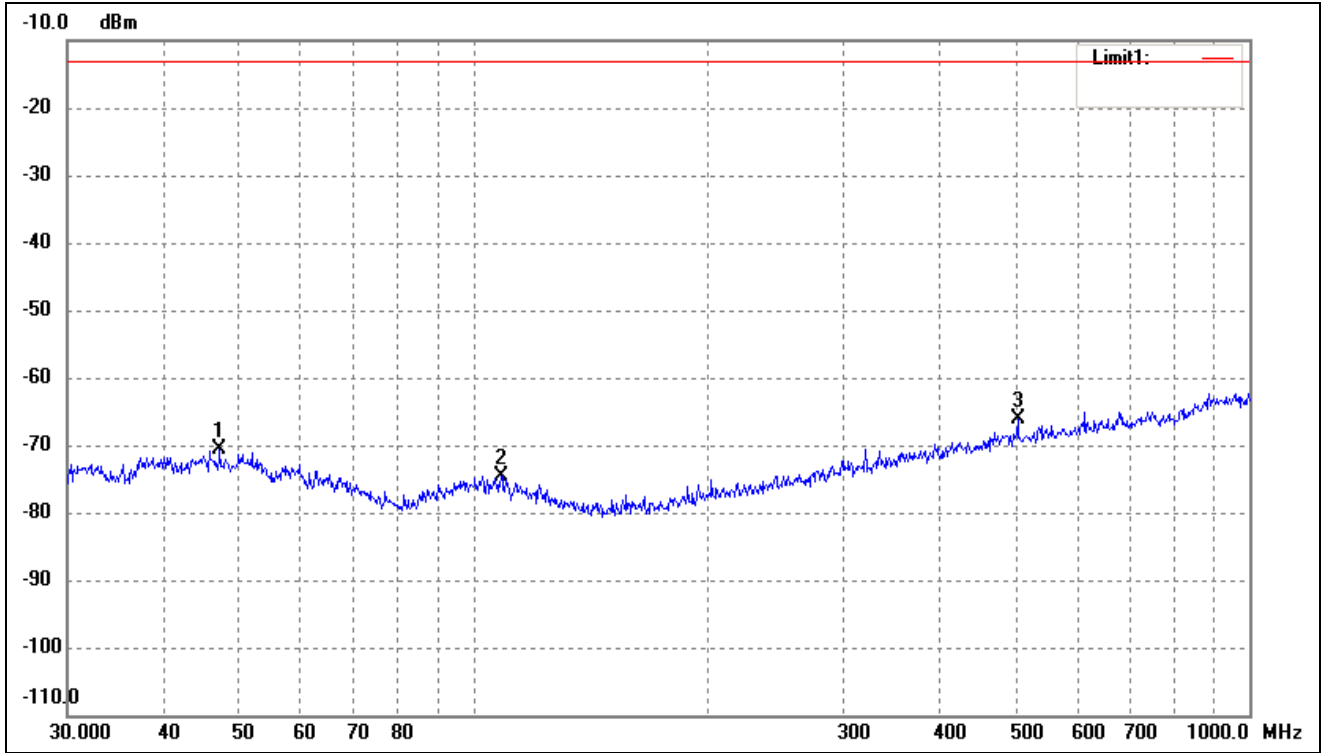

No.	Frequency (MHz)	Reading (dBm)	Correct Factor(dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	47.1599	-70.68	0.12	-70.56	-13.00	-57.56	ERP
2	108.6470	-73.02	-1.51	-74.53	-13.00	-61.53	ERP
3	502.9395	-73.87	7.73	-66.14	-13.00	-53.14	ERP

Note: Margin= (Reading+ Correct)- Limit


Test Channel	WCDMA Band V	Polarity:	Horizontal
--------------	--------------	-----------	------------

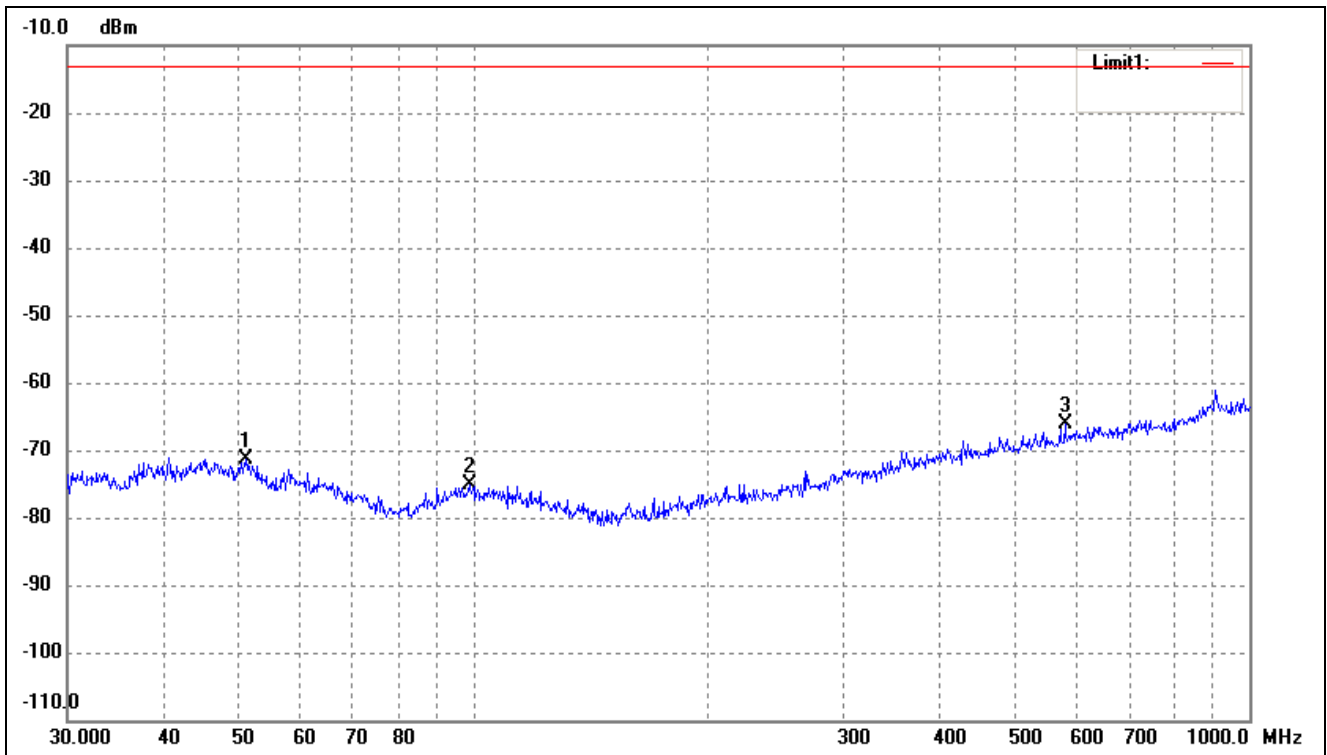

No.	Frequency (MHz)	Reading (dBm)	Correct Factor(dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	50.9420	-71.43	0.00	-71.43	-13.00	-58.43	ERP
2	98.8326	-73.52	-1.72	-75.24	-13.00	-62.24	ERP
3	578.6699	-75.53	9.33	-66.20	-13.00	-53.20	ERP




Test Channel	WCDMA Band V	Polarity:	Vertical
--------------	--------------	-----------	----------

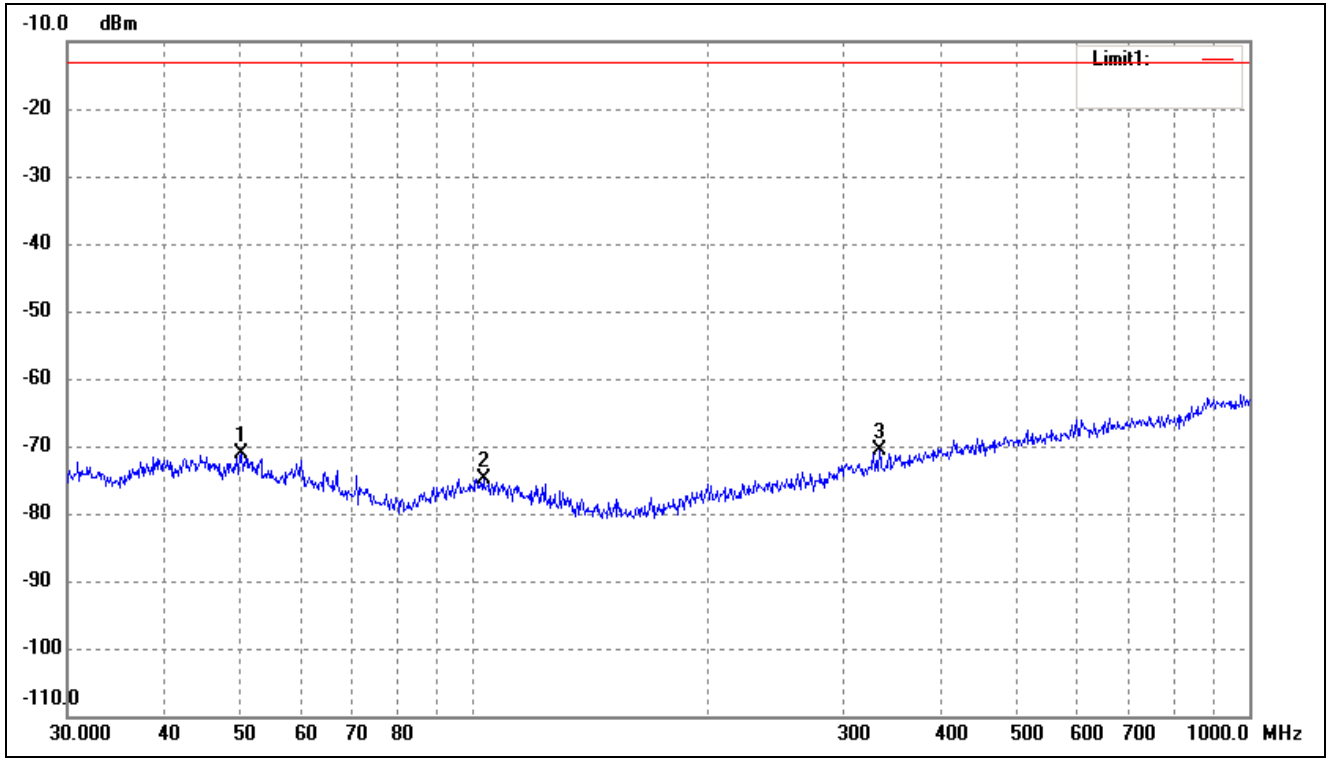


No.	Frequency (MHz)	Reading (dBm)	Correct (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	50.2325	-71.44	0.20	-71.24	-13.00	-58.24	ERP
2	103.0800	-73.29	-1.52	-74.81	-13.00	-61.81	ERP
3	333.6867	-74.03	3.37	-70.66	-13.00	-57.66	ERP

Test Channel	WCDMA Band IV	Polarity:	Horizontal
--------------	---------------	-----------	------------

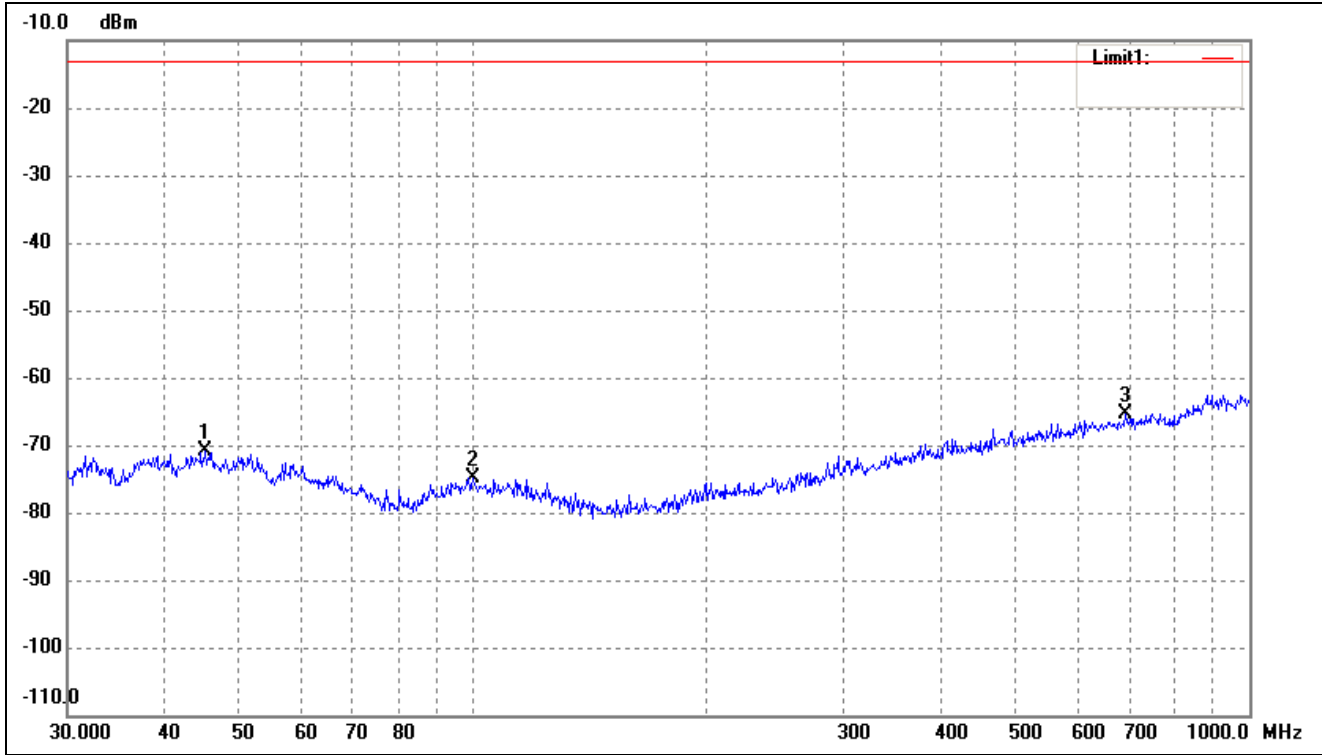

No.	Frequency (MHz)	Reading (dBm)	Correct (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	45.2166	-70.82	0.01	-70.81	-13.00	-57.81	ERP
2	99.8777	-73.37	-1.54	-74.91	-13.00	-61.91	ERP
3	691.9867	-75.36	9.94	-65.42	-13.00	-52.42	ERP


Test Channel	WCDMA Band IV	Polarity:	Vertical
--------------	---------------	-----------	----------

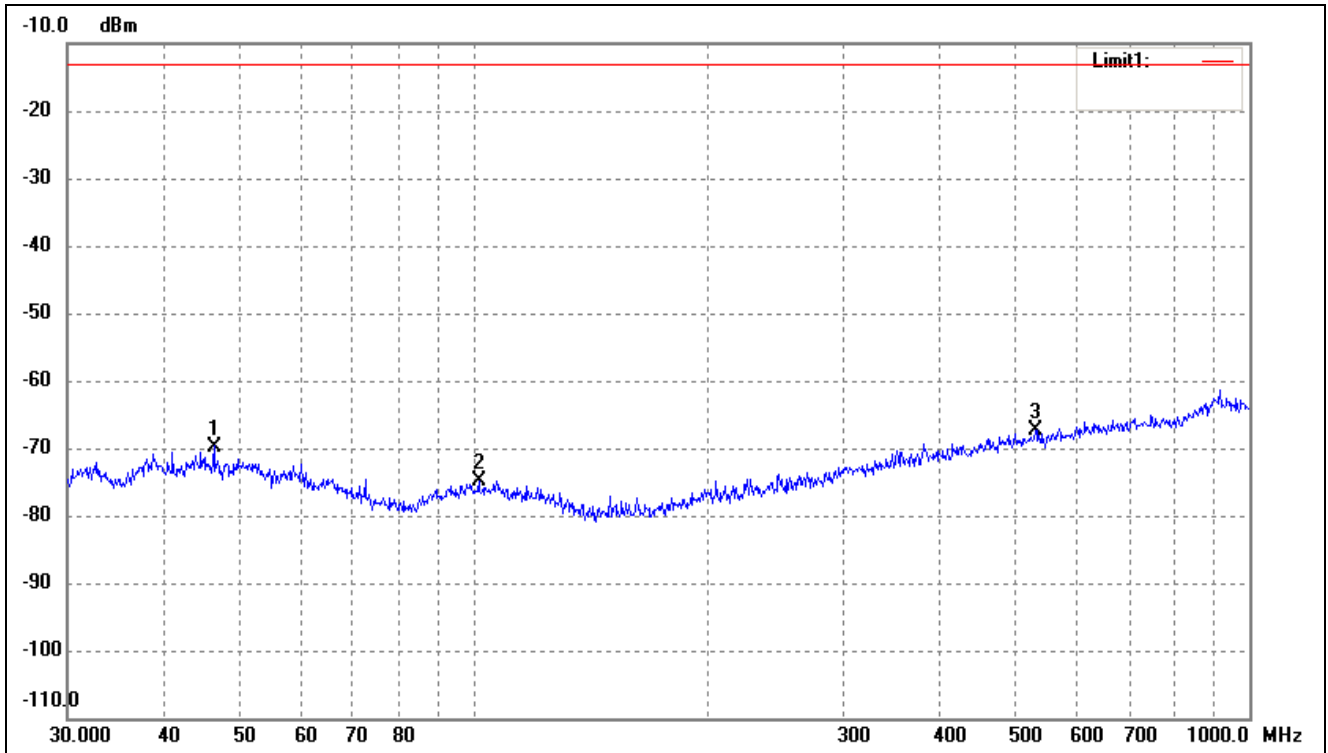

No.	Frequency (MHz)	Reading (dBm)	Correct Factor(dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	46.3402	-69.82	0.07	-69.75	-13.00	-56.75	ERP
2	101.6443	-73.25	-1.52	-74.77	-13.00	-61.77	ERP
3	530.1014	-75.05	7.70	-67.35	-13.00	-54.35	ERP


Note: Margin= (Reading+ Correct)- Limit

Test Channel	WCDMA Band II	Polarity:	Horizontal
--------------	---------------	-----------	------------

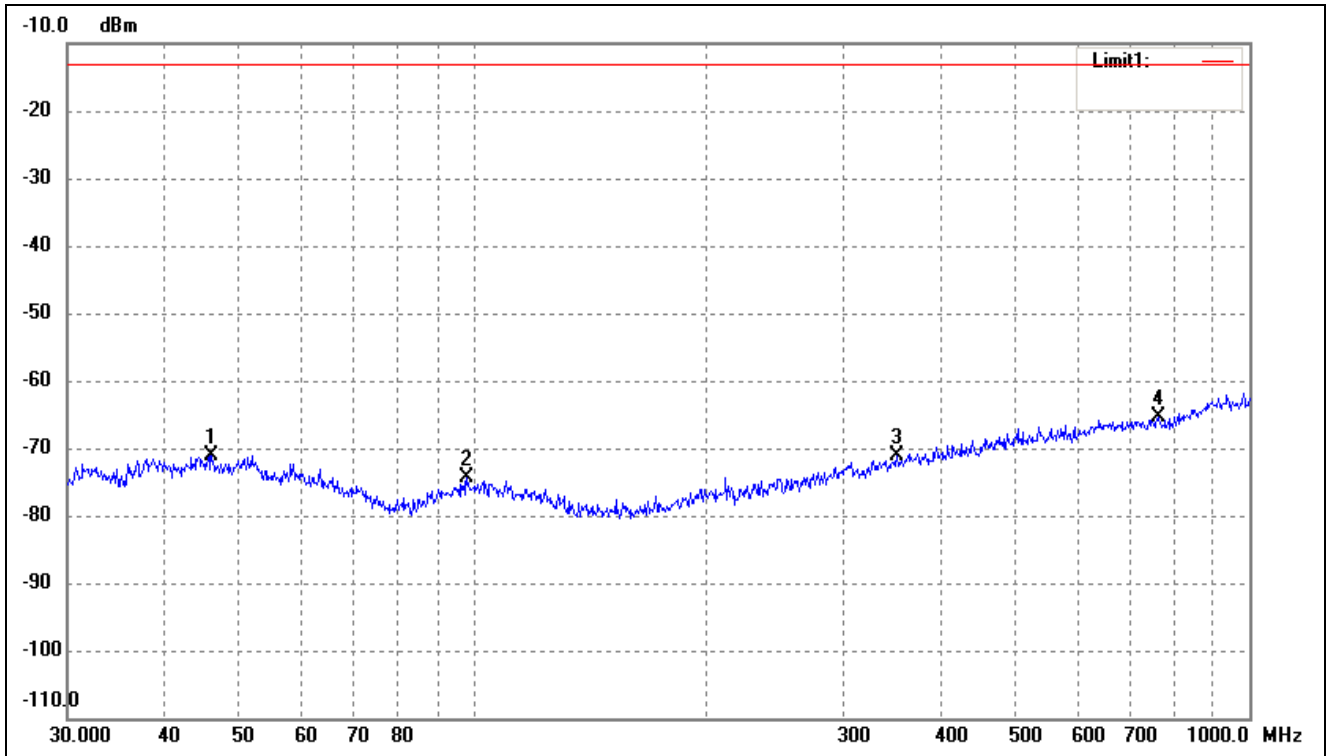

No.	Frequency (MHz)	Reading (dBm)	Correct (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	46.0164	-71.22	0.06	-71.16	-13.00	-58.16	ERP
2	98.1419	-72.62	-1.82	-74.44	-13.00	-61.44	ERP
3	351.7079	-75.62	4.39	-71.23	-13.00	-58.23	ERP
4	763.3757	-75.91	10.62	-65.29	-13.00	-52.29	ERP

Test Channel	WCDMA Band II	Polarity:	Vertical
--------------	---------------	-----------	----------

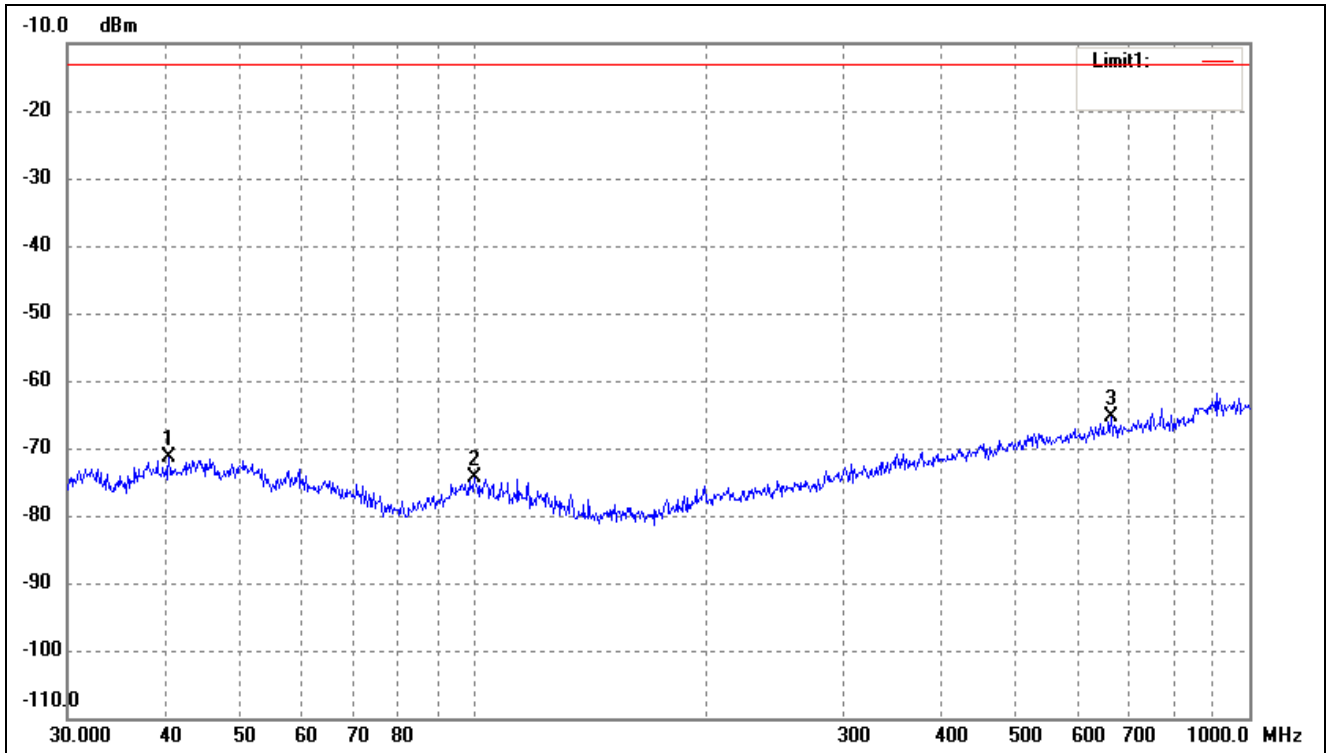


No.	Frequency (MHz)	Reading (dBm)	Correct Factor(dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	40.5591	-71.30	-0.17	-71.47	-13.00	-58.47	ERP
2	100.2286	-72.74	-1.52	-74.26	-13.00	-61.26	ERP
3	663.4729	-75.15	9.70	-65.45	-13.00	-52.45	ERP

Note: Margin= (Reading+ Correct)- Limit


➤ MDT860

For Cellular Band			
Test Channel	GSM850	Polarity:	Horizontal

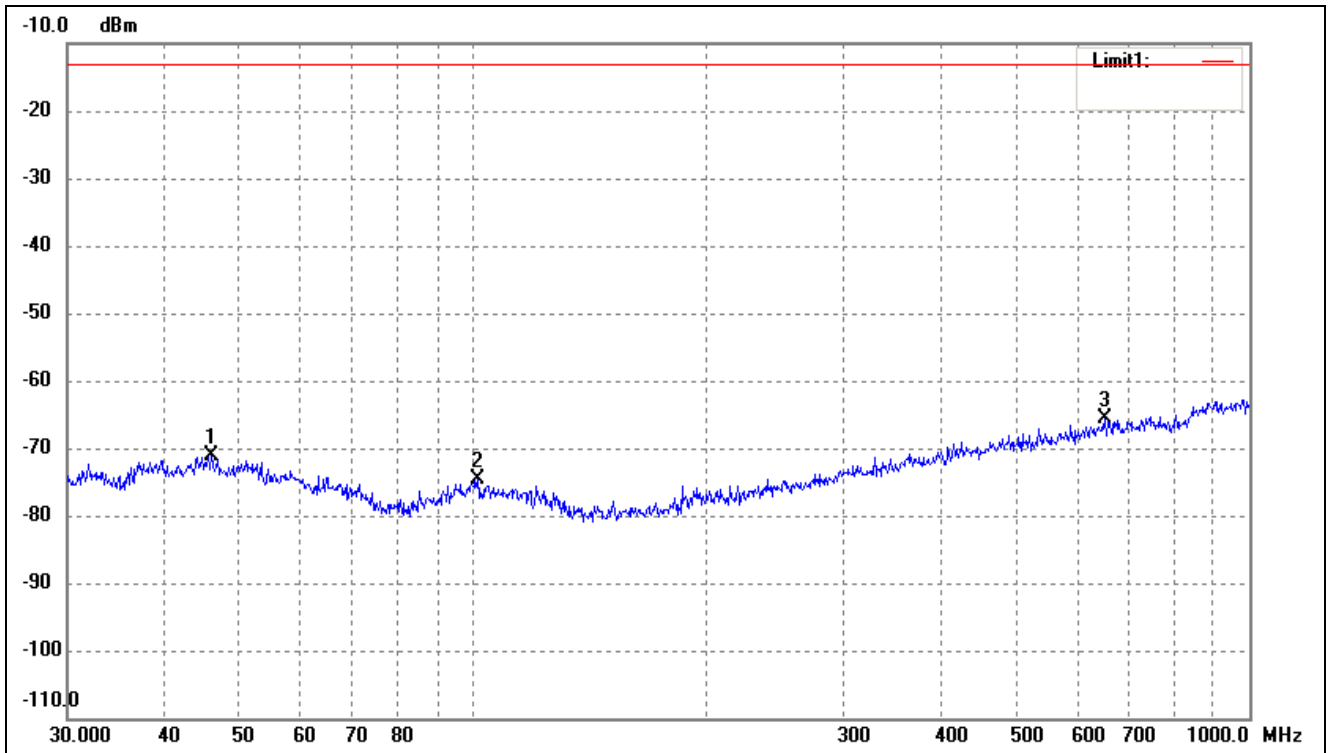


No.	Frequency (MHz)	Reading (dBm)	Correct Factor(dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	46.0164	-71.27	0.06	-71.21	-13.00	-58.21	ERP
2	101.2885	-73.17	-1.51	-74.68	-13.00	-61.68	ERP
3	651.9417	-75.00	9.47	-65.53	-13.00	-52.53	ERP

For Cellular Band			
Test Channel	GSM850	Polarity:	Vertical

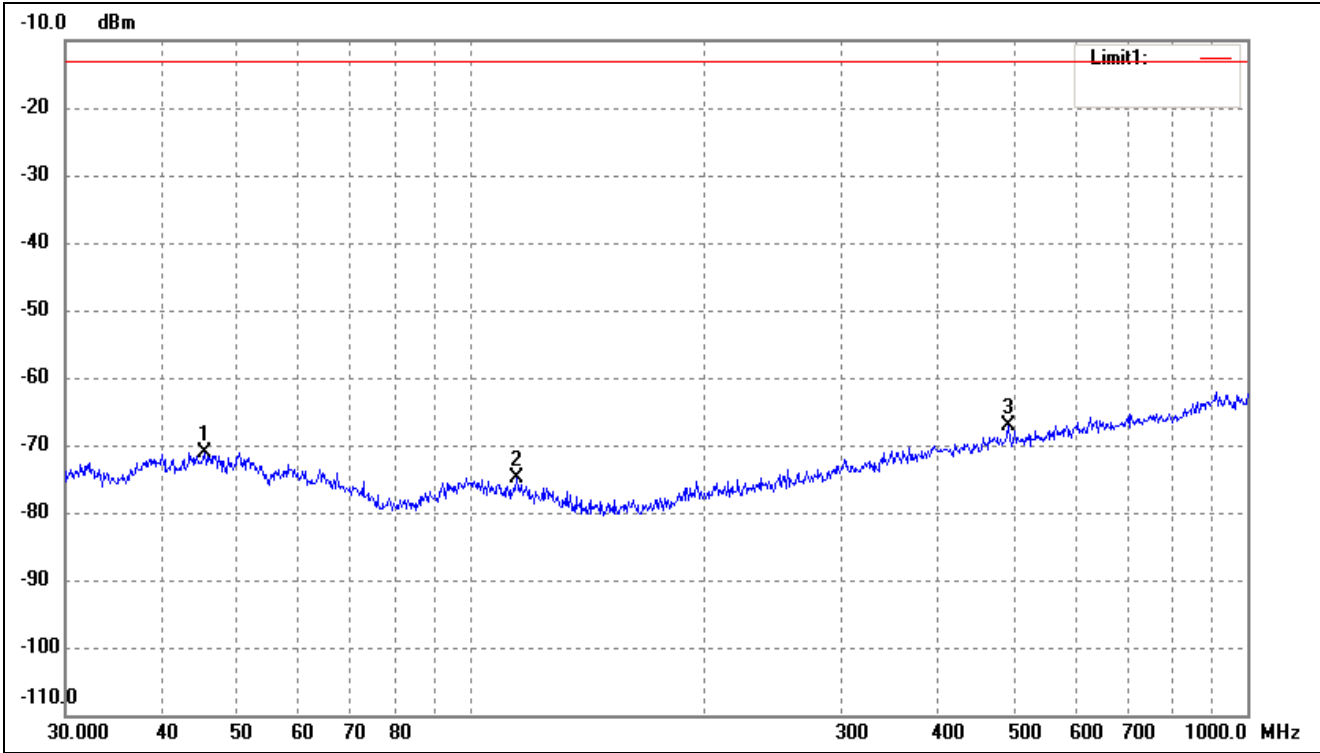

No.	Frequency (MHz)	Reading (dBm)	Correct Factor(dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	45.3755	-71.04	0.02	-71.02	-13.00	-58.02	ERP
2	114.5146	-72.81	-1.96	-74.77	-13.00	-61.77	ERP
3	492.4685	-74.55	7.51	-67.04	-13.00	-54.04	ERP


For Cellular Band			
Test Channel	GSM1900	Polarity:	Horizontal

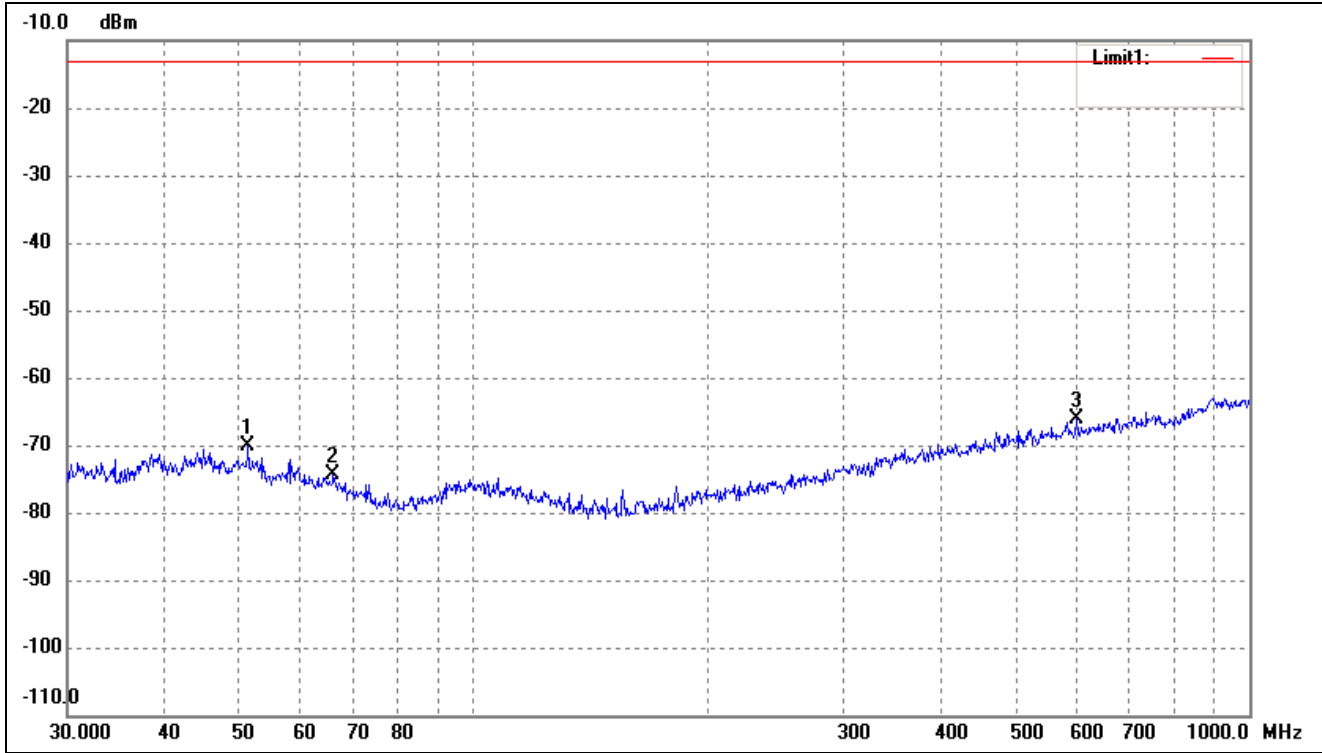

No.	Frequency (MHz)	Reading (dBm)	Correct Factor(dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	51.3005	-70.02	-0.10	-70.12	-13.00	-57.12	ERP
2	66.0342	-72.18	-2.28	-74.46	-13.00	-61.46	ERP
3	599.3213	-75.90	9.85	-66.05	-13.00	-53.05	ERP




For Cellular Band			
Test Channel	GSM1900	Polarity:	Vertical

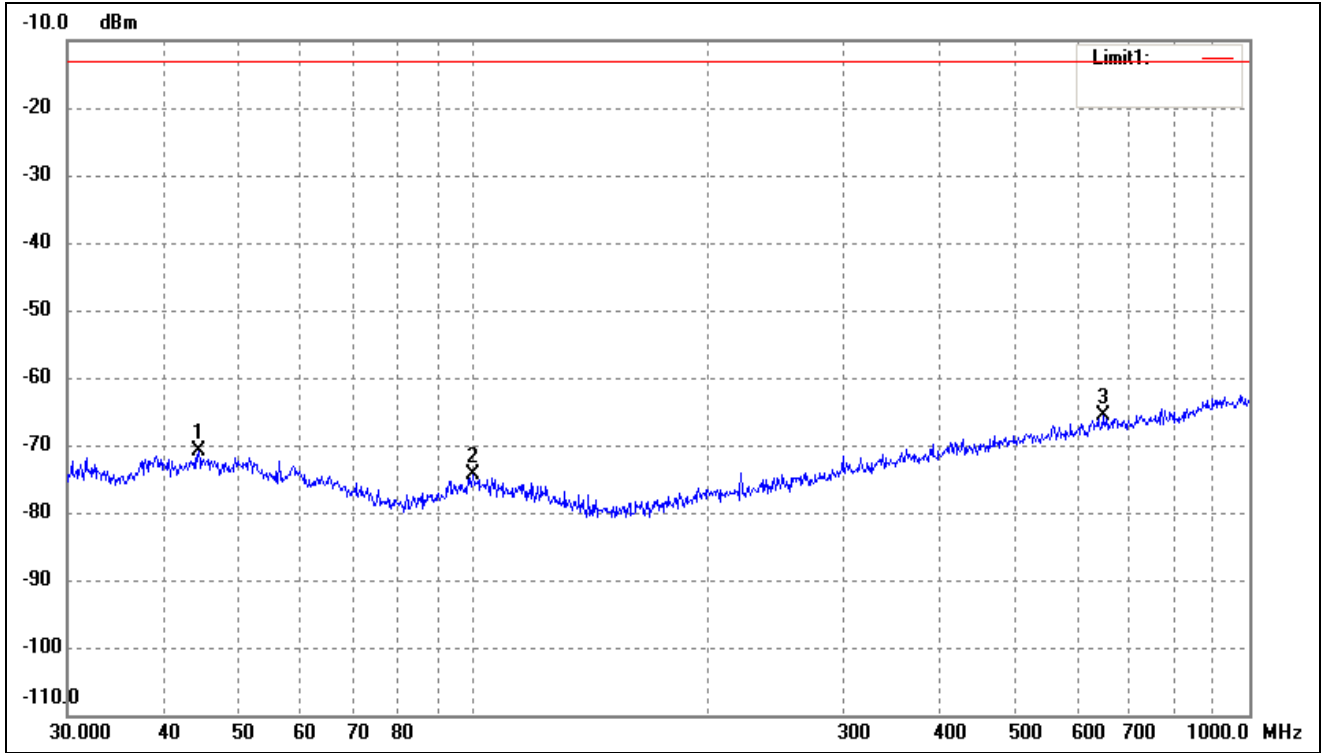

No.	Frequency (MHz)	Reading (dBm)	Correct Factor(dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	44.2752	-70.83	-0.03	-70.86	-13.00	-57.86	ERP
2	99.8777	-72.92	-1.54	-74.46	-13.00	-61.46	ERP
3	647.3856	-75.08	9.46	-65.62	-13.00	-52.62	ERP


Note: Margin= (Reading+ Correct)- Limit

Test Channel	WCDMA Band V	Polarity:	Horizontal
--------------	--------------	-----------	------------

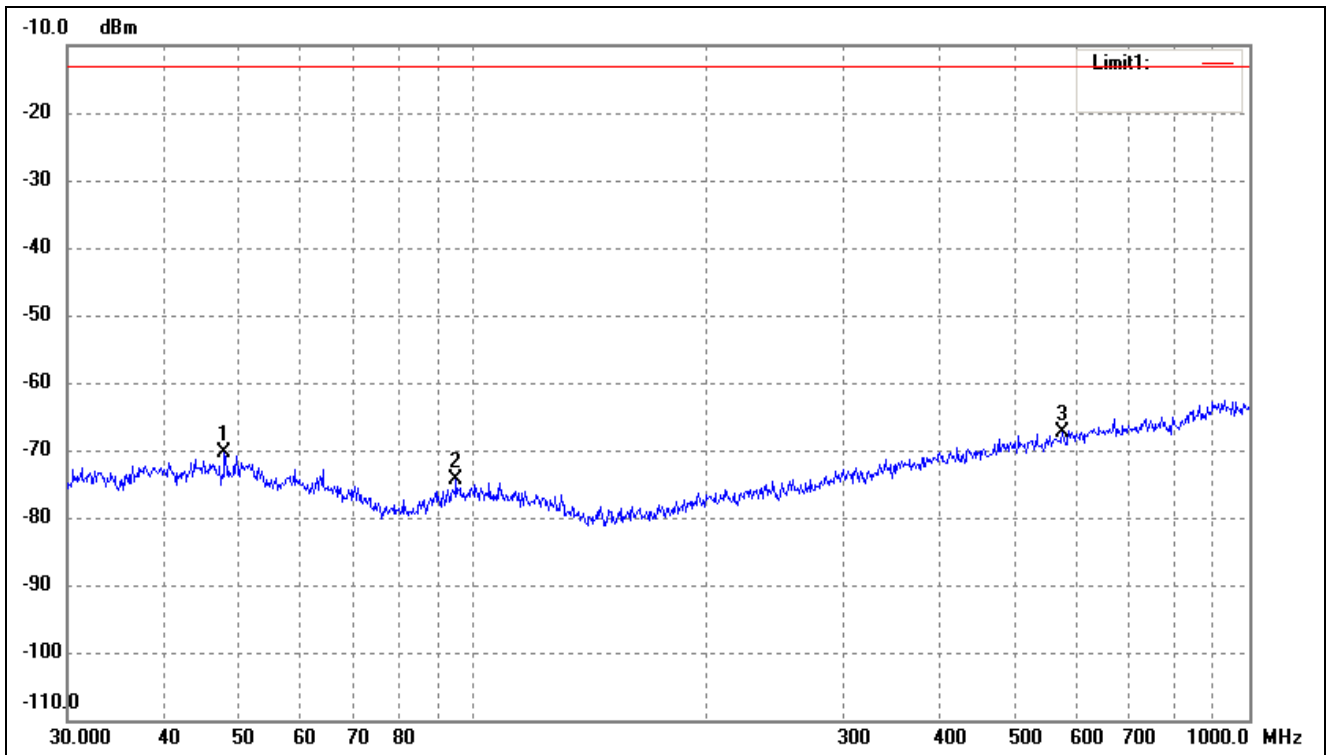


No.	Frequency (MHz)	Reading (dBm)	Correct Factor(dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	47.8260	-70.61	0.16	-70.45	-13.00	-57.45	ERP
2	95.0930	-72.07	-2.33	-74.40	-13.00	-61.40	ERP
3	574.6258	-76.59	9.22	-67.37	-13.00	-54.37	ERP

Test Channel	WCDMA Band V	Polarity:	Vertical
--------------	--------------	-----------	----------

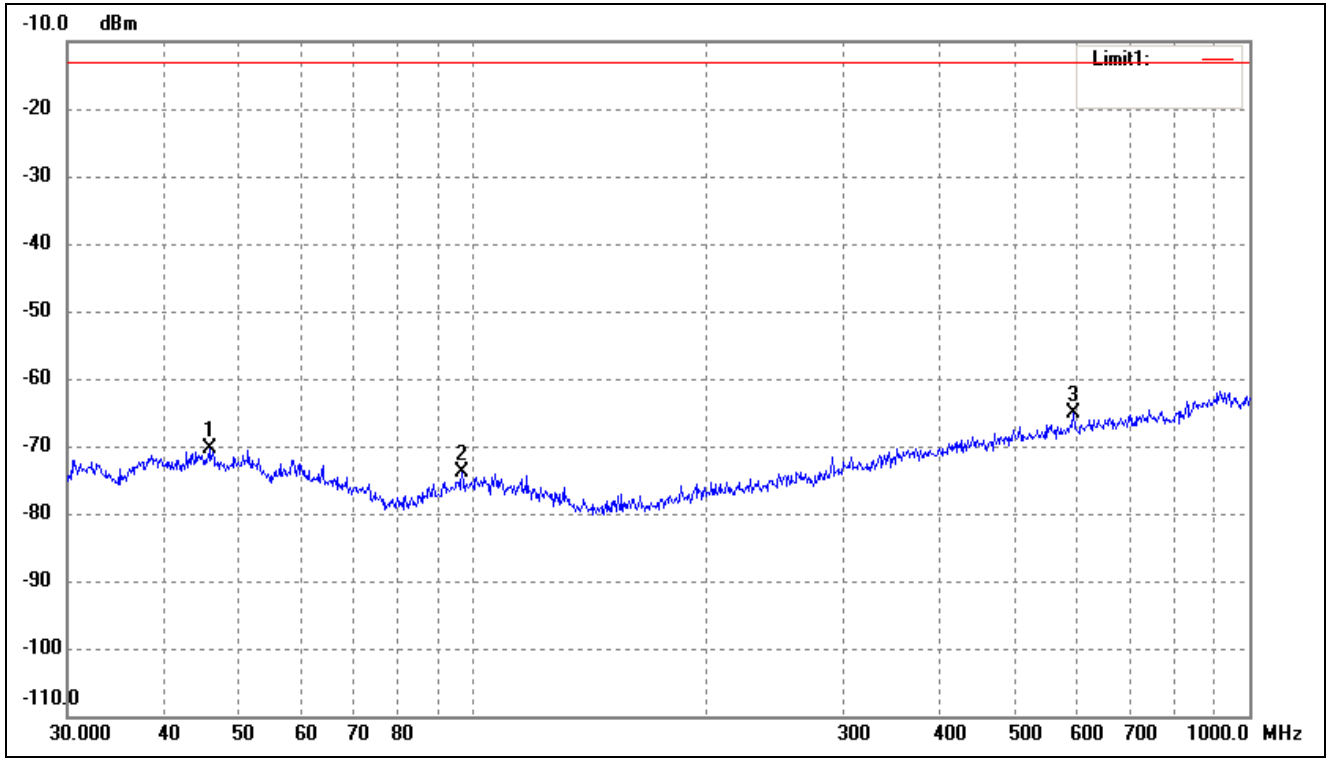


No.	Frequency (MHz)	Reading (dBm)	Correct (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	45.8553	-70.37	0.05	-70.32	-13.00	-57.32	ERP
2	96.7749	-71.78	-2.06	-73.84	-13.00	-60.84	ERP
3	593.0497	-74.90	9.69	-65.21	-13.00	-52.21	ERP

Test Channel	WCDMA Band IV	Polarity:	Horizontal
--------------	---------------	-----------	------------

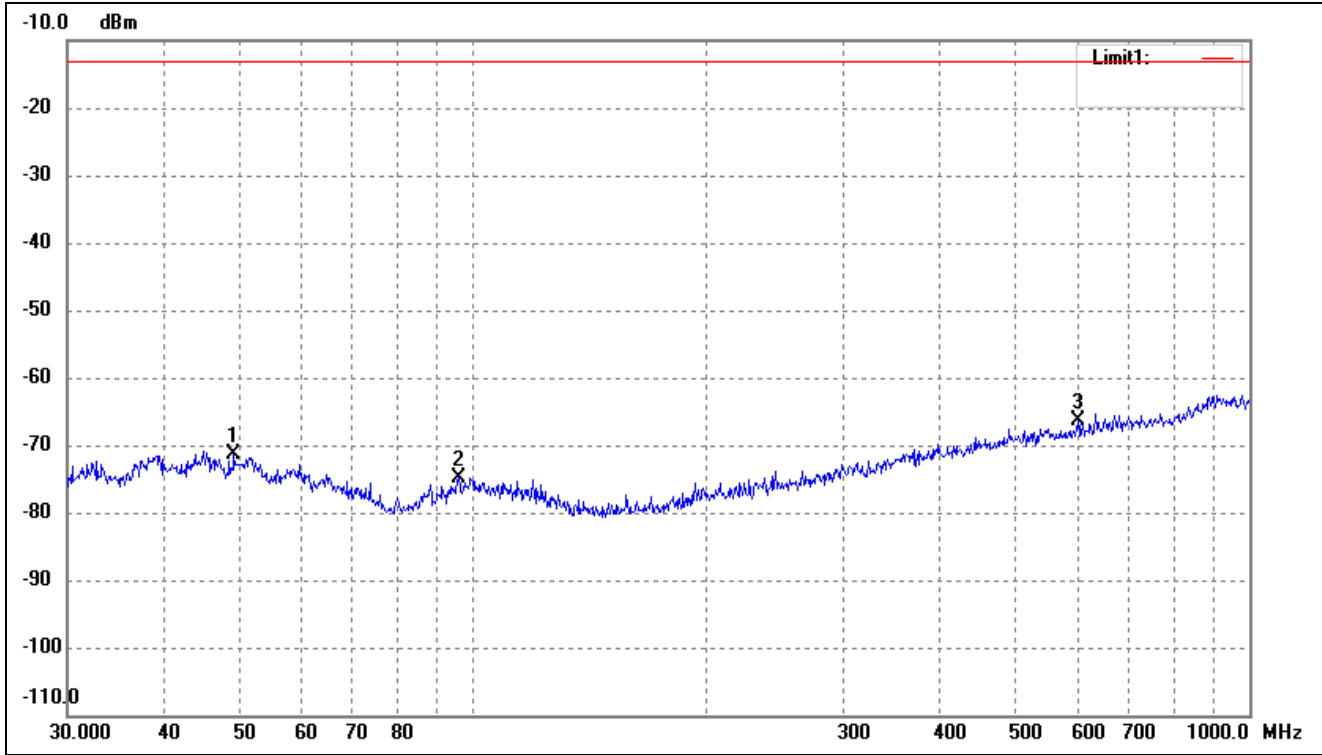

No.	Frequency (MHz)	Reading (dBm)	Correct (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	49.1866	-71.70	0.22	-71.48	-13.00	-58.48	ERP
2	95.7622	-72.52	-2.23	-74.75	-13.00	-61.75	ERP
3	601.4265	-76.15	9.86	-66.29	-13.00	-53.29	ERP


Test Channel	WCDMA Band IV	Polarity:	Vertical
--------------	---------------	-----------	----------

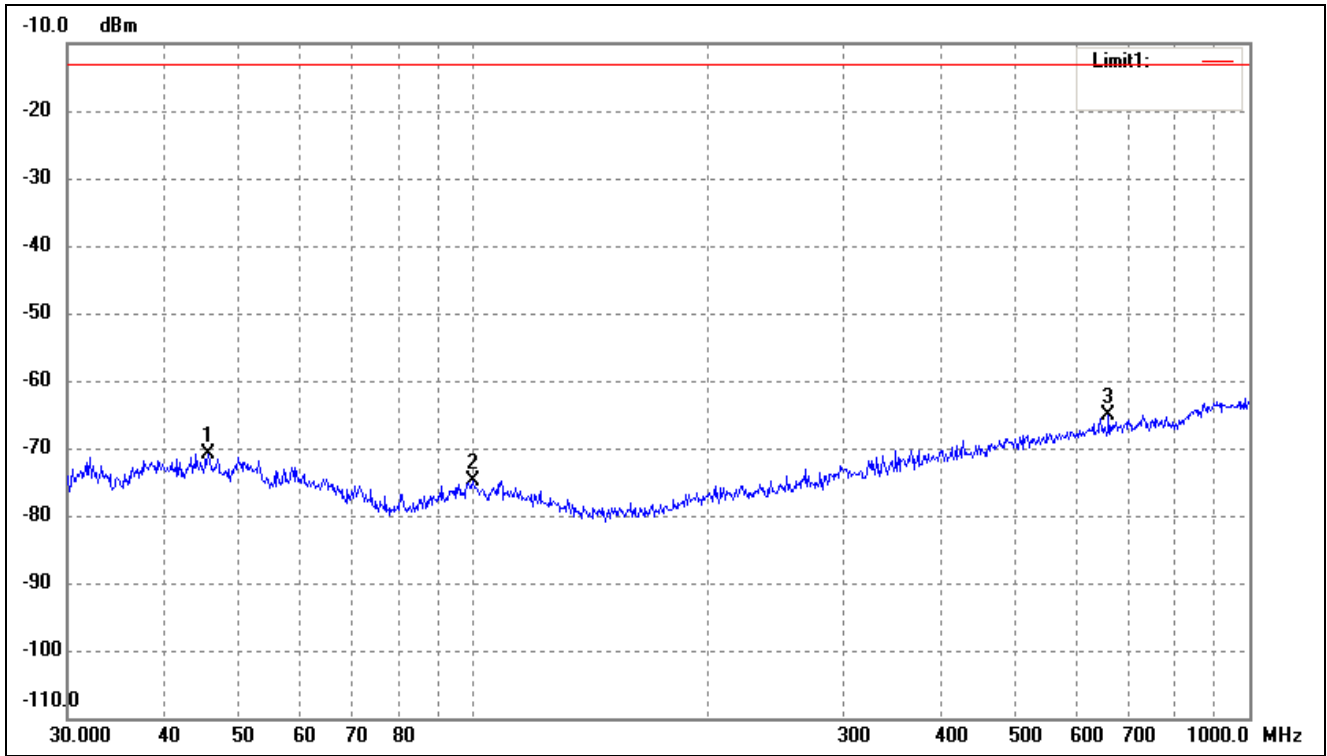

No.	Frequency (MHz)	Reading (dBm)	Correct Factor(dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	45.5348	-70.81	0.03	-70.78	-13.00	-57.78	ERP
2	99.8777	-73.25	-1.54	-74.79	-13.00	-61.79	ERP
3	658.8362	-74.83	9.61	-65.22	-13.00	-52.22	ERP


Note: Margin= (Reading+ Correct)- Limit

Test Channel	WCDMA Band II	Polarity:	Horizontal
--------------	---------------	-----------	------------

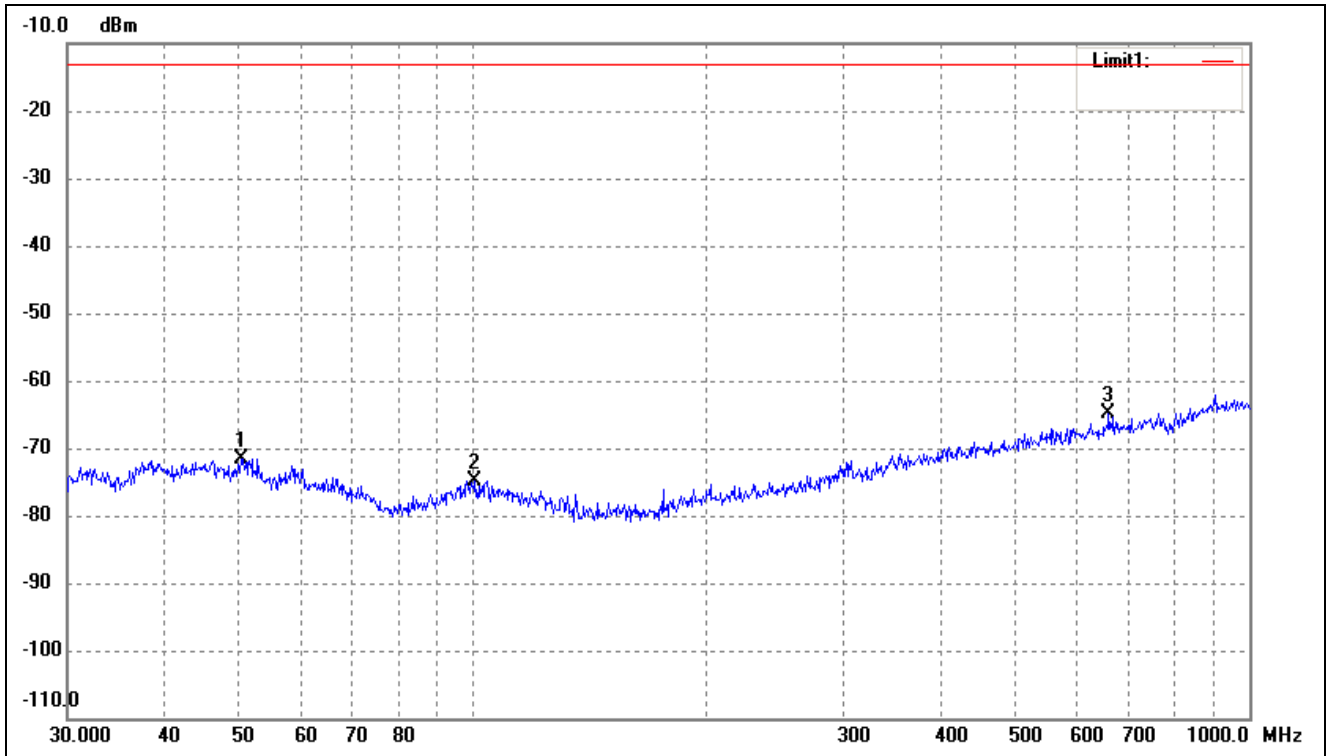

No.	Frequency (MHz)	Reading (dBm)	Correct (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	50.2325	-71.76	0.20	-71.56	-13.00	-58.56	ERP
2	100.5806	-73.22	-1.53	-74.75	-13.00	-61.75	ERP
3	658.8362	-74.56	9.61	-64.95	-13.00	-51.95	ERP

Test Channel	WCDMA Band II	Polarity:	Vertical
--------------	---------------	-----------	----------

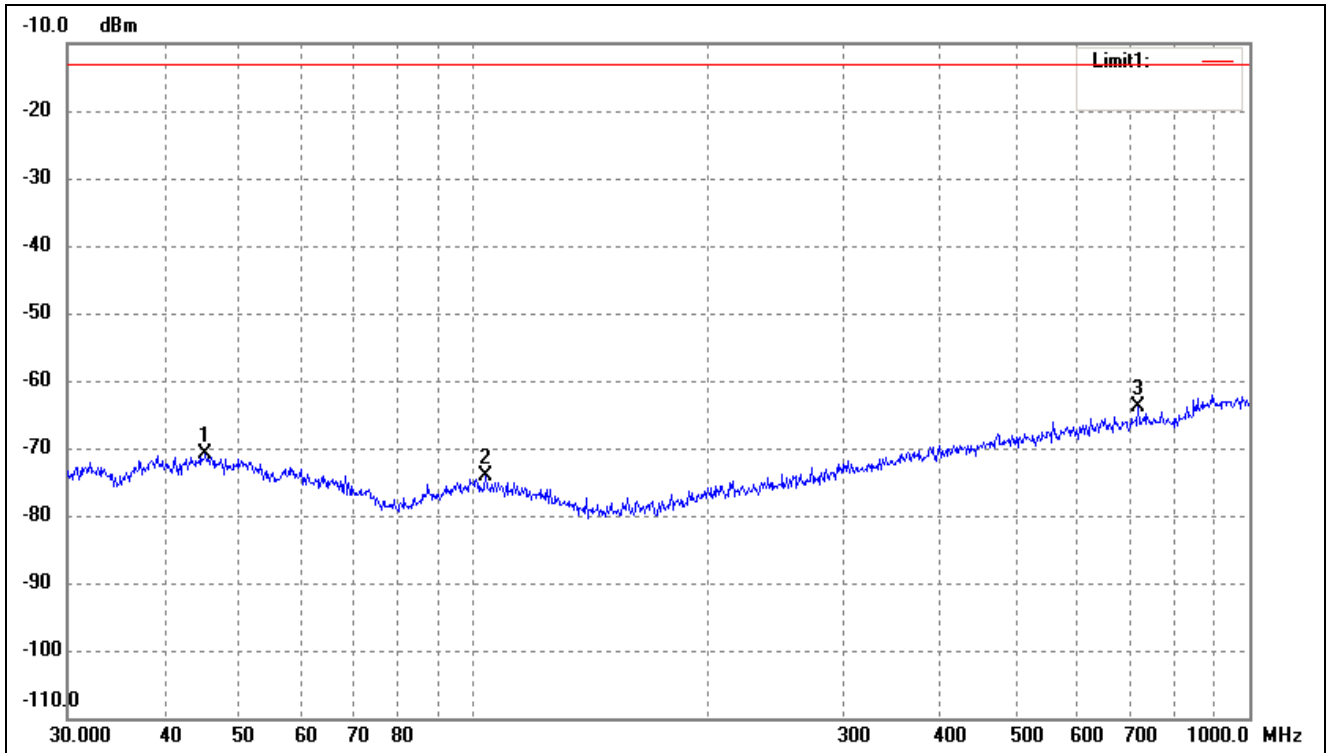

No.	Frequency (MHz)	Reading (dBm)	Correct Factor (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	45.2166	-70.77	0.01	-70.76	-13.00	-57.76	ERP
2	103.8055	-72.51	-1.52	-74.03	-13.00	-61.03	ERP
3	719.1995	-74.56	10.62	-63.94	-13.00	-50.94	ERP

Note: Margin= (Reading+ Correct)- Limit

- Spurious Emissions Above 1GHz
- **MDT760**
- For Cellular Band\_GSM850 Mode

Frequency	Reading	Correct	Result	Limit	Margin	Polar
(MHz)	(dBm)	dB	(dBm)	(dBm)	(dB)	H/V
Low Channel (824.2MHz)						
1648.4	-36.32	4.94	-31.38	-13	-18.38	H
2472.6	-41.1	8.46	-32.64	-13	-19.64	H
1648.4	-37.53	4.94	-32.59	-13	-19.59	V
2472.6	-44.43	8.46	-35.97	-13	-22.97	V
Middle Channel (836.6MHz)						
1673.2	-35.98	5.11	-30.87	-13	-17.87	H
2509.8	-44.21	8.54	-35.67	-13	-22.67	H
1673.2	-37.18	5.11	-32.07	-13	-19.07	V
2509.8	-44.83	8.54	-36.29	-13	-23.29	V
High Channel (848.8MHz)						
1697.6	-36.11	5.25	-30.86	-13	-17.86	H
2546.4	-43.62	8.57	-35.05	-13	-22.05	H
1697.6	-36.32	5.25	-31.07	-13	-18.07	V
2546.4	-41.94	8.57	-33.37	-13	-20.37	V

- For PCS Band\_GSM1900 Mode

Frequency	Reading	Correct	Result	Limit	Margin	Polar
(MHz)	(dBm)	dB	(dBm)	(dBm)	(dB)	H/V
Low Channel (1850.2MHz)						
3700.4	-42.82	10.54	-32.28	-13	-19.28	H
5550.6	-46.51	13.37	-33.14	-13	-20.14	H
3700.4	-39.96	10.54	-29.42	-13	-16.42	V
5550.6	-48.29	13.37	-34.92	-13	-21.92	V
Middle Channel (1880MHz)						
3760.0	-41.82	10.64	-31.18	-13	-18.18	H
5640.0	-46.18	13.54	-32.64	-13	-19.64	H
3760.0	-40.62	10.64	-29.98	-13	-16.98	V
5640.0	-46.18	13.54	-32.64	-13	-19.64	V
High Channel (1909.8MHz)						
3819.6	-42.13	10.74	-31.39	-13	-18.39	H
5729.4	-48.38	13.71	-34.67	-13	-21.67	H
3819.6	-41.11	10.74	-30.37	-13	-17.37	V
5729.4	-47.64	13.71	-33.93	-13	-20.93	V



## ➤ For WCDMA Band V Mode

Frequency	Reading	Correct	Result	Limit	Margin	Polar
(MHz)	(dBm)	dB	(dBm)	(dBm)	(dB)	H/V
Low Channel (826.4MHz)						
1652.8	-34.75	4.94	-29.81	-13	-16.81	H
2479.2	-42.09	8.46	-33.63	-13	-20.63	H
1652.8	-34.79	4.94	-29.85	-13	-16.85	V
2479.2	-42.71	8.46	-34.25	-13	-21.25	V
Middle Channel (836.6MHz)						
1672.8	-34.55	5.11	-29.44	-13	-16.44	H
2509.2	-44.27	8.54	-35.73	-13	-22.73	H
1672.8	-34.42	5.11	-29.31	-13	-16.31	V
2509.2	-41.97	8.54	-33.43	-13	-20.43	V
High Channel (846.6MHz)						
1693.2	-34.79	5.25	-29.54	-13	-16.54	H
2539.8	-44.41	8.57	-35.84	-13	-22.84	H
1693.2	-36.56	5.25	-31.31	-13	-18.31	V
2539.8	-44.13	8.57	-35.56	-13	-22.56	V

## ➤ For WCDMA Band IV Mode

Frequency	Reading	Correct	Result	Limit	Margin	Polar
(MHz)	(dBm)	dB	(dBm)	(dBm)	(dB)	H/V
Low Channel (1712.4MHz)						
3424.8	-37.06	8.65	-28.41	-13	-15.41	H
5137.2	-43.19	12.03	-31.16	-13	-18.16	H
3424.8	-37.93	8.65	-29.28	-13	-16.28	V
5137.2	-44.61	12.03	-32.58	-13	-19.58	V
Middle Channel (1732.4MHz)						
3466.8	-34.47	8.91	-25.56	-13	-12.56	H
5200.2	-43.52	12.29	-31.23	-13	-18.23	H
3466.8	-37.03	8.91	-28.12	-13	-15.12	V
5200.2	-41.57	12.29	-29.28	-13	-16.28	V
High Channel (1752.6MHz)						
3505.2	-35.95	9.11	-26.84	-13	-13.84	H
5257.8	-43.71	12.56	-31.15	-13	-18.15	H
3505.2	-36.42	9.11	-27.31	-13	-14.31	V
5257.8	-41.63	12.56	-29.07	-13	-16.07	V

## ➤ For WCDMA Band II Mode

Frequency	Reading	Correct	Result	Limit	Margin	Polar
(MHz)	(dBm)	dB	(dBm)	(dBm)	(dB)	H/V
Low Channel (1852.4MHz)						
3704.8	-39.09	10.54	-28.55	-13	-15.55	H
5557.2	-48.73	13.37	-35.36	-13	-22.36	H
3704.8	-42.28	10.54	-31.74	-13	-18.74	V
5557.2	-47.52	13.37	-34.15	-13	-21.15	V
Middle Channel (1880MHz)						
3760.8	-41.6	10.64	-30.96	-13	-17.96	H
5640.0	-49.86	13.54	-36.32	-13	-23.32	H
3760.8	-41.3	10.64	-30.66	-13	-17.66	V
5640.0	-47.86	13.54	-34.32	-13	-21.32	V
High Channel (1907.6MHz)						
3815.2	-40.89	10.74	-30.15	-13	-17.15	H
5722.8	-46.41	13.71	-32.7	-13	-19.7	H
3815.2	-39.48	10.74	-28.74	-13	-15.74	V
5722.8	-49.42	13.71	-35.71	-13	-22.71	H

Note: Result=Reading+ Correct, Margin= Result- Limit

➤ **MDT860**

## ➤ For Cellular Band\_GSM850 Mode

Frequency	Reading	Correct	Result	Limit	Margin	Polar
(MHz)	(dBm)	dB	(dBm)	(dBm)	(dB)	H/V
Low Channel (824.2MHz)						
1648.4	-37.27	4.94	-32.33	-13	-19.33	H
2472.6	-42.77	8.46	-34.31	-13	-21.31	H
1648.4	-36.89	4.94	-31.95	-13	-18.95	V
2472.6	-43.28	8.46	-34.82	-13	-21.82	V
Middle Channel (836.6MHz)						
1673.2	-34.14	5.11	-29.03	-13	-16.03	H
2509.8	-44.32	8.54	-35.78	-13	-22.78	H
1673.2	-37.1	5.11	-31.99	-13	-18.99	V
2509.8	-44.23	8.54	-35.69	-13	-22.69	V
High Channel (848.8MHz)						
1697.6	-36.42	5.25	-31.17	-13	-18.17	H
2546.4	-41.38	8.57	-32.81	-13	-19.81	H
1697.6	-37.51	5.25	-32.26	-13	-19.26	V
2546.4	-41.63	8.57	-33.06	-13	-20.06	V

## ➤ For PCS Band\_GSM1900 Mode

Frequency	Reading	Correct	Result	Limit	Margin	Polar
(MHz)	(dBm)	dB	(dBm)	(dBm)	(dB)	H/V
Low Channel (1850.2MHz)						
3700.4	-41.9	10.54	-31.36	-13	-18.36	H
5550.6	-48.96	13.37	-35.59	-13	-22.59	H
3700.4	-40.64	10.54	-30.10	-13	-17.10	V
5550.6	-48.12	13.37	-34.75	-13	-21.75	V
Middle Channel (1880MHz)						
3760.0	-39.48	10.64	-28.84	-13	-15.84	H
5640.0	-47.71	13.54	-34.17	-13	-21.17	H
3760.0	-41.38	10.64	-30.74	-13	-17.74	V
5640.0	-48.52	13.54	-34.98	-13	-21.98	V
High Channel (1909.8MHz)						
3819.6	-41.65	10.74	-30.91	-13	-17.91	H
5729.4	-49.25	13.71	-35.54	-13	-22.54	H
3819.6	-40.69	10.74	-29.95	-13	-16.95	V
5729.4	-48.75	13.71	-35.04	-13	-22.04	V

## ➤ For WCDMA Band V Mode

Frequency	Reading	Correct	Result	Limit	Margin	Polar
(MHz)	(dBm)	dB	(dBm)	(dBm)	(dB)	H/V
Low Channel (826.4MHz)						
1652.8	-34.7	4.94	-29.76	-13	-16.76	H
2479.2	-42.25	8.46	-33.79	-13	-20.79	H
1652.8	-35.58	4.94	-30.64	-13	-17.64	V
2479.2	-41.2	8.46	-32.74	-13	-19.74	V
Middle Channel (836.6MHz)						
1672.8	-35.18	5.11	-30.07	-13	-17.07	H
2509.2	-42.01	8.54	-33.47	-13	-20.47	H
1672.8	-34.41	5.11	-29.3	-13	-16.3	V
2509.2	-44.2	8.54	-35.66	-13	-22.66	V
High Channel (846.6MHz)						
1693.2	-35.56	5.25	-30.31	-13	-17.31	H
2539.8	-41.75	8.57	-33.18	-13	-20.18	H
1693.2	-35.43	5.25	-30.18	-13	-17.18	V
2539.8	-43.99	8.57	-35.42	-13	-22.42	V

## ➤ For WCDMA Band IV Mode

Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Polar H/V
Low Channel (1712.4MHz)						
3424.8	-34.69	8.65	-26.04	-13	-13.04	H
5137.2	-44.18	12.03	-32.15	-13	-19.15	H
3424.8	-34.97	8.65	-26.32	-13	-13.32	V
5137.2	-44.09	12.03	-32.06	-13	-19.06	V
Middle Channel (1732.4MHz)						
3466.8	-35.07	8.91	-26.16	-13	-13.16	H
5200.2	-43.1	12.29	-30.81	-13	-17.81	H
3466.8	-37.12	8.91	-28.21	-13	-15.21	V
5200.2	-41.52	12.29	-29.23	-13	-16.23	V
High Channel (1752.6MHz)						
3505.2	-36.19	9.11	-27.08	-13	-14.08	H
5257.8	-41.62	12.56	-29.06	-13	-16.06	H
3505.2	-36.86	9.11	-27.75	-13	-14.75	V
5257.8	-41.74	12.56	-29.18	-13	-16.18	V

## ➤ For WCDMA Band II Mode

Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Polar H/V
Low Channel (1852.4MHz)						
3704.8	-42.96	10.54	-32.42	-13	-19.42	H
5557.2	-48.42	13.37	-35.05	-13	-22.05	H
3704.8	-41.47	10.54	-30.93	-13	-17.93	V
5557.2	-47.2	13.37	-33.83	-13	-20.83	V
Middle Channel (1880MHz)						
3760.8	-39.75	10.64	-29.11	-13	-16.11	H
5640.0	-49.5	13.54	-35.96	-13	-22.96	H
3760.8	-40.55	10.64	-29.91	-13	-16.91	V
5640.0	-49.16	13.54	-35.62	-13	-22.62	V
High Channel (1907.6MHz)						
3815.2	-42.22	10.74	-31.48	-13	-18.48	H
5722.8	-46.94	13.71	-33.23	-13	-20.23	H
3815.2	-41.8	10.74	-31.06	-13	-18.06	V
5722.8	-47.46	13.71	-33.75	-13	-20.75	H

Note: Result=Reading+ Correct, Margin= Result- Limit

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

## **8. Frequency Stability**

---

### **8.1 Standard Applicable**

According to §22.355, §24.235, §27.54 the limit is 2.5ppm.

### **8.2 Test Procedure**

According to §2.1055, the following test procedure was performed.

The Frequency Stability is measured directly with a Frequency Domain Analyzer. Frequency Deviation in ppm is calculated from the measured peak to peak value.

The Carrier Frequency Stability over Power Supply Voltage and over Temperature is measured with a Frequency Domain Analyzer in histogram mode.

### **8.3 Summary of Test Results/Plots**

**Please refer to Appendix E**

## 9. Modulation characteristics

---


### 9.1 Standard Applicable

According to §2.1047, measurements required: Modulation characteristics is given below:

- (a) Voice modulated communication equipment. A curve or equivalent data showing the frequency response of the audio modulating circuit over a range of 100 to 5000 Hz shall be submitted. For equipment required to have an audio low-pass filter, a curve showing the frequency response of the filter, or of all circuitry installed between the modulation limiter and the modulated stage shall be submitted.
- (b) Equipment which employs modulation limiting. A curve or family of curves showing the percentage of modulation versus the modulation input voltage shall be supplied. The information submitted shall be sufficient to show modulation limiting capability throughout the range of modulating frequencies and input modulating signal levels employed.
- (c) Single sideband and independent sideband radiotelephone transmitters which employ a device or circuit to limit peak envelope power. A curve showing the peak envelope power output versus the modulation input voltage shall be supplied. The modulating signals shall be the same in frequency as specified in paragraph (c) of §2.1049 for the occupied bandwidth tests.
- (d) Other types of equipment. A curve or equivalent data which shows that the equipment will meet the modulation requirements of the rules under which the equipment is to be licensed.

### 9.2 Test Procedure

According to ANSI C63.26-2015 section 5.3.2, the following test setup was performed.

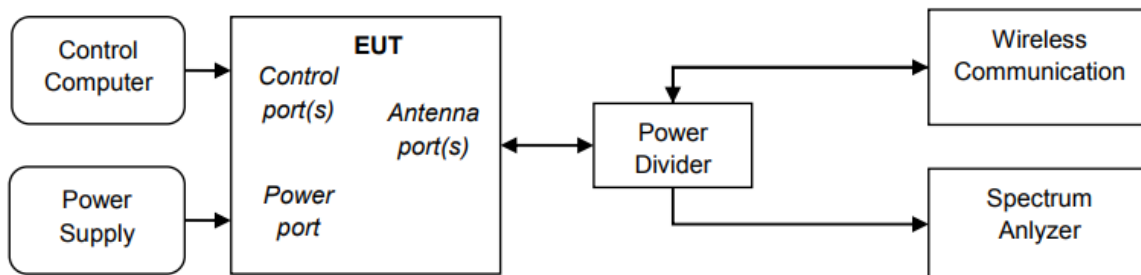

### 9.3 Summary of Test Results/Plots

Please refer to Appendix F

## APPENDIX SUMMARY

---

Project No.	WTX20X11088233W	Test Engineer	combat
Start date	2020/12/08	Finish date	2020/12/08
Temperature	25°C	Humidity	53%
RF specifications	GSM/WCDMA		

APPENDIX	Description of Test Item	Result
A	RF Output Power	Compliant
B	Peak-to-average Ratio (PAR) of Transmitter	Compliant
C	Emission Bandwidth	Compliant
D	Out of Band Emissions at Antenna Terminal	Compliant
E	Frequency Stability	Compliant
F	Modulation characteristics	Compliant

**APPENDIX A****Conducted Average power**

Conducted Average power (dBm)						
Band	GSM850			PCS1900		
Channel	128	190	251	512	661	810
Frequency(MHz)	824.20	836.60	848.80	1850.20	1880.00	1909.80
GSM	33.19	33.09	33.04	30.62	30.27	30.07
GPRS(1Slot)	33.18	33.10	33.03	30.65	30.30	30.10
EGPRS(1Slot)	27.07	27.16	27.16	26.07	26.54	26.67

Conducted Average power (dBm)						
Band	WCDMA Band V			WCDMA Band II		
Channel	4132	4183	4233	9262	9400	9538
Frequency(MHz)	826.4	836.6	846.6	1852.4	1880.0	1907.6
RMC 12.2k	23.58	23.50	23.45	23.40	23.75	23.81
HSDPA Subtest-1	22.52	22.49	22.42	22.44	22.80	22.84
HSDPA Subtest-2	22.51	22.46	22.41	22.41	22.78	22.81
HSDPA Subtest-3	22.50	22.47	22.40	22.42	22.79	22.82
HSDPA Subtest-4	22.49	22.48	22.41	22.43	22.78	22.82
HSUPA Subtest-1	22.57	22.45	22.35	22.43	22.50	22.82
HSUPA Subtest-2	22.56	22.43	22.33	22.41	22.49	22.79
HSUPA Subtest-3	22.57	22.43	22.31	22.42	22.48	22.81
HSUPA Subtest-4	22.56	22.42	22.32	22.42	22.49	22.8
HSUPA Subtest-5	22.57	22.41	22.34	22.41	22.48	22.81



Conducted Average power (dBm)						
Band	WCDMA Band IV					
Channel	1312	1412	1513			
Frequency(MHz)	1712.4	1733.4	1752.6			
RMC 12.2k	23.41	23.32	23.19			
HSDPA Subtest-1	22.38	22.34	22.21			
HSDPA Subtest-2	22.36	22.31	22.19			
HSDPA Subtest-3	22.37	22.32	22.18			
HSDPA Subtest-4	22.36	22.32	22.20			
HSUPA Subtest-1	22.37	22.29	22.22			
HSUPA Subtest-2	22.35	22.26	22.18			
HSUPA Subtest-3	22.34	22.27	22.19			
HSUPA Subtest-4	22.34	22.28	22.2			
HSUPA Subtest-5	22.34	22.27	22.19			

## APPENDIX B

---

### Peak-to-average Ratio (PAR) of Transmitter

PCS1900				
Test Mode	Channel	Frequency (MHz)	PAR (dB)	Limit (dB)
GSM	661	1850.2	5.35	13
GPRS(1 Slot)	661	1850.2	4.98	13
EDGE(1 Slot)	661	1850.2	4.82	13

WCDMA Band IV				
Test Mode	Channel	Frequency (MHz)	PAR (dB)	Limit (dB)
WCDMA	1312	1712.4	5.03	13
	1412	1733.4	4.87	13
	1513	1752.6	5.13	13

WCDMA Band II				
Test Mode	Channel	Frequency (MHz)	PAR (dB)	Limit (dB)
WCDMA	9262	1852.4	5.36	13
	9400	1880.0	5.17	13
	9538	1907.6	5.28	13




Note: Only the worst case was selected to record.




**APPENDIX C**

EUT Mode	Channel	Frequency (MHz)	99% Occupy bandwidth (kHz)	-26dB bandwidth (kHz)
GSM 850 (GMSK)	128	824.20	241.3410	315.274
	190	836.60	249.6705	313.941
	251	848.80	246.8075	322.520
GPRS850 (GMSK,1Slot)	128	824.20	242.2074	319.542
	190	836.60	247.2581	317.492
	251	848.80	246.6636	319.982
EGPRS850 (8PSK,1Slot)	128	824.20	249.6963	314.449
	190	836.60	246.4726	317.531
	251	848.80	250.7942	322.688
PCS1900 (GMSK)	512	1850.20	247.4651	309.663
	661	1880.00	243.2529	315.712
	810	1909.80	244.1587	314.437
GPRS1900 (GMSK,1Slot)	512	1850.20	242.2603	315.201
	661	1880.00	243.6030	314.446
	810	1909.80	250.0363	316.050
EGPRS1900 (8PSK,1Slot)	512	1850.20	251.8446	313.773
	661	1880.00	252.8461	332.391
	810	1909.80	257.2721	322.321

EUT Mode	Channel	Frequency (MHz)	99% Occupy bandwidth (kHz)	-26dB bandwidth (kHz)
WCDMA Band V	4132	826.40	4.1611	4.724
	4183	836.60	4.1753	4.741
	4233	846.60	4.1754	4.709
HSDPA	4132	826.40	4.1744	4.710
	4183	836.60	4.1875	4.716
	4233	846.60	4.1824	4.884
HSUPA	4132	826.40	4.1869	4.972
	4183	836.60	4.1894	4.867
	4233	846.60	4.1837	4.698
WCDMA Band II	9262	1852.40	4.1781	4.712
	9400	1880.00	4.1871	4.666
	9538	1907.60	4.1870	4.690
HSDPA	9262	1852.40	4.1977	4.753
	9400	1880.00	4.1918	4.731
	9538	1907.60	4.1863	4.739
HSUPA	9262	1852.40	4.1870	4.720
	9400	1880.00	4.1817	4.700
	9538	1907.60	4.1989	4.728
WCDMA Band IV	1312	1712.4	4.1851	4.729
	1412	1733.4	4.1812	4.714
	1513	1752.6	4.1742	4.714
HSDPA	1312	1712.4	4.1824	4.721
	1412	1733.4	4.1781	4.699
	1513	1752.6	4.1663	4.685
HSUPA	1312	1712.4	4.1997	5.001
	1412	1733.4	4.2001	4.730
	1513	1752.6	4.1871	4.677




<p>GSM 850 (GMSK)-Low</p>	
<p>GSM 850 (GMSK)-Middle</p>	
<p>GSM 850 (GMSK)-High</p>	

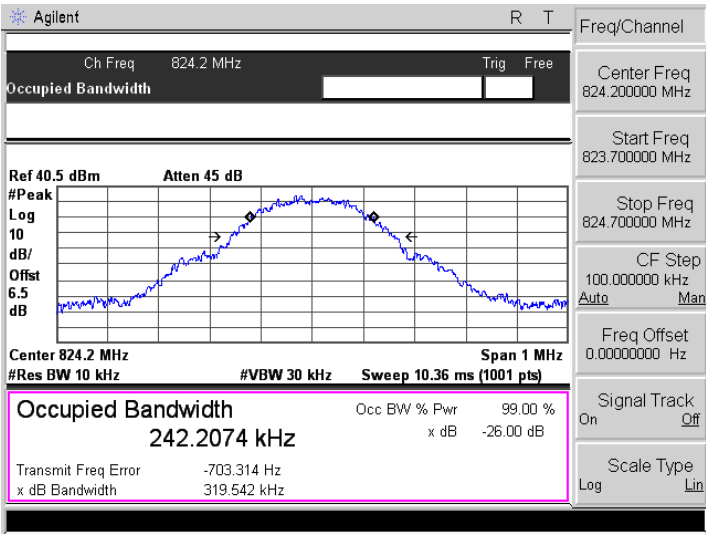
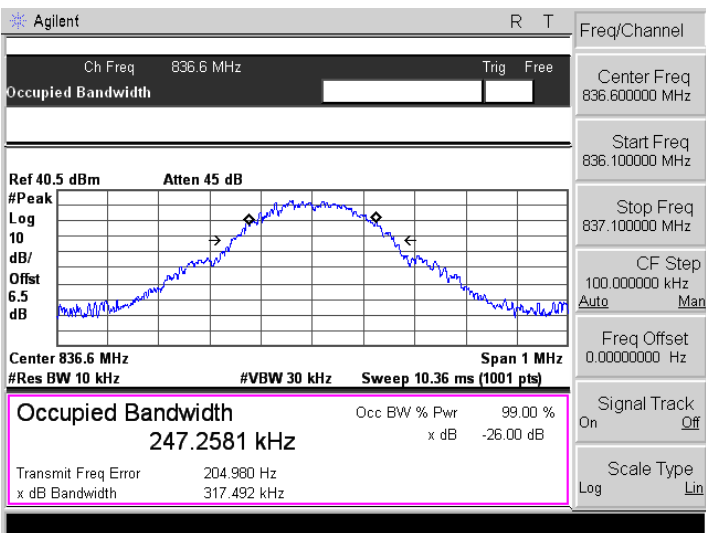
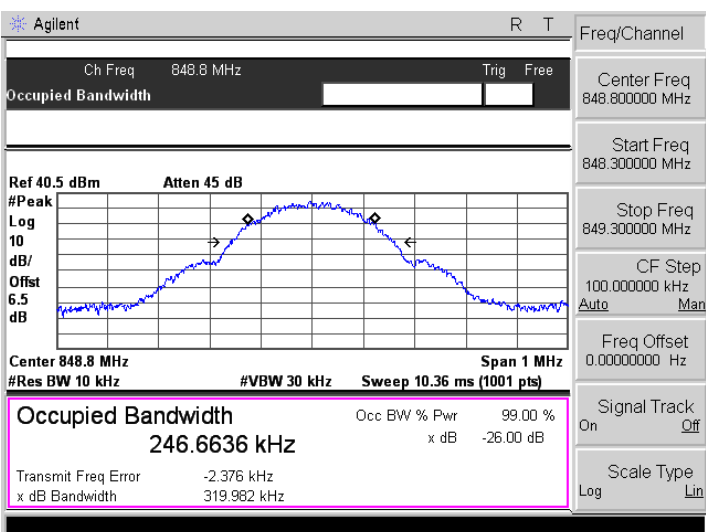
<p>GPRS850 (GMSK,1Slot)-Low</p>	 <p>Agilent R T</p> <p>Ch Freq 824.2 MHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 40.5 dBm Atten 45 dB</p> <p>#Peak Log 10 dB/Offset 6.5 dB</p> <p>Center 824.2 MHz Span 1 MHz</p> <p>#Res BW 10 kHz #VBW 30 kHz Sweep 10.36 ms (1001 pts)</p> <p><b>Occupied Bandwidth</b> 242.2074 kHz Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error -703.314 Hz</p> <p>x dB Bandwidth 319.542 kHz</p> <p>Freq/Channel</p> <p>Center Freq 824.200000 MHz</p> <p>Start Freq 823.700000 MHz</p> <p>Stop Freq 824.700000 MHz</p> <p>CF Step 100.000000 kHz Auto Man</p> <p>Freq Offset 0.0000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>GPRS850 (GMSK,1Slot)-Middle</p>	 <p>Agilent R T</p> <p>Ch Freq 836.6 MHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 40.5 dBm Atten 45 dB</p> <p>#Peak Log 10 dB/Offset 6.5 dB</p> <p>Center 836.6 MHz Span 1 MHz</p> <p>#Res BW 10 kHz #VBW 30 kHz Sweep 10.36 ms (1001 pts)</p> <p><b>Occupied Bandwidth</b> 247.2581 kHz Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error 204.980 Hz</p> <p>x dB Bandwidth 317.492 kHz</p> <p>Freq/Channel</p> <p>Center Freq 836.600000 MHz</p> <p>Start Freq 836.100000 MHz</p> <p>Stop Freq 837.100000 MHz</p> <p>CF Step 100.000000 kHz Auto Man</p> <p>Freq Offset 0.0000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>GPRS850 (GMSK,1Slot)-High</p>	 <p>Agilent R T</p> <p>Ch Freq 848.8 MHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 40.5 dBm Atten 45 dB</p> <p>#Peak Log 10 dB/Offset 6.5 dB</p> <p>Center 848.8 MHz Span 1 MHz</p> <p>#Res BW 10 kHz #VBW 30 kHz Sweep 10.36 ms (1001 pts)</p> <p><b>Occupied Bandwidth</b> 246.6636 kHz Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error -2.376 kHz</p> <p>x dB Bandwidth 319.982 kHz</p> <p>Freq/Channel</p> <p>Center Freq 848.800000 MHz</p> <p>Start Freq 848.300000 MHz</p> <p>Stop Freq 849.300000 MHz</p> <p>CF Step 100.000000 kHz Auto Man</p> <p>Freq Offset 0.0000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
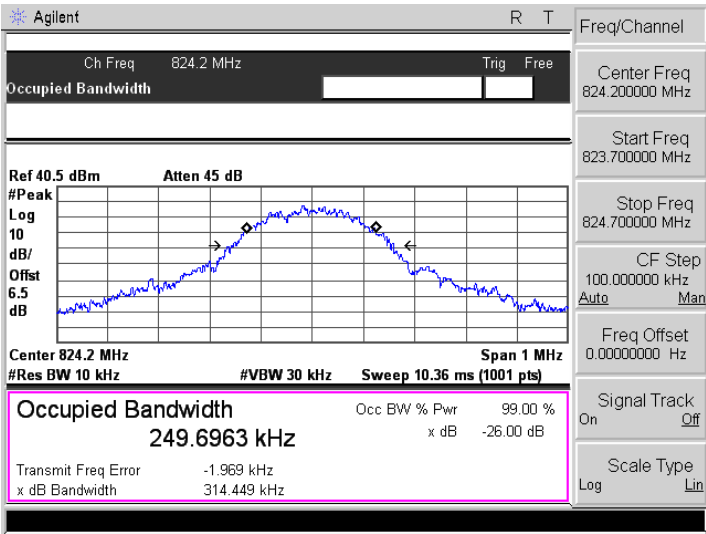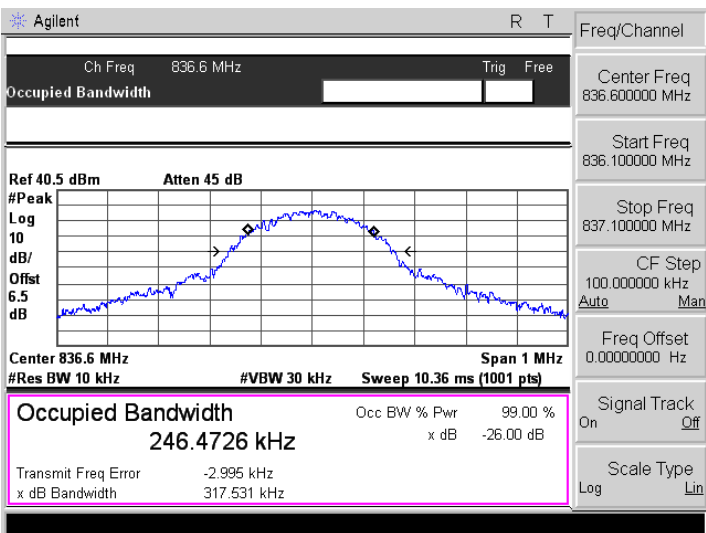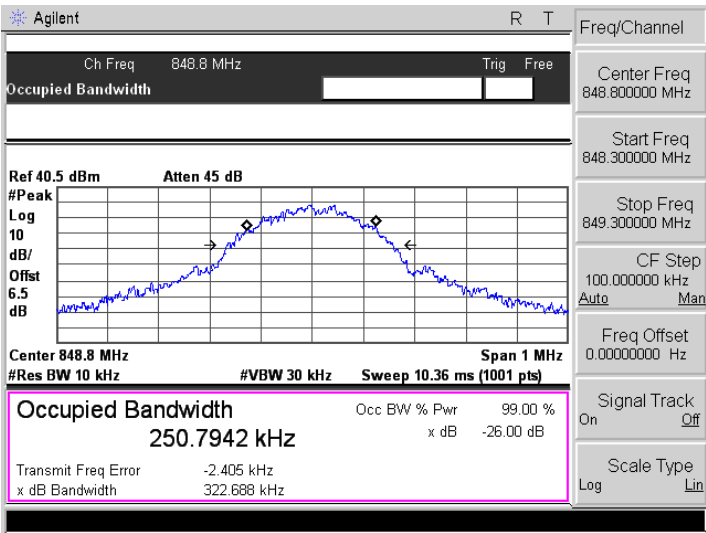
<p>EGPRS850 (8PSK,1Slot)-Low</p>	
<p>EGPRS850 (8PSK,1Slot)-Middle</p>	
<p>EGPRS850 (8PSK,1Slot)-High</p>	

<p>PCS1900 (GMSK)-Low</p>	<p>Agilent R T</p> <p>Ch Freq 1.8502 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 40.5 dBm Atten 45 dB</p> <p>#Peak Log 10 dB/Offset 6.5 dB</p> <p>Center 1.85 GHz Span 1 MHz #Res BW 10 kHz #VBW 30 kHz Sweep 10.36 ms (1001 pts)</p> <p><b>Occupied Bandwidth</b> 242.2603 kHz Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error -611.542 Hz x dB Bandwidth 315.201 kHz</p> <p>Freq/Channel</p> <p>Center Freq 1.8502000 GHz</p> <p>Start Freq 1.8497000 GHz</p> <p>Stop Freq 1.8507000 GHz</p> <p>CF Step 100.000000 kHz Auto Man</p> <p>Freq Offset 0.0000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>PCS1900 (GMSK)-Middle</p>	<p>Agilent R T</p> <p>Ch Freq 1.88 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 40.5 dBm Atten 45 dB</p> <p>#Peak Log 10 dB/Offset 6.5 dB</p> <p>Center 1.88 GHz Span 1 MHz #Res BW 10 kHz #VBW 30 kHz Sweep 10.36 ms (1001 pts)</p> <p><b>Occupied Bandwidth</b> 243.6030 kHz Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error -1.540 kHz x dB Bandwidth 314.446 kHz</p> <p>Freq/Channel</p> <p>Center Freq 1.8800000 GHz</p> <p>Start Freq 1.8795000 GHz</p> <p>Stop Freq 1.8805000 GHz</p> <p>CF Step 100.000000 kHz Auto Man</p> <p>Freq Offset 0.0000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>PCS1900 (GMSK)-High</p>	<p>Agilent R T</p> <p>Ch Freq 1.9098 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 40.5 dBm Atten 45 dB</p> <p>#Peak Log 10 dB/Offset 6.5 dB</p> <p>Center 1.91 GHz Span 1 MHz #Res BW 10 kHz #VBW 30 kHz Sweep 10.36 ms (1001 pts)</p> <p><b>Occupied Bandwidth</b> 250.0363 kHz Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error -1.264 kHz x dB Bandwidth 316.050 kHz</p> <p>Freq/Channel</p> <p>Center Freq 1.9098000 GHz</p> <p>Start Freq 1.9093000 GHz</p> <p>Stop Freq 1.9103000 GHz</p> <p>CF Step 100.000000 kHz Auto Man</p> <p>Freq Offset 0.0000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>

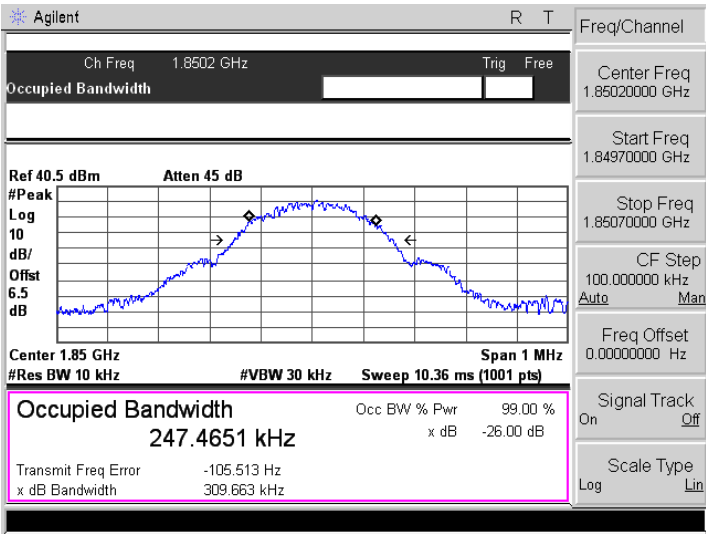
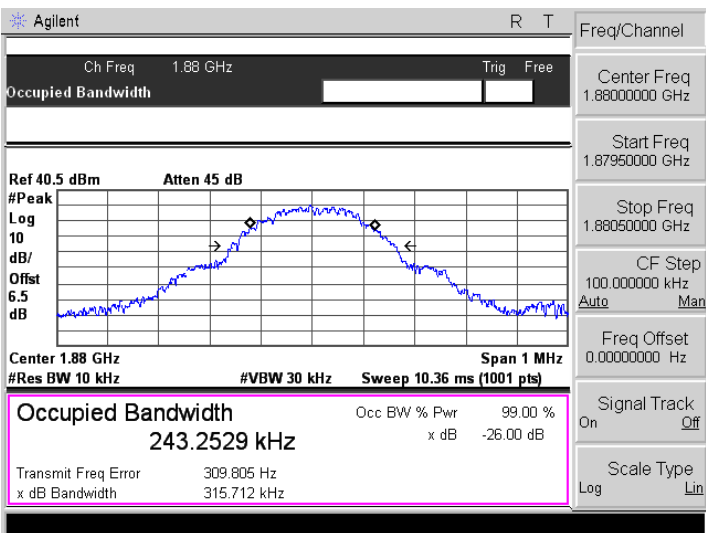
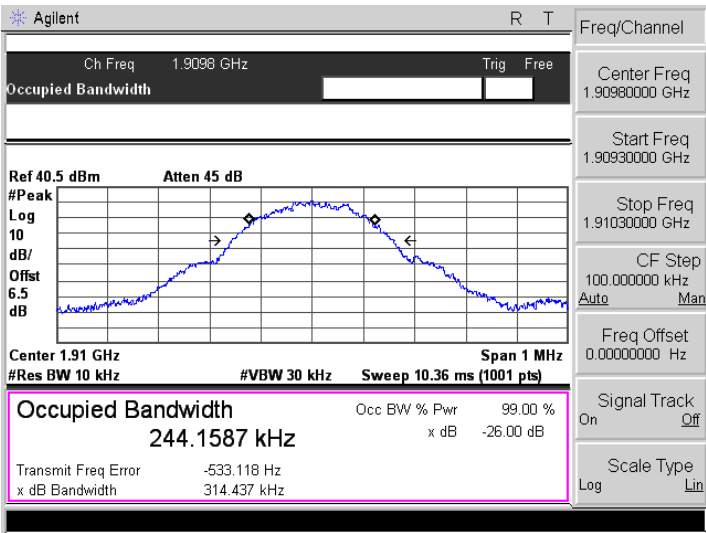


<p>GPRS1900 (GMSK,1Slot)-Low</p>	
<p>GPRS1900 (GMSK,1Slot)-Middle</p>	
<p>GPRS1900 (GMSK,1Slot)-High</p>	
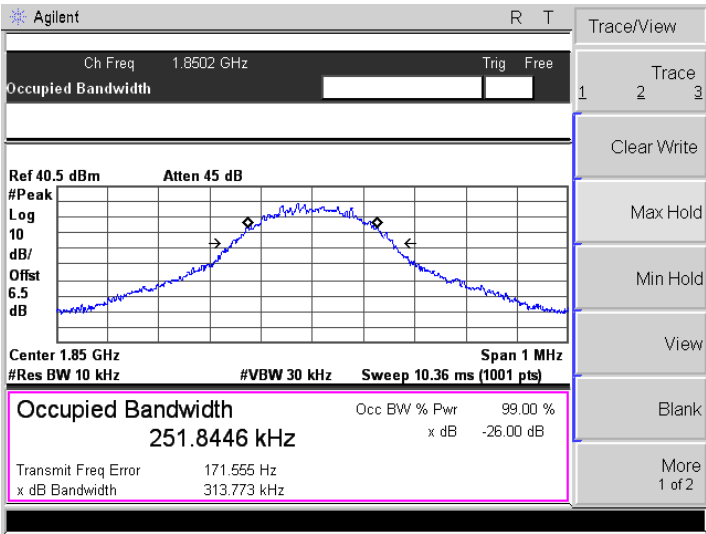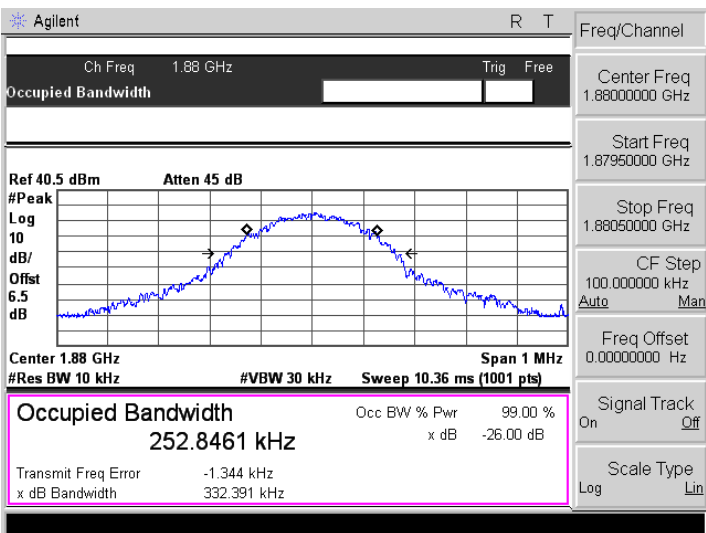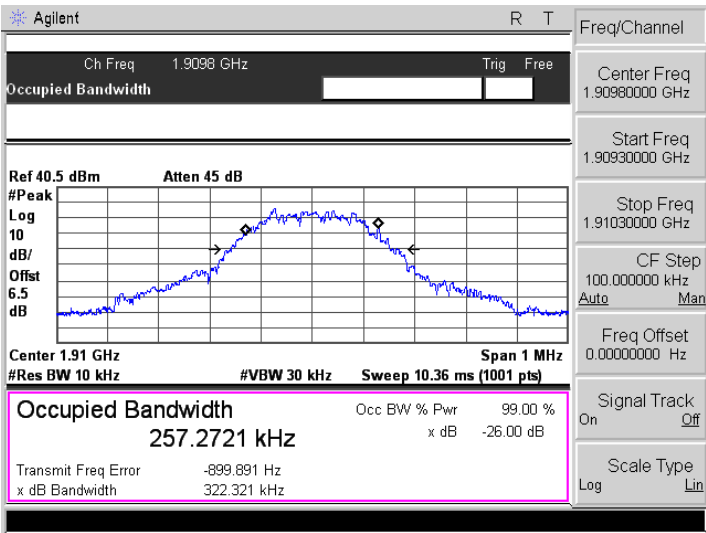
<p>EGPRS1900 (8PSK,1Slot)-Low</p>	 <p>Agilent R T</p> <p>Ch Freq 1.8502 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 40.5 dBm Atten 45 dB</p> <p>#Peak Log 10 dB/ Offst 6.5 dB</p> <p>Center 1.85 GHz Span 1 MHz</p> <p>#Res BW 10 kHz #VBW 30 kHz Sweep 10.36 ms (1001 pts)</p> <p><b>Occupied Bandwidth</b> 251.8446 kHz Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error 171.555 Hz</p> <p>x dB Bandwidth 313.773 kHz</p> <p>Trace/View</p> <p>Trace 1 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>
<p>EGPRS1900 (8PSK,1Slot)-Middle</p>	 <p>Agilent R T</p> <p>Ch Freq 1.88 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 40.5 dBm Atten 45 dB</p> <p>#Peak Log 10 dB/ Offst 6.5 dB</p> <p>Center 1.88 GHz Span 1 MHz</p> <p>#Res BW 10 kHz #VBW 30 kHz Sweep 10.36 ms (1001 pts)</p> <p><b>Occupied Bandwidth</b> 252.8461 kHz Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error -1.344 kHz</p> <p>x dB Bandwidth 332.391 kHz</p> <p>Freq/Channel</p> <p>Center Freq 1.88000000 GHz</p> <p>Start Freq 1.87950000 GHz</p> <p>Stop Freq 1.88050000 GHz</p> <p>CF Step 100.000000 kHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>EGPRS1900 (8PSK,1Slot)-High</p>	 <p>Agilent R T</p> <p>Ch Freq 1.9098 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 40.5 dBm Atten 45 dB</p> <p>#Peak Log 10 dB/ Offst 6.5 dB</p> <p>Center 1.91 GHz Span 1 MHz</p> <p>#Res BW 10 kHz #VBW 30 kHz Sweep 10.36 ms (1001 pts)</p> <p><b>Occupied Bandwidth</b> 257.2721 kHz Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error -899.891 Hz</p> <p>x dB Bandwidth 322.321 kHz</p> <p>Freq/Channel</p> <p>Center Freq 1.90980000 GHz</p> <p>Start Freq 1.90930000 GHz</p> <p>Stop Freq 1.91030000 GHz</p> <p>CF Step 100.000000 kHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>




<p>WCDMA Band V-Low</p>	<p>Agilent R T</p> <p>Ch Freq 826.4 MHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 30 dBm Atten 35 dB</p> <p>#Peak Log 10 dB/ Offst 6.5 dB</p> <p>Center 826.4 MHz Span 10 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth</b> Occ BW % Pwr 99.00 % <b>4.1611 MHz</b> x dB -26.00 dB</p> <p>Transmit Freq Error -1.301 kHz x dB Bandwidth 4.724 MHz</p> <p>Freq/Channel Center Freq 826.400000 MHz Start Freq 821.400000 MHz Stop Freq 831.400000 MHz CF Step 1.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin</p>
<p>WCDMA Band V-Middle</p>	<p>Agilent R T</p> <p>Ch Freq 836.6 MHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 30 dBm Atten 35 dB</p> <p>#Peak Log 10 dB/ Offst 6.5 dB</p> <p>Center 836.6 MHz Span 10 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth</b> Occ BW % Pwr 99.00 % <b>4.1753 MHz</b> x dB -26.00 dB</p> <p>Transmit Freq Error -6.315 kHz x dB Bandwidth 4.741 MHz</p> <p>Freq/Channel Center Freq 836.600000 MHz Start Freq 831.600000 MHz Stop Freq 841.600000 MHz CF Step 1.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin</p>
<p>WCDMA Band V-High</p>	<p>Agilent R T</p> <p>Ch Freq 846.6 MHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 30 dBm Atten 35 dB</p> <p>#Peak Log 10 dB/ Offst 6.5 dB</p> <p>Center 846.6 MHz Span 10 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth</b> Occ BW % Pwr 99.00 % <b>4.1754 MHz</b> x dB -26.00 dB</p> <p>Transmit Freq Error -24.905 kHz x dB Bandwidth 4.709 MHz</p> <p>Freq/Channel Center Freq 846.600000 MHz Start Freq 841.600000 MHz Stop Freq 851.600000 MHz CF Step 1.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin</p>

<p>HSDPA-Low</p>	<p>Agilent R T</p> <p>Ch Freq 826.4 MHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 30 dBm Atten 35 dB</p> <p>#Peak Log 10 dB/ Offst 6.5 dB</p> <p>Center 826.4 MHz Span 10 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth 4.1744 MHz</b></p> <p>Occ BW % Pwr 99.00% x dB -26.00 dB</p> <p>Transmit Freq Error -3.895 kHz x dB Bandwidth 4.710 MHz</p> <p>Freq/Channel</p> <p>Center Freq 826.400000 MHz</p> <p>Start Freq 821.400000 MHz</p> <p>Stop Freq 831.400000 MHz</p> <p>CF Step 1.0000000 MHz Auto Man</p> <p>Freq Offset 0.0000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>HSDPA-Middle</p>	<p>Agilent R T</p> <p>Ch Freq 836.6 MHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 30 dBm Atten 35 dB</p> <p>#Peak Log 10 dB/ Offst 6.5 dB</p> <p>Center 836.6 MHz Span 10 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth 4.1875 MHz</b></p> <p>Occ BW % Pwr 99.00% x dB -26.00 dB</p> <p>Transmit Freq Error -6.551 kHz x dB Bandwidth 4.716 MHz</p> <p>Freq/Channel</p> <p>Center Freq 836.600000 MHz</p> <p>Start Freq 831.600000 MHz</p> <p>Stop Freq 841.600000 MHz</p> <p>CF Step 1.0000000 MHz Auto Man</p> <p>Freq Offset 0.0000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>HSDPA-High</p>	<p>Agilent R T</p> <p>Ch Freq 846.6 MHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 30 dBm Atten 35 dB</p> <p>#Peak Log 10 dB/ Offst 6.5 dB</p> <p>Center 846.6 MHz Span 10 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth 4.1824 MHz</b></p> <p>Occ BW % Pwr 99.00% x dB -26.00 dB</p> <p>Transmit Freq Error -13.517 kHz x dB Bandwidth 4.884 MHz</p> <p>Trace/View</p> <p>Trace 1 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>
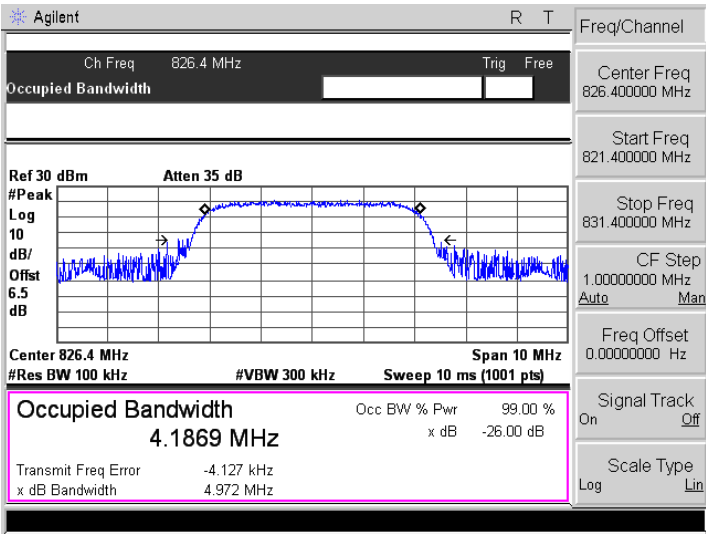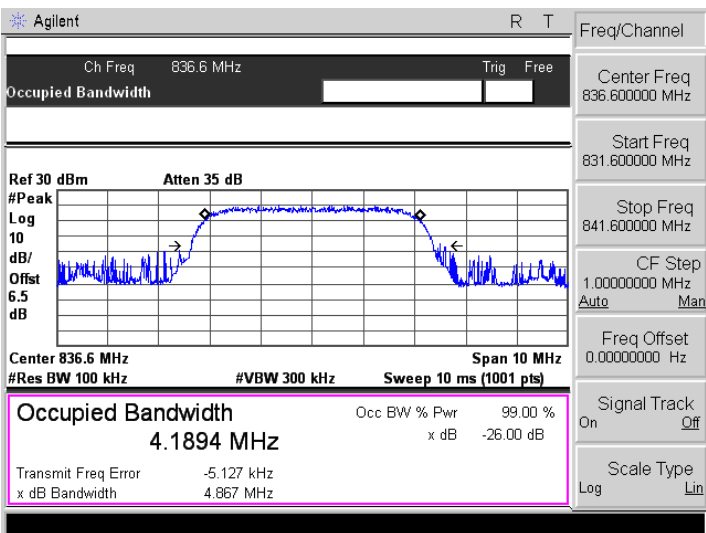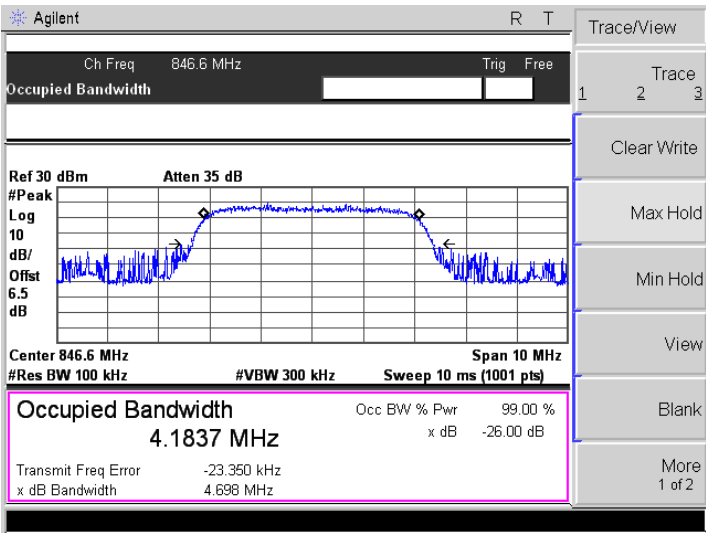
<p>HSUPA-Low</p>	
<p>HSUPA-Middle</p>	
<p>HSUPA-High</p>	

<p>WCDMA Band II-Low</p>	<p>Agilent R T</p> <p>Ch Freq 1.8524 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 30 dBm Atten 35 dB</p> <p>#Peak Log 10 dB/ Offst 6.5 dB</p> <p>Center 1.852 GHz Span 10 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth</b> Occ BW % Pwr 99.00 % 4.1781 MHz x dB -26.00 dB</p> <p>Transmit Freq Error -3.521 kHz x dB Bandwidth 4.712 MHz</p> <p>Freq/Channel</p> <p>Center Freq 1.85240000 GHz</p> <p>Start Freq 1.84740000 GHz</p> <p>Stop Freq 1.85740000 GHz</p> <p>CF Step 1.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>WCDMA Band II-Middle</p>	<p>Agilent R T</p> <p>Ch Freq 1.88 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 30 dBm Atten 35 dB</p> <p>#Peak Log 10 dB/ Offst 6.5 dB</p> <p>Center 1.88 GHz Span 10 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth</b> Occ BW % Pwr 99.00 % 4.1871 MHz x dB -26.00 dB</p> <p>Transmit Freq Error 559.246 Hz x dB Bandwidth 4.666 MHz</p> <p>Freq/Channel</p> <p>Center Freq 1.88000000 GHz</p> <p>Start Freq 1.87500000 GHz</p> <p>Stop Freq 1.88500000 GHz</p> <p>CF Step 1.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>WCDMA Band II-High</p>	<p>Agilent R T</p> <p>Ch Freq 1.9076 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 30 dBm Atten 35 dB</p> <p>#Peak Log 10 dB/ Offst 6.5 dB</p> <p>Center 1.908 GHz Span 10 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth</b> Occ BW % Pwr 99.00 % 4.1870 MHz x dB -26.00 dB</p> <p>Transmit Freq Error -10.693 kHz x dB Bandwidth 4.690 MHz</p> <p>Freq/Channel</p> <p>Center Freq 1.90760000 GHz</p> <p>Start Freq 1.90260000 GHz</p> <p>Stop Freq 1.91260000 GHz</p> <p>CF Step 1.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>

<p>HSDPA-Low</p>	<p>Agilent R T</p> <p>Ch Freq 1.8524 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 30 dBm Atten 35 dB</p> <p>#Peak Log 10 dB/ Offst 6.5 dB</p> <p>Center 1.852 GHz Span 10 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth</b> Occ BW % Pwr 99.00 % 4.1977 MHz x dB -26.00 dB</p> <p>Transmit Freq Error -4.027 kHz x dB Bandwidth 4.753 MHz</p> <p>Freq/Channel</p> <p>Center Freq 1.85240000 GHz</p> <p>Start Freq 1.84740000 GHz</p> <p>Stop Freq 1.85740000 GHz</p> <p>CF Step 1.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>HSDPA-Middle</p>	<p>Agilent R T</p> <p>Ch Freq 1.88 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 30 dBm Atten 35 dB</p> <p>#Peak Log 10 dB/ Offst 6.5 dB</p> <p>Center 1.88 GHz Span 10 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth</b> Occ BW % Pwr 99.00 % 4.1918 MHz x dB -26.00 dB</p> <p>Transmit Freq Error 2.548 kHz x dB Bandwidth 4.731 MHz</p> <p>Freq/Channel</p> <p>Center Freq 1.88000000 GHz</p> <p>Start Freq 1.87500000 GHz</p> <p>Stop Freq 1.88500000 GHz</p> <p>CF Step 1.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>HSDPA-High</p>	<p>Agilent R T</p> <p>Ch Freq 1.9076 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 30 dBm Atten 35 dB</p> <p>#Peak Log 10 dB/ Offst 6.5 dB</p> <p>Center 1.908 GHz Span 10 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth</b> Occ BW % Pwr 99.00 % 4.1863 MHz x dB -26.00 dB</p> <p>Transmit Freq Error -5.909 kHz x dB Bandwidth 4.739 MHz</p> <p>Freq/Channel</p> <p>Center Freq 1.90760000 GHz</p> <p>Start Freq 1.90260000 GHz</p> <p>Stop Freq 1.91260000 GHz</p> <p>CF Step 1.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
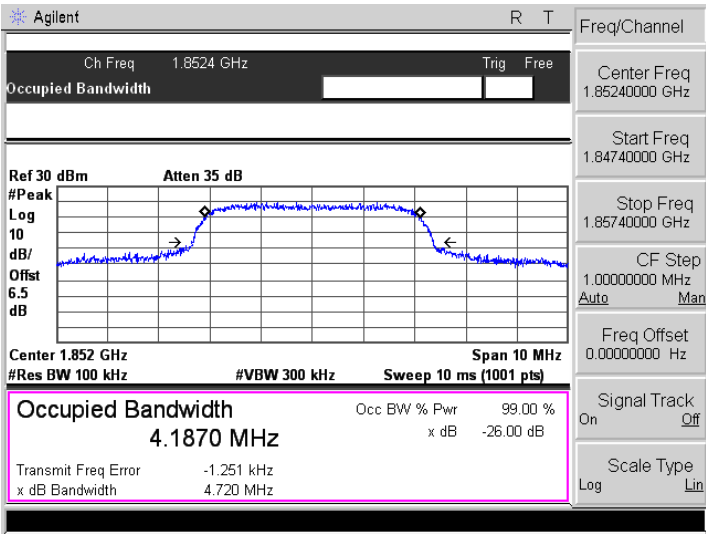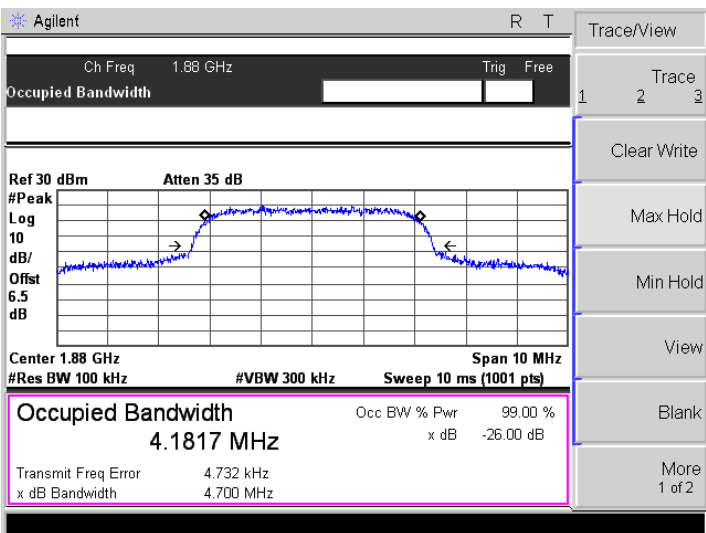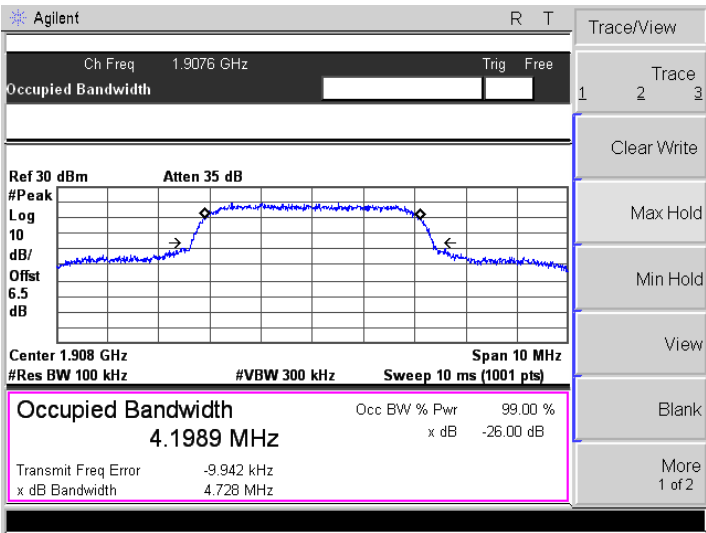
<p>HSUPA-Low</p>	
<p>HSUPA-Middle</p>	
<p>HSUPA-High</p>	




<p>WCDMA Band IV-Low</p>	<p>Agilent R T</p> <p>Ch Freq 1.7124 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 30 dBm Atten 35 dB</p> <p>#Peak Log 10 dB/ Offset 6.5 dB</p> <p>Center 1.712 GHz Span 10 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth</b> 4.1851 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error 8.030 kHz x dB Bandwidth 4.729 MHz</p> <p>Freq/Channel</p> <p>Center Freq 1.71240000 GHz</p> <p>Start Freq 1.70740000 GHz</p> <p>Stop Freq 1.71740000 GHz</p> <p>CF Step 1.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>WCDMA Band IV-Middle</p>	<p>Agilent R T</p> <p>Ch Freq 1.7324 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 30 dBm Atten 35 dB</p> <p>#Peak Log 10 dB/ Offset 6.5 dB</p> <p>Center 1.732 GHz Span 10 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth</b> 4.1812 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error -8.439 kHz x dB Bandwidth 4.714 MHz</p> <p>Freq/Channel</p> <p>Center Freq 1.73240000 GHz</p> <p>Start Freq 1.72740000 GHz</p> <p>Stop Freq 1.73740000 GHz</p> <p>CF Step 1.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>WCDMA Band IV-High</p>	<p>Agilent R T</p> <p>Ch Freq 1.7526 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 30 dBm Atten 35 dB</p> <p>#Peak Log 10 dB/ Offset 6.5 dB</p> <p>Center 1.753 GHz Span 10 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth</b> 4.1742 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error -27.091 kHz x dB Bandwidth 4.714 MHz</p> <p>Freq/Channel</p> <p>Center Freq 1.75260000 GHz</p> <p>Start Freq 1.74760000 GHz</p> <p>Stop Freq 1.75760000 GHz</p> <p>CF Step 1.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>

<p>HSDPA-Low</p>	
<p>HSDPA-Middle</p>	
<p>HSDPA-High</p>	



<p>HSUPA-Low</p>	
<p>HSUPA-Middle</p>	
<p>HSUPA-High</p>	

## APPENDIX D


### Out of Band Emissions at Antenna Terminal

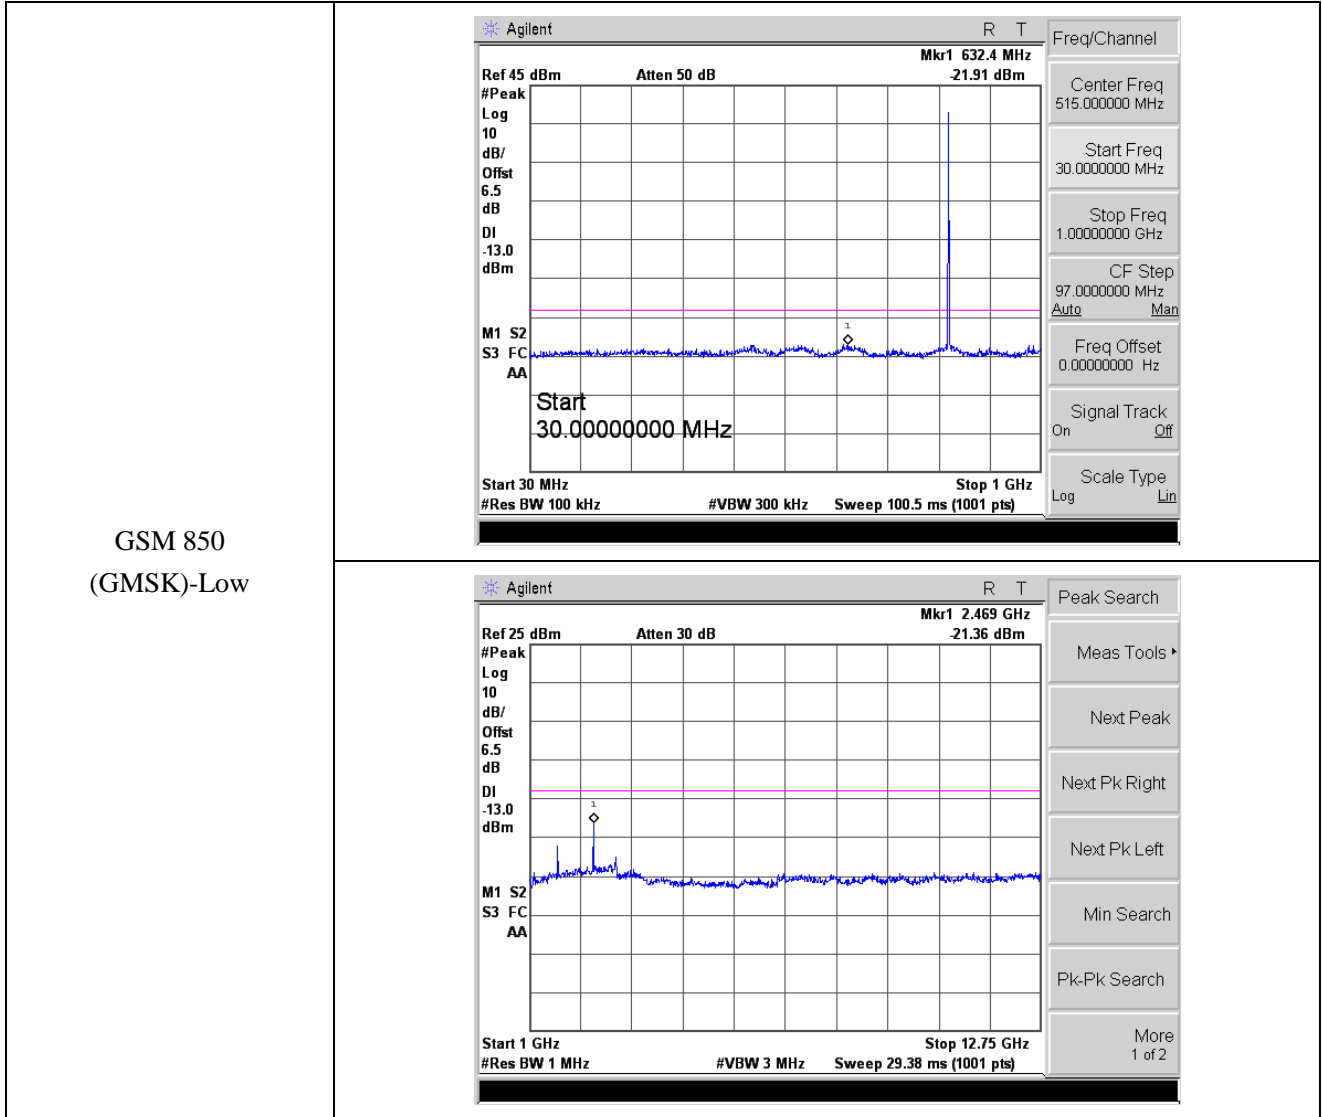


GSM 850  
(GMSK)-Middle

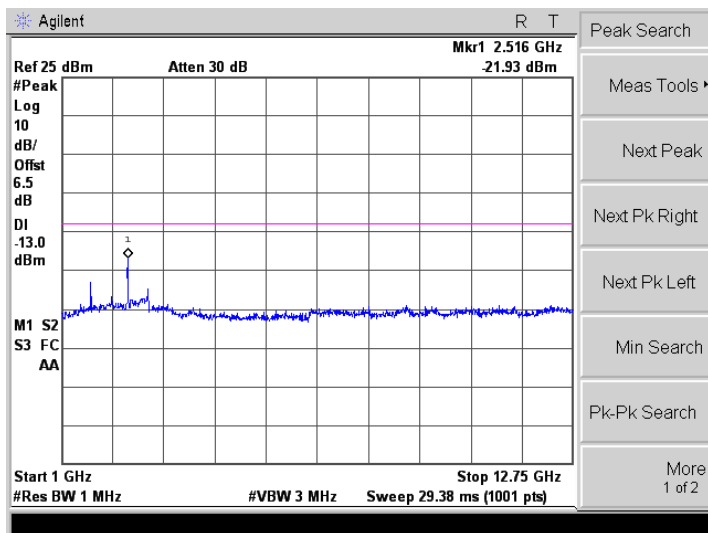
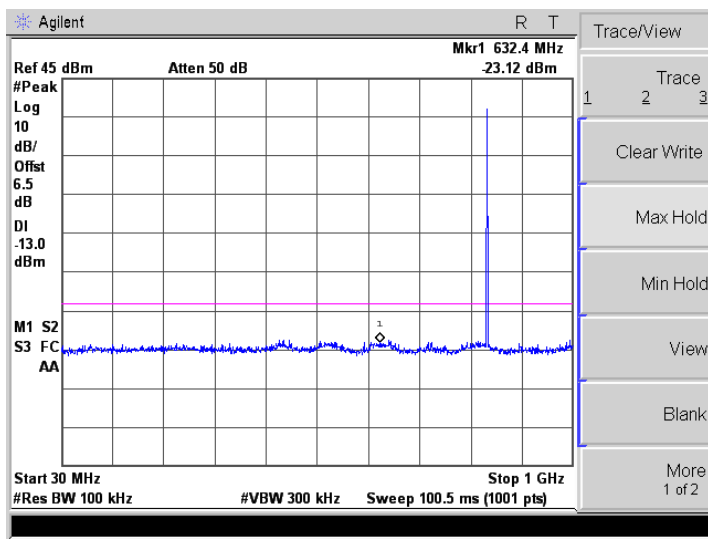


GSM 850  
(GMSK)-High

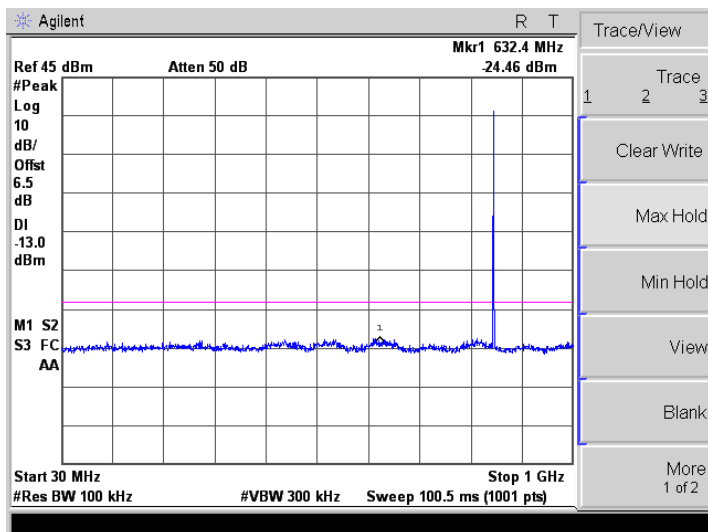


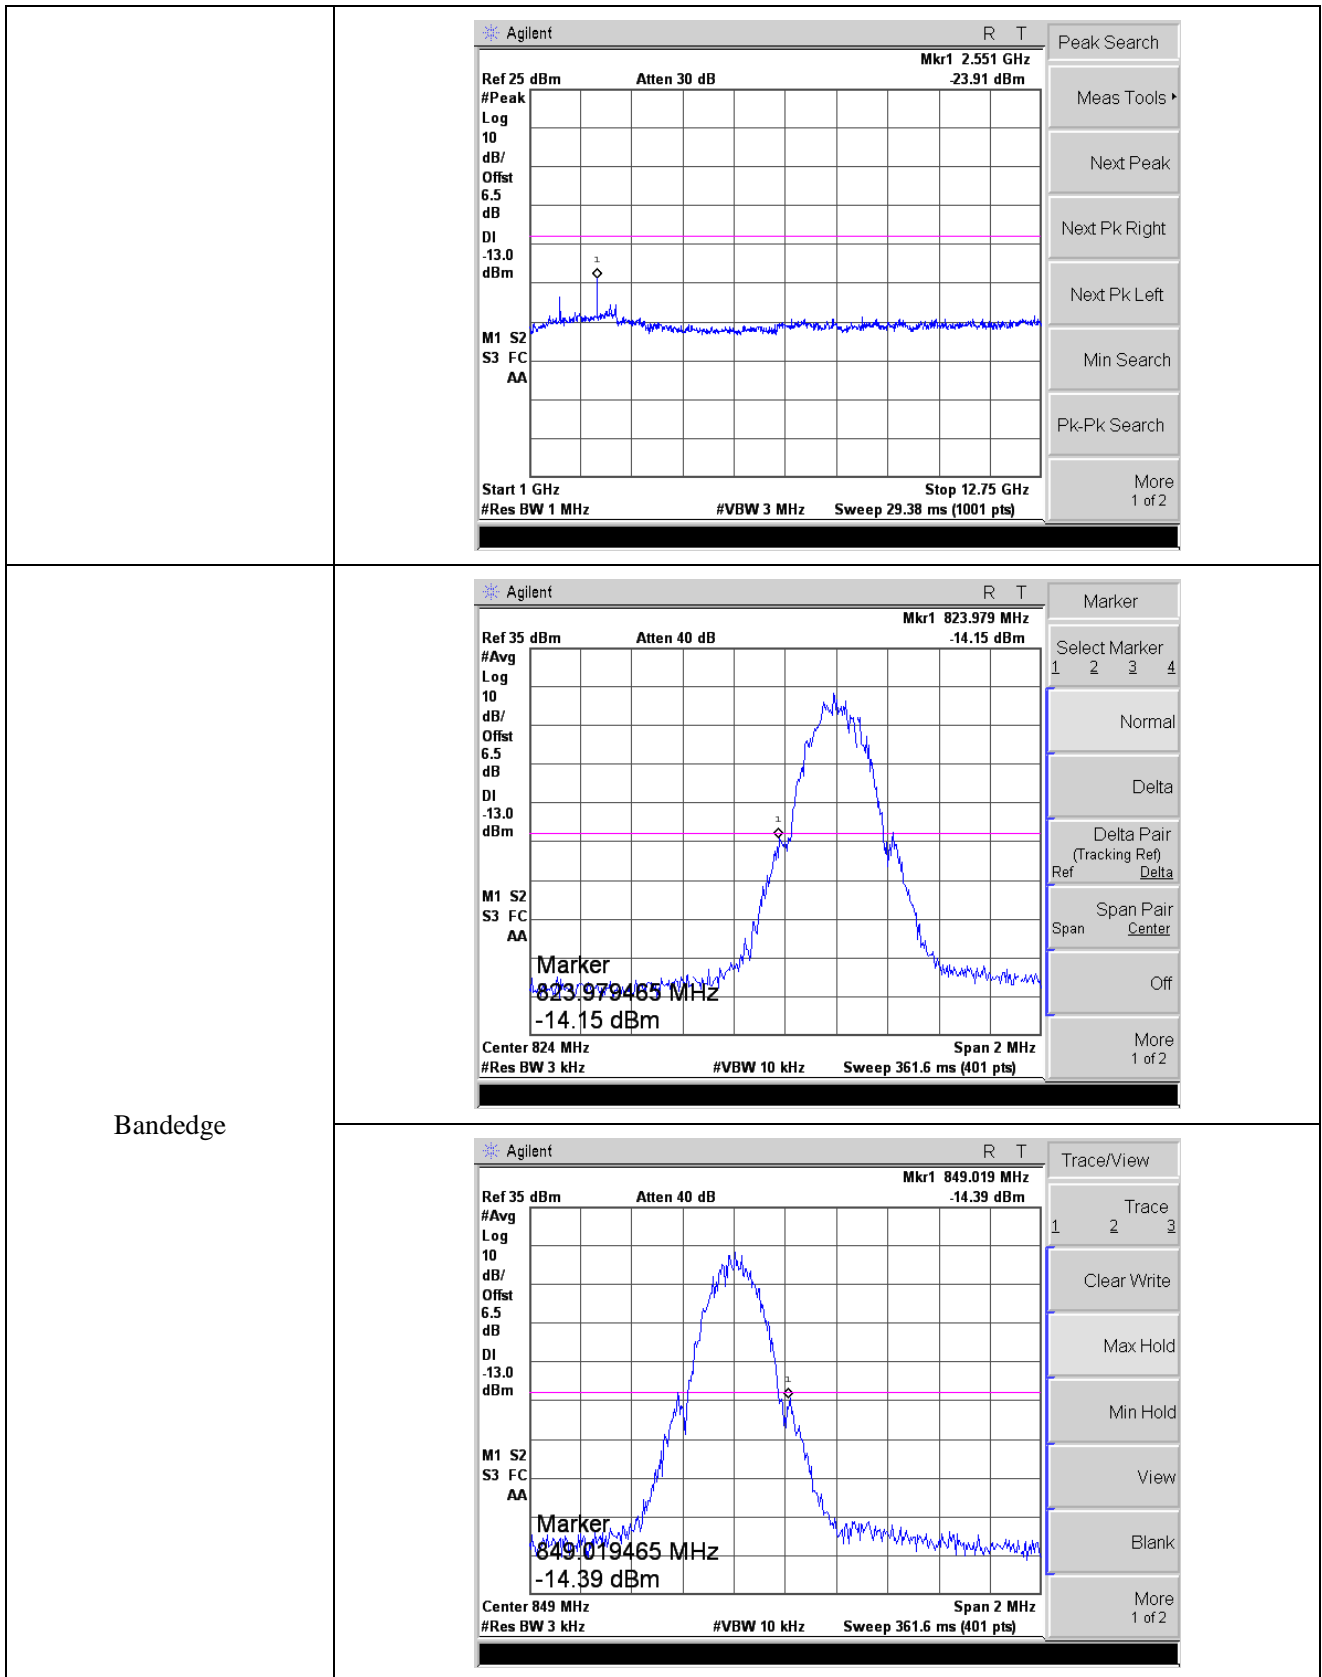


GPRS850  
(GMSK,1Slot)-Low

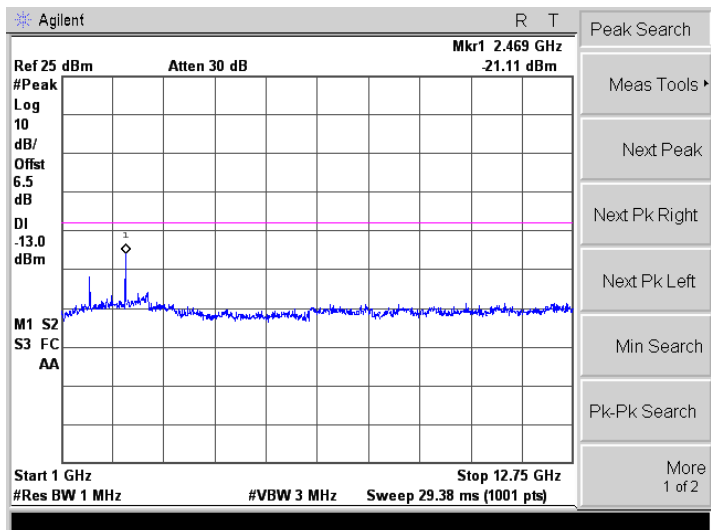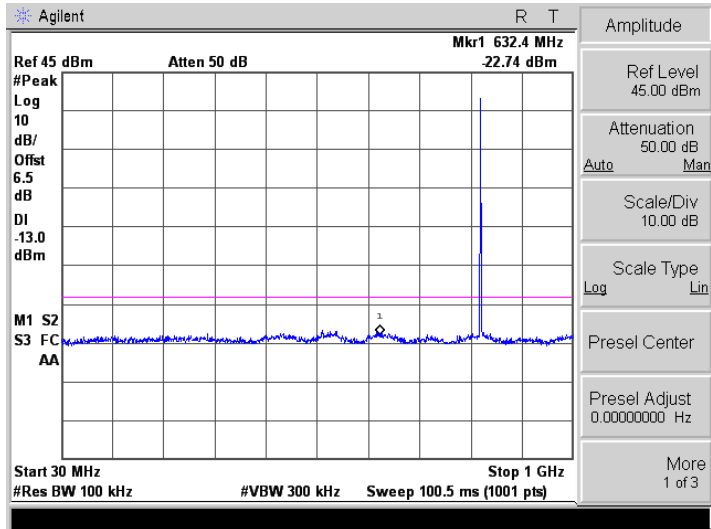



GPRS850  
(GMSK,1Slot)-Middle

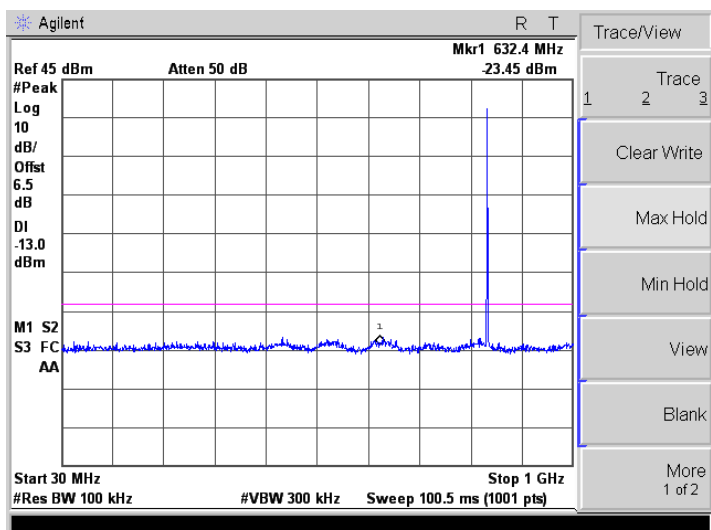

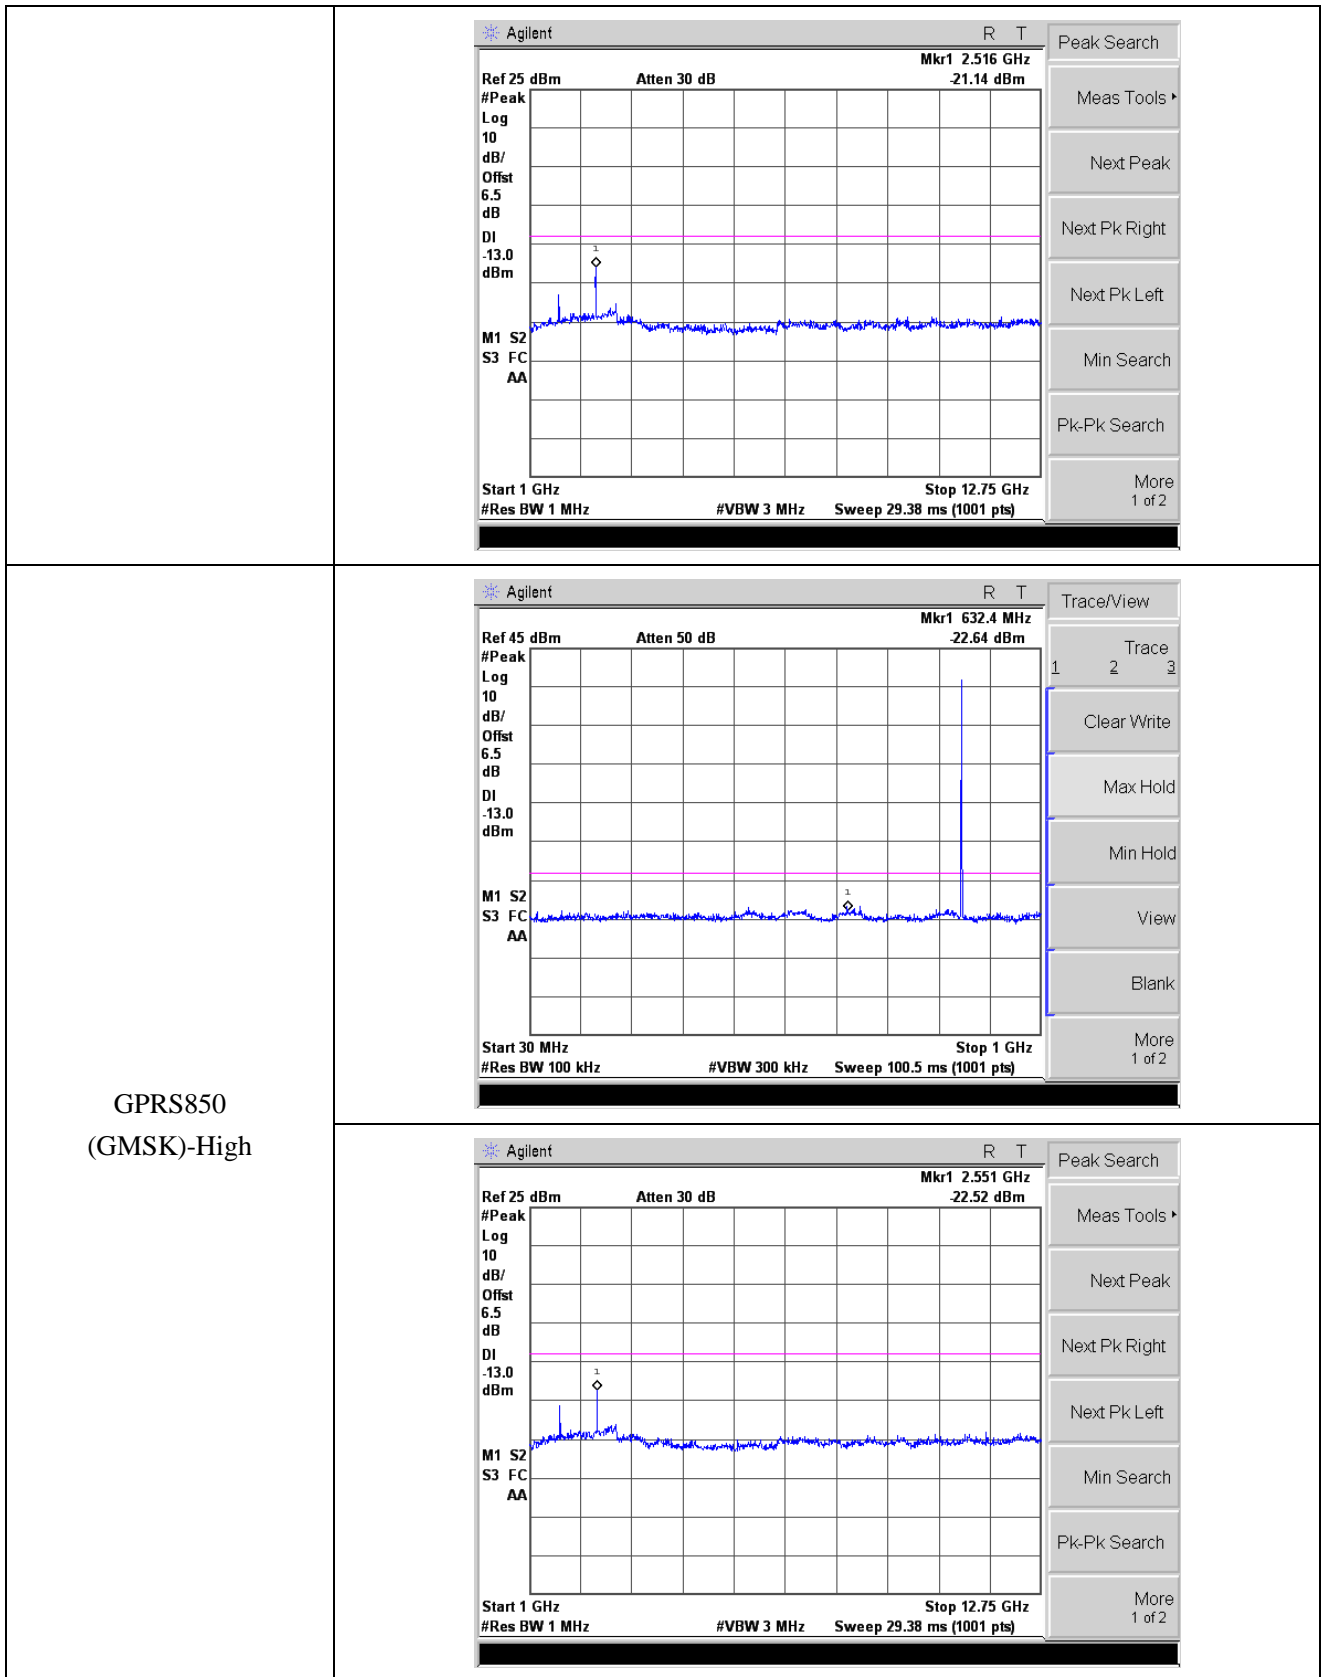






Bandedge

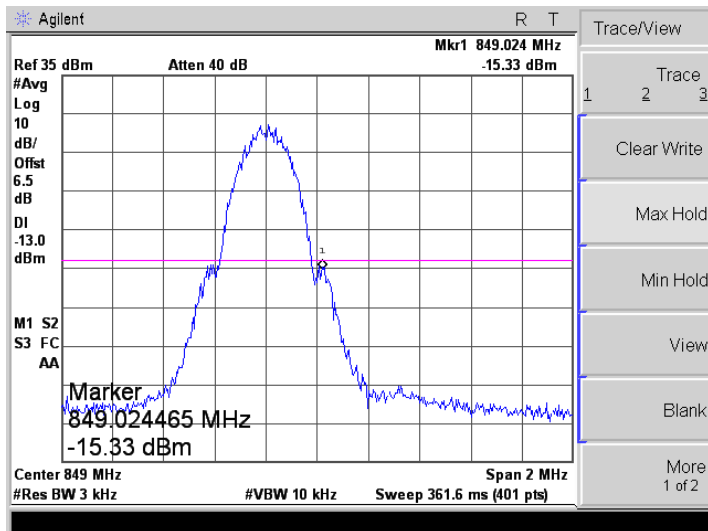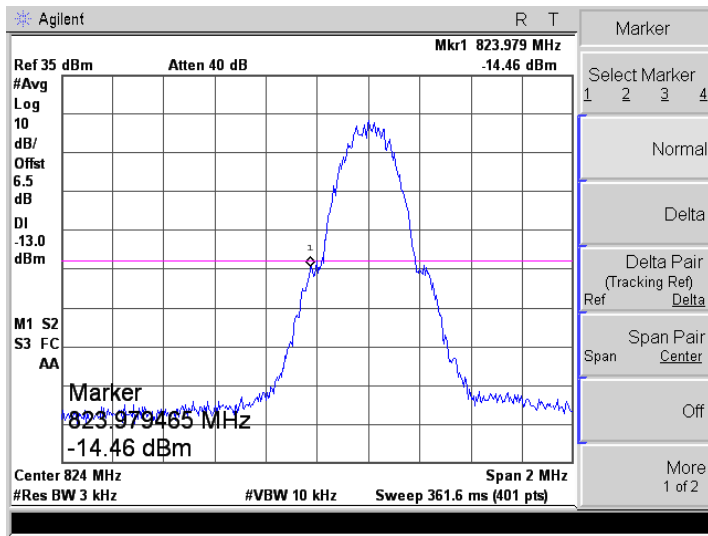


EGPRS850  
(8PSK,1Slot)-Low


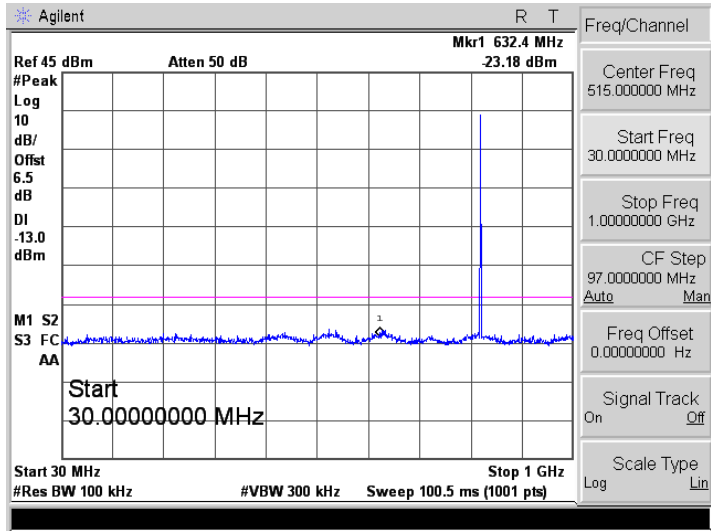


EGPRS850  
(8PSK,1Slot)-Middle


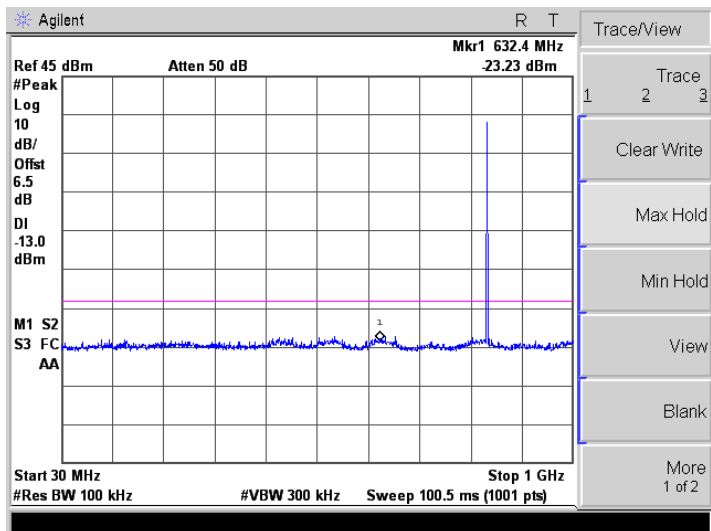
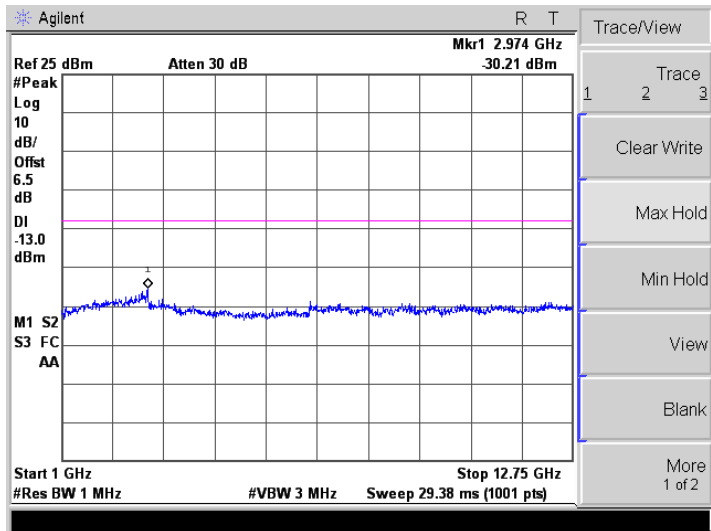


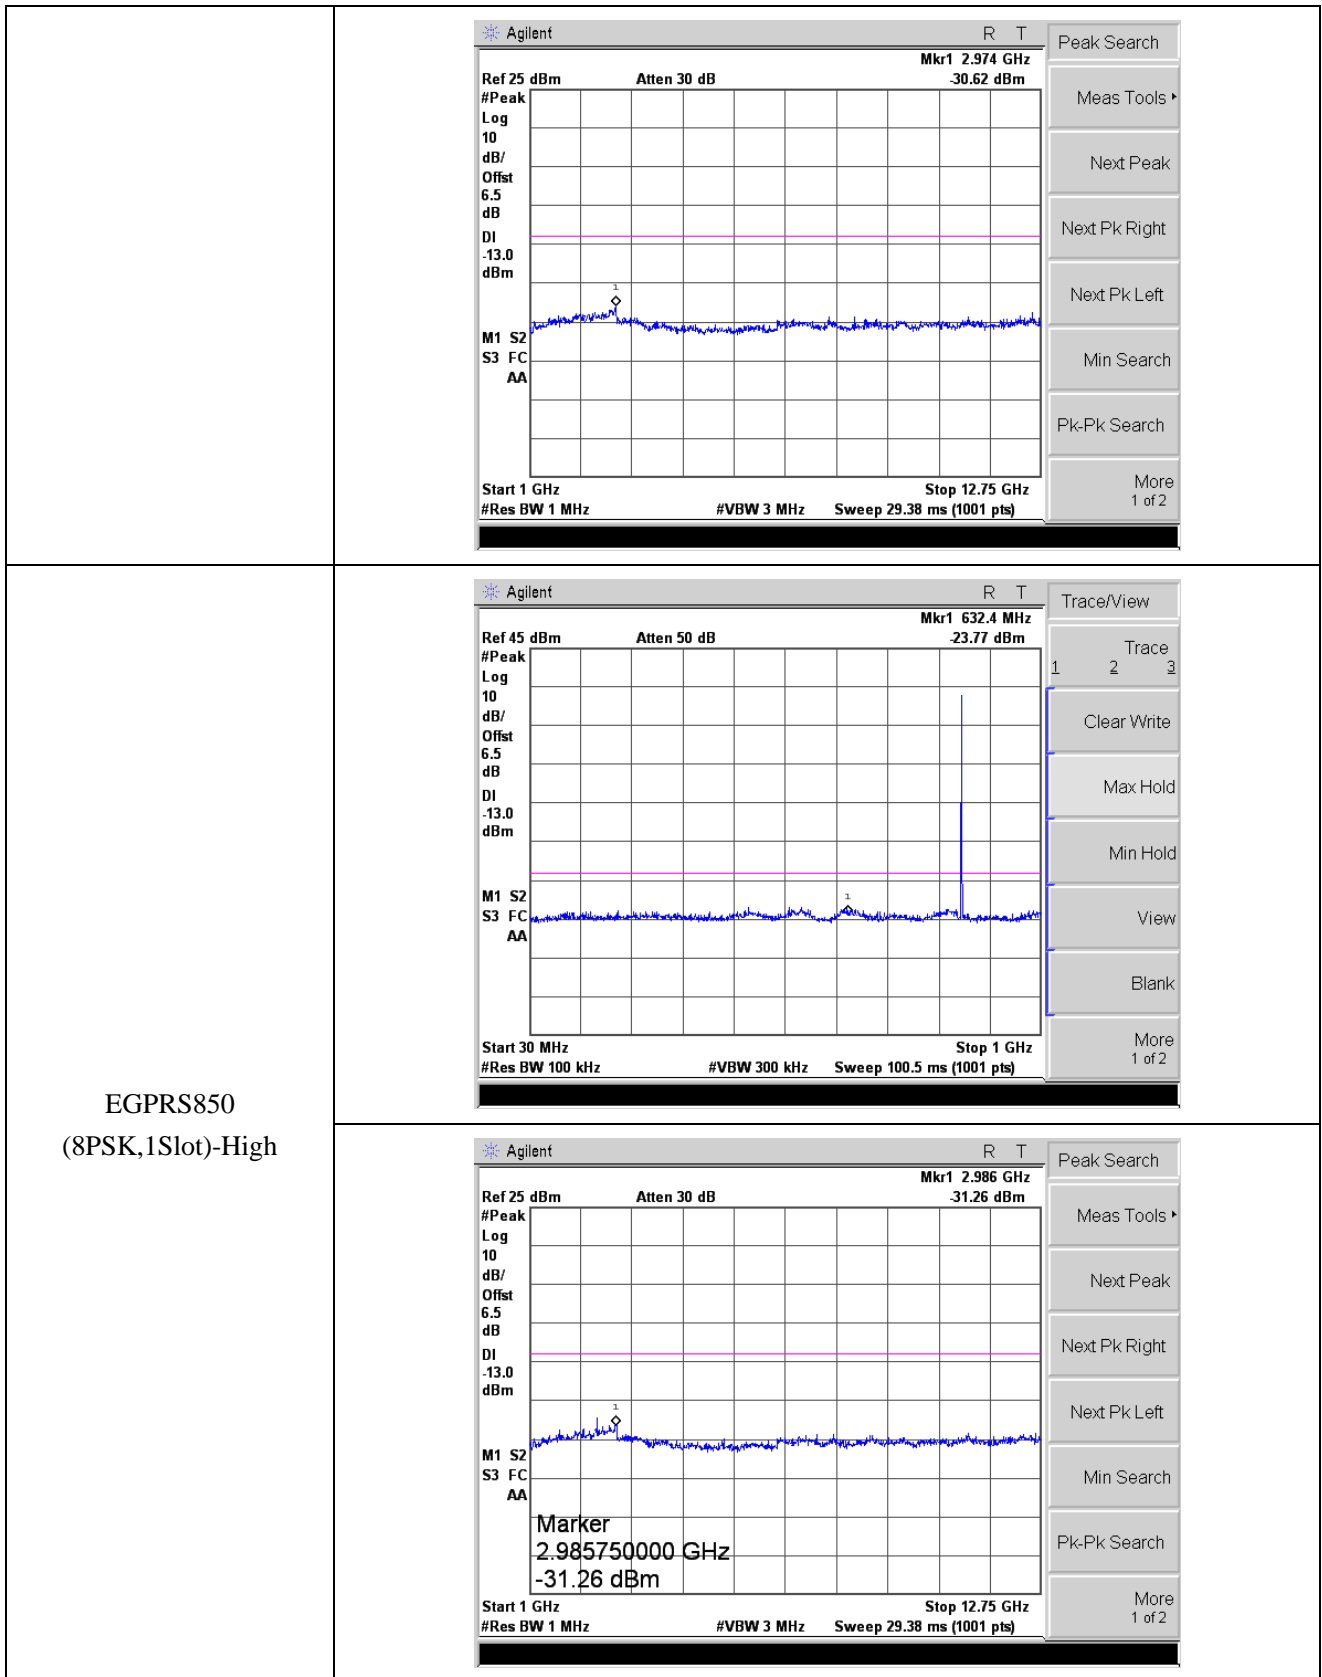


Bandedge

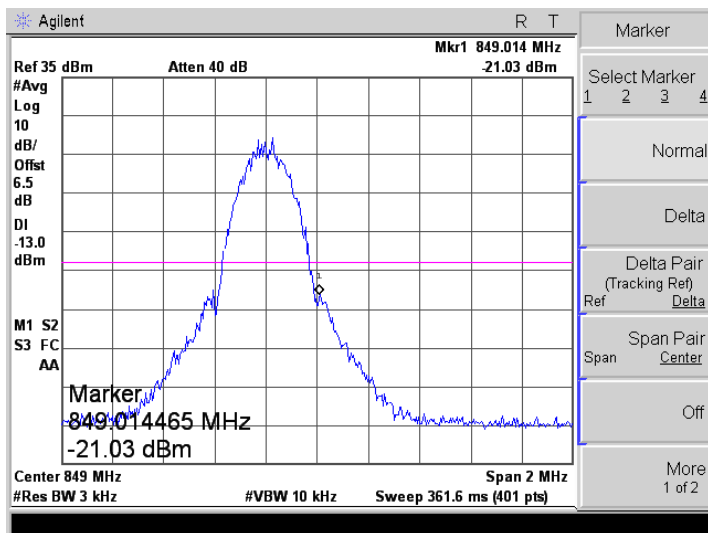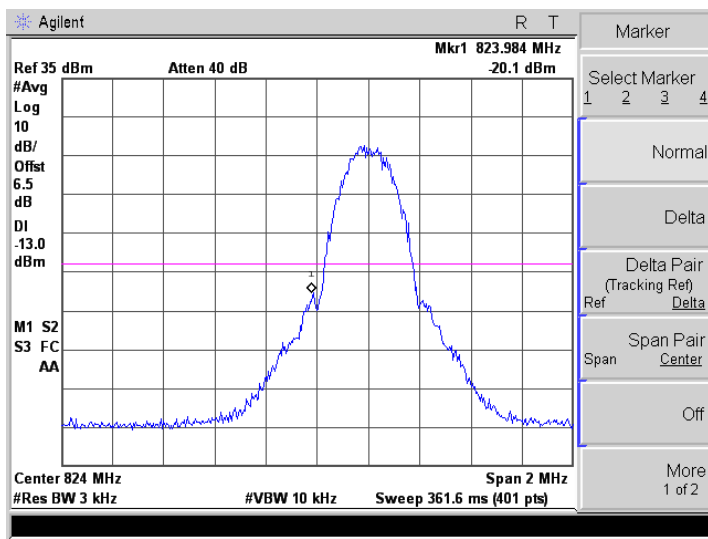


PCS1900  
(GMSK)-Low

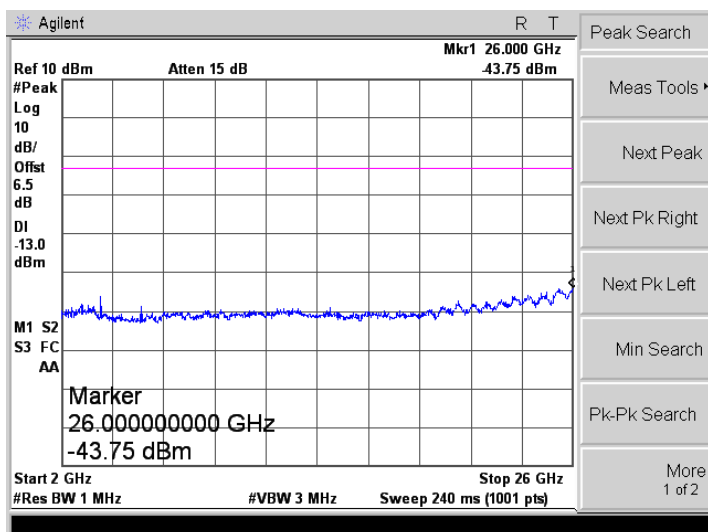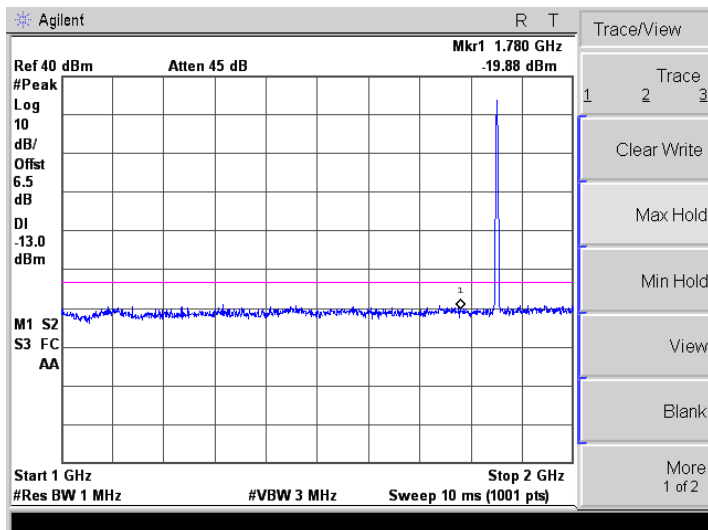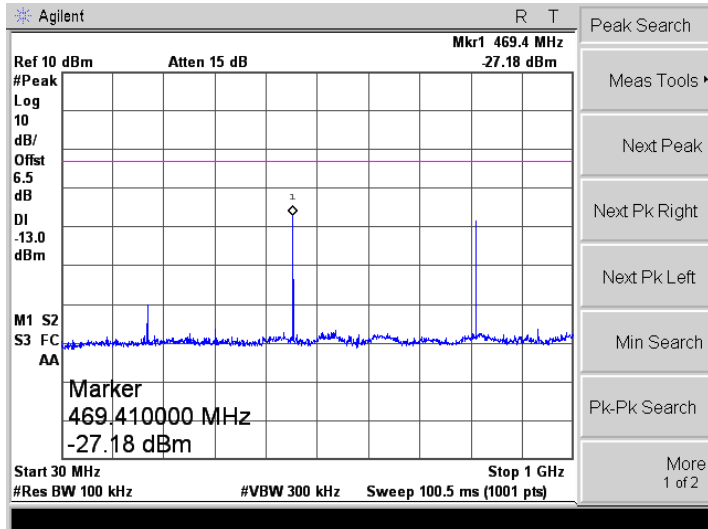


PCS1900  
(GMSK)-Middle

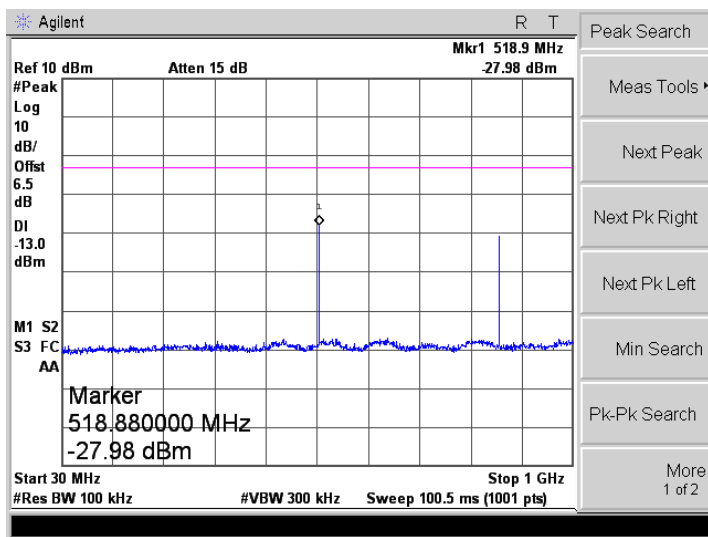

- Peak Search
- Meas Tools ▶
- Next Peak
- Next Pk Right
- Next Pk Left
- Min Search
- Pk-Pk Search
- More 1 of 2



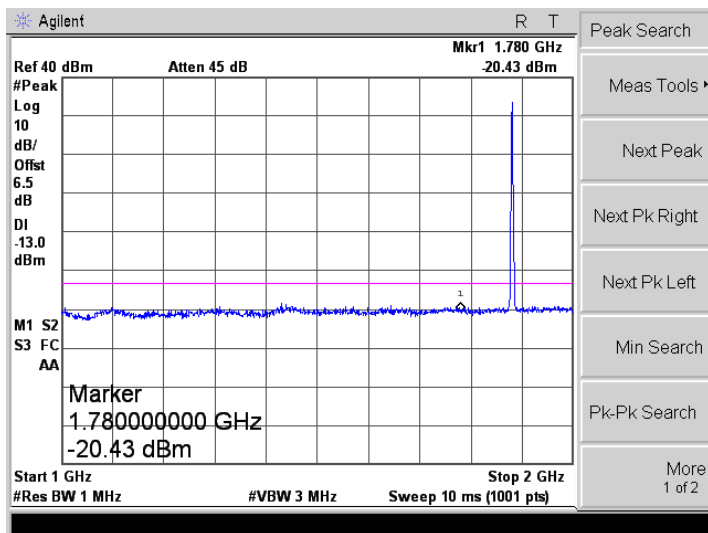


- Peak Search
- Meas Tools ▶
- Next Peak
- Next Pk Right
- Next Pk Left
- Min Search
- Pk-Pk Search
- More 1 of 2


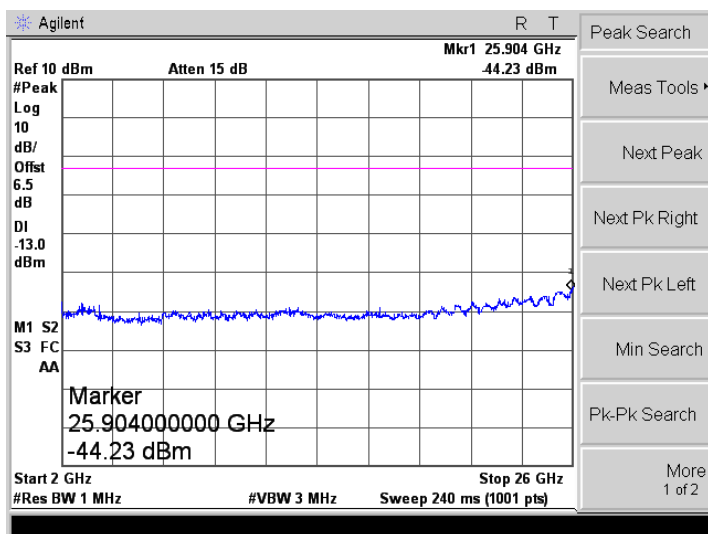


- Peak Search
- Meas Tools ▶
- Next Peak
- Next Pk Right
- Next Pk Left
- Min Search
- Pk-Pk Search
- More 1 of 2

PCS1900  
(GMSK)-High

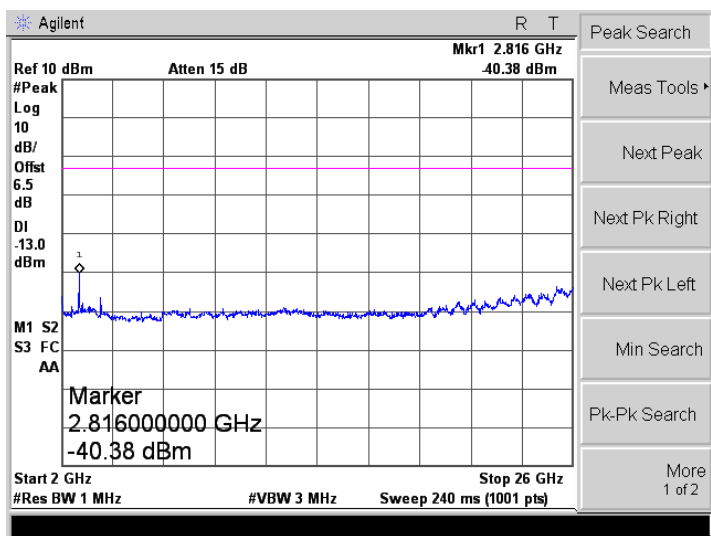
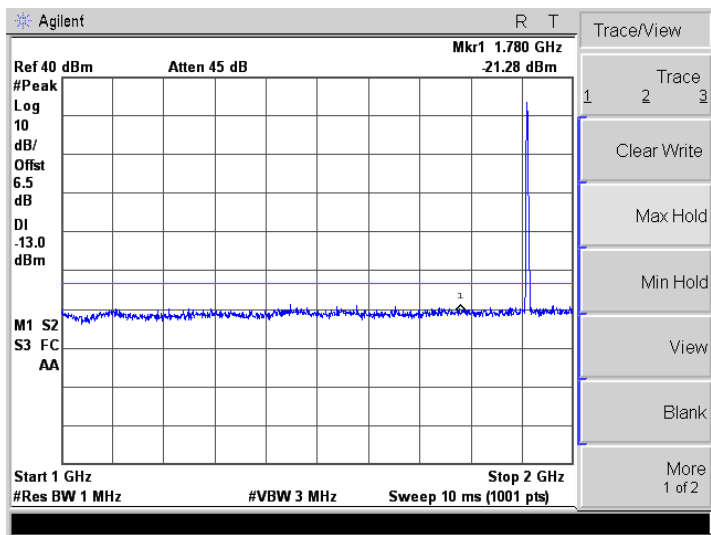
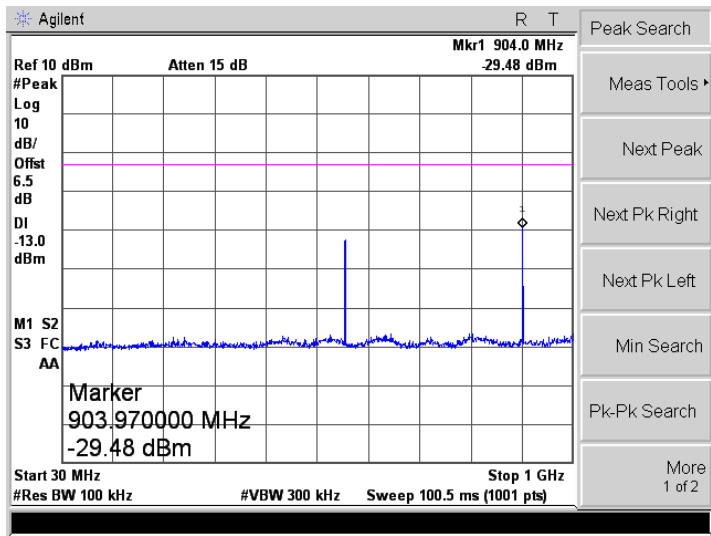


Bandedge

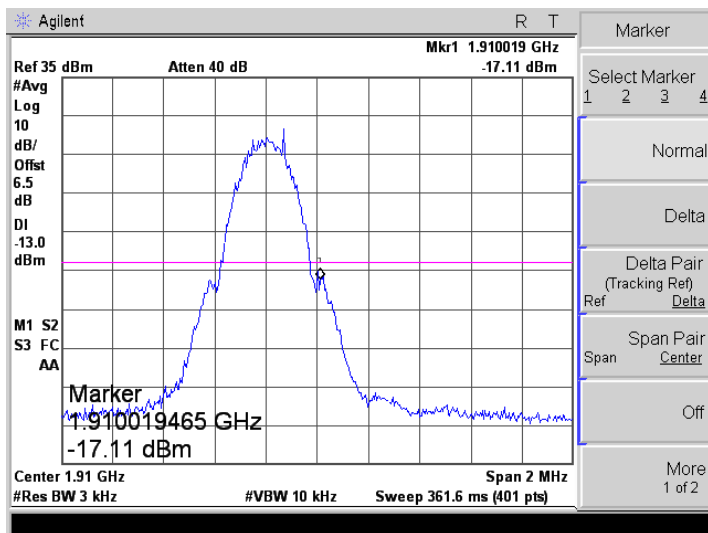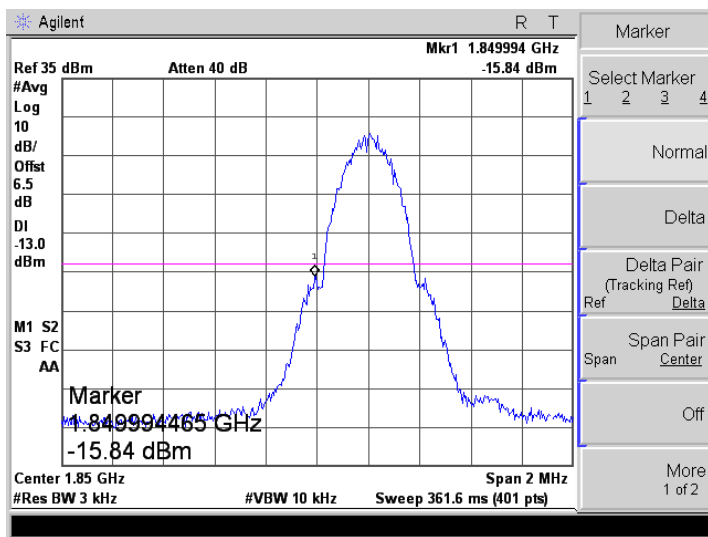





GPRS1900  
(GMSK,1Slot)-Low

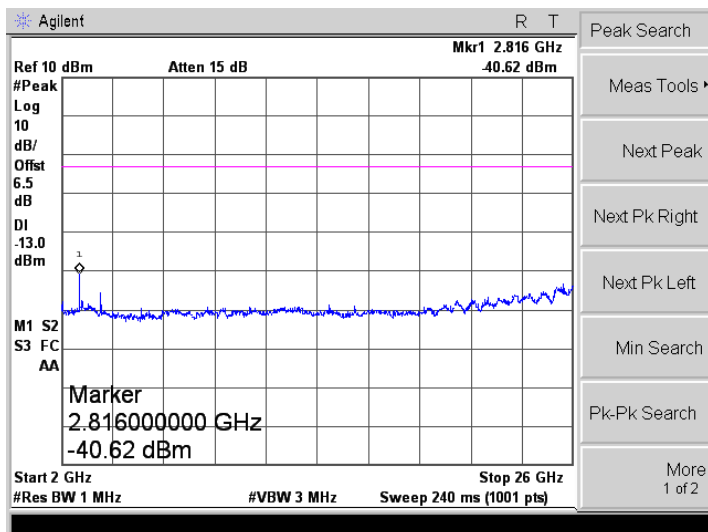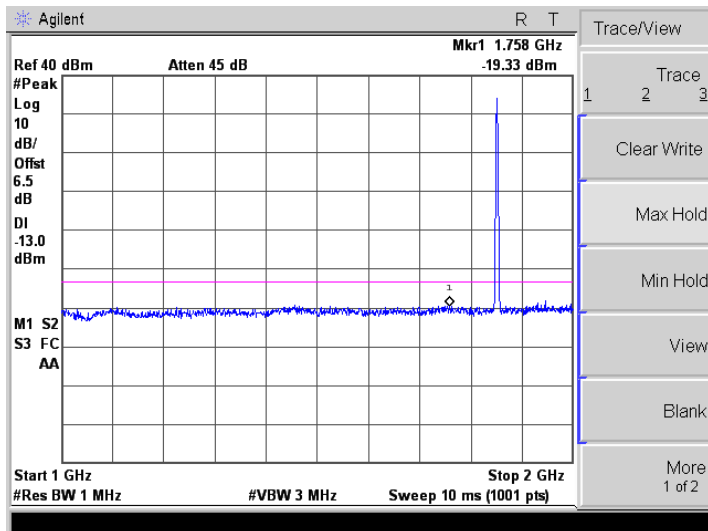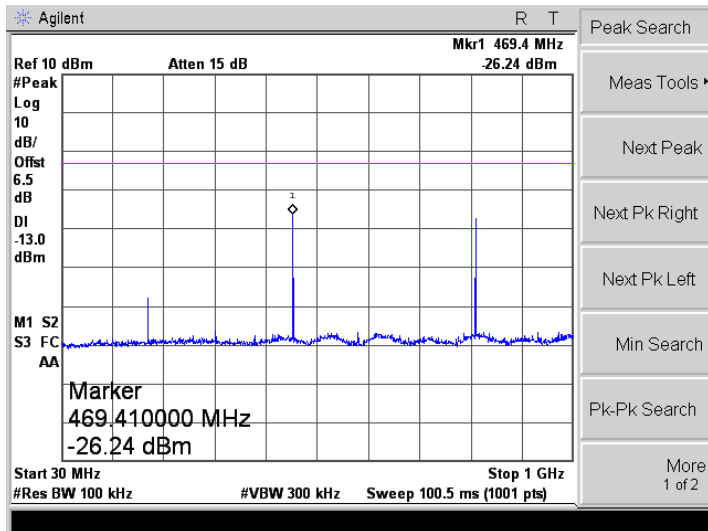


GPRS1900  
(GMSK,1Slot)-Middle

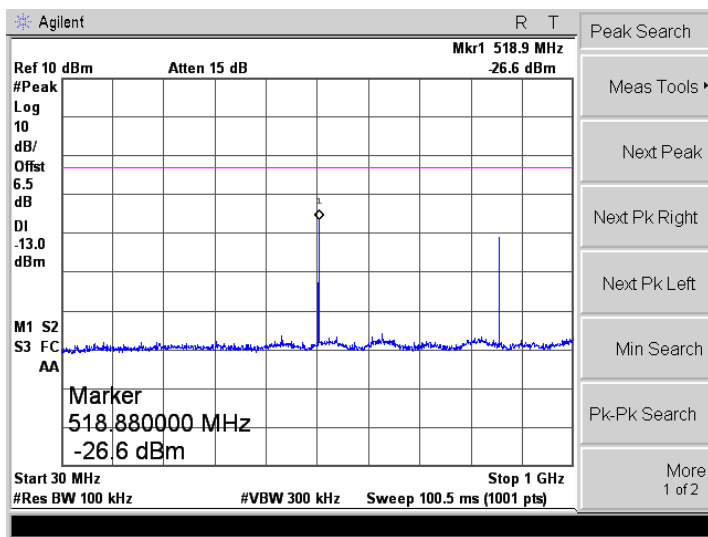

Peak Search  
 Meas Tools ▶  
 Next Peak  
 Next Pk Right  
 Next Pk Left  
 Min Search  
 Pk-Pk Search  
 More  
 1 of 2



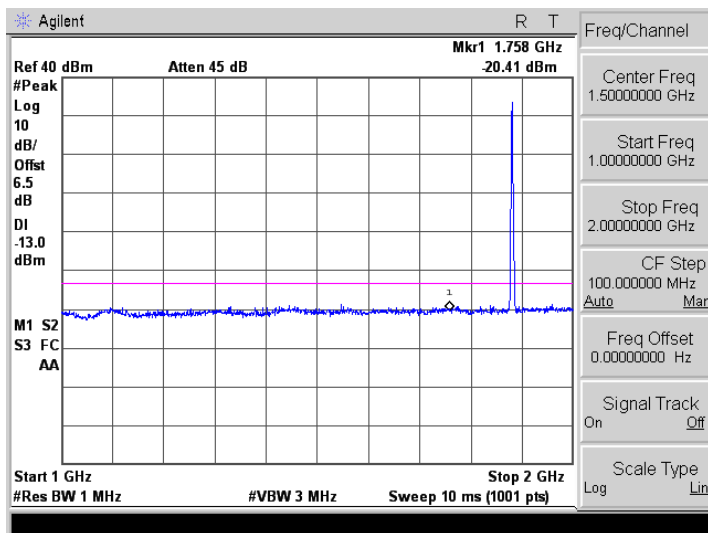


Freq/Channel  
 Center Freq  
 1.50000000 GHz  
 Start Freq  
 1.00000000 GHz  
 Stop Freq  
 2.00000000 GHz  
 CF Step  
 100.000000 MHz  
 Auto Man  
 Freq Offset  
 0.00000000 Hz  
 Signal Track  
 On Off  
 Scale Type  
 Log Lin


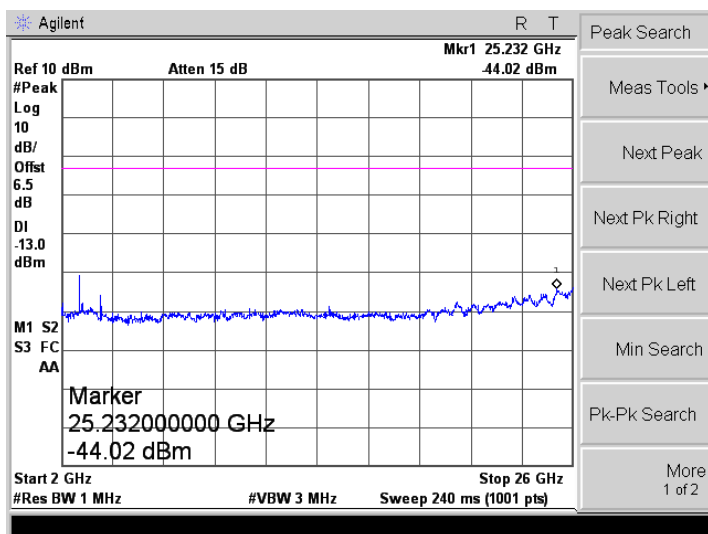


Peak Search  
 Meas Tools ▶  
 Next Peak  
 Next Pk Right  
 Next Pk Left  
 Min Search  
 Pk-Pk Search  
 More  
 1 of 2




GPRS1900  
(GMSK,1Slot)-High

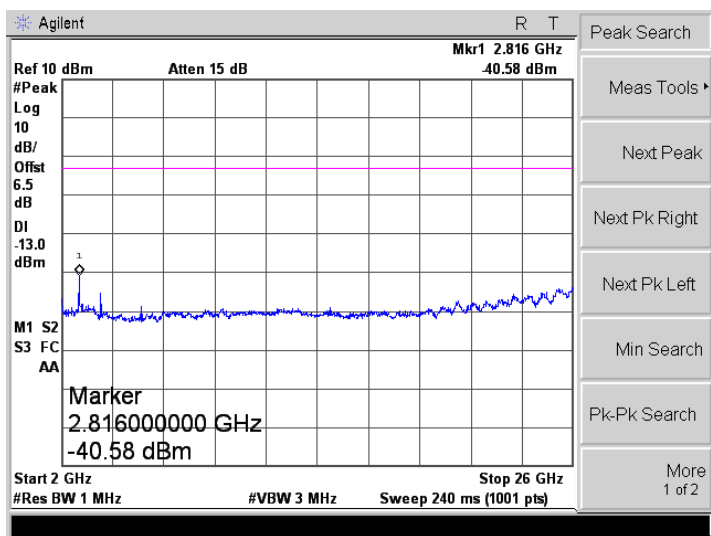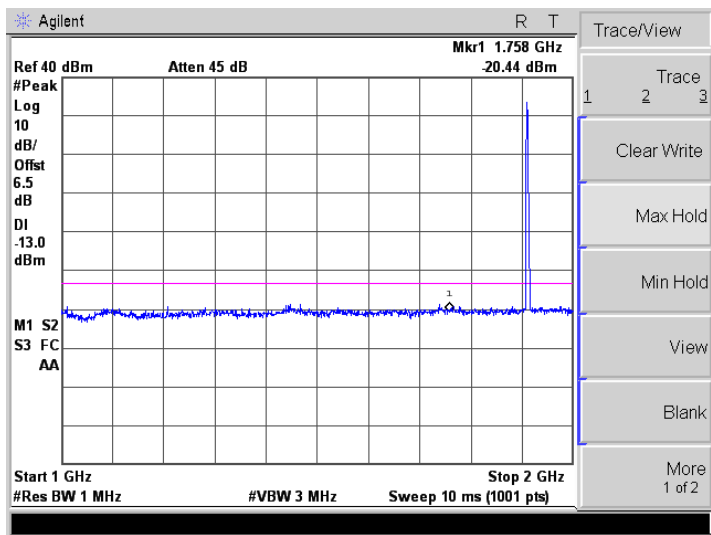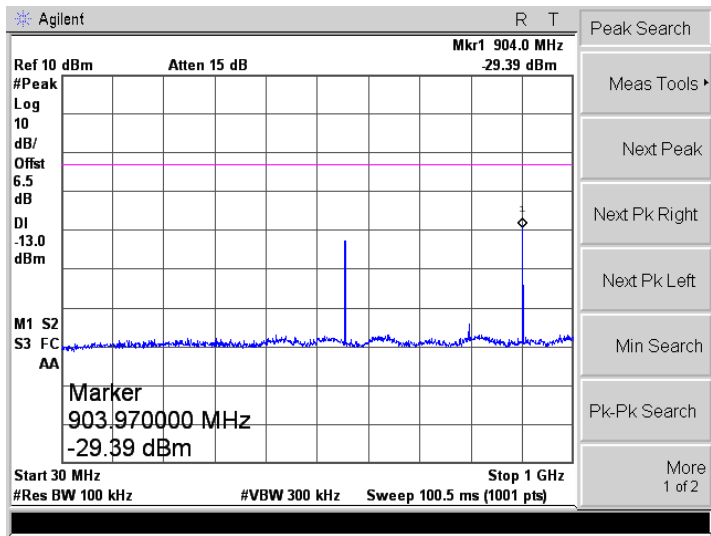




Bandedge

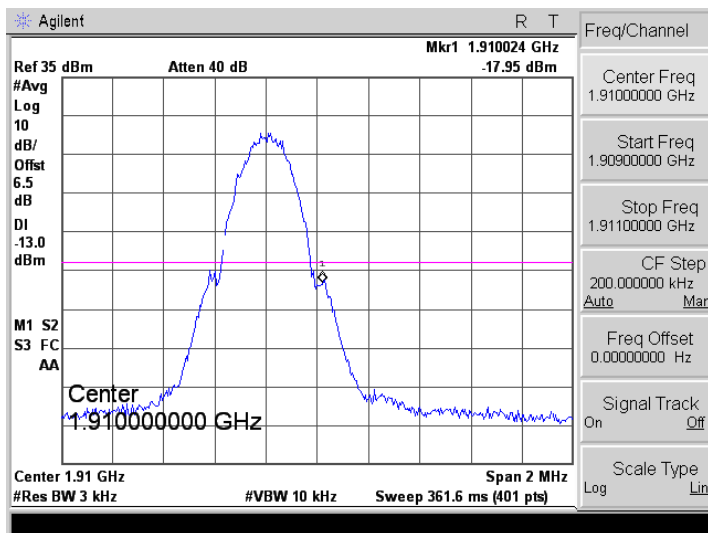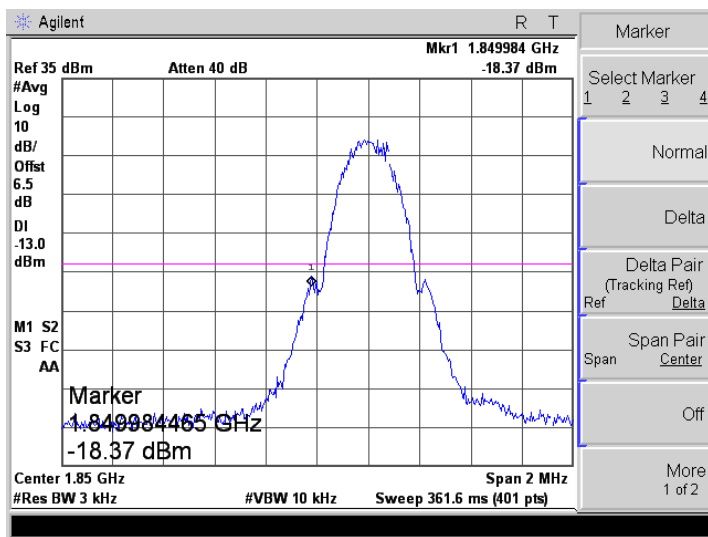




EGPRS1900  
(8PSK,1Slot)-Low

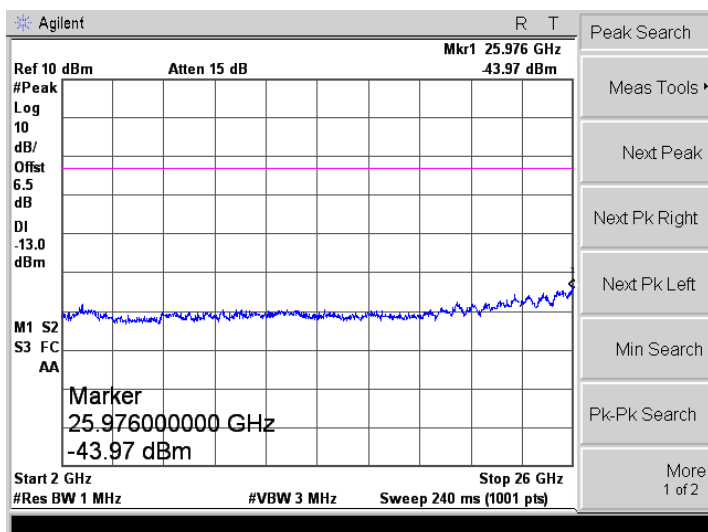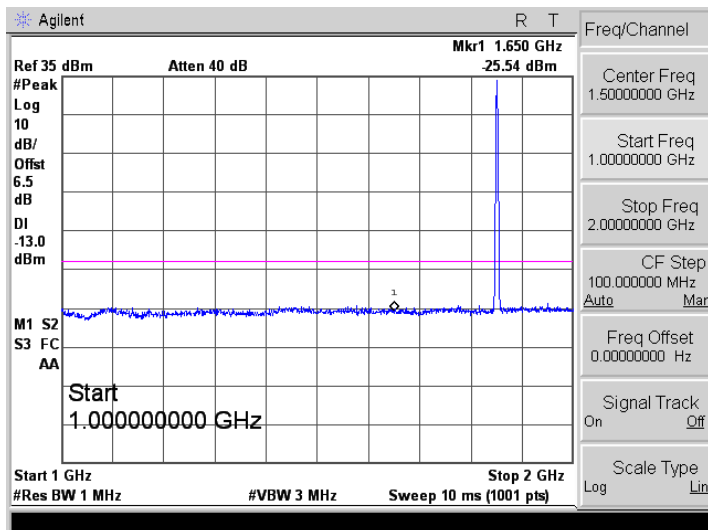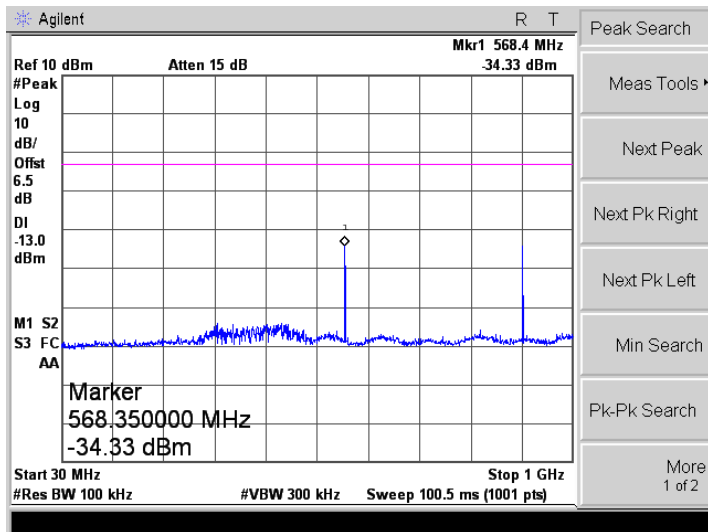



EGPRS1900  
(8PSK,1Slot)-Middle

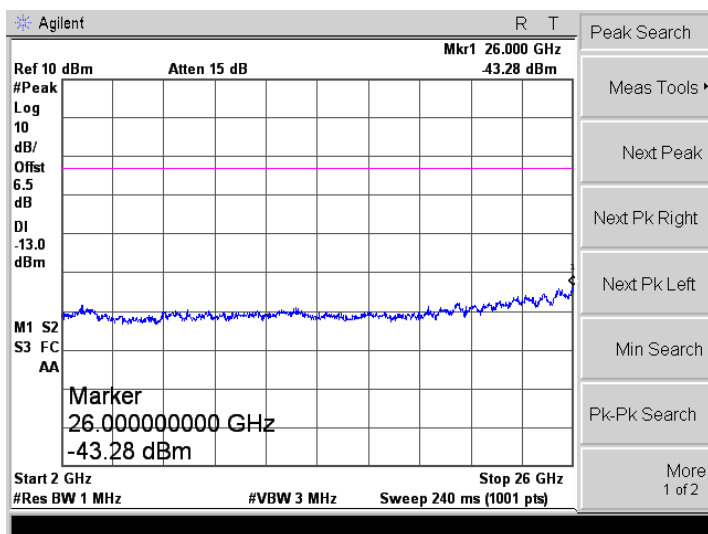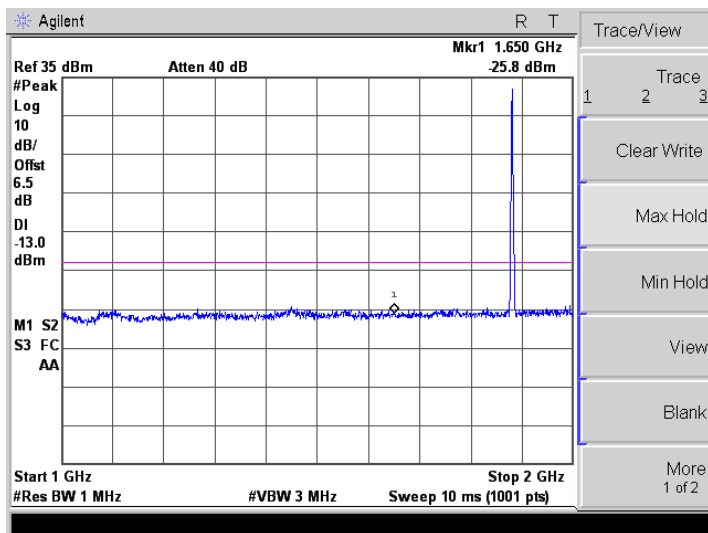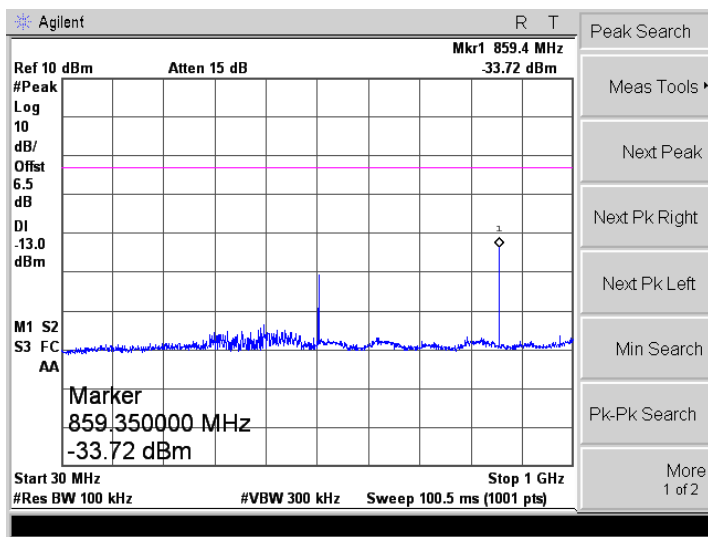

EGPRS1900  
(8PSK,1Slot)-High

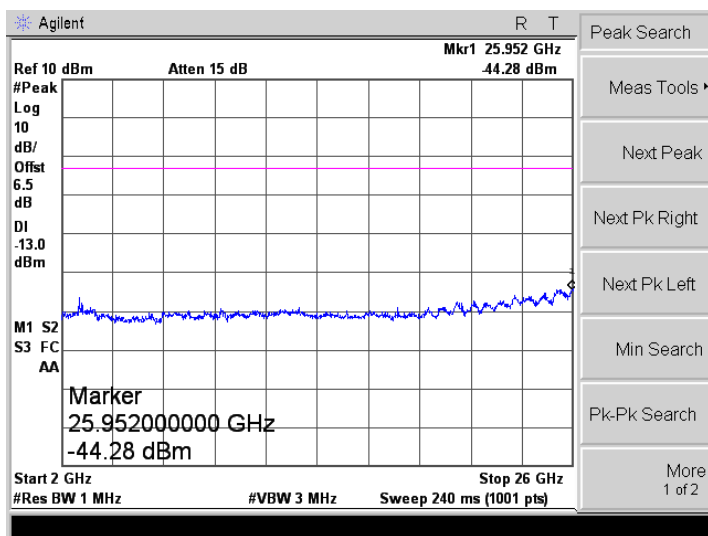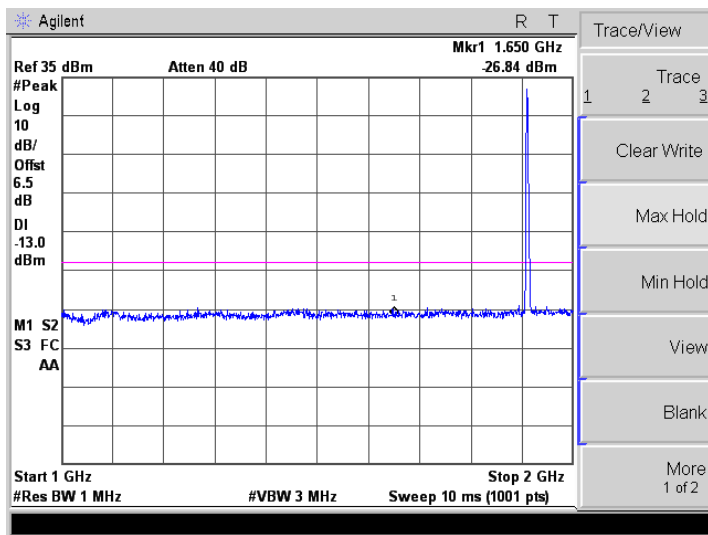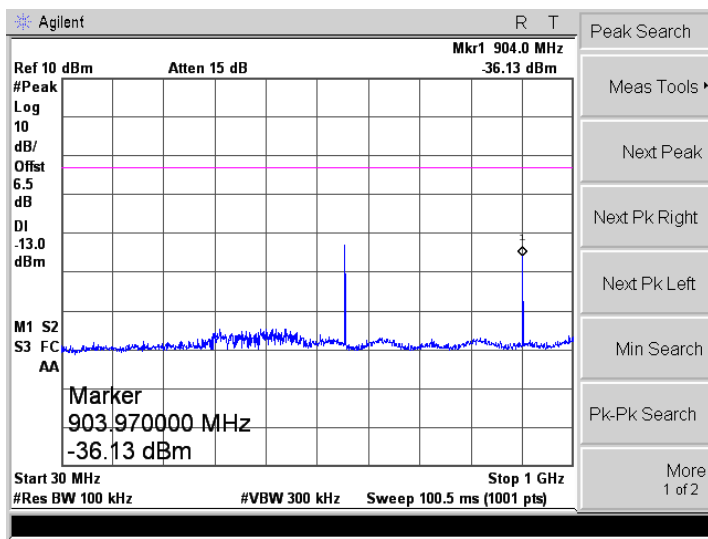


Bandedge

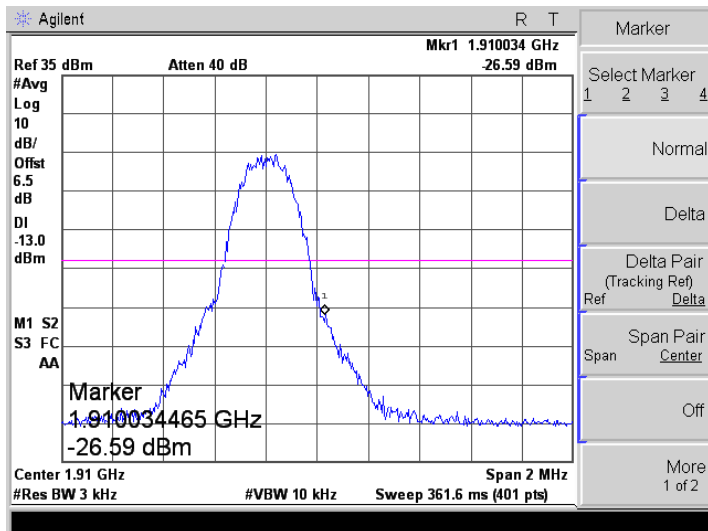
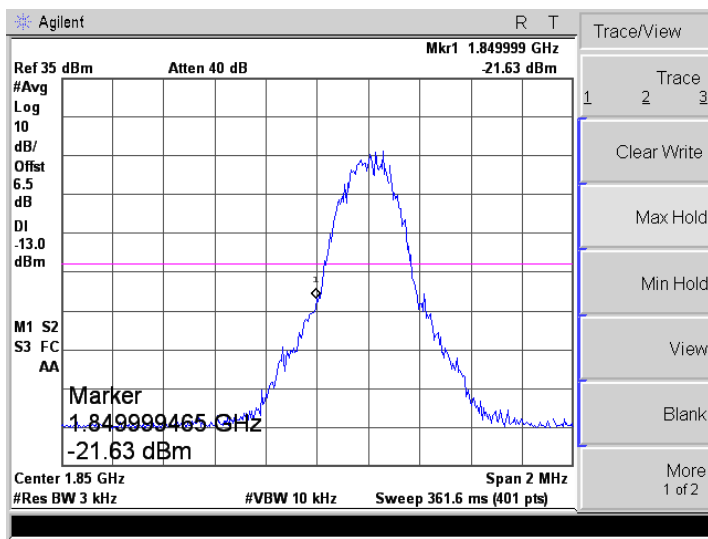





WCDMA Band V-Low


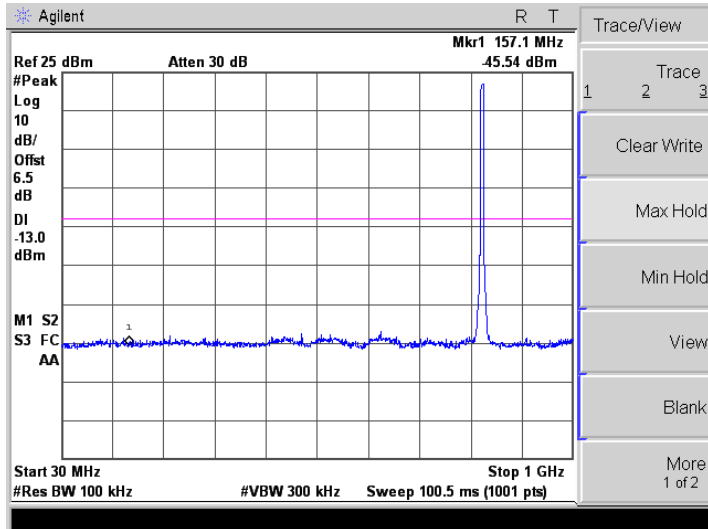


WCDMA Band V-Middle

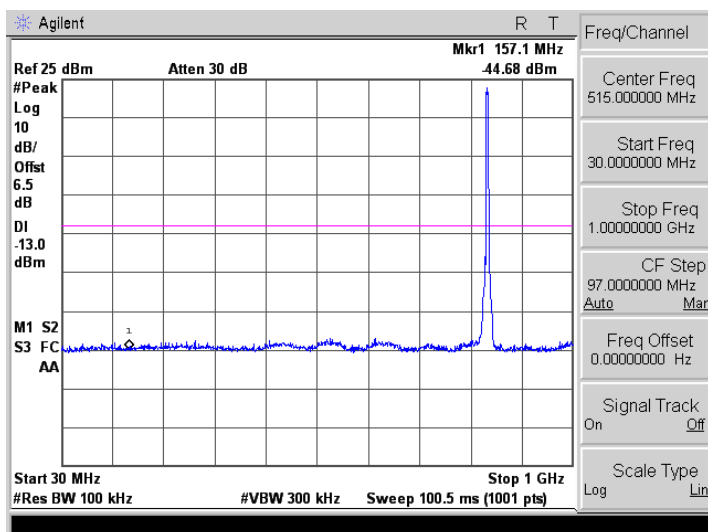
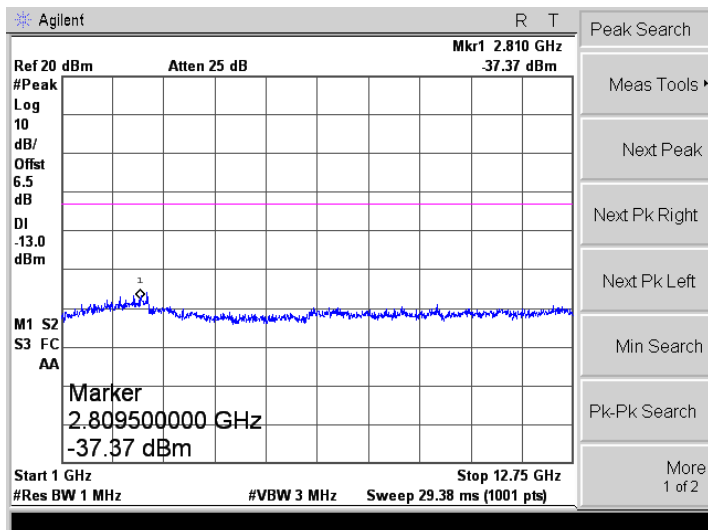


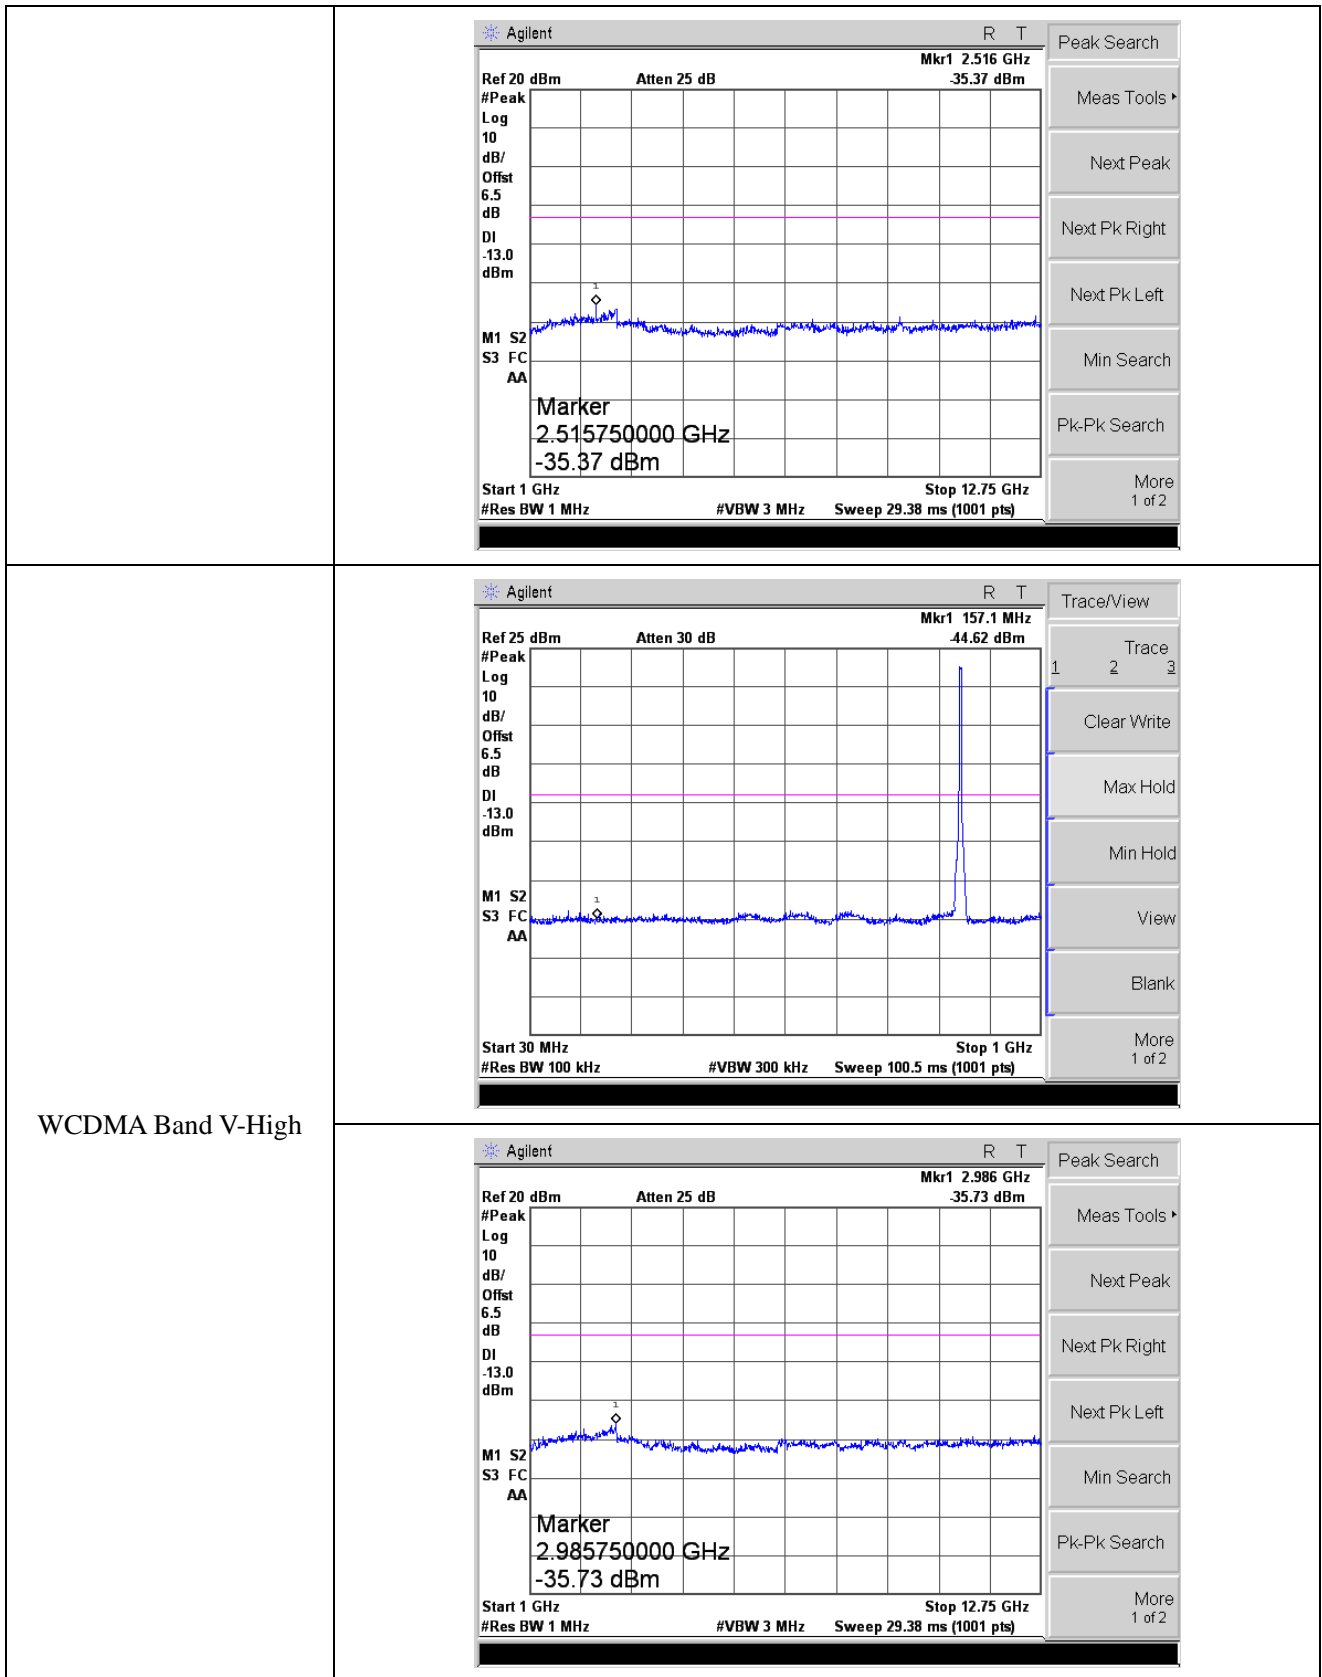


Bandedge

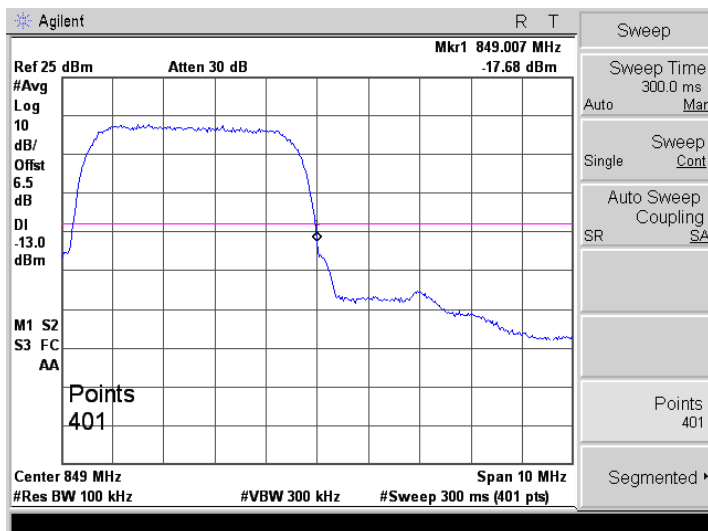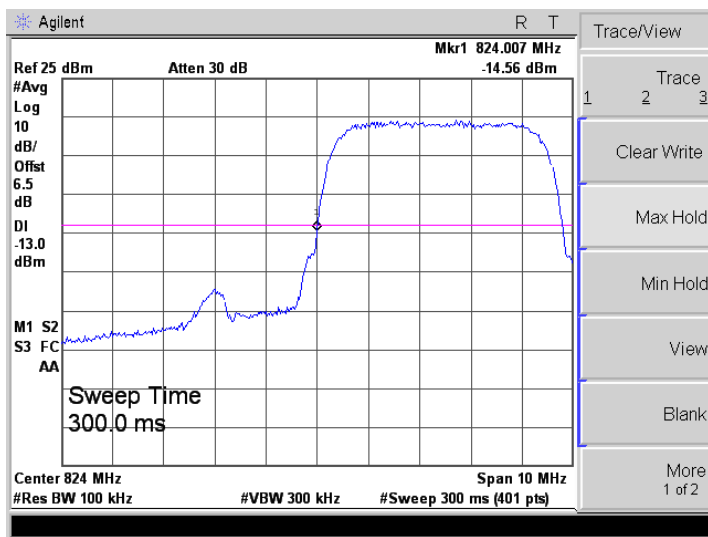


HSDPA Band V-Low

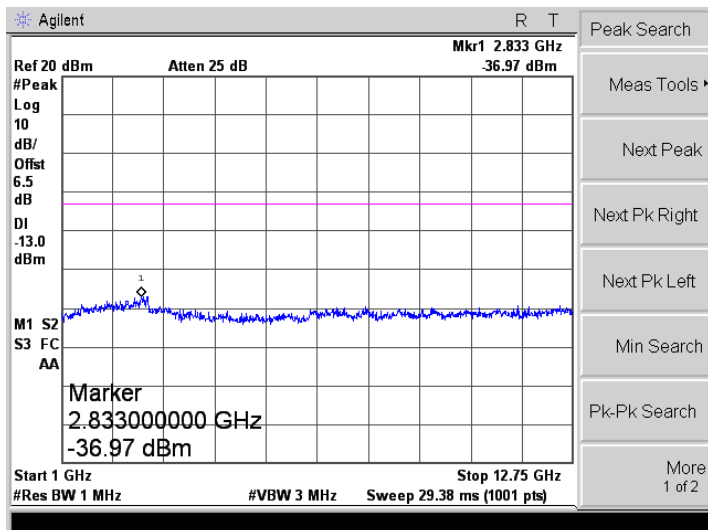
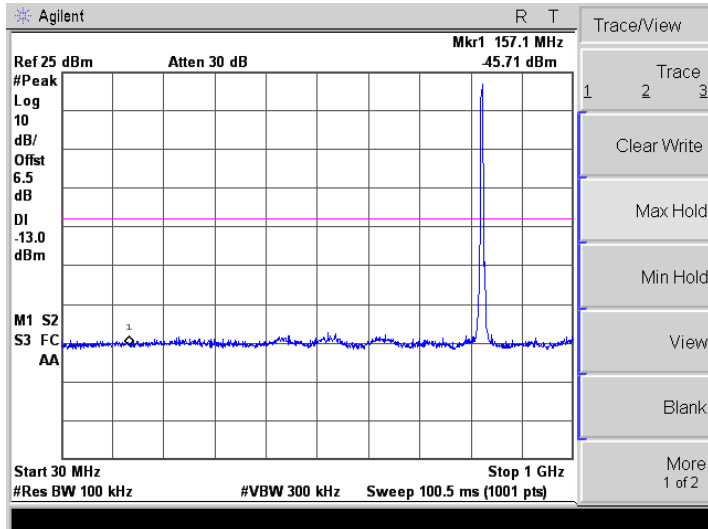


HSDPA Band V-Middle


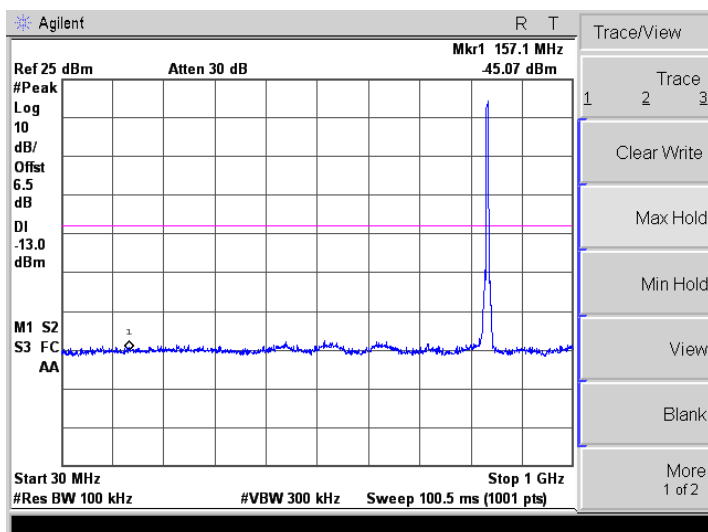


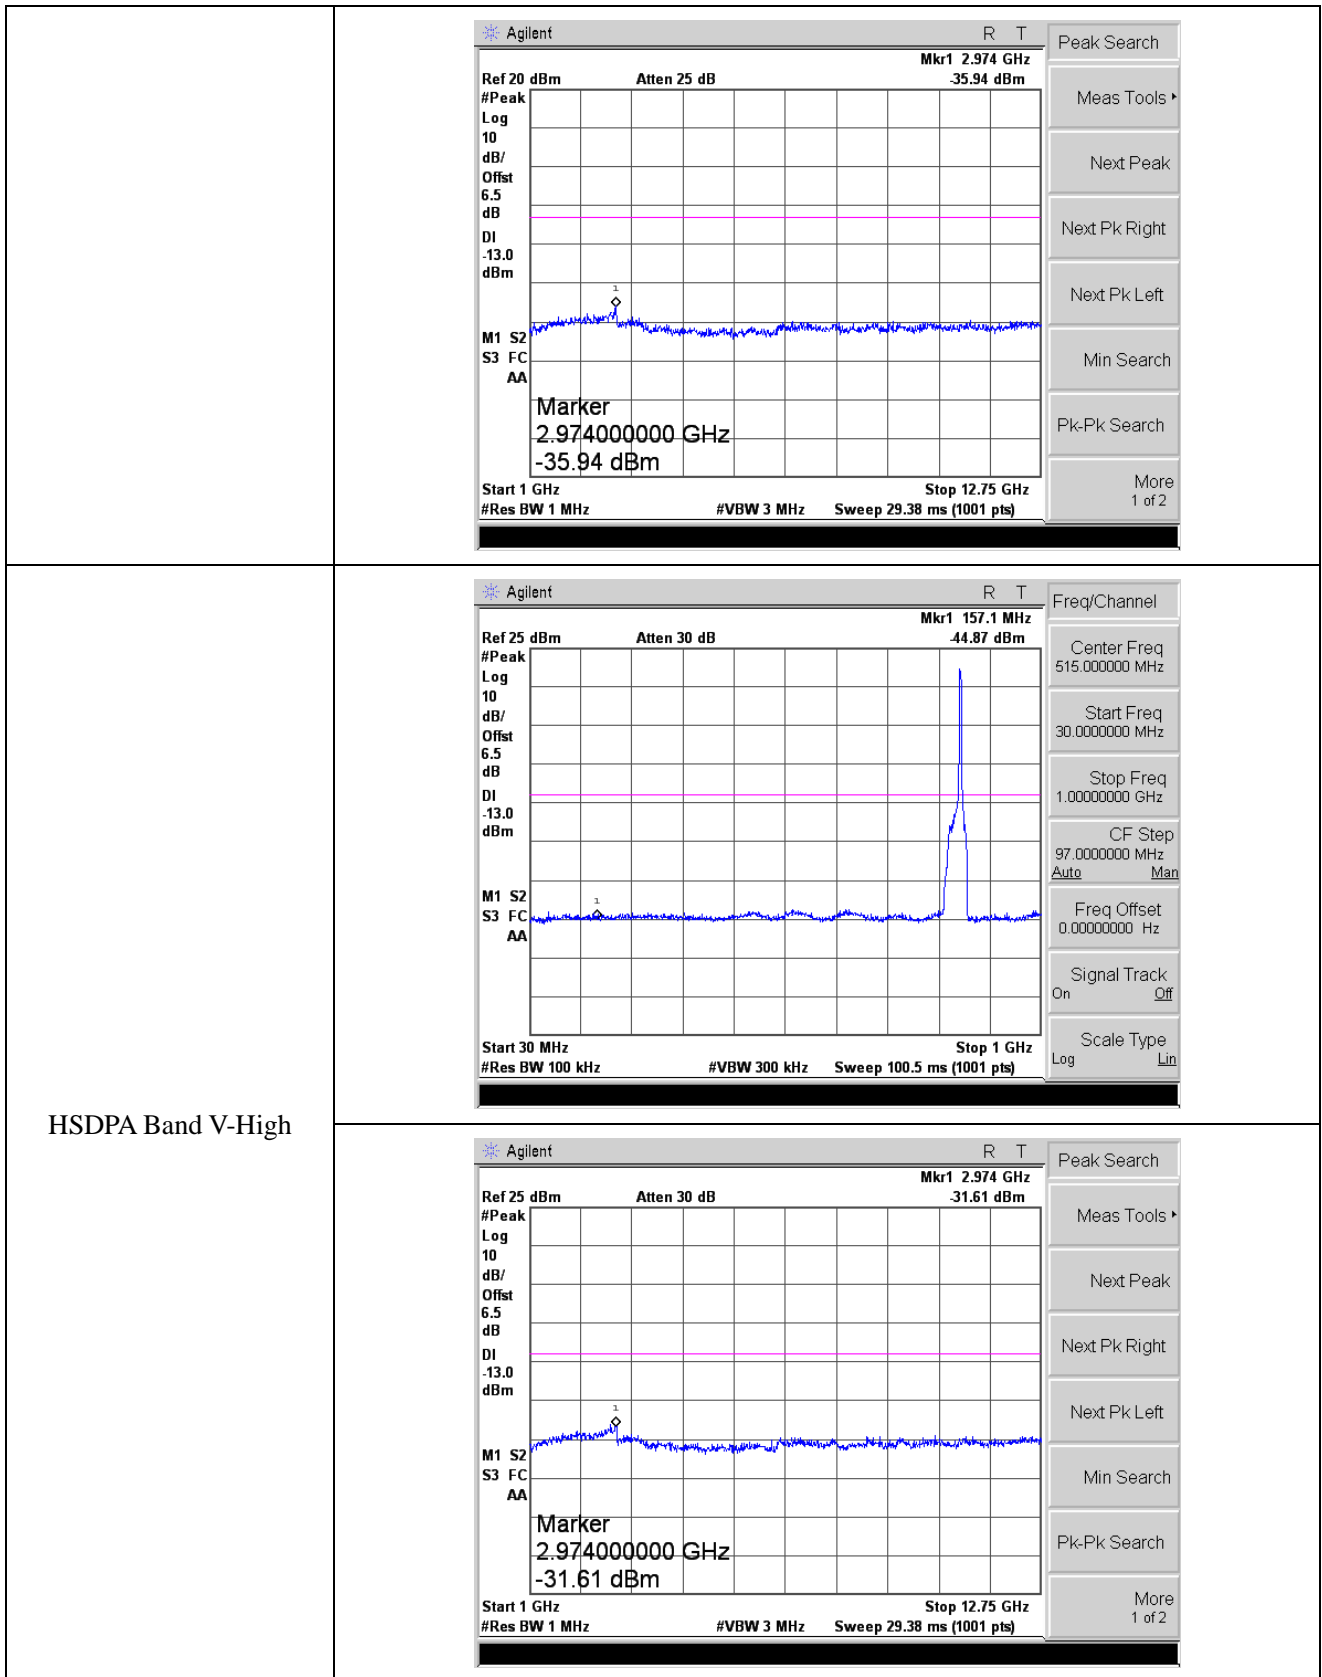


Bandedge

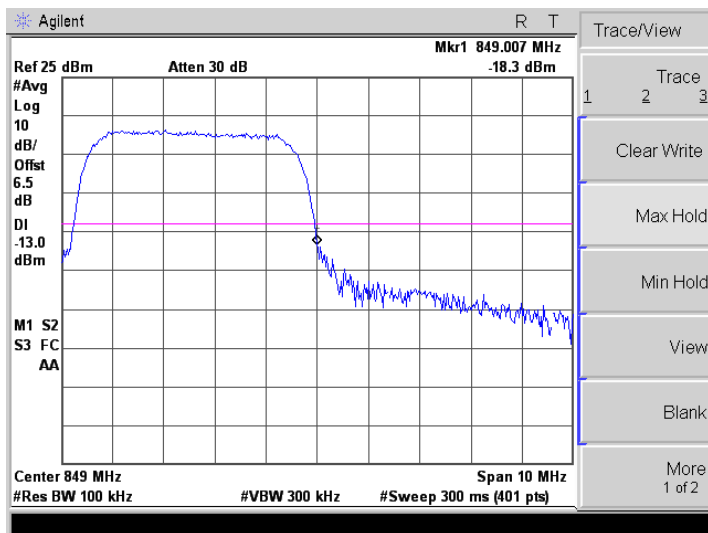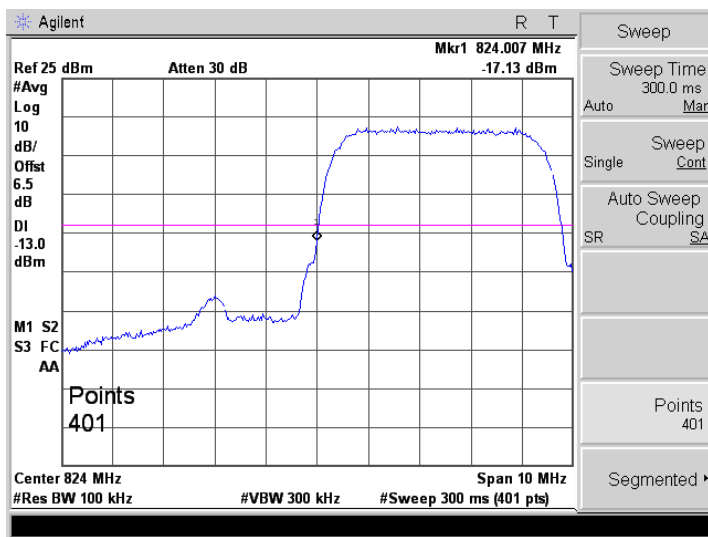


HSUPA Band V-Low

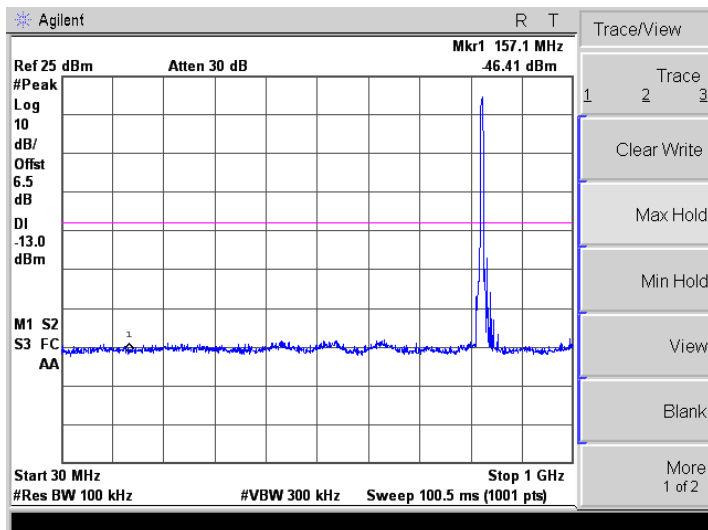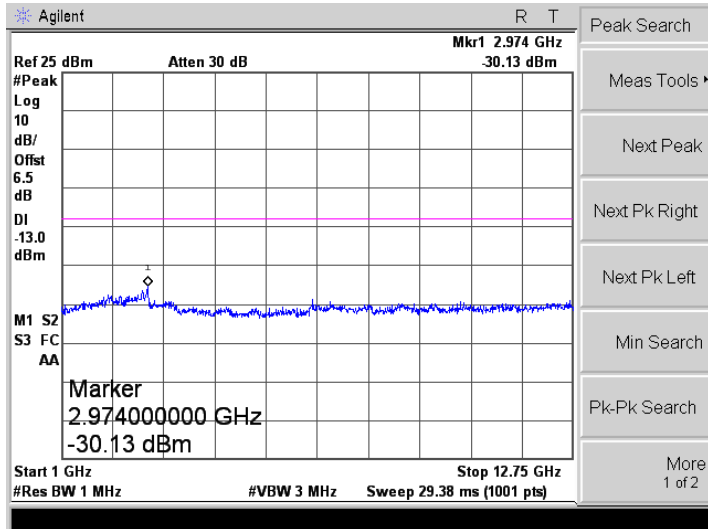



HSUPA Band V-Middle

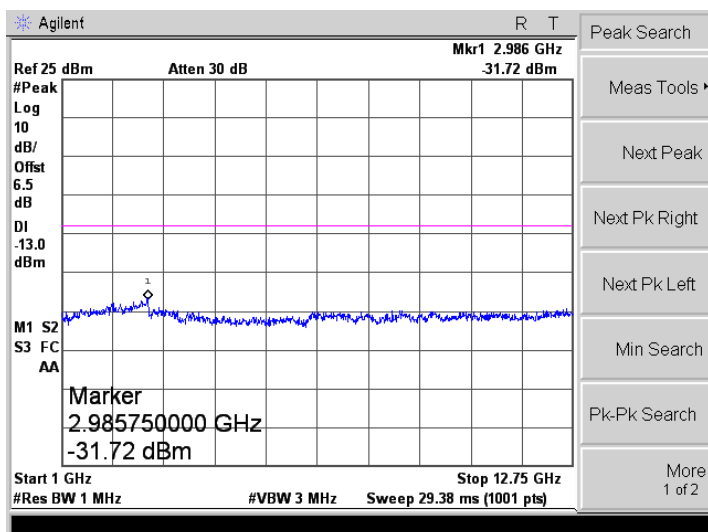



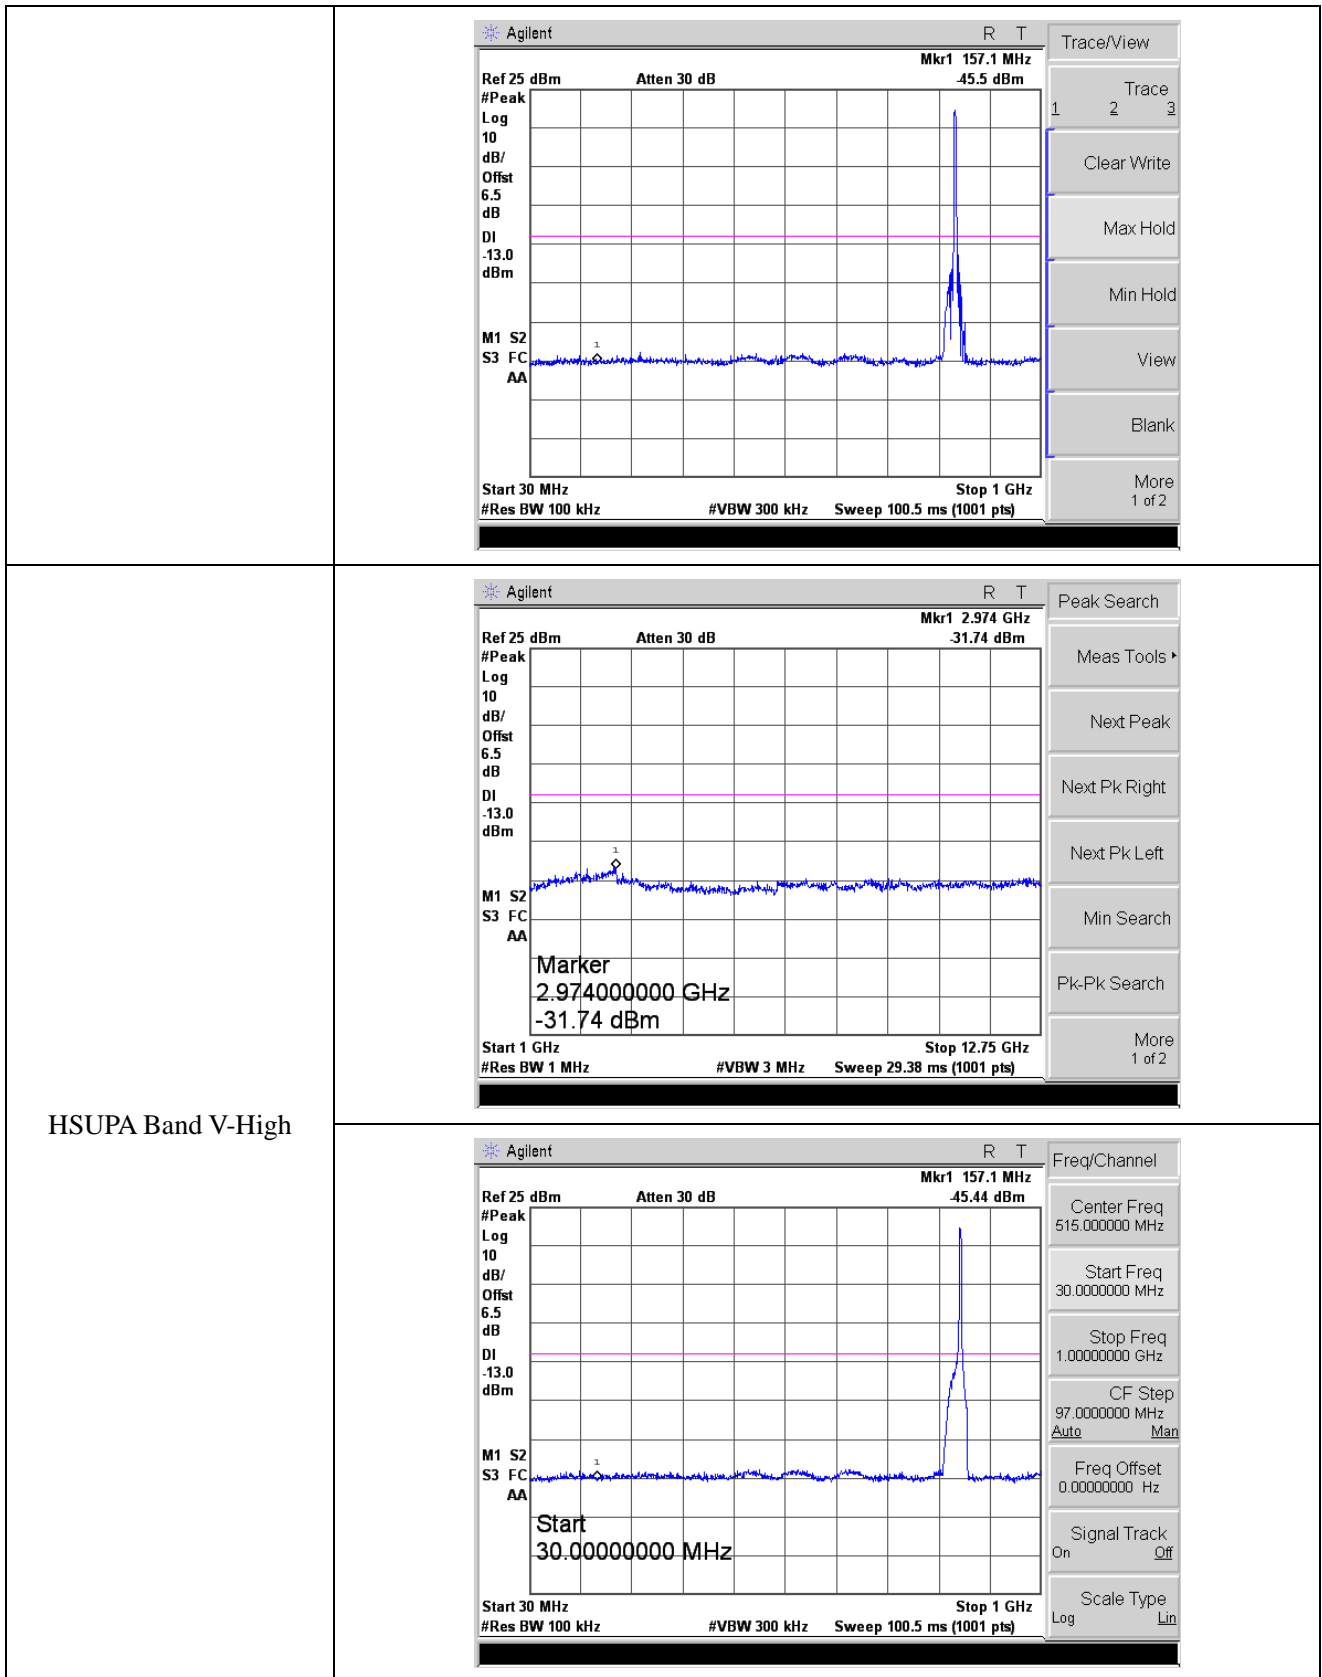







Bandedge

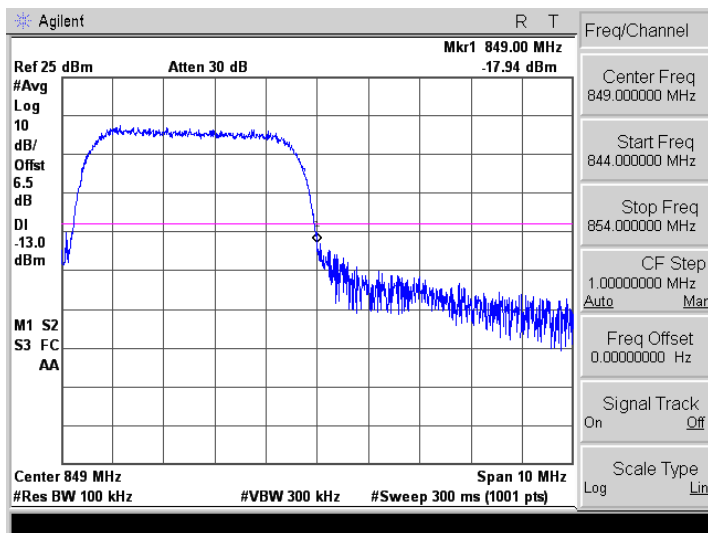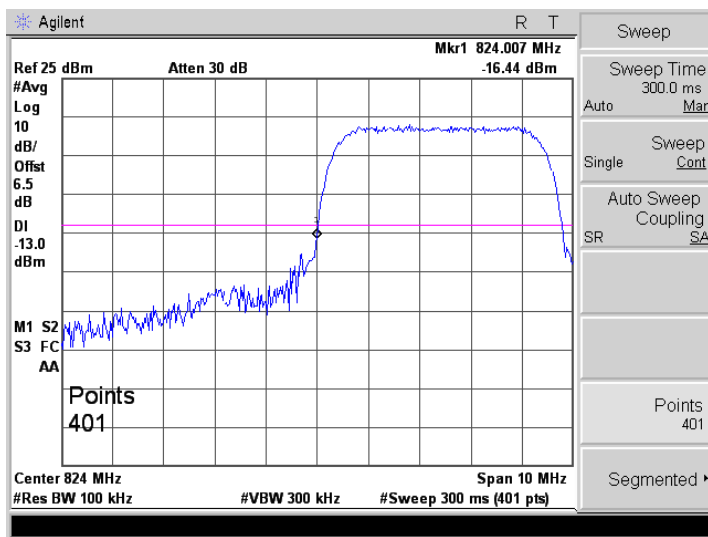


WCDMA Band IV-Low

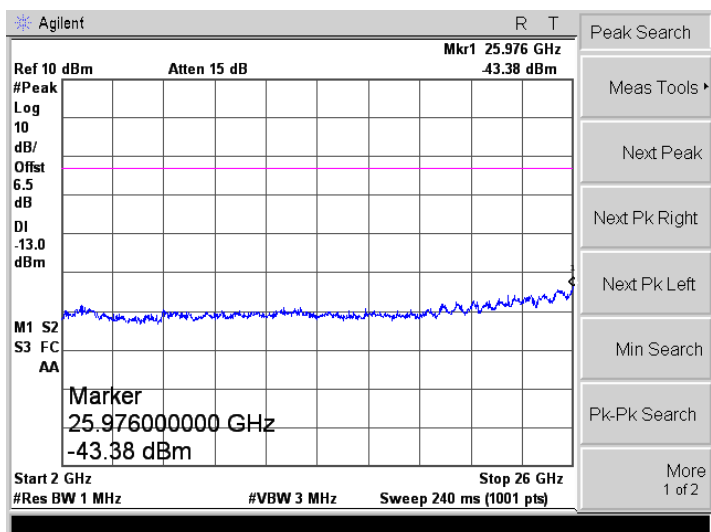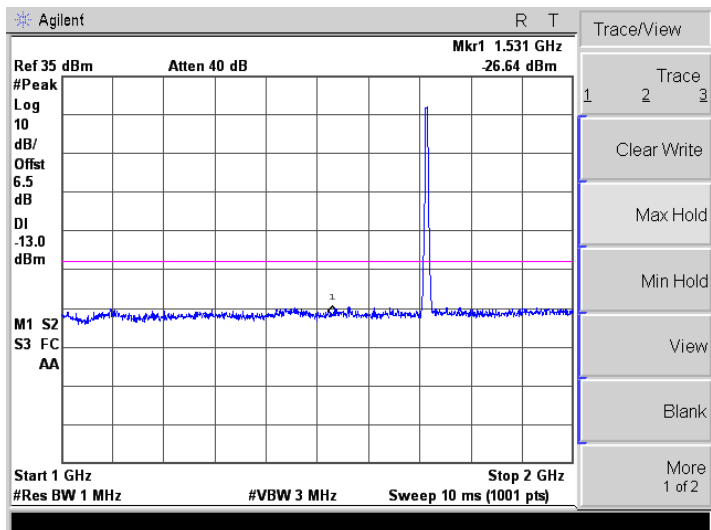
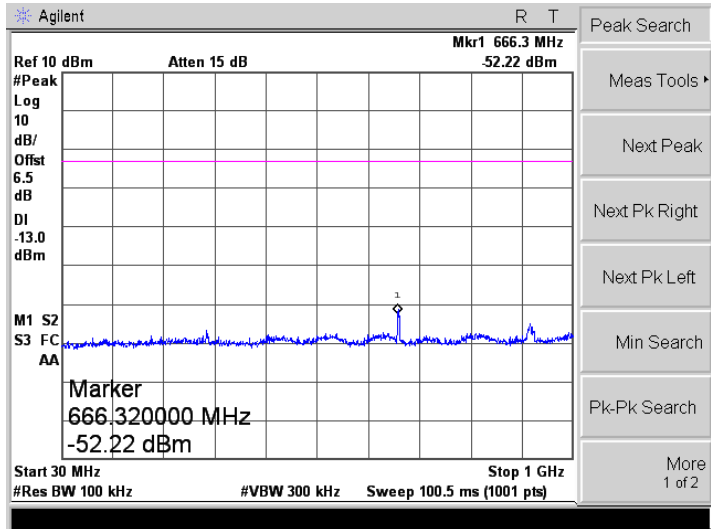


WCDMA Band IV-Middle

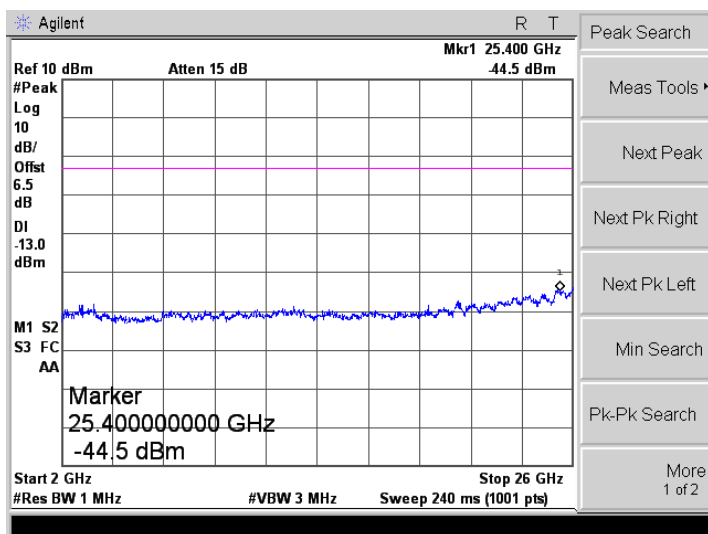
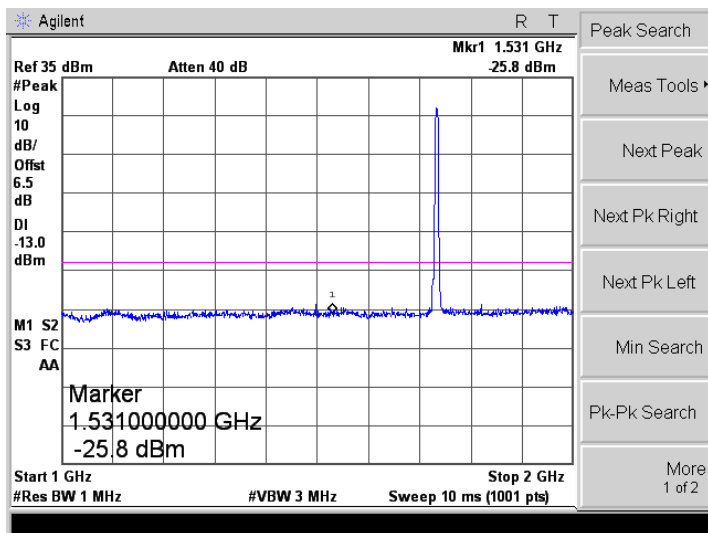
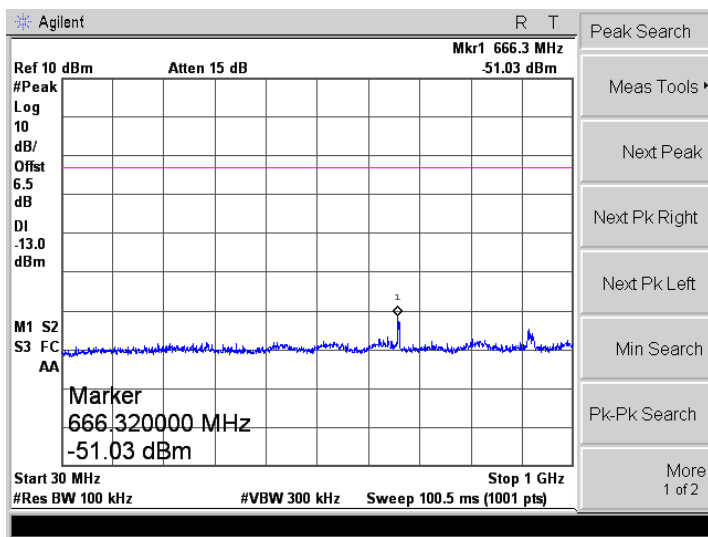


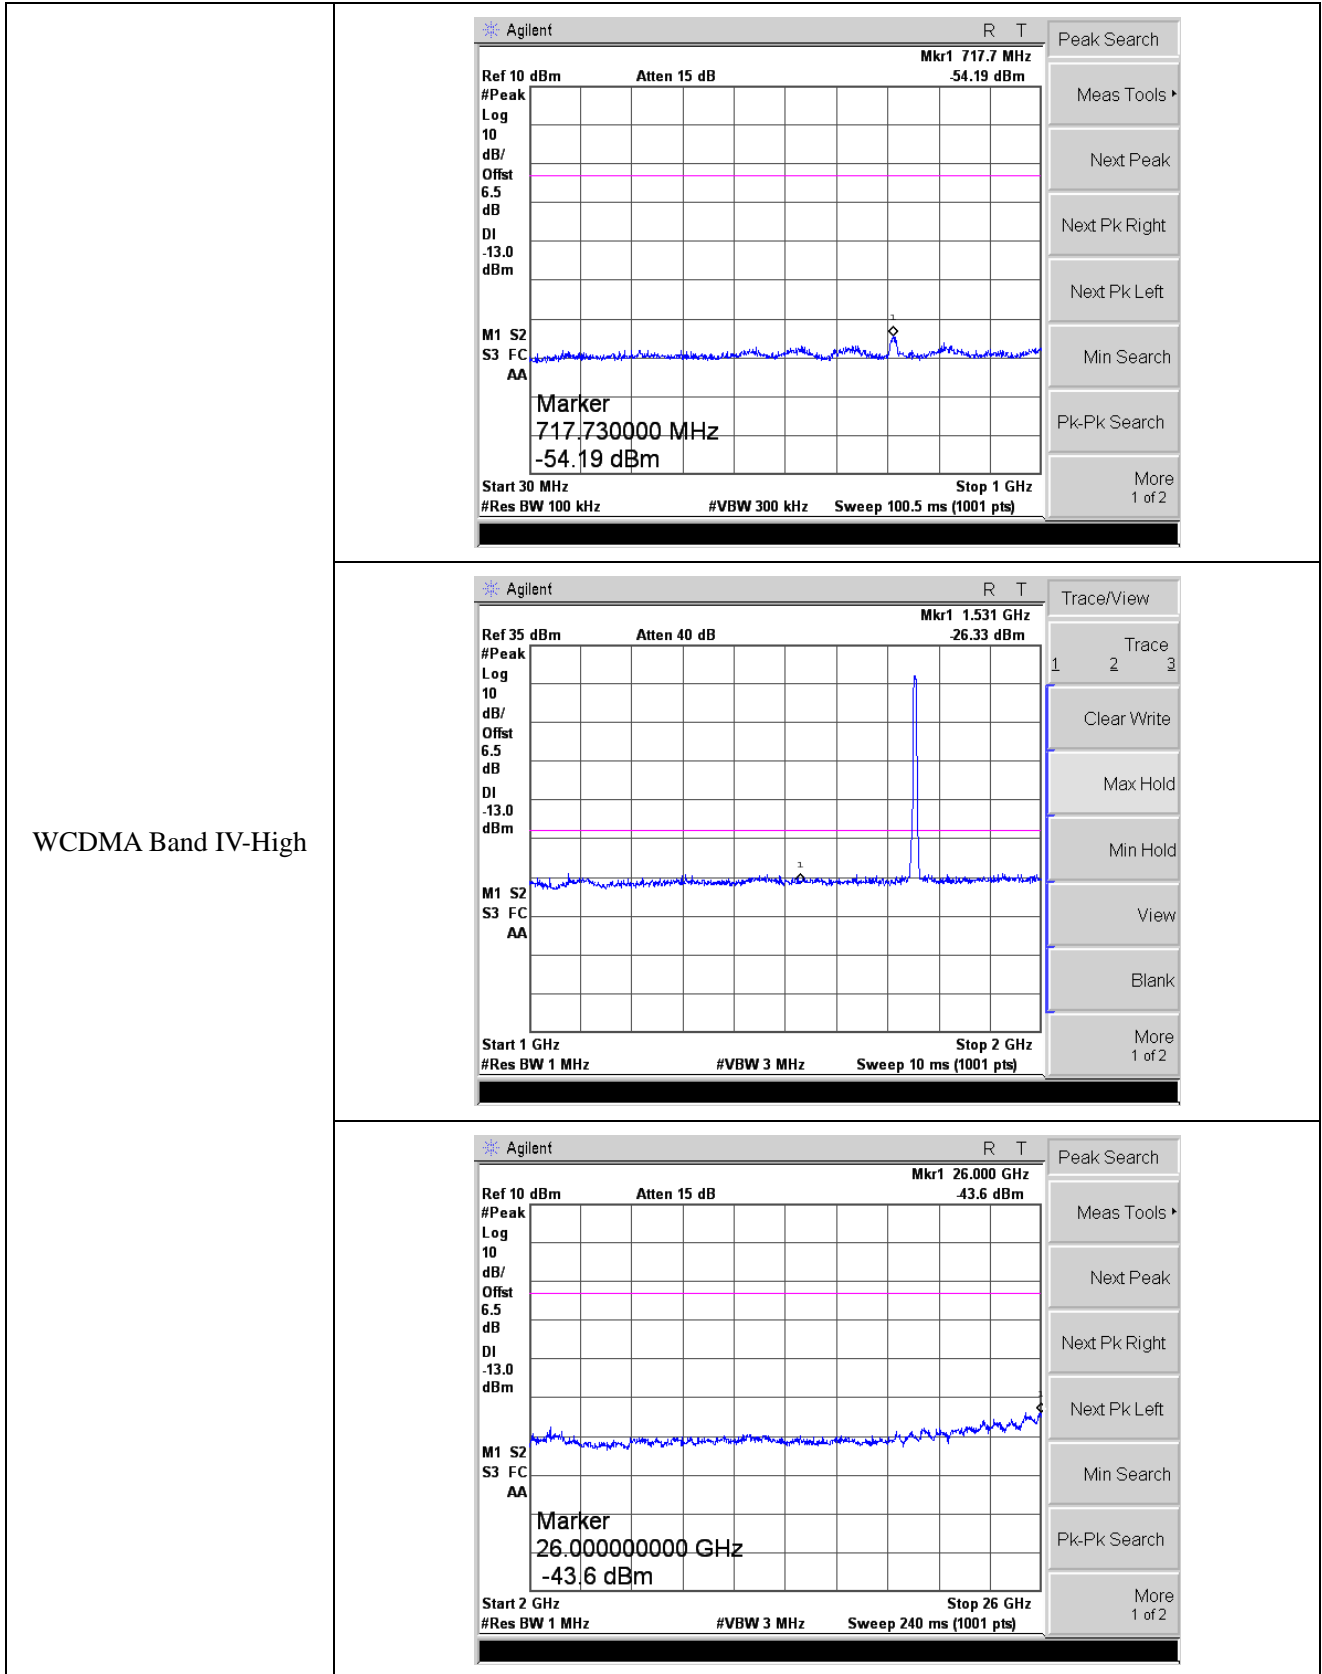




Bandedge

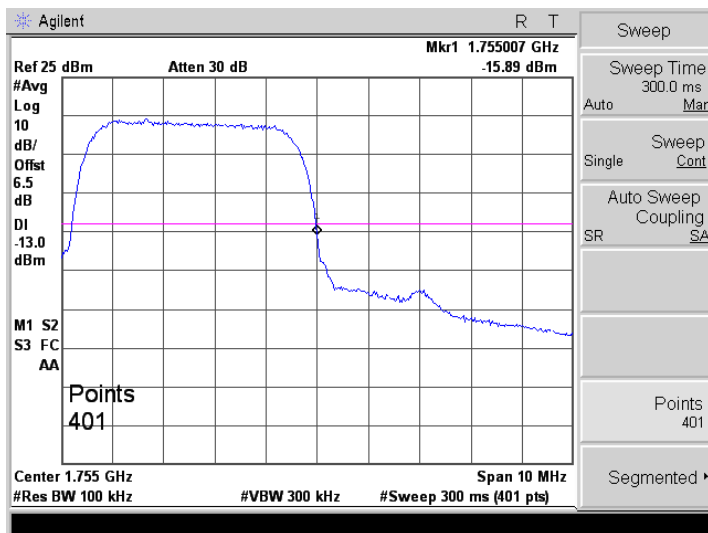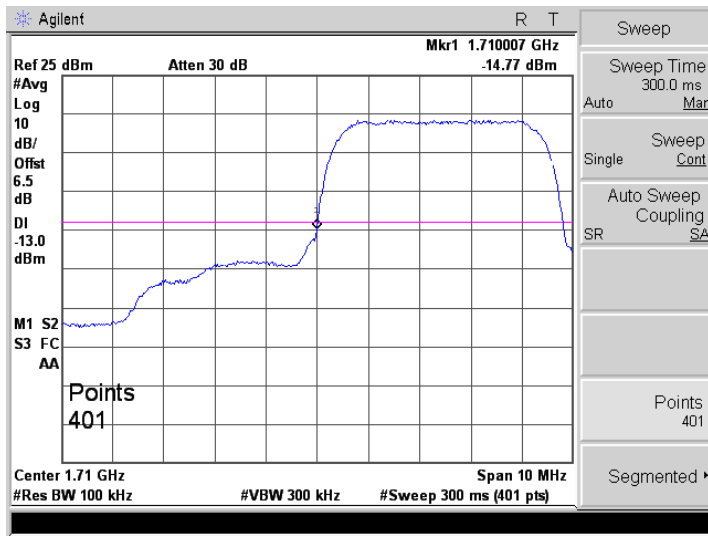




HSDPA Band IV-Low

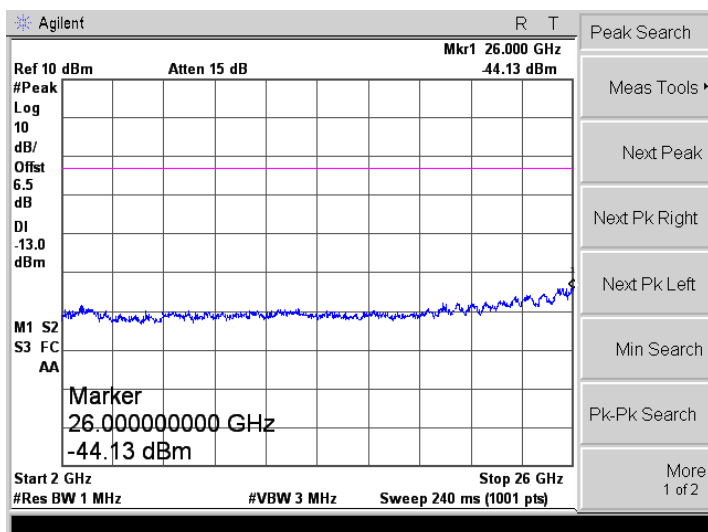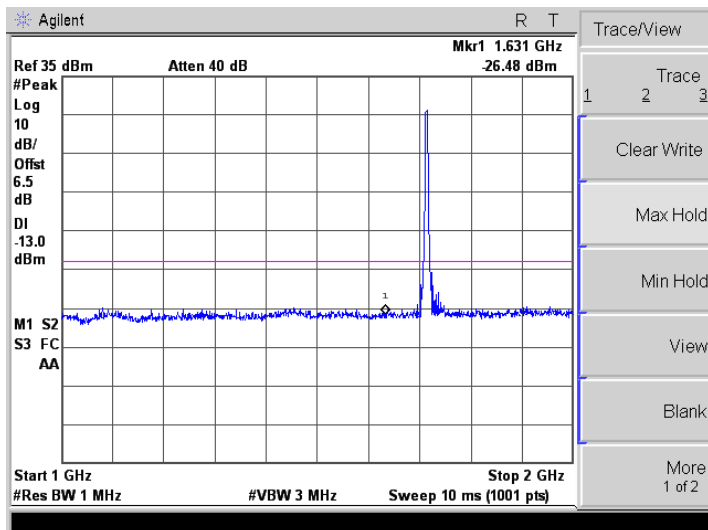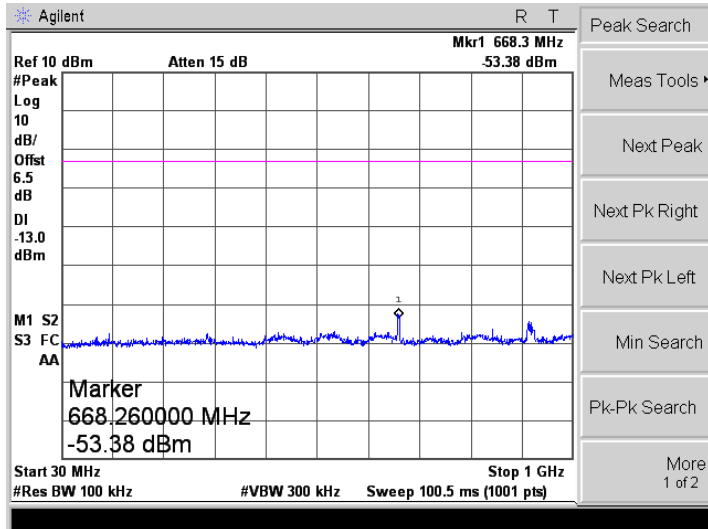

HSDPA Band IV-Middle

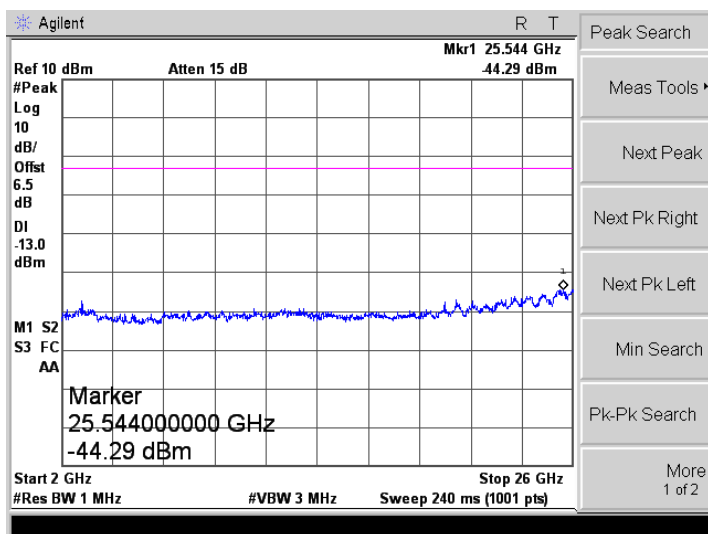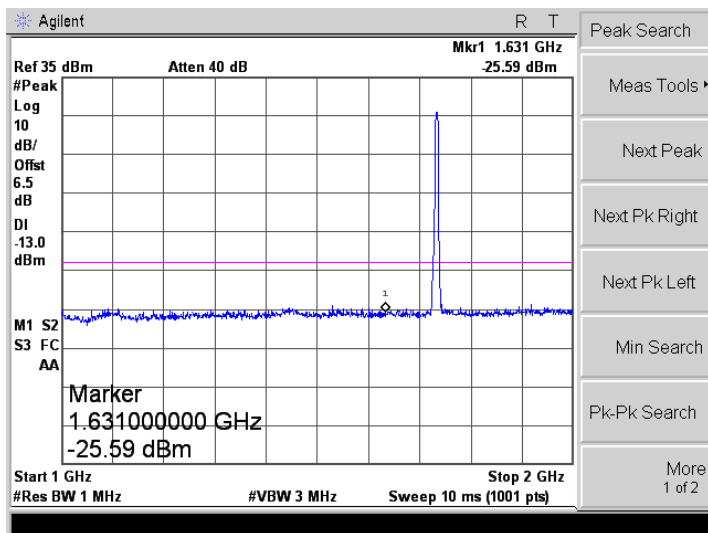
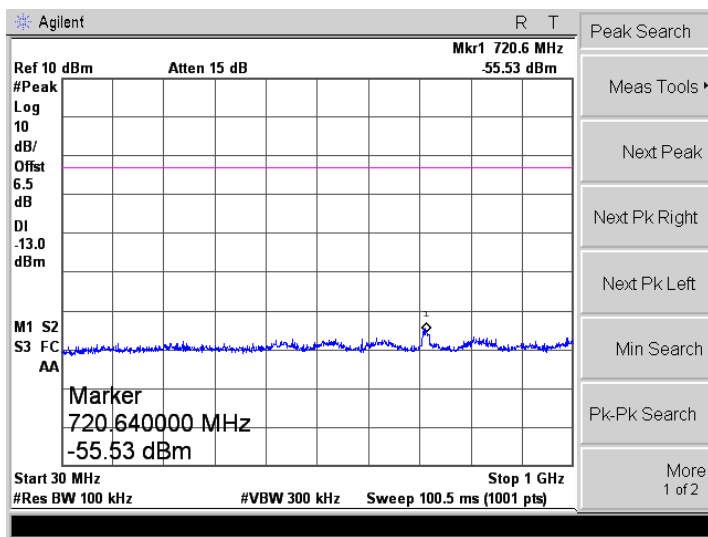


HSDPA Band IV-High

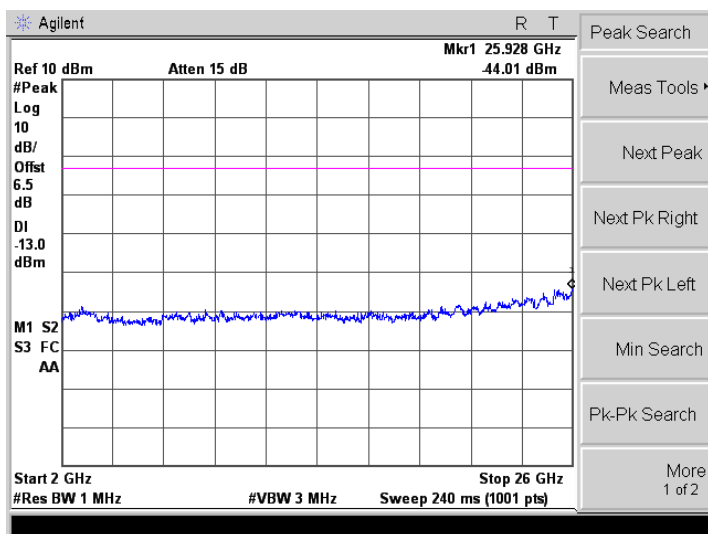
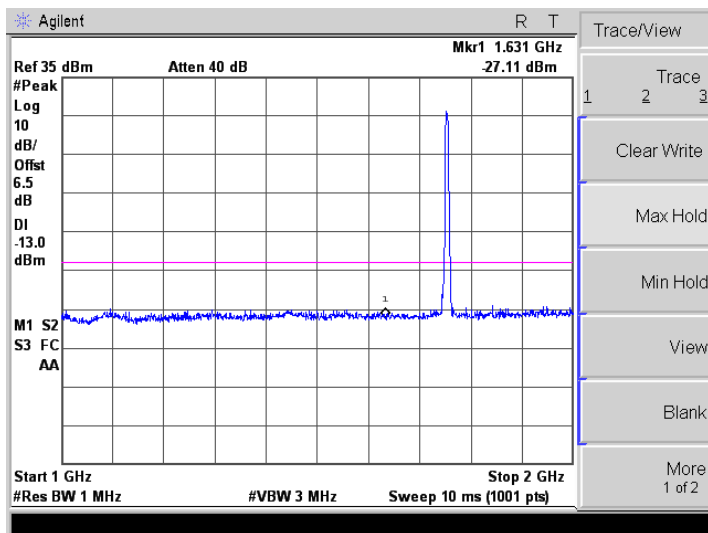
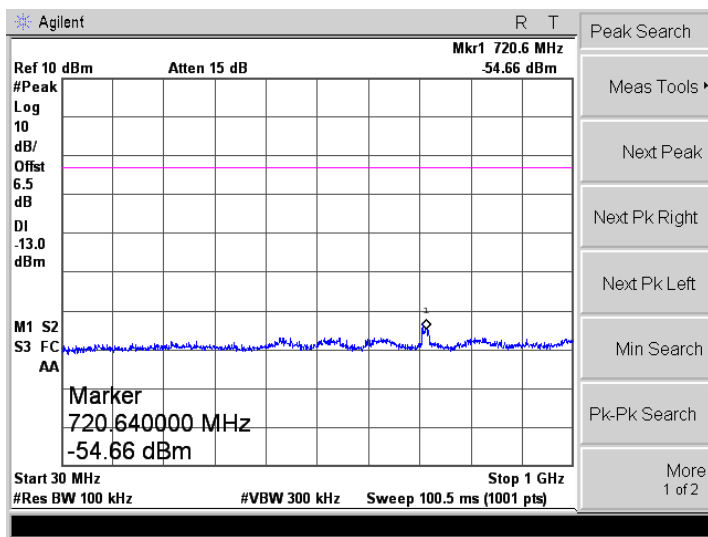







Bandedge

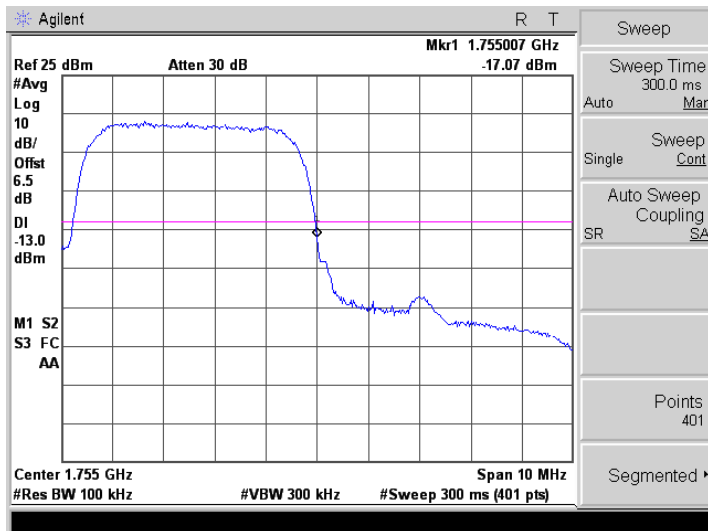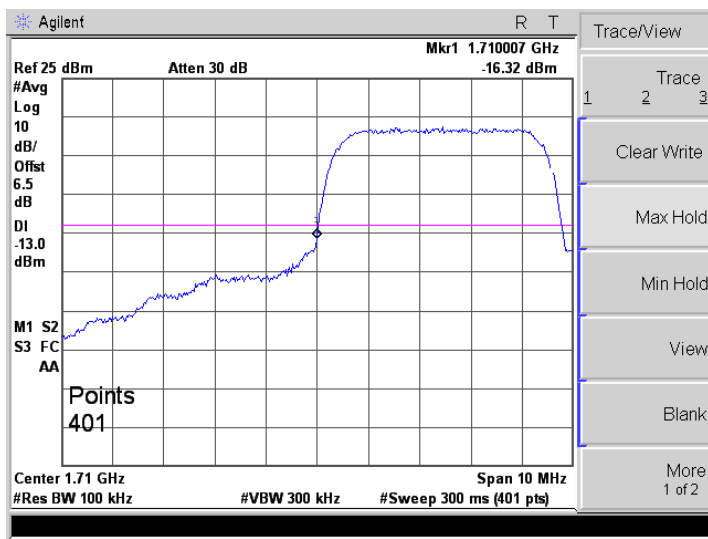




HSUPA Band IV-Low

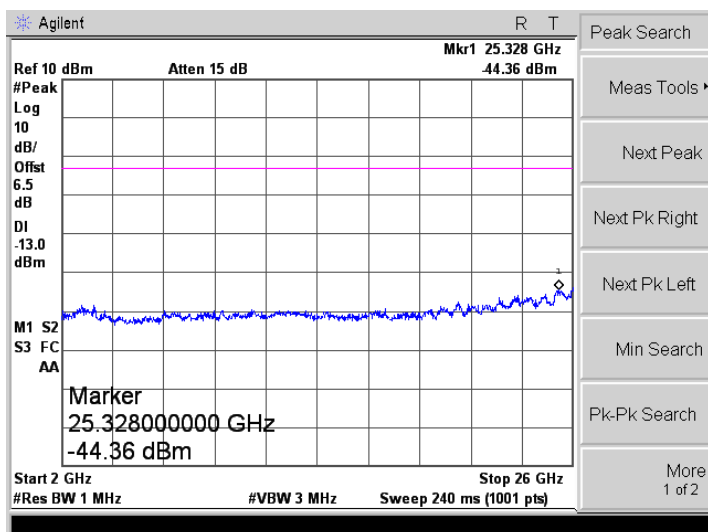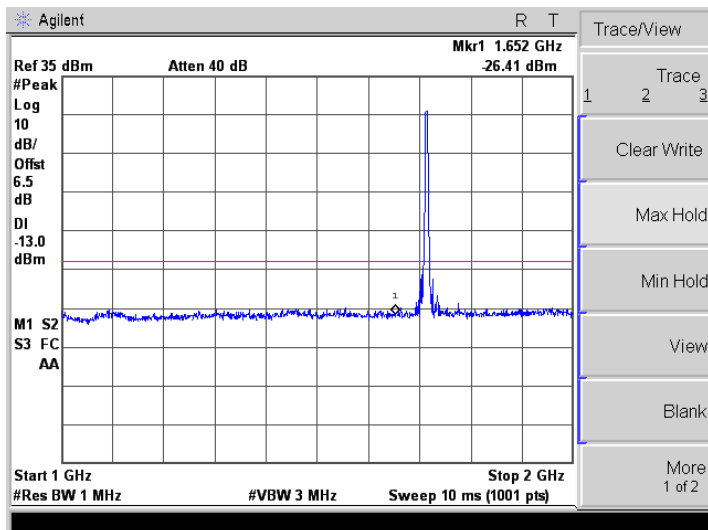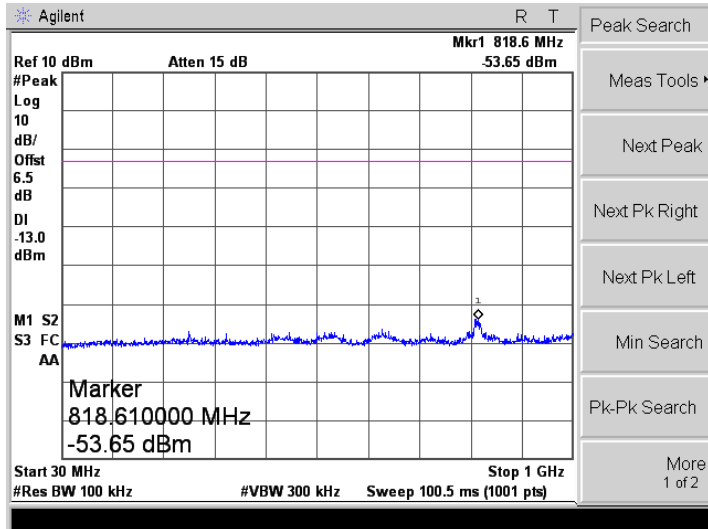



HSUPA Band IV-Middle

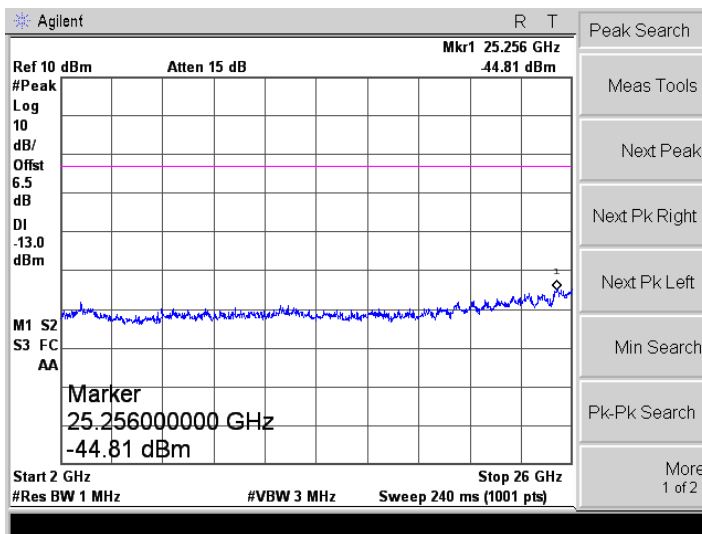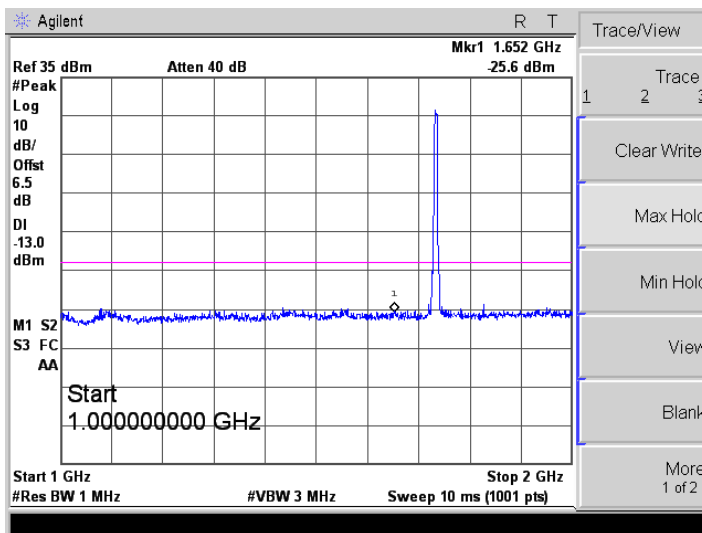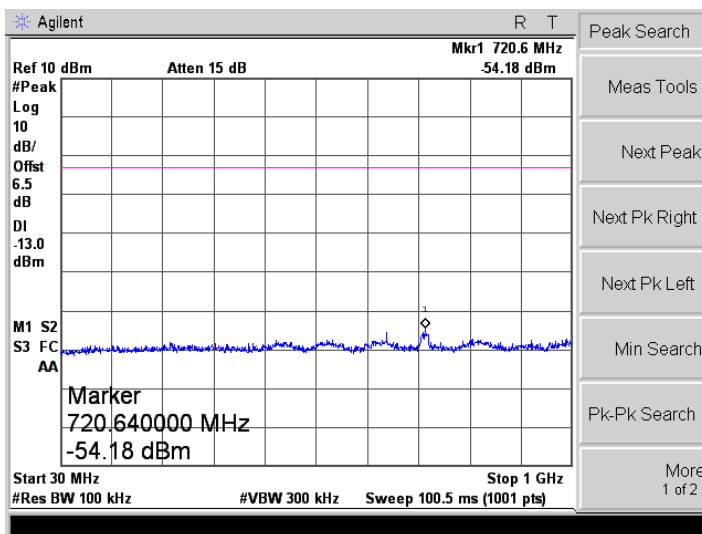




HSUPA Band IV-High

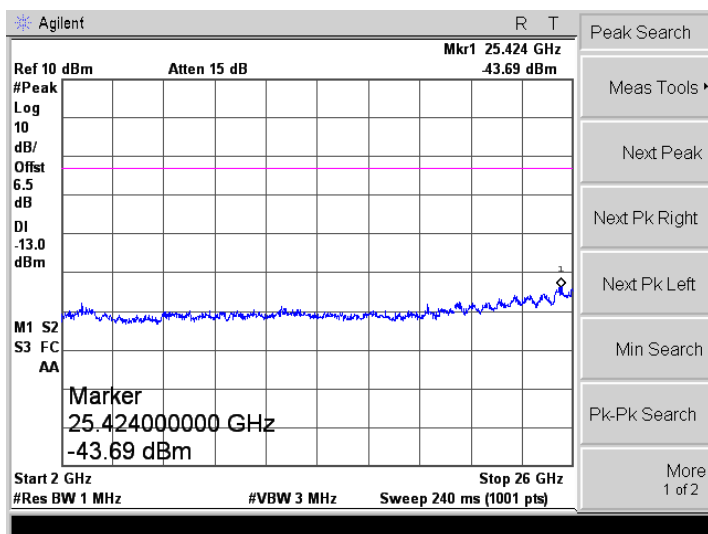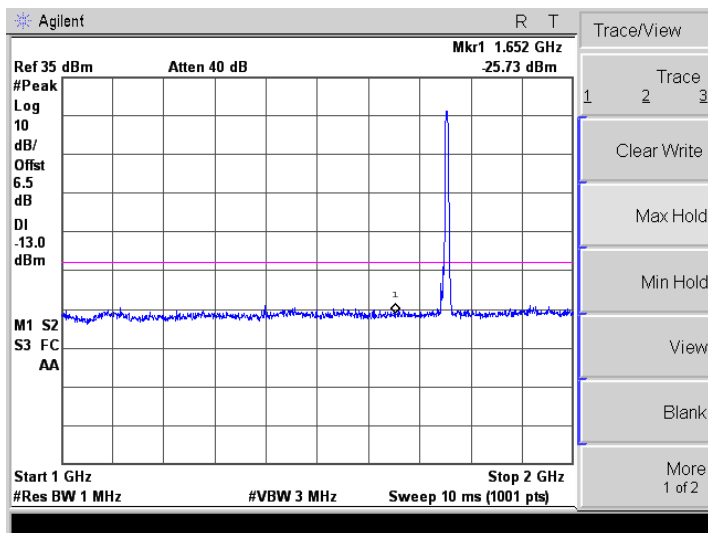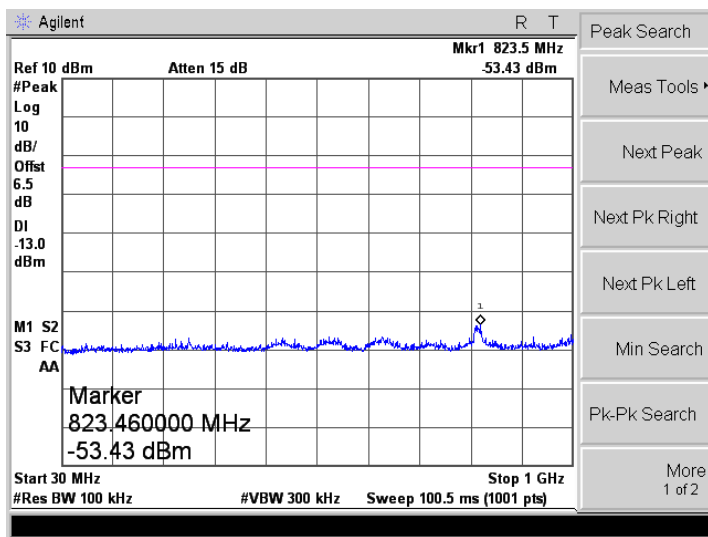




Bandedge

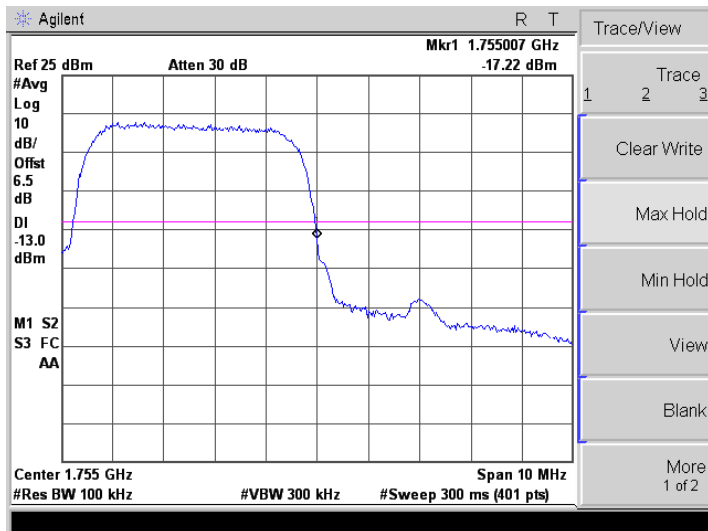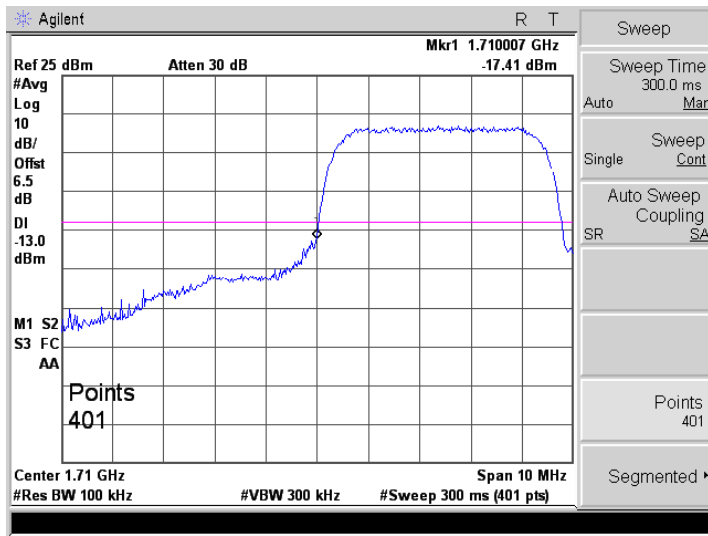




WCDMA Band II-Low

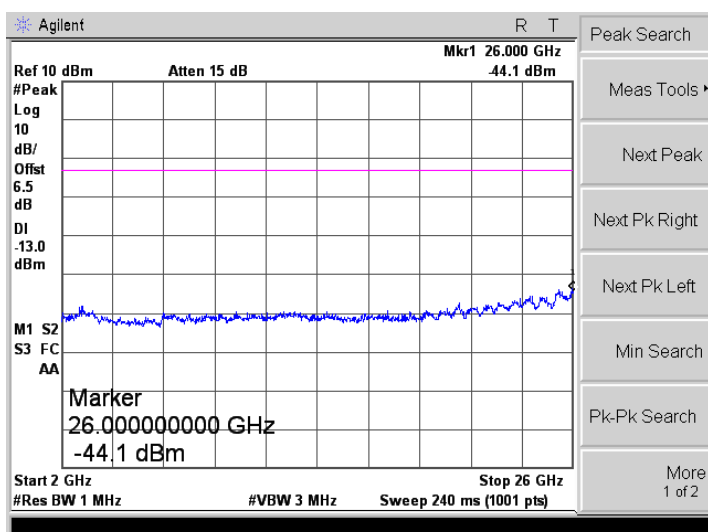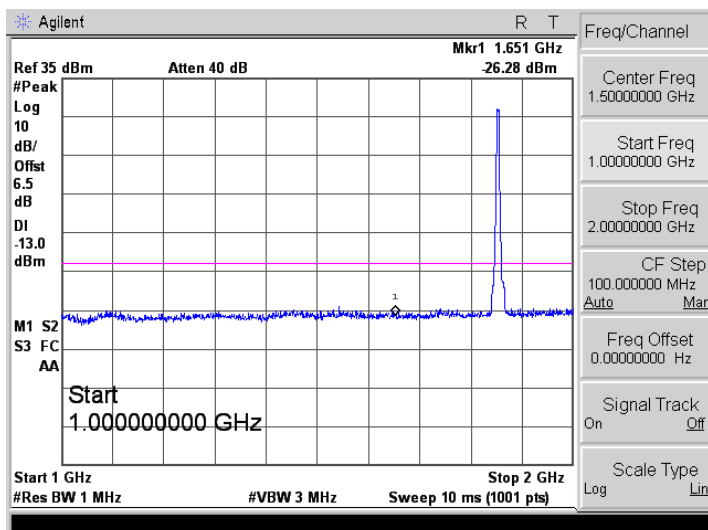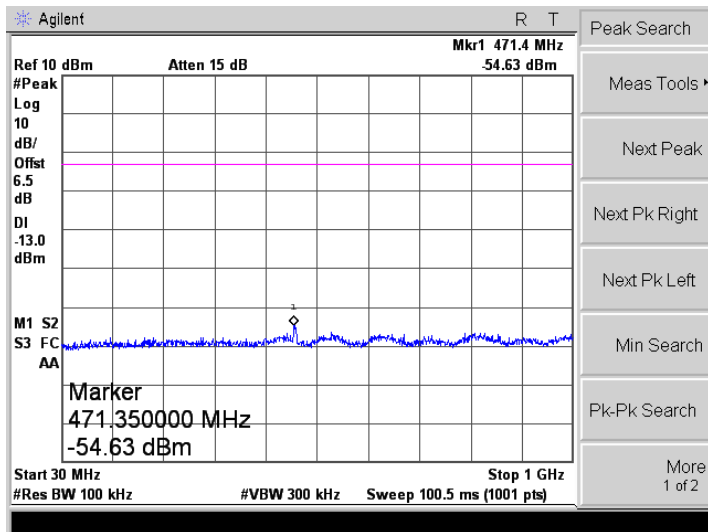

WCDMA Band II-Low

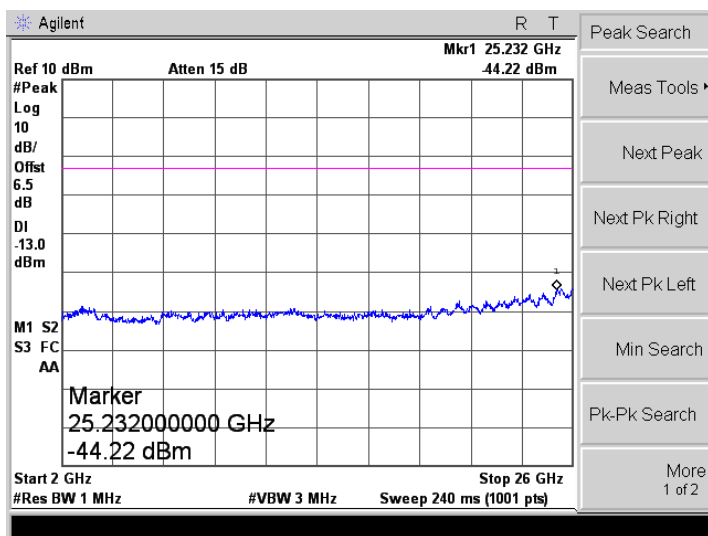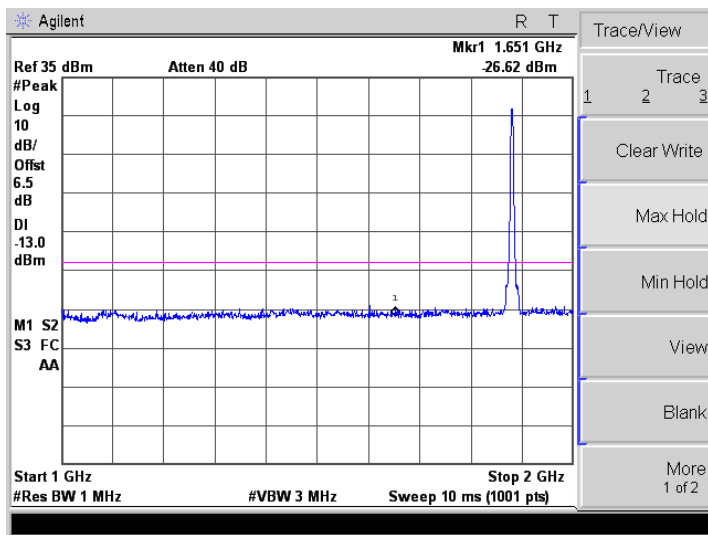
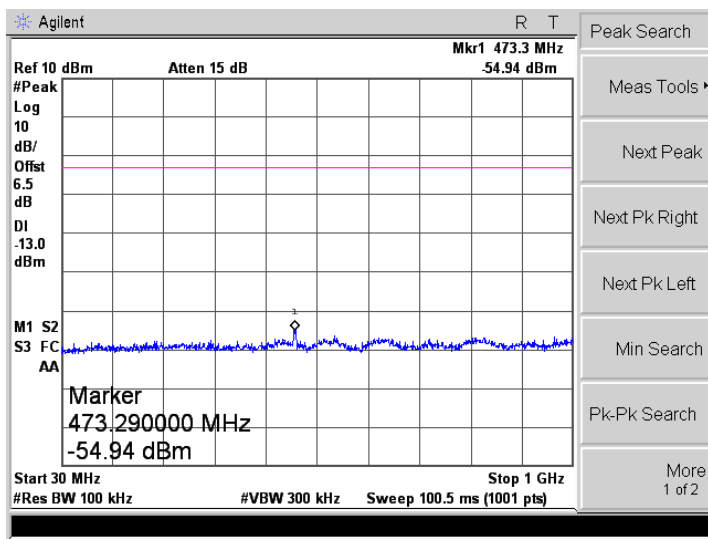


WCDMA Band II-Low

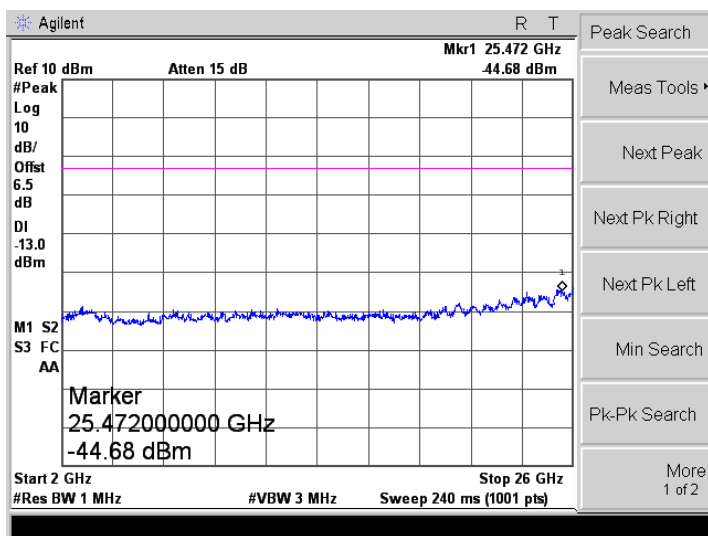
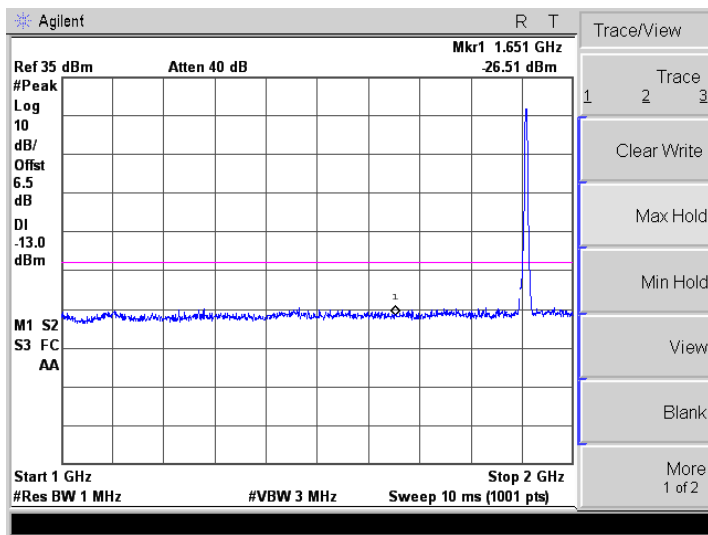
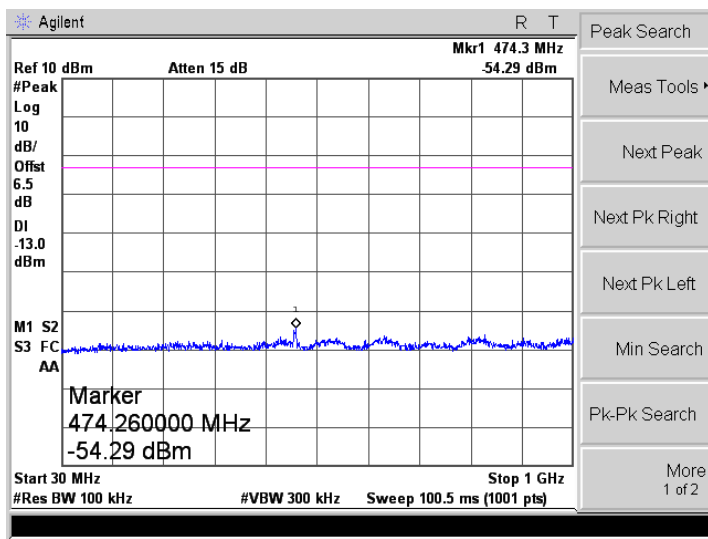







Bandedge

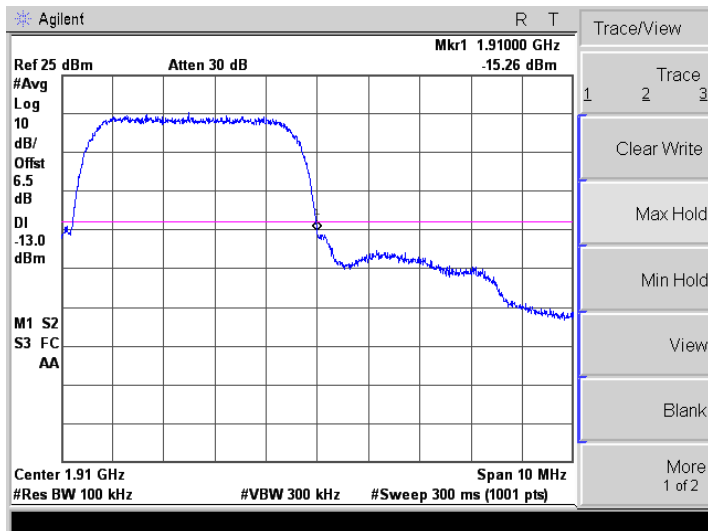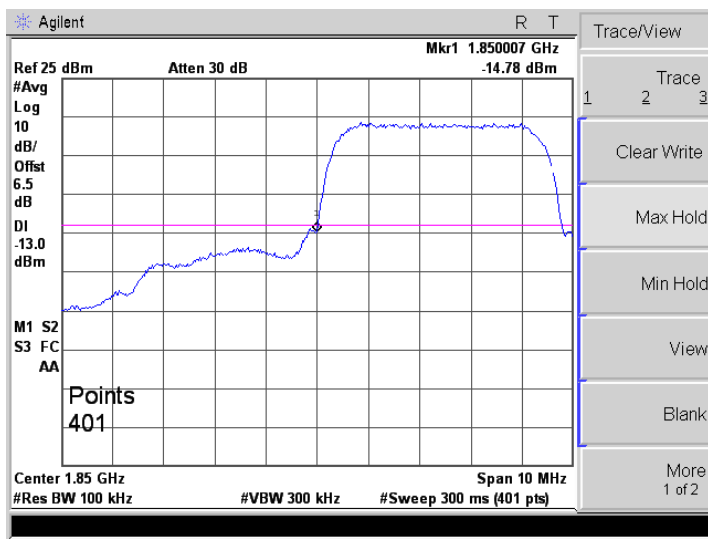




HSDPA Band II-Low

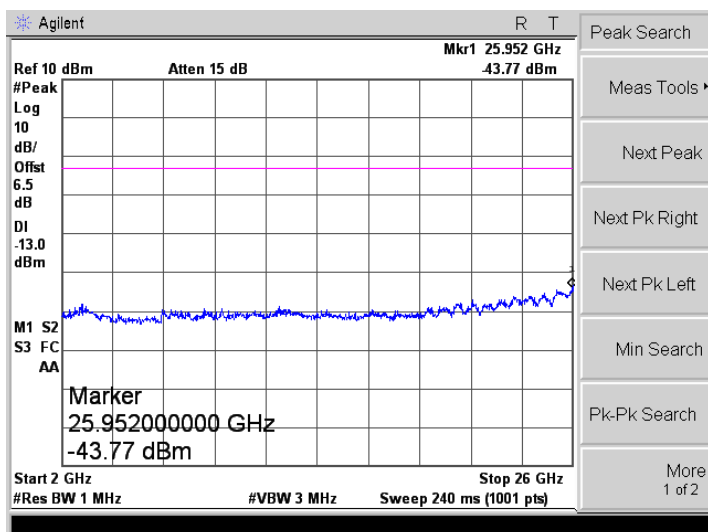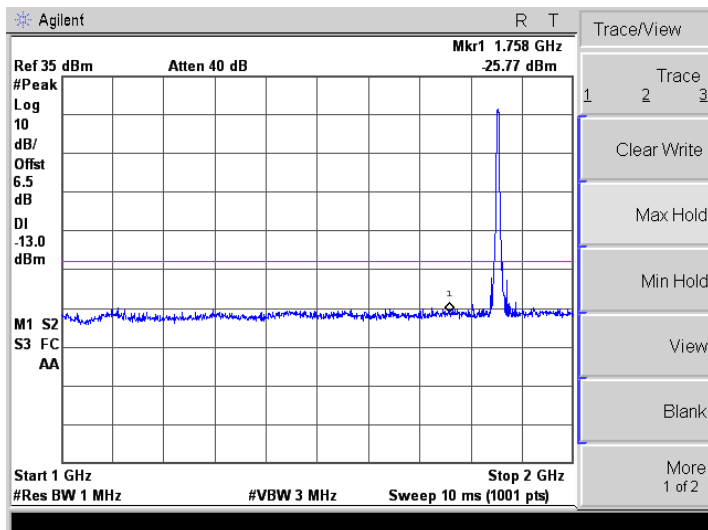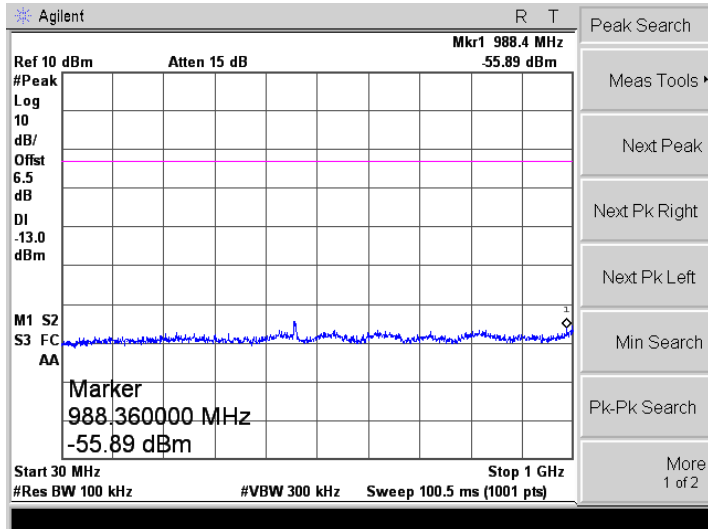



HSDPA Band II-Low

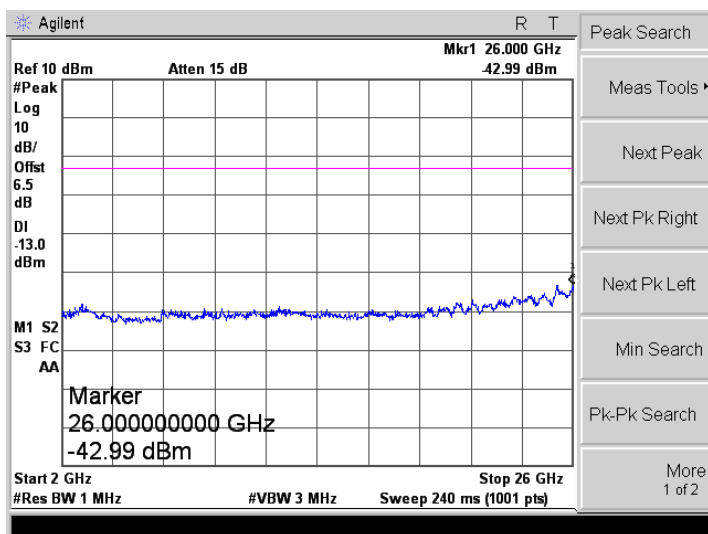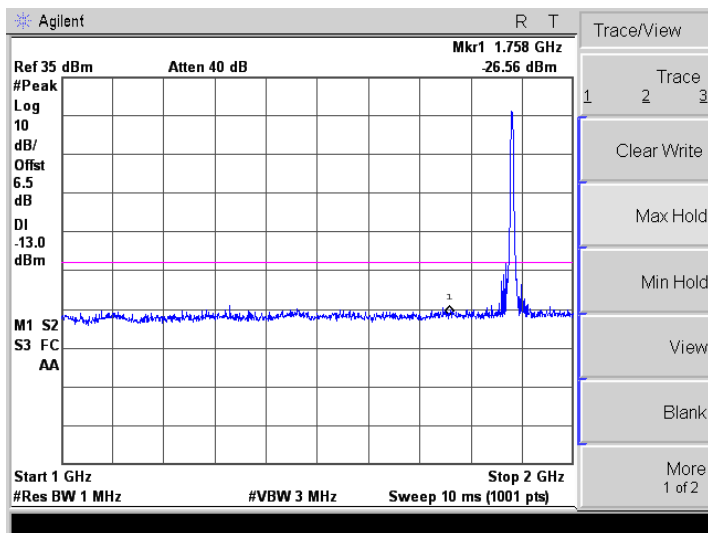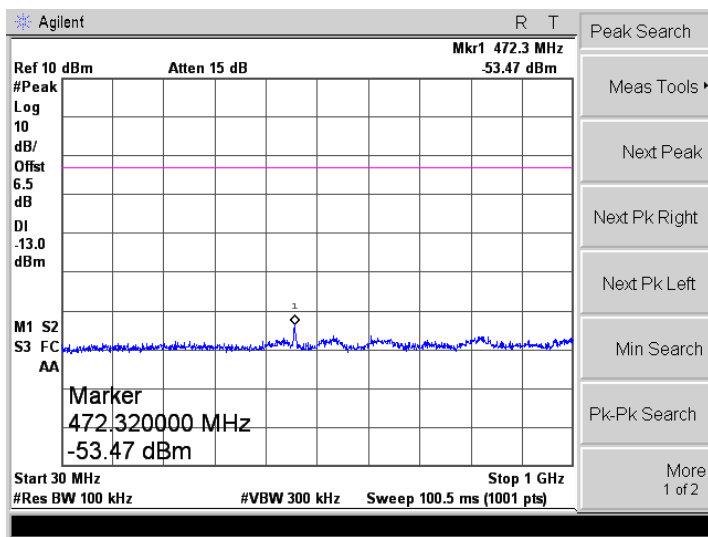




HSDPA Band II-Low

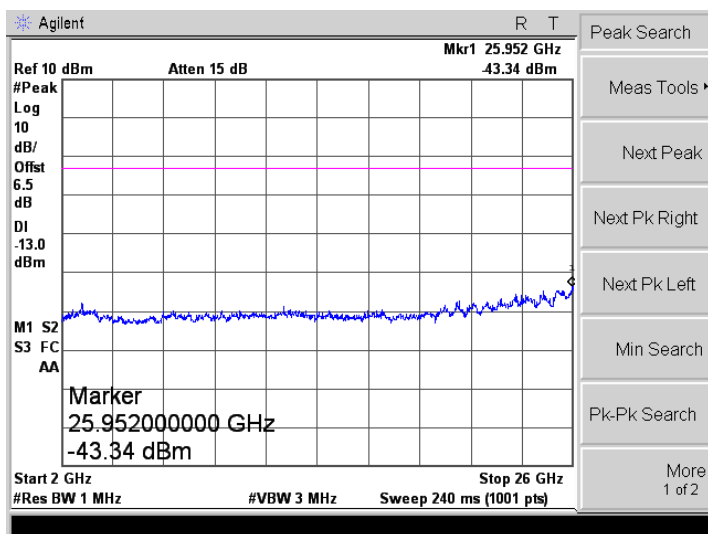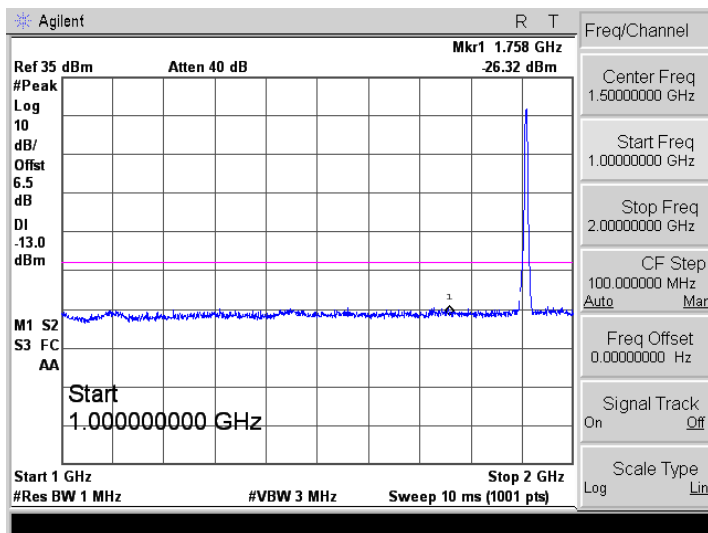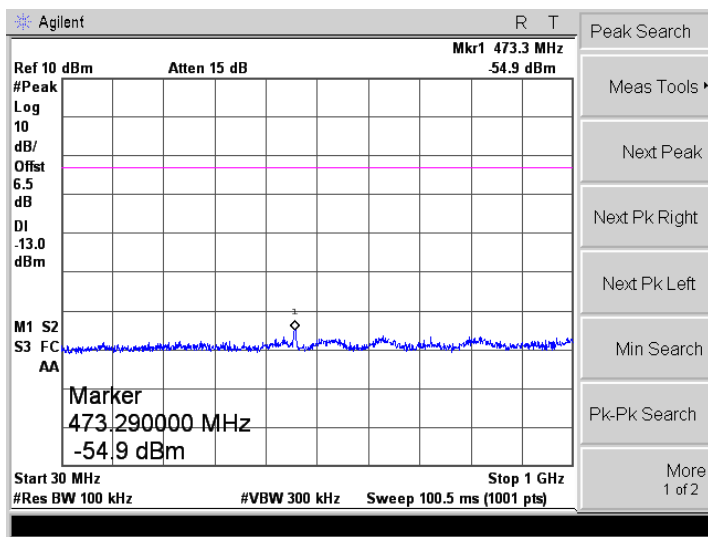




Bandedge

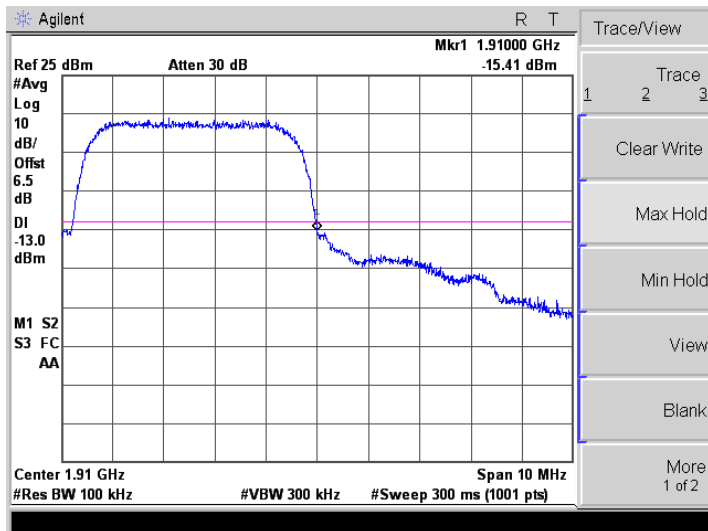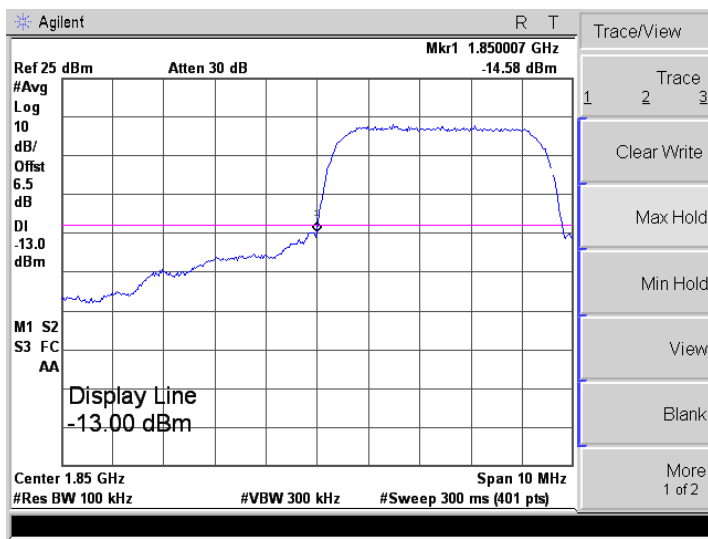




HSUPA Band II-Low

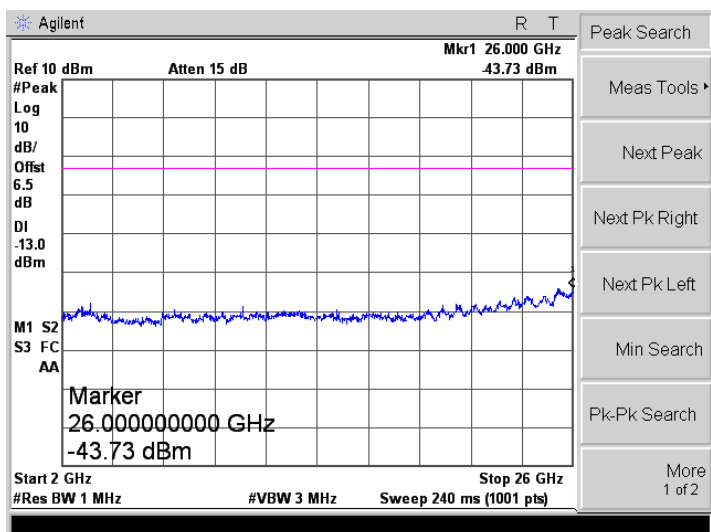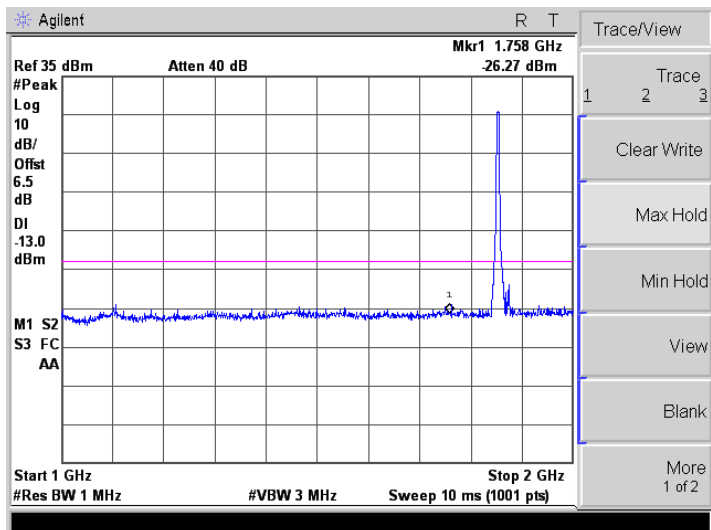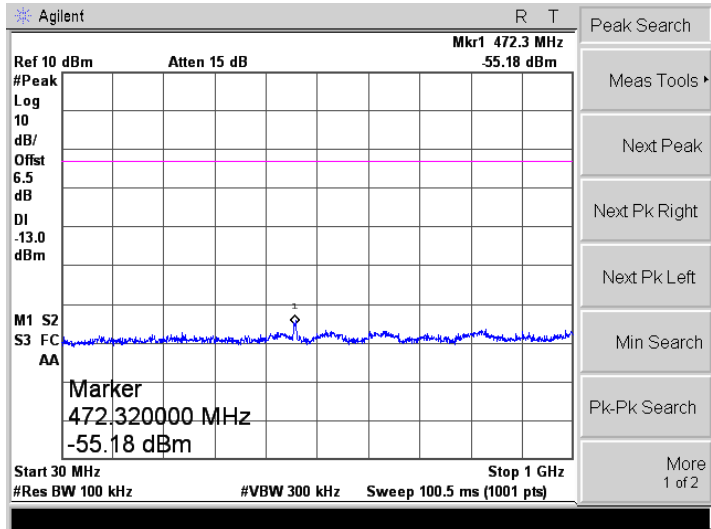

HSUPA Band II-Low

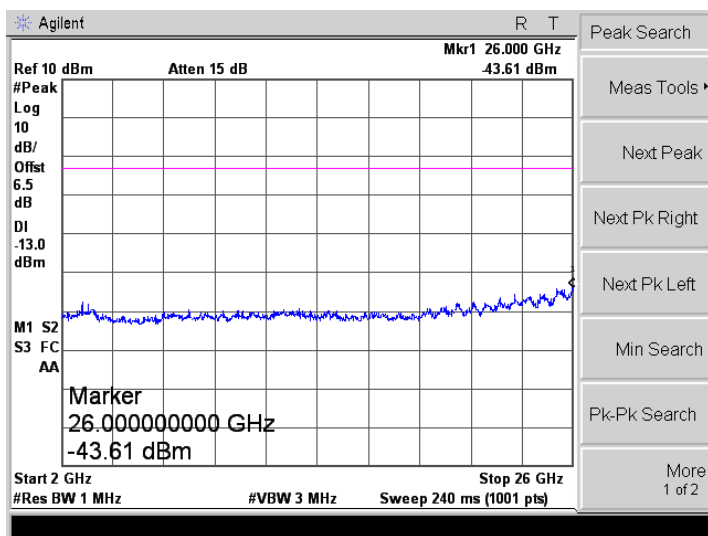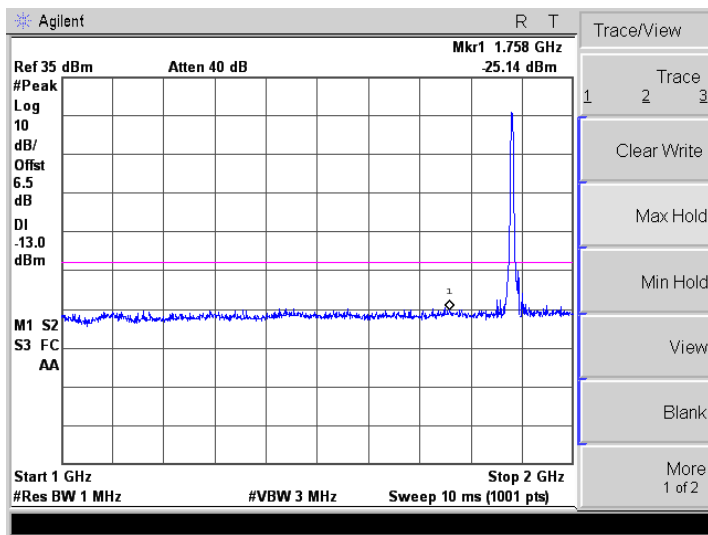
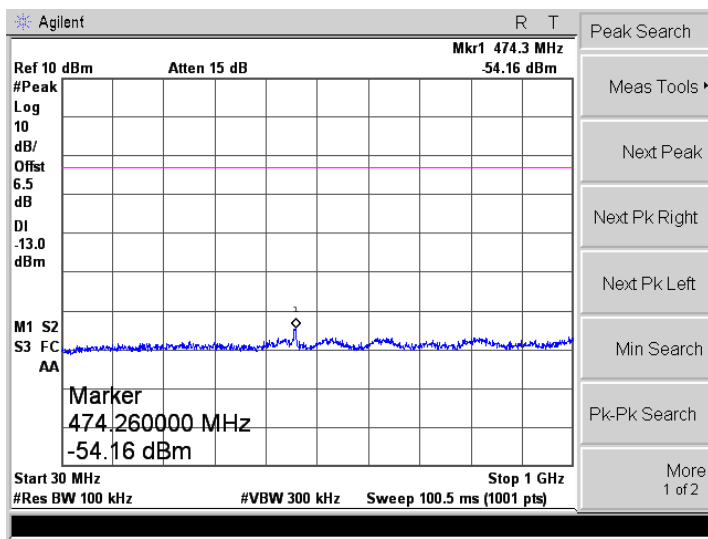


HSUPA Band II-Low

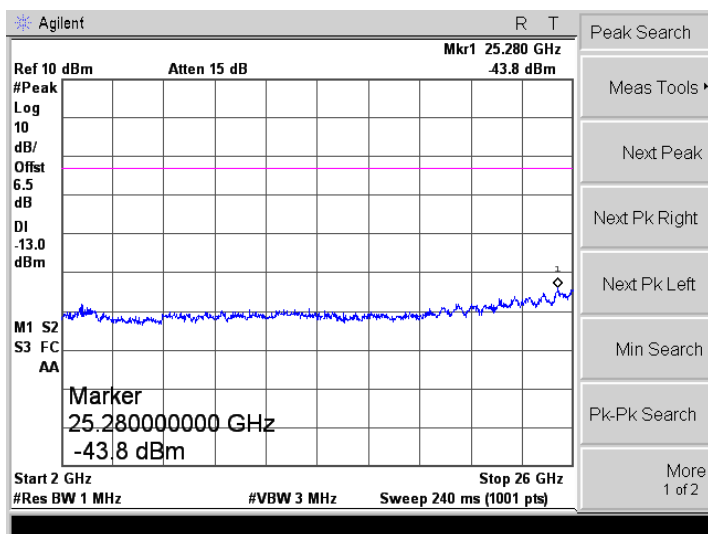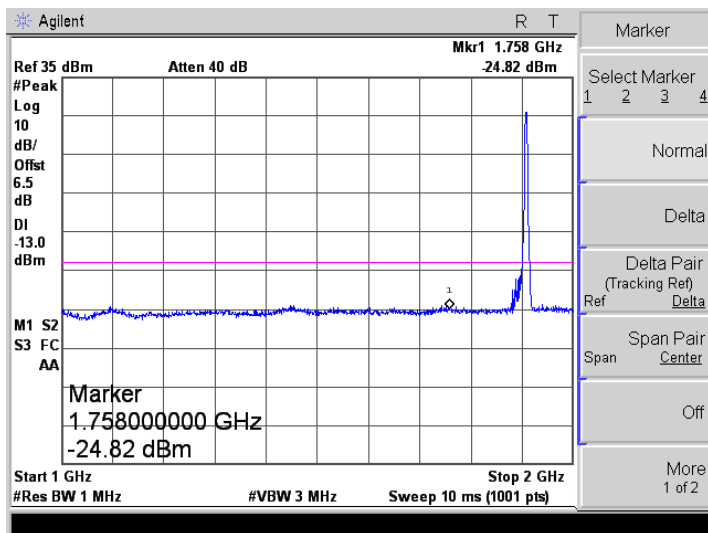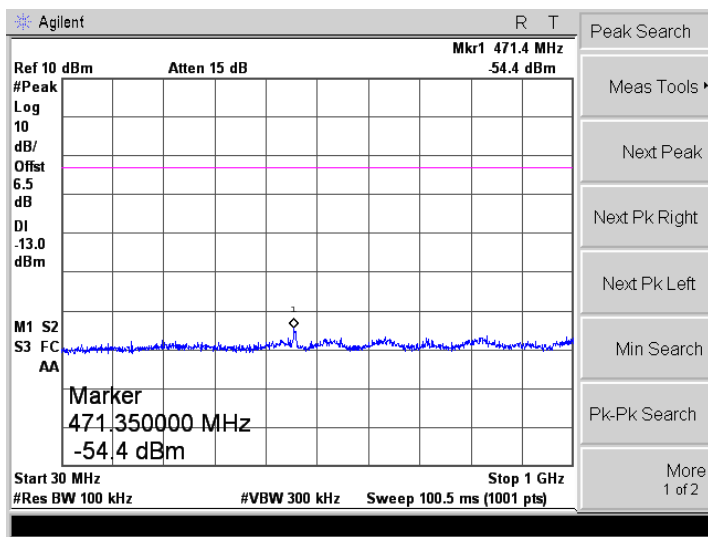



Bandedge

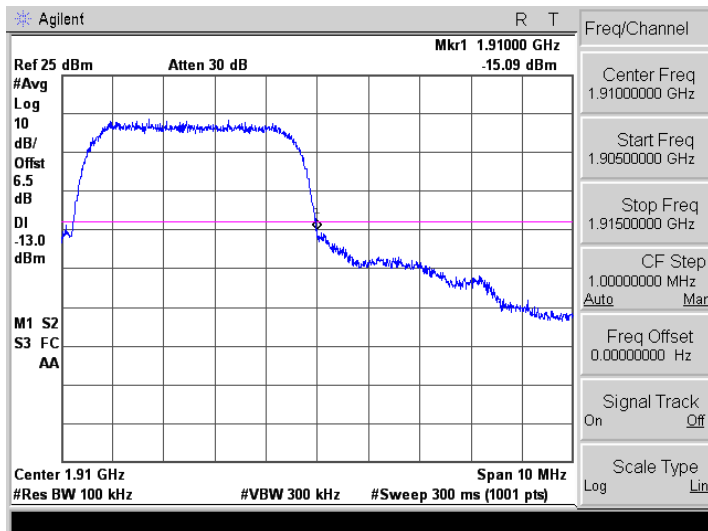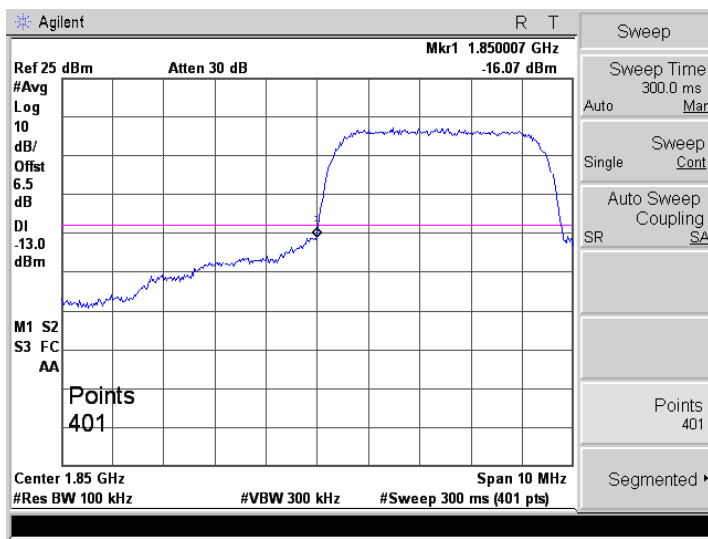

## APPENDIX E

### Frequency Stability

Note: 1. Worst case at GSM850/PCS1900/WCDMA B2/B4/B5 middle channel

2. Normal Voltage NV=DC3.7V; Low Voltage LV=DC3.5V;High Voltage HV=DC4.2V

➤ Frequency stability V.S. Temperature measurement

Reference Frequency: GSM850 Middle channel=190 channel=836.6MHz					
Power supplied (Vdc)	Temperature ( °C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
NV	-30	66	0.0791	2.50	Pass
	-20	52	0.0616		
	-10	46	0.0552		
	0	39	0.0469		
	10	35	0.0414		
	20	27	0.0322		
	30	32	0.0386		
	40	38	0.0460		
	50	46	0.0552		
Reference Frequency: PCS1900 Middle channel=661 channel=1880MHz					
Power supplied (Vdc)	Temperature ( °C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
NV	-30	60	0.0319	2.50	Pass
	-20	51	0.0270		
	-10	47	0.0250		
	0	41	0.0217		
	10	35	0.0184		
	20	28	0.0151		
	30	33	0.0176		
	40	38	0.0200		
	50	43	0.0229		

Reference Frequency: WCDMA Band V Middle channel=4183 channel=836.6MHz					
Power supplied (Vdc)	Temperature ( °C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
NV	-30	68	0.0818	2.50	Pass
	-20	53	0.0634		
	-10	47	0.0561		
	0	41	0.0487		
	10	34	0.0405		
	20	28	0.0340		
	30	36	0.0432		
	40	43	0.0515		
	50	49	0.0588		
Reference Frequency: WCDMA Band IV Middle channel=1412 channel=1733.6MHz					
Power supplied (Vdc)	Temperature ( °C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
NV	-30	70	0.0404	2.50	Pass
	-20	66	0.0382		
	-10	55	0.0315		
	0	47	0.0271		
	10	39	0.0226		
	20	33	0.0191		
	30	41	0.0235		
	40	45	0.0262		
	50	52	0.0302		

Reference Frequency: WCDMA Band II Middle channel=9400 channel=1880MHz					
Power supplied (Vdc)	Temperature ( °C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
NV	-30	55	0.0295	2.50	Pass
	-20	46	0.0245		
	-10	42	0.0225		
	0	36	0.0192		
	10	32	0.0172		
	20	27	0.0143		
	30	31	0.0164		
	40	37	0.0196		
50	42	0.0225			


➤ Frequency stability V.S. Voltage measurement


Reference Frequency: GSM850 (GSM link) Middle channel=190 channel=836.6MHz					
Temperature ( °C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	HV	65	0.0772	2.50	Pass
	NV	58	0.0699		
	LV	52	0.0625		
Reference Frequency: PCS1900 (GSM link) Middle channel=661 channel=1880MHz					
Temperature ( °C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	HV	64	0.0340	2.50	Pass
	NV	54	0.0286		
	LV	50	0.0266		




Reference Frequency: WCDMA Band V Middle channel=4183 channel=836.6MHz					
Temperature ( °C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	
		Hz	ppm	Result	
25	HV	52	0.0616	2.50	Pass
	NV	45	0.0542		
	LV	37	0.0441		
Reference Frequency: WCDMA Band IV Middle channel=1412 channel=1733.6MHz					
Temperature ( °C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	HV	47	0.0271	2.50	Pass
	NV	40	0.0231		
	LV	35	0.0200		
Reference Frequency: WCDMA Band II Middle channel=9400 channel=1880MHz					
Temperature ( °C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	HV	60	0.0319	2.50	Pass
	NV	56	0.0299		
	LV	45	0.0237		

# APPENDIX F

## Modulation characteristics

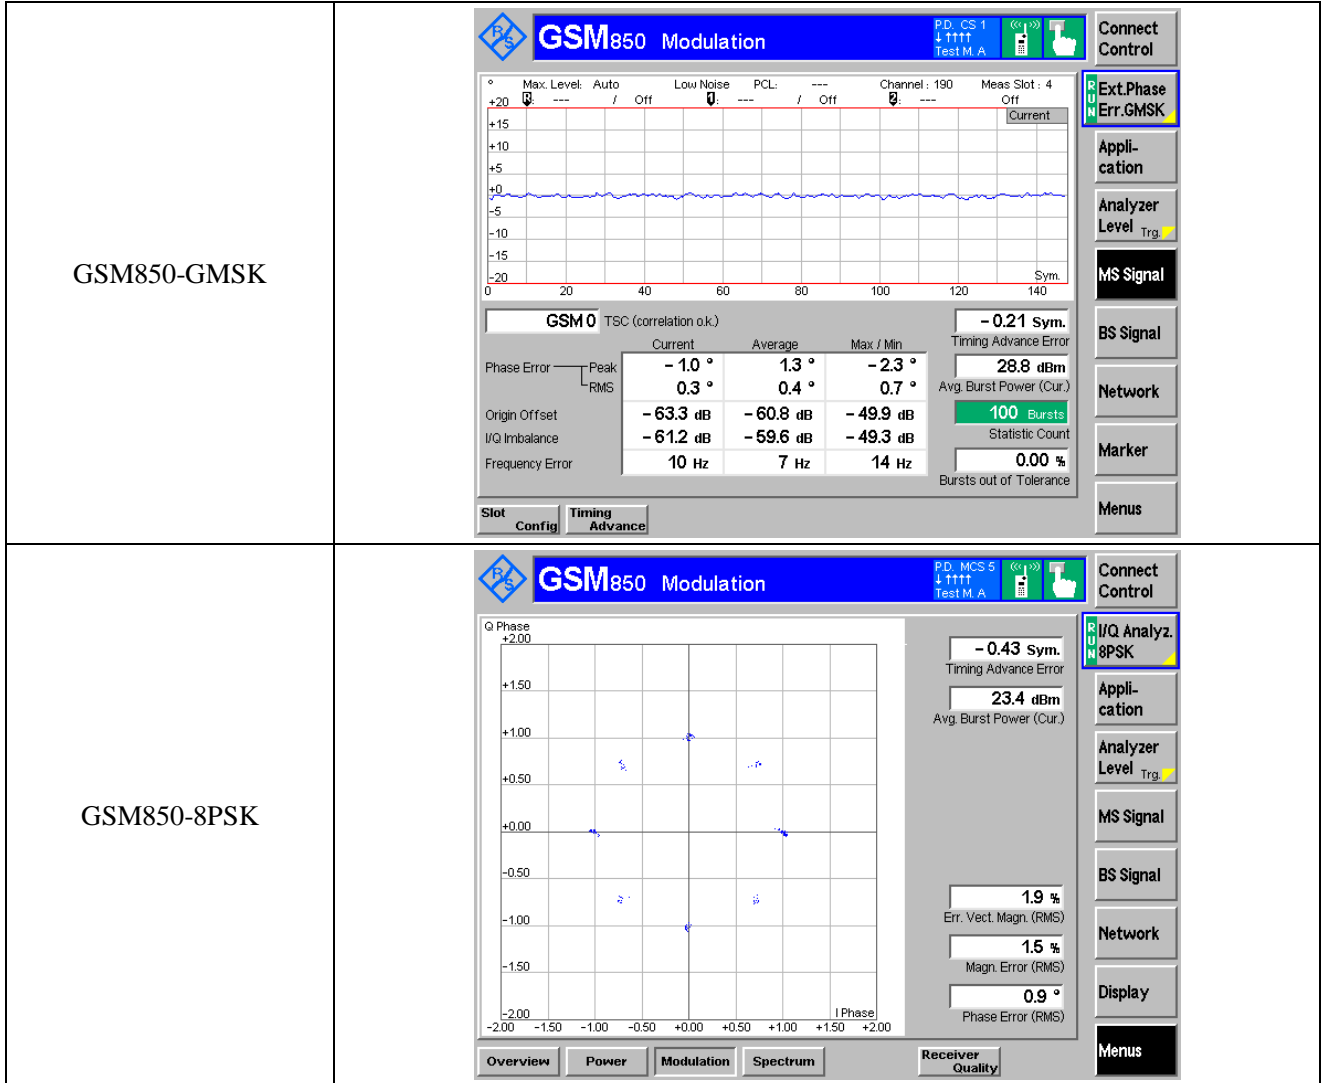

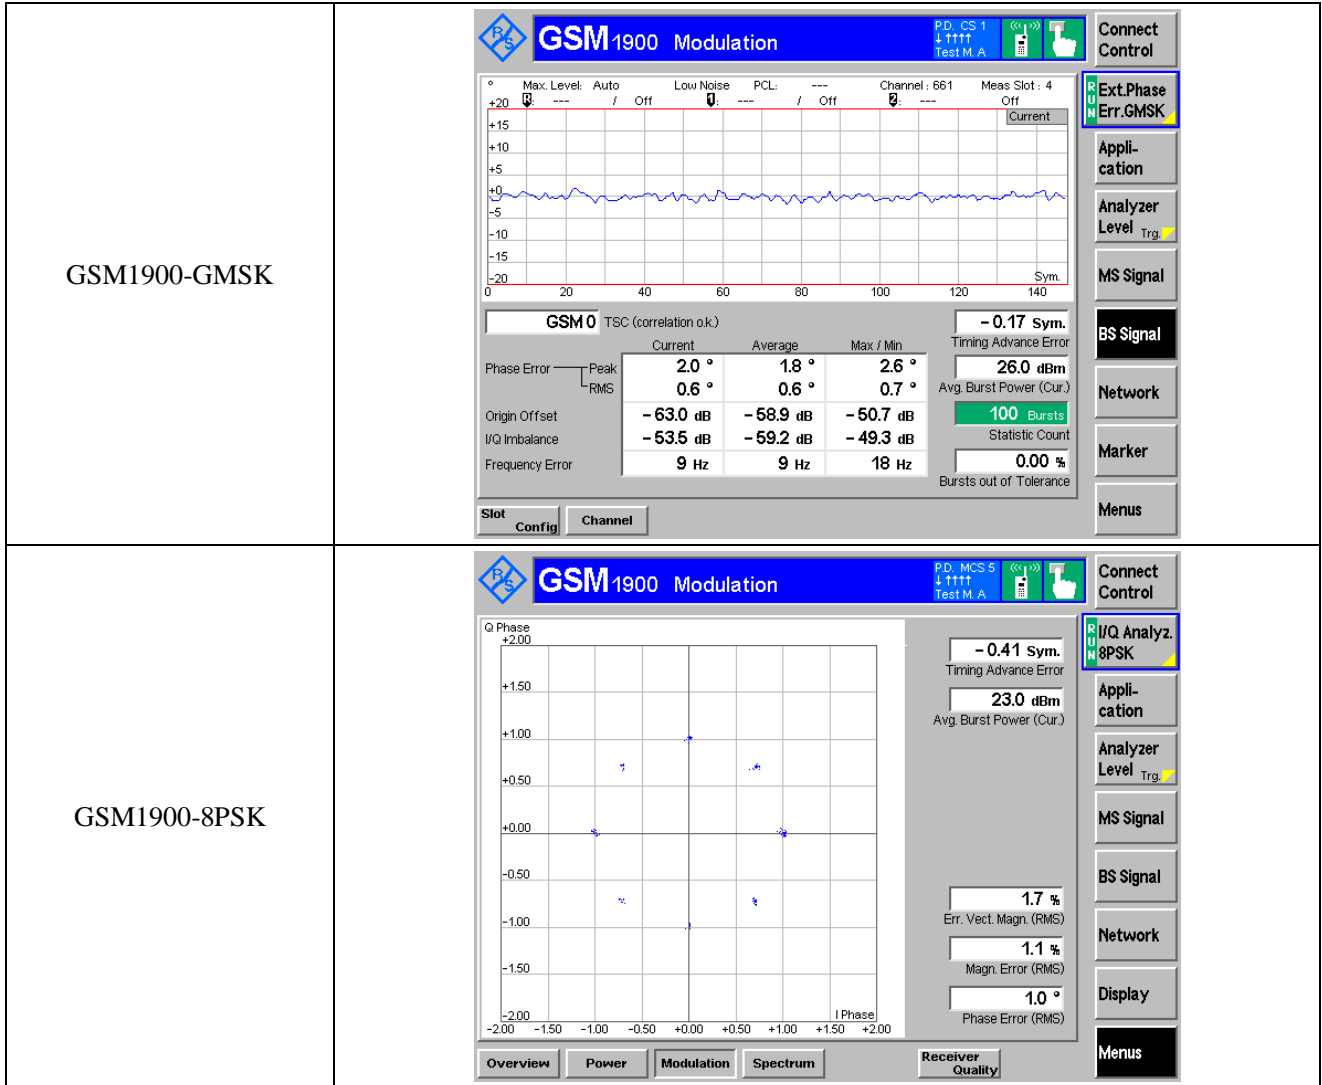
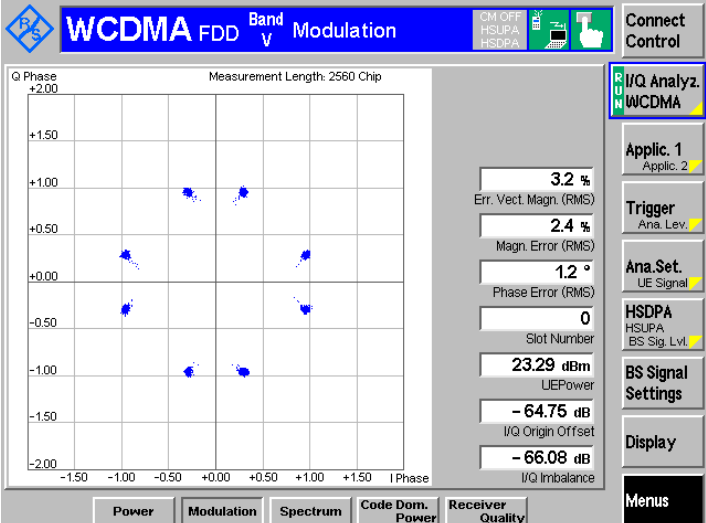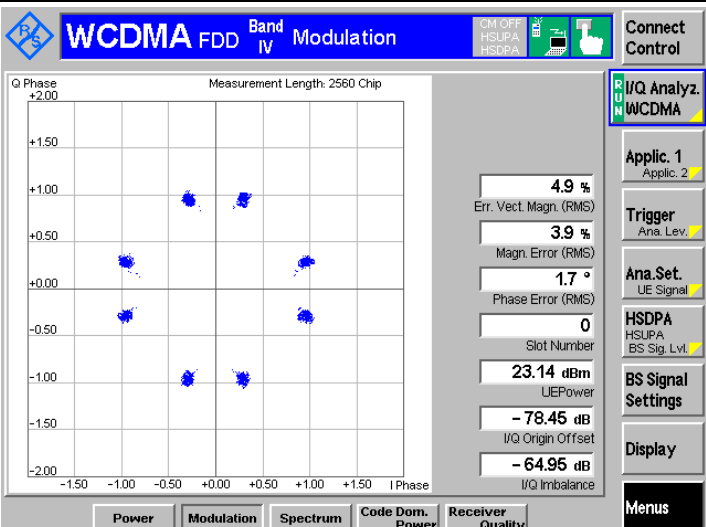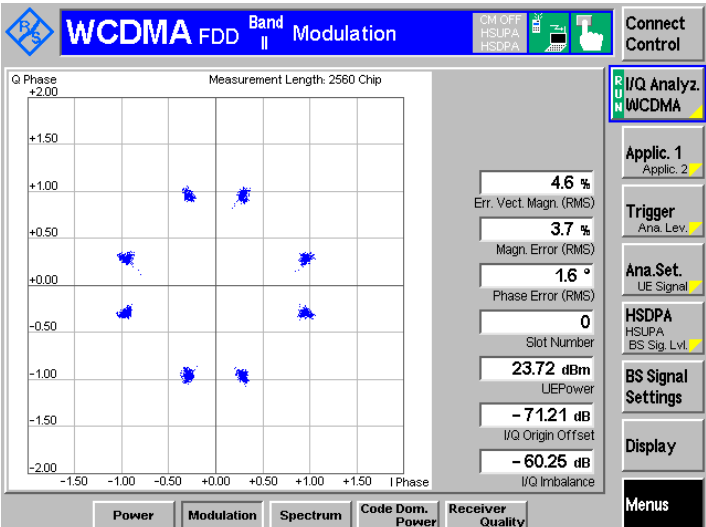
<p>WCDMA B5</p>	 <p>WCDMA FDD Band V Modulation</p> <p>Measurement Length: 2560 Chip</p> <p>Q Phase vs I Phase constellation diagram.</p> <p>Err. Vect. Magn. (RMS): 3.2 %          Magn. Error (RMS): 2.4 %          Phase Error (RMS): 1.2 °</p> <p>Slot Number: 0</p> <p>UE Power: 23.29 dBm          I/Q Origin Offset: -64.75 dB          I/Q Imbalance: -66.08 dB</p>
<p>WCDMA B4</p>	 <p>WCDMA FDD Band IV Modulation</p> <p>Measurement Length: 2560 Chip</p> <p>Q Phase vs I Phase constellation diagram.</p> <p>Err. Vect. Magn. (RMS): 4.9 %          Magn. Error (RMS): 3.9 %          Phase Error (RMS): 1.7 °</p> <p>Slot Number: 0</p> <p>UE Power: 23.14 dBm          I/Q Origin Offset: -78.45 dB          I/Q Imbalance: -64.95 dB</p>
<p>WCDMA B2</p>	 <p>WCDMA FDD Band II Modulation</p> <p>Measurement Length: 2560 Chip</p> <p>Q Phase vs I Phase constellation diagram.</p> <p>Err. Vect. Magn. (RMS): 4.6 %          Magn. Error (RMS): 3.7 %          Phase Error (RMS): 1.6 °</p> <p>Slot Number: 0</p> <p>UE Power: 23.72 dBm          I/Q Origin Offset: -71.21 dB          I/Q Imbalance: -60.25 dB</p>



## **APPENDIX PHOTOGRAPHS**

---

**Please refer to “ANNEX”**

**\*\*\*\*\* END OF REPORT \*\*\*\*\***