

## FCC Test Report (BT-EDR)

**Report No.:** RF170912E01-2

**FCC ID:** 2AHSBN-AP61

**Test Model:** AP61

**Received Date:** Sep. 14, 2017

**Test Date:** Oct. 03 to 11, 2017

**Issued Date:** Oct. 27, 2017

**Applicant:** Mist Systems, Inc.

**Address:** 1601 South De Anza Blvd. Suite 248 Cupertino California United States 95014

**Issued By:** Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch Hsin Chu Laboratory

**Lab Address:** E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300, Taiwan R.O.C.

**Test Location:** E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300, Taiwan R.O.C.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

## Table of Contents

<b>Release Control Record .....</b>	<b>4</b>
<b>1      Certificate of Conformity.....</b>	<b>5</b>
<b>2      Summary of Test Results .....</b>	<b>6</b>
2.1    Measurement Uncertainty .....	6
2.2    Modification Record .....	6
<b>3      General Information.....</b>	<b>7</b>
3.1    General Description of EUT (BT-EDR).....	7
3.2    Description of Test Modes .....	9
3.2.1 Test Mode Applicability and Tested Channel Detail.....	10
3.3    Description of Support Units .....	12
3.3.1 Configuration of System under Test .....	13
3.4    General Description of Applied Standards .....	15
<b>4      Test Types and Results .....</b>	<b>16</b>
4.1    Radiated Emission and Bandedge Measurement.....	16
4.1.1 Limits of Radiated Emission and Bandedge Measurement .....	16
4.1.2 Test Instruments .....	17
4.1.3 Test Procedures.....	19
4.1.4 Deviation from Test Standard .....	19
4.1.5 Test Setup.....	20
4.1.6 EUT Operating Conditions.....	21
4.1.7 Test Results (Mode 1).....	22
4.1.8 Test Results (Mode 2).....	29
4.2    Conducted Emission Measurement .....	36
4.2.1 Limits of Conducted Emission Measurement.....	36
4.2.2 Test Instruments .....	36
4.2.3 Test Procedures.....	37
4.2.4 Deviation From Test Standard .....	37
4.2.5 Test Setup.....	37
4.2.6 EUT Operating Condition .....	37
4.2.7 Test Results (Mode 1).....	38
4.3    Number of Hopping Frequency Used.....	40
4.3.1 Limits of Hopping Frequency Used Measurement .....	40
4.3.2 Test Setup.....	40
4.3.3 Test Instruments .....	40
4.3.4 Test Procedure .....	40
4.3.5 Deviation fromTest Standard .....	40
4.3.6 Test Results .....	41
4.4    Dwell Time on Each Channel .....	42
4.4.1 Limits of Dwell Time on Each Channel Measurement.....	42
4.4.2 Test Setup.....	42
4.4.3 Test Instruments .....	42
4.4.4 Test Procedures.....	42
4.4.5 Deviation from Test Standard .....	42
4.4.6 Test Results .....	43
4.5    Channel Bandwidth .....	47
4.5.1 Limits of Channel Bandwidth Measurement.....	47
4.5.2 Test Setup.....	47
4.5.3 Test Instruments .....	47
4.5.4 Test Procedure .....	47
4.5.5 Deviation from Test Standard .....	47
4.5.6 EUT Operating Condition .....	47
4.5.7 Test Results .....	48
4.6    Hopping Channel Separation .....	49

4.6.1	Limits of Hopping Channel Separation Measurement.....	49
4.6.2	Test Setup.....	49
4.6.3	Test Instruments .....	49
4.6.4	Test Procedure .....	49
4.6.5	Deviation from Test Standard .....	49
4.6.6	Test Results .....	50
4.7	Maximum Output Power.....	51
4.7.1	Limits of Maximum Output Power Measurement .....	51
4.7.2	Test Setup.....	51
4.7.3	Test Instruments .....	51
4.7.4	Test Procedure .....	51
4.7.5	Deviation from Test Standard .....	51
4.7.6	EUT Operating Condition .....	51
4.7.7	Test Results .....	52
4.8	Conducted Out of Band Emission Measurement.....	53
4.8.1	Limits of Conducted Out of Band Emission Measurement.....	53
4.8.2	Test Instruments .....	53
4.8.3	Test Procedure .....	53
4.8.4	Deviation from Test Standard .....	53
4.8.5	EUT Operating Condition .....	53
4.8.6	Test Results .....	53
<b>5</b>	<b>Pictures of Test Arrangements.....</b>	<b>56</b>
<b>Appendix – Information on the Testing Laboratories .....</b>		<b>57</b>

### Release Control Record

Issue No.	Description	Date Issued
RF170912E01-2	Original release.	Oct. 27, 2017

## 1 Certificate of Conformity

**Product:** Premium Outdoor Wi-Fi & BLE Array AP

**Brand:** Mist

**Test Model:** AP61

**Sample Status:** ENGINEERING SAMPLE

**Applicant:** Mist Systems, Inc.

**Test Date:** Oct. 03 to 11, 2017

**Standards:** 47 CFR FCC Part 15, Subpart C (Section 15.247)

ANSI C63.10: 2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

  
**Prepared by :** \_\_\_\_\_, **Date:** Oct. 27, 2017

Mary Ko / Specialist

  
**Approved by :** \_\_\_\_\_, **Date:** Oct. 27, 2017

May Chen / Manager

## 2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (SECTION 15.247)			
FCC Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -13.12dB at 0.16562MHz.
15.247(a)(1) (iii)	Number of Hopping Frequency Used	PASS	Meet the requirement of limit.
15.247(a)(1) (iii)	Dwell Time on Each Channel	PASS	Meet the requirement of limit.
15.247(a)(1)	1. Hopping Channel Separation 2. Spectrum Bandwidth of a Frequency Hopping Sequence Spread Spectrum System	PASS	Meet the requirement of limit.
15.247(b)	Maximum Peak Output Power	PASS	Meet the requirement of limit.
15.205 & 209 & 15.247(d)	Radiated Emissions & Band Edge Measurement	PASS	Meet the requirement of limit. Minimum passing margin is -5.9dB at 383.13MHz.
15.247(d)	Antenna Port Emission	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	Antenna connector is i-pex(MHF) not a standard connector.

**NOTE:** If The Frequency Hopping System operating in 2400-2483.5MHz band and the output power less than 125mW. The hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of hopping channel whichever is greater.

### 2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Conducted Emissions at mains ports	150kHz ~ 30MHz	1.84 dB
Radiated Emissions up to 1 GHz	30MHz ~ 1GHz	5.32 dB
Radiated Emissions above 1 GHz	1GHz ~ 6GHz	5.14 dB
	6GHz ~ 18GHz	5.04 dB
	18GHz ~ 40GHz	5.25 dB

### 2.2 Modification Record

There were no modifications required for compliance.

### 3 General Information

#### 3.1 General Description of EUT (BT-EDR)

Product	Premium Outdoor Wi-Fi & BLE Array AP
Brand	Mist
Test Model	AP61
Status of EUT	ENGINEERING SAMPLE
Power Supply Rating	802.3at (50-57Vdc)
Modulation Type	GFSK, π/4-DQPSK, 8DPSK
Modulation Technology	FHSS
Transfer Rate	Up to 3Mbps
Operating Frequency	2402MHz ~ 2480MHz
Number of Channel	79
Output Power	10.375mW
Antenna Type	Refer to Note
Antenna Connector	Refer to Note
Accessory Device	NA
Data Cable Supplied	NA

Note:

- There are WLAN and Bluetooth technology used for the EUT. The EUT has three radios as following table:

Radio 1	Radio 2	Radio 3
WLAN - 2.4GHz + 5GHz	(Scanning Radio) WLAN RX only - 2.4GHz + 5GHz	Bluetooth

- Simultaneously transmission condition.

Condition	Technology	
1	WLAN 2.4GHz (Radio 1)	Bluetooth(Radio 3)
2	WLAN 5GHz (Radio 1)	Bluetooth(Radio 3)

**Note:** The emission of the simultaneous operation has been evaluated and no non-compliance was found.

- The EUT must be supplied with a POE (only for test not for sale) as following table:

Brand	Model No.	Spec.
Microsemi	PD-9001GR/AT/AC	Input: 100-240Vac, 50/60Hz, 0.67A Output: 55Vdc, 0.6A

4. The antennas provided to the EUT, please refer to the following table:

#### Radio 1

##### WLAN - 2.4GHz + 5GHz (Internal antenna)

Antenna No.	Transmitter Circuit	Antenna Net Gain (dBi)	Frequency Range (GHz)	Antenna Type	Connector Type
1	Chain (0)	3.87	2.4~2.4835	PIFA	i-pex(MHF)
		4.94	5.15~5.25		
		4.66	5.25~5.35		
		4.25	5.47~5.725		
		4.42	5.725~5.85		
2	Chain (1)	3.91	2.4~2.4835	PIFA	i-pex(MHF)
		4.23	5.15~5.25		
		4.54	5.25~5.35		
		4.66	5.47~5.725		
		4.70	5.725~5.85		
3	Chain (2)	3.93	2.4~2.4835	PIFA	i-pex(MHF)
		4.53	5.15~5.25		
		4.86	5.25~5.35		
		4.95	5.47~5.725		
		4.94	5.725~5.85		
4	Chain (3)	3.81	2.4~2.4835	PIFA	i-pex(MHF)
		4.50	5.15~5.25		
		4.92	5.25~5.35		
		4.71	5.47~5.725		
		4.90	5.725~5.85		

#### Radio 2

##### WLAN RX only - 2.4GHz + 5GHz (Scanning radio antenna)

Antenna No.	Transmitter Circuit	Antenna Net Gain (dBi)	Frequency Range (GHz)	Antenna Type	Connector Type
1	Chain (0)	3.85	2.4~2.4835	PIFA	i-pex(MHF)
		4.61	5.15~5.25		
		4.71	5.25~5.35		
		4.72	5.47~5.725		
		4.73	5.725~5.85		

#### Radio 3

##### Bluetooth

Antenna No.	Transmitter Circuit	Antenna Net Gain (dBi)	Frequency Range (GHz)	Antenna Type	Connector Type
1	Chain (0)	3.56	2.4~2.4835	Omni	i-pex(MHF)
2	Chain (1)	5.01	2.4~2.4835	Patch	i-pex(MHF)

Note: Max. gain was selected for the final test.

5. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

### 3.2 Description of Test Modes

79 channels are provided for BT-EDR mode:

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461		

### 3.2.1 Test Mode Applicability and Tested Channel Detail

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE≥1G	RE<1G	PLC	APCM	
1	√	√	√	√	Antenna type: Patch
2	√	√	-	-	Antenna type: Omni

Where **RE≥1G**: Radiated Emission above 1GHz

**PLC**: Power Line Conducted Emission

**RE<1G**: Radiated Emission below 1GHz

**APCM**: Antenna Port Conducted Measurement

**NOTE:** “-” means no effect.

#### Radiated Emission Test (Above 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE
0 to 78	0, 39, 78	FHSS	GFSK	DH5
0 to 78	0, 39, 78	FHSS	8DPSK	3DH5

#### Radiated Emission Test (Below 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE
0 to 78	39	FHSS	GFSK	DH5

#### Power Line Conducted Emission Test:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE
0 to 78	39	FHSS	GFSK	DH5

**Antenna Port Conducted Measurement:**

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE
0 to 78	0, 39, 78	FHSS	GFSK	DH5
0 to 78	0, 39, 78	FHSS	8DPSK	3DH5

**Test Condition:**

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER (SYSTEM)	TESTED BY
RE≥1G	23deg. C, 70%RH	120Vac, 60Hz	Rey chen
RE<1G	25deg. C, 65%RH	120Vac, 60Hz	Eason Tseng
PLC	26deg. C, 74%RH	120Vac, 60Hz	Andy Ho
APCM	25deg. C, 60%RH	120Vac, 60Hz	Anderson Chen

### 3.3 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Laptop	DELL	E6420	B92T3R1	FCC DoC	Provided by Lab
B.	Laptop	DELL	E6420	482T3R1	FCC DoC	Provided by Lab
C.	PoE	Microsemi	PD-9001GR/AT/AC	NA	NA	Supplied by client


Note:

1. All power cords of the above support units are non-shielded (1.8m).


ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	RJ-45 Cable	1	10	No	0	Provided by Lab
2.	RJ-45 Cable	1	3	No	0	Provided by Lab
3.	RJ-45 Cable	1	10	No	0	Provided by Lab
4.	Earth Cable	1	3	No	0	Provided by Lab

### 3.3.1 Configuration of System under Test

For Conducted Emission:

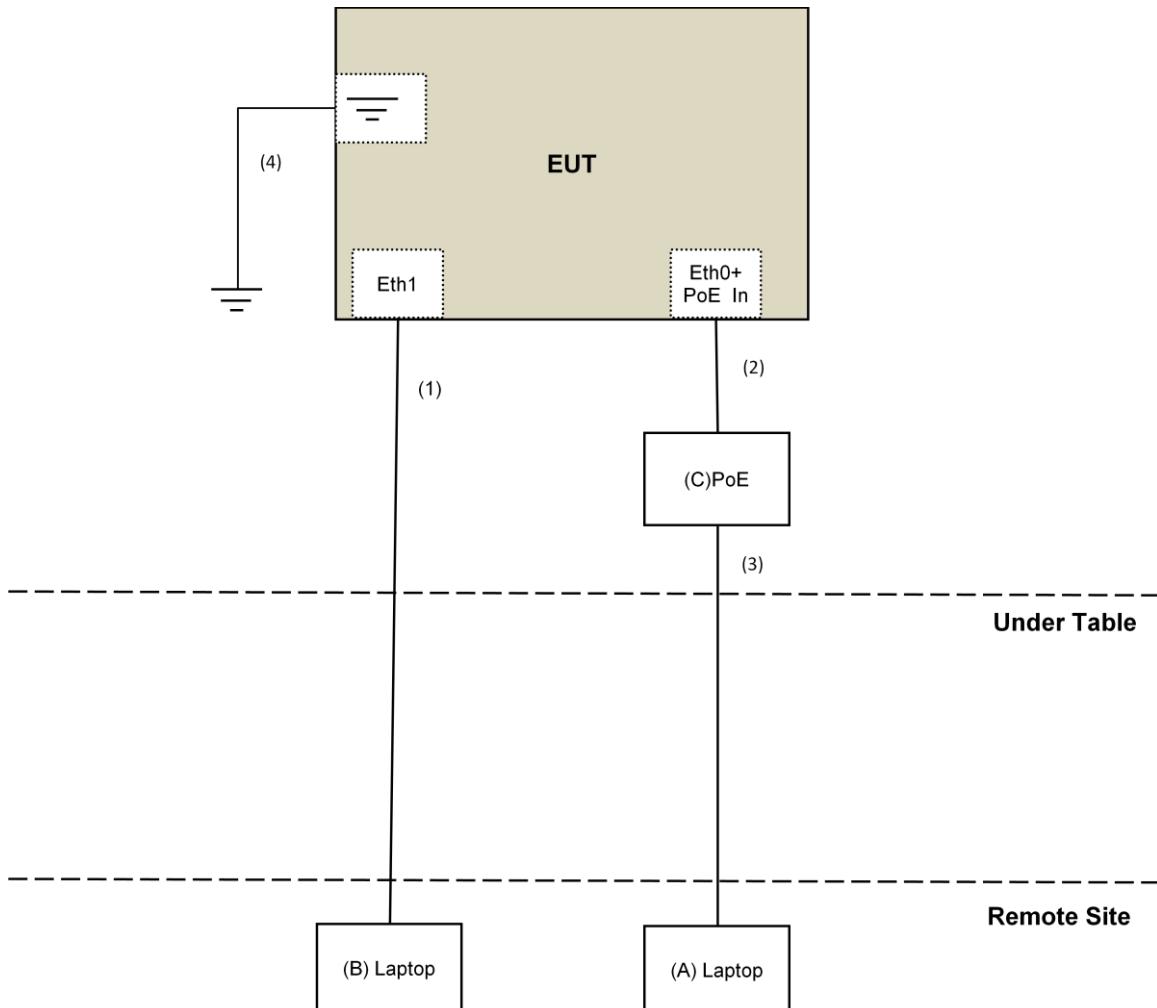

For other test:

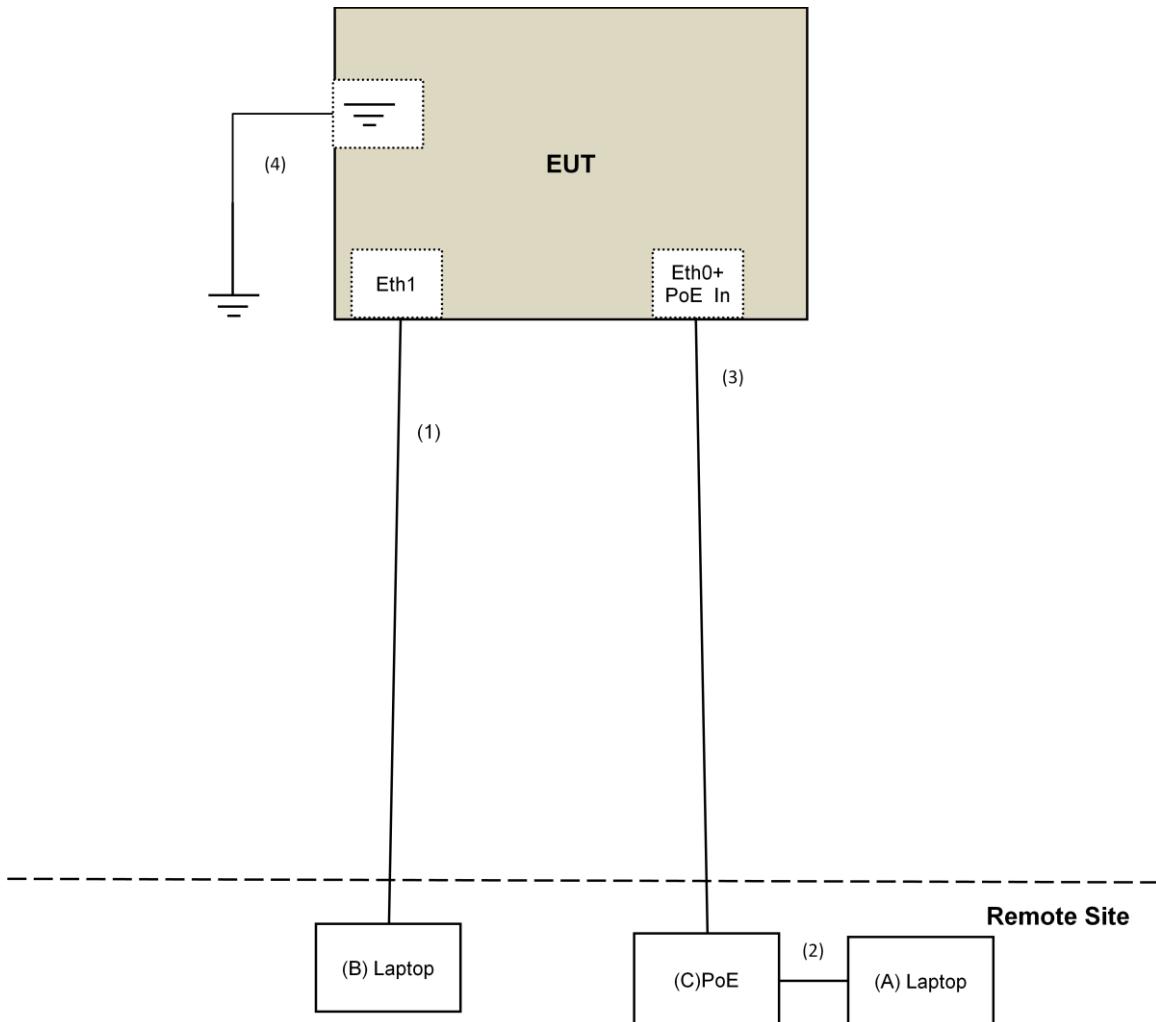

### 3.4 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC Part 15, Subpart C (15.247)**

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

**Note:** The EUT has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC).  
The test report has been issued separately.

## 4 Test Types and Results

### 4.1 Radiated Emission and Bandedge Measurement

#### 4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

**NOTE:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dB<sub>UV</sub>/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.1.2 Test Instruments

**For below 1GHz test:**

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver Agilent	N9038A	MY50010156	July 12, 2017	July 11, 2018
Pre-Amplifier <sup>(*)</sup> EMCI	EMC001340	980142	Jan. 20, 2016	Jan. 19, 2018
Loop Antenna <sup>(*)</sup> Electro-Metrics	EM-6879	264	Dec. 16, 2016	Dec. 15, 2018
RF Cable	NA	LOOPCAB-001 LOOPCAB-002	Jan. 17, 2017	Jan. 16, 2018
Pre-Amplifier Mini-Circuits	ZFL-1000VH2B	AMP-ZFL-05	May 06, 2017	May 05, 2018
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-361	Dec. 29, 2016	Dec. 28, 2017
RF Cable	8D	966-3-1 966-3-2 966-3-3	Apr. 01, 2017	Mar. 31, 2018
Fixed attenuator Mini-Circuits	UNAT-5+	PAD-3m-3-01	Oct. 05, 2016	Oct. 04, 2017
Software	ADT_Radiated_V8.7.08	NA	NA	NA
Antenna Tower & Turn Table Max-Full	MF-7802	MF780208406	NA	NA

**Note:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. \*The calibration interval of the above test instruments is 24 months and the calibrations are traceable to NML/ROC and NIST/USA.
3. The test was performed in 966 Chamber No. 3.
- 4 Loop antenna was used for all emissions below 30 MHz.
- 5 The FCC Designation Number is TW2022.
- 6 The CANADA Site Registration No. is 20331-1.
- 7 Tested Date: Oct. 03, 2017.

**For other test:**

<b>DESCRIPTION &amp; MANUFACTURER</b>	<b>MODEL NO.</b>	<b>SERIAL NO.</b>	<b>CALIBRATED DATE</b>	<b>CALIBRATED UNTIL</b>
Test Receiver Agilent	N9038A	MY50010156	July 12, 2017	July 11, 2018
Horn_Antenna SCHWARZBECK	BBHA9120-D	9120D-406	Dec. 28, 2016	Dec. 27, 2017
Pre-Amplifier EMCI	EMC12630SE	980384	Feb. 02, 2017	Feb. 01, 2018
RF Cable	EMC104-SM-SM-1200 EMC104-SM-SM-2000 EMC104-SM-SM-5000	160922 150317 150322	Feb. 02, 2017 Mar. 29, 2017 Mar. 29, 2017	Feb. 01, 2018 Mar. 28, 2018 Mar. 28, 2018
Spectrum Analyzer Keysight	N9030A	MY54490679	July 25, 2017	July 24, 2018
Pre-Amplifier EMCI	EMC184045SE	980386	Feb. 02, 2017	Feb. 01, 2018
Horn_Antenna SCHWARZBECK	BBHA 9170	BBHA9170608	Dec. 15, 2016	Dec. 14, 2017
RF Cable	SUCOFLEX 102	36432/2 36433/2	Jan. 15, 2017	Jan. 14, 2018
Software	ADT_Radiated_V8.7.08	NA	NA	NA
Antenna Tower & Turn Table Max-Full	MF-7802	MF780208406	NA	NA
Boresight Antenna Fixture	FBA-01	FBA-SIP01	NA	NA
Spectrum Analyzer R&S	FSV40	100964	July 1, 2017	June 30, 2018
Power meter Anritsu	ML2495A	1014008	May 11, 2017	May 10, 2018
Power sensor Anritsu	MA2411B	0917122	May 11, 2017	May 10, 2018

**Note:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. \*The calibration interval of the above test instruments is 24 months and the calibrations are traceable to NML/ROC and NIST/USA.
3. The test was performed in 966 Chamber No. 3.
- 4 Loop antenna was used for all emissions below 30 MHz.
- 5 The FCC Designation Number is TW2022.
- 6 The CANADA Site Registration No. is 20331-1.
- 7 Tested Date: Oct. 05 to 11, 2017.

#### 4.1.3 Test Procedures

##### **For Radiated emission below 30MHz**

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Both X and Y axes of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

**NOTE:**

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

##### **For Radiated emission above 30MHz**

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

**Note:**


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

#### 4.1.4 Deviation from Test Standard


No deviation.

#### 4.1.5 Test Setup


**For Radiated emission below 30MHz**

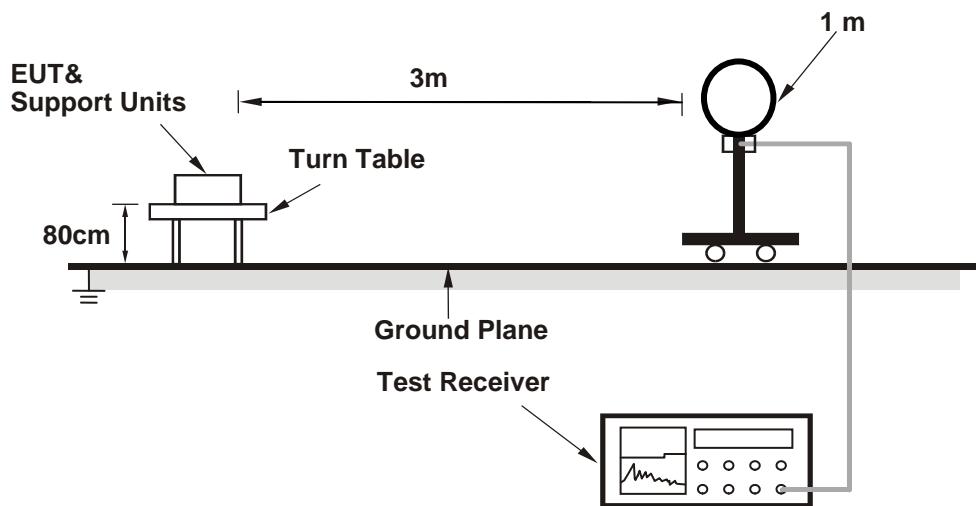

**For Radiated emission 30MHz to 1GHz**

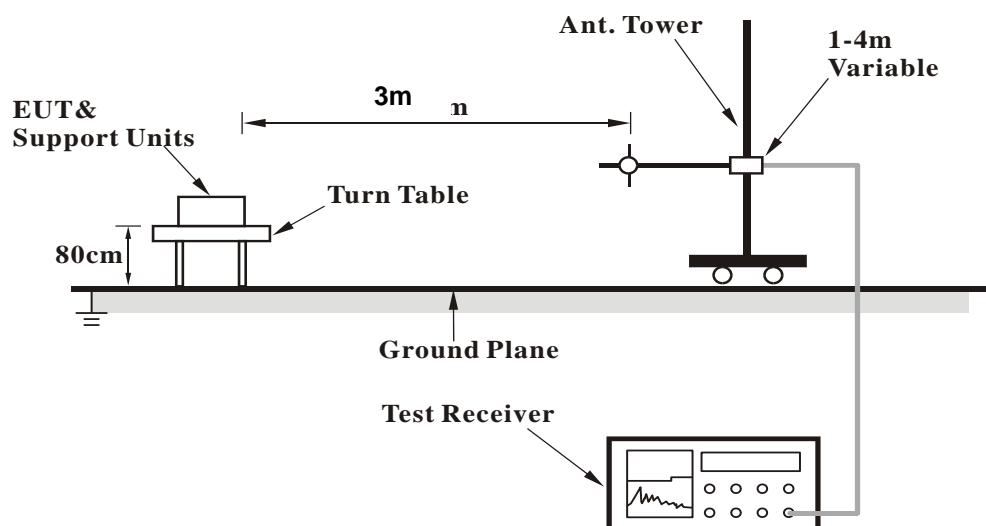

**For Radiated emission above 1GHz**

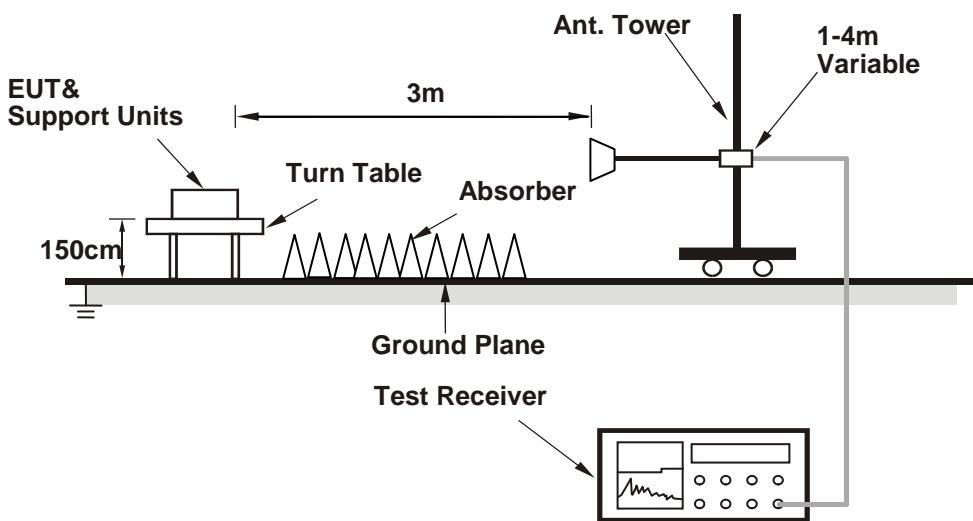

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.1.6 EUT Operating Conditions

- Connected the EUT with the Laptop which is placed on remote site.
- Controlling software (HyperTerminal paste AP61\_BT+BLE SOP\_170929.txt command) has been activated to set the EUT on specific status.

#### 4.1.7 Test Results (Mode 1)

##### Above 1GHz Data:

##### BT\_GFSK

<b>CHANNEL</b>	TX Channel 0	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	53.9 PK	74.0	-20.1	2.21 H	297	55.5	-1.6
2	2390.00	41.5 AV	54.0	-12.5	2.21 H	297	43.1	-1.6
3	*2402.00	102.4 PK			2.21 H	297	103.9	-1.5
4	*2402.00	72.3 AV			2.21 H	297	73.8	-1.5
5	4804.00	42.1 PK	74.0	-31.9	2.19 H	23	39.1	3.0
6	4804.00	12.0 AV	54.0	-42.0	2.19 H	23	9.0	3.0
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	53.8 PK	74.0	-20.2	1.20 V	360	55.4	-1.6
2	2390.00	41.3 AV	54.0	-12.7	1.20 V	360	42.9	-1.6
3	*2402.00	97.2 PK			1.20 V	360	98.7	-1.5
4	*2402.00	67.1 AV			1.20 V	360	68.6	-1.5
5	4804.00	43.4 PK	74.0	-30.6	1.94 V	28	40.4	3.0
6	4804.00	13.3 AV	54.0	-40.7	1.94 V	28	10.3	3.0

##### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.
6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 \* 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to:  $20\log(3.125 / 100) = -30.1 \text{ dB}$
7. The average value of fundamental and harmonic frequency is: Average = Peak value + 20 log(Duty cycle)

<b>CHANNEL</b>	TX Channel 39	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	102.9 PK			2.21 H	297	104.4	-1.5
2	*2441.00	72.8 AV			2.21 H	297	74.3	-1.5
3	4882.00	42.0 PK	74.0	-32.0	2.15 H	22	38.8	3.2
4	4882.00	11.9 AV	54.0	-42.1	2.15 H	22	8.7	3.2
5	7323.00	43.1 PK	74.0	-30.9	1.45 H	243	34.2	8.9
6	7323.00	13.0 AV	54.0	-41.0	1.45 H	243	4.1	8.9
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	97.6 PK			1.17 V	360	99.1	-1.5
2	*2441.00	67.5 AV			1.17 V	360	69.0	-1.5
3	4882.00	43.0 PK	74.0	-31.0	1.88 V	37	39.8	3.2
4	4882.00	12.9 AV	54.0	-41.1	1.88 V	37	9.7	3.2
5	7323.00	44.2 PK	74.0	-29.8	2.99 V	190	35.3	8.9
6	7323.00	14.1 AV	54.0	-39.9	2.99 V	190	5.2	8.9

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.
6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 \* 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to:  $20\log(3.125 / 100) = -30.1 \text{ dB}$
7. The average value of fundamental and harmonic frequency is: Average = Peak value + 20 log(Duty cycle)

<b>CHANNEL</b>	TX Channel 78	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	102.3 PK			2.16 H	305	103.7	-1.4
2	*2480.00	72.2 AV			2.16 H	305	73.6	-1.4
3	2483.50	54.5 PK	74.0	-19.5	2.16 H	305	55.9	-1.4
4	2483.50	24.4 AV	54.0	-29.6	2.16 H	305	25.8	-1.4
5	4960.00	42.5 PK	74.0	-31.5	2.20 H	36	39.3	3.2
6	4960.00	12.4 AV	54.0	-41.6	2.20 H	36	9.2	3.2
7	7440.00	43.7 PK	74.0	-30.3	1.43 H	254	34.5	9.2
8	7440.00	13.6 AV	54.0	-40.4	1.43 H	254	4.4	9.2

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	97.1 PK			1.00 V	360	98.5	-1.4
2	*2480.00	67.0 AV			1.00 V	360	68.4	-1.4
3	2483.50	54.2 PK	74.0	-19.8	1.00 V	360	55.6	-1.4
4	2483.50	24.1 AV	54.0	-29.9	1.00 V	360	25.5	-1.4
5	4960.00	43.0 PK	74.0	-31.0	1.92 V	25	39.8	3.2
6	4960.00	12.9 AV	54.0	-41.1	1.92 V	25	9.7	3.2
7	7440.00	43.6 PK	74.0	-30.4	3.02 V	188	34.4	9.2
8	7440.00	13.5 AV	54.0	-40.5	3.02 V	188	4.3	9.2

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.
6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 \* 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to:  $20\log(3.125 / 100) = -30.1 \text{ dB}$
7. The average value of fundamental and harmonic frequency is: Average = Peak value + 20 log(Duty cycle)

**BT\_8DPSK**

<b>CHANNEL</b>	TX Channel 0	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	54.0 PK	74.0	-20.0	2.26 H	309	55.6	-1.6
2	2390.00	41.8 AV	54.0	-12.2	2.26 H	309	43.4	-1.6
3	*2402.00	101.3 PK			2.26 H	309	102.8	-1.5
4	*2402.00	71.2 AV			2.26 H	309	72.7	-1.5
5	4804.00	42.9 PK	74.0	-31.1	2.28 H	14	39.9	3.0
6	4804.00	12.8 AV	54.0	-41.2	2.28 H	14	9.8	3.0

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	53.3 PK	74.0	-20.7	1.00 V	360	54.9	-1.6
2	2390.00	41.0 AV	54.0	-13.0	1.00 V	360	42.6	-1.6
3	*2402.00	96.5 PK			1.00 V	360	98.0	-1.5
4	*2402.00	66.4 AV			1.00 V	360	67.9	-1.5
5	4804.00	43.2 PK	74.0	-30.8	1.00 V	186	40.2	3.0
6	4804.00	13.1 AV	54.0	-40.9	1.00 V	186	10.1	3.0

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.
6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 \* 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to:  $20\log(3.125 / 100) = -30.1 \text{ dB}$
7. The average value of fundamental and harmonic frequency is: Average = Peak value + 20 log(Duty cycle)

<b>CHANNEL</b>	TX Channel 39	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	101.7 PK			2.16 H	321	103.2	-1.5
2	*2441.00	71.6 AV			2.16 H	321	73.1	-1.5
3	4882.00	42.8 PK	74.0	-31.2	2.24 H	8	39.6	3.2
4	4882.00	12.7 AV	54.0	-41.3	2.24 H	8	9.5	3.2
5	7323.00	43.8 PK	74.0	-30.2	1.52 H	243	34.9	8.9
6	7323.00	13.7 AV	54.0	-40.3	1.52 H	243	4.8	8.9
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	96.8 PK			1.00 V	360	98.3	-1.5
2	*2441.00	66.7 AV			1.00 V	360	68.2	-1.5
3	4882.00	43.5 PK	74.0	-30.5	1.00 V	192	40.3	3.2
4	4882.00	13.4 AV	54.0	-40.6	1.00 V	192	10.2	3.2
5	7323.00	44.4 PK	74.0	-29.6	1.00 V	310	35.5	8.9
6	7323.00	14.3 AV	54.0	-39.7	1.00 V	310	5.4	8.9

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.
6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 \* 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to:  $20\log(3.125 / 100) = -30.1 \text{ dB}$
7. The average value of fundamental and harmonic frequency is: Average = Peak value + 20 log(Duty cycle)

<b>CHANNEL</b>	TX Channel 78	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	101.1 PK			2.20 H	310	102.5	-1.4
2	*2480.00	71.0 AV			2.20 H	310	72.4	-1.4
3	2483.50	54.4 PK	74.0	-19.6	2.20 H	310	55.8	-1.4
4	2483.50	24.3 AV	54.0	-29.7	2.20 H	310	25.7	-1.4
5	4960.00	42.6 PK	74.0	-31.4	2.25 H	21	39.4	3.2
6	4960.00	12.5 AV	54.0	-41.5	2.25 H	21	9.3	3.2
7	7440.00	43.4 PK	74.0	-30.6	1.46 H	252	34.2	9.2
8	7440.00	13.3 AV	54.0	-40.7	1.46 H	252	4.1	9.2

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	96.2 PK			1.00 V	360	97.6	-1.4
2	*2480.00	66.1 AV			1.00 V	360	67.5	-1.4
3	2483.50	53.6 PK	74.0	-20.4	1.00 V	360	55.0	-1.4
4	2483.50	23.5 AV	54.0	-30.5	1.00 V	360	24.9	-1.4
5	4960.00	42.9 PK	74.0	-31.1	1.86 V	39	39.7	3.2
6	4960.00	12.8 AV	54.0	-41.2	1.86 V	39	9.6	3.2
7	7440.00	44.0 PK	74.0	-30.0	3.05 V	186	34.8	9.2
8	7440.00	13.9 AV	54.0	-40.1	3.05 V	186	4.7	9.2

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.
6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 \* 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to:  $20\log(3.125 / 100) = -30.1 \text{ dB}$
7. The average value of fundamental and harmonic frequency is: Average = Peak value + 20 log(Duty cycle)

**Below 1GHz Data:**
**BT\_GFSK**

<b>CHANNEL</b>	TX Channel 39	<b>DETECTOR FUNCTION</b>	Quasi-Peak (QP)
<b>FREQUENCY RANGE</b>	9kHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	87.21	34.0 QP	40.0	-6.0	1.50 H	278	48.1	-14.1
2	235.30	30.4 QP	46.0	-15.6	1.50 H	302	40.4	-10.0
3	385.22	31.8 QP	46.0	-14.2	3.00 H	214	37.5	-5.7
4	447.81	32.1 QP	46.0	-13.9	1.50 H	99	35.8	-3.7
5	474.14	34.4 QP	46.0	-11.6	2.00 H	212	37.9	-3.5
6	546.96	28.1 QP	46.0	-17.9	2.00 H	51	30.4	-2.3
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	30.07	26.9 QP	40.0	-13.1	2.00 V	290	36.2	-9.3
2	234.96	28.3 QP	46.0	-17.7	2.00 V	144	38.4	-10.1
3	333.78	35.3 QP	46.0	-10.7	2.00 V	2	41.8	-6.5
4	374.35	38.4 QP	46.0	-7.6	2.00 V	360	44.3	-5.9
5	476.90	31.9 QP	46.0	-14.1	2.00 V	359	35.4	-3.5
6	672.99	27.7 QP	46.0	-18.3	2.00 V	92	27.6	0.1

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

#### 4.1.8 Test Results (Mode 2)

##### Above 1GHz Data:

##### BT\_GFSK

<b>CHANNEL</b>	TX Channel 0	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	54.1 PK	74.0	-19.9	1.41 H	330	55.7	-1.6
2	2390.00	41.4 AV	54.0	-12.6	1.41 H	330	43.0	-1.6
3	*2402.00	101.8 PK			1.41 H	330	103.3	-1.5
4	*2402.00	71.7 AV			1.41 H	330	73.2	-1.5
5	4804.00	34.3 PK	74.0	-39.7	1.66 H	51	31.3	3.0
6	4804.00	4.2 AV	54.0	-49.8	1.66 H	51	1.2	3.0
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	55.1 PK	74.0	-18.9	1.00 V	347	56.7	-1.6
2	2390.00	42.7 AV	54.0	-11.3	1.00 V	347	44.3	-1.6
3	*2402.00	103.1 PK			1.00 V	347	104.6	-1.5
4	*2402.00	73.0 AV			1.00 V	347	74.5	-1.5
5	4804.00	41.1 PK	74.0	-32.9	2.38 V	328	38.1	3.0
6	4804.00	11.0 AV	54.0	-43.0	2.38 V	328	8.0	3.0

##### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.
6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 \* 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to:  $20\log(3.125 / 100) = -30.1 \text{ dB}$
7. The average value of fundamental and harmonic frequency is: Average = Peak value + 20 log(Duty cycle)

<b>CHANNEL</b>	TX Channel 39	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	101.2 PK			1.37 H	331	102.7	-1.5
2	*2441.00	71.1 AV			1.37 H	331	72.6	-1.5
3	4882.00	34.3 PK	74.0	-39.7	1.65 H	66	31.1	3.2
4	4882.00	4.2 AV	54.0	-49.8	1.65 H	66	1.0	3.2
5	7323.00	32.5 PK	74.0	-41.5	1.62 H	59	23.6	8.9
6	7323.00	2.4 AV	54.0	-51.6	1.62 H	59	-6.5	8.9
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	102.5 PK			1.00 V	341	104.0	-1.5
2	*2441.00	72.4 AV			1.00 V	341	73.9	-1.5
3	4882.00	41.5 PK	74.0	-32.5	2.45 V	345	38.3	3.2
4	4882.00	11.4 AV	54.0	-42.6	2.45 V	345	8.2	3.2
5	7323.00	42.2 PK	74.0	-31.8	2.37 V	289	33.3	8.9
6	7323.00	12.1 AV	54.0	-41.9	2.37 V	289	3.2	8.9

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.
6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 \* 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to:  $20\log(3.125 / 100) = -30.1 \text{ dB}$
7. The average value of fundamental and harmonic frequency is: Average = Peak value + 20 log(Duty cycle)

<b>CHANNEL</b>	TX Channel 78	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	101.4 PK			1.38 H	337	102.8	-1.4
2	*2480.00	71.3 AV			1.38 H	337	72.7	-1.4
3	2483.50	55.1 PK	74.0	-18.9	1.38 H	337	56.5	-1.4
4	2483.50	25.0 AV	54.0	-29.0	1.38 H	337	26.4	-1.4
5	4960.00	34.2 PK	74.0	-39.8	1.65 H	51	31.0	3.2
6	4960.00	4.1 AV	54.0	-49.9	1.65 H	51	0.9	3.2
7	7440.00	32.0 PK	74.0	-42.0	1.63 H	60	22.8	9.2
8	7440.00	1.9 AV	54.0	-52.1	1.63 H	60	-7.3	9.2

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	104.9 PK			1.00 V	353	106.3	-1.4
2	*2480.00	74.8 AV			1.00 V	353	76.2	-1.4
3	2483.50	56.4 PK	74.0	-17.6	1.00 V	353	57.8	-1.4
4	2483.50	26.3 AV	54.0	-27.7	1.00 V	353	27.7	-1.4
5	4960.00	41.6 PK	74.0	-32.4	2.43 V	341	38.4	3.2
6	4960.00	11.5 AV	54.0	-42.5	2.43 V	341	8.3	3.2
7	7440.00	42.7 PK	74.0	-31.3	2.39 V	302	33.5	9.2
8	7440.00	12.6 AV	54.0	-41.4	2.39 V	302	3.4	9.2

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.
6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 \* 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to:  $20\log(3.125 / 100) = -30.1 \text{ dB}$
7. The average value of fundamental and harmonic frequency is: Average = Peak value + 20 log(Duty cycle)

**BT\_8DPSK**

<b>CHANNEL</b>	TX Channel 0	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	53.6 PK	74.0	-20.4	1.48 H	334	55.2	-1.6
2	2390.00	40.3 AV	54.0	-13.7	1.48 H	334	41.9	-1.6
3	*2402.00	98.7 PK			1.48 H	334	100.2	-1.5
4	*2402.00	68.6 AV			1.48 H	334	70.1	-1.5
5	4804.00	34.6 PK	74.0	-39.4	1.62 H	64	31.6	3.0
6	4804.00	4.5 AV	54.0	-49.5	1.62 H	64	1.5	3.0

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	54.6 PK	74.0	-19.4	1.03 V	355	56.2	-1.6
2	2390.00	41.6 AV	54.0	-12.4	1.03 V	355	43.2	-1.6
3	*2402.00	101.5 PK			1.03 V	355	103.0	-1.5
4	*2402.00	71.4 AV			1.03 V	355	72.9	-1.5
5	4804.00	41.5 PK	74.0	-32.5	2.39 V	341	38.5	3.0
6	4804.00	11.4 AV	54.0	-42.6	2.39 V	341	8.4	3.0

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.
6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 \* 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to:  $20\log(3.125 / 100) = -30.1 \text{ dB}$
7. The average value of fundamental and harmonic frequency is: Average = Peak value + 20 log(Duty cycle)

<b>CHANNEL</b>	TX Channel 39	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	99.0 PK			1.45 H	338	100.5	-1.5
2	*2441.00	68.9 AV			1.45 H	338	70.4	-1.5
3	4882.00	34.7 PK	74.0	-39.3	1.59 H	63	31.5	3.2
4	4882.00	4.6 AV	54.0	-49.4	1.59 H	63	1.4	3.2
5	7323.00	31.6 PK	74.0	-42.4	1.68 H	54	22.7	8.9
6	7323.00	1.5 AV	54.0	-52.5	1.68 H	54	-7.4	8.9
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	100.8 PK			1.32 V	338	102.3	-1.5
2	*2441.00	70.7 AV			1.32 V	338	72.2	-1.5
3	4882.00	41.2 PK	74.0	-32.8	2.49 V	353	38.0	3.2
4	4882.00	11.1 AV	54.0	-42.9	2.49 V	353	7.9	3.2
5	7323.00	43.2 PK	74.0	-30.8	2.35 V	309	34.3	8.9
6	7323.00	13.1 AV	54.0	-40.9	2.35 V	309	4.2	8.9

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.
6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 \* 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to:  $20\log(3.125 / 100) = -30.1 \text{ dB}$
7. The average value of fundamental and harmonic frequency is: Average = Peak value + 20 log(Duty cycle)

<b>CHANNEL</b>	TX Channel 78	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	98.9 PK			1.42 H	344	100.3	-1.4
2	*2480.00	68.8 AV			1.42 H	344	70.2	-1.4
3	2483.50	52.7 PK	74.0	-21.3	1.42 H	344	54.1	-1.4
4	2483.50	22.6 AV	54.0	-31.4	1.42 H	344	24.0	-1.4
5	4960.00	34.0 PK	74.0	-40.0	1.63 H	66	30.8	3.2
6	4960.00	3.9 AV	54.0	-50.1	1.63 H	66	0.7	3.2
7	7440.00	32.2 PK	74.0	-41.8	1.62 H	56	23.0	9.2
8	7440.00	2.1 AV	54.0	-51.9	1.62 H	56	-7.1	9.2

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	102.2 PK			1.24 V	340	103.6	-1.4
2	*2480.00	72.1 AV			1.24 V	340	73.5	-1.4
3	2483.50	54.0 PK	74.0	-20.0	1.24 V	340	55.4	-1.4
4	2483.50	23.9 AV	54.0	-30.1	1.24 V	340	25.3	-1.4
5	4960.00	41.5 PK	74.0	-32.5	2.38 V	357	38.3	3.2
6	4960.00	11.4 AV	54.0	-42.6	2.38 V	357	8.2	3.2
7	7440.00	42.7 PK	74.0	-31.3	2.37 V	297	33.5	9.2
8	7440.00	12.6 AV	54.0	-41.4	2.37 V	297	3.4	9.2

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.
6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 \* 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to:  $20\log(3.125 / 100) = -30.1 \text{ dB}$
7. The average value of fundamental and harmonic frequency is: Average = Peak value + 20 log(Duty cycle)

**Below 1GHz Data:**

**BT\_GFSK**

<b>CHANNEL</b>	TX Channel 39	<b>DETECTOR FUNCTION</b>	Quasi-Peak (QP)
<b>FREQUENCY RANGE</b>	9kHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	87.21	33.5 QP	40.0	-6.5	1.00 H	19	47.6	-14.1
2	235.25	30.7 QP	46.0	-15.3	2.00 H	82	40.7	-10.0
3	385.29	32.3 QP	46.0	-13.7	2.00 H	112	38.0	-5.7
4	447.73	35.2 QP	46.0	-10.8	2.00 H	18	38.9	-3.7
5	546.96	28.1 QP	46.0	-17.9	2.00 H	51	30.4	-2.3
6	885.37	29.6 QP	46.0	-16.4	2.00 H	188	26.9	2.7
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	40.21	25.6 QP	40.0	-14.4	1.00 V	355	34.4	-8.8
2	190.87	35.5 QP	43.5	-8.0	1.00 V	215	46.4	-10.9
3	337.54	35.9 QP	46.0	-10.1	2.00 V	356	42.4	-6.5
4	<b>383.13</b>	<b>40.1 QP</b>	<b>46.0</b>	<b>-5.9</b>	<b>3.00 V</b>	<b>0</b>	<b>45.8</b>	<b>-5.7</b>
5	479.72	32.3 QP	46.0	-13.7	2.00 V	355	35.8	-3.5
6	644.33	38.0 QP	46.0	-8.0	1.00 V	324	38.2	-0.2

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

## 4.2 Conducted Emission Measurement

### 4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

### 4.2.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver R&S	ESCS 30	847124/029	Oct. 24, 2016	Oct. 23, 2017
Line-Impedance Stabilization Network (for EUT) R&S	ESH3-Z5	848773/004	Oct. 26, 2016	Oct. 25, 2017
Line-Impedance Stabilization Network (for Peripheral) R&S	ENV216	100072	June 03, 2017	June 02, 2018
50 ohms Terminator	N/A	EMC-02	Sep. 22, 2017	Sep. 21, 2018
RF Cable	5D-FB	COCCAB-001	Sep. 29, 2017	Sep. 28, 2018
10 dB PAD Mini-Circuits	HAT-10+	CONATT-004	June 18, 2017	June 17, 2018
Software BVADT	BVADT_Cond_V7.3.7.4	NA	NA	NA

**Note:**

1. The calibration interval of the above test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Shielded Room No. 1.
3. Tested Date: Oct. 04, 2017

#### 4.2.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

**NOTE:** The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

#### 4.2.4 Deviation From Test Standard

No deviation.

#### 4.2.5 Test Setup

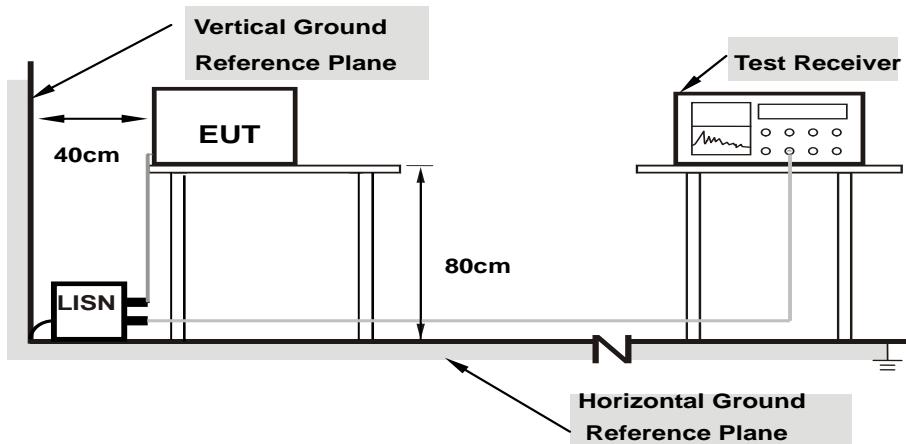

**Note: 1. Support units were connected to second LISN.**

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.2.6 EUT Operating Condition

Same as 4.1.6.


#### 4.2.7 Test Results (Mode 1)

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor (dB)	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		Q.P. (dB)	AV. (dB)	Q.P. (dB)	AV. (dB)	Q.P. (dB)	AV. (dB)	Q.P. (dB)	AV. (dB)	
1	0.16259	10.07	41.61	30.43	51.68	40.50	65.33	55.33	-13.65	-14.83
2	0.18516	10.06	30.98	9.90	41.04	19.96	64.25	54.25	-23.21	-34.29
3	0.20469	10.06	35.68	24.64	45.74	34.70	63.42	53.42	-17.68	-18.72
4	0.44297	10.11	28.80	16.89	38.91	27.00	57.01	47.01	-18.10	-20.01
5	17.22266	11.11	22.38	8.41	33.49	19.52	60.00	50.00	-26.51	-30.48
6	24.73438	11.32	22.32	15.71	33.64	27.03	60.00	50.00	-26.36	-22.97

#### REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

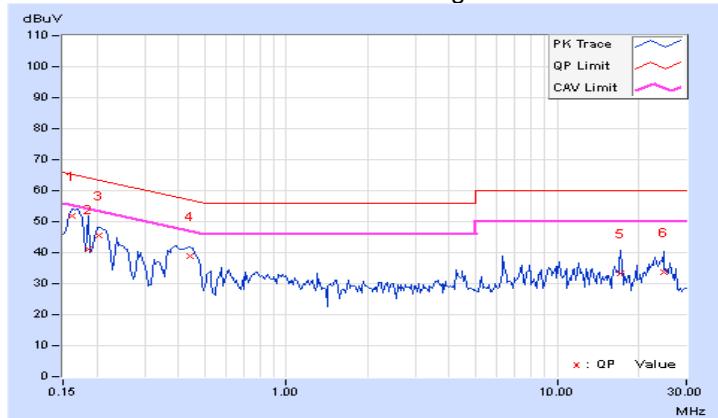


Phase	Neutral (N)		Detector Function		Quasi-Peak (QP) / Average (AV)	
-------	-------------	--	-------------------	--	--------------------------------	--

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.
1	<b>0.16562</b>	<b>10.05</b>	<b>41.50</b>	<b>32.01</b>	<b>51.55</b>	<b>42.06</b>	<b>65.18</b>	<b>55.18</b>	<b>-13.63</b>	<b>-13.12</b>
2	0.19297	10.03	29.66	8.64	39.69	18.67	63.91	53.91	-24.22	-35.24
3	0.24375	10.05	29.32	18.19	39.37	28.24	61.97	51.97	-22.60	-23.73
4	0.43125	10.10	28.61	18.95	38.71	29.05	57.23	47.23	-18.52	-18.18
5	6.34766	10.35	24.67	21.25	35.02	31.60	60.00	50.00	-24.98	-18.40
6	24.78125	10.98	21.99	17.96	32.97	28.94	60.00	50.00	-27.03	-21.06

**REMARKS:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

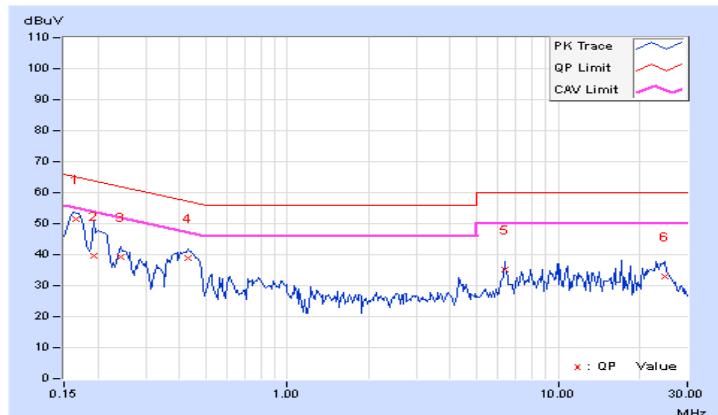


### 4.3 Number of Hopping Frequency Used

#### 4.3.1 Limits of Hopping Frequency Used Measurement

At least 15 channels frequencies, and should be equally spaced.

#### 4.3.2 Test Setup

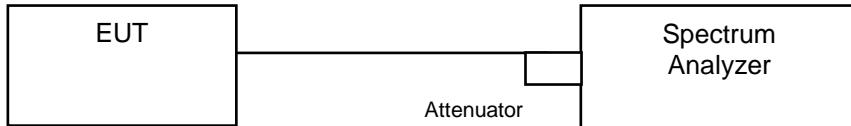

#### 4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

#### 4.3.4 Test Procedure

- a. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- c. Set the SA on MaxHold Mode, and then keep the EUT in hopping mode. Record all the signals from each channel until each one has been recorded.
- d. Set the SA on View mode and then plot the result on SA screen.
- e. Repeat above procedures until all frequencies measured were complete.

#### 4.3.5 Deviation from Test Standard

No deviation.

#### 4.3.6 Test Results

There are 79 hopping frequencies in the hopping mode. Please refer to next page for the test result. On the plots, it shows that the hopping frequencies are equally spaced.




#### 4.4 Dwell Time on Each Channel

##### 4.4.1 Limits of Dwell Time on Each Channel Measurement

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

##### 4.4.2 Test Setup

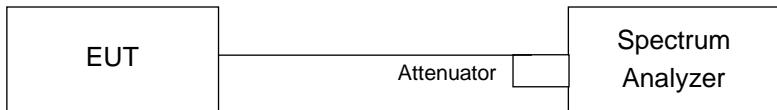

##### 4.4.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

##### 4.4.4 Test Procedures

- a. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- c. Adjust the center frequency of SA on any frequency be measured and set SA to zero span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
- d. Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.
- e. Repeat above procedures until all different time-slot modes have been completed.

##### 4.4.5 Deviation from Test Standard


No deviation.

#### 4.4.6 Test Results

##### GFSK

<b>Mode</b>	<b>Number of transmission in a 31.6 (79Hopping*0.4)</b>	<b>Length of transmission time (msec)</b>	<b>Result (msec)</b>	<b>Limit (msec)</b>
DH1	50 (times / 5 sec) * 6.32 = 316 times	0.468	147.89	400
DH3	26 (times / 5 sec) * 6.32 = 164.32 times	1.73	284.27	400
DH5	17 (times / 5 sec) * 6.32 = 107.44 times	2.96	318.02	400


**NOTE:** Test plots of the transmitting time slot are shown on next page.

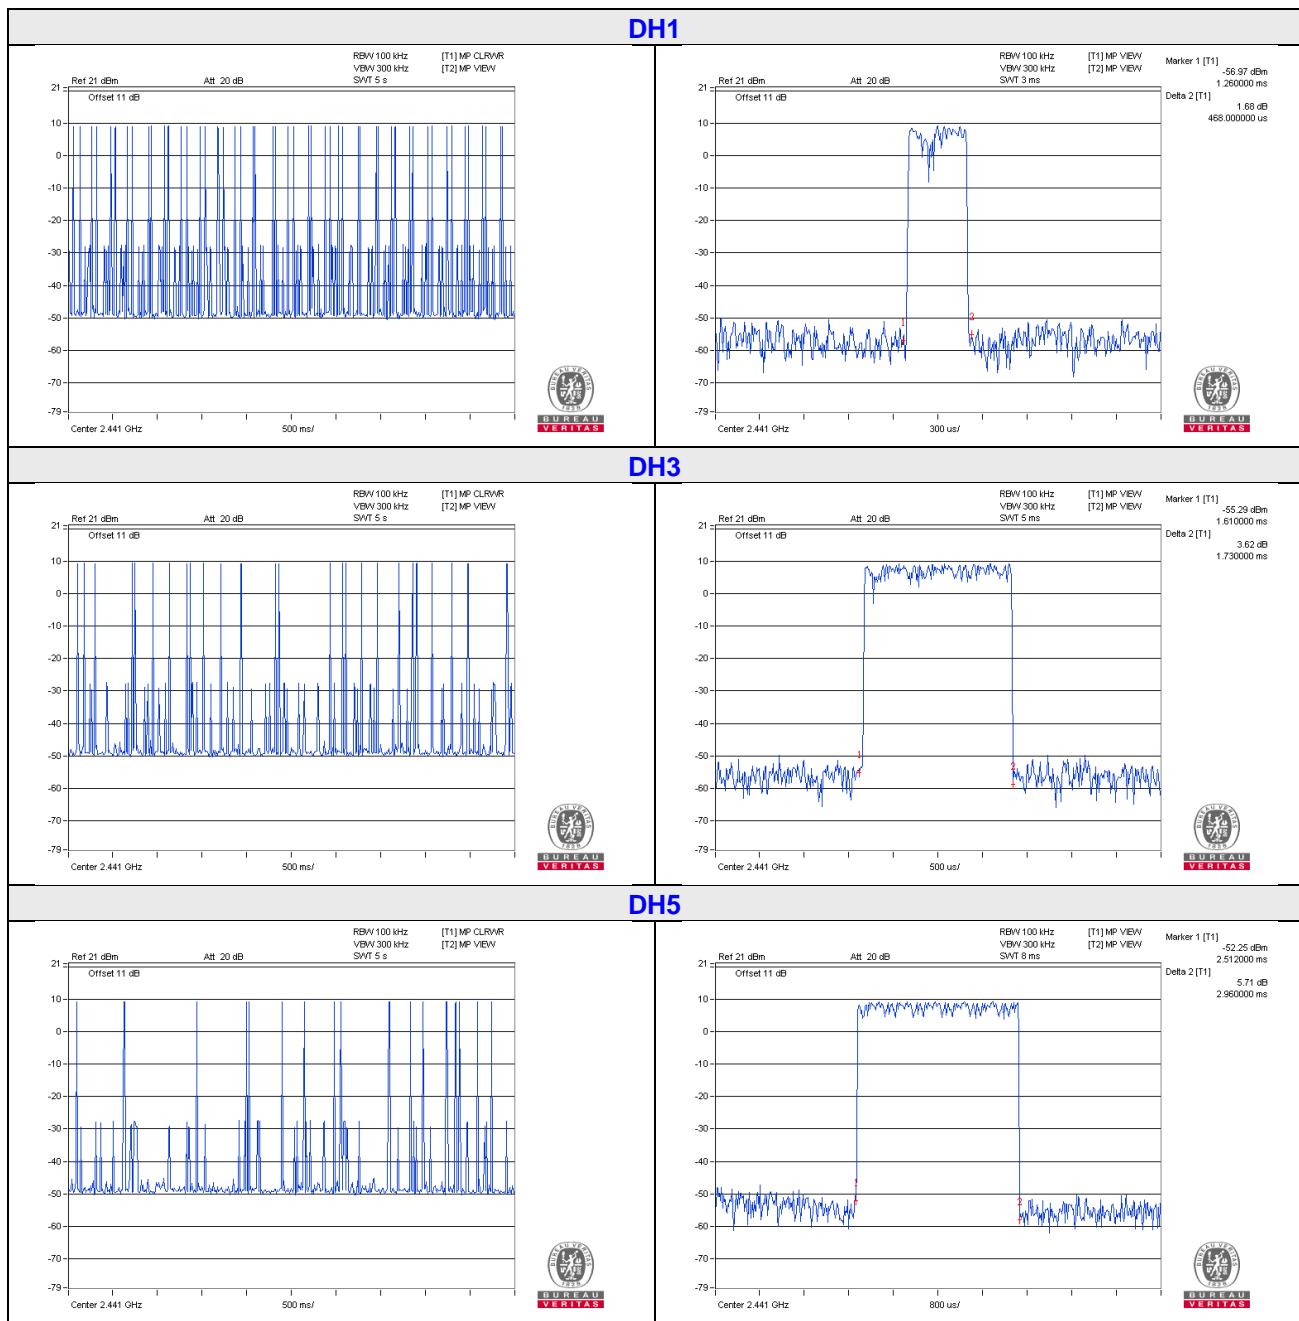

### 8DPSK

<b>Mode</b>	<b>Number of transmission in a 31.6 (79Hopping*0.4)</b>	<b>Length of transmission time (msec)</b>	<b>Result (msec)</b>	<b>Limit (msec)</b>
3DH1	50 (times / 5 sec) * 6.32 = 316 times	0.456	144.1	400
3DH3	27 (times / 5 sec) * 6.32 = 170.64 times	1.73	295.21	400
3DH5	18 (times / 5 sec) * 6.32 = 113.76 times	2.944	334.91	400

**NOTE:** Test plots of the transmitting time slot are shown on next page.

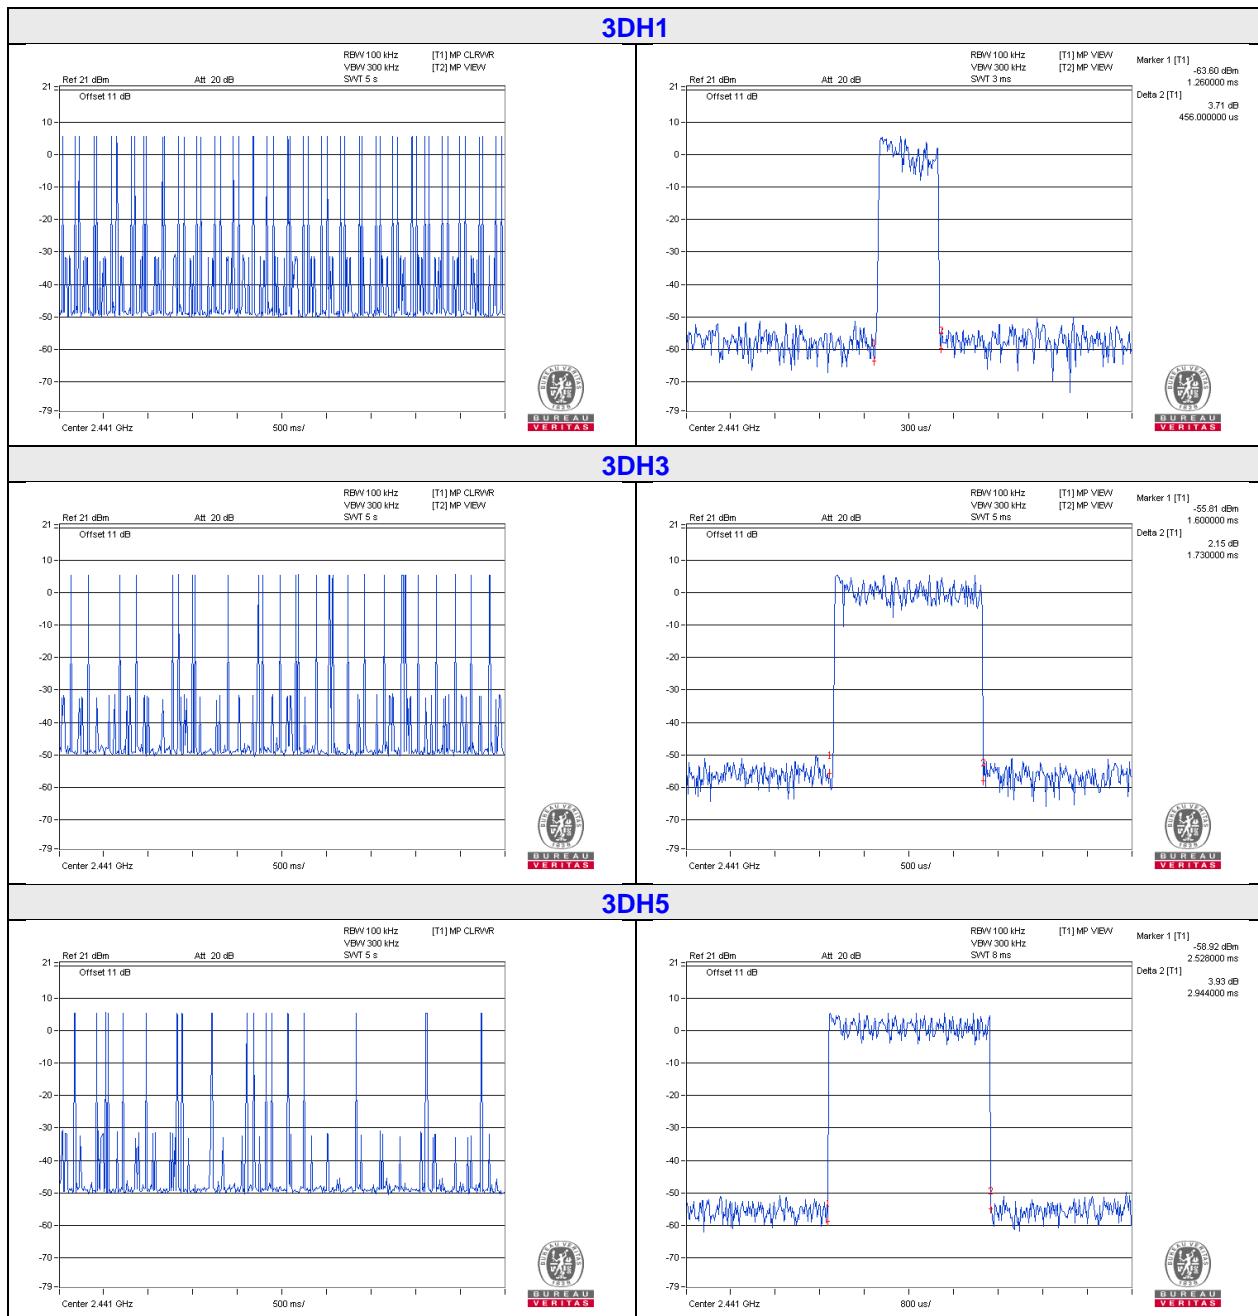


## 4.5 Channel Bandwidth

### 4.5.1 Limits of Channel Bandwidth Measurement

For frequency hopping system operating in the 2400-2483.5MHz, If the 20dB bandwidth of hopping channel is greater than 25kHz, two-thirds 20dB bandwidth of hopping channel shall be a minimum limit for the hopping channel separation.

### 4.5.2 Test Setup

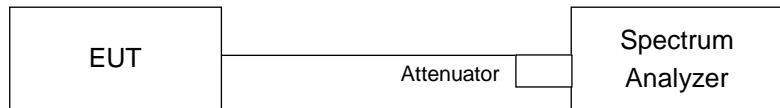

### 4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

### 4.5.4 Test Procedure

- a. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- c. Measure the frequency difference of two frequencies that were attenuated 20dB from the reference level. Record the frequency difference as the emission bandwidth.
- d. Repeat above procedures until all frequencies measured were complete.

### 4.5.5 Deviation from Test Standard


No deviation.

### 4.5.6 EUT Operating Condition

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.

#### 4.5.7 Test Results

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	
		GFSK	8DPSK
0	2402	0.99	1.32
39	2441	1.01	1.31
78	2480	1.01	1.32

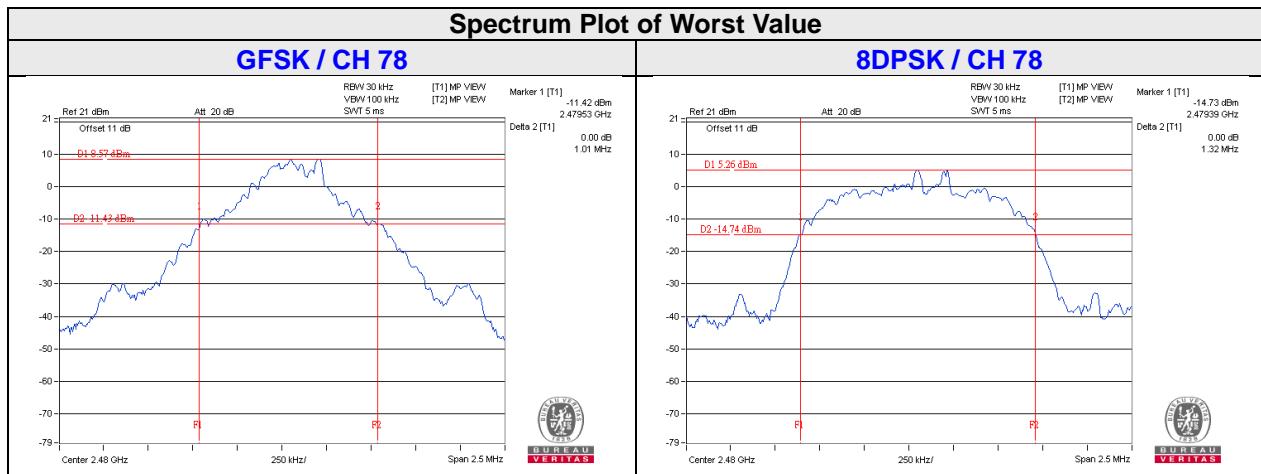


## 4.6 Hopping Channel Separation

### 4.6.1 Limits of Hopping Channel Separation Measurement

At least 25kHz or two-third of 20dB hopping channel bandwidth (whichever is greater).

### 4.6.2 Test Setup

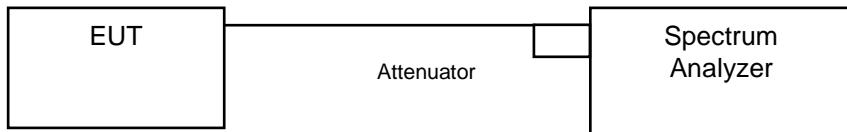

### 4.6.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

### 4.6.4 Test Procedure

#### Measurement Procedure REF

- a. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range.
- c. By using the MaxHold function record the separation of two adjacent channels.
- d. Measure the frequency difference of these two adjacent channels by SA MARK function. And then plot the result on SA screen.
- e. Repeat above procedures until all frequencies measured were complete.


### 4.6.5 Deviation from Test Standard

No deviation.

#### 4.6.6 Test Results

Channel	Frequency (MHz)	Adjacent Channel Separation (MHz)		20dB Bandwidth (MHz)		Minimum Limit (MHz)		Pass / Fail
		GFSK	8DPSK	GFSK	8DPSK	GFSK	8DPSK	
0	2402	1.00	1.00	0.99	1.32	0.66	0.88	Pass
39	2441	1.00	1.00	1.01	1.31	0.68	0.88	Pass
78	2480	1.00	1.00	1.01	1.32	0.68	0.88	Pass

**NOTE:** The minimum limit is two-third 20dB bandwidth.

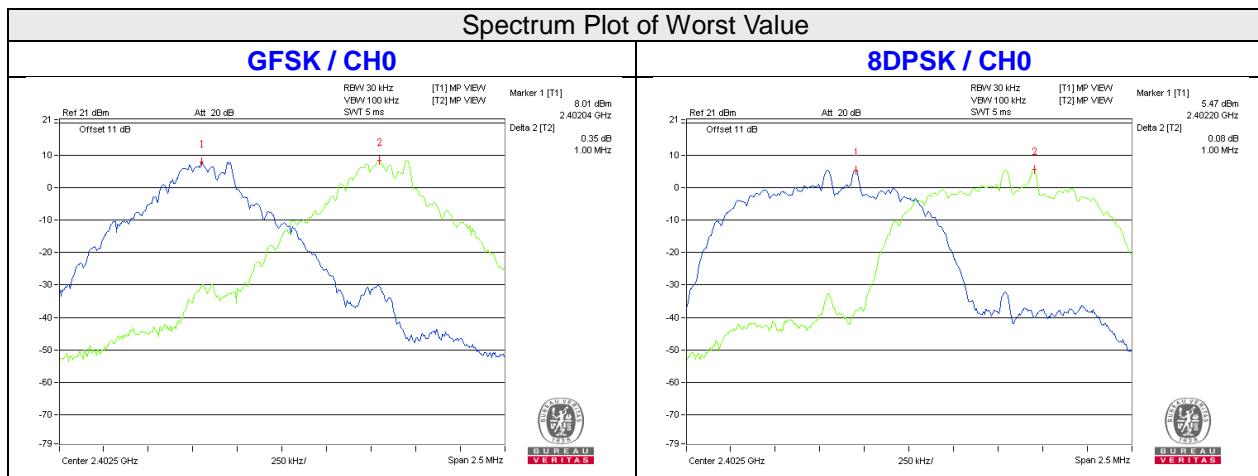

## 4.7 Maximum Output Power

### 4.7.1 Limits of Maximum Output Power Measurement

The Maximum Output Power Measurement is 125mW.

### 4.7.2 Test Setup



### 4.7.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

### 4.7.4 Test Procedure

- a. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- c. The center frequency of the spectrum analyzer is set to the fundamental frequency and using 3MHz RBW and 10 MHz VBW.
- d. Measure the captured power within the band and recording the plot.
- e. Repeat above procedures until all frequencies required were complete.

### 4.7.5 Deviation from Test Standard


No deviation.

### 4.7.6 EUT Operating Condition

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.

#### 4.7.7 Test Results

Channel	Frequency (MHz)	Output Power (mW)		Output Power (dBm)		Power Limit (mW)	Pass / Fail
		GFSK	8DPSK	GFSK	8DPSK		
0	2402	9.016	7.261	9.55	8.61	125	Pass
39	2441	10.375	8.128	10.16	9.10	125	Pass
78	2480	8.75	7.112	9.42	8.52	125	Pass

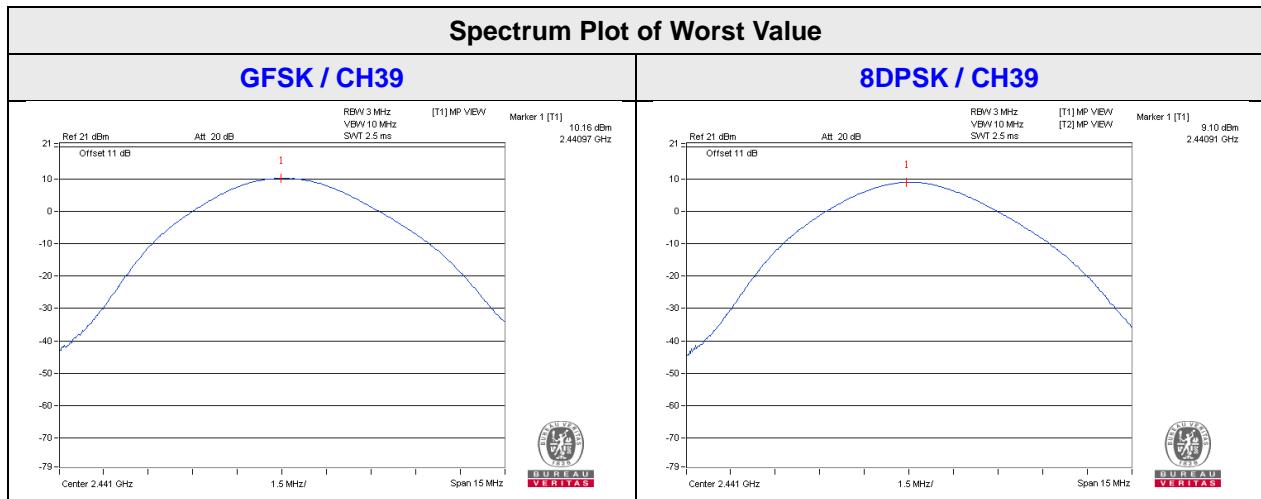

## 4.8 Conducted Out of Band Emission Measurement

### 4.8.1 Limits of Conducted Out of Band Emission Measurement

Below –20dB of the highest emission level of operating band (in 100kHz RBW).

### 4.8.2 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

### 4.8.3 Test Procedure

The transmitter output was connected to the spectrum analyzer via a low loss cable. Set both RBW and VBW of spectrum analyzer to 100 kHz and 300 kHz with suitable frequency span including 100 MHz bandwidth from band edge. The band edges were measured and recorded.

### 4.8.4 Deviation from Test Standard

No deviation.

### 4.8.5 EUT Operating Condition


The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.

### 4.8.6 Test Results


The spectrum plots are attached on the following images. D1 line indicates the highest level, D2 line indicates the 20dB offset below D1. It shows compliance with the requirement.

## GFSK


### Hopping disabled\_Low Channel

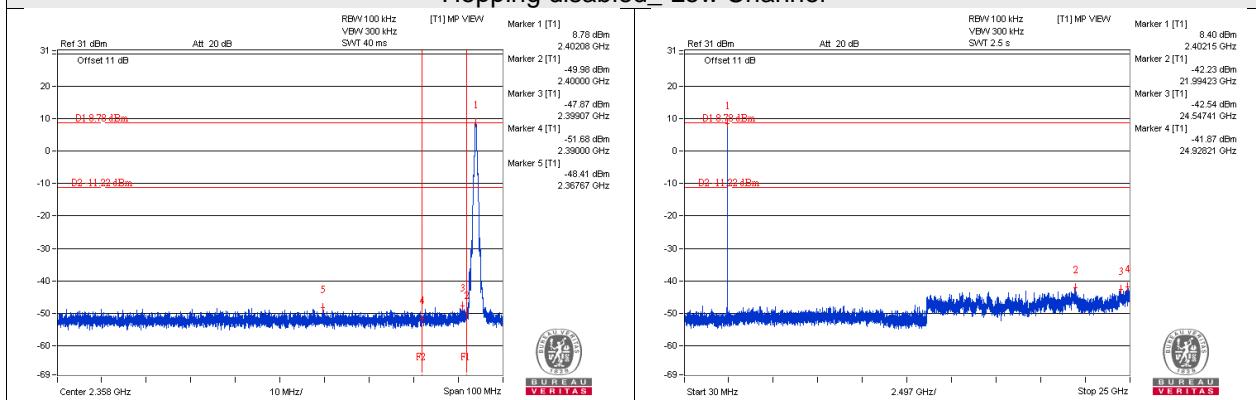


### Hopping disabled\_High Channel

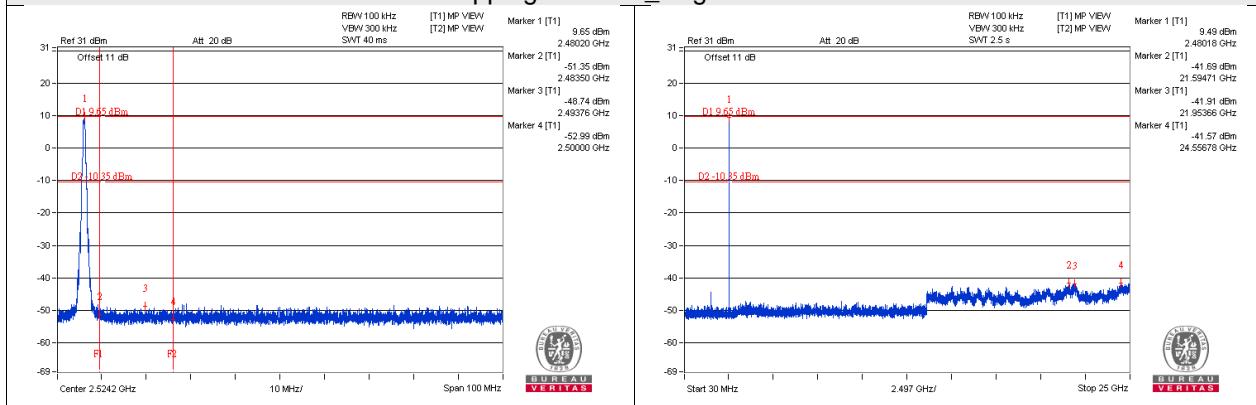

### Hopping enabled\_Low Channel

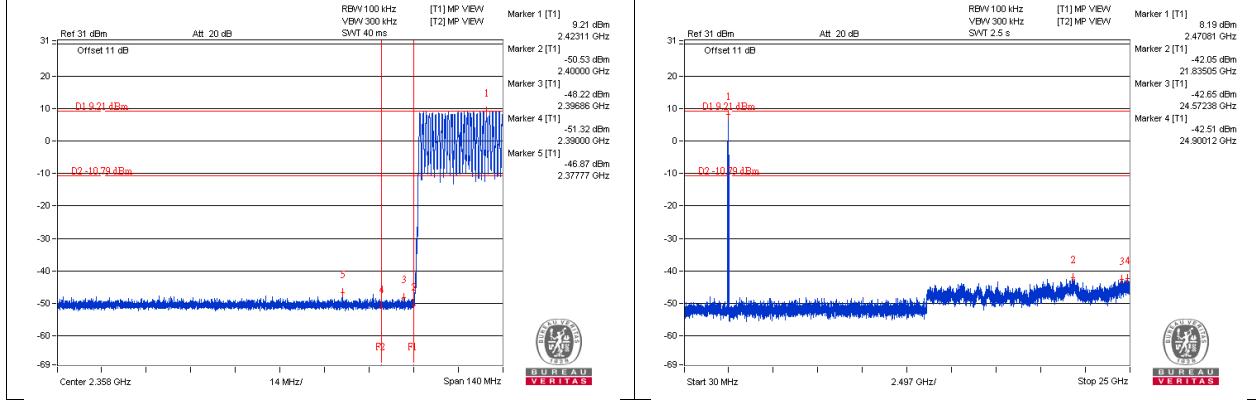


### Hopping enabled\_High Channel

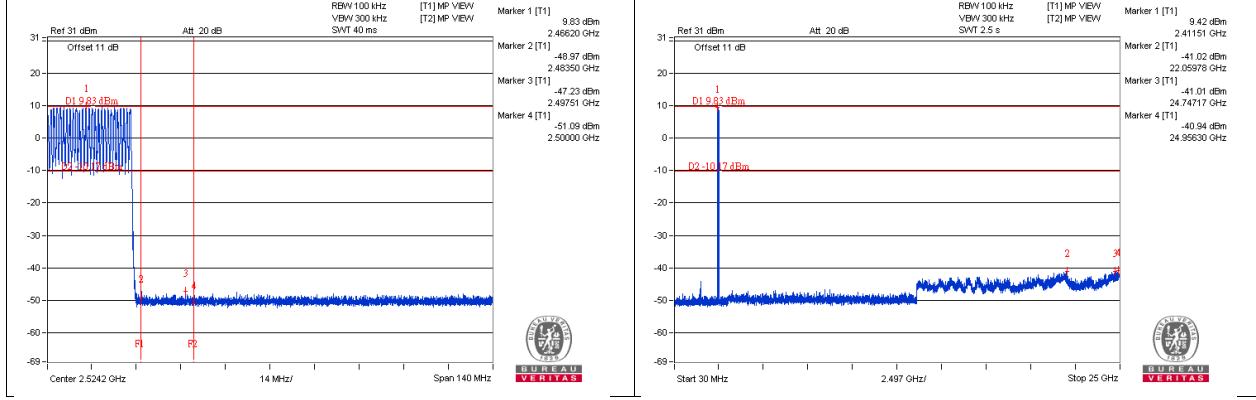


## 8DPSK


### Hopping disabled\_Low Channel

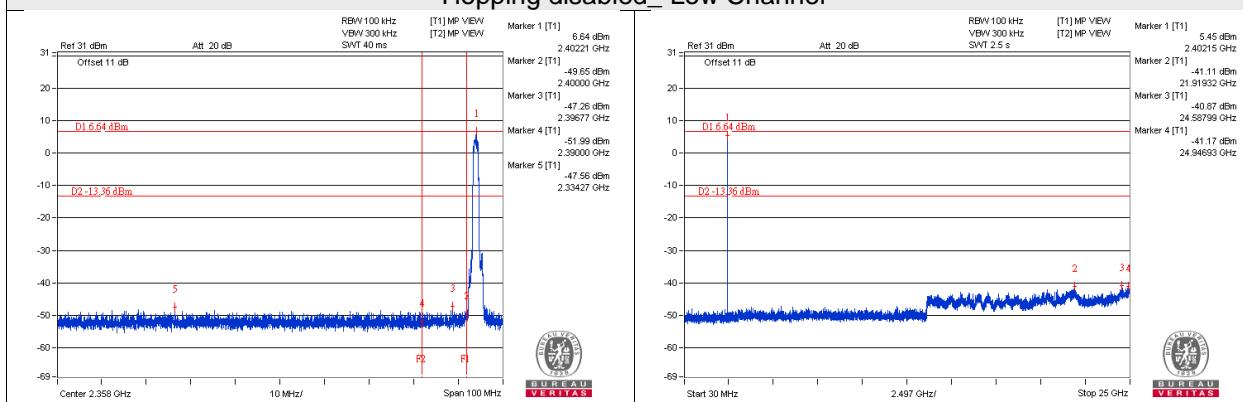


### Hopping disabled\_High Channel

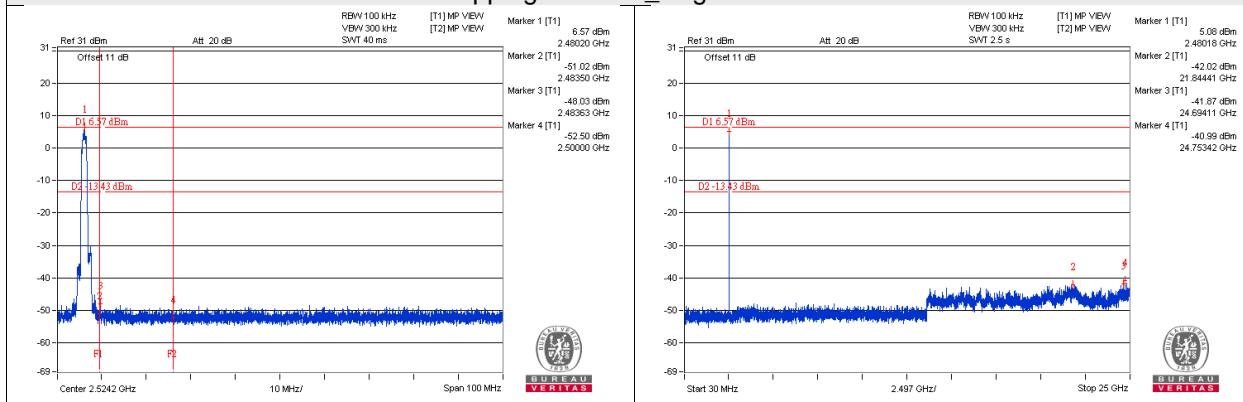

### Hopping enabled\_Low Channel

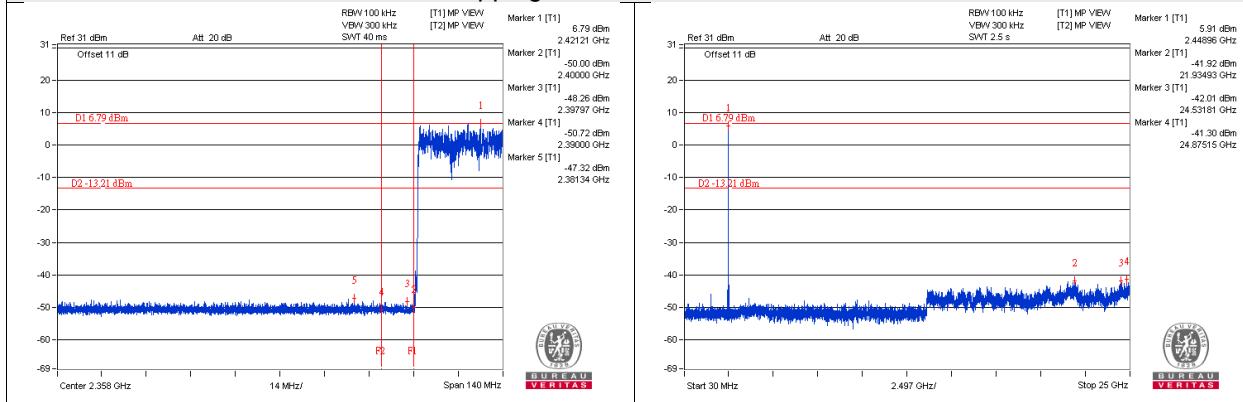

### Hopping enabled\_High Channel

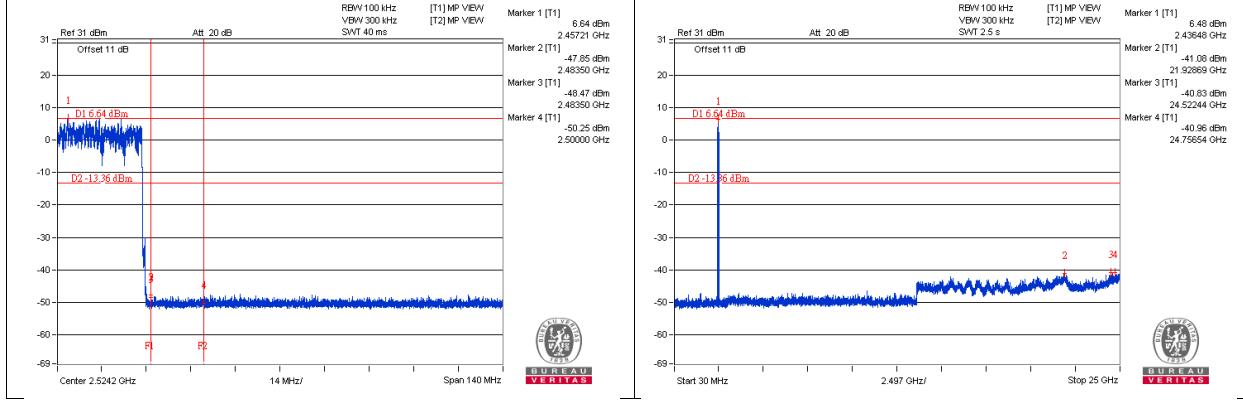

## 5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

## Appendix – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

**Linko EMC/RF Lab**

Tel: 886-2-26052180

Fax: 886-2-26051924

**Hsin Chu EMC/RF/Telecom Lab**

Tel: 886-3-6668565

Fax: 886-3-6668323

**Hwa Ya EMC/RF/Safety Lab**

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: [service.adt@tw.bureauveritas.com](mailto:service.adt@tw.bureauveritas.com)

Web Site: [www.bureauveritas-adt.com](http://www.bureauveritas-adt.com)

The address and road map of all our labs can be found in our web site also.

--- END ---