



RF - TEST REPORT

- FCC Part 15.247, RSS-247 -

Type / Model Name	: M2
Product Description	: Radio Module 802.11a/b/n/ac & BLE
Applicant	: BSH Hausgeräte GmbH
Address	: Carl-Wery-Straße 34
	81739 München
Manufacturer	: BSH Hausgeräte GmbH
Address	: Carl-Wery-Straße 34
	81739 München

Test Result according to the standards listed in clause 1 test standards:	POSITIVE
--	-----------------

Test Report No. :	80091012-02 Rev_3	03. June 2022
		Date of issue



Deutsche
Akkreditierungsstelle
D-PL-12030-01-03
D-PL-12030-01-04

FCC ID: 2AHES-M2

IC ID: 21152-M2

Contents

1 TEST STANDARDS	3
2 EQUIPMENT UNDER TEST	4
2.1 Information provided by the Client	4
2.2 Sampling	4
2.3 Photo documentation of the EUT – Detailed photos see ATTACHMENT A	4
2.4 General remarks	4
2.5 Equipment type	4
2.6 Short description of the equipment under test (EUT)	4
2.7 Variants of the EUT	5
2.8 Operation frequency and channel plan	5
2.9 Transmit operating modes	5
2.10 Antenna	6
2.11 Power supply system utilised	6
2.12 Peripheral devices and interface cables	6
2.13 Determination of worst-case conditions for final measurement	6
3 TEST RESULT SUMMARY	8
3.2 Final assessment	8
4 TEST ENVIRONMENT	9
4.1 Address of the test laboratory	9
4.2 Environmental conditions	9
4.3 Statement of the measurement uncertainty	9
4.4 Conformity Decision Rule	10
4.5 Measurement protocol for FCC and ISED	10
5 TEST CONDITIONS AND RESULTS	13
5.1 AC power line conducted emissions	13
5.2 DTS Bandwidth and OBW	19
5.3 Maximum peak conducted output power	27
5.5 Power spectral density	39
5.7 Band edge compliance	44
5.9 Unwanted emissions	49
5.10 Unwanted emissions in restricted bands, radiated	60
5.12 Antenna application	73
5.13 Defacto EIRP-Limit	73
6 USED TEST EQUIPMENT AND ACCESSORIES	74

ATTACHMENT A as separate supplement

FCC ID: 2AHES-M2

IC ID: 21152-M2

1 TEST STANDARDS

The tests were performed according to following standards:

FCC Rules and Regulations Part 15, Subpart A - General (September 2021)

Part 15, Subpart A, Section 15.31	Measurement standards
Part 15, Subpart A, Section 15.33	Frequency range of radiated measurements
Part 15, Subpart A, Section 15.35	Measurement detector functions and bandwidths

FCC Rules and Regulations Part 15, Subpart C - Intentional Radiators (September 2021)

Part 15, Subpart C, Section 15.203	Antenna requirement
Part 15, Subpart C, Section 15.204	External radio frequency power amplifiers and antenna modifications
Part 15, Subpart C, Section 15.205	Restricted bands of operation
Part 15, Subpart C, Section 15.207	Conducted limits
Part 15, Subpart C, Section 15.209	Radiated emission limits, general requirements
Part 15, Subpart C, Section 15.247	Operation within the bands 902 - 928 MHz, 2400 - 2483.5 MHz and 5725 - 5850 MHz

ANSI C63.10: 2013 Testing Unlicensed Wireless Devices

ETSI TR 100 028 V1.3.1: 2001-03 Electromagnetic Compatibility and Radio Spectrum Matters (ERM); Uncertainties in the Measurement of Mobile Radio Equipment Characteristics—Part 1 and Part 2

KDB 558074 D01 v05 Guidance for compliance measurements on DTS; FHSS and hybrid system devices operating under Section 15.247 of the FCC rules, April 2, 2019.

FCC ID: 2AHES-M2

IC ID: 21152-M2

2 EQUIPMENT UNDER TEST

2.1 Information provided by the Client

Please note, we do not take any responsibility for information provided by the client or his representative which may have an influence on the validity of the test results.

2.2 Sampling

The customer is responsible for the choice of sample. Sample configuration, start-up and operation is carried out by the customer or according his/her instructions.

2.3 Photo documentation of the EUT – Detailed photos see ATTACHMENT A

2.4 General remarks

As requested by the manufacturer all tests were performed with the highest possible power setting to still comply with the applying regulations and limits. Used power settings are listed under 2.13. of this test report.

Maximum peak conducted output power is additionally measured with power settings as applied in the final product.

2.5 Equipment type

WLAN - Client

2.6 Short description of the equipment under test (EUT)

The EUT is a communication module for assembling into household devices. The firmware does not support ad-hoc modes and gives the user no possibility to choose the data transmission or power setting. The EUT is compatible with IEEE 802.11b, g, n, a, ac Standard and 802.15. It supports the 2.4 GHz and 5 GHz frequency band and supports no beam forming.

Tested samples : 1 (radiated)

Serial number : 80012117280000440335000001789

SW : BSH Embedded Linux Platform (SMM M2 default) - debug [HWTEST] 40.0.0-204-g45fedbf \n \l

Firmware : 1.28 RC0.0 wl0: Apr 15 2021 03:04:08 version 7.45.234 (4ca95bb CY WLTEST)
FWID 01-67595eaa

Tested samples : 1 (conducted) with maximum power setting

Serial number : 80012117280000440335000001793

SW : BSH Embedded Linux Platform (SMM M2 default) - debug [HWTEST] 40.0.0-204-g45fedbf \n \l

Firmware : 1.28 RC0.0 wl0: Apr 15 2021 03:04:08 version 7.45.234 (4ca95bb CY WLTEST)
FWID 01-67595eaa

FCC ID: 2AHES-M2**IC ID: 21152-M2**

Tested samples : 1 (conducted) with final power setting
 Serial number : 80012117280000440335000001781
 SW : BSH Embedded Linux Platform (SMM M2 default) - debug [HWTEST] 51.0.2-166-g265f5d5 bsh-smm-m2 ttymxc3
 Firmware : 1.28 RC0.0 wl0: Apr 15 2021 03:04:08 version 7.45.234 (4ca95bb CY WLTEST)
 FWID 01-67595eaa

2.7 Variants of the EUT

There are no variants.

2.8 Operation frequency and channel plan

The operating frequency band is 2400 MHz to 2483.5 MHz.

Channel plan WLAN Standard 802.11b, g, n HT20	
Channel	Frequency (MHz)
1	2412
2	2417
3	2422
4	2427
5	2432
6	2437
7	2442
8	2447
9	2452
10	2457
11	2462

Channel plan WLAN Standard 802.11n HT40	
Channel	Frequency (MHz)
3	2422
4	2427
5	2432
6	2437
7	2442
8	2447
9	2452

2.9 Transmit operating modes

The EUT use DSSS or OFDM modulation and provide following data rates with auto-fall-back:

- 802.11b 11, 5.5, 2, 1 Mbps (*Mbps = megabits per second*)
- 802.11g 54, 48, 36, 24, 18, 12, 9, 6 Mbps
- 802.11n HT20, MCS 0 - 7
- 802.11n HT40, MCS 0 - 7

FCC ID: 2AHES-M2**IC ID: 21152-M2**

2.10 Antenna

The following antennas shall be used with the EUT:

Number	Characteristic	Model number	Plug	Frequency range (GHz)	Gain (dBi)
1	Omni	PCB antenna	-	2.4	2.1

The EUT has only an integrated PCB antenna, no temporary connector and no external antenna to be connected.

2.11 Power supply system utilised

Power supply voltage, V_{nom} : 5 V_{DC}

2.12 Peripheral devices and interface cables

The following peripheral devices and interface cables were connected during the measurements:

- Debug Adapter Model: -
- Micro USB cable Model: -
- Laptop Model: -

2.13 Determination of worst-case conditions for final measurement

Preliminary tests are performed in all three orthogonal axes of the EUT to locate at which position and at what setting of the EUT produce the maximum of the emissions. For the further measurement the EUT is set in this position.

The tests are carried out in the following frequency band:

2400 MHz – 2483.5 MHz

For the final test the following channels and test modes are selected:

WLAN	Available channel	Tested channels	Modulation	Modulation type	Data rate
802.11b	1 to 11	1, 6, 13	OFDM	BPSK	11 Mbps
802.11n HT20	1 to 11	1, 6, 13	OFDM	BPSK	MCS7
802.11n HT40	3 to 9	3, 6, 9	OFDM	BPSK	MCS7

Power Settings:

Following power settings for maximum power output were used.

802.11b		
Channel	Frequency	Power Setting
	MHz	
CH1	2412	q70
CH6	2437	q84
CH11	2462	q56

802.11n HT20		
Channel	Frequency	Power Setting
	MHz	
CH1	2412	q46
CH6	2437	q76
CH11	2462	q56

802.11n HT40		
Channel	Frequency	Power Setting
	MHz	
CH3	2422	q34
CH6	2437	q48
CH9	2452	q27

FCC ID: 2AHES-M2**IC ID: 21152-M2****2.13.1 Test jig**

No test jig is used.

2.13.2 Test software

The test software is controlled by a terminal program (PuTTY). The test software allows to set the EUT into RX and TX continuous modulated mode and set different channel by command.

FCC ID: 2AHES-M2

IC ID: 21152-M2

3 TEST RESULT SUMMARY

FCC Rule Part	RSS Rule Part	Description	Result
15.207(a)	RSS-Gen, 8.8	AC power line conducted emissions	passed
15.247(a)(2)	RSS-247, 5.2(a)	-6 dB EBW	passed
15.247(b)(3)	RSS-247, 5.4(d)	Maximum peak conducted output power	passed
15.247(b)(4)	RSS-247, 5.4(d)	Defacto limit	passed
15.247(d)	RSS-247, 5.5	Unwanted emission, radiated	passed
15.247(d)	RSS-Gen, 8.10	Emissions in restricted bands	passed
15.247(e)	RSS-247, 5.2(b)	PSD	passed
15.35(c)	RSS-Gen, 6.10	Pulsed operation	passed
15.203	-	Antenna requirement	passed
	RSS-Gen, 6.11	Transmitter frequency stability	passed
	RSS-Gen, 6.6	99 % Bandwidth	passed

The mentioned RSS Rule Parts in the above table are related to:

RSS-Gen, Issue 5 + Amendment 1 + Amendment 2, March 2019

RSS-247, Issue 2, February 2017

3.1 Revision history of test report

Test report No	Rev.	Issue Date	Changes
80091012-02	0	18 January 2022	Initial test report
80091012-02	1	21 February 2022	Changed measurements of nHT40 CH11 to nHT40 CH9
80091012-02	2	08 April 2022	Correced typing errors
80091012-02	3	03 June 2022	Added conducted output power measurement with final power settings

The test report with the highest revision number replaces the previous test reports.

3.2 Final assessment

The equipment under test fulfills the requirements cited in clause 1 test standards.

Date of receipt of test sample : acc. to storage records

Testing commenced on : 24 August 2021

Testing concluded on : 23 May 2022

Checked by: _____ Tested by: _____

Klaus Gegenfurtner
Teamleader Radio

Lukas Scheuermann
Radio Team

FCC ID: 2AHES-M2

IC ID: 21152-M2

4 TEST ENVIRONMENT

4.1 Address of the test laboratory

CSA Group Bayern GmbH
Ohmstrasse 1-4
94342 STRASSKIRCHEN
GERMANY

4.2 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature: 15 - 35 °C

Humidity: 30 - 60 %

Atmospheric pressure: 86 - 106 kPa

4.3 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. It is noted that the expanded measurement uncertainty corresponds to the measurement results from the standard measurement uncertainty multiplied by the coverage factor $k = 2$. The true value is located in the corresponding interval with a probability of 95 %. The measurement uncertainty was calculated for all measurements listed in this test report on basis of the ETSI Technical Report TR 100 028 Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 1 and Part 2. The results are documented in the quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Measurement Type	Range	Confidence Level	Calculated Uncertainty
AC power line conducted emissions	0.15 MHz to 30 MHz	95%	$\pm 3.29 \text{ dB}$
EBW and OBW	2400 MHz to 3000 MHz	95%	$\pm 2.5 \times 10^{-7}$
Maximum peak conducted output power	2400 MHz to 3000 MHz	95%	$\pm 0.62 \text{ dB}$
Power spectral density	2400 MHz to 3000 MHz	95%	$\pm 0.62 \text{ dB}$
Conducted Spurious Emissions	9 kHz to 10000 MHz	95%	$\pm 2.15 \text{ dB}$
Conducted Spurious Emissions	10000 MHz to 40000 MHz	95%	$\pm 3.47 \text{ dB}$
Radiated Spurious Emissions	9 kHz to 30 MHz	95%	$\pm 3.53 \text{ dB}$
Radiated Spurious Emissions	30 MHz to 1000 MHz	95%	$\pm 3.71 \text{ dB}$
Radiated Spurious Emissions	1000 MHz to 10000 MHz	95%	$\pm 2.34 \text{ dB}$
Field strength of the fundamental	100 kHz to 100 MHz	95%	$\pm 3.53 \text{ dB}$

FCC ID: 2AHES-M2

IC ID: 21152-M2

4.4 Conformity Decision Rule

The applied conformity decision rule is based on ILAC G8:09/2019 clause 4.2.1 Binary Statement for Simple Acceptance Rule ($w = 0$).

Details can be found in the procedure CSA_B_V50_29.

4.5 Measurement protocol for FCC and ISED

4.5.1 General information

CSA Group Bayern GmbH is recognized as wireless testing laboratory under the CAB identifier:

FCC: DE 0011
ISED: DE0009

4.5.2 General Standard information

The test methods used comply with ANSI C63.10 - "Testing Unlicensed Wireless Devices".

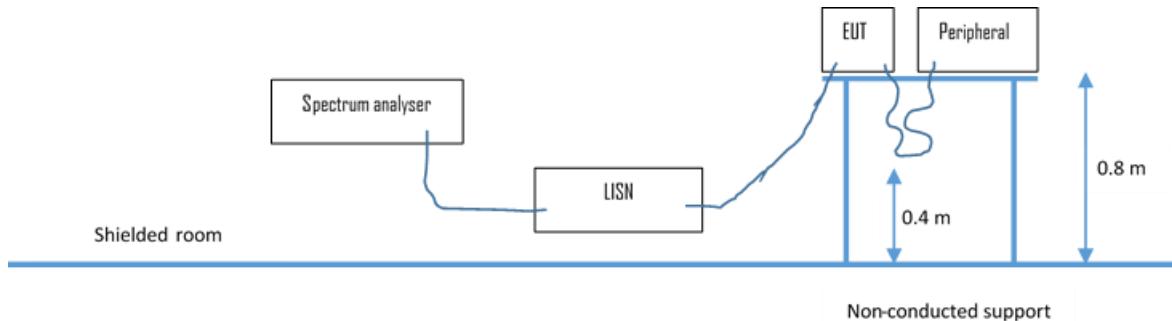
4.5.2.1 Justification

The equipment under test (EUT) is configured in a typical user arrangement in accordance with the manufacturer's instructions.

4.5.3 Details of test procedures

4.5.3.1 Conducted emission

Test setup according ANSI C63.10



The final level, expressed in $\text{dB}\mu\text{V}$, is arrived at by taking the reading directly from the Spectrum analyser. This level is compared to the limit.

To convert between $\text{dB}\mu\text{V}$ and μV , the following conversions apply:

$$\text{dB}\mu\text{V} = 20(\log \mu\text{V})$$

$$\mu\text{V} = \text{Inverse log}(\text{dB}\mu\text{V}/20)$$

Conducted emissions on the 50 Hz and/or 60 Hz power interface of the EUT are measured in the frequency range of 150 kHz to 30 MHz. The measurements are performed using a receiver, which has CISPR characteristic bandwidth and quasi-peak detection and a Line Impedance Stabilization Network (LISN) with $50 \Omega / 50 \mu\text{H}$ (CISPR 16) characteristics. The receiver is protected by means of an impedance matched pulse limiter connected directly to the RF input. Table top equipment is placed on a non-conducting table 80 centimetres above the floor and is positioned 40 centimetres from the vertical ground plane (wall) of the screen room. If the minimum limit margin appears to be less than 20 dB with a peak mode measurement, the emission is re-measured using a tuned receiver with quasi-peak and average detection and recorded on the data sheets.


FCC ID: 2AHES-M2

IC ID: 21152-M2

4.5.3.2 Radiated emission

4.5.3.2.1 OATS1 test site (9 kHz - 30 MHz):

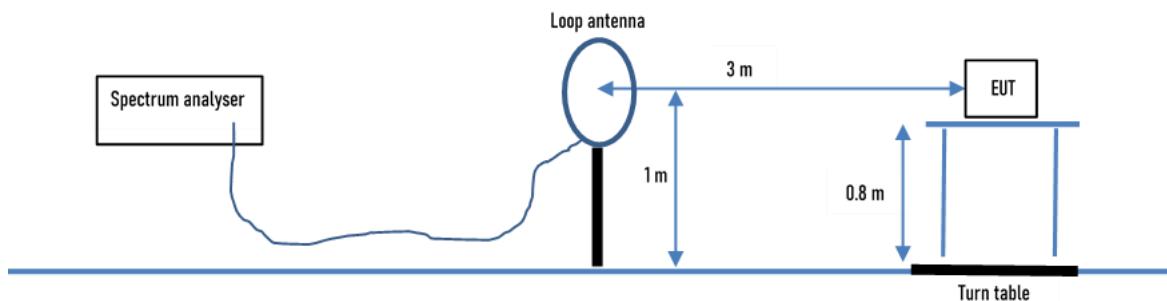
Test setup according ANSI C63.10



Emissions from the EUT are measured in the frequency range of 9 MHz to 30 MHz using a tuned receiver and a calibrated loop antenna. Table top equipment is placed on a 1.0 X 1.5 m non-conducting table 80 centimetres above the ground plane. Cables to simulators/testers (if used in this test) are routed through the center of the table and to a screened room located outside the test area. The antenna is positioned 3, 10 or 30 metres horizontally from the EUT and is repeated vertically. To locate maximum emissions from the test sample the antenna is varied along the site axis and the EUT is rotated 360 degrees.

4.5.3.2.2 OATS1 test site (30 MHz - 1 GHz):

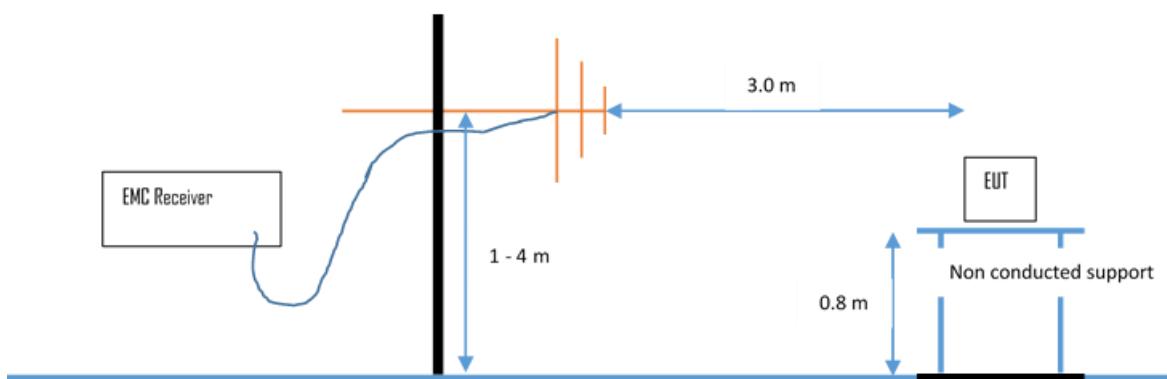Test setup according ANSI C63.10.



Spurious emissions from the EUT are measured in the frequency range of 30 MHz to 1000 MHz using a tuned receiver and appropriate broadband linearly polarised antennas. Measurements between 30 MHz and 1000 MHz are made with 120 kHz/6 dB bandwidth and quasi-peak detection. Table top equipment is placed on a 1.0 X 1.5 m non-conducting table 80 centimetres above the ground plane. Floor standing equipment is placed directly on the turntable/ground plane. Cables to simulators/testers (if used in this test) are routed through the center of the table and to a screened room located outside the test area. To locate maximum emissions from the test sample the antenna is varied in height from 1 to 4 metres and the EUT is rotated 360 degrees. The final level in dB μ V/m is calculated by taking the reading from the EMI receiver (Level dB μ V) and adding the correction factors and cable loss factor (dB). The FCC limit is subtracted from this result in order to provide the limit margin listed in the measurement protocol.

The resolution bandwidth setting:

30 MHz – 1000 MHz: RBW: 120 kHz

Example:


Frequency (MHz)	Level (dB μ V)	+	Factor (dB)	=	Level (dB μ V/m)	-	Limit (dB μ V/m)	=	Delta (dB)
719.0	75.0	+	32.6	=	107.6	-	110.0	=	-2.4

FCC ID: 2AHES-M2

IC ID: 21152-M2


4.5.3.2.3 Anechoic chamber 1 (1000 MHz – 18000 MHz)

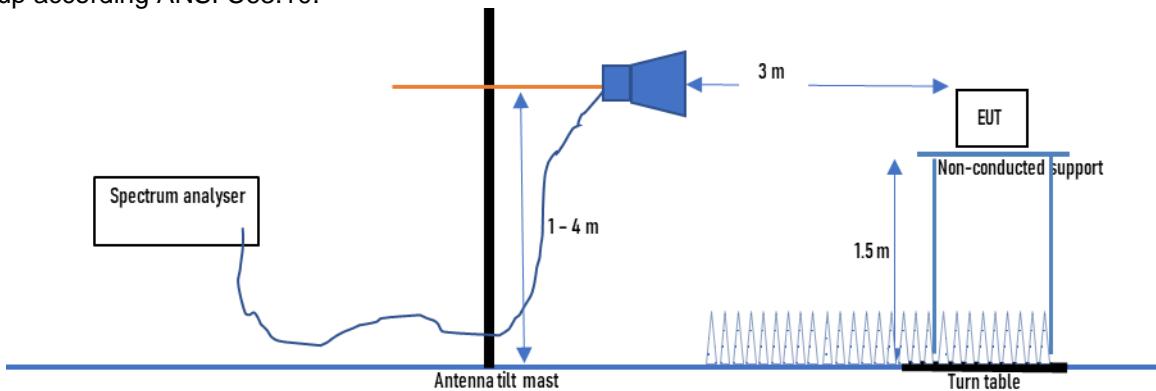Test setup according ANSI C63.10.



Radiated emissions from the EUT are measured in the frequency range 1 GHz up to 18 GHz as specified in 47 CFR Part 15, Subpart A, Section 15.33, using a spectrum analyser and appropriate linearly polarized antennas. Table top equipment is placed on a non-conducting table, 1.5 metre above the ground plane. The turntable is fully covered with the appropriate absorber (Type VHP-12). Any controlling device is positioned such that it does not significantly influence the measurement results. Interconnecting cables that hang closer than 40 cm to the ground plane are folded back and forth in the center, forming a bundle 30 cm to 40 cm long. Measurements are made in three orientations of the EUT and the horizontal and vertical polarization planes of measurement antenna in a fully anechoic room. The measurement antenna is adjusted and the EUT orientated to permit the measurement of the maximum emission from the EUT. The conditions determined as worst-case will then be used for the final measurements.

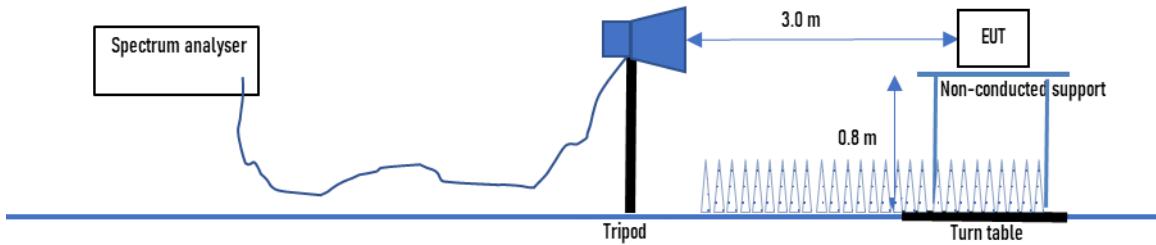4.5.3.2.4 Anechoic chamber 1 (18 GHz – 40 GHz)



Emissions from the EUT are measured in the frequency range 18 GHz up to 40 GHz as specified in 47 CFR Part 15, Subpart A, Section 15.33, using a spectrum analyser and appropriate linearly polarized antennas. Table top equipment is placed on a non-conducting table, 0.8 metre above the ground plane. The turntable is fully covered with the appropriate absorber (Type VHP-12). Any controlling device is positioned such that it does not significantly influence the measurement results. Interconnecting cables that hang closer than 40 cm to the ground plane are folded back and forth in the center, forming a bundle 30 cm to 40 cm long. Measurements are made in three orientations of the EUT and the horizontal and vertical polarization planes of measurement antenna in a fully anechoic room. The measurement antenna is adjusted and the EUT orientated to permit the measurement of the maximum emission from the EUT. The conditions determined as worst-case will then be used for the final measurements. Where appropriate, the test distance may be reduced in order to detect emissions under better uncertainty. The limit are adopted.

FCC ID: 2AHES-M2

IC ID: 21152-M2

5 TEST CONDITIONS AND RESULTS

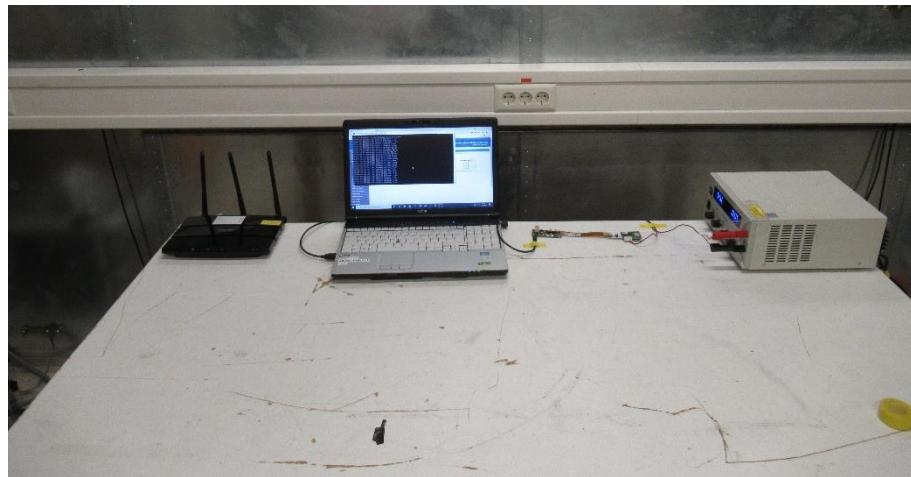
5.1 AC power line conducted emissions

For test instruments and accessories used see section 6 Part A 4.

5.1.1 Description of the test location

Test location: Shielded Room S2

5.1.2 Photo documentation of the test set-up



5.1.3 Applicable standard

According to FCC Part 15, Section 15.207(a):

Except as shown in paragraphs (b) and (c) of this Section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the given limits.

5.1.4 Description of Measurement

The measurements are performed following the procedures set out in ANSI C63.10 described under item 4.4.3. If the minimum limit margin appears to be less than 20 dB with a peak mode measurement, the emissions are re-measured using a tuned receiver with quasi-peak and average detection and recorded on the data sheets.

FCC ID: 2AHES-M2

IC ID: 21152-M2

5.1.5 Test result

Frequency range: 0.15 MHz - 30 MHz
Min. limit margin -9.2 dB at 23.988 MHz

Limit according to FCC Part 15, Section 15.207(a):

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency

The requirements are **FULFILLED**.

Remarks: For detailed test result please refer to following test protocols


FCC ID: 2AHES-M2

IC ID: 21152-M2

5.1.6 Test protocol

Test point: L1
 Operation mode: WLAN 802.11n RX Mode
 Remarks:

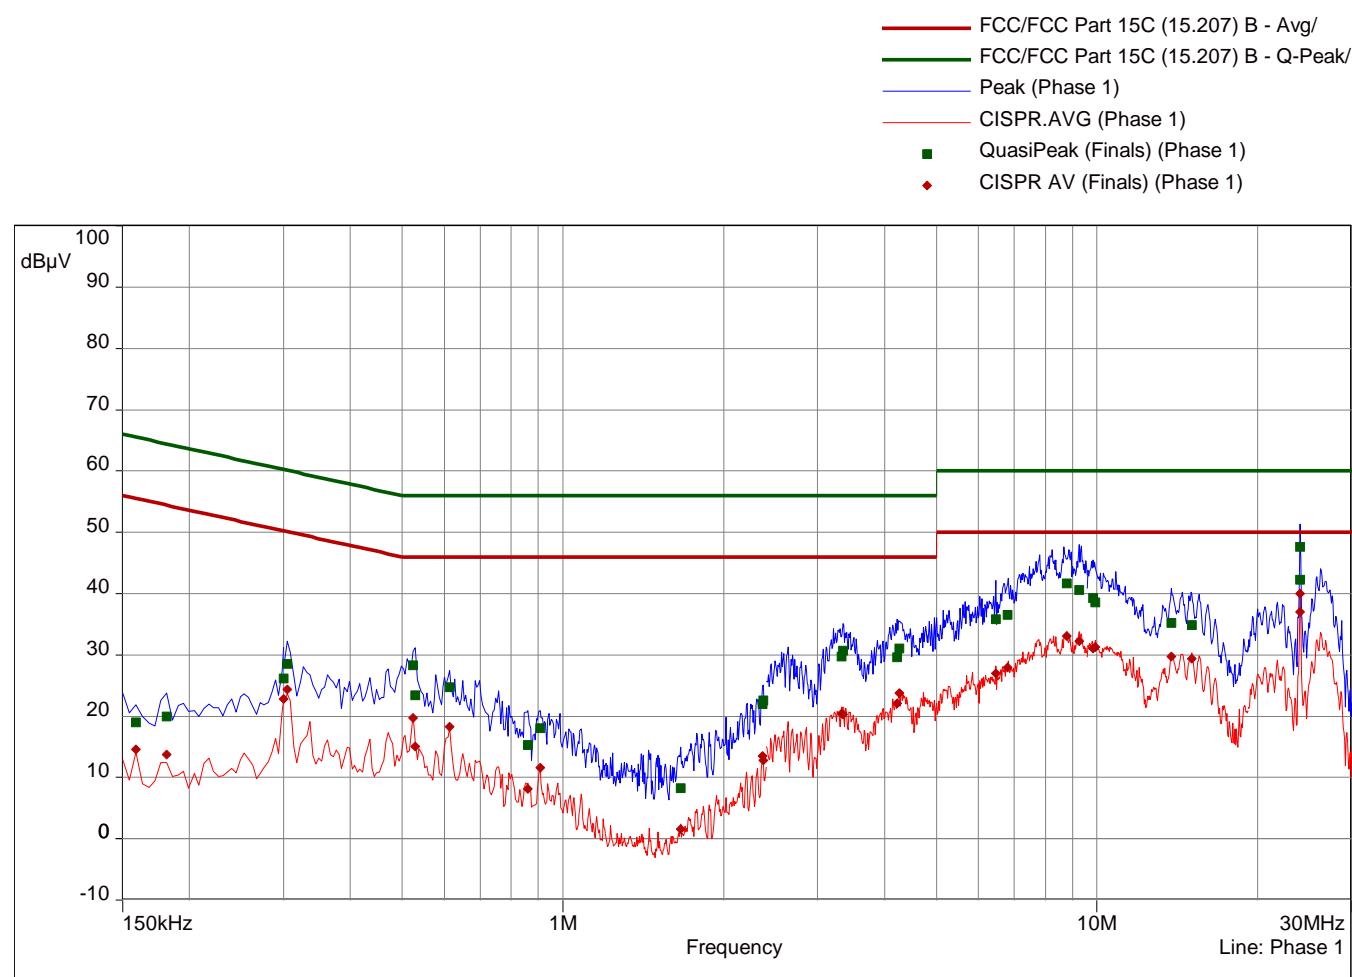Result: passed



FCC/FCC Part 15C (15.207)B

freq	SR	QP	margin	limit	AV	margin	limit	line	RBW	Measure time	corr
MHz		dB μ V	dB	dB μ V	dB μ V	dB	dB μ V		Hz	sec	dB
0.159	1	19.01	-46.51	65.52	14.62	-40.89	55.52	Phase 1	9k	1.00	10.10
0.1815	1	19.96	-44.46	64.42	13.71	-40.71	54.42	Phase 1	9k	1.00	10.10
0.3	1	26.18	-34.07	60.24	22.79	-27.45	50.24	Phase 1	9k	1.00	10.14
0.3045	2	28.55	-31.57	60.12	24.36	-25.76	50.12	Phase 1	9k	1.00	10.14
0.525	2	28.31	-27.69	56.00	19.73	-26.27	46.00	Phase 1	9k	1.00	10.16
0.5295	2	23.40	-32.60	56.00	15.05	-30.95	46.00	Phase 1	9k	1.00	10.16
0.6135	3	24.67	-31.33	56.00	18.31	-27.69	46.00	Phase 1	9k	1.00	10.17
0.861	3	15.34	-40.66	56.00	8.15	-37.85	46.00	Phase 1	9k	1.00	10.19
0.906	3	18.07	-37.93	56.00	11.61	-34.39	46.00	Phase 1	9k	1.00	10.20
1.6635	4	8.25	-47.75	56.00	1.59	-44.41	46.00	Phase 1	9k	1.00	10.27
2.3655	4	22.00	-34.00	56.00	13.46	-32.54	46.00	Phase 1	9k	1.00	10.31
2.37	4	22.55	-33.45	56.00	12.82	-33.18	46.00	Phase 1	9k	1.00	10.31
3.327	5	29.79	-26.21	56.00	20.47	-25.53	46.00	Phase 1	9k	1.00	10.35
3.345	5	30.71	-25.29	56.00	20.32	-25.68	46.00	Phase 1	9k	1.00	10.35

FCC ID: 2AHES-M2**IC ID: 21152-M2**


4.2225	5	29.67	-26.33	56.00	22.12	-23.88	46.00	Phase 1	9k	1.00	10.41
4.2585	5	31.06	-24.94	56.00	23.77	-22.23	46.00	Phase 1	9k	1.00	10.41
6.465	6	35.87	-24.13	60.00	27.04	-22.96	50.00	Phase 1	9k	1.00	10.56
6.789	6	36.58	-23.42	60.00	27.97	-22.03	50.00	Phase 1	9k	1.00	10.59
8.7735	6	41.63	-18.37	60.00	33.08	-16.92	50.00	Phase 1	9k	1.00	10.69
9.273	6	40.63	-19.37	60.00	32.20	-17.80	50.00	Phase 1	9k	1.00	10.71
9.843	7	39.32	-20.68	60.00	31.10	-18.90	50.00	Phase 1	9k	1.00	10.73
9.9105	7	38.55	-21.45	60.00	31.27	-18.73	50.00	Phase 1	9k	1.00	10.74
13.794	7	35.22	-24.78	60.00	29.78	-20.22	50.00	Phase 1	9k	1.00	11.09
15.0585	7	34.82	-25.18	60.00	29.42	-20.58	50.00	Phase 1	9k	1.00	11.19
23.988	8	47.62	-12.38	60.00	39.95	-10.05	50.00	Phase 1	9k	1.00	11.64
24.015	8	42.28	-17.72	60.00	37.05	-12.95	50.00	Phase 1	9k	1.00	11.64

FCC ID: 2AHES-M2

IC ID: 21152-M2

Test point: N
 Operation mode: WLAN 802.11n RX Mode
 Remarks:

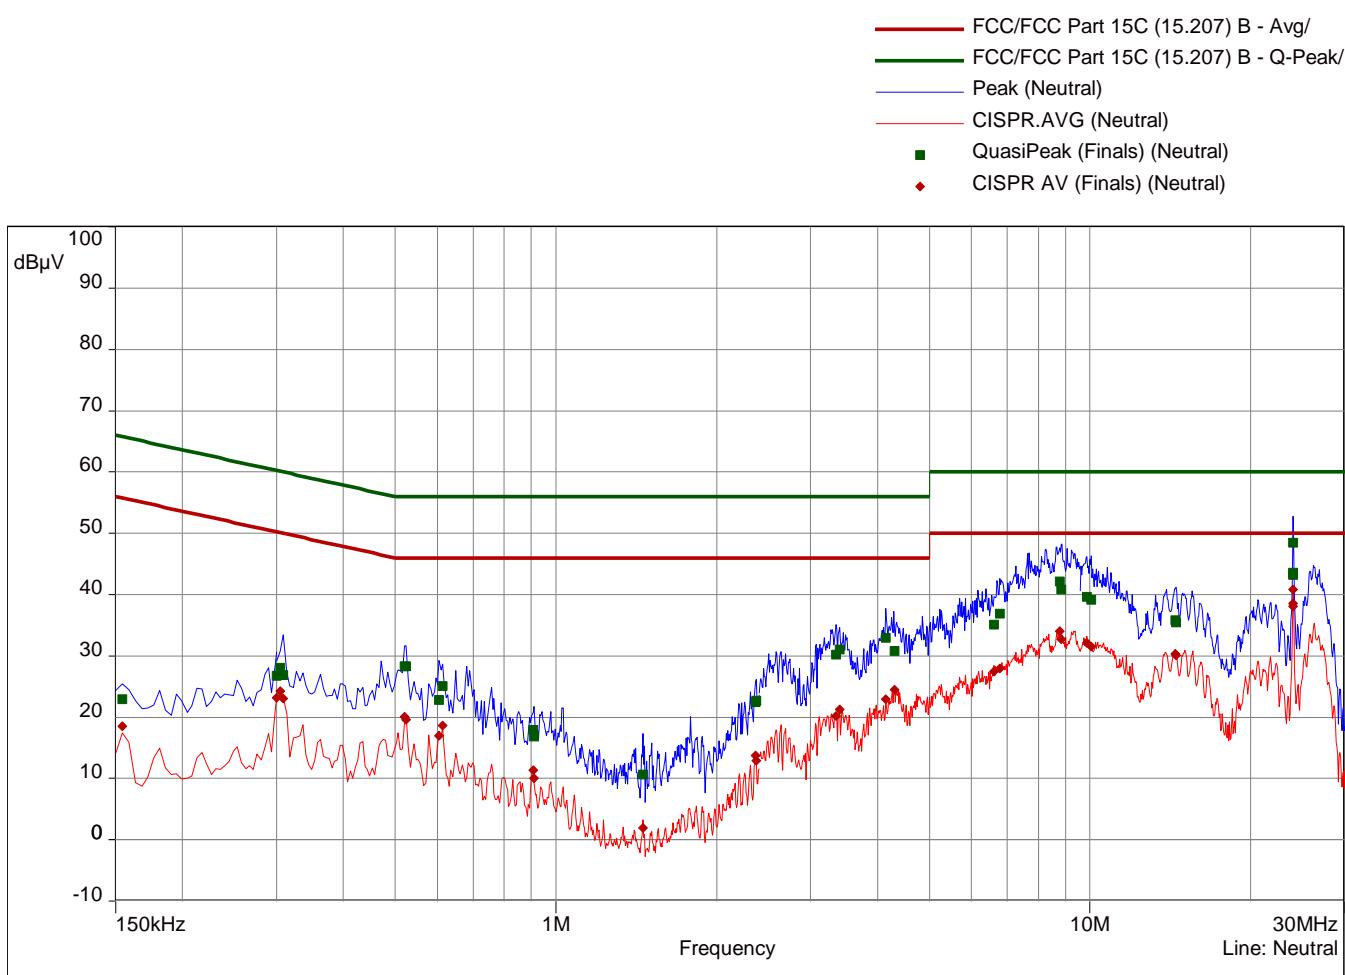Result: passed



FCC ID: 2AHES-M2**IC ID: 21152-M2**

4.1505	13	32.97	-23.03	56.00	23.00	-23.00	46.00	Neutral	9k	1.00	10.40
4.299	13	30.80	-25.20	56.00	24.54	-21.46	46.00	Neutral	9k	1.00	10.41
6.609	14	35.15	-24.85	60.00	27.47	-22.53	50.00	Neutral	9k	1.00	10.55
6.7755	14	36.91	-23.09	60.00	27.96	-22.04	50.00	Neutral	9k	1.00	10.56
8.769	14	42.09	-17.91	60.00	34.01	-15.99	50.00	Neutral	9k	1.00	10.63
8.823	14	40.82	-19.18	60.00	32.75	-17.25	50.00	Neutral	9k	1.00	10.63
9.8565	15	39.66	-20.34	60.00	32.14	-17.86	50.00	Neutral	9k	1.00	10.67
10.041	15	39.10	-20.90	60.00	31.56	-18.44	50.00	Neutral	9k	1.00	10.67
14.4465	15	35.81	-24.19	60.00	30.39	-19.61	50.00	Neutral	9k	1.00	10.97
14.4735	15	35.49	-24.51	60.00	30.15	-19.85	50.00	Neutral	9k	1.00	10.97
23.988	16	48.48	-11.52	60.00	40.80	-9.20	50.00	Neutral	9k	1.00	11.26
24.0105	16	43.60	-16.40	60.00	38.54	-11.46	50.00	Neutral	9k	1.00	11.26
24.0195	16	43.22	-16.78	60.00	38.05	-11.95	50.00	Neutral	9k	1.00	11.26

FCC ID: 2AHES-M2

IC ID: 21152-M2

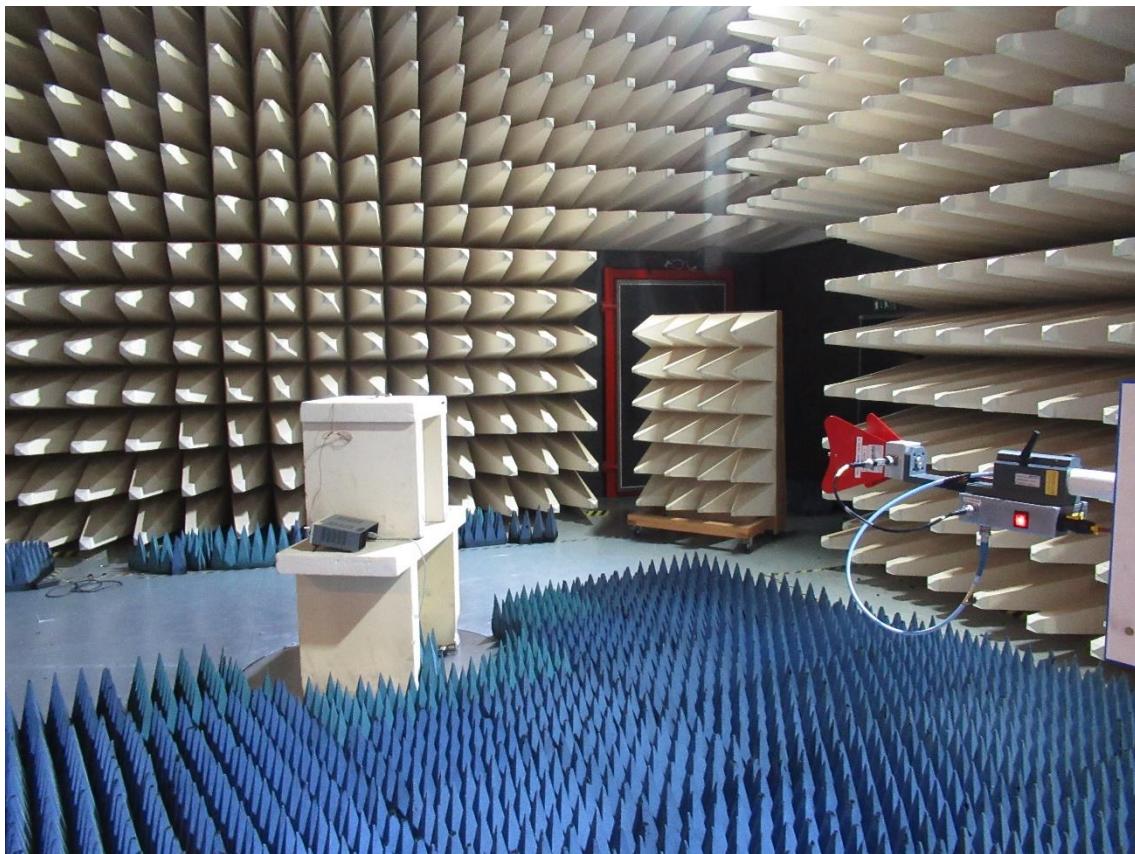
5.2 DTS Bandwidth and OBW

For test instruments and accessories used see section 6 Part **MB**.

5.2.1 Description of the test location

Test location: Anechoic chamber 1
Test distance: 3 m

5.2.2 Photo documentation of the test set-up



5.2.3 Applicable standard

According to FCC Part 15, Section 15.247(a)(2):

Systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 – 2483.5 MHz and 5725 – 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

5.2.4 Description of Measurement

The bandwidth was measured at an amplitude level reduced from the reference level of a modulated channel by a ratio of -6 dB. The reference level is the level of the highest signal amplitude observed at the transmitter at either the fundamental frequency or the first order modulation products in all typical modes of operation, including the unmodulated carrier, even if atypical. An alternative is to use the bandwidth measurement of the analyser.

Spectrum analyser settings for DTS Bandwidth:

RBW: 100 kHz, VBW: 300 kHz, Detector: Max peak, Sweep time: 5 s;

Spectrum analyser settings for OBW:

RBW: 1-5% OBW, VBW: 3 RBW, Detector: Max peak, Sweep time: 5 s;

FCC ID: 2AHES-M2**IC ID: 21152-M2****5.2.5 Test result**

Modulation	Channel	Frequency	DTS Bandwidth	minimum Limit
		MHz	MHz	MHz
802.11b	1	2412	9.081	0.5
	6	2437	9.081	0.5
	11	2462	7.557	0.5
802.11n HT20	1	2412	1.379	0.5
	6	2437	15.045	0.5
	11	2462	5.065	0.5
802.11n HT40	3	2422	8.811	0.5
	6	2437	32.473	0.5
	9	2452	13.931	0.5

Modulation	Channel	Channel Frequency	OBW 99%
		MHz	MHz
802.11b	1	2412	12.356
	6	2437	12.564
	11	2462	11.138
802.11n HT20	1	2412	17.688
	6	2437	18.093
	11	2462	17.280
802.11n HT40	3	2422	35.067
	6	2437	36.071
	9	2452	35.960

The requirements are **FULFILLED**.


Remarks: For detailed test results please refer to following test protocols. The RSS Gen defines no limit for the occupied bandwidth.

FCC ID: 2AHES-M2

IC ID: 21152-M2

5.2.6 Test protocols EBW

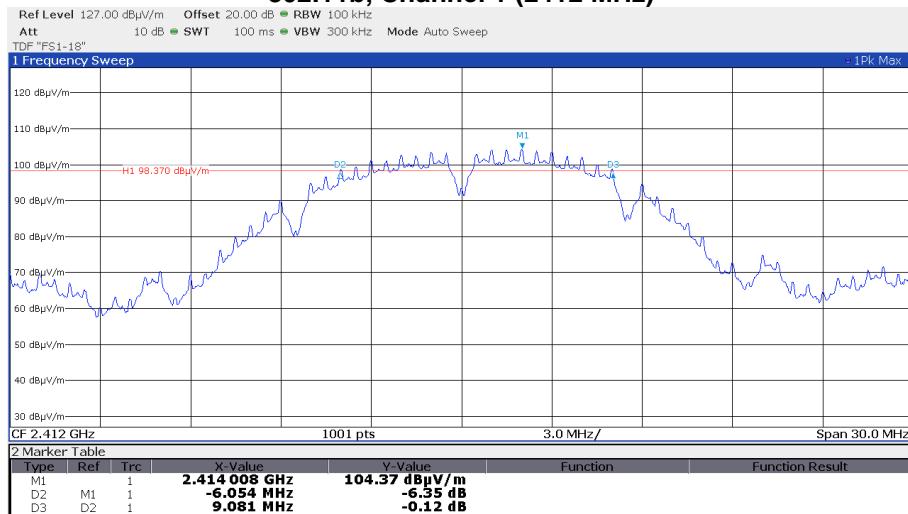
802.11b, Channel 1 (2412 MHz)



802.11b, Channel 6 (2437 MHz)



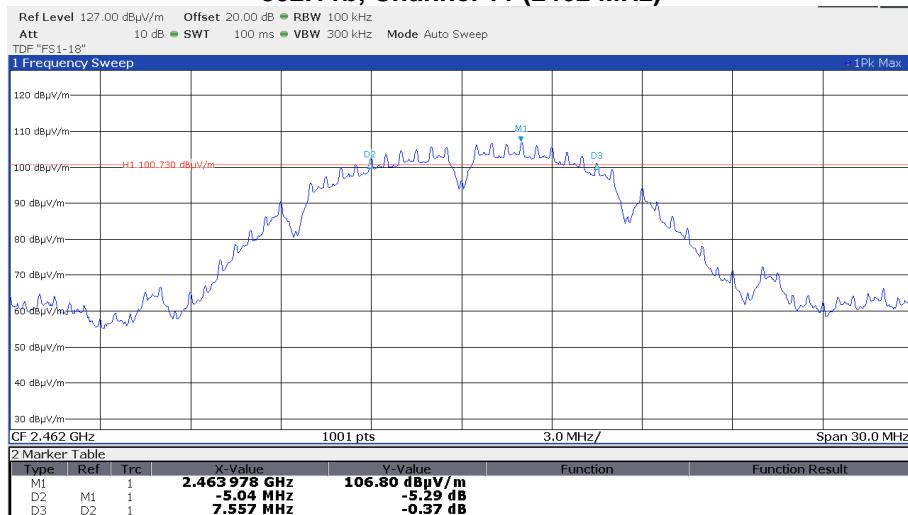802.11b, Channel 11 (2462 MHz)




FCC ID: 2AHES-M2


IC ID: 21152-M2

802.11n HT20, Channel 1 (2412 MHz)

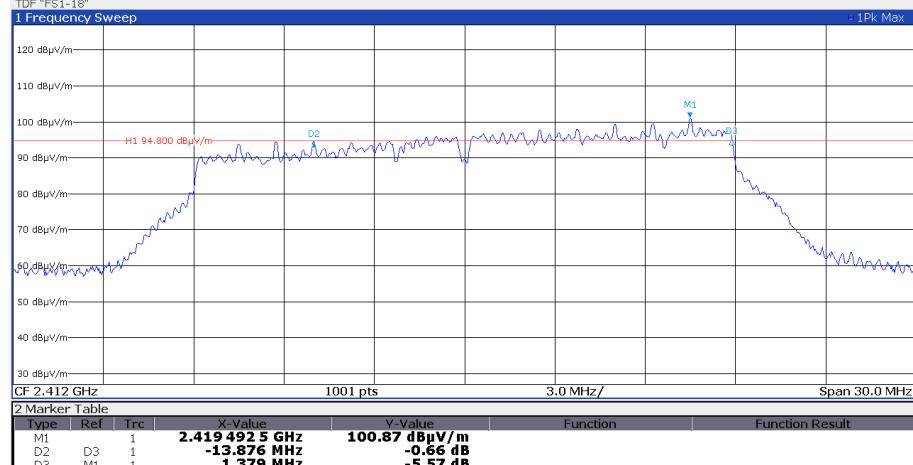
Ref Level 127.00 dB μ V/m Offset 20.00 dB RBW 100 kHz
 Att 10 dB SWT 100 ms VBW 300 kHz Mode Auto Sweep
 TDF "FS1-18"

**802.11n HT20, Channel 6 (2437 MHz)**

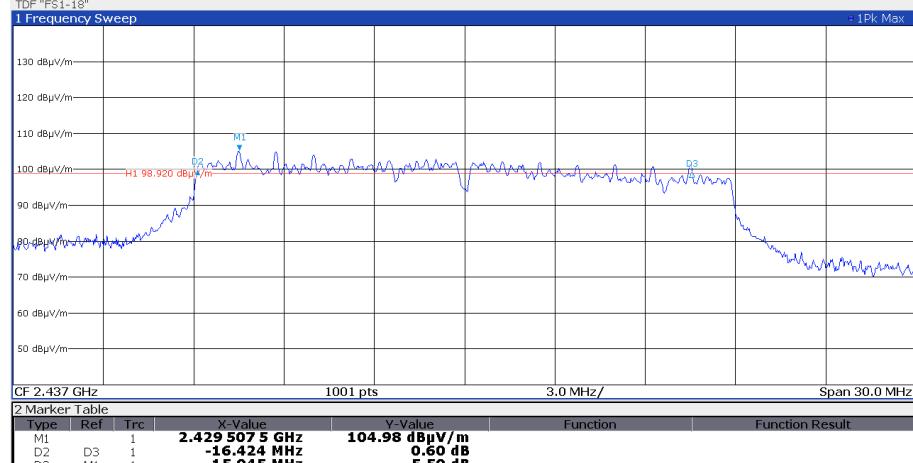Ref Level 140.00 dB μ V/m Offset 20.00 dB RBW 100 kHz
 Att 23 dB SWT 100 ms VBW 300 kHz Mode Auto Sweep
 TDF "FS1-18"

**802.11n HT20, Channel 11 (2462 MHz)**

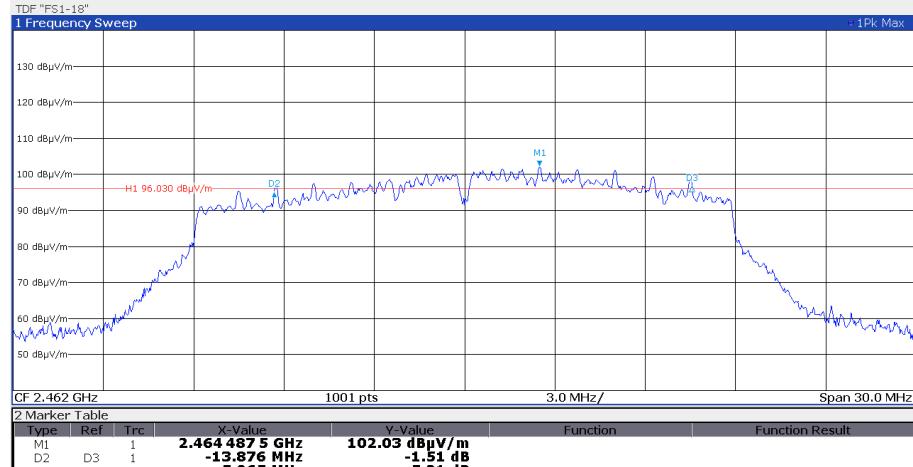Ref Level 140.00 dB μ V/m Offset 20.00 dB RBW 100 kHz
 Att 23 dB SWT 100 ms VBW 300 kHz Mode Auto Sweep
 TDF "FS1-18"




FCC ID: 2AHES-M2


IC ID: 21152-M2

802.11n HT40, Channel 3 (2422 MHz)

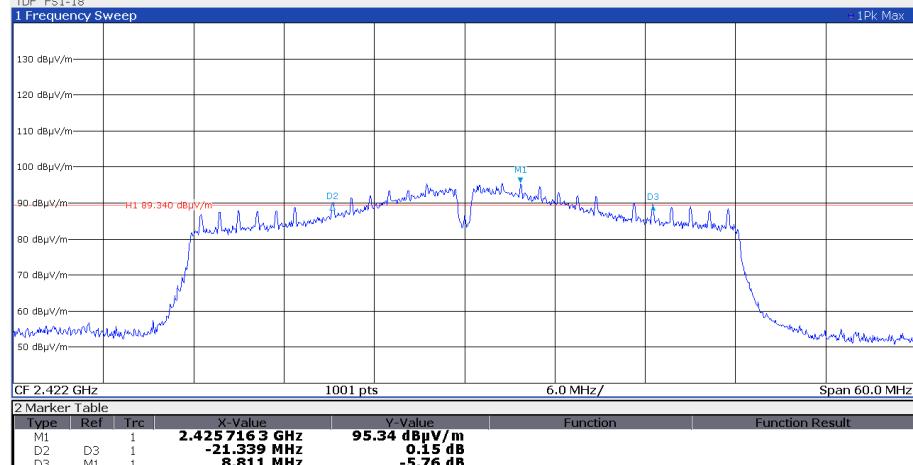
Ref Level 140.00 dB μ V/m Offset 20.00 dB RBW 100 kHz
 Att 23 dB SWT 100 ms VBW 300 kHz Mode Auto Sweep
 TDF "FS1-18"

**802.11n HT40, Channel 6 (2437 MHz)**

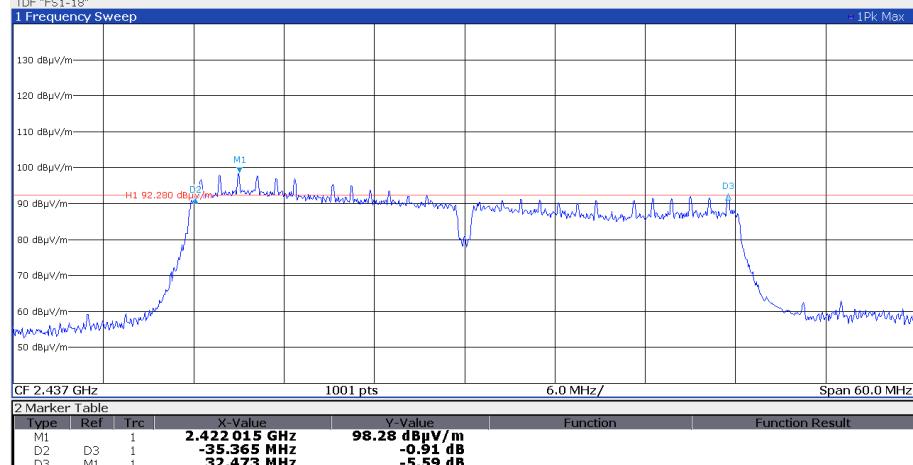Ref Level 140.00 dB μ V/m Offset 20.00 dB RBW 100 kHz
 Att 23 dB SWT 100 ms VBW 300 kHz Mode Auto Sweep
 TDF "FS1-18"

**802.11n HT40, Channel 9 (2452 MHz)**

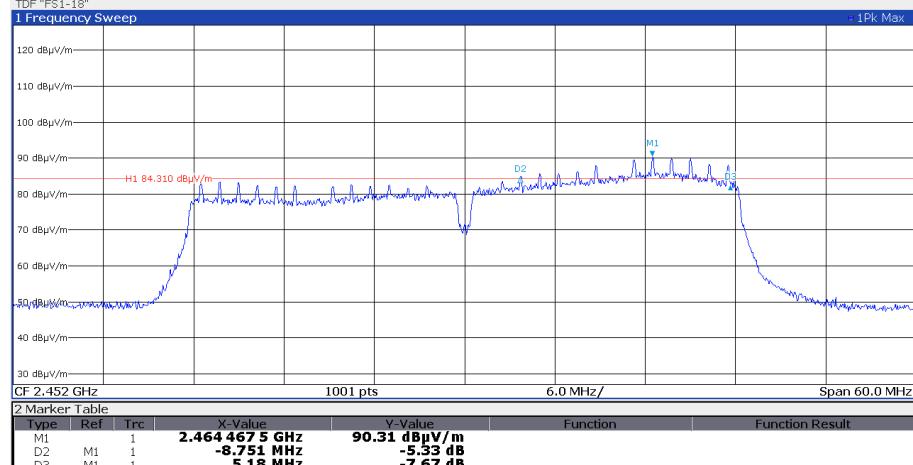Ref Level 127.00 dB μ V/m Offset 20.00 dB RBW 100 kHz
 Att 10 dB SWT 100 ms VBW 300 kHz Mode Auto Sweep
 TDF "FS1-18"




FCC ID: 2AHES-M2


IC ID: 21152-M2

5.2.7 Test protocols OBW

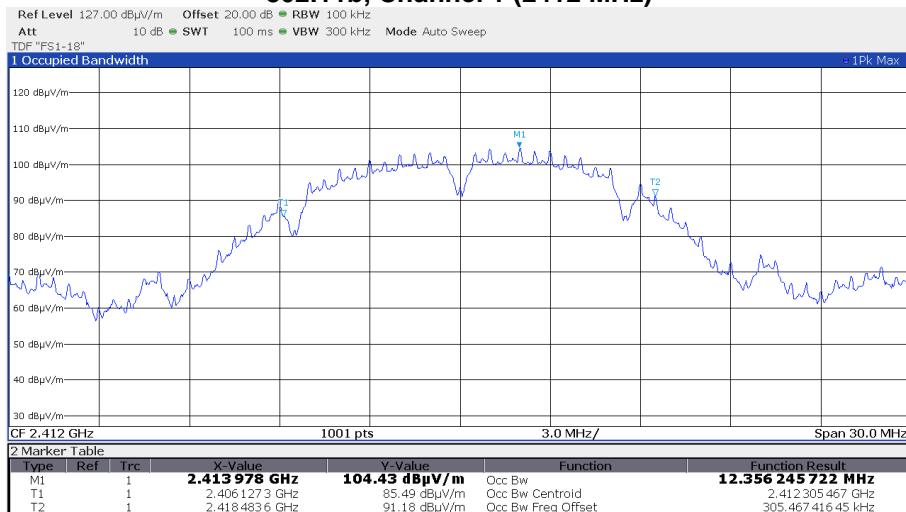
802.11b, Channel 1 (2412 MHz)



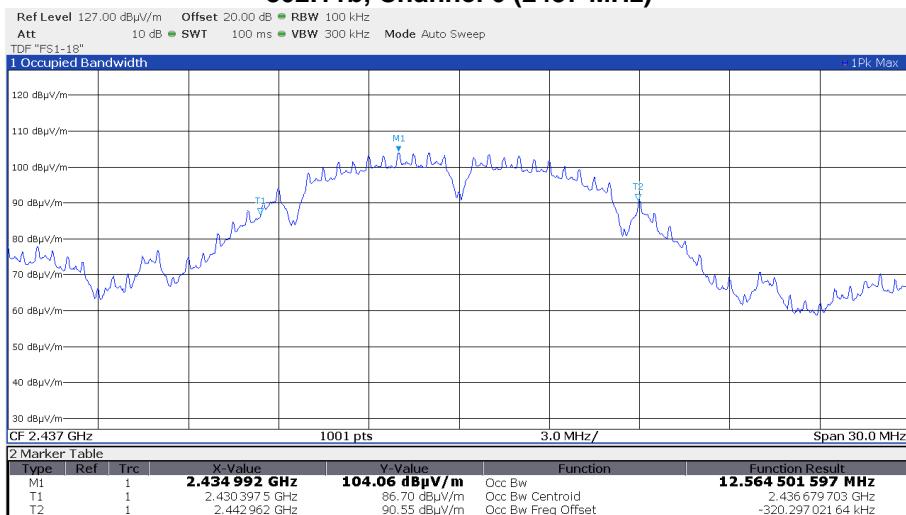802.11b, Channel 6 (2437 MHz)






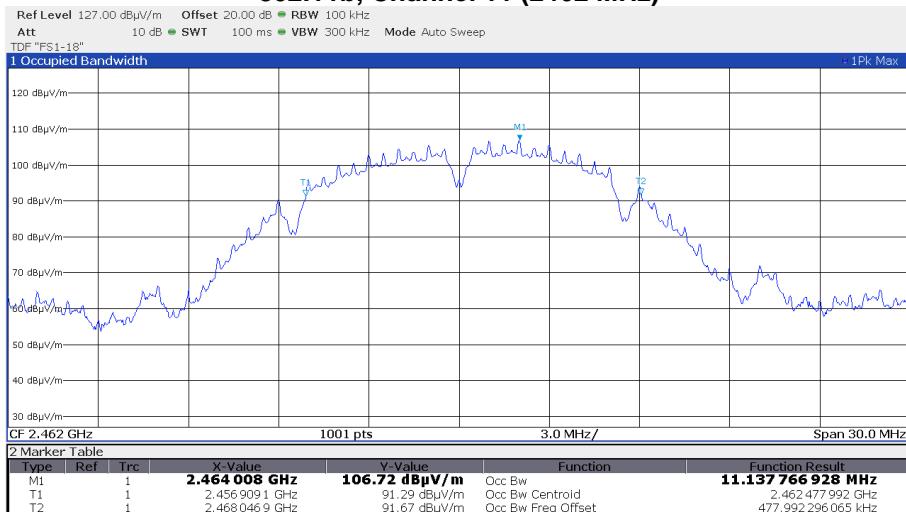802.11b, Channel 11 (2462 MHz)



FCC ID: 2AHES-M2

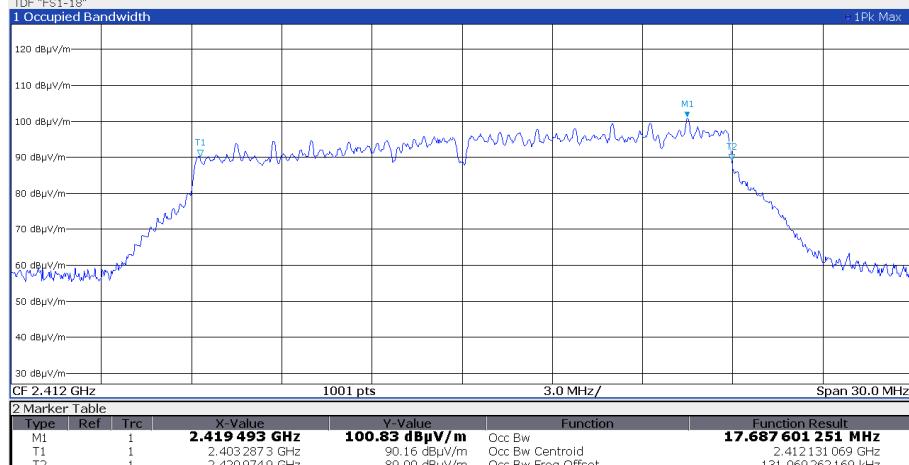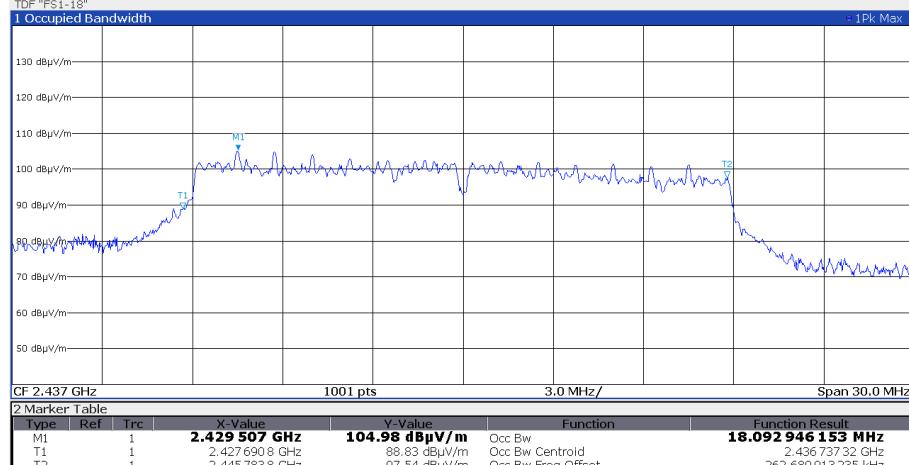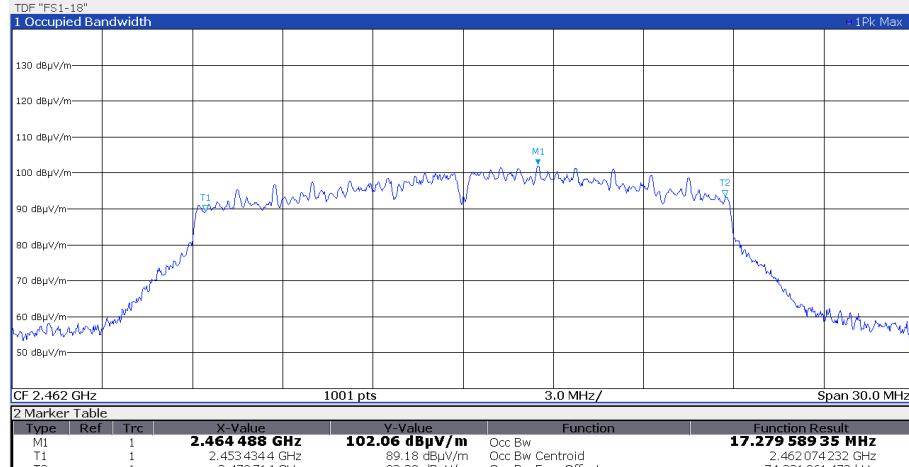IC ID: 21152-M2


802.11n HT20, Channel 1 (2412 MHz)
 Ref Level 127.00 dB μ V/m Offset 20.00 dB RBW 100 kHz
 Att 10 dB SWT 100 ms VBW 300 kHz Mode Auto Sweep
 TDF "FS1-18"
**802.11n HT20, Channel 6 (2437 MHz)**
 Ref Level 140.00 dB μ V/m Offset 20.00 dB RBW 100 kHz
 Att 23 dB SWT 100 ms VBW 300 kHz Mode Auto Sweep
 TDF "FS1-18"
**802.11n HT20, Channel 11 (2462 MHz)**
 Ref Level 140.00 dB μ V/m Offset 20.00 dB RBW 100 kHz
 Att 23 dB SWT 100 ms VBW 300 kHz Mode Auto Sweep
 TDF "FS1-18"


FCC ID: 2AHES-M2


IC ID: 21152-M2

802.11n HT40, Channel 3 (2422 MHz)

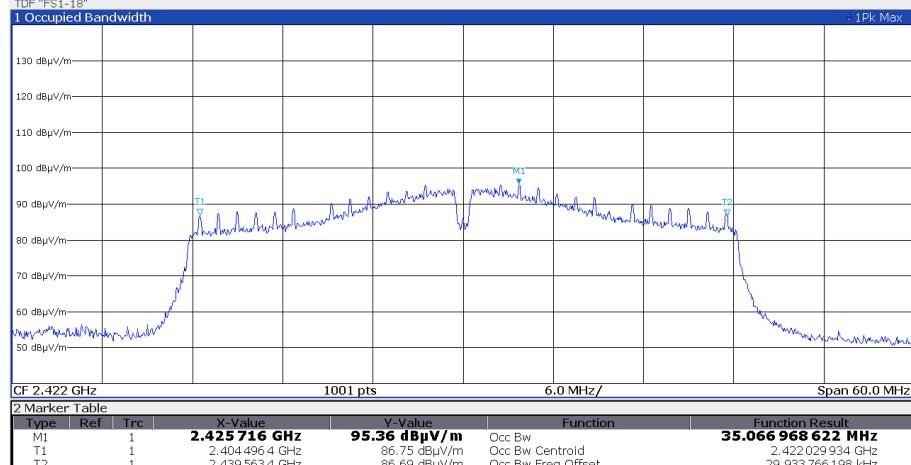
Ref Level 140.00 dB μ V/m Offset 20.00 dB RBW 100 kHz
 Att 23 dB SWT 100 ms VBW 300 kHz Mode Auto Sweep
 TDF "FS1-18"

**802.11n HT40, Channel 6 (2437 MHz)**

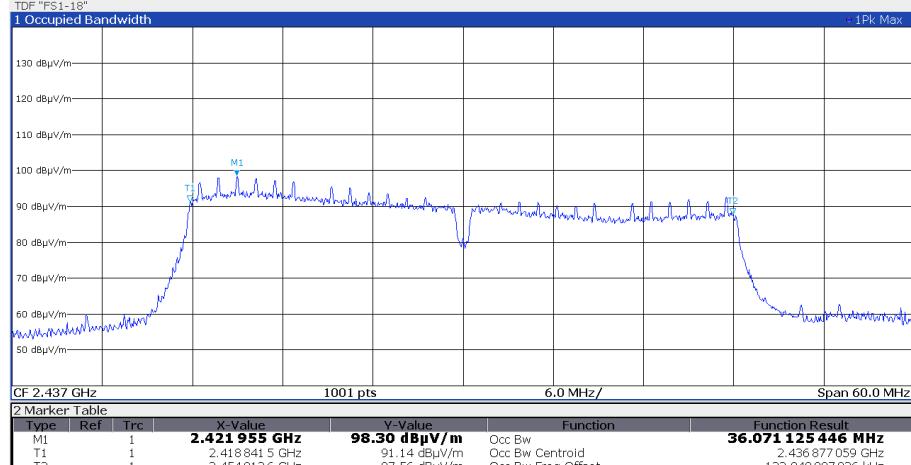Ref Level 140.00 dB μ V/m Offset 20.00 dB RBW 100 kHz
 Att 23 dB SWT 100 ms VBW 300 kHz Mode Auto Sweep
 TDF "FS1-18"

**802.11n HT40, Channel 9 (2452 MHz)**

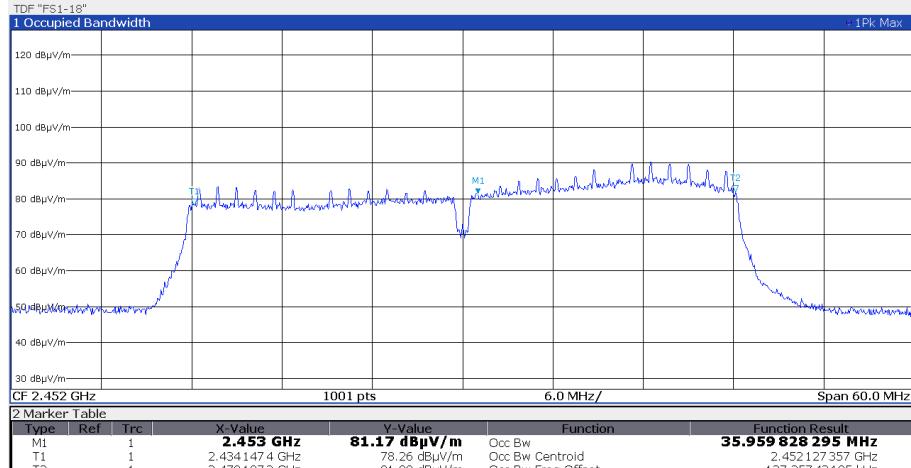Ref Level 127.00 dB μ V/m Offset 20.00 dB RBW 100 kHz
 Att 10 dB SWT 100 ms VBW 300 kHz Mode Auto Sweep
 TDF "FS1-18"



FCC ID: 2AHES-M2

IC ID: 21152-M2

5.3 Maximum peak conducted output power

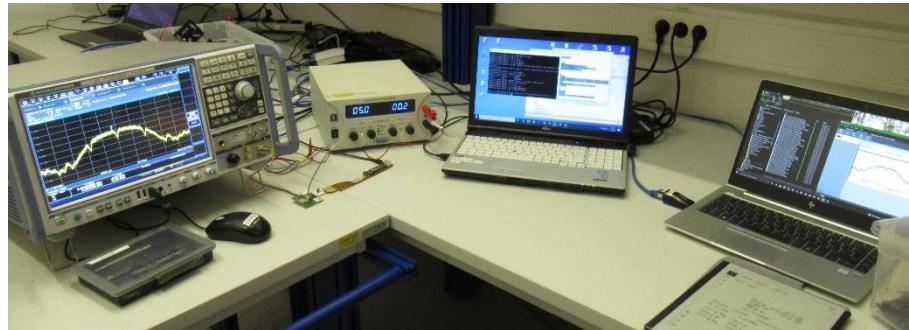
For test instruments and accessories used see section 6 Part **CPC 3**.

5.3.1 Description of the test location


Test location: Shielded Room S6
Test location: Anechoic chamber 1

5.3.2 Photo documentation of the test set-up

Conducted Setup



Radiated Setup

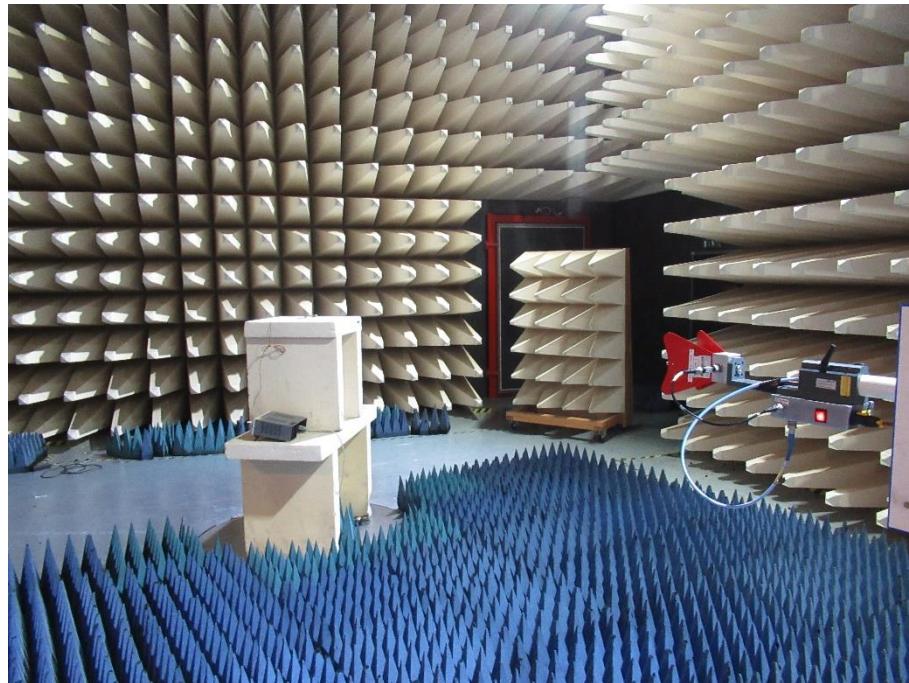

5.3.3 Applicable standard

According to FCC Part 15, Section 15.247(b)(3):

For systems using digital modulation in the 2400 – 2483.5 MHz the maximum peak output power of the transmitter shall not exceed 1 Watt. The limit is based on transmitting antennas of directional gain that do not exceed 6 dBi.

5.3.4 Description of Measurement

The maximum peak conducted output power is measured using a spectrum analyser following the procedure set out in ANSI C63.10, item 11.9.1.1. The EUT is set in TX continuous mode while measuring.

FCC ID: 2AHES-M2

IC ID: 21152-M2

5.3.5 Test result

Following tables are with maximum power setting:

Radiated Measurement						
FCC §15.247 (b)(3 & 4) RSS-247 5.4 (d)						
Modulation	Channel	Frequency	Measured fieldstrength	Calculated EIRP	EIRP Limit	Margin
		MHz	dB(μV/m)	dBm	dBm	dB
802.11b DSSS 1 Mbps	CH1	2412	115.40	20.2	36	-15.8
	CH6	2437	115.40	20.2	36	-15.8
	CH11	2462	117.60	22.4	36	-13.6
802.11n, HT20, MCS7	CH1	2412	119.20	24.0	36	-12.0
	CH6	2437	121.50	26.3	36	-9.7
	CH11	2462	121.30	26.1	36	-9.9
802.11n, HT40, MCS7	CH3	2422	118.70	23.5	36	-12.5
	CH6	2437	120.20	25.0	36	-11.0
	CH9	2452	116.40	21.2	36	-14.8

Conducted Measurement					
FCC §15.247 (b)(3) RSS-247 5.4 (d)					
Modulation	Channel	Frequency	Measured Conducted TX Power	Conducted Tx-Power Limit	Margin
		MHz	dBm	dBm	dB
802.11b DSSS 1 Mbps	CH1	2412	19.4	30.0	-10.7
	CH6	2437	23.2	30.0	-6.8
	CH11	2462	19.8	30.0	-10.2
802.11n, HT20, MCS7	CH1	2412	20.2	30.0	-9.8
	CH6	2437	25.5	30.0	-4.5
	CH11	2462	24.1	30.0	-5.9
802.11n, HT40, MCS7	CH3	2422	20.0	30.0	-10.0
	CH6	2437	22.6	30.0	-7.4
	CH9	2452	18.6	30.0	-11.4

FCC ID: 2AHES-M2**IC ID: 21152-M2**

Following table is with final power setting

Conducted Measurement					
FCC §15.247 (b)(3) RSS-247 5.4 (d)					
Modulation	Channel	Frequency	Measured Conducted TX Power	Conducted Tx-Power Limit	Margin
		MHz	dBm	dBm	dB
802.11b DSSS 1 Mbps	CH1	2412	17.2	30.0	-12.8
	CH6	2437	17.0	30.0	-13.0
	CH11	2462	14.7	30.0	-15.3
802.11n, HT20	CH1	2412	20.2	30.0	-9.8
	CH6	2437	24.0	30.0	-6.1
	CH11	2462	22.7	30.0	-7.3
802.11n, HT40	CH3	2422	19.0	30.0	-11.0
	CH6	2437	20.7	30.0	-9.3
	CH9	2452	17.1	30.0	-12.9

Peak Power Limit according to FCC Part 15, Section 15.247(b)(3):

Frequency (MHz)	Conducted Peak Power Limit	
	(dBm)	(Watt)
902-928	30	1.0
2400-2483.5	30	1.0
5725-5850	30	1.0

Frequency (MHz)	Radiated Peak Power Limit	
	(dBm)	(Watt)
902-928	36	4.0
2400-2483.5	36	4.0
5725-5850	36	4.0

The requirements are **FULFILLED**.


Remarks: None.

FCC ID: 2AHES-M2


IC ID: 21152-M2

5.3.6 Radiated power measurement plots

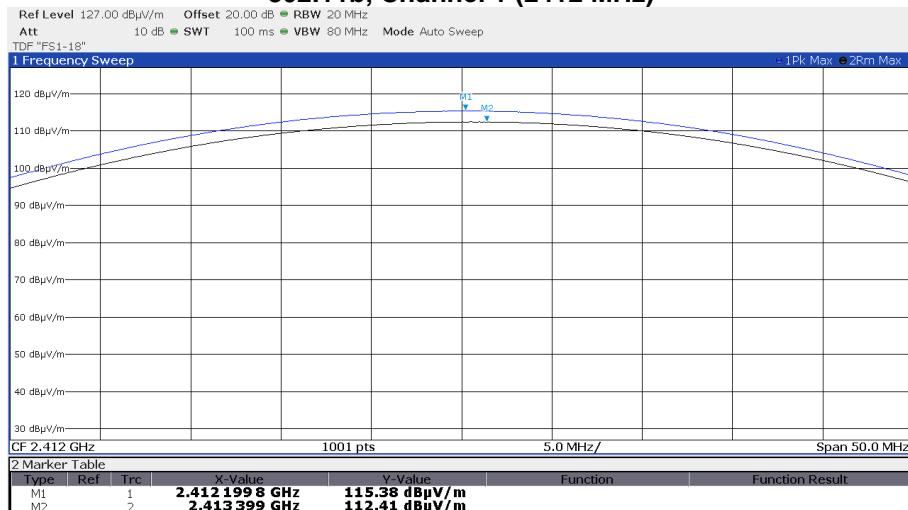
802.11b, Channel 1 (2412 MHz)



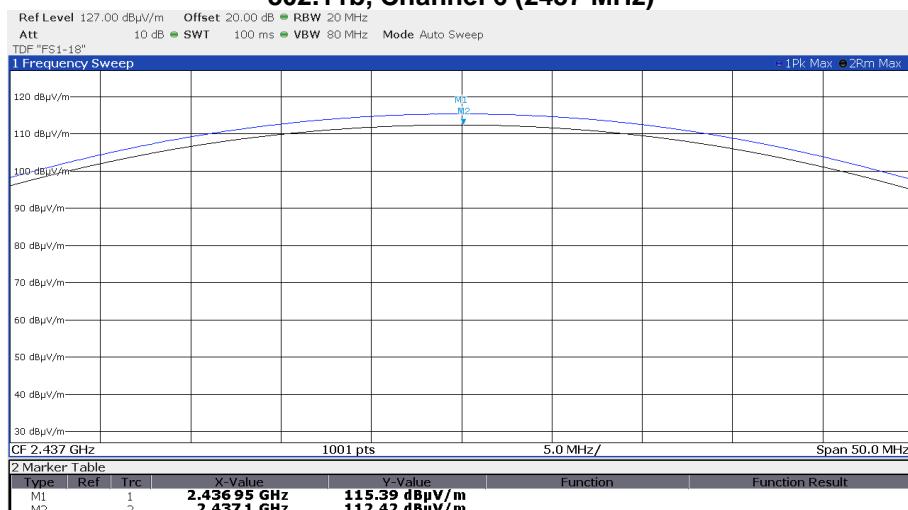802.11b, Channel 6 (2437 MHz)






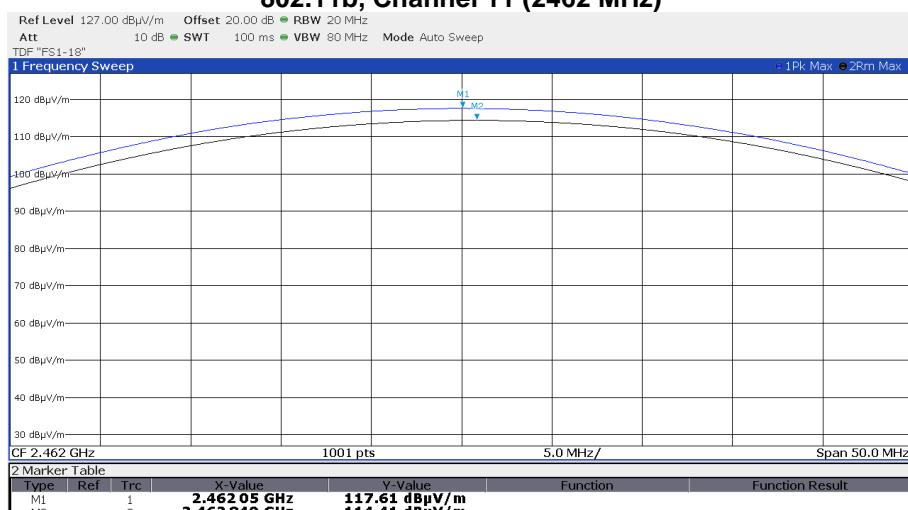802.11b, Channel 11 (2462 MHz)






FCC ID: 2AHES-M2

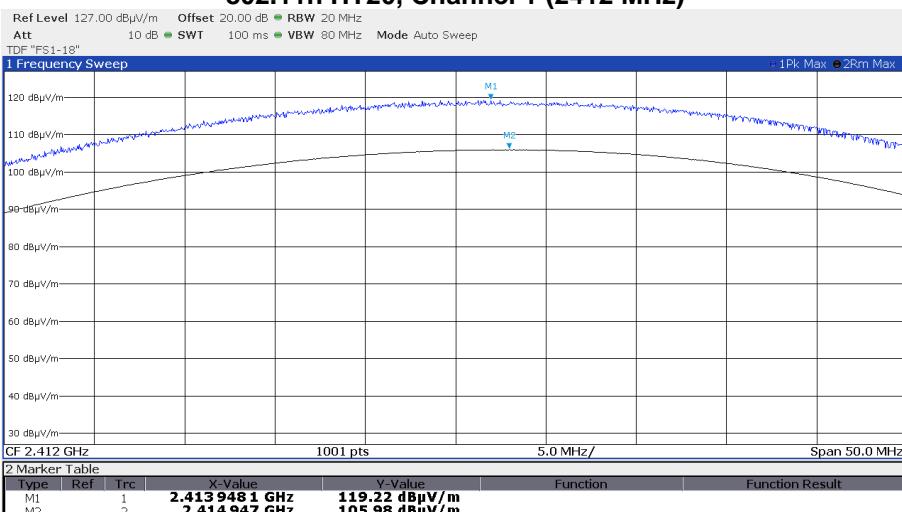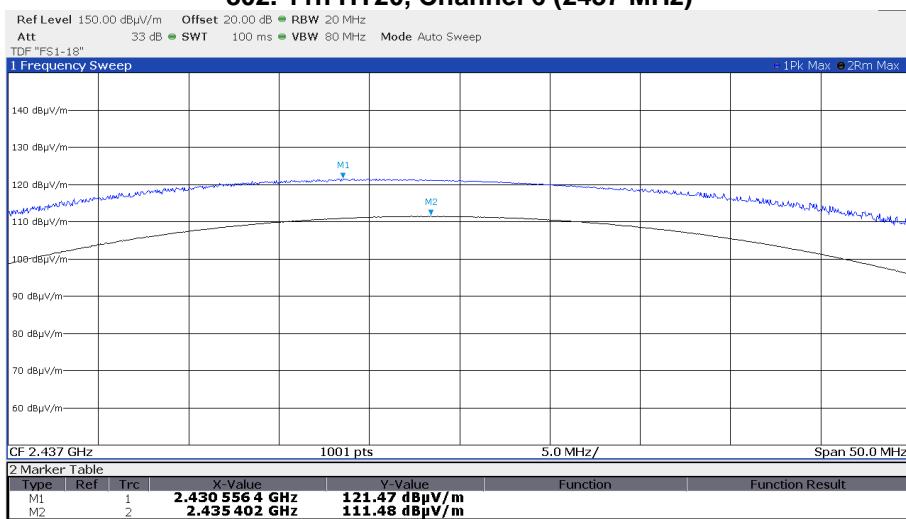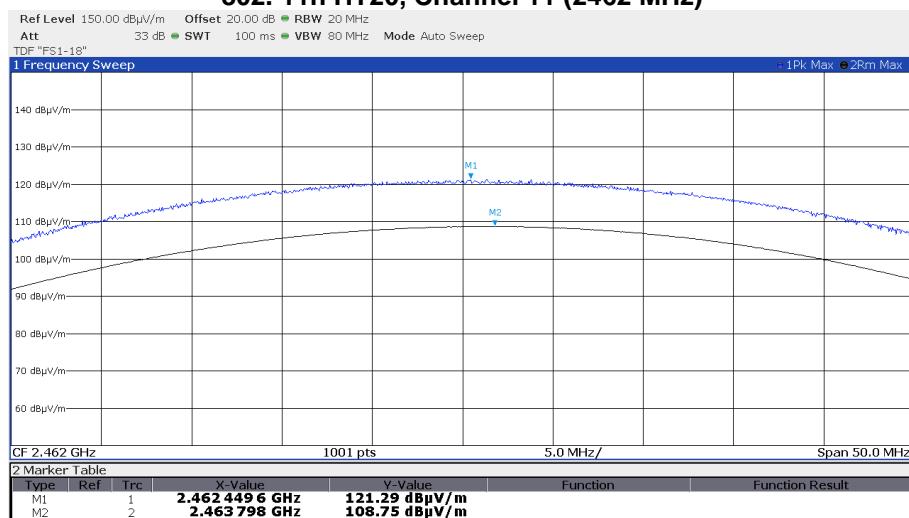IC ID: 21152-M2

802.11n HT20, Channel 1 (2412 MHz)**802.11n HT20, Channel 6 (2437 MHz)****802.11n HT20, Channel 11 (2462 MHz)**

FCC ID: 2AHES-M2

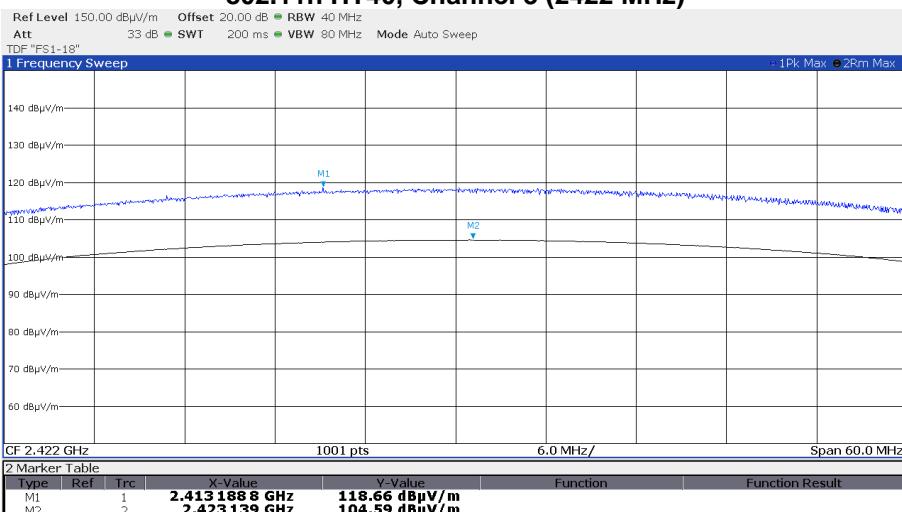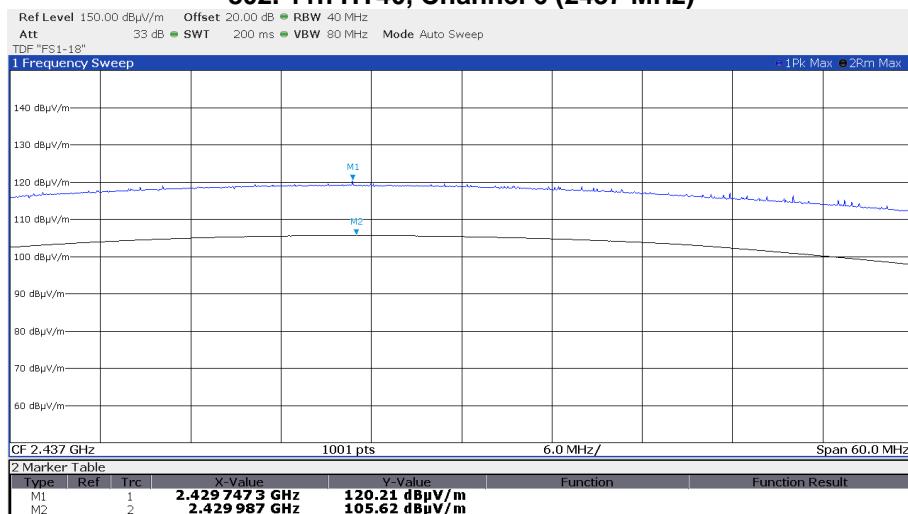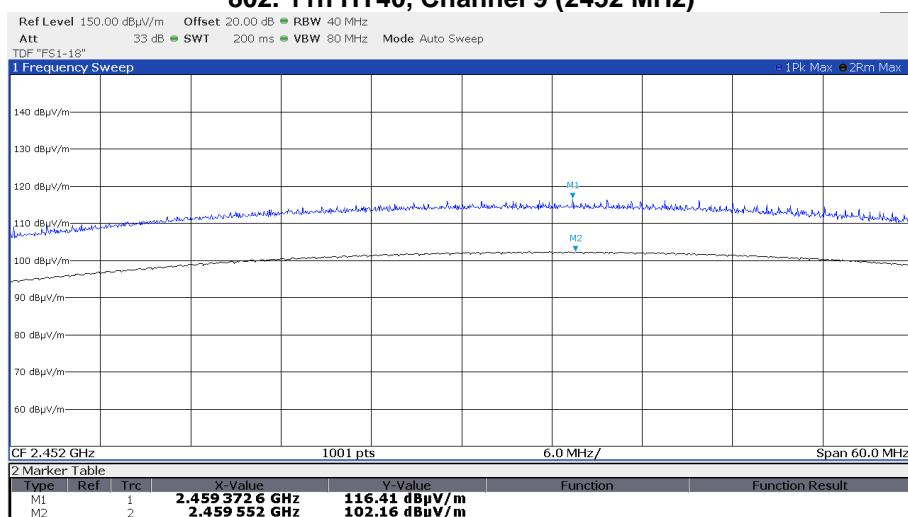IC ID: 21152-M2


802.11n HT40, Channel 3 (2422 MHz)**802.11n HT40, Channel 6 (2437 MHz)****802.11n HT40, Channel 9 (2452 MHz)**

FCC ID: 2AHES-M2


IC ID: 21152-M2

5.3.7 Conducted power measurement plots maximum power setting

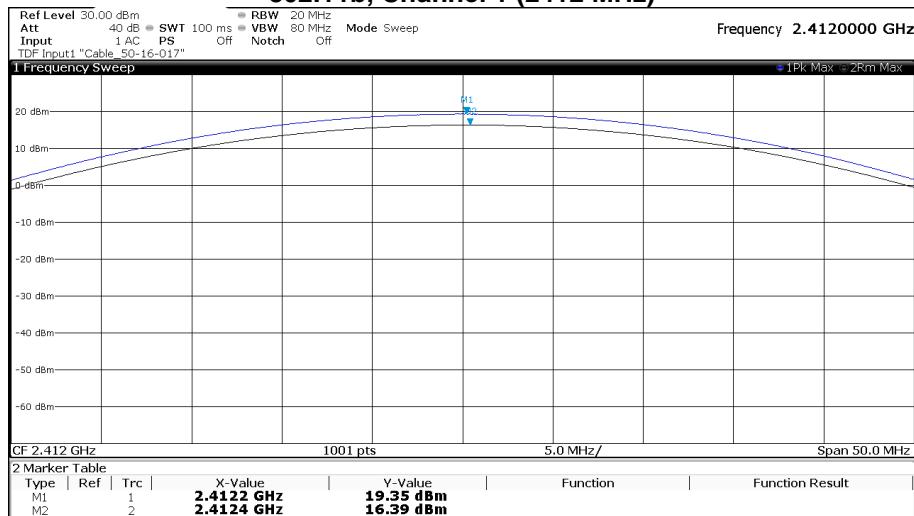
802.11b, Channel 1 (2412 MHz)



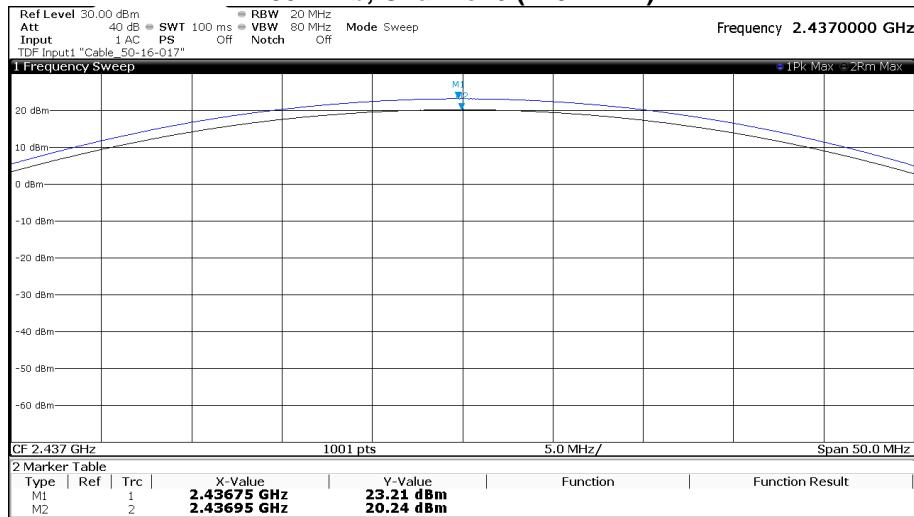802.11b, Channel 6 (2437 MHz)






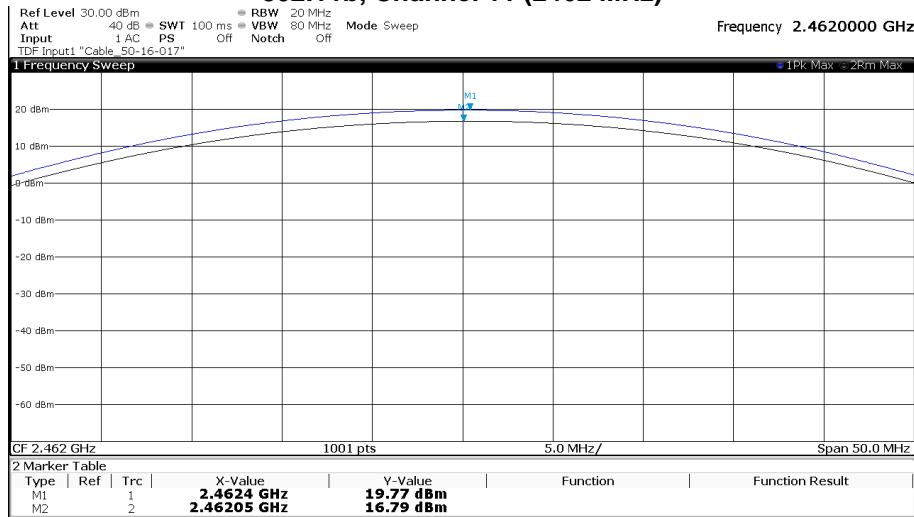802.11b, Channel 11 (2462 MHz)






FCC ID: 2AHES-M2

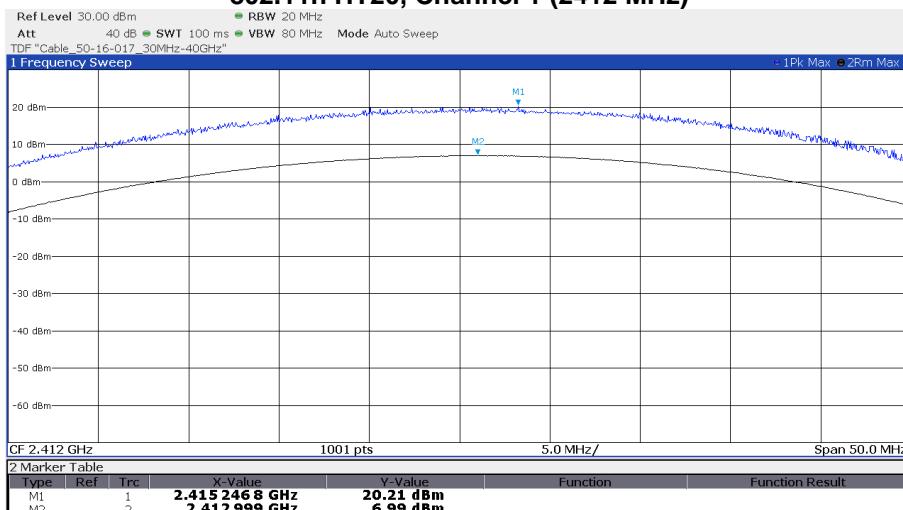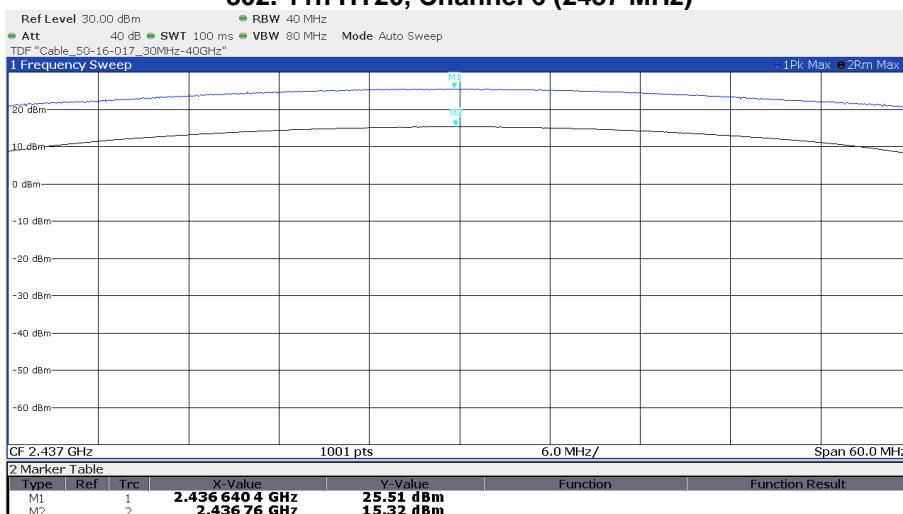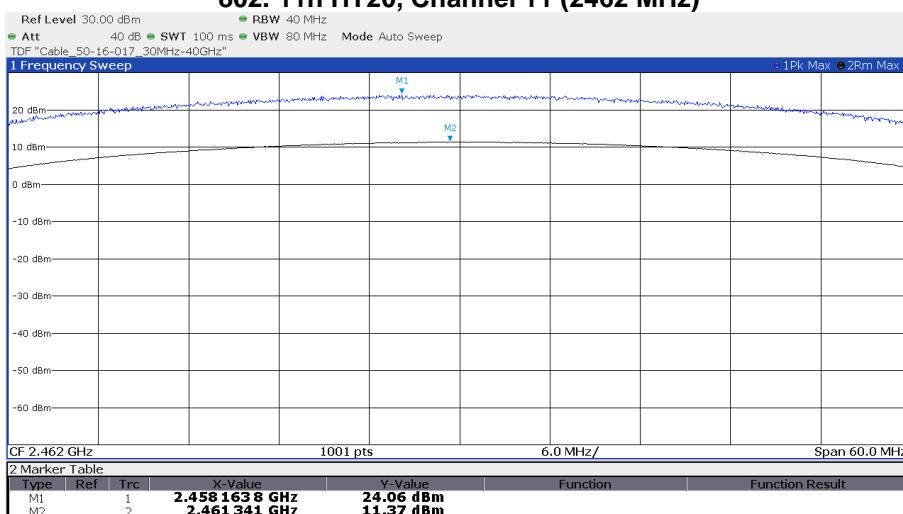IC ID: 21152-M2

802.11n HT20, Channel 1 (2412 MHz)**802.11n HT20, Channel 6 (2437 MHz)****802.11n HT20, Channel 11 (2462 MHz)**

FCC ID: 2AHES-M2

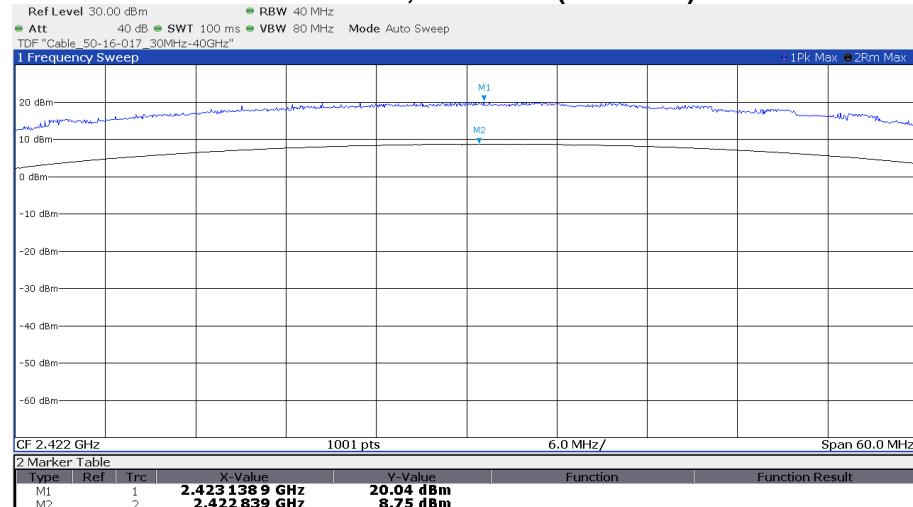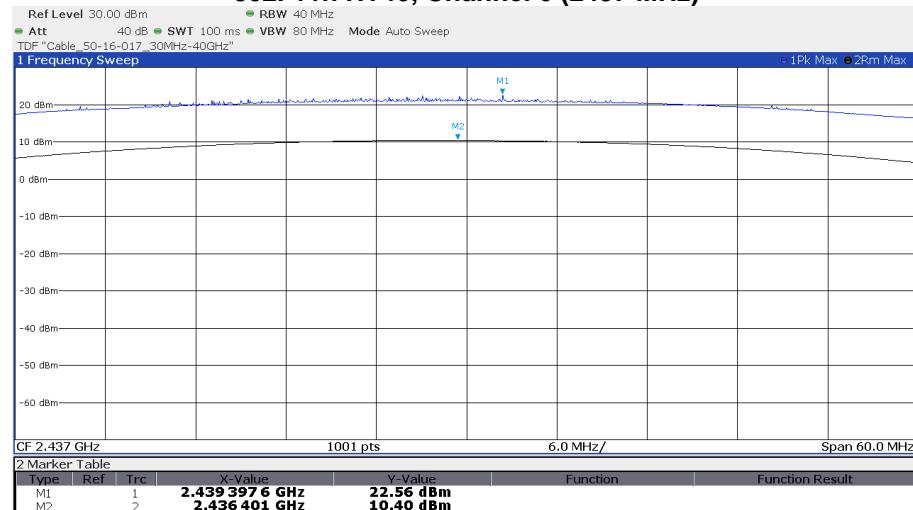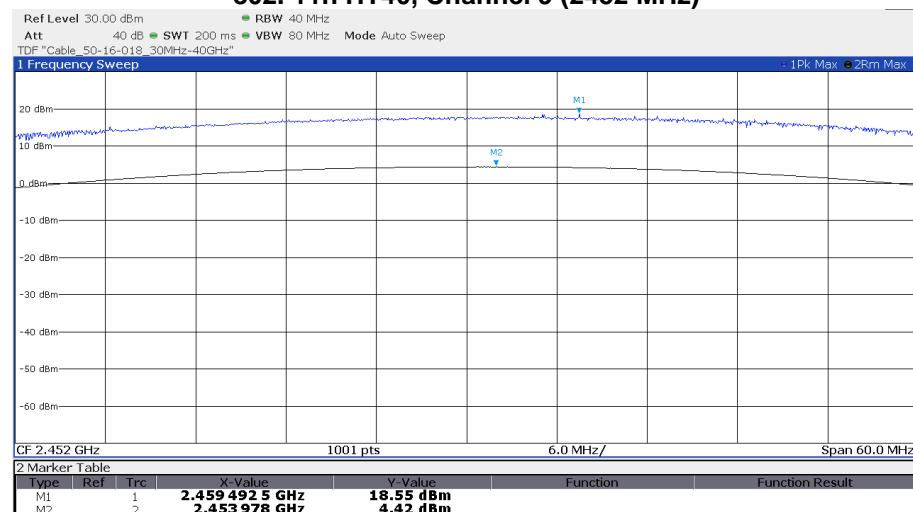IC ID: 21152-M2


802.11n HT40, Channel 3 (2422 MHz)**802.11n HT40, Channel 6 (2437 MHz)****802.11n HT40, Channel 9 (2452 MHz)**

FCC ID: 2AHES-M2


IC ID: 21152-M2

5.3.8 Conducted power measurement plots final power setting

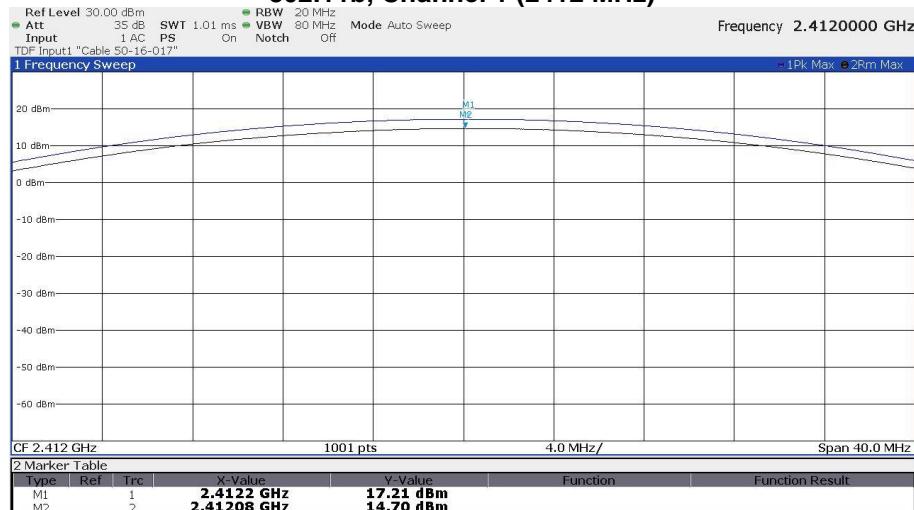802.11b, Channel 1 (2412 MHz)



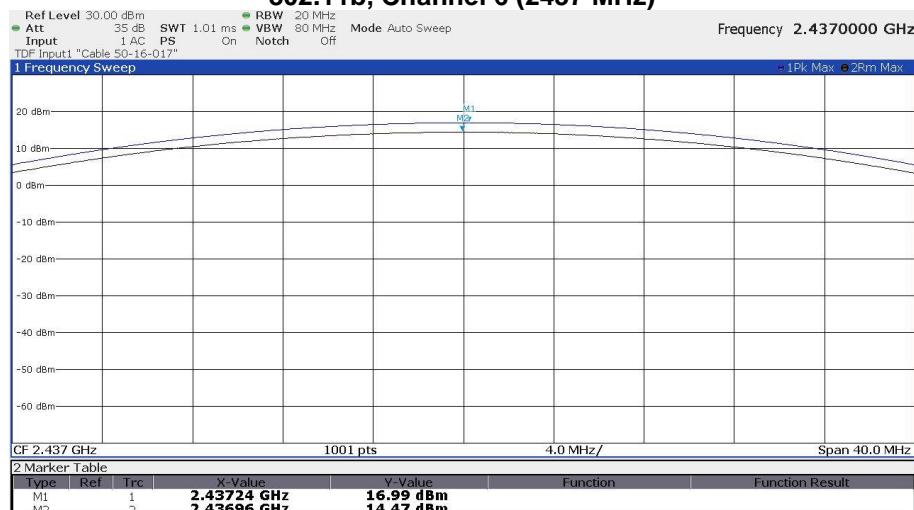802.11b, Channel 6 (2437 MHz)





802.11b, Channel 11 (2462 MHz)






FCC ID: 2AHES-M2

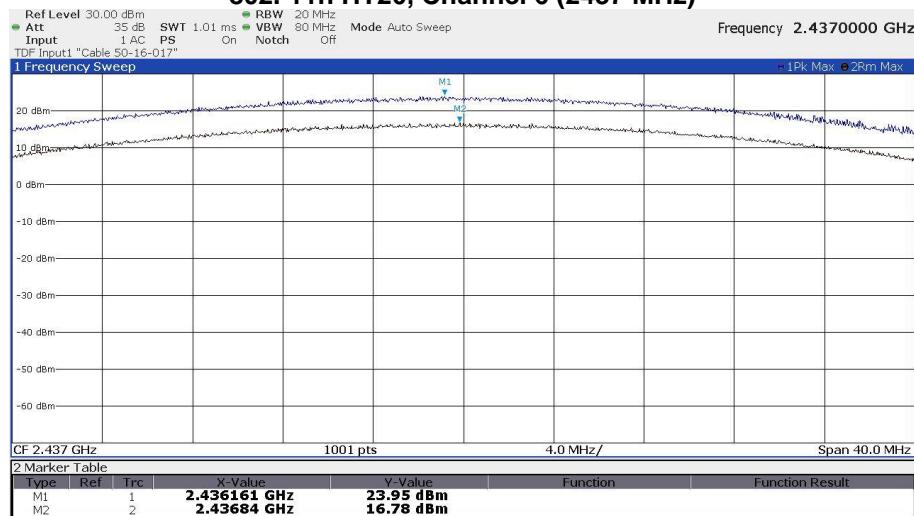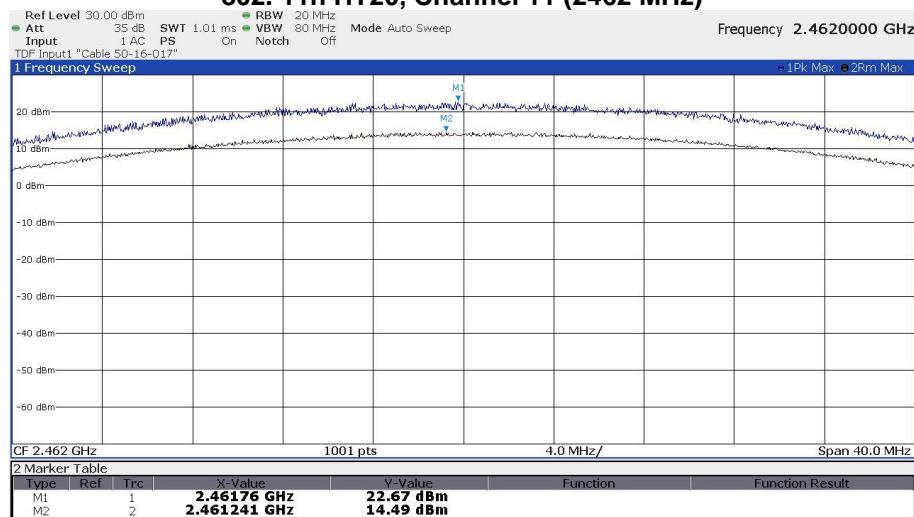IC ID: 21152-M2

802.11n HT20, Channel 1 (2412 MHz)**802.11n HT20, Channel 6 (2437 MHz)****802.11n HT20, Channel 11 (2462 MHz)**

FCC ID: 2AHES-M2

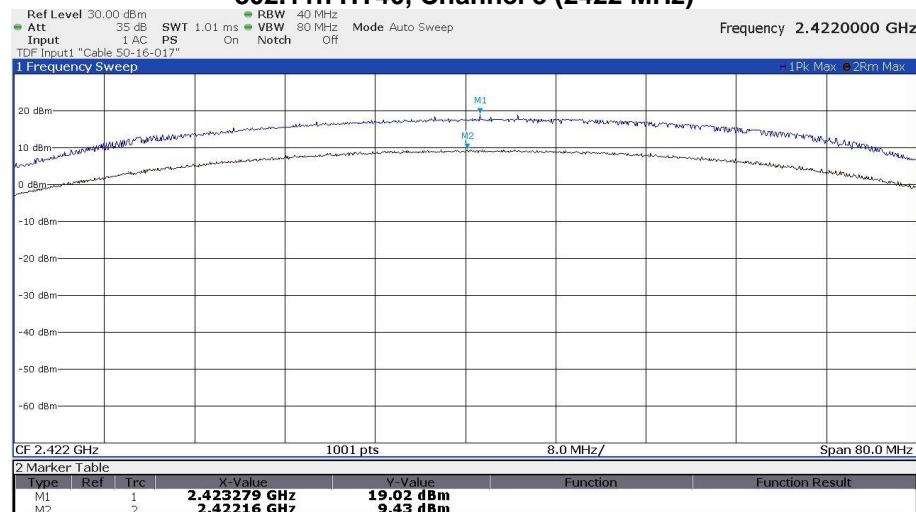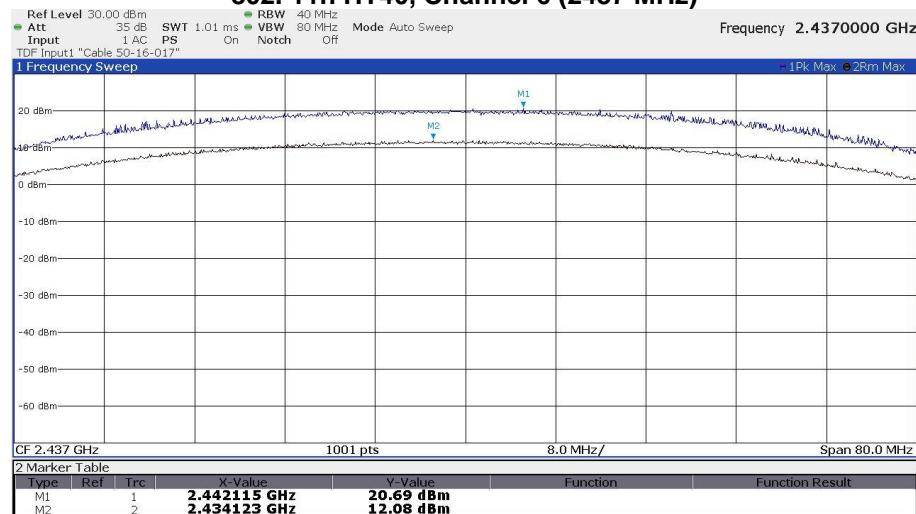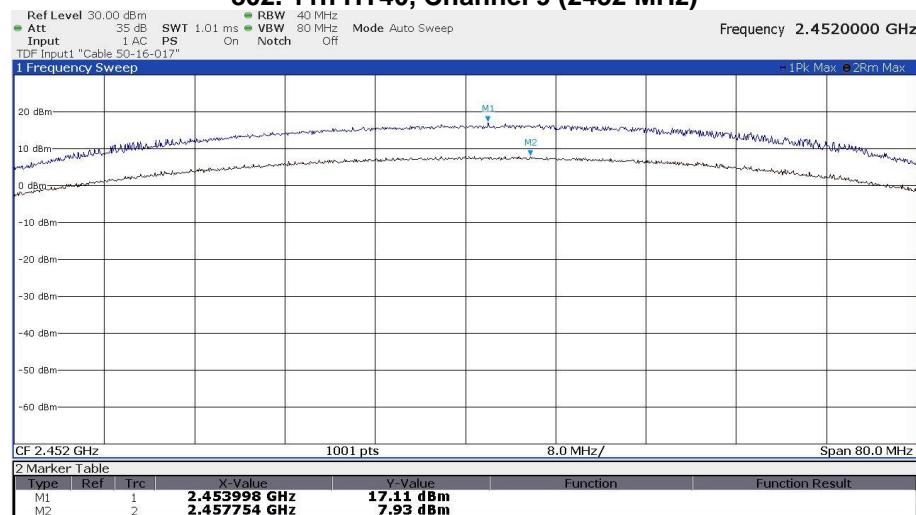IC ID: 21152-M2

802.11n HT40, Channel 3 (2422 MHz)**802.11n HT40, Channel 6 (2437 MHz)****802.11n HT40, Channel 9 (2452 MHz)**

FCC ID: 2AHES-M2

IC ID: 21152-M2

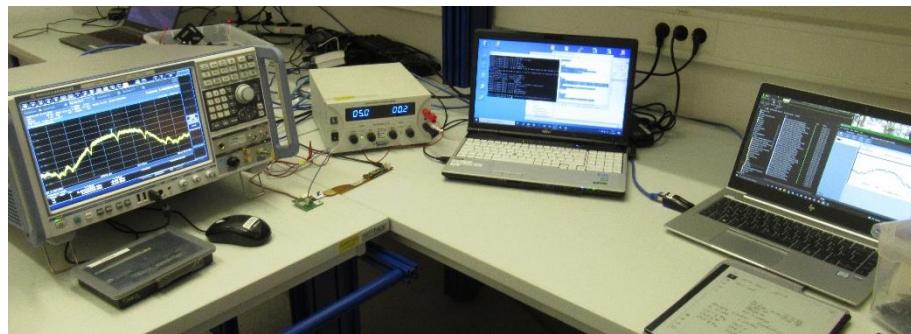
5.5 Power spectral density

For test instruments and accessories used see section 6 Part **CPC 3**.

5.5.1 Description of the test location

Test location: Shielded Room S6

5.5.2 Photo documentation of the test set-up



5.5.3 Applicable standard

According to FCC Part 15, Section 15.247(e):

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

5.5.4 Description of Measurement

The measurement is performed using the procedure set out in ANSI C63.10, item 11.10.21. The power measurement was done as peak power measurement. Therefore, the PKPSD is measured. The max peak was located and with the spectrum analyser and a marker set to peak.

Spectrum analyser settings:

RBW: 3 kHz, VBW: 10 kHz, Detector: Peak, Sweep time: 10 s,

FCC ID: 2AHES-M2**IC ID: 21152-M2**

5.5.5 Test result

WLAN Standard 802.11b, 1 Mbps

802.11b				
Channel	Channel Frequency	Measured conducted PSD	conducted PSD Limit	Margin
	MHz	dBm/3kHz	dBm/3kHz	dB
1	2412	-6.4	8	-14.4
6	2437	-2.6	8	-10.6
11	2462	-5.9	8	-13.9

WLAN Standard 802.11n, HT20, MCS7

802.11n, HT20, MCS7				
Channel	Channel Frequency	Measured conducted PSD	conducted PSD Limit	Margin
	MHz	dBm/3kHz	dBm/3kHz	dB
1	2412	-14.2	8	-22.2
6	2437	-7.9	8	-15.9
11	2462	-12.2	8	-20.2

WLAN Standard 802.11n, HT40, MCS7

802.11, HT40, MCS7				
Channel	Channel Frequency	Measured conducted PSD	conducted PSD Limit	Margin
	MHz	dBm/3kHz	dBm/3kHz	dB
3	2422	-18.1	8	-26.1
6	2437	-16.0	8	-24.0
9	2452	-21.0	8	-29.0

Power spectral density limit according to FCC Part 15, Section 15.247(e):

Frequency (MHz)	Power spectral density limit
	(dBm/3 kHz)
2400 - 2483.5	8

The requirements are **FULFILLED**.


Remarks: For detailed test results please refer to following test protocols.

FCC ID: 2AHES-M2


IC ID: 21152-M2

5.5.6 Conducted power spectral density plots

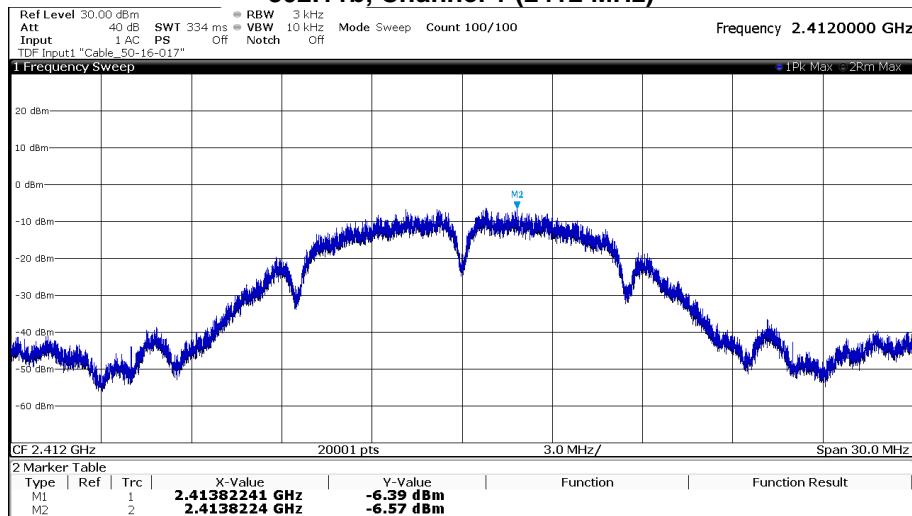
802.11b, Channel 1 (2412 MHz)



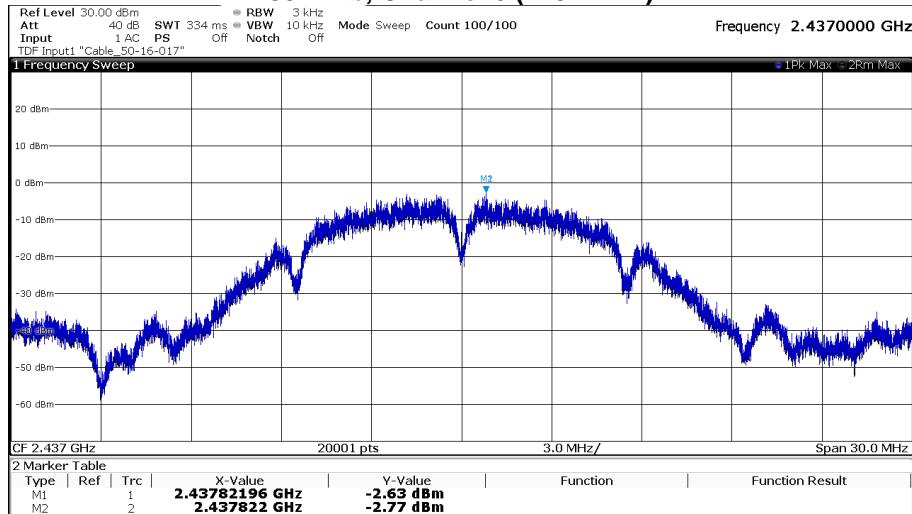802.11b, Channel 6 (2437 MHz)






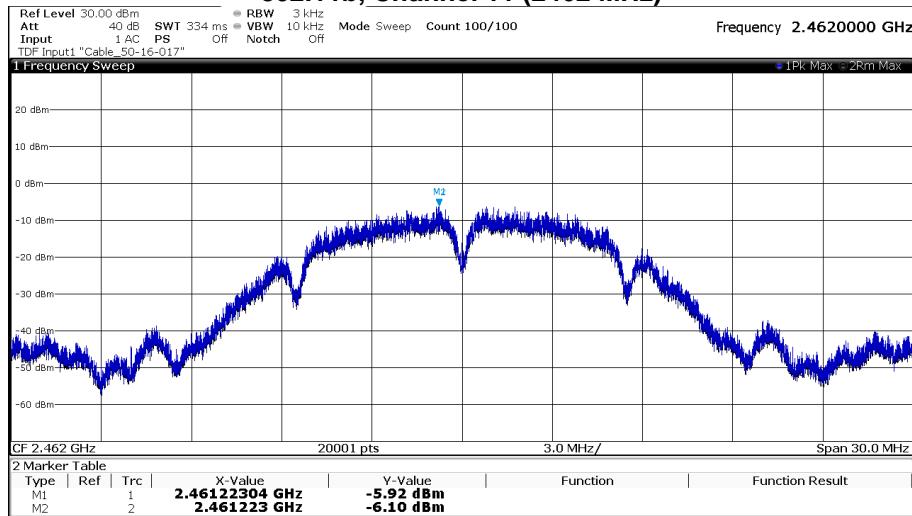802.11b, Channel 11 (2462 MHz)






FCC ID: 2AHES-M2

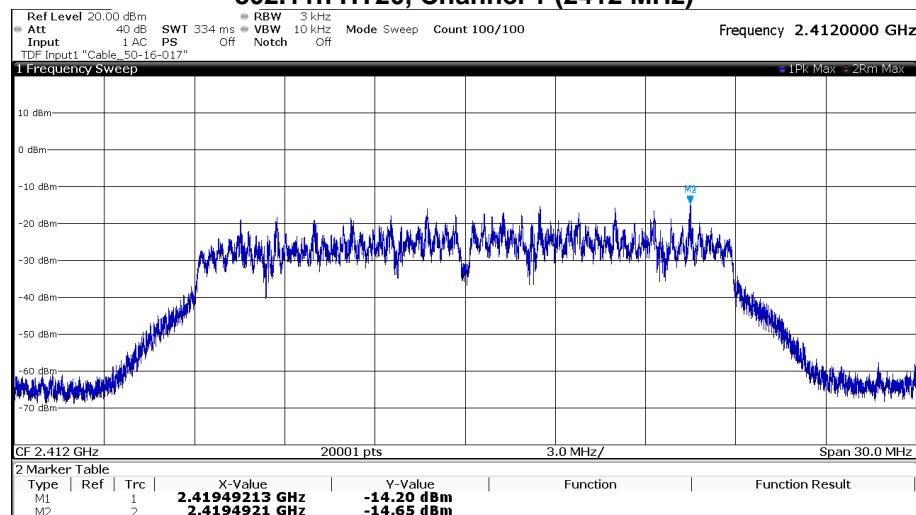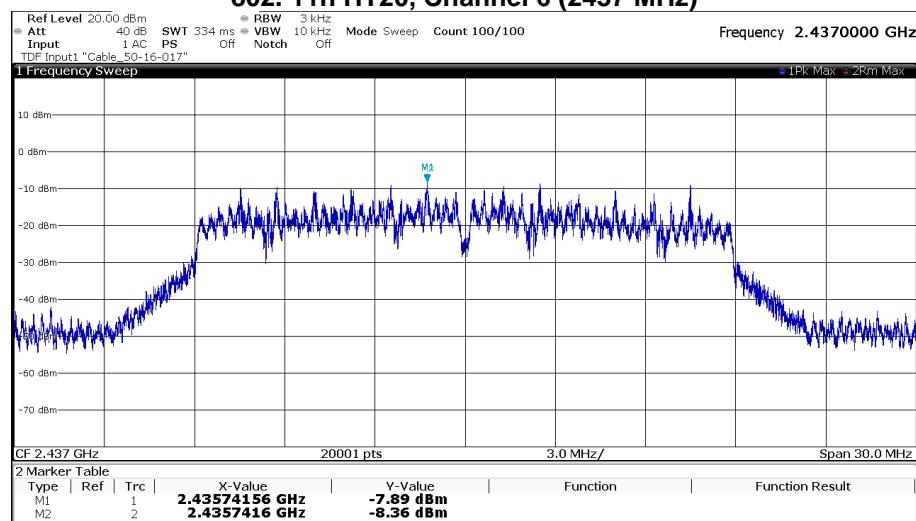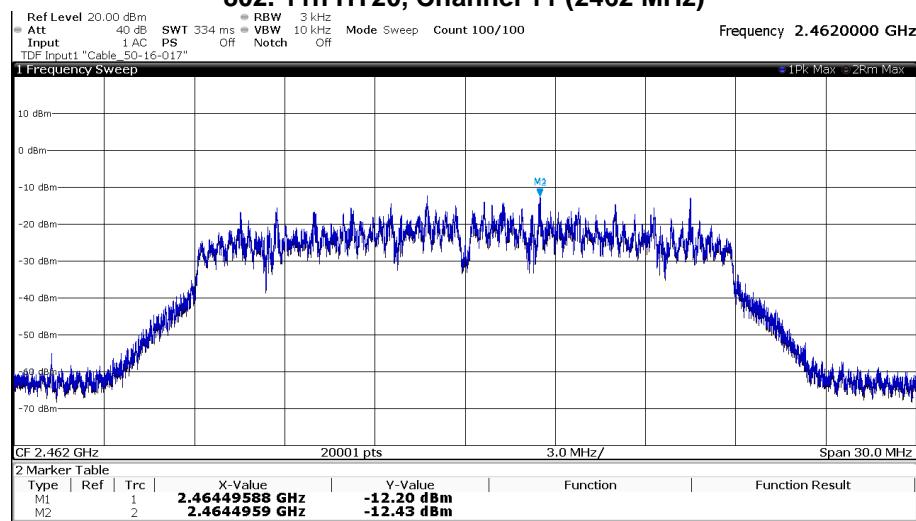IC ID: 21152-M2

802.11n HT20, Channel 1 (2412 MHz)**802.11n HT20, Channel 6 (2437 MHz)****802.11n HT20, Channel 11 (2462 MHz)**

FCC ID: 2AHES-M2

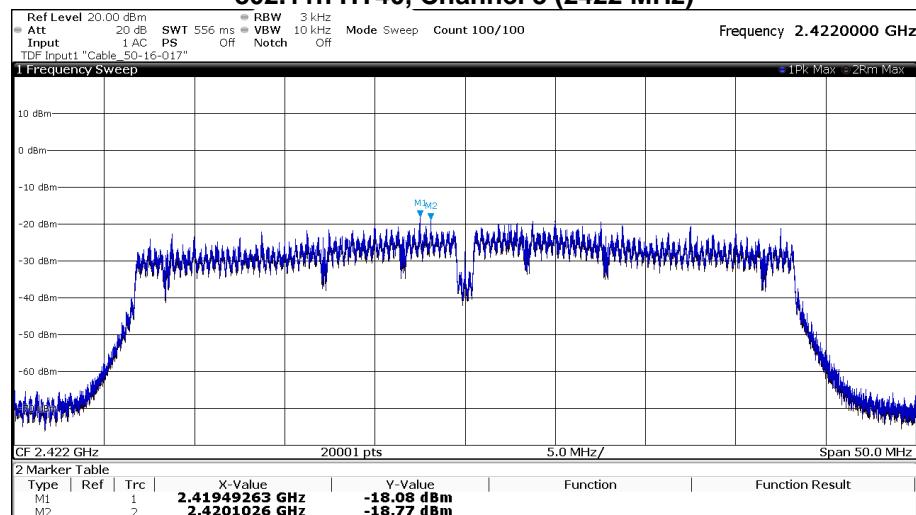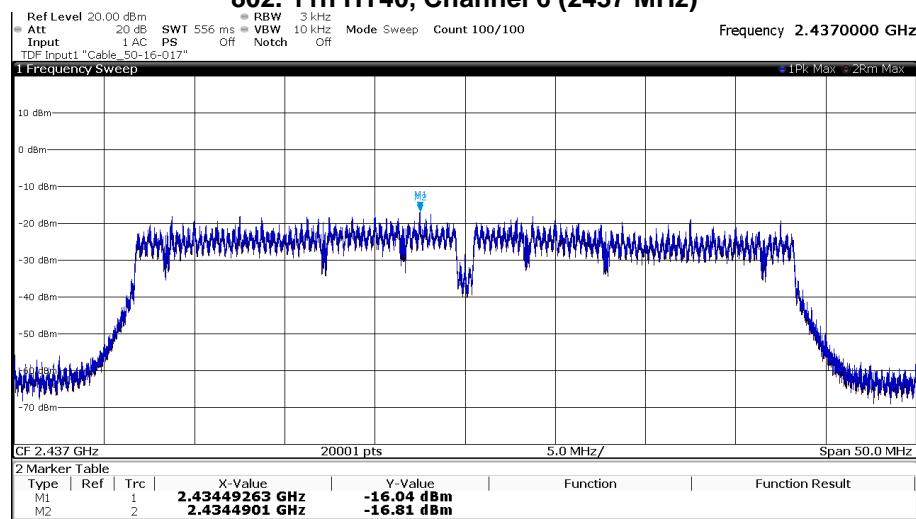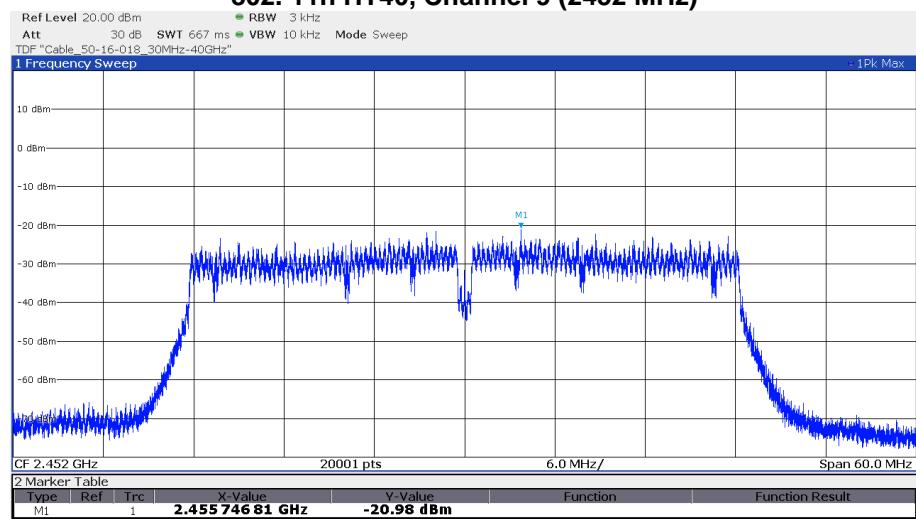IC ID: 21152-M2

802.11n HT40, Channel 3 (2422 MHz)**802.11n HT40, Channel 6 (2437 MHz)****802.11n HT40, Channel 9 (2452 MHz)**

FCC ID: 2AHES-M2

IC ID: 21152-M2

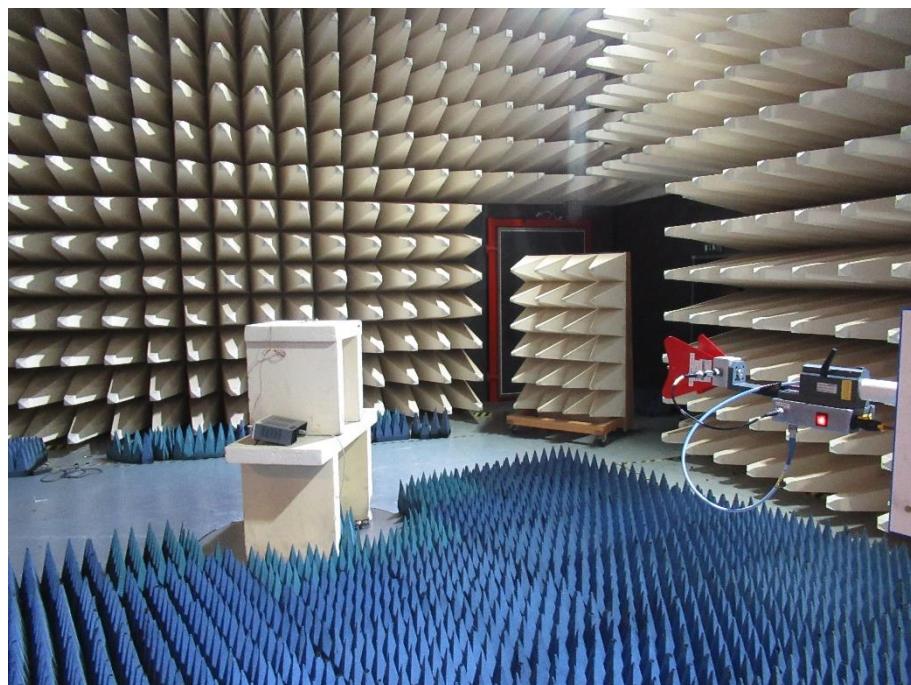
5.7 Band edge compliance

For test instruments and accessories used see section 6 Part **MB**.

5.7.1 Description of the test location

Test location: Anechoic chamber 1

5.7.2 Photo documentation of the test set-up



5.7.3 Applicable standard

According to FCC Part 15C, Section 15.247(d):

In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

5.7.4 Description of Measurement

The band edge conducted is measured using a spectrum analyser following the procedure set out in ANSI C63.10, item 11.13. The EUT is set in TX continuous mode while measuring.

Spectrum analyser settings:

RBW: 1 MHz,	VBW: 3 MHz,	Detector: Max peak,	Trace: Max hold,	Sweep: auto
RBW: 1 MHz,	VBW: 3 MHz,	Detector: RMS,	Trace: Max hold,	Sweep: auto

FCC ID: 2AHES-M2**IC ID: 21152-M2**

Limit according to FCC Subpart 15.247(d):

In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limit specified in §15.209(a) (see §15.205(c)).

The requirements are **FULFILLED**.

Remarks: For detailed test results please refer to following test protocols.


All emission at the band edges comply with the general limits with a 1 MHz RBW and will naturally do so with a 100 kHz RBW.

FCC ID: 2AHES-M2

IC ID: 21152-M2

5.7.5 Test protocol

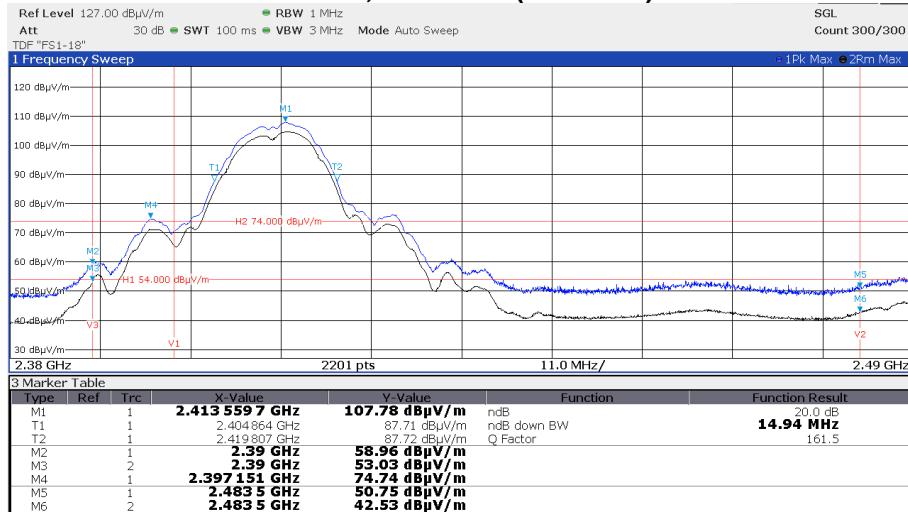
802.11b, Channel 1 (2412 MHz)



802.11b, Channel 6 (2437 MHz)






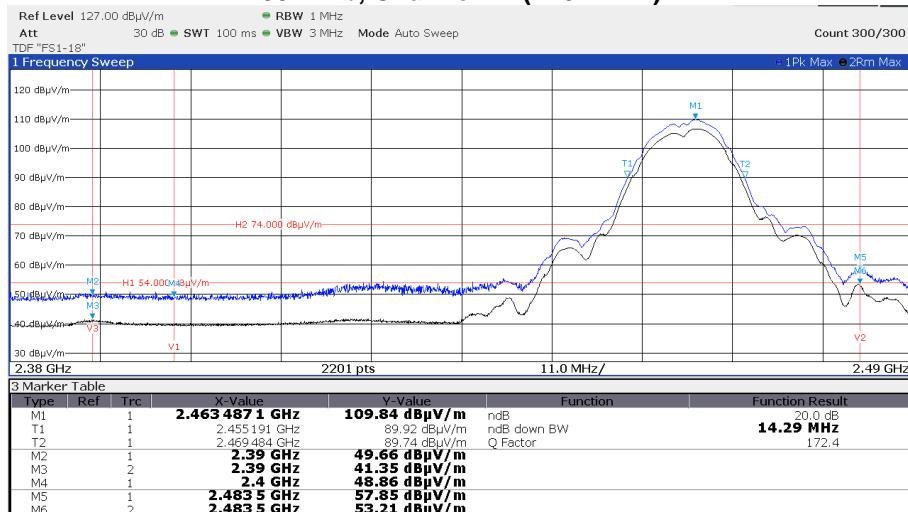802.11b, Channel 11 (2462 MHz)






FCC ID: 2AHES-M2

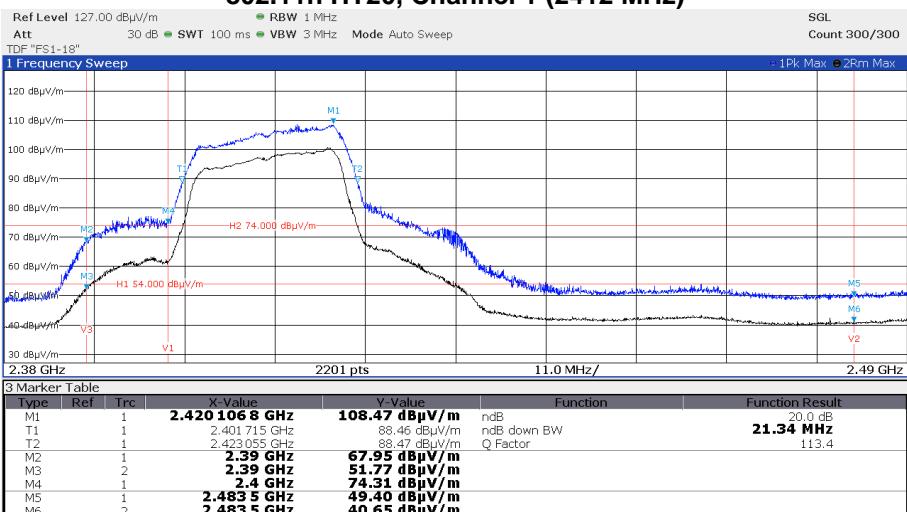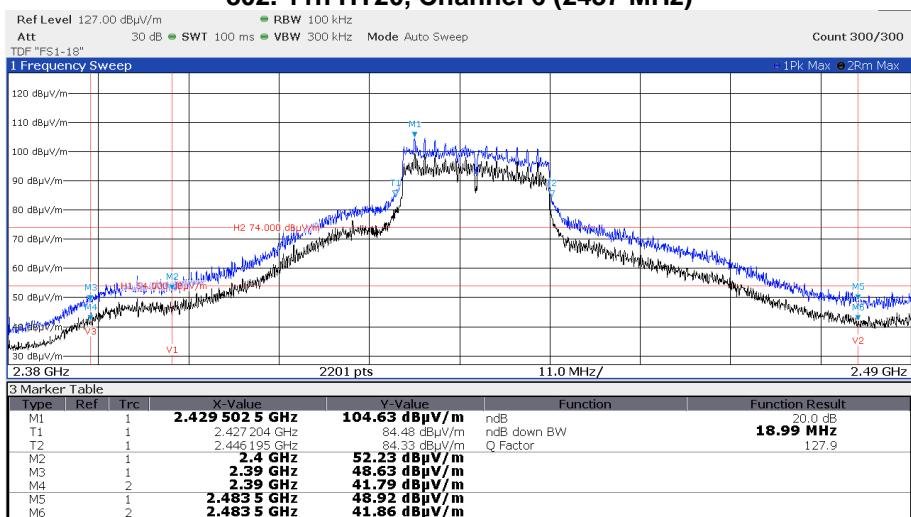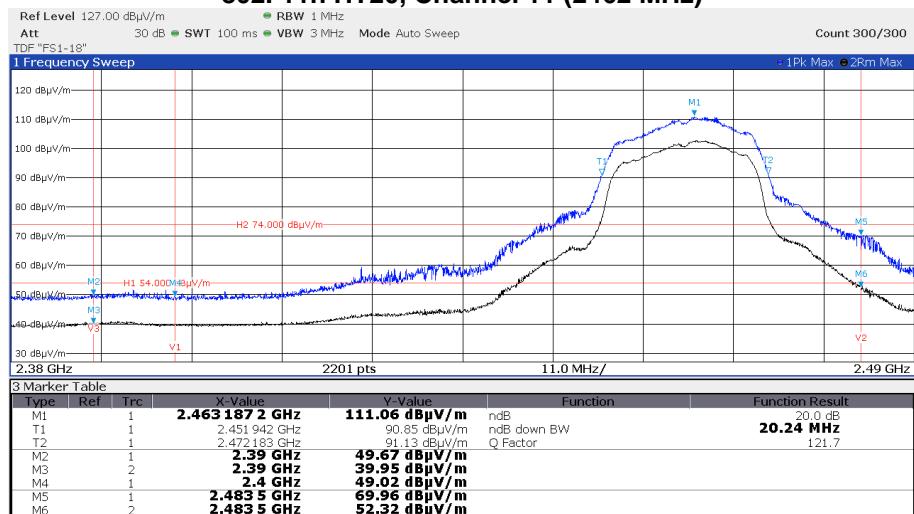IC ID: 21152-M2

802.11n HT20, Channel 1 (2412 MHz)**802.11n HT20, Channel 6 (2437 MHz)****802.11n HT20, Channel 11 (2462 MHz)**

FCC ID: 2AHES-M2

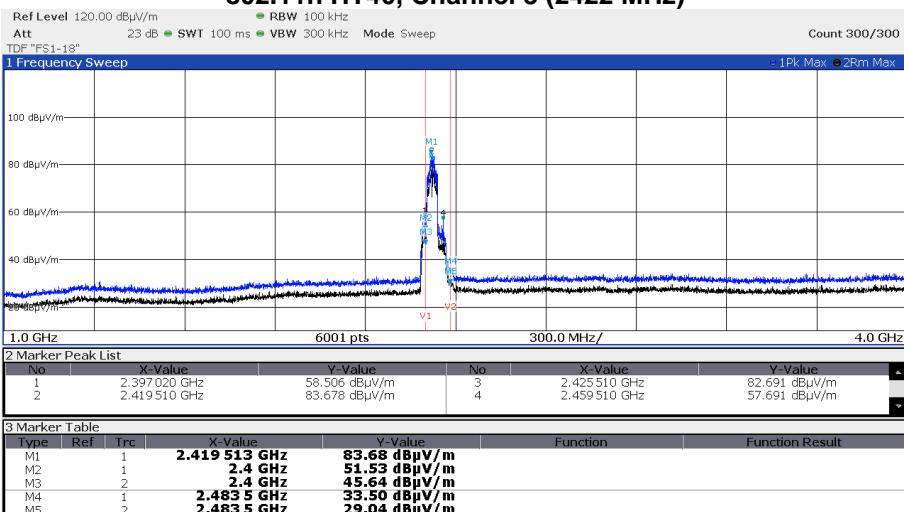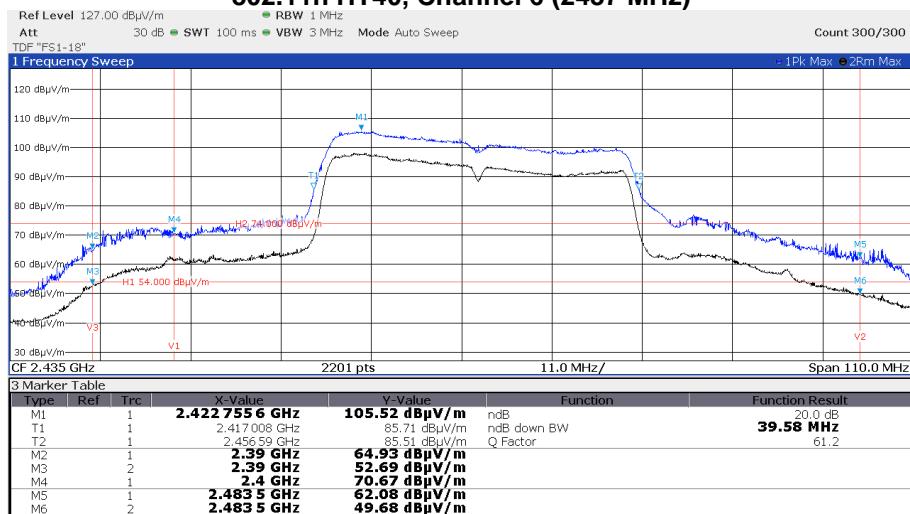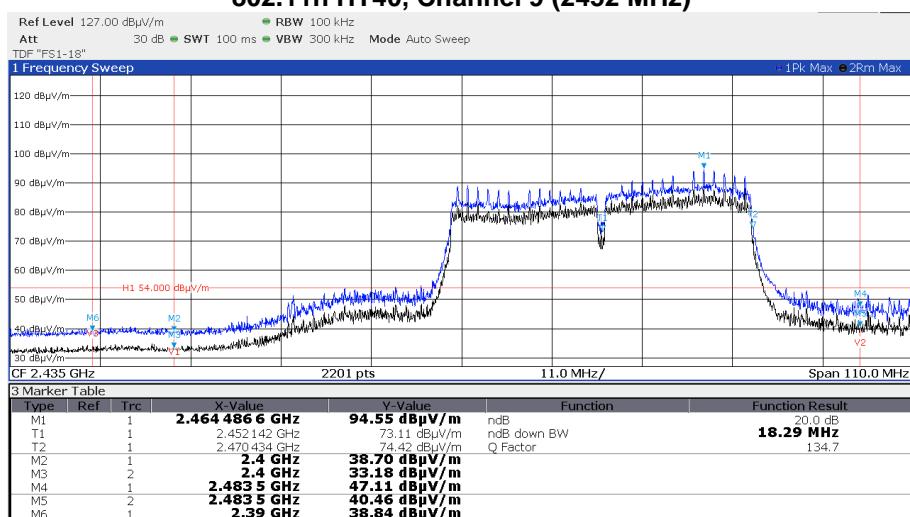IC ID: 21152-M2

802.11n HT40, Channel 3 (2422 MHz)**802.11n HT40, Channel 6 (2437 MHz)****802.11n HT40, Channel 9 (2452 MHz)**

FCC ID: 2AHES-M2

IC ID: 21152-M2

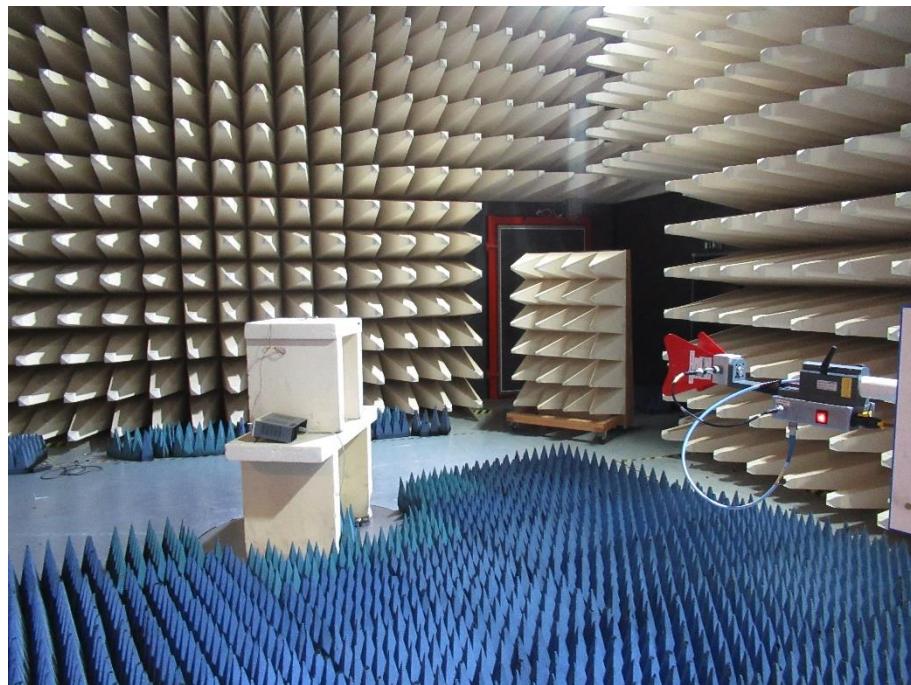
5.9 Unwanted emissions

For test instruments and accessories used see section 6 Part **SEC 2, SEC 3**.

5.9.1 Description of the test location

Test location: Anechoic chamber 1
Test distance: 3 m

5.9.2 Photo documentation of the test set-up



5.9.3 Applicable standard

According to FCC Part 15, Section 15.247(d):

In any 100 kHz bandwidth outside the frequency bands 2400 – 2483.50 MHz and 5725 – 5850 MHz, the digitally modulated radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or an radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limit specified in Section 15.209(a) (see Section 15.205(c)).

5.9.4 Description of Measurement

The radiated power of the spurious emission from the EUT is measured in a test setup following the procedures set out in ANSI C63.10. If the emission level of the EUT in peak mode complies with the average limit, then testing will be stopped and peak values of the EUT will be reported, otherwise the emission will be measured in average mode again and reported.

Spectrum analyser settings:

RBW: 1 MHz, VBW: 3 MHz, Detector: Max. peak, Trace: Max. hold, Sweep: Auto

FCC ID: 2AHES-M2

IC ID: 21152-M2

Limit according to FCC Part 15, Section 15.247(d) for emissions falling not in restricted bands:

In any 100 kHz bandwidth outside the frequency bands 2400 – 2483.50 MHz and 5725 – 5850 MHz, the digitally modulated radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or an radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required.

Frequency (MHz)	Spurious emission limit
Below 1000	20 dB below the highest level of the desired power
Above 1000	20 dB below the highest level of the desired power

The requirements are **FULFILLED**.



Remarks: The measurement was performed up to the 10th harmonic. For detailed test results please see to following test protocols. No emission below 1 GHz or above 18 GHz could be detected.
Look 5.7.4 for detailed measurements

FCC ID: 2AHES-M2

IC ID: 21152-M2



5.9.5 Test protocol

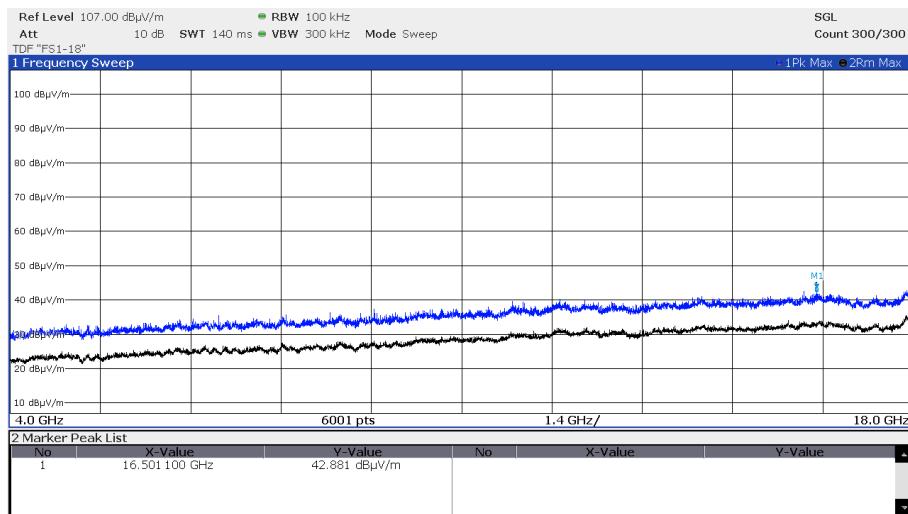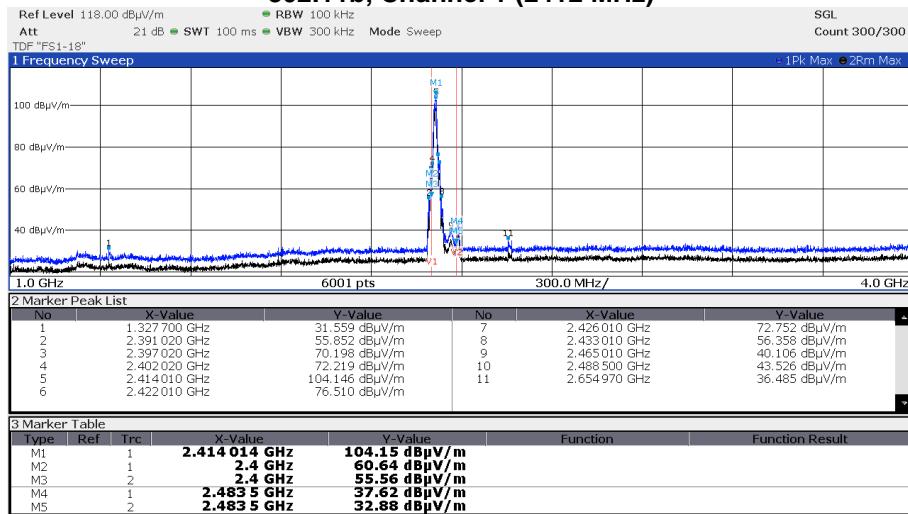802.11b, Channel 1 (2412 MHz)





FCC ID: 2AHES-M2

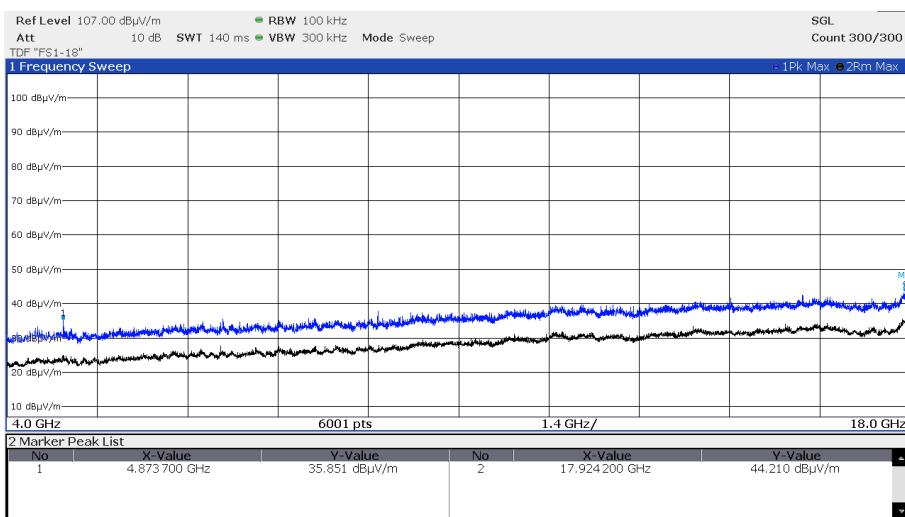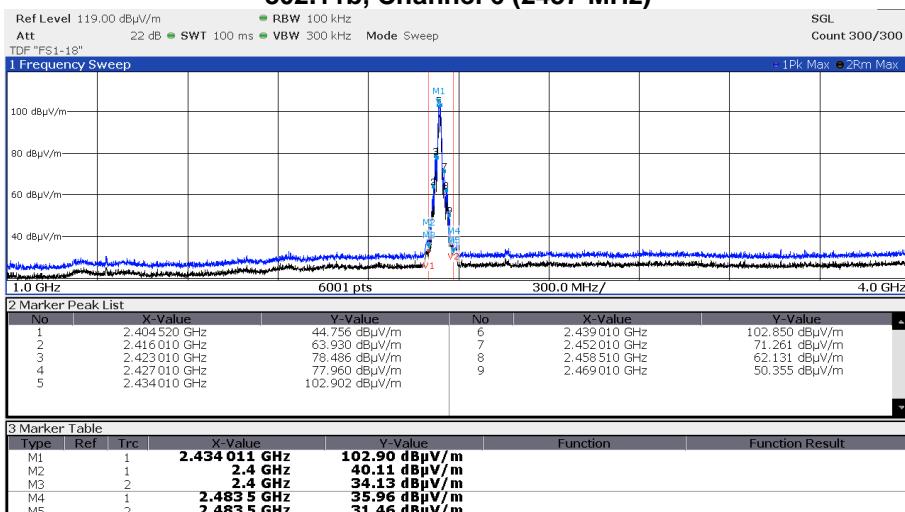IC ID: 21152-M2

802.11b, Channel 6 (2437 MHz)



FCC ID: 2AHES-M2

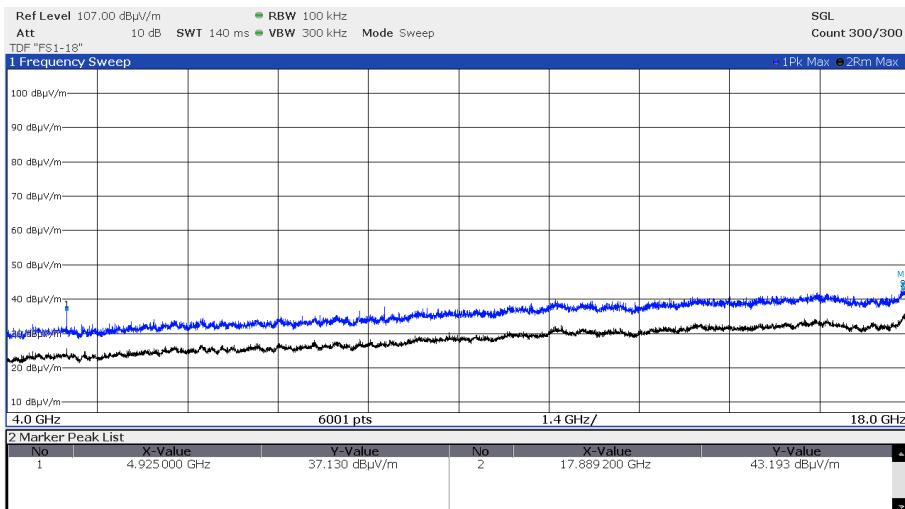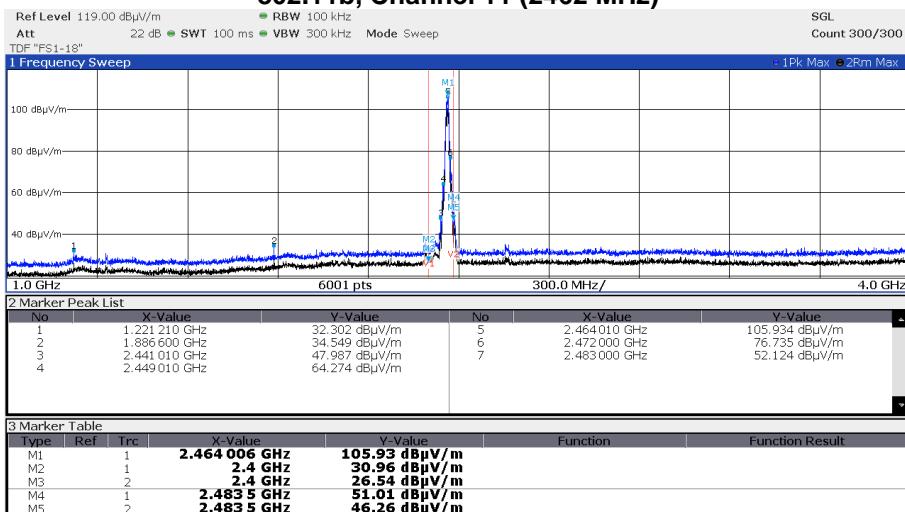IC ID: 21152-M2

802.11b, Channel 11 (2462 MHz)



FCC ID: 2AHES-M2

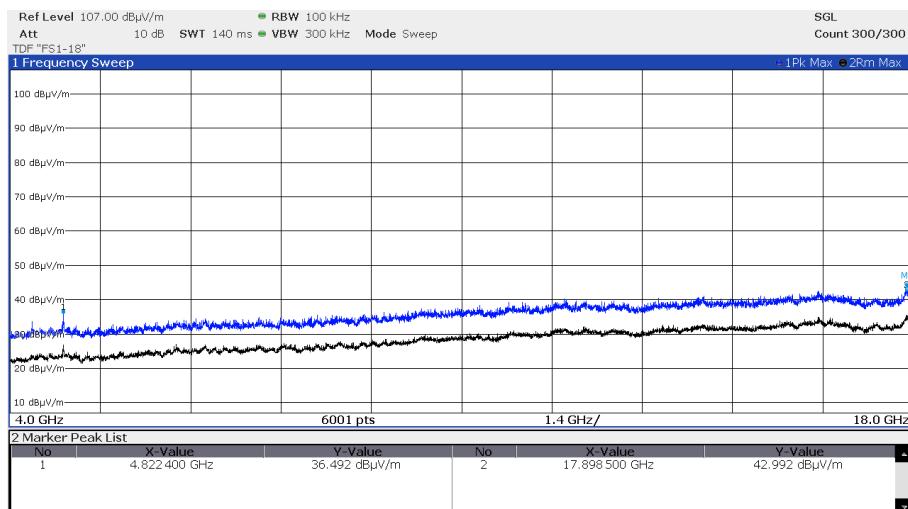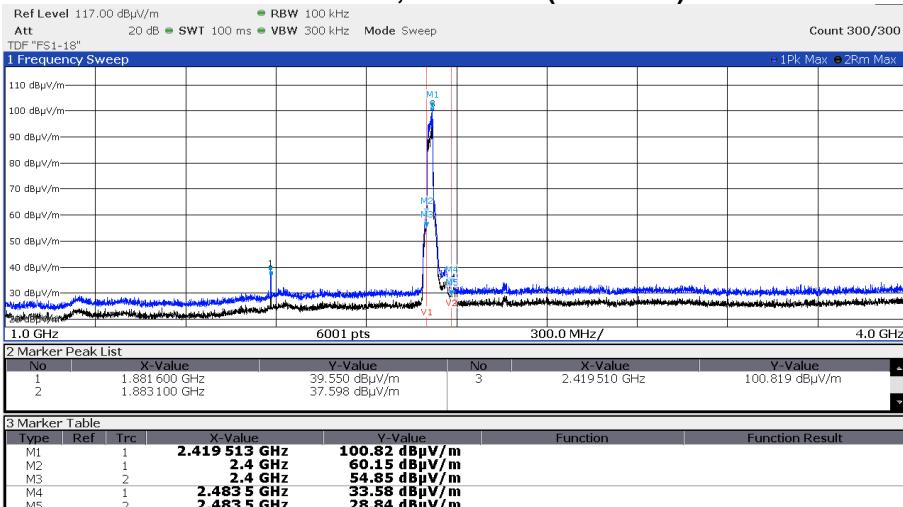IC ID: 21152-M2

802.11n HT20, Channel 1 (2412 MHz)


FCC ID: 2AHES-M2

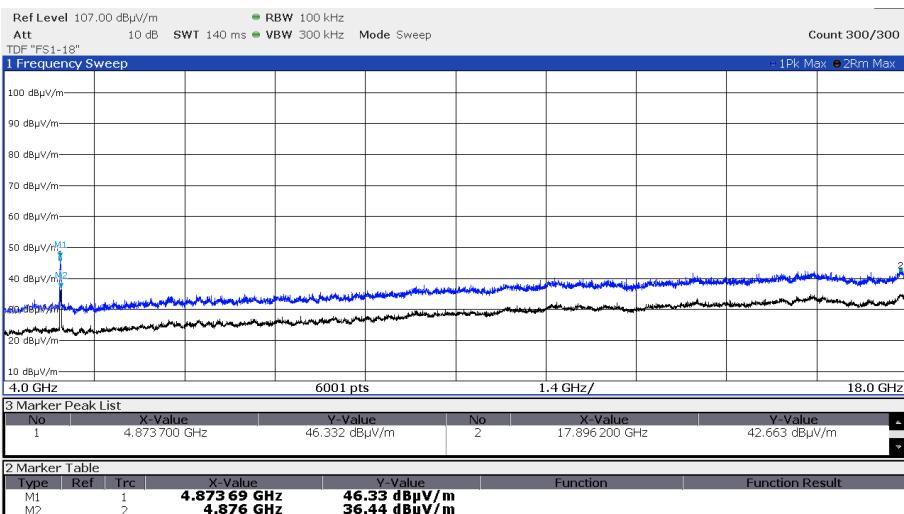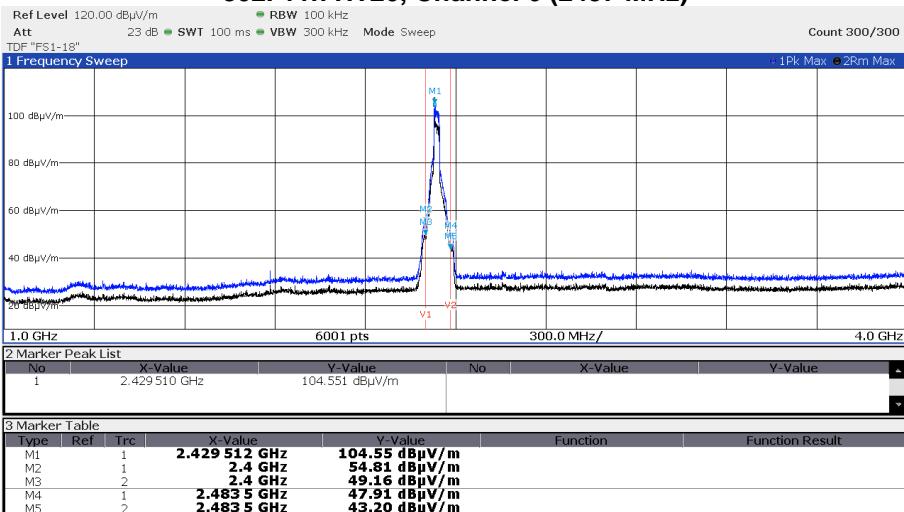IC ID: 21152-M2

802.11n HT20, Channel 6 (2437 MHz)


FCC ID: 2AHES-M2

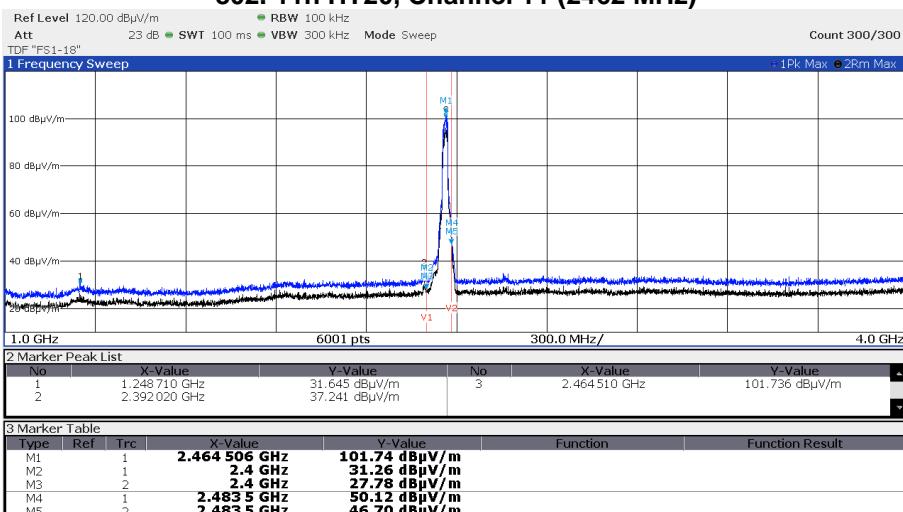IC ID: 21152-M2

802.11n HT20, Channel 11 (2462 MHz)


FCC ID: 2AHES-M2

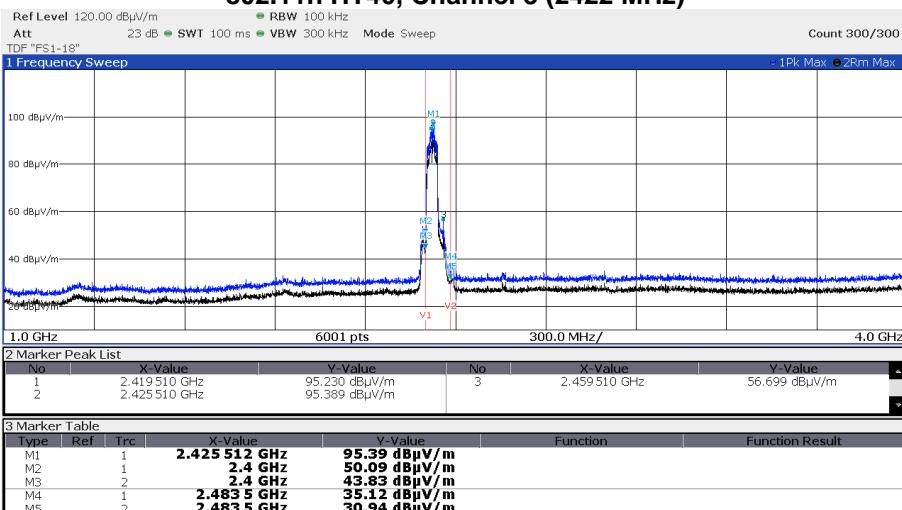IC ID: 21152-M2

802.11n HT40, Channel 3 (2422 MHz)



FCC ID: 2AHES-M2

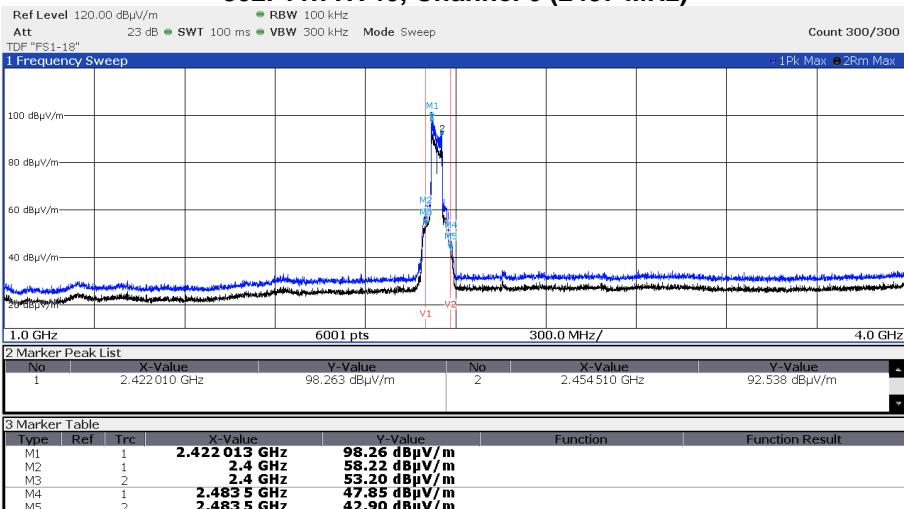IC ID: 21152-M2

802.11n HT40, Channel 6 (2437 MHz)

FCC ID: 2AHES-M2

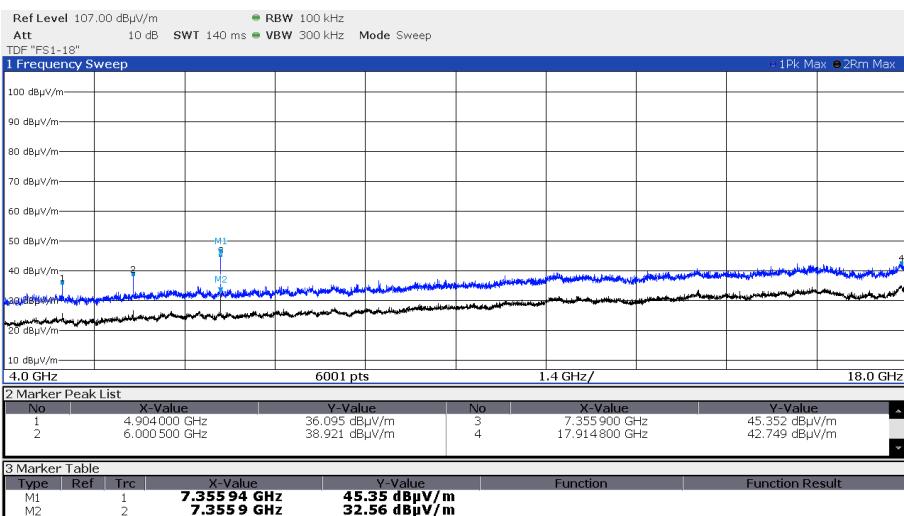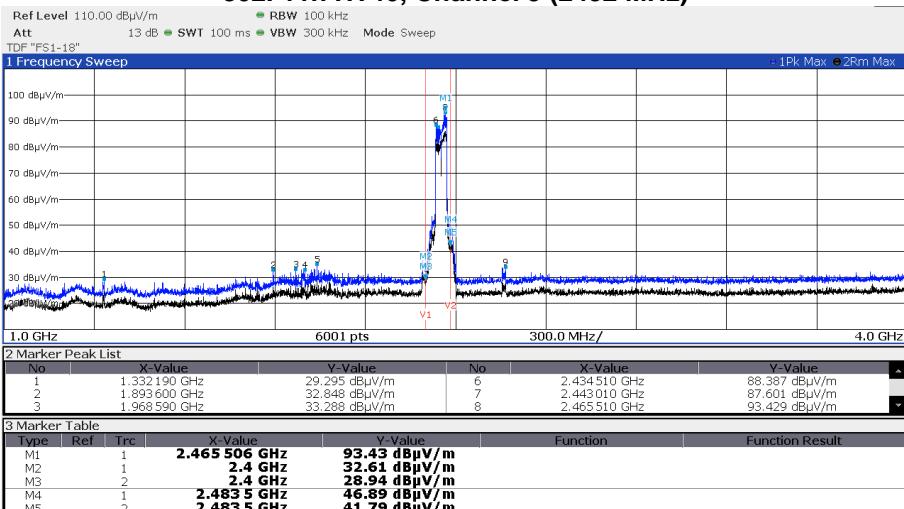IC ID: 21152-M2

802.11n HT40, Channel 9 (2452 MHz)

FCC ID: 2AHES-M2

IC ID: 21152-M2

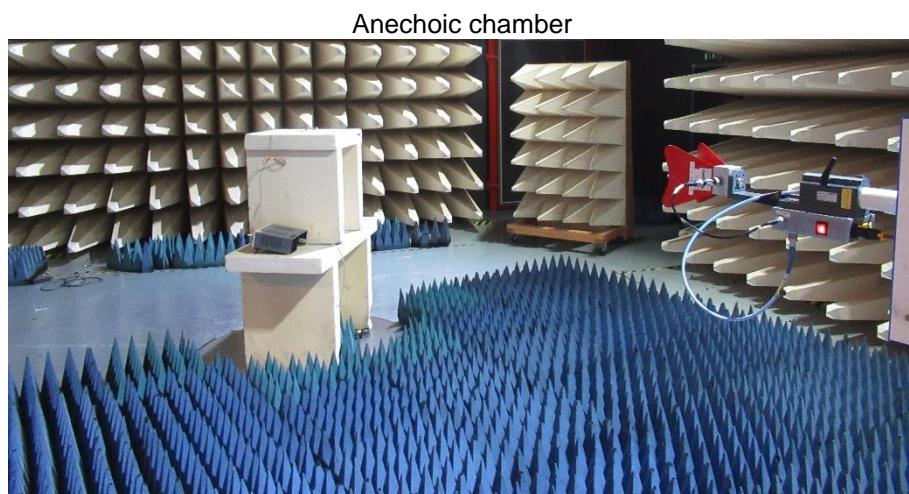
5.10 Unwanted emissions in restricted bands, radiated

For test instruments and accessories used see section 6 Part **SER 2, SER 3**.

5.10.1 Description of the test location

Test location: OATS 1
Test location: Anechoic chamber 1
Test distance: 3 m

5.10.2 Photo documentation of the test set-up



According to FCC Part 15, Section 15.205(a):

In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limit specified in Section 15.209(a).

FCC ID: 2AHES-M2**IC ID: 21152-M2**

5.10.3 Description of Measurement

The restricted bands are measured radiated. The span of the spectrum analyser is set wide enough to capture the restricted band and measure the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products which fall outside of the authorized band of operation. The restricted bands are measured falling emissions into it and the nearest restricted band are checked for emissions also the restricted band for the harmonics of the carrier.

Spectrum analyser settings:

30 MHz – 1000 MHz:	RBW: 120 kHz
1000 MHz – 25 GHz:	RBW: 1 MHz, VBW: 3 MHz, Sweep: Auto, Detector function: Peak

Radiated limits according to FCC Part 15 Section 15.209(a) for spurious emissions which fall in restricted bands:

Frequency (MHz)	Field strength of spurious emissions (μ V/m)	dB(μ V/m)	Measurement distance (metres)
0.009-0.490	2400/F (kHz)		300
0.490-1.705	24000/F (kHz)		30
1.705-30	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

Restricted bands of operation:

The field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209

MHz	MHz	MHz	GHz
0.090 – 0.110	16.42 – 16.423	399.9 – 410	4.5 – 5.15
0.495 – 0.505	16.69475 – 16.69525	608 – 614	5.35 – 5.46
2.1735 – 2.1905	16.80425 – 16.80475	960 – 1240	7.25 – 7.75
4.125 – 4.128	25.5 – 25.67	1300 – 1427	8.025 – 8.5
4.17725 – 4.17775	37.5 – 38.25	1435 – 1626.5	9.0 – 9.2
4.20725 – 4.20775	73 – 74.6	1645.5 – 1646.5	9.3 – 9.5
6.215 – 6.218	74.8 – 75.2	1660 – 1710	10.6 – 12.7
6.26775 – 6.26825	108 – 121.94	1718.8 – 1722.2	13.25 – 13.4
6.31175 – 6.31225	123 – 138	2200 – 2300	14.47 – 14.5
8.291 – 8.294	149.9 – 150.05	2310 – 2390	15.35 – 16.2
8.362 – 8.366	156.52475 – 156.52525	2483.5 – 2500	17.7 – 21.4
8.37625 – 8.38675	156.7 – 156.9	2690 – 2900	22.01 – 23.12
8.41425 – 8.41475	162.0125 – 167.17	3260 – 3267	23.6 – 24.0
12.29 – 12.293	167.72 – 173.2	3332 – 3339	31.2 – 31.8
12.51975 – 12.52025	240 – 285	3345.8 – 3358	36.43 – 36.5
12.57675 – 12.57725	322 – 335.4	3600 – 4400	Above 38.6

FCC ID: 2AHES-M2**IC ID: 21152-M2**

RSS-Gen, Table 6 – Restricted Frequency Bands

MHz	MHz	MHz	GHz
0.090 - 0.110	12.57675 - 12.57725	399.9 - 410	7.250 - 7.750
0.495 - 0.505	13.36 - 13.41	608 - 614	8.025 - 8.500
2.1735 - 2.1905	16.42 - 16.423	960 - 1427	9.0 - 9.2
3.020 - 3.026	16.69475 - 16.69525	1435 - 1626.5	9.3 - 9.5
4.125 - 4.128	16.80425 - 16.80475	1645.5 - 1646.5	10.6 - 12.7
4.17725 - 4.17775	25.5 - 25.67	1660 - 1710	13.25 - 13.4
4.20725 - 4.20775	37.5 - 38.25	1718.8 - 1722.2	14.47 - 14.5
5.677 - 5.683	73 - 74.6	2200 - 2300	15.35 - 16.2
6.215 - 6.218	74.8 - 75.2	2310 - 2390	17.7 - 21.4
6.26775 - 6.26825	108 - 138	2483.5 - 2500	22.01 - 23.12
6.31175 - 6.31225	149.9 - 150.05	2655 - 2900	23.6 - 24.0
8.291 - 8.294	156.52475 - 156.52525	3260 - 3267	31.2 - 31.8
8.362 - 8.366	156.7 - 156.9	3332 - 3339	36.43 - 36.5
8.37625 - 8.38675	162.0125 - 167.17	3345.8 - 3358	Above 38.6
8.41425 - 8.41475	167.72 - 173.2	3500 - 4400	
12.29 - 12.293	240 - 285	4500 - 5150	
12.51975 - 12.52025	322 - 335.4	5350 - 5460	

The requirements are **FULFILLED**.

Remarks: The measurement was performed up to the 10th harmonic. For detailed test results please see to following test protocols.


FCC ID: 2AHES-M2

IC ID: 21152-M2

5.10.4 Test protocol




Emission below 1000 MHz:

Frequency (MHz)	Reading Vert. (dB μ V)	Reading Hor. (dB μ V)	Correct. Vert. (dB)	Correct. Hor. (dB)	Level Vert. (dB μ V/m)	Level Hor. (dB μ V/m)	Limit (dB μ V/m)	Dlimit (dB)
35.00	16.8	3.3	16.2	17.2	33.0	20.5	40.0	-7.0
86.00	8.3	1.6	13.8	13.3	22.1	14.9	40.0	-17.9
115.00	4.3	2.5	16.9	16.1	21.2	18.6	43.5	-22.3
210.00	13.5	9.8	17.3	16.8	30.8	26.6	43.5	-12.7
690.00	0.9	-1.6	29.5	30.1	30.4	28.5	46.0	-15.6
914.00	8.8	2.7	33.0	33.4	41.8	36.1	46.0	-4.2

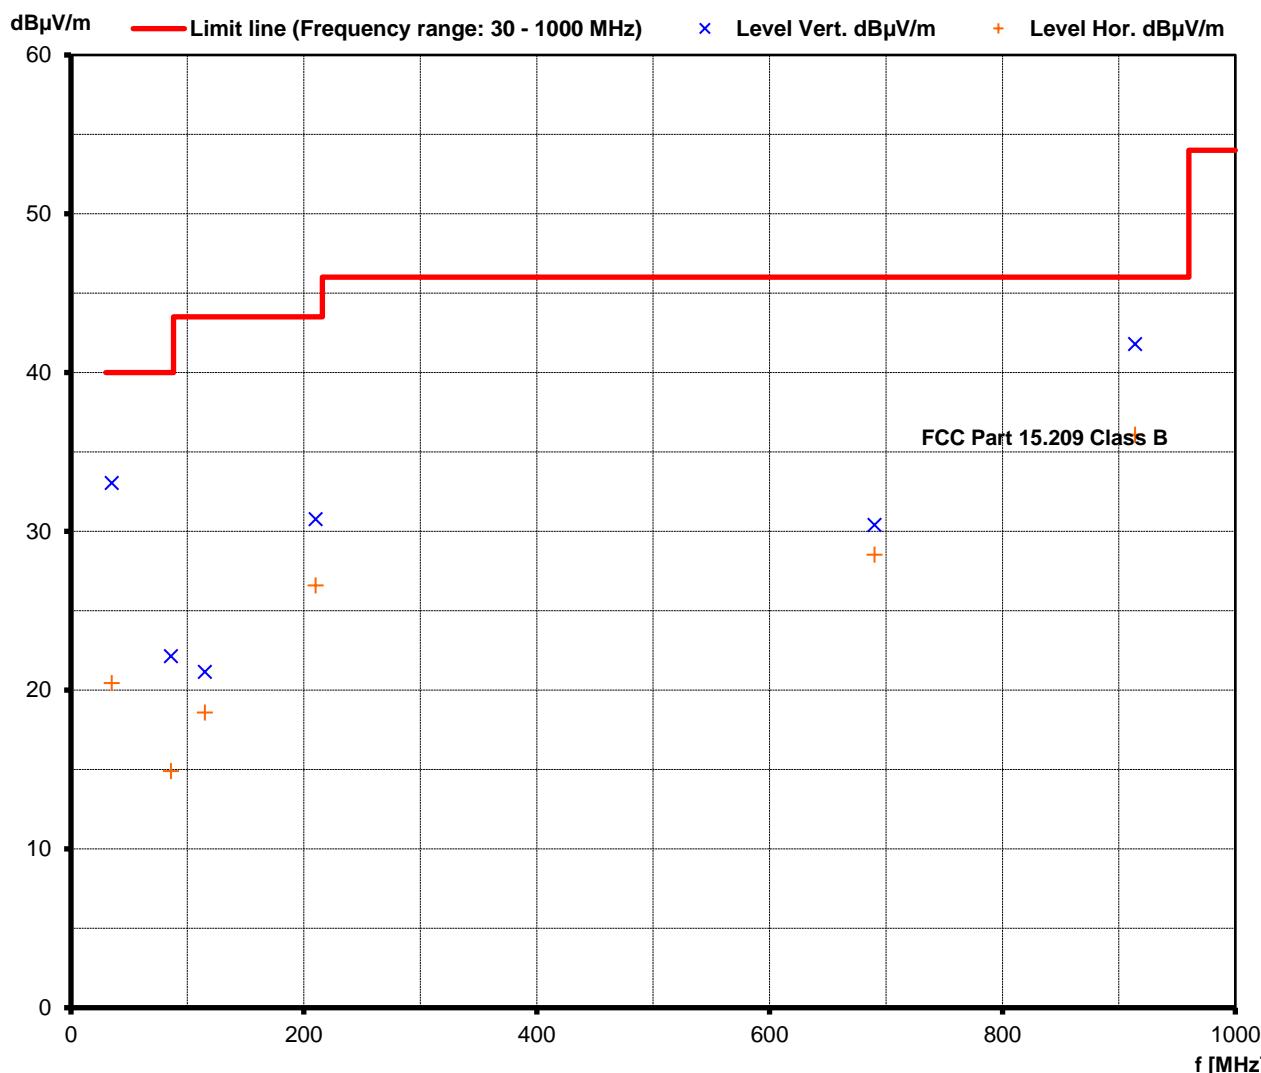

FCC ID: 2AHES-M2

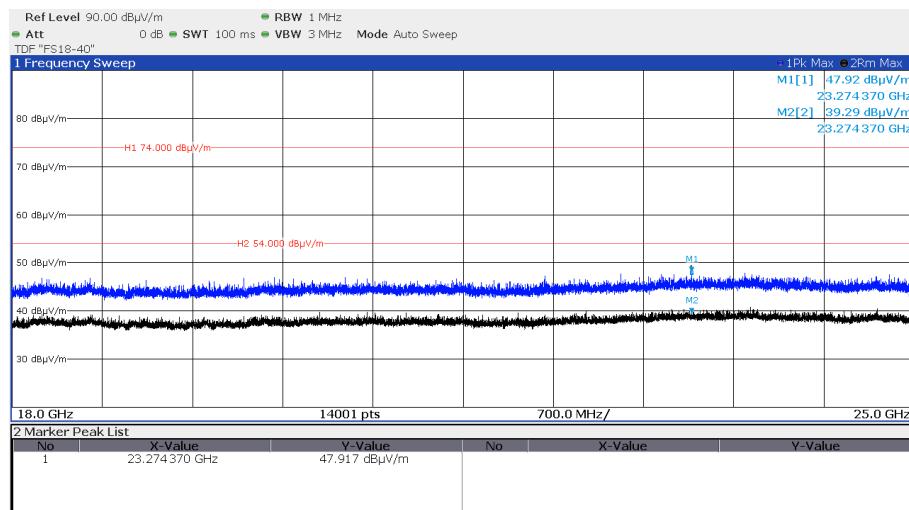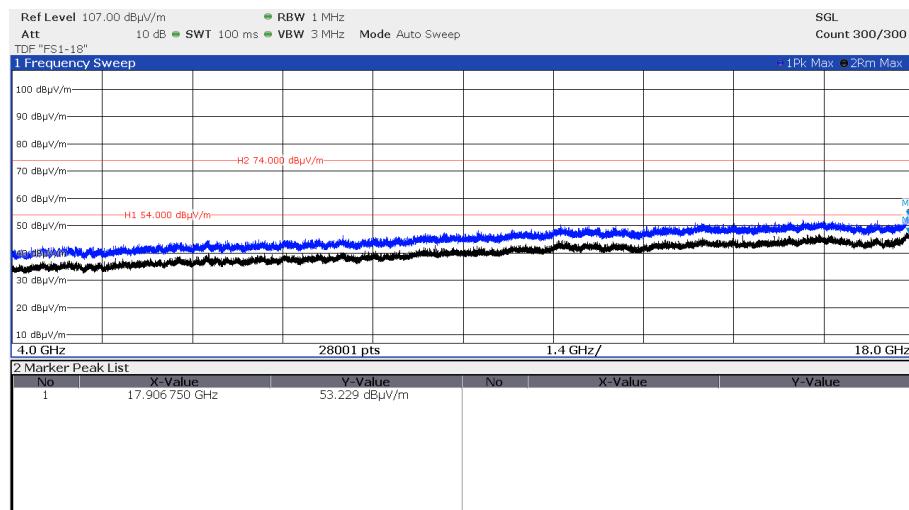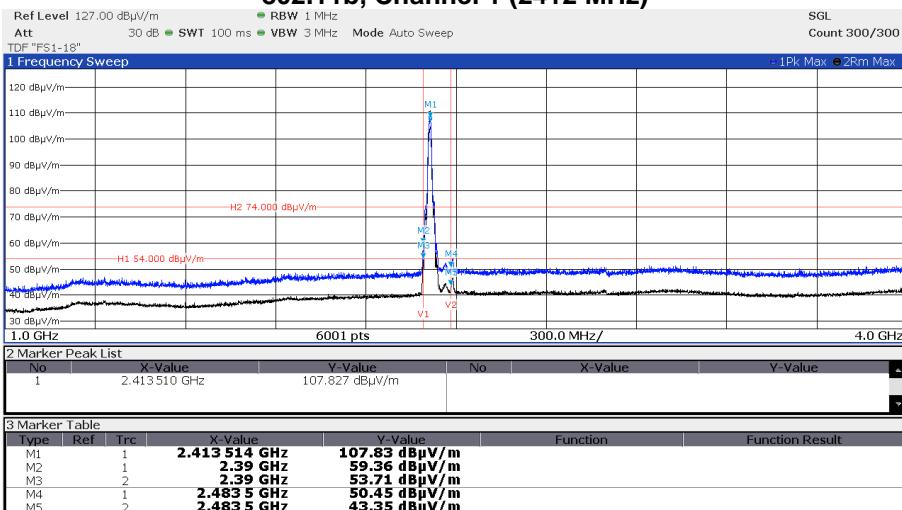IC ID: 21152-M2


802.11b, Channel 1 (2412 MHz)

FCC ID: 2AHES-M2

IC ID: 21152-M2


802.11b, Channel 6 (2437 MHz)

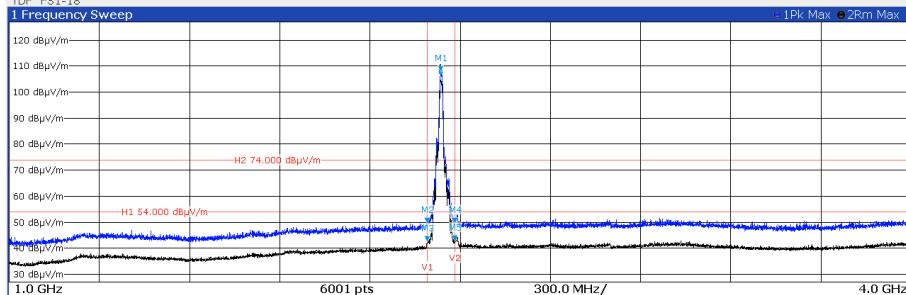Ref Level 127.00 dB μ V/m RBW 1 MHz
 Att 30 dB SWT 100 ms VBW 3 MHz Mode Auto Sweep
 TDF "FS1-18"

 SGL
 Count 300/300

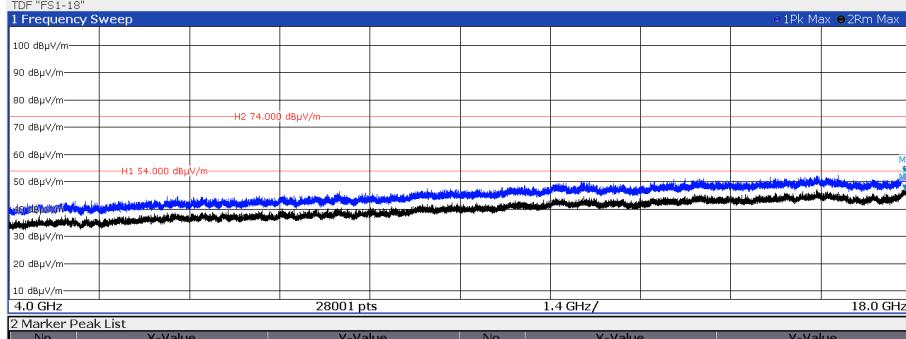
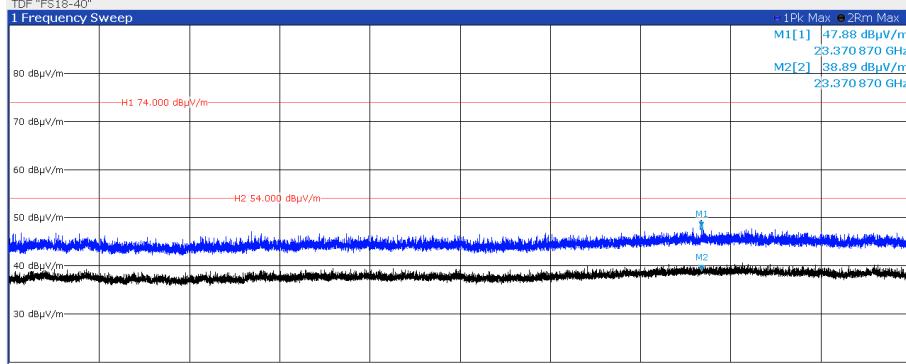
2 Marker Peak List			3 Marker Table		
No	X-Value	Y-Value	No	X-Value	Y-Value
1	2.435510 GHz	107.68 dB μ V/m	M1	2.435510 GHz	107.68 dB μ V/m
			M2	2.39 GHz	49.26 dB μ V/m
			M3	2.39 GHz	42.15 dB μ V/m
			M4	2.4835 GHz	49.41 dB μ V/m
			M5	2.4835 GHz	42.57 dB μ V/m

Ref Level 107.00 dB μ V/m RBW 1 MHz
 Att 10 dB SWT 100 ms VBW 3 MHz Mode Auto Sweep
 TDF "FS1-18"

 SGL
 Count 300/300


2 Marker Peak List		
No	X-Value	Y-Value
1	17.895750 GHz	53.008 dB μ V/m




Ref Level 90.00 dB μ V/m RBW 1 MHz
 Att 0 dB SWT 100 ms VBW 3 MHz Mode Auto Sweep
 TDF "FS18-40"

 SGL
 Count 300/300


2 Marker Peak List		
No	X-Value	Y-Value
1	23.370870 GHz	47.878 dB μ V/m




FCC ID: 2AHES-M2

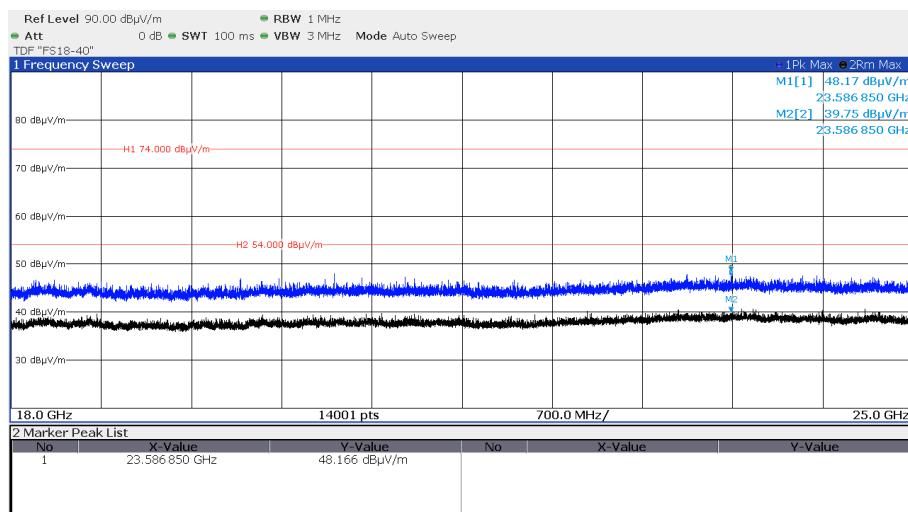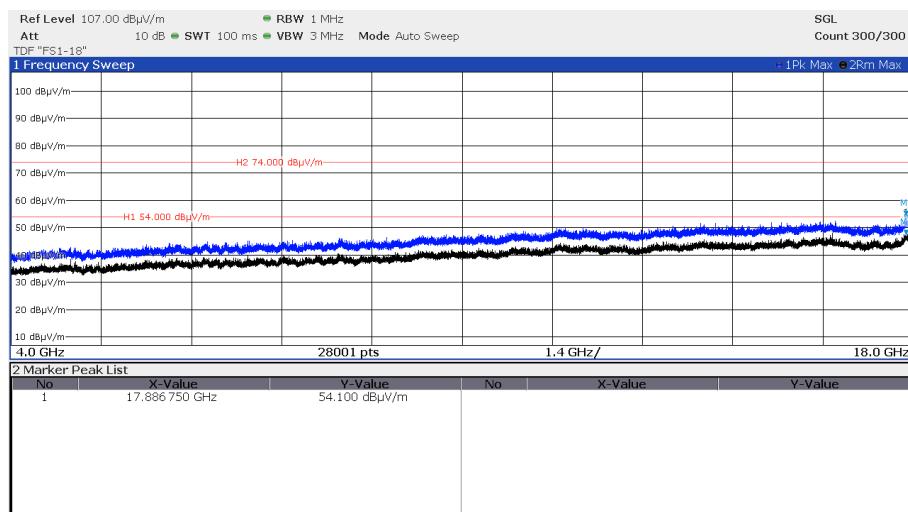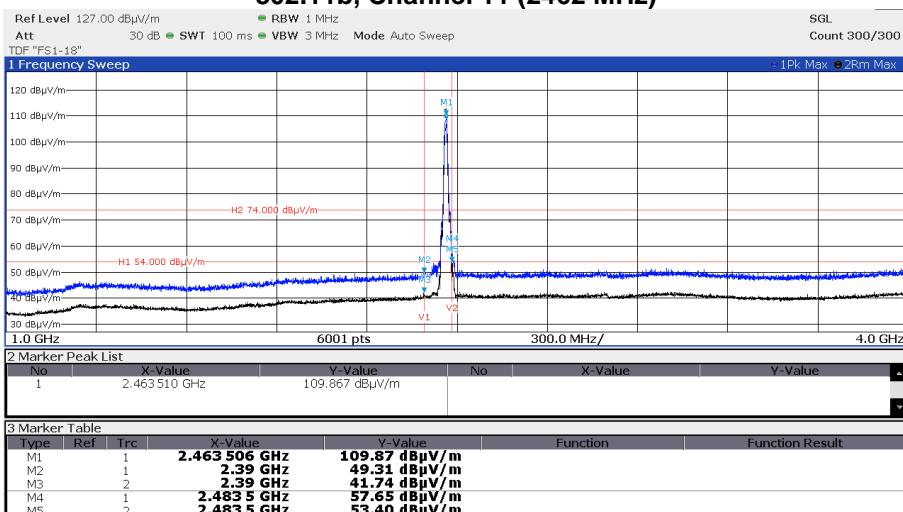IC ID: 21152-M2

802.11b, Channel 11 (2462 MHz)




FCC ID: 2AHES-M2

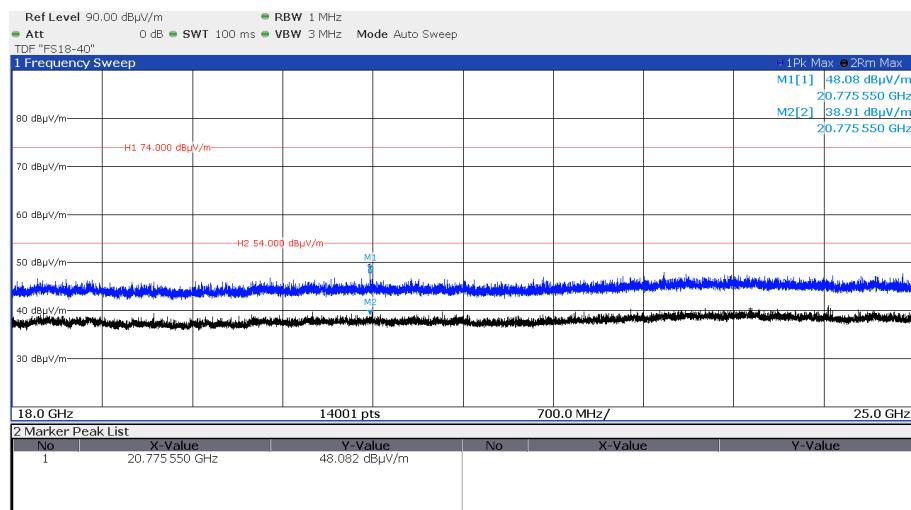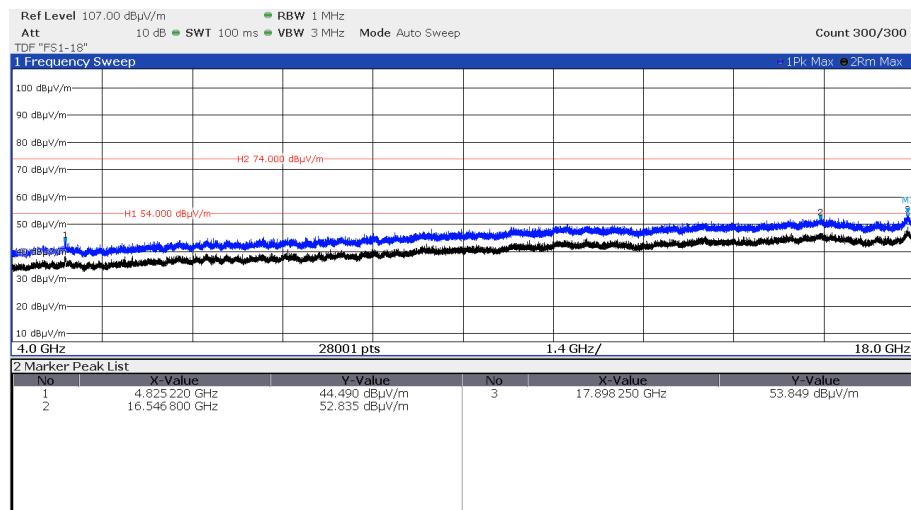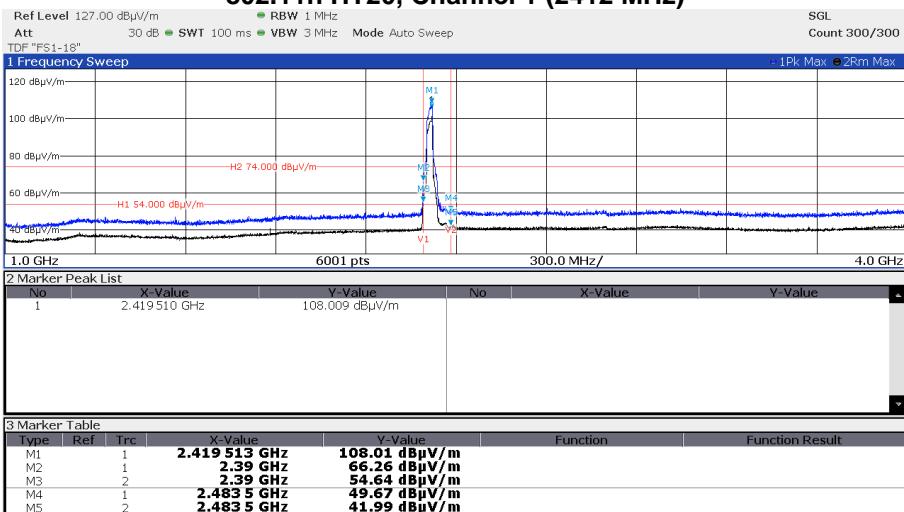IC ID: 21152-M2

802.11n HT20, Channel 1 (2412 MHz)




FCC ID: 2AHES-M2

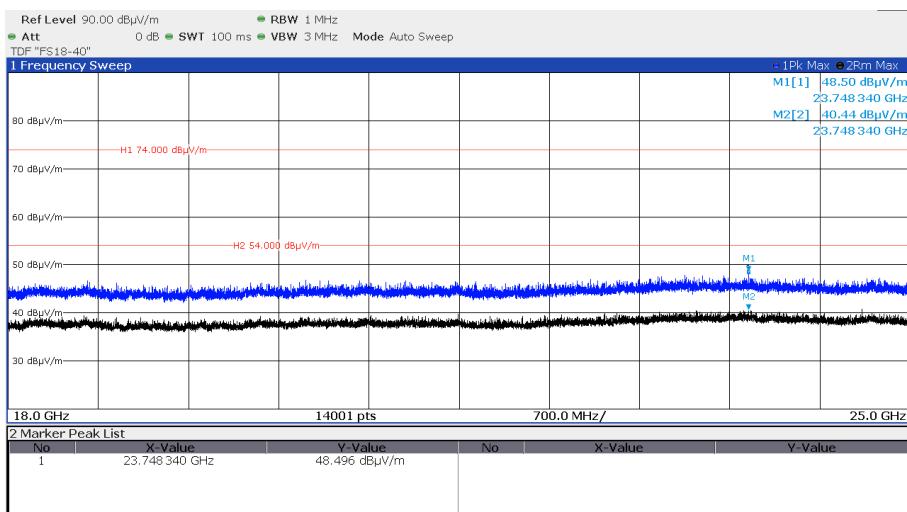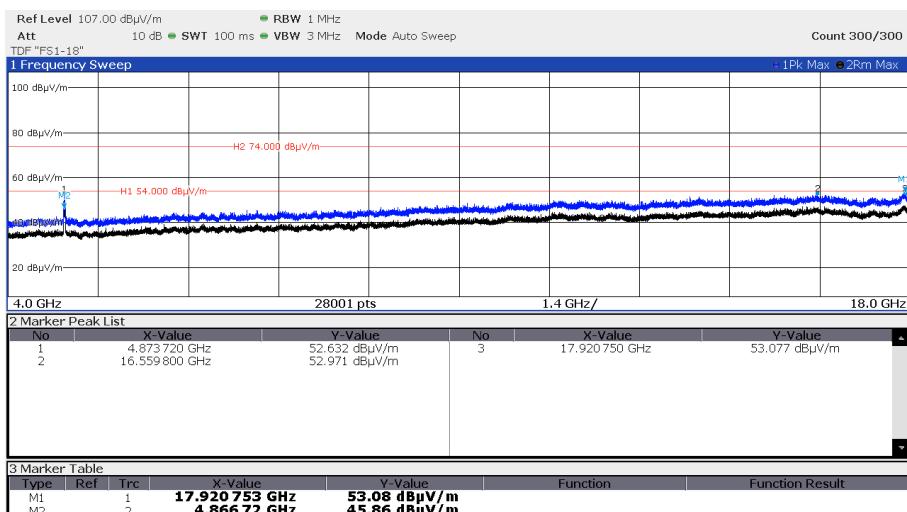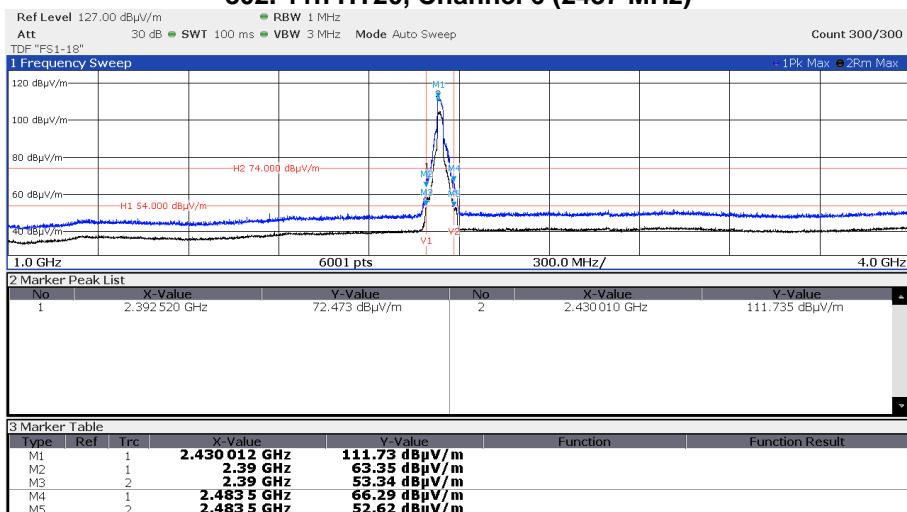IC ID: 21152-M2

802.11n HT20, Channel 6 (2437 MHz)




FCC ID: 2AHES-M2

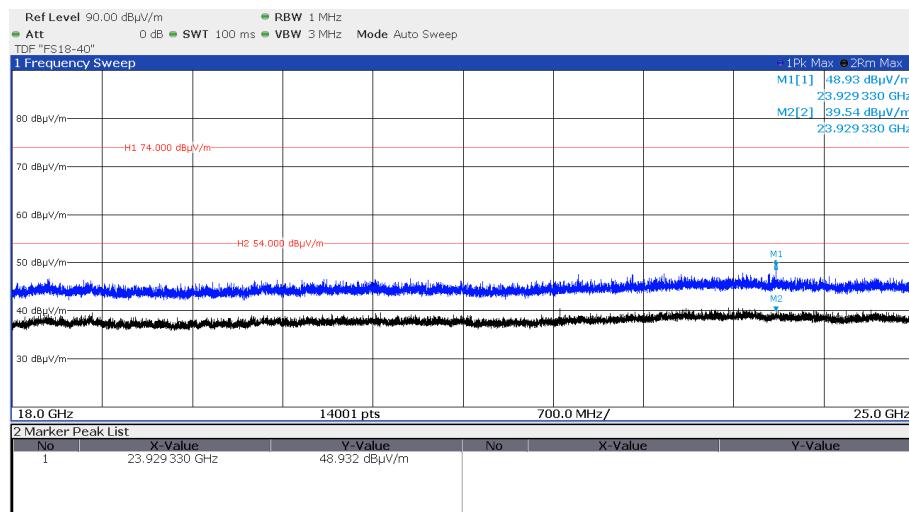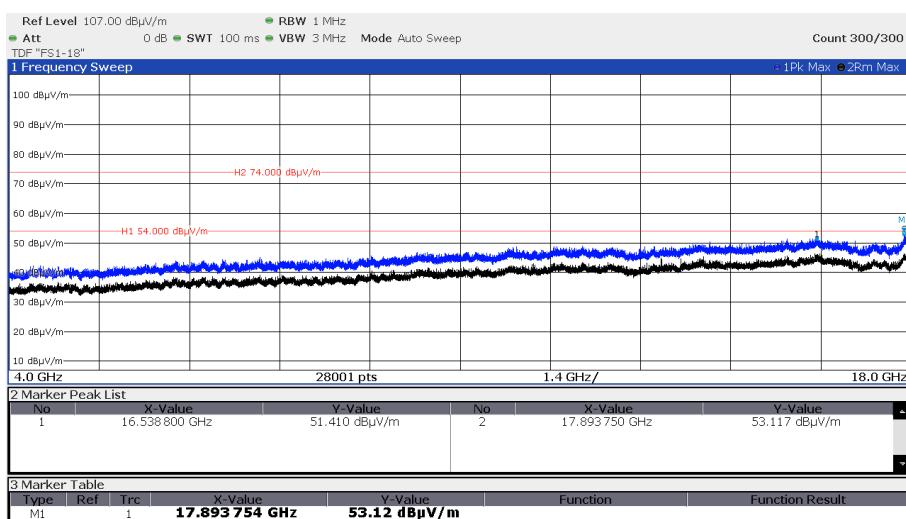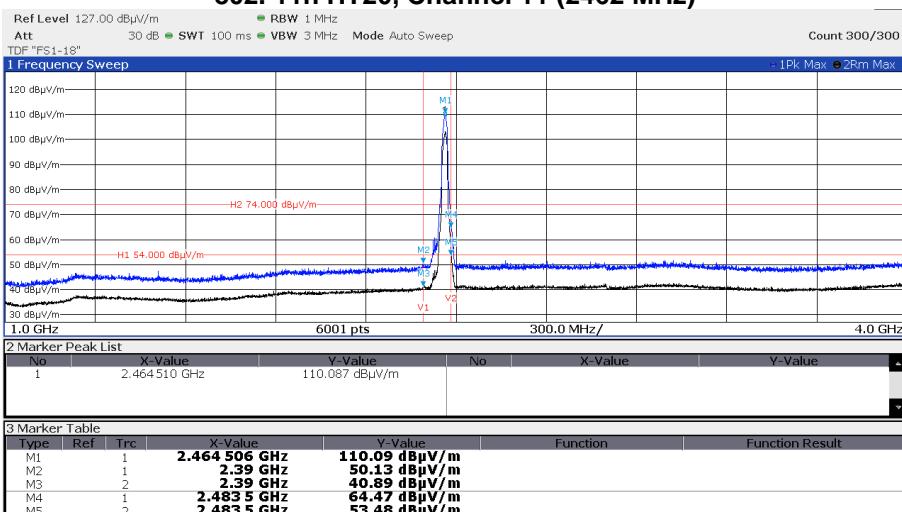IC ID: 21152-M2

802.11n HT20, Channel 11 (2462 MHz)




FCC ID: 2AHES-M2

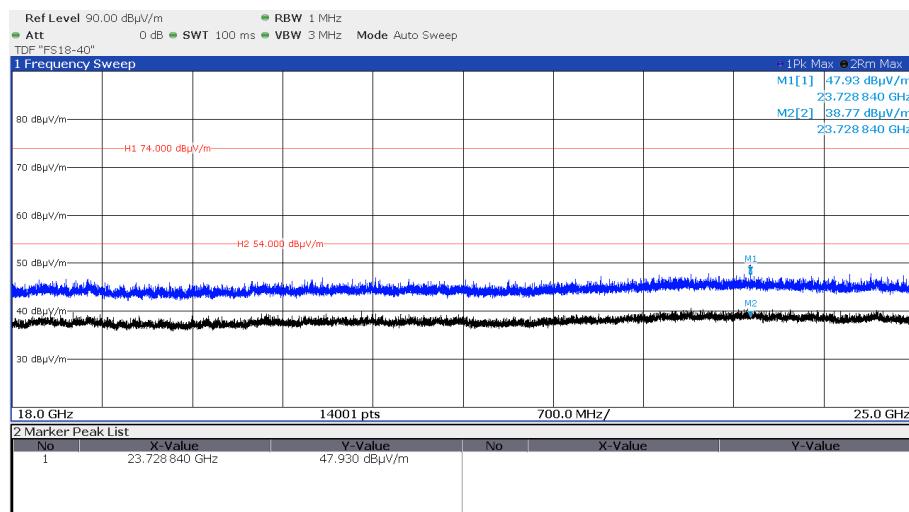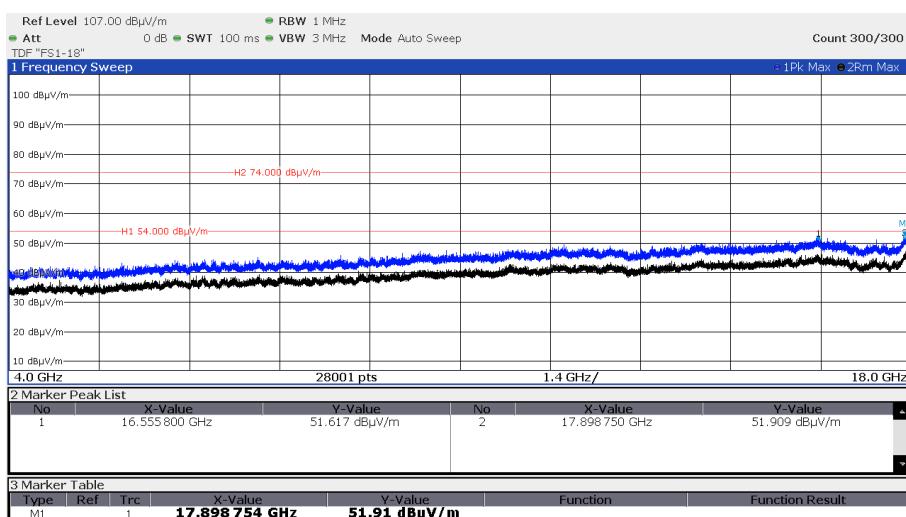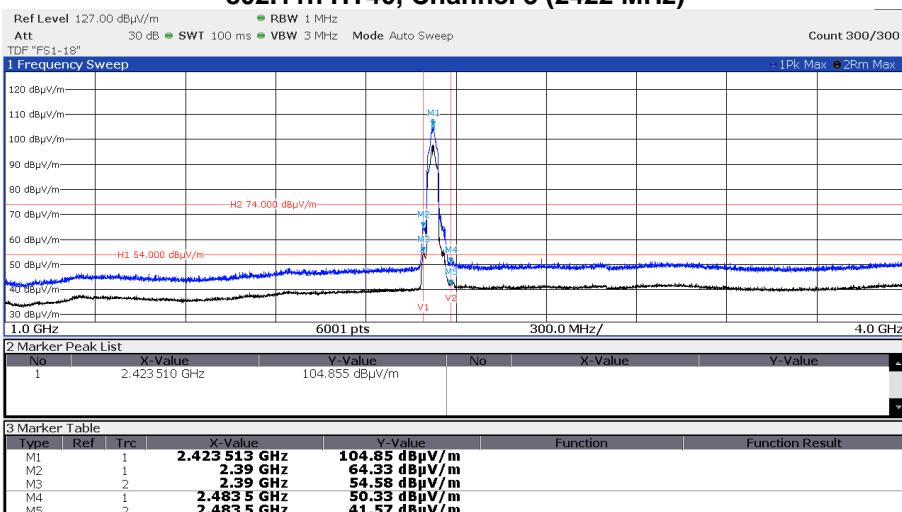IC ID: 21152-M2

802.11n HT40, Channel 3 (2422 MHz)




FCC ID: 2AHES-M2

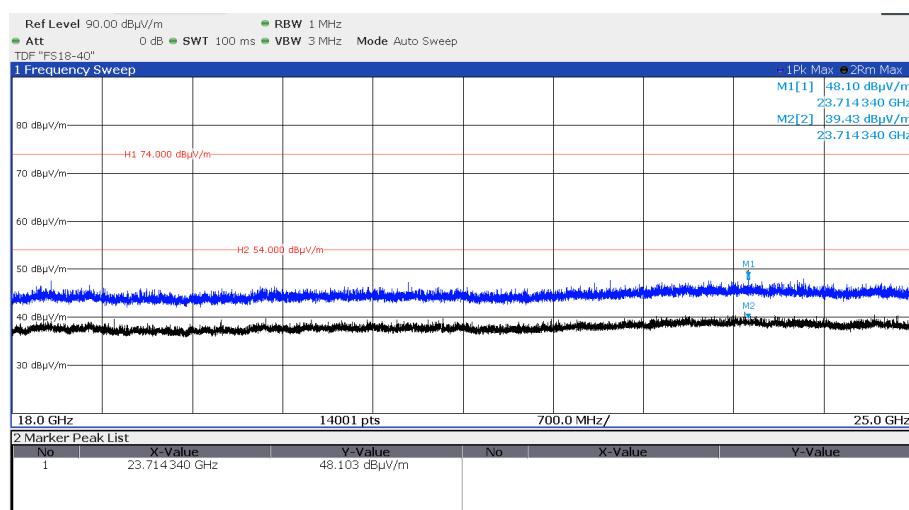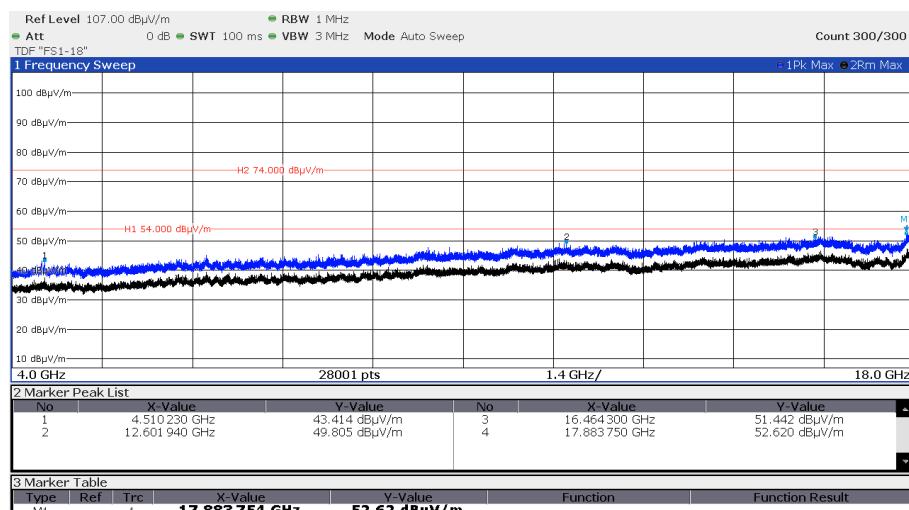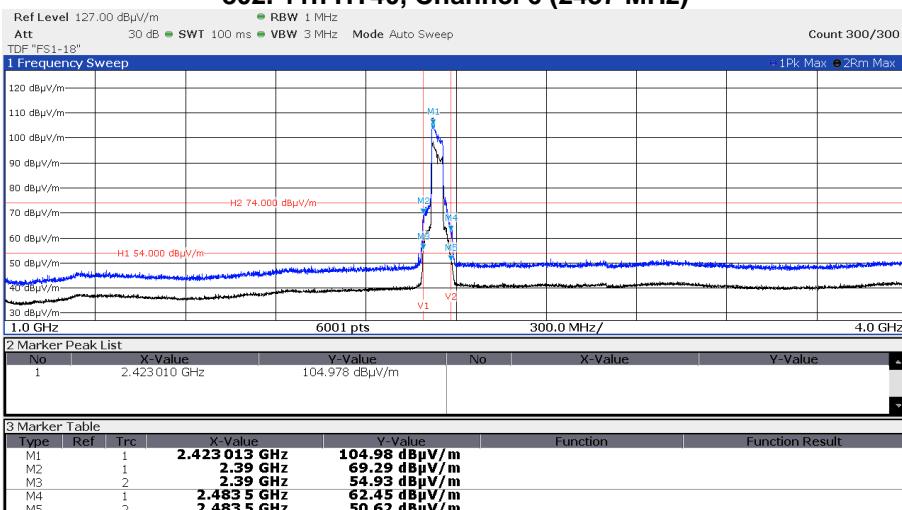IC ID: 21152-M2

802.11n HT40, Channel 6 (2437 MHz)

FCC ID: 2AHES-M2

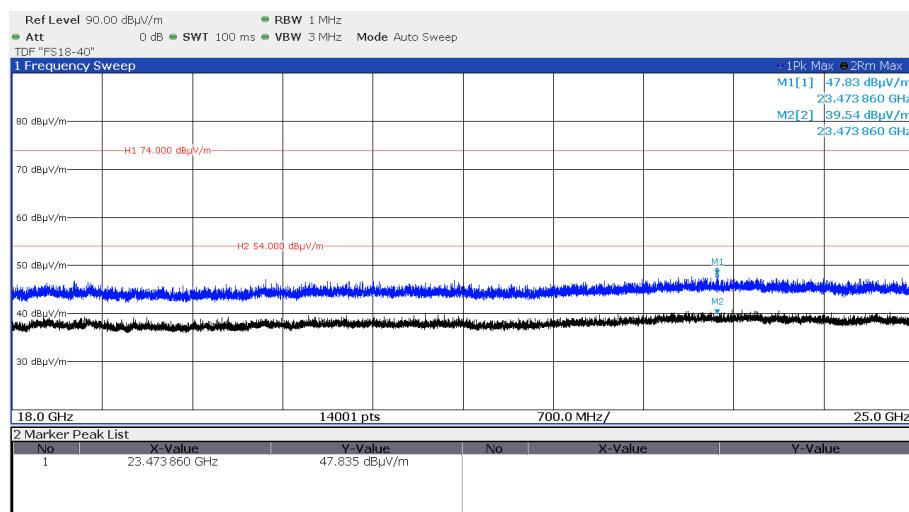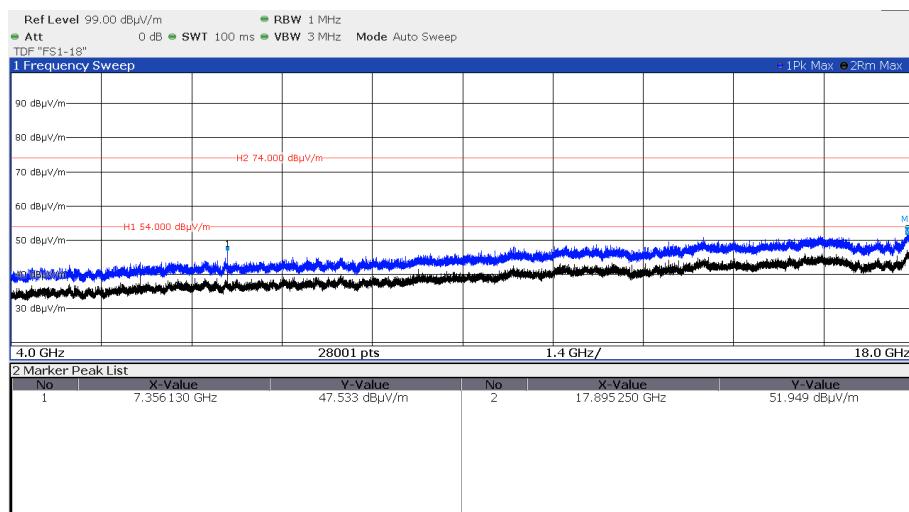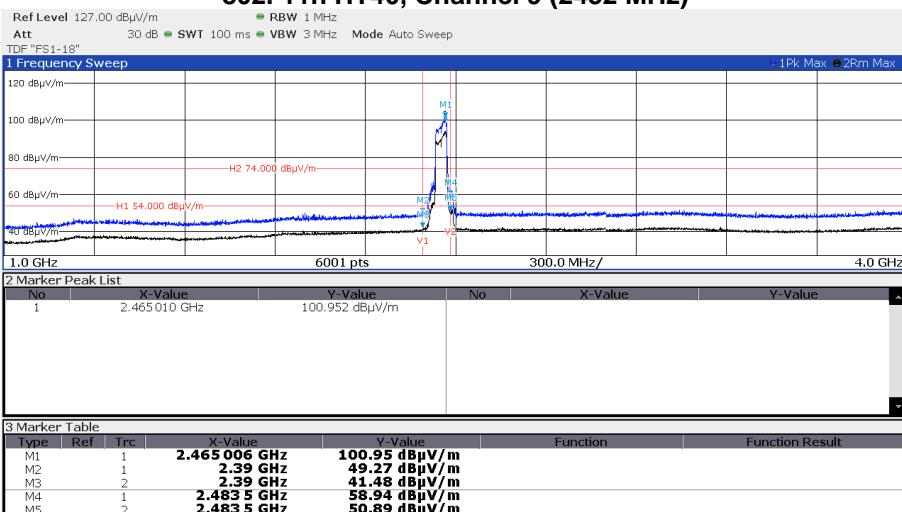IC ID: 21152-M2

802.11n HT40, Channel 9 (2452 MHz)

Remark: All emissions are below the limits of part 15.209.

FCC ID: 2AHES-M2

IC ID: 21152-M2

5.12 Antenna application

5.12.1 Applicable standard

According to FCC Part 15C, Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that broken antennas can be replaced by the user, but the use of a standard antenna jack is prohibited.

The EUT has an integrated antenna. No other antenna can be used with the device.

All supplied antennas meet the requirements of part 15.203 and 15.204.

Remarks: None.

5.13 Defacto EIRP-Limit

According to FCC Part 15C, Section 15.247(b)(4):

The conducted output power limit specified in paragraph (b) of 15.247 is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from intentional radiator shall be reduced below the stated values in paragraph (b)(1), (b)(2) and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Defacto EIRP-Limit:

$$P_{out} = 30 - (G_x - 6);$$

Antenna	Gx (dBi)	Cond. limit (dBm)	G (dBi)	Amax (dBm)	Limit P _{out} (dBm)	Reduction (dB)	P set 2.4 GHz
ANT792-8DN	14.0	30.0	6.0	9.9	22.0	-12.1	P11

The antenna is < 6 dBi gain, no Defacto limit applies.

The requirements are **FULFILLED**.

Remarks: No power reduction results from the defacto limit.

FCC ID: 2AHES-M2

IC ID: 21152-M2

6 USED TEST EQUIPMENT AND ACCESSORIES

All test instruments used are calibrated and verified regularly. The calibration history is available on request.

Test ID	Model Type	Equipment No.	Next Calib.	Last Calib.	Next Verif.	Last Verif.
A 4	BAT-EMC 3.21.0.24 ESCI ESH 2 - Z 5 N-4000-BNC ESH 3 - Z 2	01-02/68-13-001 02-02/03-15-001 02-02/20-05-004 02-02/50-05-138 02-02/50-05-155	21/06/2022 31/10/2022 13/11/2022	21/06/2021 31/10/2019 13/11/2019	19/04/2022 12/04/2022	19/10/2021 12/10/2021
CPC 3	ESW26 minibend KR-16 EA-PS 3032-05 B	02-02/03-17-002 02-02/50-16-014 02-02/50-20-008	10/02/2022	10/02/2021		
CPC 3	ESW26 minibend KR-16	02-02/03-17-002 02-02/50-16-017	10/02/2023	10/02/2022		
CPR 3	FSW43 AMF-6D-01002000-22-10P 3117 BAM 4.5-P NCD KK-SF106-2X11N-6,5M EA-PS 3032-05 B 18N-20 BAT-EMC 3.21.0.24	02-02/11-15-001 02-02/17-15-004 02-02/24-05-009 02-02/50-17-024 02-02/50-17-025 02-02/50-18-016 02-02/50-20-008 02-02/50-21-009 02-02/68-13-001	06/04/2022 28/06/2022	06/04/2021 28/06/2021		
MB	FSW43 Spectrum Analyser WK-340/40 KK-SF104-11SMA-11N-2M minibend KR-16	02-02/11-15-001 02-02/45-05-001 02-02/50-14-003 02-02/50-16-014	06/04/2022 05/08/2022	06/04/2021 05/08/2021		
SER 2	FSP 30 Spectrum Analyser VULB 9168 NW-2000-NB KK-EF393/U-16N-21N20 m KK-SD_7/8-2X21N-33,0M EA-PS 3032-05 B 50F-003 N 3 dB	02-02/11-05-001 02-02/24-05-005 02-02/50-05-113 02-02/50-12-018 02-02/50-15-028 02-02/50-20-008 02-02/50-21-010	20/12/2022	20/12/2021	07/07/2022	07/07/2021
SER 3	FSW43 AMF-6D-01002000-22-10P LNA-40-18004000-33-5P 3117 BBHA 9170 WHKX 7.5/18G-8SS BAM 4.5-P NCD KK-SF106-2X11N-6,5M EA-PS 3032-05 B KMS116-GL140SE-KMS116 BAT-EMC 3.21.0.24	02-02/11-15-001 02-02/17-15-004 02-02/17-20-002 02-02/24-05-009 02-02/24-05-013 02-02/50-07-010 02-02/50-17-024 02-02/50-17-025 02-02/50-18-016 02-02/50-20-008 02-02/50-20-026 02-02/68-13-001	06/04/2022 28/06/2022 19/05/2023	06/04/2021 28/06/2021 19/05/2020	04/02/2022	04/02/2021