



Shenzhen Huaxia Testing Technology Co., Ltd

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua District, Shenzhen, China

Telephone: +86-755-26648640
Fax: +86-755-26648637
Website: www.cqa-cert.com

Report Template Version: V04
Report Template Revision Date: 2018-07-06

Test Report

Report No.: CQASZ20210901593E-02
Applicant: Shenzhen DO Intelligent Technology Co., Ltd
Address of Applicant: 11th Floor, 3# Building, Guole Tech Park, Lirong Road, Dalang, Longhua District, Shenzhen, China
Equipment Under Test (EUT):
Product: Smart Watch
Model No.: GT01 Pro
Test Model No.: GT01 Pro
Brand Name: IDO
FCC ID: 2AHFT439
Standards: 47 CFR Part 15, Subpart C
Date of Receipt: 2021-09-14
Date of Test: 2021-09-14 to 2021-10-15
Date of Issue: 2021-11-01
Test Result: **PASS***

*In the configuration tested, the EUT complied with the standards specified above

Tested By: _____

Lewis Zhou

(Lewis Zhou)

Reviewed By: _____

Rock Huang

(Rock Huang)

Approved By: _____

Jack ai

(Jack ai)



1 Version

Revision History Of Report

Report No.	Version	Description	Issue Date
CQASZ20210901593E-02	Rev.01	Initial report	2021-11-01

2 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15, Subpart C Section 15.203/15.247 (c)	ANSI C63.10 2013	PASS
AC Power Line Conducted Emission	47 CFR Part 15, Subpart C Section 15.207	ANSI C63.10 2013	PASS
Conducted Peak Output Power	47 CFR Part 15, Subpart C Section 15.247 (b)(3)	ANSI C63.10 2013	PASS
6dB Occupied Bandwidth	47 CFR Part 15, Subpart C Section 15.247 (a)(2)	ANSI C63.10 2013	PASS
Power Spectral Density	47 CFR Part 15, Subpart C Section 15.247 (e)	ANSI C63.10 2013	PASS
Band-edge for RF Conducted Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 2013	PASS
RF Conducted Spurious Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 2013	PASS
Radiated Spurious Emissions	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 2013	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 2013	PASS

N/A: The EUT powered by DC, So Not Applicable

3 Contents

	Page
1 VERSION	2
2 TEST SUMMARY	3
3 CONTENTS	4
4 GENERAL INFORMATION	4
4.1 CLIENT INFORMATION.....	5
4.2 GENERAL DESCRIPTION OF EUT.....	5
4.3 ADDITIONAL INSTRUCTIONS.....	7
4.4 TEST ENVIRONMENT.....	8
4.5 DESCRIPTION OF SUPPORT UNITS.....	8
4.6 STATEMENT OF THE MEASUREMENT UNCERTAINTY.....	9
4.7 TEST LOCATION.....	10
4.8 TEST FACILITY.....	10
4.9 DEVIATION FROM STANDARDS.....	10
4.10 OTHER INFORMATION REQUESTED BY THE CUSTOMER.....	10
4.11 EQUIPMENT LIST.....	11
5 TEST RESULTS AND MEASUREMENT DATA	12
5.1 ANTENNA REQUIREMENT.....	12
5.2 CONDUCTED EMISSIONS.....	13
5.3 APPENDIX A: DTS BANDWIDTH.....	20
5.3.1 Test Result.....	20
5.3.2 Test Graphs.....	21
5.4 APPENDIX B: OCCUPIED CHANNEL BANDWIDTH.....	24
5.4.1 Test Result.....	24
5.4.2 Test Graphs.....	25
5.5 APPENDIX C: MAXIMUM CONDUCTED OUTPUT POWER.....	28
5.5.1 Test Result.....	28
5.5.2 Test Graphs.....	29
5.6 APPENDIX D: MAXIMUM POWER SPECTRAL DENSITY.....	32
5.6.1 Test Result.....	32
5.6.2 Test Graphs.....	33
5.7 APPENDIX E: BAND EDGE MEASUREMENTS.....	36
5.7.1 Test Result.....	36
5.7.2 Test Graphs.....	37
5.8 APPENDIX F: CONDUCTED SPURIOUS EMISSION.....	39
5.8.1 Test Result.....	39
5.8.2 Test Graphs.....	40
5.9 RADIATED SPURIOUS EMISSION & RESTRICTED BANDS.....	49
5.9.1 Spurious Emissions.....	49
6 PHOTOGRAPHS - EUT TEST SETUP	58
6.1 RADIATED SPURIOUS EMISSION.....	58
7 PHOTOGRAPHS - EUT CONSTRUCTIONAL DETAILS	60

4 General Information

4.1 Client Information

Applicant:	Shenzhen DO Intelligent Technology Co., Ltd
Address of Applicant:	11th Floor, 3# Building, Guole Tech Park, Lirong Road, Dalang, Longhua District, Shenzhen, China
Manufacturer:	Shenzhen DO Intelligent Technology Co., Ltd
Address of Manufacturer:	11th Floor, 3# Building, Guole Tech Park, Lirong Road, Dalang, Longhua District, Shenzhen, China
Factory:	Shenzhen DO Intelligent Technology Co., Ltd
Address of Factory:	11th Floor, 3# Building, Guole Tech Park, Lirong Road, Dalang, Longhua District, Shenzhen, China

4.2 General Description of EUT

Product Name:	Smart Watch
Model No.:	GT01 Pro
Test Model No.:	GT01 Pro
Trade Mark:	IDO
Hardware Version:	V1.4
Software Version:	V1.01.02
Operation Frequency:	2402MHz~2480MHz
Bluetooth Version:	BT5.1
Modulation Type:	GFSK
Transfer Rate:	1Mbps, 2Mbps
Number of Channel:	40
Product Type:	<input type="checkbox"/> Mobile <input checked="" type="checkbox"/> Portable <input type="checkbox"/> Fix Location
Test Software of EUT:	Signaling fixed frequency
Antenna Type:	FPC antenna
Antenna Gain:	-2.7 dBi
EUT Power Supply:	Li-ion battery: DC 3.85V 300mAh, Charge by DC 5V for adapter

Note:

The difference between 1# prototype and 2# prototype is only the display supplier

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
0	2402MHz	10	2422MHz	20	2442MHz	30	2462MHz
1	2404MHz	11	2424MHz	21	2444MHz	31	2464MHz
2	2406MHz	12	2426MHz	22	2446MHz	32	2466MHz
3	2408MHz	13	2428MHz	23	2448MHz	33	2468MHz
4	2410MHz	14	2430MHz	24	2450MHz	34	2470MHz
5	2412MHz	15	2432MHz	25	2452MHz	35	2472MHz
6	2414MHz	16	2434MHz	26	2454MHz	36	2474MHz
7	2416MHz	17	2436MHz	27	2456MHz	37	2476MHz
8	2418MHz	18	2438MHz	28	2458MHz	38	2478MHz
9	2420MHz	19	2440MHz	29	2460MHz	39	2480MHz

Note:


In section 15.31(m), regards to the operating frequency range over 10 MHz, the lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The lowest channel (CH0)	2402MHz
The middle channel (CH19)	2440MHz
The highest channel (CH39)	2480MHz

4.3 Additional Instructions

EUT Test Software Settings:		
Mode:	<input checked="" type="checkbox"/> Special software is used. <input type="checkbox"/> Through engineering command into the engineering mode. engineering command: <code>*##3646633##*</code>	
EUT Power level:	Class2 (Power level is built-in set parameters and cannot be changed and selected)	
Use test software to set the lowest frequency, the middle frequency and the highest frequency keep transmitting of the EUT.		
Mode	Channel	Frequency(MHz)
GFSK	CH0	2402
	CH19	2440
	CH39	2480

Run Software:

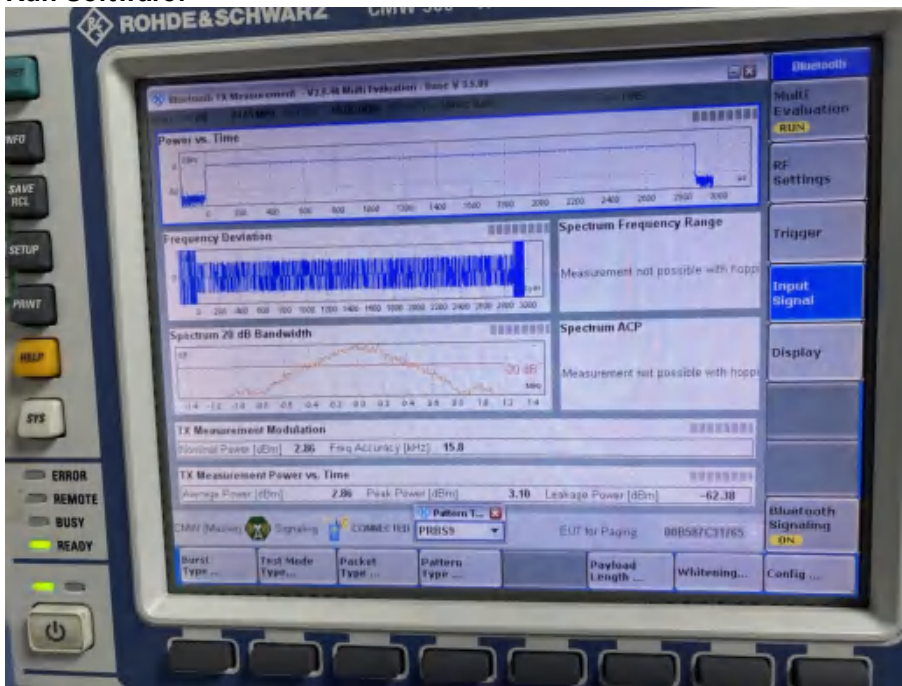

4.4 Test Environment

Operating Environment:	
Radiated Emissions:	
Temperature:	25.3 °C
Humidity:	55 % RH
Atmospheric Pressure:	1009 mbar
Radio conducted item test (RF Conducted test room):	
Temperature:	25.4 °C
Humidity:	53 % RH
Atmospheric Pressure:	1009 mbar
Test mode:	
Test Mode:	Use test software to set the lowest frequency, the middle frequency and the highest frequency keep transmitting of the EUT. Note: In the process of transmitting of EUT, the duty cycle >98%.

4.5 Description of Support Units

The EUT has been tested with associated equipment below.

1) Support equipment

Description	Manufacturer	Model No.	Certification	Supplied by
Comprehensive tester	R&S	CMW500	/	/

2) Cable

Cable No.	Description	Manufacturer	Cable Type/Length	Supplied by
/	/	/	/	/

4.6 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate.

The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities.

The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the **Shenzhen Huaxia Testing Technology Co., Ltd.** quality system acc. to DIN EN ISO/IEC 17025.

Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CQA laboratory is reported:

No.	Item	Uncertainty	Notes
1	Radiated Emission (Below 1GHz)	5.12dB	(1)
2	Radiated Emission (Above 1GHz)	4.60dB	(1)
3	Conducted Disturbance (0.15~30MHz)	3.34dB	(1)
4	Radio Frequency	3×10^{-8}	(1)
5	Duty cycle	0.6 %.	(1)
6	Occupied Bandwidth	1.1%	(1)
7	RF conducted power	0.86dB	(1)
8	RF power density	0.74	(1)
9	Conducted Spurious emissions	0.86dB	(1)
10	Temperature test	0.8°C	(1)
11	Humidity test	2.0%	(1)
12	Supply voltages	0.5 %.	(1)
13	Frequency Error	5.5 Hz	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

4.7 Test Location

Shenzhen Huaxia Testing Technology Co., Ltd,

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua District, Shenzhen, China

4.8 Test Facility

- **A2LA (Certificate No. 4742.01)**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 4742.01.

- **FCC Registration No.: 522263**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.:522263

4.9 Deviation from Standards

None.

4.10 Other Information Requested by the Customer

None.

4.11 Equipment List


Test Equipment	Manufacturer	Model No.	Instrument No.	Calibration Date	Calibration Due Date
EMI Test Receiver	R&S	ESR7	CQA-005	2021/9/10	2022/9/9
Spectrum analyzer	R&S	FSU26	CQA-038	2021/9/10	2022/9/9
Preamplifier	MITEQ	AMF-6D-02001800-29-20P	CQA-036	2021/9/10	2022/9/9
Loop antenna	Schwarzbeck	FMZB1516	CQA-060	2021/9/16	2024/9/15
Bilog Antenna	R&S	HL562	CQA-011	2021/9/16	2024/9/15
Horn Antenna	R&S	HF906	CQA-012	2021/9/16	2024/9/15
Horn Antenna	Schwarzbeck	BBHA 9170	CQA-088	2021/9/16	2024/9/15
Coaxial Cable (Above 1GHz)	CQA	N/A	C007	2021/9/10	2022/9/9
Coaxial Cable (Below 1GHz)	CQA	N/A	C013	2021/9/10	2022/9/9
Antenna Connector	CQA	RFC-01	CQA-080	2021/9/10	2022/9/9
RF cable(9KHz~40GHz)	CQA	RF-01	CQA-079	2021/9/10	2022/9/9
Power divider	MIDWEST	PWD-2533-02-SMA-79	CQA-067	2021/9/10	2022/9/9

Note:

The temporary antenna connector is soldered on the pcb board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.


5 Test results and Measurement Data

5.1 Antenna Requirement

<p>Standard requirement:</p>	<p>47 CFR Part 15C Section 15.203 /247(c)</p>
<p>15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p> <p>15.247(b) (4) requirement: The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.</p>	
<p>EUT Antenna:</p>	
<p>The antenna is FPC antenna. The best case gain of the antenna is -2.7 dBi.</p>	

5.2 Conducted Emissions


Test Requirement:	47 CFR Part 15C Section 15.207		
Test Method:	ANSI C63.10: 2013		
Test Frequency Range:	150kHz to 30MHz		
Limit:	Frequency range (MHz)	Limit (dBuV)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
* Decreases with the logarithm of the frequency.			
Test Procedure:	<ol style="list-style-type: none"> 1) The mains terminal disturbance voltage test was conducted in a shielded room. 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50Ω/50μH + 5Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded. 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2. 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement. 		
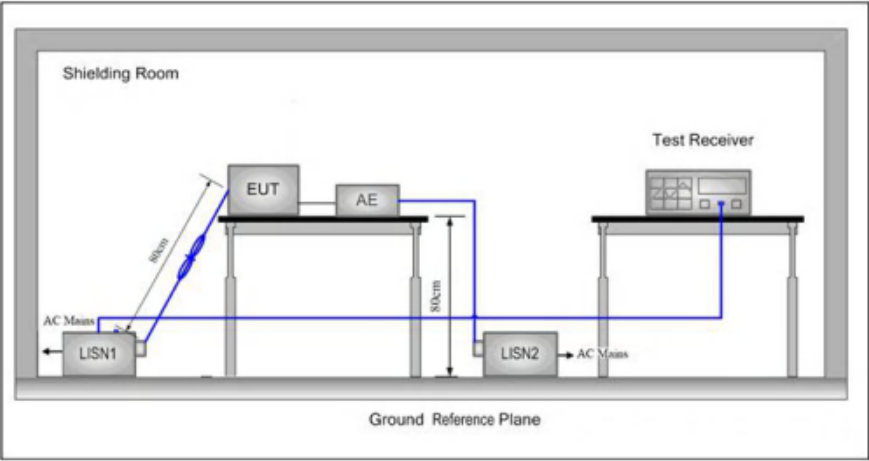
<p>Test Setup:</p>	
<p>Test Mode:</p>	<p>Charging mode</p>
<p>Test Voltage:</p>	<p>AC 120V/60Hz</p>
<p>Test Results:</p>	<p>Pass</p>

1#

Measurement Data

Live line:

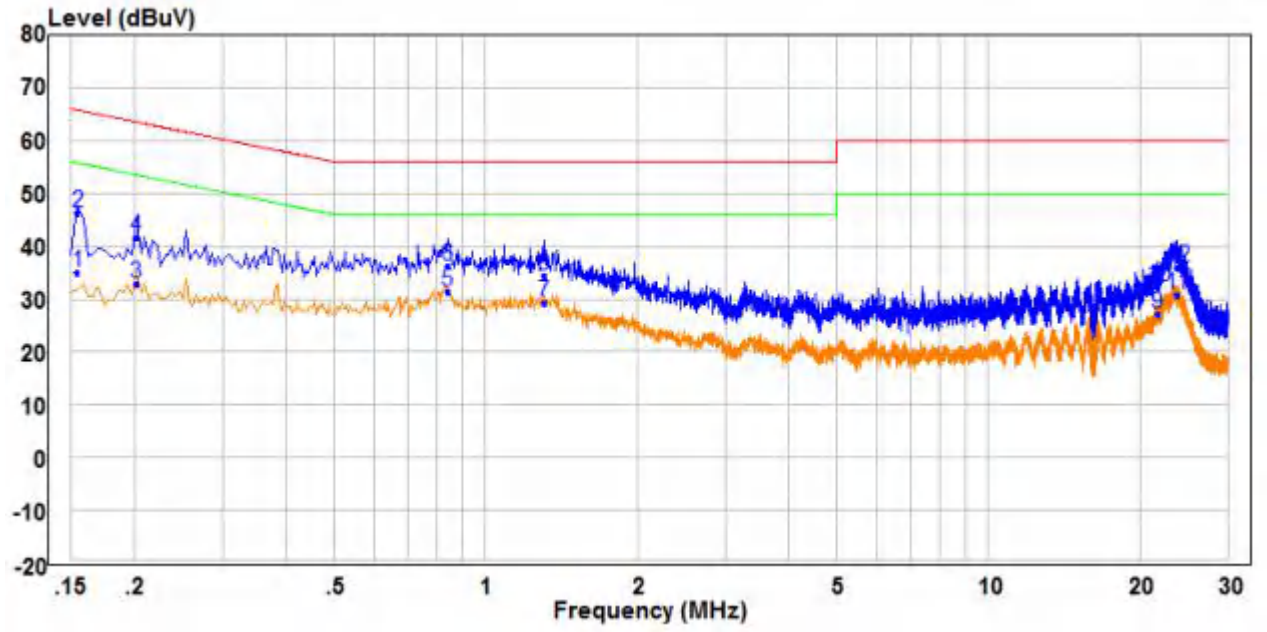


	Read Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark	Pol/Phase
	MHz	dBuV	dB	dBuV	dBuV	dB		
1	0.154	25.54	9.49	35.03	55.78	-20.75	Average	Line
2	QP 0.154	36.72	9.49	46.21	65.78	-19.57	QP	Line
3	0.202	23.44	9.49	32.93	53.53	-20.60	Average	Line
4	0.202	32.22	9.49	41.71	63.53	-21.82	QP	Line
5	PP 0.842	21.80	9.71	31.51	46.00	-14.49	Average	Line
6	0.842	26.54	9.71	36.25	56.00	-19.75	QP	Line
7	1.306	19.59	9.53	29.12	46.00	-16.88	Average	Line
8	1.306	24.80	9.53	34.33	56.00	-21.67	QP	Line
9	21.737	17.10	10.07	27.17	50.00	-22.83	Average	Line
10	21.737	22.31	10.07	32.38	60.00	-27.62	QP	Line
11	23.752	20.84	10.05	30.89	50.00	-19.11	Average	Line
12	23.752	25.96	10.05	36.01	60.00	-23.99	QP	Line

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

Neutral line:

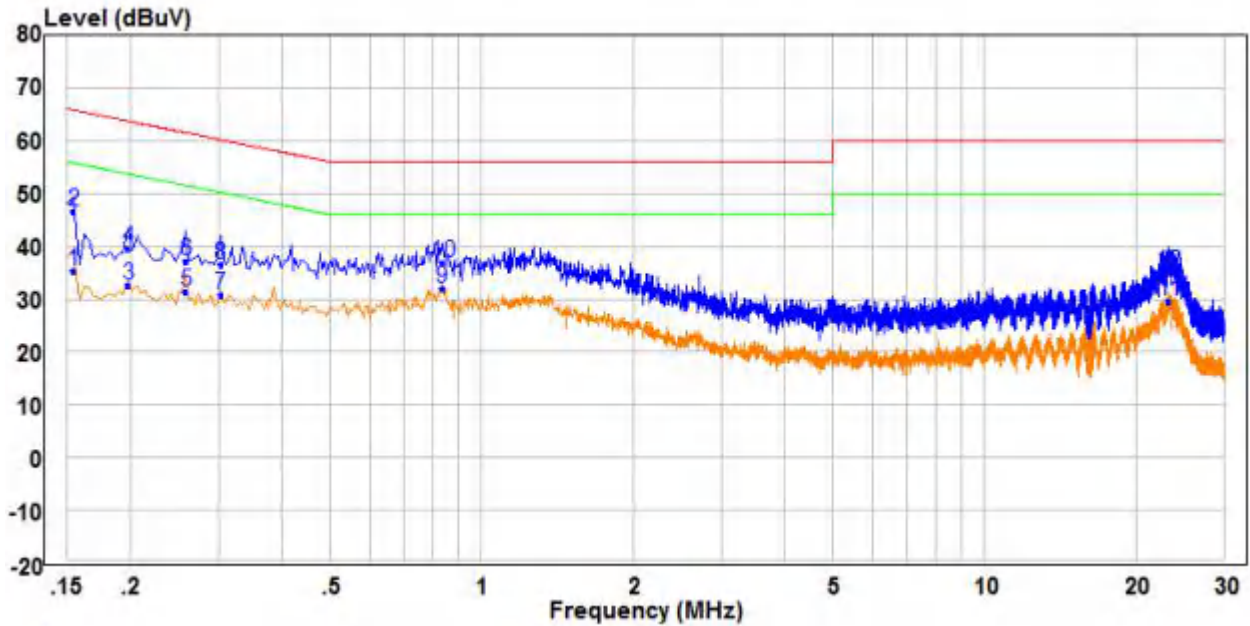

	Read Freq	Read Level	Factor	Limit Level	Over Limit	Remark	Pol/Phase
	MHz	dBuV	dB	dBuV	dB		
1	0.154	25.96	9.48	35.44	55.78	-20.34 Average	Neutral
2	0.154	36.98	9.48	46.46	65.78	-19.32 QP	Neutral
3	0.198	22.99	9.48	32.47	53.69	-21.22 Average	Neutral
4	0.198	30.15	9.48	39.63	63.69	-24.06 QP	Neutral
5	0.258	21.89	9.48	31.37	51.50	-20.13 Average	Neutral
6	0.258	27.63	9.48	37.11	61.50	-24.39 QP	Neutral
7	0.302	21.40	9.48	30.88	50.19	-19.31 Average	Neutral
8	0.302	27.14	9.48	36.62	60.19	-23.57 QP	Neutral
9 PP	0.834	22.24	9.78	32.02	46.00	-13.98 Average	Neutral
10 QP	0.834	27.07	9.78	36.85	56.00	-19.15 QP	Neutral
11	23.268	19.51	10.05	29.56	50.00	-20.44 Average	Neutral
12	23.268	25.10	10.05	35.15	60.00	-24.85 QP	Neutral


Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

2#

Measurement Data

Live line:

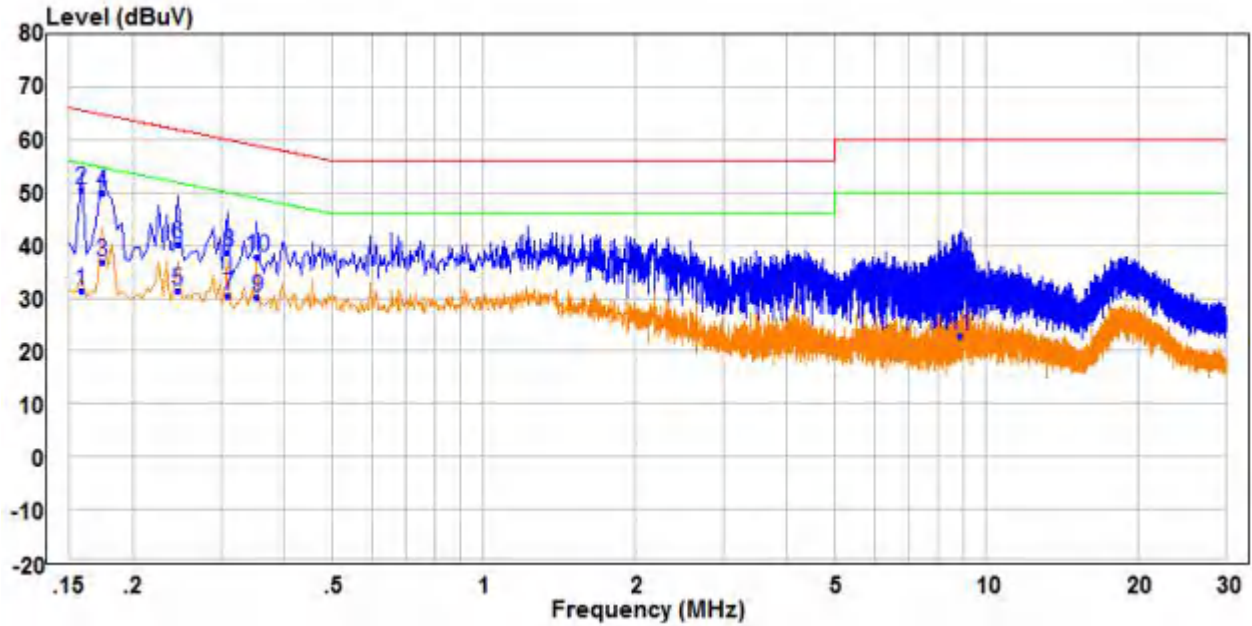


	Read Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark	Pol/Phase	
	MHz	dBuV	dB	dBuV	dBuV	dB			
1	0.158	22.00	9.49	31.49	55.57	-24.08	Average	Line	
2	0.158	40.90	9.49	50.39	65.57	-15.18	QP	Line	
3	AV	0.174	27.43	9.49	36.92	54.77	-17.85	Average	Line
4	PP	0.174	40.44	9.49	49.93	64.77	-14.84	QP	Line
5		0.246	21.99	9.49	31.48	51.89	-20.41	Average	Line
6		0.246	30.77	9.49	40.26	61.89	-21.63	QP	Line
7		0.310	21.10	9.49	30.59	49.97	-19.38	Average	Line
8		0.310	29.19	9.49	38.68	59.97	-21.29	QP	Line
9		0.354	20.71	9.50	30.21	48.87	-18.66	Average	Line
10		0.354	28.34	9.50	37.84	58.87	-21.03	QP	Line
11		8.865	13.03	9.76	22.79	50.00	-27.21	Average	Line
12		8.865	25.11	9.76	34.87	60.00	-25.13	QP	Line

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

Neutral line:

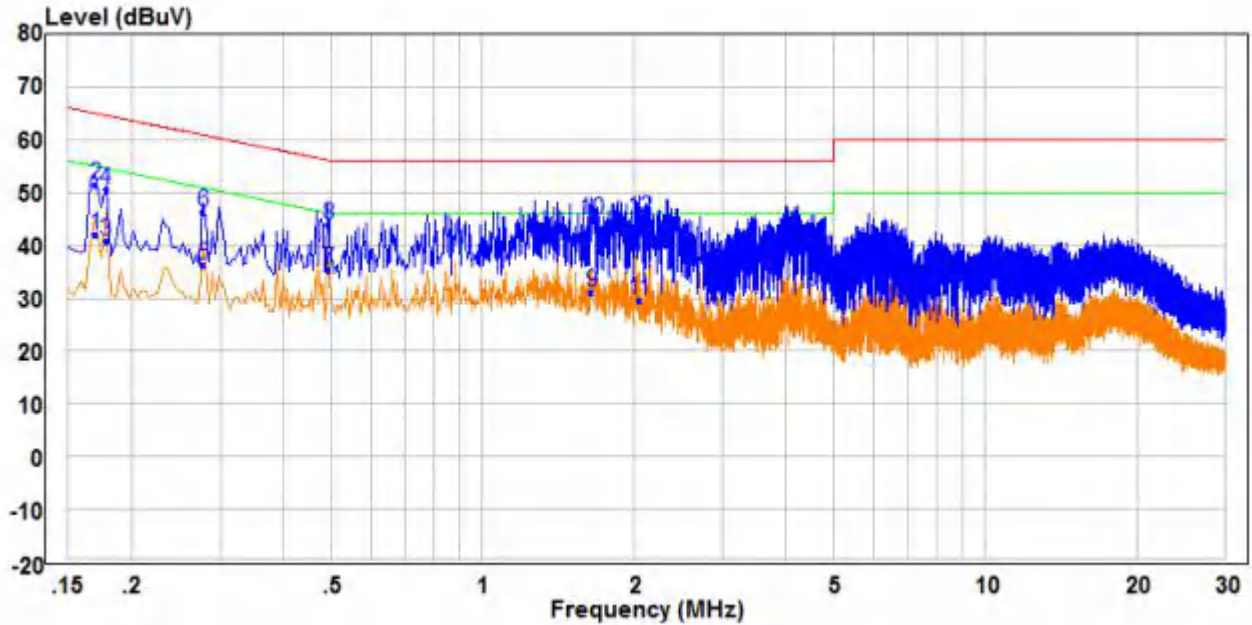

	Read Freq	Read Level	Factor	Limit Level	Over Limit	Remark	Pol/Phase
	MHz	dBuV	dB	dBuV	dB		
1	0.170	32.68	9.48	42.16	54.96	-12.80 Average	Neutral
2	0.170	42.03	9.48	51.51	64.96	-13.45 QP	Neutral
3	0.178	31.33	9.48	40.81	54.58	-13.77 Average	Neutral
4	0.178	40.91	9.48	50.39	64.58	-14.19 QP	Neutral
5	0.278	26.63	9.48	36.11	50.88	-14.77 Average	Neutral
6	0.278	36.65	9.48	46.13	60.88	-14.75 QP	Neutral
7 PP	0.494	25.76	9.59	35.35	46.10	-10.75 Average	Neutral
8	0.494	34.15	9.59	43.74	56.10	-12.36 QP	Neutral
9	1.650	21.31	9.71	31.02	46.00	-14.98 Average	Neutral
10	1.650	35.08	9.71	44.79	56.00	-11.21 QP	Neutral
11	2.050	19.89	9.72	29.61	46.00	-16.39 Average	Neutral
12 QP	2.050	35.25	9.72	44.97	56.00	-11.03 QP	Neutral

Remark:


1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

5.3 Appendix A: DTS Bandwidth


5.3.1 Test Result

TestMode	Antenna	Channel	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_1M	Ant1	2402	0.704	2401.652	2402.356	0.5	PASS
		2440	0.712	2439.648	2440.360	0.5	PASS
		2480	0.708	2479.648	2480.356	0.5	PASS
BLE_2M	Ant1	2402	1.176	2401.420	2402.596	0.5	PASS
		2440	1.164	2439.428	2440.592	0.5	PASS
		2480	1.176	2479.416	2480.592	0.5	PASS

5.3.2 Test Graphs

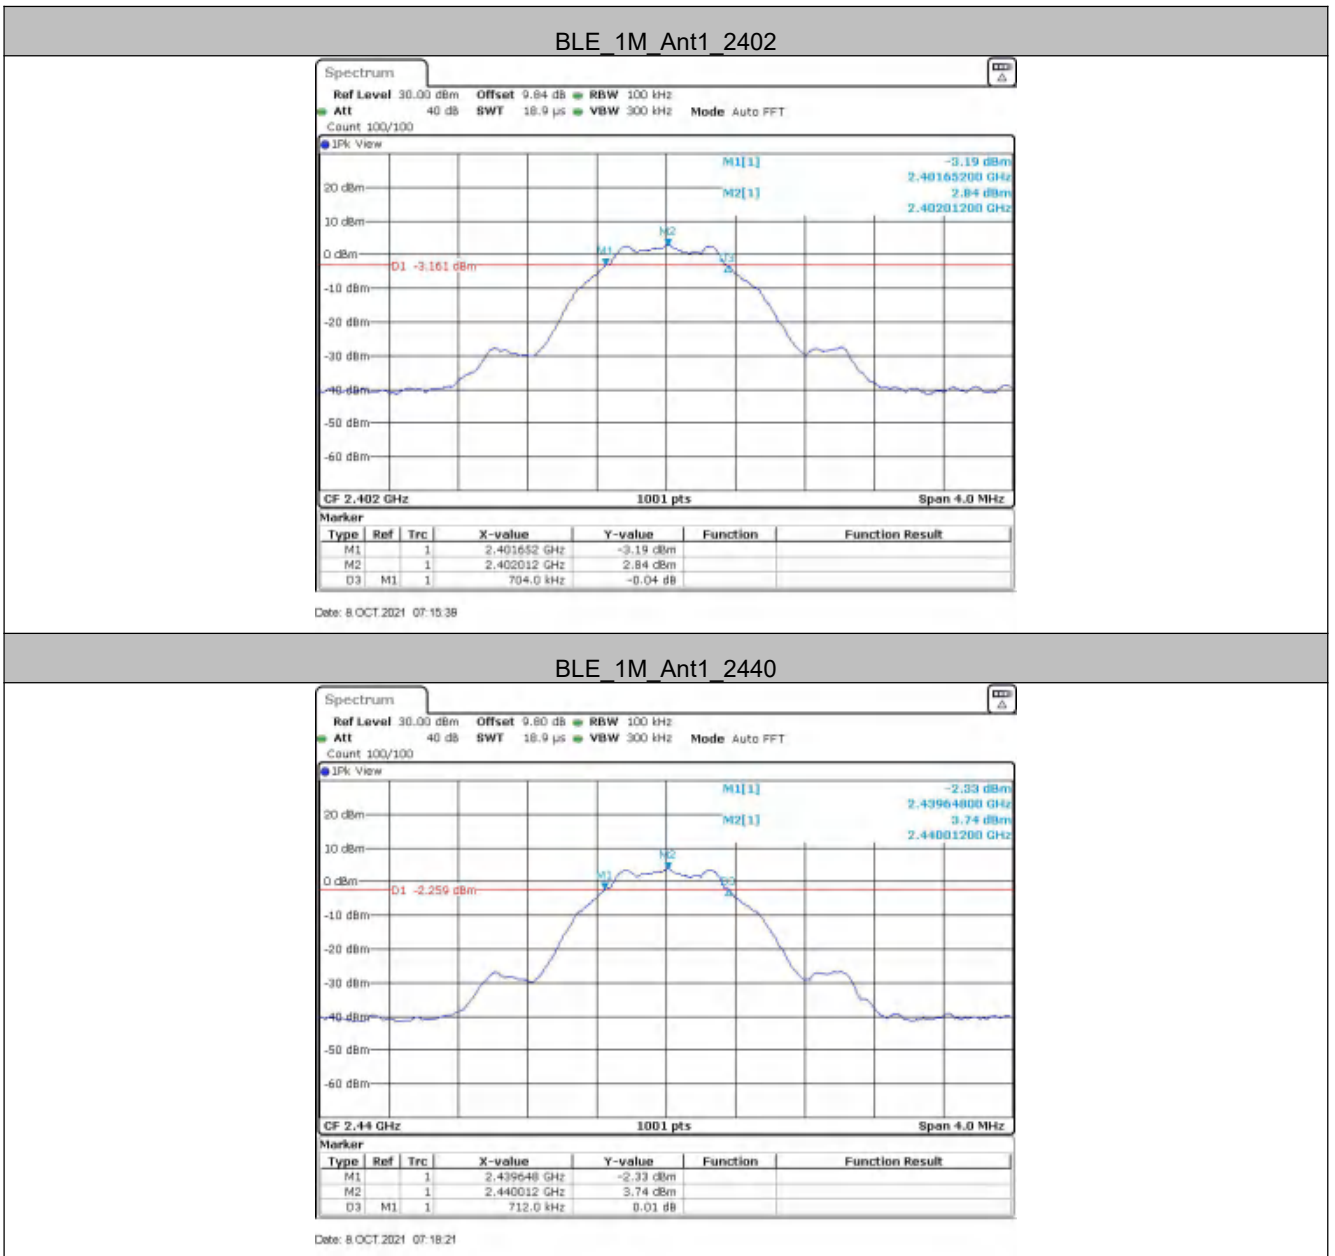


BLE 1M Ant1_2480

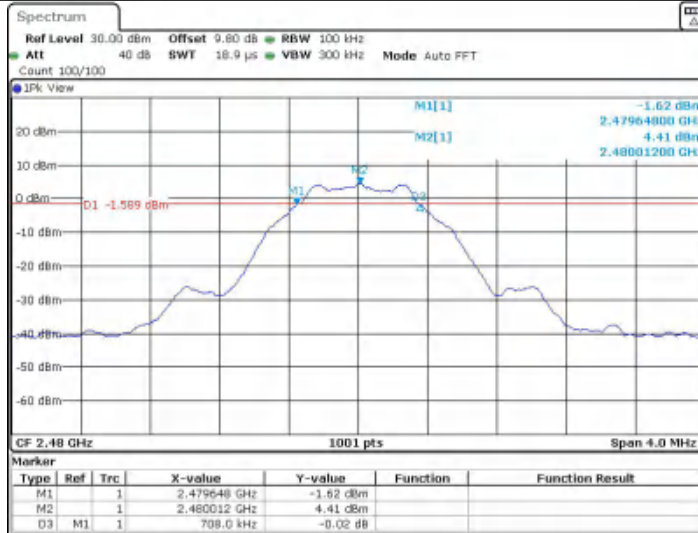


Date: 8.OCT.2021 07:20:02

BLE 2M Ant1_2402

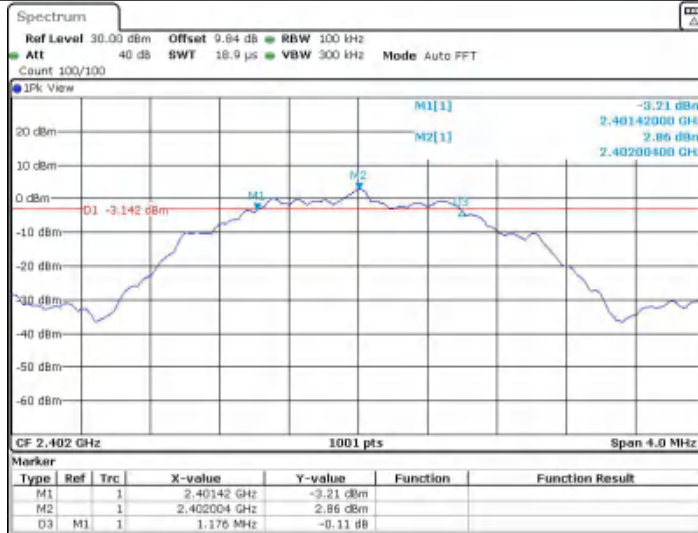


Date: 8.OCT.2021 07:29:52

BLE 2M Ant1_2440

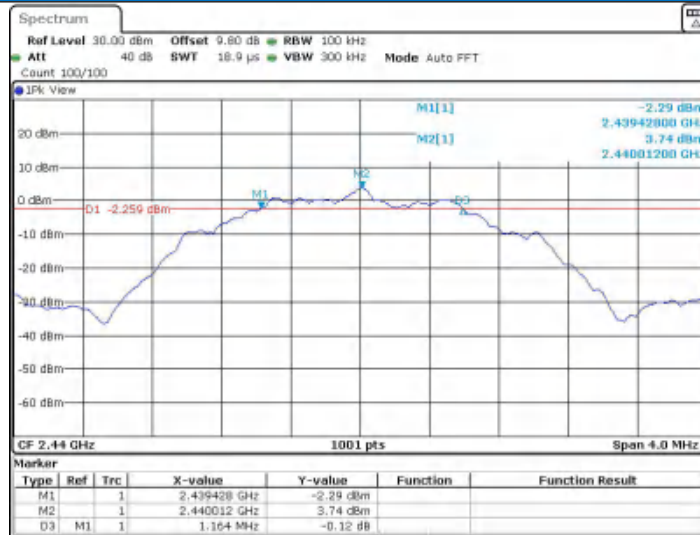

Date: 8 OCT 2021 07:33:03

BLE 2M Ant1_2480

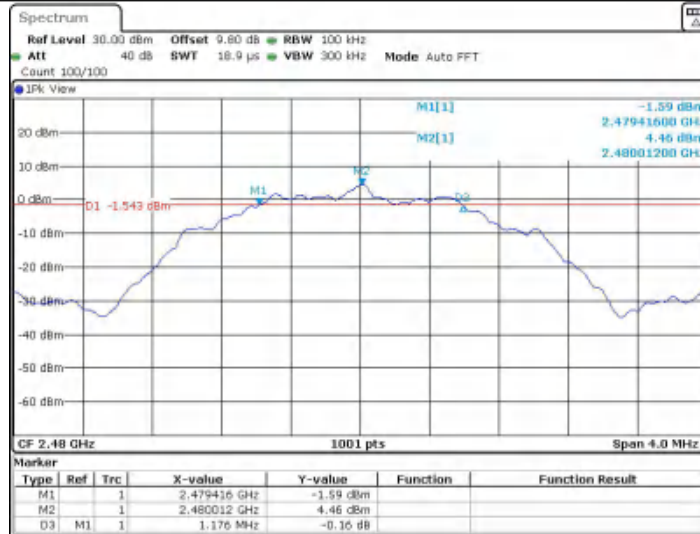


Date: 8 OCT 2021 07:35:03

5.4 Appendix B: Occupied Channel Bandwidth


5.4.1 Test Result

TestMode	Antenna	Channel	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_1M	Ant1	2402	1.027	2401.500	2402.527	---	PASS
		2440	1.027	2439.508	2440.535	---	PASS
		2480	1.031	2479.500	2480.531	---	PASS
BLE_2M	Ant1	2402	2.062	2400.977	2403.039	---	PASS
		2440	2.034	2439.017	2441.051	---	PASS
		2480	1.93	2479.069	2480.999	---	PASS

5.4.2 Test Graphs

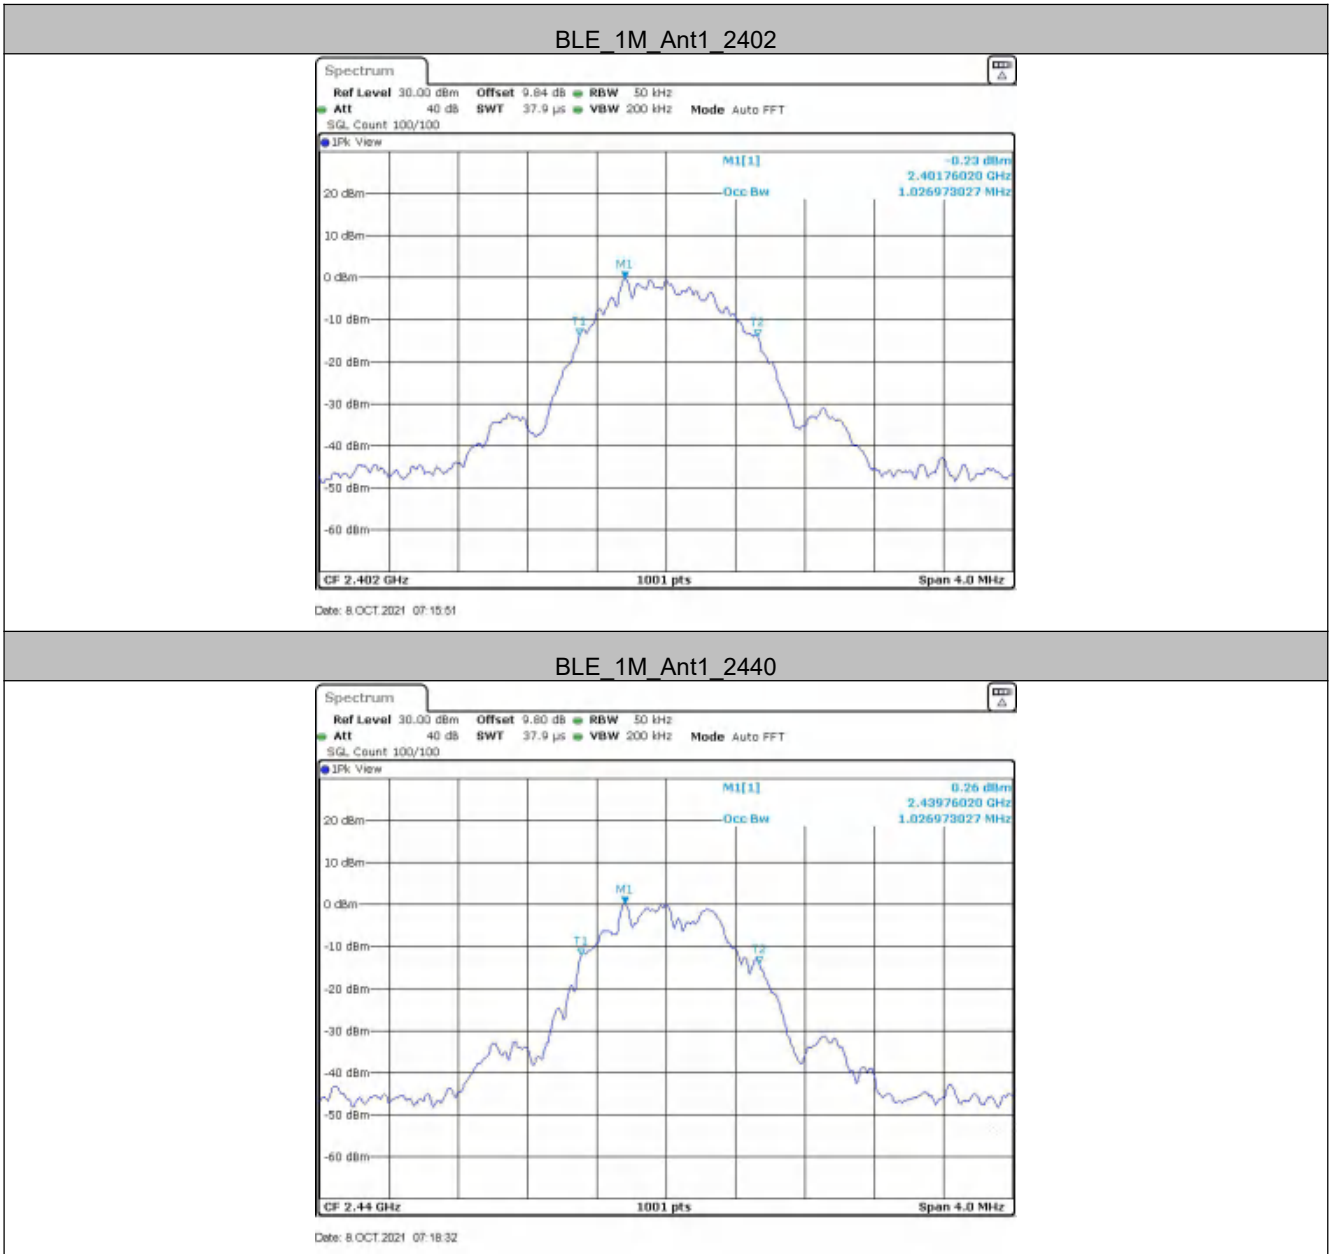


BLE 1M Ant1 2480

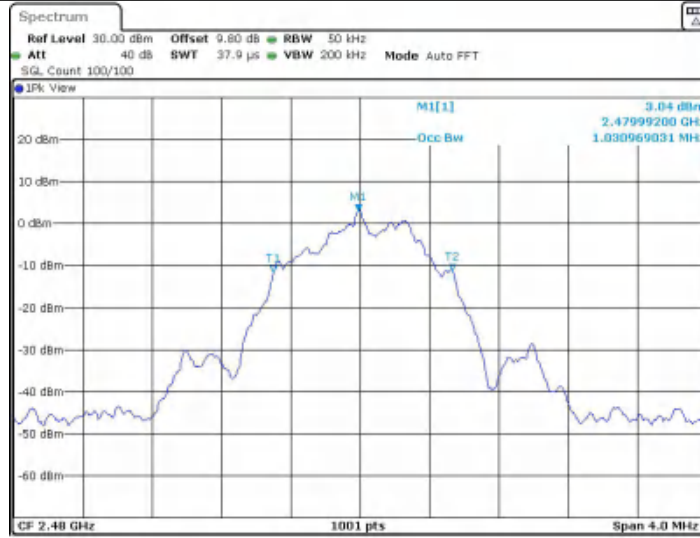


Date: 8.OCT.2021 07:20:13

BLE 2M Ant1 2402

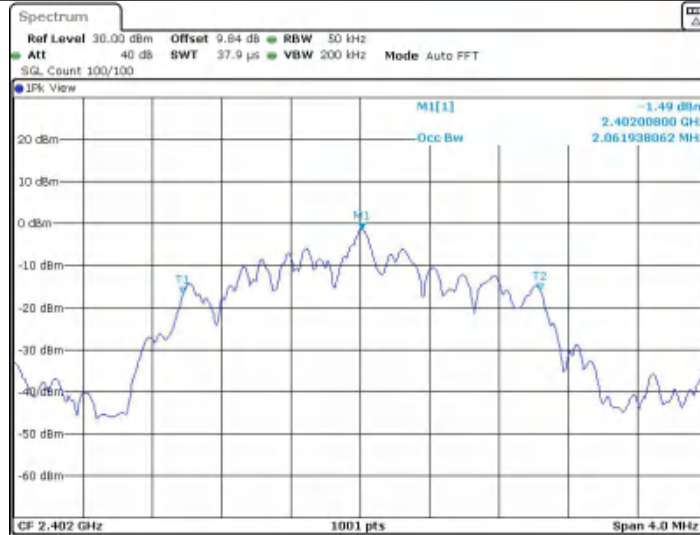


Date: 8.OCT.2021 07:30:03

BLE 2M Ant1 2440

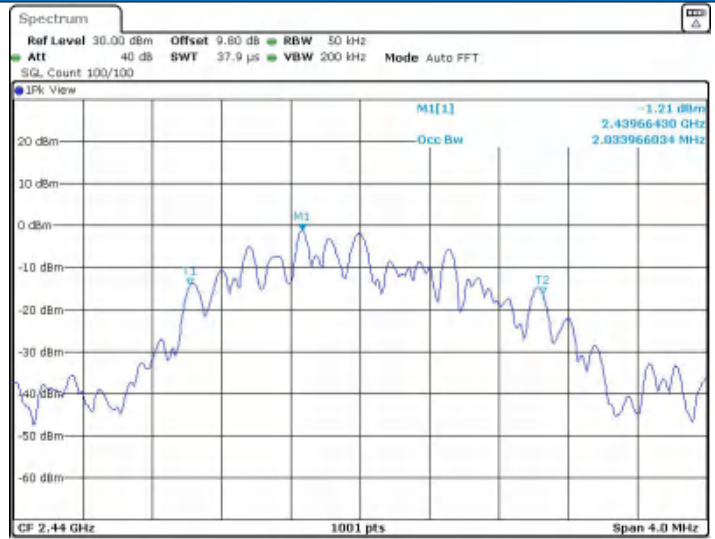

Date: 8.OCT.2021 07:33:14

BLE_2M_Ant1_2480

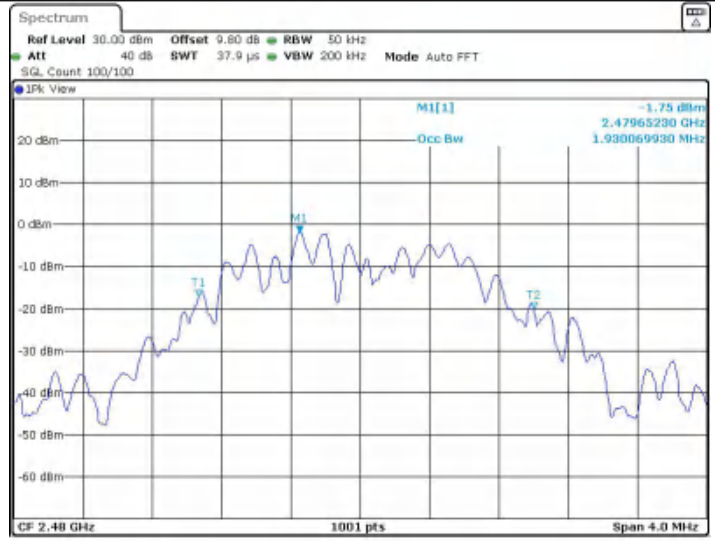


Date: 8.OCT.2021 07:35:14

5.5 Appendix C: Maximum conducted output power


5.5.1 Test Result

TestMode	Antenna	Channel	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	2402	3.56	≤30	PASS
		2440	4.43	≤30	PASS
		2480	5.11	≤30	PASS
BLE_2M	Ant1	2402	3.61	≤30	PASS
		2440	4.44	≤30	PASS
		2480	5.16	≤30	PASS

5.5.2 Test Graphs

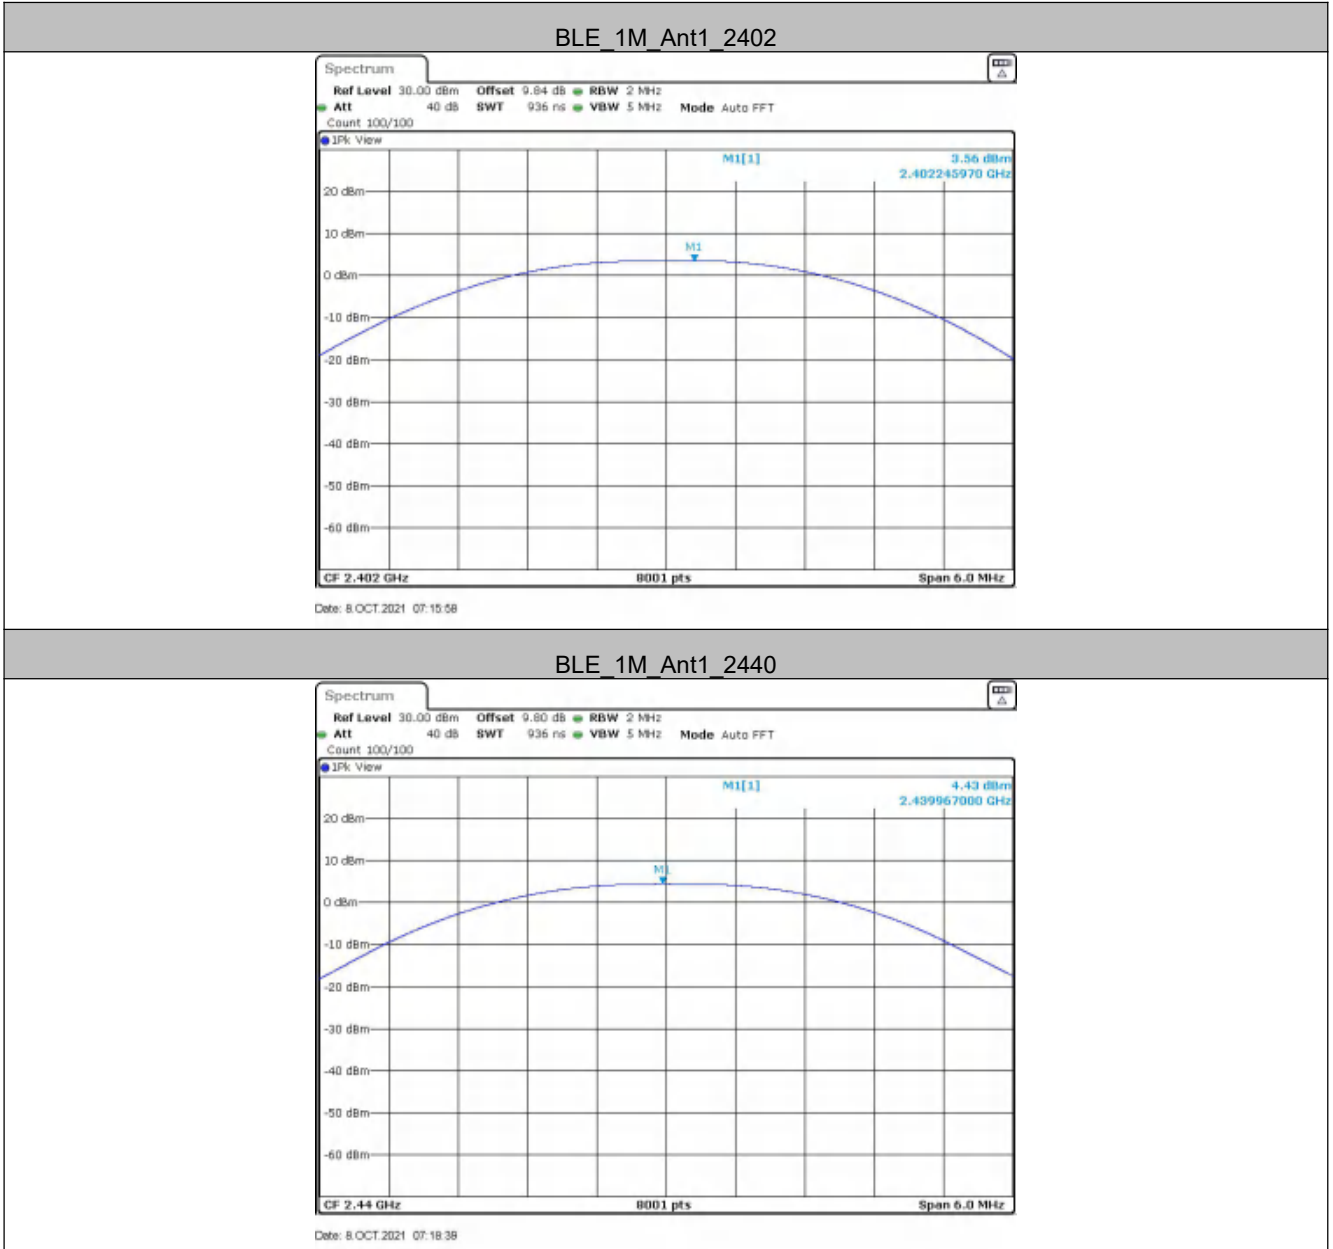


BLE 1M Ant1 2480

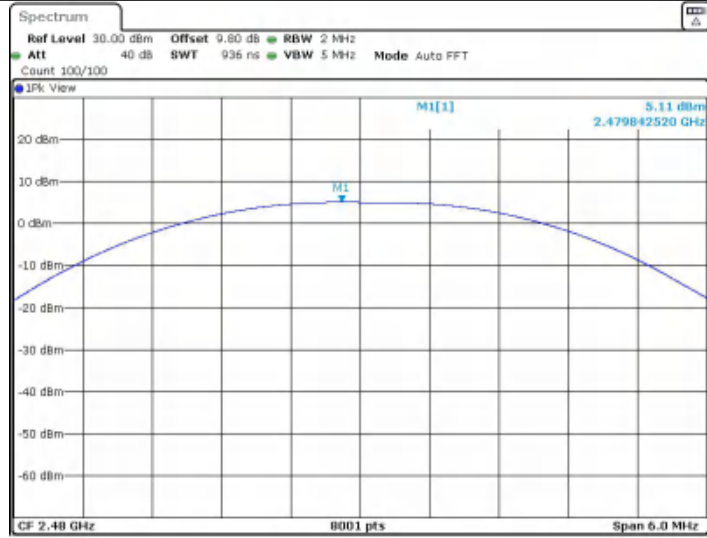


Date: 8.OCT.2021 07:20:20

BLE 2M Ant1 2402

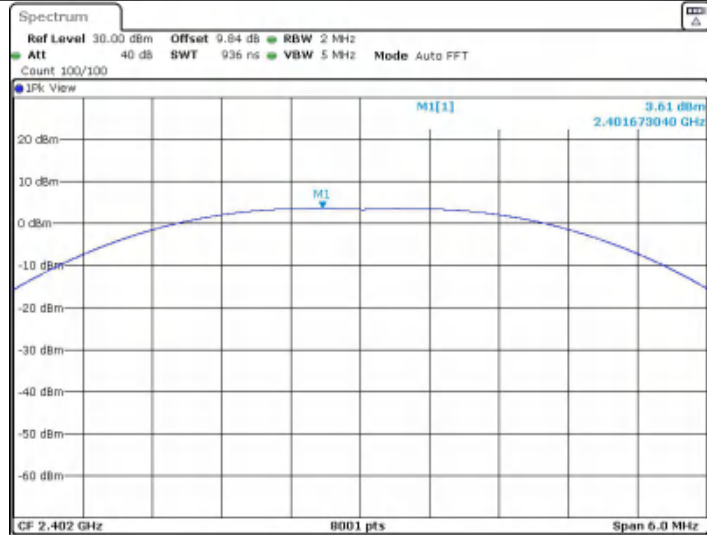


Date: 8.OCT.2021 07:30:10

BLE 2M Ant1 2440

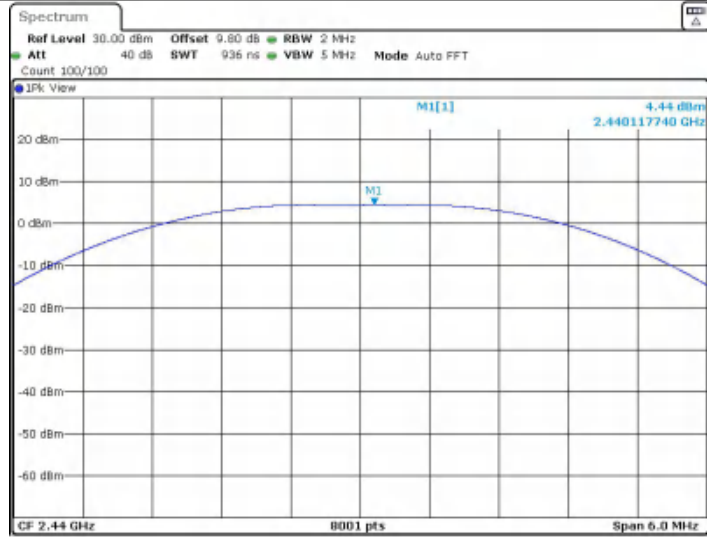

Date: 8 OCT.2021 07:33:21

BLE_2M_Ant1_2480

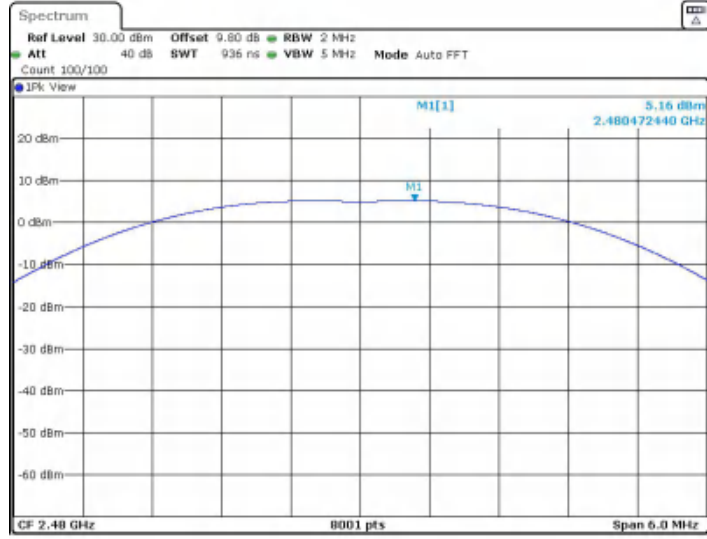


Date: 8 OCT.2021 07:35:21

5.6 Appendix D: Maximum power spectral density


5.6.1 Test Result

TestMode	Antenna	Channel	Result[dBm/3-100kHz]	Limit[dBm/10kHz]	Verdict
BLE_1M	Ant1	2402	-6.54	≤13.2	PASS
		2440	-5.76	≤13.2	PASS
		2480	-5.07	≤13.2	PASS
BLE_2M	Ant1	2402	-9.06	≤13.2	PASS
		2440	-8.02	≤13.2	PASS
		2480	-7.32	≤13.2	PASS


5.6.2 Test Graphs

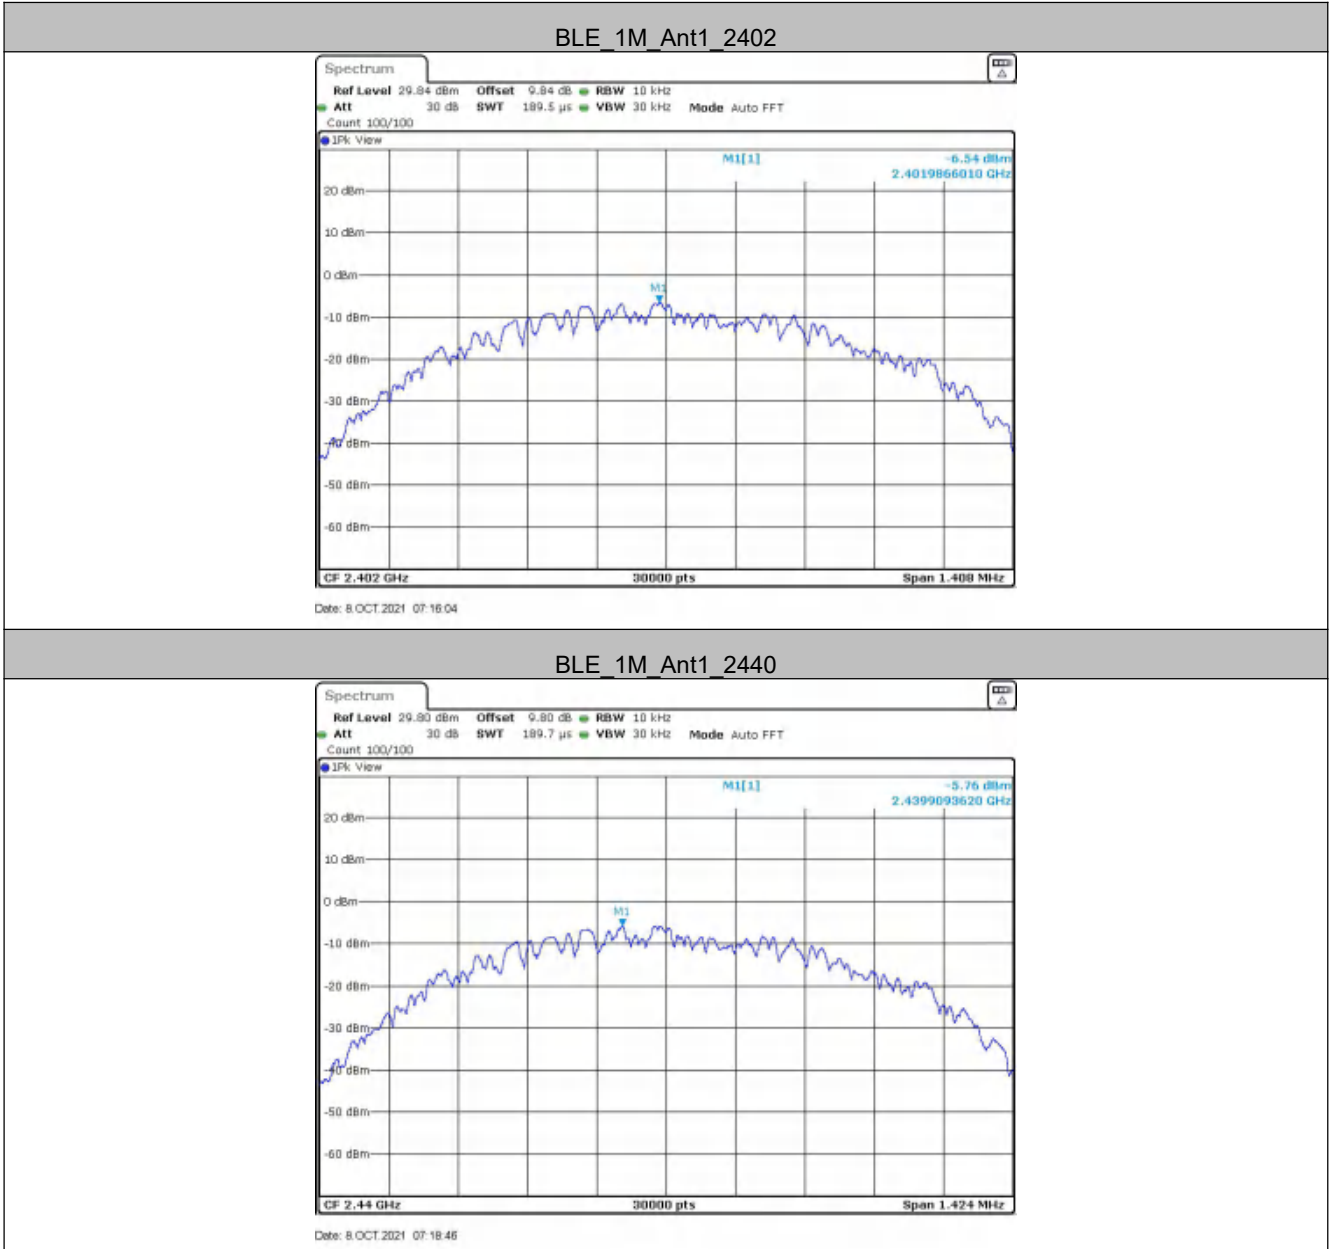


BLE 1M Ant1 2480

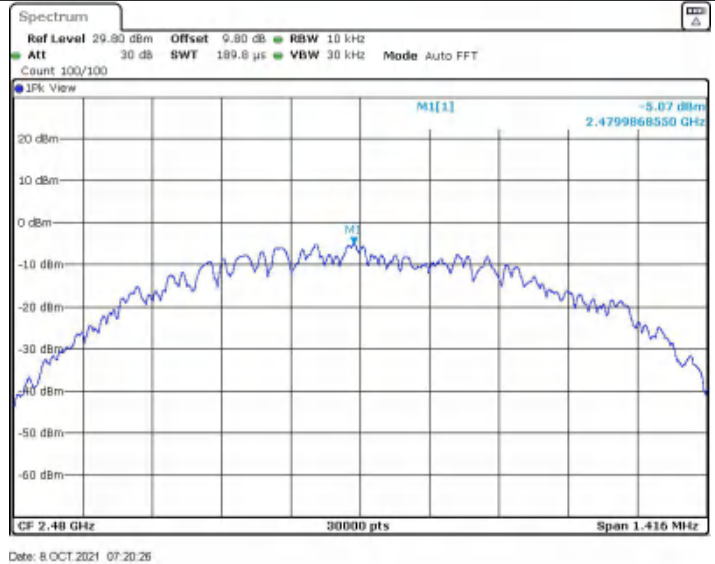

BLE 2M Ant1 2402

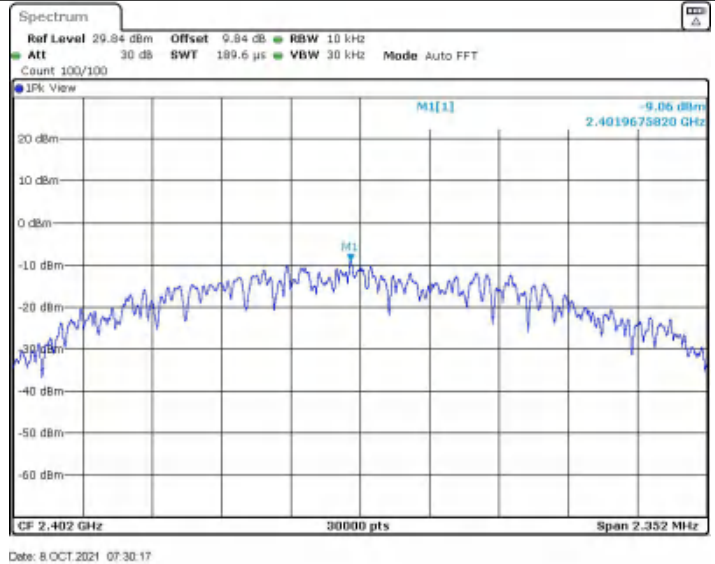


BLE 2M Ant1 2440

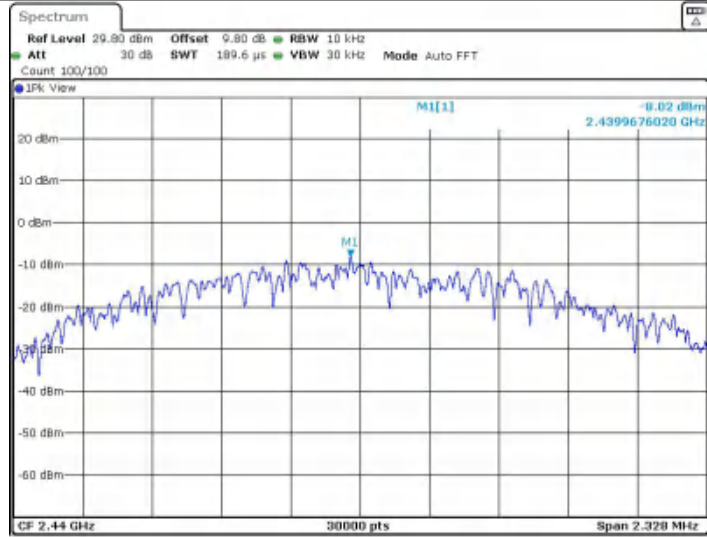

Date: 8 OCT 2021 07:33:28

BLE_2M_Ant1_2480

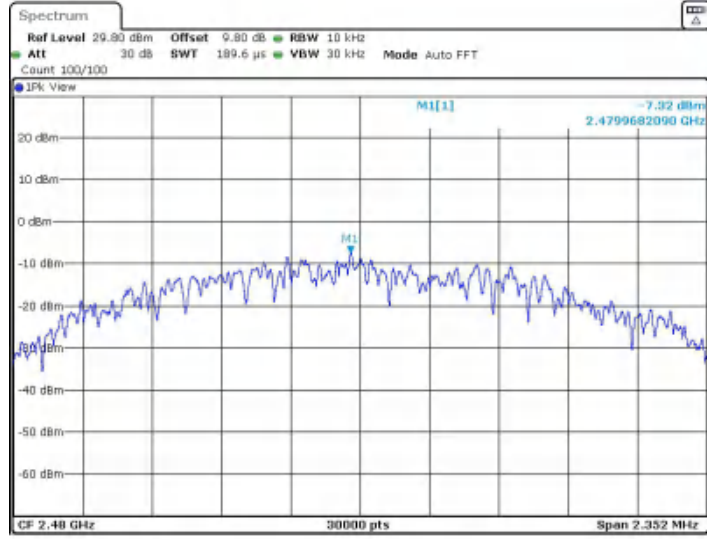


Date: 8 OCT 2021 07:35:28

5.7 Appendix E: Band edge measurements


5.7.1 Test Result

TestMode	Antenna	ChName	Channel	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	Low	2402	2.94	-40.26	≤-17.06	PASS
		High	2480	4.39	-42.92	≤-15.61	PASS
BLE_2M	Ant1	Low	2402	2.81	-30.27	≤-17.19	PASS
		High	2480	4.40	-40.98	≤-15.6	PASS

5.7.2 Test Graphs

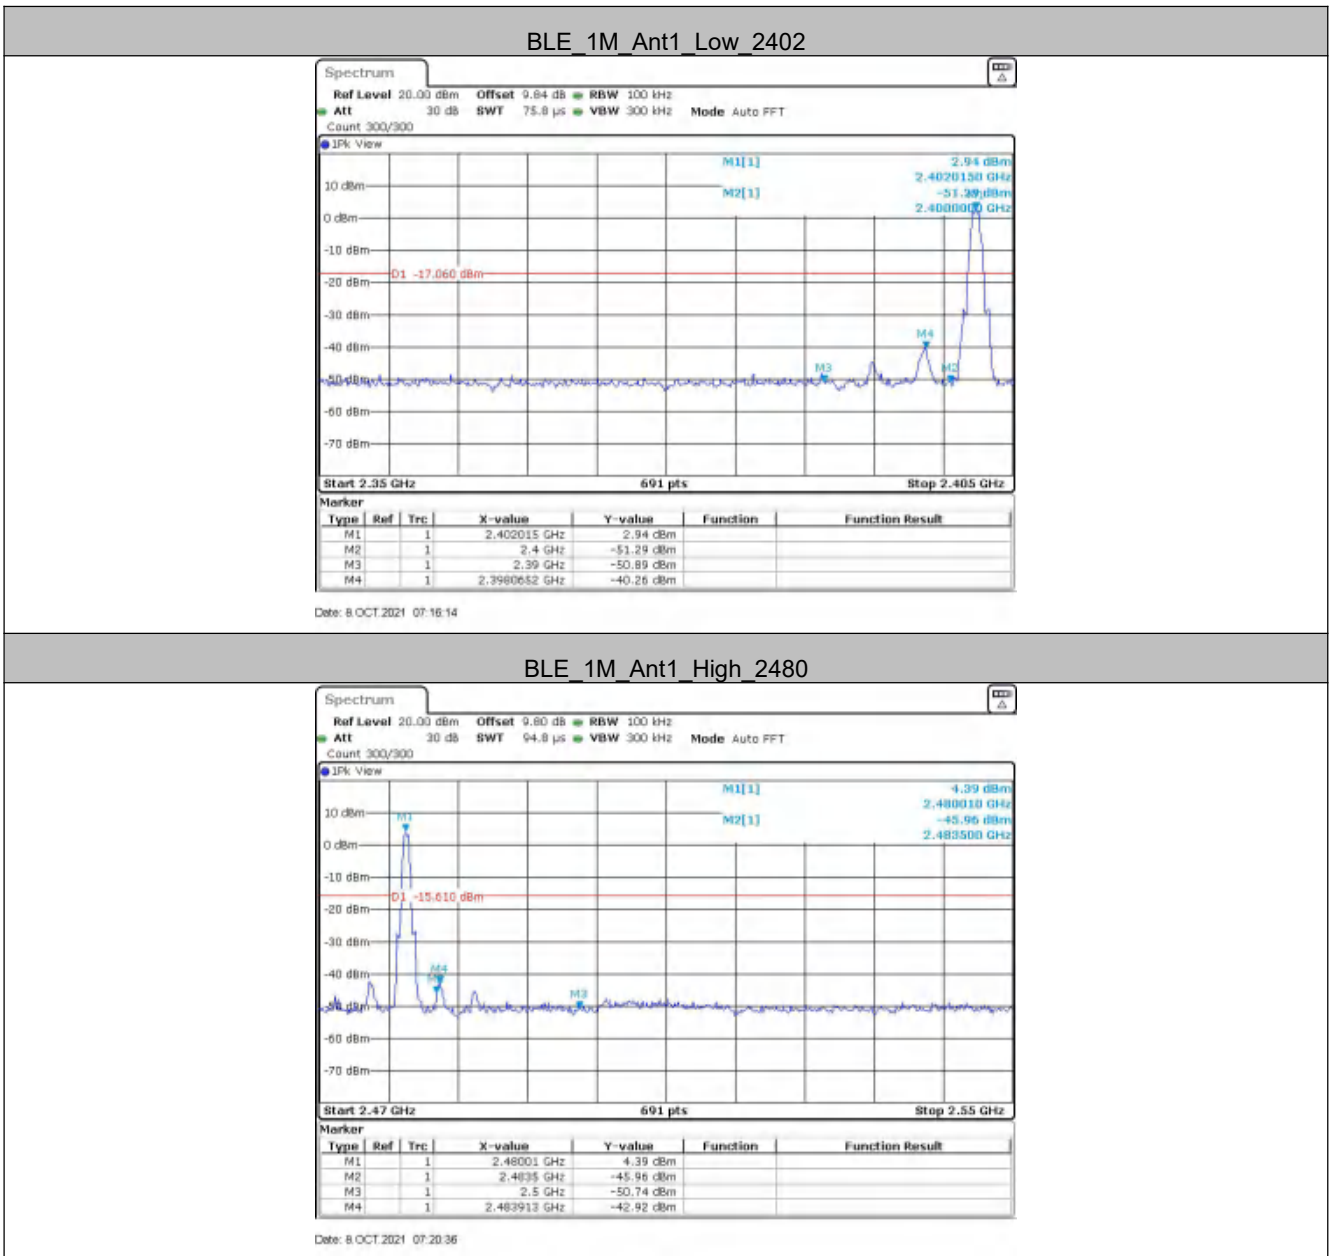


BLE 2M Ant1 Low 2402

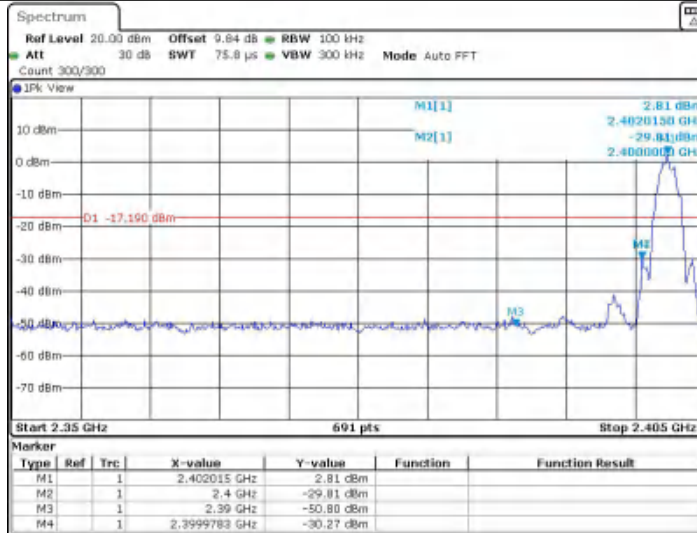

Date: 8 OCT 2021 07:30:26

BLE 2M Ant1 High 2480

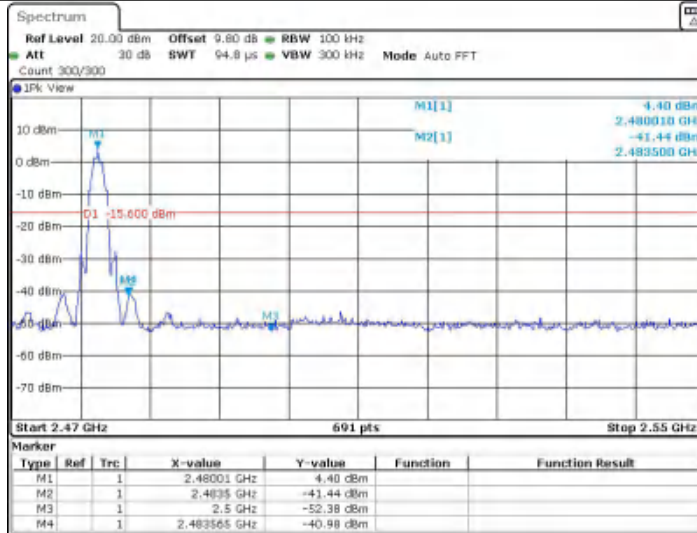


Date: 8 OCT 2021 07:35:37

5.8 Appendix F: Conducted Spurious Emission


5.8.1 Test Result

TestMode	Antenna	Channel	FreqRange [MHz]	RefLevel [dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	2402	Reference	2.79	2.79	---	PASS
			30~1000	2.79	-56.62	≤-17.21	PASS
			1000~26500	2.79	-52.73	≤-17.21	PASS
		2440	Reference	3.81	3.81	---	PASS
			30~1000	3.81	-56.27	≤-16.19	PASS
			1000~26500	3.81	-52.9	≤-16.19	PASS
		2480	Reference	4.40	4.40	---	PASS
			30~1000	4.40	-55.44	≤-15.6	PASS
			1000~26500	4.40	-53.68	≤-15.6	PASS
BLE_2M	Ant1	2402	Reference	2.85	2.85	---	PASS
			30~1000	2.85	-56.92	≤-17.15	PASS
			1000~26500	2.85	-52.79	≤-17.15	PASS
		2440	Reference	3.81	3.81	---	PASS
			30~1000	3.81	-57.28	≤-16.19	PASS
			1000~26500	3.81	-53.68	≤-16.19	PASS
		2480	Reference	4.43	4.43	---	PASS
			30~1000	4.43	-56.59	≤-15.57	PASS
			1000~26500	4.43	-52.66	≤-15.57	PASS

5.8.2 Test Graphs

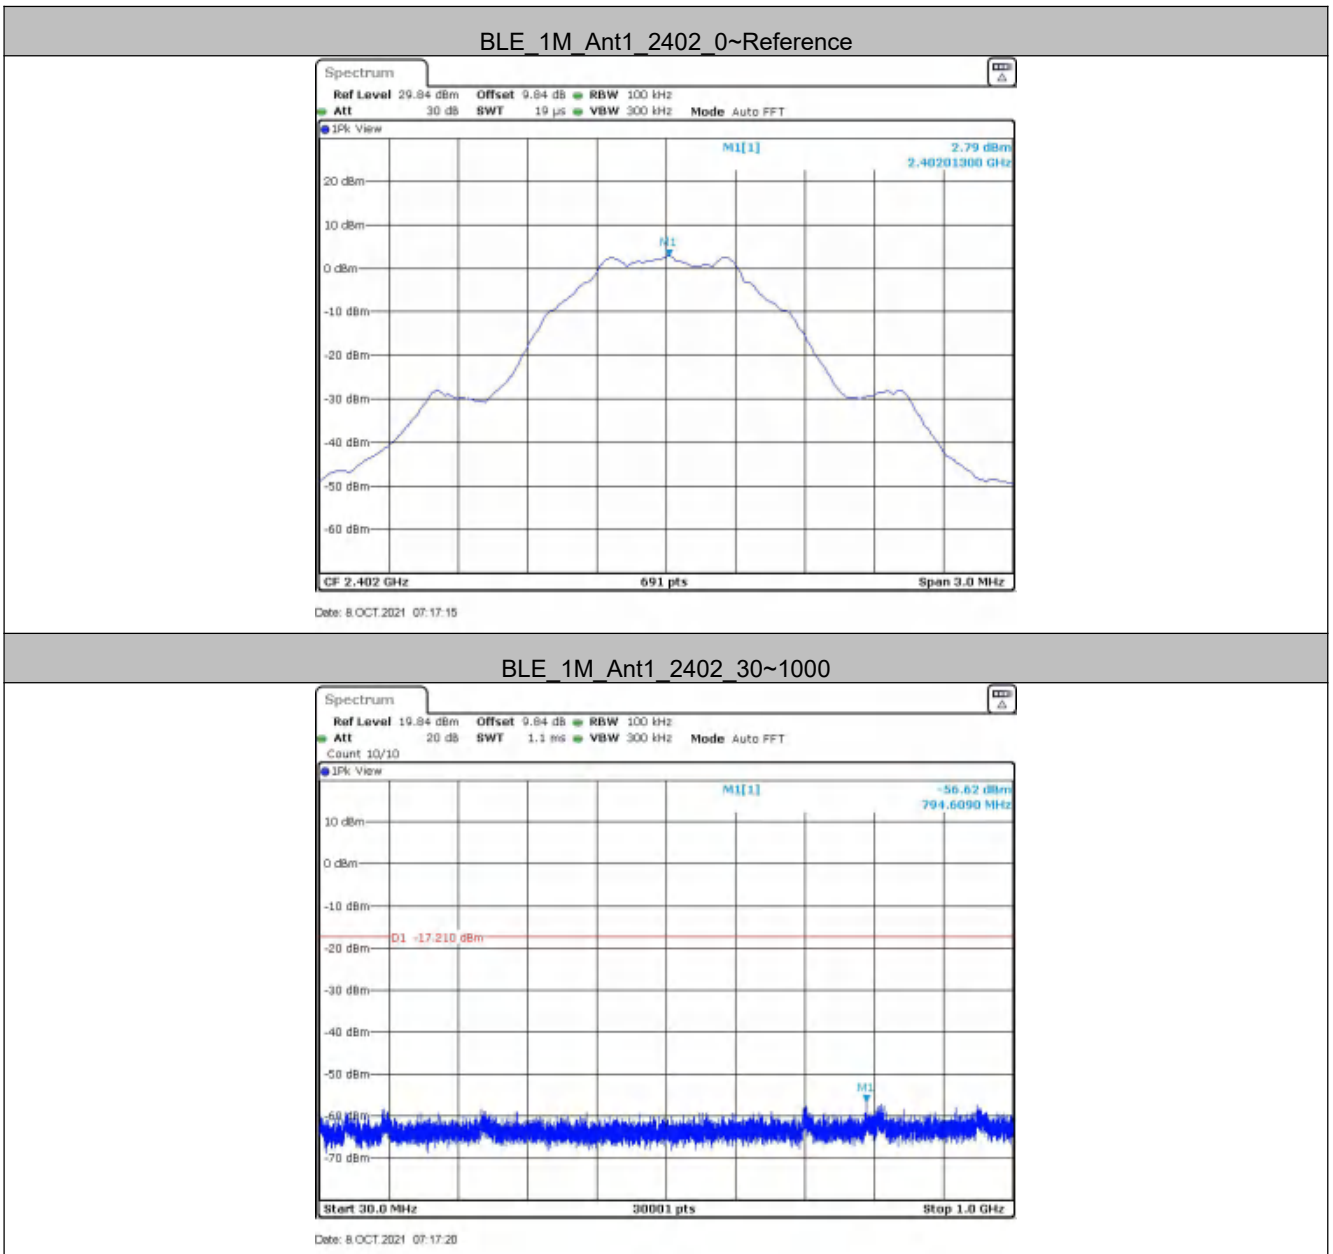


BLE_1M_Ant1_2402_1000~26500

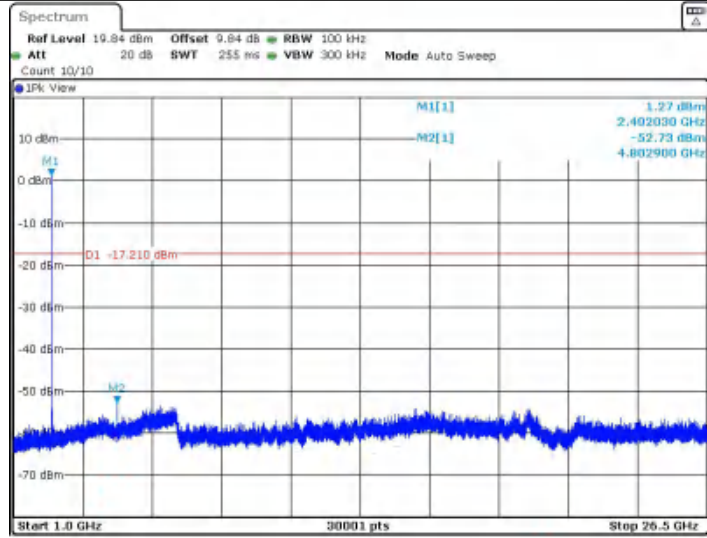


Date: 8.OCT.2021 07:17:42

BLE_1M_Ant1_2440_0~Reference

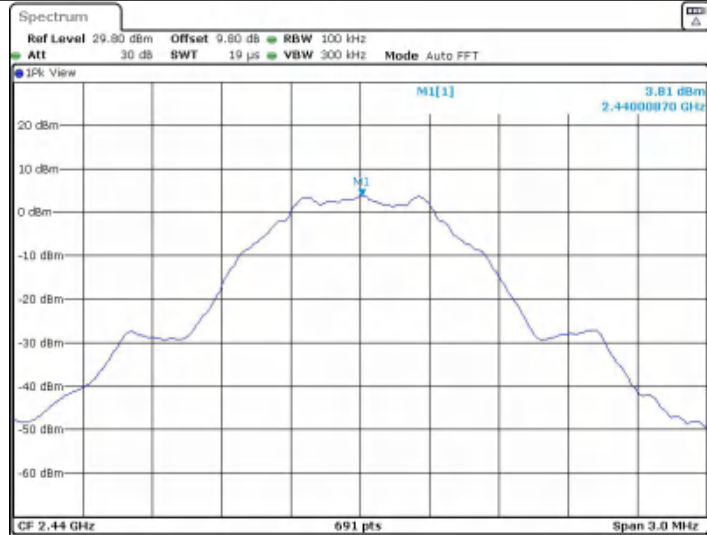


Date: 8.OCT.2021 07:18:52

BLE_1M_Ant1_2440_30~1000

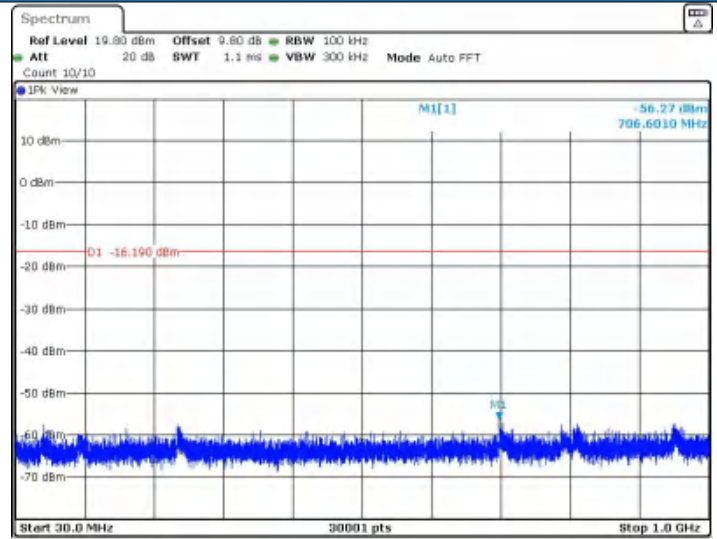


Date: 8.OCT.2021 07:18:56

BLE_1M_Ant1_2440_1000~26500

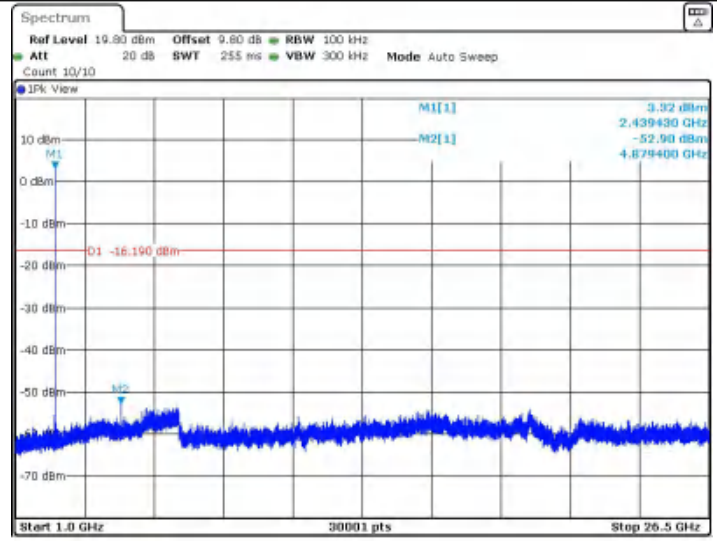


Date: 8.OCT.2021 07:18:18

BLE_1M_Ant1_2480_0~Reference

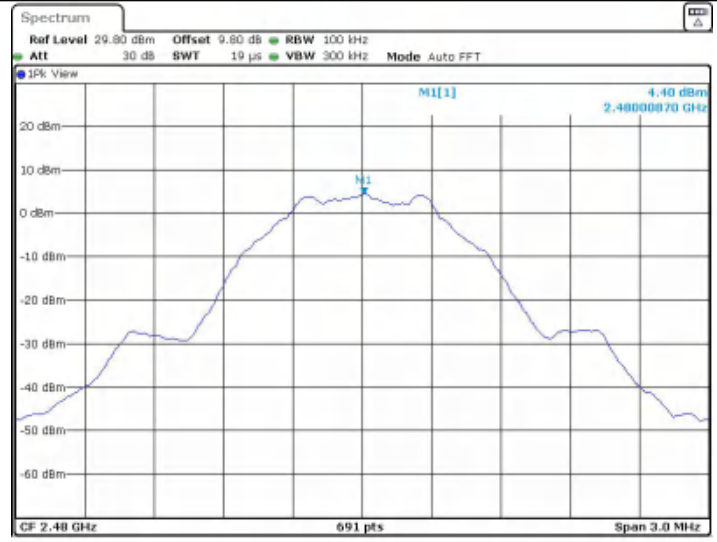


Date: 8.OCT.2021 07:21:37

BLE 1M Ant1_2480_30~1000

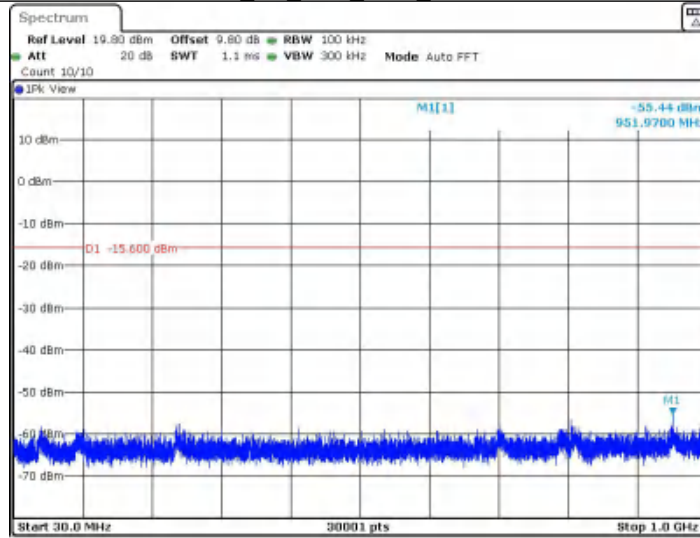


Date: 8.OCT.2021 07:21:41

BLE 1M Ant1_2480_1000~26500

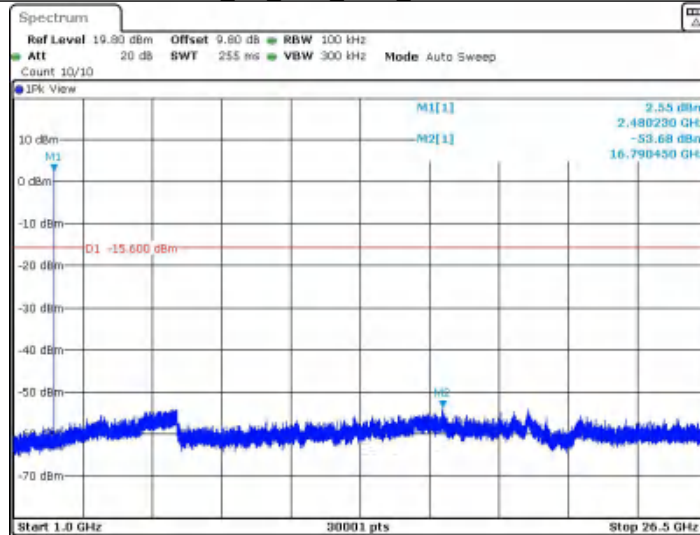


Date: 8.OCT.2021 07:22:03

BLE 2M Ant1_2402_0~Reference

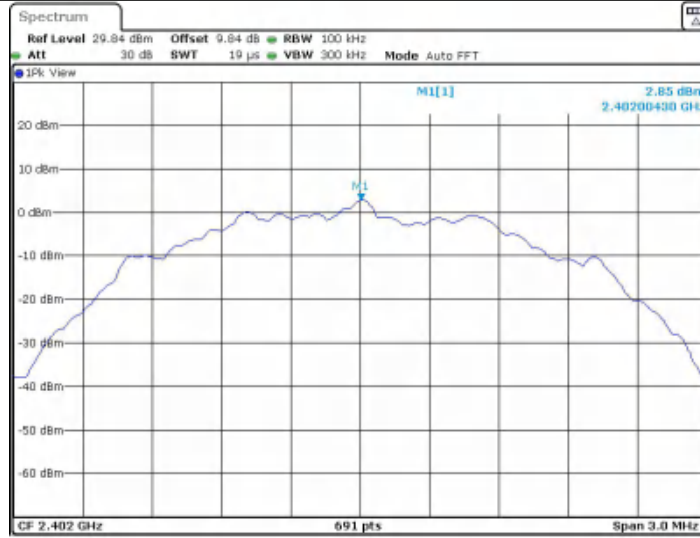


Date: 8.OCT.2021 07:31:28

BLE 2M Ant1_2402_30~1000

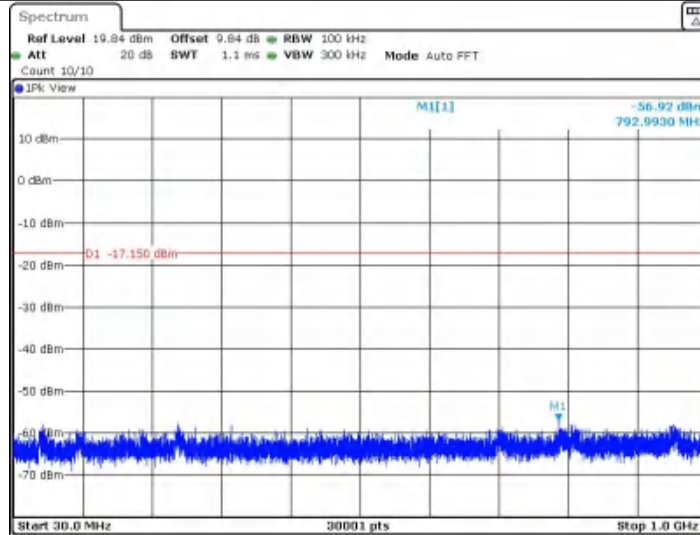


Date: 8.OCT.2021 07:31:32

BLE 2M Ant1_2402_1000~26500

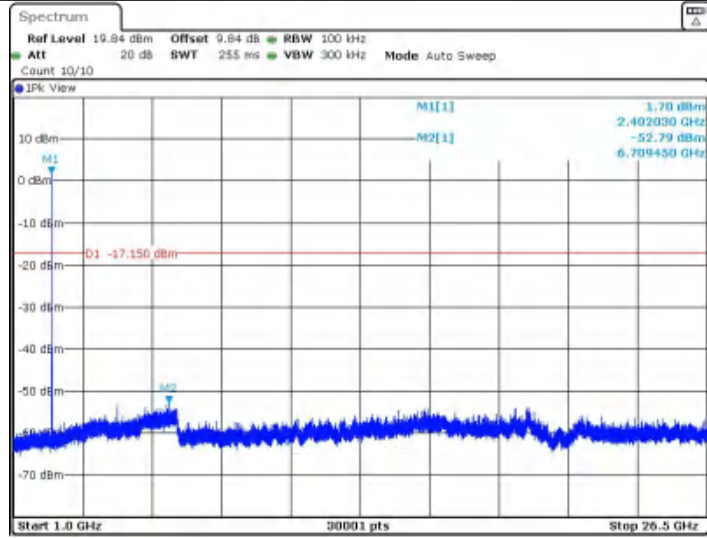


Date: 8.OCT.2021 07:31:54

BLE 2M Ant1_2440_0~Reference

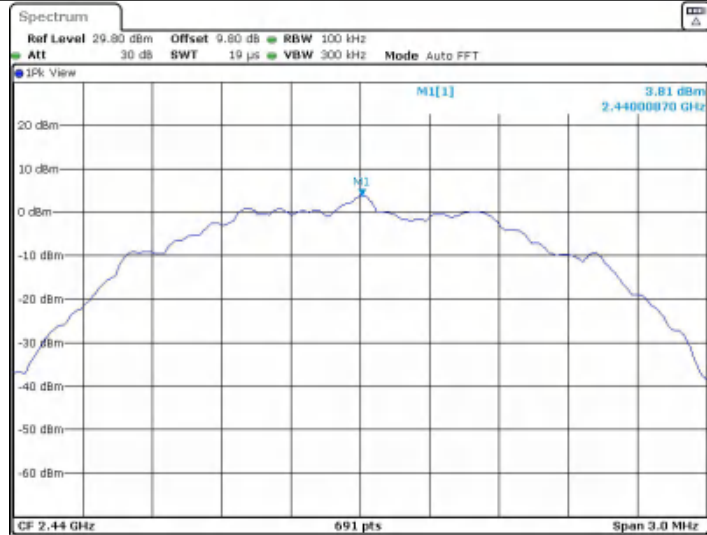


Date: 8.OCT.2021 07:33:34

BLE 2M Ant1_2440_30~1000

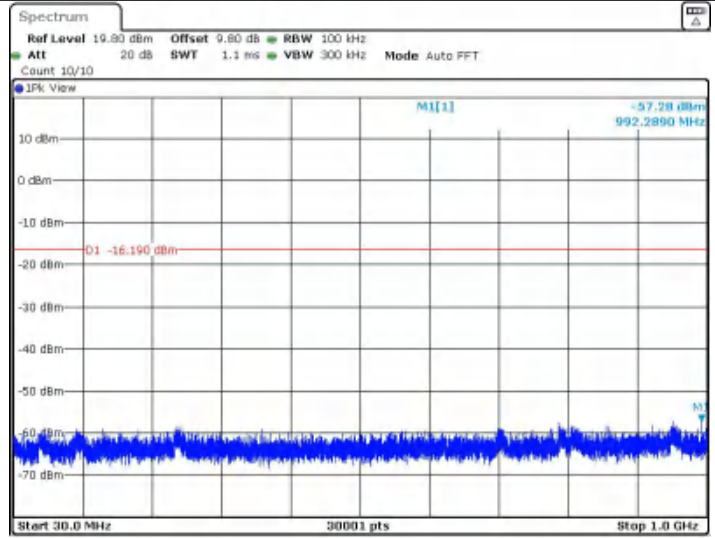


Date: 8.OCT.2021 07:33:38

BLE 2M Ant1_2440_1000~26500

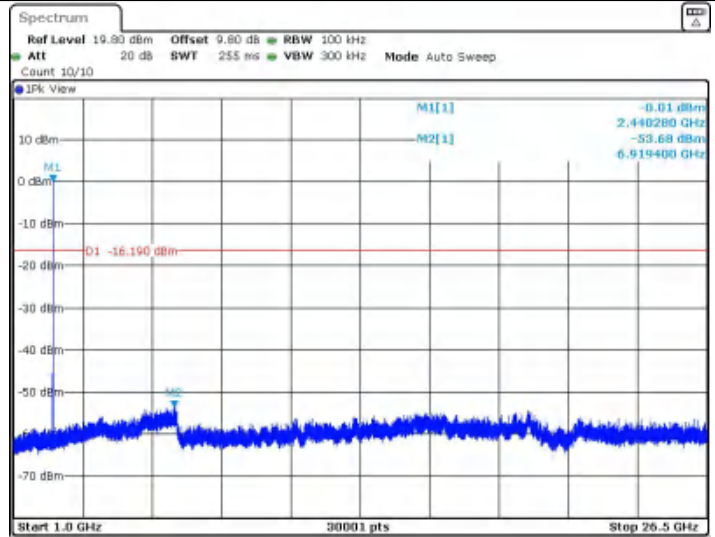


Date: 8.OCT.2021 07:34:00

BLE 2M Ant1 2480 0~Reference

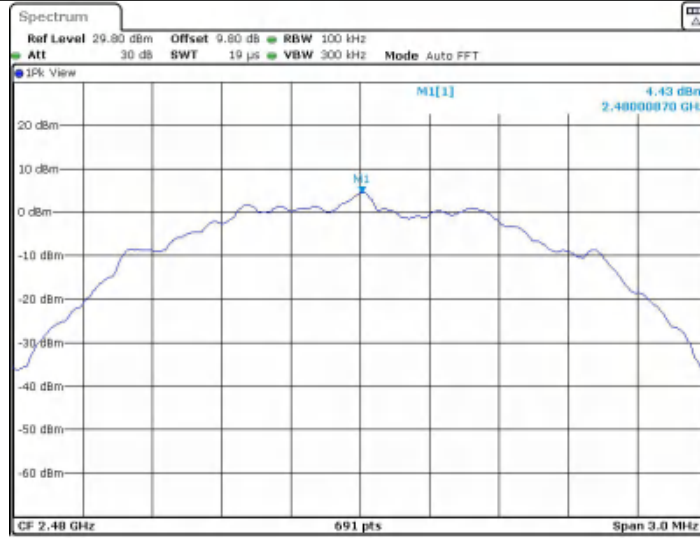


Date: 8.OCT.2021 07:41:03

BLE 2M Ant1 2480 30~1000

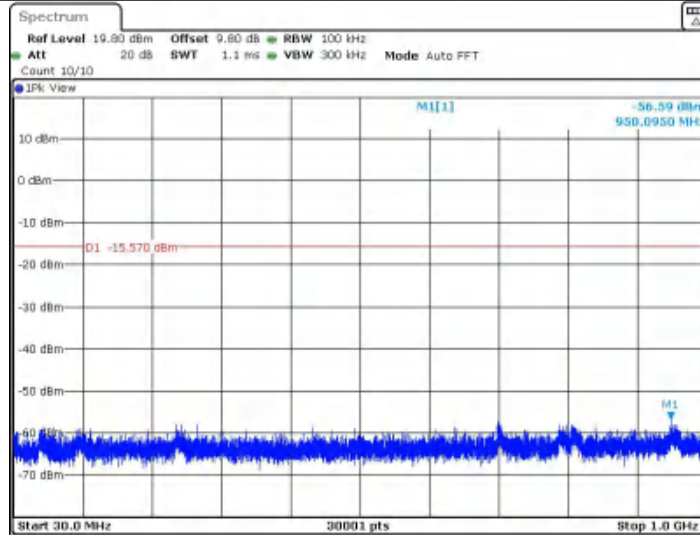

Date: 8.OCT.2021 07:41:07

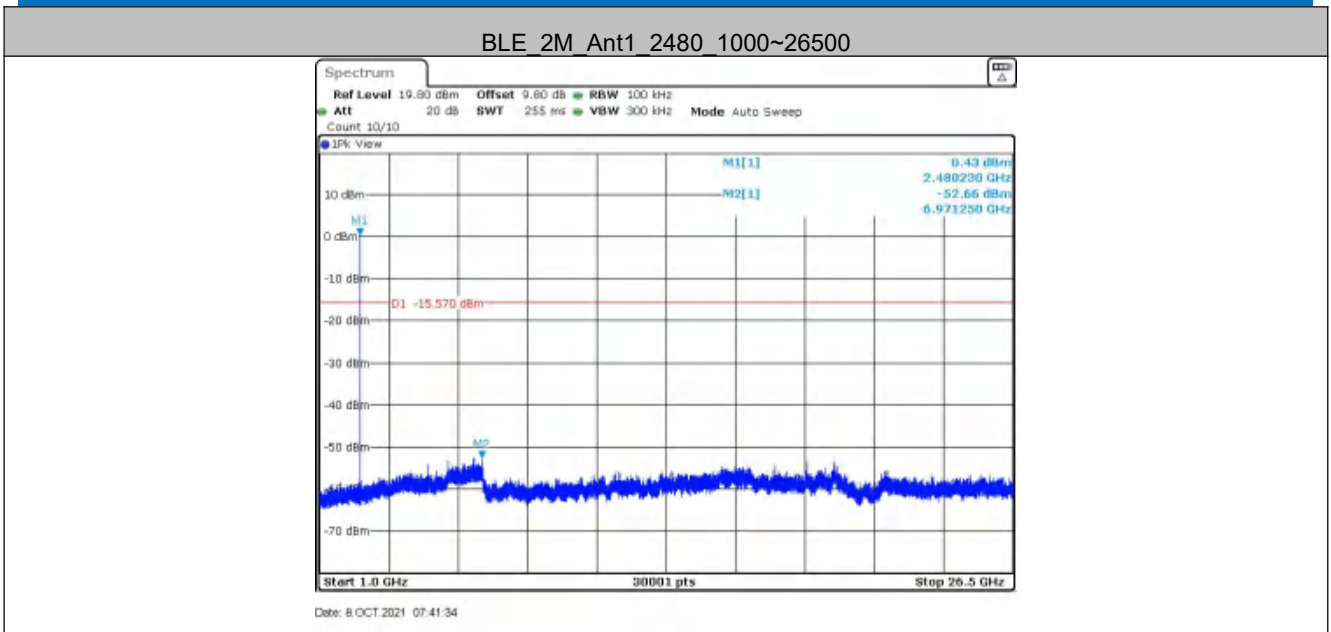

5.9 Radiated Spurious Emission & Restricted bands

5.9.1 Spurious Emissions					
Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205				
Test Method:	ANSI C63.10 2013				
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100 kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
Peak		1MHz	10Hz	Average	
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
<p>Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.</p>					

Test Setup:

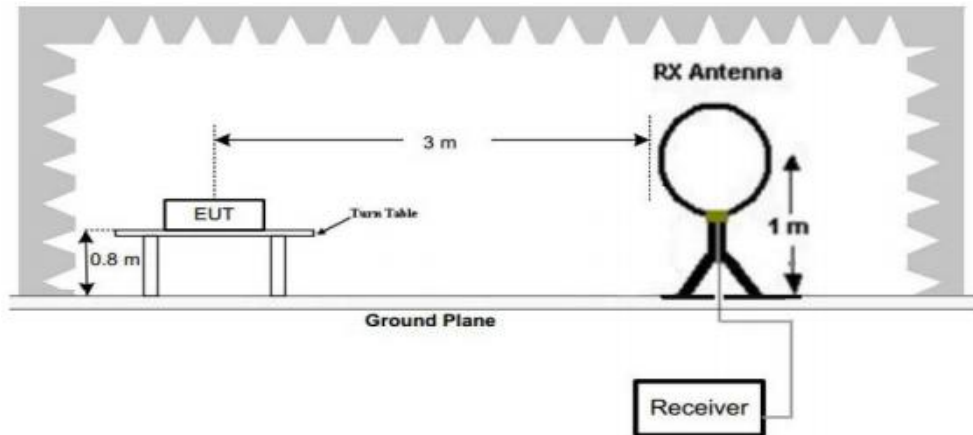


Figure 1. Below 30MHz

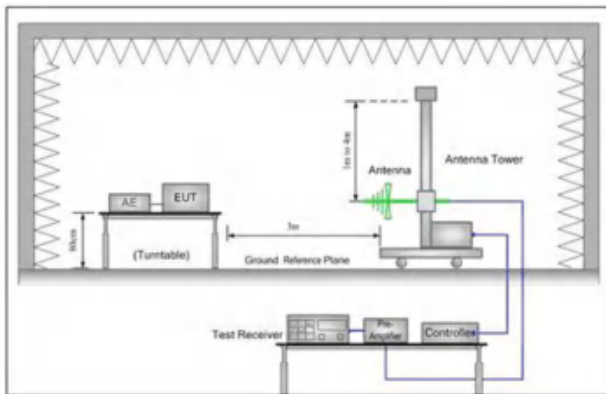


Figure 2. 30MHz to 1GHz

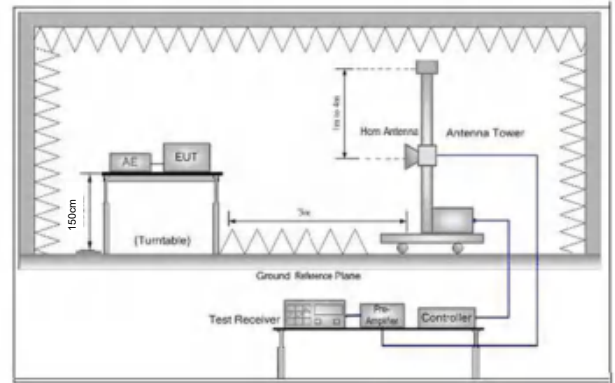


Figure 3. Above 1 GHz

<p>Test Procedure:</p>	<ol style="list-style-type: none"> a. 1) Below 1G: The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. 2) Above 1G: The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. <p>Note: For the radiated emission test above 1GHz: Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.</p> <ol style="list-style-type: none"> b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the
------------------------	---


	<p>measurement.</p> <p>d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</p> <p>e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</p> <p>f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</p> <p>g. Test the EUT in the lowest channel (2402MHz),the middle channel (2440MHz),the Highest channel (2480MHz)</p> <p>h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.</p> <p>i. Repeat above procedures until all frequencies measured was complete.</p>
Exploratory Test Mode:	<p>Transmitting with GFSK modulation.</p> <p>Transmitting mode.</p>
Final Test Mode:	<p>Through Pre-scan, find the 2Mbps of data type and GFSK modulation is the worst case.</p> <p>For below 1GHz part, through pre-scan, the worst case is the highest channel.</p> <p>Only the worst case is recorded in the report.</p>
Test Results:	Pass

Radiated Emission below 1GHz

1#

30MHz~1GHz, the worst case


Test mode:	Transmitting mode	Vertical
------------	-------------------	----------

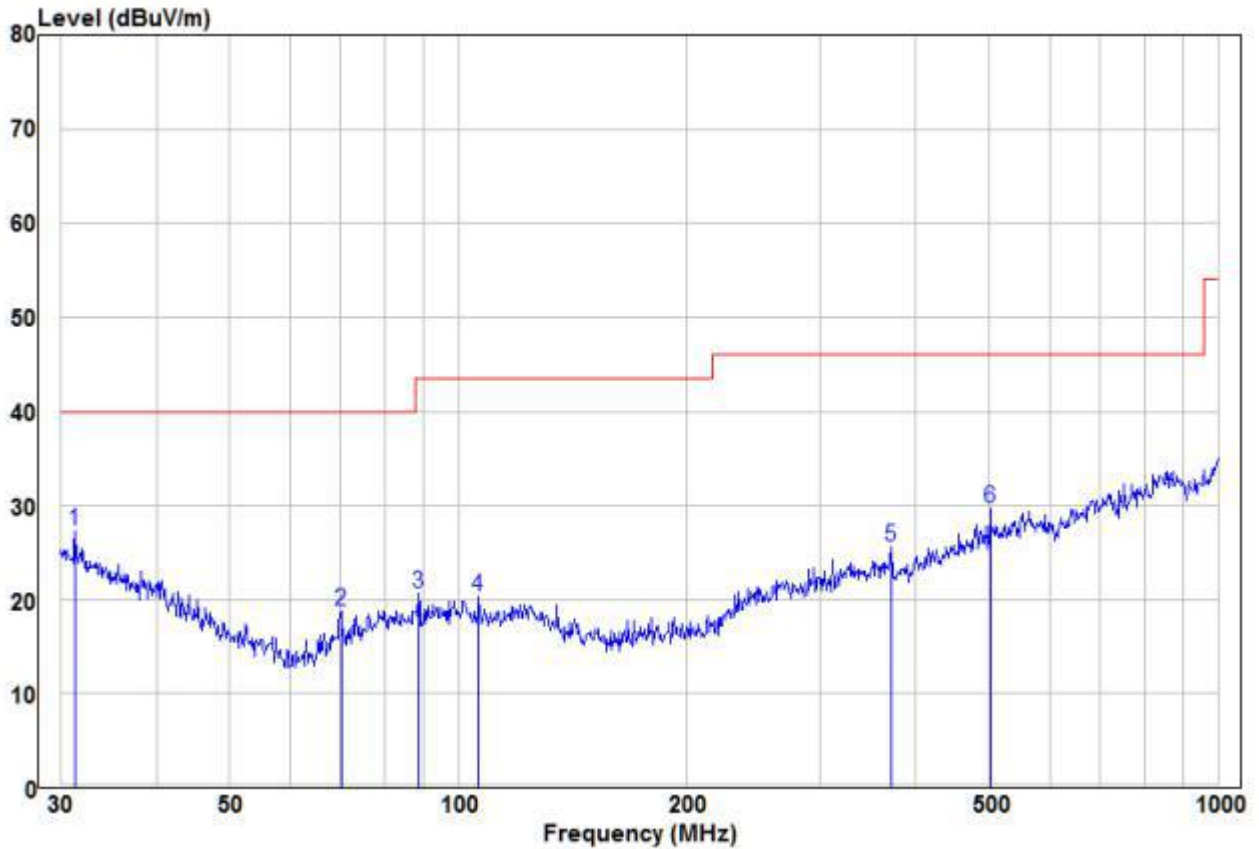

	Read Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark	Pol/Phase
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1 pp	31.29	11.64	15.58	27.22	40.00	-12.78	Peak	VERTICAL
2	70.09	10.57	8.16	18.73	40.00	-21.27	Peak	VERTICAL
3	88.65	10.69	9.98	20.67	43.50	-22.83	Peak	VERTICAL
4	106.39	9.97	10.35	20.32	43.50	-23.18	Peak	VERTICAL
5	370.70	10.35	15.31	25.66	46.00	-20.34	Peak	VERTICAL
6	501.18	11.34	18.29	29.63	46.00	-16.37	Peak	VERTICAL

30MHz~1GHz, the worst case

Test mode: Transmitting mode Horizontal

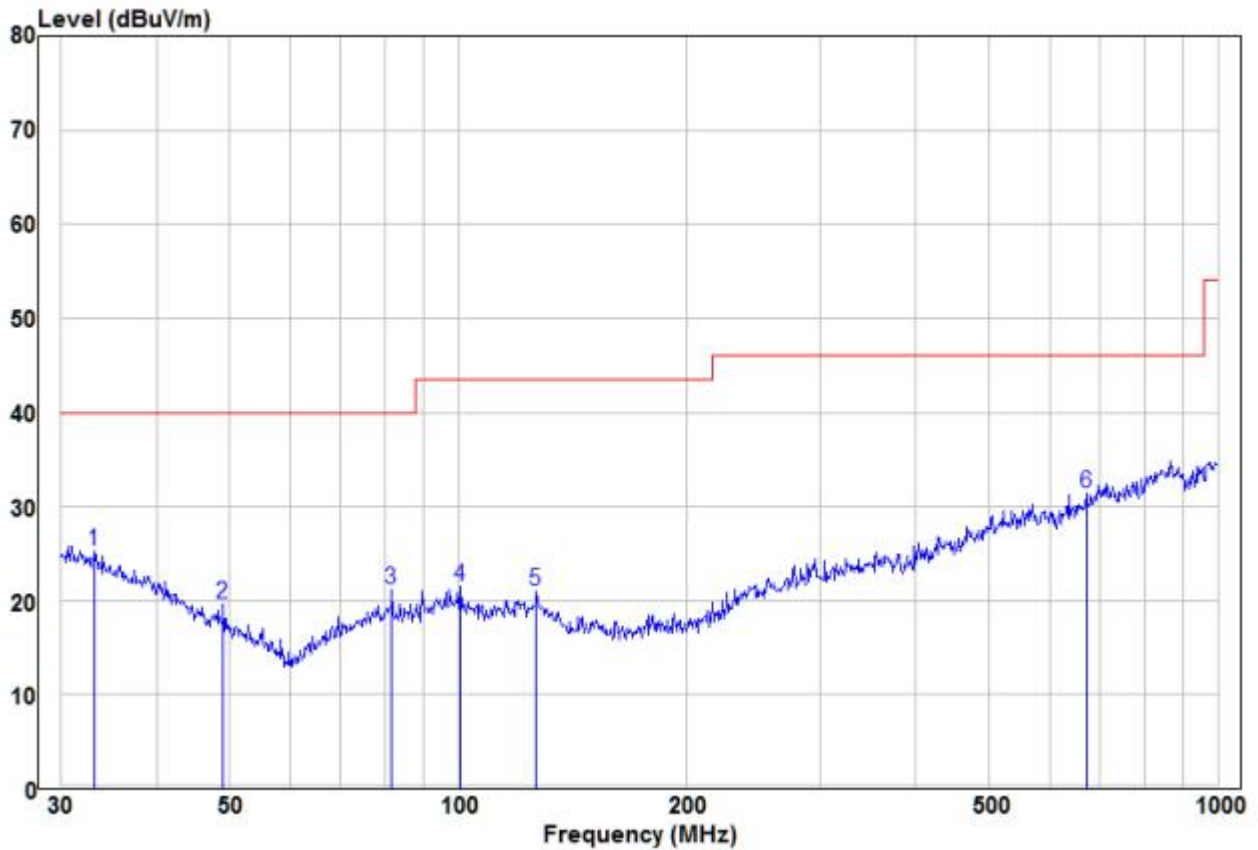

	Read Freq	Read Level	Factor	Limit Level	Over Limit	Remark	Pol/Phase
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	33.21	10.15	15.07	25.22	40.00	-14.78	Peak HORIZONTAL
2	49.01	11.14	8.55	19.69	40.00	-20.31	Peak HORIZONTAL
3	81.78	11.36	9.83	21.19	40.00	-18.81	Peak HORIZONTAL
4	100.58	10.90	10.62	21.52	43.50	-21.98	Peak HORIZONTAL
5	126.77	10.61	10.44	21.05	43.50	-22.45	Peak HORIZONTAL
6 pp	670.49	11.36	20.05	31.41	46.00	-14.59	Peak HORIZONTAL


2#

30MHz~1GHz, the worst case

Test mode:

Transmitting mode

Vertical

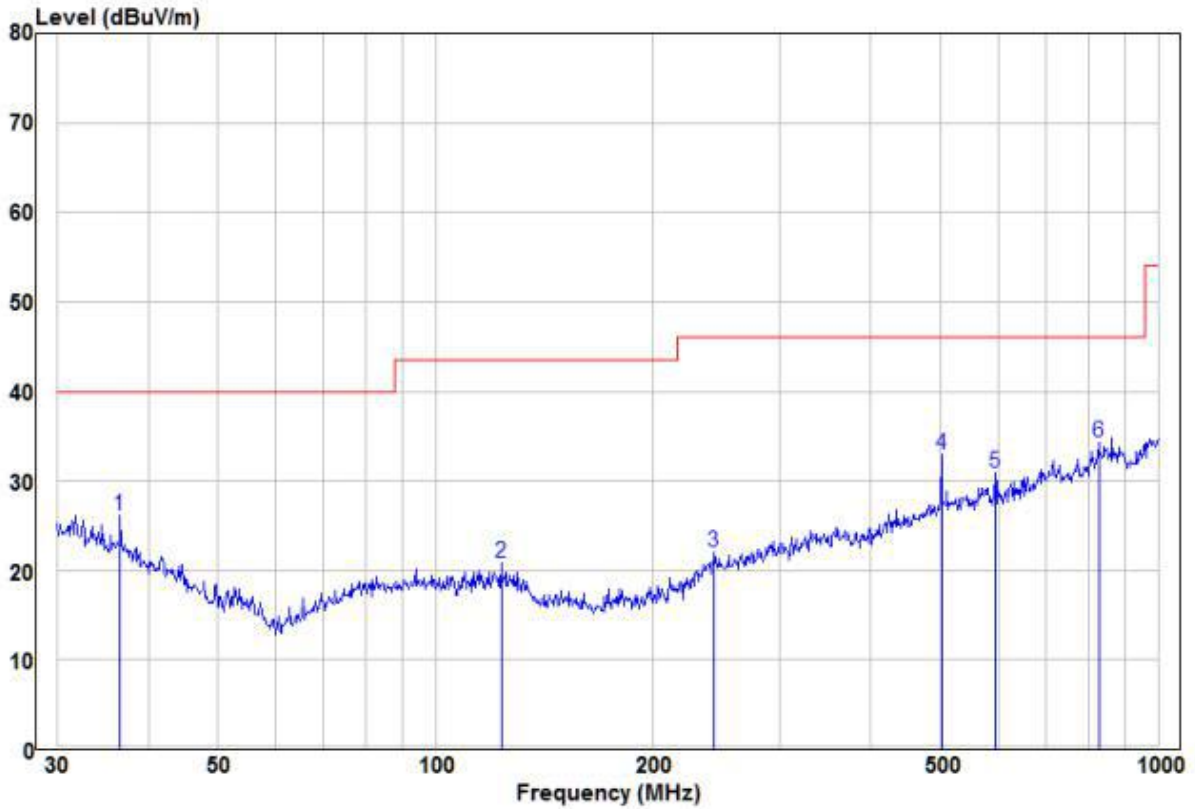


	Read Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark	Pol/Phase
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1	36.64	12.03	14.01	26.04	40.00	-13.96	Peak	VERTICAL
2	123.27	10.24	10.58	20.82	43.50	-22.68	Peak	VERTICAL
3	243.38	10.16	11.80	21.96	46.00	-24.04	Peak	VERTICAL
4	501.18	14.59	18.29	32.88	46.00	-13.12	Peak	VERTICAL
5	595.13	12.08	18.76	30.84	46.00	-15.16	Peak	VERTICAL
6 pp	827.49	10.67	23.68	34.35	46.00	-11.65	Peak	VERTICAL

30MHz~1GHz, the worst case

Test mode:

Transmitting mode

Horizontal

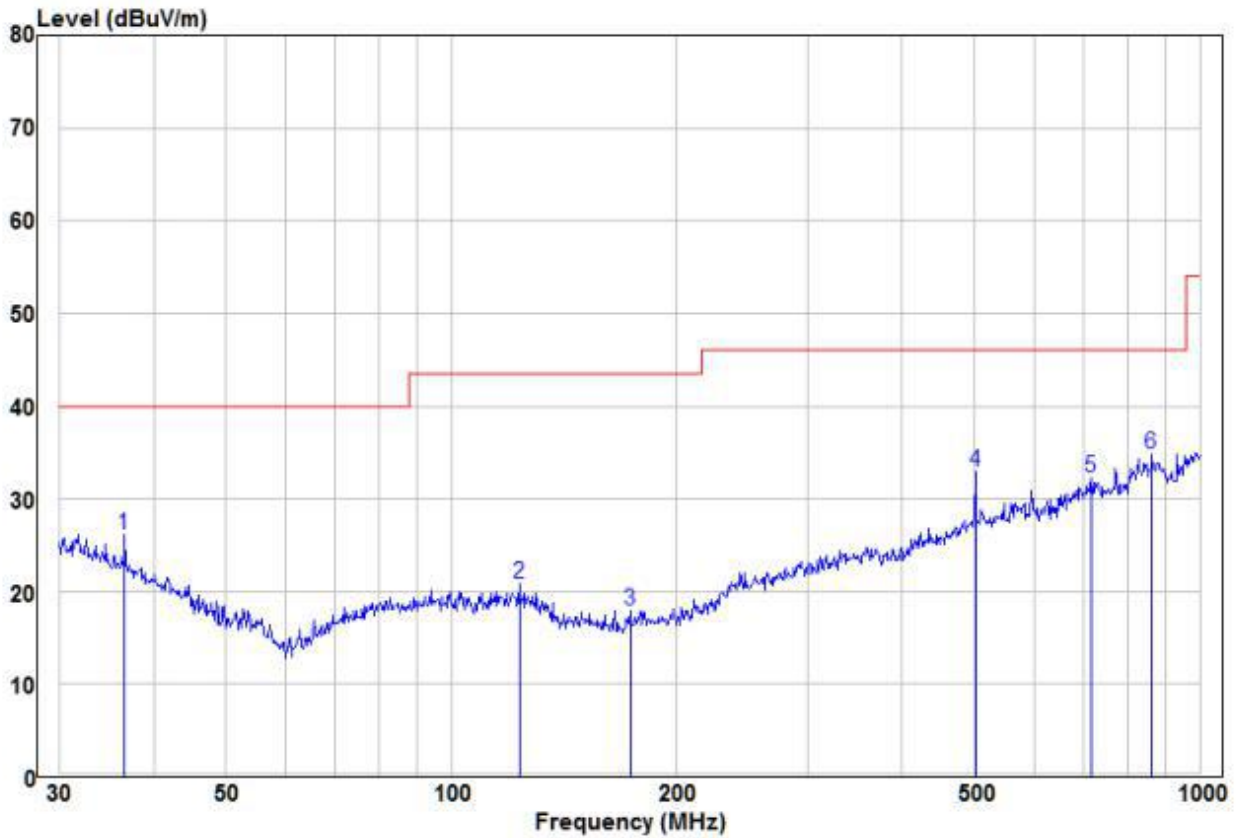

	Read Freq	Level	Factor	Level	Limit	Over	Remark	Pol/Phase
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1	36.64	12.03	14.01	26.04	40.00	-13.96	Peak	HORIZONTAL
2	123.27	10.24	10.58	20.82	43.50	-22.68	Peak	HORIZONTAL
3	173.21	10.13	7.85	17.98	43.50	-25.52	Peak	HORIZONTAL
4	501.18	14.59	18.29	32.88	46.00	-13.12	Peak	HORIZONTAL
5	716.68	11.02	21.20	32.22	46.00	-13.78	Peak	HORIZONTAL
6 pp	863.06	10.76	23.99	34.75	46.00	-11.25	Peak	HORIZONTAL

Transmitter Emission above 1GHz

Worse case mode:		GFSK(1Mbps)		Test channel:		Lowest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)		H/V
2390	55.48	-9.2	46.28	74	-27.72	Peak	H
2400	56.73	-9.39	47.34	74	-26.66	Peak	H
4804	51.56	-4.33	47.23	74	-26.77	Peak	H
7206	50.62	1.01	51.63	74	-22.37	Peak	H
2390	54.57	-9.2	45.37	74	-28.63	Peak	V
2400	52.22	-9.39	42.83	74	-31.17	Peak	V
4804	53.88	-4.33	49.55	74	-24.45	Peak	V
7206	50.04	1.01	51.05	74	-22.95	Peak	V

Worse case mode:		GFSK(1Mbps)		Test channel:		Middle	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)		H/V
4880	51.53	-4.11	47.42	74	-26.58	peak	H
7320	49.17	1.51	50.68	74	-23.32	peak	H
4880	52.43	-4.11	48.32	74	-25.68	peak	V
7320	48.25	1.51	49.76	74	-24.24	peak	V

Worse case mode:		GFSK(1Mbps)		Test channel:		Highest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)		H/V
2483.5	56.72	-9.29	47.43	74	-26.57	Peak	H
4960	51.79	-4.04	47.75	74	-26.25	Peak	H
7440	49.94	1.57	51.51	74	-22.49	Peak	H
2483.5	56.51	-9.29	47.22	74	-26.78	Peak	V
4960	52.07	-4.04	48.03	74	-25.97	Peak	V
7440	50.40	1.57	51.97	74	-22.03	Peak	V

Worse case mode:		GFSK(2Mbps)		Test channel:		Lowest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
2390	54.96	-9.2	45.76	74	-28.24	Peak	H
2400	56.99	-9.39	47.60	74	-26.40	Peak	H
4804	54.19	-4.33	49.86	74	-24.14	Peak	H
7206	49.41	1.01	50.42	74	-23.58	Peak	H
2390	53.24	-9.2	44.04	74	-29.96	Peak	V
2400	52.40	-9.39	43.01	74	-30.99	Peak	V
4804	53.49	-4.33	49.16	74	-24.84	Peak	V
7206	48.66	1.01	49.67	74	-24.33	Peak	V

Worse case mode:		GFSK(2Mbps)		Test channel:		Middle	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
4880	53.16	-4.11	49.05	74	-24.95	peak	H
7320	51.07	1.51	52.58	74	-21.42	peak	H
4880	51.56	-4.11	47.45	74	-26.55	peak	V
7320	51.08	1.51	52.59	74	-21.41	peak	V

Worse case mode:		GFSK(2Mbps)		Test channel:		Highest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
2483.5	54.48	-9.29	45.19	74	-28.81	Peak	H
4960	51.52	-4.04	47.48	74	-26.52	Peak	H
7440	49.71	1.57	51.28	74	-22.72	Peak	H
2483.5	58.02	-9.29	48.73	74	-25.27	Peak	V
4960	52.18	-4.04	48.14	74	-25.86	Peak	V
7440	50.21	1.57	51.78	74	-22.22	Peak	V

Remark:

- The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
- Scan from 9kHz to 25GHz, the disturbance above 10GHz and below 30MHz was very low. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.


6 Photographs - EUT Test Setup

6.1 Radiated Spurious Emission

9kHz~30MHz:



30MHz~1GHz:

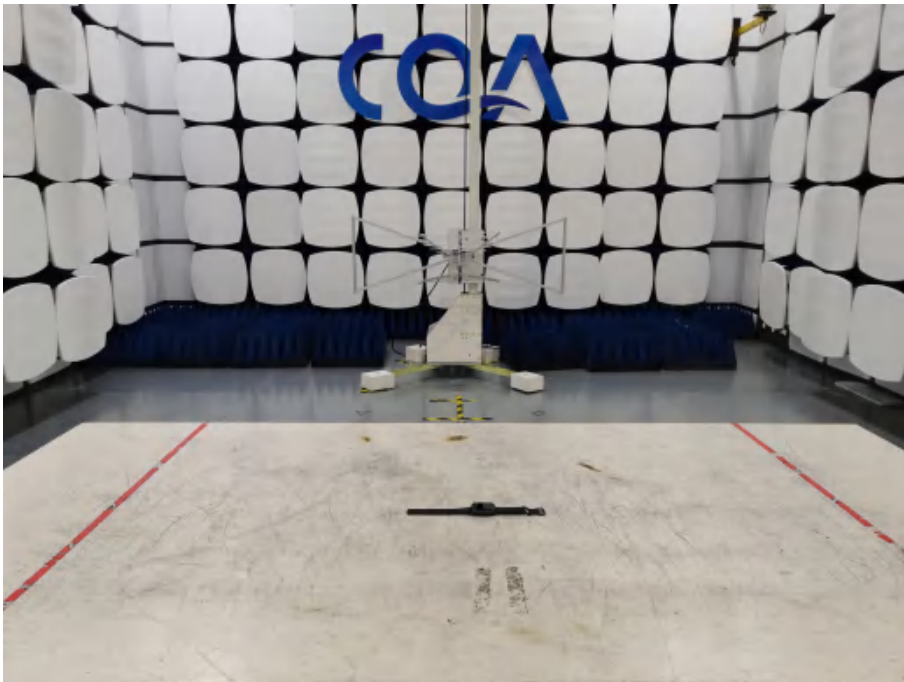

Above 1GHz:



7 Photographs - EUT Constructional Details

Refer to APPENDIX 2 PHOTOGRAPHS OF EUT for CQASZ20210901593E-01.

The End