
FCC ID: 2AHH9-NIP4C

IC: 21262-NIP4C

Model No.: PRX-NIS-4B3

Remote Key

Manufacturer: Qinuo Electronics Co., Ltd

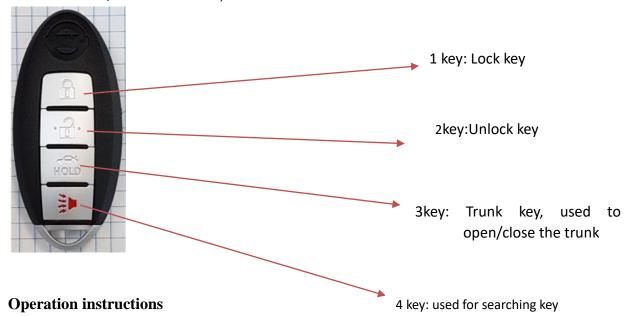

- 1. After matching the key to the car, press 1the unlock key for 2 seconds to open the door and press 2the lock key for 2 seconds to close the door.
- 2. The ignition key is used to manually unlock and start the car.

Product parameters

1 Todact parameters	
Rated voltage	DC 3V
Working current	<5mA
Operating voltage	1.8V~3.6V
Transmit power	>-20dbm
Key operation force	200±50g
Operating temperature	-5° C+45° C
Stand-by current	5uA
transmitting frequency	433.92M±75KHZ
Modulation	FSK
Battery	CR2032
Key durability	More than 100,000 times

FCC COMPLIANCE STATEMENT:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

IC WARNING

This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions:

- (1) This device may not cause interference.
- (2) This device must accept any interference, including interference that may cause undesired operation of the device

ADVERTENCIA IC

Cet appareil contient des émetteurs / récepteurs exemptés de licence conformes aux RSS (RSS)d'Innovation, Sciences et Développement économique Canada. Le fonctionnement est soumis auxdeux conditions suivantes :

- (1) Cet appareil ne doit pas causer d'interférences.
- (2) Cet appareil doit accepter toutes les interférences, y compris celles susceptibles deprovoquer un fonctionnement indésirable de l'appareil.

Radiation Exposure Statement

The device has been evaluated to meet general RF exposure requirement.

The device can be used in portable exposure condition without restriction.