

Develco Products

TEST REPORT

SCOPE OF WORK:

47 CFR FCC Part 15.247 – Radio Spectrum report

Model:

SMAZB-141, SMAZB-143, SCAZB-141, SCAZB-143

REPORT NUMBER

210700216THC-001

ISSUE DATE

Aug. 13, 2021


PAGES

32

DOCUMENT CONTROL NUMBER

GFT-OP-10h (28-Nov-2018)

© 2020 Intertek

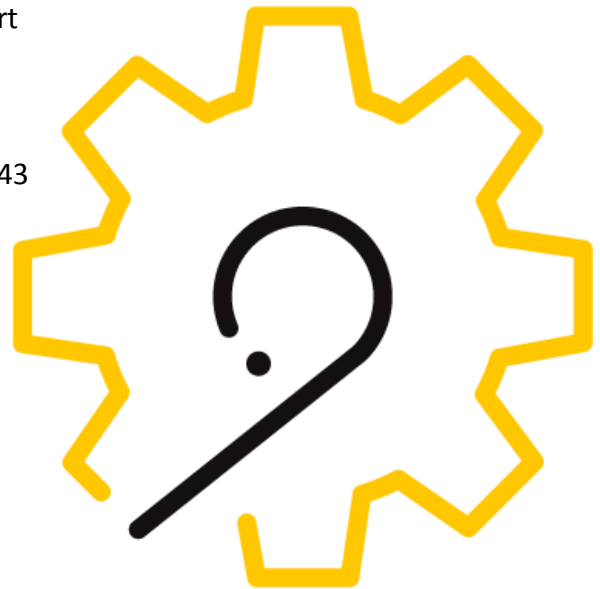

Radio Spectrum TEST REPORT

Applicant:	Develco Products Tangen 6, 8200 Aarhus N, Denmark
Product:	Smoke Alarm
Model No.:	SMAZB-141, SMAZB-143, SCAZB-141, SCAZB-143
FCC ID:	2AHNM-SCAZB
Test Method/ Standard:	47 CFR FCC Part 15.247 & ANSI C63.10 2013 KDB 558074 D01 v05r02
Test By:	Intertek Testing Services Taiwan Ltd., Hsinchu Laboratory No. 11, Lane 275, Ko-Nan 1 Street, Chia-Tung Li, Shiang-Shan District, Hsinchu City, Taiwan



Durant Wei

Durant Wei
Engineer

Zero Chen

Zero Chen
Reviewer

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

TEST REPORT**Revision History**

Report No.	Issue Date	Revision Summary
210700216THC-001	Aug. 13, 2021	Original report

Table of Contents

1. General Information	6
1.1 Identification of the EUT	6
1.2 Additional information about the EUT	6
1.3 Antenna description	6
1.4 Operation mode	7
1.5 Peripherals equipment	7
2. Minimum 6 dB Bandwidth	8
2.1 Instrument Setting.....	8
2.2 Test Procedure	8
2.3 Test Diagram	8
2.4 Limit.....	8
2.5 Test Results	9
3. Maximum Peak Conducted Output Power	11
3.1 Instrument Setting.....	11
3.2 Test Procedure	11
3.3 Test Diagram	11
3.4 Limit.....	11
3.5 Test Results	12
4. Power Spectral Density.....	13
4.1 Instrument Setting.....	13
4.2 Test Procedure	13
4.3 Test Diagram	13
4.4 Limit.....	13
4.5 Test Results	14
5. Emissions in Non-Restricted Frequency Bands	16
5.1 Instruments Setting	16
5.2 Test Procedure	16
5.3 Test Diagram	16
5.4 Limit.....	16
5.5 Test Results	16
6. Emissions in Restricted Frequency Bands (Radiated emission measurements)	20
6.1 Instrument Setting.....	20
6.2 Test setup & procedure	20
6.3 Limit.....	22
6.4 Test Result.....	23
7. Emission on Band Edge.....	27
7.1 Instrument Setting.....	27
7.2 Test Procedure	27

TEST REPORT

7.3 Test Results 27

8. AC Power Line Conducted Emission 30

Appendix A: Test equipment list..... 31

Appendix B: Measurement Uncertainty 32

Summary of Test Data

Test Requirement	Applicable Rule (Section 15.247)	Result
Minimum 6 dB Bandwidth	15.247(a)(2)	Pass
Maximum Peak Conducted Output Power	15.247(b)(3)	Pass
Power Spectral Density	15.247(e)	Pass
Emissions In Non-Restricted Frequency Bands	15.247(d)	Pass
Emissions In Restricted Frequency Bands (Radiated emission measurements)	15.247(d), 15.205, 15.209	Pass
Emission On The Band Edge	15.247(d), 15.205	Pass
AC Power Line Conducted Emission	15.207	N/A
Antenna Requirement	15.203	Pass

Note: Please note that the test results with statement of conformity, the decision rules which are based on: Safety Testing: the specification, standard or IEC Guide 115.

Other Testing: the specification, standard and not taking into account the measurement uncertainty.

1. General Information

1.1 Identification of the EUT

Product:	Smoke Alarm
Model No.:	SMAZB-141
Operating Frequency:	2405 MHz ~ 2480 MHz
Channel Number:	16 channels
Frequency of Each Channel:	2405+5 k, k=0 ~ 15
Rated Power:	DC 3V
Power Cord:	N/A
Sample receiving date:	2021/07/19
Sample condition:	Workable
Test Date(s):	2021/07/27 ~ 2021/07/30

1.2 Additional information about the EUT

The customer confirmed the models listed as below were series model to model SCAZB-143 (EUT), the difference between main model and series model are listed as below.

Model Number	Different
SMAZB-141	Base model
SMAZB-143	SMAZB-141 + 2 × L91 battery
SCAZB-141	SMAZB-141 + CO detector
SCAZB-143	SCAZB-141 + 2 × L91 battery

For more detail features, please refer to user's Manual.

1.3 Antenna description

Antenna Gain	: 1 dBi
Antenna Type	: Printed antenna
Connector Type	: Fixed

TEST REPORT**1.4 Operation mode**

The EUT press the button to select different frequency and modulation.

Mode	Channel	Frequency (MHz)	Signal transmit on time (ms)	Signal transmit on+off time (ms)	Duty cycle	Duty factor (dB)	1/T Minimum VBW (kHz)
Zigbee	Mid	2445	10.00	10.00	100.00%	0.00	0.01

1.5 Peripherals equipment

Peripherals	Brand	Model No.	Serial No.	Data cable
Lithium Battery	Panasonic	CR123A	N/A	N/A

2. Minimum 6 dB Bandwidth


2.1 Instrument Setting

Spectrum Parameter	Setting
Detector	Peak
RBW	100kHz
VBW	$\geq 3 \times \text{RBW}$
Sweep	Auto couple
Trace	Allow the trace to stabilize.
Span	Between two times and five times the occupied bandwidth
Attenuation	Auto

2.2 Test Procedure

Step 1	The transmitter output was connected to the spectrum analyzer.
Step 2	Test was performed accordance with ANSI C63.10.
Step 3	Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

2.3 Test Diagram

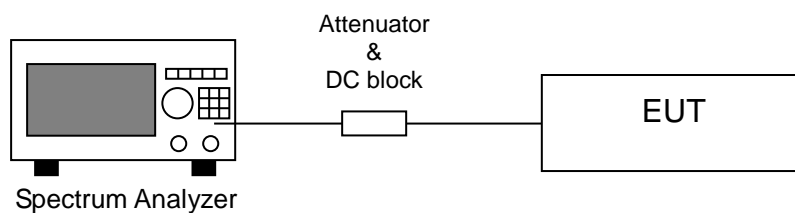

2.4 Limit


The minimum 6 dB bandwidth shall be at least 500 kHz.

2.5 Test Results

Temperature (°C):	28
Relative Humidity (%):	61
Test date:	2021/7/30

Mode	Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)	Result
Zigbee	Low	2405	1.72	>0.5	Pass
	Mid	2445	1.65	>0.5	Pass
	High	2480	1.73	>0.5	Pass

Chain 0: 6dB Bandwidth @ Zigbee Mode Ch Low

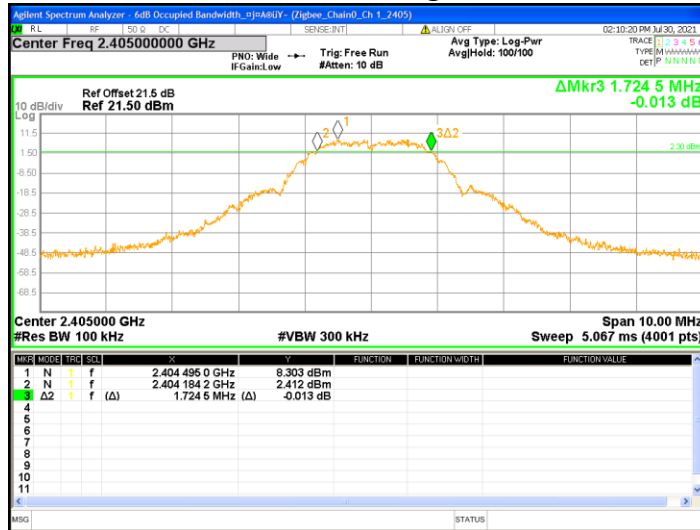

Chain 0: 6dB Bandwidth @ Zigbee Mode Ch Mid



Chain 0: 6dB Bandwidth @ Zigbee Mode Ch High



3. Maximum Peak Conducted Output Power


3.1 Instrument Setting

Power Meter Parameter	Setting
Bandwidth	65MHz bandwidth is greater than the EUT emission bandwidth
Detector	Peak & Average

3.2 Test Procedure

The preferred methodology is to use integrated average power measurements, as described in 11.9.2 and 11.13.3 of ANSI C63.10. The peak integrated band power methods of 11.9.1.2 and 11.13.3.2 of ANSI C63.10 are not applicable for FCC compliance testing purposes.

3.3 Test Diagram

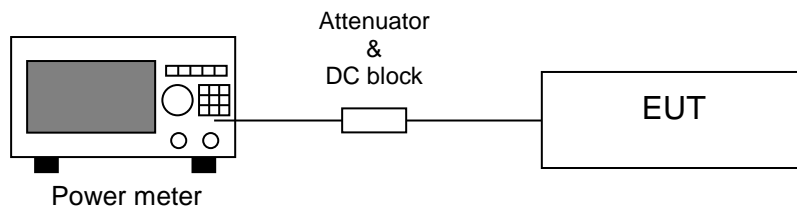

3.4 Limit

For systems using digital modulation in the 2400-2483.5 MHz: 1 Watt (30dBm)

TEST REPORT

3.5 Test Results

Temperature (°C):	28
Relative Humidity (%):	61
Test date:	2021/7/30

Mode	Channel	Frequency (MHz)	Output Power [AV] (dBm)	Total Power [AV] (mW)	Maximum Power [PK] (dBm)	Maximum Power [PK] (mW)	Limit (dBm)	Margin (dB)
Zigbee	Low	2405	13.07	20.28	13.15	20.65	30	-16.85
	Mid	2445	11.89	15.45	11.99	15.81	30	-18.01
	High	2480	10.98	12.53	11.12	12.94	30	-18.88

4. Power Spectral Density


4.1 Instrument Setting

Spectrum Function	Setting
Detector	Peak
RBW	≥ 3 kHz
VBW	$\geq 3 \times$ RBW
Sweep	Auto couple
Trace	Max hold
Span	1.5 times \times 6dB bandwidth
Attenuation	Auto

4.2 Test Procedure

Step 1	Test procedure refer to subclause 11.10 of ANSI C63.10.
Step 2	Using the maximum conducted output power in the fundamental emission demonstrates compliance. The EUT must be configured to transmit continuously at full power over the measurement duration.
Step 3	Use the peak marker function to determine the maximum amplitude level within the RBW.

4.3 Test Diagram

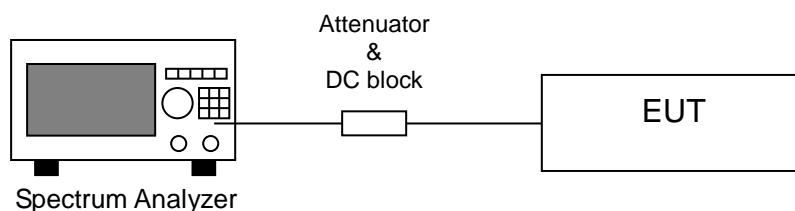

4.4 Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission

TEST REPORT

4.5 Test Results

Temperature (°C):	28
Relative Humidity (%):	61
Test date:	2021/7/30

Mode	Channel	Frequency (MHz)	RBW factor	PSD in 10kHz	PSD in 3kHz		Limit (dBm)	Margin (dB)
					(dBm)	(mW)		
Zigbee	Low	2405	5.23	-2.35	-7.58	0.17	8	-15.58
	Mid	2445	5.23	-3.11	-8.34	0.15	8	-16.34
	High	2480	5.23	-4.10	-9.33	0.12	8	-17.33

Note: Correction (RBW) Factor in 3kHz = $10\log(10\text{kHz}/3\text{kHz}) = 5.23$

Chain 0: Power Spectral Density @ Zigbee Mode Ch Low



Chain 0: Power Spectral Density @ Zigbee Mode Ch Mid



Chain 0: Power Spectral Density @ Zigbee Mode Ch High



5. Emissions in Non-Restricted Frequency Bands


5.1 Instruments Setting

Spectrum Function	Setting (Reference Level)	Setting (Emission Level)
Detector	Peak	Peak
RBW	≥ 100 kHz	≥ 100 kHz
VBW	$\geq 3 \times$ RBW	$\geq 3 \times$ RBW
Sweep	Auto couple	Auto couple
Trace	Max hold	Max hold
Span	≥ 1.5 time 6dB bandwidth	X
Attenuation	Auto	Auto

5.2 Test Procedure

- Step 1 The procedure was used in antenna-port conducted and connected to the spectrum analyzer.
- Step 2 Set instrument center frequency to center frequency.
- Step 3 Use the parameter configured in subclause 11.11 of ANSI C63.10 to measure.
- Step 4 Use the peak marker function to determine the maximum amplitude level.

5.3 Test Diagram

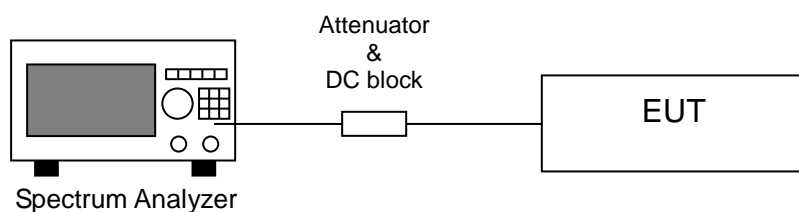


5.4 Limit

The peak output power measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz


5.5 Test Results

Temperature (°C):	28
Relative Humidity (%):	61
Test date:	2021/7/30


Chain 0: Conducted Spurious @ Zigbee Mode Ch Low

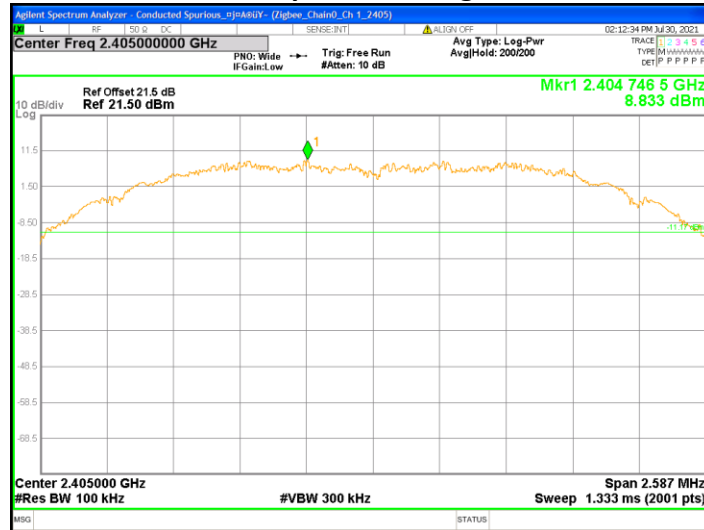


Chain 0: Conducted Spurious @ Zigbee Mode Ch Low

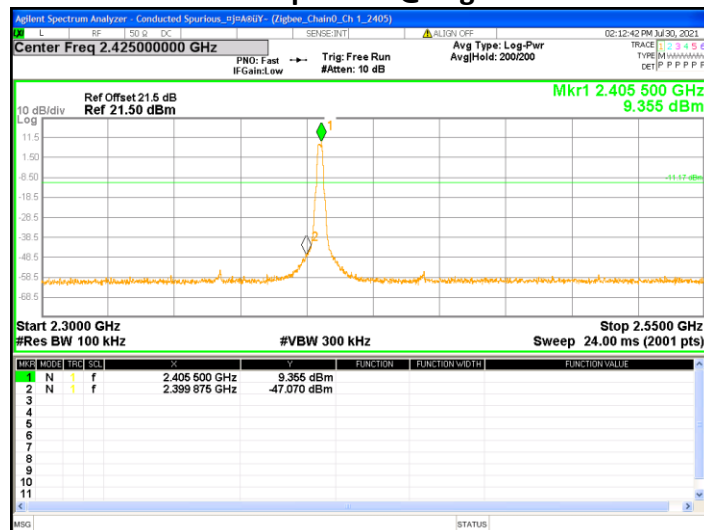


Chain 0: Conducted Spurious @ Zigbee Mode Ch Low

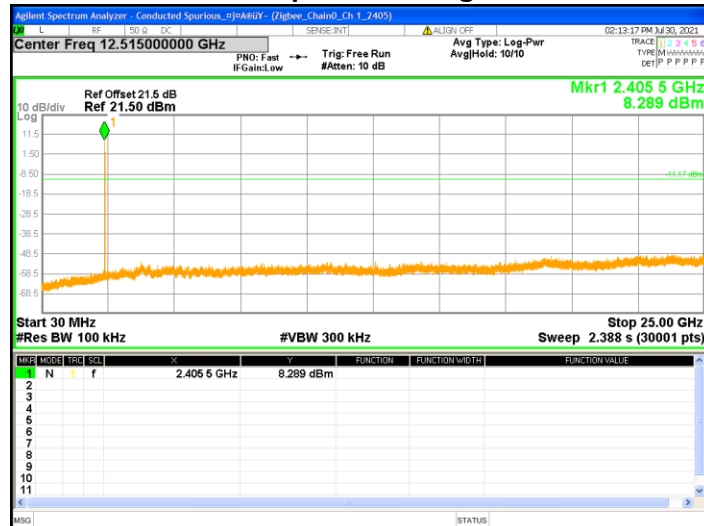


Chain 0: Conducted Spurious @ Zigbee Mode Ch Mid

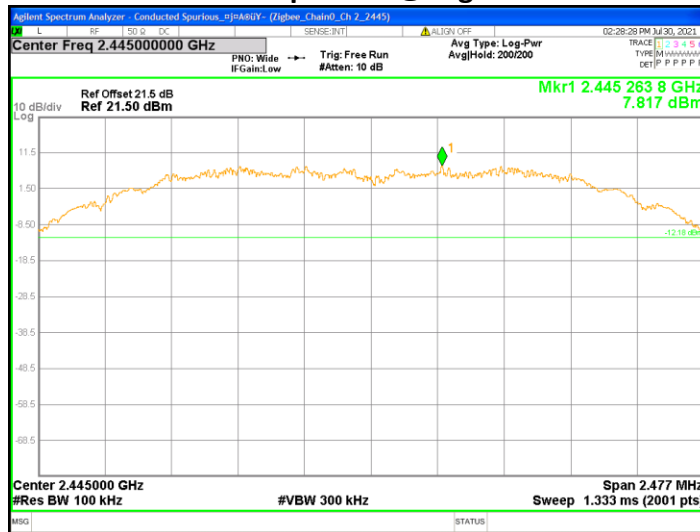


Chain 0: Conducted Spurious @ Zigbee Mode Ch Mid

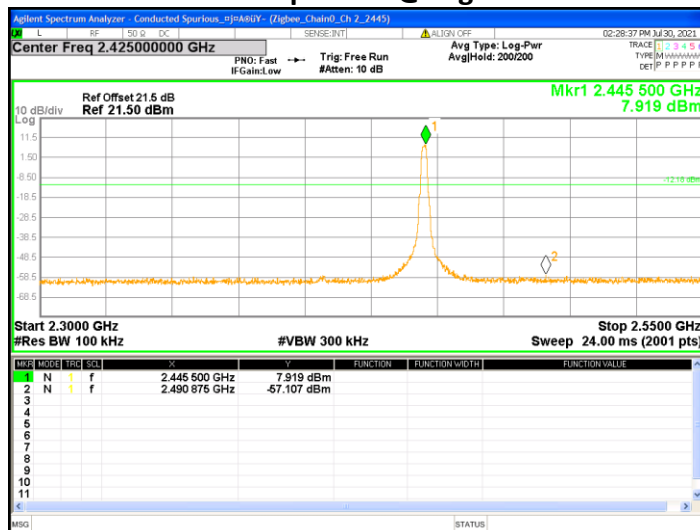


Chain 0: Conducted Spurious @ Zigbee Mode Ch Mid

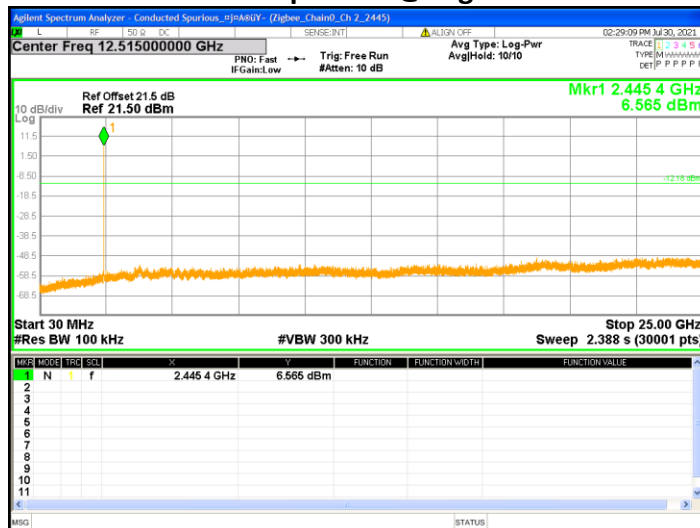


Chain 0: Conducted Spurious @ Zigbee Mode Ch High

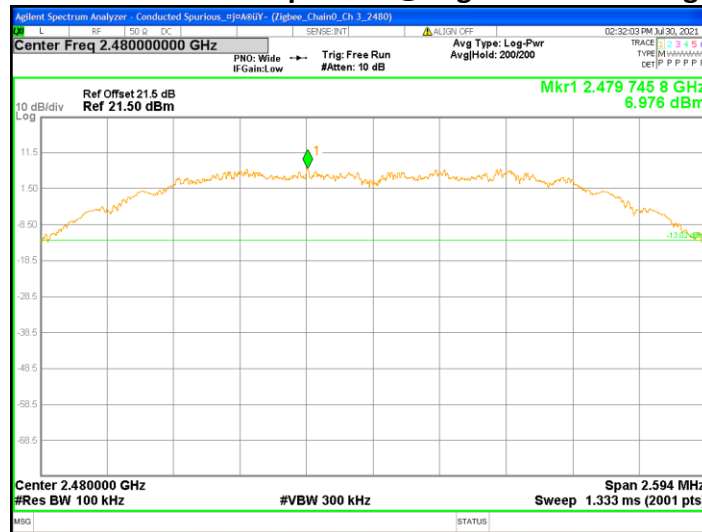

Chain 0: Conducted Spurious @ Zigbee Mode Ch High

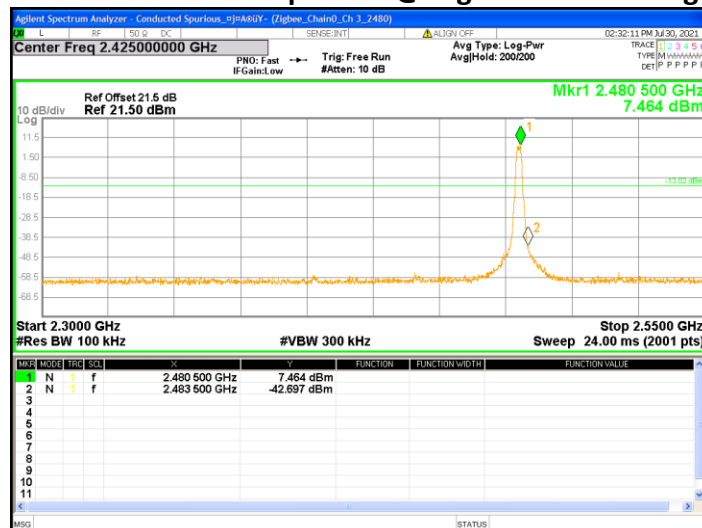

Chain 0: Conducted Spurious @ Zigbee Mode Ch High

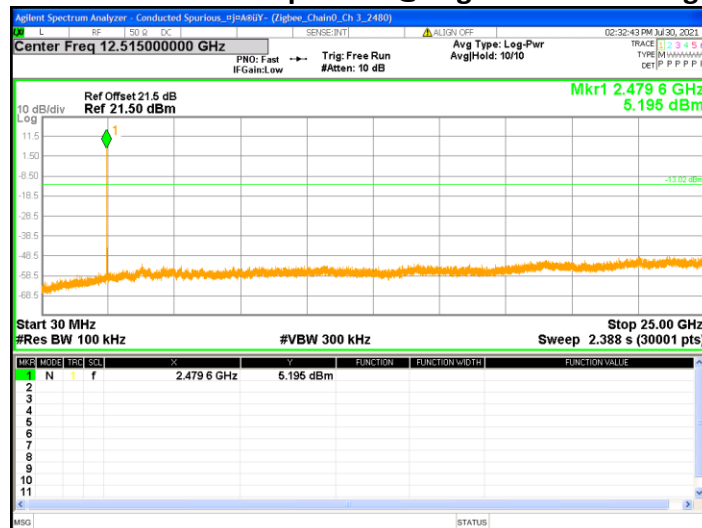


6. Emissions in Restricted Frequency Bands (Radiated emission measurements)

6.1 Instrument Setting


Receiver Function	Setting (Below 1GHz)	Setting (Above 1GHz)
Detector	QP	Peak and Average
RBW	9-150 kHz ; 200-300 Hz 0.15-30 MHz; 9-10 kHz 30-1000 MHz; 100-120 kHz	1MHz
VBW	$\geq 3 \times \text{RBW}$	3MHz & 1/T Minimum VBW
Sweep	Auto couple	Auto couple
Start Frequency	9 kHz	1GHz
Stop Frequency	1 GHz	Tenth harmonic
Attenuation	Auto	Auto

6.2 Test setup & procedure


Radiated emission from 9kHz to 30MHz uses Loop Antenna:

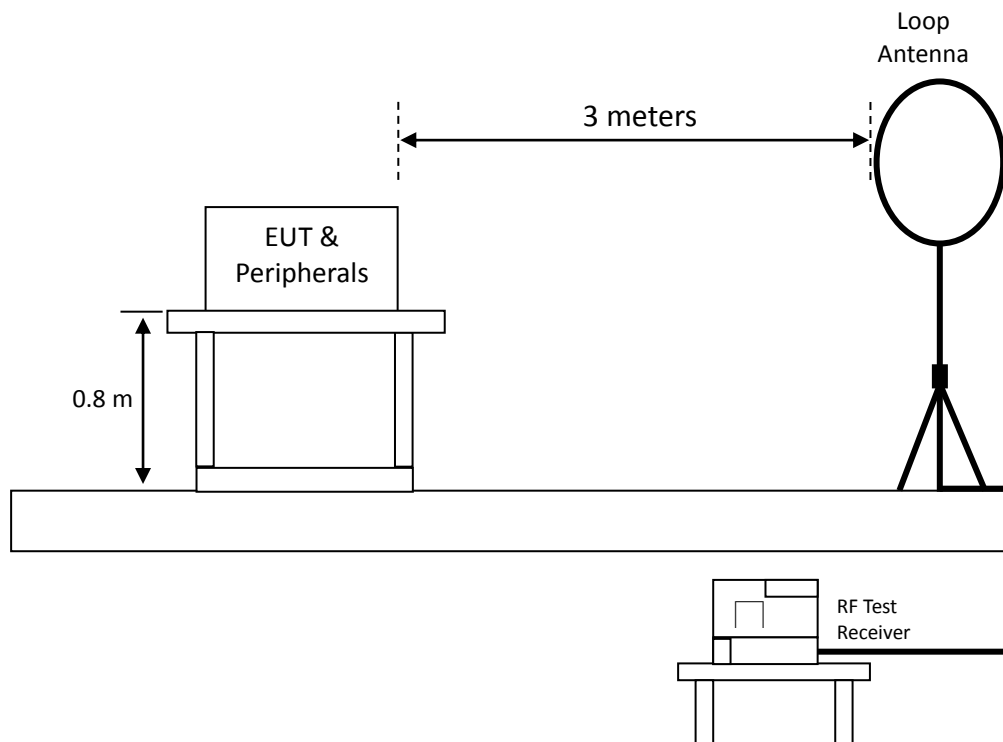

Radiated emission below 1GHz using Bilog Antenna

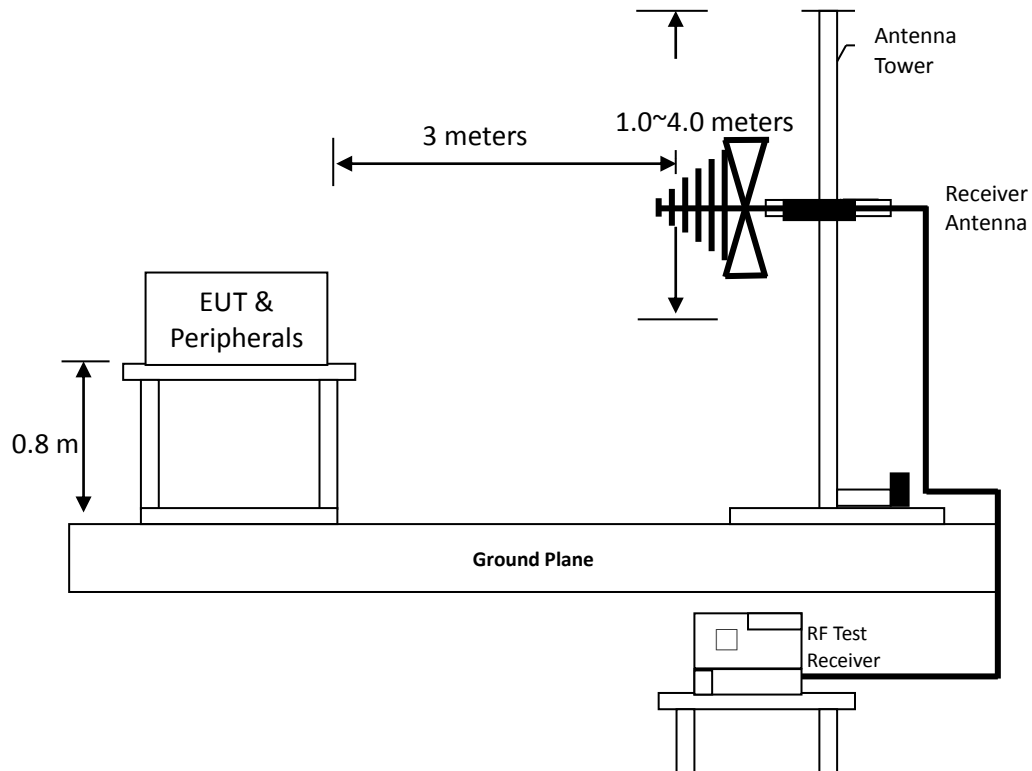

Radiated emission above 1GHz using Horn Antenna

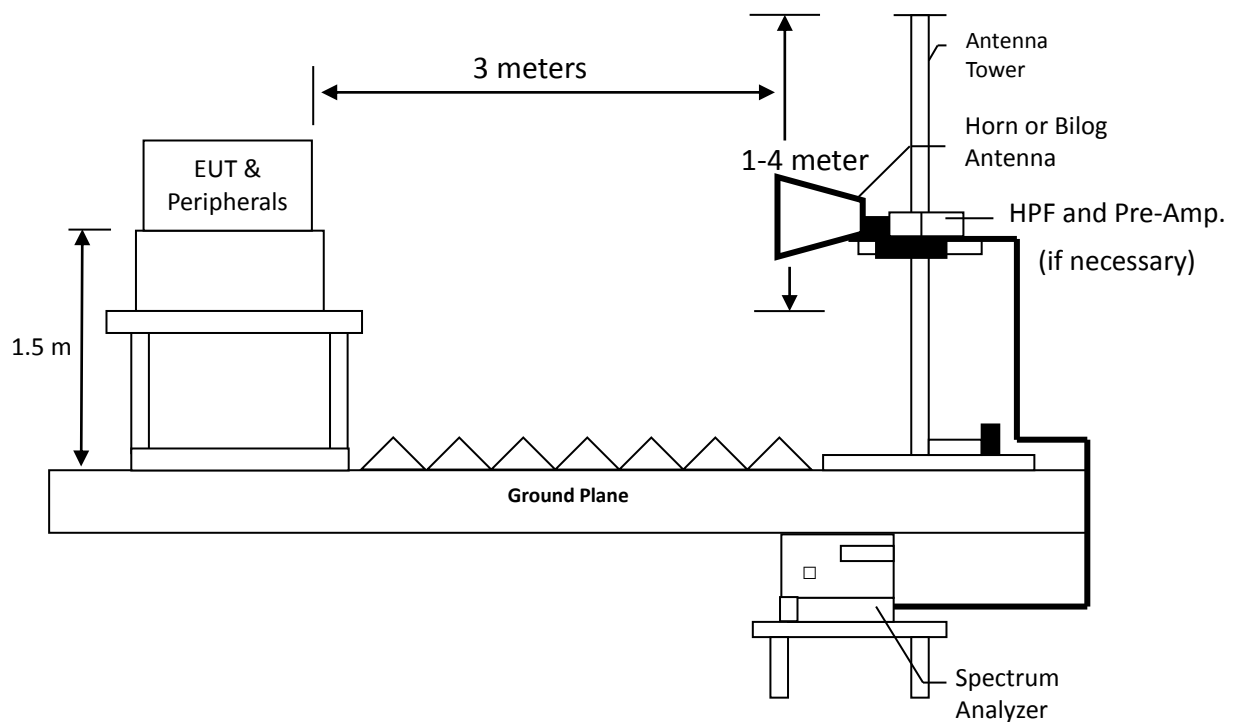

TEST REPORT

Radiated emissions were investigated cover the frequency range from 30MHz to 1000MHz using a receiver RBW of 120kHz record QP reading, and the frequency over 1GHz using a spectrum analyzer RBW of 1MHz and 10Hz VBW record Average reading. (15.209 paragraph), the Peak reading (1 MHz RBW/ 3 MHz VBW) recorded also on the report.

The EUT for testing is arranged on a turntable. If some peripherals apply to the EUT, the peripherals will be connected to EUT and the whole system. During the test, all cables were arranged to produce worst-case emissions. The signal is maximized through rotation. The height of antenna and polarization is changing constantly for exploring for maximum signal level. The height of antenna can be up to 4 meters and down to 1 meter.

The measurement for radiated emission will be done at the distance of three meters unless the signal level is too low to measure at that distance. In the case of the reading under noise floor, a pre-amplifier is used and/or the test is conducted at a closer distance. And then all readings are extrapolated back to the equivalent three meter reading using inverse scaling with distance.

6.3 Limit

Frequency(MHz)	Field Strength(uV/m)	Measurement distance(m)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark:

1. In the above table, the tighter limit applies at the band edges.
2. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system

TEST REPORT

6.4 Test Result

6.4.1 Measurement results: frequencies 9kHz to 30MHz

Temperature (°C):	30
Relative Humidity (%):	63
Test date:	2021/7/27

The test was performed on EUT under continuously transmitting mode. The worst case occurred at Channel Low.

Antenna Polarity	Frequency (MHz)	Spectrum Analyzer Detector	Correction Factor (dB/m)	Reading (dBμV)	Corrected Reading (dBμV/m)	Limit @ 3 m (dBμV/m)	Margin (dB)
Perpendicular	0.01	AV	18.20	56.48	74.68	128.52	-53.84
Perpendicular	0.16	AV	18.57	50.15	68.72	103.63	-34.91
Perpendicular	0.22	AV	18.75	48.61	67.36	100.85	-33.49
Perpendicular	0.50	QP	19.40	39.50	58.90	73.64	-14.74
Perpendicular	0.82	QP	19.65	27.01	46.66	69.36	-22.70
Perpendicular	0.88	QP	19.63	25.63	45.26	68.78	-23.52

Antenna Polarity	Frequency (MHz)	Spectrum Analyzer Detector	Correction Factor (dB/m)	Reading (dBμV)	Corrected Reading (dBμV/m)	Limit @ 3 m (dBμV/m)	Margin (dB)
Parallel	0.01	AV	18.20	59.85	78.05	128.52	-50.47
Parallel	0.16	AV	18.57	51.87	70.44	103.63	-33.19
Parallel	0.22	AV	18.75	49.65	68.40	100.85	-32.45
Parallel	0.52	QP	19.39	40.32	59.71	73.34	-13.63
Parallel	0.61	QP	19.34	34.85	54.19	71.93	-17.74
Parallel	0.85	QP	19.64	29.00	48.64	69.07	-20.43

TEST REPORT

Antenna Polarity	Frequency (MHz)	Spectrum Analyzer Detector	Correction Factor (dB/m)	Reading (dB μ V)	Corrected Reading (dB μ V/m)	Limit @ 3 m (dB μ V/m)	Margin (dB)
Ground-parallel	0.01	AV	18.20	56.60	74.80	128.52	-53.72
Ground-parallel	0.16	AV	18.57	51.55	70.12	103.63	-33.51
Ground-parallel	0.22	AV	18.75	48.23	66.98	100.85	-33.87
Ground-parallel	0.50	QP	19.40	38.87	58.27	73.64	-15.37
Ground-parallel	0.73	QP	19.54	27.66	47.20	70.43	-23.23
Ground-parallel	0.85	QP	19.64	27.26	46.90	69.07	-22.17

TEST REPORT

6.4.2 Measurement results: frequencies below 1 GHz

Temperature (°C):	30
Relative Humidity (%):	63
Test date:	2021/7/27

The test was performed on EUT under continuously transmitting mode. The worst case occurred at Channel Low.

Antenna Polarity	Frequency (MHz)	Spectrum Analyzer Detector	Correction Factor (dB/m)	Reading (dBμV)	Corrected Reading (dBμV/m)	Limit @ 3 m (dBμV/m)	Margin (dB)
Vertical	53.28	QP	20.94	3.53	24.47	40.00	-15.53
Vertical	153.19	QP	20.92	4.55	25.47	43.50	-18.03
Vertical	244.37	QP	20.37	5.05	25.42	46.00	-20.58
Vertical	372.41	QP	23.82	5.04	28.86	46.00	-17.14
Vertical	554.77	QP	28.14	4.72	32.86	46.00	-13.14
Vertical	748.77	QP	31.91	6.02	37.93	46.00	-8.07

Antenna Polarity	Frequency (MHz)	Spectrum Analyzer Detector	Correction Factor (dB/m)	Reading (dBμV)	Corrected Reading (dBμV/m)	Limit @ 3 m (dBμV/m)	Margin (dB)
Horizontal	52.31	QP	20.93	3.49	24.42	40.00	-15.58
Horizontal	159.01	QP	21.11	3.57	24.68	43.50	-18.82
Horizontal	295.78	QP	21.89	4.52	26.41	46.00	-19.59
Horizontal	435.46	QP	25.80	5.04	30.84	46.00	-15.16
Horizontal	593.57	QP	29.20	5.71	34.91	46.00	-11.09
Horizontal	744.89	QP	31.85	4.69	36.54	46.00	-9.46

Remark: Corr. Factor = Antenna Factor + Cable Loss

TEST REPORT

6.4.3 Measurement results: frequency above 1GHz to 25GHz

Temperature (°C):	30
Relative Humidity (%):	63
Test date:	2021/7/27

Mode	Frequency (MHz)	Spectrum Analyzer Detector	Ant. Pol. (H/V)	Correction Factor (dB/m)	Reading (dBμV)	Corrected Reading (dBμV/m)	Limit @ 3 m (dBμV/m)	Margin (dB)
Zigbee , Ch_Low	4810	PK	V	17.58	32.63	50.21	74.00	-23.79
	4810	PK	H	17.58	32.03	49.61	74.00	-24.39
Zigbee , Ch_Mid	4890	PK	V	17.67	31.60	49.27	74.00	-24.73
	4890	PK	H	17.67	30.29	47.96	74.00	-26.04
Zigbee , Ch_High	4960	PK	V	17.94	30.80	48.74	74.00	-25.26
	4960	PK	H	17.94	29.95	47.89	74.00	-26.11

Remark: Correction Factor = Antenna Factor + Cable Loss + High Pass Filter Loss - Pre_Amplifier Gain

7. Emission on Band Edge

7.1 Instrument Setting

Spectrum Function	Setting
Detector	Peak and Average
RBW	1MHz
VBW	3MHz & 1/T Minimum VBW
Sweep	Auto couple
Restrict bands	2310 MHz ~ 2390 MHz 2483.5 MHz ~ 2500 MHz
Attenuation	Auto

7.2 Test Procedure

The test procedure is the same as Emissions in Restricted Frequency Bands (Radiated emission measurements).


7.3 Test Results

Temperature (°C):	30
Relative Humidity (%):	63
Test date:	2021/7/27


Mode	Frequency (MHz)	Spectrum Analyzer Detector	Ant. Pol. (H/V)	Correction Factor (dB/m)	Reading (dBμV)	Corrected Reading (dBμV/m)	Limit @ 3 m (dBμV/m)	Margin (dB)	Restricted band (MHz)
Zigbee	2367.00	PK	H	34.88	9.83	44.71	74	-29.29	2310~2390
	2367.19	AV	H	34.88	1.01	35.89	54	-18.11	
	2483.50	PK	H	34.80	27.20	62.00	74	-12.00	2483.5~2500
	2483.50	AV	H	34.80	16.08	50.88	54	-3.12	

Remark: Correction Factor = Antenna Factor + Cable Loss


Restricted Band Bandedge @ Zigbee Mode Ch Low PK

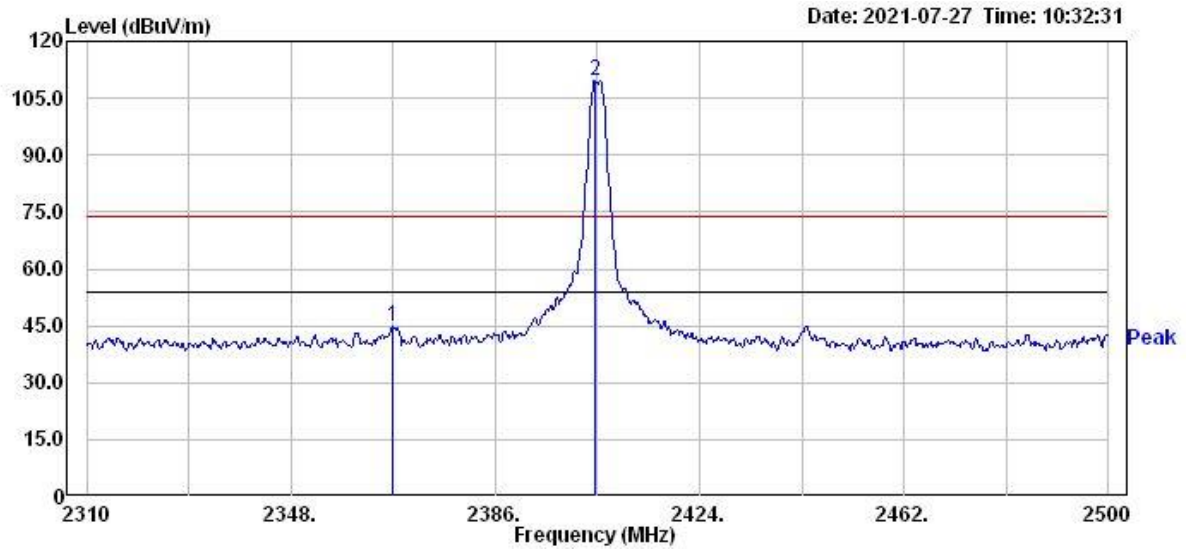


Restricted Band Bandedge @ Zigbee Mode Ch Low AV

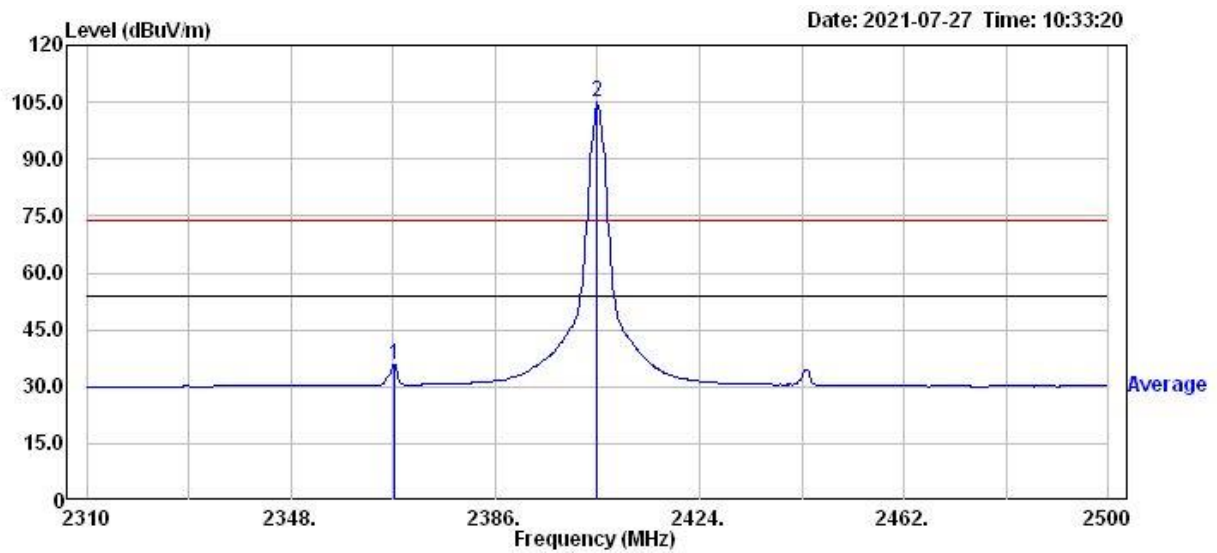

Restricted Band Bandedge @ Zigbee Mode Ch High PK

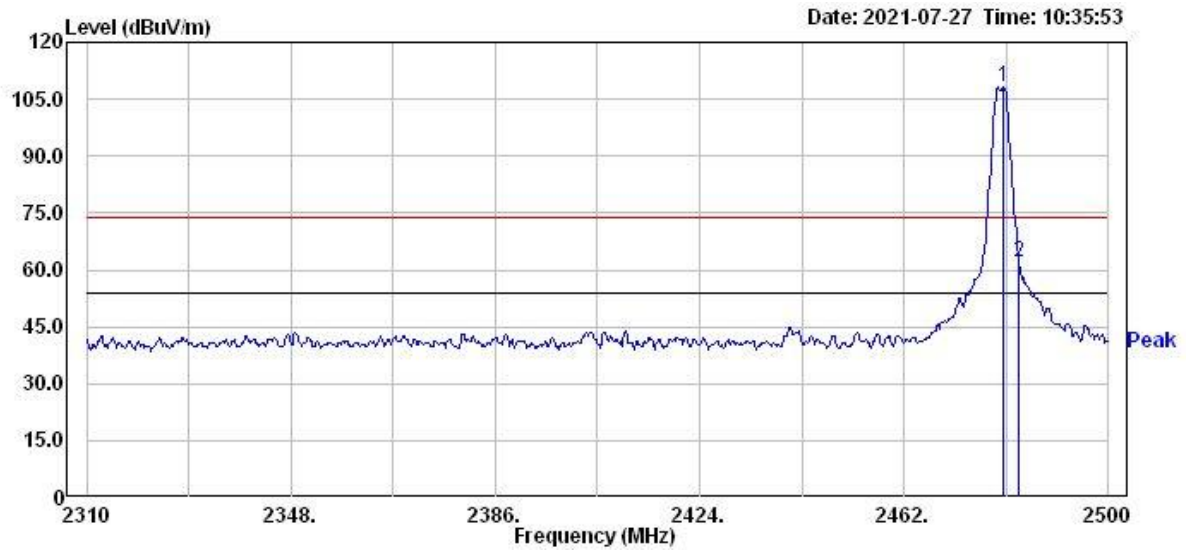

Restricted Band Bandedge @ Zigbee Mode Ch High AV

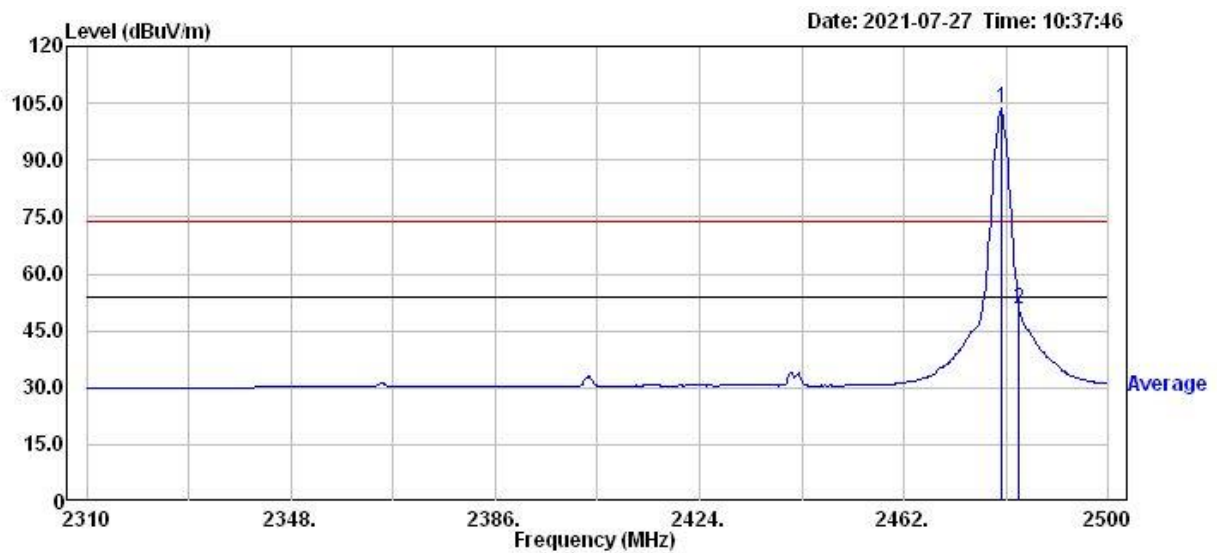

8. AC Power Line Conducted Emission

Since the EUT is not connected to AC source, therefore, the test can be waived.

Appendix A: Test equipment list

Test Equipment/ Test site	Brand	Model No.	Serial No.	Calibration Date	Next Calibration Date
EMI Test Receiver	Rohde & Schwarz	ESR7	101822	2020/08/18	2021/08/17
Spectrum Analyzer	Rohde & Schwarz	FSP30	100137	2020/08/25	2021/08/24
Signal Analyzer	Agilent	N9030A	MY51380492	2020/08/17	2021/08/16
Active Loop Antenna	SCHWARZBECK MESS-ELEKTRONIC	FMZB1519	1519-067	2021/04/14	2022/04/13
Broadband Antenna	SHWARZBECK	VULB 9168	9168-172	2021/01/29	2022/01/28
Horn Antenna	SHWARZBECK	BBHA 9120 D	9120D-456	2021/01/11	2022/01/10
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170159	2020/08/20	2023/08/19
Pre-Amplifier	AML	AML0120L3401	0419-114	2020/12/16	2021/12/15
Pre-amplifier	SGH	SGH184	20201124-1	2020/12/16	2021/12/15
Power Meter	Anritsu	ML2495A	0844001	2020/10/28	2021/10/27
Power Sensor	Anritsu	MA2411B	0738452	2020/10/28	2021/10/27
966-2(A) Cable	SUHNER	SUCOLEX 104	295105/4	2021/03/08	2022/03/07
966-2(B) Cable	SUHNER	SUCOFLEX 104P	CB0005	2021/03/08	2022/03/07
RF Cable	SUHNER	SUCOFLEX 104P	CB0006	2021/04/29	2022/04/28
966-2_3m Semi-Anechoic Chamber	966_2	CEM-966_2	N/A	2021/01/15	2022/01/14
Hight Pass Filter	Reactel	7HS-3G/18G-S11	N/A	2021/05/26	2022/05/25
20dB Attenuator	Mini-Circuits	BW-S20W5+	N/A	2021/05/26	2022/05/25
Test software	Audix	e3	V9	NCR	NCR

Note: No Calibration Required (NCR).

Appendix B: Measurement Uncertainty

This uncertainty represents an expanded uncertainty expressed at approximately the 95 % confidence level using a coverage factor of k=2.

Item	Uncertainty
Vertically polarized radiated disturbances from 30MHz~1GHz in a semi-anechoic chamber at a distance of 3m	5.16 dB
Horizontally polarized radiated disturbances from 30MHz~1GHz in a semi-anechoic chamber at a distance of 3m	5.02 dB
Radiated disturbances from 1GHz~18GHz in a semi-anechoic chamber at a distance of 3m	5.17 dB
Vertically polarized Radiated disturbances from 18GHz~26.5GHz in a semi-anechoic chamber at a distance of 1m	2.39 dB
Horizontally polarized Radiated disturbances from 18GHz~26.5GHz in a semi-anechoic chamber at a distance of 1m	2.39 dB
Radiated disturbances from 9kHz~30MHz in a semi-anechoic chamber at a distance of 3m	3.70 dB
Emission on the Band Edge Test	4.32 dB
RF Antenna Conducted Spurious Test	1.27 dB
Maximum Output Power Test	0.44 dB
Occupied Bandwidth Test	7.78 %
Carrier Frequency Separation Test	1.27 dB
Number of Hopping Frequencies Test	1.27 dB
Time of Occupancy (Dwell Time) Test	1.27 dB
AC Power Line Conducted Emission	3.08 dB