

FCC TEST REPORT

For

Samson Electronics Inc.
Portable speaker

Model No.: BRS-2001, BRS-2000

Prepared for : Samson Electronics Inc.
Address : 3400 E. Slauson Ave. Maywood California 90270 United States

Prepared By : Shenzhen Anbotek Compliance Laboratory Limited
Address : 1/F., Building 1, SEC Industrial Park, No.0409 Qianhai Road,
Nanshan District, Shenzhen, Guangdong, China
Tel: (86) 755-26066544
Fax: (86) 755-26014772

Report Number : R011605515I
Date of Test : May 18~Jun. 06, 2016
Date of Report : Jun. 08, 2016

TABLE OF CONTENT

Description

	Page
Test Report	
1. GENERAL INFORMATION.....	5
1.1. Client Information.....	5
1.2. Description of Device (EUT).....	5
1.3. Auxiliary Equipment Used during Test.....	6
1.4. Description of Test Facility.....	6
1.5. Measurement Uncertainty.....	6
2. TEST METHODOLOGY.....	7
2.1. Summary of Test Results.....	7
2.2. Description of Test Modes.....	7
2.3. List of channels:.....	8
3. CONDUCTED EMISSION TEST.....	9
3.1. Block Diagram of Test Setup.....	9
3.2. Power Line Conducted Emission Measurement Limits (15.207).....	9
3.3. Configuration of EUT on Measurement.....	9
3.4. Operating Condition of EUT.....	9
3.5. Test Procedure.....	10
3.6. Test equipment.....	10
3.7. Power Line Conducted Emission Measurement Results.....	10
4. RADIATION INTERFERENCE.....	13
4.1 Requirements (15.247, 15.209):.....	13
4.2 Test Procedure.....	13
4.3 Test Configuration.....	15
4.4 Test Results.....	15
5. CHANNEL SEPARATION TEST.....	25
5.1 Measurement Procedure.....	25
5.2 Test SET-UP.....	25
5.3 Test Equipment.....	25
5.4 Test Results.....	26
6. 20DB BANDWIDTH TEST.....	28
6.1 Measurement Procedure.....	28
6.2 Test SET-UP.....	28
6.3 Test Equipment.....	28
6.4 Test Results.....	28
7. QUANTITY OF HOPPING CHANNEL TEST.....	30
7.1 Measurement Procedure.....	30
7.2 Test SET-UP.....	30

7.3 Test Equipment.....	30
7.4 Test Results.....	30
8. DWELL TIME TEST.....	33
8.1 Measurement Procedure.....	33
8.2 Test SET-UP.....	33
8.3 Test Equipment.....	33
8.4 Test Results.....	33
9. MAXIMUM PEAK OUTPUT POWER TEST.....	35
9.1 Measurement Procedure.....	35
9.2 Test SET-UP.....	35
9.3 Test Equipment.....	35
9.4 Test Results.....	36
10. BAND EDGE TEST.....	38
10.1 Measurement Procedure.....	38
10.2 Test SET-UP.....	38
10.3 Test Equipment.....	39
10.4 Test Results.....	39
11. ANTENNA APPLICATION.....	44
11.1 Antenna requirement.....	44
11.2 Result.....	44
12. TEST SETUP PHOTOGRAPH.....	45
12.1. Photo of Conducted Emission Measurement.....	45
12.2. Photo of Radiation Emission Test.....	46
APPENDIX I (EXTERNAL PHOTOS).....	47
APPENDIX II (INTERNAL PHOTOS).....	50

TEST REPORT

Applicant : Samson Electronics Inc.
Manufacturer : GUANGZHOU HUAXING ELECTRONIC CO., LTD
EUT : Portable speaker
Model No. : BRS-2001, BRS-2000
Serial No. : N.A.
Trade Mark : 
Rating : Input DC 5V, 1A, Battery (inside) DC 3.7V, 1800mAh

Measurement Procedure Used:

FCC Part15 Subpart C 2015, Paragraph 15.207, 15.247 & 15.209


The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC Part 15 Subpart C requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.


Date of Test : May 16~Jun. 06, 2016



Prepared by : (Tested Engineer / Kebo Zhang)



Reviewer : (Project Manager / Dolly Mo)



Approved & Authorized Signer : (Manager / Tom Chen)

1. GENERAL INFORMATION

1.1. Client Information

Applicant	:	Samson Electronics Inc.
Address	:	3400 E. Slauson Ave. Maywood California 90270 United States
Manufacturer	:	GUANGZHOU HUAXING ELECTRONIC CO., LTD
Address	:	NO.75 JINGHU ROAD XINYA STREET, HUADU DISTRICT, GUANGZHOU CITY, CHINA
Factory	:	GUANGZHOU HUAXING ELECTRONIC CO., LTD
Address	:	NO.75 JINGHU ROAD XINYA STREET, HUADU DISTRICT, GUANGZHOU CITY, CHINA

1.2. Description of Device (EUT)

Product Name	:	Portable speaker
Models No.	:	BRS-2001
Serial No.	:	BRS-2000
Trademark	:	
Product Description	Operation Frequency:	2402MHz~2480MHz
	Transfer Rate:	1/2/3 Mbits/s
	Number of Channel:	79 Channels
	Modulation Type:	GFSK, π/4-DQPSK, 8-DPSK
	Modulation Technology:	FHSS
	Antenna Type:	Integral PCB Antenna
	Antenna Gain(Peak):	1.0 dBi
Power Supply	:	Input DC 5V, 1A, Battery (inside) DC 3.7V, 1800mAh

Note:

- (1) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

1.3. Auxiliary Equipment Used during Test

N/A

1.4. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 752021

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 752021, July 10, 2016.

IC-Registration No.: 8058A-1

Shenzhen Anbotek Compliance Laboratory Limited., EMC Laboratory has been registered and fully described in a report filed with the (IC) Industry Canada. The acceptance letter from the IC is maintained in our files. Registration 8058A, June 13, 2016.

Test Location

All Emissions tests were performed at

Shenzhen Anbotek Compliance Laboratory Limited. at 1/F., Building 1, SEC Industrial Park, No.0409 Qianhai Road, Nanshan District, Shenzhen, Guangdong, China

1.5. Measurement Uncertainty

Radiation Uncertainty : Ur = 4.1 dB (Horizontal)
Ur = 4.3 dB (Vertical)

Conduction Uncertainty : Uc = 3.4dB

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10: 2013 and FCC Part 15, Paragraph 15.207, 15.247 & 15.209.

2.1. Summary of Test Results

The EUT has been tested according to the following specifications:

Standard Section	Test Item	Judgment
15.203/15.247(c)	Antenna Requirement	PASS
15.207	Conducted Emission	PASS
15.247(b)(1)	Conducted Peak Output Power	PASS
15.247(a)(1)	20dB Occupied Bandwidth	PASS
15.247(a)(1)	Carrier Frequencies Separation	PASS
15.247(a)(1)	Hopping Channel Number	PASS
15.247(a)(1)	Dwell Time	PASS
15.205/15.209	Spurious Emission	PASS
15.247(d)	Band Edge	PASS
Remark: "N/A" is an abbreviation for Not Applicable.		

2.2. Description of Test Modes

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned follow was evaluated respectively.

Test Mode	Description
Transmitting mode	Keep the EUT in Transmitting mode with worst case data rate

Remark: The sample was placed 0.8m above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.

2.3. List of channels:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	27	2429	54	2456
01	2403	28	2430	55	2457
02	2404	29	2431	56	2458
03	2405	30	2432	57	2459
04	2406	31	2433	58	2460
05	2407	32	2434	59	2461
06	2408	33	2435	60	2462
07	2409	34	2436	61	2463
08	2410	35	2437	62	2464
09	2411	36	2438	63	2465
10	2412	37	2439	64	2466
11	2413	38	2440	65	2467
12	2414	39	2441	66	2468
13	2415	40	2442	67	2469
14	2416	41	2443	68	2470
15	2417	42	2444	69	2471
16	2418	43	2445	70	2472
17	2419	44	2446	71	2473
18	2420	45	2447	72	2474
19	2421	46	2448	73	2475
20	2422	47	2449	74	2476
21	2423	48	2450	75	2477
22	2424	49	2451	76	2478
23	2425	50	2452	77	2479
24	2426	51	2453	78	2480
25	2427	52	2454		
26	2428	53	2455		

Remark: Channel 0, 39 & 78 selected for GFSK, $\pi/4$ -DQPSK and 8DPSK.


2.4. Description of conducted measurements Test Modes

The product is PCB antenna, so conducted measurements used artificial antenna. The artificial antenna is $50\ \Omega$ load connected to the antenna connector.

3. Conducted Emission Test

3.1. Block Diagram of Test Setup

3.1.1. Block diagram of connection between the EUT and simulators

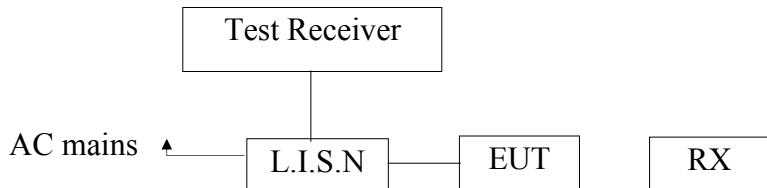

3.2. Power Line Conducted Emission Measurement Limits (15.207)

Frequency MHz	Limits dB(μ V)	
	Quasi-peak Level	Average Level
0.15 ~ 0.50	66 ~ 56*	56 ~ 46*
0.50 ~ 5.00	56	46
5.00 ~ 30.00	60	50

Notes: 1. *Decreasing linearly with logarithm of frequency.
2. The lower limit shall apply at the transition frequencies.

3.3. Configuration of EUT on Measurement

The following equipments are installed on Power Line Conducted Emission Measurement to meet the commission requirement and operating regulations in a manner which tends to maximize its emission characteristics in a normal application.

3.4. Operating Condition of EUT

- 3.4.1. Setup the EUT and simulator as shown as Section 3.1.
- 3.4.2. Turn on the power of all equipment.
- 3.4.3. Let the EUT work in test mode (ON) and measure it.

3.5. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.10-2013 on Conducted Emission Measurement.

The bandwidth of test receiver (ESCI) set at 9KHz.

The frequency range from 150KHz to 30MHz is checked.

The test results are reported on Section 3.6.

3.6. Test equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Two-Line V-network	Rohde & Schwarz	ENV216	100055	Apr. 16, 2016	1 Year
2.	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	Apr. 16, 2016	1 Year
3.	RF Switching Unit	Compliance Direction	RSU-M2	38303	Apr. 16, 2016	1 Year

3.7. Power Line Conducted Emission Measurement Results


PASS.

The frequency range from 150KHz to 30 MHz is investigated.

Please refer the following pages.

CONDUCTED EMISSION TEST DATA


Test Site: 1# Shielded Room
 Operating Condition: ON
 Test Specification: AC 110V/ 60Hz
 Comment: Live Line
 Tem.:24°C Hum.:49%

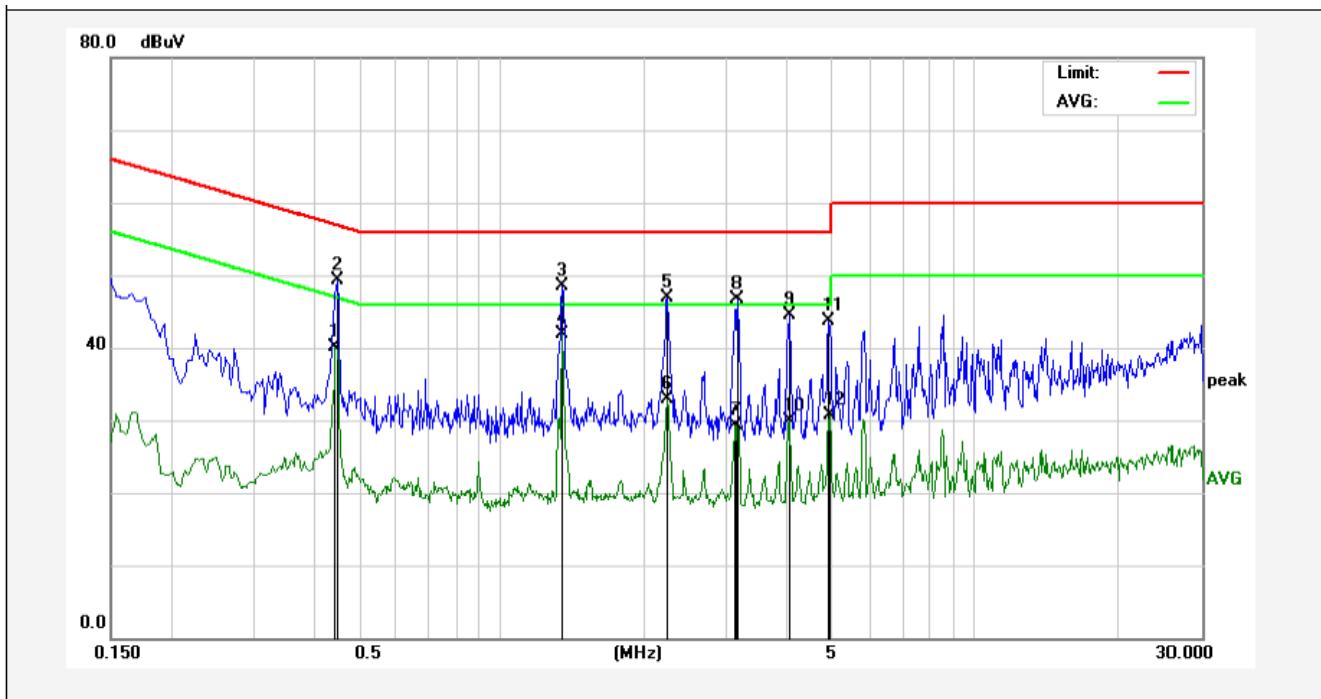

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.4460	20.05	20.00	40.05	46.95	-6.90	AVG	
2	0.4500	29.38	20.00	49.38	56.87	-7.49	QP	
3	1.3500	28.59	20.00	48.59	56.00	-7.41	QP	
4	1.3500	21.96	20.00	41.96	46.00	-4.04	AVG	
5	2.2460	26.90	20.00	46.90	56.00	-9.10	QP	
6	2.2460	12.94	20.00	32.94	46.00	-13.06	AVG	
7	3.1260	9.23	20.00	29.23	46.00	-16.77	AVG	
8	3.1460	26.64	20.00	46.64	56.00	-9.36	QP	
9	4.0500	24.48	20.00	44.48	56.00	-11.52	QP	
10	4.0500	9.81	20.00	29.81	46.00	-16.19	AVG	
11	4.9220	23.63	20.00	43.63	56.00	-12.37	QP	
12	4.9300	10.69	20.00	30.69	46.00	-15.31	AVG	

CONDUCTED EMISSION TEST DATA

Test Site: 1# Shielded Room
 Operating Condition: ON
 Test Specification: AC 110V/ 60Hz
 Comment: Neutral Line
 Tem.:24°C Hum.:49%

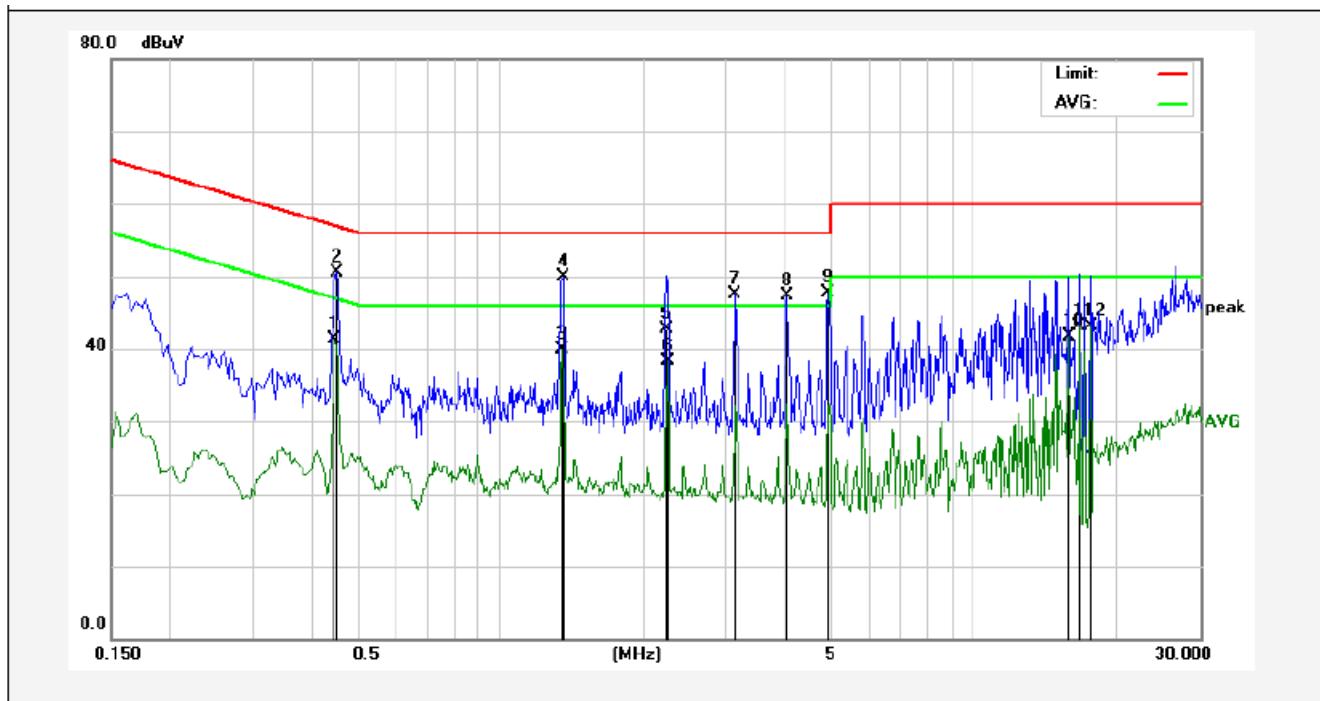

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.4460	21.39	20.00	41.39	46.95	-5.56	AVG	
2	0.4500	30.60	20.00	50.60	56.87	-6.27	QP	
3	1.3500	19.95	20.00	39.95	46.00	-6.05	AVG	
4	1.3540	29.99	20.00	49.99	56.00	-6.01	QP	
5	2.2460	22.65	20.00	42.65	56.00	-13.35	QP	
6	2.2540	18.30	20.00	38.30	46.00	-7.70	AVG	
7	3.1260	27.60	20.00	47.60	56.00	-8.40	QP	
8	4.0300	27.25	20.00	47.25	56.00	-8.75	QP	
9	4.9220	27.62	20.00	47.62	56.00	-8.38	QP	
10	15.8180	21.68	20.00	41.68	50.00	-8.32	AVG	
11	16.7139	23.09	20.00	43.09	50.00	-6.91	AVG	
12	17.6220	23.11	20.00	43.11	50.00	-6.89	AVG	

4. Radiation Interference

4.1 Requirements (15.247, 15.209):

4.1.1. Test Limits (< 30 MHZ)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meter)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30

4.1.2. Test Limits (\geq 30 MHZ)

FIELD STRENGTH of Fundamental: @3M	FIELD STRENGTH of Harmonics	S15.209 30 - 88 MHz	40 dB μ V/m
902-928 MHZ		88 - 216 MHz	43.5
2.4-2.4835 GHz		216 - 960 MHz	46
94 dB μ V/m @3m	54 dB μ V/m @3m	ABOVE 960 MHz	54dB μ V/m

For range 9KHz~30MHz, The measured value is really too low to be recorded.

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in 15.209, whichever is the lesser attenuation.

4.2 Test Procedure

For below 1GHz: The EUT is placed on a turntable, which is 0.8m above the ground plane.
 For above 1GHz: The EUT is placed on a turntable, which is 1.5m above the ground plane.
 The turn table can rotate 360 degrees to determine the position of the maximum emission level.
 The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower.
 The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Rotated the EUT through three orthogonal axes to determine the maximum emissions, both horizontal and vertical polarization of the antenna are set on test. The EUT is tested in 9*6*6 Chamber. The device is evaluated in xyz orientation.

For 9kHz to 150kHz:

Set the spectrum analyzer as:
 RBW = 200Hz, VBW =1kHz,
 Detector= Quasi-Peak
 Trace mode= Max hold.
 Sweep- auto couple.

For 150kHz to 30MHz:

Set the spectrum analyzer as:
 RBW = 9KHz, VBW =30kHz,
 Detector= Quasi-Peak
 Trace mode= Max hold.
 Sweep- auto couple.


Set the spectrum analyzer as:
 RBW =1MHz, VBW =10Hz
 Detector= Average
 Trace mode= Max hold.
 Sweep- auto couple.

Test Equipment


Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum Analysis	Agilent	E4407B	US39390582	Apr. 17, 2016	1 Year
2.	Preamplifier	Instruments corporation	EMC011830	980100	Apr. 17, 2016	1 Year
3.	EMI Test Receiver	Rohde & Schwarz	ESPI	101604	Apr. 17, 2016	1 Year
4.	Double Ridged Horn Antenna	Instruments corporation	GTH-0118	351600	Apr. 20, 2016	1 Year
5.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB9163-289	Apr. 20, 2016	1 Year
6.	Pre-amplifier	SONOMA	310N	186860	Apr. 17, 2016	1 Year
7.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A
8	Power Sensor	DAER	RPR3006W	15I00041SN046	Jun 30, 2015	1 Year
9	MXA Spectrum Analysis	Agilent	N9020A	MY51170037	Jun 30, 2015	1 Year
10	MXG RF Vector Signal Generator	Agilent	N5182A	MY48180656	Jun 30, 2015	1 Year
11	Signal Generator	Agilent	E4421B	MY41000743	Jun 30, 2015	1 Year
12	DC Power supply	IV	IV-8080	YQSB0096	Jun 30, 2015	1 Year
13	TEMP&HUMI PROGRAMMABLE CHAMBER	Bell Group	BE-THK-150M8	SE-0137	Mar 16, 2016	1 Year
14	Loop Antenna	ARA	PLA-1030/B	1029	Mar 16, 2016	1 Year
15	Simi-anechoic Chamber	ZY	Anbotek-01	AT-01	May 06, 2014	3 Year

4.3 Test Configuration


4.3.1. 9k to 30MHz emissions:

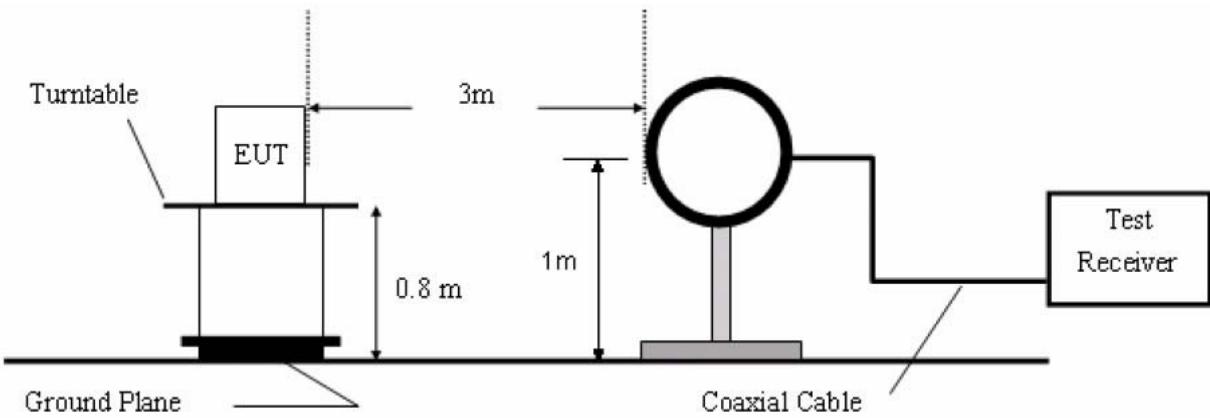

4.3.2. 30M to 1G emissions:

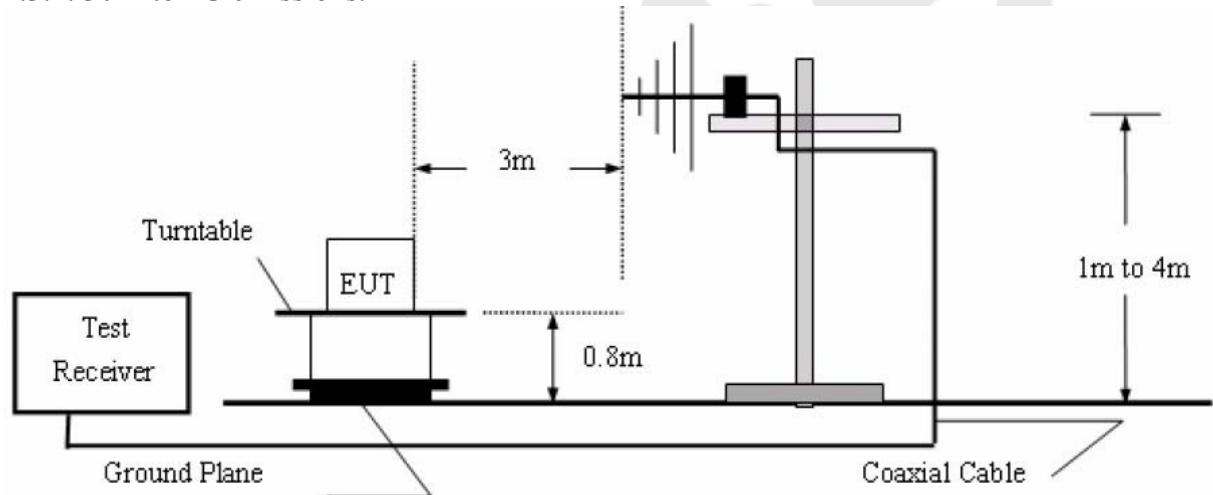

4.3.3. 1G to 40G emissions:

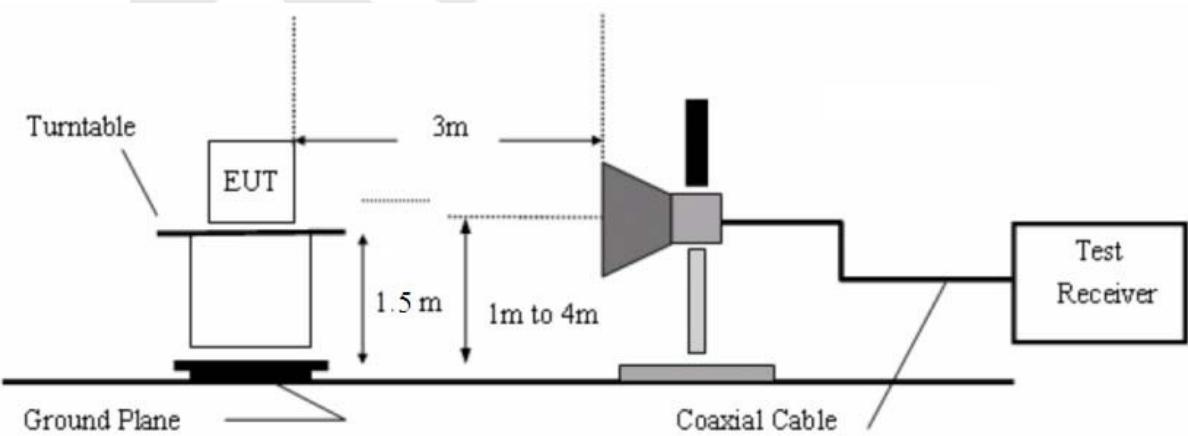

4.4 Test Results


PASS.

The EUT was tested on (BT Mode, AUX Mode, USB Mode) modes, only the worst data of (BT Mode) is attached in the following pages.
Only the worst case (x orientation).

The EDR was tested on ($\pi/4$ DQPSK, 8DPSK) modes, only the worst data of ($\pi/4$ DQPSK) is attached in the following pages.


The test results of 9kHz-30MHz and above 18000MHz are attenuated more than 20dB below the permissible limits, so the results don't record in the report.

Job No.:	011605515I	Polarization:	Horizontal
Standard:	(RE)FCC PART 15C _3m	Power Source:	AC 110V/60Hz
Test item:	Radiation Test (30~1000MHz)	Temp.(C)/Hum.(%RH):	24.3(C)/55% RH
Test Mode:	BT Mode	Distance:	3m

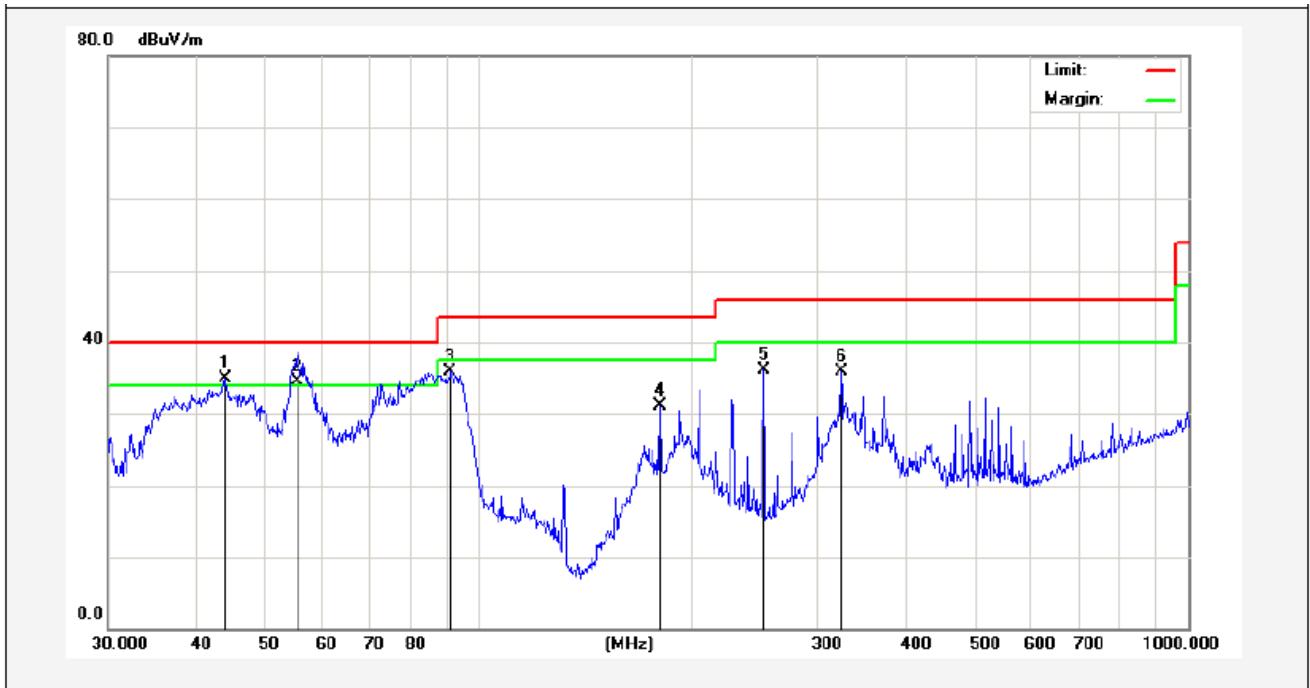


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	43.8119	46.82	-11.86	34.96	40.00	-5.04	QP	300	360	
2	55.4147	49.56	-14.97	34.59	40.00	-5.41	QP	300	0	
3	91.1745	58.37	-22.44	35.93	43.50	-7.57	peak			
4	180.0165	53.05	-21.85	31.20	43.50	-12.30	peak			
5	252.0627	54.74	-18.64	36.10	46.00	-9.90	peak			
6	324.4561	50.89	-15.04	35.85	46.00	-10.15	peak			

Job No.:	011605515I	Polarization:	Vertical
Standard:	(RE)FCC PART 15C _3m	Power Source:	AC 110V/60Hz
Test item:	Radiation Test (30~1000MHz)	Temp.(C)/Hum.(%RH):	24.3(C)/55%RH
Test Mode:	BT Mode	Distance:	3m

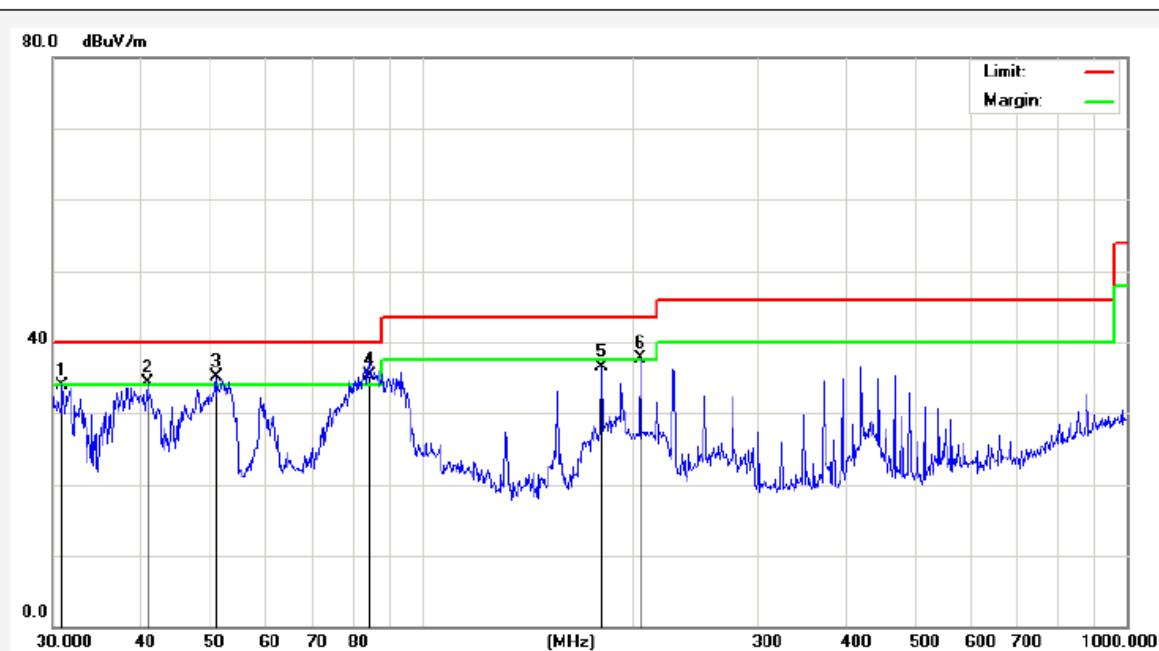

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	30.9618	50.36	-16.44	33.92	40.00	-6.08	peak			
2	40.8445	45.00	-10.71	34.29	40.00	-5.71	QP	100	0	
3	51.1208	49.82	-14.65	35.17	40.00	-4.83	QP	100	360	
4	84.4054	53.78	-18.54	35.24	40.00	-4.76	QP	100	0	
5	180.0165	53.30	-16.85	36.45	43.50	-7.05	peak			
6	204.2376	53.32	-15.71	37.61	43.50	-5.89	QP	100	360	

Job No.:	011605515I	Polarization:	Horizontal
Standard:	(RE)FCC PART 15C_Class B_3m	Power Source:	AC 110V/60Hz
Test item:	Radiation Test (Above 1GHz)	Temp.(C)/Hum.(%RH):	24.3(C)/55%RH
Test Mode:	TX(2402 MHz)	Distance:	3m

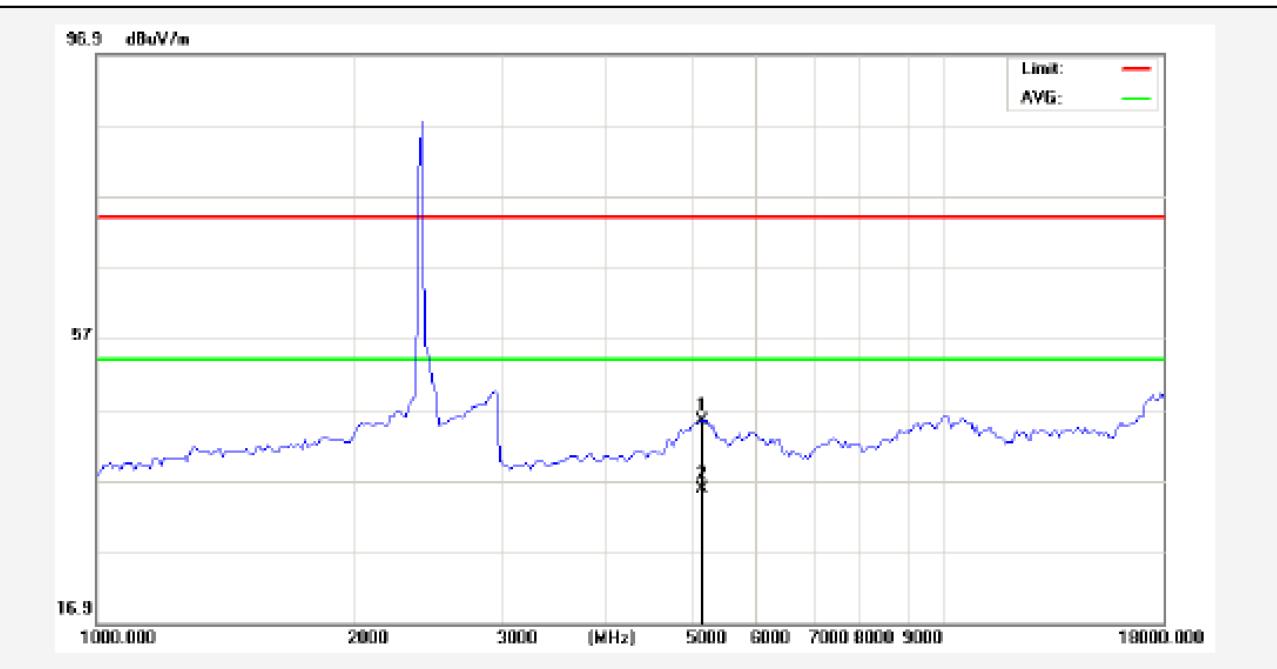

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	5165.000	41.73	3.76	45.49	74.00	-28.51	peak			
2	5165.000	31.98	3.76	35.74	54.00	-18.26	Avg			

Job No.:	011605515I	Polarization:	Vertical
Standard:	(RE)FCC PART 15C_Class B_3m	Power Source:	AC 110V/60Hz
Test item:	Radiation Test (Above 1GHz)	Temp.(C)/Hum.(%RH):	24.3(C)/55%RH
Test Mode:	TX(2402 MHz)	Distance:	3m

96.9 dBuV/m

57

16.9

1000.000 2000 3000 (MHz) 5000 6000 7000 8000 9000 19000.000

Limit: — Red
AVG: — Green

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	5165.000	41.73	3.76	45.49	74.00	-28.51	peak			
2	5165.000	31.98	3.76	35.74	54.00	-18.26	Avg			

Job No.:	011605515I	Polarization:	Horizontal
Standard:	(RE)FCC PART 15C_Class B_3m	Power Source:	AC 110V/60Hz
Test item:	Radiation Test (Above 1GHz)	Temp.(C)/Hum.(%RH):	24.3(C)/55%RH
Test Mode:	TX(2441 MHz)	Distance:	3m

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	5037.500	41.03	3.67	44.70	74.00	-29.30	peak			
2	5037.500	31.07	3.67	34.74	54.00	-19.26	Avg			

Job No.:	011605515I	Polarization:	Vertical
Standard:	(RE)FCC PART 15C_Class B_3m	Power Source:	AC 110V/60Hz
Test item:	Radiation Test (Above 1GHz)	Temp.(C)/Hum.(%RH):	24.3(C)/55%RH
Test Mode:	TX(2441 MHz)	Distance:	3m

96.9 dBuV/m


57

16.9

1000.000 2000 3000 (MHz) 5000 6000 7000 8000 9000 19000.000

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	4612.500	44.71	2.96	47.67	74.00	-26.33	peak			
2	4612.500	34.55	2.96	37.51	54.00	-16.49	Avg			

Job No.:	011605515I	Polarization:	Horizontal
Standard:	(RE)FCC PART 15C_Class B_3m	Power Source:	AC 110V/60Hz
Test item:	Radiation Test (Above 1GHz)	Temp.(C)/Hum.(%RH):	24.3(C)/55%RH
Test Mode:	TX(2480 MHz)	Distance:	3m

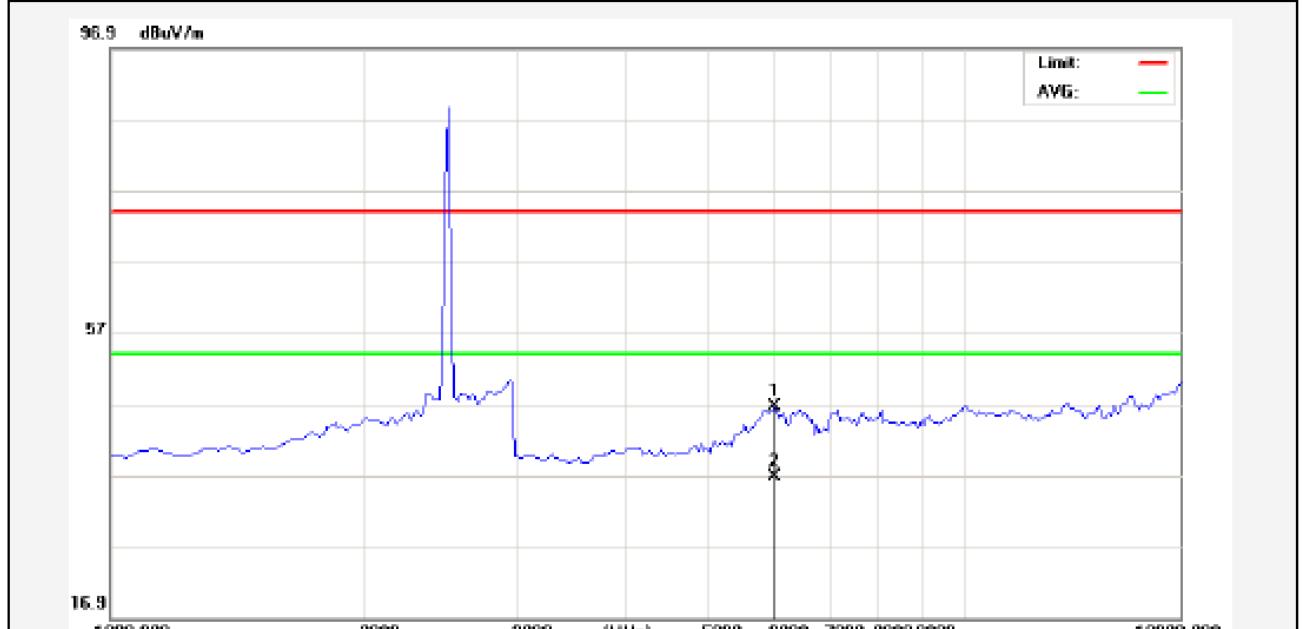

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	6015.000	39.44	7.14	46.58	74.00	-27.42	peak			
2	6015.000	29.71	7.14	36.85	54.00	-17.15	Avg			

Job No.:	011605515I	Polarization:	Vertical
Standard:	(RE)FCC PART 15C_Class B_3m	Power Source:	AC 110V/60Hz
Test item:	Radiation Test (Above 1GHz)	Temp.(C)/Hum.(%RH):	24.3(C)/55%RH
Test Mode:	TX(2480 MHz)	Distance:	3m

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	6057.500	37.50	7.18	44.68	74.00	-29.32	peak			
2	6057.500	27.59	7.18	34.77	54.00	-19.23	Avg			


5. CHANNEL SEPARATION TEST

5.1 Measurement Procedure

The EUT must have its hopping function enabled. Using the following spectrum analyzer settings:

1. Span= Wide enough to capture the peaks of two adjacent channels
2. Set the RBW = 100 kHz.
3. Set the VBW = 100 kHz.
4. Sweep time = auto couple.
5. Detector function = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.

5.2 Test SET-UP



5.3 Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum Analysis	Agilent	E4407B	US39390582	Apr. 17, 2016	1 Year
2.	Preamplifier	Instruments corporation	EMC011830	980100	Apr. 17, 2016	1 Year
3.	EMI Test Receiver	Rohde & Schwarz	ESPI	101604	Apr. 17, 2016	1 Year
4.	Double Ridged Horn Antenna	Instruments corporation	GTH-0118	351600	Apr. 20, 2016	1 Year
5.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB9163-289	Apr. 20, 2016	1 Year
6.	Pre-amplifier	SONOMA	310N	186860	Apr. 17, 2016	1 Year
7.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A
8.	Power Sensor	DAER	RPR3006W	15I00041SN046	Jun 30, 2015	1 Year
9.	MXA Spectrum Analysis	Agilent	N9020A	MY51170037	Jun 30, 2015	1 Year
10.	MXG RF Vector Signal Generator	Agilent	N5182A	MY48180656	Jun 30, 2015	1 Year
11.	Signal Generator	Agilent	E4421B	MY41000743	Jun 30, 2015	1 Year
12.	DC Power supply	IV	IV-8080	YQSB0096	Jun 30, 2015	1 Year
13.	TEMP&HUMI PROGRAMMABLE CHAMBER	Bell Group	BE-THK-150M8	SE-0137	Mar 16, 2016	1 Year


5.4 Test Results

Test Item	: Frequency Separation	Test Mode	: CH Low ~ CH High
Test Voltage	: DC 5V	Temperature	: 24°C
Test Result	: PASS	Humidity	: 55%RH

Channel	Frequency (MHz)	Separation Read Value (kHz)	Limit (kHz)	Modulation Mode
Low	2402	1005	929.5	BDR
Mid	2441	1005	931.9	BDR
High	2480	1005	929.6	BDR
Low	2402	1005	843.3	EDR
Mid	2441	1005	840.0	EDR
High	2480	1005	836.7	EDR

Remark:

1. The limit of mode (EDR) is 2/3 of 20dB BW;
2. The EDR was tested on ($\pi/4$ DQPSK, 8DPSK) modes, only the worst data of ($\pi/4$ DQPSK) is attached in the following pages.

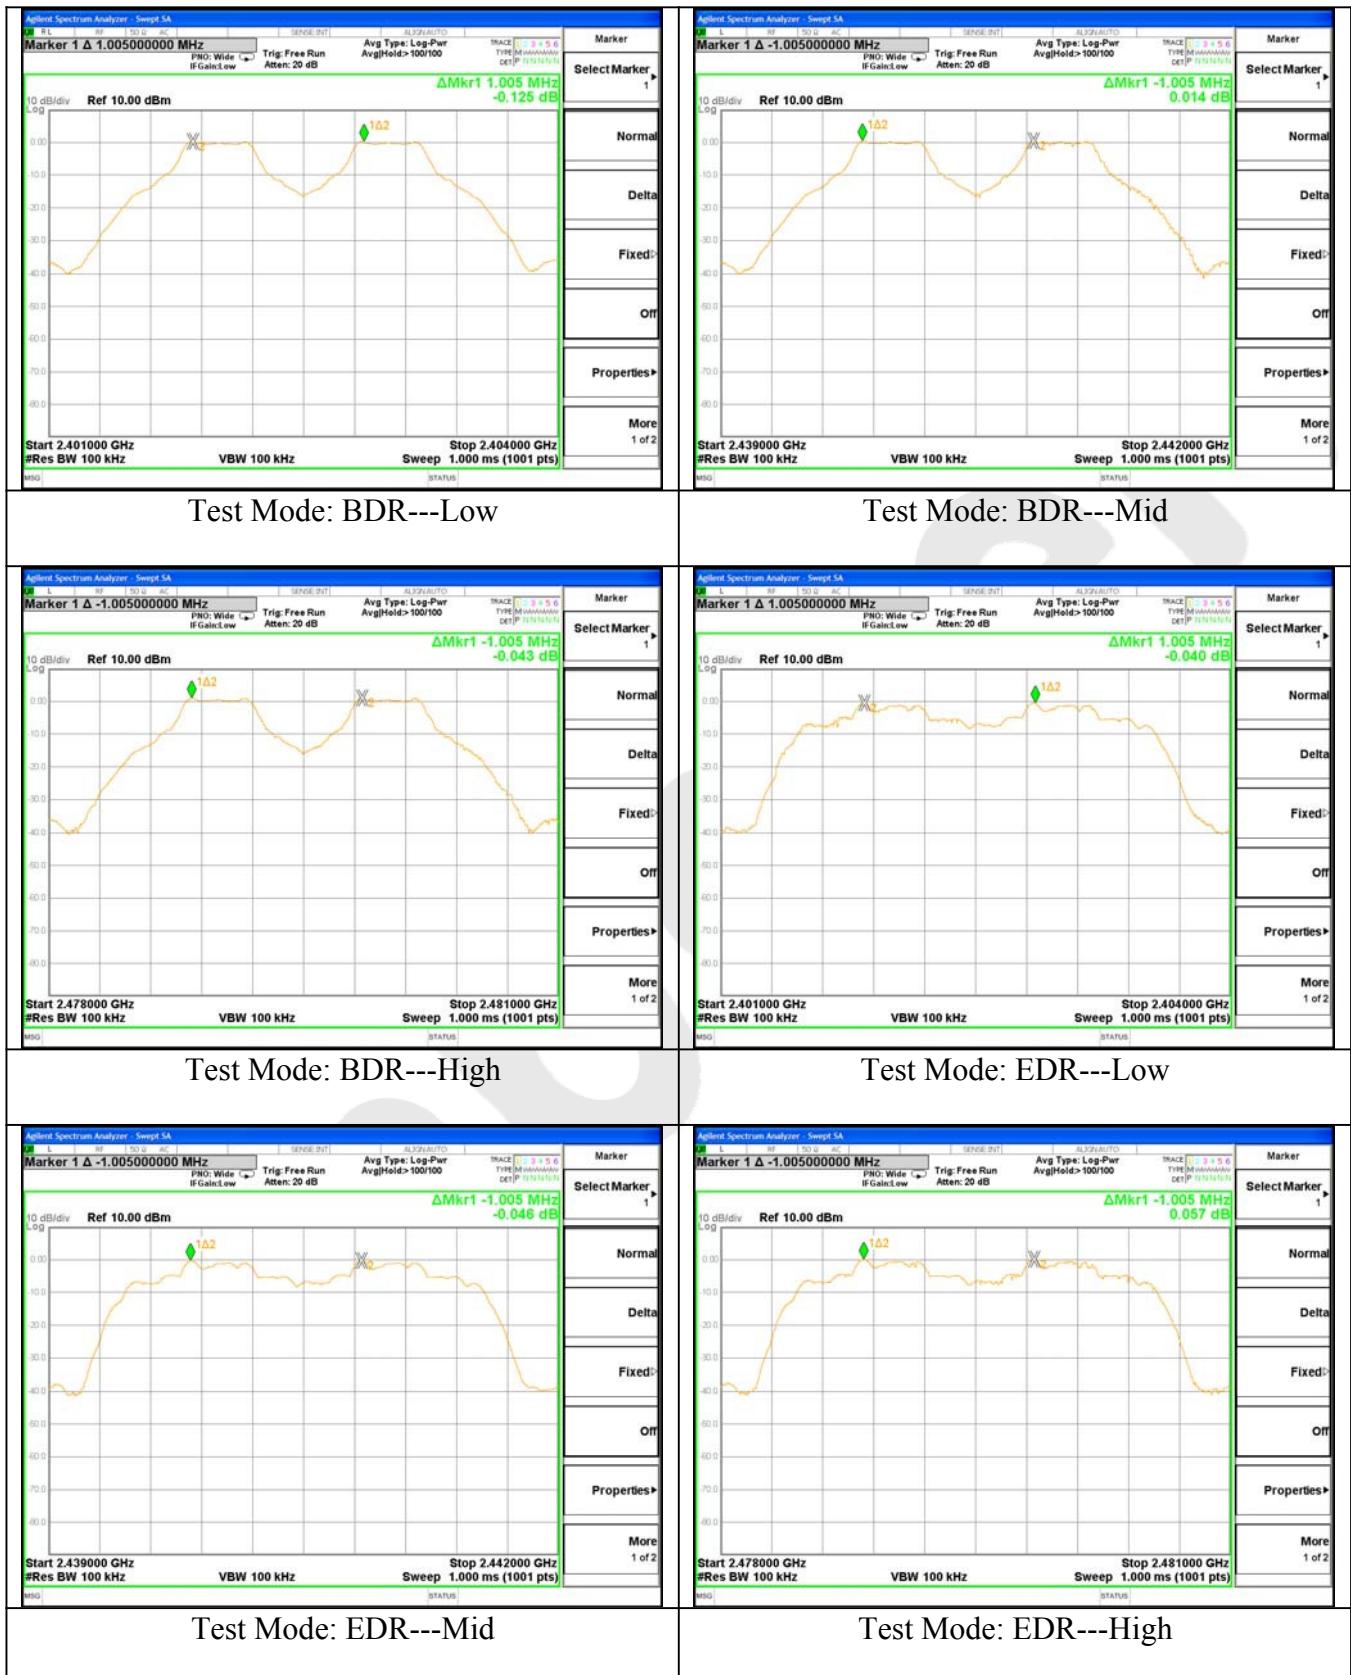


6. 20DB BANDWIDTH TEST

6.1 Measurement Procedure

Using the following spectrum analyzer settings:

1. Span= approximately 2 to 3 times the 20dB bandwidth, centered on a hopping channel.
2. Set the RBW = 30 kHz.
3. Set the VBW = 100 kHz.
4. Sweep time = auto couple.
5. Detector function = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.

6.2 Test SET-UP



6.3 Test Equipment

Same as the equipment listed in 5.3.

6.4 Test Results

Test Item	:	20dB BW	Test Mode	:	CH Low ~ CH High
Test Voltage	:	DC 5V	Temperature	:	24°C
Test Result	:	PASS	Humidity	:	55%RH

Channel	Frequency (MHz)	20dB Down BW(kHz)	Modulation Mode
Low	2402	929.5	BDR
Mid	2441	931.9	BDR
High	2480	929.6	BDR
Low	2402	1265.0	EDR
Mid	2441	1260.0	EDR
High	2480	1255.0	EDR

Remark: The EDR was tested on ($\pi/4$ DQPSK, 8DPSK) modes, only the worst data of ($\pi/4$ DQPSK) is attached in the following pages.




7. QUANTITY OF HOPPING CHANNEL TEST

7.1 Measurement Procedure

The EUT must have its hopping function enabled. Using the following spectrum analyzer setting:

1. Span= the frequency band of operation
2. Set the RBW = 100KHz.
3. Set the VBW = 300KHz.
4. Sweep time = auto couple.
5. Detector function = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.

7.2 Test SET-UP



7.3 Test Equipment


Same as the equipment listed in 5.3.

7.4 Test Results


Test Item	:	Number of Hopping Frequency	Test Mode	:	CH Low ~ CH High
Test Voltage	:	DC 5V	Temperature	:	24°C
Test Result	:	PASS	Humidity	:	55%RH

Hopping Channel Frequency Range	Quantity of Hopping Channel	Quantity of Hopping Channel
2402-2480	79	>15


GFSK

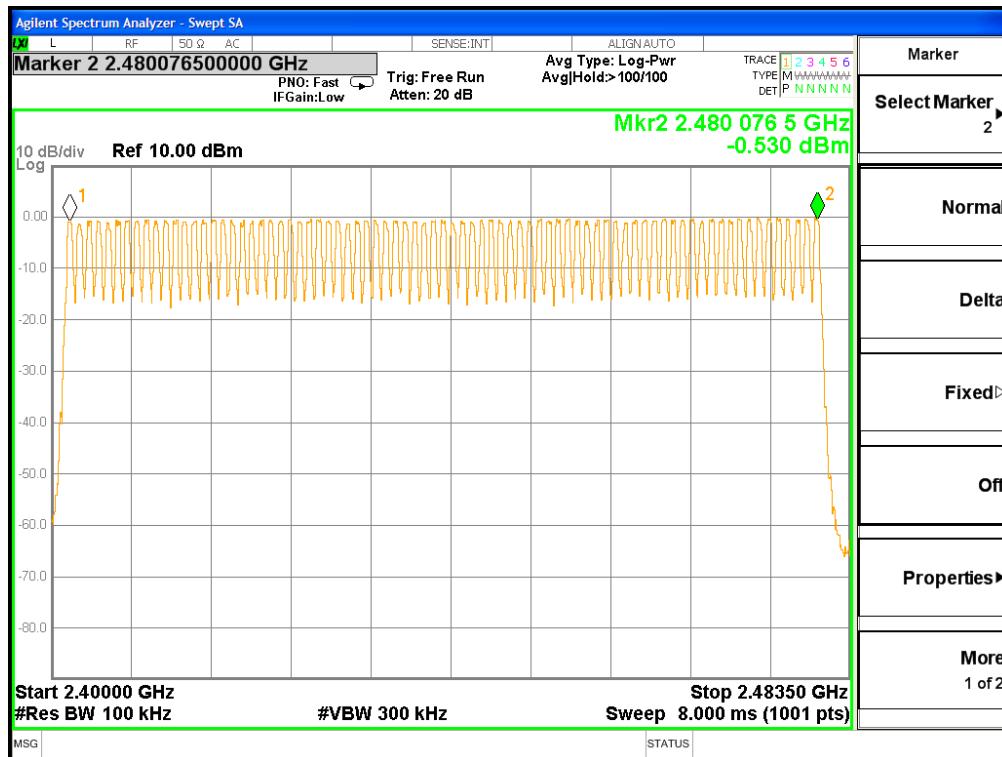

$\pi/4$ DQPSK,

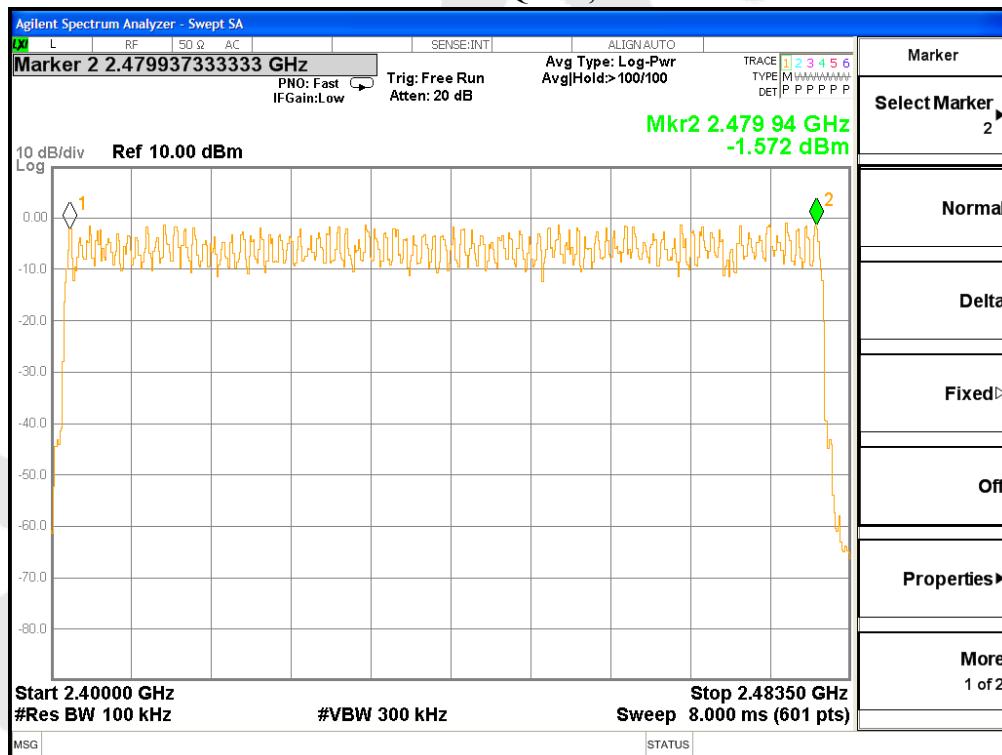

8DPSK

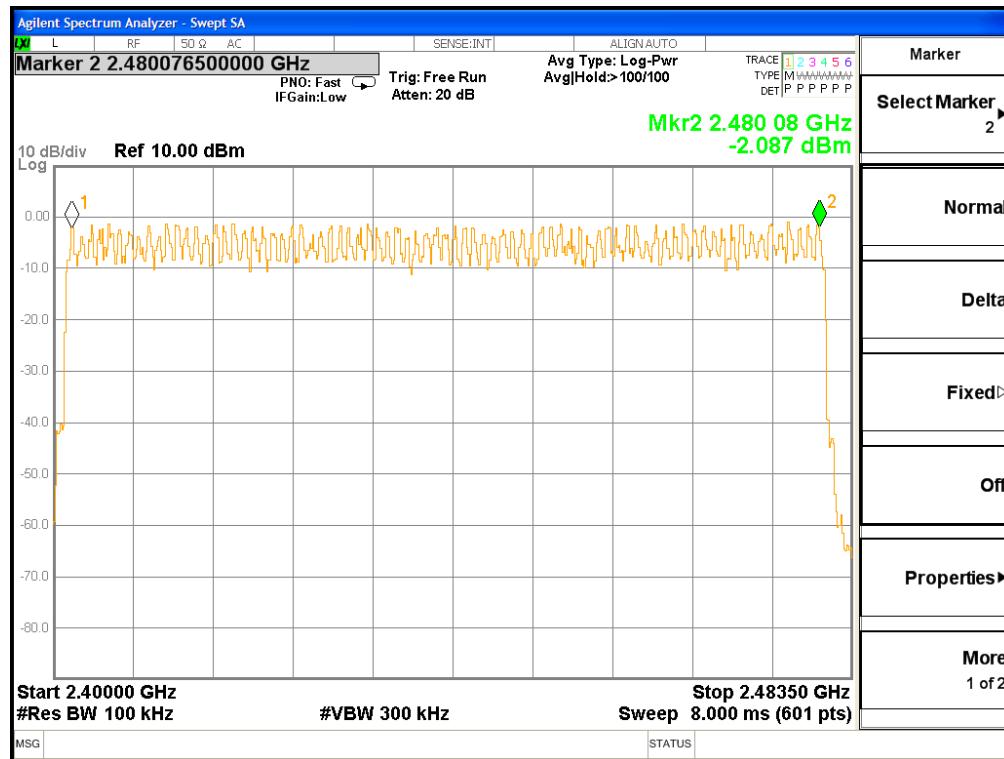


8. DWELL TIME TEST

8.1 Measurement Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

1. Span= zero span, centered on a hopping channel
2. Set the RBW = 1 MHz.
3. Set the VBW = 1 MHz.
4. Sweep time = as necessary to capture the entire dwell time per hopping channel.
5. Detector function = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.

8.2 Test SET-UP



8.3 Test Equipment


Same as the equipment listed in 5.3.

8.4 Test Results

Test Item	:	Time of Occupancy	Test Mode	:	CH Low ~ CH High
Test Voltage	:	DC 5V	Temperature	:	24°C
Test Result	:	PASS	Humidity	:	55%RH

Package Type	Pulse width (ms)	Time slot length(ms)	Dwell time (ms)	Limit (s)	Modulation
DH1	0.364	time slot length *1600/2 /79 * 31.6	116.48	0.4	BDR
DH3	1.615	time slot length *1600/4 /79 * 31.6	258.40	0.4	BDR
DH5	2.873	time slot length *1600/6 /79 * 31.6	306.45	0.4	BDR
DH1	0.373	time slot length *1600/2 /79 * 31.6	119.36	0.4	EDR
DH3	1.625	time slot length *1600/4 /79 * 31.6	260.00	0.4	EDR
DH5	2.858	time slot length *1600/6 /79 * 31.6	304.85	0.4	EDR

Remark: The EDR was tested on ($\pi/4$ DQPSK, 8DPSK) modes, only the worst data of ($\pi/4$ DQPSK) is attached in the following pages.

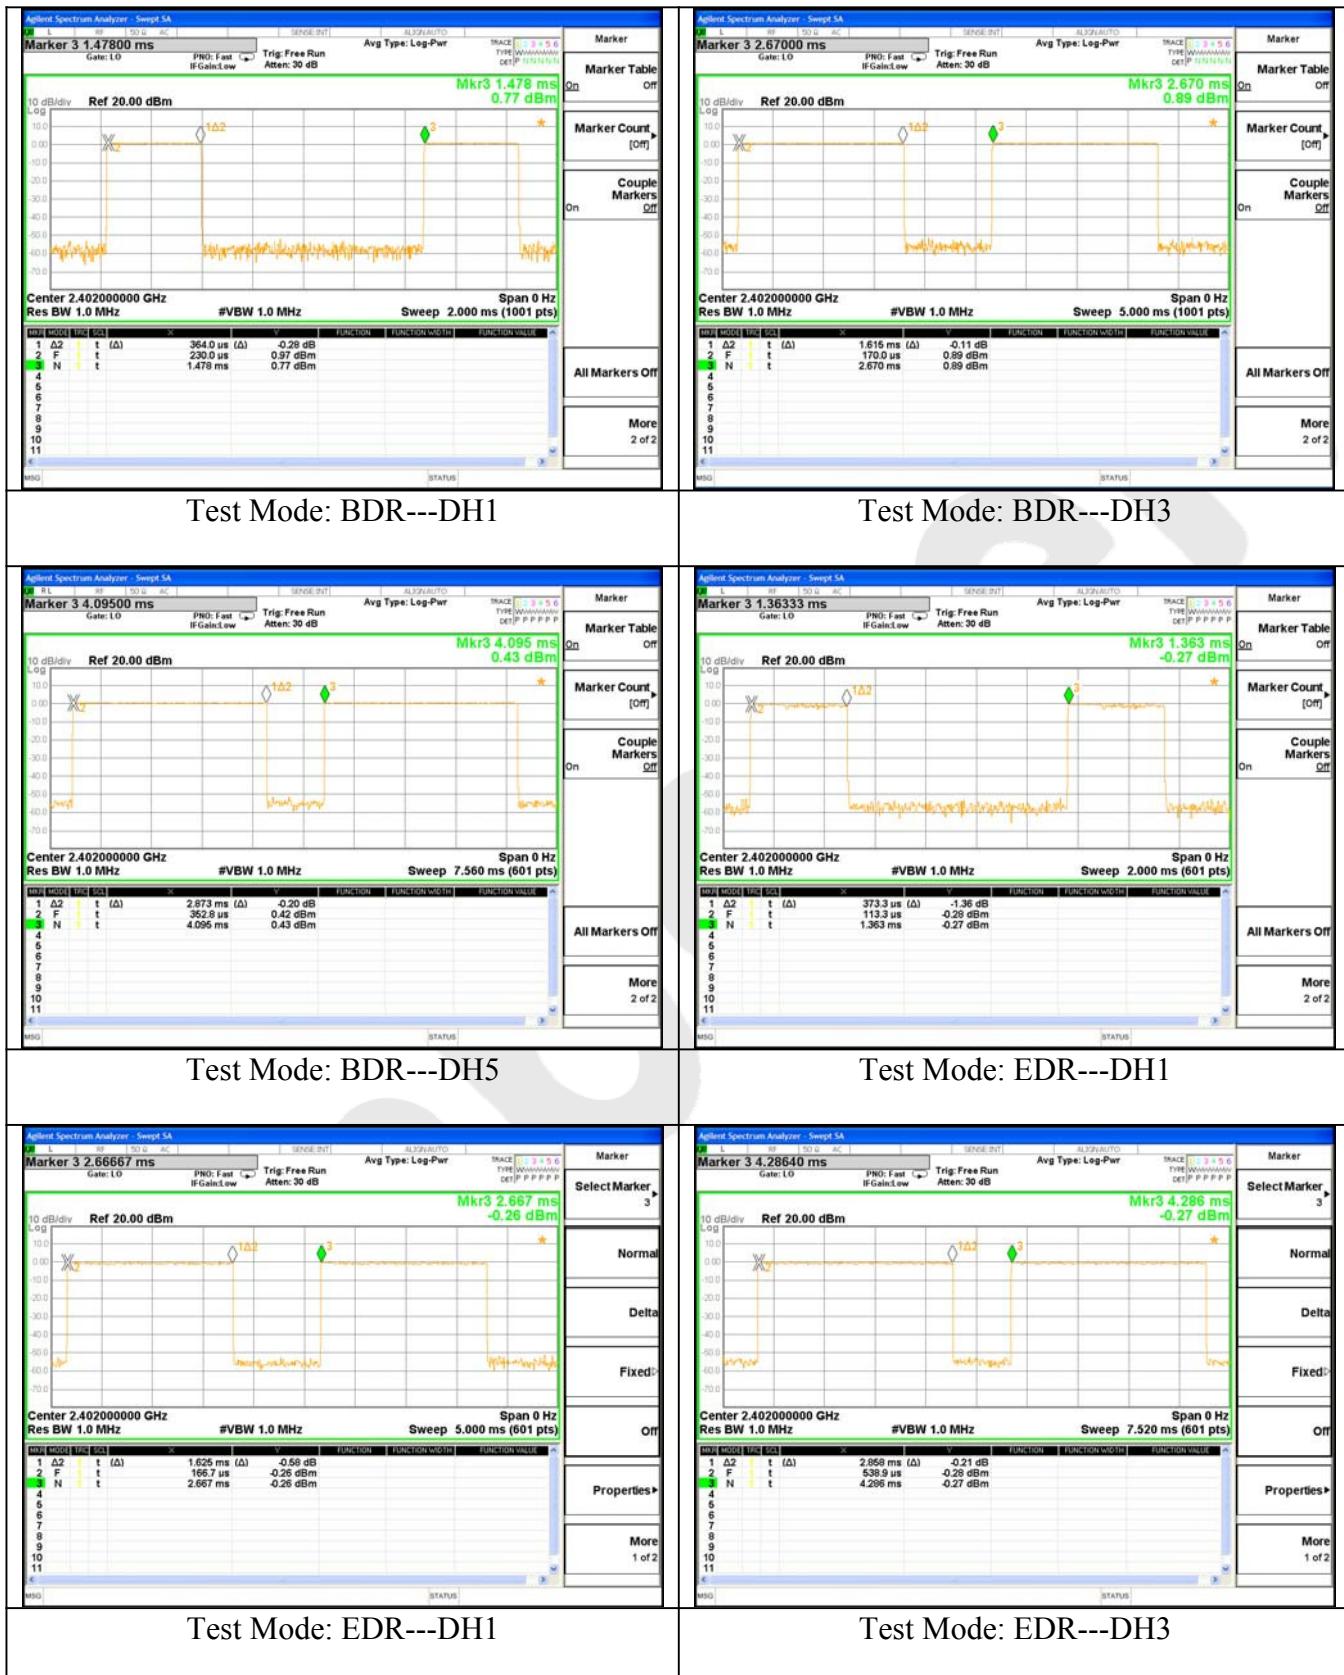

9. MAXIMUM PEAK OUTPUT POWER TEST

9.1 Measurement Procedure

- a. Check the calibration of the measuring instrument(SA) using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- c. The center frequency of the spectrum analyzer is set to the fundamental frequency and using proper RBW and VBW setting.
- d. Measure the captured power within the band and recording the plot.
- e. Repeat above procedures until all frequencies required were complete.

Using the following spectrum analyzer settings:

1. Span= approximately 5 times the 20dB bandwidth, centered on a hopping channel
2. Set the RBW = 3 MHz.
3. Set the VBW = 3 MHz.
4. Sweep time = auto couple.
5. Detector function = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.

9.2 Test SET-UP



9.3 Test Equipment

Same as the equipment listed in 5.3.

9.4 Test Results

Test Item	:	Max. peak output power	Test Mode	:	CH Low ~ CH High
Test Voltage	:	DC 5V	Temperature	:	24°C
Test Result	:	PASS	Humidity	:	55%RH

Channel Frequency (MHz)	Peak Power output(mW)	Peak Power output(dBm)	Peak Power Limit(mW)	Results	Modulation
2402	1.163	0.655	1000	PASS	BDR
2441	1.246	0.955	1000	PASS	BDR
2480	1.409	1.490	1000	PASS	BDR
2402	1.152	0.616	1000	PASS	EDR
2441	1.236	0.921	1000	PASS	EDR
2480	1.381	1.401	1000	PASS	EDR

Remark: The EDR was tested on ($\pi/4$ DQPSK, 8DPSK) modes, only the worst data of ($\pi/4$ DQPSK) is attached in the following pages.



10. BAND EDGE TEST

10.1 Measurement Procedure


A) Conducted Emission method:

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Put it on the Rotated table and turn on the EUT and make it operate in transmitting mode. Then set it to low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set spectrum analyzer RBW 100kHz and VBW 300kHz convenient frequency span including 100kHz bandwidth from band edge,
4. Measurement the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Report above procedures until all measured frequencies were complete.

B) Radiated Emission method:

The EUT is placed on a turn table which is 1.5 meter high above the ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Rotated the EUT through three orthogonal axes to determine the maximum emissions, both horizontal and vertical polarization of the antenna are set on test. The EUT is tested in 9*6*6 Chamber. for Radiated emissions restricted band RBW= 1 MHz, VBW= 3 MHz.

10.2 Test SET-UP

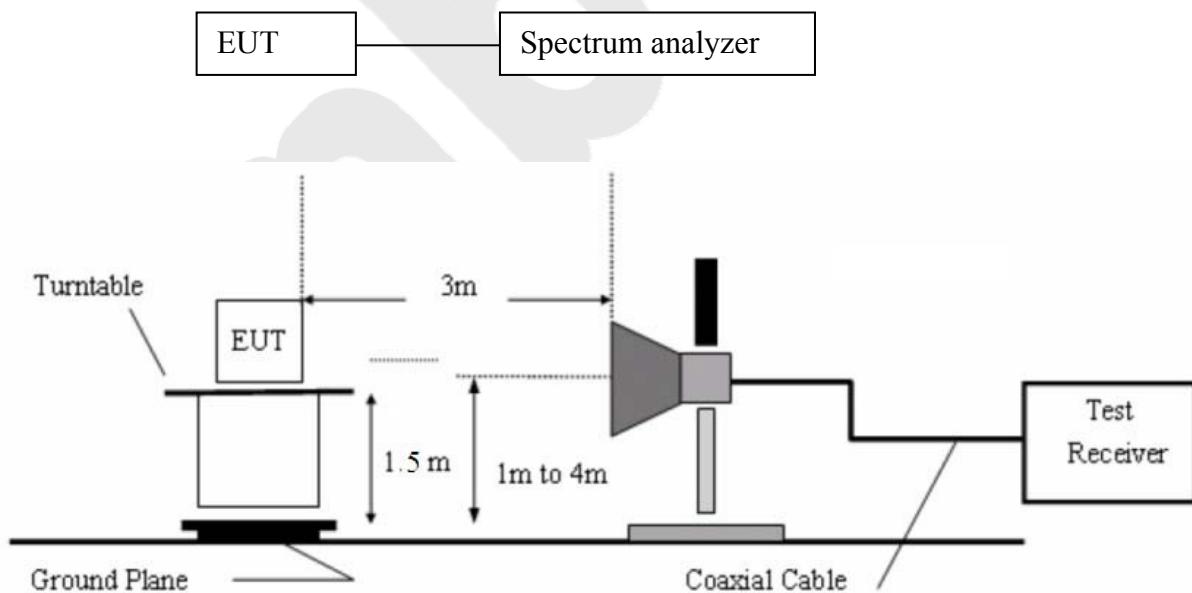

10.3 Test Equipment

Same as the equipment listed in 5.3.

10.4 Test Results

Pass.

Please refer the following data.

Test Item : Band edge
Test Voltage : DC 5V
Test Result : PASS

Test Mode : CH Low ~ CH High
Temperature : 24°C
Humidity : 55%RH


1. Radiated emission Test

Frequency (MHz)	Antenna polarization (H/V)	Emission (dB _u V/m)		Band edge Limit (dB _u V/m)		Modulation
		PK	AV	PK	AV	
<2400	H	51.27	38.75	74.00	54.00	$\pi/4$ DQPSK
	V	53.42	39.34	74.00	54.00	$\pi/4$ DQPSK
>2483.5	H	51.13	38.44	74.00	54.00	$\pi/4$ DQPSK
	V	50.03	39.28	74.00	54.00	$\pi/4$ DQPSK


Remark: The EDR was tested on ($\pi/4$ DQPSK, 8DPSK) modes, only the worst data of ($\pi/4$ DQPSK) is attached in the following pages.

2. Conducted Emission Method


2.1 For Hopping Mode:

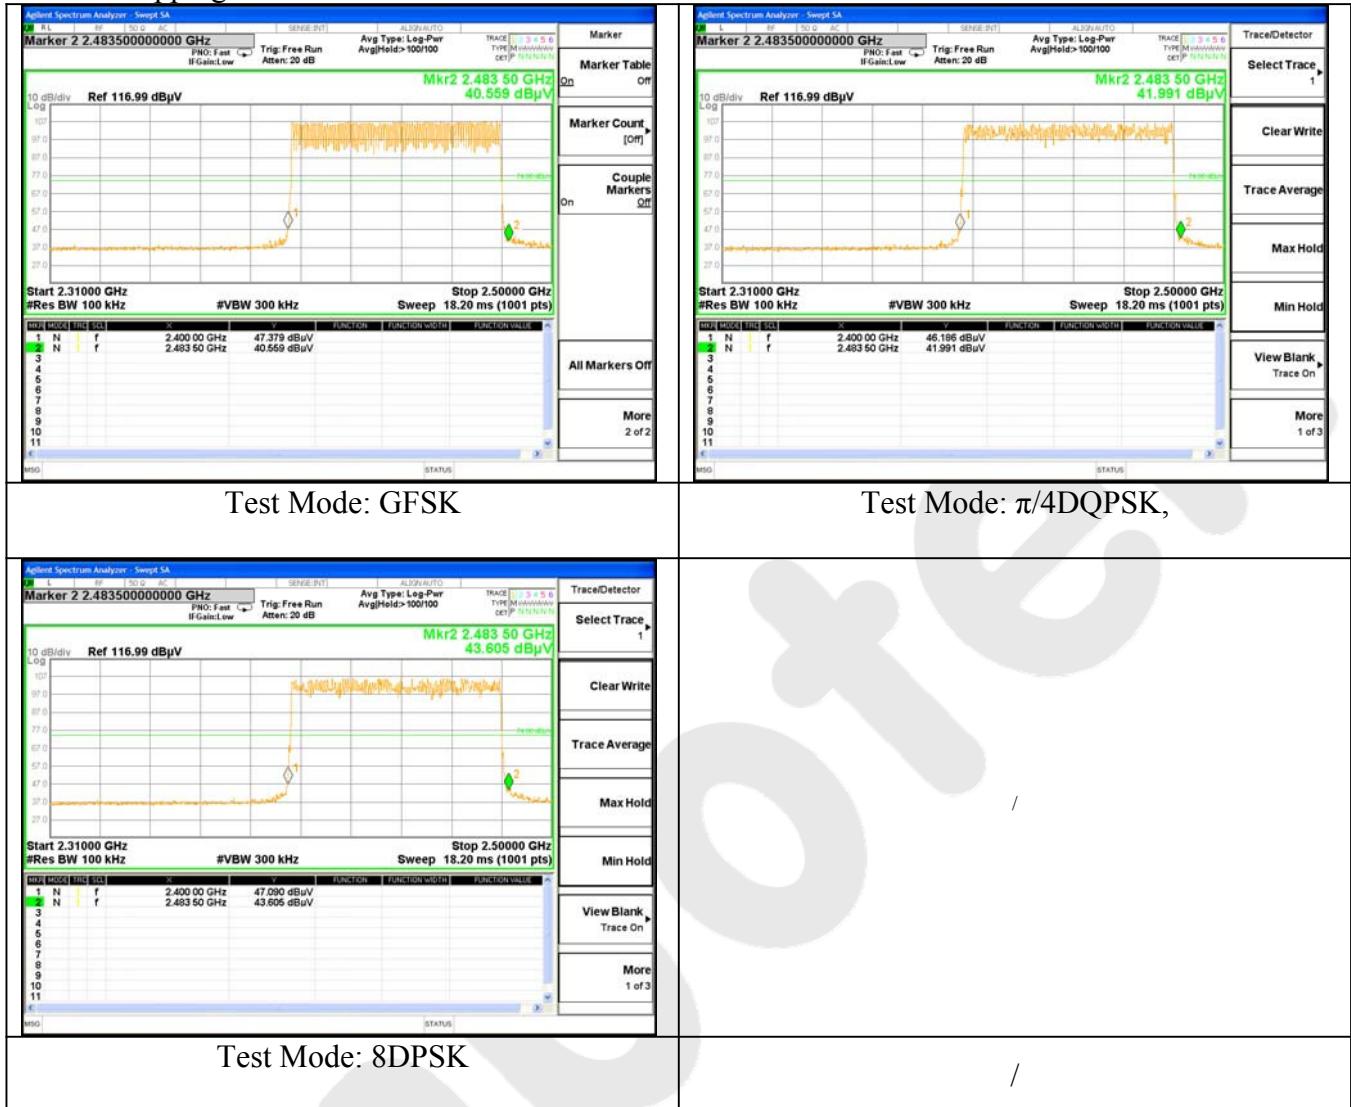


2.2 For Non-Hopping Mode:

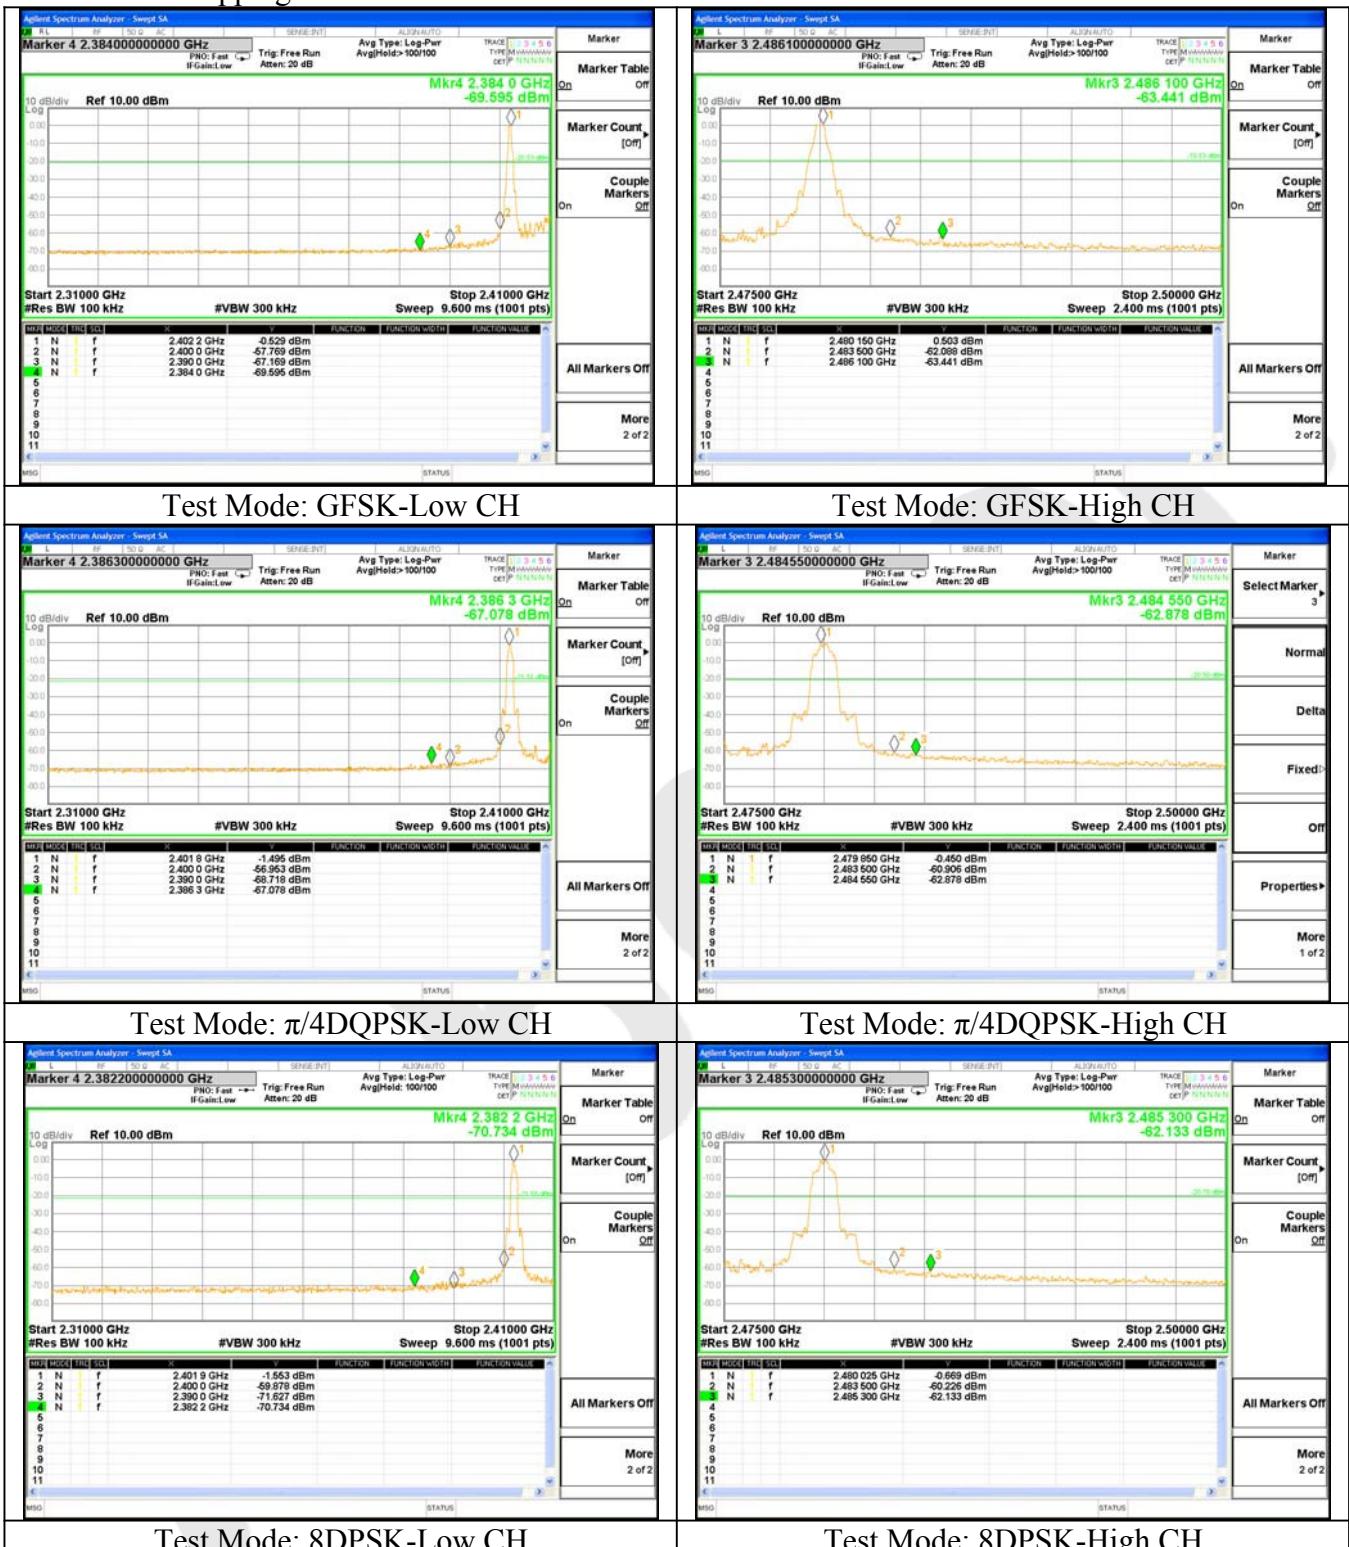

2.3 Conducted Emission Method

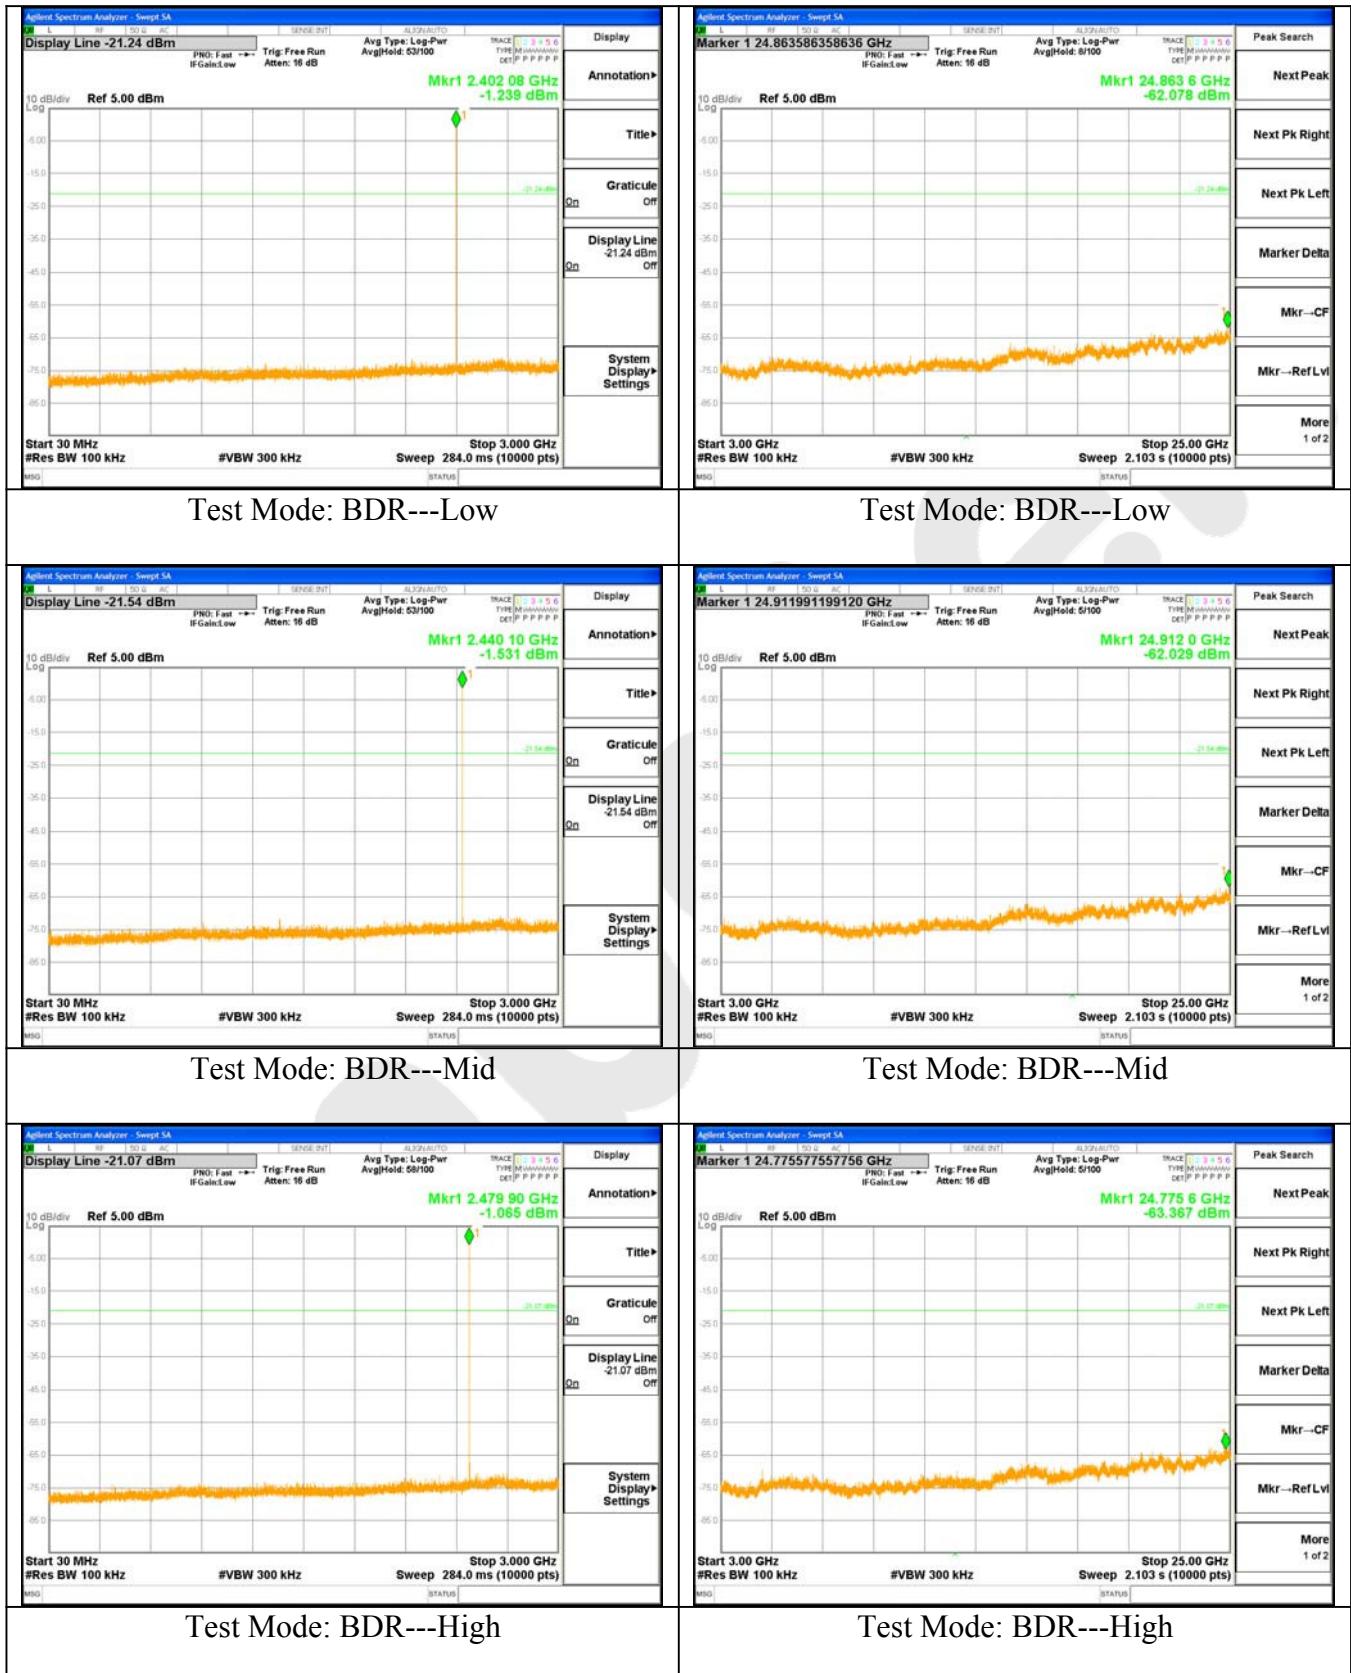

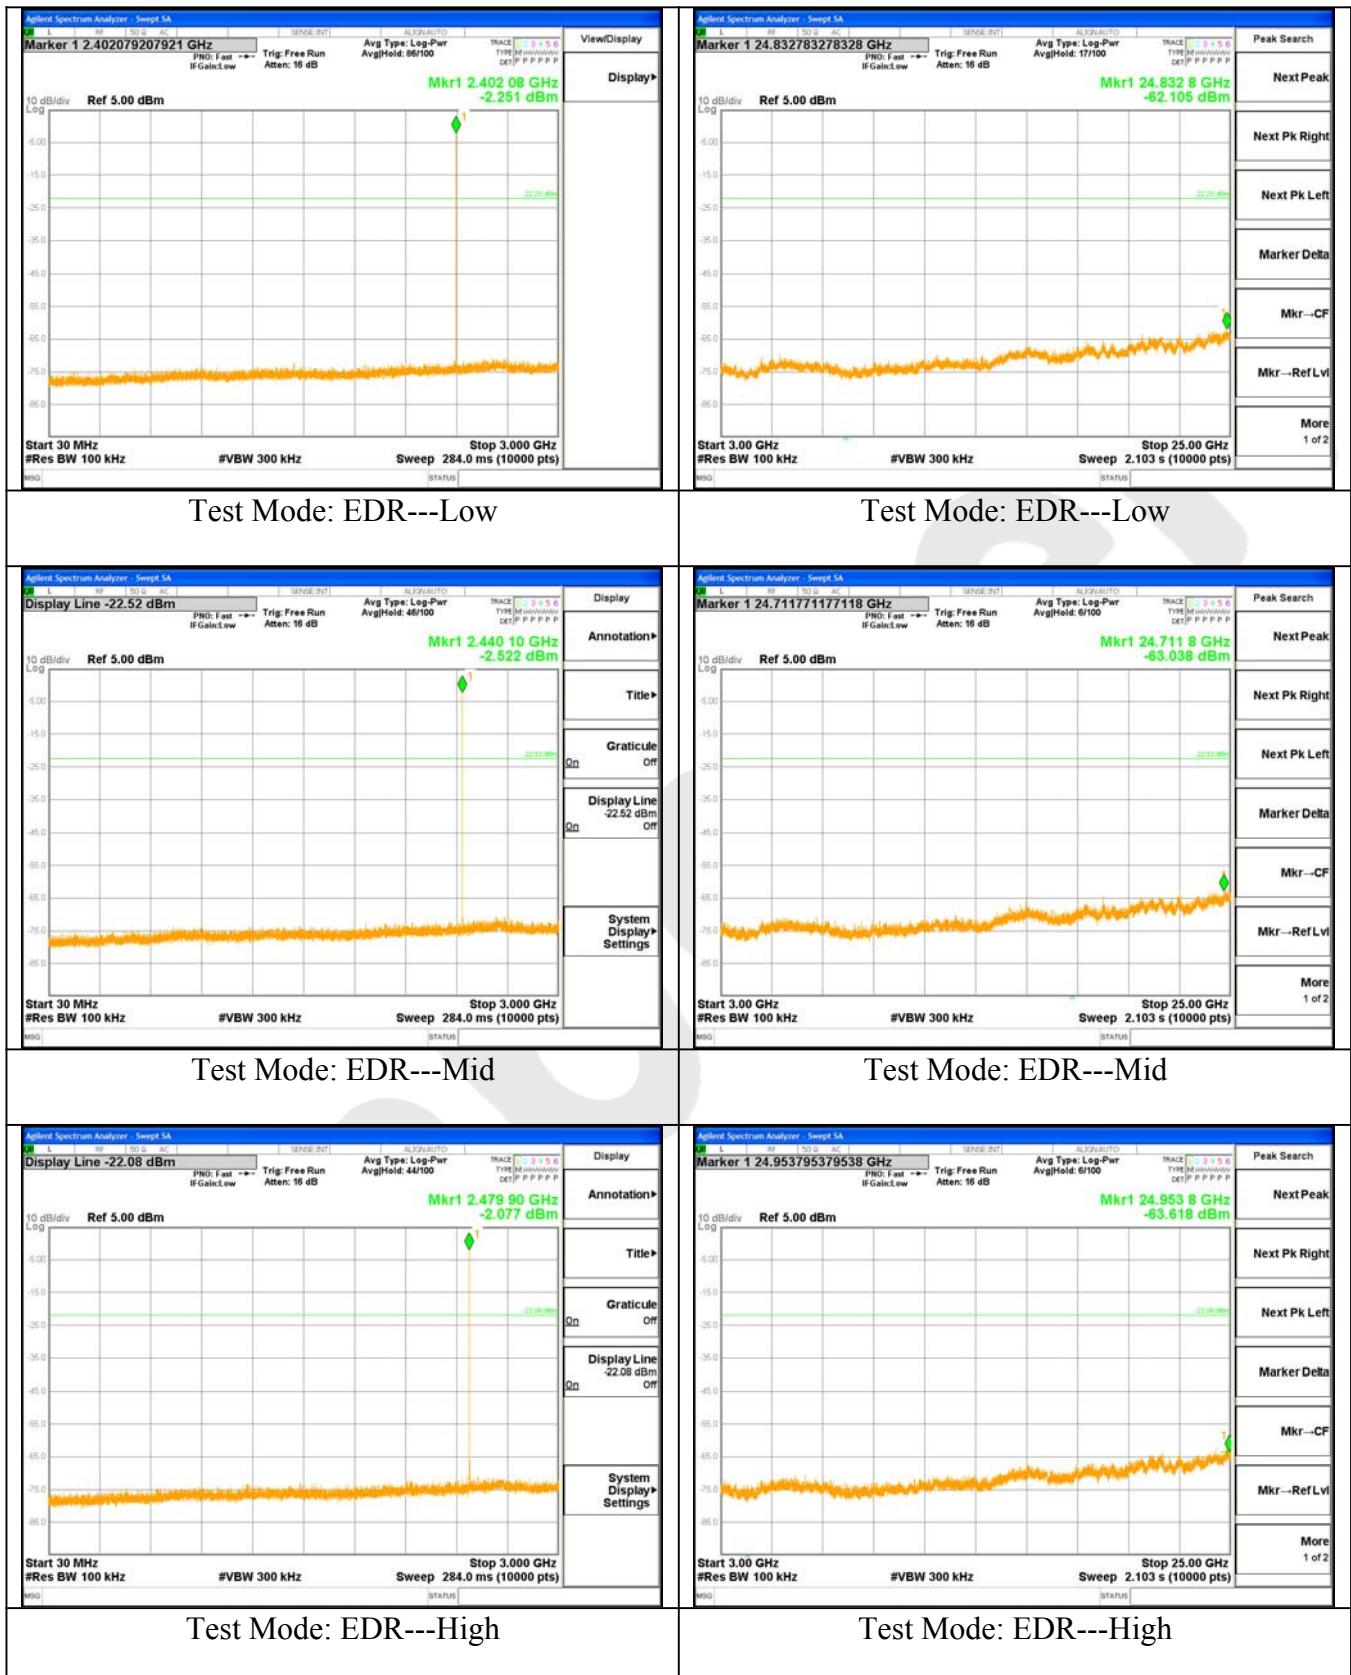

11. ANTENNA APPLICATION

11.1 Antenna requirement

The EUT'S antenna is met the requirement of FCC part 15C section 15.203 and 15.247.


FCC part 15C section 15.247 requirements:

Systems operating in the 2402-2480MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum peak output power of the intentional radiator is reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

11.2 Result

The EUT's antenna used a PCB Antenna, The antenna's gain is 1.0 dBi and meets the requirement.

BT Antenna


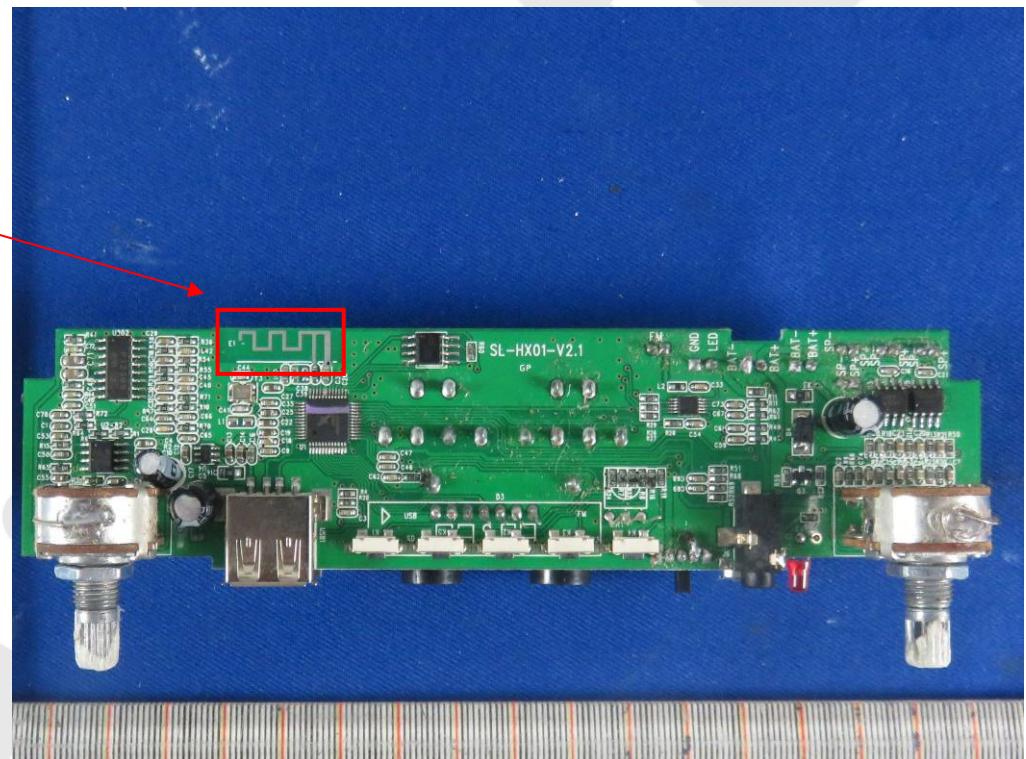


12. TEST SETUP PHOTOGRAPH

12.1. Photo of Conducted Emission Measurement




12.2. Photo of Radiation Emission Test

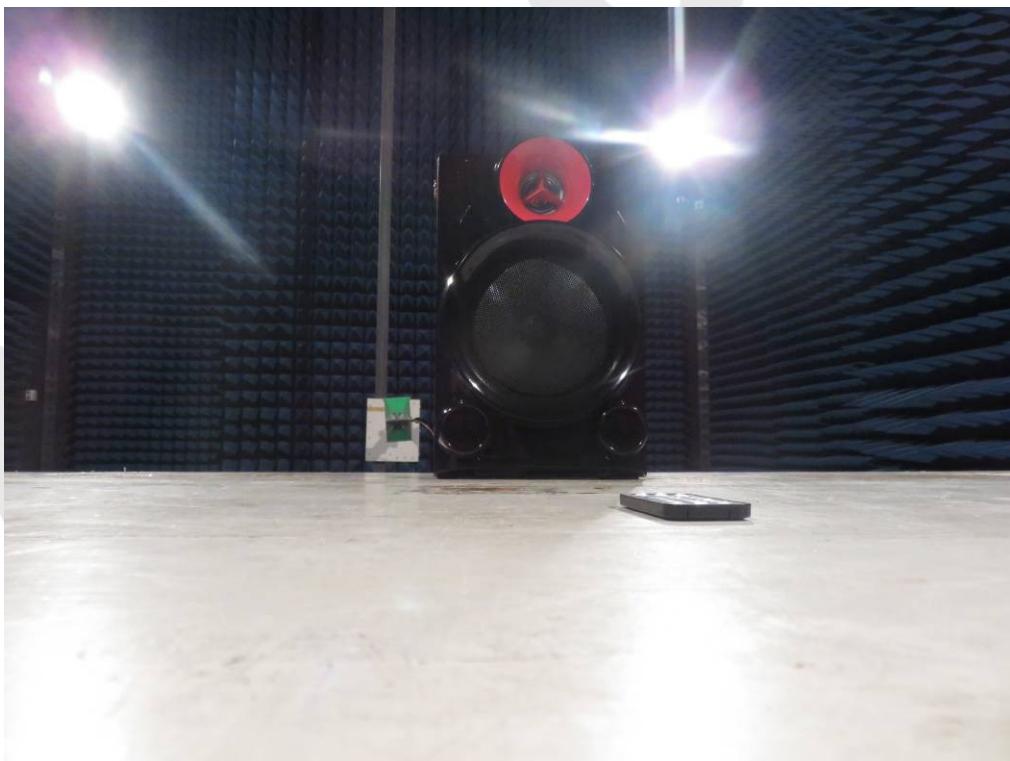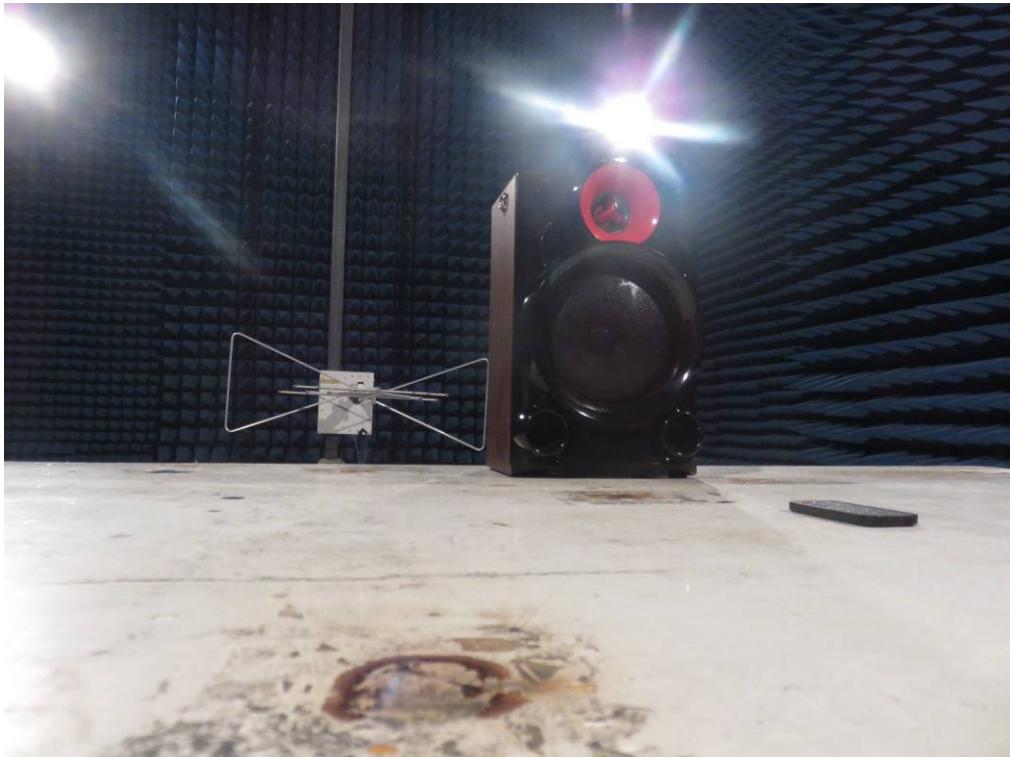


APPENDIX I (EXTERNAL PHOTOS)








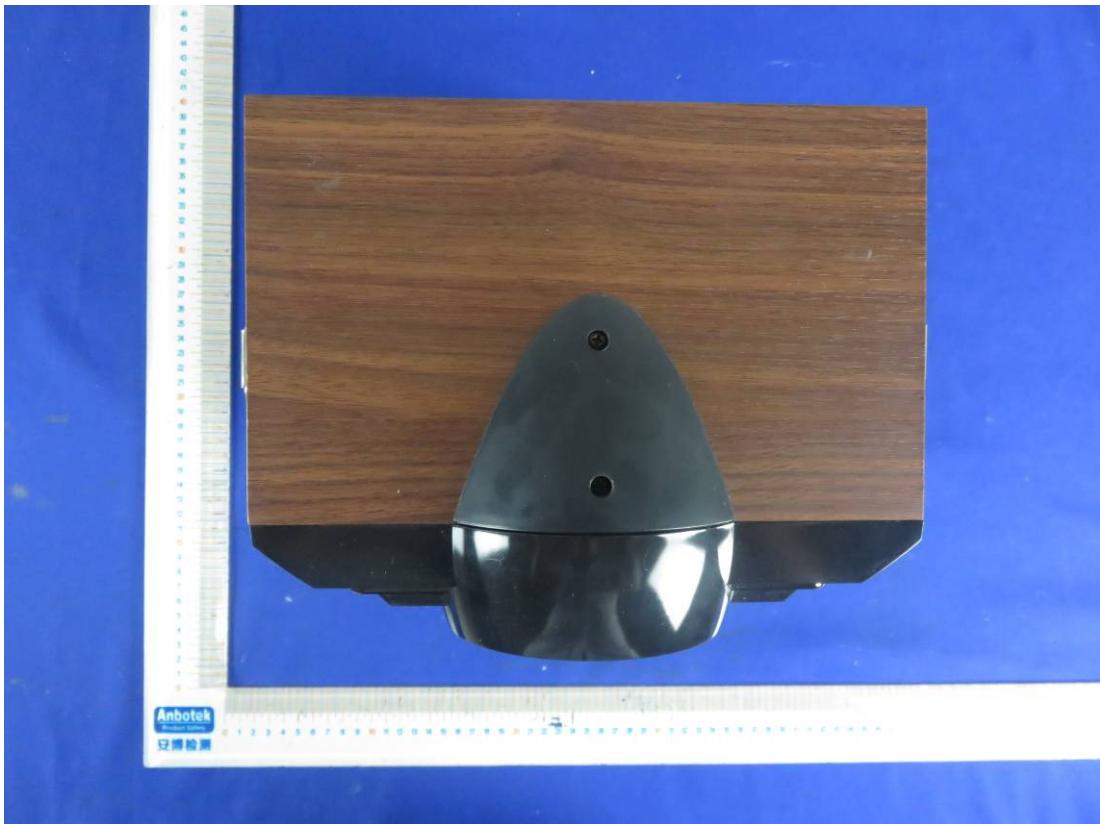

APPENDIX II (INTERNAL PHOTOS)

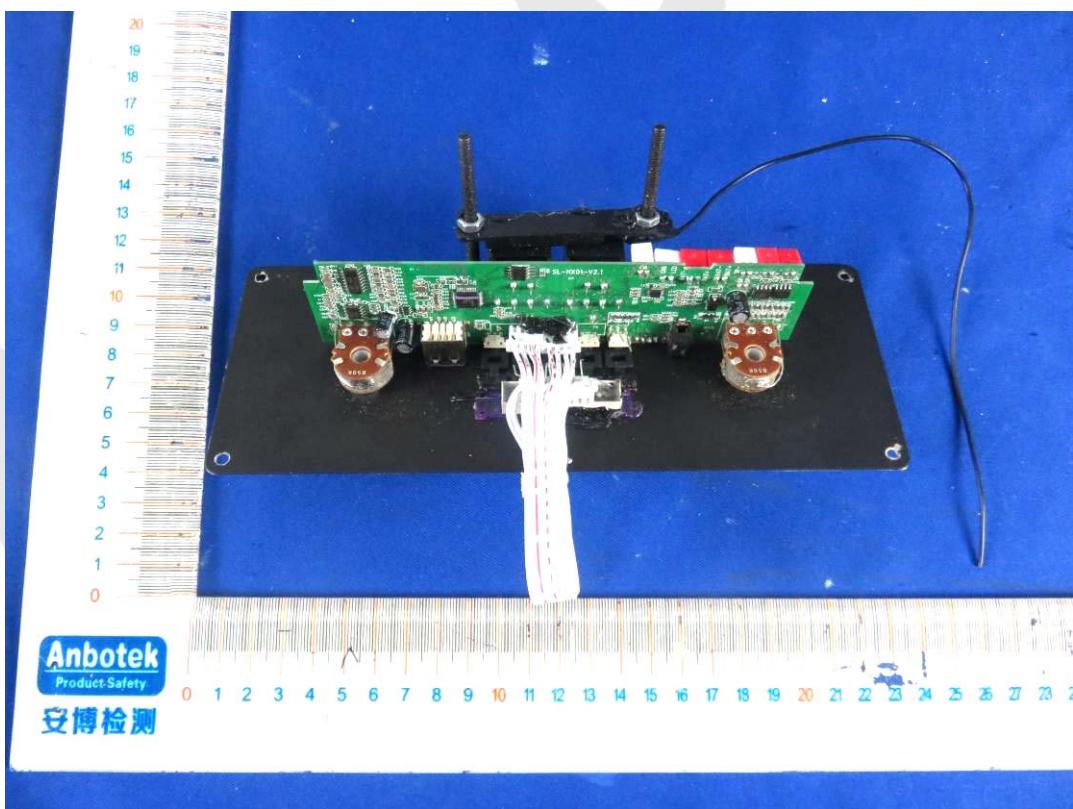


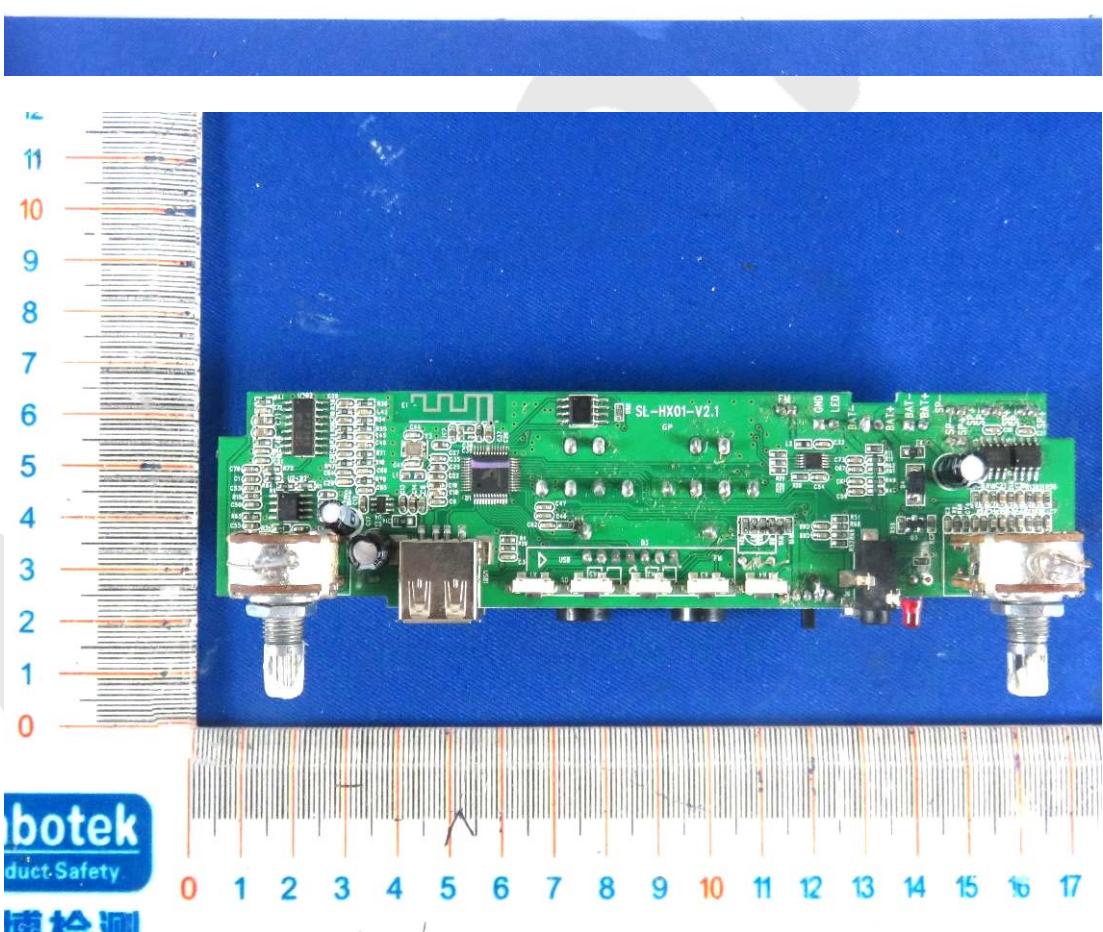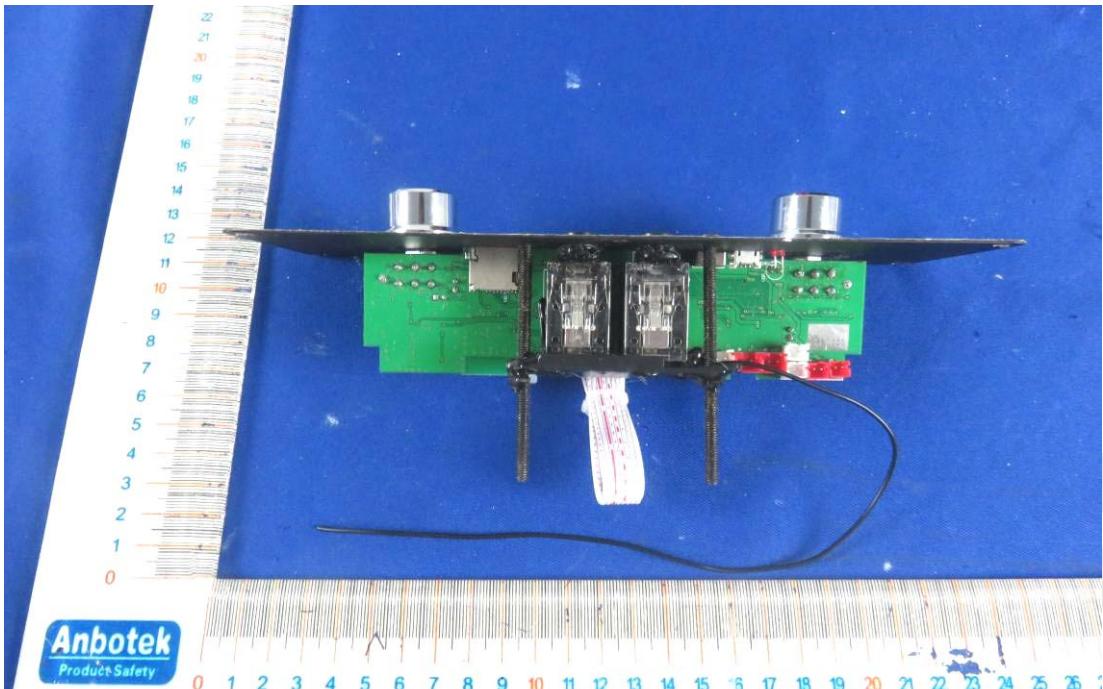

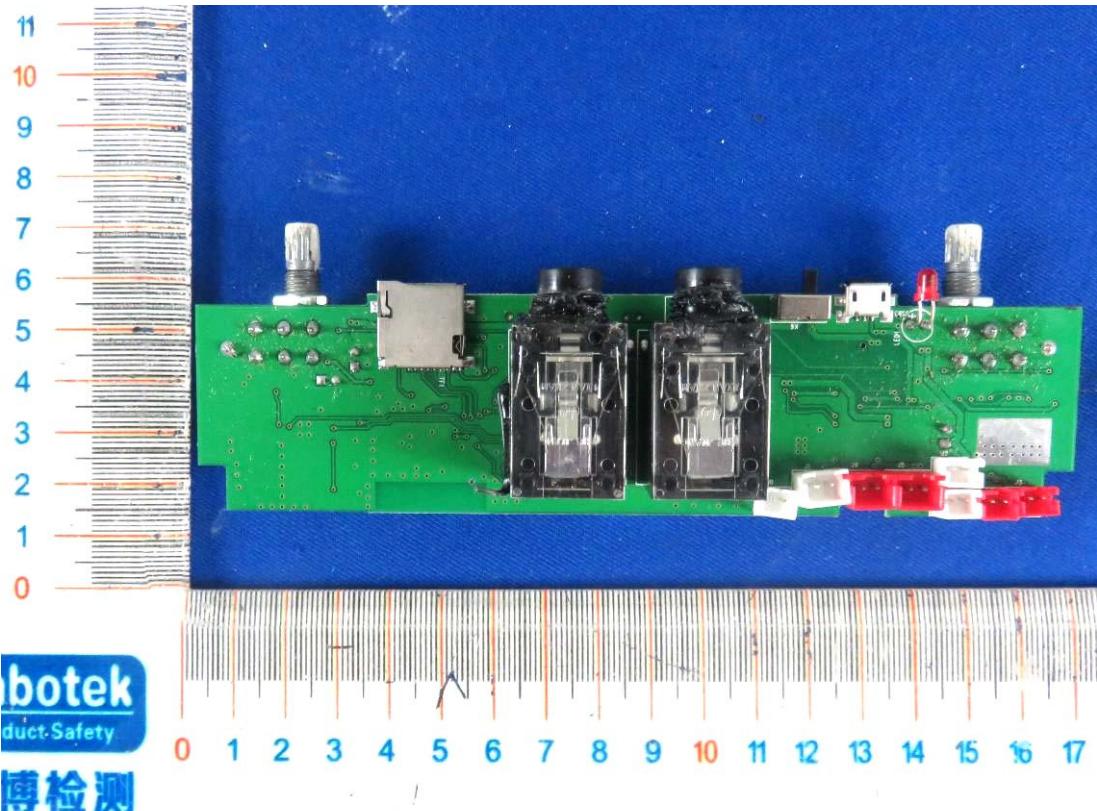

botek
duct.Safety
博检测

BT Antenna

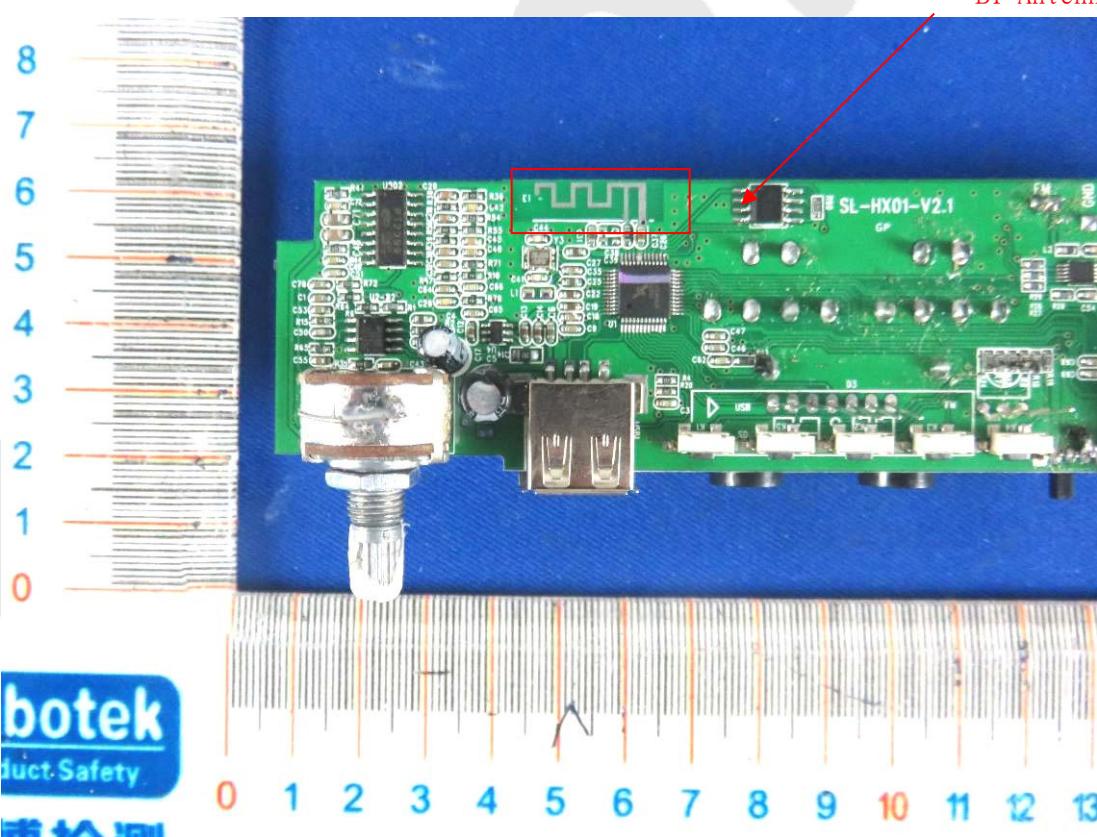

botek
duct.Safety
博检测

