

TEST REPORT

Reference No. : WTS19S05030256W
FCC ID..... : 2AHRE-KS-604S
Applicant..... : SHEN ZHEN HIDIN TECHNOLOGY CO., LTD
Address : 6th floor ,No. 1301-59, Yinxing Industrial Park, Guanlan, Longhua District, Shenzhen ,Guangdong China.
Manufacturer : SHEN ZHEN HIDIN TECHNOLOGY CO., LTD
Address : 6th floor ,No. 1301-59, Yinxing Industrial Park, Guanlan, Longhua District, Shenzhen ,Guangdong China.
Product..... : Wi-Fi Smart Wall Socket
Model(s)..... : KS-604S
Standards..... : FCC CFR47 Part 15 C Section 15.247:2018
Date of Receipt sample..... : 2019-05-16
Date of Test..... : 2019-05-16 to 2019-05-22
Date of Issue : 2019-05-23
Test Result : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company.
The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:

Waltek Services (Shenzhen) Co., Ltd.

Address: 1/F., Fukangtai Building, West Baima Road, Songgang Street, Baoan District, Shenzhen, Guangdong, China
Tel :+86-755-83551033
Fax:+86-755-83552400

Compiled by:

Jack Wen

Jack Wen / Test Engineer

Approved by:



Philo Zhong

Philo Zhong / Manager

1. Laboratories Introduction

Waltek Services (Shenzhen) Co., Ltd is a professional third-party testing and certification laboratory with multi-year product testing and certification experience, established strictly in accordance with ISO/IEC 17025 requirements, and accredited by ILAC (International Laboratory Accreditation Cooperation) member. A2LA (American Association for Laboratory Accreditation, the certification number is 4243.01) of USA, CNAS (China National Accreditation Service for Conformity Assessment, the registration number is L3110) of China. Meanwhile, Waltek has got recognition as registration and accreditation laboratory from EMSD (Electrical and Mechanical Services Department), and American Energy star, FCC(The Federal Communications Commission), CEC(California energy efficiency), ISED (Innovation, Science and Economic Development Canada). It's the strategic partner and data recognition laboratory of international authoritative organizations, such as Intertek(ETL-SEMKO), TÜV Rheinland, TÜV SÜD, etc.



Waltek Services (Shenzhen) Co., Ltd is one of the largest and the most comprehensive third party testing laboratory in China. Our test capability covered four large fields: safety test. ElectroMagnetic Compatibility(EMC), and energy performance, wireless radio. As a professional, comprehensive, justice international test organization, we still keep the scientific and rigorous work attitude to help each client satisfy the international standards and assist their product enter into globe market smoothly.

1.1 Test Facility

A. Accreditations for Conformity Assessment (International)

Country/Region	Scope Covered By	Scope	Note
USA	ISO/IEC 17025	FCC ID \ DOC \ VOC	1
Canada		IC ID \ VOC	2
Japan		MIC-T \ MIC-R	-
Europe		EMCD \ RED	-
Taiwan		NCC	-
Hong Kong		OFCA	-
Australia		RCM	-
India		WPC	-
Thailand		NTC	-
Singapore		IDA	-
Note:			
1. FCC Designation No.: CN1201. Test Firm Registration No.: 523476.			
2. ISED CAB identifier: CN0013.			

B.TCBs and Notify Bodies Recognized Testing Laboratory.

Recognized Testing Laboratory of ...	Notify body number
TUV Rheinland	Optional.
Intertek	
TUV SUD	
SGS	
Phoenix Testlab GmbH	0700
Element Materials Technology Warwick Ltd.	0891
Timco Engineering, Inc.	1177
Eurofins Product Service GmbH	0681

2. Contents

	Page
COVER PAGE	1
1. LABORATORIES INTRODUCTION	2
1.1 TEST FACILITY.....	3
2. CONTENTS	4
3. REVISION HISTORY	6
4. GENERAL INFORMATION	7
4.1 GENERAL DESCRIPTION OF E.U.T.....	7
4.2 DETAILS OF E.U.T.....	7
4.3 CHANNEL LIST.....	7
4.4 TEST MODE.....	7
5. EQUIPMENT USED DURING TEST	9
5.1 EQUIPMENTS LIST.....	9
5.2 MEASUREMENT UNCERTAINTY.....	10
5.3 TEST EQUIPMENT CALIBRATION.....	10
6. TEST SUMMARY	11
7. CONDUCTED EMISSION	12
7.1 E.U.T. OPERATION.....	12
7.2 EUT SETUP.....	12
7.3 MEASUREMENT DESCRIPTION.....	12
7.4 CONDUCTED EMISSION TEST RESULT.....	13
8. RADIATED EMISSIONS	15
8.1 EUT OPERATION.....	15
8.2 TEST SETUP.....	16
8.3 SPECTRUM ANALYZER SETUP.....	17
8.4 TEST PROCEDURE.....	18
8.5 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	18
8.6 SUMMARY OF TEST RESULTS.....	19
9. BAND EDGE MEASUREMENT	28
9.1 TEST PROCEDURE.....	28
9.2 TEST RESULT.....	29
10. BANDWIDTH MEASUREMENT	32
10.1 TEST PROCEDURE:.....	32
10.2 TEST RESULT:.....	32
11. MAXIMUM PEAK OUTPUT POWER	37
11.1 TEST PROCEDURE:.....	37
11.2 TEST RESULT:.....	37
12. POWER SPECTRAL DENSITY	38
12.1 TEST PROCEDURE:.....	38
12.2 TEST RESULT:.....	38
13. ANTENNA REQUIREMENT	44
14. RF EXPOSURE	45
14.1 REQUIREMENTS.....	45
14.2 THE PROCEDURES / LIMIT.....	45
14.3 MPE CALCULATION METHOD.....	46
15. PHOTOGRAPHS – TEST SETUP PHOTOS	47

15.1	RADIATED EMISSION	47
15.2	CONDUCTED EMISSION	48
16.	PHOTOGRAPHS - CONSTRUCTIONAL DETAILS	49
16.1	EUT – EXTERNAL VIEW	49
16.2	EUT – INTERNAL VIEW.....	54

3. Revision History

Test report No.	Date of Receipt sample	Date of Test	Date of Issue	Purpose	Comment	Approved
WTS19S05030256W	2019-05-16	2019-05-16 to 2019-05-22	2019-05-23	original	-	Valid

4. General Information

4.1 General Description of E.U.T

Product Name:	Wi-Fi Smart Wall Socket
Model No.:	KS-604S
Model Difference:	N/A
Operation Frequency:	802.11b/g/n HT20: 2412MHz ~ 2462MHz
RF output power:	9.41dBm
Antenna installation:	PCB Printed Antenna
Type of modulation:	IEEE 802.11b (CCK/QPSK/BPSK,11Mbps max.) IEEE 802.11g (BPSK/QPSK/16QAM/64QAM,54Mbps max.) IEEE 802.11n (BPSK/QPSK/16QAM/64QAM,HT20:72Mbps max.)

4.2 Details of E.U.T

	Input: AC 110-125V 60Hz 15A Max
Ratings:	Load Power: Single 1500W(120V) Total 2500W(120V) Inductive Load<2000W USB Output: 5V/2.1A

4.3 Channel List

WIFI

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
1	2412	2	2417	3	2422	4	2427
5	2432	6	2437	7	2442	8	2447
9	2452	10	2457	11	2462	12	-

4.4 Test Mode

Table 1 Tests Carried Out Under FCC part 15.247

Test Items	Mode	Data Rate	Channel	TX/RX
Maximum Peak Output Power	802.11b	11 Mbps	1/6/11	TX
	802.11g	54 Mbps	1/6/11	TX
	802.11n HT20	108 Mbps	1/6/11	TX
Power Spectral Density	802.11b	11 Mbps	1/6/11	TX
	802.11g	54 Mbps	1/6/11	TX
	802.11n HT20	108 Mbps	1/6/11	TX
Frequency Range	802.11b	11 Mbps	1/11	TX
	802.11g	54 Mbps	1/11	TX
	802.11n HT20	108 Mbps	1/11	TX
Transmitter Spurious Emissions	802.11b	11 Mbps	1/6/11	TX
	802.11g	54 Mbps	1/6/11	TX
	802.11n HT20	108 Mbps	1/6/11	TX

Note :Parameters set by test software during channel & power tests, the software provided by the customer was used to set the operating channels as well as the output power level. The RF output
Waltek Services (Shenzhen) Co.,Ltd.
<http://www.waltek.com.cn>

power set is the power expected by the manufacturer and is going to be fixed on the firmware of the final product.

5. Equipment Used during Test

5.1 Equipments List

Conducted Emissions						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1	EMI Test Receiver	R&S	ESCI	100947	2018.09.15	2019.09.14
2	LISN	R&S	ENV216	100115	2018.09.15	2019.09.14
3	Cable	Top	TYPE16(3.5M)	-	2018.09.15	2019.09.14
3m Semi-anechoic Chamber for Radiation Emissions						
1	Spectrum Analyzer	R&S	FSP30	100091	2019.04.28	2020.04.27
2	Broad-band Horn Antenna(1-18GHz)	SCHWARZBECK	BBHA 9120 D	667	2019.04.28	2020.04.27
3	Broadband Preamplifier	COMPLIANCE DIRECTION	PAP-1G18	2004	2019.04.28	2020.04.27
4	Coaxial Cable (above 1GHz)	Top	1GHz-18GHz	EW02014-7	2019.04.28	2020.04.27
5	Spectrum Analyzer	R&S	FSP40	100501	2018.10.24	2019.10.23
6	Broad-band Horn Antenna(18-40GHz)	SCHWARZBECK	BBHA 9170	BBHA917065 1	2018.10.24	2019.10.23
7	Microwave Broadband Preamplifier (18-40GHz)	SCHWARZBECK	BBV 9721	100472	2018.10.24	2019.10.23
8	Cable	Top	18-40GHz	-	2018.10.24	2019.10.23
3m Semi-anechoic Chamber for Radiation Emissions						
Item	Equipment	Manufacturer	Model No.	Serial No	Last Calibration Date	Calibration Due Date
1	Test Receiver	R&S	ESCI	101296	2019.04.19	2020.04.18
2	Trilog Broadband Antenna	SCHWARZBECK	VULB9160	9160-3325	2019.04.18	2020.04.17
3	Amplifier	ANRITSU	MH648A	M43381	2019.04.19	2020.04.18
4	Cable	HUBER+SUHNER	CBL2	525178	2019.04.19	2020.04.18
5	Active Loop Antenna	Com-Power Corp.	AL-130R	10160007	2019.04.16	2020.04.15
RF Conducted Testing						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMC Analyzer (9k~26.5GHz)	Agilent	E7405A	MY45114943	2018-09-13	2019-09-12
2.	Spectrum Analyzer (9k-6GHz)	R&S	FSL6	100959	2018-09-11	2019-09-10
3.	Signal Analyzer (9k~26.5GHz)	Agilent	N9010A	MY50520207	2018-09-11	2019-09-10

5.2 Measurement Uncertainty

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-6}$
RF Power	± 1.0 dB
RF Power Density	± 2.2 dB
Radiated Spurious Emissions test	± 5.03 dB (30M~1000MHz)
	± 5.47 dB (1000M~25000MHz)
Conducted Spurious Emissions test	± 3.64 dB (AC mains 150KHz~30MHz)

5.3 Test Equipment Calibration

All the test equipments used are valid and calibrated by GUANG ZHOU GRG METROLOGY & TEST CO., LTD. address is No.163, Pingyun Rd. West of Huangpu Ave, Tianhe District, Guangzhou, Guangdong, China.

6. Test Summary

Test Items	Test Requirement	Result
Radiated Emissions	15.247 15.205(a) 15.209(a)	Pass
Conducted Emissions	15.207(a)	Pass
Bandwidth	15.247(a)(2)	Pass
Maximum Peak Output Power	15.247(b)(3),(4)	Pass
Power Spectral Density	15.247(e)	Pass
Band Edge	15.247(d)	Pass
Antenna Requirement	15.203	Pass
Maximum Permissible Exposure (Exposure of Humans to RF Fields)	1.1307(b)(1)	Pass
Note: Pass=Compliance; NC=Not Compliance; NT=Not Tested; N/A=Not Applicable.		

7. Conducted Emission

Test Requirement:	FCC CFR 47 Part 15 Section 15.207
Test Method:	ANSI C63.10:2013
Test Result:	PASS
Frequency Range:	150kHz to 30MHz
Class/Severity:	Class B
Limit:	66-56 dB μ V between 0.15MHz & 0.5MHz 56 dB μ V between 0.5MHz & 5MHz 60 dB μ V between 5MHz & 30MHz
Detector:	Peak for pre-scan (9kHz Resolution Bandwidth)

7.1 E.U.T. Operation

Operating Environment :


Temperature:	21.5 °C
Humidity:	51.9 % RH
Atmospheric Pressure:	101.2kPa

EUT Operation :

The test was performed in Transmitting mode, the test data were shown in the report.

7.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10.

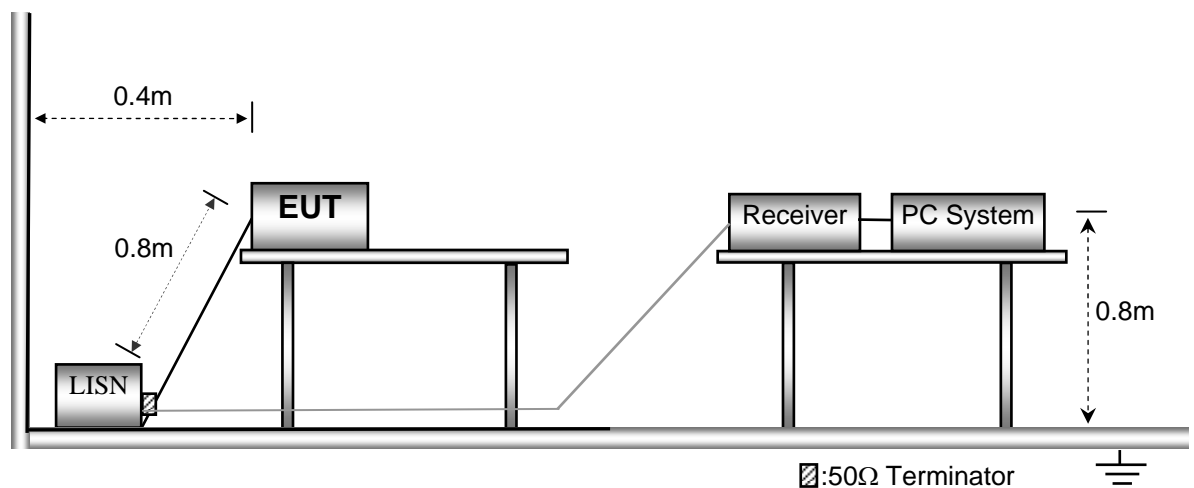

7.3 Measurement Description


The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

7.4 Conducted Emission Test Result

An initial pre-scan was performed on the live and neutral lines.


Only the worst case (WIFI transmitting mode) test data were record in the report.

Live line:

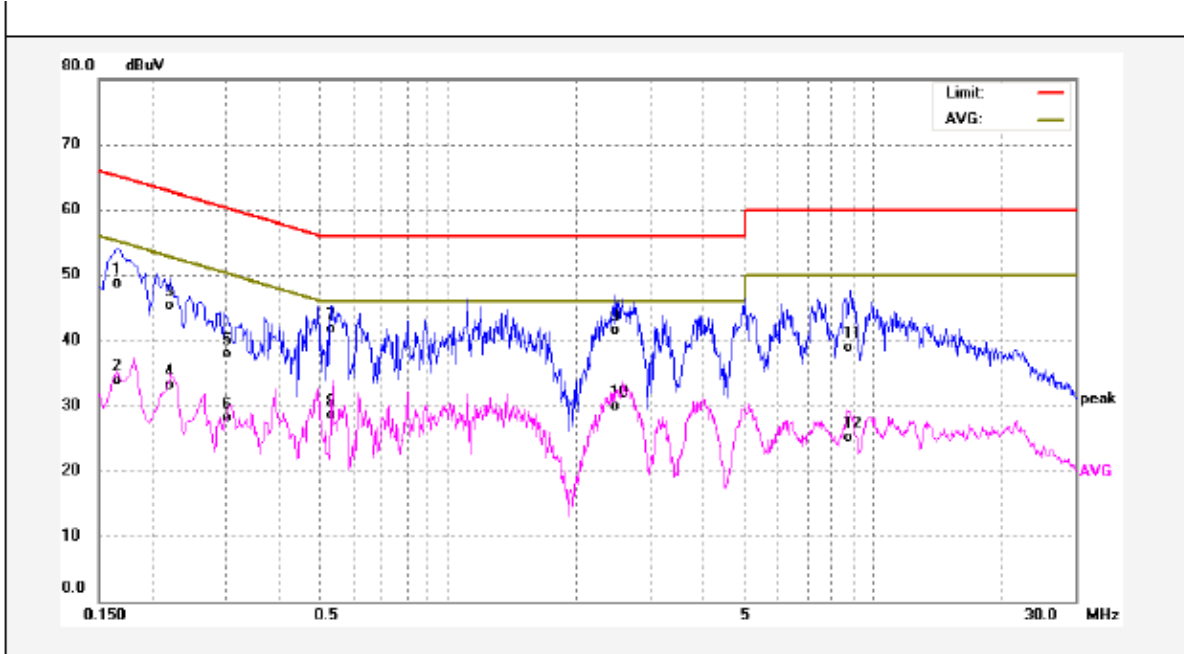

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1660	38.94	9.77	48.71	65.15	-16.44	QP	
2	0.1660	24.05	9.77	33.82	55.15	-21.33	AVG	
3	0.2220	35.49	9.77	45.26	62.74	-17.48	QP	
4	0.2220	23.42	9.77	33.19	52.74	-19.55	AVG	
5	0.2980	28.00	9.82	37.82	60.30	-22.48	QP	
6	0.2980	18.27	9.82	28.09	50.30	-22.21	AVG	
7	0.5299	31.82	9.82	41.64	56.00	-14.36	QP	
8	0.5299	18.65	9.82	28.47	46.00	-17.53	AVG	
9	2.4780	31.47	9.95	41.42	56.00	-14.58	QP	
10	2.4780	19.93	9.95	29.88	46.00	-16.12	AVG	
11	8.8340	28.75	10.08	38.83	60.00	-21.17	QP	
12	8.8340	15.11	10.08	25.19	50.00	-24.81	AVG	

Neutral line:

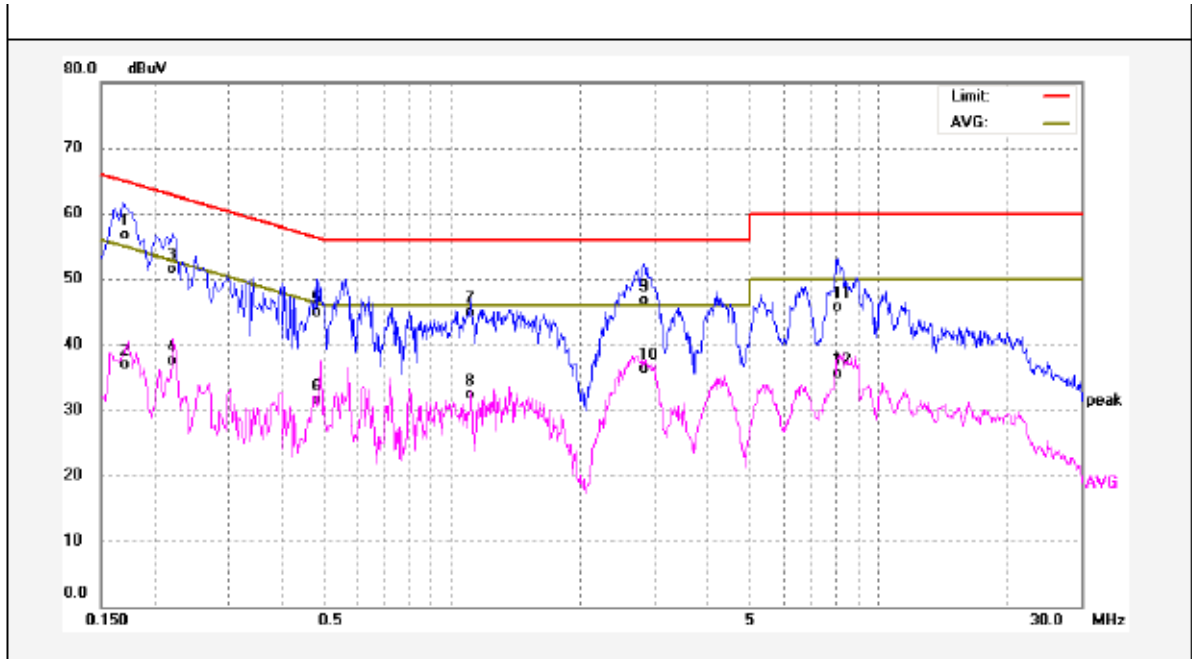

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1700	46.87	9.78	56.65	64.96	-8.31	QP	
2	0.1700	27.13	9.78	36.91	54.96	-18.05	AVG	
3	0.2220	41.67	9.77	51.44	62.74	-11.30	QP	
4	0.2220	27.68	9.77	37.45	52.74	-15.29	AVG	
5	0.4820	35.11	9.81	44.92	56.30	-11.38	QP	
6	0.4820	21.64	9.81	31.45	46.30	-14.85	AVG	
7	1.1100	35.06	9.88	44.94	56.00	-11.06	QP	
8	1.1100	22.41	9.88	32.29	46.00	-13.71	AVG	
9	2.8300	36.87	9.93	46.80	56.00	-9.20	QP	
10	2.8300	26.37	9.93	36.30	46.00	-9.70	AVG	
11	8.0340	35.52	10.09	45.61	60.00	-14.39	QP	
12	8.0340	25.34	10.09	35.43	50.00	-14.57	AVG	

8. Radiated Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.209 & 15.247

Test Method: ANSI C63.10:2013

Test Result: PASS

Measurement Distance: 3m

Limit:

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	2400/F(kHz)	300	10000 * 2400/F(kHz)	$20\log^{(2400/F(kHz))} + 80$
0.490 ~ 1.705	24000/F(kHz)	30	100 * 24000/F(kHz)	$20\log^{(24000/F(kHz))} + 40$
1.705 ~ 30	30	30	100 * 30	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

8.1 EUT Operation

Operating Environment :

Temperature: 23.5 °C

Humidity: 52.1 % RH

Atmospheric Pressure: 101.2kPa


EUT Operation :

The test was performed in transmitting mode, the test data were shown in the report.


8.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.10.


The test setup for emission measurement below 30MHz.

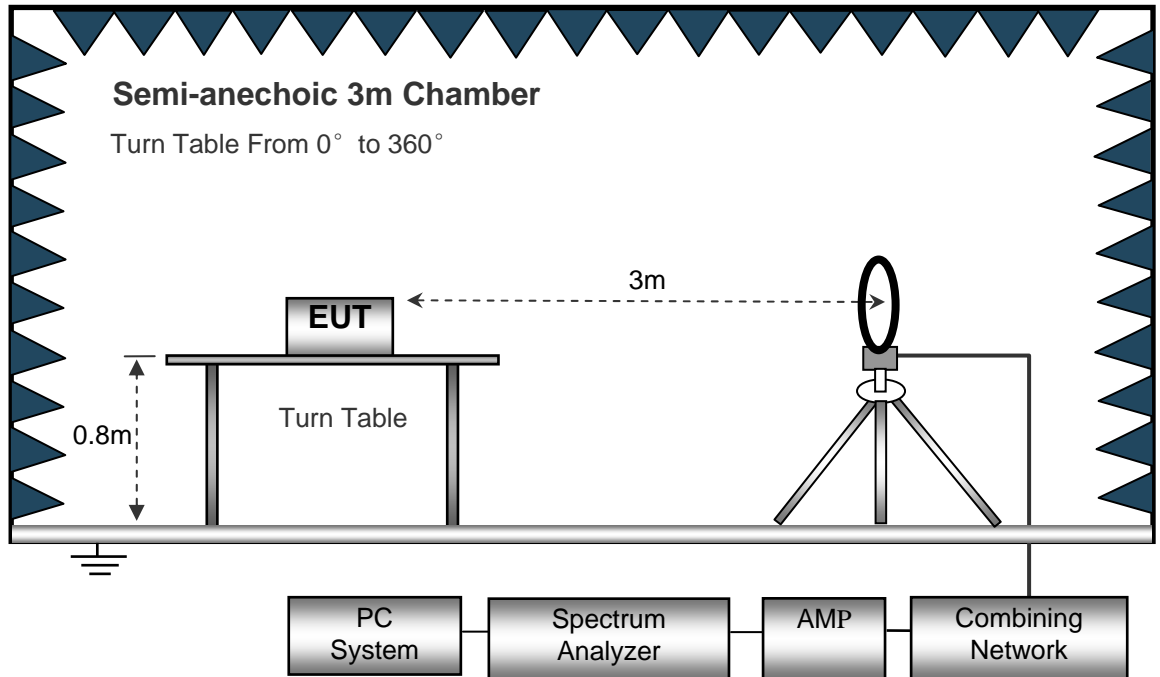

The test setup for emission measurement from 30 MHz to 1 GHz.

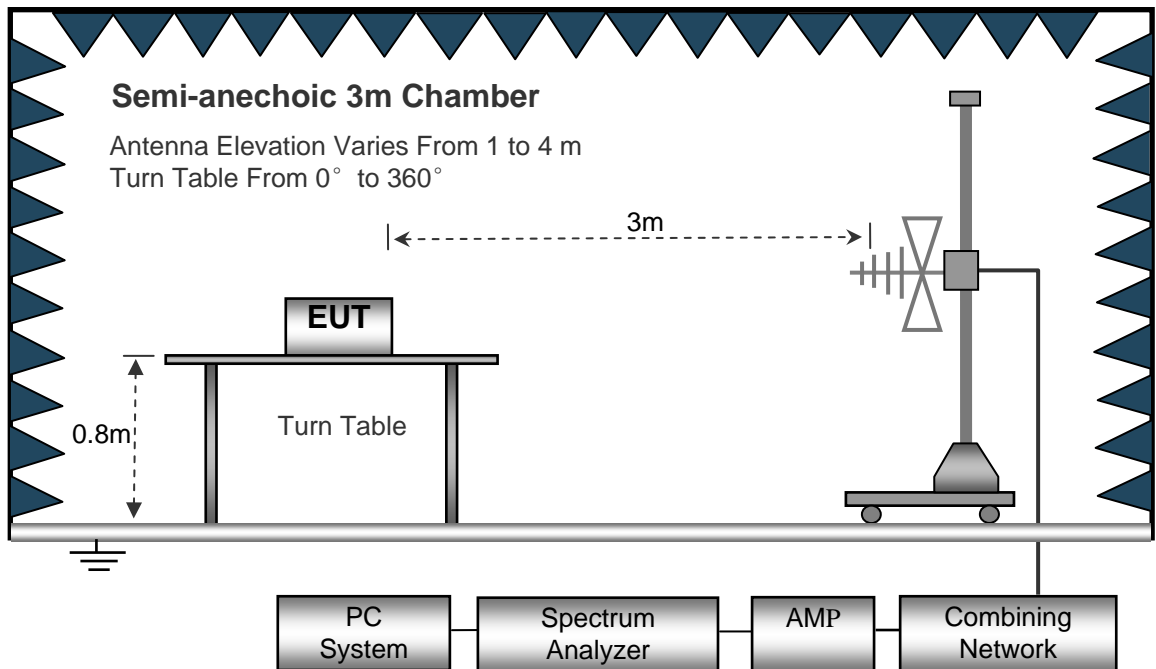

The test setup for emission measurement above 1 GHz.

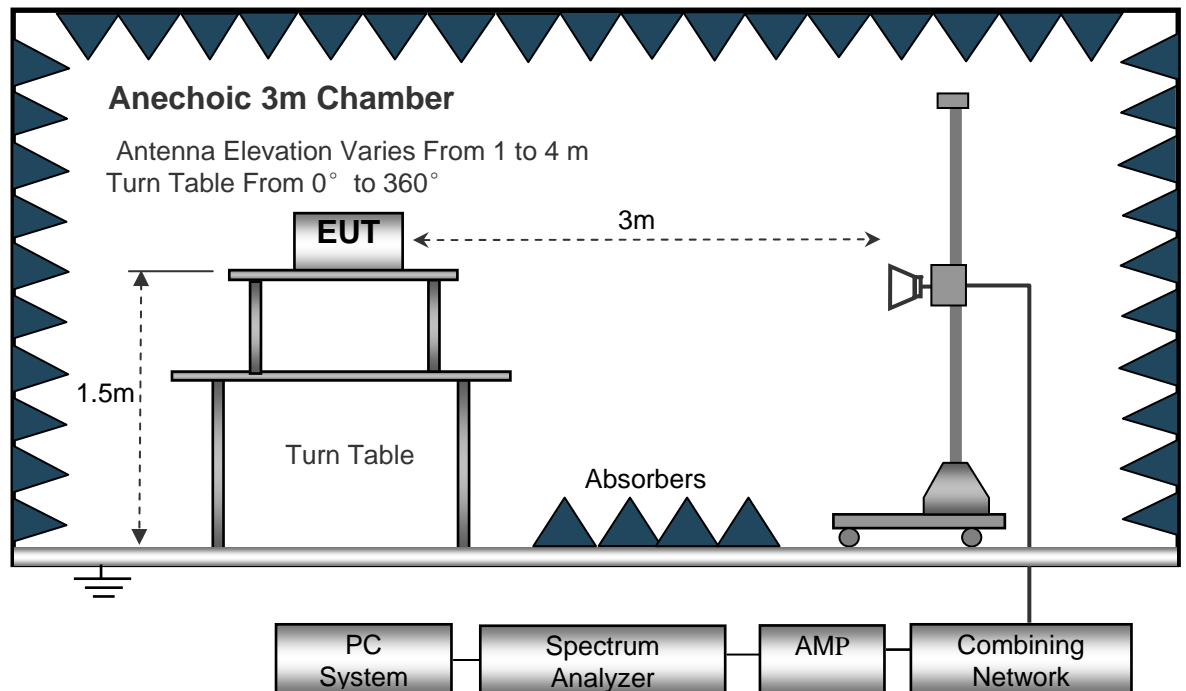

8.3 Spectrum Analyzer Setup

Below 30MHz

Sweep Speed Auto
 IF Bandwidth.....10kHz
 Video Bandwidth.....10kHz
 Resolution Bandwidth.....10kHz

30MHz ~ 1GHz

Sweep Speed Auto
 DetectorPK
 Resolution Bandwidth.....100kHz
 Video Bandwidth.....300kHz

Above 1GHz

Sweep Speed Auto
 DetectorPK
 Resolution Bandwidth.....1MHz
 Video Bandwidth.....3MHz
 DetectorAve.
 Resolution Bandwidth.....1MHz
 Video Bandwidth.....10Hz

8.4 Test Procedure

1. The EUT is placed on a turntable. For below 1GHz, the EUT is 0.8m above ground plane;
For above 1GHz, the EUT is 1.5m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are performed in X,Y and Z axis positioning(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand),the worst condition was tested putting the eut in X axis,so the worst data were shown as follow.
8. A 2.4GHz high -pass filter is used during radiated emissions above 1GHz measurement.

8.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$

8.6 Summary of Test Results

Test Frequency : 9kHz ~ 30MHz

The measurements were more than 20 dB below the limit and not reported.

Test Frequency : 30MHz ~ 18GHz

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
11b: Low Channel 2412MHz									
485.57	12.81	PK	185	1.8	H	21.09	33.90	45.00	-11.10
485.57	12.22	PK	315	1.8	V	21.09	33.31	45.00	-11.69
4824.00	50.49	PK	138	1.9	V	-1.05	49.44	74.00	-24.56
4824.00	42.74	Ave	138	1.9	V	-1.05	41.69	54.00	-12.31
7236.00	46.19	PK	15	1.8	H	1.34	47.53	74.00	-26.47
7236.00	41.24	Ave	15	1.8	H	1.34	42.58	54.00	-11.42
2327.82	45.77	PK	282	1.3	V	-13.19	32.58	74.00	-41.42
2327.82	38.26	Ave	282	1.3	V	-13.19	25.07	54.00	-28.93
2351.21	42.50	PK	24	1.2	H	-13.15	29.35	74.00	-44.65
2351.21	36.95	Ave	24	1.2	H	-13.15	23.80	54.00	-30.20
2496.77	44.51	PK	62	1.7	V	-13.08	31.43	74.00	-42.57
2496.77	36.04	Ave	62	1.7	V	-13.08	22.96	54.00	-31.04

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
11b: Middle Channel 2437MHz									
485.57	14.60	PK	325	1.7	H	21.09	35.69	45.00	-9.31
485.57	12.78	PK	194	1.7	V	21.09	33.87	45.00	-11.13
4874.00	49.46	PK	253	1.3	V	-0.63	48.83	74.00	-25.17
4874.00	44.24	Ave	253	1.3	V	-0.63	43.61	54.00	-10.39
7311.00	45.24	PK	207	1.1	H	2.21	47.45	74.00	-26.55
7311.00	42.79	Ave	207	1.1	H	2.21	45.00	54.00	-9.00
2326.64	45.89	PK	38	1.3	V	-13.19	32.70	74.00	-41.30
2326.64	38.54	Ave	38	1.3	V	-13.19	25.35	54.00	-28.65
2360.89	42.24	PK	45	1.9	H	-13.14	29.10	74.00	-44.90
2360.89	36.09	Ave	45	1.9	H	-13.14	22.95	54.00	-31.05
2487.41	42.27	PK	77	1.4	V	-13.09	29.18	74.00	-44.82
2487.41	36.70	Ave	77	1.4	V	-13.09	23.61	54.00	-30.39

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
11b: High Channel 2462MHz									
485.57	13.46	PK	140	1.6	H	21.09	34.55	45.00	-10.45
485.57	13.91	PK	193	1.9	V	21.09	35.00	45.00	-10.00
4924.00	50.34	PK	309	1.3	V	-0.25	50.09	74.00	-23.91
4924.00	44.75	Ave	309	1.3	V	-0.25	44.50	54.00	-9.50
7386.00	48.22	PK	11	1.6	H	2.85	51.07	74.00	-22.93
7386.00	41.31	Ave	11	1.6	H	2.85	44.16	54.00	-9.84
2339.29	45.65	PK	157	1.7	V	-13.19	32.46	74.00	-41.54
2339.29	38.59	Ave	157	1.7	V	-13.19	25.40	54.00	-28.60
2371.40	42.12	PK	40	1.6	H	-13.14	28.98	74.00	-45.02
2371.40	38.62	Ave	40	1.6	H	-13.14	25.48	54.00	-28.52
2486.46	44.54	PK	29	1.6	V	-13.09	31.45	74.00	-42.55
2486.46	38.48	Ave	29	1.6	V	-13.09	25.39	54.00	-28.61

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
11g: Low Channel 2412MHz									
485.57	13.78	PK	232	1.7	H	21.09	34.87	45.00	-10.13
485.57	12.67	PK	116	1.0	V	21.09	33.76	45.00	-11.24
4824.00	51.66	PK	334	1.5	V	-1.06	50.60	74.00	-23.40
4824.00	48.37	Ave	334	1.5	V	-1.06	47.31	54.00	-6.69
7236.00	47.10	PK	231	1.2	H	1.35	48.45	74.00	-25.55
7236.00	46.46	Ave	231	1.2	H	1.35	47.81	54.00	-6.19
2339.30	45.79	PK	76	1.4	V	-13.19	32.60	74.00	-41.40
2339.30	38.74	Ave	76	1.4	V	-13.19	25.55	54.00	-28.45
2373.76	43.00	PK	230	1.1	H	-13.14	29.86	74.00	-44.14
2373.76	36.51	Ave	230	1.1	H	-13.14	23.37	54.00	-30.63
2497.02	42.33	PK	34	1.3	V	-13.08	29.25	74.00	-44.75
2497.02	38.97	Ave	34	1.3	V	-13.08	25.89	54.00	-28.11

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
11g: Middle Channel 2437MHz									
485.57	14.24	PK	155	1.7	H	21.09	35.33	45.00	-9.67
485.57	13.93	PK	154	1.4	V	21.09	35.02	45.00	-9.98
4874.00	49.64	PK	336	1.2	V	-0.62	49.02	74.00	-24.98
4874.00	48.79	Ave	336	1.2	V	-0.62	48.17	54.00	-5.83
7311.00	47.47	PK	126	1.8	H	2.20	49.67	74.00	-24.33
7311.00	46.28	Ave	126	1.8	H	2.20	48.48	54.00	-5.52
2331.11	46.97	PK	348	1.7	V	-13.19	33.78	74.00	-40.22
2331.11	39.99	Ave	348	1.7	V	-13.19	26.80	54.00	-27.20
2378.03	42.31	PK	25	1.6	H	-13.15	29.16	74.00	-44.84
2378.03	36.52	Ave	25	1.6	H	-13.15	23.37	54.00	-30.63
2490.35	44.03	PK	239	1.3	V	-13.09	30.94	74.00	-43.06
2490.35	36.77	Ave	239	1.3	V	-13.09	23.68	54.00	-30.32

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
11g: High Channel 2462MHz									
485.57	12.96	PK	170	1.9	H	21.09	34.05	45.00	-10.95
485.57	13.37	PK	21	1.2	V	21.09	34.46	45.00	-10.54
4924.00	50.76	PK	111	2.0	V	-0.25	50.51	74.00	-23.49
4924.00	46.47	Ave	111	2.0	V	-0.25	46.22	54.00	-7.78
7386.00	47.69	PK	24	1.7	H	2.86	50.55	74.00	-23.45
7386.00	42.41	Ave	24	1.7	H	2.86	45.27	54.00	-8.73
2317.02	45.65	PK	90	1.6	V	-13.19	32.46	74.00	-41.54
2317.02	38.04	Ave	90	1.6	V	-13.19	24.85	54.00	-29.15
2376.55	44.63	PK	251	1.4	H	-13.14	31.49	74.00	-42.51
2376.55	36.18	Ave	251	1.4	H	-13.14	23.04	54.00	-30.96
2497.30	44.20	PK	193	1.5	V	-13.08	31.12	74.00	-42.88
2497.30	38.97	Ave	193	1.5	V	-13.08	25.89	54.00	-28.11

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
n20: Low Channel 2412MHz									
485.57	14.38	PK	17	2.0	H	21.09	35.47	45.00	-9.53
485.57	12.92	PK	197	1.8	V	21.09	34.01	45.00	-10.99
4824.00	50.58	PK	263	1.4	V	-1.06	49.52	74.00	-24.48
4824.00	48.90	Ave	263	1.4	V	-1.06	47.84	54.00	-6.16
7236.00	47.07	PK	164	1.4	H	1.34	48.41	74.00	-25.59
7236.00	45.54	Ave	164	1.4	H	1.34	46.88	54.00	-7.12
2324.03	46.43	PK	127	1.2	V	-13.19	33.24	74.00	-40.76
2324.03	37.97	Ave	127	1.2	V	-13.19	24.78	54.00	-29.22
2378.42	43.34	PK	39	1.1	H	-13.14	30.20	74.00	-43.80
2378.42	38.83	Ave	39	1.1	H	-13.14	25.69	54.00	-28.31
2486.47	42.79	PK	296	1.5	V	-13.08	29.71	74.00	-44.29
2486.47	38.46	Ave	296	1.5	V	-13.08	25.38	54.00	-28.62

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
n20: Middle Channel 2437MHz									
485.57	13.04	PK	208	1.1	H	21.09	34.13	45.00	-10.87
485.57	13.95	PK	17	1.5	V	21.09	35.04	45.00	-9.96
4874.00	50.37	PK	111	1.5	V	-0.61	49.76	74.00	-24.24
4874.00	48.41	Ave	111	1.5	V	-0.61	47.80	54.00	-6.20
7311.00	47.65	PK	336	1.8	H	2.21	49.86	74.00	-24.14
7311.00	45.35	Ave	336	1.8	H	2.21	47.56	54.00	-6.44
2345.84	46.95	PK	46	1.1	V	-13.19	33.76	74.00	-40.24
2345.84	39.81	Ave	46	1.1	V	-13.19	26.62	54.00	-27.38
2378.43	42.38	PK	204	1.1	H	-13.14	29.24	74.00	-44.76
2378.43	38.93	Ave	204	1.1	H	-13.14	25.79	54.00	-28.21
2485.69	44.16	PK	269	1.6	V	-13.09	31.07	74.00	-42.93
2485.69	36.12	Ave	269	1.6	V	-13.09	23.03	54.00	-30.97

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
n20: High Channel 2462MHz									
485.57	14.80	PK	38	1.6	H	21.09	35.89	45.00	-9.11
485.57	13.82	PK	44	1.0	V	21.09	34.91	45.00	-10.09
4924.00	50.65	PK	86	1.4	V	-0.24	50.41	74.00	-23.59
4924.00	48.86	Ave	86	1.4	V	-0.24	48.62	54.00	-5.38
7386.00	47.37	PK	104	1.6	H	2.83	50.20	74.00	-23.80
7386.00	45.05	Ave	104	1.6	H	2.83	47.88	54.00	-6.12
2329.25	45.39	PK	115	1.1	V	-13.19	32.20	74.00	-41.80
2329.25	38.08	Ave	115	1.1	V	-13.19	24.89	54.00	-29.11
2365.29	42.48	PK	52	1.7	H	-13.14	29.34	74.00	-44.66
2365.29	37.97	Ave	52	1.7	H	-13.14	24.83	54.00	-29.17
2493.00	44.60	PK	327	1.5	V	-13.08	31.52	74.00	-42.48
2493.00	36.20	Ave	327	1.5	V	-13.08	23.12	54.00	-30.88

Test Frequency: 18GHz~25GHz

The measurements were more than 20 dB below the limit and not reported.

9. Band Edge Measurement


Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	558074 D01 15.247 Meas Guidance v05r02
Test Limit:	Regulation 15.247 (d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
Test Mode:	Transmitting

9.1 Test Produce


1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

9.2 Test Result


Test result plots shown as follows:

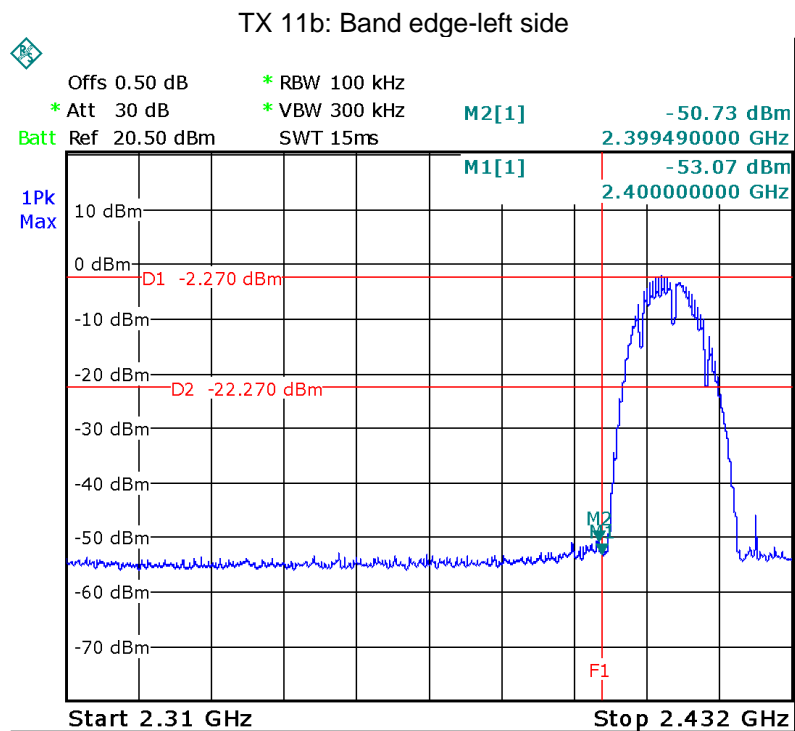


TX 11b: Band edge-right side

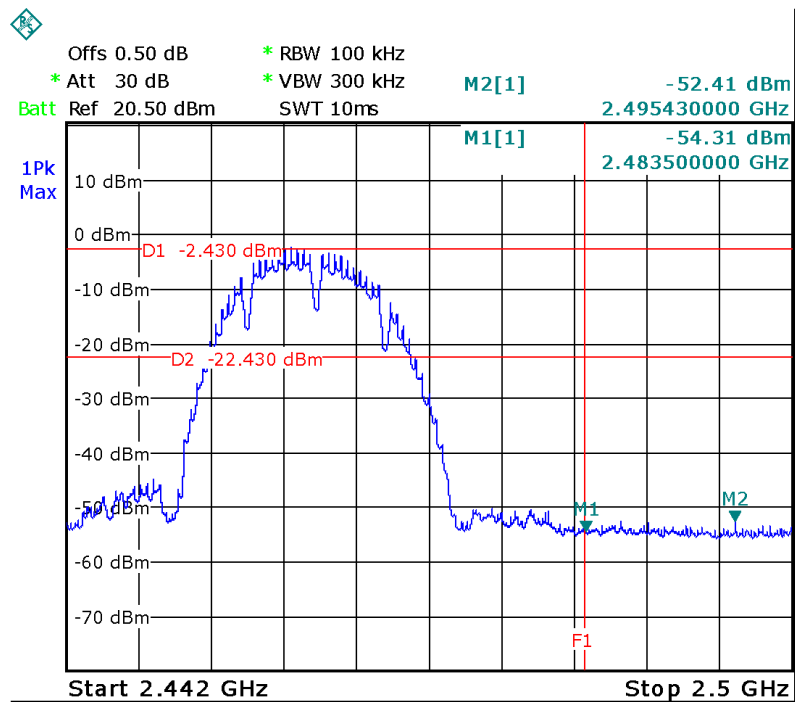


TX 11g: Band edge-left side

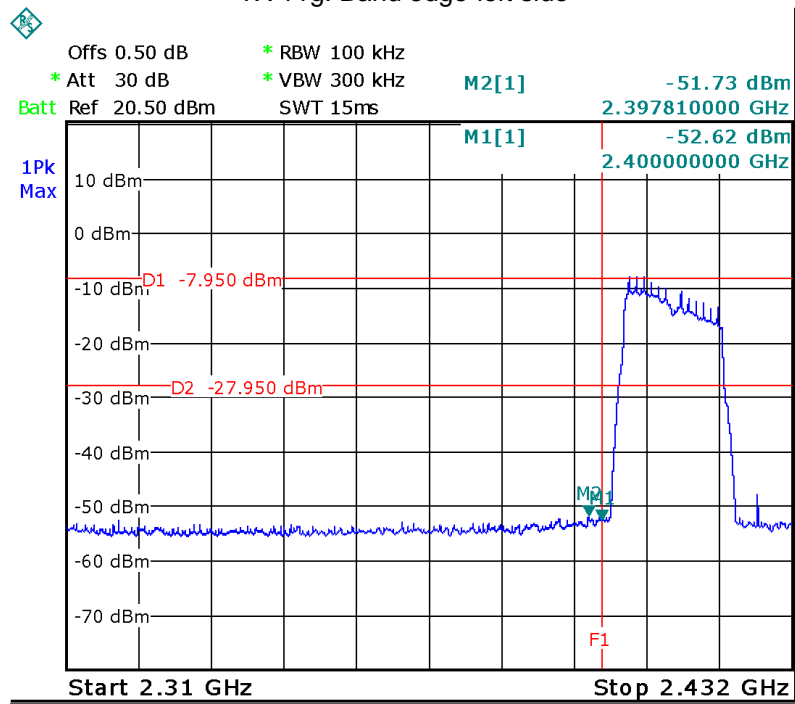


TX 11g: Band edge-right side

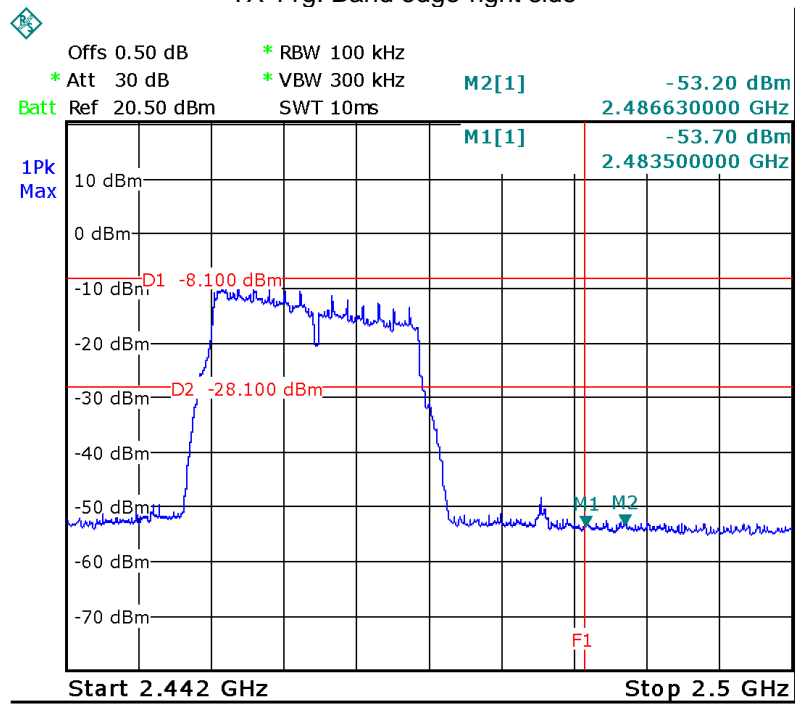

TX 11n HT20: Band edge-left side

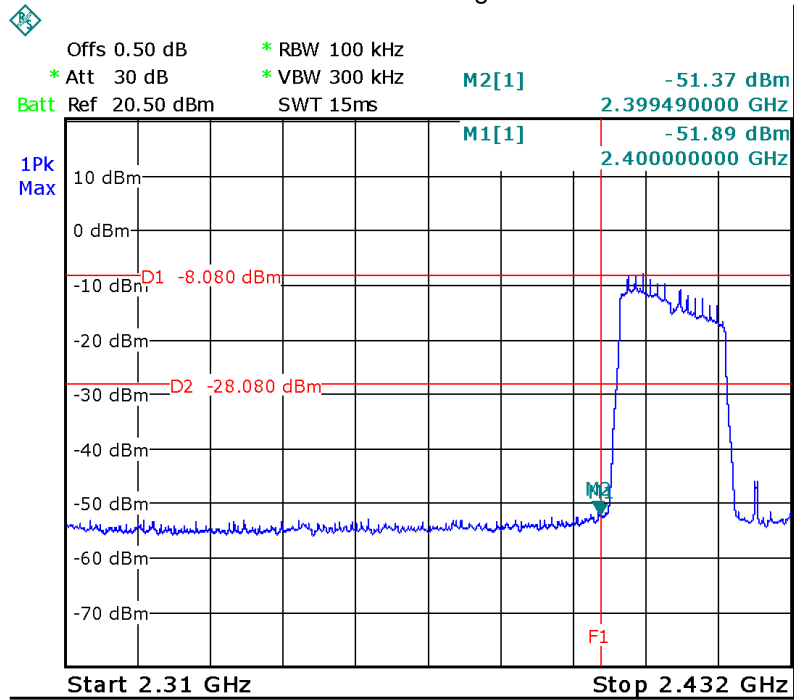

TX 11n HT20: Band edge-right side

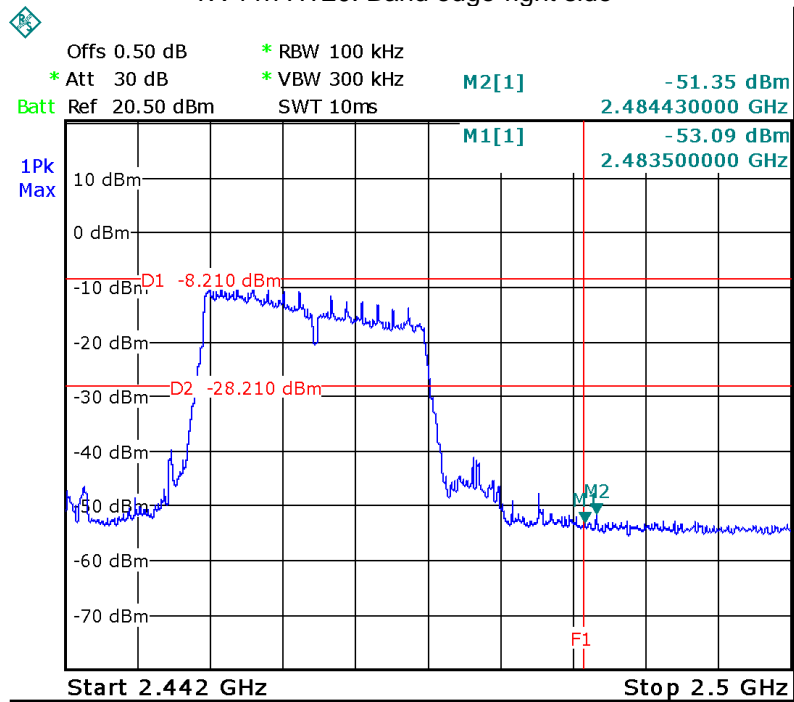

10. Bandwidth Measurement

Test Requirement:

FCC CFR47 Part 15 Section 15.247

Test Method:

558074 D01 15.247 Meas Guidance v05r02

10.1 Test Procedure:


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz



10.2 Test Result:

Operation mode	6dB Bandwidth (MHz)			99% Bandwidth (MHz)		
	Channel 1	Channel 6	Channel 11	Channel 1	Channel 6	Channel 11
TX 11b	Channel 1	Channel 6	Channel 11	Channel 1	Channel 6	Channel 11
	10.060	10.571	10.092	13.764	14.020	14.052
TX 11g	Channel 1	Channel 6	Channel 11	Channel 1	Channel 6	Channel 11
	15.768	15.868	15.818	16.467	16.617	16.617
TX 11n HT20	Channel 1	Channel 6	Channel 11	Channel 1	Channel 6	Channel 11
	16.383	16.383	16.437	17.569	17.731	17.731


Wifi: Test result plot as follows:

Mode: TX 11b channel 1

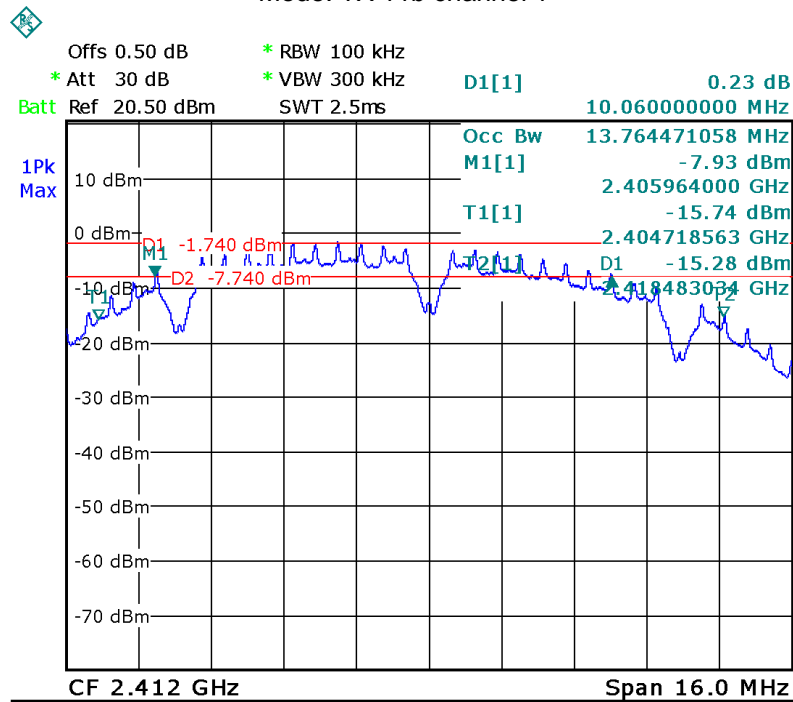


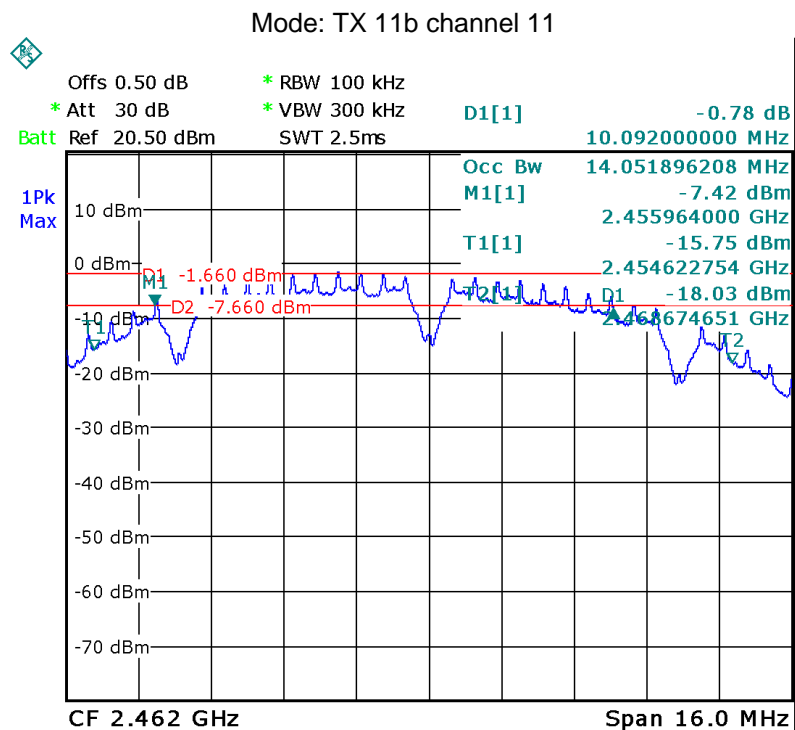
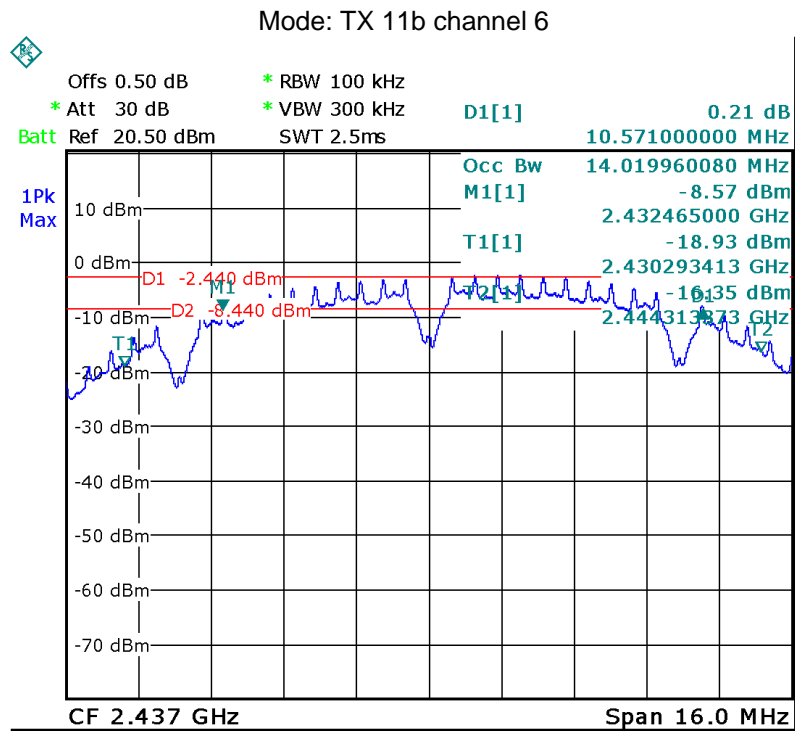




Mode: TX 11g channel 1

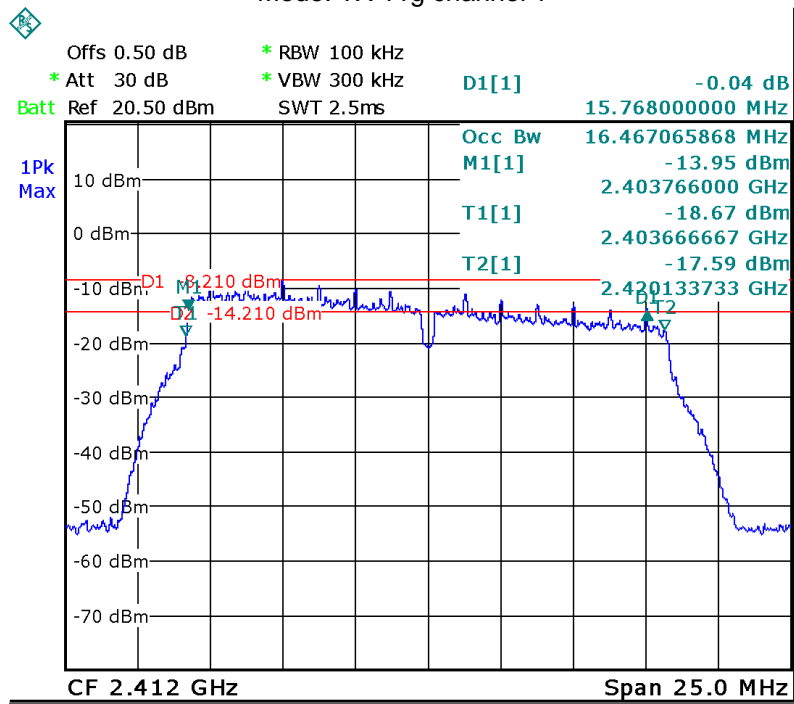

Mode: TX 11g channel 6

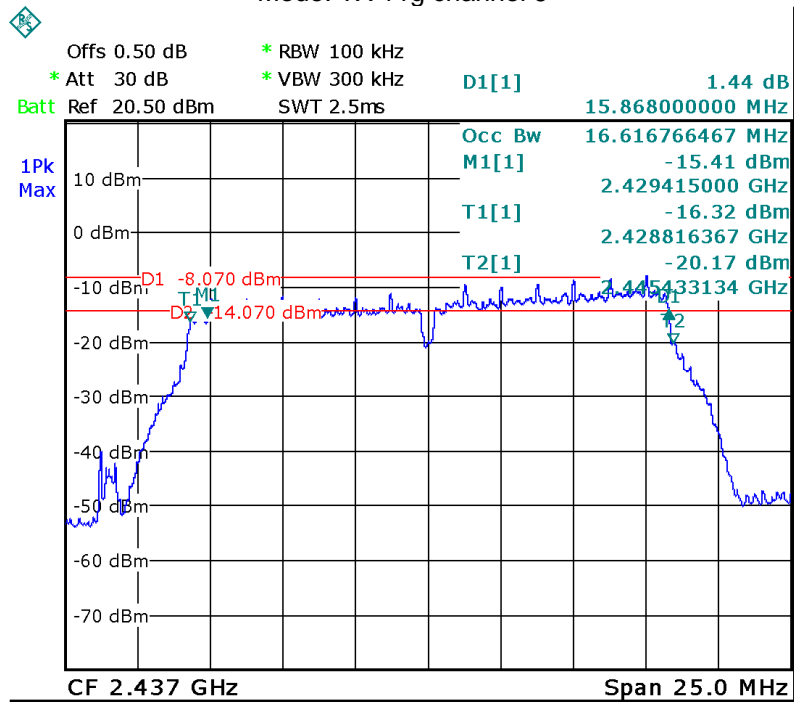

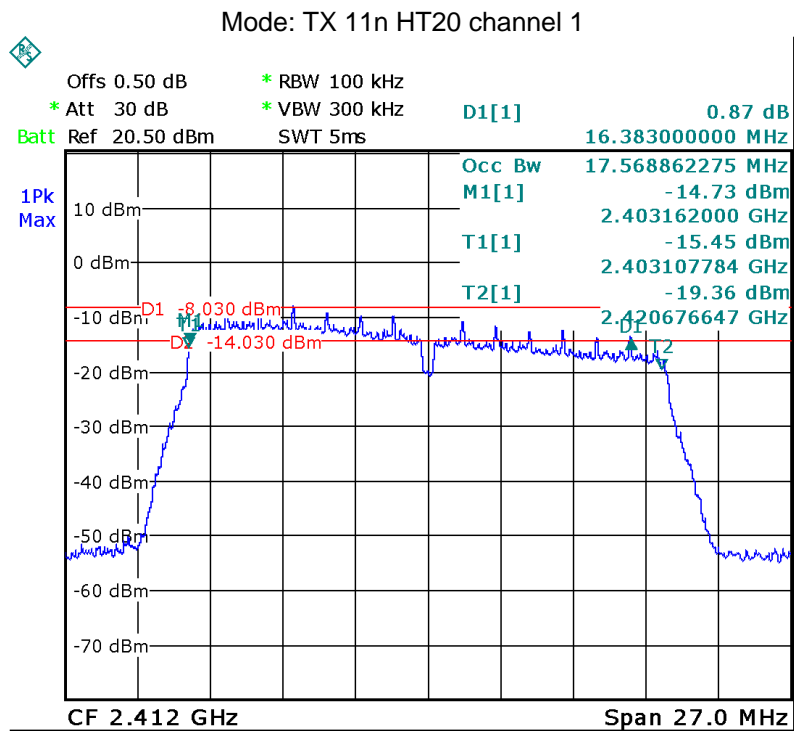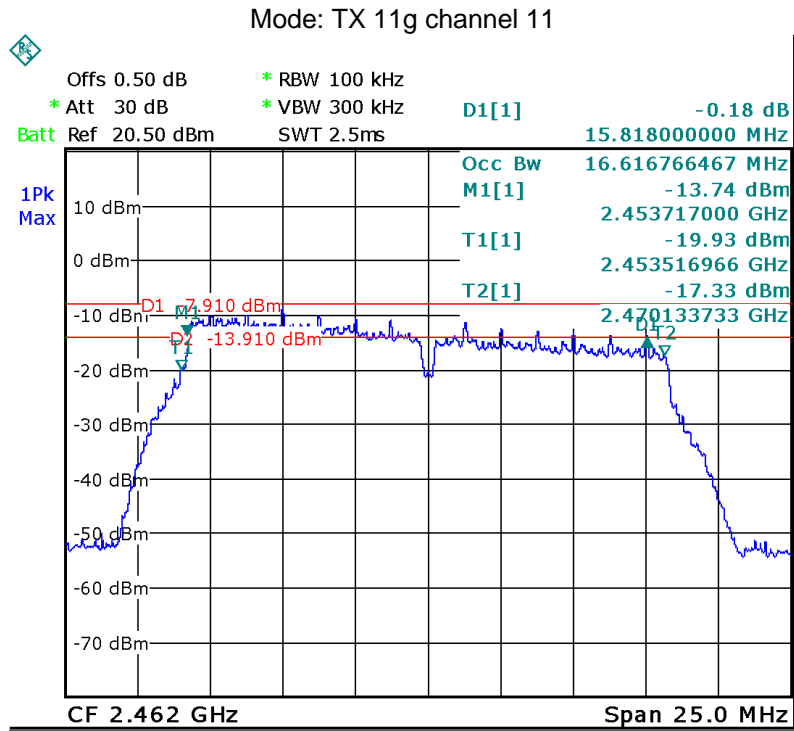

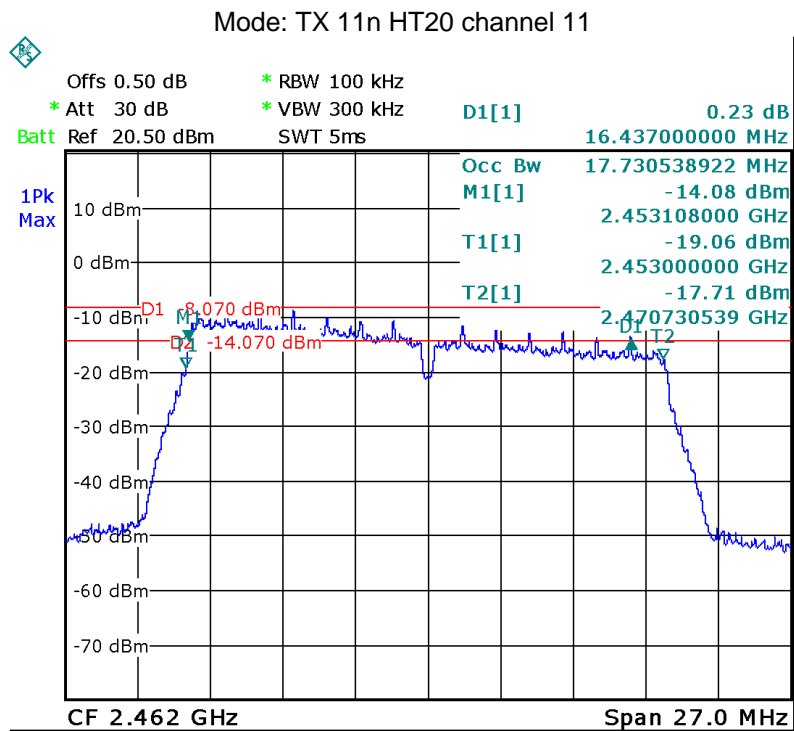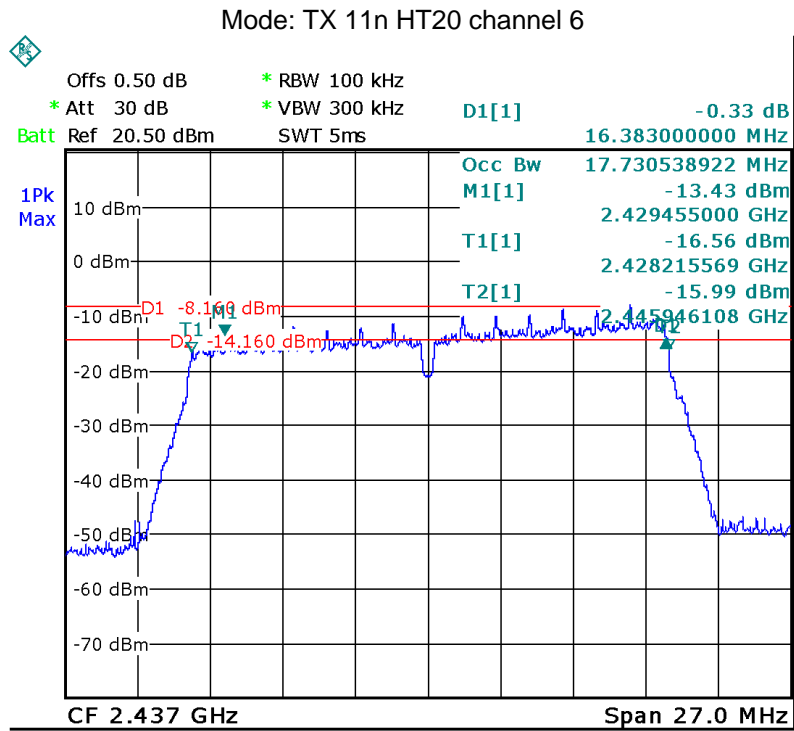

11. Maximum Peak Output Power

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: 558074 D01 15.247 Meas Guidance v05r02

11.1 Test Procedure:

558074 D01 DTS Meas Guidance V04

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 1 MHz. VBW = 3 MHz. Sweep = auto; Detector Function = Peak, Set the span to fully encompass the DTS bandwidth.
3. Keep the EUT in transmitting at lowest, medium and highest channel individually. Record the max value.

11.2 Test Result:

Test mode :TX 11b		
Maximum Peak Output Power (dBm)		
2412MHz	2437MHz	2462MHz
9.20	9.20	9.34
Limit: 1W/30dBm		

Test mode :TX 11g		
Maximum Peak Output Power (dBm)		
2412MHz	2437MHz	2462MHz
9.15	9.17	9.20
Limit: 1W/30dBm		

Test mode :TX 11n HT20		
Maximum Peak Output Power (dBm)		
2412MHz	2437MHz	2462MHz
9.41	9.26	9.28
Limit: 1W/30dBm		

12. Power Spectral density

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: 558074 D01 15.247 Meas Guidance v05r02

12.1 Test Procedure:

558074 D01 DTS Meas Guidance V04



1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 3kHz. VBW = 10kHz , Span = 1.5 times the DTS channel bandwidth(6 dB bandwidth). Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section
Submit this plot.



12.2 Test Result:



Test mode :TX 11b		
Power Spectral (dBm per 3kHz)		
2412MHz	2437MHz	2462MHz
-15.36	-17.90	-17.22
Limit: 8dBm per 3kHz		



Test mode :TX 11g		
Power Spectral (dBm per 3kHz)		
2412MHz	2437MHz	2462MHz
-21.55	-22.51	-22.68
Limit: 8dBm per 3kHz		


Test mode :TX 11n HT20		
Power Spectral (dBm per 3kHz)		
2412MHz	2437MHz	2462MHz
-23.11	-21.22	-22.79
Limit: 8dBm per 3kHz		

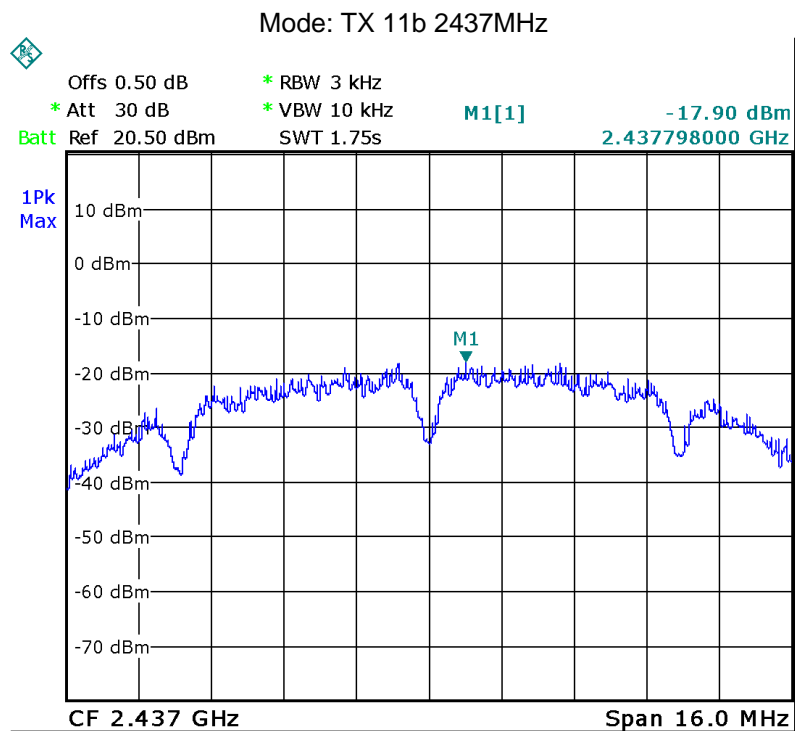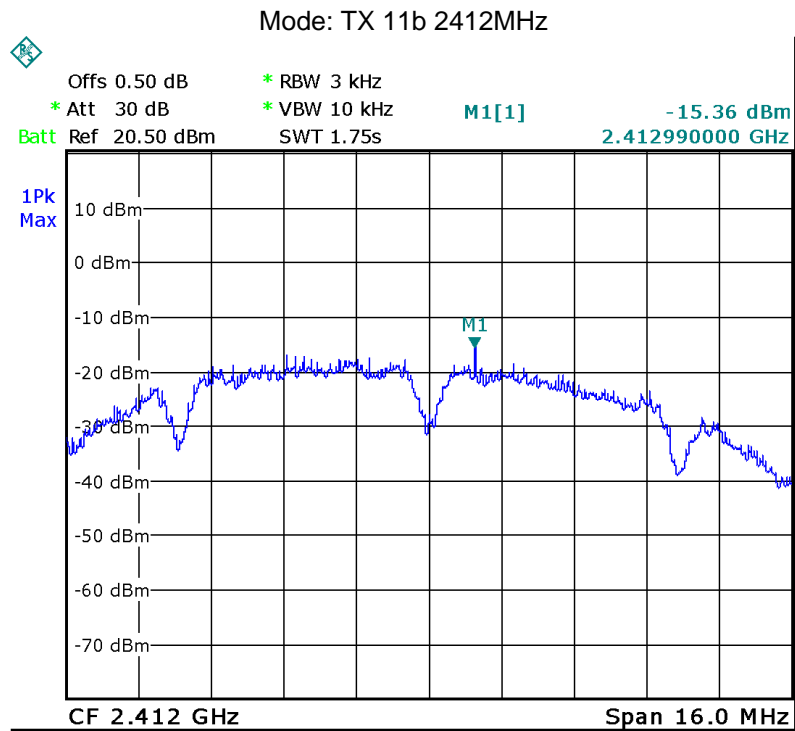

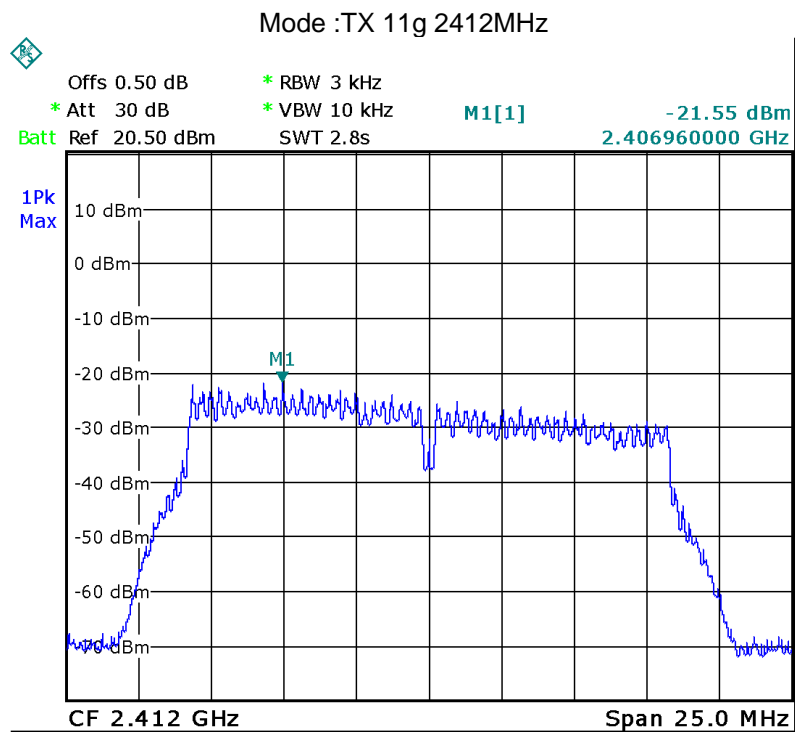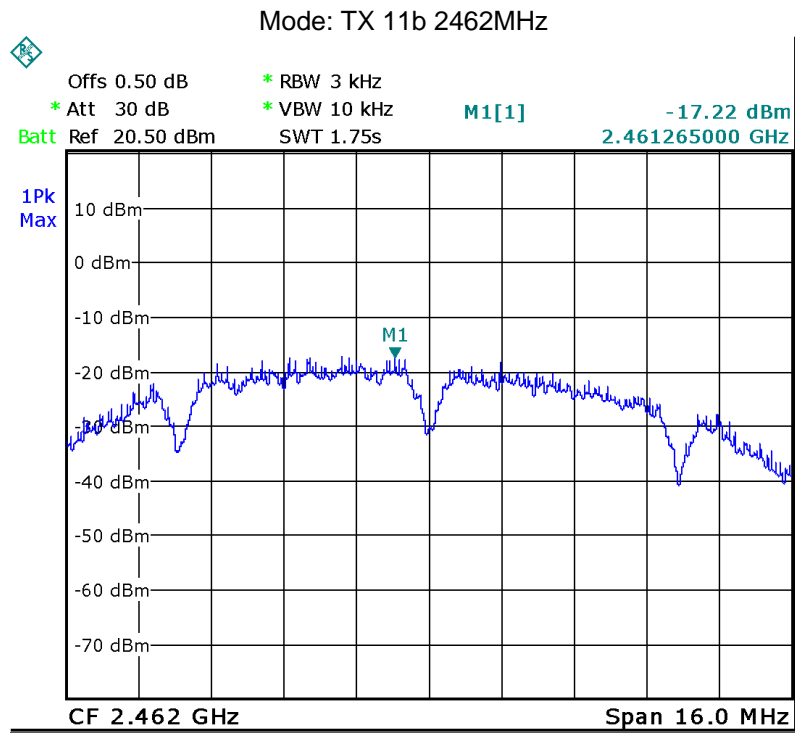

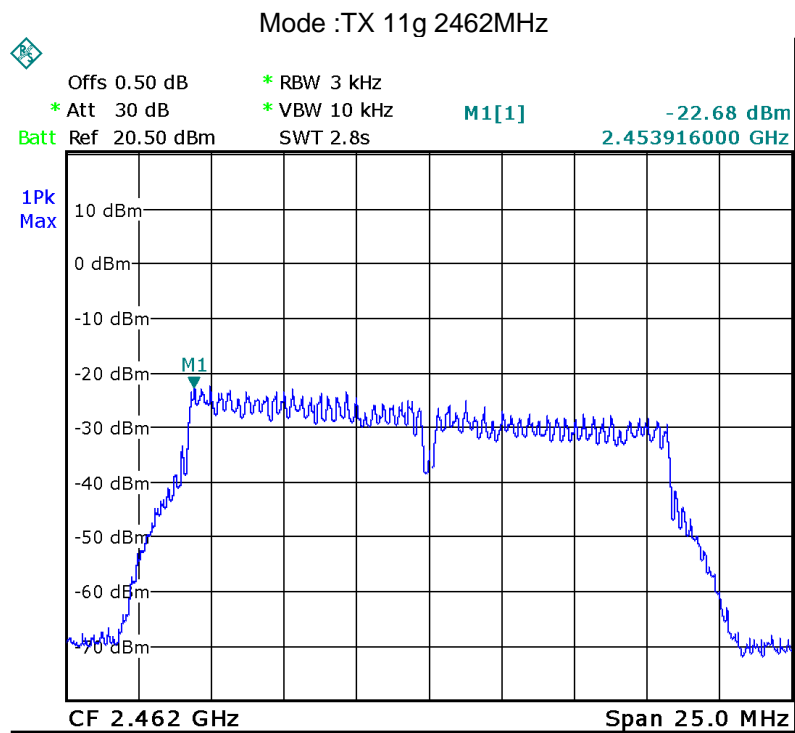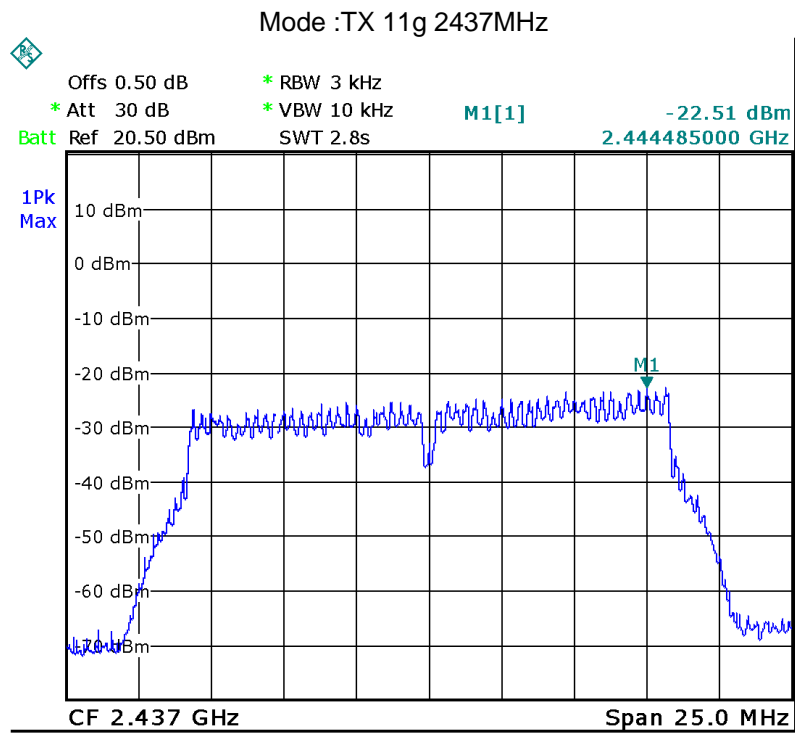

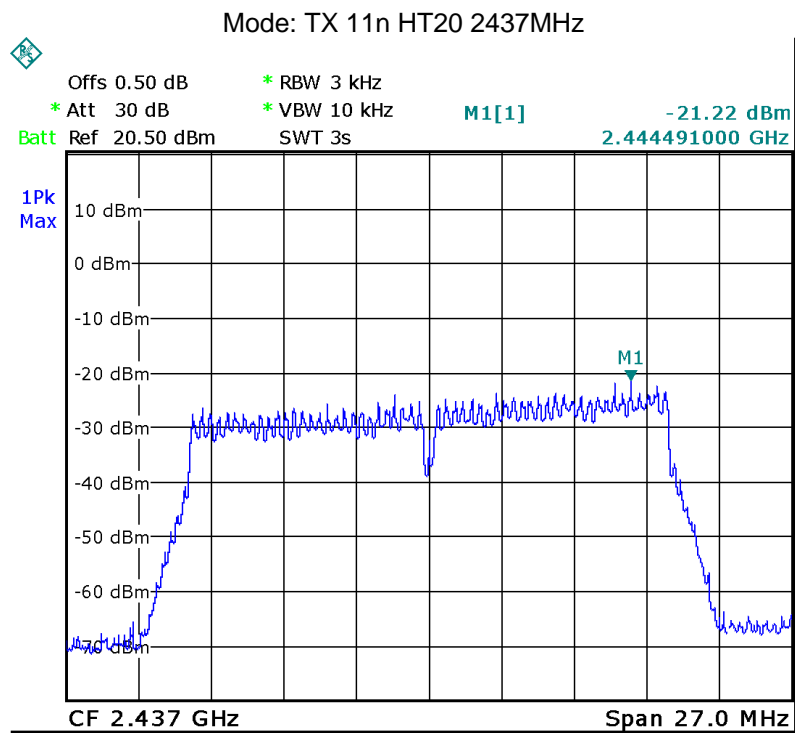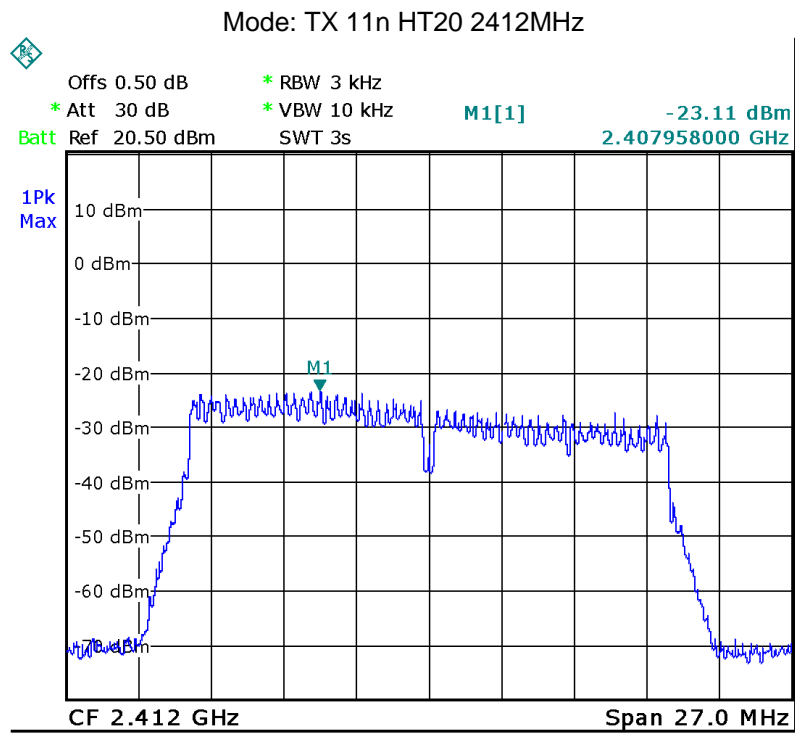

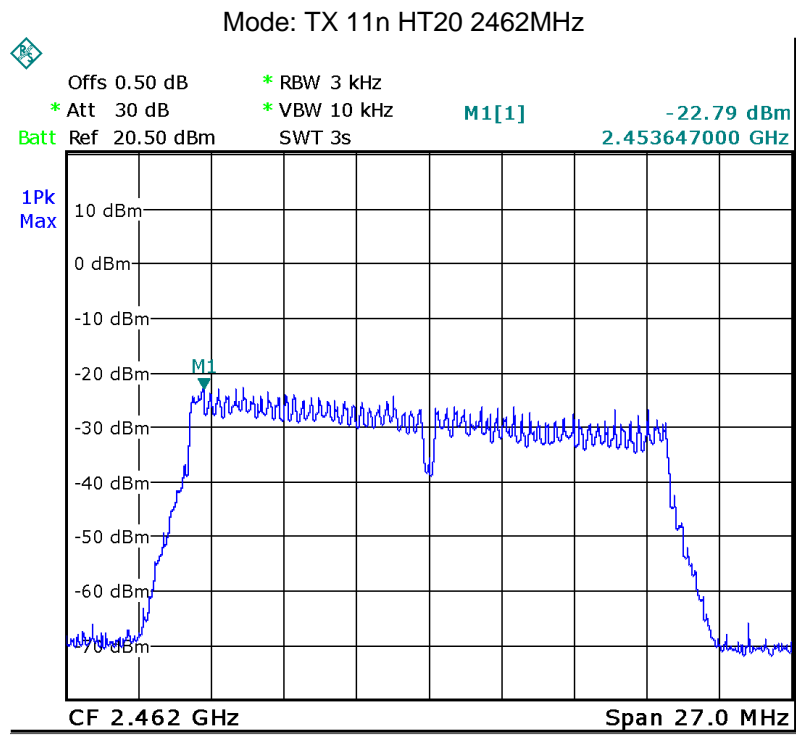


13. Antenna Requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Result:

The EUT has a PCB Printed Antenna, meets the requirements of FCC 15.203.

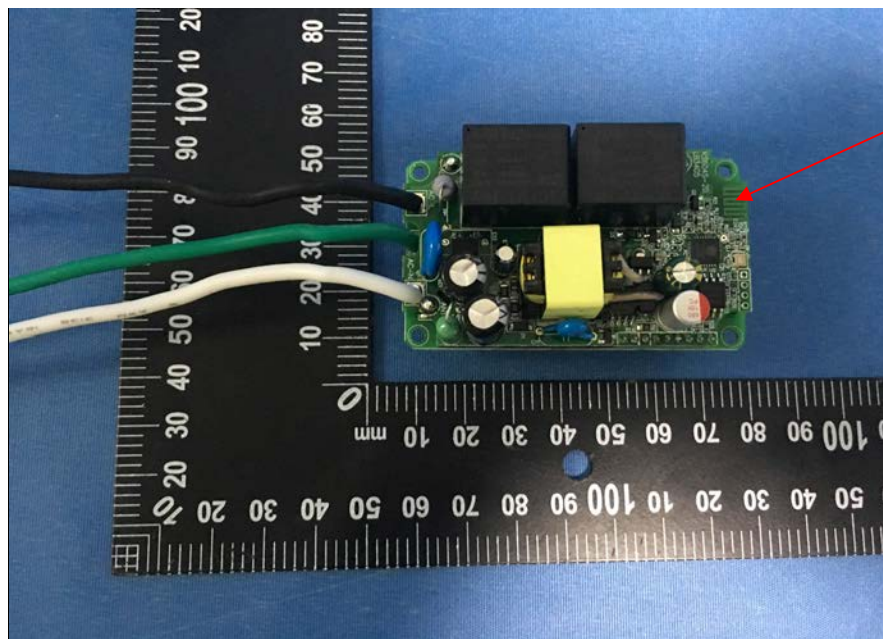

14. RF Exposure

Test Requirement:	FCC Part 1.1307
Evaluation Method:	FCC Part 2.1091

14.1 Requirements

Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess limit for maximum permissible exposure. In accordance with 47 CFR FCC Part 2 Subpart J, section 2.1091 this device has been defined as a mobile device whereby a distance of 0.2 m normally can be maintained between the user and the device.

14.2 The procedures / limit

(A) Limits for Occupational / Controlled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842 / f	4.89 / f	(900 / f)*	6
30-300	61.4	0.163	1.0	6
300-1500			F/300	6
1500-100,000			5	6

(B) Limits for General Population / Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f)*	30
30-300	27.5	0.073	0.2	30
300-1500			F/1500	30
1500-100,000			1.0	30

Note: f = frequency in MHz ; *Plane-wave equivalent power density

14.3 MPE Calculation Method

P = Peak RF output power (W)

G = EUT Antenna numeric gain (numeric)

d = Separation distance between radiator and human body (m)

The formula can be changed to

$$Pd = P_{out} * G / (4 * \pi * R^2)$$

From the peak EUT RF output power, the minimum mobile separation distance, $d=0.2\text{m}$, as well as the gain of the used antenna, the RF power density can be obtained.


Antenna Gain (dBi)	Antenna Gain (numeric)	Max. Peak Output Power (dBm)	Peak Output Power (mW)	Power Density (mW/cm ²)	Limit of Power Density (mW/cm ²)
0.00	1.00	9.41	8.73	0.0017	1

Compliance.


15. Photographs – Test Setup Photos

15.1 Radiated Emission

Test frequency Below 30MHz

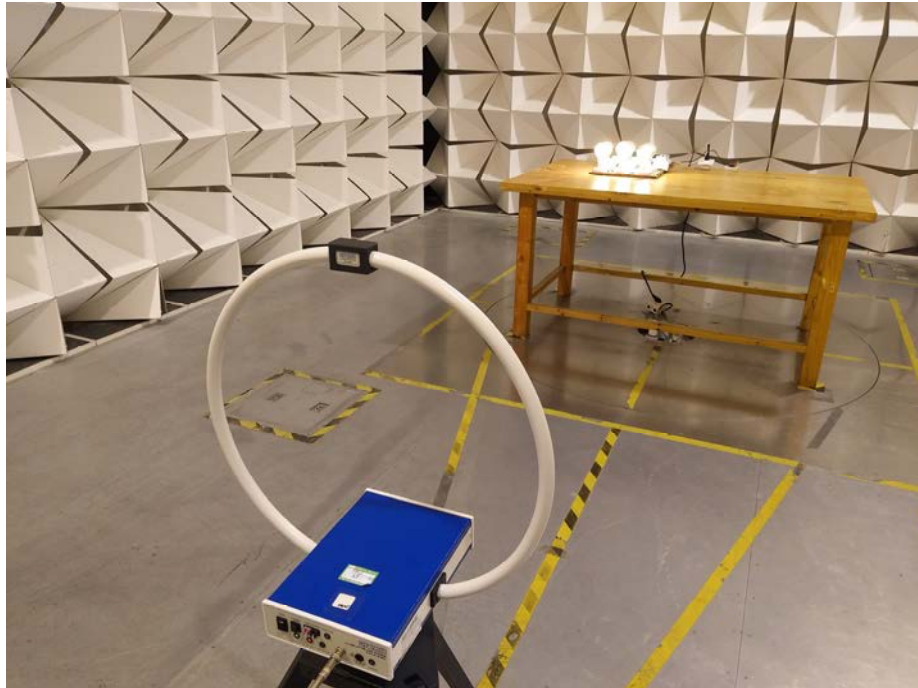

Test frequency from 30MHz to 1GHz

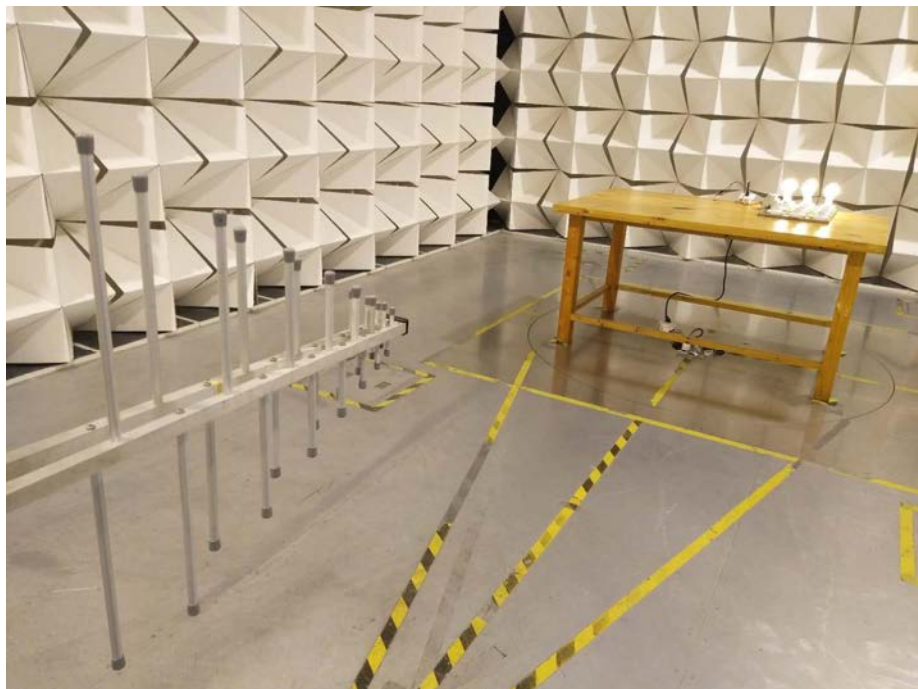

Test frequency above 1GHz





15.2 Conducted Emission






16. Photographs - Constructional Details


16.1 EUT – External View



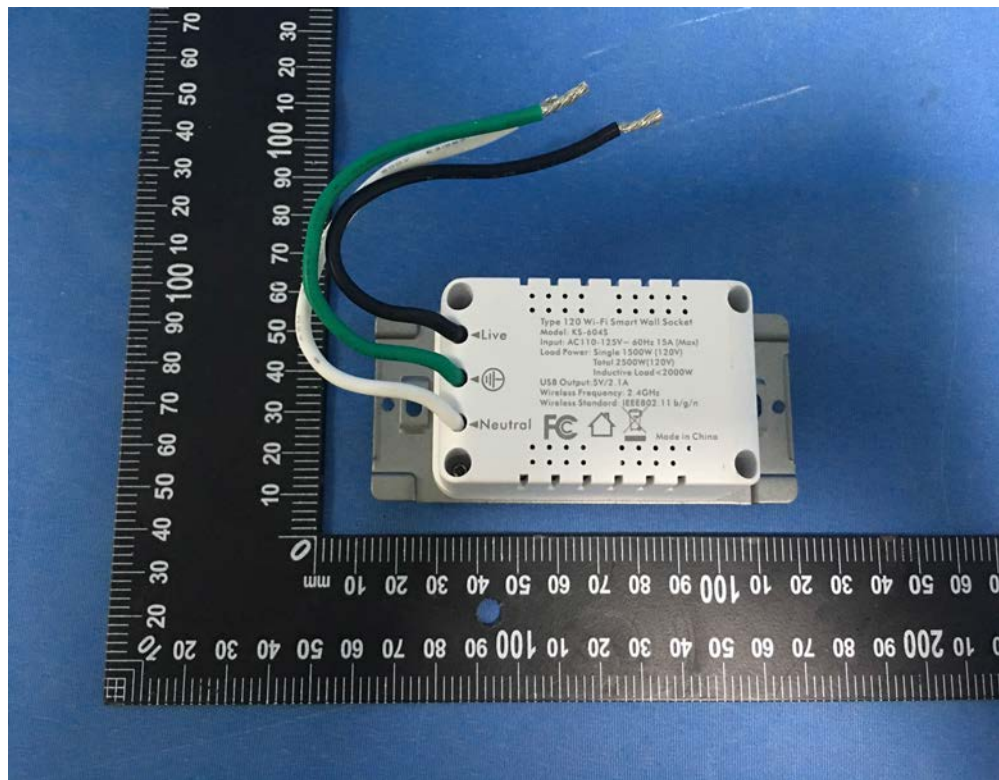
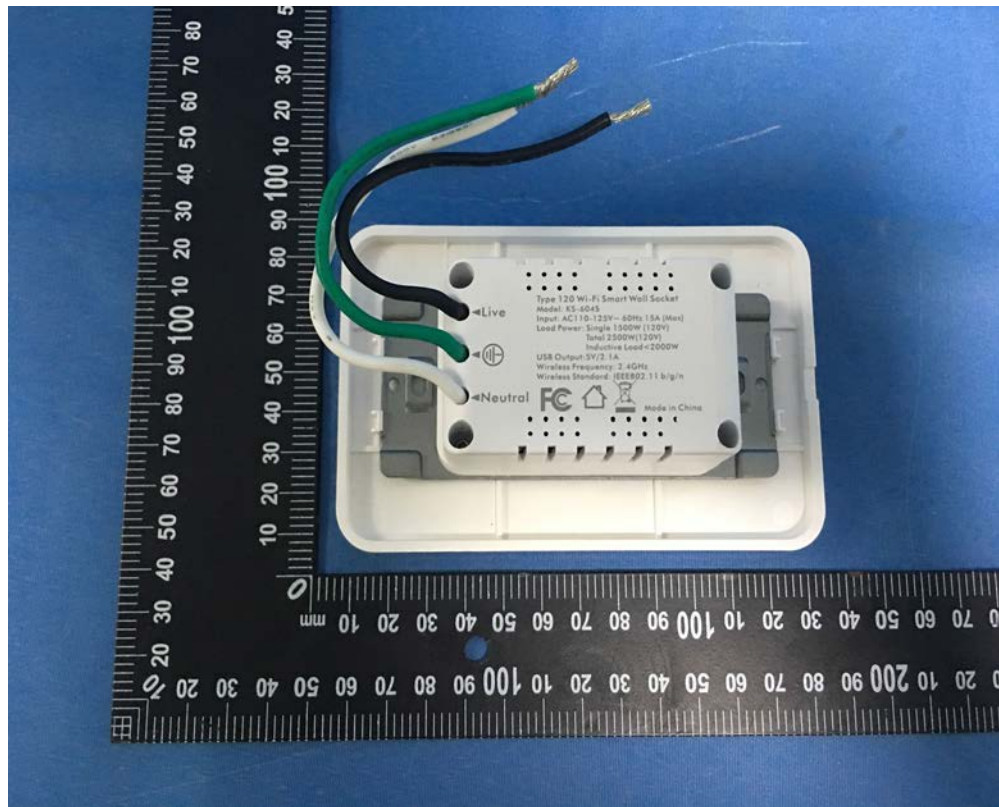


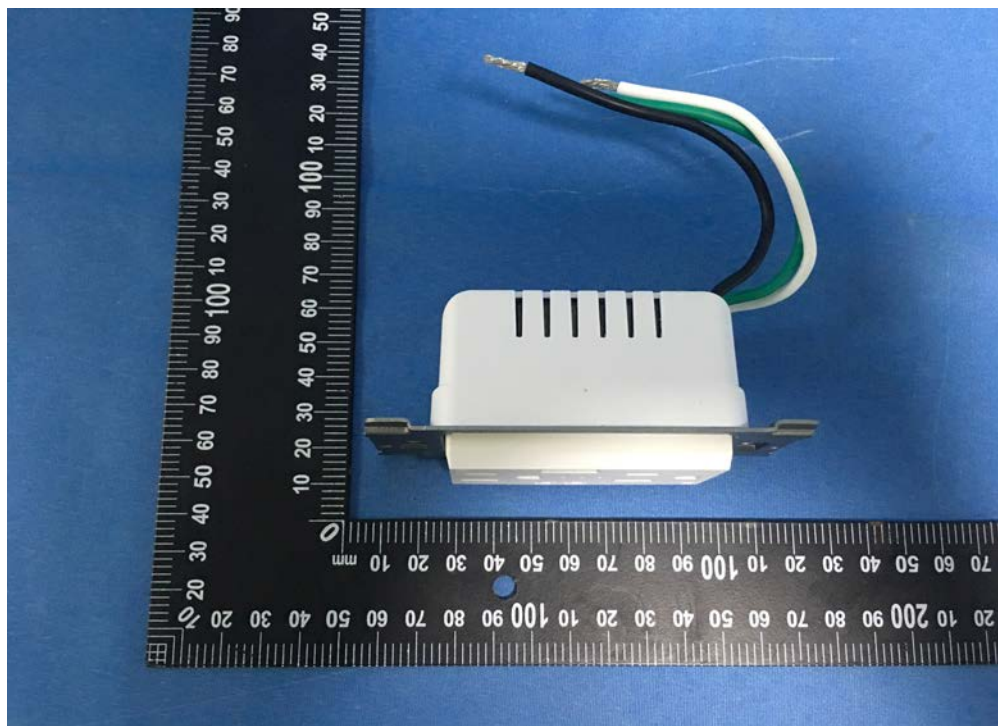
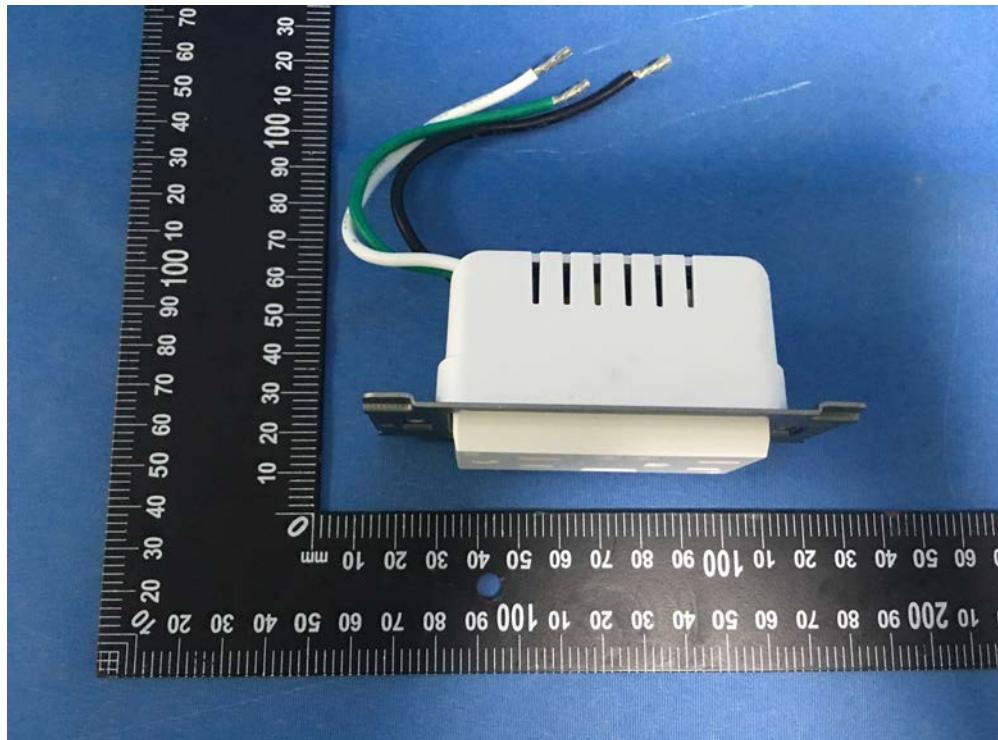



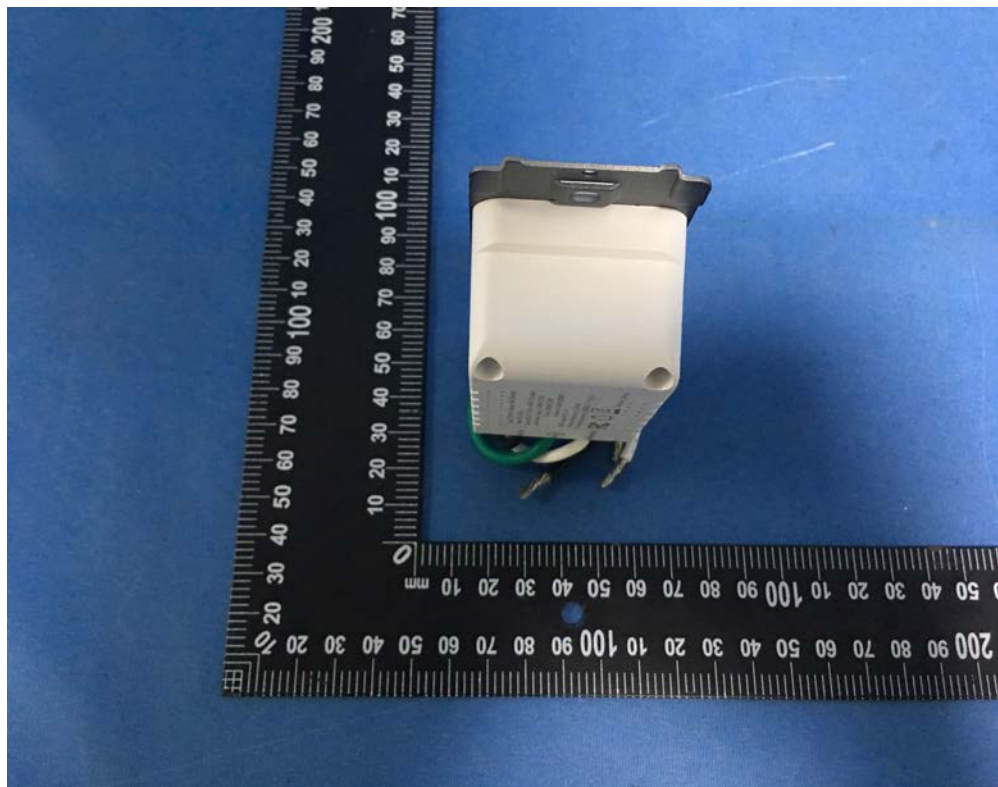


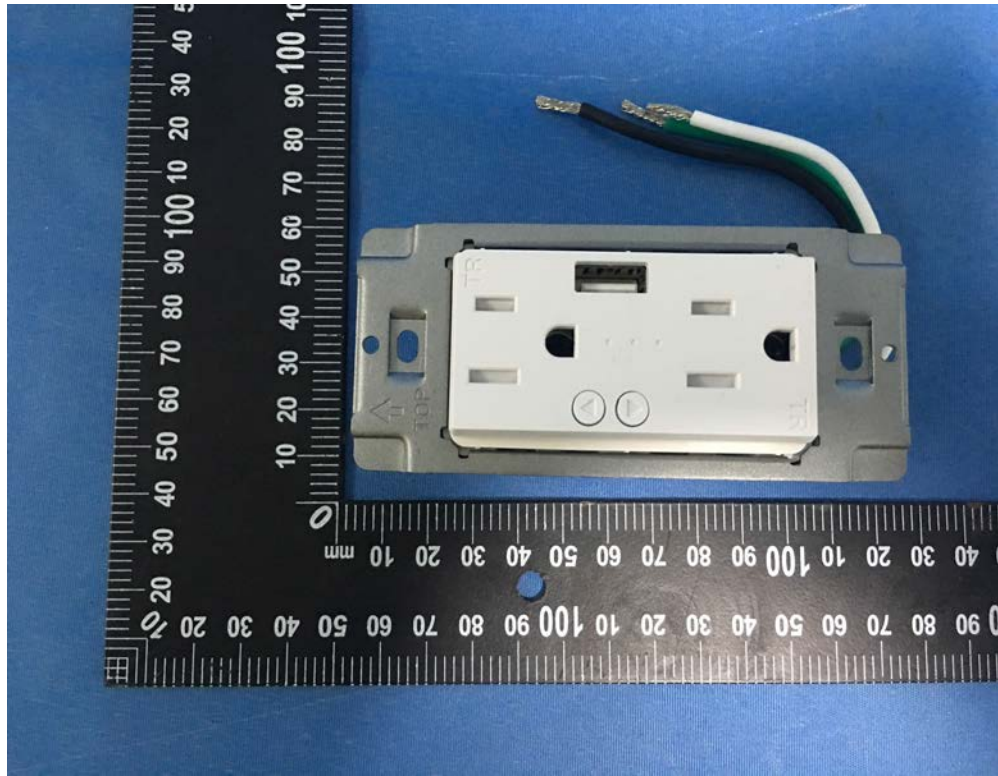


16.2 EUT – Internal View

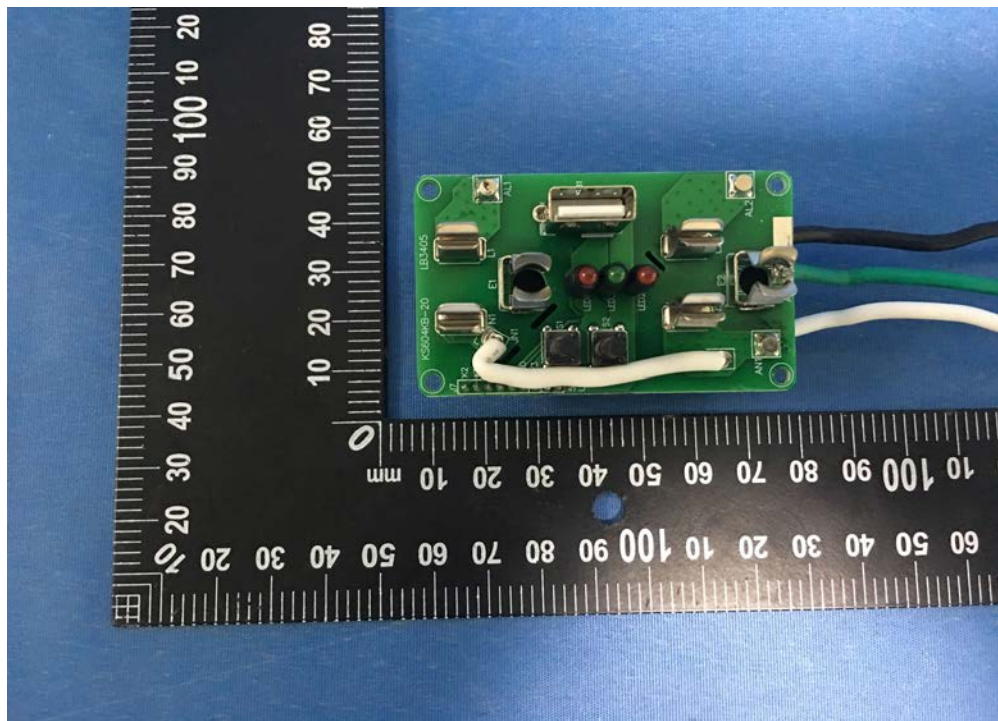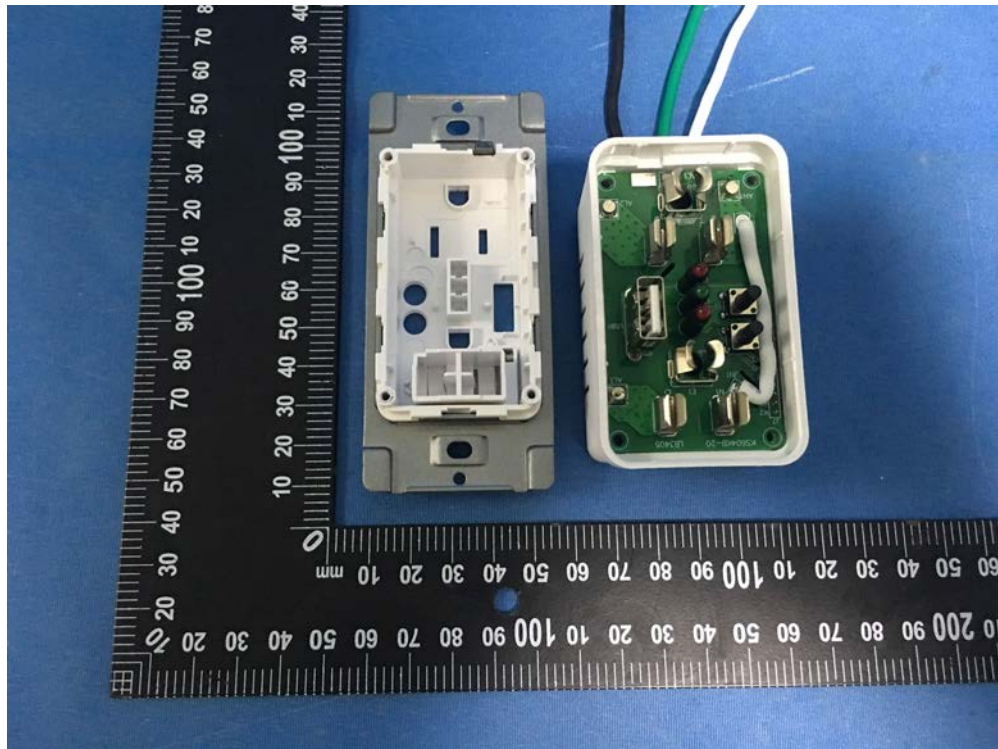

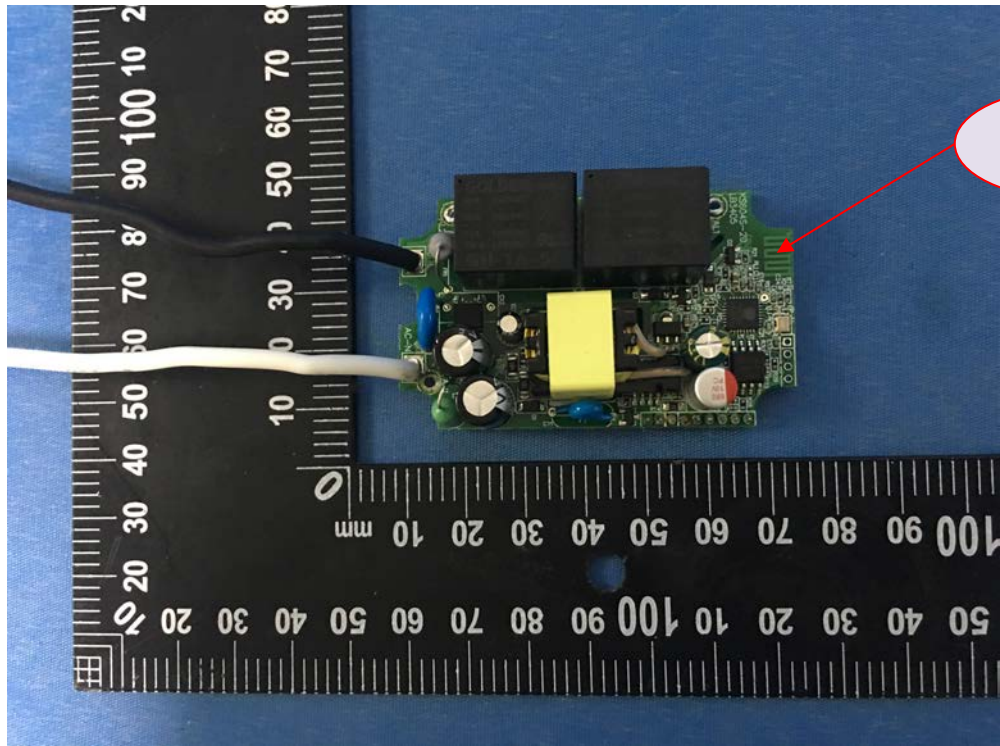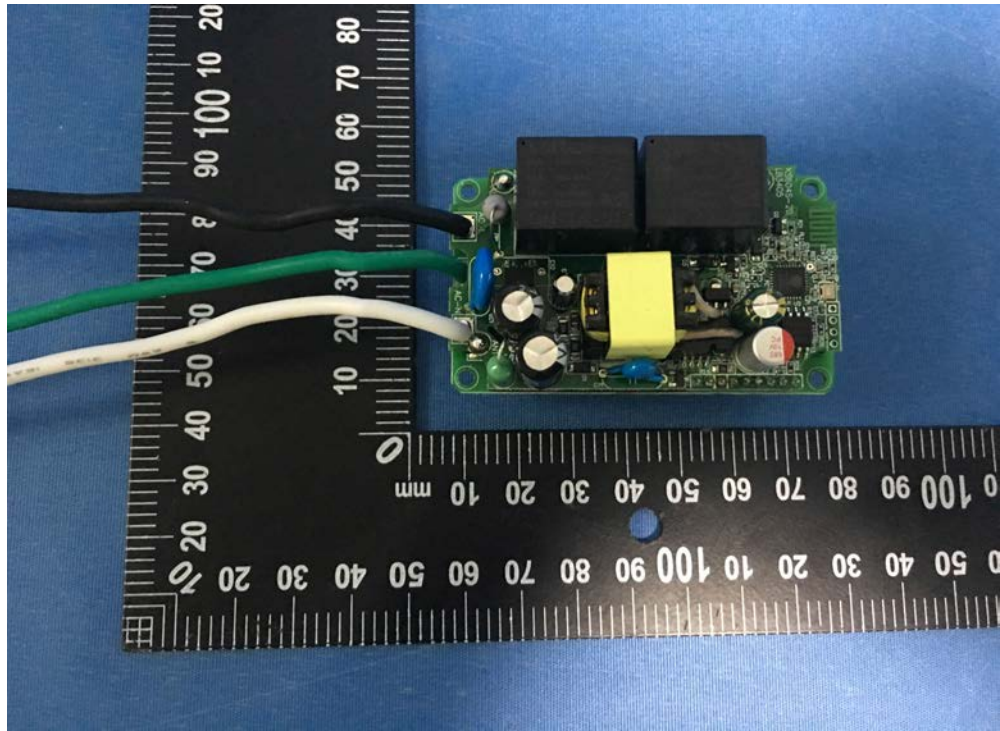

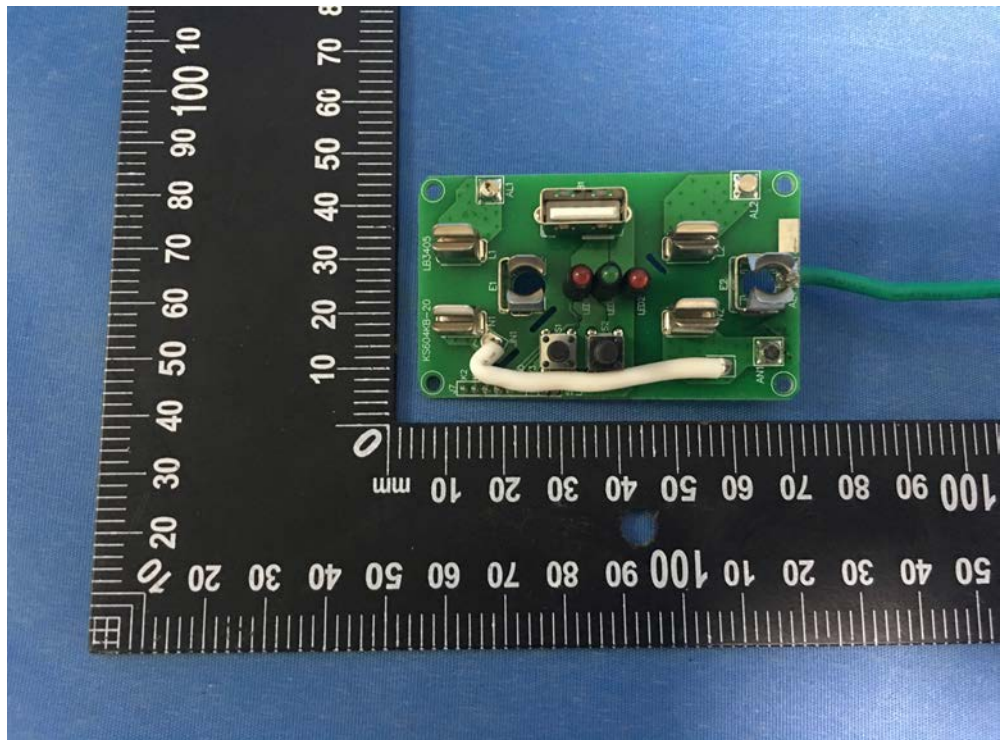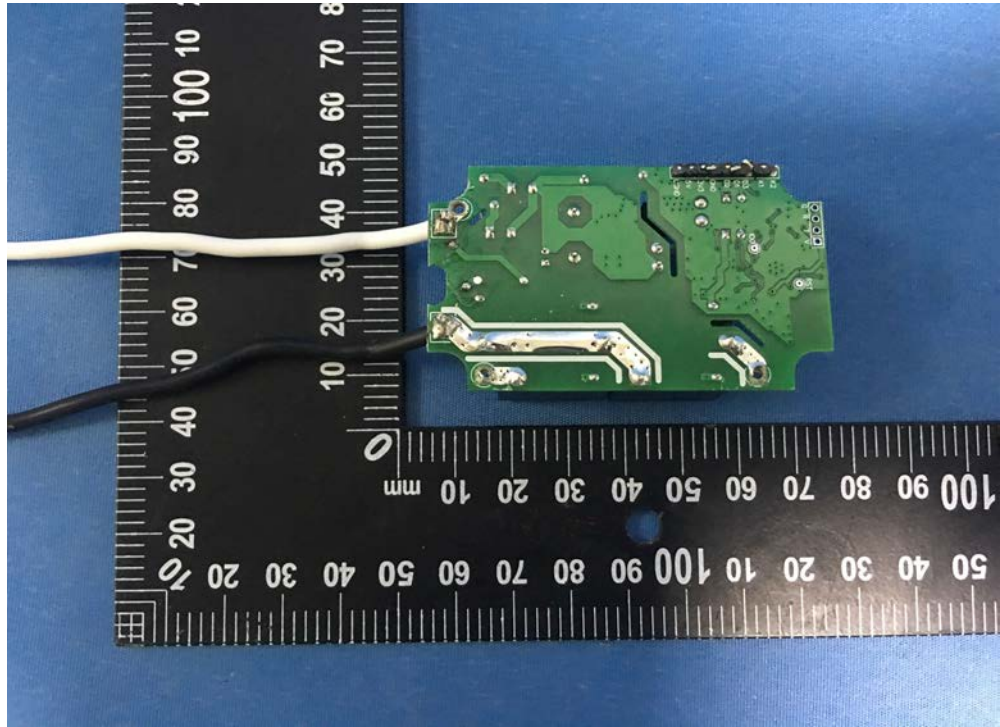

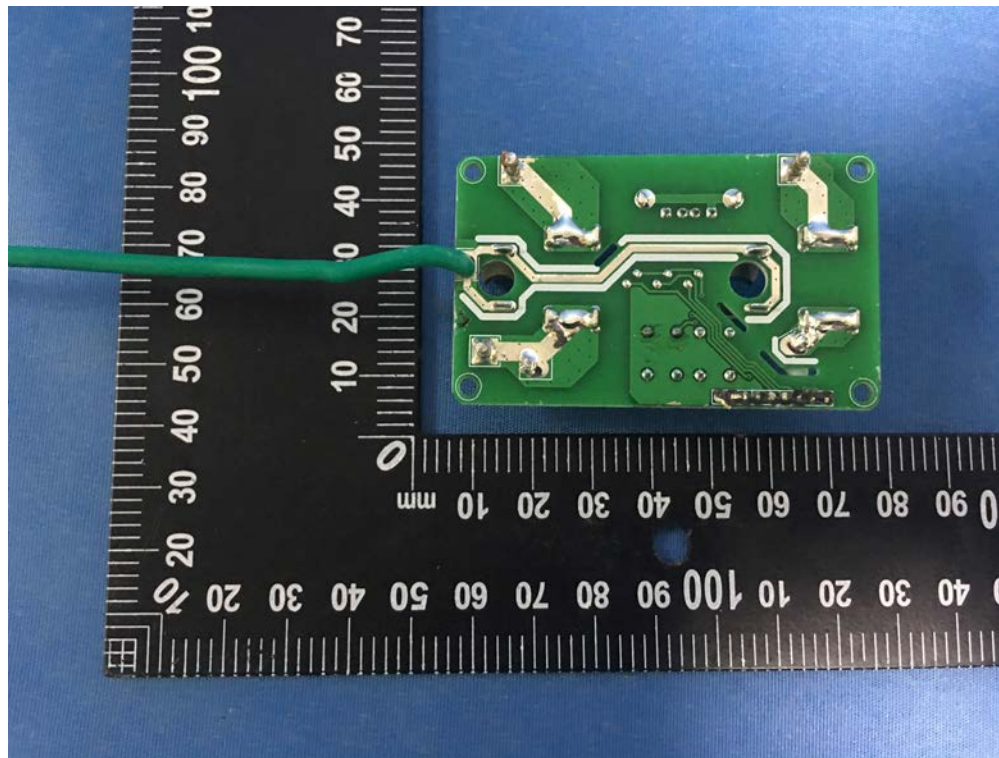

====End of Report====