



MEASUREMENT REPORT

FCC PART 15.247 Bluetooth-LE


Report No.: S202305185940E06

Issue Date: 07-19-2023

Applicant: ADDASOUND DENMARK A/S
Address: Skalhuse 5, DK-9240 Nibe, Denmark
FCC ID: 2AHSPINSPIRE16PRO
Product: Bluetooth headset
Model No.: INSPIRE16PRO
FCC Classification: Digital Transmission System (DTS)
FCC Rule Part(s): Part 15 Subpart C (15.247)
Test Procedure(s): ANSI C63.10-2013, KDB 558074 D01v05r02
Result: Pass
Item Receipt Date: May 19, 2023
Test Date: Jul 1~ Jul 6,2023

Compiled By Amos Xia
 (Amos Xia)
 Senior Test Engineer

Approved By Line Chen
 (Line Chen)
 Engineer Manager



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4-2014. Test results reported herein relate only to the item(s) tested. The test report shall not be reproduced except in full without the written approval of Fangguang Inspection & Testing Co., Ltd. Wuxi Branch

The test report must not be used by the client to claim product certifications, approval, or endorsement by NVLAP, NIST or any agency of U.S. Government.

Revision History

Report No.	Version	Description	Issue Date
S202305185940E06	Rev. 01	/	07-19-2023

CONTENTS

Description	Page
§2.1033 General Information	5
1. INTRODUCTION	6
1.1. Scope	6
1.2. Fangguang Test Location	6
2. PRODUCT INFORMATION	7
2.1. Equipment Description.....	7
2.2. Product Specification Subjective to this Report.....	7
2.3. Operation Frequency / Channel List	8
2.4. Device Capabilities	8
2.5. Description of Test Software.....	8
2.6. Test Mode	8
2.7. Test Configuration	9
2.8. EMI Suppression Device(s)/Modifications.....	9
2.9. Labeling Requirements	9
2.10. Calculation with all conversion and correction factors used	9
3. DESCRIPTION OF TEST	10
3.1. Evaluation Procedure	10
3.2. AC Line Conducted Emissions	10
3.3. Radiated Emissions	11
4. ANTENNA REQUIREMENTS	12
5. TEST EQUIPMENT CALIBRATION DATE	13
6. MEASUREMENT UNCERTAINTY	14
7. TEST RESULT.....	15
7.1. Summary.....	15
7.2. 6dB Bandwidth Measurement.....	16
7.2.1. Test Limit	16
7.2.2. Test Procedure used.....	16
7.2.3. Test Setting.....	16
7.2.4. Test Setup.....	16
7.2.5. Test Result.....	17
7.3. Output Power Measurement.....	20
7.3.1. Test Limit	20

7.3.2. Test Procedure Used	20
7.3.3. Test Setting.....	20
7.3.4. Test Setup.....	21
7.3.5. Test Result of Output Power	21
7.4. Power Spectral Density Measurement.....	25
7.4.1. Test Limit	25
7.4.2. Test Procedure Used	25
7.4.3. Test Setting.....	25
7.4.4. Test Setup.....	26
7.4.5. Test Result.....	27
7.5. Conducted Band Edge and Out-of-Band Emissions.....	31
7.5.1. Test Limit	31
7.5.2. Test Procedure Used	31
7.5.3. Test Setting.....	31
7.5.4. Test Setup.....	31
7.5.5. Test Result.....	32
7.6. Radiated Spurious Emission Measurement	42
7.6.1. Test Limit	42
7.6.2. Test Procedure Used	42
7.6.3. Test Setting.....	42
7.6.4. Test Setup.....	44
7.6.5. Test Result.....	46
7.7. Radiated Restricted Band Edge Measurement	54
7.7.1. Test Limit	54
7.7.2. Test Procedure Used	57
7.7.3. Test Setting.....	57
7.7.4. Test Setup.....	58
7.7.5. Test Result.....	59
7.8. AC Conducted Emissions Measurement.....	75
7.8.1. Test Limit	75
7.8.2. Test Setup.....	75
7.8.3. Test Result.....	76
8. CONCLUSION.....	76

§2.1033 General Information

Applicant:	ADDASOUND DENMARK A/S
Applicant Address:	Skalhuse 5, DK-9240 Nibe, Denmark
Manufacturer:	ADDASOUND DENMARK A/S
Manufacturer Address:	Skalhuse 5, DK-9240 Nibe, Denmark
Test Site:	Fanguang Inspection & Testing Co., Ltd.
LAB ID:	CN5037
Test Site Address:	G9 Building, China Sensor Network International Innovation Park No.200, Linghu Avenue Wuxi, Jiangsu 214000 China
FCC Rule Part(s):	Part 15 Subpart C (15.247)
FCC ID:	2AHSPINSPIRE16PRO
Test Device Serial No.:	S/N.: INS169104001 <input type="checkbox"/> Production <input checked="" type="checkbox"/> Pre-Production <input type="checkbox"/> Engineering
FCC Classification:	Digital Transmission System (DTS)

1. INTRODUCTION

1.1. Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2. Fanguang Test Location

These measurement tests were performed at the Fanguang Inspection and testing Co.,LTD located at 200 Linghu Avenue, Xinwu District, Wuxi City. The detailed description of the measurement facility was found to be in compliance with the requirements of ANSI C63.4-2014.

2. PRODUCT INFORMATION

2.1. Equipment Description

Product Name:	Bluetooth headset
Model Name:	INSPIRE16PRO
Trade Mark:	 ADDASOUND/艾德声/ADDA
Input Voltage Range:	Battery: 3.7V
Bluetooth Version:	5.2

2.2. Product Specification Subjective to this Report

Bluetooth Frequency	2400 ~ 2483.5MHz
Type of modulation	GFSK
Data Rate	1Mbps&2Mbps
Antenna Type:	Integral Antenna
Antenna Gain:	2 dBi

2.3. Operation Frequency / Channel List

Channel	Frequency	Channel	Frequency	Channel	Frequency
00	2402 MHz	01	2404 MHz	02	2406 MHz
03	2408 MHz	04	2410 MHz	05	2412 MHz
06	2414 MHz	07	2416 MHz	08	2418 MHz
09	2420 MHz	10	2422 MHz	11	2424 MHz
12	2426 MHz	13	2428 MHz	14	2430 MHz
15	2432 MHz	16	2434 MHz	17	2436 MHz
18	2438 MHz	19	2440 MHz	20	2442 MHz
21	2444 MHz	22	2446 MHz	23	2448 MHz
24	2450 MHz	25	2452 MHz	26	2454 MHz
27	2456 MHz	28	2458 MHz	29	2460 MHz
30	2462 MHz	31	2464 MHz	32	2466 MHz
33	2468 MHz	34	2470 MHz	35	2472 MHz
36	2474 MHz	37	2476 MHz	38	2478 MHz
39	2480 MHz	--	--	--	--

2.4. Device Capabilities

This device contains the following capabilities: Bluetooth (5.1) , The 2M PHY option is not supported for channels 0, 12 and 39.

Note: The maximum achievable duty cycle was determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW =8MHz. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles of BLE_1M are 62.90%, The duty cycles of BLE_2M are 33.87%.

2.5. Description of Test Software

The test utility software used during testing was “BlueTest3”, the version was v 3.3.6, and the emission setting value is the software default value.

2.6. Test Mode

Test Mode	Mode 1: Transmit by BLE_1M
Test Mode	Mode 2: Transmit by BLE_2M

2.7. Test Configuration

The EUT was tested per the guidance of KDB 558074 D01 v05r02. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing.

2.8. EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

2.9. Labeling Requirements

Per 2.1074 & 15.19; Docket 95-19

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase.

However, when the device is so small wherein placement of the label with specified statement is not practical, only the FCC ID must be displayed on the device per Section 15.19(a)(5). Please see attachment for FCC ID label and label location.

2.10. Calculation with all conversion and correction factors used

For AC Line Conducted Emissions Test:

Measure Level (dB μ V) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

For Radiated Emissions Below 1GHz Test:

Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

For Radiated Emissions Above 1GHz Test:

Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

3. DESCRIPTION OF TEST

3.1. Evaluation Procedure

The measurement procedures described in the American National Standard for Testing Unlicensed Wireless Devices (ANSI C63.10-2013), and the guidance provided in KDB 558074 D01 v05r02 were used in the measurement of the EUT.

Deviation from measurement procedure.....None

3.2. AC Line Conducted Emissions

The line-conducted facility is located inside an 8'x4'x4' shielded enclosure. A 1m x 2m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50uH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference ground-plane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the receiver and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The receiver was scanned from 150kHz to 30MHz. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 9kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Each emission was also maximized by varying: power lines, the mode of operation or data exchange speed, or support equipment whichever determined the worst-case emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions are used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

An extension cord was used to connect to a single LISN which powered by EUT. The extension cord was calibrated with LISN, the impedance and insertion loss are compliance with the requirements as stated in ANSI C63.10-2013.

3.3. Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. The turntable is used for radiated measurement. It is a continuously rotatable, remote controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm high PVC support structure is placed on top of the turntable.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up for frequencies below 1GHz was placed on top of the 0.8 meter high, 1 x 1.5 meter table; and test set-up for frequencies 1-25GHz was placed on top of the 1.5 meter high, 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, if applicable, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions. According to 3dB Beam-Width of horn antenna, the horn antenna should be always directed to the EUT when rising height.

4. ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- Use a unique coupling to the intentional radiator.

5. TEST EQUIPMENT CALIBRATION DATE

Conducted Emissions

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EMI Test Receiver	R&S	ESR3	FWXGJC-2016-181	1 year	2024/03/14
Two-Line V-Network	R&S	ENV 216	FWXGJC-2016-182	1 year	2024/05/14
Thermohyrometer	Yuhuaze	HTC-1	FWXDA-2016-385	1 year	2024/03/21

Radiated Emission

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Loop Antenna	Schwarzbeck	FMZB 1519B	FWXGJC-2018-015	3 year	2024/08/13
Bi-Log Antenna	R&S	HL562E	FWXGJC-2016-267-06	1 year	2024/03/10
Broadband Horn Antenna	R&S	HF907	FWXGJC-2016-267-07	1 year	2024/03/02
Broadband Horn Antenna	Schwarzbeck	BBHA9170	FWXGJC-2018-016	3 year	2024/06/04
EMI Receiver	R&S	ESR26	FWXGJC-2016-267-01	1 year	2023/11/08
Pre-Amplifier	R&S	SCU-18D	FWXGJC-2016-267-05	1 year	2023/11/17
Pre-Amplifier	R&S	EMC184055 SE	FWXGJC-2018-018	3 year	2025/04/13
Thermohyrometer	Yuhuaze	HTC-1	FWXDA-2016-386	1 year	2023/11/21
Anechoic Chamber	Aimuke	EMCCT-3	FWXGJC-2016-270	3 year	2025/06/07

Conducted Test Equipment

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EXA Signal Analyzer	Keysight	N9010B	FWXGJC-2018-010	1 year	2024/03/13
RF Control Unit	Toncend	JS0806-2	FWXGJC-2018-013	1 year	2024/05/14
Thermohyrometer	Yuhuaze	HTC-1	FWXDA-2016-385	1 year	2024/03/21

Test Software	Manufacturer	Version	Asset No.	Function
EMI Test Software	tonscend	V2.5.0.0	FWXWA-2018-004	Emission Test
RF Test Software	Toncend	3.2.22	/	/

6. MEASUREMENT UNCERTAINTY

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

AC Conducted Emission Measurement
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 2.05dB
Radiated Emission Measurement
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 30MHz-1GHz: 3.06dB 1GHz-12.75GHz: 4.13dB
Spurious Emissions, Conducted
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 30MHz-1GHz: 1.00 dB 1GHz-26.5GHz: 1.30 dB
Output Power
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 0.60dB
Power Spectrum Density
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 0.80dB
Occupied Bandwidth
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 0.20MHz

7. TEST RESULT

7.1. Summary

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.247(a)(2)	6dB Bandwidth	$\geq 500\text{kHz}$	Conducted	Pass	Section 7.2
15.247(b)(3)	Output Power	$\leq 30\text{dBm}$		Pass	Section 7.3
15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$		Pass	Section 7.4
15.247(d)	Band Edge	$\geq 20\text{dBc}$		Pass	Section 7.5
15.247(d)	Out-of-Band Emissions	$\geq 20\text{dBc}$		Pass	Section 7.5
15.205 15.209	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209 (RSS GEN [8.9])	Radiated	Pass	Section 7.6&7.7
15.207	AC Conducted Emissions 150kHz - 30MHz	< FCC 15.207 limits (RSS GEN [8.8])	Line Conducted	Pass	Section 7.8

Notes:

- 1) All modes of operation and data rates were investigated. For radiated emission test, every axis (X, Y, Z) was also verified. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.

7.2. 6dB Bandwidth Measurement

7.2.1. Test Limit

The minimum permissible 6dB bandwidth is 500 kHz.

7.2.2. Test Procedure used


ANSI C63.10-2013 Section 11.8.2 Option 1

KDB 558074 D01 v05r02 – Section 8.2

7.2.3. Test Setting

1. Set RBW = 100 kHz
2. VBW $\geq 3 \times$ RBW
3. Detector = peak
4. Trace mode = max hold
5. Sweep = auto couple
6. Allow the trace was allowed to stabilize
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

7.2.4. Test Setup

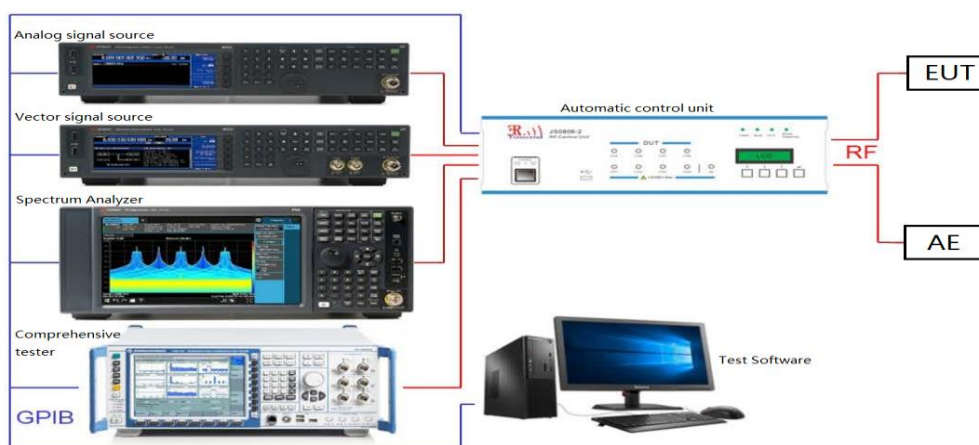

7.2.5. Test Result

Test Mode	Antenna	Channel	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	99% BW[MHz]	Verdict
BLE_1M	Ant1	2402	0.756	2401.612	2402.368	≥ 0.5	1.0458	PASS
		2440	0.704	2439.640	2440.344	≥ 0.5	1.0412	PASS
		2480	0.692	2479.644	2480.336	≥ 0.5	1.0420	PASS
BLE_2M	Ant1	2404	1.176	2403.420	2404.596	≥ 0.5	2.0771	PASS
		2440	1.168	2439.412	2440.580	≥ 0.5	2.0688	PASS
		2478	1.164	2477.408	2478.572	≥ 0.5	2.0672	PASS

BLE_1M_Ant1_2402



BLE_1M_Ant1_2440



BLE_1M_Ant1_2480



BLE_2M_Ant1_2404



BLE_2M_Ant1_2440



BLE_2M_Ant1_2478



7.3. Output Power Measurement

7.3.1. Test Limit

The maximum permissible conducted output power is 1 Watt (30dBm). And for antenna gain greater than 6dBi the limit shall reduce by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

7.3.2. Test Procedure Used


ANSI C63.10-2013 – Section 11.9.1.1

KDB 558074 D01 v05r02 – Section 8.3.1.2

7.3.3. Test Setting

- 1.Set the RBW \geq DTS bandwidth.
- 2.Set the VBW \geq [3 \times RBW].
- 3.Set the span \geq [3 \times RBW].
- 4.Detector = peak.
- 5.Sweep time = auto couple.
- 6.Trace mode = max hold.
- 7.Allow trace to fully stabilize.
8. Use peak marker function to determine the peak amplitude level.


7.3.4. Test Setup

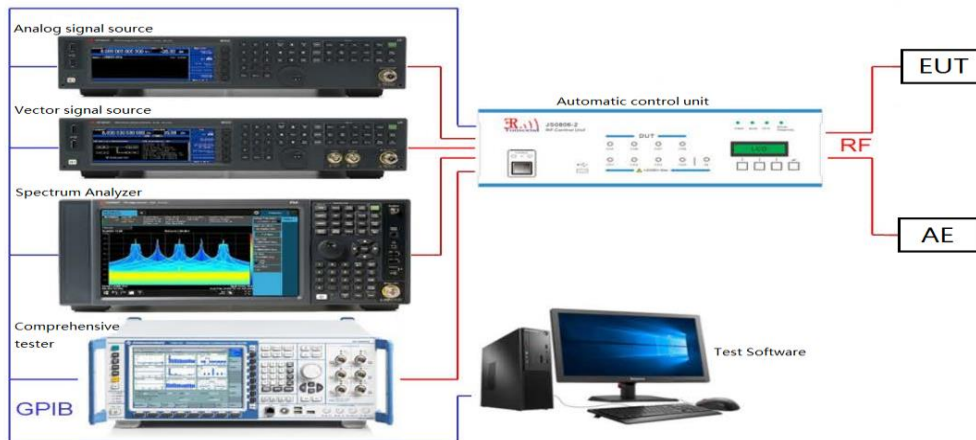


7.3.5. Test Result

Test Mode	Antenna	Channel	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	2402	4.73	≤30	PASS
		2440	4.57	≤30	PASS
		2480	3.45	≤30	PASS
BLE_2M	Ant1	2404	4.87	≤30	PASS
		2440	4.65	≤30	PASS
		2478	3.46	≤30	PASS


Test Graphs Peak

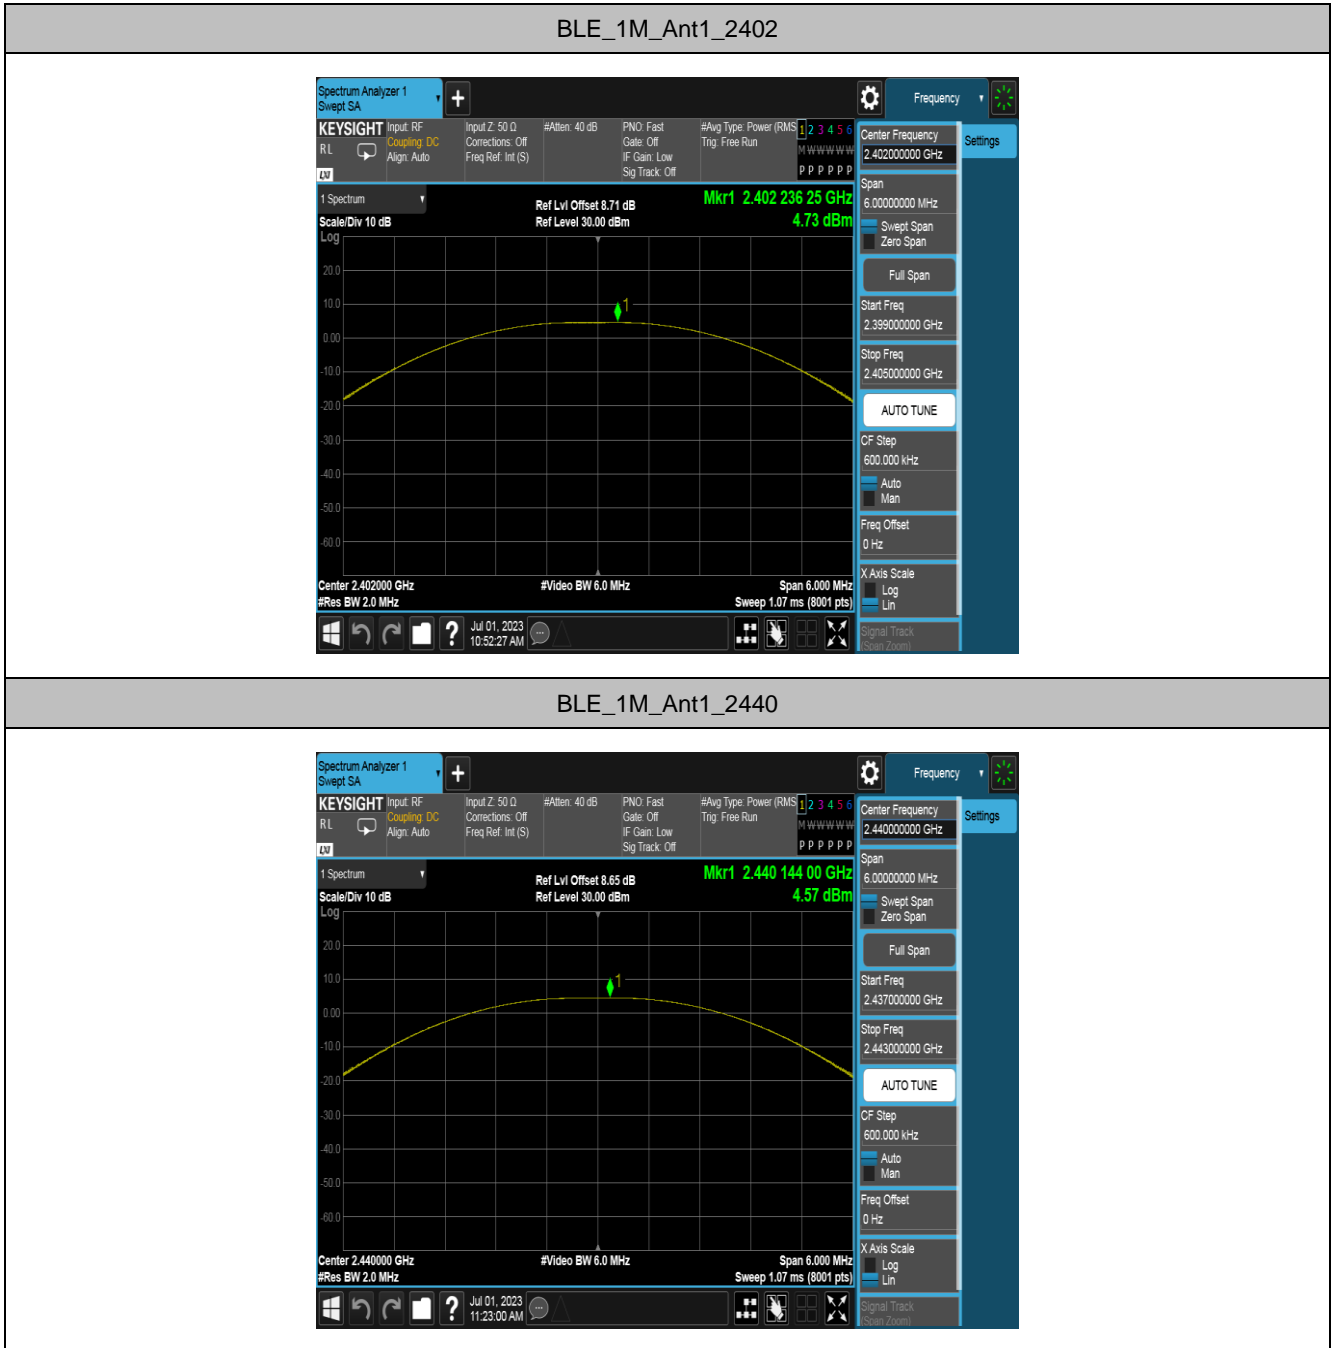


BLE_1M_Ant1_2480

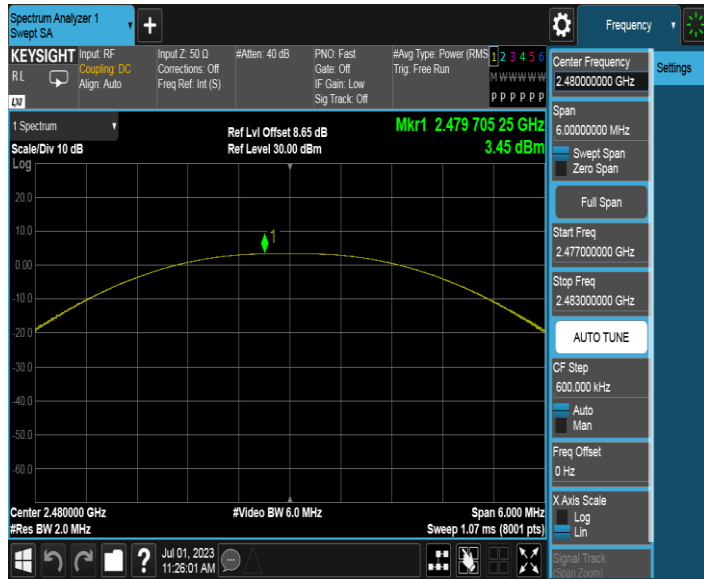


BLE_2M_Ant1_2404

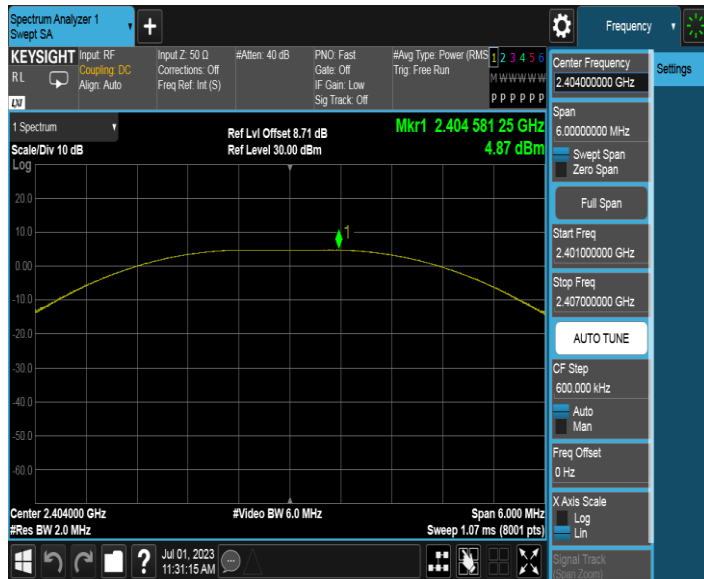

BLE_2M_Ant1_2440

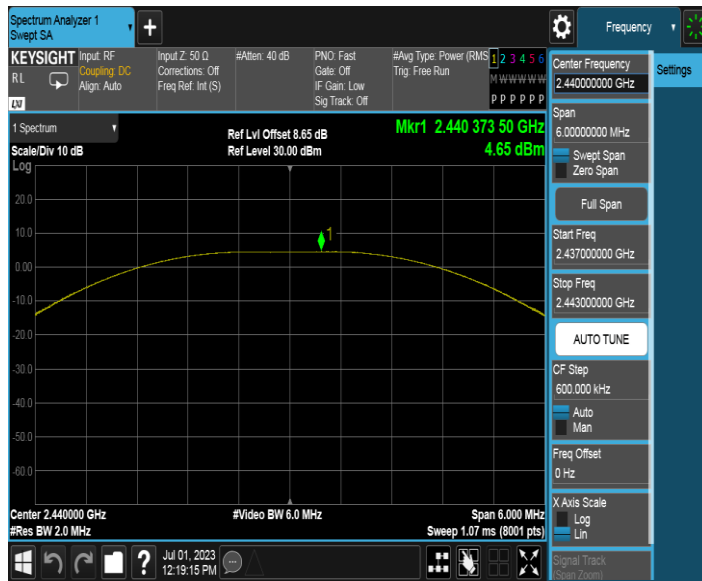

BLE_2M_Ant1_2478

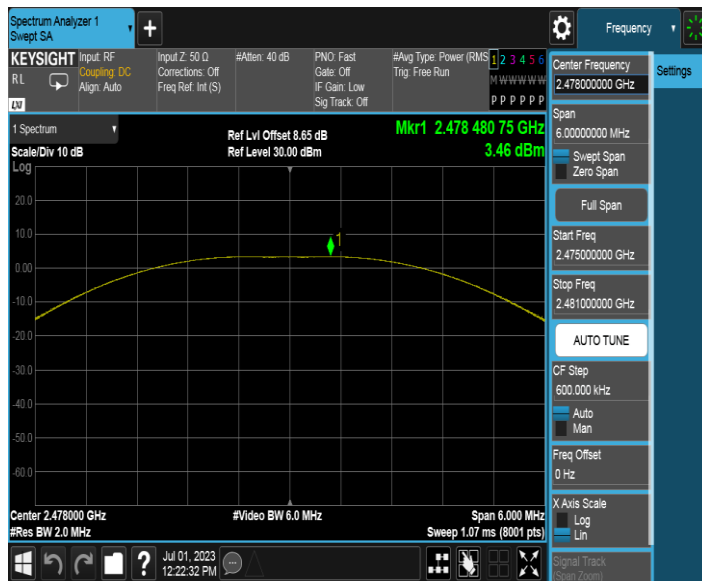

7.4. Power Spectral Density Measurement

7.4.1. Test Limit

The maximum permissible power spectral density is 8dBm in any 3 kHz band. And for antenna gain greater than 6dBi the limit shall reduce by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

7.4.2. Test Procedure Used


KDB 558074 D01 v05r02 - Section 8.4

ANSI C63.10 – Section 11.10.2

7.4.3. Test Setting

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq [3 \times \text{RBW}]$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.


7.4.4. Test Setup

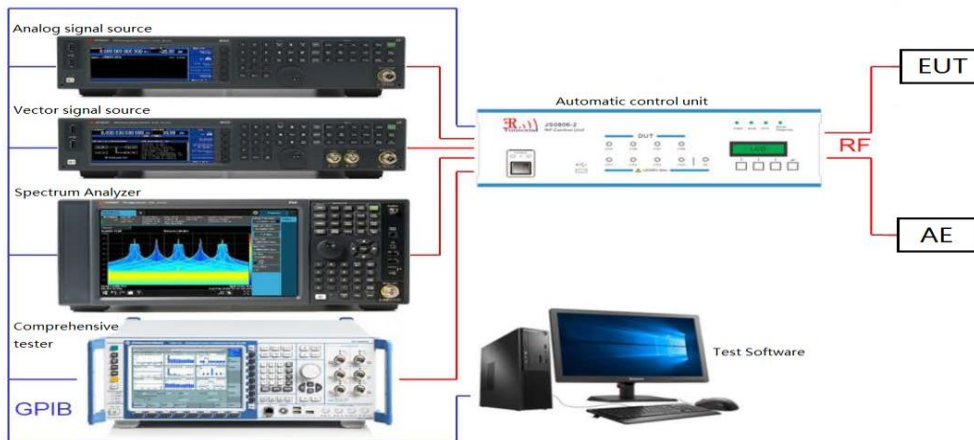


7.4.5. Test Result

Test Mode	Antenna	Channel	Result[dBm/3-100kHz]	Limit[dBm/3kHz]	Verdict
BLE_1M	Ant1	2402	-10.48	≤8.00	PASS
		2440	-10.46	≤8.00	PASS
		2480	-11.56	≤8.00	PASS
BLE_2M	Ant1	2404	-13.01	≤8.00	PASS
		2440	-13.31	≤8.00	PASS
		2478	-14.53	≤8.00	PASS


Test Graphs

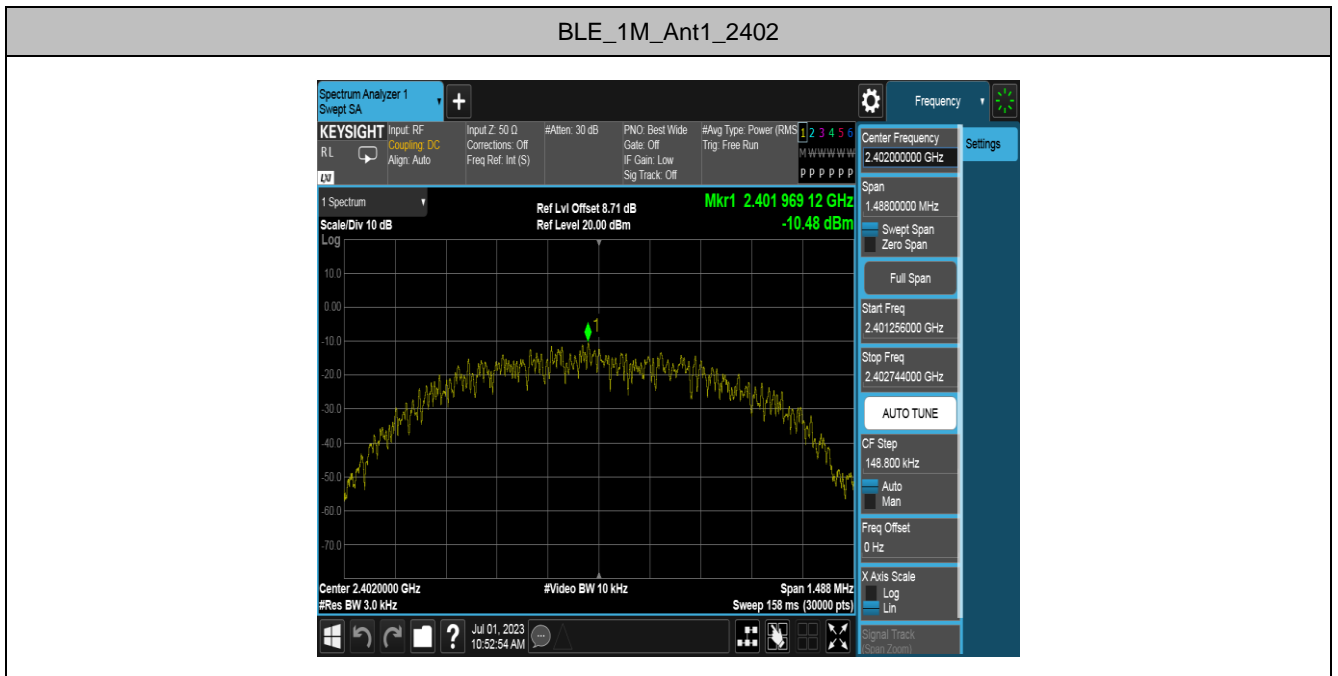


BLE_1M_Ant1_2440

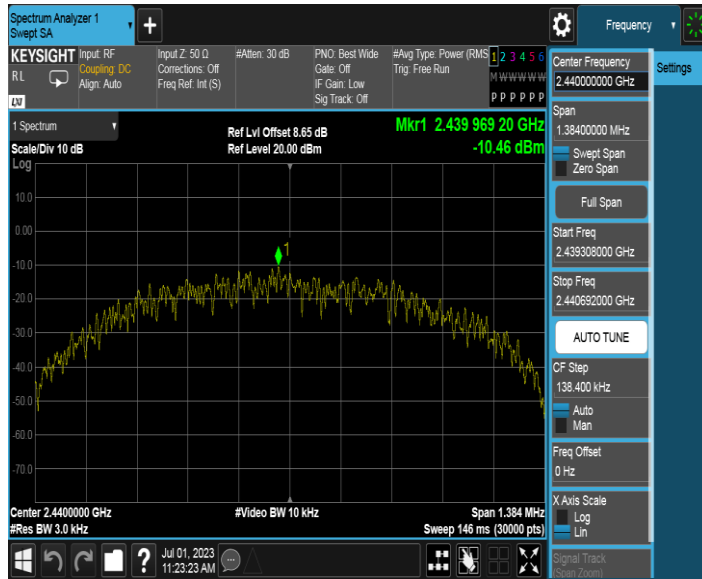


BLE_1M_Ant1_2480

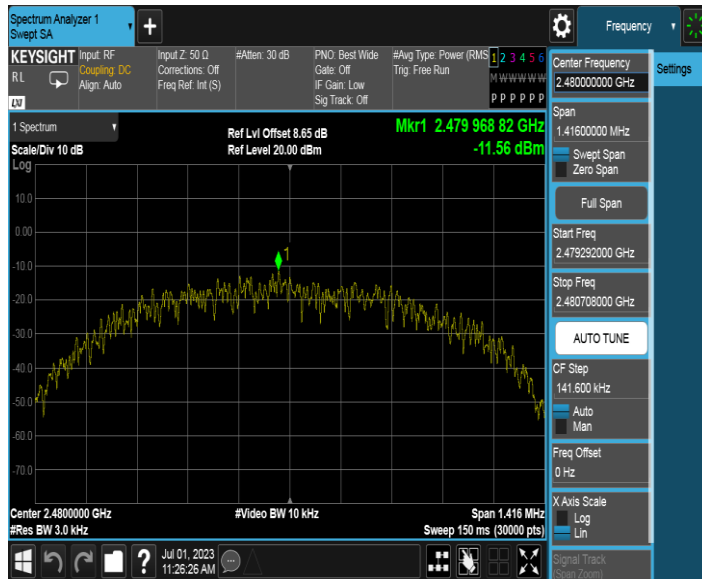


BLE_2M_Ant1_2404

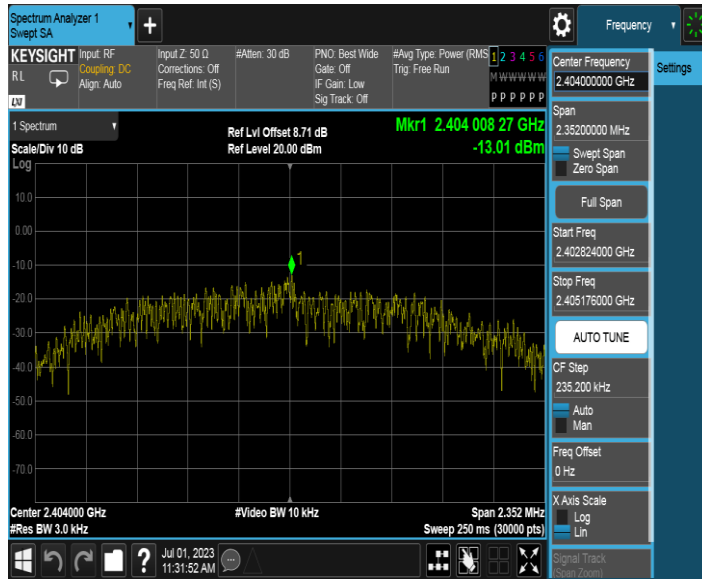

BLE_2M_Ant1_2440

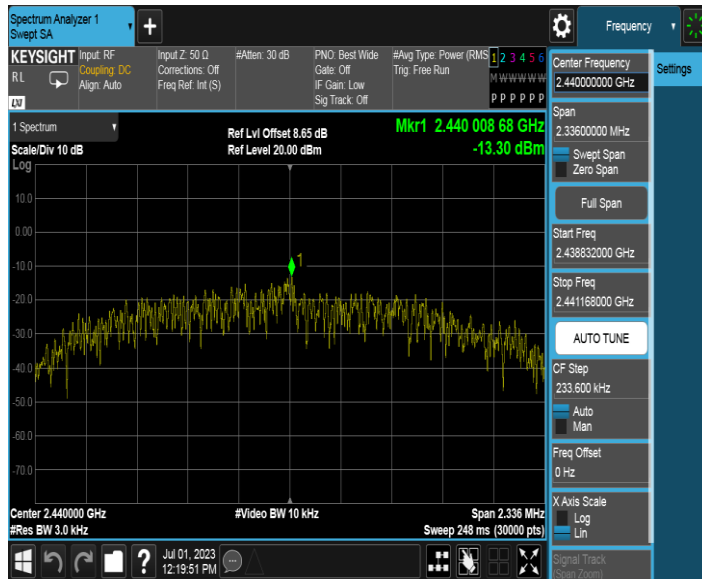

BLE_2M_Ant1_2478

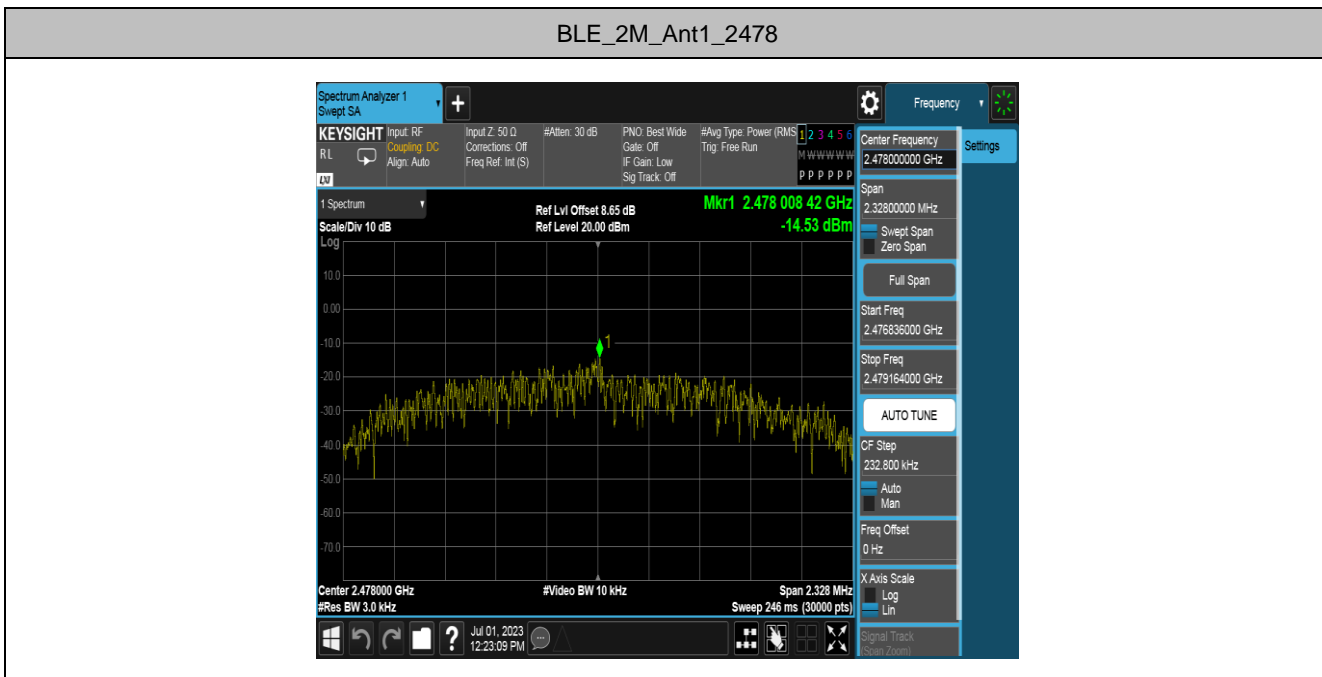

7.5. Conducted Band Edge and Out-of-Band Emissions

7.5.1. Test Limit

The limit for out-of-band spurious emissions at the band edge is 20dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100 kHz bandwidth per the PSD procedure.

7.5.2. Test Procedure Used


KDB 558074 D01 v05r02 - Section 8.5 & Section 8.6

ANSI C63.10 – Section 11.11&11.12

7.5.3. Test Setting

- (a) Set the center frequency and span to encompass frequency range to be measured
- (b) RBW = 100kHz
- (c) VBW = 300kHz
- (d) Detector = Peak
- (e) Trace mode = max hold
- (f) Sweep time = auto couple
- (g) The trace was allowed to stabilize

7.5.4. Test Setup

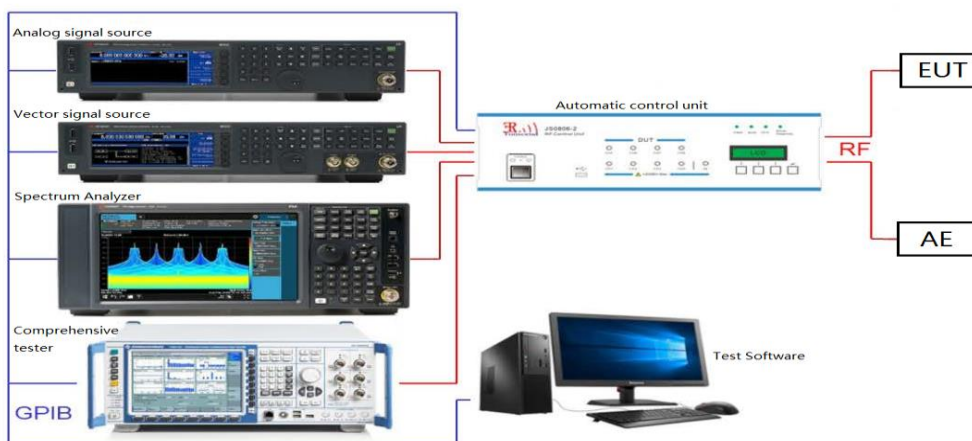

7.5.5. Test Result


Test Mode	Antenna	Channel	FreqRange [MHz]	RefLevel [dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	2402	Reference	4.43	4.43	---	PASS
			30~1000	4.43	-61.46	≤-15.57	PASS
			1000~26500	4.43	-52.7	≤-15.57	PASS
		2440	Reference	4.28	4.28	---	PASS
			30~1000	4.28	-61.39	≤-15.72	PASS
			1000~26500	4.28	-52.98	≤-15.72	PASS
		2480	Reference	3.09	3.09	---	PASS
			30~1000	3.09	-61.15	≤-16.91	PASS
			1000~26500	3.09	-51.93	≤-16.91	PASS
BLE_2M	Ant1	2404	Reference	4.57	4.57	---	PASS
			30~1000	4.57	-61.39	≤-15.43	PASS
			1000~26500	4.57	-52.44	≤-15.43	PASS
		2440	Reference	4.34	4.34	---	PASS
			30~1000	4.34	-61.07	≤-15.66	PASS
			1000~26500	4.34	-52.43	≤-15.66	PASS
		2478	Reference	3.12	3.12	---	PASS
			30~1000	3.12	-59.99	≤-16.88	PASS
			1000~26500	3.12	-52.67	≤-16.88	PASS

Test Graphs


BLE_1M_Ant1_2402_0~Reference



BLE_1M_Ant1_2402_30~1000

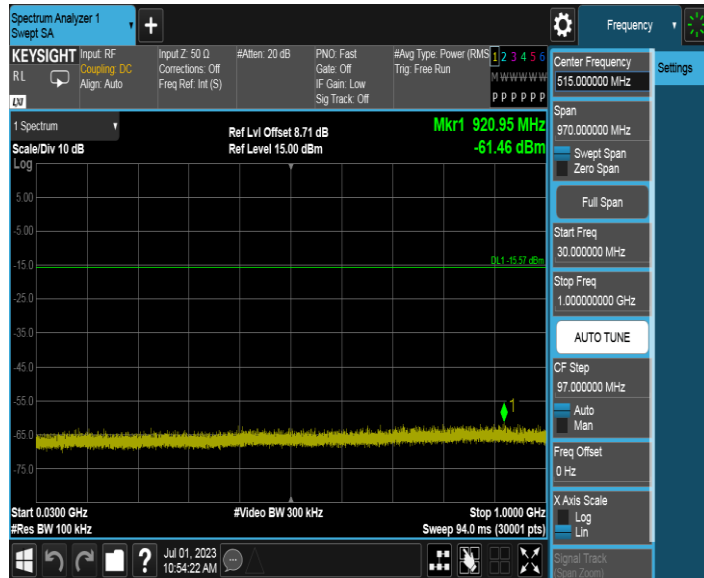


BLE_1M_Ant1_2402_1000~26500

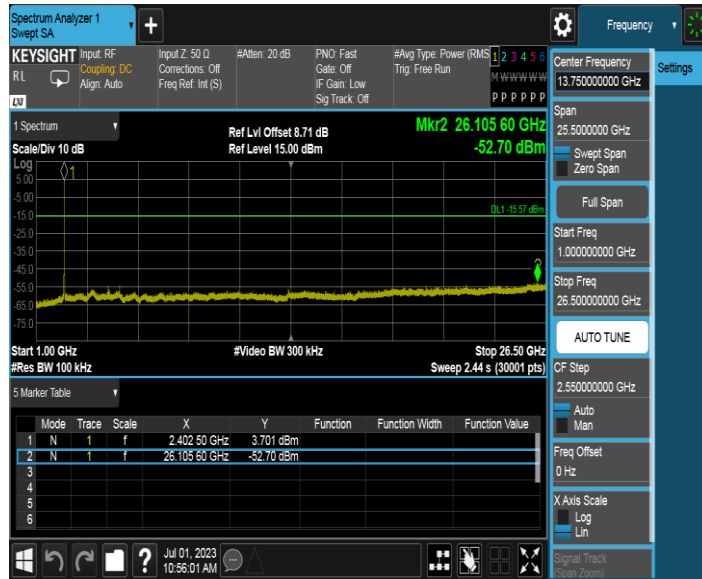

BLE_1M_Ant1_2440_0~Reference



BLE_1M_Ant1_2440_30~1000

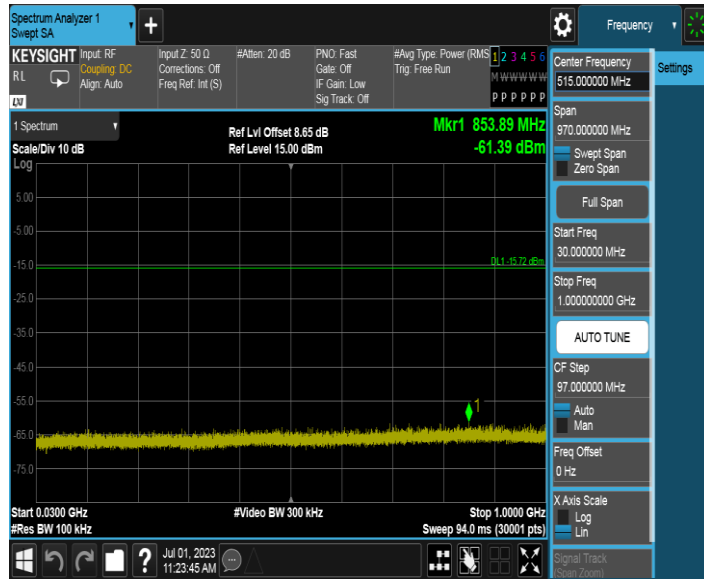


BLE_1M_Ant1_2440_1000~26500




BLE_1M_Ant1_2480_0~Reference



BLE_1M_Ant1_2480_30~1000

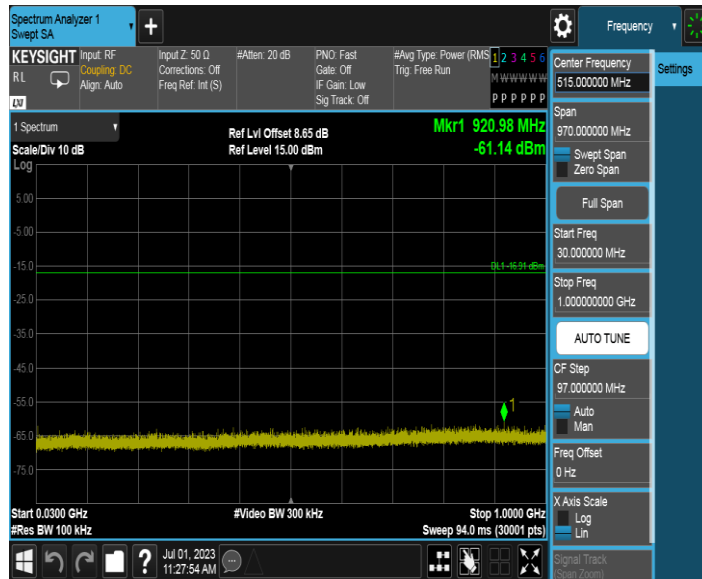


BLE_1M_Ant1_2480_1000~26500

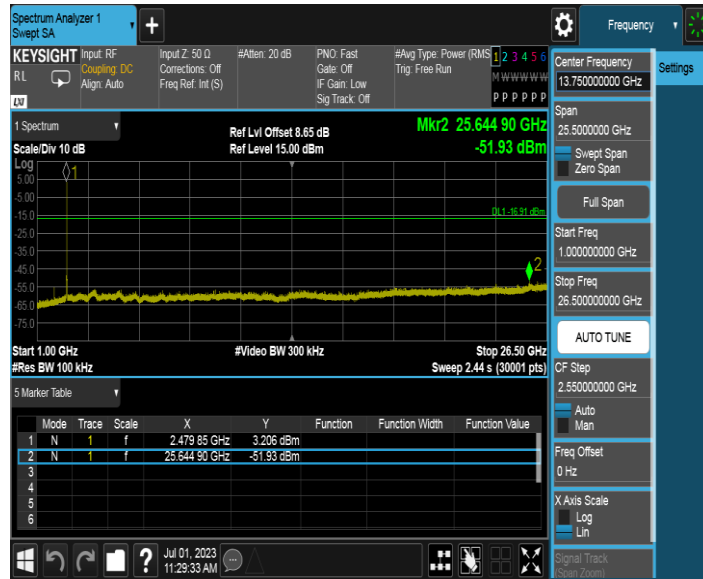

BLE_2M_Ant1_2404_0~Reference



BLE_2M_Ant1_2404_30~1000

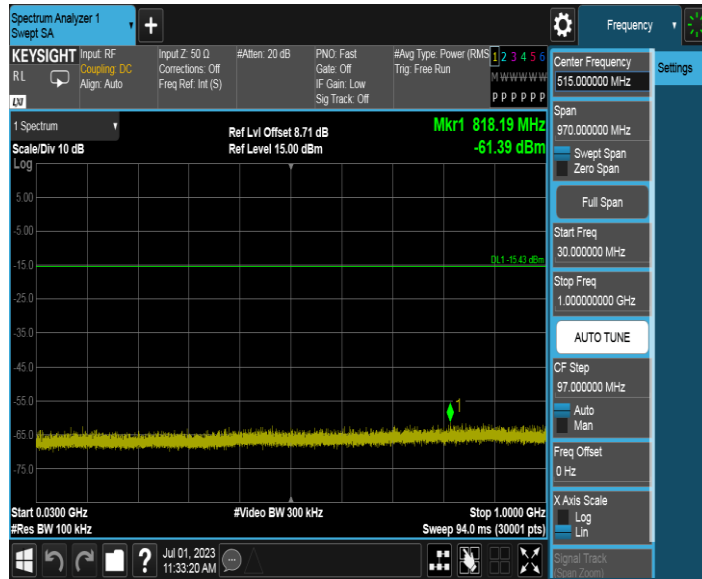


BLE_2M_Ant1_2404_1000~26500




BLE_2M_Ant1_2440_0~Reference



BLE_2M_Ant1_2440_30~1000

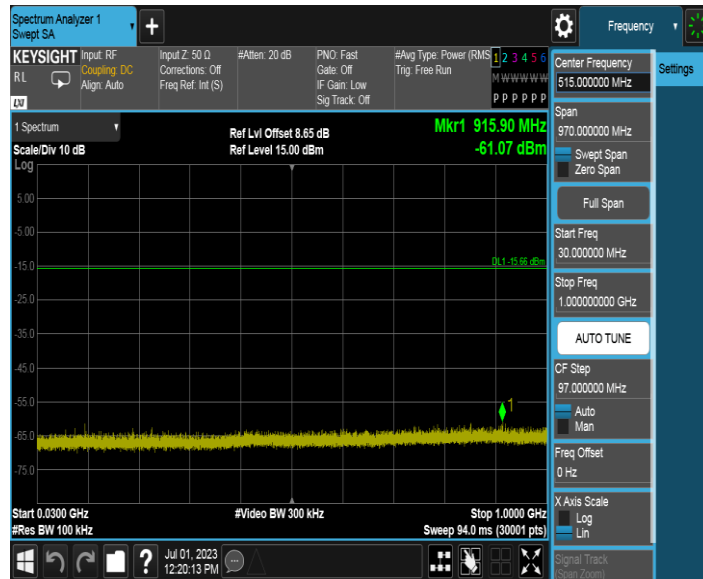


BLE_2M_Ant1_2440_1000~26500

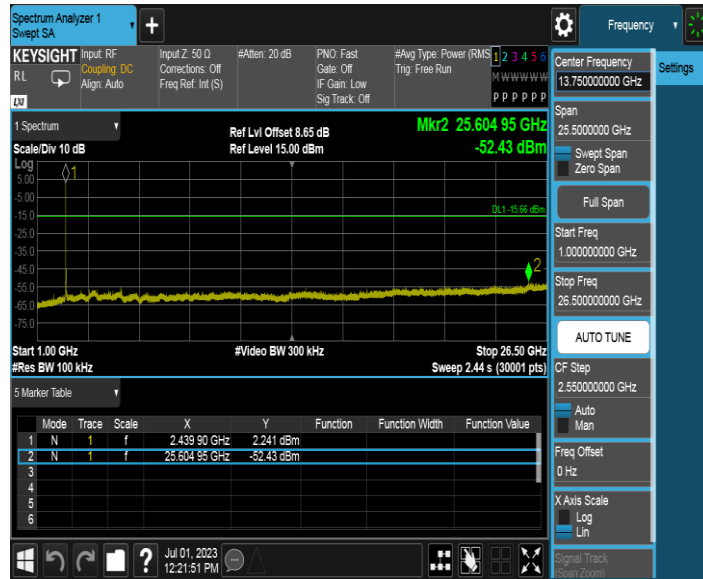


BLE_2M_Ant1_2478_0~Reference



BLE_2M_Ant1_2478_30~1000

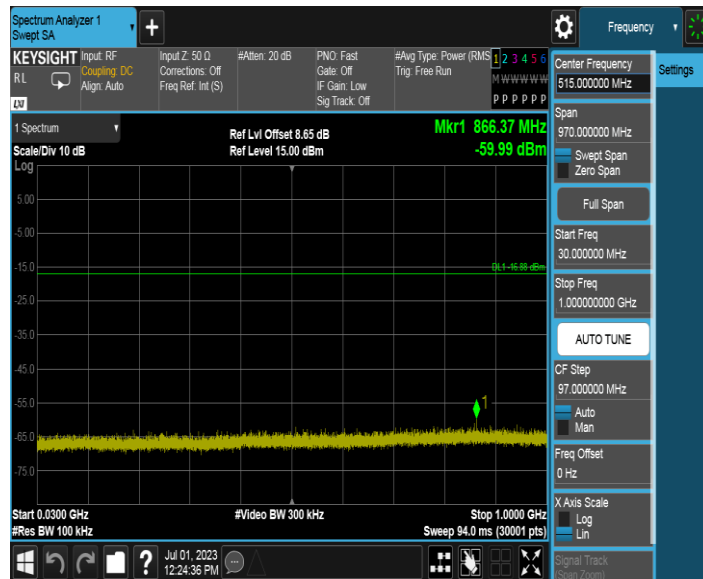

BLE_2M_Ant1_2478_1000~26500

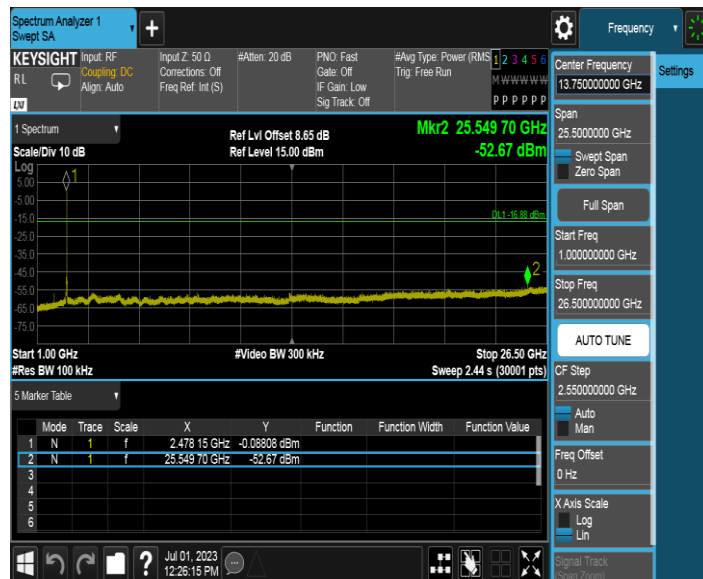

7.6. Radiated Spurious Emission Measurement

7.6.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 – 0.490	2400/F (kHz)	300
0.490 – 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.6.2. Test Procedure Used

ANSI C63.10-2013 – Section 6.6.4.3

7.6.3. Test Setting

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = as specified in Table 1
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Table 1 - RBW as a function of frequency


Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000 MHz	1 MHz

Average Field Strength Measurements


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = Power Average (RMS)
5. Number of sweep point = 2001 (Number of sweep points must be $\geq 2 \times \text{span} / \text{RBW}$)
6. Sweep time = auto
7. Trace (RMS) averaging was performed over at least 100 traces.

7.6.4. Test Setup


9kHz ~ 30MHz Test Setup:

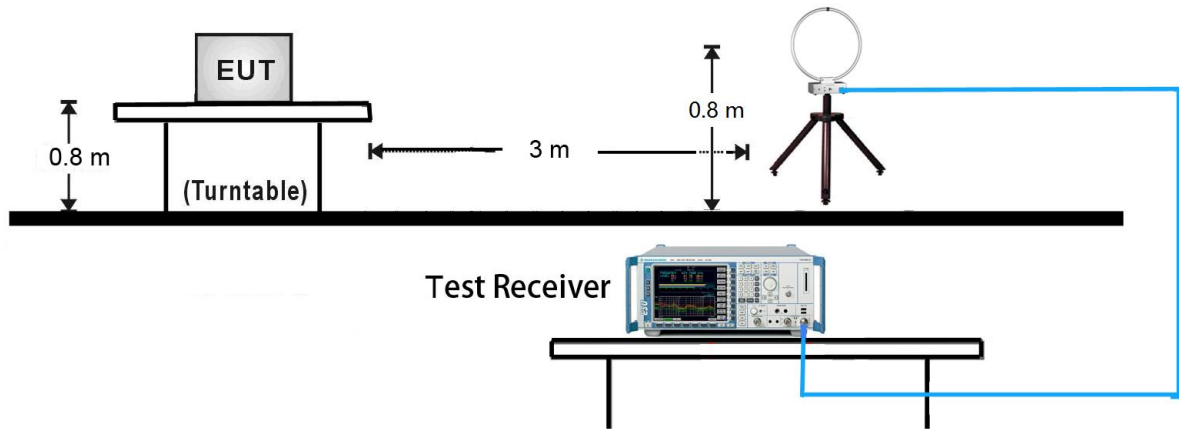

30MHz ~ 1GHz Test Setup:

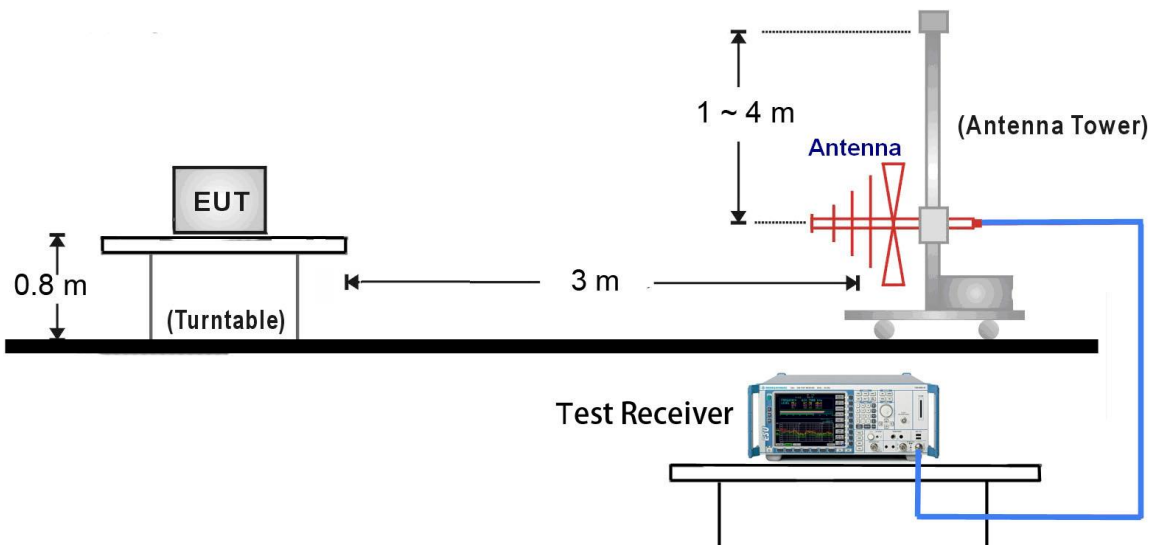

1GHz ~ 26.5GHz Test Setup:

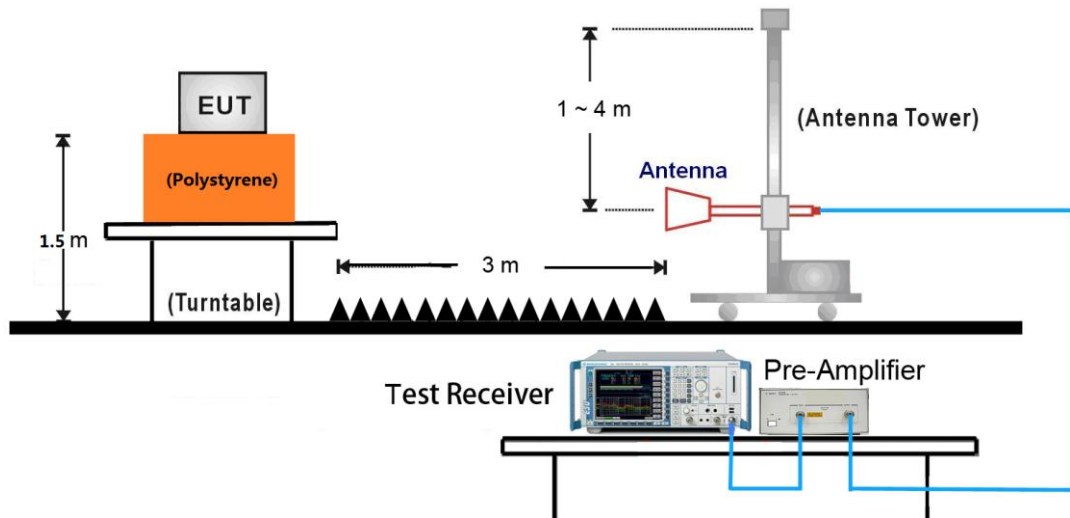

7.6.5. Test Result

Test Mode:	BLE_1M	Test Date:	2023-07-06
Test Channel:	00	Test Engineer:	Amos Xia
Remark:	Average measurement was not performed if peak level lower than average limit. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Frequency (MHz)	Level (dB μ V/m)	Factor (dB)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
3085.0000	41.66	4.01	74.00	32.34	Peak	Horizontal
4005.0000	41.69	5.14	74.00	32.31	Peak	Horizontal
6205.0000	46.40	11.32	74.00	27.60	Peak	Horizontal
8325.0000	51.53	15.68	74.00	22.47	Peak	Horizontal
3300.0000	40.57	3.65	74.00	33.43	Peak	Vertical
3815.0000	40.70	4.52	74.00	33.30	Peak	Vertical
5655.0000	44.95	9.99	74.00	29.05	Peak	Vertical
8315.0000	51.49	15.61	74.00	22.51	Peak	Vertical

Test Mode:	BLE_1M	Test Date:	2023-07-06
Test Channel:	19	Test Engineer:	Amos Xia
Remark:	Average measurement was not performed if peak level lower than average limit. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Frequency (MHz)	Level (dB μ V/m)	Factor (dB)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
3270.0000	40.97	3.79	74.00	33.03	Peak	Horizontal
4035.0000	41.32	5.17	74.00	32.68	Peak	Horizontal
5250.0000	44.42	8.73	74.00	29.58	Peak	Horizontal
6885.0000	47.64	14.06	74.00	26.36	Peak	Horizontal
3250.0000	39.51	3.88	74.00	34.49	150	Vertical
4135.0000	41.36	5.41	74.00	32.64	150	Vertical
5140.0000	43.28	7.95	74.00	30.72	150	Vertical
6475.0000	47.24	12.22	74.00	26.76	150	Vertical

Test Mode:	BLE_1M	Test Date:	2023-07-06
Test Channel:	39	Test Engineer:	Amos Xia
Remark:	Average measurement was not performed if peak level lower than average limit. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Frequency (MHz)	Level (dB μ V/m)	Factor (dB)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
3605.0000	40.25	4.02	74.00	33.75	Peak	Horizontal
4465.0000	43.23	6.74	74.00	30.77	Peak	Horizontal
5500.0000	45.15	10.11	74.00	28.85	Peak	Horizontal
6205.0000	47.16	11.32	74.00	26.84	Peak	Horizontal
3505.0000	40.02	3.68	74.00	33.98	Peak	Vertical
4425.0000	42.65	6.49	74.00	31.35	Peak	Vertical
4860.0000	43.72	7.13	74.00	30.28	Peak	Vertical
5635.0000	45.14	9.97	74.00	28.86	Peak	Vertical

Test Mode:	BLE_2M	Test Date:	2023-07-06
Test Channel:	01	Test Engineer:	Amos Xia
Remark:	Average measurement was not performed if peak level lower than average limit. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Frequency (MHz)	Level (dB μ V/m)	Factor (dB)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
3995.0000	41.83	5.12	74.00	32.17	Peak	Horizontal
4640.0000	43.55	6.87	74.00	30.45	Peak	Horizontal
5435.0000	44.85	9.72	74.00	29.15	Peak	Horizontal
6070.0000	46.61	10.99	74.00	27.39	Peak	Horizontal
3615.0000	41.91	4.03	74.00	32.09	Peak	Vertical
4615.0000	43.34	6.87	74.00	30.66	Peak	Vertical
5845.0000	47.47	10.30	74.00	26.53	Peak	Vertical
7075.0000	49.76	14.26	74.00	24.24	Peak	Vertical

Test Mode:	BLE_2M	Test Date:	2023-07-06
Test Channel:	19	Test Engineer:	Amos Xia
Remark:	Average measurement was not performed if peak level lower than average limit. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Frequency (MHz)	Level (dB μ V/m)	Factor (dB)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
3475.0000	40.05	3.72	74.00	33.95	Peak	Horizontal
4110.0000	41.00	5.37	74.00	33.00	Peak	Horizontal
4905.0000	43.08	7.32	74.00	30.92	Peak	Horizontal
5660.0000	45.80	9.99	74.00	28.20	Peak	Horizontal
3630.0000	40.62	4.06	74.00	33.38	150	Vertical
4725.0000	42.77	6.97	74.00	31.23	150	Vertical
5800.0000	44.98	10.22	74.00	29.02	150	Vertical
6725.0000	47.43	13.11	74.00	26.57	150	Vertical

Test Mode:	BLE_2M	Test Date:	2023-07-06
Test Channel:	38	Test Engineer:	Amos Xia
Remark:	Average measurement was not performed if peak level lower than average limit. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		


Frequency (MHz)	Level (dB μ V/m)	Factor (dB)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
3485.0000	40.20	3.69	74.00	33.80	Peak	Horizontal
4665.0000	44.08	6.90	74.00	29.92	Peak	Horizontal
5930.0000	45.84	10.46	74.00	28.16	Peak	Horizontal
6845.0000	47.86	13.85	74.00	26.14	Peak	Horizontal
3440.0000	40.20	3.75	74.00	33.80	Peak	Vertical
3925.0000	41.64	4.81	74.00	32.36	Peak	Vertical
5460.0000	44.33	9.87	74.00	29.67	Peak	Vertical
7005.0000	48.40	14.16	74.00	25.60	Peak	Vertical

The worst case of Radiated Emission below 1GHz:

30MHz – 1GHz Test Data

EUT:	Bluetooth headset	Polarity:	Horizontal
Model:	INSPIRE16PRO	SN:	INS169104001
Mode:	Transmit at BLE_1M Channel 00	Voltage:	DC 3.7V
Environment:	Temp: 22°C; Humi:52%	Engineer:	Amos Xia

Test Graph

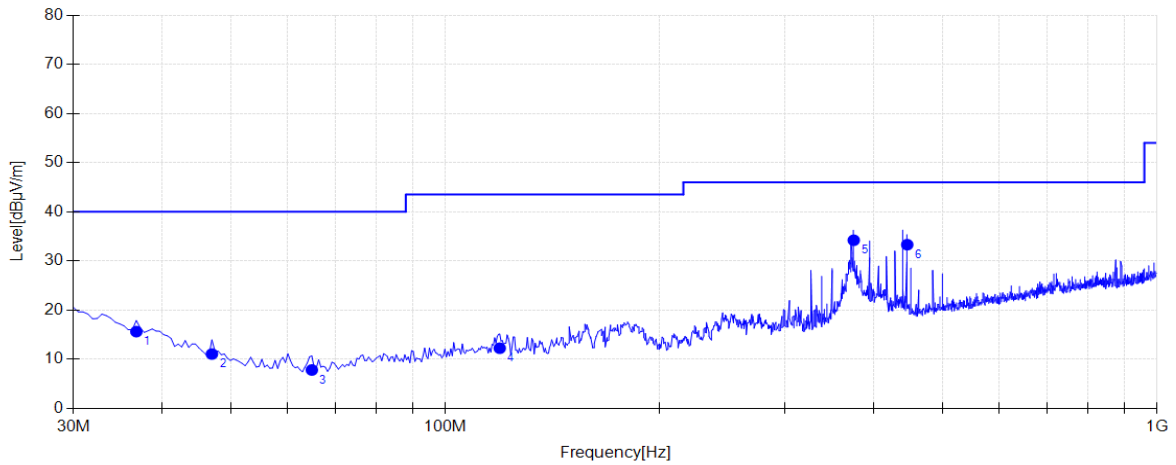


Final Data List								
NO.	Freq. [MHz]	Factor [dB]	QP Value [dBµV/m]	QP Limit [dBµV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
1	36.7900	16.27	15.64	40.00	24.36	200	78	Horizontal
2	46.9750	11.07	11.07	40.00	28.93	200	105	Horizontal
3	64.9200	7.67	7.83	40.00	32.17	200	251	Horizontal
4	119.240	11.64	12.26	43.50	31.24	200	300	Horizontal
5	374.835	15.33	34.22	46.00	11.78	100	330	Horizontal
6	445.645	17.44	33.32	46.00	12.68	100	0	Horizontal

Note 1: The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible (the test frequency range: 9kHz ~ 30MHz, 18GHz ~ 26.5GHz), therefore no data appear in the report.

EUT:	Bluetooth headset	Polarity:	Vertical
Model:	INSPIRE16PRO	SN:	INS169104001
Mode:	Transmit at BLE_1M Channel 00	Voltage:	DC 3.7V
Environment:	Temp: 22°C; Humi:52%	Engineer:	Amos Xia

Test Graph

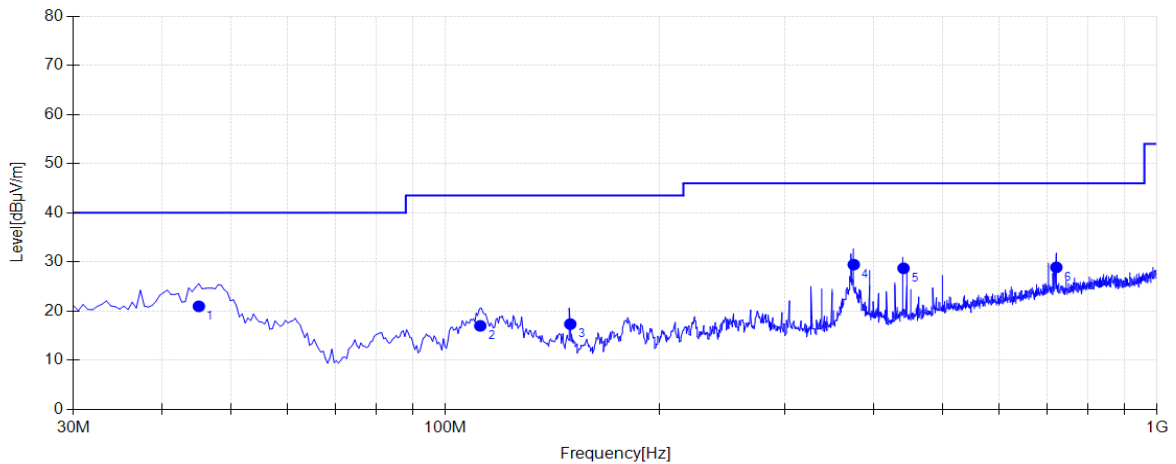

Final Data List								
NO.	Freq. [MHz]	Factor [dB]	QP Value [dBµV/m]	QP Limit [dBµV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
1	45.0350	12.06	20.98	40.00	19.02	100	217	Vertical
2	111.965	11.49	17.01	43.50	26.49	100	320	Vertical
3	149.795	10.84	17.37	43.50	26.13	200	0	Vertical
4	374.835	15.33	29.46	46.00	16.54	200	213	Vertical
5	440.310	17.24	28.72	46.00	17.28	200	213	Vertical
6	722.095	22.16	28.90	46.00	17.10	200	47	Vertical

Note 1: The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible (the test frequency range: 9kHz ~ 30MHz, 18GHz ~ 26.5GHz), therefore no data appear in the report.

7.7. Radiated Restricted Band Edge Measurement

7.7.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.25 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41	--	--	--

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

For RSS-Gen Section 8.10 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 8.10 of RSS-Gen, must also comply with the radiated emission limits specified in Section 8.9.

Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.009 - 0.110	240 - 285	9.0 - 9.2
2.1735 - 2.1905	322 - 335.4	9.3 - 9.5
3.020 - 3.026	399.9 - 410	10.6 - 12.7
4.125 - 4.128	608 - 614	13.25 - 13.4
4.17725 - 4.17775	960 - 1427	14.47 - 14.5
4.20725 - 4.20775	1435 - 1626.5	15.35 - 16.2
5.677 - 5.683	1645.5 - 1646.5	17.7 - 21.4
6.215 - 6.218	1660 - 1710	22.01 - 23.12
6.26775 - 6.26825	1718.8 - 1722.2	23.6 - 24.0
6.31175 - 6.31225	2200 - 2300	31.2 - 31.8
8.291 - 8.294	2310 - 2390	36.43 - 36.5
8.362 - 8.366	2655 - 2900	Above 38.6
8.37625 - 8.38675	3260 - 3267	--
8.41425 - 8.41475	3332 - 3339	
12.29 - 12.293	334.5 - 3358	
12.51975 - 12.52025	3500 - 4400	
12.57675 - 12.57725	4500 - 5150	
13.36 - 13.41	5350 - 5460	
16.42 - 16.423	7250 - 7750	
16.69475 - 16.69525	8025 - 8500	
16.80425 - 16.80475	--	
25.5 - 25.67		
37.5 - 38.25		
73 - 74.6		
74.8 - 75.2		
108 - 138		
156.52475 - 156.525225		
156.7 - 156.9		

All out of band emissions appearing in a restricted band as specified in Section 8.10 of the RSS-Gen

must not exceed the limits shown in Table per Section 8.9.

RSS-Gen Section 8.9		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.7.2. Test Procedure Used

ANSI C63.10 Section 6.3 (General Requirements)

ANSI C63.10 Section 6.6 (Standard test method above 1GHz)

7.7.3. Test Setting


Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = Power Average (RMS)
5. Number of sweep point = 2001 (Number of sweep points must be $\geq 2 \times \text{span} / \text{RBW}$)
6. Sweep time = auto
7. Trace (RMS) averaging was performed over at least 100 traces.


7.7.4. Test Setup

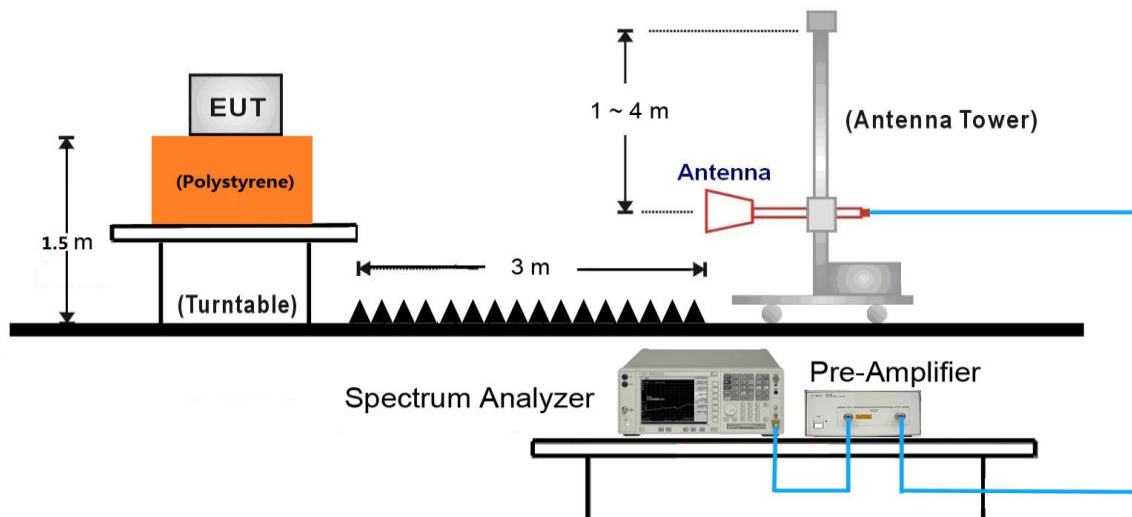

7.7.5. Test Result

Project Information			
EUT:	Bluetooth headset	Model:	INSPIRE16PRO
SN:	INS169104001	Voltage:	DC 3.7V
Environment:	Temp: 22°C; Humi:52%	Engineer:	Amos Xia
Remark:	Transmit at BLE_1M Channel 00		

Test Graph

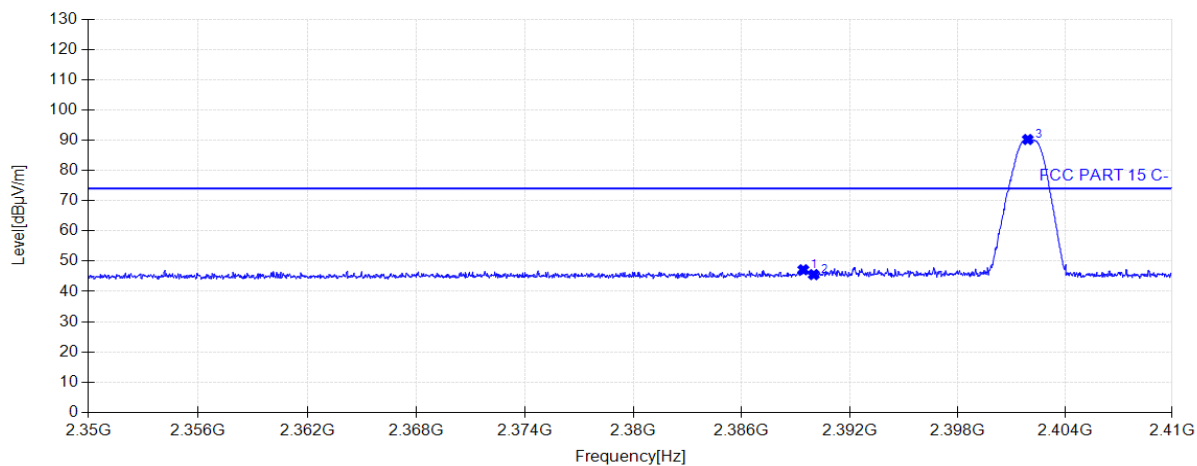


Suspected Data List

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2389.42	47.18	32.74	74.00	26.82	160	309	Horizontal
2	2390.00	45.56	32.74	74.00	28.44	160	129	Horizontal
3	2401.93	90.22	32.80	74.00	-16.22	160	227	Horizontal

Project Information			
EUT:	Bluetooth headset	Model:	INSPIRE16PRO
SN:	INS169104001	Voltage:	DC 3.7V
Environment:	Temp: 22°C; Humi:52%	Engineer:	Amos Xia
Remark:	Transmit at BLE_1M Channel 00		


Test Graph

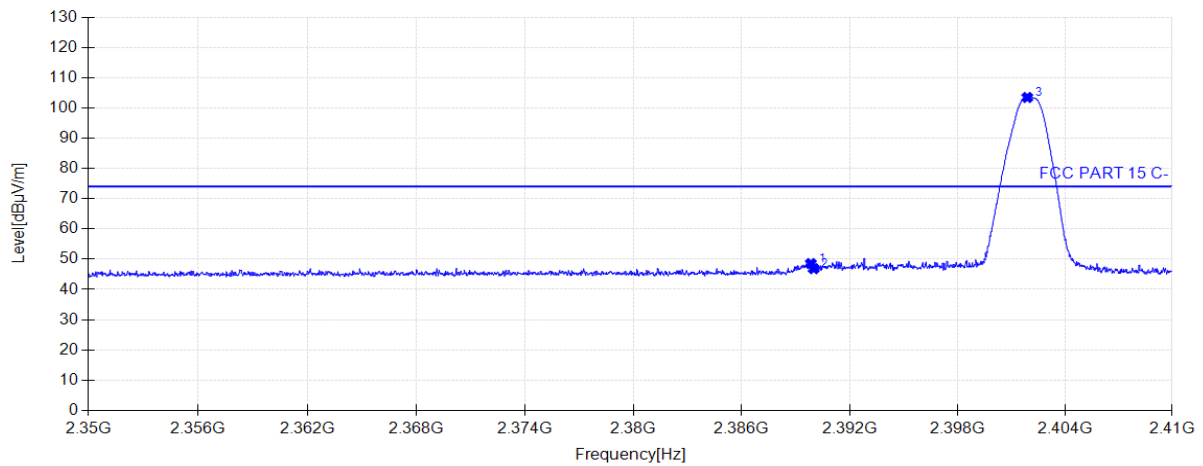

Suspected Data List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2389.84	48.54	32.74	74.00	25.46	160	100	Vertical
2	2390.00	46.87	32.74	74.00	27.13	160	100	Vertical
3	2401.90	103.45	32.80	74.00	-29.45	160	273	Vertical

Project Information			
EUT:	Bluetooth headset	Model:	INSPIRE16PRO
SN:	INS169104001	Voltage:	DC 3.7V
Environment:	Temp: 22°C; Humi:52%	Engineer:	Amos Xia
Remark:	Transmit at BLE_1M Channel 00		


Test Graph

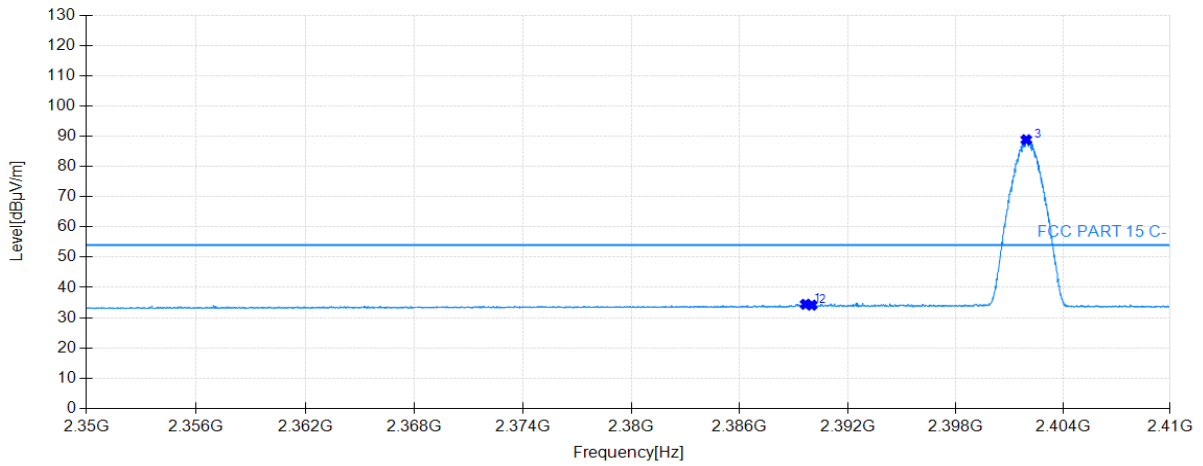

Suspected Data List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2389.66	34.44	32.74	54.00	19.56	160	130	Horizontal
2	2390.00	34.15	32.74	54.00	19.85	160	130	Horizontal
3	2401.96	88.81	32.80	54.00	-34.81	160	226	Horizontal

Project Information			
EUT:	Bluetooth headset	Model:	INSPIRE16PRO
SN:	INS169104001	Voltage:	DC 3.7V
Environment:	Temp: 22°C; Humi:52%	Engineer:	Amos Xia
Remark:	Transmit at BLE_1M Channel 00		


Test Graph

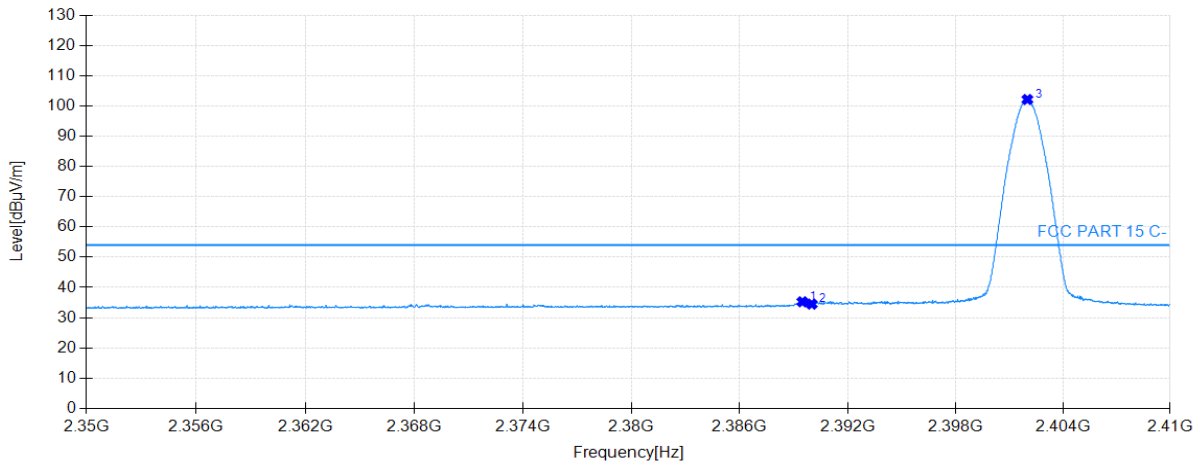

Suspected Data List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2389.48	35.25	32.74	54.00	18.75	160	99	Vertical
2	2390.00	34.50	32.74	54.00	19.50	160	126	Vertical
3	2402.02	102.12	32.80	54.00	-48.12	160	271	Vertical

Project Information			
EUT:	Bluetooth headset	Model:	INSPIRE16PRO
SN:	INS169104001	Voltage:	DC 3.7V
Environment:	Temp: 22°C; Humi:52%	Engineer:	Amos Xia
Remark:	Transmit at BLE_1M Channel 39		


Test Graph

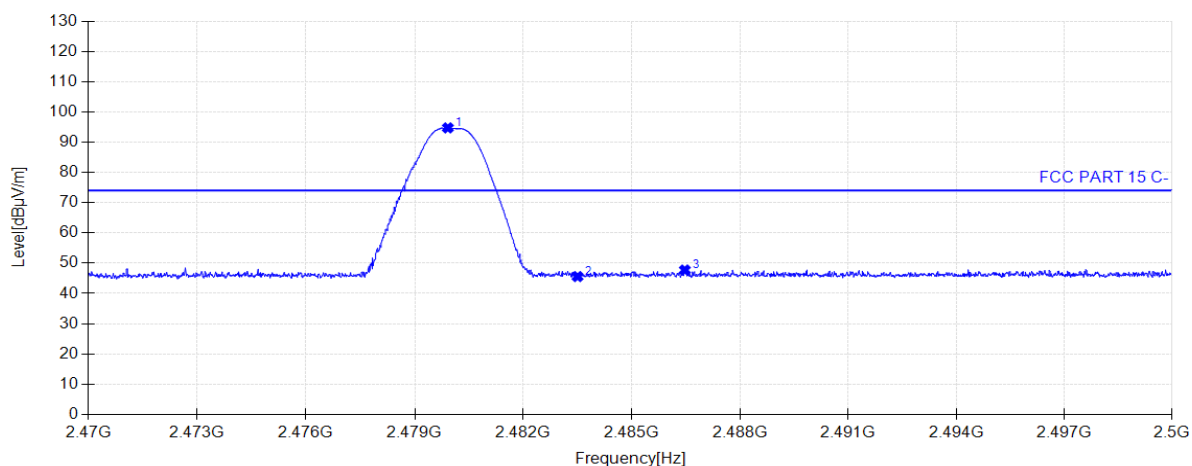

Suspected Data List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2479.91	94.72	33.21	74.00	-20.72	160	226	Horizontal
2	2483.50	45.58	33.23	74.00	28.42	160	343	Horizontal
3	2486.47	47.73	33.25	74.00	26.27	160	1	Horizontal

Project Information			
EUT:	Bluetooth headset	Model:	INSPIRE16PRO
SN:	INS169104001	Voltage:	DC 3.7V
Environment:	Temp: 22°C; Humi:52%	Engineer:	Amos Xia
Remark:	Transmit at BLE_1M Channel 39		


Test Graph

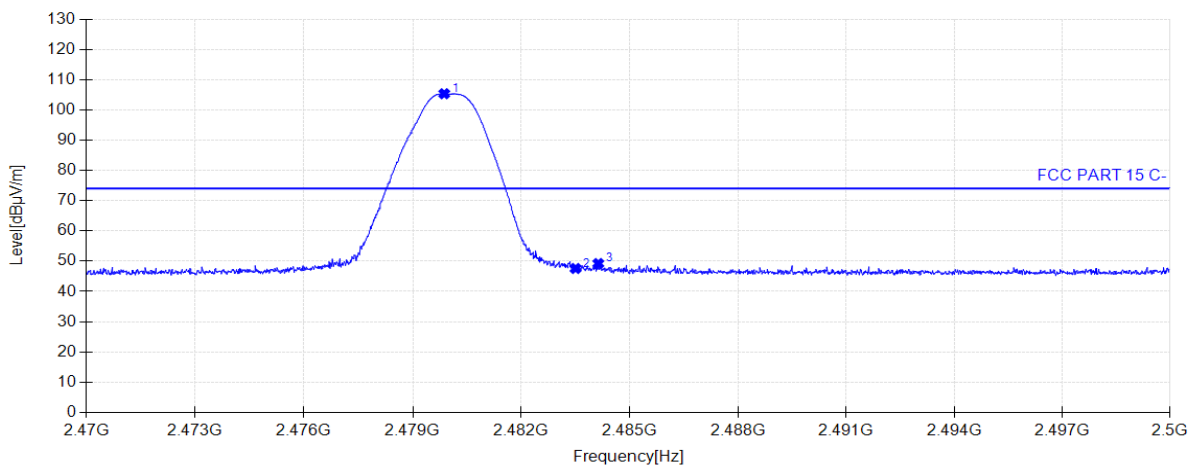

Suspected Data List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2479.87	105.34	33.21	74.00	-31.34	160	284	Vertical
2	2483.50	47.59	33.23	74.00	26.41	160	277	Vertical
3	2484.13	49.23	33.24	74.00	24.77	160	306	Vertical

Project Information			
EUT:	Bluetooth headset	Model:	INSPIRE16PRO
SN:	INS169104001	Voltage:	DC 3.7V
Environment:	Temp: 22°C; Humi:52%	Engineer:	Amos Xia
Remark:	Transmit at BLE_1M Channel 39		


Test Graph

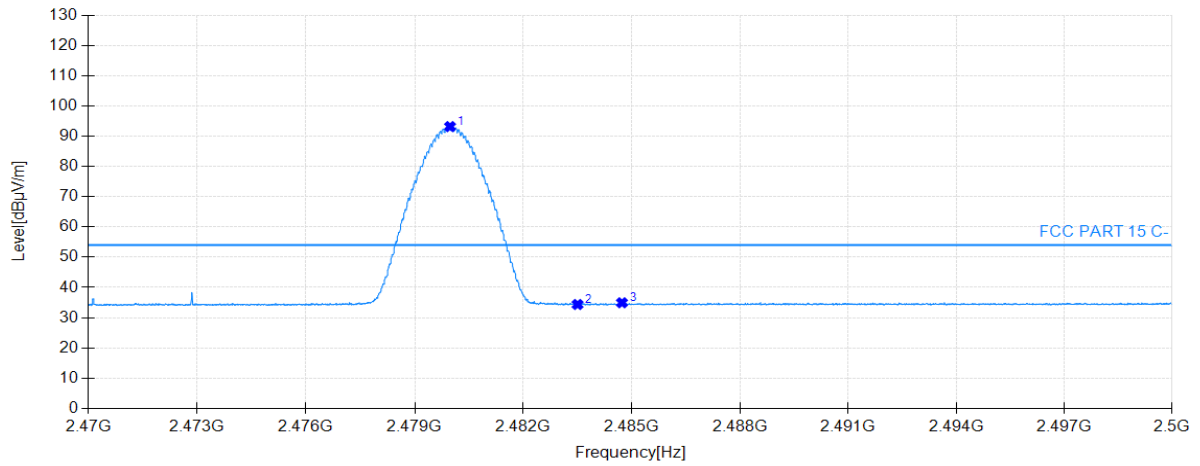

Suspected Data List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2479.97	93.16	33.21	54.00	-39.16	160	220	Horizontal
2	2483.50	34.37	33.23	54.00	19.63	160	109	Horizontal
3	2484.73	34.93	33.24	54.00	19.07	160	206	Horizontal

Project Information			
EUT:	Bluetooth headset	Model:	INSPIRE16PRO
SN:	INS169104001	Voltage:	DC 3.7V
Environment:	Temp: 22°C; Humi:52%	Engineer:	Amos Xia
Remark:	Transmit at BLE 1M Channel 39		


Test Graph

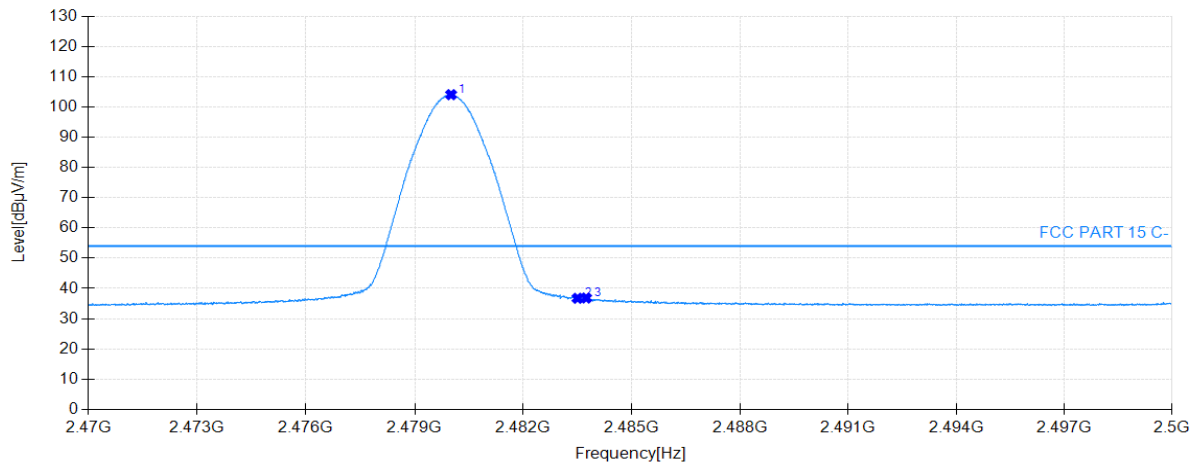

Suspected Data List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2480.00	104.04	33.21	54.00	-50.04	160	279	Vertical
2	2483.50	36.75	33.23	54.00	17.25	160	291	Vertical
3	2483.74	36.83	33.23	54.00	17.17	160	286	Vertical

Project Information			
EUT:	Bluetooth headset	Model:	INSPIRE16PRO
SN:	INS169104001	Voltage:	DC 3.7V
Environment:	Temp: 22°C; Humi:52%	Engineer:	Amos Xia
Remark:	Transmit at BLE_2M Channel 01		


Test Graph

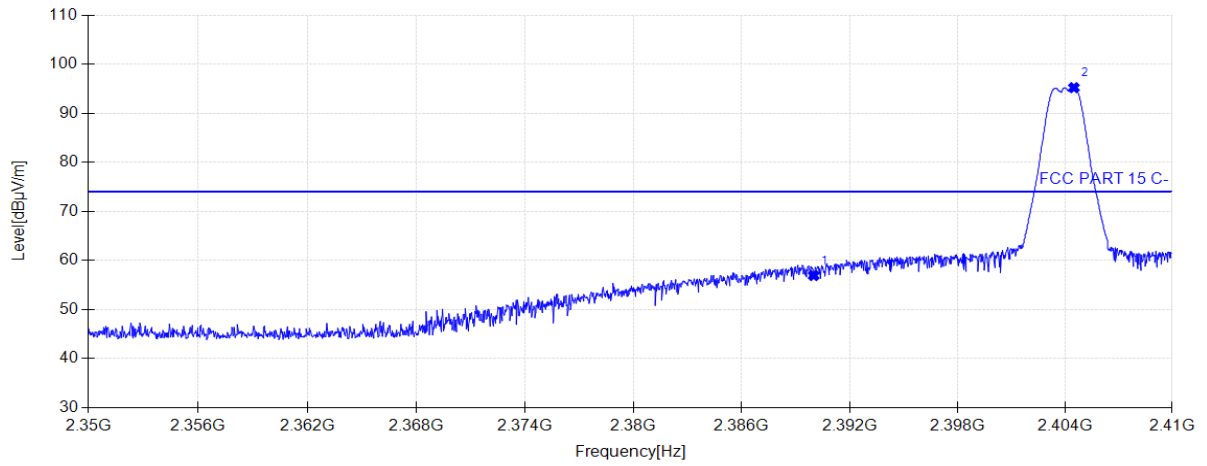

Suspected Data List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2390.00	56.91	32.74	74.00	17.09	160	145	Horizontal
2	2404.51	95.21	32.82	74.00	-21.21	160	104	Horizontal

Project Information			
EUT:	Bluetooth headset	Model:	INSPIRE16PRO
SN:	INS169104001	Voltage:	DC 3.7V
Environment:	Temp: 22°C; Humi:52%	Engineer:	Amos Xia
Remark:	Transmit at BLE_2M Channel 01		


Test Graph

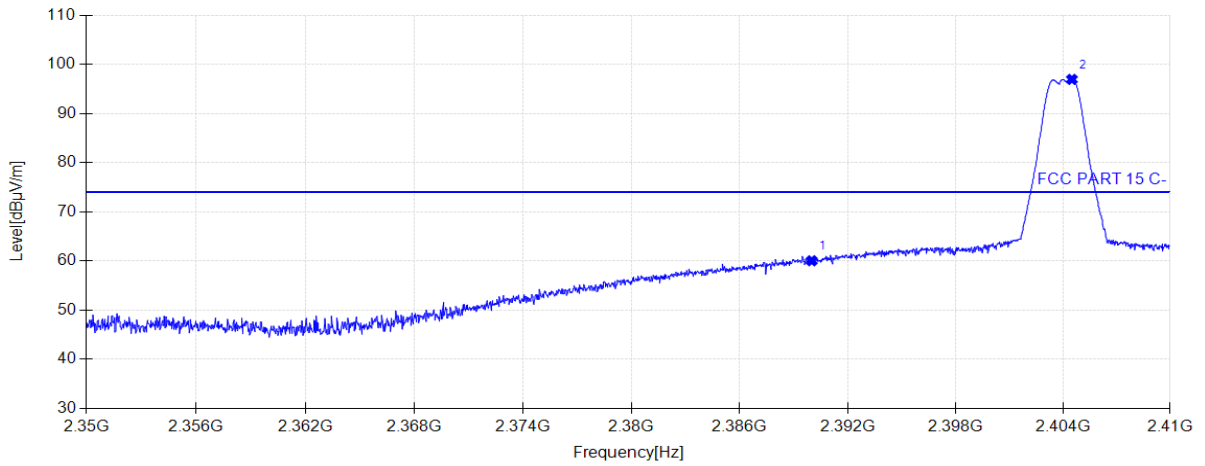

Suspected Data List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2390.00	60.04	32.74	74.00	13.96	160	0	Vertical
2	2404.51	96.93	32.82	74.00	-22.93	160	317	Vertical

Project Information			
EUT:	Bluetooth headset	Model:	INSPIRE16PRO
SN:	INS169104001	Voltage:	DC 3.7V
Environment:	Temp: 22°C; Humi:52%	Engineer:	Amos Xia
Remark:	Transmit at BLE_2M Channel 01		


Test Graph

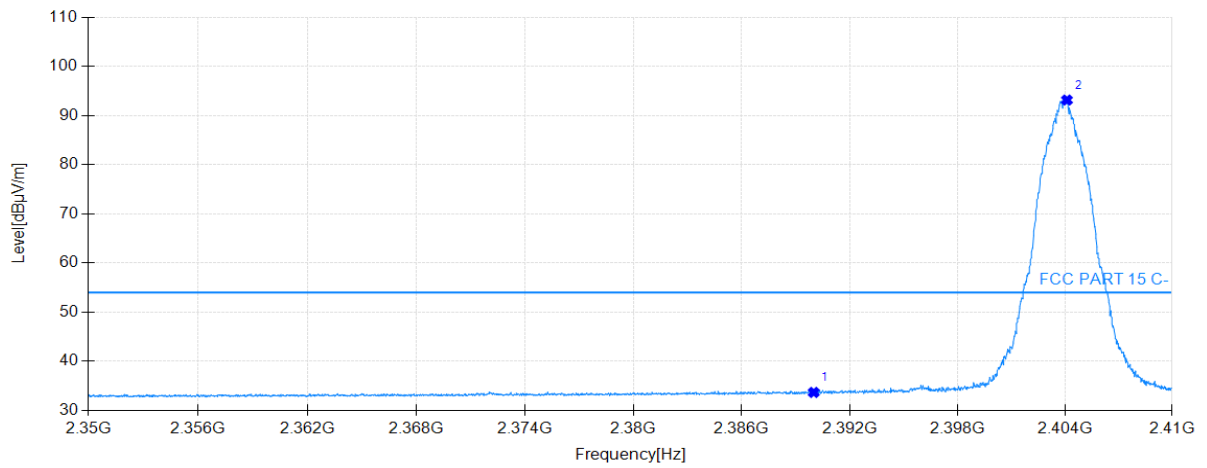

Suspected Data List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2390.00	33.67	32.74	54.00	20.33	160	126	Horizontal
2	2404.12	93.14	32.82	54.00	-39.14	160	342	Horizontal

Project Information			
EUT:	Bluetooth headset	Model:	INSPIRE16PRO
SN:	INS169104001	Voltage:	DC 3.7V
Environment:	Temp: 22°C; Humi:52%	Engineer:	Amos Xia
Remark:	Transmit at BLE_2M Channel 01		


Test Graph

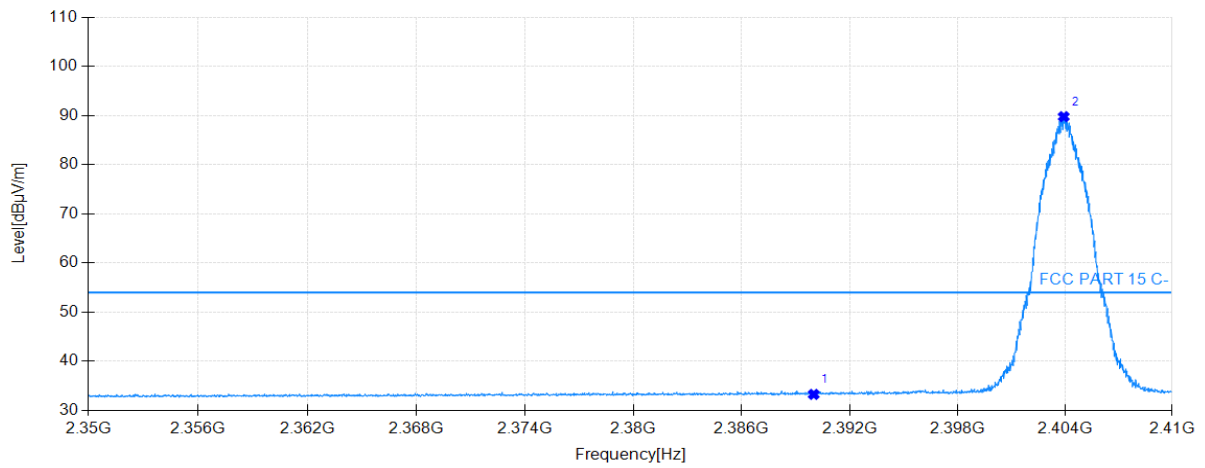

Suspected Data List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2390.00	33.27	32.74	54.00	20.73	160	166	Vertical
2	2403.94	89.75	32.81	54.00	-35.75	160	132	Vertical

Project Information			
EUT:	Bluetooth headset	Model:	INSPIRE16PRO
SN:	INS169104001	Voltage:	DC 3.7V
Environment:	Temp: 22°C; Humi:52%	Engineer:	Amos Xia
Remark:	Transmit at BLE_2M Channel 38		


Test Graph

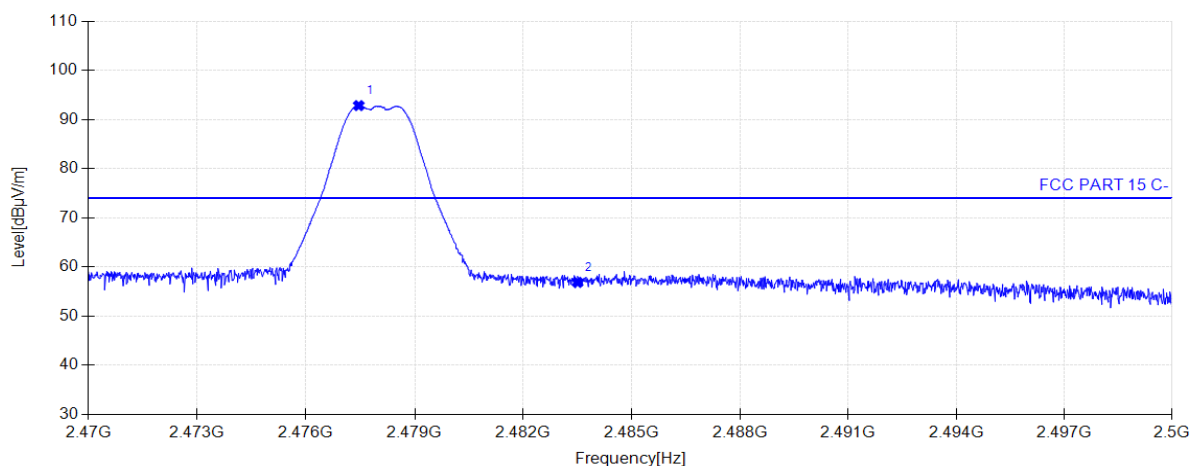

Suspected Data List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2477.45	92.82	33.20	74.00	-18.82	160	138	Horizontal
2	2483.50	56.87	33.23	74.00	17.13	160	138	Horizontal

Project Information			
EUT:	Bluetooth headset	Model:	INSPIRE16PRO
SN:	INS169104001	Voltage:	DC 3.7V
Environment:	Temp: 22°C; Humi:52%	Engineer:	Amos Xia
Remark:	Transmit at BLE_2M Channel 38		


Test Graph

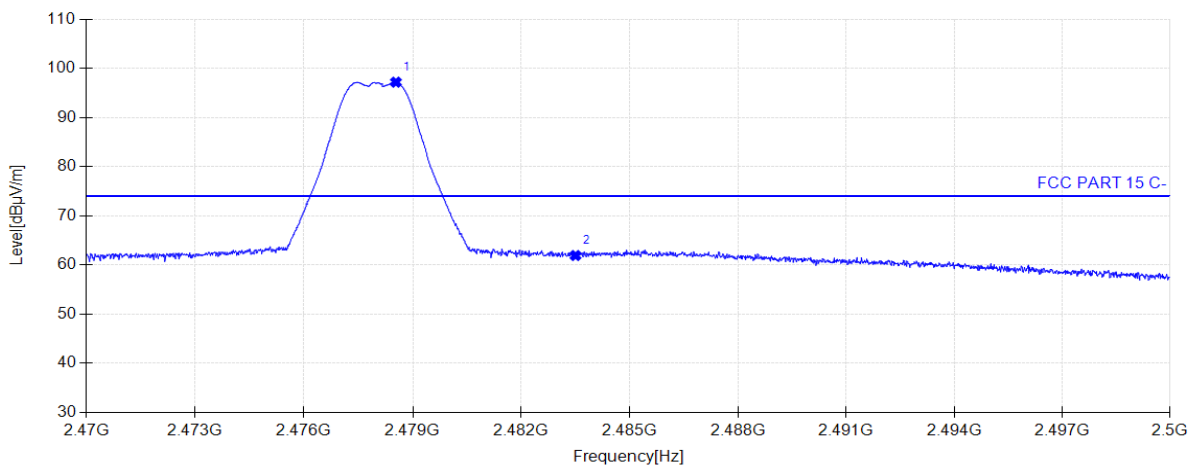

Suspected Data List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2478.53	97.18	33.21	74.00	-23.18	160	9	Vertical
2	2483.50	61.92	33.23	74.00	12.08	160	37	Vertical

Project Information			
EUT:	Bluetooth headset	Model:	INSPIRE16PRO
SN:	INS169104001	Voltage:	DC 3.7V
Environment:	Temp: 22°C; Humi:52%	Engineer:	Amos Xia
Remark:	Transmit at BLE_2M Channel 38		


Test Graph

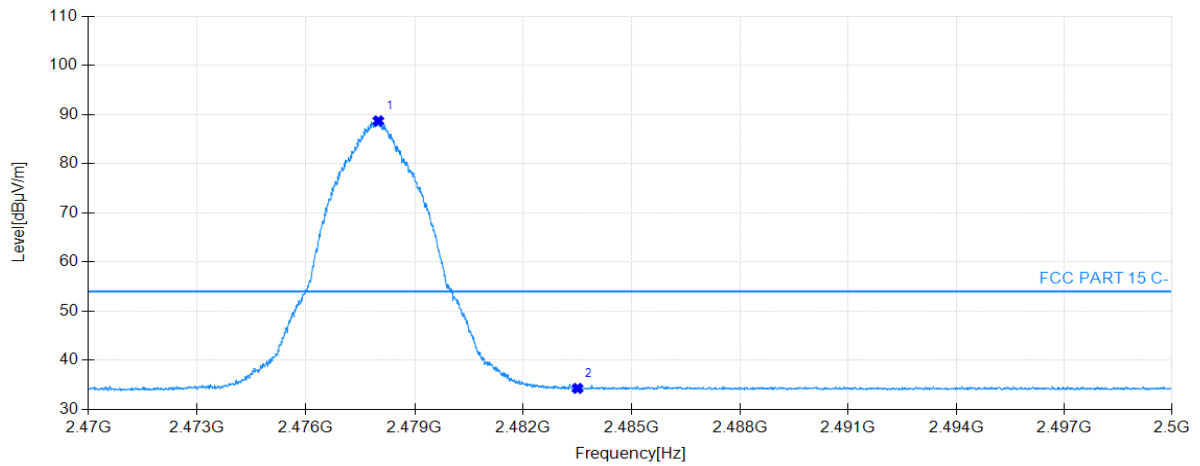

Suspected Data List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2477.99	88.69	33.20	54.00	-34.69	160	146	Horizontal
2	2483.50	34.28	33.23	54.00	19.72	160	125	Horizontal

Project Information			
EUT:	Bluetooth headset	Model:	INSPIRE16PRO
SN:	INS169104001	Voltage:	DC 3.7V
Environment:	Temp: 22°C; Humi:52%	Engineer:	Amos Xia
Remark:	Transmit at BLE_2M Channel 38		

Test Graph

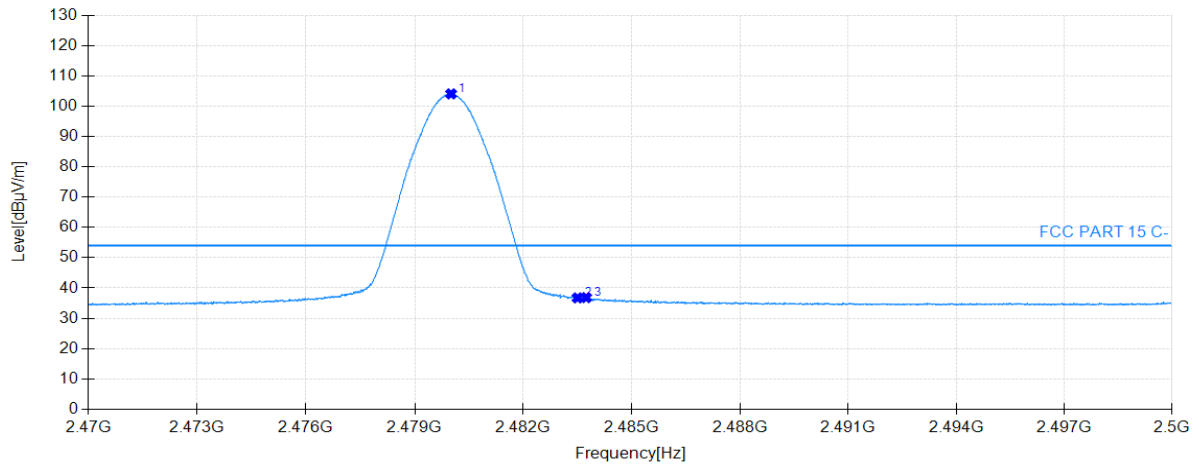

Suspected Data List

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2477.92	92.38	33.20	54.00	-38.38	160	8	Vertical
2	2483.50	34.89	33.23	54.00	19.11	160	36	Vertical

Note: The pre-test has been carried out for the 2310-2390mhz band, and the value in the 2310-2350mhz band is 20dB lower than the limit value, so the section of 2310-2350mhz is not reflected in the report.

7.8. AC Conducted Emissions Measurement


7.8.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

7.8.2. Test Setup

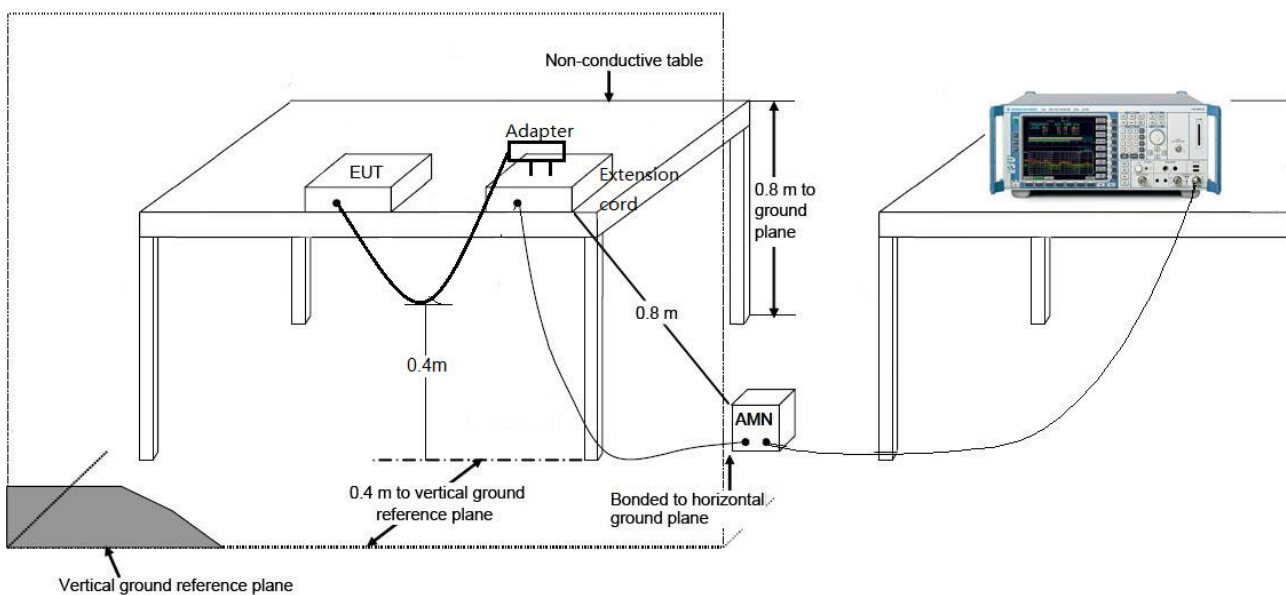


7.8.3. Test Result

EUT:	Bluetooth headset	Polarity:	LINE
Model:	INSPIRE16PRO	Voltage:	AC120V/60Hz
Environment:	Temp: 22°C; Humi:52%	Engineer:	Amos Xia
Remark:	The worst case of transmit by BLE		

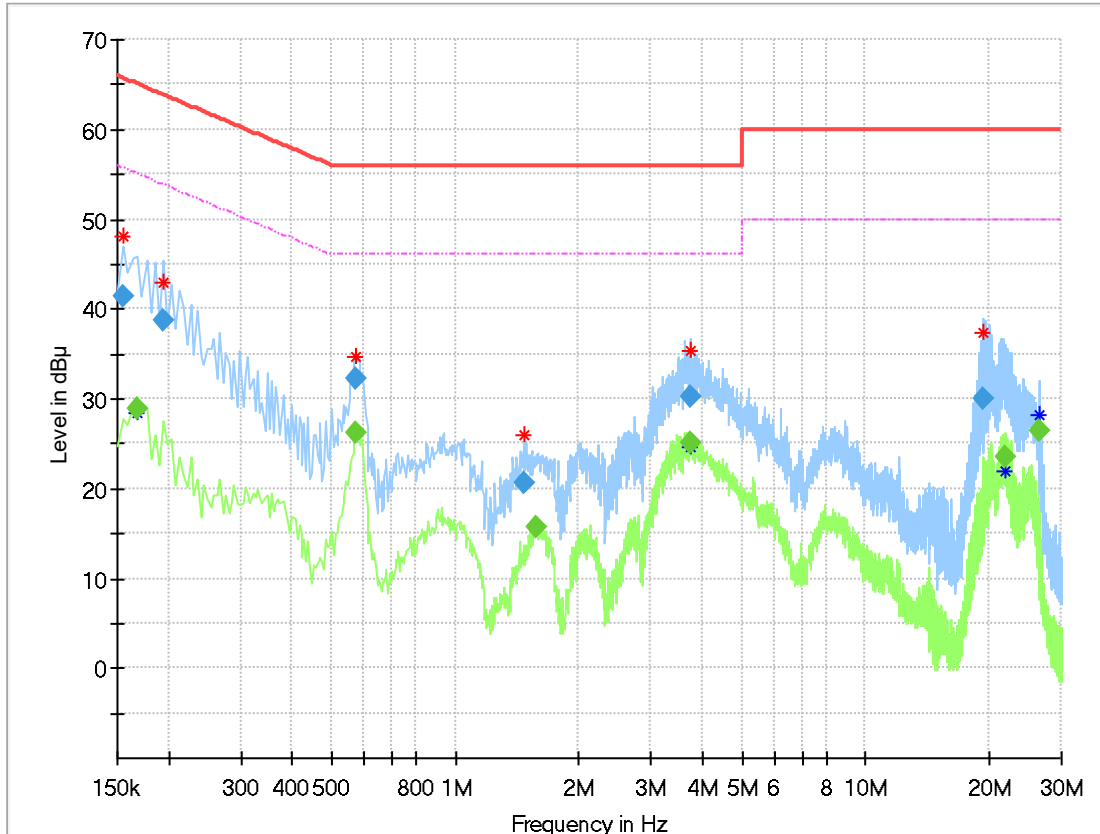

Frequency (MHz)	QuasiPeak (dBuV)	Average (dBuV)	Limit (dBuV)	Margin (dB)	Meas. Time	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.154500	41.35	---	65.75	24.40	100.0	9.000	L1	ON	9.6
0.168000	---	28.88	55.06	26.18	100.0	9.000	L1	ON	9.6
0.195000	38.69	---	63.82	25.13	100.0	9.000	L1	ON	9.6
0.573000	---	26.15	46.00	19.85	100.0	9.000	L1	ON	9.6
0.573000	32.33	---	56.00	23.67	100.0	9.000	L1	ON	9.6
1.464000	20.51	---	56.00	35.49	100.0	9.000	L1	ON	9.6
1.572000	---	15.72	46.00	30.28	100.0	9.000	L1	ON	9.6
3.727500	30.30	---	56.00	25.70	100.0	9.000	L1	ON	9.6
3.736500	---	25.04	46.00	20.96	100.0	9.000	L1	ON	9.6
19.419000	30.00	---	60.00	30.00	100.0	9.000	L1	ON	9.8
21.853500	---	23.44	50.00	26.56	100.0	9.000	L1	ON	9.8
26.623500	---	26.47	50.00	23.53	100.0	9.000	L1	ON	9.8

EUT:	Bluetooth headset	Polarity:	NEUTRAL
Model:	INSPIRE16PRO	Voltage:	AC120V/60Hz
Environment:	Temp: 22°C; Humi:52%	Engineer:	Amos Xia
Remark:	The worst case of transmit by BLE		

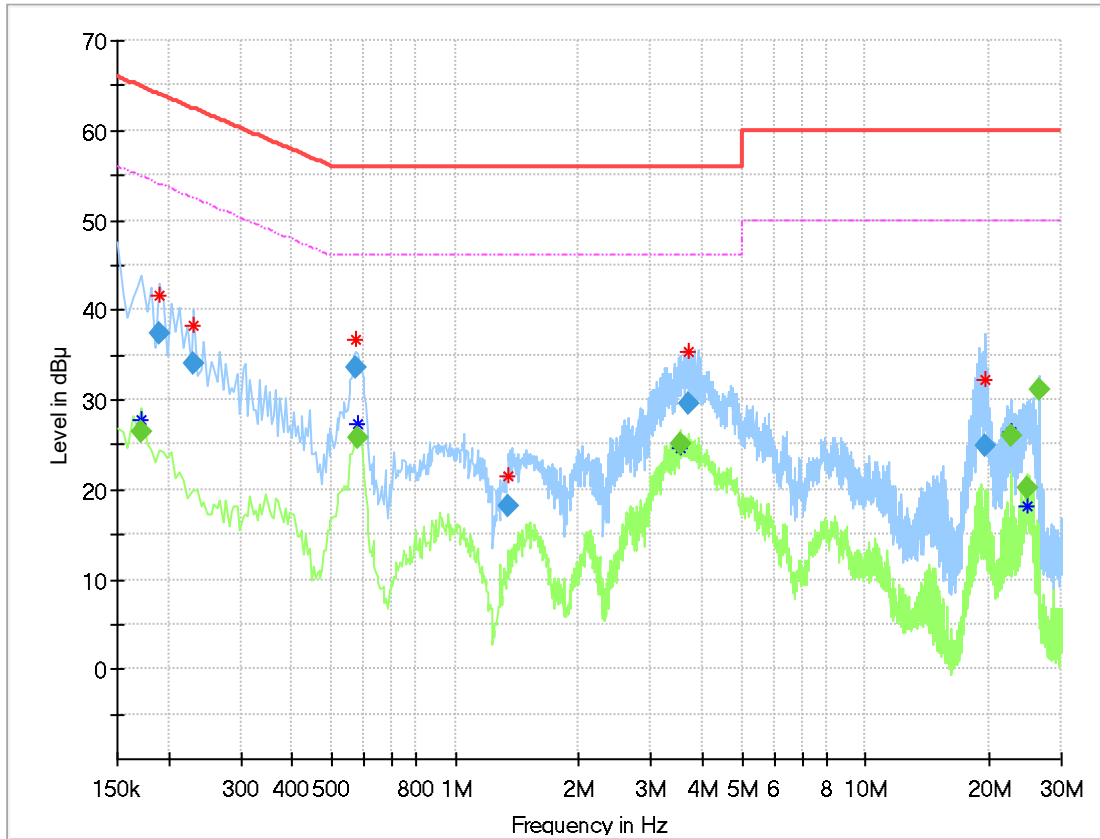

Frequency (MHz)	QuasiPeak (dBuV)	Average (dBuV)	Limit (dBuV)	Margin (dB)	Meas. Time	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.172500	---	26.45	54.84	28.39	100.0	9.000	N	ON	9.6
0.190500	37.40	---	64.02	26.62	100.0	9.000	N	ON	9.6
0.231000	33.91	---	62.41	28.50	100.0	9.000	N	ON	9.6
0.573000	33.53	---	56.00	22.47	100.0	9.000	N	ON	9.6
0.577500	---	25.79	46.00	20.21	100.0	9.000	N	ON	9.6
1.347000	18.23	---	56.00	37.77	100.0	9.000	N	ON	9.6
3.534000	---	25.14	46.00	20.86	100.0	9.000	N	ON	9.6
3.709500	29.56	---	56.00	26.44	100.0	9.000	N	ON	9.6
19.594500	24.75	---	60.00	35.25	100.0	9.000	N	ON	9.8
22.528500	---	25.99	50.00	24.01	100.0	9.000	N	ON	9.8
24.837000	---	20.06	50.00	29.94	100.0	9.000	N	ON	9.9
26.623500	---	31.08	50.00	18.92	100.0	9.000	N	ON	9.9

8. CONCLUSION

The data collected relate only the item(s) tested and show that the **Bluetooth headset** is in compliance with Part 15C of the FCC Rules.

_____ The End _____