

# TEST REPORT

**FCC Applicant:** Shenzhen Sunricher Technology Limited

**Address of Applicant:** 3rd Floor,B building,Jia'an Industrial Building, Liu Xian Third road,No.72 area, Xin'an Street, Baoan District, Shenzhen, China

**IC Applicant:** Shenzhen Sunricher Technology Co.,Ltd

**Address of Applicant:** 310, Longtaili building No.30,Avenue 4th,High Tech Science Park, Shenzhen 518000 China

**Manufacturer/Factory:** Shenzhen Sunricher Technology Limited

**Address of Manufacturer/Factory:** 3rd &4thFloor,B building,Jia'an Industrial Building,Liu Xian Third road,No.72 area,Xin'an Street,Baoan District, Shenzhen,China

**Equipment Under Test (EUT)**

Product Name: LED Controllers

Model No.: See section 5.1

**FCC ID:** 2AHST-SB9001K

**IC:** 20309-SB9001K

**Applicable standards:** FCC CFR Title 47 Part 15 Subpart C Section 15.247  
RSS-247 Issue 2  
RSS-Gen Issue 5

**Date of sample receipt:** November 09, 2020

**Date of Test:** November 10-17, 2020

**Date of report issued:** November 17, 2020

**Test Result :** PASS \*

\* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:

**Robinson Luo**


**Laboratory Manager**

This results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

## 2 Version

Version No.	Date	Description
00	November 17, 2020	Original

Prepared By:



Date:

November 17, 2020

Project Engineer

Check By:

  
Reviewer

Date:

November 17, 2020

## 3 Contents

	Page
1 COVER PAGE.....	1
2 VERSION.....	2
3 CONTENTS .....	3
4 TEST SUMMARY .....	4
5 GENERAL INFORMATION.....	5
5.1 GENERAL DESCRIPTION OF EUT .....	5
5.2 TEST MODE .....	7
5.3 DESCRIPTION OF SUPPORT UNITS .....	7
5.4 DEVIATION FROM STANDARDS.....	7
5.5 ABNORMALITIES FROM STANDARD CONDITIONS .....	7
5.6 TEST FACILITY.....	7
5.7 TEST LOCATION .....	7
6 TEST INSTRUMENTS LIST .....	8
7 TEST RESULTS AND MEASUREMENT DATA.....	10
7.1 ANTENNA REQUIREMENT .....	10
7.2 CONDUCTED OUTPUT POWER .....	11
7.3 CHANNEL BANDWIDTH & 99% OCCUPY BANDWIDTH.....	13
7.4 POWER SPECTRAL DENSITY .....	15
7.5 SPURIOUS EMISSION IN NON-RESTRICTED & RESTRICTED BANDS .....	17
7.5.1 Conducted Emission Method.....	17
7.5.2 Radiated Emission Method.....	20
7.6 FREQUENCY STABILITY .....	35
8 TEST SETUP PHOTO .....	37
9 EUT CONSTRUCTIONAL DETAILS .....	37

## 4 Test Summary

Test Item	Section in CFR 47	Result
Antenna requirement	15.203/15.247 (c) RSS-Gen Section 6.8	Pass
AC Power Line Conducted Emission	15.207 RSS-Gen Section 8.8	N/A
Conducted Output Power	15.247 (b)(3) RSS-247 Section 5.4(d)	Pass
Channel Bandwidth	15.247 (a)(2) RSS-247 Section 5.2(a)	Pass
99% Occupy Bandwidth	RSS-Gen Section 6.7	Pass
Power Spectral Density	15.247 (e) RSS-247 Section 5.2(b)	Pass
Band Edge	15.247(d) RSS-247 Section 5.5	Pass
Spurious Emission	15.205/15.209 RSS-247 Section 5.5	Pass
Frequency stability	RSS-Gen Section 6.11& Section 8.11	Pass

### Remarks:

1. Pass: The EUT complies with the essential requirements in the standard.
2. Test according to ANSI C63.10:2013 and RSS-Gen.

### Measurement Uncertainty

Test Item	Frequency Range	Measurement Uncertainty	Notes
Radiated Emission	30MHz-200MHz	3.8039dB	(1)
Radiated Emission	200MHz-1GHz	3.9679dB	(1)
Radiated Emission	1GHz-18GHz	4.29dB	(1)
Radiated Emission	18GHz-40GHz	3.30dB	(1)
AC Power Line Conducted Emission	0.15MHz ~ 30MHz	3.44dB	(1)

Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

## 5 General Information

### 5.1 General Description of EUT

Product Name:	LED Controllers
FCC Model No.:	SR-SB9001K5-RGBW, SR-SB9001K5-DIM, SR-SB9001K5-CCT, SR-SB9001K5-RGB, SR-BL9001K5-DIM, SR-BL9001K5-RGBW, SR-BL9001K5-CCT, SR-BL9001K5-RGB, SR-ZG9001K5-DIM, SR-ZG9001K5-RGB, SR-ZG9001K5-CCT, SR-ZG9001K5-CCT2, SR-ZG9001K5-RGBW, SR-2833N-K5-RGBW, SR-2833N-K5-CCT, SR-2833N-K5-RGB, SR-2833N-K5-US, RFD9001Z, RFD9001Z300
IC Model No.:	SR-SB9001K5-RGBW, SR-SB9001K5-DIM, SR-SB9001K5-CCT, SR-SB9001K5-RGB, RFD9001Z, RFD9001Z300
Test Model No.:	SR-SB9001K5-RGBW
Remark: All above models are identical in the same PCB layout, interior structure and electrical circuits. The differences are appearance color and model name for commercial purpose.	
Test sample(s) ID:	GTS202011000087-1
Sample(s) Status:	Engineer sample
S/N:	N/A
Hardware Version:	V1.0
Software Version:	V1.0
Operation Frequency:	2402MHz~2480MHz
Channel Numbers:	40
Channel Separation:	2MHz
Modulation Type:	GFSK
Antenna Type:	Integral Antenna
Antenna Gain:	0dBi(declare by applicant)
Power Supply:	DC 3V

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402 MHz	11	2422 MHz	21	2442 MHz	31	2462 MHz
2	2404 MHz	12	2424 MHz	22	2444 MHz	32	2464 MHz
3	2406 MHz	13	2426 MHz	23	2446 MHz	33	2466 MHz
4	2408 MHz	14	2428 MHz	24	2448 MHz	34	2468 MHz
5	2410 MHz	15	2430 MHz	25	2450 MHz	35	2470 MHz
6	2412 MHz	16	2432 MHz	26	2452 MHz	36	2472 MHz
7	2414 MHz	17	2434 MHz	27	2454 MHz	37	2474 MHz
8	2416 MHz	18	2436 MHz	28	2456 MHz	38	2476 MHz
9	2418 MHz	19	2438 MHz	29	2458 MHz	39	2478 MHz
10	2420 MHz	20	2440 MHz	30	2460 MHz	40	2480 MHz

**Note:**

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The lowest channel	2402MHz
The middle channel	2440MHz
The Highest channel	2480MHz

## 5.2 Test mode

Transmitting mode	Keep the EUT in continuously transmitting mode
Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.	

## 5.3 Description of Support Units

None.
-------

## 5.4 Deviation from Standards

None.
-------

## 5.5 Abnormalities from Standard Conditions

None.
-------

## 5.6 Test Facility

<p>The test facility is recognized, certified, or accredited by the following organizations:</p> <ul style="list-style-type: none"><li>● <b>FCC —Registration No.: 381383</b> Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 381383.</li><li>● <b>IC —Registration No.: 9079A</b> The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A</li><li>● <b>NVLAP (LAB CODE:600179-0)</b> Global United Technology Services Co., Ltd., is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP). LAB CODE:600179-0</li></ul>
---

## 5.7 Test Location

All tests were performed at:
Global United Technology Services Co., Ltd. Address: No. 123-128, Tower A, Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, Guangdong, China 518102 Tel: 0755-27798480 Fax: 0755-27798960

## 6 Test Instruments list

Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	July. 02 2020	July. 01 2025
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	June. 25 2020	June. 24 2021
4	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	GTS214	June. 25 2020	June. 24 2021
5	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120 D	GTS208	June. 25 2020	June. 24 2021
6	Horn Antenna	ETS-LINDGREN	3160	GTS217	June. 25 2020	June. 24 2021
7	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
8	Coaxial Cable	GTS	N/A	GTS213	June. 25 2020	June. 24 2021
9	Coaxial Cable	GTS	N/A	GTS211	June. 25 2020	June. 24 2021
10	Coaxial cable	GTS	N/A	GTS210	June. 25 2020	June. 24 2021
11	Coaxial Cable	GTS	N/A	GTS212	June. 25 2020	June. 24 2021
12	Amplifier(100kHz-3GHz)	HP	8347A	GTS204	June. 25 2020	June. 24 2021
13	Amplifier(2GHz-20GHz)	HP	84722A	GTS206	June. 25 2020	June. 24 2021
14	Amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	June. 25 2020	June. 24 2021
15	Band filter	Amindeon	82346	GTS219	June. 25 2020	June. 24 2021
16	Power Meter	Anritsu	ML2495A	GTS540	June. 25 2020	June. 24 2021
17	Power Sensor	Anritsu	MA2411B	GTS541	June. 25 2020	June. 24 2021
18	Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	GTS575	June. 25 2020	June. 24 2021
19	Splitter	Agilent	11636B	GTS237	June. 25 2020	June. 24 2021
20	Loop Antenna	ZHINAN	ZN30900A	GTS534	June. 25 2020	June. 24 2021
21	Breitband hornantenne	SCHWARZBECK	BBHA 9170	GTS579	Oct. 18 2020	Oct. 17 2021
22	Amplifier	TDK	PA-02-02	GTS574	Oct. 18 2020	Oct. 17 2021
23	Amplifier	TDK	PA-02-03	GTS576	Oct. 18 2020	Oct. 17 2021
24	PSA Series Spectrum Analyzer	Rohde & Schwarz	FSP	GTS578	June. 25 2020	June. 24 2021



<b>RF Conducted Test:</b>						
<b>Item</b>	<b>Test Equipment</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Serial No.</b>	<b>Cal.Date (mm-dd-yy)</b>	<b>Cal.Due date (mm-dd-yy)</b>
1	MXA Signal Analyzer	Agilent	N9020A	GTS566	June. 25 2020	June. 24 2021
2	EMI Test Receiver	R&S	ESCI 7	GTS552	June. 25 2020	June. 24 2021
3	Spectrum Analyzer	Agilent	E4440A	GTS533	June. 25 2020	June. 24 2021
4	MXG vector Signal Generator	Agilent	N5182A	GTS567	June. 25 2020	June. 24 2021
5	ESG Analog Signal Generator	Agilent	E4428C	GTS568	June. 25 2020	June. 24 2021
6	USB RF Power Sensor	DARE	RPR3006W	GTS569	June. 25 2020	June. 24 2021
7	RF Switch Box	Shongyi	RFSW3003328	GTS571	June. 25 2020	June. 24 2021
8	Programmable Constant Temp & Humi Test Chamber	WEWON	WHTH-150L-40-880	GTS572	June. 25 2020	June. 24 2021


<b>General used equipment:</b>						
<b>Item</b>	<b>Test Equipment</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Inventory No.</b>	<b>Cal.Date (mm-dd-yy)</b>	<b>Cal.Due date (mm-dd-yy)</b>
1	Humidity/ Temperature Indicator	KTJ	TA328	GTS243	June. 25 2020	June. 24 2021
2	Barometer	ChangChun	DYM3	GTS255	June. 25 2020	June. 24 2021

## 7 Test results and Measurement Data

### 7.1 Antenna requirement

<b>Standard requirement:</b>	FCC Part15 C Section 15.203 /247(c)
<p><b>15.203 requirement:</b></p> <p>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p> <p><b>15.247(c) (1)(i) requirement:</b></p> <p>(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.</p>	
<b>Standard requirement:</b>	RSS-Gen Section 6.8
<p>A transmitter can only be sold or operated with antennas with which it was approved.</p> <p>When a measurement at the antenna connector is used to determine RF output power, the effective gain of the device's antenna shall be stated, based on measurement or on data from the antenna manufacturer. For transmitters of RF output power of 10 milliwatts or less, only the portion of the antenna gain that is in excess of 6 dBi (6 dB above isotropic gain) shall be added to the measured RF output power to demonstrate compliance with the radiated power limits specified in the applicable standard. For transmitters of output power greater than 10 milliwatts, the total antenna gain shall be added to the measured RF output power to demonstrate compliance to the specified radiated power</p>	
<b>E.U.T Antenna:</b>	
<i>The antenna is integral antenna, the best case gain of the is 0dBi, reference to the appendix II for details</i>	

## 7.2 Conducted Output Power

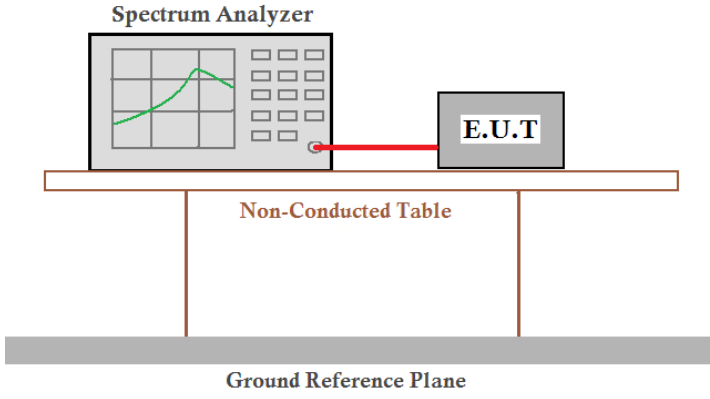
Test Requirement:	FCC Part15 C Section 15.247 (b)(3) RSS-247 Section 5.4(d)
Test Method:	ANSI C63.10:2013 and KDB558074 D01 DTS Meas Guidance v05r02 and RSS-Gen
Limit:	30dBm 36dBm(4W for e.i.r.p)
Test setup:	 <p>The diagram shows a Spectrum Analyzer on the left, connected by a red cable to an E.U.T. (Equipment Under Test) on the right. Both are placed on a table labeled 'Non-Conducted Table'. Below the table is a 'Ground Reference Plane'.</p>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

### Measurement Data


Test Mode	Frequency (MHz)	Tx Type	Measured Peak Output Power (dBm)	Limits (dBm)	Verdict
			Ant 1		
1M	2402	SISO	2.86	30	PASS
	2440	SISO	2.77	30	PASS
	2480	SISO	2.65	30	PASS

Test Mode	Frequency (MHz)	Tx Type	E.I.R.P.(dBm)	Limits (dBm)	Verdict
			Ant 1		
1M	2402	SISO	2.86	36	PASS
	2440	SISO	2.77	36	PASS
	2480	SISO	2.65	36	PASS


Test plot as follows:

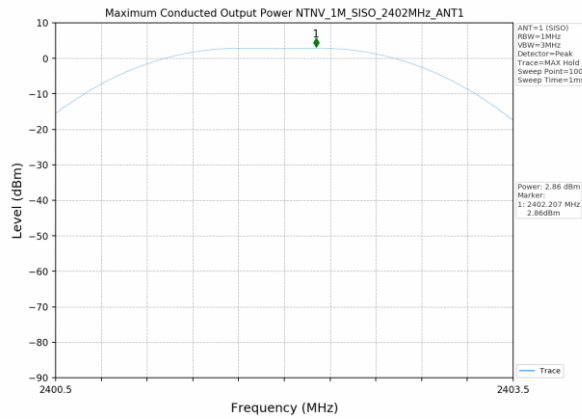

Lowest channel

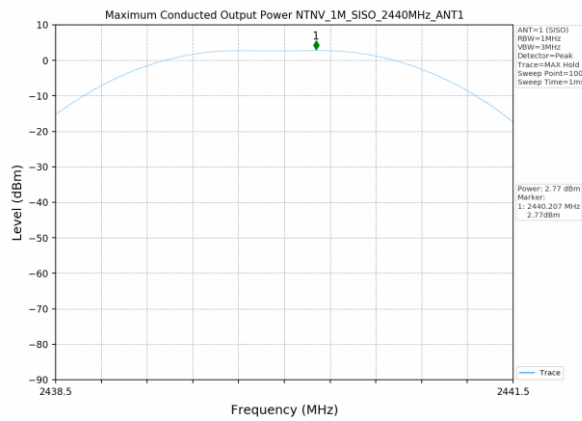


Middle channel

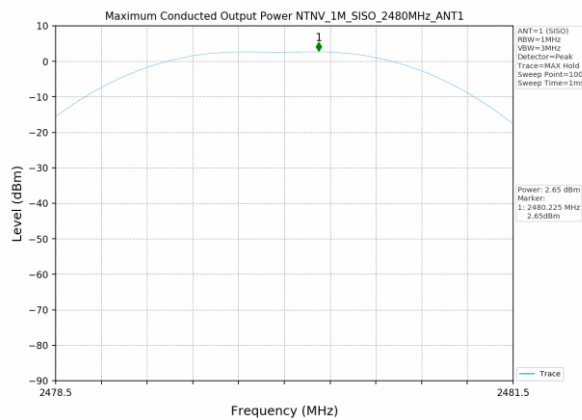

Highest channel

## 7.3 Channel Bandwidth & 99% Occupy Bandwidth

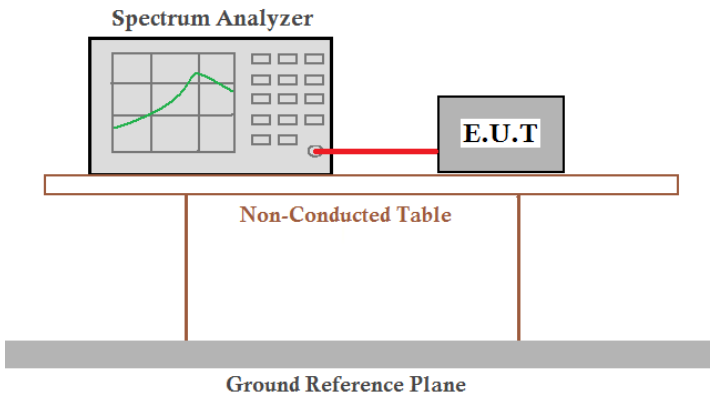Test Requirement:	FCC Part15 C Section 15.247 (a)(2) & RSS-247 Section 5.2(a)
Test Method:	ANSI C63.10:2013 and KDB558074 D01 DTS Meas Guidance v05r02 and RSS-Gen
Limit:	>500KHz
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected via a red cable to an E.U.T. (Equipment Under Test). Both are placed on a Non-Conducted Table. Below the table is a Ground Reference Plane.</p>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass


### Measurement Data

Test Mode	Frequency (MHz)	TX Type	ANT No.	6dB Bandwidth		Verdict
				Test Result (MHz)	Limits (MHz)	
1M	2402	SISO	1	0.682	≥0.5	PASS
	2440	SISO	1	0.687	≥0.5	PASS
	2480	SISO	1	0.679	≥0.5	PASS


Test Mode	Frequency (MHz)	TX Type	ANT No.	99% Occupied Bandwidth	
				Test Result (MHz)	Only for Report Use
1M	2402	SISO	1	1.023	Only for Report Use
	2440	SISO	1	1.033	Only for Report Use
	2480	SISO	1	1.031	Only for Report Use

Test plot as follows:



-6dB BW

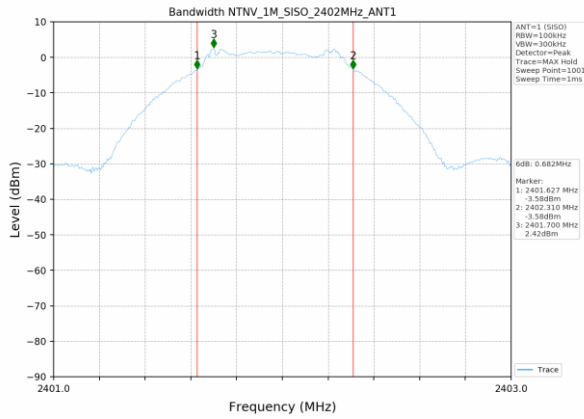



99% BW

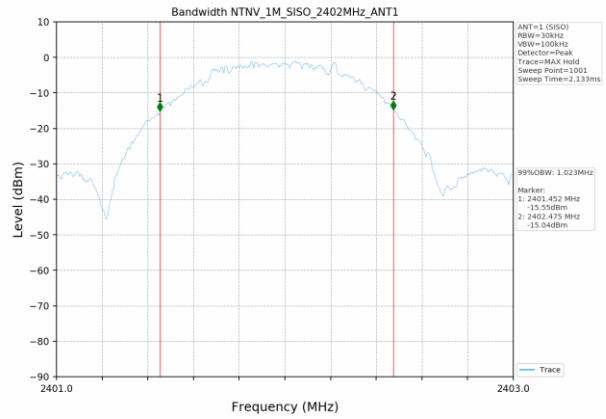

Lowest channel

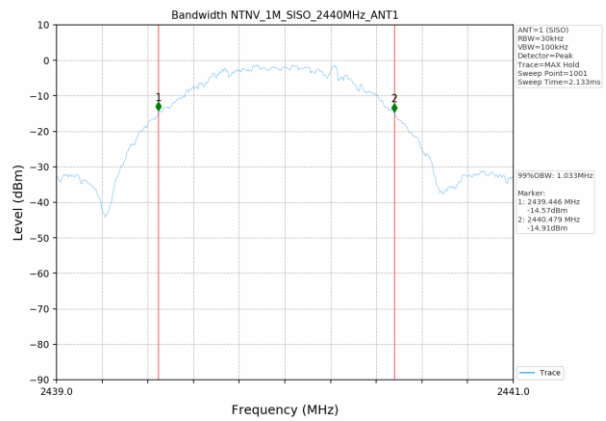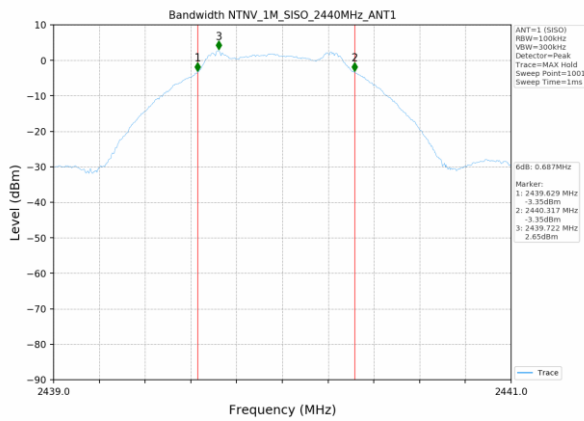


Middle channel

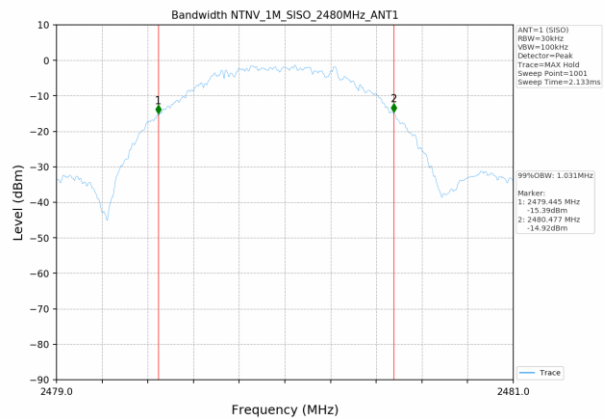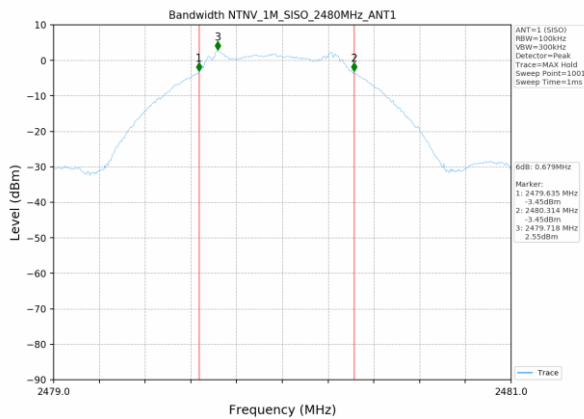

Highest channel


## 7.4 Power Spectral Density

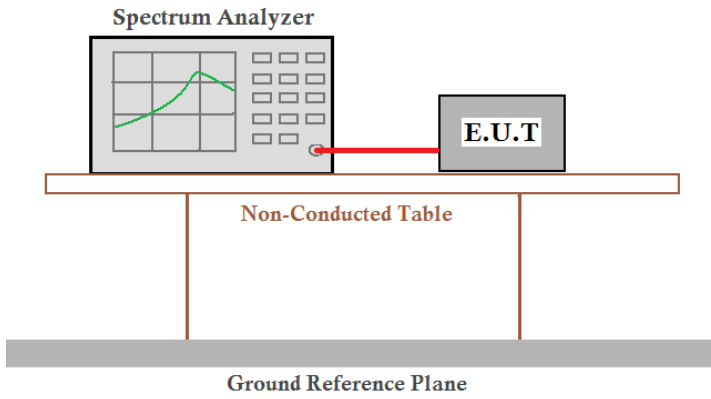Test Requirement:	FCC Part15 C Section 15.247 (e) RSS-247 Section 5.2(b)
Test Method:	ANSI C63.10:2013 and KDB558074 D01 DTS Meas Guidance v05r02 and RSS-Gen
Limit:	8dBm/3kHz
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both are placed on a Non-Conducted Table, which is supported by a Ground Reference Plane.</p>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass


## Measurement Data

Test Mode	Frequency (MHz)	Tx Type	Maximum Power Spectral Density (dBm/3KHz)	Limits (dBm/3kHz)	Verdict
			Ant 1		
1M	2402	SISO	-9.98	≤8	PASS
	2440	SISO	-9.88	≤8	PASS
	2480	SISO	-10.11	≤8	PASS


Test plot as follows:

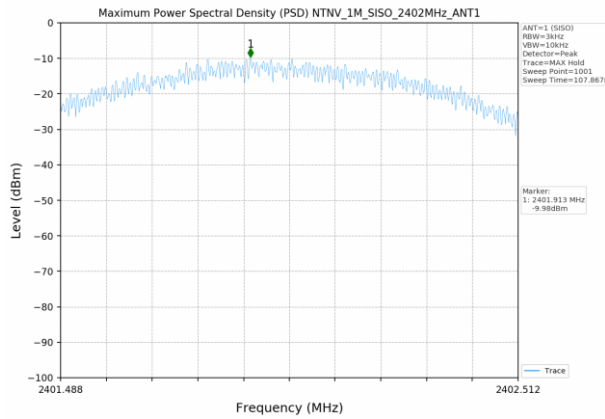

Lowest channel

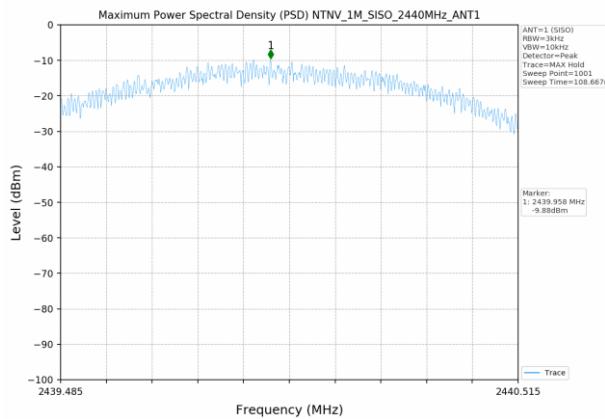

Middle channel

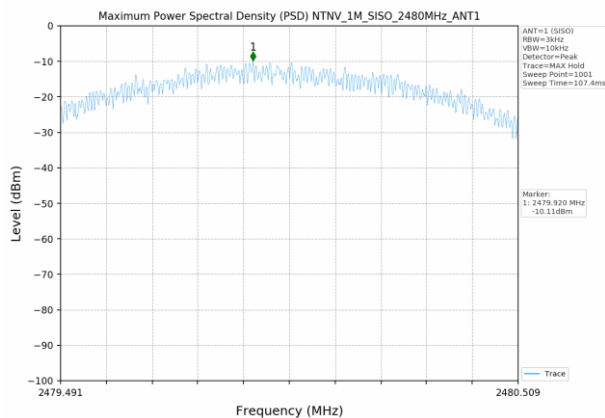


Highest channel



## 7.5 Spurious Emission in Non-restricted & restricted Bands




### 7.5.1 Conducted Emission Method



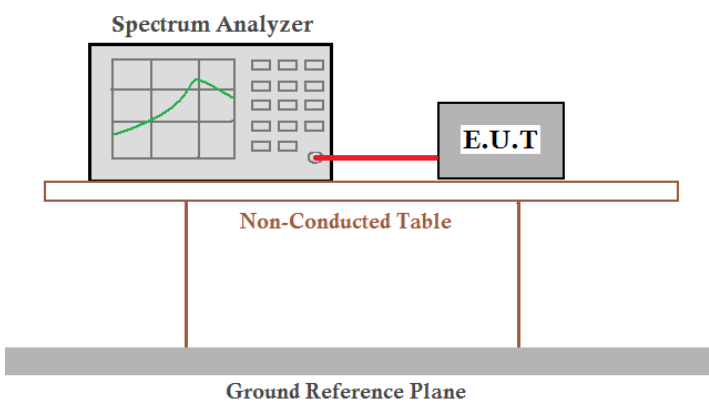
Test Requirement:	FCC Part15 C Section 15.247 (d) RSS-247 Section 5.5
Test Method:	ANSI C63.10:2013 and KDB558074 D01 DTS Meas Guidance v05r02 & RSS-Gen
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T. are placed on a Non-Conducted Table. The table is supported by two legs. Below the table is a Ground Reference Plane.</p>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

### Measurement Data

Test Mode	Frequency (MHz)	TX Type	ANT No.	Spurious Conducted Emission (dBm)	Limits (dBm)	Verdict
1M	2402	SISO	1	Refer to test graph	-17.25	PASS
	2440	SISO	1	Refer to test graph	-17.25	PASS
	2480	SISO	1	Refer to test graph	-17.25	PASS




Test plot as follows:

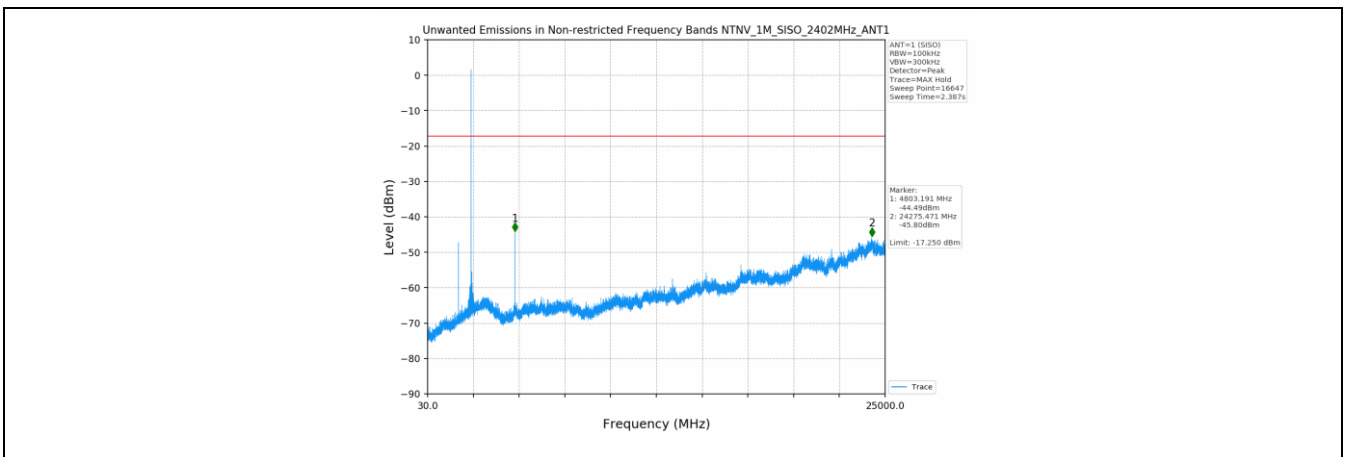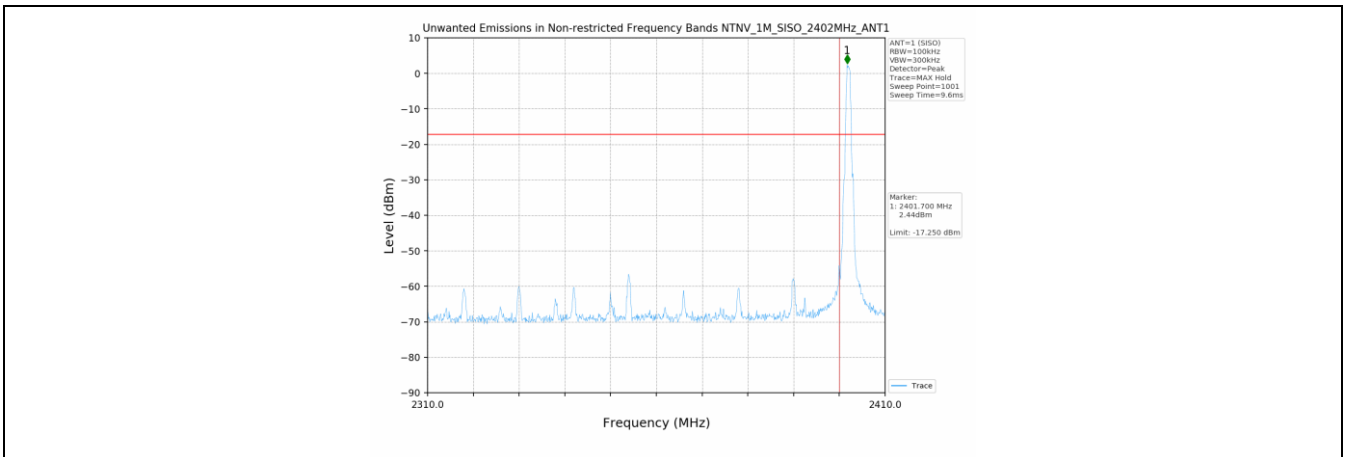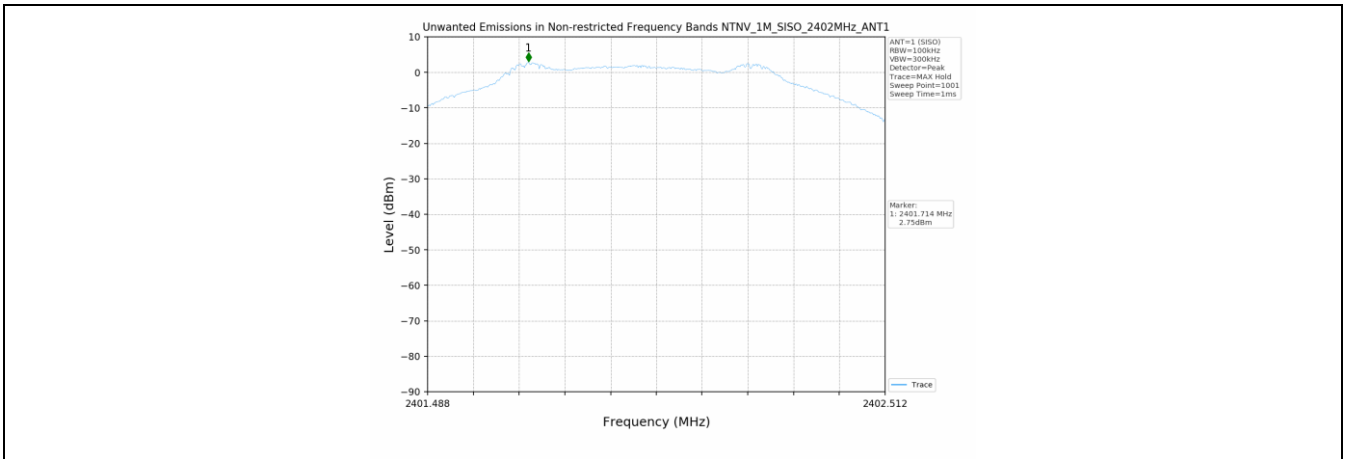

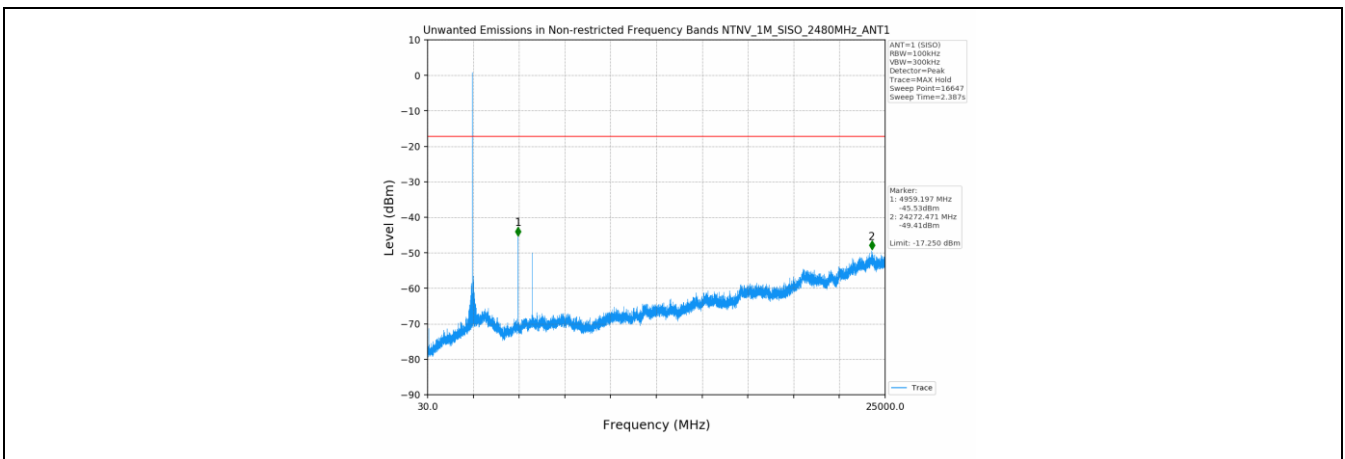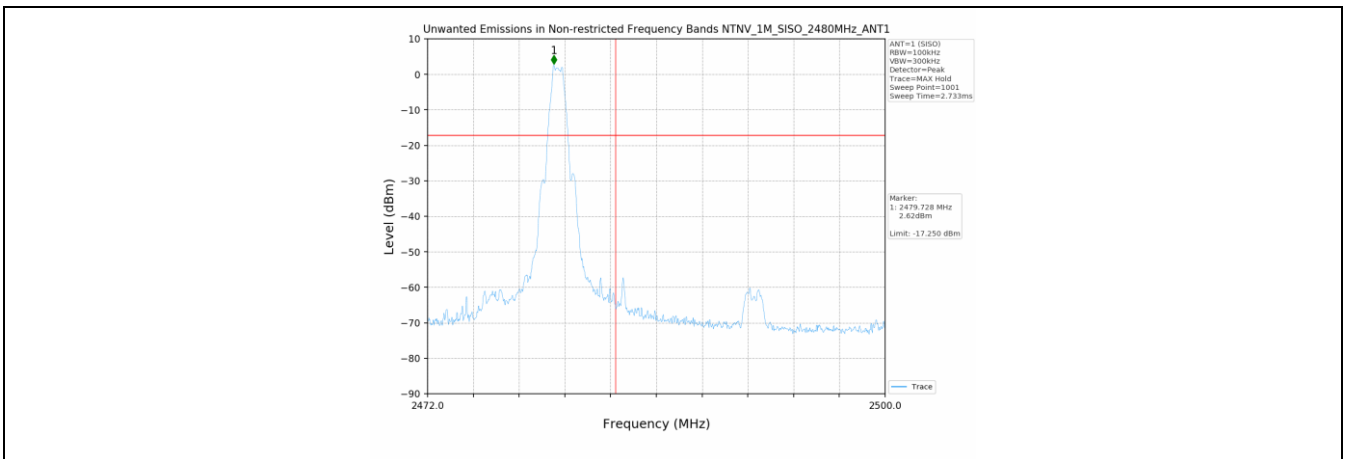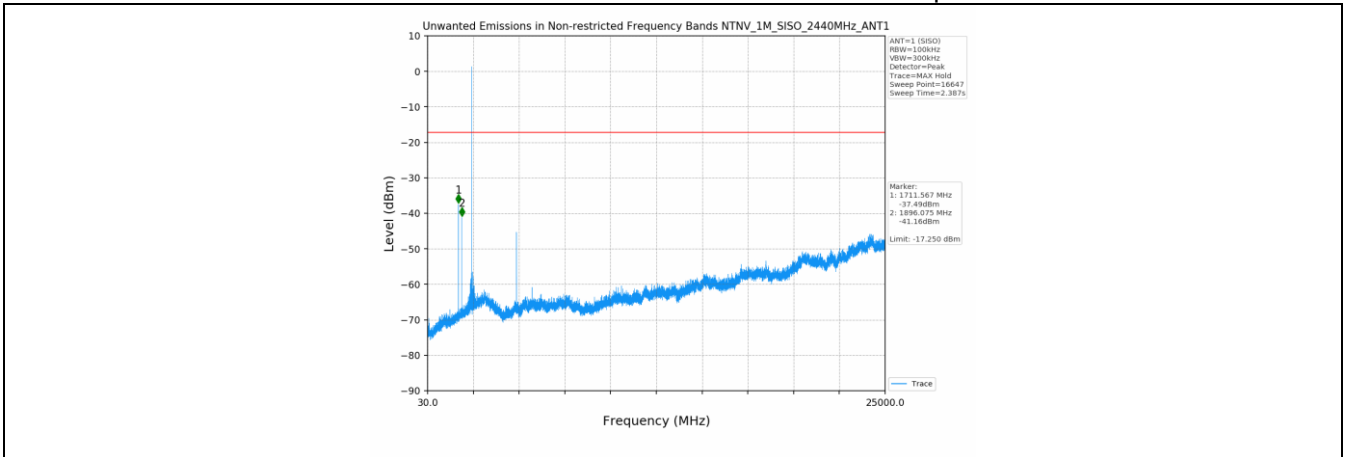

## 7.5.2 Radiated Emission Method

Test Requirement:	FCC Part15 C Section 15.209 RSS-247 Section 3.3 & RSS-Gen Section 8.9																												
Test Method:	ANSI C63.10:2013 & RSS-Gen																												
Test Frequency Range:	9kHz to 25GHz																												
Test site:	Measurement Distance: 3m																												
Receiver setup:	Frequency	Detector	RBW	VBW	Value																								
	9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak																								
	150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak																								
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak																								
	Above 1GHz	Peak	1MHz	3MHz	Peak																								
Peak		1MHz	10Hz	Average																									
FCC Limit:	<table border="1"> <thead> <tr> <th>Frequency (MHz)</th> <th>Field strength (microvolts/meter)</th> <th>Measurement distance (meters)</th> </tr> </thead> <tbody> <tr> <td>0.009-0.490</td> <td>2400/F(kHz)</td> <td>300</td> </tr> <tr> <td>0.490-1.705</td> <td>24000/F(kHz)</td> <td>30</td> </tr> <tr> <td>1.705-30.0</td> <td>30</td> <td>30</td> </tr> <tr> <td>30-88</td> <td>100**</td> <td>3</td> </tr> <tr> <td>88-216</td> <td>150**</td> <td>3</td> </tr> <tr> <td>216-960</td> <td>200**</td> <td>3</td> </tr> <tr> <td>Above 960</td> <td>500</td> <td>3</td> </tr> </tbody> </table> <p>The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.</p>					Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)	0.009-0.490	2400/F(kHz)	300	0.490-1.705	24000/F(kHz)	30	1.705-30.0	30	30	30-88	100**	3	88-216	150**	3	216-960	200**	3	Above 960	500	3
	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)																										
0.009-0.490	2400/F(kHz)	300																											
0.490-1.705	24000/F(kHz)	30																											
1.705-30.0	30	30																											
30-88	100**	3																											
88-216	150**	3																											
216-960	200**	3																											
Above 960	500	3																											
IC Limit:	<p><b>Table 5 – General field strength limits at frequencies above 30 MHz</b></p> <table border="1"> <thead> <tr> <th>Frequency (MHz)</th> <th>Field strength (µV/m at 3 m)</th> </tr> </thead> <tbody> <tr> <td>30 – 88</td> <td>100</td> </tr> <tr> <td>88 – 216</td> <td>150</td> </tr> <tr> <td>216 – 960</td> <td>200</td> </tr> <tr> <td>Above 960</td> <td>500</td> </tr> </tbody> </table> <p><b>Table 6 – General field strength limits at frequencies below 30 MHz</b></p> <table border="1"> <thead> <tr> <th>Frequency</th> <th>Magnetic field strength (H-Field) (µA/m)</th> <th>Measurement distance (m)</th> </tr> </thead> <tbody> <tr> <td>9 - 490 kHz<sup>1</sup></td> <td>6.37/F (F in kHz)</td> <td>300</td> </tr> <tr> <td>490 - 1705 kHz</td> <td>63.7/F (F in kHz)</td> <td>30</td> </tr> <tr> <td>1.705 - 30 MHz</td> <td>0.08</td> <td>30</td> </tr> </tbody> </table> <p><b>Note 1:</b> The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.</p>					Frequency (MHz)	Field strength (µV/m at 3 m)	30 – 88	100	88 – 216	150	216 – 960	200	Above 960	500	Frequency	Magnetic field strength (H-Field) (µA/m)	Measurement distance (m)	9 - 490 kHz <sup>1</sup>	6.37/F (F in kHz)	300	490 - 1705 kHz	63.7/F (F in kHz)	30	1.705 - 30 MHz	0.08	30		
Frequency (MHz)	Field strength (µV/m at 3 m)																												
30 – 88	100																												
88 – 216	150																												
216 – 960	200																												
Above 960	500																												
Frequency	Magnetic field strength (H-Field) (µA/m)	Measurement distance (m)																											
9 - 490 kHz <sup>1</sup>	6.37/F (F in kHz)	300																											
490 - 1705 kHz	63.7/F (F in kHz)	30																											
1.705 - 30 MHz	0.08	30																											
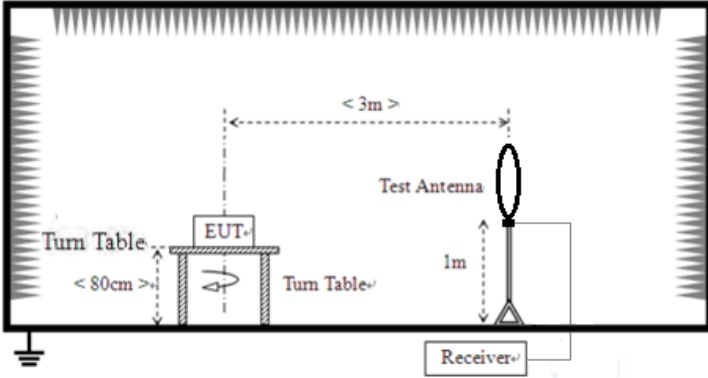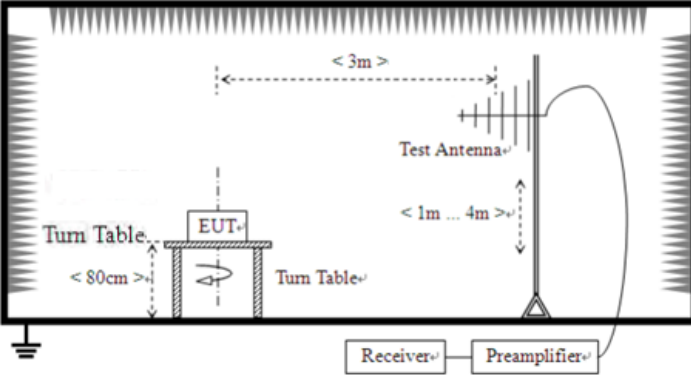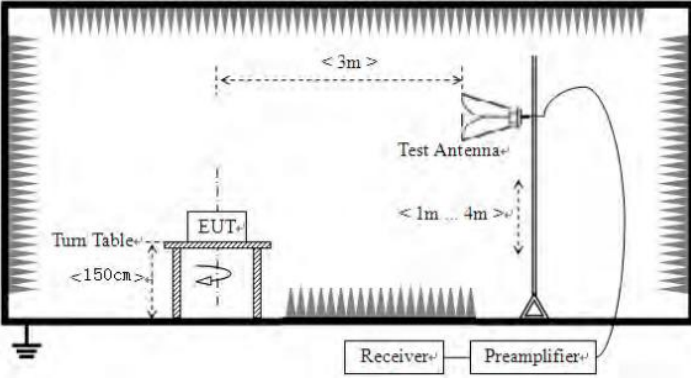
<p>Test setup:</p>	<p>For radiated emissions from 9kHz to 30MHz</p>  <p>For radiated emissions from 30MHz to 1GHz</p>  <p>For radiated emissions above 1GHz</p> 
<p>Test Procedure:</p>	<ol style="list-style-type: none"> <li>1. The EUT was placed on the top of a rotating table (0.8m for below 1G and 1.5m for above 1G) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li> </ol>

	<ol style="list-style-type: none"> <li>3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li> <li>4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.</li> <li>5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li> <li>6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</li> </ol>						
Test Instruments:	Refer to section 6.0 for details						
Test mode:	Refer to section 5.2 for details						
Test environment:	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 15%;">Temp.:</td> <td style="width: 20%;">25 °C</td> <td style="width: 15%;">Humid.:</td> <td style="width: 15%;">52%</td> <td style="width: 15%;">Press.:</td> <td style="width: 20%;">1012mbar</td> </tr> </table>	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar
Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar		
Test voltage:	AC 120V, 60Hz						
Test results:	Pass						

**Measurement data:**

Remark:

Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis which it is worse case.


■ **9kHz~30MHz**

The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.

■ **Below 1GHz**


Pre-scan all test modes, found worst case at 2440MHz, and so only show the test result of 2440MHz

Horizontal:

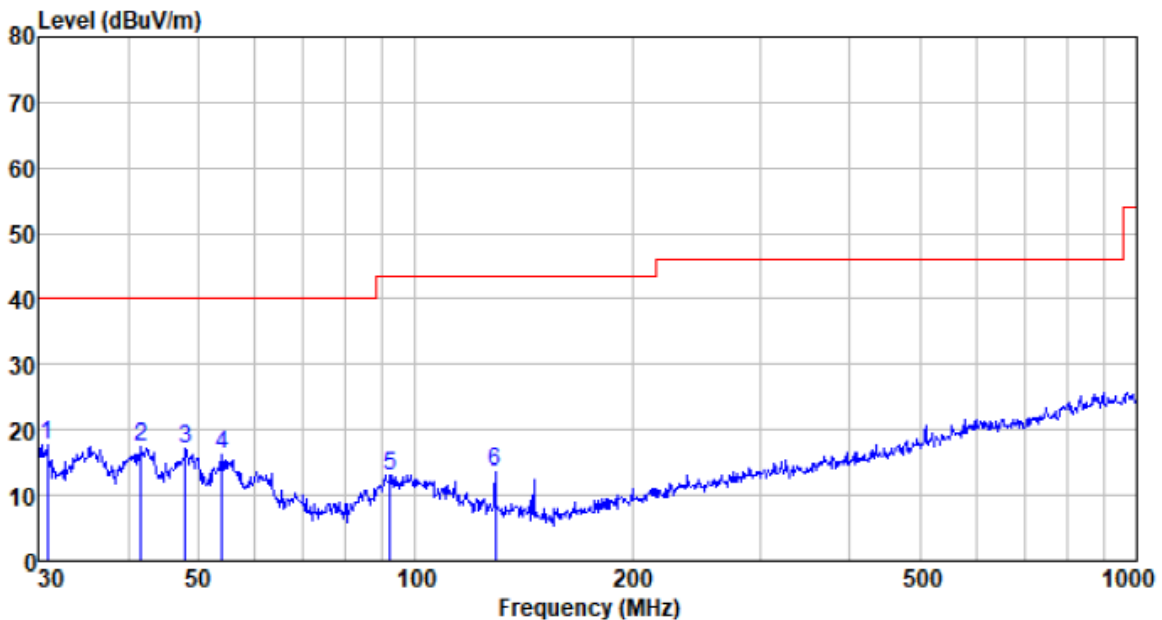

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
30.853	40.97	11.22	0.56	35.06	17.69	40.00	-22.31	QP
41.713	40.31	12.22	0.68	35.76	17.45	40.00	-22.55	QP
47.994	40.11	12.28	0.75	36.09	17.05	40.00	-22.95	QP
53.882	39.67	11.90	0.81	36.24	16.14	40.00	-23.86	QP
92.139	37.61	11.04	1.13	36.66	13.12	43.50	-30.38	QP
129.015	40.81	8.28	1.43	36.94	13.58	43.50	-29.92	QP

Vertical:

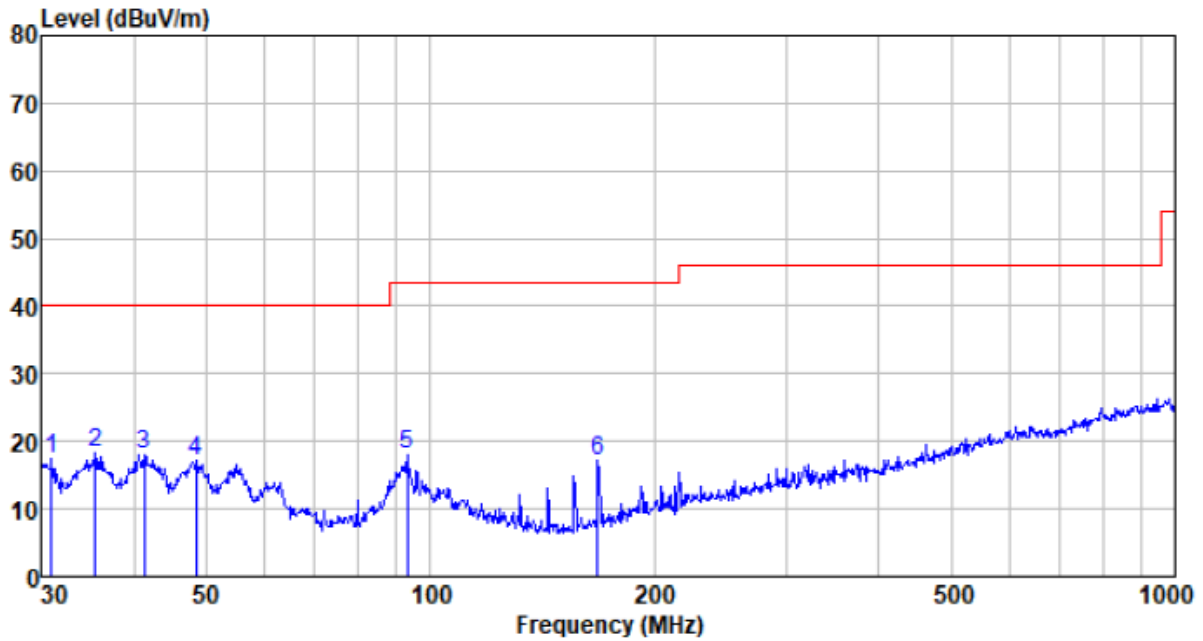


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
30.962	40.63	11.22	0.56	35.07	17.34	40.00	-22.66	QP
35.499	41.54	11.42	0.61	35.39	18.18	40.00	-21.82	QP
41.277	40.93	12.21	0.68	35.74	18.08	40.00	-21.92	QP
48.502	40.14	12.29	0.76	36.11	17.08	40.00	-22.92	QP
93.113	42.43	11.18	1.14	36.66	18.09	43.50	-25.41	QP
167.824	44.11	8.46	1.67	37.18	17.06	43.50	-26.44	QP



- Above 1GHz
- Unwanted Emissions in Restricted Frequency Bands


Test channel:	Lowest channel
---------------	----------------

Horizontal:

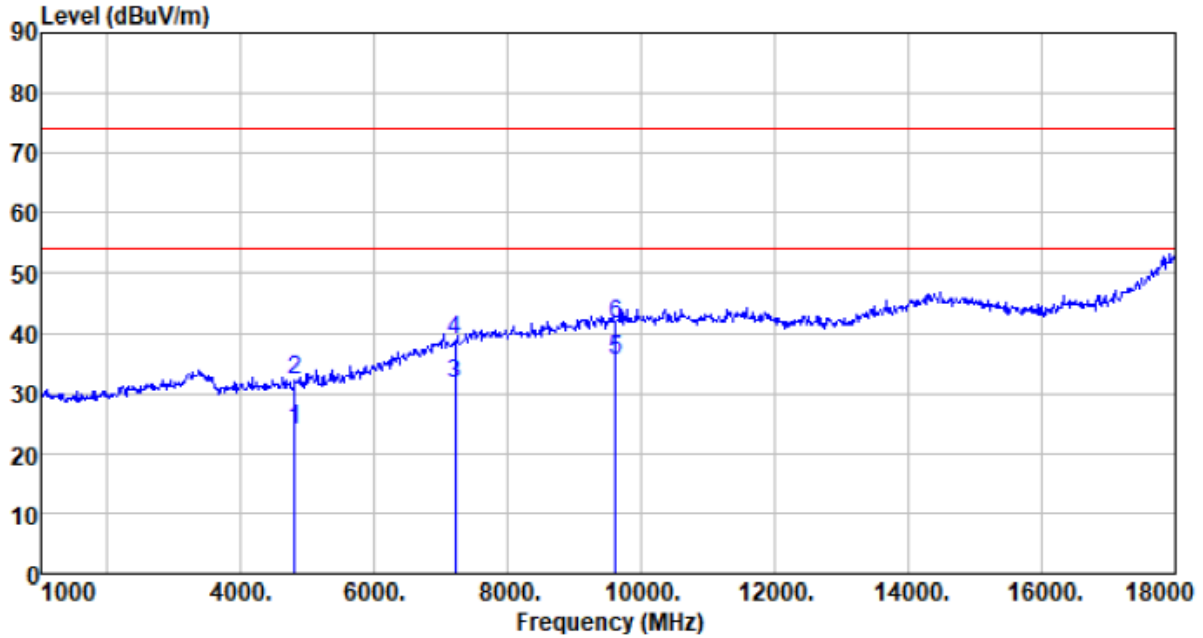

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
4804.000	25.73	31.20	4.61	37.73	23.81	54.00	-30.19	Average
4804.000	34.17	31.20	4.61	37.73	32.25	74.00	-41.75	Peak
7206.000	24.45	36.16	6.48	35.63	31.46	54.00	-22.54	Average
7206.000	31.84	36.16	6.48	35.63	38.85	74.00	-35.15	Peak
9608.000	24.73	37.93	7.97	34.94	35.69	54.00	-18.31	Average
9608.000	30.63	37.93	7.97	34.94	41.59	74.00	-32.41	Peak


Vertical:

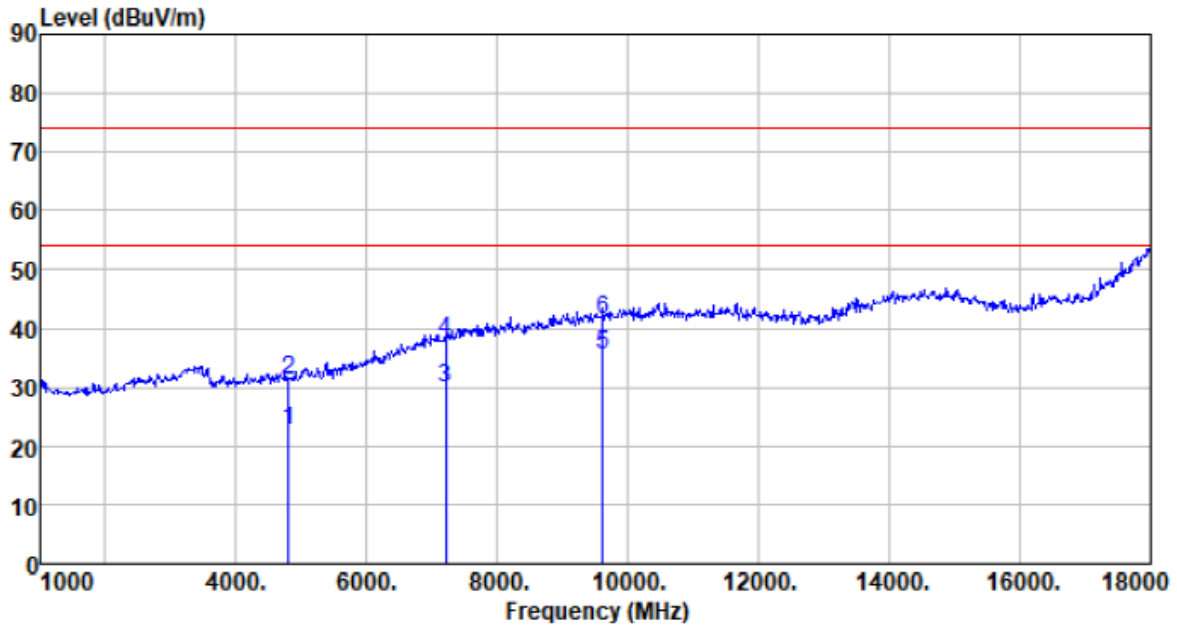

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
4804.000	24.65	31.20	4.61	37.73	22.73	54.00	-31.27	Average
4804.000	33.24	31.20	4.61	37.73	31.32	74.00	-42.68	Peak
7206.000	22.89	36.16	6.48	35.63	29.90	54.00	-24.10	Average
7206.000	30.72	36.16	6.48	35.63	37.73	74.00	-36.27	Peak
9608.000	24.73	37.93	7.97	34.94	35.69	54.00	-18.31	Average
9608.000	30.63	37.93	7.97	34.94	41.59	74.00	-32.41	Peak


Test channel:	Middle channel
---------------	----------------

Horizontal:

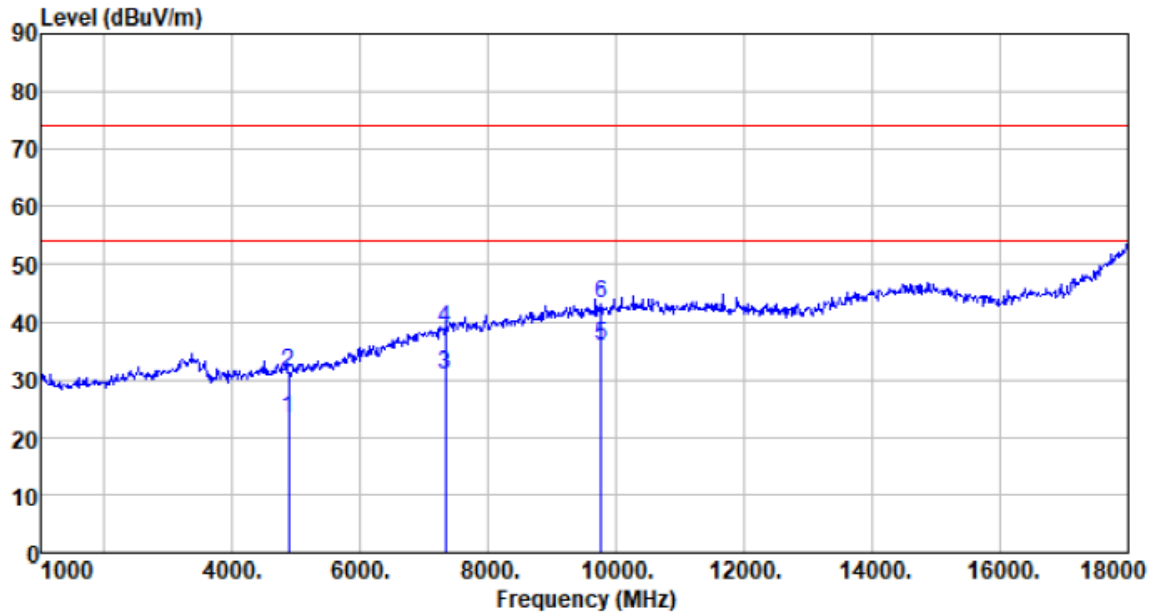

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamplifier factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
4880.000	24.87	31.31	4.69	37.75	23.12	54.00	-30.88	Average
4880.000	32.98	31.31	4.69	37.75	31.23	74.00	-42.77	Peak
7320.000	23.27	36.43	6.63	35.60	30.73	54.00	-23.27	Average
7320.000	31.56	36.43	6.63	35.60	39.02	74.00	-34.98	Peak
9760.000	24.83	38.10	8.03	35.03	35.93	54.00	-18.07	Average
9760.000	31.95	38.10	8.03	35.03	43.05	74.00	-30.95	Peak


Vertical:

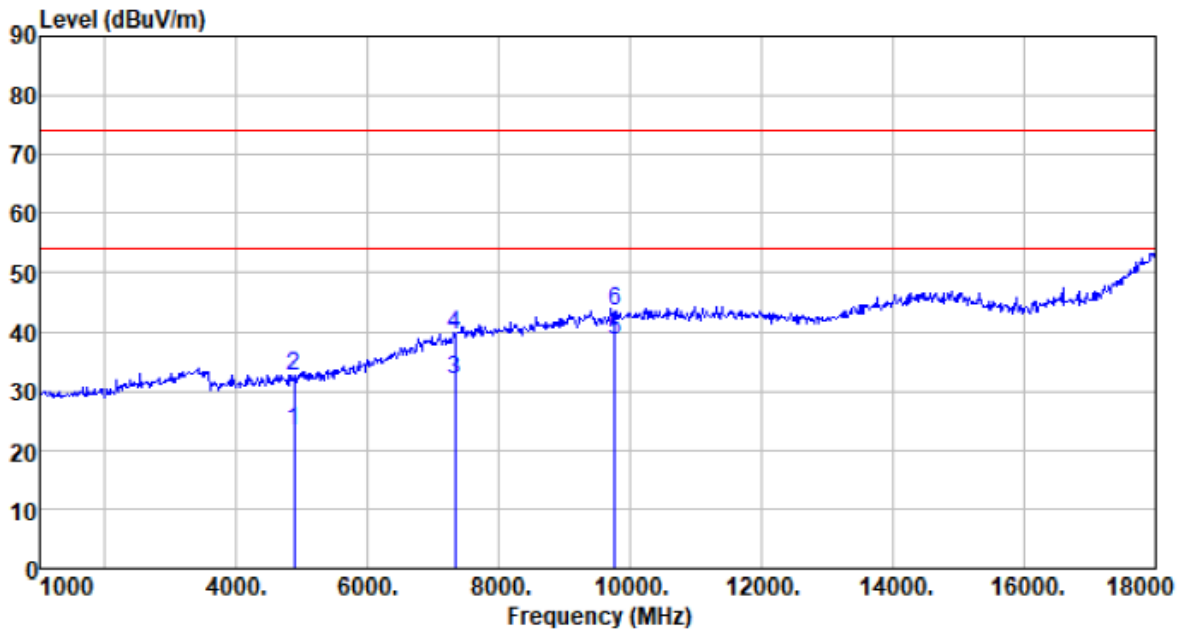

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
4880.000	25.15	31.31	4.69	37.75	23.40	54.00	-30.60	Average
4880.000	34.35	31.31	4.69	37.75	32.60	74.00	-41.40	Peak
7320.000	24.50	36.43	6.63	35.60	31.96	54.00	-22.04	Average
7320.000	31.93	36.43	6.63	35.60	39.39	74.00	-34.61	Peak
9760.000	27.44	38.10	8.03	35.03	38.54	54.00	-15.46	Average
9760.000	32.30	38.10	8.03	35.03	43.40	74.00	-30.60	Peak


Test channel:	Highest channel
---------------	-----------------

Horizontal:

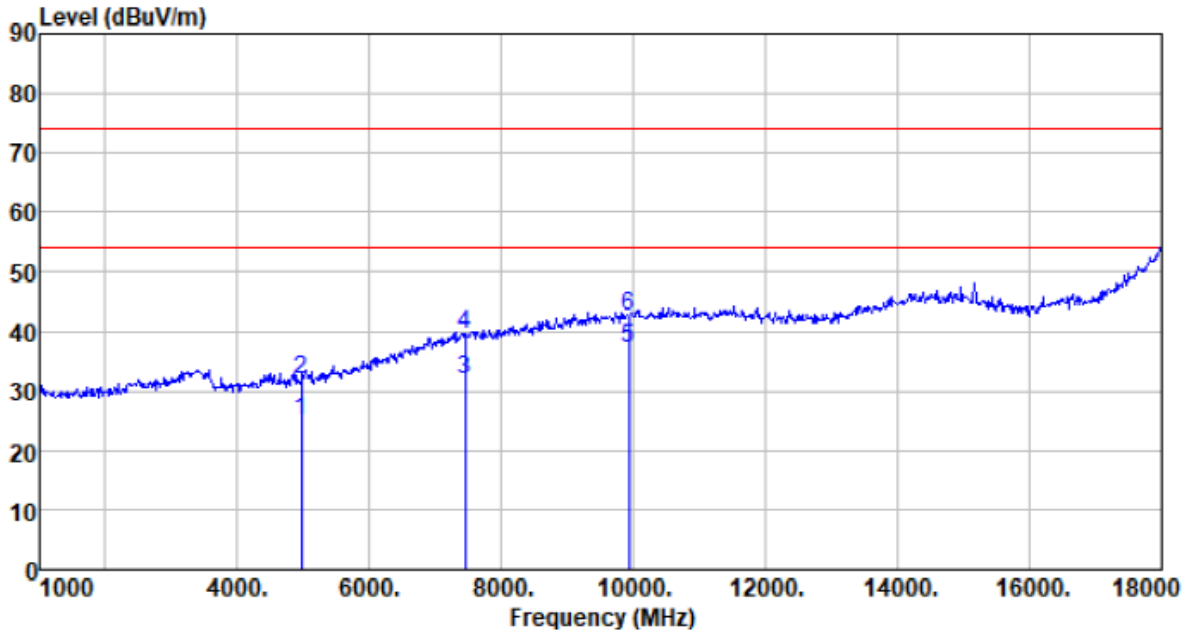

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
4960.000	26.42	31.44	4.79	37.78	24.87	54.00	-29.13	Average
4960.000	33.54	31.44	4.79	37.78	31.99	74.00	-42.01	Peak
7440.000	24.13	36.66	6.77	35.56	32.00	54.00	-22.00	Average
7440.000	31.66	36.66	6.77	35.56	39.53	74.00	-34.47	Peak
9920.000	25.90	38.30	8.09	35.14	37.15	54.00	-16.85	Average
9920.000	31.18	38.30	8.09	35.14	42.43	74.00	-31.57	Peak

Vertical:

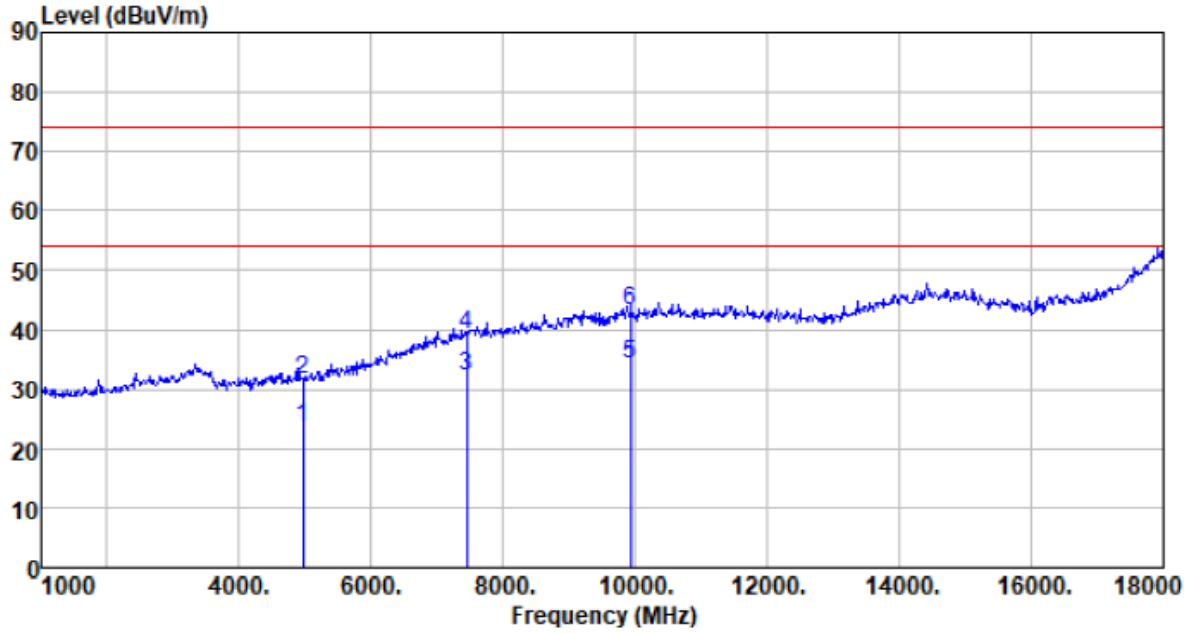

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
4960.000	25.25	31.44	4.79	37.78	23.70	54.00	-30.30	Average
4960.000	33.26	31.44	4.79	37.78	31.71	74.00	-42.29	Peak
7440.000	24.47	36.66	6.77	35.56	32.34	54.00	-21.66	Average
7440.000	31.34	36.66	6.77	35.56	39.21	74.00	-34.79	Peak
9920.000	22.89	38.30	8.09	35.14	34.14	54.00	-19.86	Average
9920.000	31.78	38.30	8.09	35.14	43.03	74.00	-30.97	Peak


Remarks:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor
2. “\*”, means this data is too weak instrument of signal is unable to test.
3. The emission levels of other frequencies are very lower than the limit and not show in test report.

■ Unwanted Emissions in Non-restricted Frequency Bands


Test channel:	Lowest channel
---------------	----------------

Horizontal:

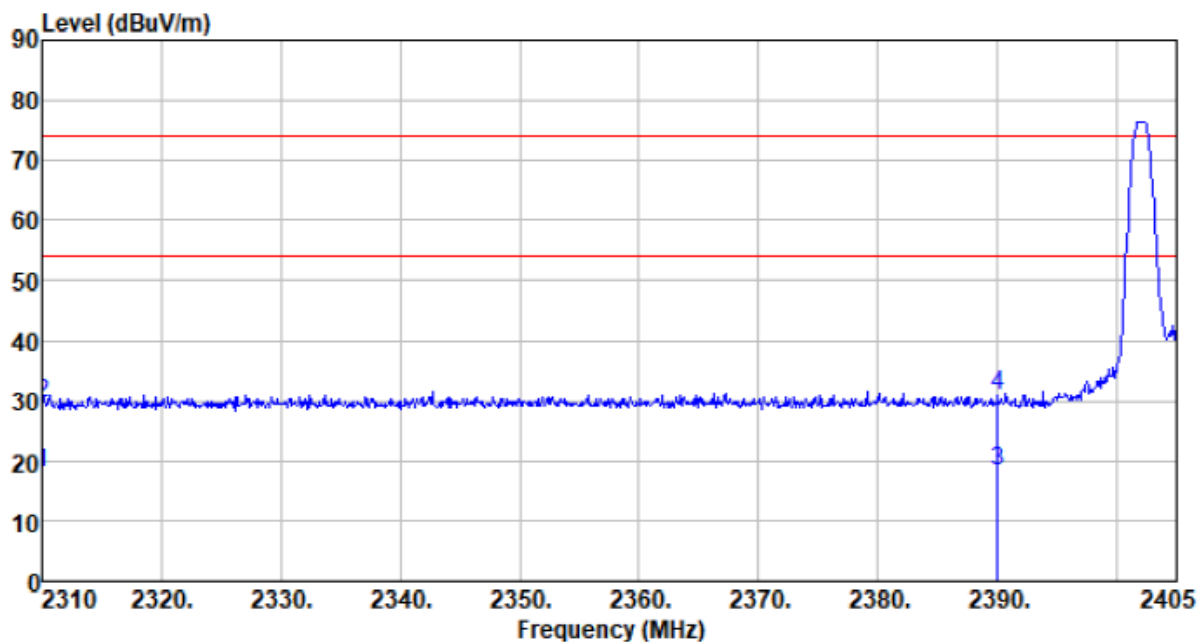

Freq MHz	Reading level dBUV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBUV/m	Limit level dBUV/m	Over limit dB	Remark
2310.000	24.83	27.14	2.81	36.79	17.99	54.00	-36.01	Average
2310.000	36.45	27.14	2.81	36.79	29.61	74.00	-44.39	Peak
2390.000	24.96	27.37	2.91	36.85	18.39	54.00	-35.61	Average
2390.000	37.53	27.37	2.91	36.85	30.96	74.00	-43.04	Peak

Vertical:

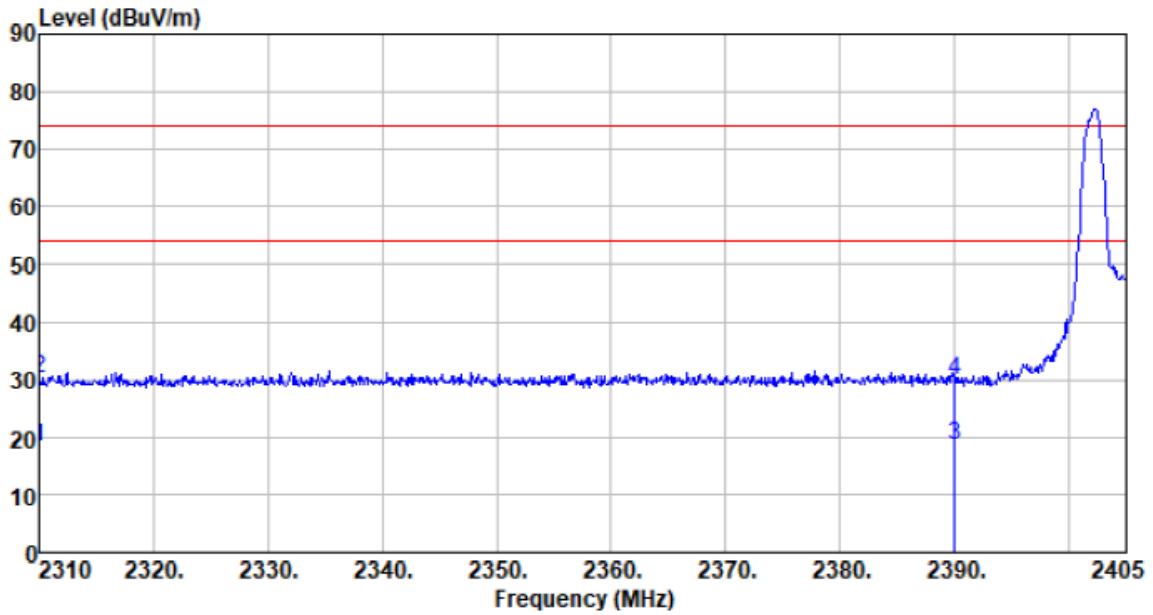


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2310.000	24.96	27.14	2.81	36.79	18.12	54.00	-35.88	Average
2310.000	36.94	27.14	2.81	36.79	30.10	74.00	-43.90	Peak
2390.000	25.09	27.37	2.91	36.85	18.52	54.00	-35.48	Average
2390.000	36.54	27.37	2.91	36.85	29.97	74.00	-44.03	Peak




Test channel:	Highest channel
---------------	-----------------

Horizontal:

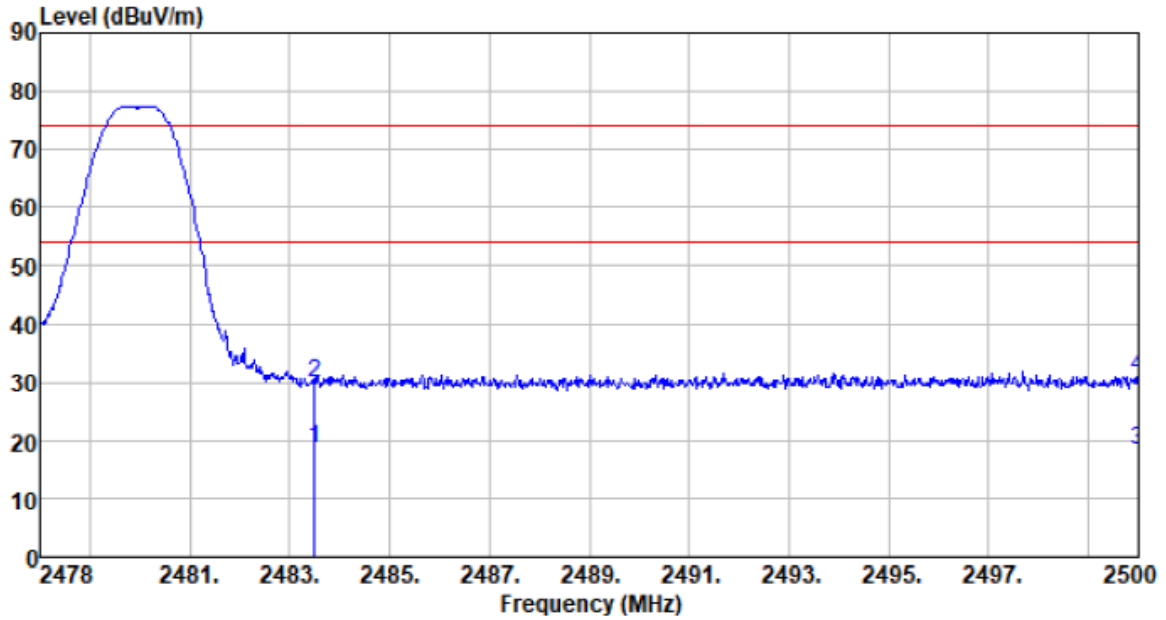

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2483.500	24.74	27.66	2.99	36.93	18.46	54.00	-35.54	Average
2483.500	36.14	27.66	2.99	36.93	29.86	74.00	-44.14	Peak
2500.000	24.41	27.70	3.01	36.94	18.18	54.00	-35.82	Average
2500.000	37.26	27.70	3.01	36.94	31.03	74.00	-42.97	Peak

Vertical:

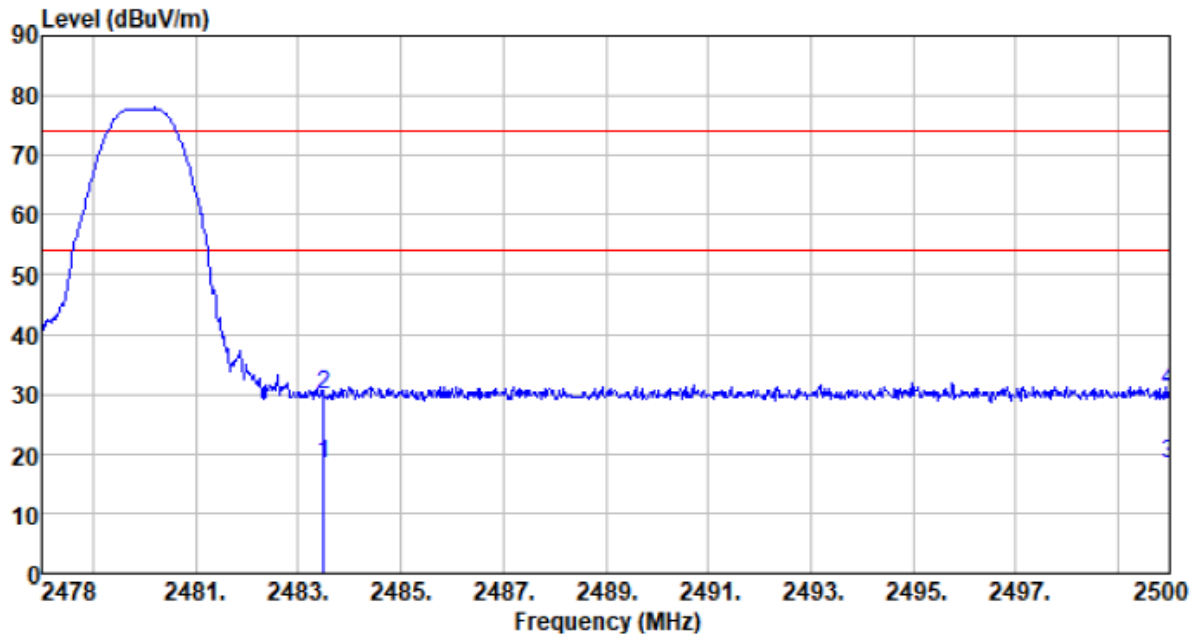


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2483.500	24.64	27.66	2.99	36.93	18.36	54.00	-35.64	Average
2483.500	36.18	27.66	2.99	36.93	29.90	74.00	-44.10	Peak
2500.000	24.65	27.70	3.01	36.94	18.42	54.00	-35.58	Average
2500.000	36.80	27.70	3.01	36.94	30.57	74.00	-43.43	Peak

**Remarks:**

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. The pre-test were performed on lowest, middle and highest frequencies, only the worst case's (lowest and highest frequencies) data was showed.

## 7.6 Frequency Stability

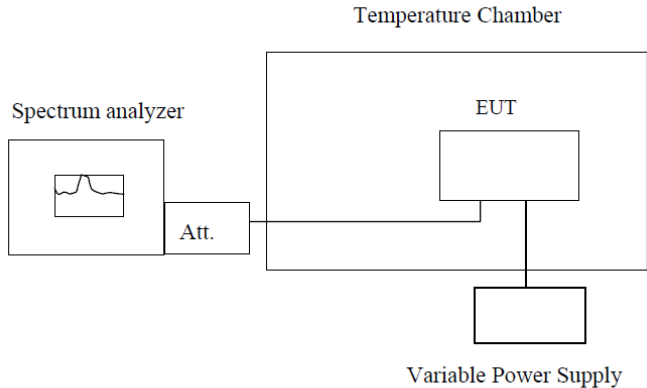Test Requirement:	RSS-Gen Section 6.11& Section 8.11
Test Method:	ANSI C63.10: 2013 & RSS-Gen
Limit:	Manufactures of devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified
Test Procedure:	The EUT was setup to ANSI C63.10, 2013; tested to 2.1055 for compliance to RSS-Gen requirements.
Test setup:	 <p style="text-align: center;"><b>Note :</b> Measurement setup for testing on Antenna connector</p>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Remark: Set the EUT transmits at un-modulation mode to test frequency stability.

**Measurement data:**

<b>Frequency stability versus Temp.</b>						
<b>Power Supply: DC 3V</b>						
Temp. (°C)	Operating Frequency (MHz)	0 minute Measured Frequency (MHz)	2 minute Measured Frequency (MHz)	5 minute Measured Frequency (MHz)	10 minute Measured Frequency (MHz)	Pass /Fail
-30	2402	2402.34	2402.31	2402.34	2402.70	Pass
	2440	2440.49	2440.25	2440.24	2440.54	Pass
	2480	2480.88	2480.70	2480.00	2480.75	Pass
-20	2402	2402.49	2402.24	2402.55	2402.88	Pass
	2440	2440.97	2440.69	2440.16	2440.45	Pass
	2480	2480.04	2480.50	2480.47	2480.52	Pass
-10	2402	2402.65	2402.25	2402.89	2402.29	Pass
	2440	2440.07	2440.93	2440.41	2440.87	Pass
	2480	2480.74	2480.74	2480.31	2480.21	Pass
0	2402	2402.02	2402.44	2402.75	2402.74	Pass
	2440	2440.95	2440.91	2440.83	2440.55	Pass
	2480	2480.22	2480.85	2480.98	2480.51	Pass
10	2402	2402.89	2402.71	2402.75	2402.96	Pass
	2440	2440.43	2440.27	2440.87	2440.67	Pass
	2480	2480.42	2480.09	2480.06	2480.45	Pass
20	2402	2402.98	2402.70	2402.31	2402.18	Pass
	2440	2440.39	2440.27	2440.11	2440.32	Pass
	2480	2480.33	2480.67	2480.86	2480.91	Pass
30	2402	2402.05	2402.98	2402.31	2402.24	Pass
	2440	2440.07	2440.53	2440.91	2440.40	Pass
	2480	2480.79	2480.80	2480.39	2480.54	Pass
40	2402	2402.30	2402.26	2402.33	2402.27	Pass
	2440	2440.23	2440.51	2440.26	2440.77	Pass
	2480	2480.38	2480.65	2480.62	2480.28	Pass
50	2402	2402.41	2402.19	2402.07	2402.75	Pass
	2440	2440.63	2440.13	2440.50	2440.99	Pass
	2480	2480.96	2480.42	2480.70	2480.17	Pass
<b>Frequency stability versus Voltage</b>						
<b>Temperature: 25°C</b>						
Power Supply (VDC)	Operating Frequency (MHz)	0 minute Measured Frequency (MHz)	2 minute Measured Frequency (MHz)	5 minute Measured Frequency (MHz)	10 minute Measured Frequency (MHz)	Pass /Fail
3.3	2402	2402.51	2402.94	2402.27	2402.23	Pass
	2440	2440.42	2440.47	2440.63	2440.85	Pass
	2480	2480.71	2480.02	2480.33	2480.55	Pass
2.7	2402	2402.21	2402.17	2402.81	2402.73	Pass
	2440	2440.05	2440.61	2440.64	2440.48	Pass
	2480	2480.30	2480.04	2480.88	2480.61	Pass

## 8 Test Setup Photo

Reference to the **appendix I** for details.

## 9 EUT Constructional Details

Reference to the **appendix II** for details.

-----End-----