

# FCC REPORT

**Applicant:** Shenzhen Sunricher Technology Limited

**Address of Applicant:** 3rd Floor,B building,Jia'an Industrial Building, Liu Xian Third road,No.72 area, Xin'an Street, Baoan District, Shenzhen, China

**Manufacturer/Factory:** Shenzhen Sunricher Technology Limited

**Address of Manufacturer/Factory:** 3rd Floor,B building,Jia'an Industrial Building, Liu Xian Third road,No.72 area, Xin'an Street, Baoan District, Shenzhen, China

## Equipment Under Test (EUT)

**Product Name:** LED Driver

**Model No.:** SRPF-ZG9105-75CCT, SRPF-ZG9105-50CC,

SRPF-ZG9105-75CC, SRP-ZG9105-50CCT,

SRP-ZG9105-75CCT, SRP-ZG9105-50CC,

SRP-ZG9105-75CC, SRPL-ZG9105-50CC,

SRPL-ZG9105-50CCT, SRPF-ZG9105-24-50CVT,

SRPL-ZG9105-24-75CVT, SRP-ZG9105-24-96CVF,

SRPF-ZG9105-50CCT

**Trade mark:**



**FCC ID:** 2AHST-SRPFZG9105

**Applicable standards:** FCC CFR Title 47 Part 15 Subpart C Section 15.247

**Date of sample receipt:** October 29, 2018

**Date of Test:** October 29, 2018-November 02, 2018

**Date of report issued:** November 02, 2018

**Test Result :** PASS \*

\* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:

Robinson Lo

**Laboratory Manager**

This results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

## 2 Version

Version No.	Date	Description
00	November 02, 2018	Original

**Prepared By:**



**Date:**

November 02, 2018

**Project Engineer**

**Check By:**



**Date:**

November 02, 2018

**Reviewer**

### 3 Contents

	Page
1 COVER PAGE .....	1
2 VERSION .....	2
3 CONTENTS .....	3
4 TEST SUMMARY .....	4
4.1 MEASUREMENT UNCERTAINTY .....	4
5 GENERAL INFORMATION .....	5
5.1 GENERAL DESCRIPTION OF EUT .....	5
5.2 TEST MODE .....	7
5.3 DESCRIPTION OF SUPPORT UNITS .....	7
5.4 TEST FACILITY .....	7
5.5 TEST LOCATION .....	7
6 TEST INSTRUMENTS LIST .....	8
7 TEST RESULTS AND MEASUREMENT DATA .....	10
7.1 ANTENNA REQUIREMENT .....	10
7.2 CONDUCTED EMISSIONS .....	11
7.3 CONDUCTED PEAK OUTPUT POWER .....	14
7.4 CHANNEL BANDWIDTH .....	16
7.5 POWER SPECTRAL DENSITY .....	18
7.6 BAND EDGES .....	20
7.6.1 Conducted Emission Method .....	20
7.6.2 Radiated Emission Method .....	22
7.7 SPURIOUS EMISSION .....	25
7.7.1 Conducted Emission Method .....	25
7.7.2 Radiated Emission Method .....	27
8 TEST SETUP PHOTO .....	35
9 EUT CONSTRUCTIONAL DETAILS .....	37

## 4 Test Summary

Test Item	Section in CFR 47	Result
Antenna requirement	15.203/15.247 (c)	Pass
AC Power Line Conducted Emission	15.207	Pass
Conducted Peak Output Power	15.247 (b)(3)	Pass
Channel Bandwidth	15.247 (a)(2)	Pass
Power Spectral Density	15.247 (e)	Pass
Band Edge	15.247(d)	Pass
Spurious Emission	15.205/15.209	Pass

Pass: The EUT complies with the essential requirements in the standard.

Remark : Test according to ANSI C63.4:2014 and ANSI C63.10:2013

N/A means not applicable.

### 4.1 Measurement Uncertainty

Test Item	Frequency Range	Measurement Uncertainty	Notes
Radiated Emission	9kHz ~ 30MHz	± 4.34dB	(1)
Radiated Emission	30MHz ~ 1000MHz	± 4.24dB	(1)
Radiated Emission	1GHz ~ 26.5GHz	± 4.68dB	(1)
AC Power Line Conducted Emission	0.15MHz ~ 30MHz	± 3.45dB	(1)

Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

## 5 General Information

### 5.1 General Description of EUT

Product Name:	LED Driver
Model No.:	SRPF-ZG9105-75CCT, SRPF-ZG9105-50CC, SRPF-ZG9105-75CC, SRP-ZG9105-50CCT, SRP-ZG9105-75CCT, SRP-ZG9105-50CC, SRP-ZG9105-75CC, SRPL-ZG9105-50CC, SRPL-ZG9105-50CCT, SRPF-ZG9105-24-50CVT, SRPL-ZG9105-24-75CVT, SRP-ZG9105-24-96CVF, SRPF-ZG9105-50CCT
Test Model No:	SRPF-ZG9105-50CCT

*Remark: All above models are identical in the same PCB layout, interior structure and electrical circuits.*

*The difference is model name for commercial purpose.*

Serial No.:	000001
Test sample(s) ID:	GTS201810000141-1
Sample(s) Status	Engineer sample
Operation Frequency:	2405MHz~2480MHz
Channel numbers:	16
Channel separation:	5MHz
Modulation type:	O-QPSK
Antenna Type:	Integral Antenna
Antenna gain:	0dBi(declare by Applicant)
Power supply:	Input: AC 100-277V, 0.23-0.6A, 50/60Hz Output: DC6-48V 0.25-1.5A

<b>Operation Frequency each of channel</b>							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2405MHz	5	2425MHz	9	2445MHz	13	2465MHz
2	2410MHz	6	2430MHz	10	2450MHz	14	2470MHz
3	2415MHz	7	2435MHz	11	2455MHz	15	2475MHz
4	2420MHz	8	2440MHz	12	2460MHz	16	2480 MHz

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The lowest channel	2405MHz
The middle channel	2440MHz
The Highest channel	2480MHz

## 5.2 Test mode

Transmitting mode	Keep the EUT in continuously transmitting mode.
<p><i>Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data. Antenna position have been test X,Y,Z polarity, only worse case is reported</i></p>	

## 5.3 Description of Support Units

None
------

## 5.4 Test Facility

<p>The test facility is recognized, certified, or accredited by the following organizations:</p> <ul style="list-style-type: none"><li>• <b>FCC —Registration No.: 381383</b> Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 381383, January 08, 2018</li><li>• <b>Industry Canada (IC) —Registration No.: 9079A-2</b> The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A-2, August 15, 2016.</li></ul>
--

## 5.5 Test Location

<p>All tests were performed at:</p> <p>Global United Technology Services Co., Ltd. Address: No. 301-309, 3/F., Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, Guangdong, China Tel: 0755-27798480 Fax: 0755-27798960</p>
---

## 6 Test Instruments list

Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	July. 03 2015	July. 02 2020
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	June. 27 2018	June. 26 2019
4	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	GTS214	June. 27 2018	June. 26 2019
5	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120 D	GTS208	June. 27 2018	June. 26 2019
6	Horn Antenna	ETS-LINDGREN	3160	GTS217	June. 27 2018	June. 26 2019
7	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
8	Coaxial Cable	GTS	N/A	GTS213	June. 27 2018	June. 26 2019
9	Coaxial Cable	GTS	N/A	GTS211	June. 27 2018	June. 26 2019
10	Coaxial cable	GTS	N/A	GTS210	June. 27 2018	June. 26 2019
11	Coaxial Cable	GTS	N/A	GTS212	June. 27 2018	June. 26 2019
12	Amplifier(100kHz-3GHz)	HP	8347A	GTS204	June. 27 2018	June. 26 2019
13	Amplifier(2GHz-20GHz)	HP	84722A	GTS206	June. 27 2018	June. 26 2019
14	Amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	June. 27 2018	June. 26 2019
15	Band filter	Amindeon	82346	GTS219	June. 27 2018	June. 26 2019
16	Power Meter	Anritsu	ML2495A	GTS540	June. 27 2018	June. 26 2019
17	Power Sensor	Anritsu	MA2411B	GTS541	June. 27 2018	June. 26 2019
18	Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	GTS575	June. 27 2018	June. 26 2019
19	Splitter	Agilent	11636B	GTS237	June. 27 2018	June. 26 2019
20	Loop Antenna	ZHINAN	ZN30900A	GTS534	June. 27 2018	June. 26 2019

Conducted Emission						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Shielding Room	ZhongYu Electron	7.3(L)x3.1(W)x2.9(H)	GTS252	May. 16 2014	May. 15 2019
2	EMI Test Receiver	R&S	ESCI 7	GTS552	June. 27 2018	June. 26 2019
3	Coaxial Switch	ANRITSU CORP	MP59B	GTS225	June. 27 2018	June. 26 2019
4	Artificial Mains Network	SCHWARZBECK MESS	NSLK8127	GTS226	June. 27 2018	June. 26 2019
5	Coaxial Cable	GTS	N/A	GTS227	June. 27 2018	June. 26 2019
6	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
7	Thermo meter	KTJ	TA328	GTS233	June. 27 2018	June. 26 2019
8	Absorbing clamp	Elektronik-Feinmechanik	MDS21	GTS229	June. 27 2018	June. 26 2019


RF Conducted Test:						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	MXA Signal Analyzer	Agilent	N9020A	GTS566	June. 27 2018	June. 26 2019
2	EMI Test Receiver	R&S	ESCI 7	GTS552	June. 27 2018	June. 26 2019
3	Spectrum Analyzer	Agilent	E4440A	GTS533	June. 27 2018	June. 26 2019
4	MXG vector Signal Generator	Agilent	N5182A	GTS567	June. 27 2018	June. 26 2019
5	ESG Analog Signal Generator	Agilent	E4428C	GTS568	June. 27 2018	June. 26 2019
6	USB RF Power Sensor	DARE	RPR3006W	GTS569	June. 27 2018	June. 26 2019
7	RF Switch Box	Shongyi	RFSW3003328	GTS571	June. 27 2018	June. 26 2019
8	EMI Test Receiver	R&S	ESCI 7	GTS552	June. 27 2018	June. 26 2019
9	Programmable Constant Temp & Humi Test Chamber	WEWON	WHTH-150L-40-880	GTS572	June. 27 2018	June. 26 2019

General used equipment:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Humidity/ Temperature Indicator	KTJ	TA328	GTS243	June. 27 2018	June. 26 2019
2	Barometer	ChangChun	DYM3	GTS255	June. 27 2018	June. 26 2019


## 7 Test results and Measurement Data

### 7.1 Antenna requirement

Standard requirement:	FCC Part15 C Section 15.203 /247(c)
<b>15.203 requirement:</b> An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
<b>15.247(c) (1)(i) requirement:</b> (i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.	
<b>EUT Antenna:</b> <i>The antenna is integral Antenna, the best case gain of the antenna is 0dBi</i>	

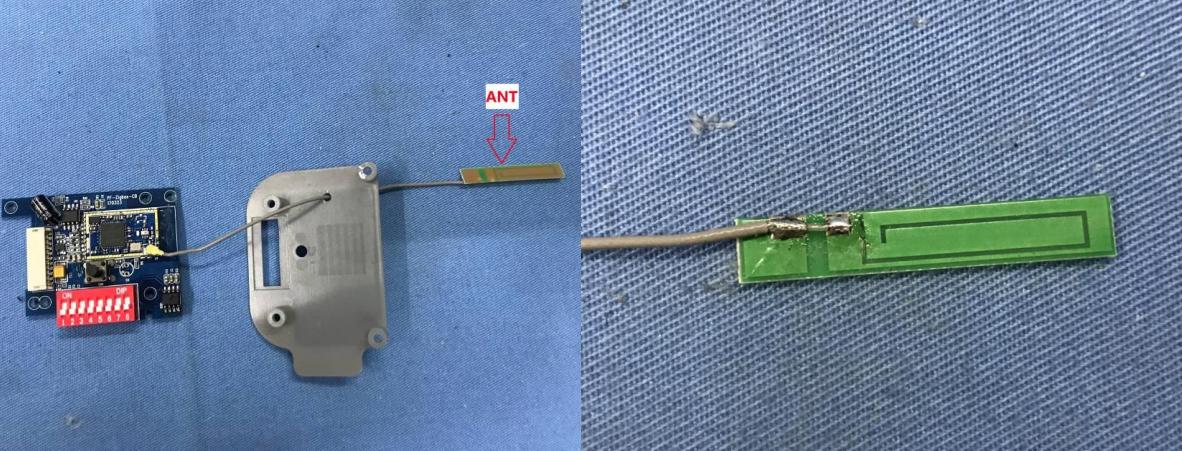


## 7.2 Conducted Emissions

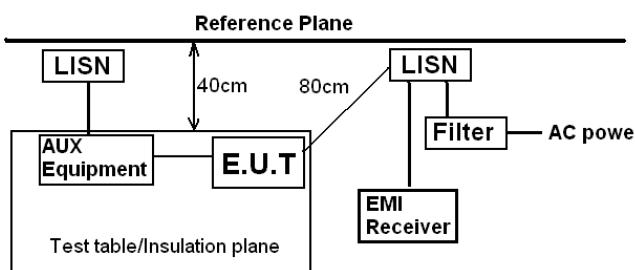Test Requirement:	FCC Part15 C Section 15.207																
Test Method:	ANSI C63.10:2013																
Test Frequency Range:	150KHz to 30MHz																
Class / Severity:	Class B																
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto																
Limit:	<table border="1"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th> <th colspan="2">Limit (dBuV)</th> </tr> <tr> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table>			Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)																
	Quasi-peak	Average															
0.15-0.5	66 to 56*	56 to 46*															
0.5-5	56	46															
5-30	60	50															
	* Decreases with the logarithm of the frequency.																
Test setup:	 <p>Remark:  <i>E.U.T: Equipment Under Test  LISN: Line Impedance Stabilization Network  Test table height=0.8m</i></p>																
Test procedure:	<ol style="list-style-type: none"> <li>1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment.</li> <li>2. The peripheral devices are also connected to the main power through LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs).</li> <li>3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement.</li> </ol>																
Test Instruments:	Refer to section 6.0 for details																
Test mode:	Refer to section 5.2 for details																
Test voltage:	AC 120V, 60Hz																
Test results:	Pass																


**Measurement data**

<b>Mode:</b>	<b>Transmitting mode</b>	<b>Test by:</b>	<b>Jason</b>
<b>Temp./Hum.(%H):</b>	<b>26°C/56%RH</b>	<b>Probe:</b>	<b>Line</b>

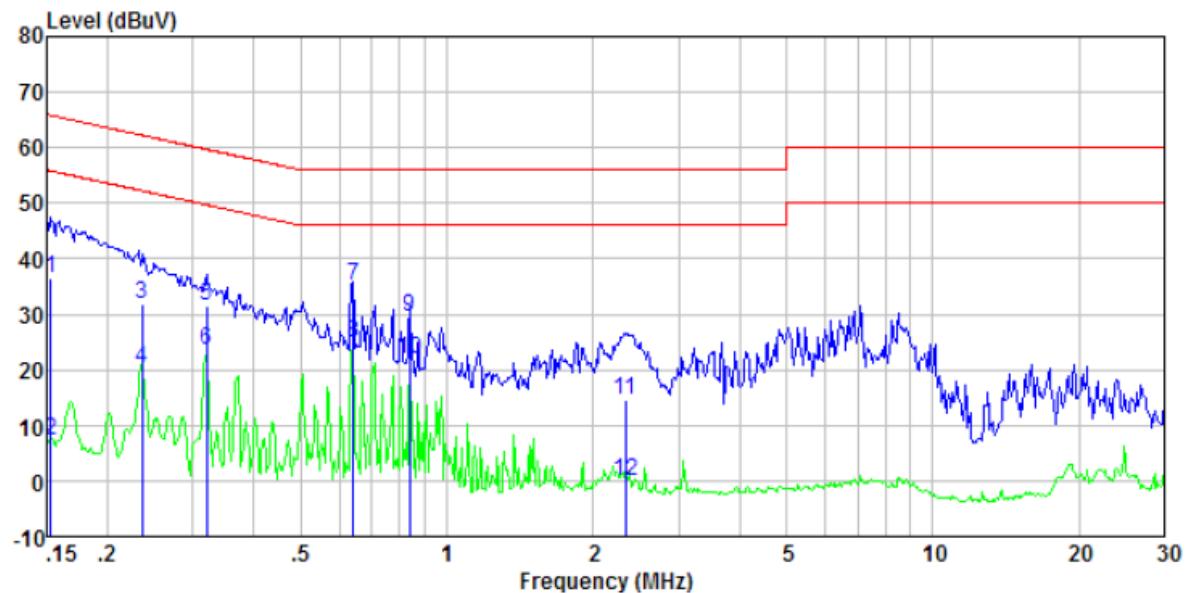

Freq MHz	Reading level dBuV	LISN/ISN factor dB/m	Cable loss dB	Level dBuV	Limit level dBuV	Over limit dB	Remark
0.15	35.95	0.40	0.07	36.42	65.82	-29.40	QP
0.15	6.73	0.40	0.07	7.20	55.82	-48.62	Average
0.24	31.49	0.40	0.11	32.00	62.26	-30.26	QP
0.24	19.63	0.40	0.11	20.14	52.26	-32.12	Average
0.32	30.94	0.39	0.10	31.43	59.71	-28.28	QP
0.32	22.99	0.39	0.10	23.48	49.71	-26.23	Average
0.64	34.63	0.27	0.12	35.02	56.00	-20.98	QP
0.64	24.47	0.27	0.12	24.86	46.00	-21.14	Average
0.84	29.10	0.23	0.14	29.47	56.00	-26.53	QP
0.84	21.49	0.23	0.14	21.86	46.00	-24.14	Average
2.33	14.16	0.20	0.18	14.54	56.00	-41.46	QP
2.33	-0.38	0.20	0.18	0.00	46.00	-46.00	Average

Mode:	Transmitting mode	Test by:	Jason
Temp./Hum.(%H):	26°C/56%RH	Probe:	Neutral

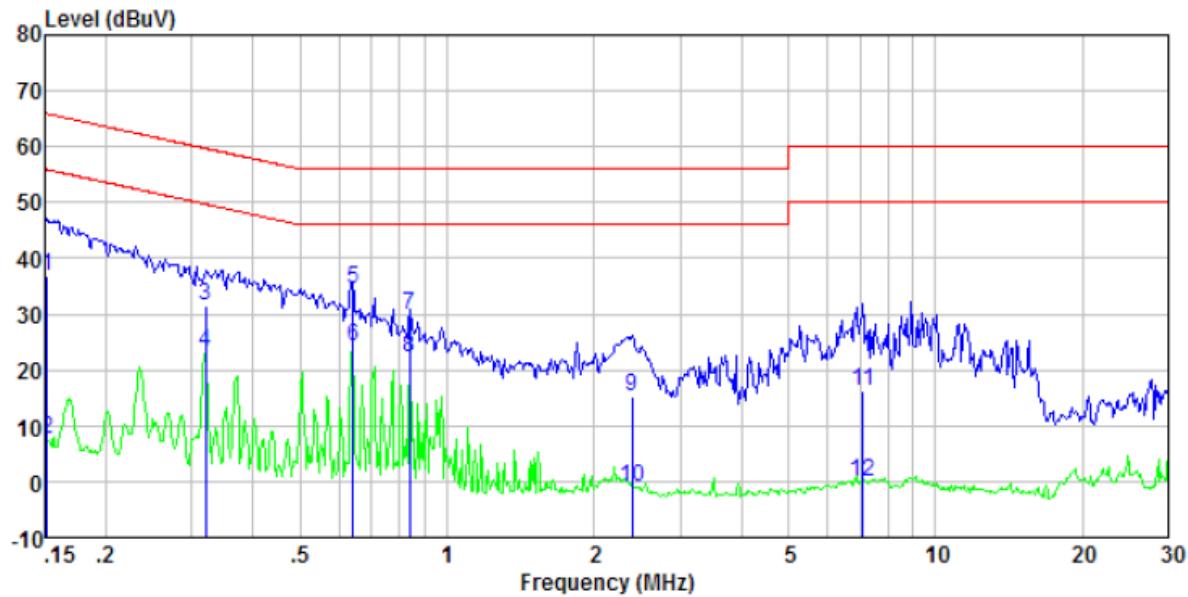


Freq MHz	Reading level dBuV	LISN/ISM factor dB/m	Cable loss dB	Level dBuV	Limit level dBuV	Over limit dB	Remark
0.15	36.44	0.40	0.07	36.91	65.91	-29.00	QP
0.15	7.19	0.40	0.07	7.66	55.91	-48.25	Average
0.32	30.86	0.39	0.10	31.35	59.71	-28.36	QP
0.32	22.78	0.39	0.10	23.27	49.71	-26.44	Average
0.64	34.11	0.27	0.12	34.50	56.00	-21.50	QP
0.64	23.83	0.27	0.12	24.22	46.00	-21.78	Average
0.84	29.49	0.23	0.14	29.86	56.00	-26.14	QP
0.84	21.92	0.23	0.14	22.29	46.00	-23.71	Average
2.40	14.94	0.20	0.18	15.32	56.00	-40.68	QP
2.40	-1.48	0.20	0.18	-1.10	46.00	-47.10	Average
7.10	15.97	0.20	0.19	16.36	60.00	-43.64	QP
7.10	-0.38	0.20	0.19	0.01	50.00	-49.99	Average

#### Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level =Receiver Read level + LISN Factor + Cable Loss
4. If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the average detector receiver is unnecessary.


## 7.3 Conducted Peak Output Power

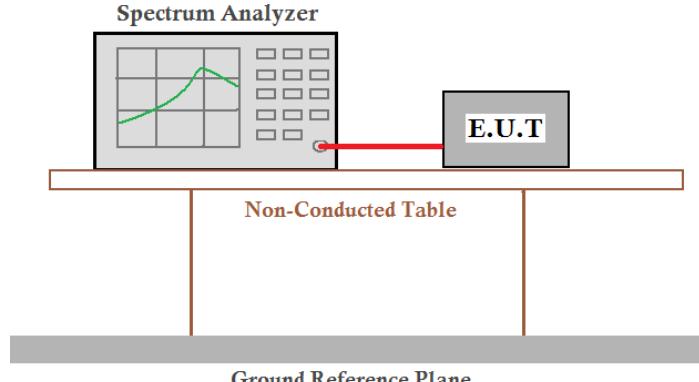Test Requirement:	FCC Part15 C Section 15.247 (b)(3)
Test Method:	ANSI C63.10:2013 and KDB558074 D01 DTS Meas Guidance V05
Limit:	30dBm
Test setup:	
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass


### Measurement Data

Frequency (MHz)	Peak Output Power (dBm)	Limit(dBm)	Result
2405	-3.87	30	PASS
2440	-2.37		
2480	-4.19		


**Test plot as follows:**

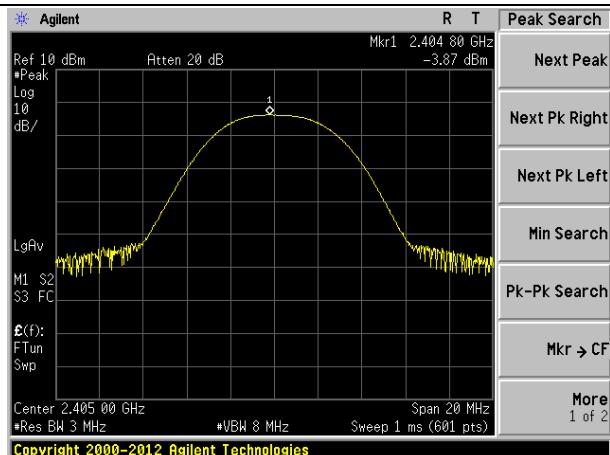

Lowest channel

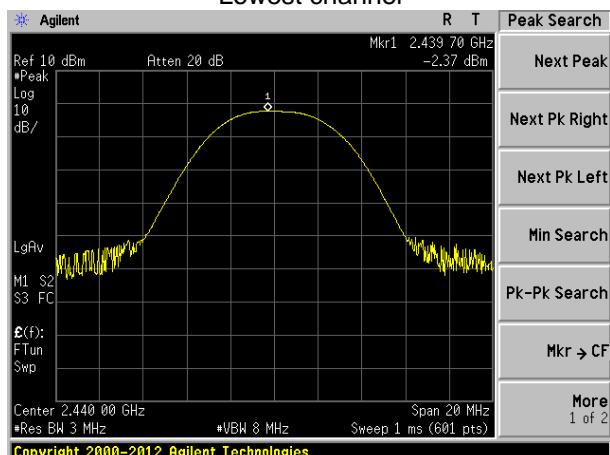


Middle channel

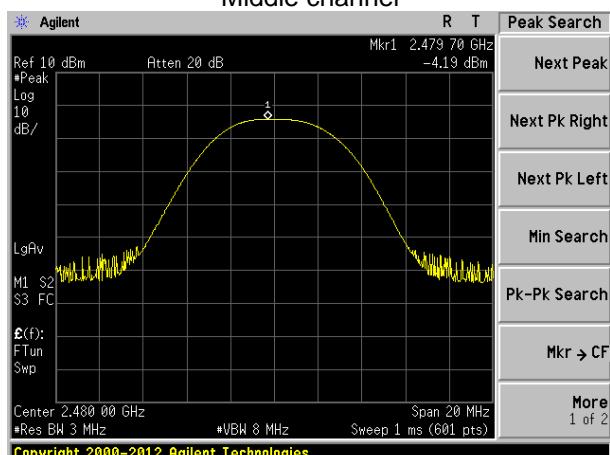

Highest channel

## 7.4 Channel Bandwidth

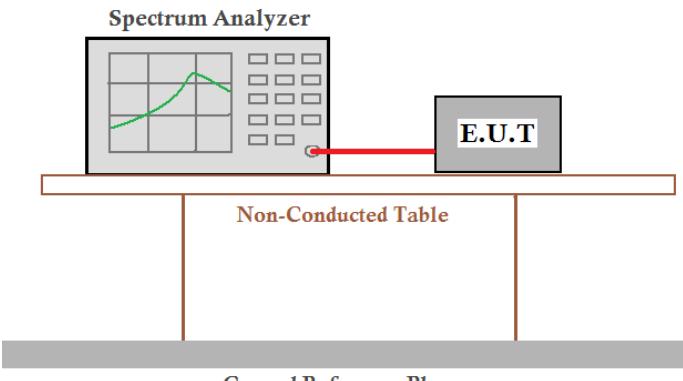Test Requirement:	FCC Part15 C Section 15.247 (a)(2)
Test Method:	ANSI C63.10:2013 and KDB558074 D01 DTS Meas Guidance V05
Limit:	>500KHz
Test setup:	
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass


### Measurement Data

Frequency (MHz)	Channel Bandwidth (MHz)	Limit(KHz)	Result
2405	1.818	>500	Pass
2440	1.639		
2480	1.622		

**Test plot as follows:**



Lowest channel

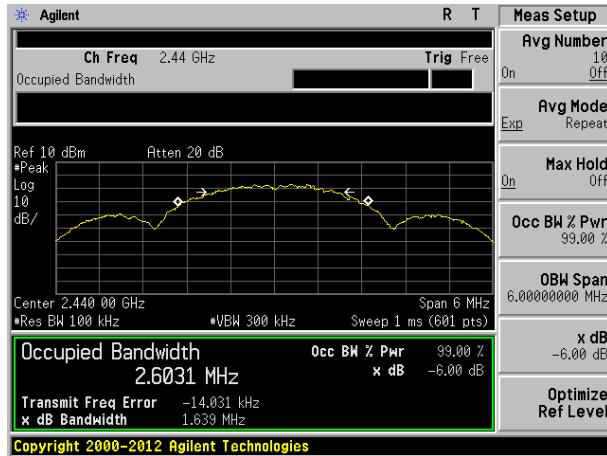


Middle channel



Highest channel


## 7.5 Power Spectral Density

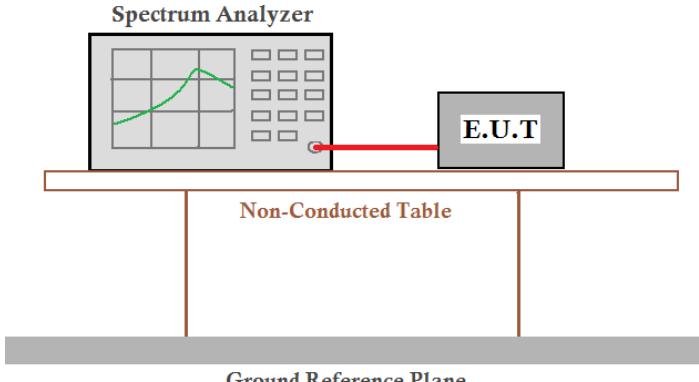Test Requirement:	FCC Part15 C Section 15.247 (e)
Test Method:	ANSI C63.10:2013 and KDB558074 D01 DTS Meas Guidance V05
Limit:	8dBm/3kHz
Test setup:	
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

### Measurement Data


Frequency (MHz)	Power Spectral Density (dBm)	Limit (dBm/3kHz)	Result
2405	-14.21	8.00	Pass
2440	-12.65		
2480	-14.36		

**Test plot as follows:**

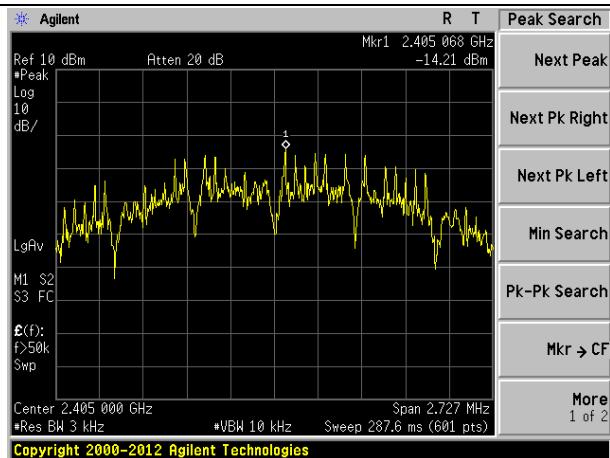


Peak Search  
Next Peak  
Next Pk Right  
Next Pk Left  
Min Search  
Pk-Pk Search  
Mkr → CF  
More 1 of 2

Lowest channel

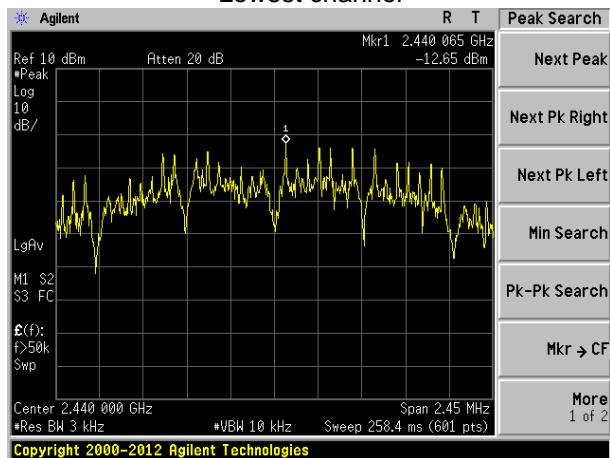

Peak Search  
Next Peak  
Next Pk Right  
Next Pk Left  
Min Search  
Pk-Pk Search  
Mkr → CF  
More 1 of 2

Middle channel

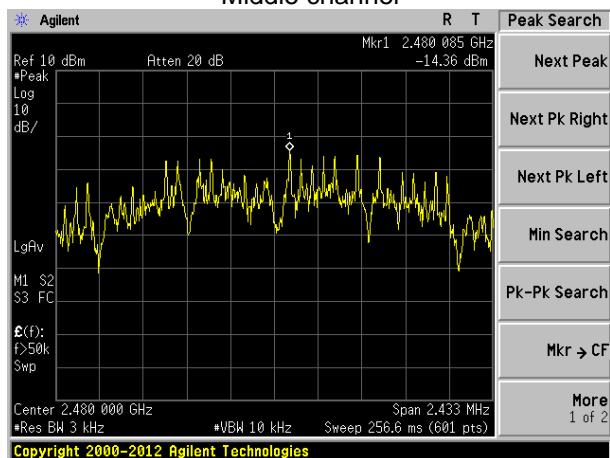


Peak Search  
Next Peak  
Next Pk Right  
Next Pk Left  
Min Search  
Pk-Pk Search  
Mkr → CF  
More 1 of 2



Highest channel

## 7.6 Band edges

### 7.6.1 Conducted Emission Method

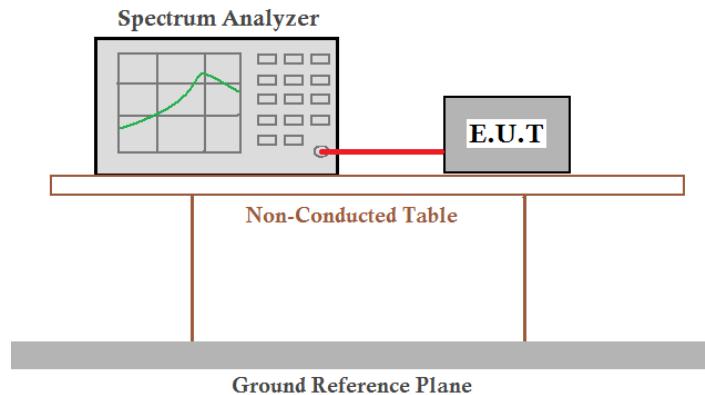Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.10:2013 and KDB558074 D01 DTS Meas Guidance V05
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	 <p>The diagram illustrates the test setup for conducted emission. A 'Spectrum Analyzer' is connected to the 'E.U.T' (Equipment Under Test) via a cable. The E.U.T is placed on a 'Non-Conducted Table'. The entire setup is positioned above a 'Ground Reference Plane'.</p>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass


**Test plot as follows:**

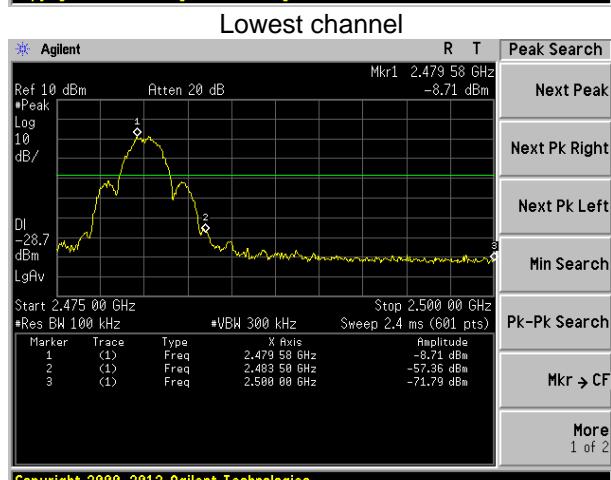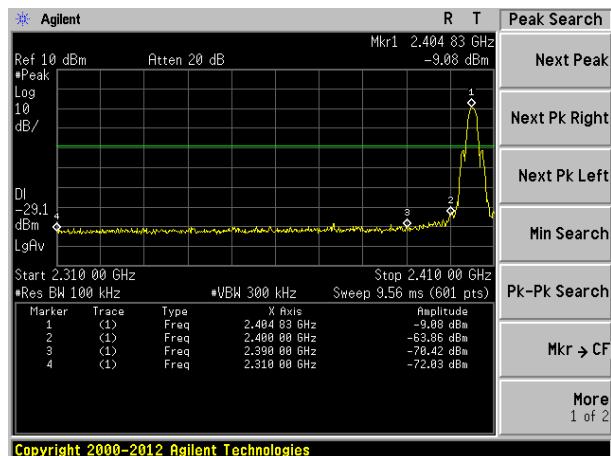

Lowest channel

Highest channel

## 7.6.2 Radiated Emission Method

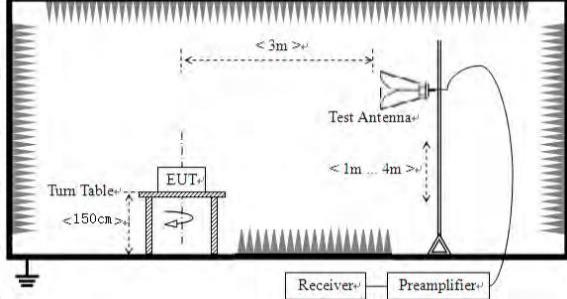Test Requirement:	FCC Part15 C Section 15.209 and 15.205								
Test Method:	ANSI C63.10:2013								
Test Frequency Range:	All of the restrict bands were tested, only the worst band's (2310MHz to 2500MHz) data was showed.								
Test site:	Measurement Distance: 3m								
Receiver setup:	Frequency	Detector	RBW	VBW	Value				
	Above 1GHz	Peak	1MHz	3MHz	Peak				
		RMS	1MHz	3MHz	Average				
Limit:	Frequency	Limit (dBuV/m @3m)		Value					
	Above 1GHz	54.00		Average					
		74.00		Peak					
Test setup:									
Test Procedure:	<ol style="list-style-type: none"> <li>The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li> <li>The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li> <li>For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.</li> <li>The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li> <li>If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</li> <li>The radiation measurements are performed in X, Y, Z axis positioning. And found the Y axis positioning which it is worse case, only the test worst case mode is recorded in the report.</li> </ol>								
Test Instruments:	Refer to section 6.0 for details								
Test mode:	Refer to section 5.2 for details								
Test results:	Pass								

**Measurement data:**

*Remark: The pre-test were performed on lowest, middle and highest frequencies, only the worst case's was showed.*

Test channel:	Lowest channel
---------------	----------------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	37.78	27.91	5.30	24.64	46.35	74.00	-27.65	Vertical
2390.00	37.99	27.59	5.38	24.71	46.25	74.00	-27.75	Vertical
2400.00	38.51	27.58	5.39	24.72	46.76	74.00	-27.24	Vertical
2310.00	36.05	27.91	5.30	24.64	44.62	74.00	-29.38	Horizontal
2390.00	36.56	27.59	5.38	24.71	44.82	74.00	-29.18	Horizontal
2400.00	37.89	27.58	5.39	24.72	46.14	74.00	-27.86	Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	28.73	27.91	5.30	24.64	37.30	54.00	-16.70	Vertical
2390.00	29.15	27.59	5.38	24.71	37.41	54.00	-16.59	Vertical
2400.00	29.70	27.58	5.39	24.72	37.95	54.00	-16.05	Vertical
2310.00	26.54	27.91	5.30	24.64	35.11	54.00	-18.89	Horizontal
2390.00	27.97	27.59	5.38	24.71	36.23	54.00	-17.77	Horizontal
2400.00	28.24	27.58	5.39	24.72	36.49	54.00	-17.51	Horizontal

Test channel:	Highest channel							
---------------	-----------------	--	--	--	--	--	--	--

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	42.71	27.53	5.47	24.80	50.91	74.00	-23.09	Vertical
2500.00	33.59	27.55	5.49	24.86	41.77	74.00	-32.23	Vertical
2483.50	35.70	27.53	5.47	24.80	43.90	74.00	-30.10	Horizontal
2500.00	26.92	27.55	5.49	24.86	35.10	74.00	-38.90	Horizontal

Average value:


Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	33.62	27.53	5.47	24.80	41.82	54.00	-12.18	Vertical
2500.00	23.70	27.55	5.49	24.86	31.88	54.00	-22.12	Vertical
2483.50	24.28	27.53	5.47	24.80	32.48	54.00	-21.52	Horizontal
2500.00	17.70	27.55	5.49	24.86	25.88	54.00	-28.12	Horizontal

Remark:

1. *Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor*
2. *The emission levels of other frequencies are very lower than the limit and not show in test report.*


## 7.7 Spurious Emission

### 7.7.1 Conducted Emission Method

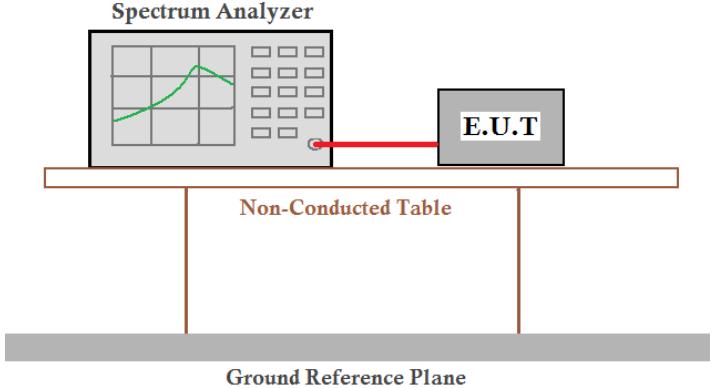Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.10:2013 and KDB558074 D01 DTS Meas Guidance V05
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass


**Test plot as follows:**

Lowest channel

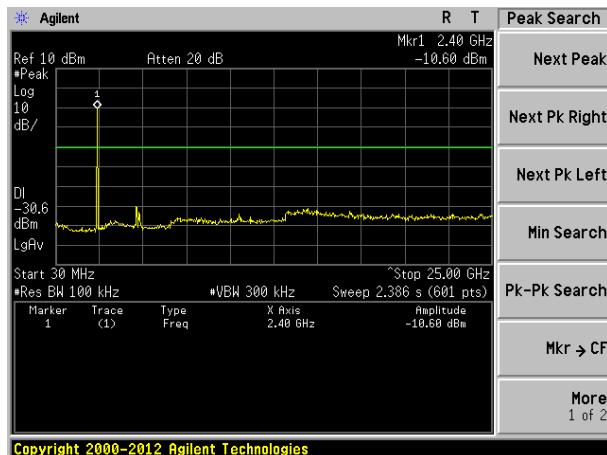


30MHz~25GHz

Middle channel

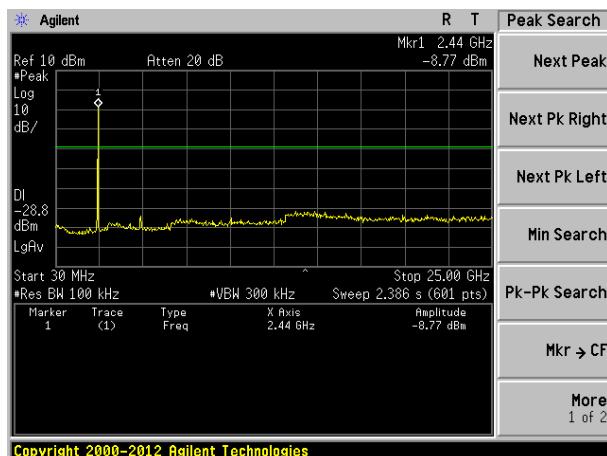

30MHz~25GHz


Highest channel

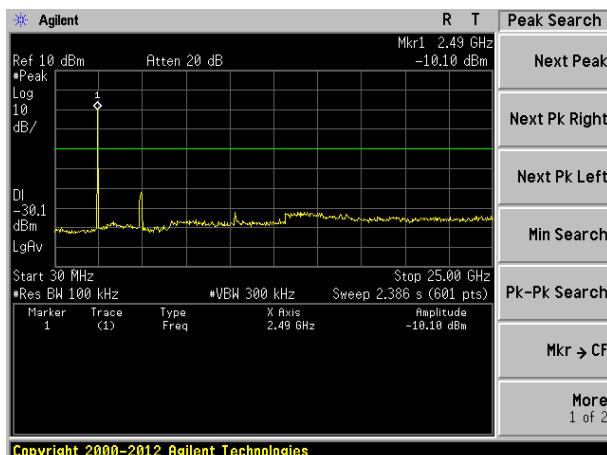

30MHz~25GHz

## 7.7.2 Radiated Emission Method

Test Requirement:	FCC Part15 C Section 15.209																									
Test Method:	ANSI C63.10:2013																									
Test Frequency Range:	9kHz to 25GHz																									
Test site:	Measurement Distance: 3m																									
Receiver setup:	<table border="1"> <thead> <tr> <th>Frequency</th><th>Detector</th><th>RBW</th><th>VBW</th><th>Value</th></tr> </thead> <tbody> <tr> <td>30MHz-1GHz</td><td>Quasi-peak</td><td>120KHz</td><td>300KHz</td><td>Quasi-peak</td></tr> <tr> <td rowspan="2">Above 1GHz</td><td>Peak</td><td>1MHz</td><td>3MHz</td><td>Peak</td></tr> <tr> <td>RMS</td><td>1MHz</td><td>3MHz</td><td>Average</td></tr> </tbody> </table>					Frequency	Detector	RBW	VBW	Value	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak	Above 1GHz	Peak	1MHz	3MHz	Peak	RMS	1MHz	3MHz	Average		
Frequency	Detector	RBW	VBW	Value																						
30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak																						
Above 1GHz	Peak	1MHz	3MHz	Peak																						
	RMS	1MHz	3MHz	Average																						
Limit: (Spurious Emissions)	<table border="1"> <thead> <tr> <th>Frequency</th><th>Limit (uV/m)</th><th>Value</th><th>Measurement Distance</th></tr> </thead> <tbody> <tr> <td>30MHz-88MHz</td><td>100</td><td>QP</td><td rowspan="6">3m</td></tr> <tr> <td>88MHz-216MHz</td><td>150</td><td>QP</td></tr> <tr> <td>216MHz-960MHz</td><td>200</td><td>QP</td></tr> <tr> <td>960MHz-1GHz</td><td>500</td><td>QP</td></tr> <tr> <td rowspan="2">Above 1GHz</td><td>500</td><td>Average</td></tr> <tr> <td>5000</td><td>Peak</td></tr> </tbody> </table>				Frequency	Limit (uV/m)	Value	Measurement Distance	30MHz-88MHz	100	QP	3m	88MHz-216MHz	150	QP	216MHz-960MHz	200	QP	960MHz-1GHz	500	QP	Above 1GHz	500	Average	5000	Peak
Frequency	Limit (uV/m)	Value	Measurement Distance																							
30MHz-88MHz	100	QP	3m																							
88MHz-216MHz	150	QP																								
216MHz-960MHz	200	QP																								
960MHz-1GHz	500	QP																								
Above 1GHz	500	Average																								
	5000	Peak																								

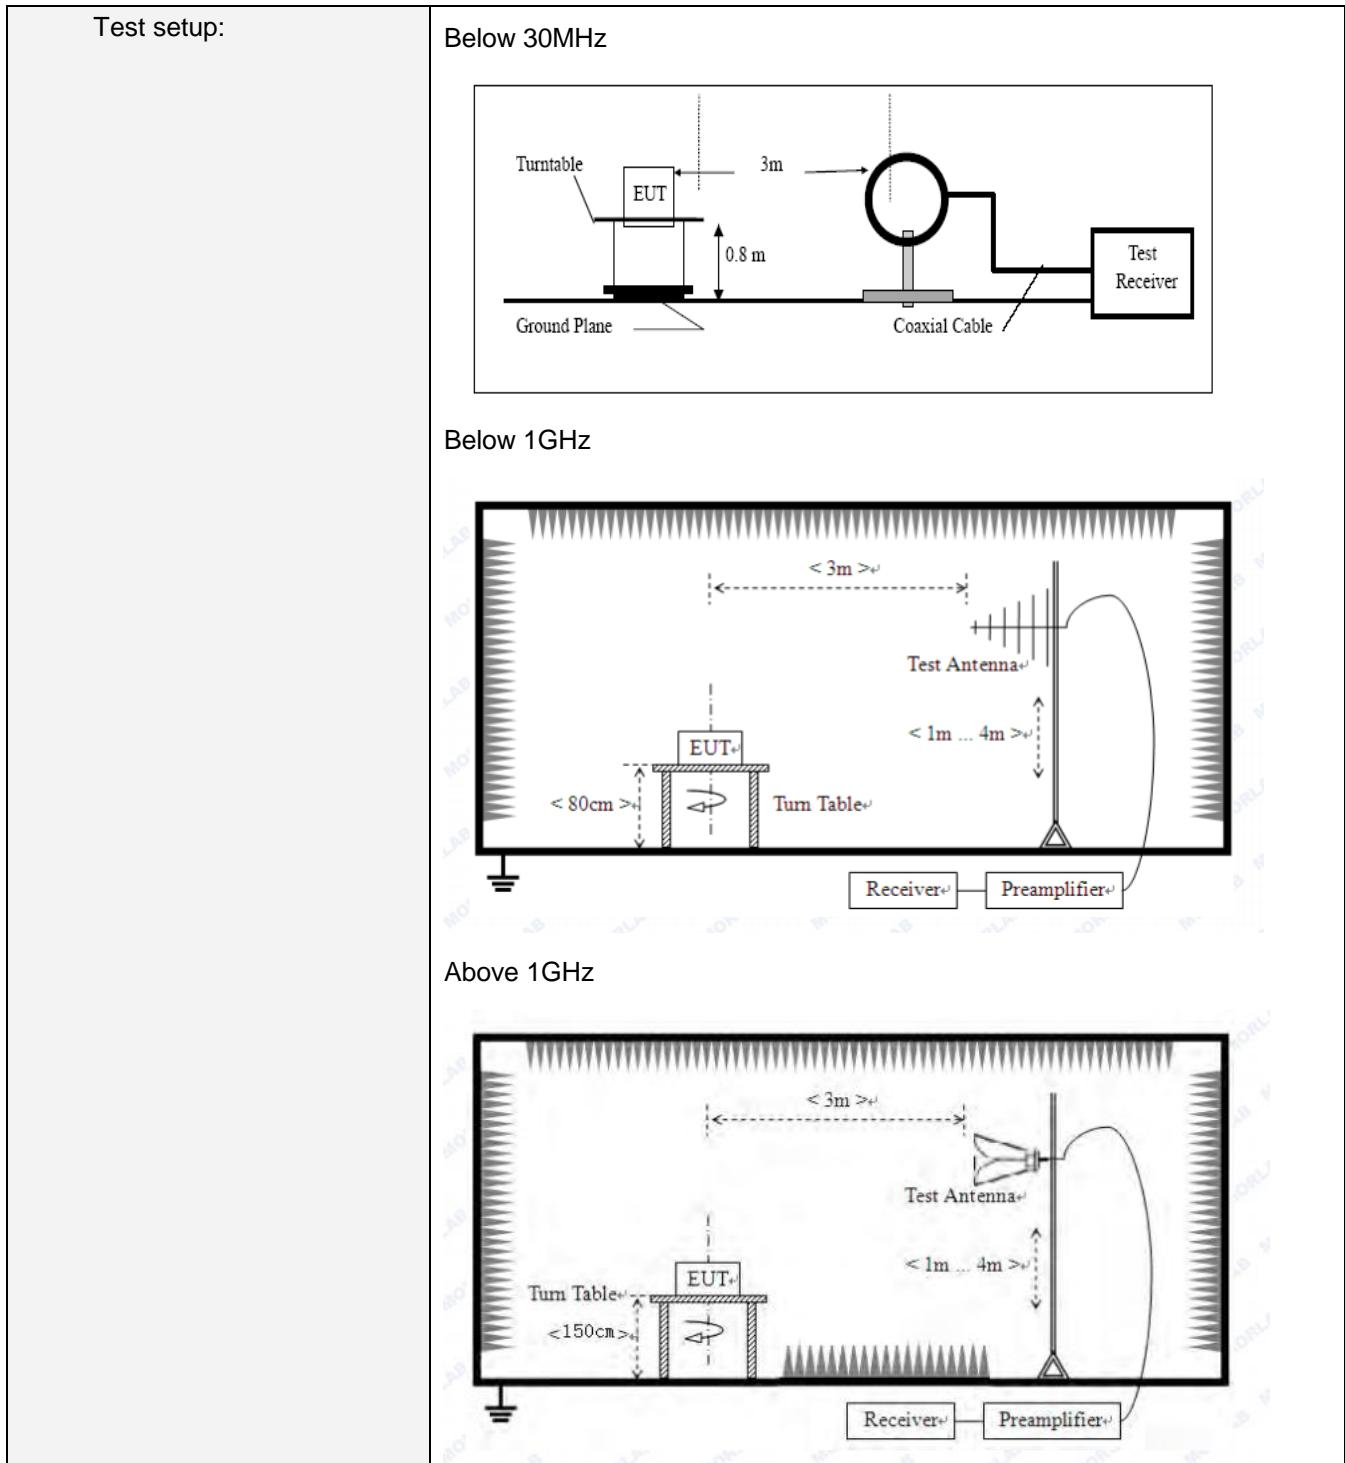

Test Procedure:	<ol style="list-style-type: none"> <li>1. The EUT was placed on the top of a rotating table (0.8m for below 1G and 1.5m for above 1G) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li> <li>3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li> <li>4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.</li> <li>5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li> <li>6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</li> </ol>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test voltage:	AC 120V, 60Hz
Test results:	Pass

**Measurement data:**

**9 kHz ~ 30 MHz**

The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.

*Remark:*


*Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis which it is worse case.*

**Remark:**

All positions of the antenna are tested, only show the worst case: The antenna is perpendicular to the product.


**■ Below 1GHz**

<b>Mode:</b>	<b>Transmitting mode</b>	<b>Test by:</b>	<b>Jason</b>
<b>Temp./Hum.(%H):</b>	<b>26°C/56%RH</b>	<b>Polarization:</b>	<b>Horizontal</b>

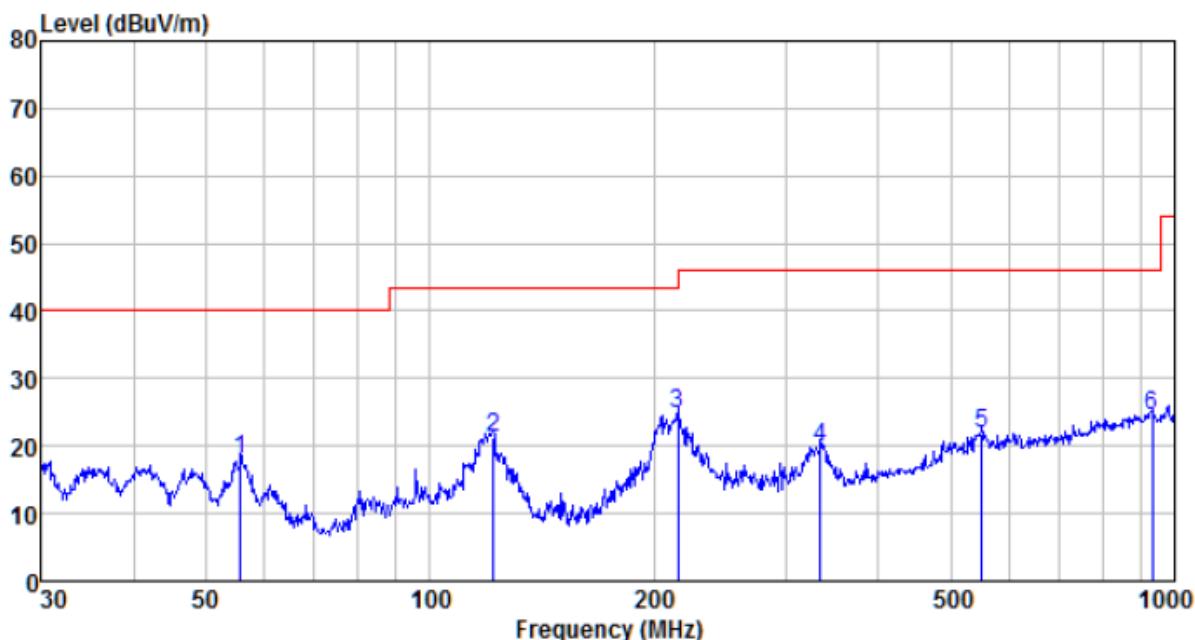

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark
55.609	41.66	11.73	0.82	36.26	17.95	40.00	-22.05	QP
121.549	47.54	9.27	1.37	36.89	21.29	43.50	-22.21	QP
215.268	49.26	10.98	1.93	37.35	24.82	43.50	-18.68	QP
334.859	40.52	14.26	2.54	37.46	19.86	46.00	-26.14	QP
550.948	37.46	18.45	3.53	37.53	21.91	46.00	-24.09	QP
932.272	34.52	22.43	4.98	37.57	24.36	46.00	-21.64	QP

Mode:	Transmitting mode	Test by:	Jason
Temp./Hum.(%H):	26°C/56%RH	Polarization:	Vertical

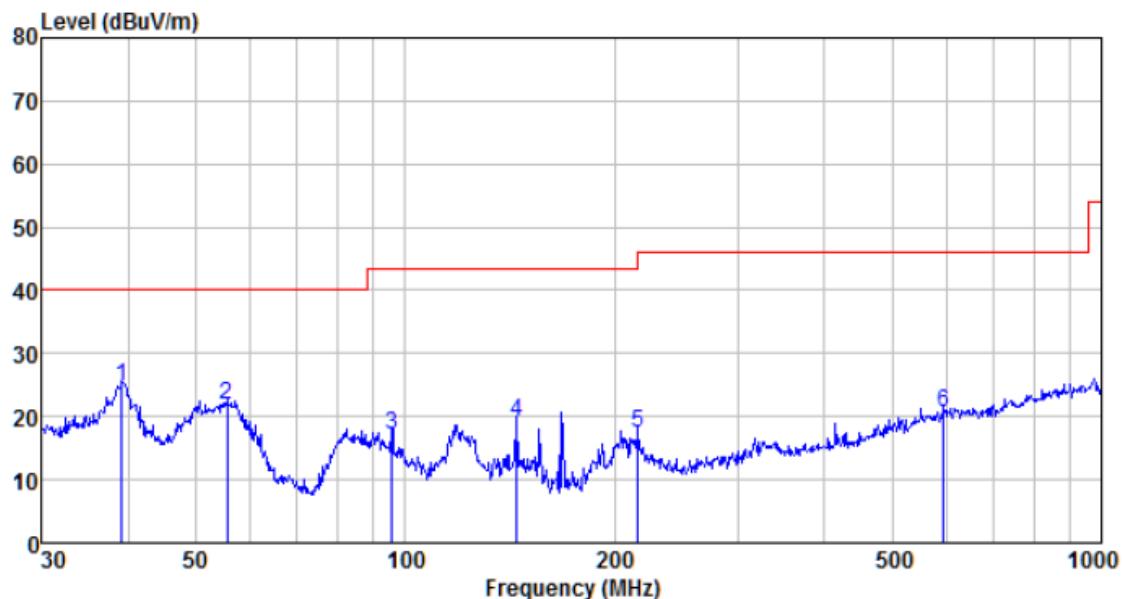

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark
39.162	47.57	12.08	0.65	35.62	24.68	40.00	-15.32	QP
55.415	45.48	11.75	0.82	36.26	21.79	40.00	-18.21	QP
95.762	41.07	11.59	1.16	36.69	17.13	43.50	-26.37	QP
144.842	47.12	7.50	1.53	37.05	19.10	43.50	-24.40	QP
216.024	41.72	11.02	1.93	37.35	17.32	46.00	-28.68	QP
593.050	35.25	19.33	3.70	37.54	20.74	46.00	-25.26	QP

## ■ Above 1GHz

Test channel:			Lowest channel					
---------------	--	--	----------------	--	--	--	--	--

### Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4810.00	49.55	31.17	8.60	37.66	51.66	74.00	-22.34	Vertical
7215.00	38.54	36.09	11.66	35.69	50.60	74.00	-23.40	Vertical
9620.00	29.61	37.84	14.14	34.91	46.68	74.00	-27.32	Vertical
12025.00	26.93	38.61	15.03	36.13	44.44	74.00	-29.56	Vertical
4810.00	48.63	31.17	8.60	37.66	50.74	74.00	-23.26	Horizontal
7215.00	41.64	36.09	11.66	35.69	53.70	74.00	-20.30	Horizontal
9620.00	27.52	37.84	14.14	34.91	44.59	74.00	-29.41	Horizontal
12025.00	27.10	38.61	15.03	36.13	44.61	74.00	-29.39	Horizontal

### Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4810.00	43.74	31.17	8.60	37.66	45.85	54.00	-8.15	Vertical
7215.00	30.08	36.09	11.66	35.69	42.14	54.00	-11.86	Vertical
9620.00	19.61	37.84	14.14	34.91	36.68	54.00	-17.32	Vertical
12025.00	17.06	38.61	15.03	36.13	34.57	54.00	-19.43	Vertical
4810.00	43.16	31.17	8.60	37.66	45.27	54.00	-8.73	Horizontal
7215.00	30.79	36.09	11.66	35.69	42.85	54.00	-11.15	Horizontal
9620.00	17.83	37.84	14.14	34.91	34.90	54.00	-19.10	Horizontal
12025.00	17.33	38.61	15.03	36.13	34.84	54.00	-19.16	Horizontal

### Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. \*\*, means this data is the too weak instrument of signal is unable to test.

Test channel:	Middle channel
---------------	----------------

**Peak value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4890.00	49.77	31.26	8.66	37.68	52.01	74.00	-21.99	Vertical
7335.00	40.07	36.32	11.72	35.64	52.47	74.00	-21.53	Vertical
9780.00	28.98	38.01	14.25	34.98	46.26	74.00	-27.74	Vertical
12225.00	25.83	38.64	15.14	36.26	43.35	74.00	-30.65	Vertical
4890.00	48.49	31.26	8.66	37.68	50.73	74.00	-23.27	Horizontal
7335.00	39.78	36.32	11.72	35.64	52.18	74.00	-21.82	Horizontal
9780.00	28.45	38.01	14.25	34.98	45.73	74.00	-28.27	Horizontal
12225.00	27.21	38.64	15.14	36.26	44.73	74.00	-29.27	Horizontal

**Average value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4890.00	41.94	31.26	8.66	37.68	44.18	54.00	-9.82	Vertical
7335.00	32.30	36.32	11.72	35.64	44.70	54.00	-9.30	Vertical
9780.00	22.13	38.01	14.25	34.98	39.41	54.00	-14.59	Vertical
12225.00	15.34	38.64	15.14	36.26	32.86	54.00	-21.14	Vertical
4890.00	39.59	31.26	8.66	37.68	41.83	54.00	-12.17	Horizontal
7335.00	22.00	36.32	11.72	35.64	34.40	54.00	-19.60	Horizontal
9780.00	21.06	38.01	14.25	34.98	38.34	54.00	-15.66	Horizontal
12225.00	17.41	38.64	15.14	36.26	34.93	54.00	-19.07	Horizontal

**Remark:**

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. \*\*, means this data is the too weak instrument of signal is unable to test.

Test channel:	Highest channel							
---------------	-----------------	--	--	--	--	--	--	--

**Peak value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4960.00	50.14	31.36	8.73	37.69	52.54	74.00	-21.46	Vertical
7440.00	39.45	36.59	11.79	35.58	52.25	74.00	-21.75	Vertical
9920.00	28.61	38.22	14.38	35.07	46.14	74.00	-27.86	Vertical
12400.00	26.70	38.68	15.27	36.43	44.22	74.00	-29.78	Vertical
4960.00	48.46	31.36	8.73	37.69	50.86	74.00	-23.14	Horizontal
7440.00	39.56	36.59	11.79	35.58	52.36	74.00	-21.64	Horizontal
9920.00	28.56	38.22	14.38	35.07	46.09	74.00	-27.91	Horizontal
12400.00	27.99	38.68	15.27	36.43	45.51	74.00	-28.49	Horizontal

**Average value:**



Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4960.00	42.00	31.36	8.73	37.69	44.40	54.00	-9.60	Vertical
7440.00	31.30	36.59	11.79	35.58	44.10	54.00	-9.90	Vertical
9920.00	20.22	38.22	14.38	35.07	37.75	54.00	-16.25	Vertical
12400.00	16.68	38.68	15.27	36.43	34.20	54.00	-19.80	Vertical
4960.00	40.02	31.36	8.73	37.69	42.42	54.00	-11.58	Horizontal
7440.00	31.36	36.59	11.79	35.58	44.16	54.00	-9.84	Horizontal
9920.00	20.02	38.22	14.38	35.07	37.55	54.00	-16.45	Horizontal
12400.00	18.11	38.68	15.27	36.43	35.63	54.00	-18.37	Horizontal

**Remark:**

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. \*\*, means this data is the too weak instrument of signal is unable to test.

## 8 Test Setup Photo



Radiated Emission

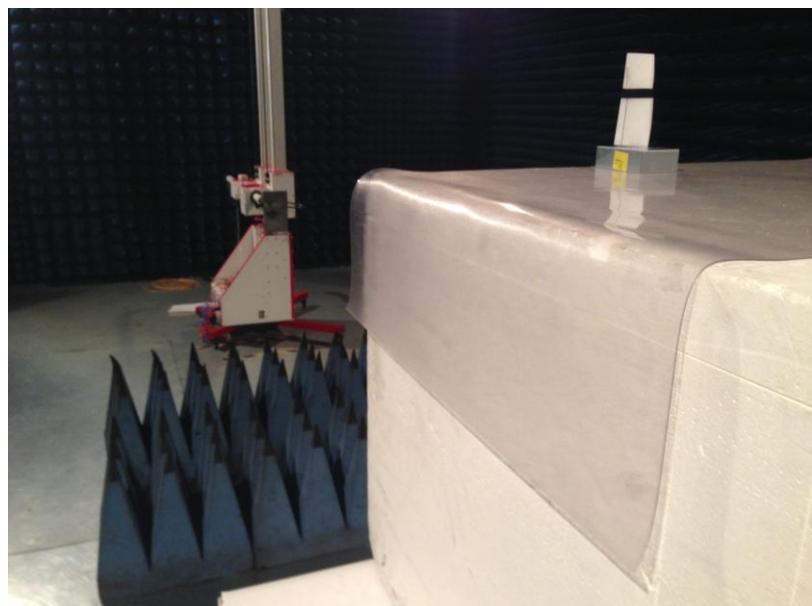
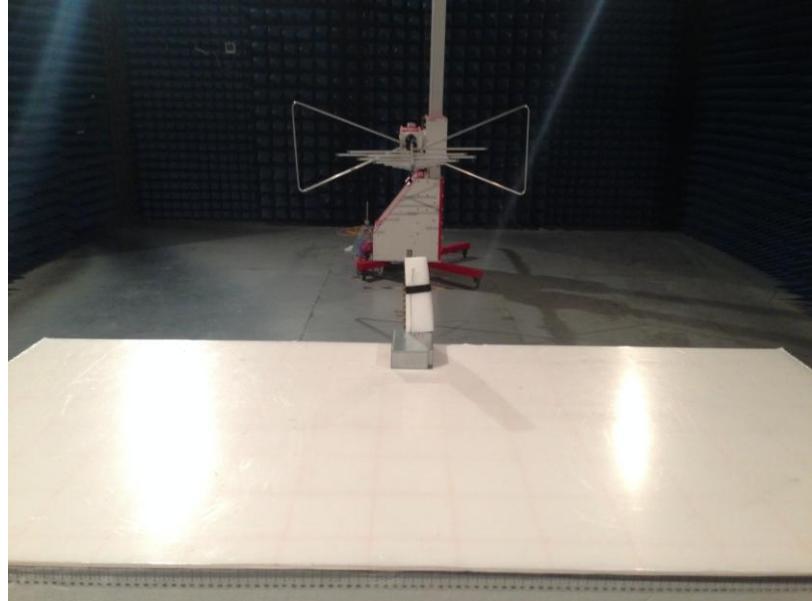




Conducted Emission






## 9 EUT Constructional Details

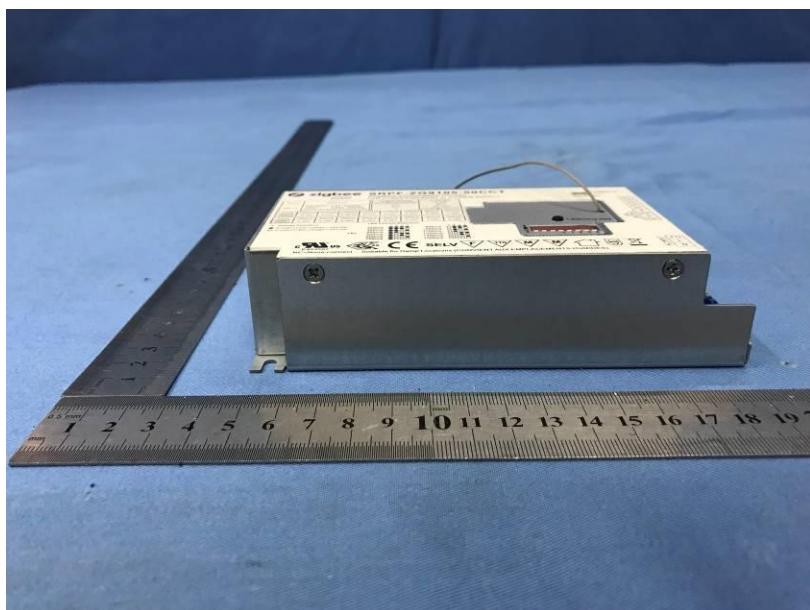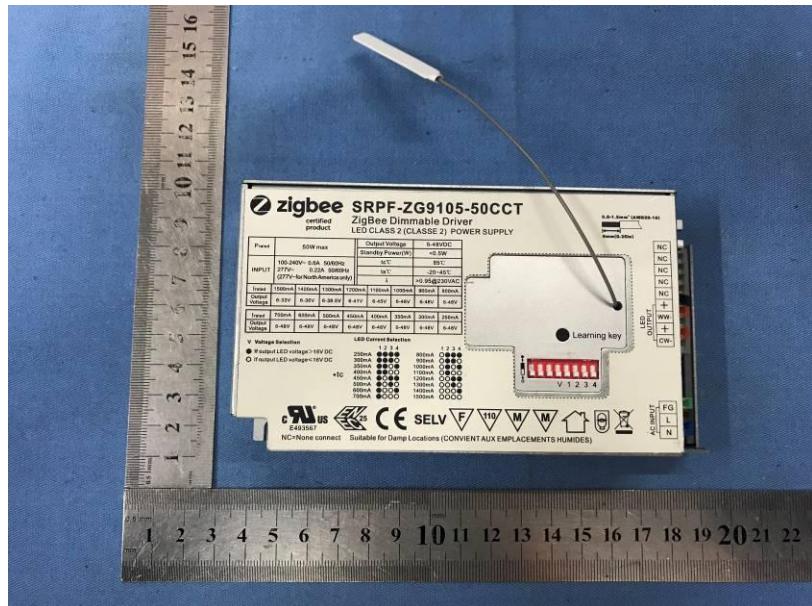


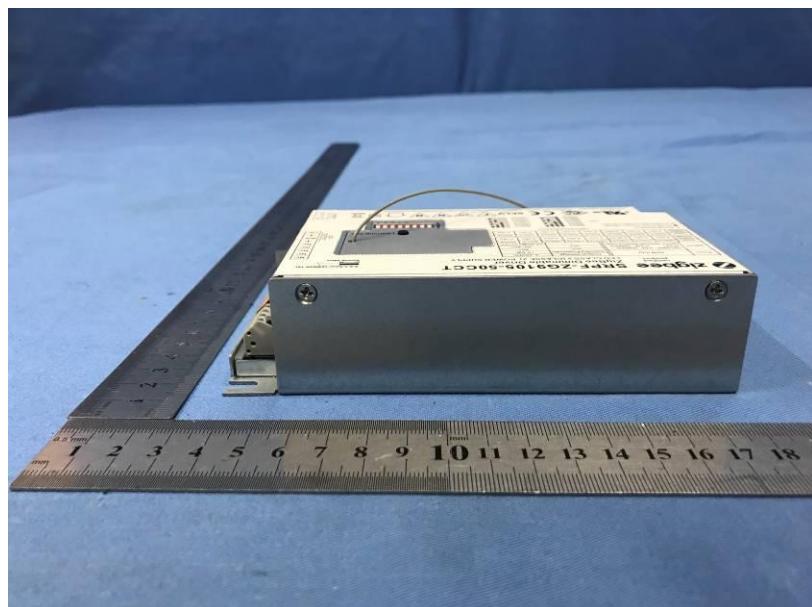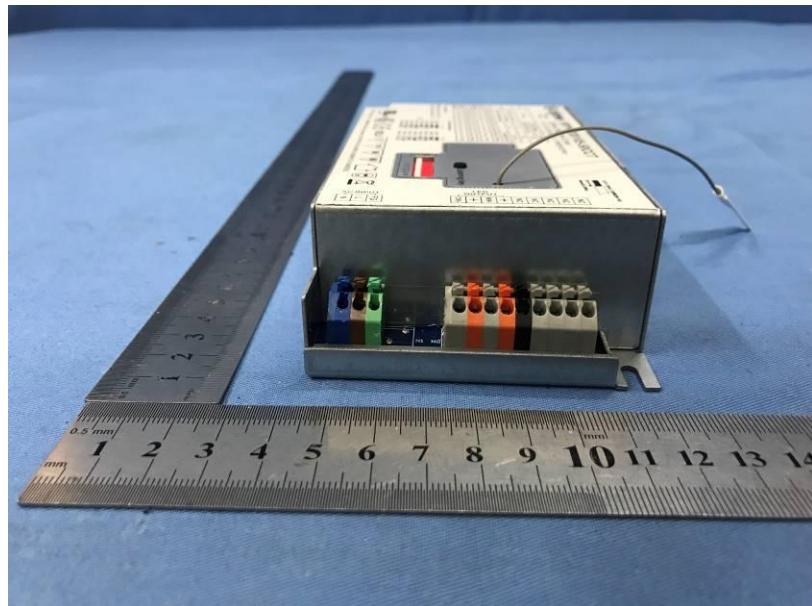


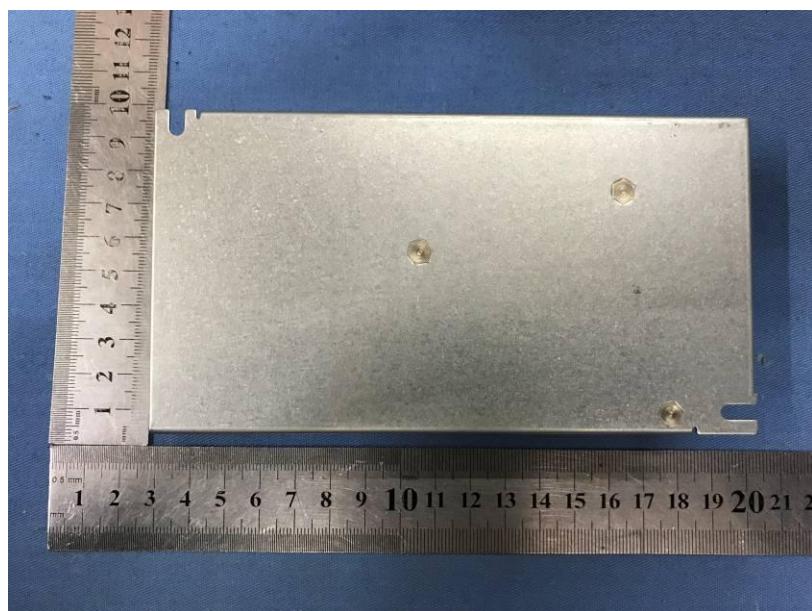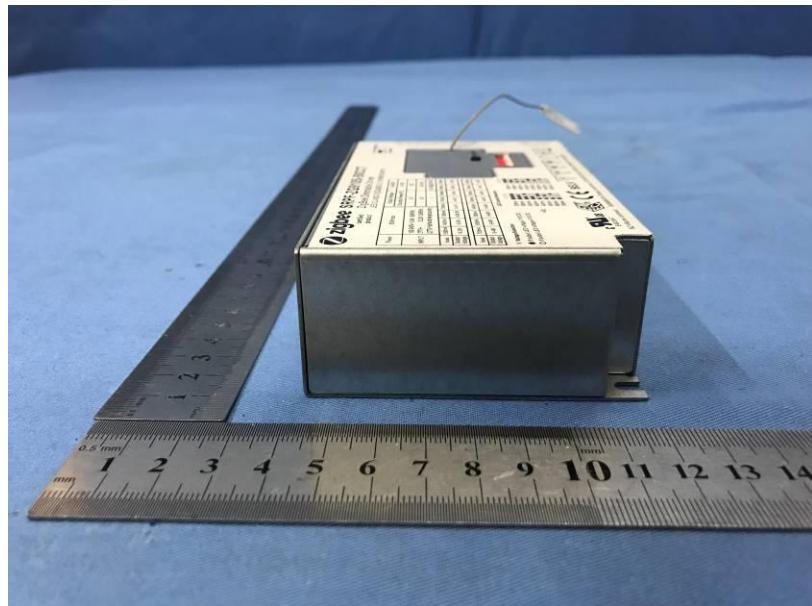

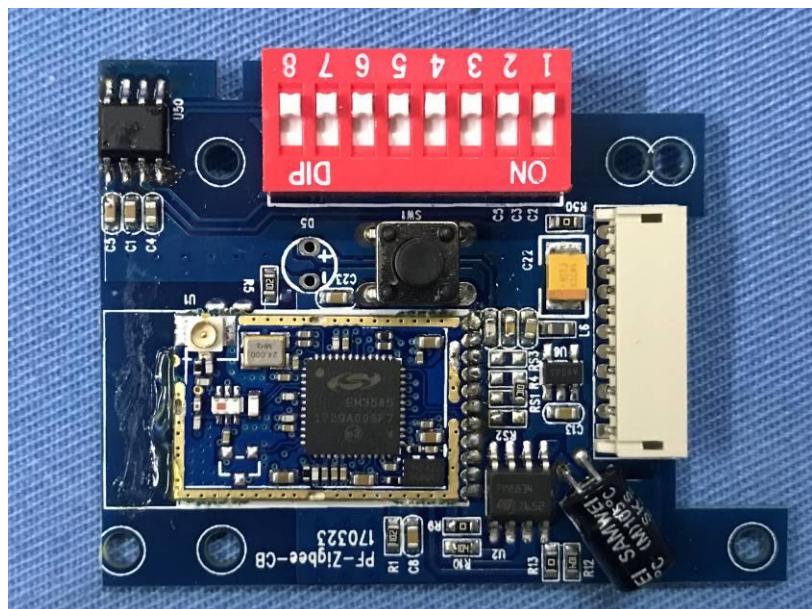

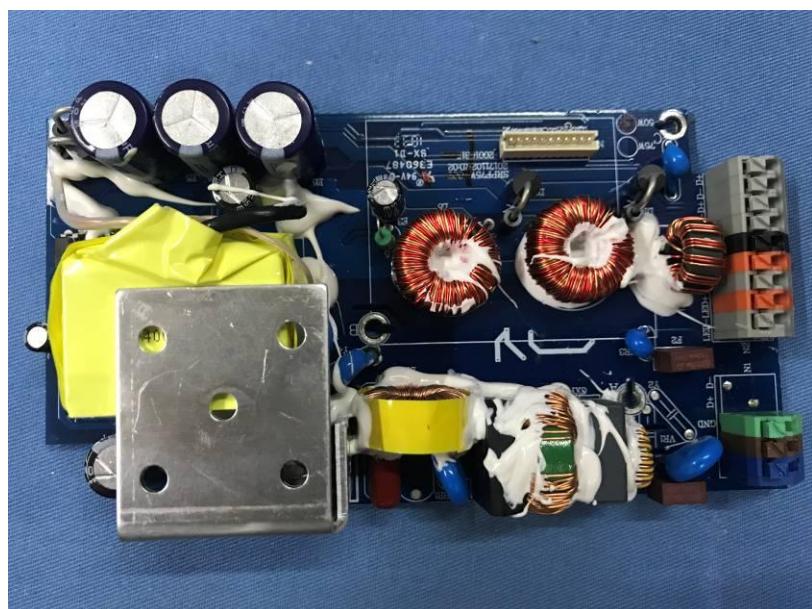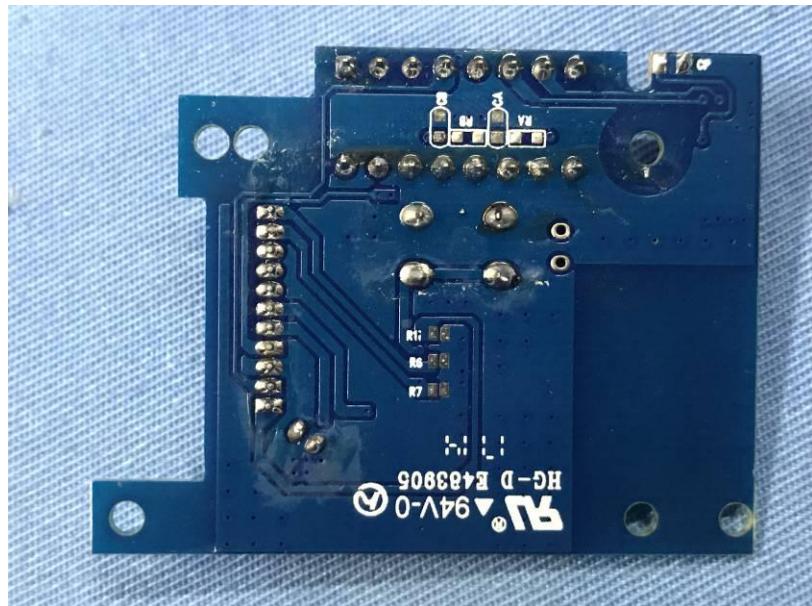

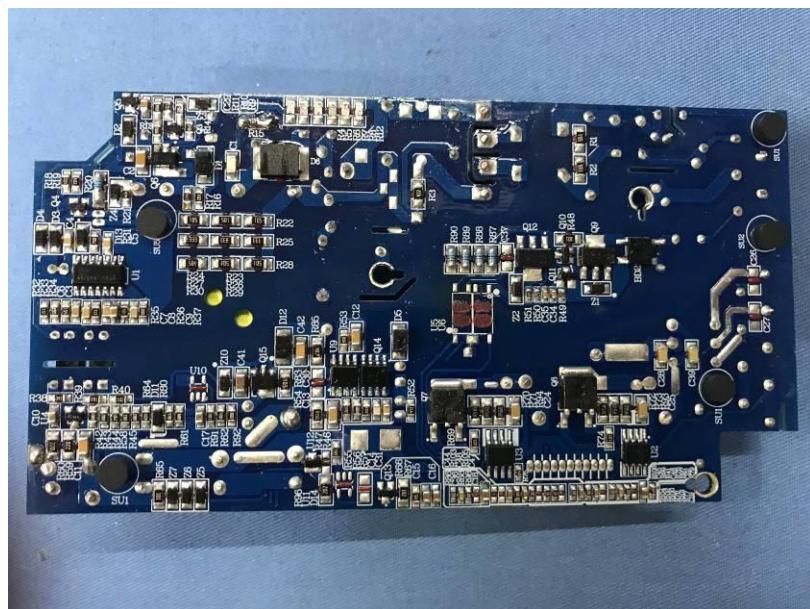

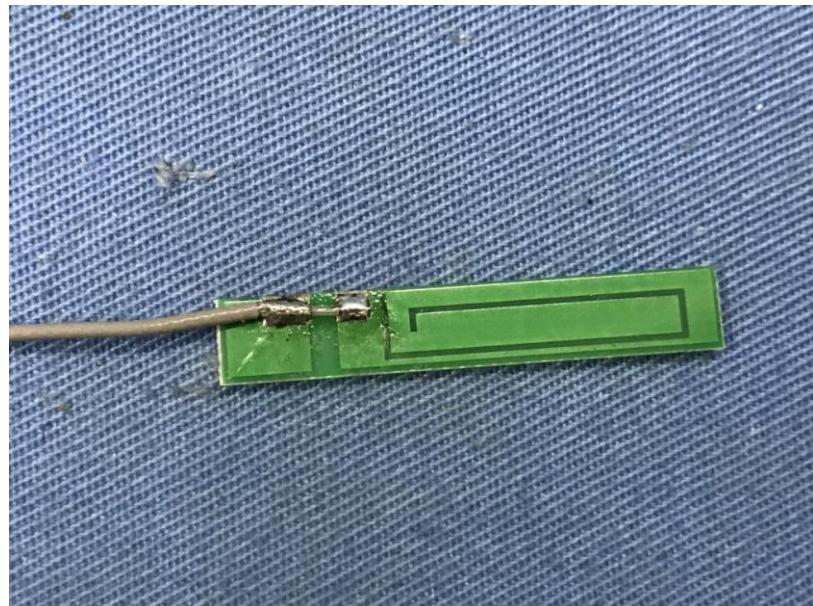

-----End-----