

FCC RADIO TEST REPORT

FCC ID: 2AHU7NV-04758

Applicant : MAX SALES GROUP
Address : 2331 S. Tubeway Ave. Commerce CA 90040

Equipment Under Test (EUT):

Name : Bluetooth speaker
Model : NV-04758

Standards : FCC PART 15, SUBPART C : 2014 (Section 15.247)
Report No : CTB160326001E
Date of Test : April 01-10, 2016
Date of Issue : April 12, 2016

Tset Result : **PASS**

In the configuration tested, the EUT complied with the standards specified above

Authorized Signature



(Simon Lee)
General Manager

The manufacture should ensure that all the products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of Shenzhen CTB Testing Technology Co., Ltd. Or test done by Shenzhen CTB Testing Technology Co., Ltd. Approvals in connection with, distribution or use of the product described in this report must be approved by Shenzhen CTB Testing Technology Co., Ltd Approvals in writing.

Contents

1. General Information.....	4
1.1. Description of Device (EUT).....	4
1.2. Accessories of device (EUT).....	5
1.3. Test Lab information.....	5
2. Summary of test.....	6
2.1. Summary of test result.....	6
2.2. Assistant equipment used for test.....	6
2.3. Block Diagram.....	7
2.4. Test mode.....	7
2.5. Test Conditions.....	7
2.6. Measurement Uncertainty (95% confidence levels, k=2).....	8
2.7. Test Equipment.....	9
3. Maximum Output power.....	10
3.1. Limit.....	10
3.2. Test Procedure.....	10
3.3. Test Setup.....	10
3.4. Test Result.....	10
4. Bandwidth.....	11
4.1. Limit.....	11
4.2. Test Procedure.....	11
4.3. Test Result.....	11
5. Carrier Frequency Separation.....	13
5.1. Limit.....	13
5.2. Test Procedure.....	13
5.3. Test Result.....	13
6. Number Of Hopping Channel.....	15
6.1. Limit.....	15
6.2. Test Procedure.....	15
6.3. Test Result.....	15
7. Dwell Time.....	17
7.1. Test limit.....	17
7.2. Test Procedure.....	17
7.3. Test Results.....	17
8. Radiated emissions.....	22
8.1. Limit.....	22
8.2. Block Diagram of Test setup.....	23
8.3. Test Procedure.....	23
8.4. Test Result.....	24
9. Band Edge Compliance.....	30
9.1. Block Diagram of Test Setup.....	30
9.2. Limit.....	30
9.3. Test Procedure.....	30

9.4. Test Result.....	30
10. Power Line Conducted Emissions.....	37
10.1. Block Diagram of Test Setup	37
10.2. Limit.....	37
10.3. Test Procedure.....	37
10.4. Test Result.....	37
11. Antenna Requirements.....	40
11.1. Limit.....	40
11.2. Result.....	40
12. Test setup photo.....	41
12.1. Photos of Radiated emission	41
12.2. Photos of Conducted Emission test.....	42
13. Photos of EUT	43

1. General Information

1.1. Description of Device (EUT)

EUT	:	Bluetooth speaker
Model No.	:	NV-04758
Trademark	:	N/A
Power supply	:	DC 5V From USB For Charge or DC 3.7V From lithium battery.
Radio Technology	:	Bluetooth 2.1+EDR
Operation frequency	:	2402-2480MHz
Modulation	:	GFSK, $\pi/4$ DQPSK, 8- DPSK
Antenna Type	:	PCB Antenna, max gain 1.0dBi.
Applicant	:	MAX SALES GROUP
Address	:	2331 S. Tubeway Ave. Commerce CA 90040
Manufacturer	:	MAX SALES GROUP
Address	:	2331 S. Tubeway Ave. Commerce CA 90040

1.2. Accessories of device (EUT)

Accessories 1 : USB Line

Type : 0.45m

Accessories 1 : Audio Line

Type : 0.45m

1.3. Test Lab information

Shenzhen CTB Testing Technology Co., Ltd.

10th floor, West Logistics Information Center Building, Fuyong Town ,
Bao'an District, Shenzhen City, P.R.C

FCC Registered No.: 671575

2. Summary of test

2.1. Summary of test result

Description of Test Item	Standard	Results
Maximum Peak Output Power	FCC Part 15: 15.247(b)(1) ANSI C63.4 :2009	PASS
Bandwidth	FCC Part 15: 15.215 ANSI C63.4 :2009	PASS
Carrier Frequency Separation	FCC Part 15: 15.247(a)(1) ANSI C63.4 :2009	PASS
Number Of Hopping Channel	FCC Part 15: 15.247(a)(1)(iii) ANSI C63.4 :2009	PASS
Dwell Time	FCC Part 15: 15.247(a)(1)(iii) ANSI C63.4 :2009	PASS
Radiated Emission	FCC Part 15: 15.209 FCC Part 15: 15.247(d) ANSI C63.4 :2009	PASS
Band Edge Compliance	FCC Part 15: 15.247(d) ANSI C63.4 :2009	PASS
Power Line Conducted Emissions	FCC Part 15: 15.207 ANSI C63.4 :2009	PASS
Antenna requirement	FCC Part 15: 15.203	PASS
Note: Test with the test procedure Bluetool.		

2.2. Assistant equipment used for test

Description	:	Notebook
Manufacturer	:	ACER
Model No.	:	E5
Remark	:	FCC DOC Approved

2.3. Block Diagram

1, For radiated emissions test: EUT was placed on a turn table, which is 0.8 meter high above ground. EUT was be set into BT test mode by adb.exe software before test.



2.4. Test mode

The test software “AppoTech RF Control Kit V3.62” was used to control EUT work in Continuous TX mode, and select test channel, wireless mode.

Tested mode, channel, and data rate information		
Mode	Channel	Frequency (MHz)
GFSK	Low :CH1	2402
	Middle: CH40	2441
	High: CH79	2480

Tested mode, channel, and data rate information		
Mode	Channel	Frequency (MHz)
$\pi/4$ DQPSK	Low :CH1	2402
	Middle: CH40	2441
	High: CH79	2480

Tested mode, channel, and data rate information		
Mode	Channel	Frequency (MHz)
8- DPSK	Low :CH1	2402
	Middle: CH40	2441
	High: CH79	2480

2.5. Test Conditions

Temperature range	21-25°C
Humidity range	40-75%
Pressure range	86-106kPa

2.6. Measurement Uncertainty (95% confidence levels, k=2)

Item	MU	Remark
Uncertainty for Power point Conducted Emissions Test	2.40dB	
Uncertainty for Radiation Emission test in 3m chamber (below 30MHz)	2.15 dB	Polarize: V
	2.56dB	Polarize: H
Uncertainty for Radiation Emission test in 3m chamber (30MHz to 1GHz)	3.54dB	Polarize: V
	4.2dB	Polarize: H
Uncertainty for Radiation Emission test in 3m chamber (1GHz to 25GHz)	2.12dB	Polarize: H
	2.52dB	Polarize: V
Uncertainty for radio frequency	1×10^{-9}	
Uncertainty for conducted RF Power	0.66dB	
Uncertainty for temperature	0.2°C	
Uncertainty for humidity	1%	
Uncertainty for DC and low frequency voltages	0.05%	

2.7. Test Equipment

Equipment	Manufacture	Model No.	Serial No.	Cal. Due day	Cal Interval
3m Semi-Anechoic Chamber	Frankonia	N/A	N/A	2017.04.07	1Year
EMI Test receiver	Rohde&Schwarz	ESCS30	100085	2017.04.07	1Year
Signal Analyzer	Agilent	N9010A	MY48030494	2016.08.15	1 Year
Bilog Antenna	SCHAFFNER CHASE	CBL6143	N/A	2017.04.07	1Year
Horn Antenna	SCHAFFNER CHASE	BBHA 9120D	BBHA 9120 D(1206)	2017.04.07	1Year
Amplifier	EM	EM-30180	060568	2017.04.07	1Year
Power Meter	Anritsu	ML2487A	6K00001491	2016.08.15	1Year
Power sensor	Anritsu	ML2491A	32516	2016.08.15	1Year
Coaxial Cable	SZHTW	N/A	C-01	2017.04.07	1Year
Coaxial Cable	SZHTW	N/A	C-02	2017.04.07	1Year
Coaxial Cable	SZHTW	N/A	C-03	2017.04.07	1Year
Test Receiver	Rohde&Schwarz	ESCS30	100086	2017.04.07	1 Year
L.I.S.N.	Schwarzbeck	NSLK8126	8126466	2017.04.07	1 Year
50 Ω Coaxial Switch	Anritsu	MP59B	6200264326	2017.04.07	1 Year

3. Maximum Output power

3.1. Limit


Please refer section 15.247.

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts, the e.i.r.p shall not exceed 4W

3.2. Test Procedure

The transmitter output is connected to the RF Power Meter. The RF Power Meter is set to the Peak power detection.

3.3. Test Setup



3.4. Test Result

EUT:Bluetooth speaker		M/N: NV-04758			
Test date: 2016-04-05		Test site: RF site		Tested by: Mason	
Mode	Freq (MHz)	PEAK Output Power (dBm)	PEAK Output Power (mW)	Limit (dBm)	Margin (dB)
GFSK	2402	1.06	1.28	21	19.94
	2441	1.11	1.29	21	19.89
	2480	1.05	1.27	21	19.95
$\pi/4$ DQPSK,	2402	0.85	1.22	30	29.15
	2441	0.83	1.21	30	29.17
	2480	0.80	1.20	30	29.20
8- DPSK	2402	0.61	1.15	30	29.39
	2441	0.55	1.14	30	29.45
	2480	0.59	1.15	30	29.41
Conclusion: PASS					

4. Bandwidth

4.1. Limit

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

4.2. Test Procedure

The transmitter output was coupled to a spectrum analyzer via a antenna. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 30kHz RBW and 100kHz VBW. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB. Peak detector is used .




4.3. Test Result

EUT: Bluetooth speaker		M/N: NV-04758		
Test date: 2016-04-05		Test site: RF site		Tested by: Mason
Mode	Freq (MHz)	20dB Bandwidth (MHz)	Limit (kHz)	Conclusion
GFSK	2402	0.789	/	PASS
	2441	0.771	/	PASS
	2480	0.783	/	PASS
$\pi/4$ DQPSK	2402	1.206	/	PASS
	2441	1.211	/	PASS
	2480	1.213	/	PASS
8- DPSK	2402	1.213	/	PASS
	2441	1.217	/	PASS
	2480	1.215	/	PASS

Test plot as follows:

The test plot only show the worst mode.

Original Test data For 20dB bandwidth
8- DPSK

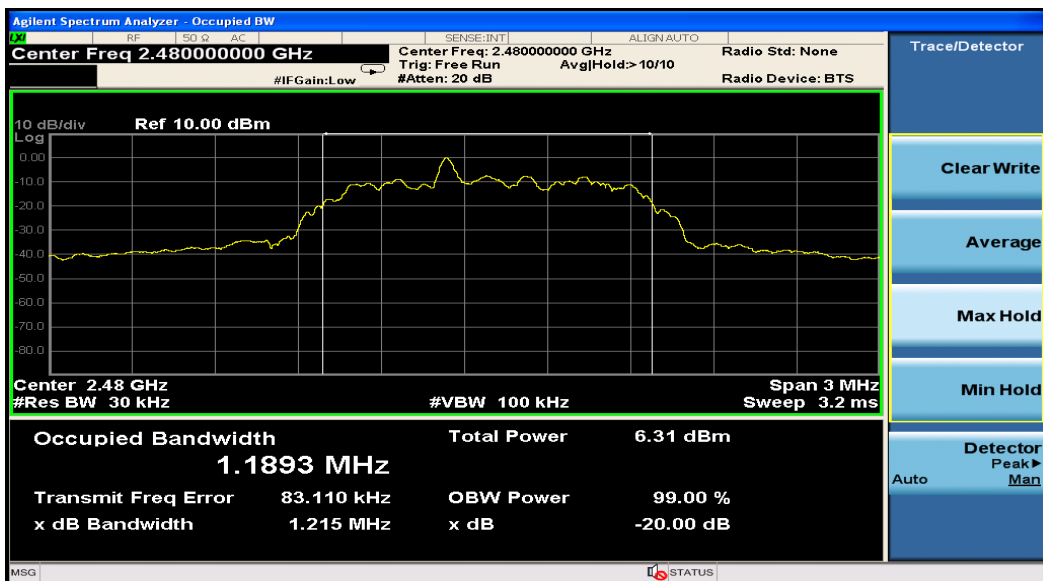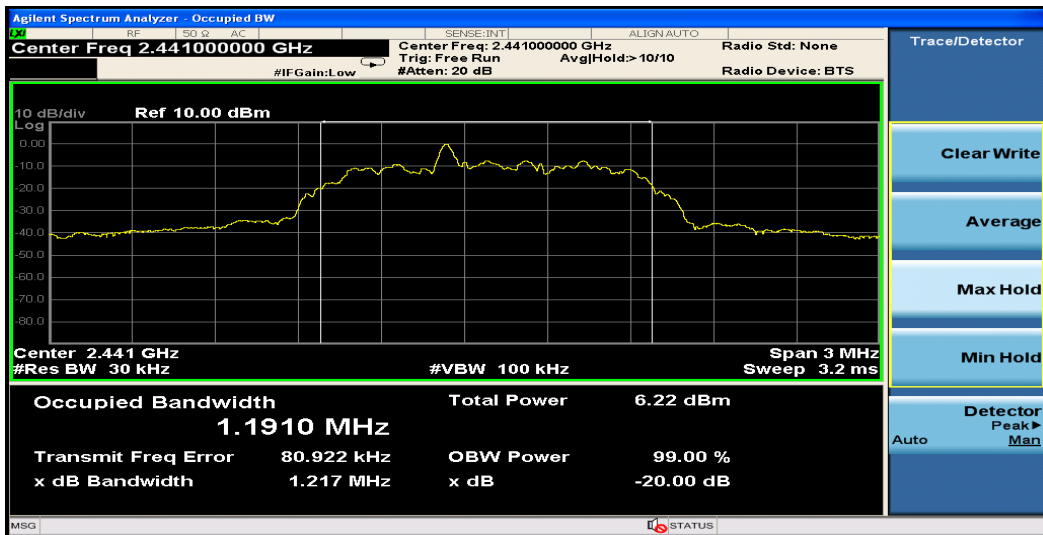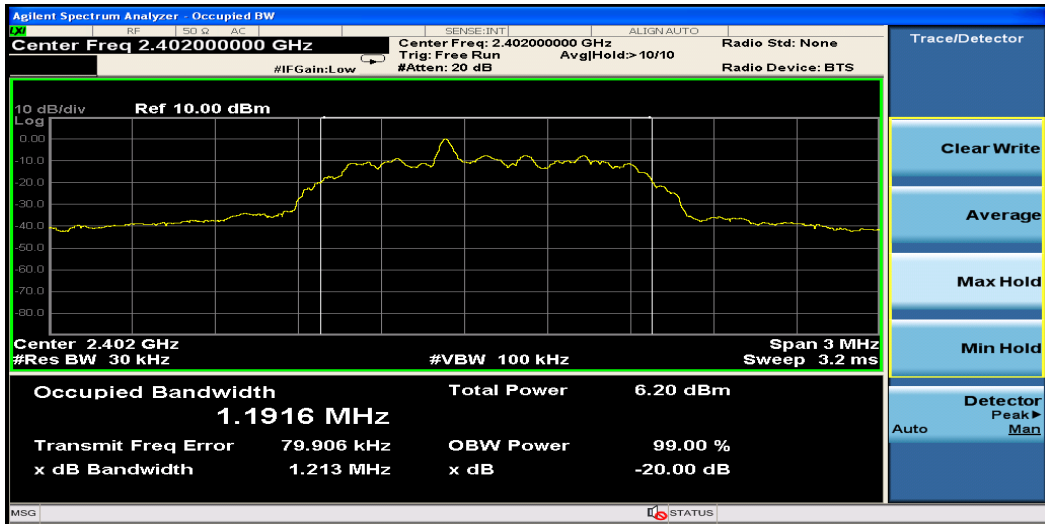

5. Carrier Frequency Separation

5.1. Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW


5.2. Test Procedure

The transmitter output was coupled to a spectrum analyzer via a antenna. The carrier frequency was measured by spectrum analyzer with 100kHz RBW and 300kHz VBW.

5.3. Test Result

EUT: Bluetooth speaker		M/N: NV-04758		
Test date: 2016-04-06		Test site: RF site		Tested by: Mason
Mode/Channel	Channel separation (MHz)	20dB Bandwidth (MHz)	Limit (MHz) 2/3 20dB bandwidth	Conclusion
GFSK	1.002	0.823	0.549	PASS
$\pi/4$ DQPSK	1.002	1.185	0.790	PASS
8- DPSK	1.000	1.192	0.795	PASS


Original test data for channel separation
GFSK

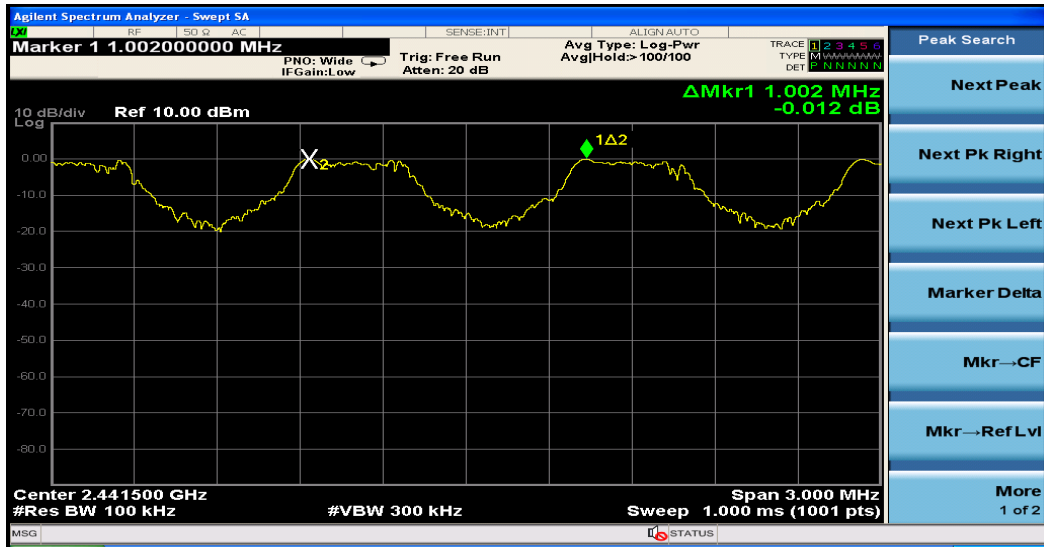

$\pi/4$ DQPSK



8- DPSK

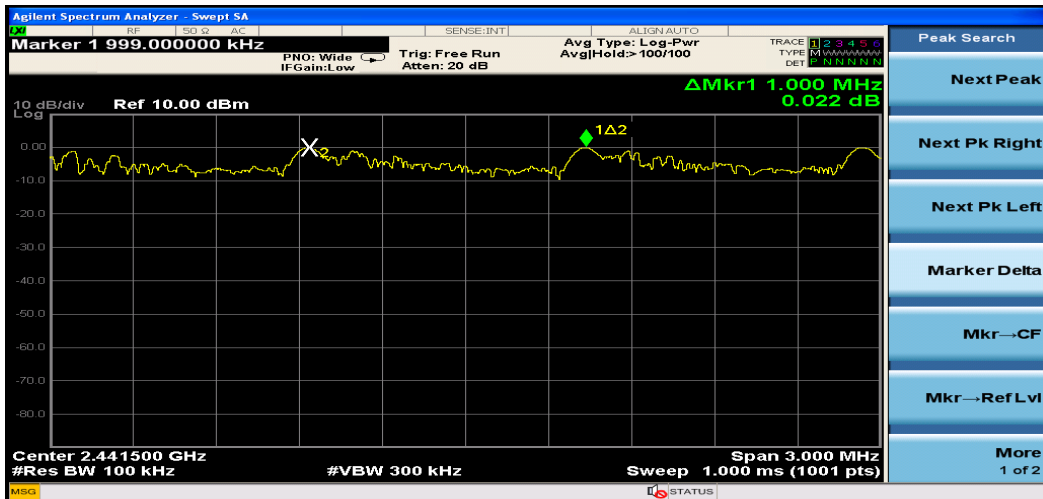

6. Number Of Hopping Channel

6.1. Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels


6.2. Test Procedure

The transmitter output was coupled to a spectrum analyzer via a antenna. The number of hopping channel was measured by spectrum analyzer with 100kHz RBW and 300kHz VBW.


6.3. Test Result

EUT: Bluetooth speaker		M/N: NV-04758	
Test date: 2016-04-06		Test site: RF site	Tested by: Mason
Mode	Number of hopping channel	Limit	Conclusion
GFSK	79	>15	PASS
$\pi/4$ DQPSK	79	>15	PASS
8- DPSK	79	>15	PASS


Original test data for hopping channel number
GFSK

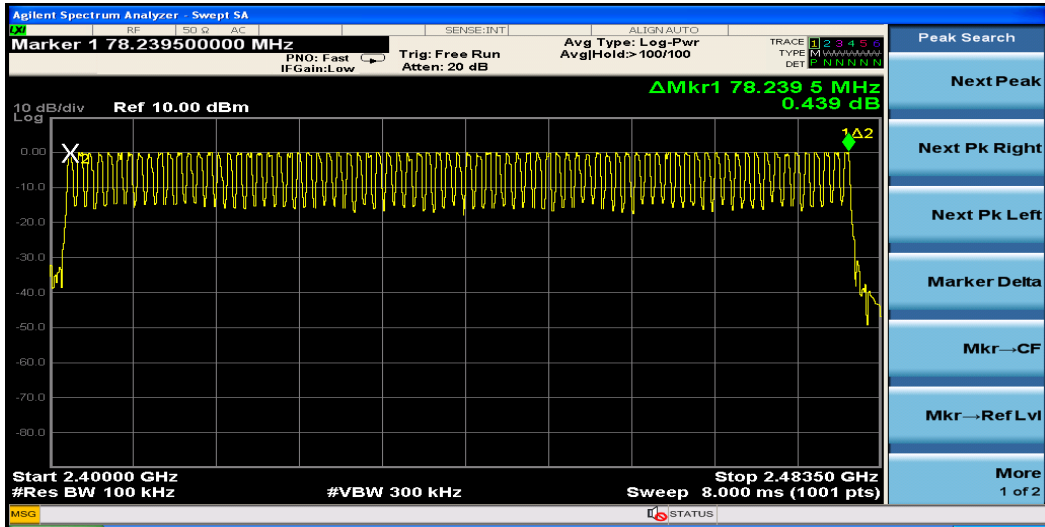

$\pi/4$ DQPSK

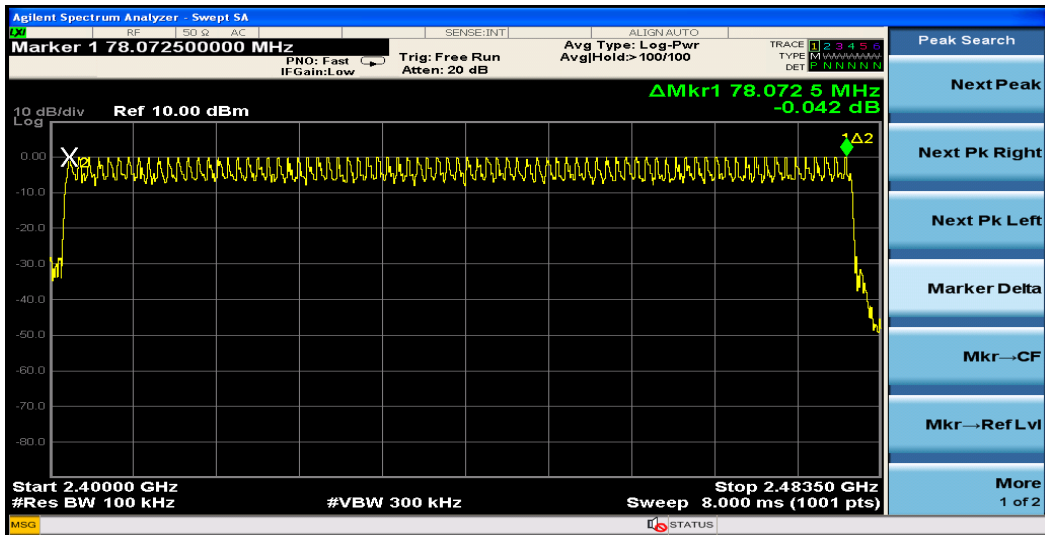

8- DPSK

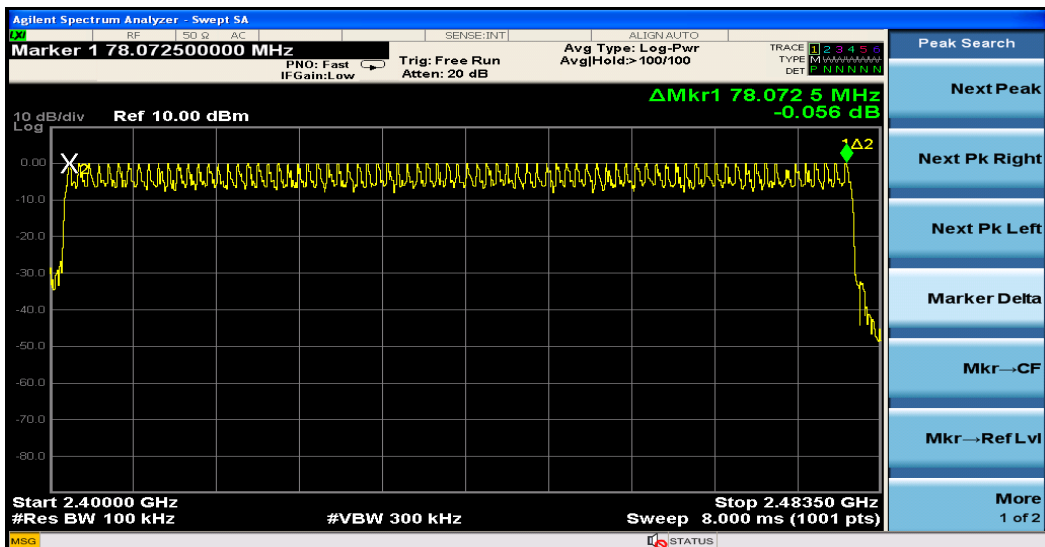

7. Dwell Time

7.1. Test limit

Please refer section 15.247

According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz. The average time of occupancy on any frequency shall not be greater than 0.4 s within period of 0.4 seconds multiplied by the number of hopping channels employed.

7.2. Test Procedure

7.2.1. Place the EUT on the table and set it in transmitting mode.

7.2.2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

7.2.3. Set center frequency of spectrum analyzer = operating frequency.

7.2.4. Set the spectrum analyzer as RBW, VBW=1MHz, Span = 0Hz, Sweep = auto.

7.2.5. Repeat above procedures until all frequencies measured were complete.

7.3. Test Results

PASS.

Detailed information please see the following page.

EUT: Bluetooth speaker		M/N: NV-04758				
Test date: 2016-04-06		Test site: RF site			Tested by: Mason	
Mode	Data Packet	Frequency (MHz)	Pulse Duration (ms)	Dwell Time (s)	Limit (s)	Conclusion
GFSK	DH1	2441	0.36	0.230	<0.4	PASS
	DH3	2441	1.64	0.350	<0.4	PASS
	DH5	2441	2.86	0.366	<0.4	PASS
$\pi/4$	DH1	2441	0.37	0.237	<0.4	PASS
	DH3	2441	1.62	0.346	<0.4	PASS
DQPSK	DH5	2441	2.86	0.366	<0.4	PASS
8- DPSK	DH1	2441	0.37	0.237	<0.4	PASS
	DH3	2441	1.62	0.346	<0.4	PASS
	DH5	2441	2.87	0.367	<0.4	PASS

Note: 1, A period time = $0.4 \text{ (s)} * 79 = 31.6 \text{ (s)}$


2, DH1 time slot = $\text{Pulse Duration} * (1600 / (1 * 79)) * \text{A period time}$

DH3 time slot = $\text{Pulse Duration} * (1600 / (3 * 79)) * \text{A period time}$


DH5 time slot = $\text{Pulse Duration} * (1600 / (5 * 79)) * \text{A period time}$

GFSK


DH1:

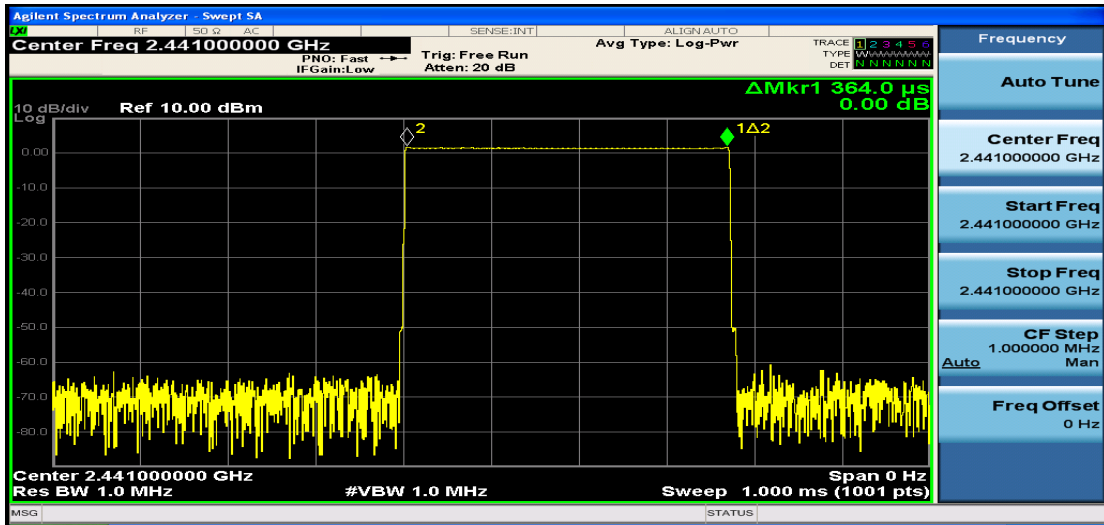


DH3:

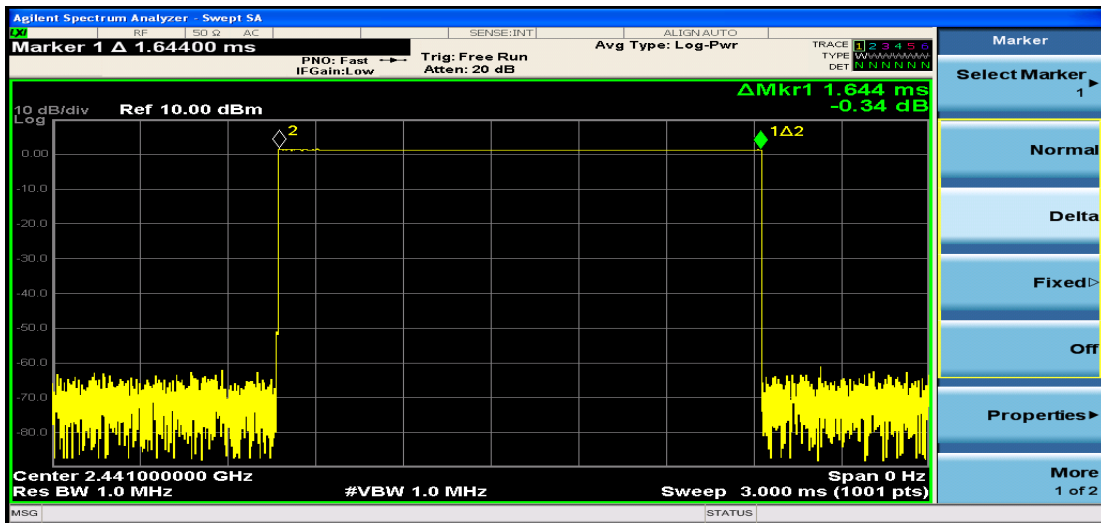


DH5

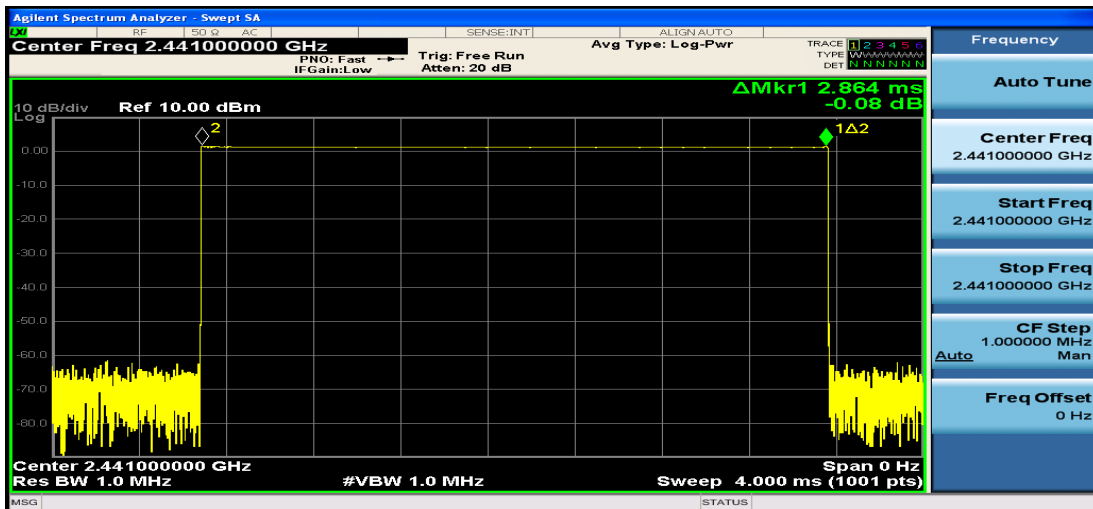


$\pi/4$ DQPSK
2DH1

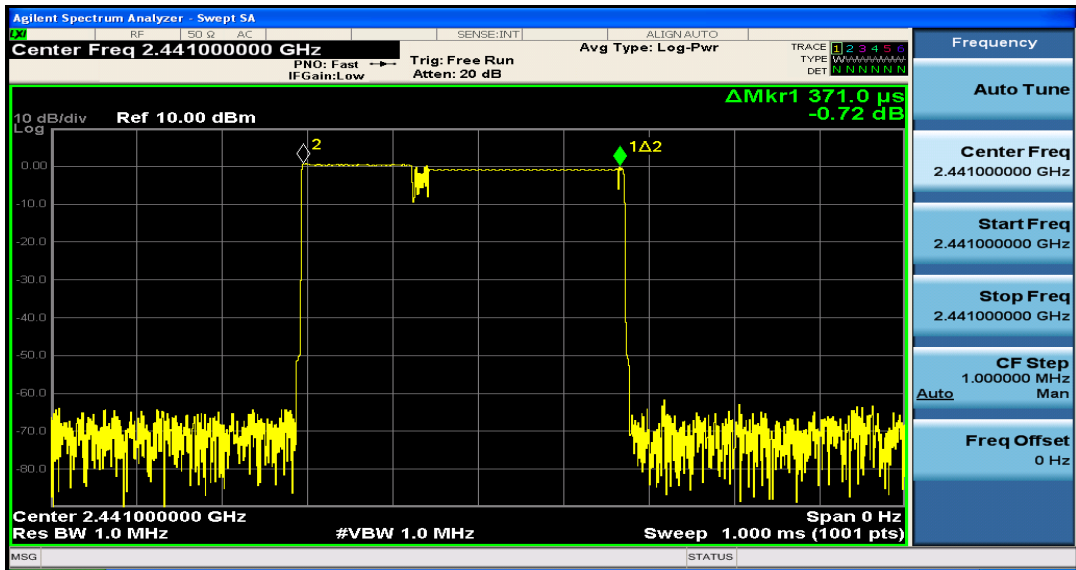


2DH3

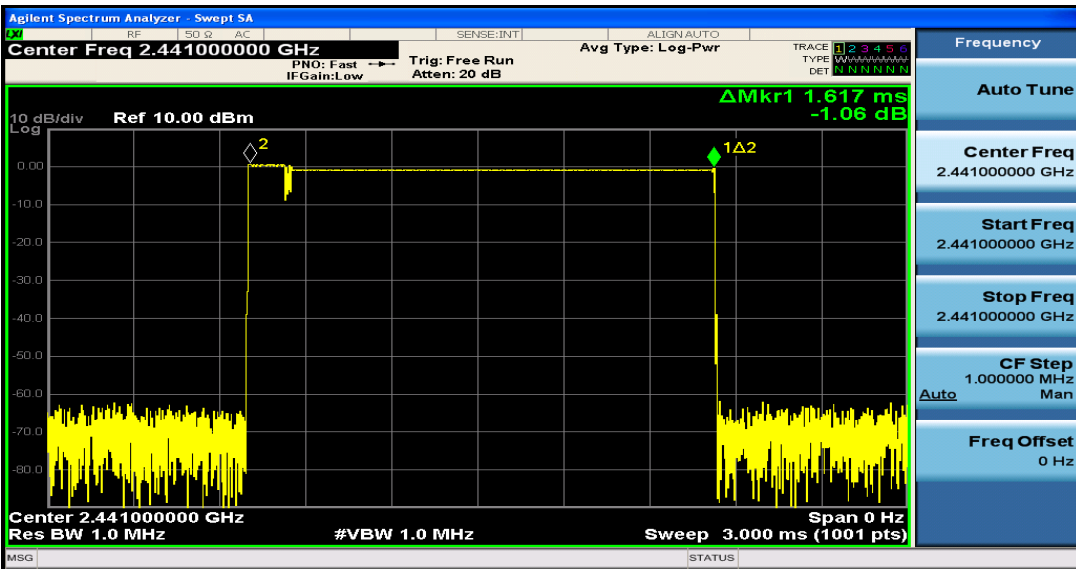


2DH5

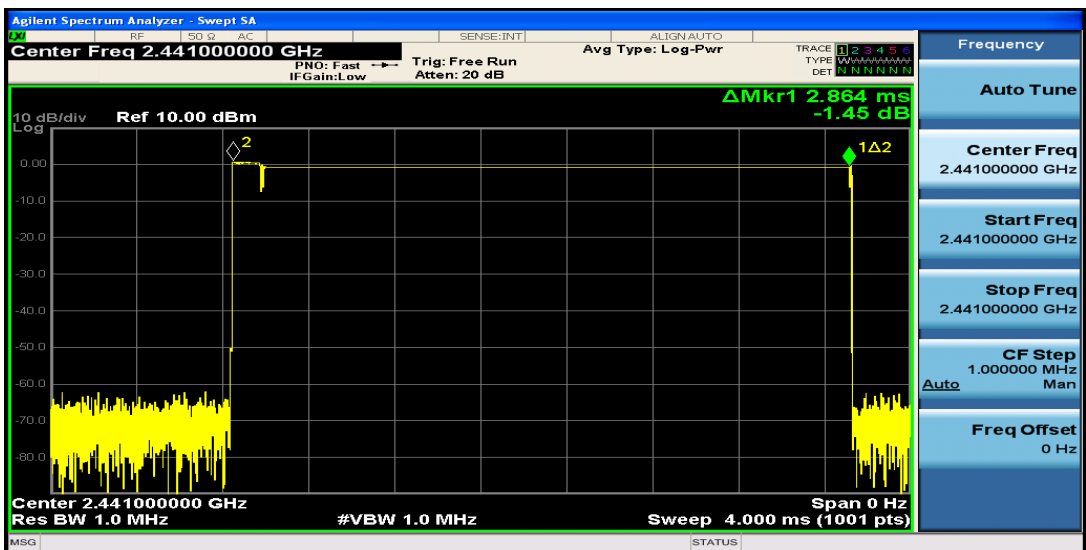


8- DPSK
3DH1

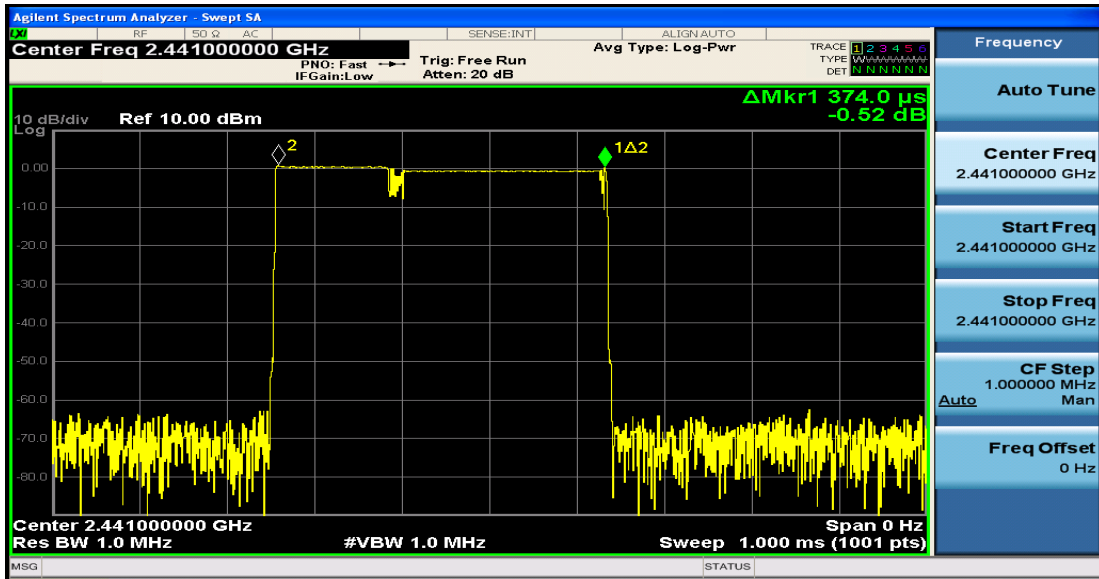

3DH3

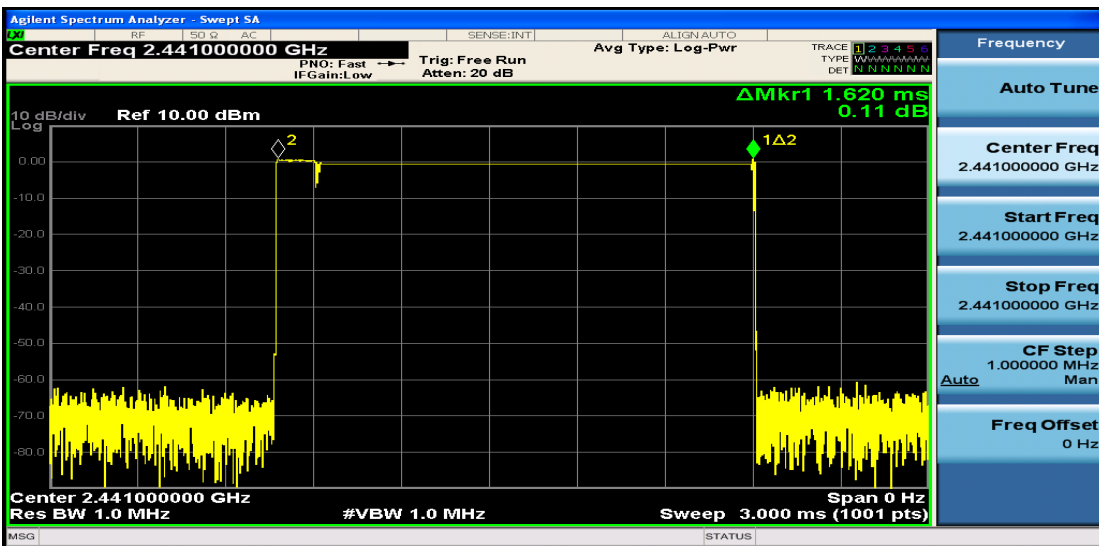

3DH5

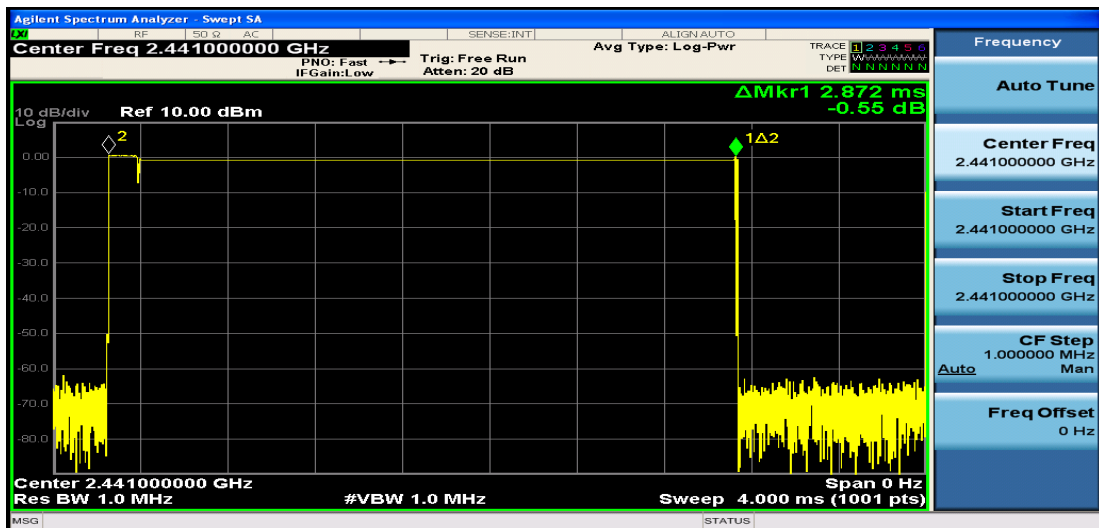

8. Radiated emissions

8.1. Limit

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

15.205 Restricted frequency band


MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)

15.209 Limit


FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		μV/m	dB(μV)/m
0.009-0.490	300	2400/F(KHz)	/
0.490-1.705	30	24000/F(KHz)	/
1.705-30	30	30	29.5
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 dB(μV)/m (Peak) 54.0 dB(μV)/m (Average)	

8.2. Block Diagram of Test setup

8.2.1. In 3m Anechoic Chamber Test Setup Diagram for below 1GHz

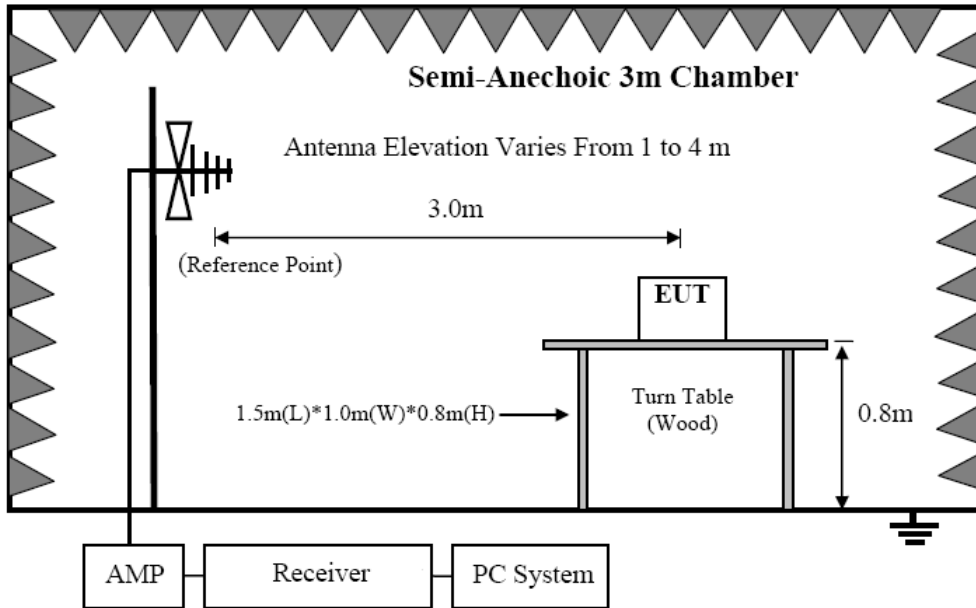

8.2.2. In 3m Anechoic Chamber Test Setup Diagram for frequency above 1GHz

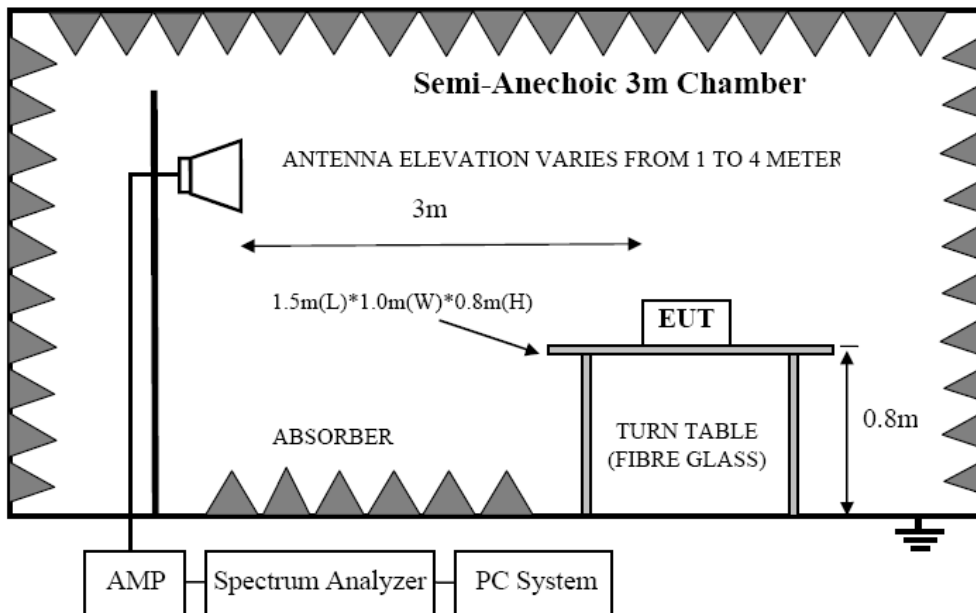

Note: For harmonic emissions test a appropriate high pass filter was inserted in the input port of AMP.

8.3. Test Procedure

- (1) EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber.
- (2) Setup EUT and simulator as shown in section 1.4 and 6.1

- (3) Test antenna was located 3m from the EUT on an adjustable mast. Below pre-scan procedure was first performed in order to find prominent radiated emissions.
 - (a) Change work frequency or channel of device if practicable.
 - (b) Change modulation type of device if practicable.
 - (c) Rotated EUT though three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions
- (4) Spectrum frequency from 9KHz to 25GHz (tenth harmonic of fundamental frequency) was investigated
- (5) For final emissions measurements at each frequency of interest, the EUT were rotated and the antenna height was varied between 1m and 4m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.4 2009 on Radiated Emission test.
- (6) For emissions above 1GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1MHz, VBW is set at 3MHz for Peak measure; RBW is set at 1MHz, VBW is set at 10Hz for Average measure.

8.4. Test Result


We have scanned the 10th harmonic from 9KHz to the EUT.
Detailed information please see the following page.

From 9KHz to 30MHz: Conclusion: PASS

Note: The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

From 30MHz to 1000MHz: Conclusion: PASS


Remark: All modes have been tested, and only worst data of GFSK mode, Channel 2402MHz was listed in this report.

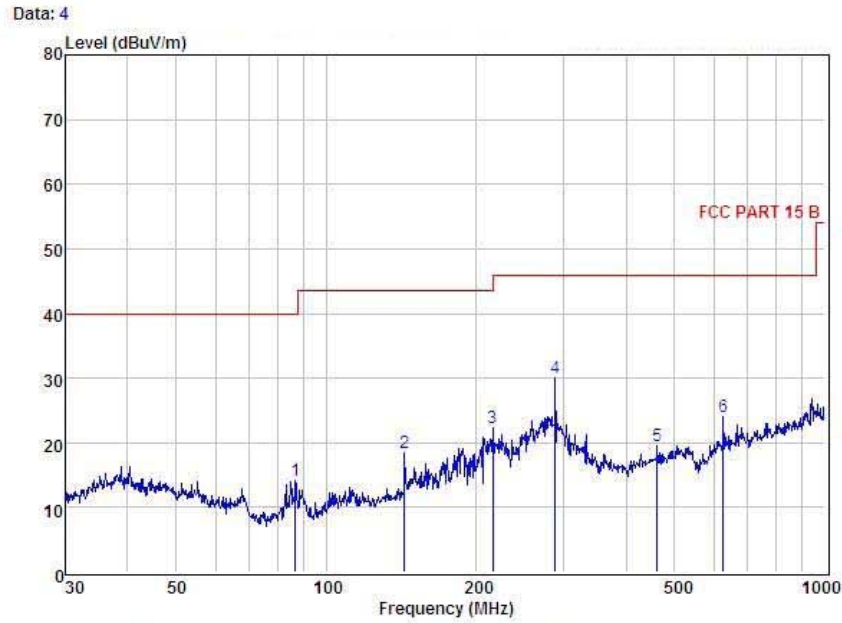

Condition : FCC PART 15 B Sm POL: HORIZONTAL									
Item	Freq MHz	Read Level dBuV	Antenna Factor dB	Preamp Factor dB	Cable Loss dB	Level dBuV	Limit dBuV	Margin dBuV	Remark
1	86.81	31.22	9.41	26.81	0.32	14.14	40.00	-25.86	QP
2	143.83	31.09	13.77	26.90	0.38	13.34	43.50	-25.16	QP
3	216.02	38.47	10.41	27.05	0.55	22.38	46.00	-23.62	QP
4	287.99	40.99	12.54	24.17	0.68	30.02	46.00	-15.98	QP
5	460.73	27.01	16.08	24.51	1.02	19.60	46.00	-26.40	QP
6	625.08	29.96	18.80	25.82	1.11	24.05	46.00	-21.95	QP

Remark: Level = Read Level + Antenna Factor - Preamp Factor + Cable Loss

Data: 3

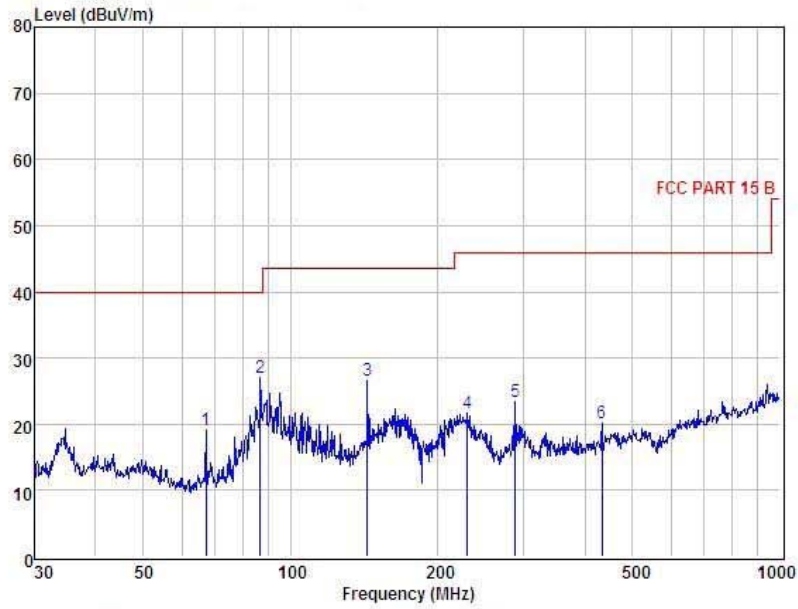

Condition : FCC PART 15 B 3m POL: VERTICAL									
Item	Freq MHz	Read Level dBuV	Antenna Factor dB	Preamp Factor dB	Cable Loss dB	Level dBuV	Limit dBuV	Margin dBuV	Remark
1	67.20	34.66	11.21	26.98	0.28	19.17	40.00	-20.83	QP
2	86.81	44.00	9.41	26.81	0.32	26.92	40.00	-13.08	QP
3	143.83	39.44	13.77	26.90	0.38	26.69	43.50	-16.81	QP
4	230.10	36.51	11.21	26.57	0.58	21.73	46.00	-24.27	QP
5	297.99	34.30	12.54	24.17	0.66	23.33	46.00	-22.67	QP
6	432.55	28.39	15.53	24.46	0.74	20.20	46.00	-25.80	QP

Remark: Level = Read Level + Antenna Factor - Preamp Factor + Cable Loss

Above 1GHz: PASS

Remark: All modes have been tested, and only reported worst data of GFSK mode.


1GHz—25GHz Radiated emission Test result									
EUT: Bluetooth speaker					M/N: NV-04758				
Power: DC 5.0V From PC									
Test date: 2016-04-07			Test site: 3m Chamber			Tested by: Mason			
Test mode: GFSK Tx CH1 2402MHz									
Antenna polarity: Vertical									
No	Freq (MHz)	Read Level (dBuV/m)	Antenna Factor (dB/m)	Cable loss (dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4804	44.79	33.95	10.18	34.26	54.66	74	19.34	PK
2	4804	35.22	33.95	10.18	34.26	45.09	54	8.91	AV
3	7206	/							
4	9608	/							
5	12010	/							
Antenna Polarity: Horizontal									
1	4804	45.18	33.95	10.18	34.26	55.05	74	18.95	PK
2	4804	36.68	33.95	10.18	34.26	46.55	54	7.45	AV
3	7206	/							
4	9608	/							
5	12010	/							
Note:									
1, Measuring frequency from 1GHz to 25GHz									
2, Spectrum Set for PK measure: RBW=1MHz, VBW=1MHz, Sweep time=Auto, Detector: PK									
2, Spectrum Set for AV measure: RBW=1MHz, VBW=10Hz, Sweep time=Auto, Detector: PK									
3, Result = Read level + Antenna factor + cable loss-Amp factor									
4, All the other emissions not reported were too low to read and deemed to comply with FCC limit.									

1GHz—25GHz Radiated emission Test result									
EUT: Bluetooth speaker					M/N: NV-04758				
Power: DC 5.0V From PC									
Test date: 2016-04-07			Test site: 3m Chamber			Tested by: Mason			
Test mode: GFSK Tx CH40 2441MHz									
Antenna polarity: Vertical									
No	Freq (MHz)	Read Level (dBuV/m)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4882	43.98	33.93	10.2	34.29	53.82	74	20.18	PK
2	4882	34.21	33.93	10.2	34.29	44.05	54	9.95	AV
3	7323	/							
4	9764	/							
5	12205	/							
Antenna Polarity: Horizontal									
1	4882	45.18	33.93	10.2	34.29	55.02	74	18.98	PK
2	4882	35.82	33.93	10.2	34.29	45.66	54	8.34	AV
3	7323	/							
4	9764	/							
5	12205	/							
Note:									
1, Measuring frequency from 1GHz to 25GHz									
2, Spectrum Set for PK measure: RBW=1MHz, VBW=1MHz, Sweep time=Auto, Detector: PK									
2, Spectrum Set for AV measure: RBW=1MHz, VBW=10Hz, Sweep time=Auto, Detector: PK									
3, Result = Read level + Antenna factor + cable loss-Amp factor									
4, All the other emissions not reported were too low to read and deemed to comply with FCC limit.									

1GHz—25GHz Radiated emission Test result									
EUT: Bluetooth speaker					M/N: NV-04758				
Power: DC 5.0V From PC									
Test date: 2016-04-07			Test site: 3m Chamber			Tested by: Mason			
Test mode: GFSK Tx CH79 2480MHz									
Antenna polarity: Vertical									
No	Freq (MHz)	Read Level (dBuV/m)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4960	46.12	33.98	10.22	34.25	56.07	74	17.93	PK
2	4960	35.05	33.98	10.22	34.25	45.00	54	9.00	AV
3	7440	/							
4	9920	/							
5	12400	/							
Antenna Polarity: Horizontal									
1	4960	45.88	33.98	10.22	34.25	55.83	74	18.17	PK
2	4960	35.71	33.98	10.22	34.25	45.66	54	8.34	AV
3	7440	/							
4	9920	/							
5	12400	/							
Note:									
1, Measuring frequency from 1GHz to 25GHz									
2, Spectrum Set for PK measure: RBW=1MHz, VBW=1MHz, Sweep time=Auto, Detector: PK									
2, Spectrum Set for AV measure: RBW=1MHz, VBW=10Hz, Sweep time=Auto, Detector: PK									
3, Result = Read level + Antenna factor + cable loss-Amp factor									
4, All the other emissions not reported were too low to read and deemed to comply with FCC limit.									

9. Band Edge Compliance

9.1. Block Diagram of Test Setup

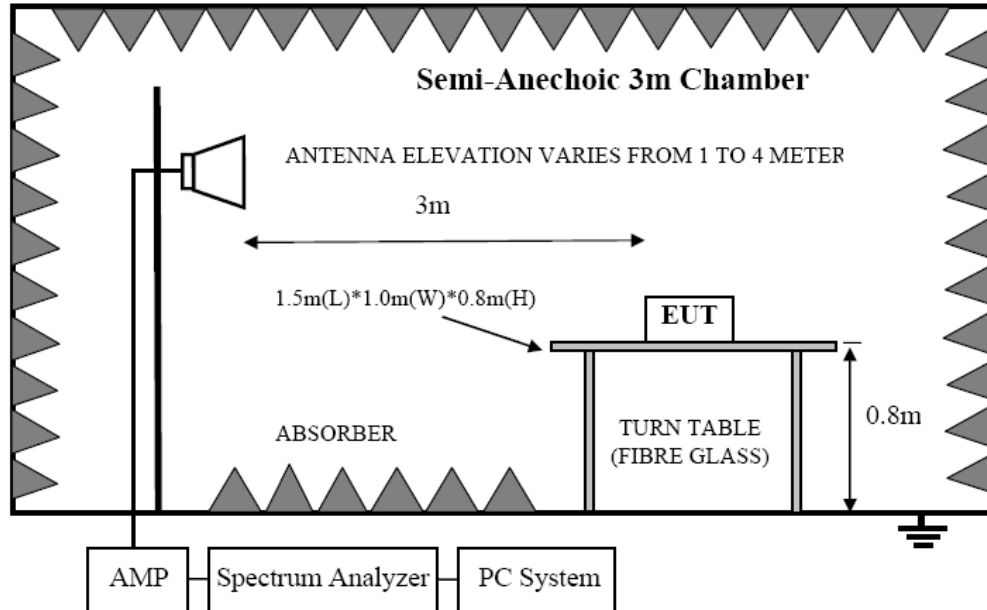

9.2. Limit

All the lower and upper band-edges emissions appearing within restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions outside operation shall be at least 30dB below the fundamental emissions, or comply with 15.209 limits.

9.3. Test Procedure

All restriction band and non- restriction band have been tested , only worse case is reported.

9.4. Test Result

PASS. (See below detailed test data)

Remark: All modes have been tested, and only reported worst data of GFSK mode.

Radiated Method

GFSK (CH Low)

Band Edge Test result								
EUT: Bluetooth speaker				M/N: NV-04758				
Power: DC 5.0V From PC								
Test date: 2016-04-07			Test site: 3m Chamber			Tested by: Mason		
Test mode: Tx CH Low 2402MHz								
Antenna polarity: Vertical								
Freq (MHz)	Read Level (dBuV/m)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2390	46.81	27.62	3.92	34.97	43.38	74	30.62	PK
2390	/	27.62	3.92	34.97	/	54	/	AV
2400	55.05	27.62	3.94	34.97	51.64	74	22.36	PK
2400	/	27.62	3.94	34.97	/	54	/	AV
Antenna Polarity: Horizontal								
2390	47.42	27.62	3.92	34.97	43.99	74	30.01	PK
2390	/	27.62	3.92	34.97	/	54	/	AV
2400	55.71	27.62	3.94	34.97	52.30	74	21.70	PK
2400	/	27.62	3.94	34.97	/	54	/	AV
Note: 1, Spectrum Set for PK measure: RBW=1MHz, VBW=1MHz, Sweep time=Auto, Detector: PK 2, Spectrum Set for AV measure: RBW=1MHz, VBW=10Hz, Sweep time=Auto, Detector: PK 3, Result = Read level + Antenna factor + cable loss-Amp factor 4, All the other emissions not reported were too low to read and deemed to comply with FCC limit.								

GFSK (CH High)

Band Edge Test result								
EUT: Bluetooth speaker					M/N: NV-04758			
Power: DC 5.0V From PC								
Test date: 2016-04-07			Test site: 3m Chamber			Tested by: Mason		
Test mode: Tx CH High 2480MHz								
Antenna polarity: Vertical								
Freq (MHz)	Read Level (dBuV/m)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2483.5	46.12	27.59	4.00	34.97	42.74	74	31.26	PK
2483.5	/	27.59	4.00	34.97	/	54	/	AV
Antenna Polarity: Horizontal								
2483.5	46.53	27.59	4.00	34.97	43.15	74	30.85	PK
2483.5	/	27.59	4.00	34.97	/	54	/	AV
Note: 1, Spectrum Set for PK measure: RBW=1MHz, VBW=1MHz, Sweep time=Auto, Detector: PK 2, Spectrum Set for AV measure: RBW=1MHz, VBW=10Hz, Sweep time=Auto, Detector: PK 3, Result = Read level + Antenna factor + cable loss-Amp factor 4, All the other emissions not reported were too low to read and deemed to comply with FCC limit.								

GFSK (Hopping Low)


Band Edge Test result								
EUT: Bluetooth speaker					M/N: NV-04758			
Power: DC 5.0V From PC								
Test date: 2016-04-07			Test site: 3m Chamber			Tested by: Mason		
Test mode: Tx CH Low 2402MHz								
Antenna polarity: Vertical								
Freq (MHz)	Read Level (dBuV/m)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2390	46.25	27.62	3.92	34.97	42.82	74	31.18	PK
2390	/	27.62	3.92	34.97	/	54	/	AV
2400	55.77	27.62	3.94	34.97	52.36	74	21.64	PK
2400	/	27.62	3.94	34.97	/	54	/	AV
Antenna Polarity: Horizontal								
2390	45.81	27.62	3.92	34.97	42.38	74	31.62	PK
2390	/	27.62	3.92	34.97	/	54	/	AV
2400	54.73	27.62	3.94	34.97	51.32	74	22.68	PK
2400	/	27.62	3.94	34.97	/	54	/	AV
Note:								
1, Spectra Set for PK measure: RBW=1MHz, VBW=1MHz, Sweep time=Auto, Detector: PK								
2, Spectra Set for AV measure: RBW=1MHz, VBW=10Hz, Sweep time=Auto, Detector: PK								
3, Result = Read level + Antenna factor + cable loss-Amp factor								
4, All the other emissions not reported were too low to read and deemed to comply with FCC limit.								

GFSK (Hopping High)

Band Edge Test result								
EUT: Bluetooth speaker				M/N: NV-04758				
Power: DC 5.0V From PC								
Test date: 2016-04-07			Test site: 3m Chamber			Tested by: Mason		
Test mode: Tx CH High 2480MHz								
Antenna polarity: Vertical								
Freq (MHz)	Read Level (dBuV/m)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2483.5	46.42	27.59	4.00	34.97	43.04	74	30.96	PK
2483.5	/	27.59	4.00	34.97	/	54	/	AV
Antenna Polarity: Horizontal								
2483.5	47.38	27.59	4.00	34.97	44.00	74	30.00	PK
2483.5	/	27.59	4.00	34.97	/	54	/	AV
Note:								
1, Spectrum Set for PK measure: RBW=1MHz, VBW=1MHz, Sweep time=Auto, Detector: PK								
2, Spectrum Set for AV measure: RBW=1MHz, VBW=10Hz, Sweep time=Auto, Detector: PK								
3, Result = Read level + Antenna factor + cable loss-Amp factor								
4, All the other emissions not reported were too low to read and deemed to comply with FCC limit.								

10. Power Line Conducted Emissions

10.1. Block Diagram of Test Setup

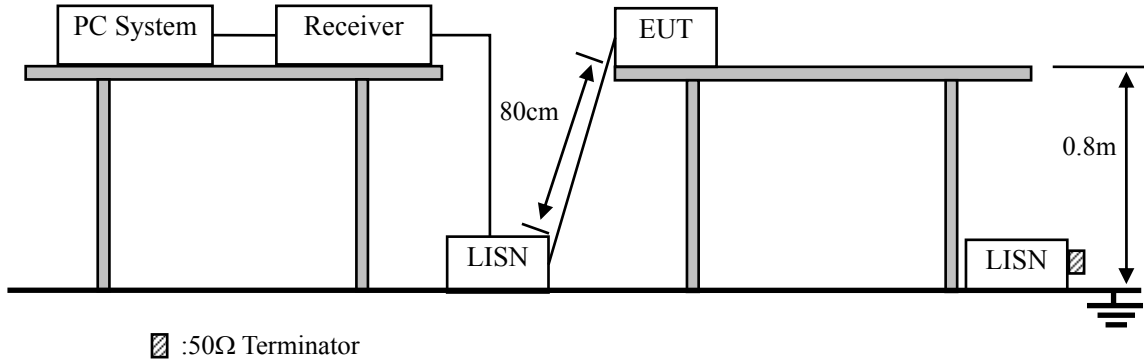

10.2. Limit

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level dB(μV)	Average Level dB(μV)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50


- Notes: 1. * Decreasing linearly with logarithm of frequency.
 2. The lower limit shall apply at the transition frequencies.

10.3. Test Procedure

- (1) The EUT was placed on a non-metallic table, 80cm above the ground plane.
- (2) Setup the EUT and simulator as shown in 10.1
- (3) The EUT Power connected to the power mains through a power adapter and a line impedance stabilization network (L.I.S.N1). The other peripheral devices power cord connected to the power mains through a line impedance stabilization network (L.I.S.N2), this provided a 50-ohm coupling impedance for the EUT (Please refer to the block diagram of the test setup and photographs). Both sides of power line were checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.4 2009 on conducted Emission test.
- (4) The bandwidth of test receiver is set at 10KHz.
- (5) The frequency range from 150 KHz to 30MHz is checked.

10.4. Test Result

PASS. (See below detailed test data)

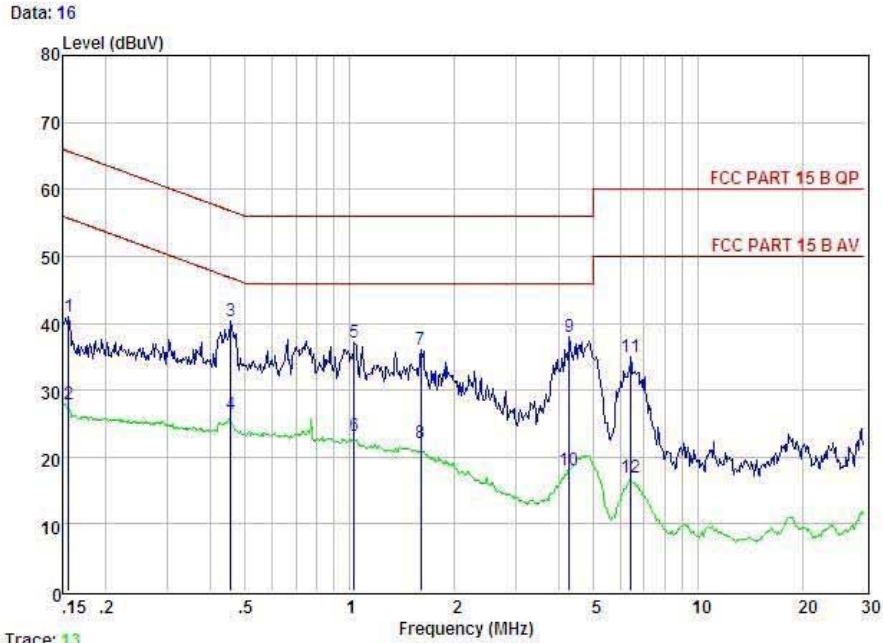


Trace: 13

Condition : FCC PART 15 B QP POL: NEUTRAL Temp:24 °C Hum:56 %

Item	Freq	Read	LISN	Attenuator	Cable	Level	Limit	Margin	Remark
	MHz	dBuV	Factor	Factor	Loss	dBuV	dBuV	dBuV	
1	0.156	31.07	0.03	-9.72	0.10	40.92	65.65	-24.73	QP
2	0.156	18.07	0.03	-9.72	0.10	27.92	55.65	-27.73	Average
3	0.456	30.52	0.03	-9.72	0.10	40.37	56.76	-16.39	QP
4	0.456	16.52	0.03	-9.72	0.10	26.37	46.76	-20.39	Average
5	1.032	27.34	0.04	-9.71	0.10	37.19	56.00	-18.81	QP
6	1.032	13.34	0.04	-9.71	0.10	23.19	46.00	-22.81	Average
7	1.602	26.16	0.05	-9.71	0.10	36.02	56.00	-19.98	QP
8	1.602	12.16	0.05	-9.71	0.10	22.02	46.00	-23.98	Average
9	4.269	28.16	0.08	-9.69	0.12	38.05	56.00	-17.95	QP
10	4.269	8.16	0.08	-9.69	0.12	18.05	46.00	-27.95	Average
11	6.420	25.21	0.12	-9.58	0.14	35.05	60.00	-24.95	QP
12	6.420	7.21	0.12	-9.58	0.14	17.05	50.00	-32.95	Average

Remarks: Level = Read + LISN Factor - Attenuator Factor + Cable loss

Data: 18

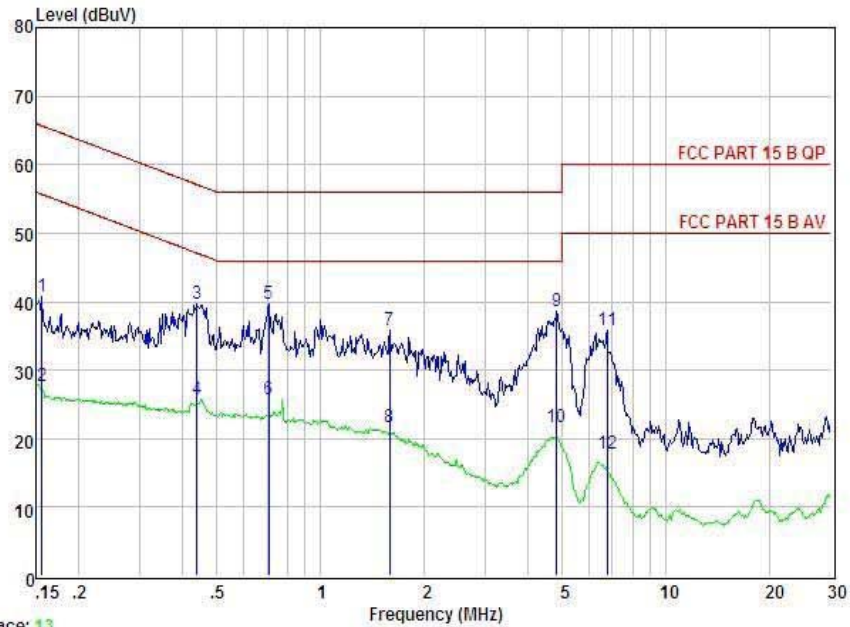

Trace: 13

Condition : FCC PART 15 B QP POL: LINE Temp:24 °C Hum:56 %

Item	Freq MHz	Read dBuV	LISN Factor dB	Attenuator Factor dB	Cable Loss dB	Level dBuV	Limit dBuV	Margin dBuV	Remark
1	0.156	30.81	0.03	-9.72	0.10	40.66	65.65	-24.99	QP
2	0.156	17.81	0.03	-9.72	0.10	27.66	55.65	-27.99	Average
3	0.440	29.78	0.03	-9.72	0.10	39.63	57.07	-17.44	QP
4	0.440	15.78	0.03	-9.72	0.10	25.63	47.07	-21.44	Average
5	0.708	29.91	0.04	-9.72	0.10	39.77	56.00	-16.23	QP
6	0.708	15.91	0.04	-9.72	0.10	25.77	46.00	-20.23	Average
7	1.585	25.87	0.05	-9.71	0.10	35.73	56.00	-20.27	QP
8	1.585	11.87	0.05	-9.71	0.10	21.73	46.00	-24.27	Average
9	4.822	28.78	0.10	-9.68	0.12	38.68	56.00	-17.32	QP
10	4.822	11.78	0.10	-9.68	0.12	21.68	46.00	-24.32	Average
11	6.769	25.93	0.12	-9.56	0.15	35.76	60.00	-24.24	QP
12	6.769	7.93	0.12	-9.56	0.15	17.76	50.00	-32.24	Average

Remarks: Level = Read + LISN Factor - Attenuator Factor + Cable loss

Note: If QP Result comply with AV limit, AV Result is deemed to comply with AV limit

11. Antenna Requirements

11.1. Limit



For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

11.2. Result


The antennas used for this product are PCB Antenna for Bluetooth, no antenna other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is only 1.0dBi for Bluetooth.

12. Test setup photo

12.1. Photos of Radiated emission

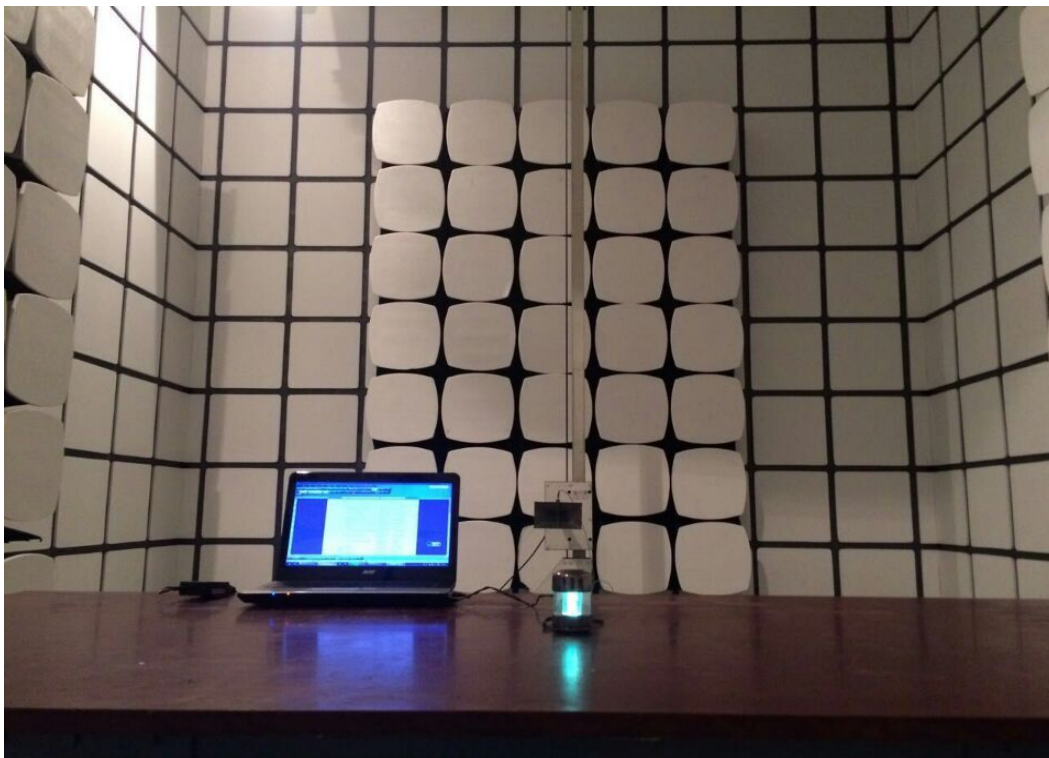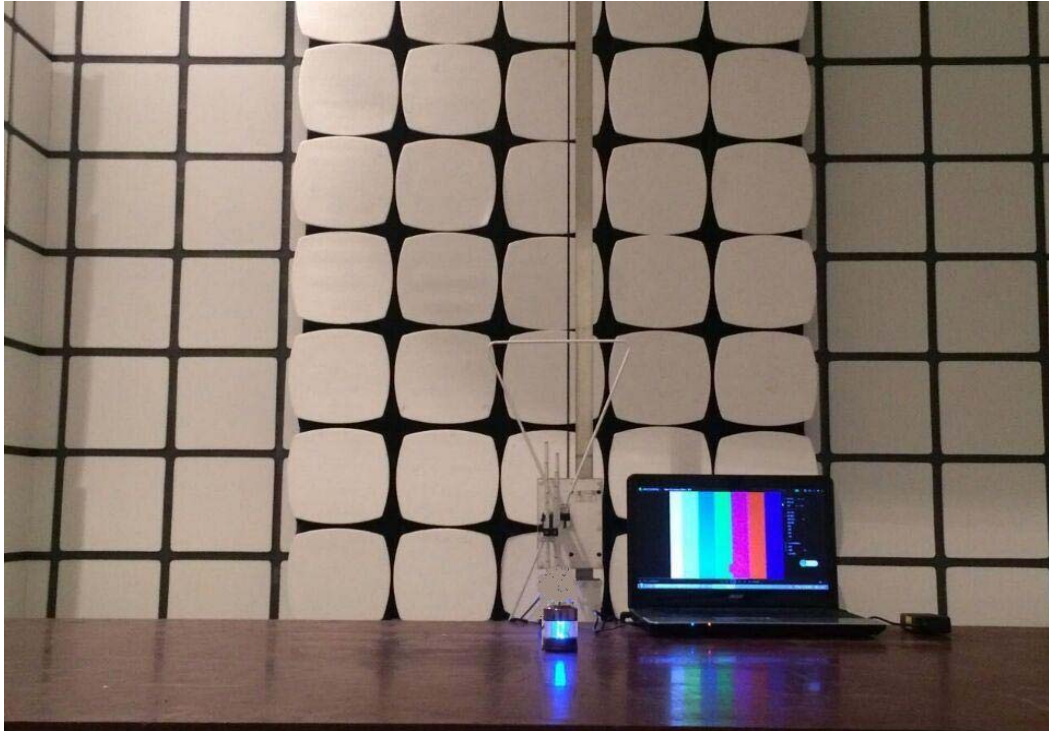

12.2.Photos of Conducted Emission test

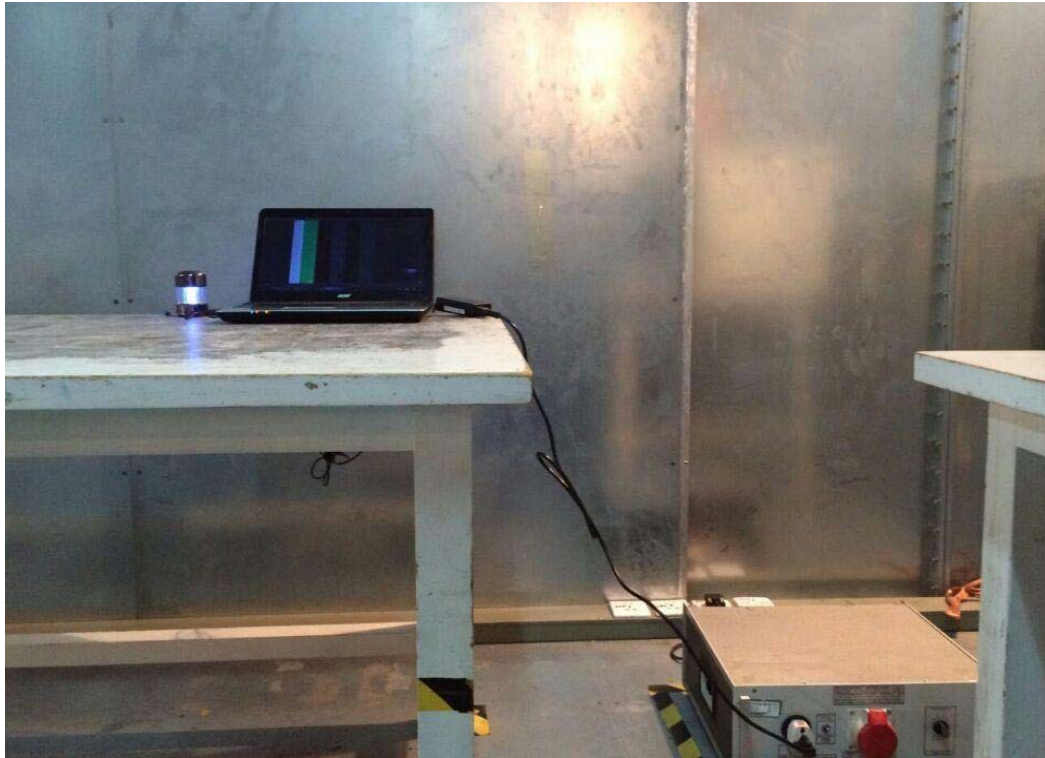




13.Photos of EUT









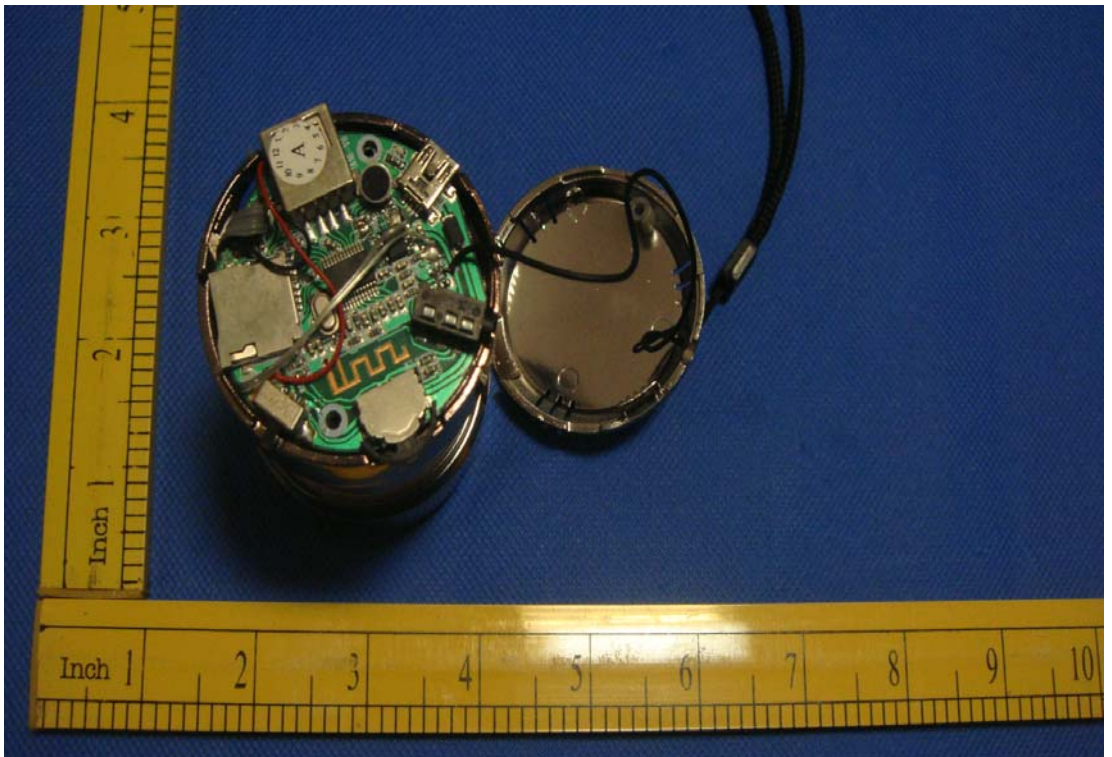

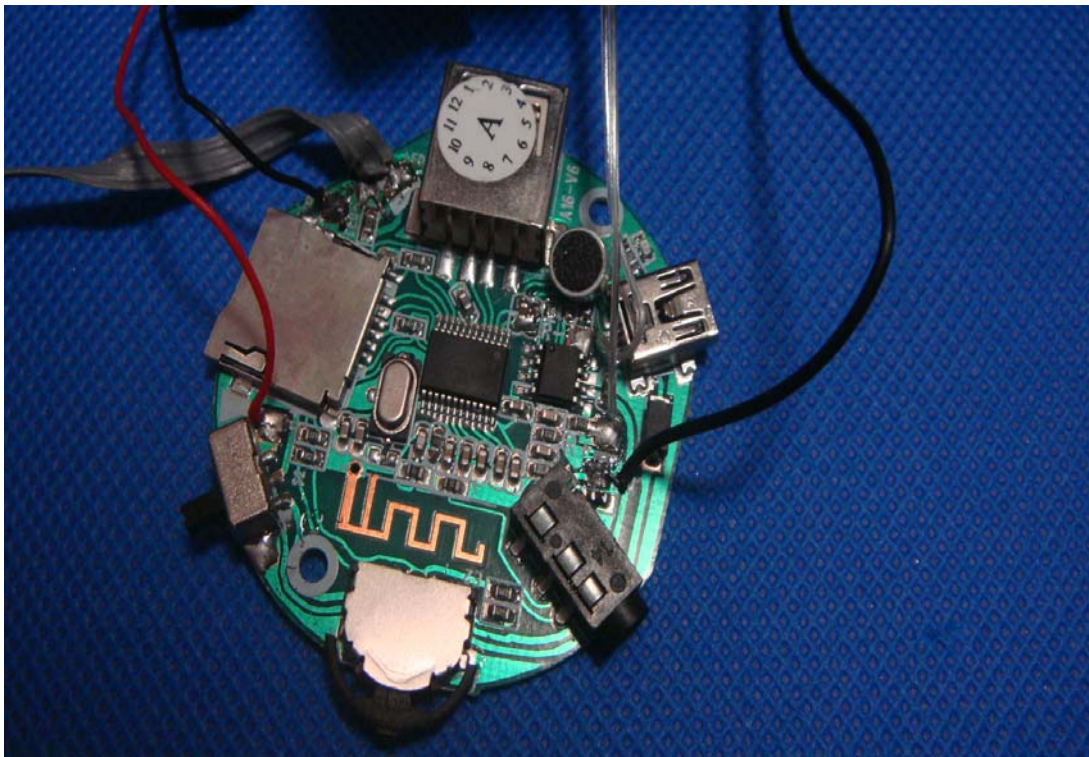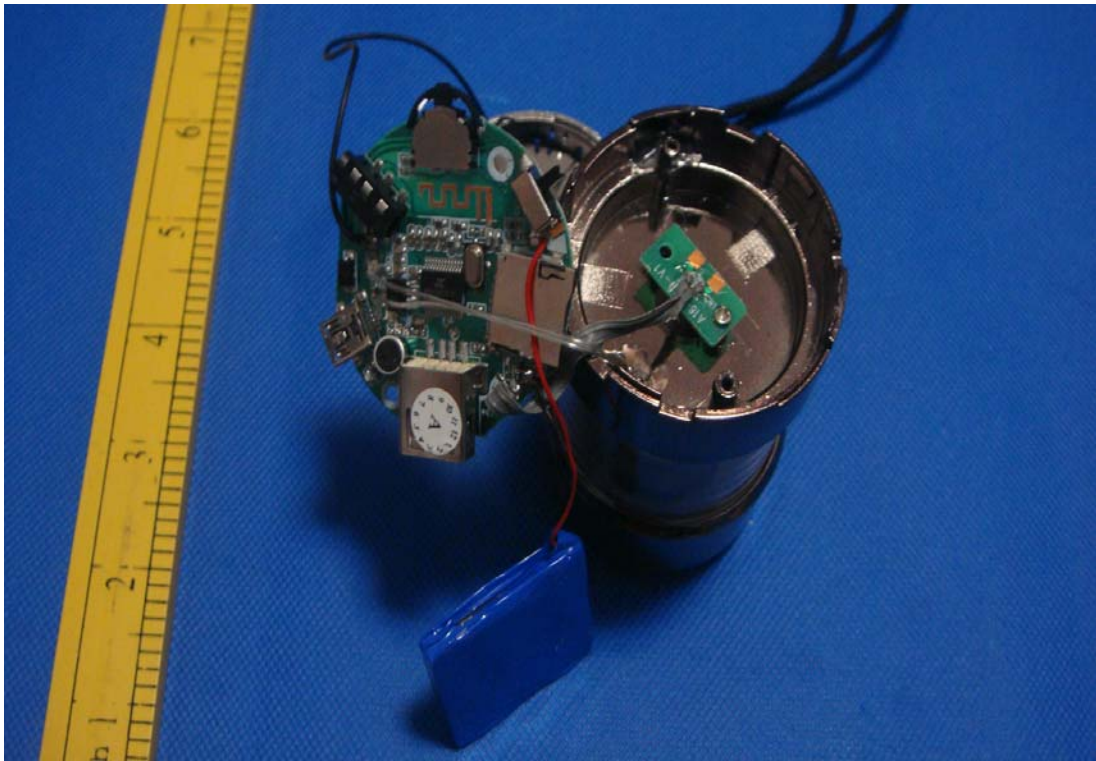

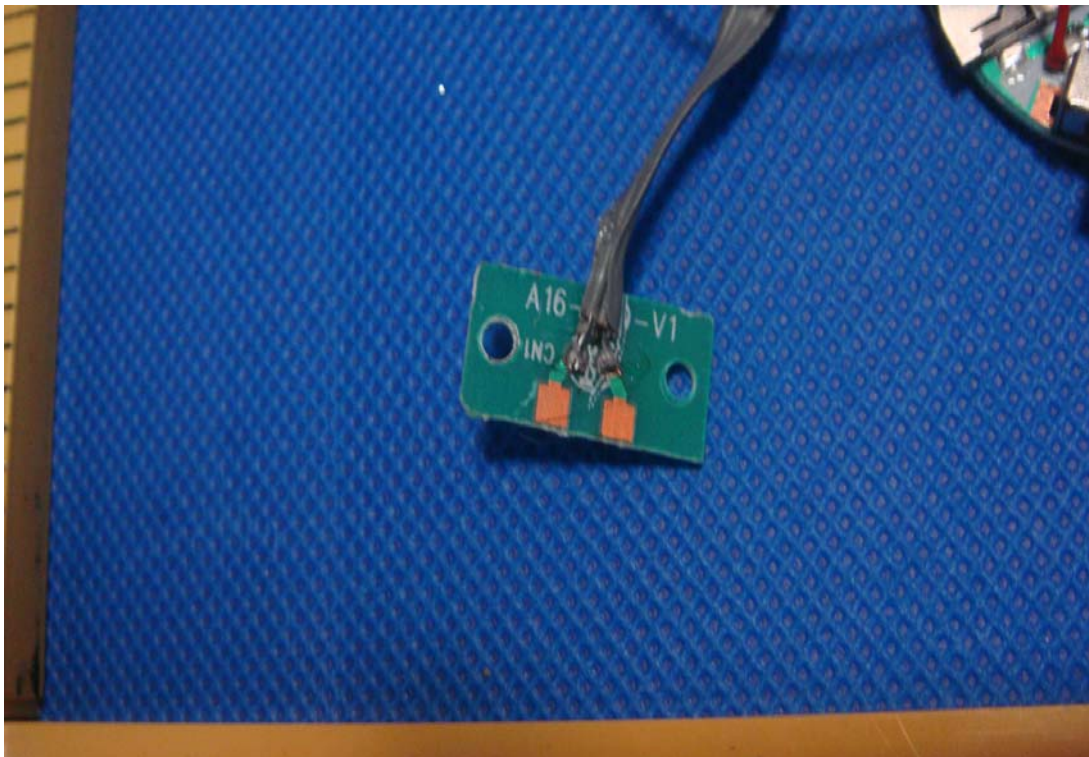

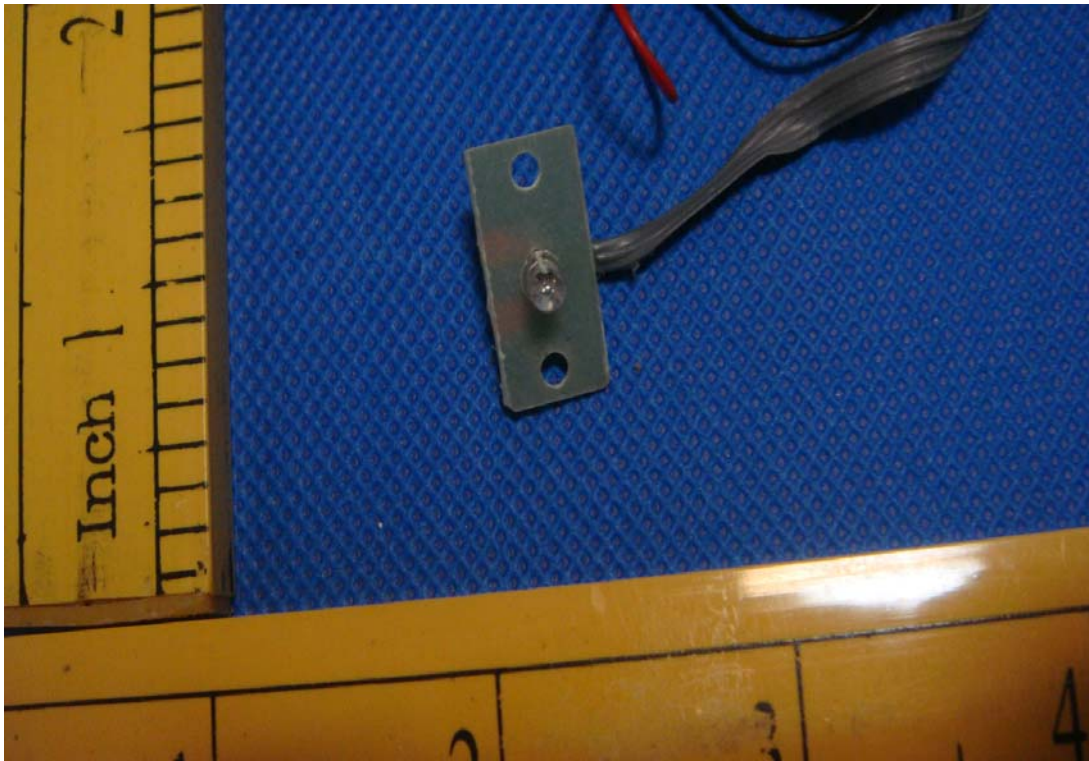

-----END OF THE REPORT-----