
ANTENNA SPECIFICATION

1. Antenna Description

Antenna plate	Internal antenna	
Market name/Model name	EW232-37	
Manufacture	Iton Technology Corp	
Antenna Max. Gain	1.58dBi	
Frequency Range	2400-2500MHz	
Connect Type	Integer antenna	
VSWR	1.1	
Antenna Type	PCB Antenna	
Antenna Model	F2-2	
Manufacture address: East of 7th Floor, Building C, Shenzhen International Innovation Center		
(Futian Science and Technology Plaza), No. 1006 Shennan Avenue, Huafu Street, Futian District,		
Shenzhen		


2. Picture of antenna





3. Antenna Gain

Fre(MHz)	Eff(%) (dB)	Gain(dB)
2400	38. 58	1.08
2410	36. 56	0.98
2420	38.85	1.17
2430	39.88	1.25
2440	42.3	1.33
2450	47.05	1.58
2460	40.56	1.28
2470	37.02	1.02
2480	38.71	1.12
2490	39.27	1.19
2500	37.12	1.04

4. Antenna Radiation Pattern

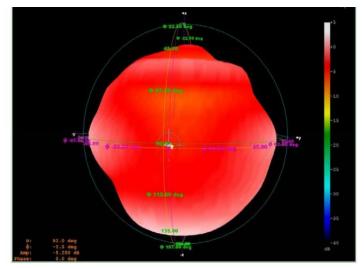






usb XZ

dBm

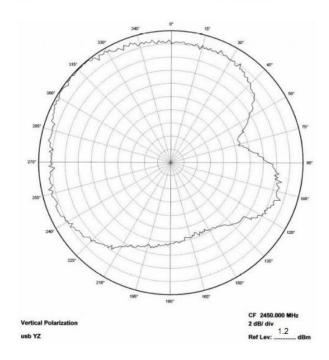

5. Antenna Return Loss

	4000000 GH2 77.264 ft -22.032 ft 3.0100 pr 4400000 GH2 56.124 ft -6.7828 ft 9.6165 pr 1800000 GH2 43.038 ft 8.0241 ft 514.95 pH
50.00	Log Mag 10.00d8/ Ref 0.000d8 [F1]
40.00	1 2.400000 GH2 -11.425 dB 2 2.4400000 GH2 -21.317 dB >3 2.4800000 GH2 -19.03 dB
30.00	
20.00	
10.00	
0.000	
-10.00	
1 100 0 10 10 10 10 10 10 10 10 10 10 10	A
-20.00	4
-30,00	
-40.00	

6. The Environment of Antenna Radiation Pattern

