

---

# FCC Test Report

---

Report No.: AGC01835160305FE03

**FCC ID** : 2AHYVEPICBT  
**APPLICATION PURPOSE** : Original Equipment  
**PRODUCT DESIGNATION** : BPIC BT  
**BRAND NAME** : JLAB  
**MODEL NAME** : EPIC BT  
**CLIENT** : PEAG,LLC dba JLab Audio  
**DATE OF ISSUE** : Apr.12,2016  
**STANDARD(S)** : FCC Part 15 Rules  
**TEST PROCEDURE(S)**  
**REPORT VERSION** : V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd



**CAUTION:**

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.

**Report Revise Record**

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Apr.12,2016	Valid	Original Report

## TABLE OF CONTENTS


<b>1. VERIFICATION OF CONFORMITY .....</b>	<b>4</b>
<b>2. GENERAL INFORMATION .....</b>	<b>5</b>
2.1. PRODUCT DESCRIPTION.....	5
2.2. TABLE OF CARRIER FREQUENCYS.....	5
<b>3. MEASUREMENT UNCERTAINTY.....</b>	<b>7</b>
<b>4. DESCRIPTION OF TEST MODES.....</b>	<b>7</b>
<b>5. SYSTEM TEST CONFIGURATION .....</b>	<b>9</b>
5.1. CONFIGURATION OF EUT SYSTEM .....	9
5.2. EQUIPMENT USED IN EUT SYSTEM .....	9
5.3. SUMMARY OF TEST RESULTS .....	9
<b>6. TEST FACILITY .....</b>	<b>10</b>
<b>7 TEST METHODOLOGY.....</b>	<b>10</b>
<b>8. ALL TEST EQUIPMENT LIST .....</b>	<b>10</b>
<b>9. RADIATED EMISSION .....</b>	<b>12</b>
9.1TEST LIMIT.....	12
9.2. MEASUREMENT PROCEDURE .....	13
9.3. TEST SETUP.....	15
9.4. TEST RESULT .....	17
<b>10. BAND EDGE EMISSION .....</b>	<b>45</b>
10.1. MEASUREMENT PROCEDURE .....	45
10.2 TEST SETUP .....	45
10.3 RADIATED TEST RESULT .....	46
<b>11. 20DB BANDWIDTH.....</b>	<b>54</b>
11.1. MEASUREMENT PROCEDURE .....	54
11.2. TEST SET-UP .....	54
11.3. LIMITS AND MEASUREMENT RESULTS .....	54
<b>12. FCC LINE CONDUCTED EMISSION TEST .....</b>	<b>64</b>
12.1. LIMITS OF LINE CONDUCTED EMISSION TEST .....	64
12.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST .....	64
12.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST .....	65
12.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST .....	65
12.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST .....	66
<b>APPENDIX A: PHOTOGRAPHS OF TEST SETUP .....</b>	<b>67</b>
<b>APPENDIX B: PHOTOGRAPHS OF EUT .....</b>	<b>69</b>

### 1. VERIFICATION OF CONFORMITY

<b>Applicant</b>	PEAG,LLC dba JLab Audio
<b>Address</b>	3402 Piazza D`Oro Way, Suite 230,Oceanside,CA 92056,USA
<b>Manufacturer</b>	Cosonic Acoustic Technology Co., Ltd.
<b>Address</b>	5th Floor, 1st Building, No.6, South Industry Road, Songshan Lake National High-tech Industrial Development Zone, Dongguan City, Guangdong, China 523808
<b>Product Designation</b>	BPIC BT
<b>Brand Name</b>	JLAB
<b>Test Model</b>	EPIC BT
<b>Date of test</b>	Mar.27,2016 to Mar.28,2016
<b>Deviation</b>	None
<b>Condition of Test Sample</b>	Normal
<b>Report Template</b>	AGCRT-US-BR/RF

We hereby certify that:

The above equipment was tested by Dongguan Precise Testing Service Co., Ltd. The test data, the energy emitted by the sample tested as described in this report is in compliance with the requirements of FCC Rules Part 15.249.

  
\_\_\_\_\_  
Tested By Time Huang(Huang Nanhui) Apr.12,2016

  
\_\_\_\_\_  
Reviewed By Forrest Lei(Lei Yonggang) Apr.12,2016

  
\_\_\_\_\_  
Approved By Solger Zhang(Zhang Hongyi)  
Authorized Officer Apr.12,2016

## 2. GENERAL INFORMATION

### 2.1. PRODUCT DESCRIPTION

A major technical description of EUT is described as following

<b>Operation Frequency</b>	2.402 GHz to 2.480GHz
<b>RF Output Power</b>	3.05dBm(Max)
<b>Bluetooth Version</b>	V4.1
<b>Modulation</b>	GFSK, $\pi/4$ -DQPSK, 8DPSK
<b>Number of channels</b>	79 for BR/EDR, 40 for BLE
<b>Hardware Version</b>	1.0
<b>Software Version</b>	1.0
<b>Antenna Designation</b>	Ceramic Antenna
<b>Antenna Gain</b>	0dBi
<b>Power Supply</b>	DC 3.7V by battery

Note: The USB port can't be used to transfer data with PC. The BT was not active when charging

### 2.2. TABLE OF CARRIER FREQUENCIES

BR/EDR channel List

Frequency Band	Channel Number	Frequency
2400~2483.5MHZ	0	2402MHZ
	1	2403MHZ
	:	:
	38	2440 MHZ
	39	2441 MHZ
	40	2442 MHZ
	:	:
	77	2479 MHZ
	78	2480 MHZ

BLE Channel List

Frequency Band	Channel Number	Frequency
2400~2483.5MHZ	0	2402MHZ
	1	2404MHZ
	:	:
	38	2478 MHZ
	39	2480 MHZ

### 3. MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 3.18\text{dB}$
2	All emissions, radiated	$\pm 3.91\text{dB}$
3	Temperature	$\pm 0.5^\circ\text{C}$
4	Humidity	$\pm 2\%$


### 4. DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION
1	Low channel GFSK
2	Middle channel GFSK
3	High channel GFSK
4	Low channel $\pi/4$ -DQPSK
5	Middle channel $\pi/4$ -DQPSK
6	High channel $\pi/4$ -DQPSK
7	Low channel 8DPSK
8	Middle channel 8DPSK
9	High channel 8DPSK
10	BT link

**Note:**

1. All the test modes can be supply by battery, only the result of the worst case was recorded in the report, if no other cases.
2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
3. The EUT used fully-charged battery when tested.

Software Setting

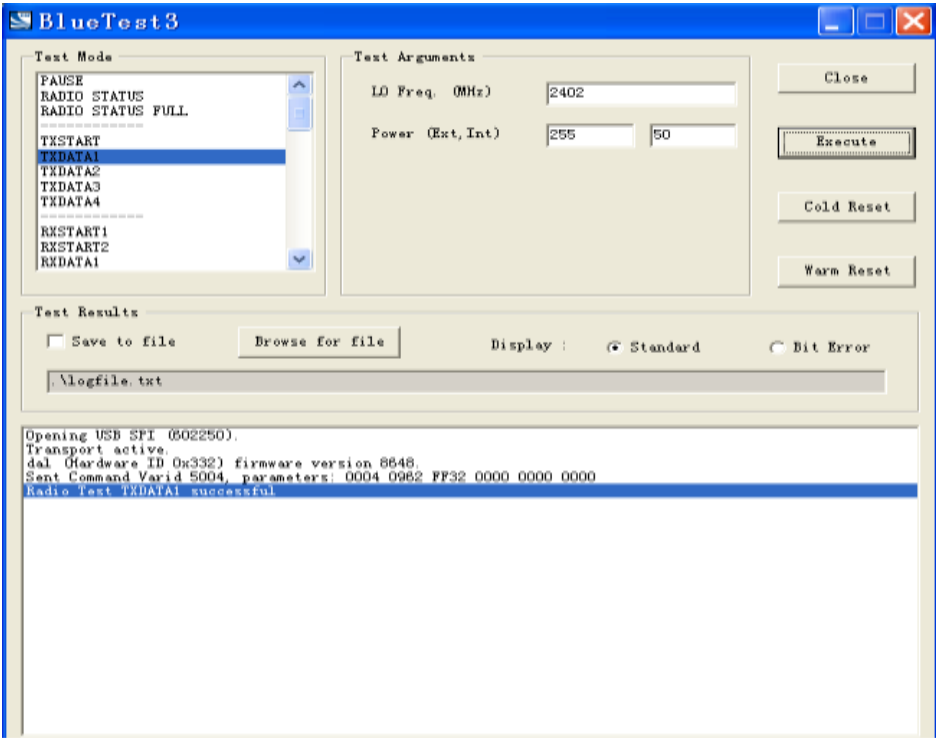





## 5. SYSTEM TEST CONFIGURATION

### 5.1. CONFIGURATION OF EUT SYSTEM

Configure 1: (Normal hopping)



Configure 2: (Control continuous TX)

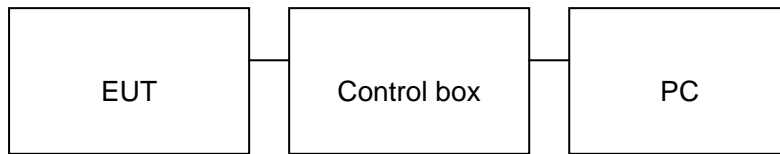

### 5.2. EQUIPMENT USED IN EUT SYSTEM

Item	Equipment	Model No.	ID or Specification	Remark
1	BPIC BT	EPIC BT	2AHYVEPICBT	EUT
2	PC	SONY	E1412AYCW	A.E
3	Control box	N/A	N/A	A.E
5	Temporary Antenna Connector	T10	N/A	A.E

### 5.3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.249	Radiated Emission	Compliant
§15.249	Band Edges	Compliant
§15.207	Conduction Emission	N/A
§15.215	BANDWIDTH	Compliant

Note: N/A means not applicable.

## 6. TEST FACILITY

<b>Site</b>	Dongguan Precise Testing Service Co., Ltd.
<b>Location</b>	Building D,Baoding Technology Park,Guangming Road2,Dongcheng District, Dongguan, Guangdong, China,
<b>FCC Registration No.</b>	371540
<b>Description</b>	The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.4:2014

## 7 TEST METHODOLOGY

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard for Testing Unlicensed Wireless Devices, and ANSI C63.4-2014, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9kHz to 40 GHz.

## 8. ALL TEST EQUIPMENT LIST

FOR RADIATED EMISSION TEST (BELOW 1GHZ)

Radiated Emission Test Site					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
EMI Test Receiver	Rohde & Schwarz	ESCI	101417	July 4, 2015	July 3, 2016
Trilog Broadband Antenna (25M-1GHz)	SCHWARZBECK	VULB9160	9160-3355	July 4, 2015	July 3, 2016
Signal Amplifier	SCHWARZBECK	BBV 9475	9745-0013	July 4, 2015	July 3, 2016
RF Cable	SCHWARZBECK	AK9515E	96221	July 4, 2015	July 3, 2016
3m Anechoic Chamber	CHENGYU	966	PTS-001	June 6, 2015	June 5, 2016
MULTI-DEVICE Positioning Controller	Max-Full	MF-7802	MF780208339	N/A	N/A
Active loop antenna (9K-30MHz)	Schwarzbeck	FMZB1519	1519-038	June 6, 2015	June 5, 2016
Spectrum analyzer	Agilent	E4407B	MY46185649	June 6, 2015	June 5, 2016
Radiation Cable 1	MXT	RS1	R005	June 6, 2015	June 5, 2016
Radiation Cable 2	MXT	RS1	R006	June 6, 2015	June 5, 2016

## FOR RADIATED EMISSION TEST (1GHZ ABOVE)

Radiated Emission Test Site					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
EMI Test Receiver	Rohde & Schwarz	ESCI	101417	July 4, 2015	July 3, 2016
Horn Antenna (1G-18GHz)	SCHWARZBECK	BBHA9120D	9120D-1246	July 11, 2015	July 10, 2016
Spectrum Analyzer	Agilent	E4411B	MY4511453	July 4, 2015	July 3, 2016
Signal Amplifier	SCHWARZBECK	BBV 9718	9718-269	July 7, 2015	July 6, 2016
RF Cable	SCHWARZBECK	AK9515H	96220	July 8, 2015	July 7, 2016
3m Anechoic Chamber	CHENGYU	966	PTS-001	June 6, 2015	June 5, 2016
MULTI-DEVICE Positioning Controller	Max-Full	MF-7802	MF780208339	N/A	N/A
Horn Ant (18G-40GHz)	Schwarzbeck	BBHA 9170	9170-181	June 6, 2015	June 5, 2016
Radiation Cable 1	MXT	RS1	R005	June 6, 2015	June 5, 2016
Radiation Cable 2	MXT	RS1	R006	June 6, 2015	June 5, 2016

Conducted Emission Test Site					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
EMI Test Receiver	- Rohde & Schwarz	ESCI	101417	July 4, 2015	July 3, 2016
Artificial Mains Network	Narda	L2-16B	000WX31025	July 8, 2015	July 7, 2016
Artificial Mains Network (AUX)	Narda	L2-16B	000WX31026	July 8, 2015	July 7, 2016
RF Cable	SCHWARZBECK	AK9515E	96222	July 4, 2015	July 3, 2016
Shielded Room	CHENGYU	843	PTS-002	June 6,2015	June 5,2016
Conduction Cable	MXT	SE1	S003	June 6,2015	June 5,2016

## 9. RADIATED EMISSION

### 9.1 TEST LIMIT

#### Standard FCC15.249

Fundamental Frequency	Field Strength of Fundamental (millivolts/meter)	Field Strength of Harmonics (microvolts/meter)
900-928MHz	50	500
2400-2483.5MHz	50	500
5725-5875MHz	50	500
24.0-24.25GHz	250	2500

#### Standard FCC 15.209

Frequency (MHz)	Distance Meters	Field Strengths Limit	
		$\mu$ V/m	dB( $\mu$ V)/m
0.009 ~ 0.490	300	2400/F(kHz)	---
0.490 ~ 1.705	30	24000/F(kHz)	---
1.705 ~ 30	30	30	---
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	Other:74.0 dB( $\mu$ V)/m (Peak) 54.0 dB( $\mu$ V)/m (Average)	

Remark: (1) Emission level  $\text{dB}\mu\text{V} = 20 \log \text{Emission level } \mu\text{V/m}$   
(2) The smaller limit shall apply at the cross point between two frequency bands.  
(3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

## 9.2. MEASUREMENT PROCEDURE

1. The measuring distance of 3m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation(below 1GHz)
2. The measuring distance of 3m shall used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation(above 1GHz)
3. The height of the test antenna shall vary between 1m to 4m.Both horizontal and vertical polarization Of the antenna are set to make the measurement.
4. The initial step in collecting radiated emission data is a receive peak detector mode. Pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
5. All readings are peak unless otherwise stated QP in column of Note. Peak denoted that the Peak reading compliance with the QP limits and then QP Mode measurement didn't perform(Below 1GHz)
6. All readings are Peak mode value unless otherwise stated AVG in column of Note. If the Peak mode measured value compliance with the Peak limits and lower than AVG Limits, the EUT shall be deemed to meet Peak&AVG limits and then only Peak mode was measured, but AVG mode didn't perform.(above 1GHz)


The following table is the setting of spectrum analyzer and receiver.

<b>Spectrum Parameter</b>	<b>Setting</b>
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP
Start ~Stop Frequency	1GHz~26.5GHz 1MHz/3MHz for Peak, 1MHz/10Hz for Average


<b>Receiver Parameter</b>	<b>Setting</b>
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP

9.3. TEST SETUP


Radiated Emission Test-Setup Frequency Below 30MHz

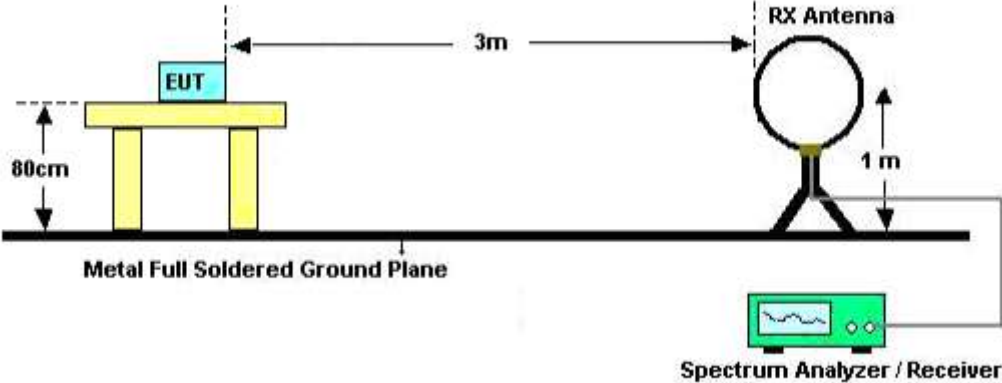

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

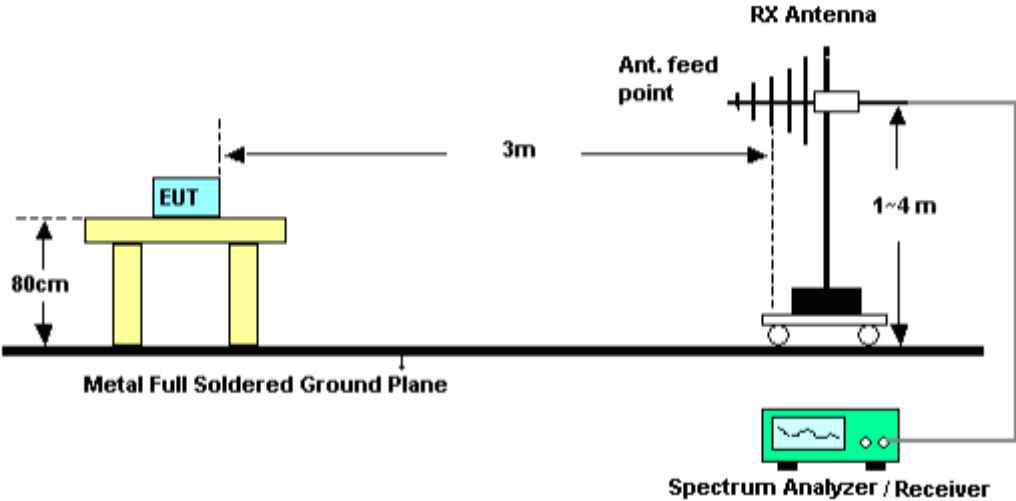

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

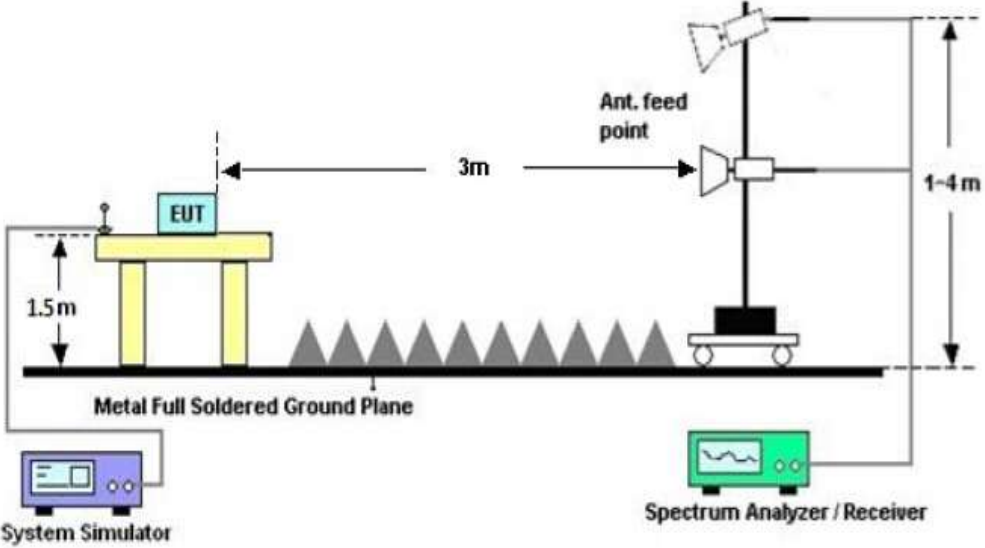



**9.4. TEST RESULT**


**(Worst modulation: GFSK)  
 FOR BR/EDR**

**RADIATED EMISSION BELOW 30MHZ**

No emission found between lowest internal used/generated frequencies to 30MHz.

**RADIATED EMISSION BELOW 1GHZ**

**RADIATED EMISSION TEST- (30MHZ-1GHZ)-LOW CHANNEL-HORIZONTAL**

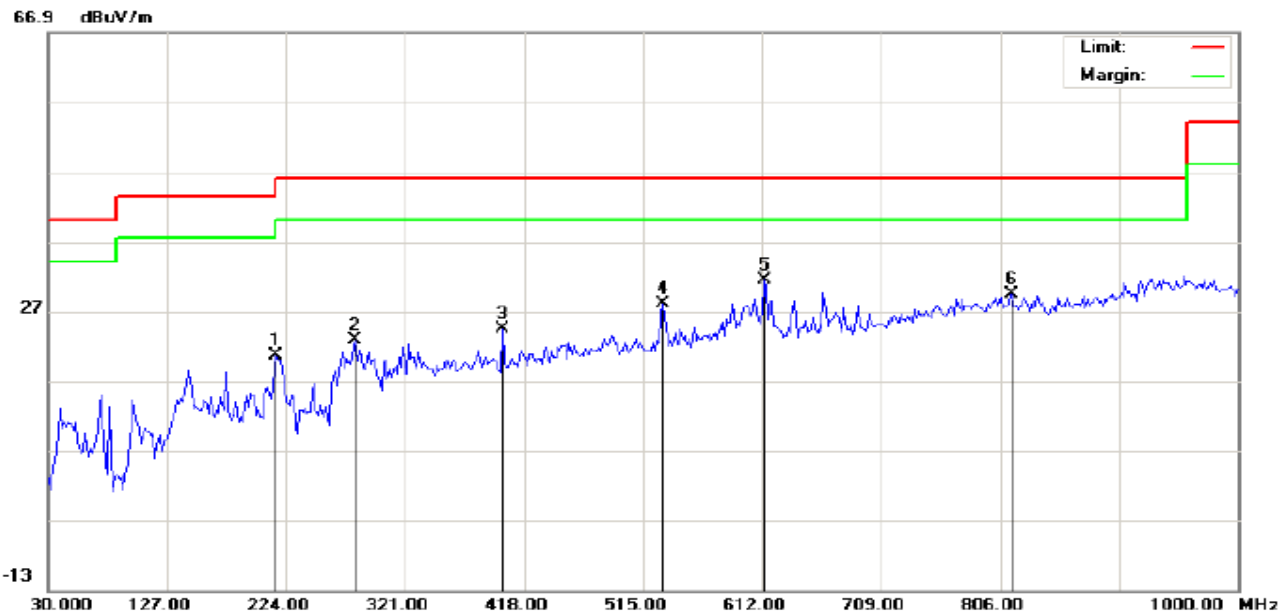


Site: site #1 Polarization: *Horizontal* Temperature: 22.3  
 Limit: FCC Class B 3M Radiation Power: Humidity: 52.3 %  
 EUT: EPIC BT Distance:  
 M/N: EPIC BT  
 Mode: Low Channel TX  
 Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		215.9167	10.28	10.38	20.66	43.50	-22.84	peak			
2		280.5833	10.62	12.11	22.73	46.00	-23.27	peak			
3		400.2167	5.30	19.08	24.38	46.00	-21.62	peak			
4		531.1667	6.05	21.97	28.02	46.00	-17.98	peak			
5	*	613.6167	7.55	23.76	31.31	46.00	-14.69	peak			
6		815.7000	2.17	27.32	29.49	46.00	-16.51	peak			

**RESULT: PASS**

RADIATED EMISSION TEST- (30MHZ-1GHZ)-LOW CHANNEL -VERTICAL

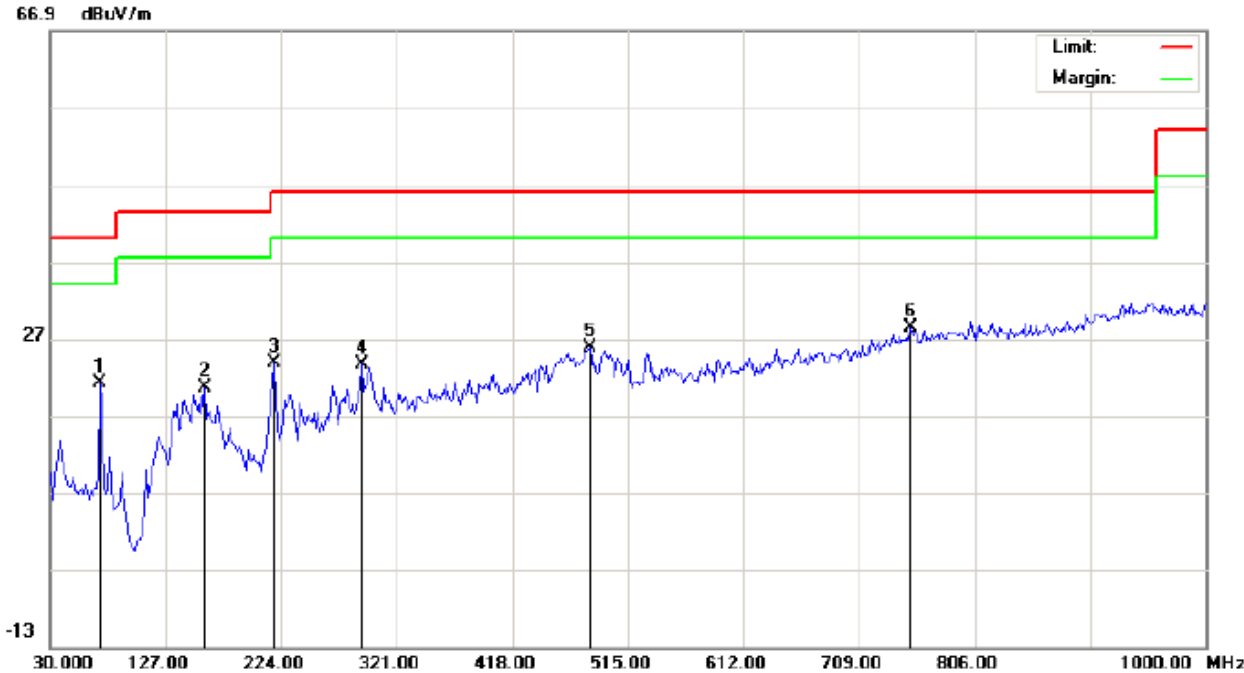

Site: site #1  
 Limit: FCC Class B 3M Radiation  
 EUT: EPIC BT  
 M/N: EPIC BT  
 Mode: Low Channel TX  
 Note:

Polarization: *Vertical*  
 Power:  
 Distance:

Temperature: 22.3  
 Humidity: 52.3 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		72.0333	17.40	3.76	21.16	40.00	-18.84	peak			
2		159.3333	5.18	15.33	20.51	43.50	-22.99	peak			
3		217.5333	13.15	10.72	23.87	46.00	-22.13	peak			
4		291.9000	8.46	15.17	23.63	46.00	-22.37	peak			
5		482.6667	4.96	20.94	25.90	46.00	-20.10	peak			
6	*	752.6500	1.77	26.67	28.44	46.00	-17.56	peak			

**RESULT: PASS**

- Note:** 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.  
 2. The "Factor" value can be calculated automatically by software of measurement system.

RADIATED EMISSION TEST- (30MHZ-1GHZ)-MIDDLE CHANNEL-HORIZONTAL




Site: site #1 Polarization: *Horizontal* Temperature: 22.3  
 Limit: FCC Class B 3M Radiation Power: Humidity: 52.3 %  
 EUT: EPIC BT Distance:  
 M/N: EPIC BT  
 Mode: Middle Channel TX  
 Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna	Table	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		Height	Degree	
									cm	degree	
1		175.5000	7.99	10.90	18.89	43.50	-24.61	peak			
2		280.5833	11.43	12.11	23.54	46.00	-22.46	peak			
3		400.2167	5.67	19.08	24.75	46.00	-21.25	peak			
4		532.7833	7.15	22.02	29.17	46.00	-16.83	peak			
5	*	586.1332	7.46	23.38	30.84	46.00	-15.16	peak			
6		663.7333	5.15	24.22	29.37	46.00	-16.63	peak			

**RESULT: PASS**

RADIATED EMISSION TEST- (30MHZ-1GHZ)- MIDDLE CHANNEL -VERTICAL

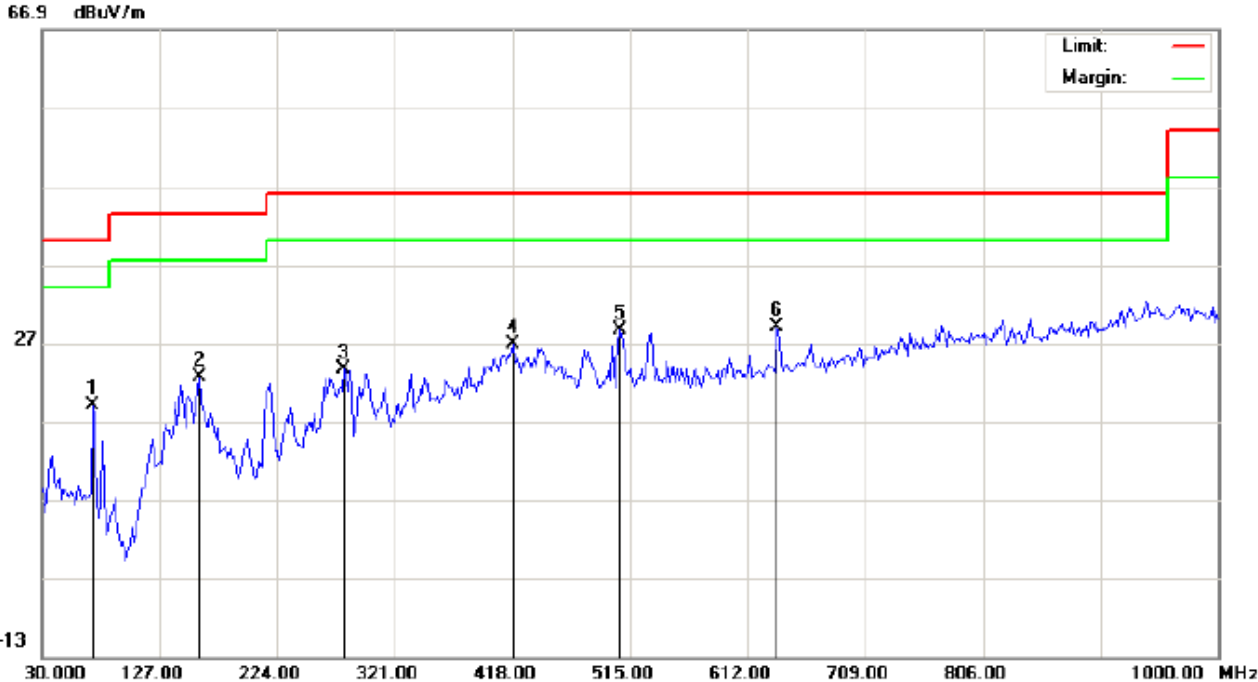

Site: site #1                                      Polarization: *Vertical*                                      Temperature: 22.3  
Limit: FCC Class B 3M Radiation                                      Power:                                      Humidity: 52.3 %  
EUT: EPIC BT                                      Distance:                                        
M/N: EPIC BT  
Mode: Middle Channel TX  
Note:


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		72.0333	15.32	3.76	19.08	40.00	-20.92	peak			
2		159.3333	7.32	15.33	22.65	43.50	-20.85	peak			
3		278.9667	8.91	14.77	23.68	46.00	-22.32	peak			
4		418.0000	7.16	19.62	26.78	46.00	-19.22	peak			
5		506.9167	7.31	21.32	28.63	46.00	-17.37	peak			
6	*	636.2500	5.55	23.54	29.09	46.00	-16.91	peak			

**RESULT: PASS**

**Note:** 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

RADIATED EMISSION TEST- (30MHZ-1GHZ)-HIGH CHANNEL-HORIZONTAL

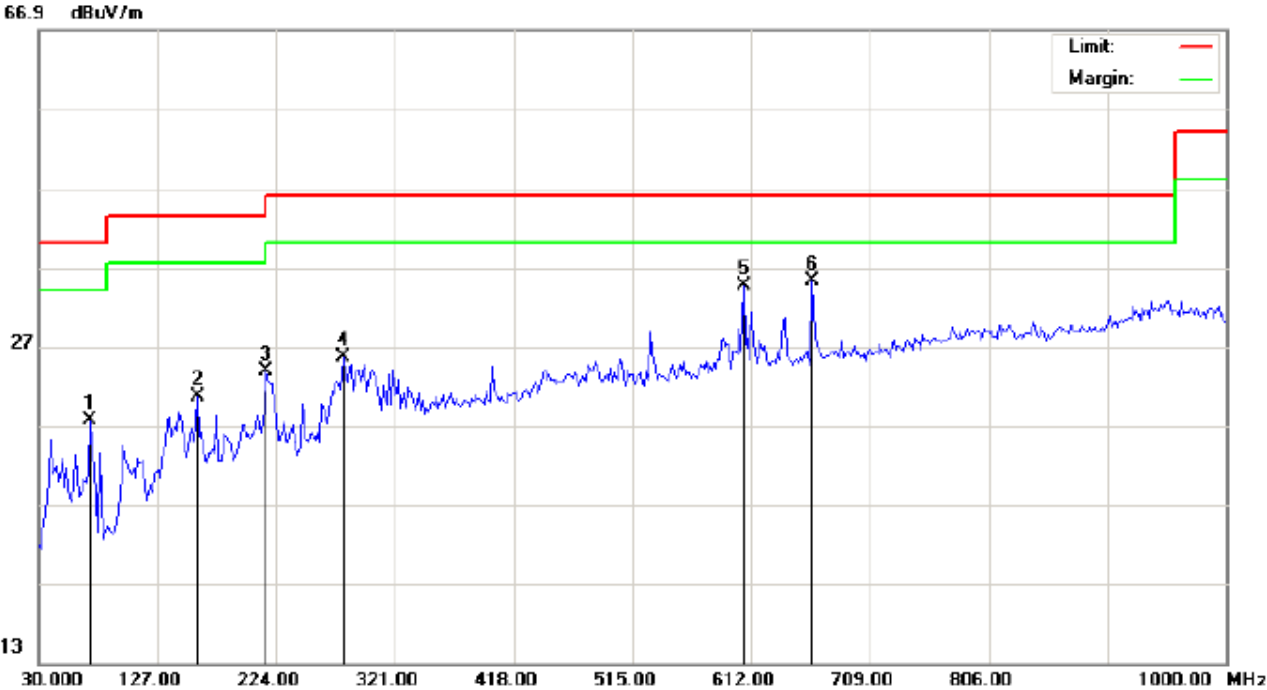

Site: site #1	Polarization: <i>Horizontal</i>	Temperature: 22.3
Limit: FCC Class B 3M Radiation	Power:	Humidity: 52.3 %
EUT: EPIC BT	Distance:	
M/N: EPIC BT		
Mode: High Channel TX		
Note:		

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		72.0333	9.25	8.28	17.53	40.00	-22.47	peak			
2		159.3333	10.06	10.49	20.55	43.50	-22.95	peak			
3		215.9167	13.48	10.38	23.86	43.50	-19.64	peak			
4		278.9667	13.81	11.83	25.64	46.00	-20.36	peak			
5		605.5333	10.83	23.74	34.57	46.00	-11.43	peak			
6	*	662.1167	11.06	24.17	35.23	46.00	-10.77	peak			

RESULT: PASS

RADIATED EMISSION TEST- (30MHZ-1GHZ)-HIGH CHANNEL -VERTICAL



Site: site #1	Polarization: <i>Vertical</i>	Temperature: 22.3
Limit: FCC Class B 3M Radiation	Power:	Humidity: 52.3 %
EUT: EPIC BT	Distance:	
M/N: EPIC BT		
Mode: High Channel TX		
Note:		

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		72.0333	16.47	3.76	20.23	40.00	-19.77	peak			
2		152.8667	8.23	15.28	23.51	43.50	-19.99	peak			
3		298.3667	8.94	15.36	24.30	46.00	-21.70	peak			
4		461.6500	10.26	20.72	30.98	46.00	-15.02	peak			
5		773.6667	4.58	26.96	31.54	46.00	-14.46	peak			
6	*	822.1667	7.09	27.32	34.41	46.00	-11.59	peak			

**RESULT: PASS**

- Note:** 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.  
 2. The "Factor" value can be calculated automatically by software of measurement system.


FOR BLE

**RADIATED EMISSION BELOW 30MHZ**

No emission found between lowest internal used/generated frequencies to 30MHz.

**RADIATED EMISSION BELOW 1GHZ**

RADIATED EMISSION TEST- (30MHZ-1GHZ)-LOW CHANNEL-HORIZONTAL

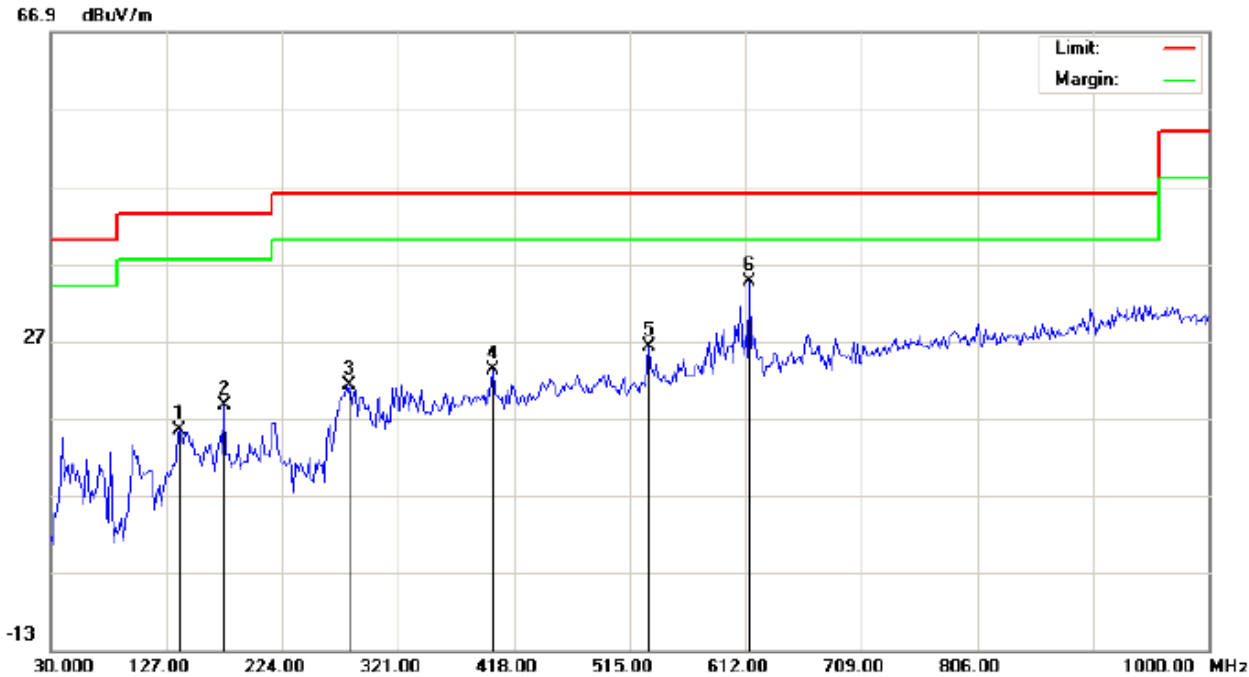

Site: site #1  
 Limit: FCC Class B 3M Radiation  
 EUT: EPIC BT  
 M/N: EPIC BT  
 Mode: Low Channel TX  
 Note:


Polarization: *Horizontal*  
 Power:  
 Distance:

Temperature: 22.3  
 Humidity: 52.3 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna	Table	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		Height	Degree	
1		138.3167	0.94	14.41	15.35	43.50	-28.15	peak	cm	degree	
2		175.5000	7.76	10.90	18.66	43.50	-24.84	peak			
3		280.5833	9.08	12.11	21.19	46.00	-24.81	peak			
4		400.2167	4.14	19.08	23.22	46.00	-22.78	peak			
5		531.1667	4.31	21.97	26.28	46.00	-19.72	peak			
6	*	615.2333	10.76	23.77	34.53	46.00	-11.47	peak			

**RESULT: PASS**

RADIATED EMISSION TEST- (30MHZ-1GHZ)-LOW CHANNEL -VERTICAL

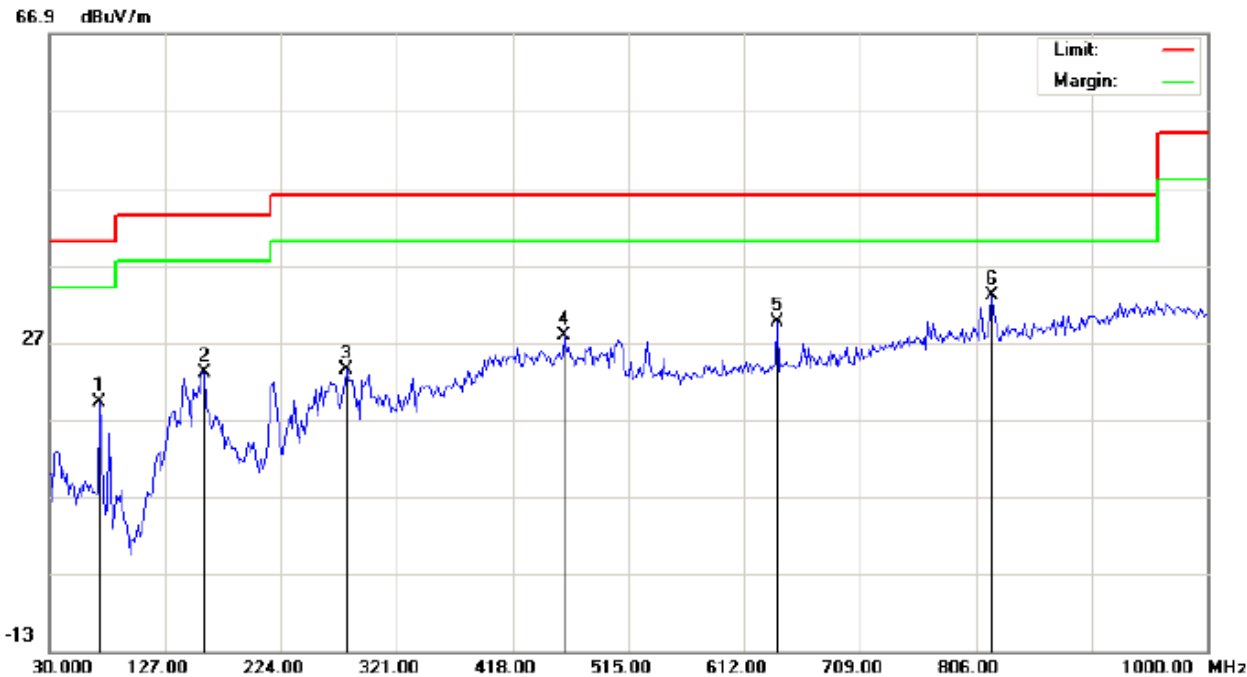

Site: site #1 Polarization: **Vertical** Temperature: 22.3  
Limit: FCC Class B 3M Radiation Power: Humidity: 52.3 %  
EUT: EPIC BT Distance:  
M/N: EPIC BT  
Mode: Low Channel TX  
Note:


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna	Table	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		Height	Degree	
									cm	degree	
1		72.0333	15.37	3.76	19.13	40.00	-20.87	peak			
2		159.3333	7.74	15.33	23.07	43.50	-20.43	peak			
3		278.9667	8.68	14.77	23.45	46.00	-22.55	peak			
4		461.6500	7.18	20.72	27.90	46.00	-18.10	peak			
5		639.4833	6.01	23.61	29.62	46.00	-16.38	peak			
6	*	818.9333	5.76	27.32	33.08	46.00	-12.92	peak			

**RESULT: PASS**

- Note:** 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.  
2. The "Factor" value can be calculated automatically by software of measurement system.



RADIATED EMISSION TEST- (30MHZ-1GHZ)-MIDDLE CHANNEL-HORIZONTAL

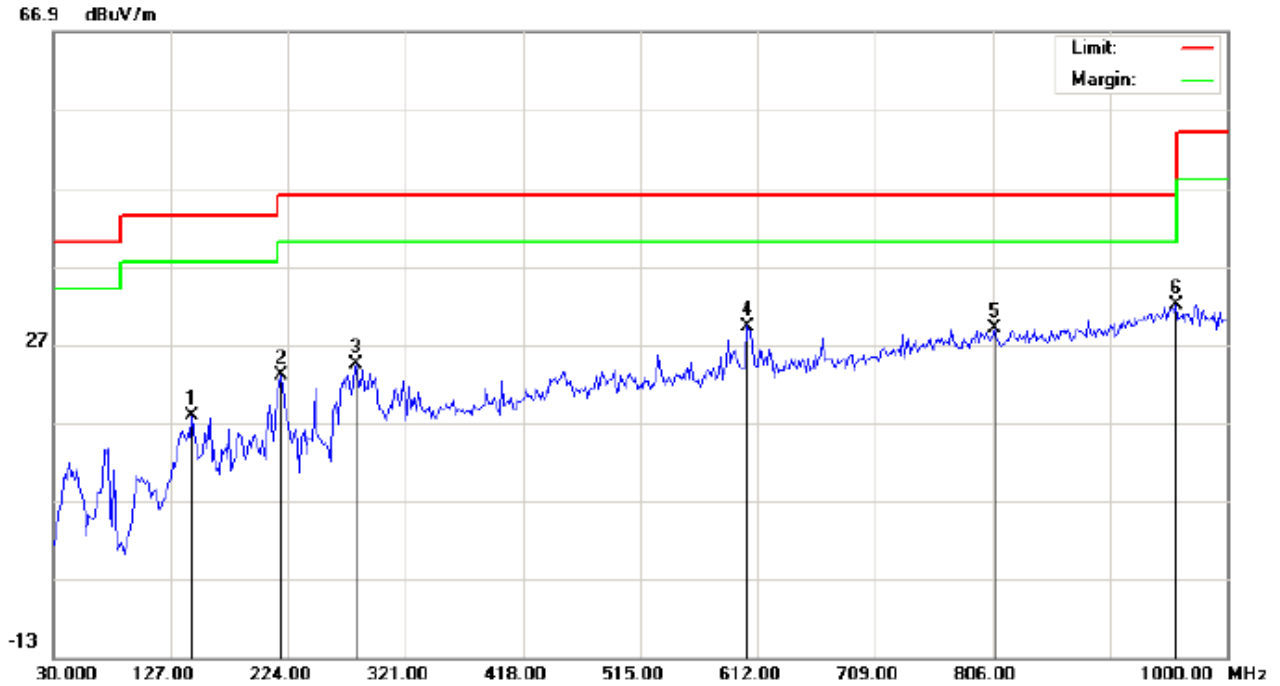

Site: site #1  
 Limit: FCC Class B 3M Radiation  
 EUT: EPIC BT  
 M/N: EPIC BT  
 Mode: Middle Channel TX  
 Note:

Polarization: *Horizontal*  
 Power:  
 Distance:

Temperature: 22.3  
 Humidity: 52.3 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		144.7833	3.69	14.04	17.73	43.50	-25.77	peak			
2		217.5333	12.88	10.21	23.09	46.00	-22.91	peak			
3		280.5833	12.32	12.11	24.43	46.00	-21.57	peak			
4		603.9167	5.56	23.74	29.30	46.00	-16.70	peak			
5		807.6167	1.61	27.32	28.93	46.00	-17.07	peak			
6	*	957.9667	2.09	29.92	32.01	46.00	-13.99	peak			

**RESULT: PASS**

RADIATED EMISSION TEST- (30MHZ-1GHZ)- MIDDLE CHANNEL -VERTICAL



Site: site #1  
 Limit: FCC Class B 3M Radiation  
 EUT: EPIC BT  
 M/N: EPIC BT  
 Mode: Middle Channel TX  
 Note:

Polarization: *Vertical*  
 Power:  
 Distance:

Temperature: 22.3  
 Humidity: 52.3 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		73.6500	14.74	3.36	18.10	40.00	-21.90	peak			
2		159.3333	5.90	15.33	21.23	43.50	-22.27	peak			
3		267.6500	11.78	14.43	26.21	46.00	-19.79	peak			
4		461.6500	10.81	20.72	31.53	46.00	-14.47	peak			
5		773.6667	4.66	26.96	31.62	46.00	-14.38	peak			
6	*	818.9333	7.88	27.32	35.20	46.00	-10.80	peak			

**RESULT: PASS**

- Note:** 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.  
 2. The "Factor" value can be calculated automatically by software of measurement system.

RADIATED EMISSION TEST- (30MHZ-1GHZ)-HIGH CHANNEL-HORIZONTAL



Site: site #1  
Limit: FCC Class B 3M Radiation  
EUT: EPIC BT  
M/N: EPIC BT  
Mode: High Channel TX  
Note:


Polarization: *Horizontal*  
Power:  
Distance:

Temperature: 22.3  
Humidity: 52.3 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		217.5333	12.54	10.21	22.75	46.00	-23.25	peak			
2		280.5833	10.83	12.11	22.94	46.00	-23.06	peak			
3		451.9500	3.64	20.61	24.25	46.00	-21.75	peak			
4		579.6667	7.95	23.22	31.17	46.00	-14.83	peak			
5	*	662.1167	8.52	24.17	32.69	46.00	-13.31	peak			
6		789.8333	2.06	27.18	29.24	46.00	-16.76	peak			

**RESULT: PASS**

RADIATED EMISSION TEST- (30MHZ-1GHZ)-HIGH CHANNEL -VERTICAL

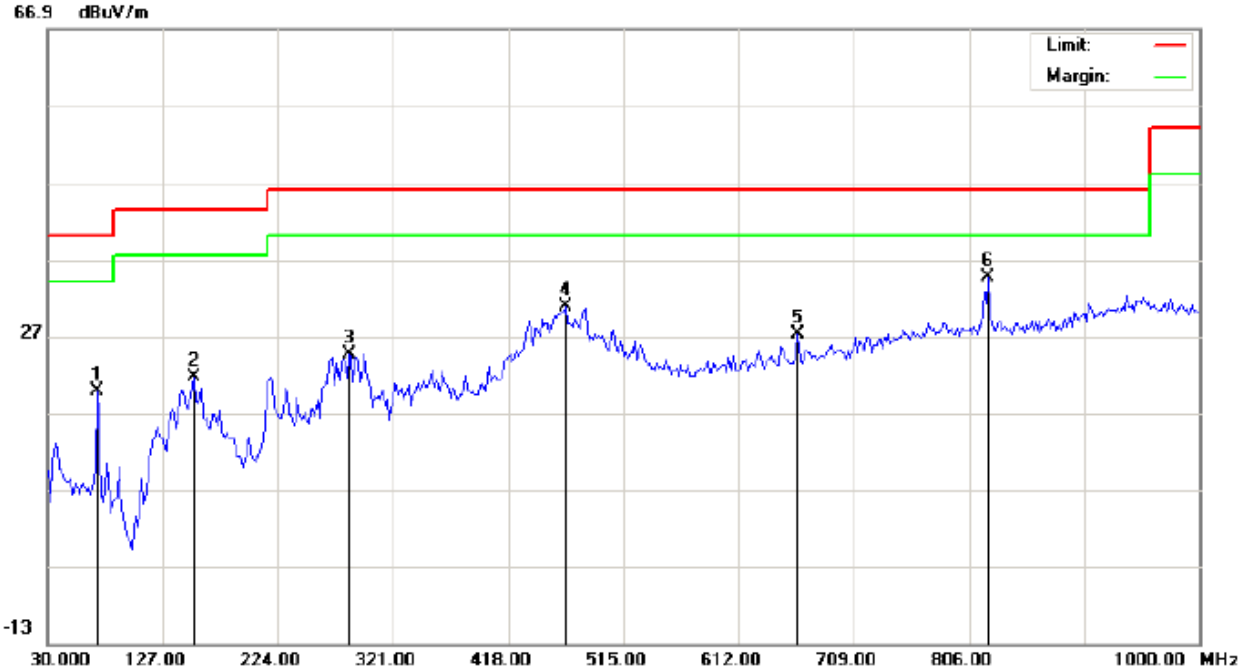

Site: site #1  
 Limit: FCC Class B 3M Radiation  
 EUT: EPIC BT  
 M/N: EPIC BT  
 Mode: High Channel TX  
 Note:

Polarization: *Vertical*  
 Power:  
 Distance:

Temperature: 22.3  
 Humidity: 52.3 %


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		72.0333	16.02	3.76	19.78	40.00	-20.22	peak			
2		152.8667	6.25	15.28	21.53	43.50	-21.97	peak			
3		283.8167	9.70	14.92	24.62	46.00	-21.38	peak			
4		466.5000	9.94	20.77	30.71	46.00	-15.29	peak			
5		662.1167	2.96	24.17	27.13	46.00	-18.87	peak			
6	*	822.1667	7.37	27.32	34.69	46.00	-11.31	peak			

**RESULT: PASS**

- Note:** 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.  
 2. The "Factor" value can be calculated automatically by software of measurement system.

**RADIATED EMISSION ABOVE 1GHZ**  
**(Worst modulation: GFSK)**  
**FOR BR/EDR**

**RADIATED EMISSION TEST- (ABOVE 1GHZ)-LOW CHANNEL-HORIZONTAL**

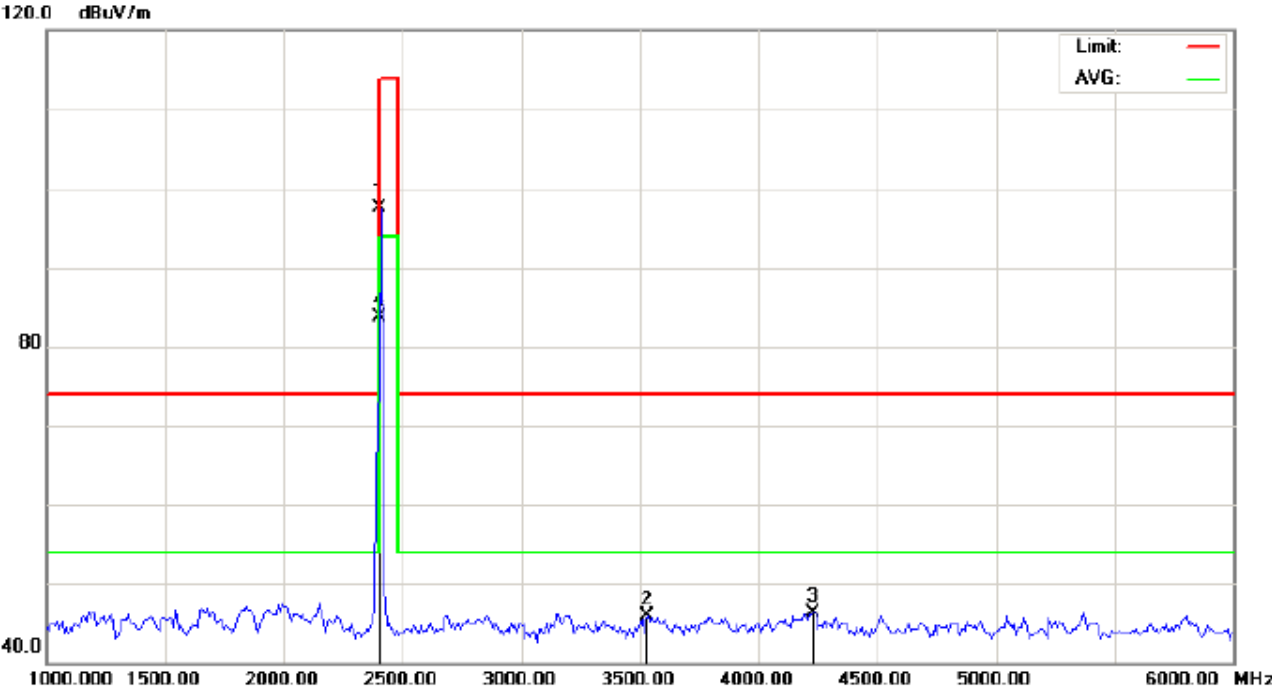


Site: site #1 Polarization: *Horizontal* Temperature: 26  
 Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %  
 EUT: BPIC BT Distance: 3m  
 M/N: BPIC BT  
 Mode: Low Channel TX  
 Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna	Table	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		Height	Degree	
									cm	degree	
1		2402.000	107.21	-9.68	97.53	114.00	-16.47	peak			
2		3533.333	53.52	-7.68	45.84	74.00	-28.16	peak			
3		4233.333	50.41	-4.02	46.39	74.00	-27.61	peak			
4	*	2402.000	93.41	-9.68	83.73	94.00	-10.27	AVG	100	246	

**RESULT: PASS**

RADIATED EMISSION TEST- (ABOVE 1GHZ)-LOW CHANNEL- VERTICAL

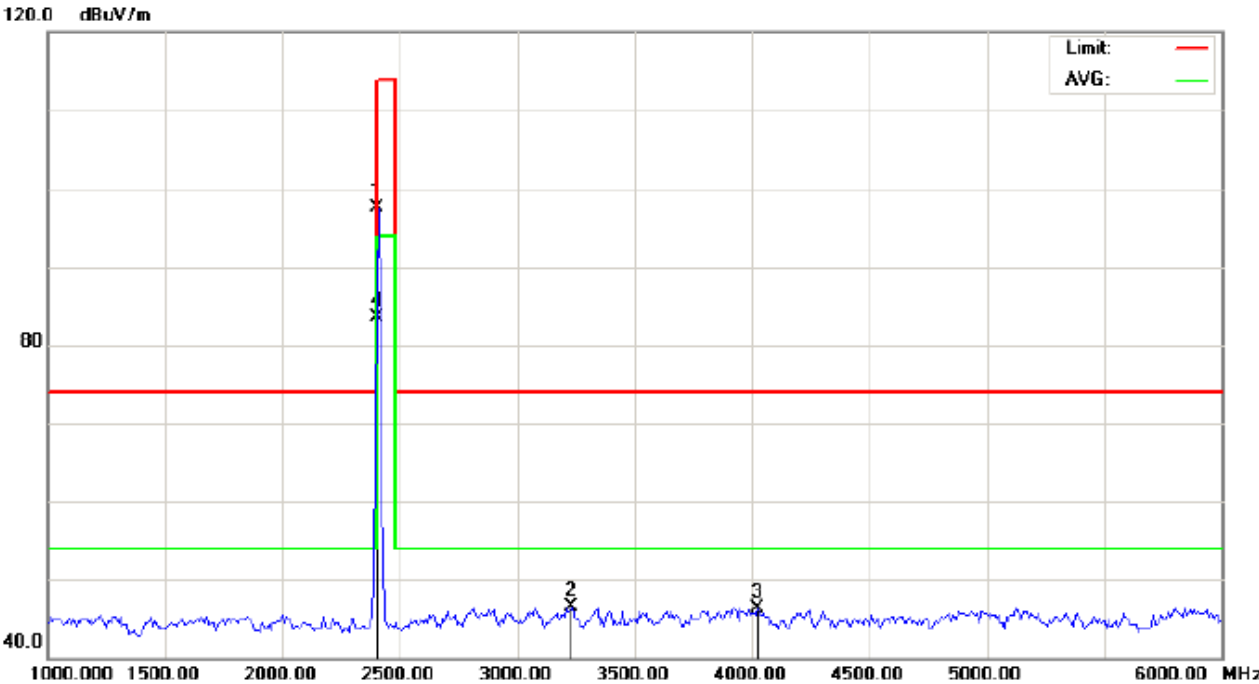

Site: site #1  
 Limit: FCC Class B 3M Radiation above 1GHZ(PK)-  
 EUT: BPIC BT  
 M/N: BPIC BT  
 Mode: Low Channel TX  
 Note:


Polarization: *Vertical*  
 Power:  
 Distance: 3m

Temperature: 26  
 Humidity: 60 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2402.000	107.25	-9.68	97.57	114.00	-16.43	peak			
2		3233.333	54.70	-8.14	46.56	74.00	-27.44	peak			
3		4025.000	51.06	-4.72	46.34	74.00	-27.66	peak			
4	*	2402.000	93.27	-9.68	83.59	94.00	-10.41	AVG	100	298	

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHZ)-MIDDLE CHANNEL-HORIZONTAL

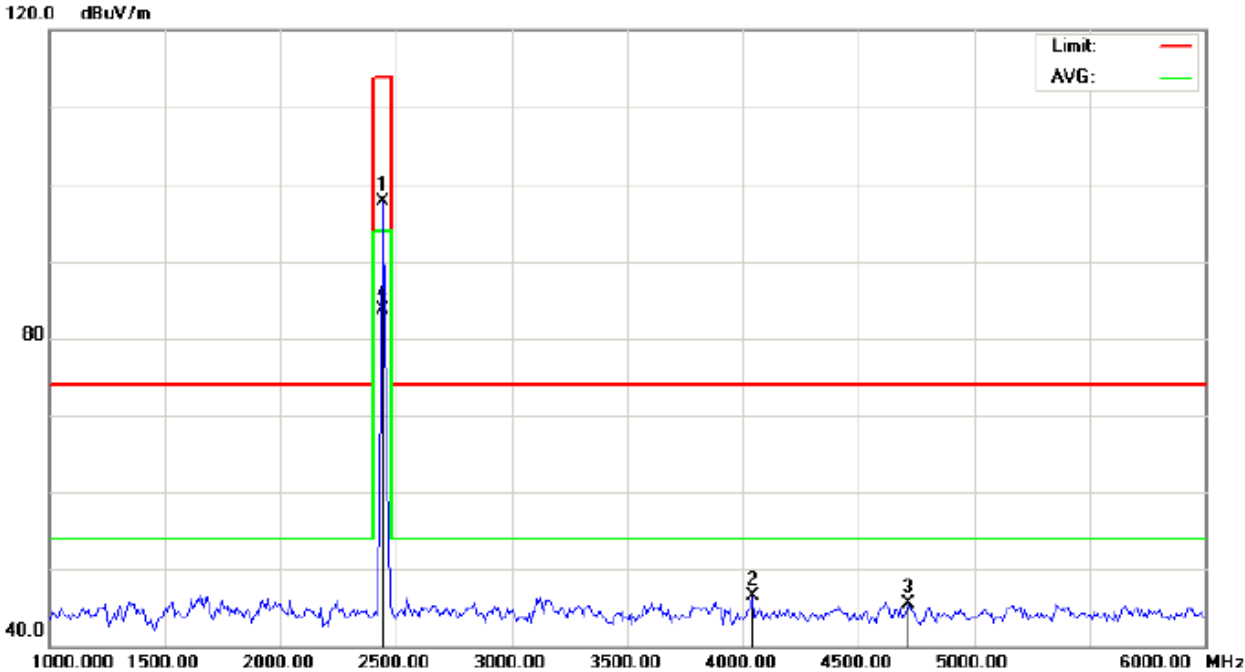

Site: site #1  
 Limit: FCC Class B 3M Radiation above 1GHZ(PK)-  
 EUT: BPIC BT  
 M/N: BPIC BT  
 Mode: Middle Channel TX  
 Note:


Polarization: *Horizontal*  
 Power:  
 Distance: 3m

Temperature: 26  
 Humidity: 60 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna	Table	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		Height	Degree	
1		2441.000	107.26	-9.63	97.63	114.00	-16.37	peak			
2		4041.667	51.18	-4.67	46.51	74.00	-27.49	peak			
3		4716.667	48.08	-2.54	45.54	74.00	-28.46	peak			
4	*	2441.000	93.32	-9.63	83.69	94.00	-10.31	AVG	100	251	

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHZ)-MIDDLE CHANNEL- VERTICAL

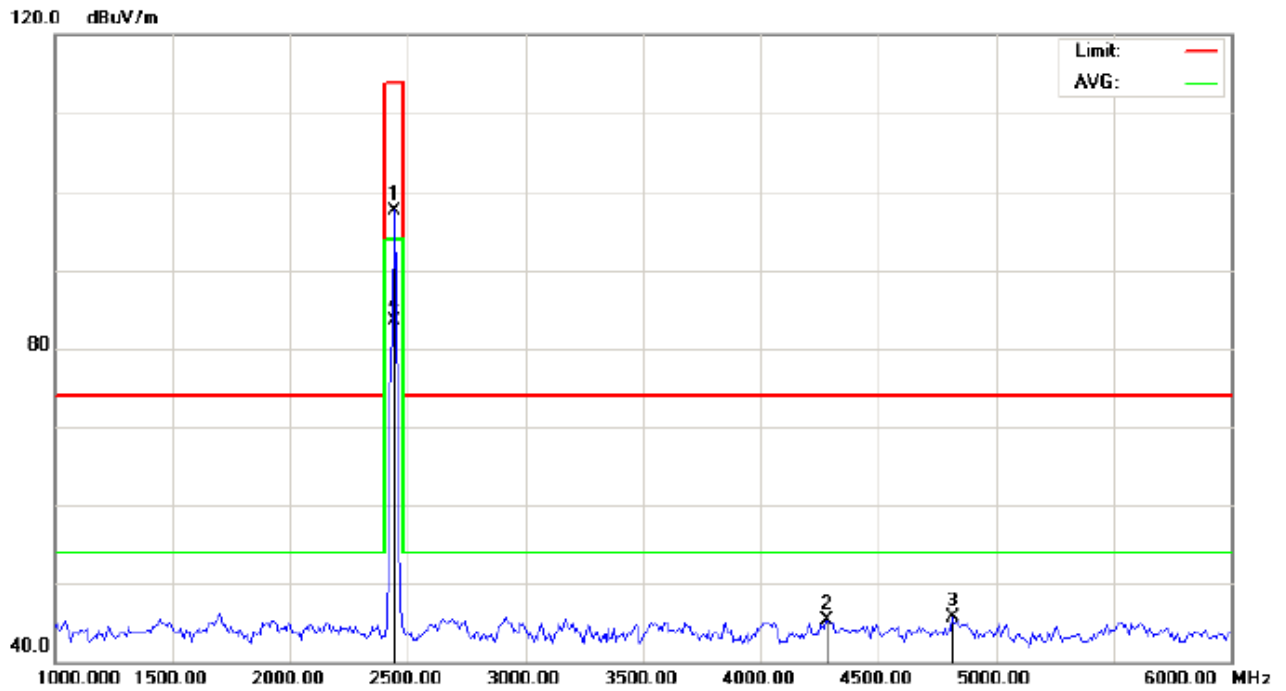

Site: site #1  
 Limit: FCC Class B 3M Radiation above 1GHZ(PK)-  
 EUT: BPIC BT  
 M/N: BPIC BT  
 Mode: Middle Channel TX  
 Note:

Polarization: *Vertical*  
 Power:  
 Distance: 3m


Temperature: 26  
 Humidity: 60 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2441.000	107.21	-9.63	97.58	114.00	-16.42	peak			
2		4283.333	49.11	-3.85	45.26	74.00	-28.74	peak			
3		4816.667	47.95	-2.28	45.67	74.00	-28.33	peak			
4	*	2441.000	93.05	-9.63	83.42	94.00	-10.58	AVG	100	301	

**RESULT: PASS**



RADIATED EMISSION TEST- (ABOVE 1GHZ)-HIGH CHANNEL-HORIZONTAL

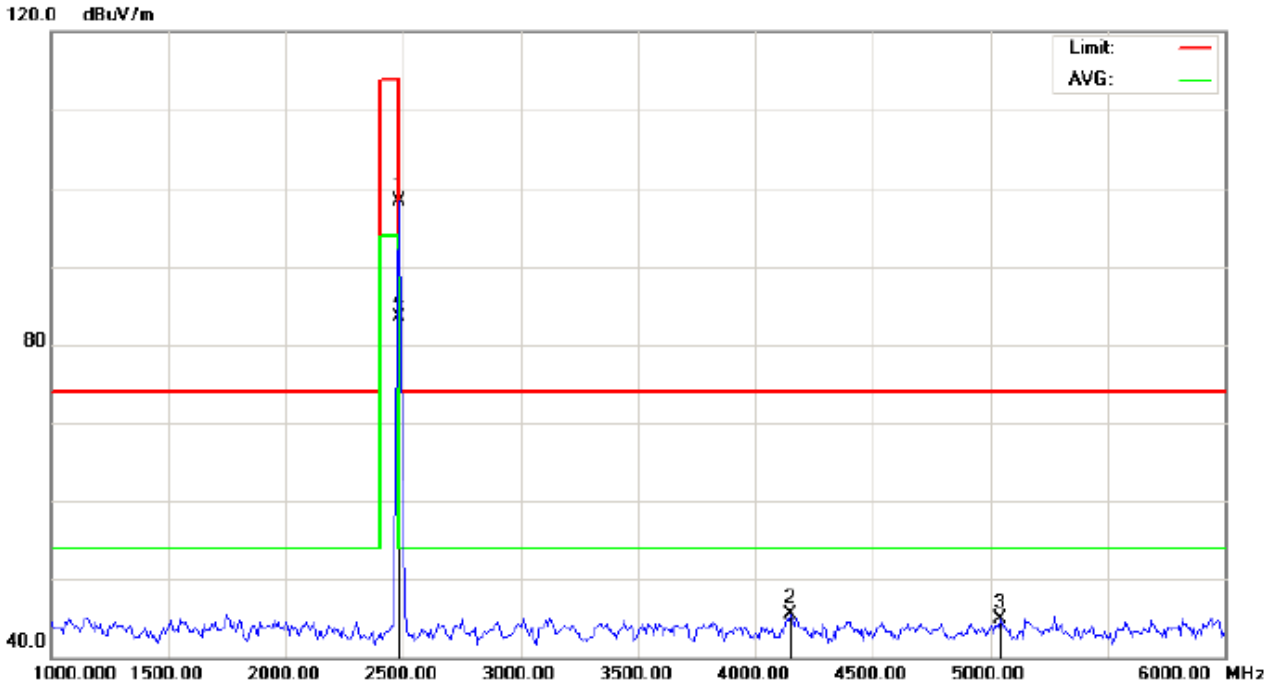

Site: site #1  
 Limit: FCC Class B 3M Radiation above 1GHZ(PK)-  
 EUT: BPIC BT  
 M/N: BPIC BT  
 Mode: High Channel TX  
 Note:


Polarization: *Horizontal*  
 Power:  
 Distance: 3m

Temperature: 26  
 Humidity: 60 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2480.000	107.84	-9.59	98.25	114.00	-15.75	peak			
2		4150.000	49.72	-4.30	45.42	74.00	-28.58	peak			
3		5041.667	46.73	-1.80	44.93	74.00	-29.07	peak			
4	*	2480.000	93.13	-9.59	83.54	94.00	-10.46	AVG	100	248	

**RESULT: PASS**

RADIATED EMISSION TEST- (ABOVE 1GHZ)-HIGH CHANNEL- VERTICAL

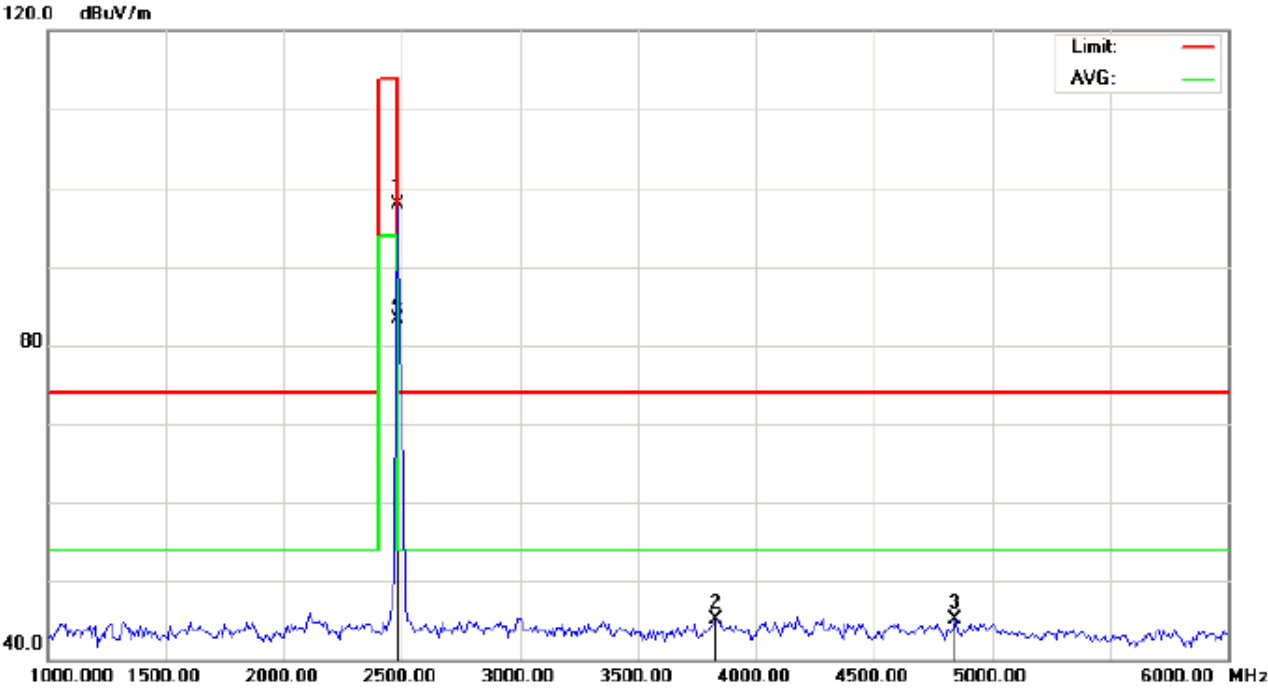

Site: site #1  
 Limit: FCC Class B 3M Radiation above 1GHZ(PK)-  
 EUT: BPIC BT  
 M/N: BPIC BT  
 Mode: High Channel TX  
 Note:

Polarization: *Vertical*  
 Power:  
 Distance: 3m

Temperature: 26  
 Humidity: 60 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2480.000	107.41	-9.59	97.82	114.00	-16.18	peak			
2		3833.333	50.90	-5.84	45.06	74.00	-28.94	peak			
3		4841.667	47.30	-2.21	45.09	74.00	-28.91	peak			
4	*	2480.000	92.84	-9.59	83.25	94.00	-10.75	AVG	100	302	

**RESULT: PASS**

**Note:** 6~25GHz at least have 20dB margin. No recording in the test report.  
 Factor=Antenna Factor + Cable loss - Amplifier gain, Margin=Measurement-Limit.  
 The "Factor" value can be calculated automatically by software of measurement system.

**Field strength of the fundamental signal (GFSK Result)**

**Peak value**

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	Polarization
2402	107.21	-9.68	97.53	114	-16.47	Horizontal
2402	107.25	-9.68	97.57	114	-16.43	Vertical
2441	107.26	-9.63	97.63	114	-16.37	Horizontal
2441	107.21	-9.63	97.58	114	-16.42	Vertical
2480	107.84	-9.59	98.25	114	-15.75	Horizontal
2480	107.41	-9.59	97.82	114	-16.18	Vertical

**Average value**

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	Polarization
2402	93.41	-9.68	83.73	94	-10.27	Horizontal
2402	93.27	-9.68	83.59	94	-10.41	Vertical
2441	93.32	-9.63	83.69	94	-10.31	Horizontal
2441	93.05	-9.63	83.42	94	-10.58	Vertical
2480	93.13	-9.59	83.54	94	-10.46	Horizontal
2480	92.84	-9.59	83.25	94	-10.75	Vertical

**Field strength of the fundamental signal ( $\pi/4$ -DQPSK Result)**

**Peak value**

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	106.93	-9.68	97.25	114	-16.75	Horizontal
2402	106.99	-9.68	97.31	114	-16.69	Vertical
2441	104.95	-9.63	95.32	114	-18.68	Horizontal
2441	104.86	-9.63	95.23	114	-18.77	Vertical
2480	-104.00	-9.59	94.41	114	-19.59	Horizontal
2480	-104.00	-9.59	94.36	114	-19.64	Vertical

**Average value**

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	93.25	-9.68	83.57	94	-10.43	Horizontal
2402	93.57	-9.68	83.89	94	-10.11	Vertical
2441	92.09	-9.63	82.46	94	-11.54	Horizontal
2441	92.07	-9.63	82.44	94	-11.56	Vertical
2480	-91.70	-9.59	82.11	94	-11.89	Horizontal
2480	-91.18	-9.59	81.59	94	-12.41	Vertical

**Field strength of the fundamental signal (8DPSK Result)**

**Peak value**


Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	106.15	-9.68	96.47	114	-17.53	Horizontal
2402	106.23	-9.68	96.55	114	-17.45	Vertical
2441	104.16	-9.63	94.53	114	-19.47	Horizontal
2441	104.31	-9.63	94.68	114	-19.32	Vertical
2480	-103.7	-9.59	94.09	114	-19.91	Horizontal
2480	-103.6	-9.59	93.99	114	-20.01	Vertical

**Average value**

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	93.12	-9.68	83.44	94	-10.56	Horizontal
2402	93.34	-9.68	83.66	94	-10.34	Vertical
2441	91.7	-9.63	82.07	94	-11.93	Horizontal
2441	91.06	-9.63	81.43	94	-12.57	Vertical
2480	-91.17	-9.59	81.58	94	-12.42	Horizontal
2480	-90.86	-9.59	81.27	94	-12.73	Vertical

**FOR BLE**

**RADIATED EMISSION TEST- (ABOVE 1GHZ)-LOW CHANNEL-HORIZONTAL**

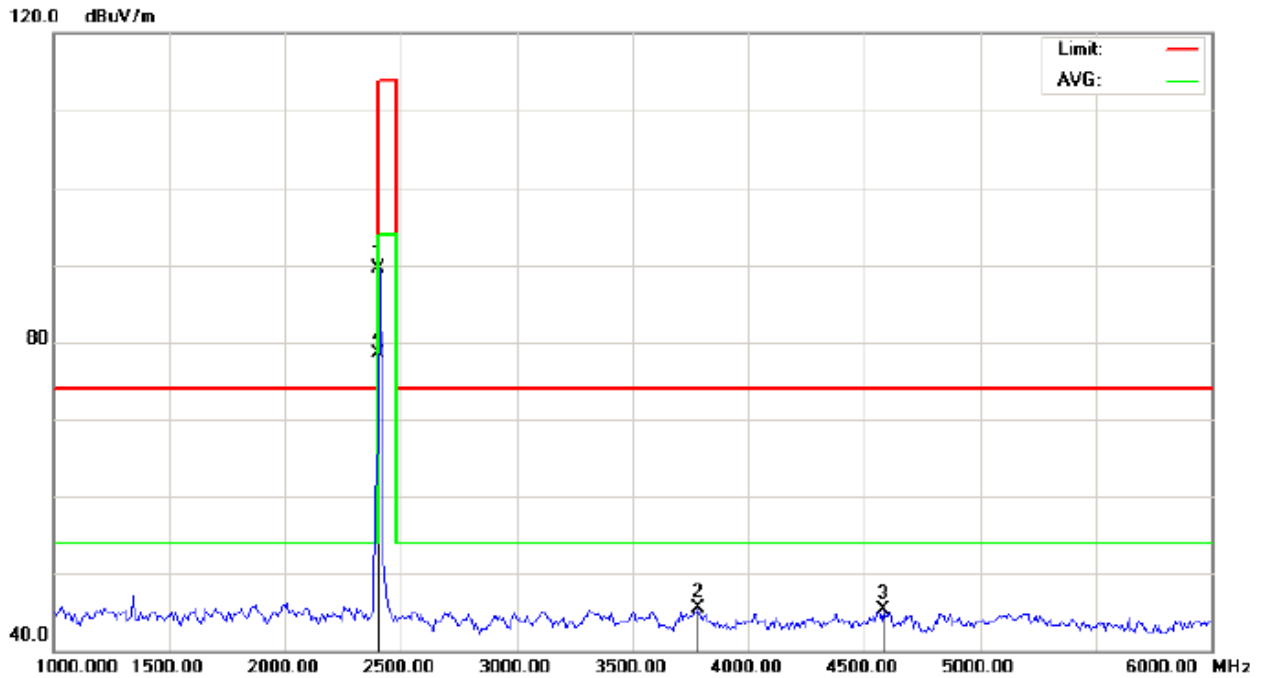

Site: site #1  
 Limit: FCC Class B 3M Radiation above 1GHZ(PK)-  
 EUT: BPIC BT  
 M/N: BPIC BT  
 Mode: Low Channel TX  
 Note:


Polarization: *Horizontal*  
 Power:  
 Distance: 3m

Temperature: 26  
 Humidity: 60 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2402.000	99.19	-9.68	89.51	114.00	-24.49	peak			
2		3783.333	51.72	-6.14	45.58	74.00	-28.42	peak			
3		4583.333	48.15	-2.89	45.26	74.00	-28.74	peak			
4	*	2402.000	88.17	-9.68	78.49	94.00	-15.51	AVG	100	332	

**RESULT: PASS**

RADIATED EMISSION TEST- (ABOVE 1GHZ)-LOW CHANNEL- VERTICAL

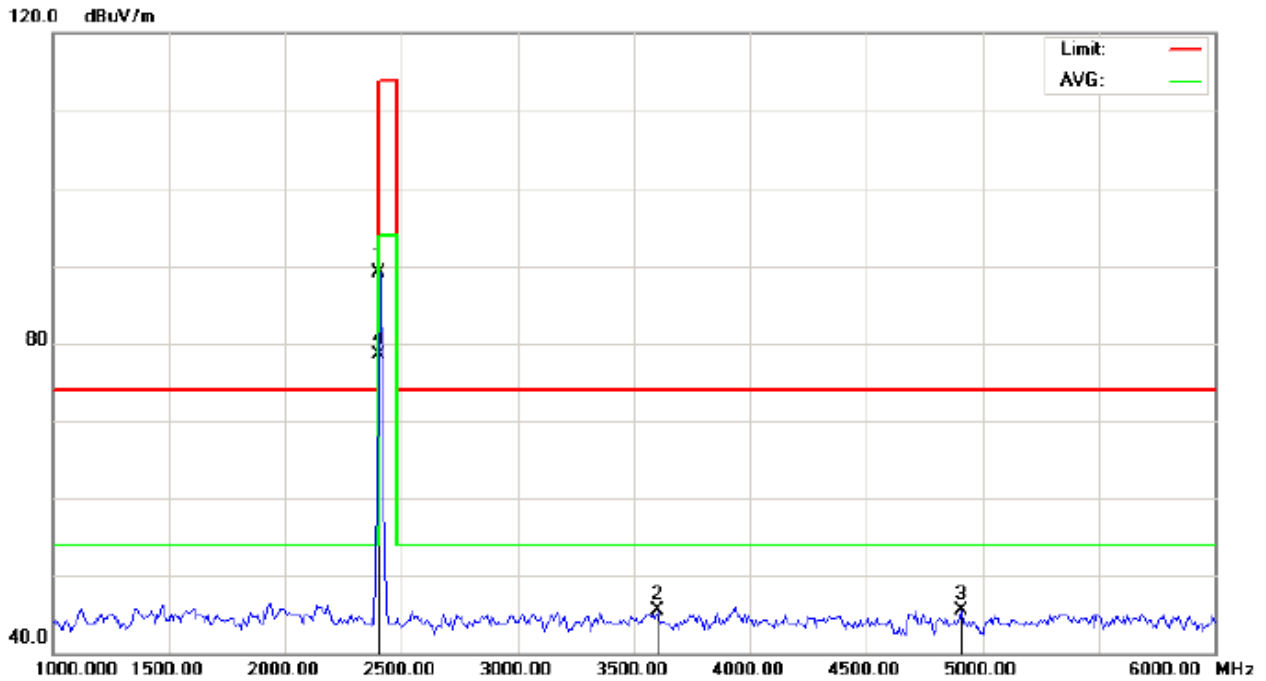

Site: site #1

Polarization: *Vertical*

Temperature: 26

Limit: FCC Class B 3M Radiation above 1GHZ(PK)-

Power:

Humidity: 60 %

EUT: BPIC BT

Distance: 3m

M/N: BPIC BT


Mode: Low Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2402.000	98.76	-9.68	89.08	114.00	-24.92	peak			
2		3600.000	52.71	-7.27	45.44	74.00	-28.56	peak			
3		4908.333	47.59	-2.04	45.55	74.00	-28.45	peak			
4	*	2402.000	88.25	-9.68	78.57	94.00	-15.43	AVG	100	97	

**RESULT: PASS**

RADIATED EMISSION TEST- (ABOVE 1GHZ)-MIDDLE CHANNEL-HORIZONTAL

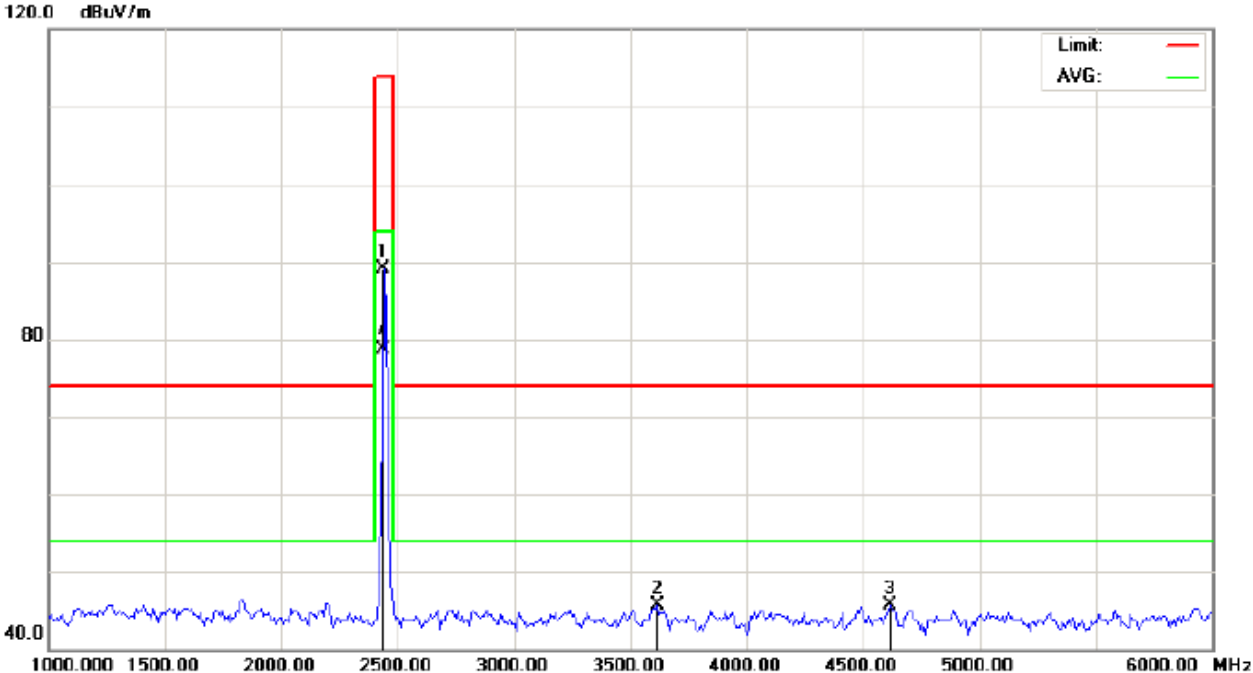


Site: site #1	Polarization: <i>Horizontal</i>	Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)-	Power:	Humidity: 60 %
EUT: BPIC BT	Distance: 3m	
M/N: BPIC BT		
Mode: Middle Channel TX		
Note:		

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2440.000	98.79	-9.64	89.15	114.00	-24.85	peak			
2		3616.667	52.85	-7.17	45.68	74.00	-28.32	peak			
3		4616.667	48.56	-2.80	45.76	74.00	-28.24	peak			
4	*	2440.000	88.43	-9.64	78.79	94.00	-15.21	AVG	100	329	

**RESULT: PASS**



RADIATED EMISSION TEST- (ABOVE 1GHZ)-MIDDLE CHANNEL- VERTICAL

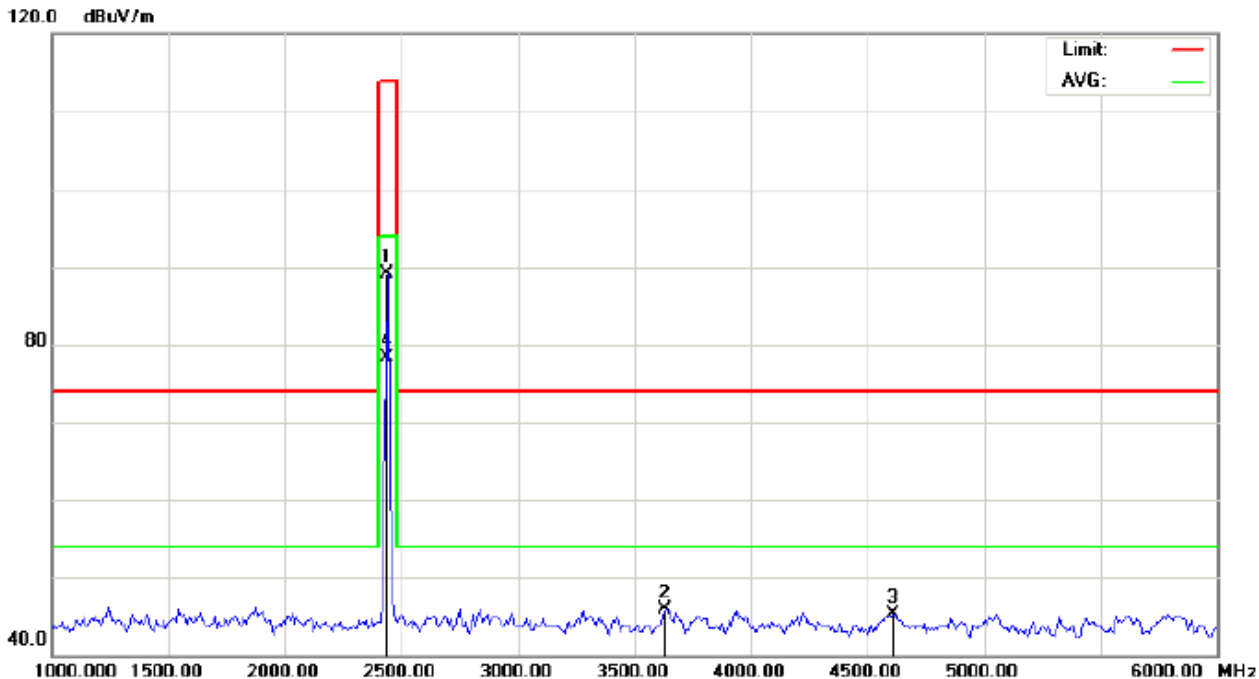


Site: site #1                                      Polarization: *Vertical*                                      Temperature: 26  
 Limit: FCC Class B 3M Radiation above 1GHZ(PK)-      Power:                                      Humidity: 60 %  
 EUT: BPIC BT                                      Distance: 3m  
 M/N: BPIC BT  
 Mode: Middle Channel TX  
 Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna	Table	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		Height	Degree	
									cm	degree	
1		2440.000	98.71	-9.64	89.07	114.00	-24.93	peak			
2		3633.333	52.93	-7.07	45.86	74.00	-28.14	peak			
3		4608.333	48.11	-2.83	45.28	74.00	-28.72	peak			
4	*	2440.000	87.96	-9.64	78.32	94.00	-15.68	AVG	100	101	

**RESULT: PASS**

RADIATED EMISSION TEST- (ABOVE 1GHZ)-HIGH CHANNEL-HORIZONTAL

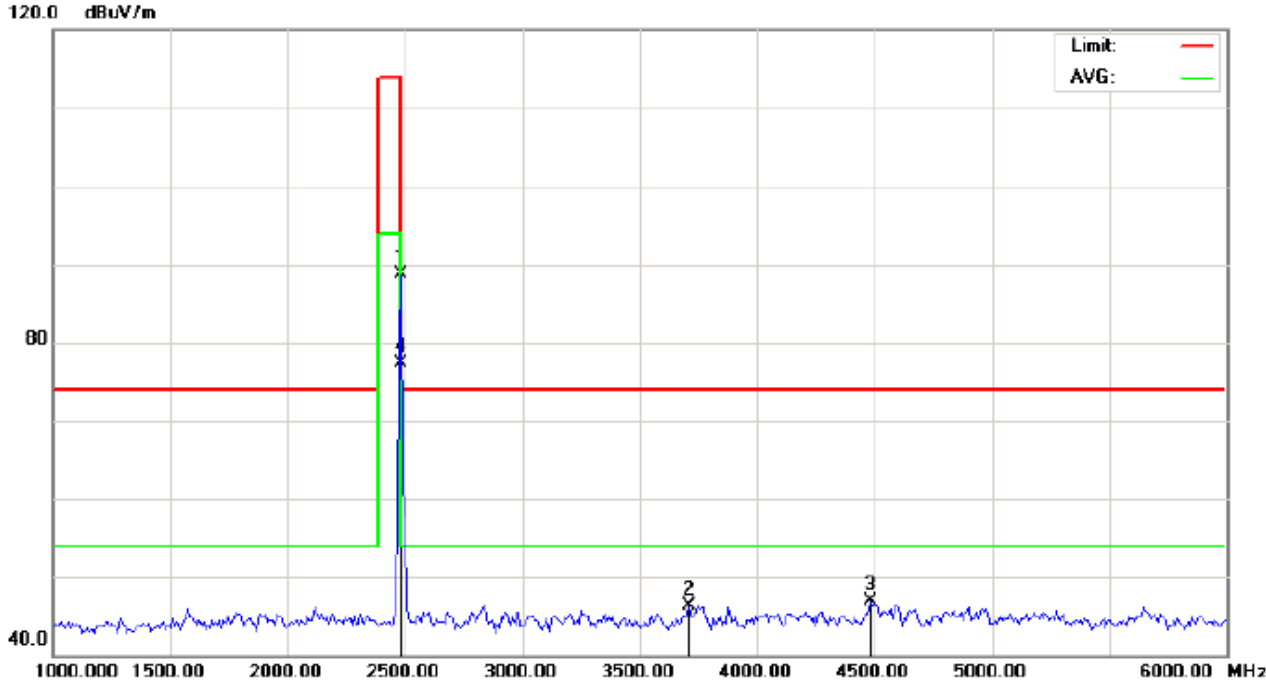


Site: site #1 Polarization: *Horizontal* Temperature: 26  
 Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %  
 EUT: BPIC BT Distance: 3m  
 M/N: BPIC BT  
 Mode: High Channel TX  
 Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2480.000	98.35	-9.59	88.76	114.00	-25.24	peak			
2		3708.333	52.89	-6.61	46.28	74.00	-27.72	peak			
3		4483.333	50.05	-3.17	46.88	74.00	-27.12	peak			
4	*	2480.000	86.87	-9.59	77.28	94.00	-16.72	AVG	100	334	

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHZ)-HIGH CHANNEL- VERTICAL

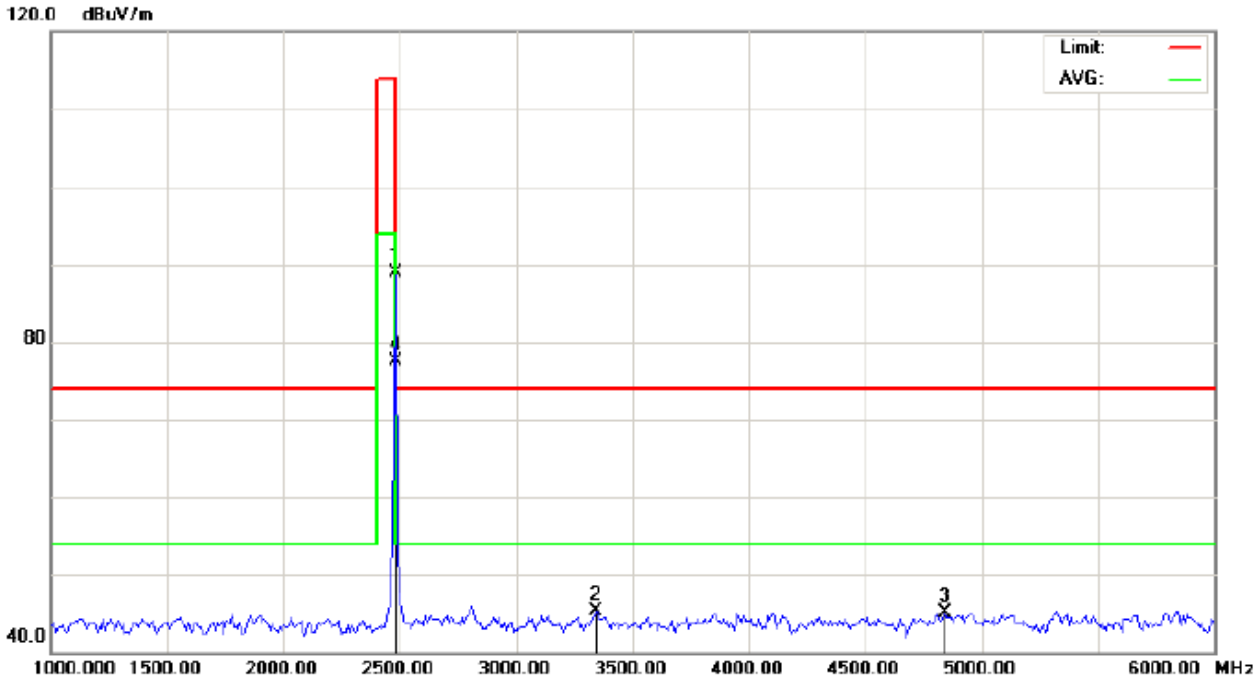

Site: site #1 Polarization: *Vertical* Temperature: 26  
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %  
EUT: BPIC BT Distance: 3m  
M/N: BPIC BT  
Mode: High Channel TX  
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2480.000	98.40	-9.59	88.81	114.00	-25.19	peak			
2		3341.667	53.40	-8.04	45.36	74.00	-28.64	peak			
3		4841.667	47.30	-2.21	45.09	74.00	-28.91	peak			
4	*	2480.000	87.08	-9.59	77.49	94.00	-16.51	AVG	100	95	

**RESULT: PASS**

**Note:** 6~25GHz at least have 20dB margin. No recording in the test report.  
Factor=Antenna Factor + Cable loss - Amplifier gain, Margin=Measurement-Limit.  
The “Factor” value can be calculated automatically by software of measurement system.

**Field strength of the fundamental signal****Peak value**

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	99.19	-9.68	89.51	114	-24.49	Horizontal
2402	98.76	-9.68	89.08	114	-28.56	Vertical
2440	98.79	-9.64	89.15	114	-24.85	Horizontal
2440	98.71	-9.64	89.07	114	-24.93	Vertical
2480	98.35	-9.59	88.76	114	-25.24	Horizontal
2480	98.40	-9.59	88.81	114	-25.19	Vertical

**Average value**

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	88.17	-9.68	78.49	94	-15.51	Horizontal
2402	88.25	-9.68	78.57	94	-15.43	Vertical
2440	88.43	-9.64	78.79	94	-15.21	Horizontal
2440	87.96	-9.64	78.32	94	-15.68	Vertical
2480	86.87	-9.59	77.28	94	-16.72	Horizontal
2480	87.08	-9.59	77.49	94	-16.51	Vertical


## 10. BAND EDGE EMISSION

### 10.1. MEASUREMENT PROCEDURE

- 1The EUT operates at hopping-off test mode. The lowest or highest channels are tested to verify the largest transmission and spurious emissions power at the continuous transmission mode.
- 2Max hold the trace of the setp 1,and the EUT operates at hopping-on test mode to verify the largest spurious emissions power.
- 3Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission
- 4 test equipment's setting refer to the section 9


### 10.2 TEST SETUP

RADIATED EMISSION TEST SETUP

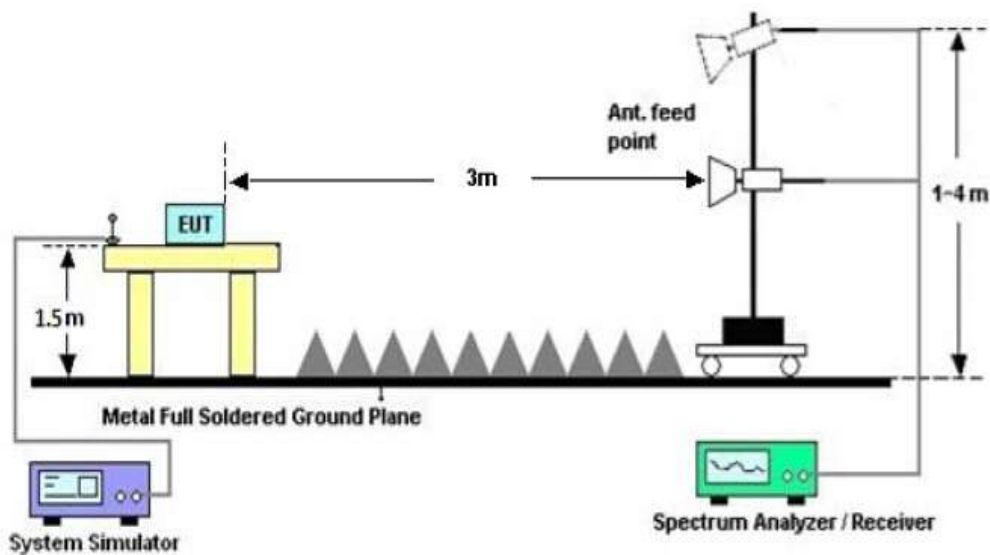

10.3 RADIATED TEST RESULT  
 (Worst modulation: GFSK)  
 FOR BR/EDR


TEST PLOT OF BAND EDGE FOR LOW CHANNEL-Horizontal

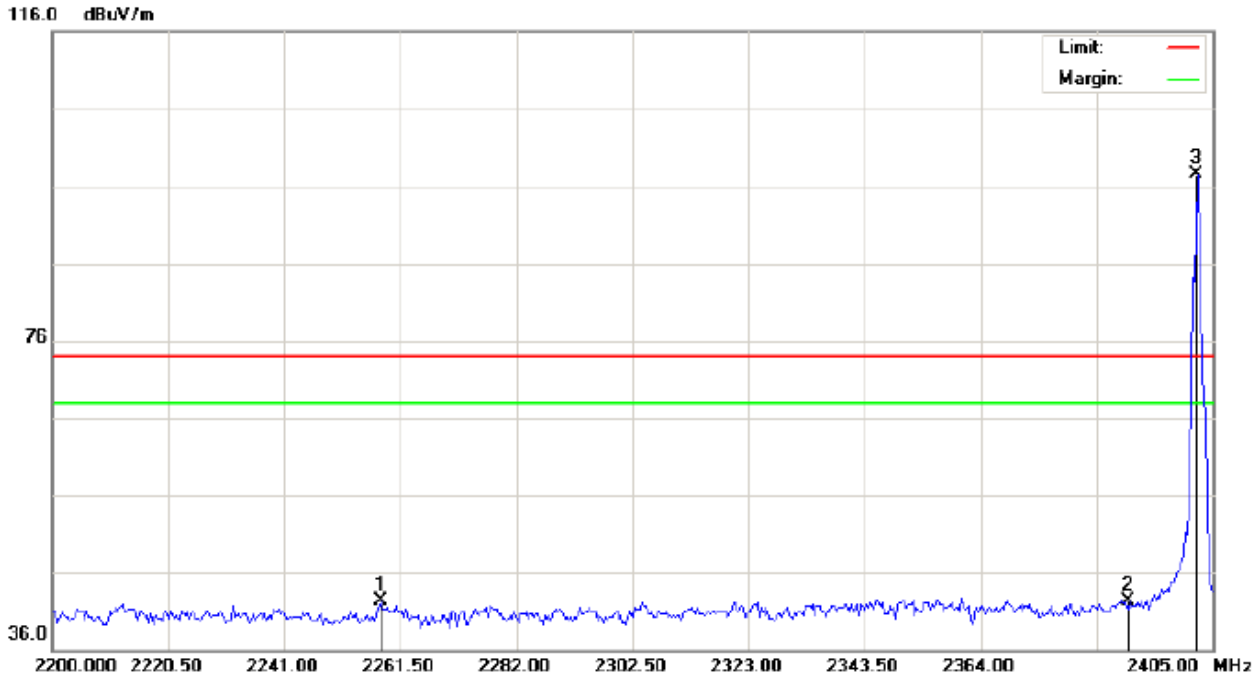

Site: site #1      Polarization: *Horizontal*      Temperature: 26  
 Limit: FCC Class B 3M Radiation above 1GHZ(PK)      Power:      Humidity: 60 %  
 EUT: BPIC BT      Distance:  
 M/N: BPIC BT  
 Mode: Low Channel TX  
 Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2258.083	32.20	10.16	42.36	74.00	-31.64	peak			
2		2390.000	32.00	10.31	42.31	74.00	-31.69	peak			
3	*	2402.000	87.22	10.32	97.54	74.00	23.54	peak			


TEST PLOT OF BAND EDGE FOR LOW CHANNEL –Vertical

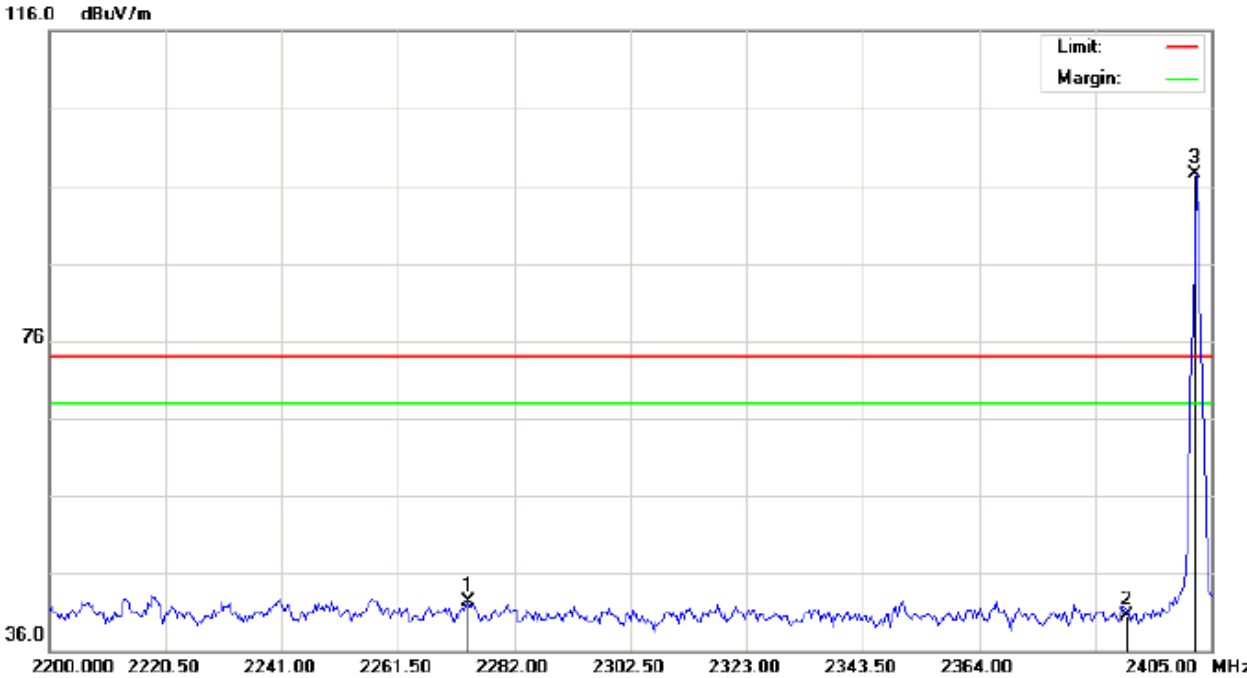

Site: site #1	Polarization: <i>Vertical</i>	Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)	Power:	Humidity: 60 %
EUT: BPIC BT	Distance:	
M/N: BPIC BT		
Mode: Low Channel TX		
Note:		

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2273.800	32.22	10.18	42.40	74.00	-31.60	peak			
2		2390.000	30.21	10.31	40.52	74.00	-33.48	peak			
3	*	2402.000	87.09	10.32	97.41	74.00	23.41	peak			

TEST PLOT OF BAND EDGE FOR HIGH CHANNEL -Horizontal

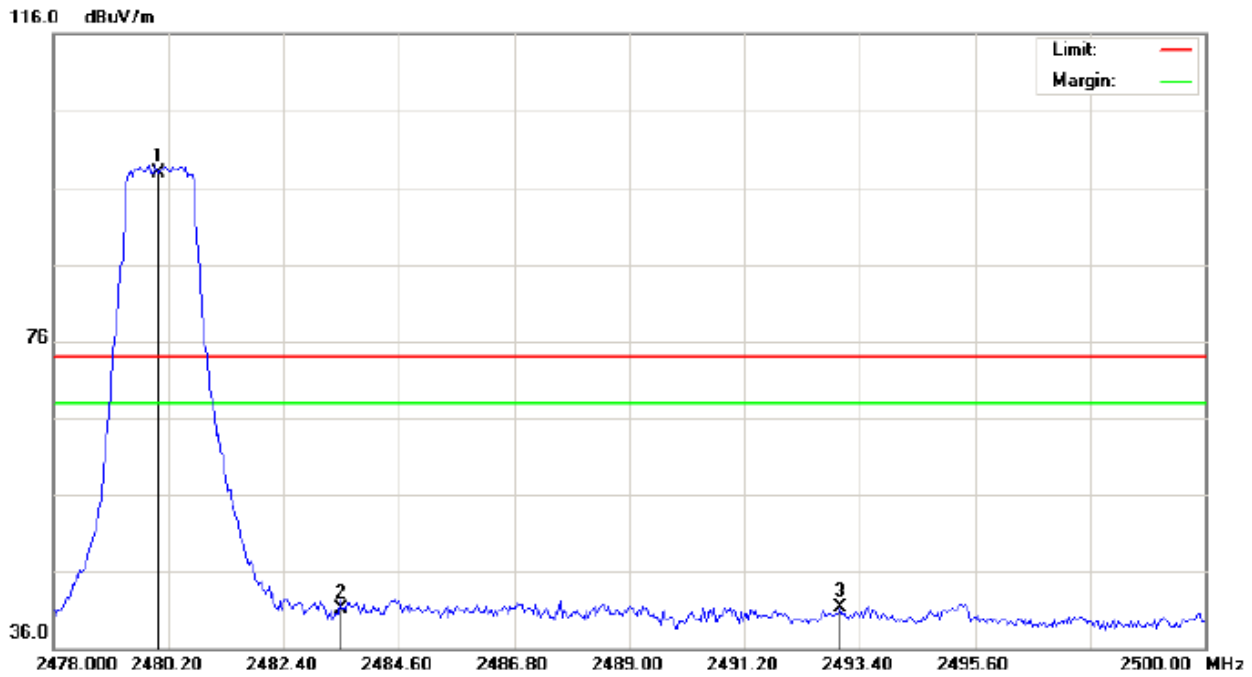


Site: site #1                                  Polarization: *Horizontal*                                  Temperature: 26  
Limit: FCC Class B 3M Radiation above 1GHZ(PK)      Power:    Humidity: 60 %  
EUT: BPIC BT    Distance:  
M/N: BPIC BT  
Mode: High Channel TX  
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2480.000	87.55	10.41	97.96	74.00	23.96	peak			
2		2483.500	30.69	10.41	41.10	74.00	-32.90	peak			
3		2493.033	30.97	10.42	41.39	74.00	-32.61	peak			



TEST PLOT OF BAND EDGE FOR HIGH CHANNEL-Vertical

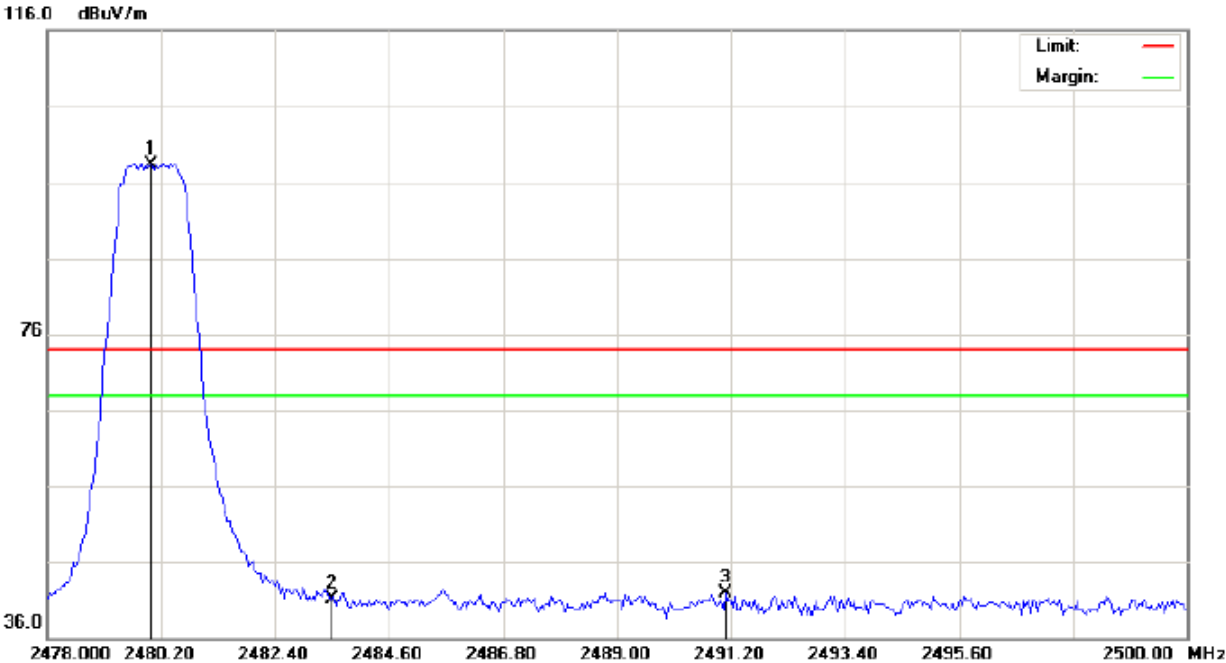

Site: site #1 Polarization: *Vertical* Temperature: 26  
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %  
EUT: BPIC BT Distance:  
M/N: BPIC BT  
Mode: High Channel TX  
Note:


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2480.000	87.82	10.41	98.23	74.00	24.23	peak			
2		2483.500	30.76	10.41	41.17	74.00	-32.83	peak			
3		2491.090	31.45	10.42	41.87	74.00	-32.13	peak			

**RESULT: PASS**

**Note:** The other modes radiation emission have enough 20dB margin.  
Factor=Antenna Factor + Cable loss - Amplifier gain, Over=Measure-Limit.  
The “Factor” value can be calculated automatically by software of measurement system.  
Hopping on mode and Hopping off mode have been tested, but only worst case reported.

FOR BLE

TEST PLOT OF BAND EDGE FOR LOW CHANNEL-Horizontal

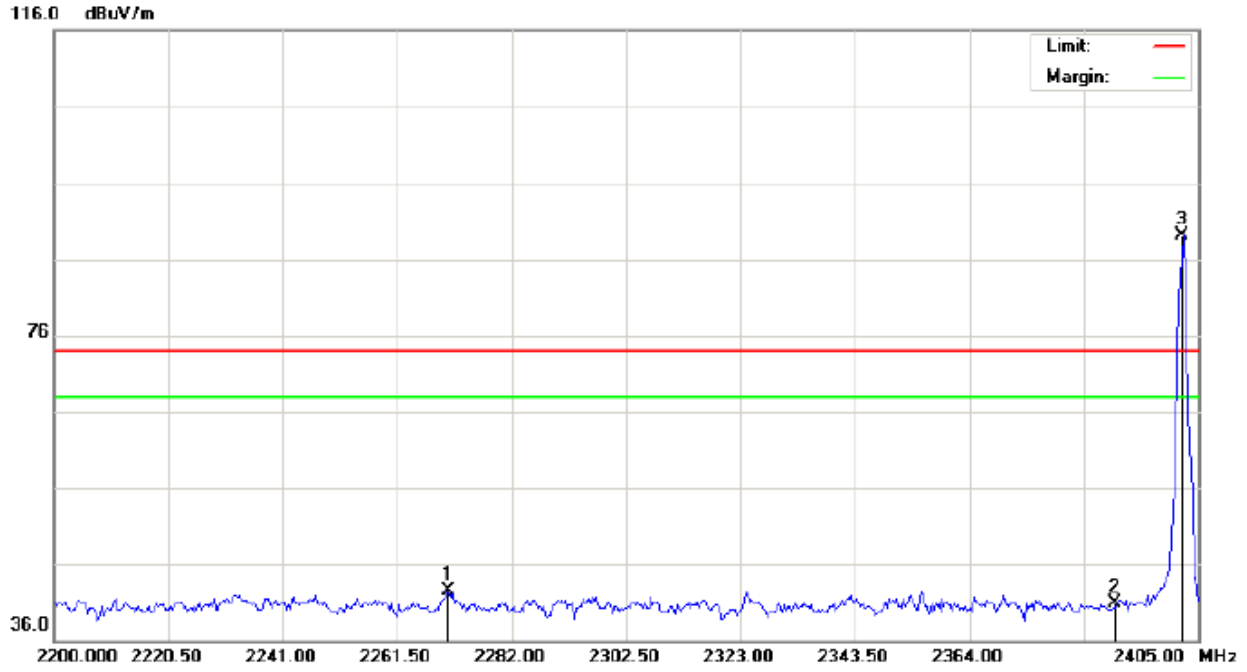

Site: site #1  
 Limit: FCC Class B 3M Radiation above 1GHZ(PK)  
 EUT: BPIC BT  
 M/N: BPIC BT  
 Mode: Low Channel TX  
 Note:


Polarization: *Horizontal*  
 Power:  
 Distance:

Temperature: 26  
 Humidity: 60 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna	Table	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		Height	Degree	
									cm	degree	
1		2270.725	32.26	10.18	42.44	74.00	-31.56	peak			
2		2390.000	30.50	10.31	40.81	74.00	-33.19	peak			
3	*	2402.000	78.72	10.32	89.04	74.00	15.04	peak			




TEST PLOT OF BAND EDGE FOR HIGH CHANNEL -Horizontal

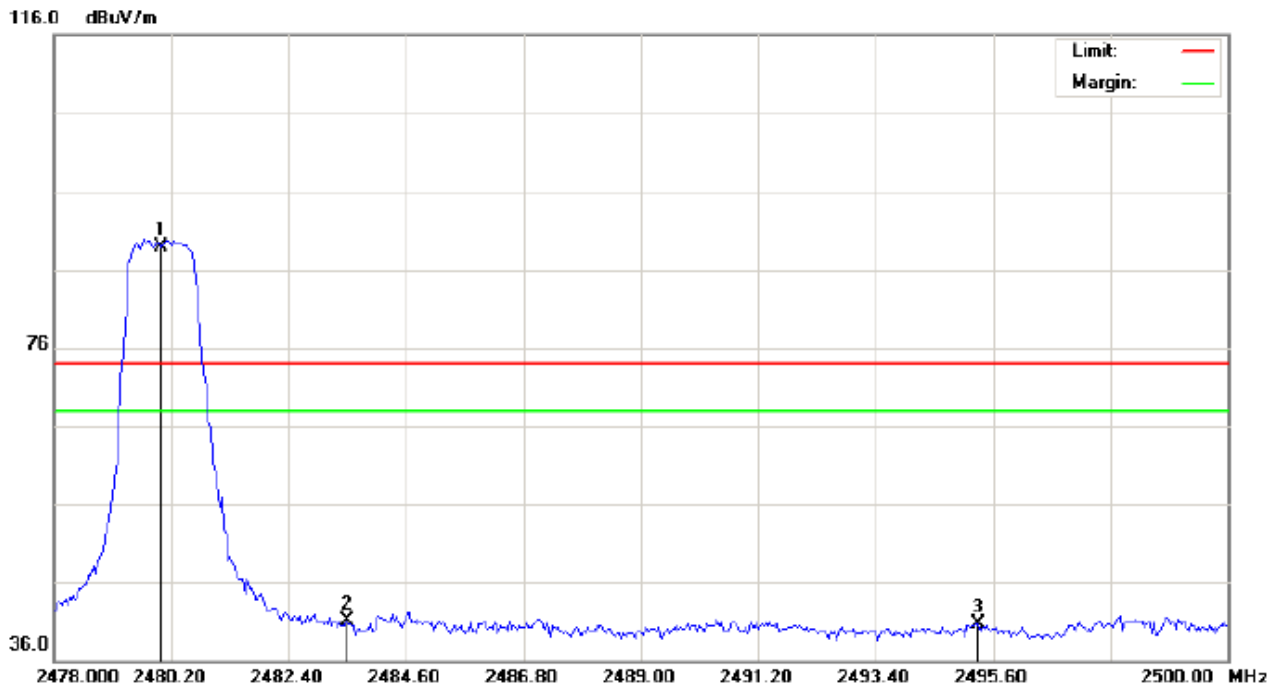

Site: site #1 Polarization: *Horizontal* Temperature: 26  
 Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %  
 EUT: BPIC BT Distance:  
 M/N: BPIC BT  
 Mode: High Channel TX  
 Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2480.000	78.55	10.41	88.96	74.00	14.96	peak			
2		2483.500	30.69	10.41	41.10	74.00	-32.90	peak			
3		2495.307	30.25	10.42	40.67	74.00	-33.33	peak			

TEST PLOT OF BAND EDGE FOR HIGH CHANNEL-Vertical

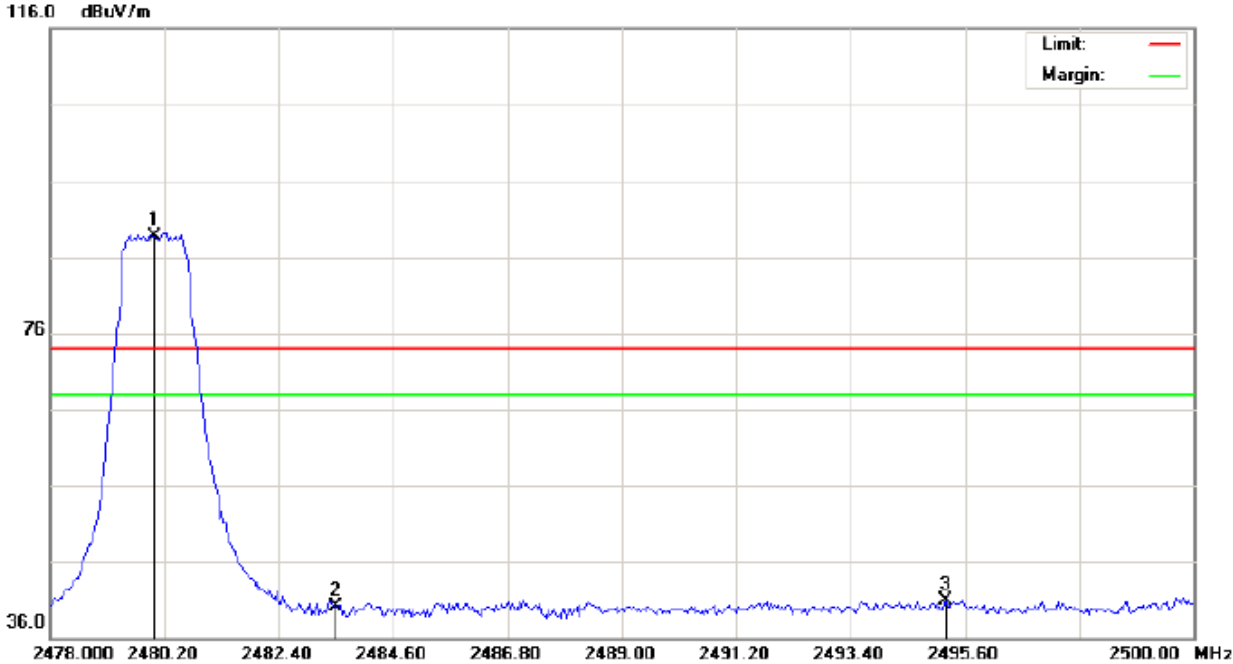

Site: site #1 Polarization: **Vertical** Temperature: 26  
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %  
EUT: BPIC BT Distance:  
M/N: BPIC BT  
Mode: High Channel TX  
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna	Table	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		Height	Degree	
1	*	2480.000	78.32	10.41	88.73	74.00	14.73	peak	cm	degree	
2		2483.500	29.76	10.41	40.17	74.00	-33.83	peak			
3		2495.233	30.45	10.42	40.87	74.00	-33.13	peak			

**RESULT: PASS**

**Note:** The other modes radiation emission have enough 20dB margin.

Factor=Antenna Factor + Cable loss - Amplifier gain, Over=Measure-Limit.

The "Factor" value can be calculated automatically by software of measurement system.


**11. 20DB BANDWIDTH**

**11.1. MEASUREMENT PROCEDURE**

1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
2. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
3. Set Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hoping channel  
 RBW ≥ 1% of the 20 dB bandwidth, VBW ≥ RBW; Sweep = auto; Detector function = peak
4. Set SPA Trace 1 Max hold, then View.

**11.2. TEST SET-UP**

**(BLOCK DIAGRAM OF CONFIGURATION)**

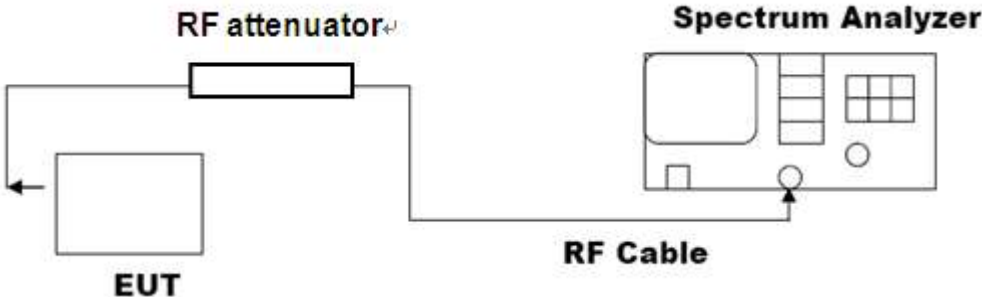

Note: The EUT has been used temporary antenna connector for testing.

**11.3. LIMITS AND MEASUREMENT RESULTS**

**FOR BR/EDR**

BLUETOOTH 1MBPS LIMITS AND MEASUREMENT RESULT			
Applicable Limits	Measurement Result		
	Test Data (MHz)		Criteria
N/A	Low Channel	1.110	PASS
	Middle Channel	1.102	PASS
	High Channel	1.100	PASS

TEST PLOT OF BANDWIDTH FOR LOW CHANNEL



TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL



TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL






BLUETOOTH 2MBPS LIMITS AND MEASUREMENT RESULT			
Applicable Limits	Measurement Result		
	Test Data (MHz)		Criteria
N/A	Low Channel	1.366	PASS
	Middle Channel	1.364	PASS
	High Channel	1.370	PASS


TEST PLOT OF BANDWIDTH FOR LOW CHANNEL



TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

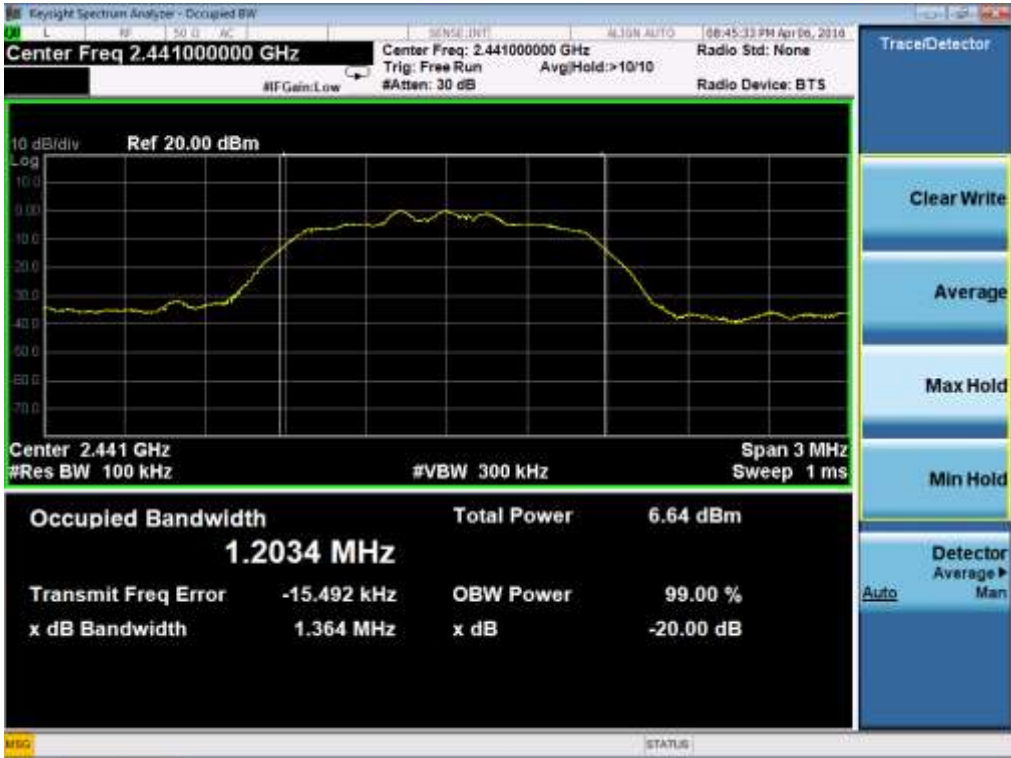


TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

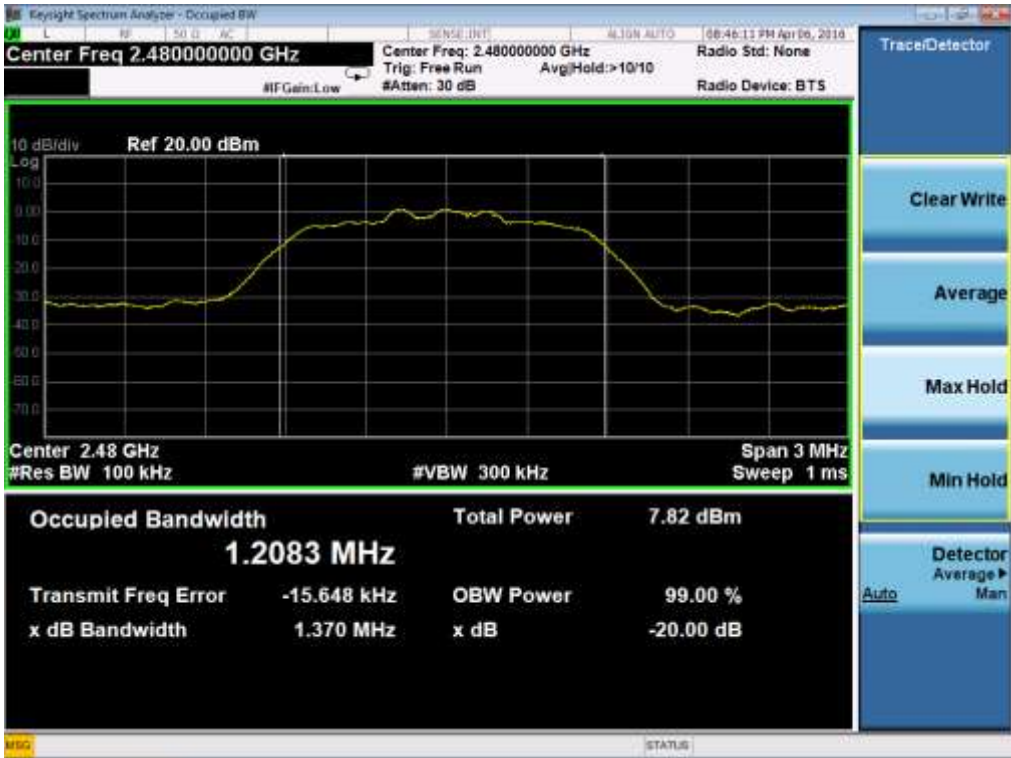


BLUETOOTH 3MBPS LIMITS AND MEASUREMENT RESULT			
Applicable Limits	Measurement Result		
	Test Data (MHz)		Criteria
N/A	Low Channel	1.370	PASS
	Middle Channel	1.367	PASS
	High Channel	1.373	PASS


TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

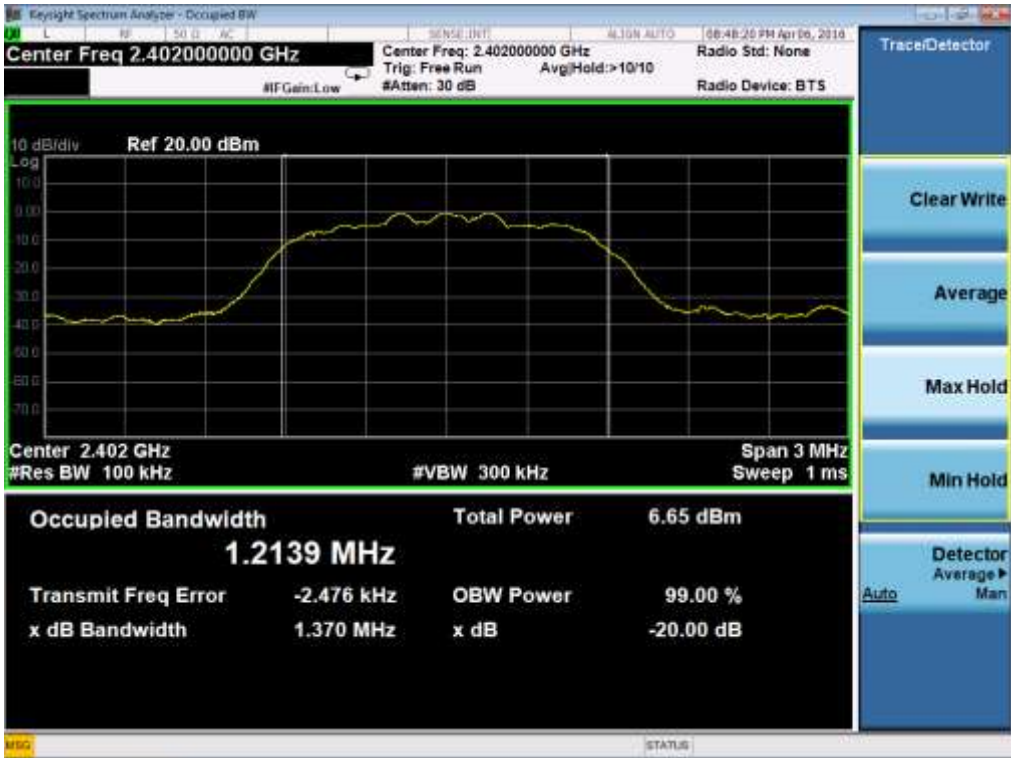

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

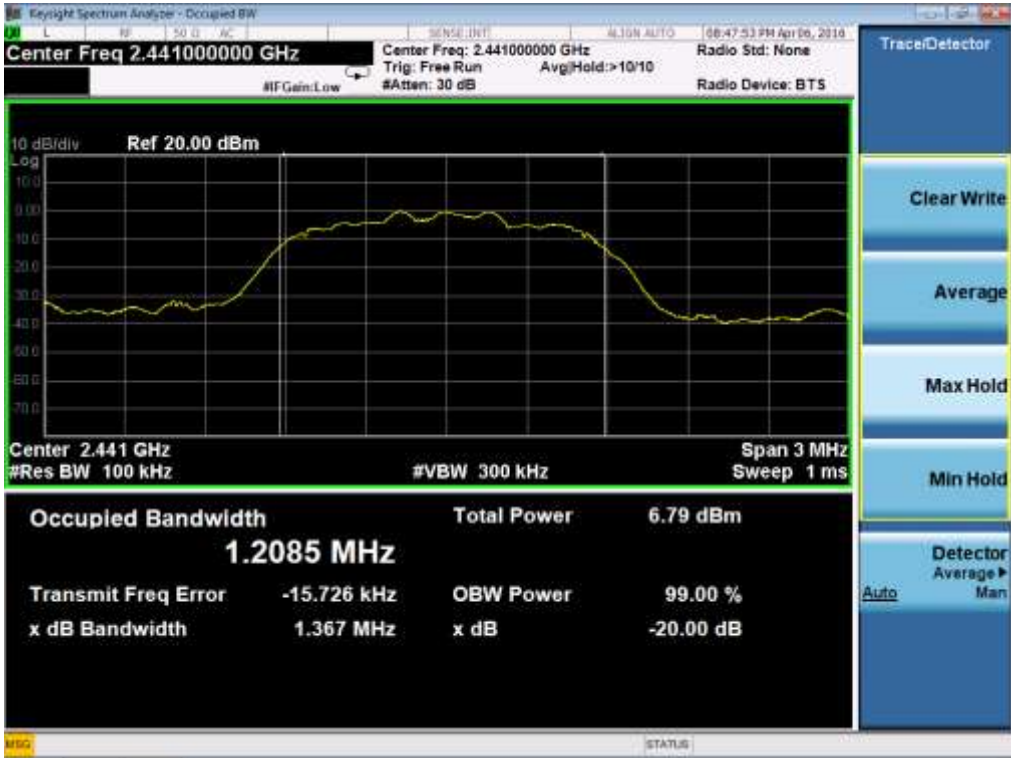

TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

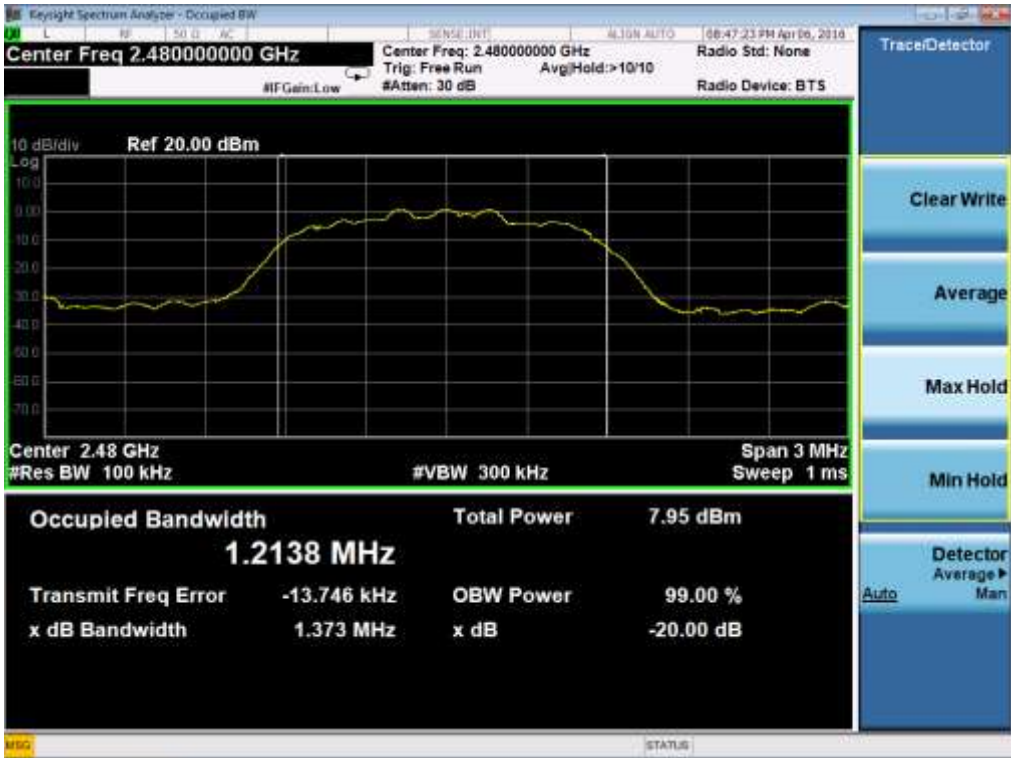

**FOR BLE**

<b>BLUETOOTH 1MBPS LIMITS AND MEASUREMENT RESULT</b>			
<b>Applicable Limits</b>	<b>Measurement Result</b>		
	<b>Test Data (MHz)</b>		<b>Criteria</b>
N/A	Low Channel	1.203	PASS
	Middle Channel	1.203	PASS
	High Channel	1.198	PASS

TEST PLOT OF BANDWIDTH FOR LOW CHANNEL



TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL



TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL



**12. FCC LINE CONDUCTED EMISSION TEST**


**12.1. LIMITS OF LINE CONDUCTED EMISSION TEST**

Frequency	Maximum RF Line Voltage	
	Q.P.( dBuV)	Average( dBuV)
150kHz~500kHz	66-56	56-46
500kHz~5MHz	56	46
5MHz~30MHz	60	50

Note:

1. The lower limit shall apply at the transition frequency.
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

**12.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST**

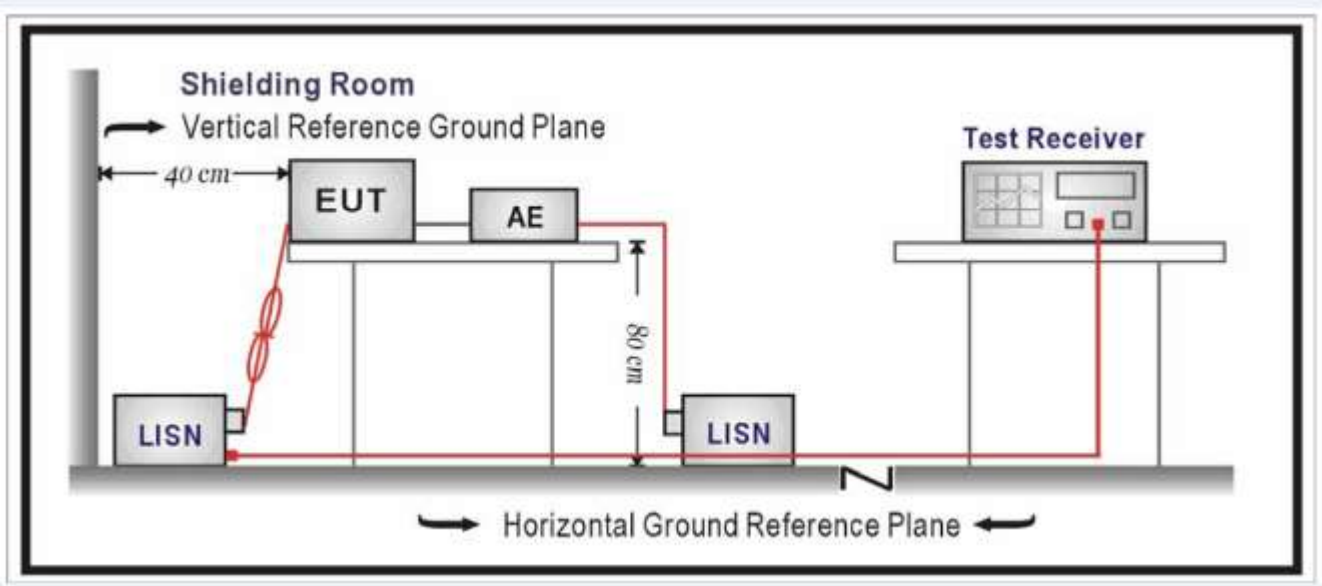



### **12.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST**

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
2. Support equipment, if needed, was placed as per ANSI C63.4.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.
4. All support equipments received AC120V/60Hz power from a LISN, if any.
5. The EUT received DC charging voltage by PC or by adapter which received 120V/60Hz power by a LISN.
6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.
9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

### **12.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST**


- EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less -2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
3. The test data of the worst case condition(s) was reported on the Summary Data page.


#### **12.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST**

N/A

Owing to the EUT was not active when charging, So the test item is not applicable.

**APPENDIX A: PHOTOGRAPHS OF TEST SETUP**  
FCC RADIATED EMISSION TEST SETUP

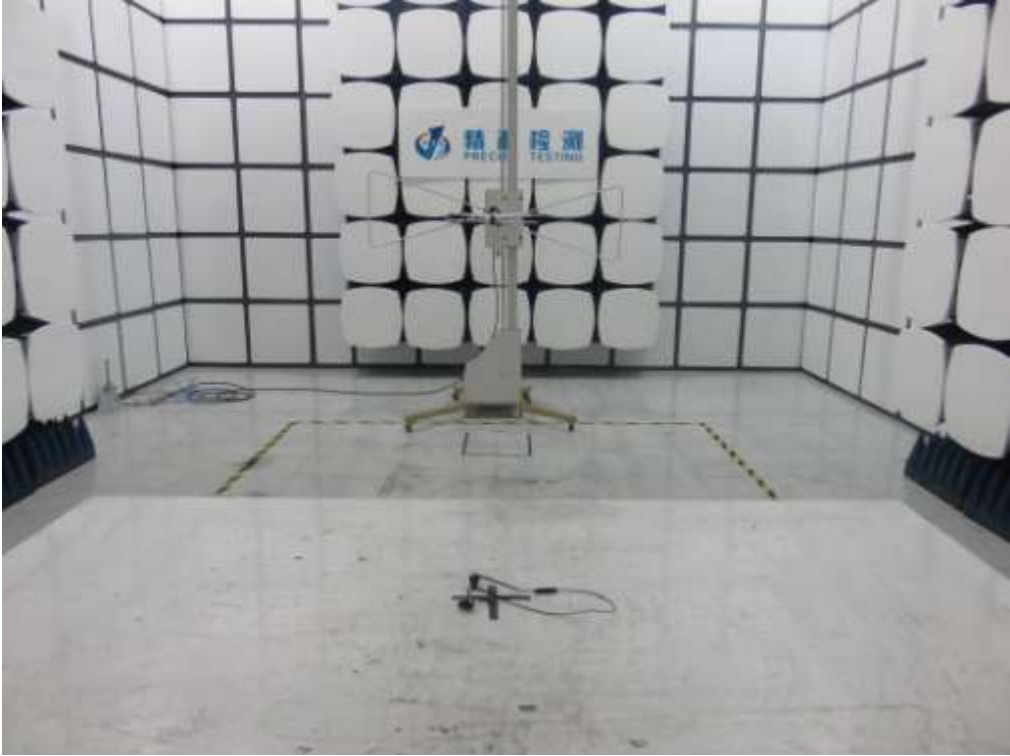

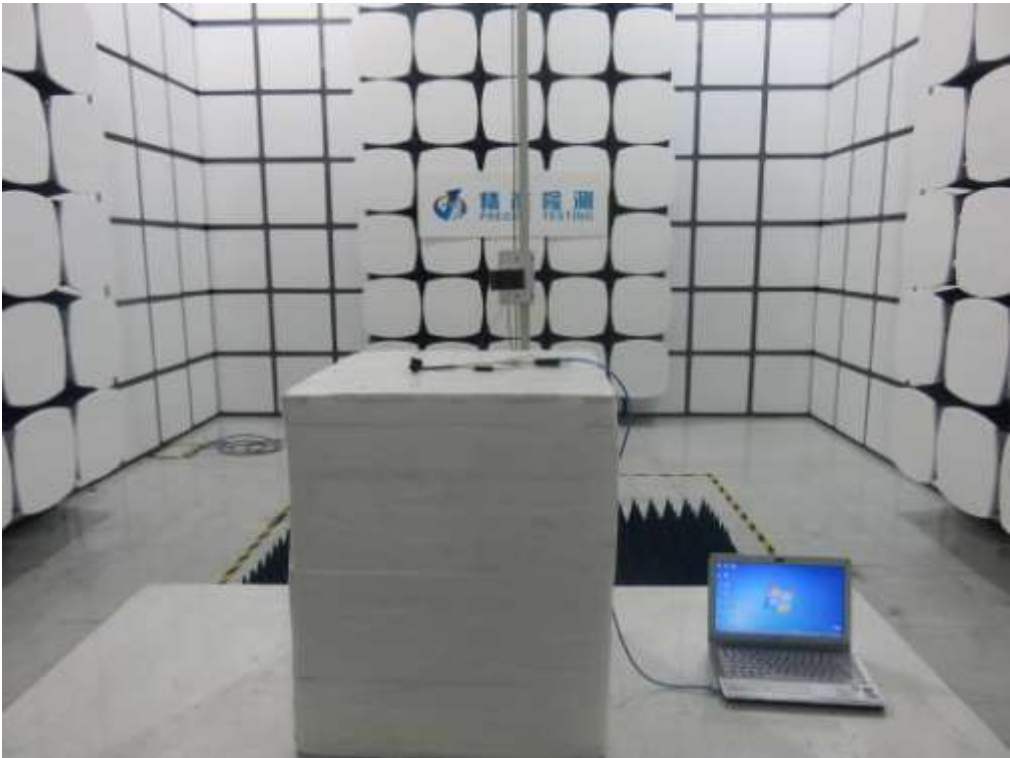

**APPENDIX B: PHOTOGRAPHS OF EUT**  
TOP VIEW OF EUT



BOTTOM VIEW OF EUT



FRONT VIEW OF EUT



BACK VIEW OF EUT



LEFT VIEW OF EUT



RIGHT VIEW OF EUT



VIEW OF EUT (PORT)




VIEW OF EUT (OPEN)







INTERNAL VIEW OF EUT-1

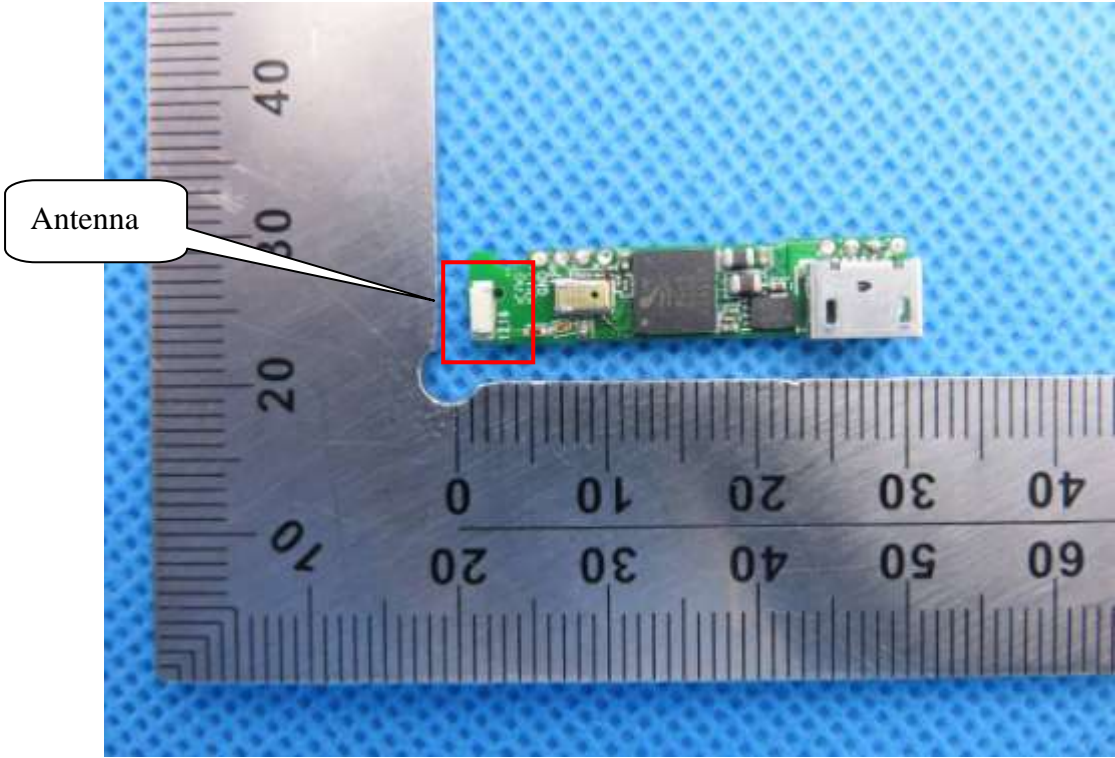

INTERNAL VIEW OF EUT-2

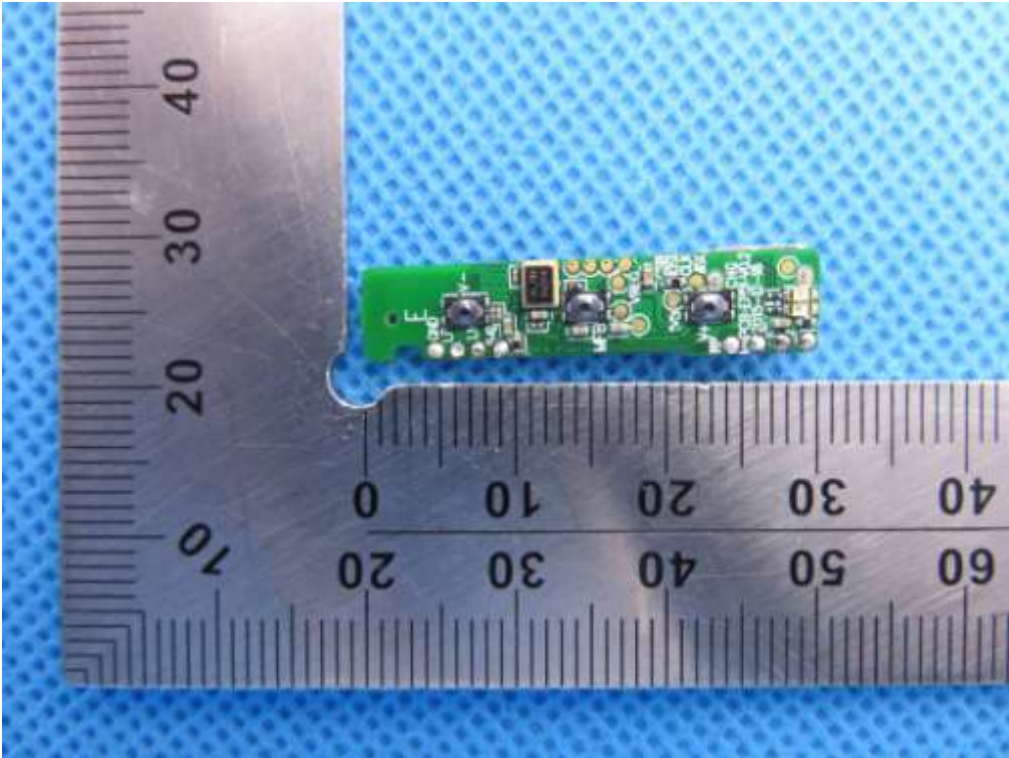

INTERNAL VIEW OF EUT-3

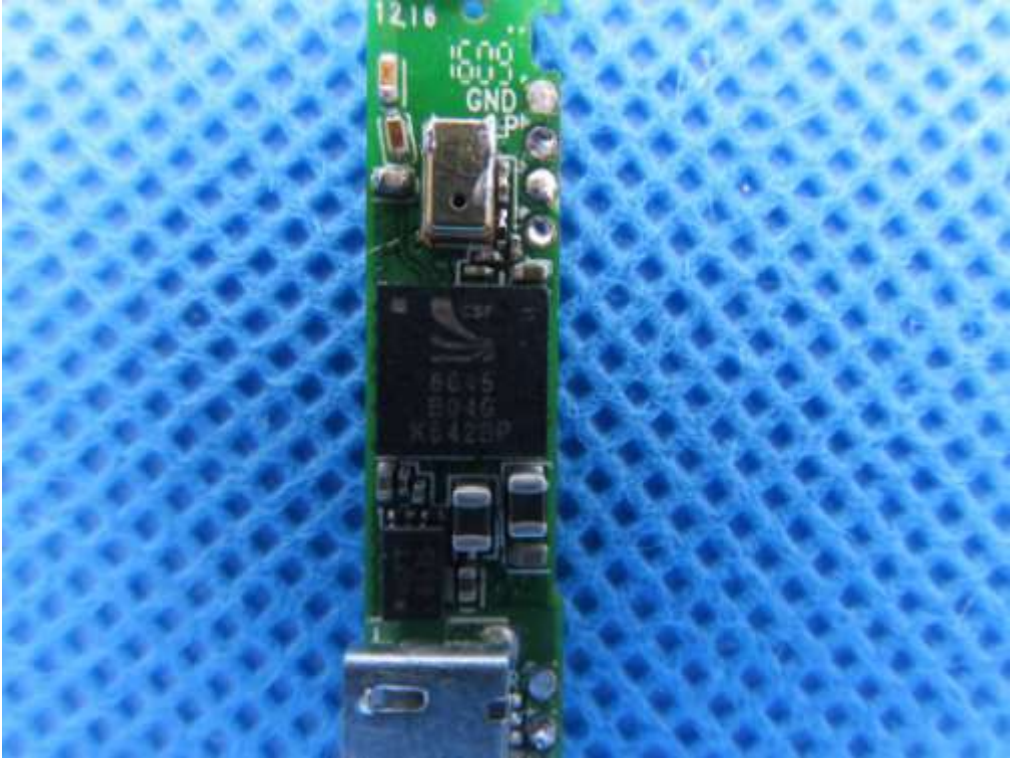

----END OF REPORT----