



Shenzhen CTL Testing Technology Co., Ltd.
Tel: +86-755-89486194 E-mail: ctl@ctl-lab.com

TEST REPORT

FCC PART 15.247

Report Reference No. : **CTL1811123012-WF02**

Compiled by: (position+printed name+signature)	Happy Guo (File administrators)	
Tested by: (position+printed name+signature)	Nice Nong (Test Engineer)	
Approved by: (position+printed name+signature)	Ivan Xie (Manager)	

Product Name : TWS Bluetooth earphones

Model/Type reference : T2

List Model(s)..... : WS1, T1, T3, T4, T5

Trade Mark..... : iHaper, ORIVER, HIFIWALKER

FCC ID..... : 2AI43-WS1

Applicant's name : **Shenzhen Globalegrow E-Commerce Co.,Limited**

Address of applicant : 6th Floor, Building 8.Zhongxing Industrial City. Chuangye Road, Nanshan District, Shenzhen, China

Test Firm..... : **Shenzhen CTL Testing Technology Co., Ltd.**

Address of Test Firm : Floor 1-A, Baisha Technology Park, No.3011, Shahexi Road, Nanshan District, Shenzhen, China 518055

Test specification..... :

Standard : **FCC Part 15.247:** Operation within the bands 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz.

TRF Originator : Shenzhen CTL Testing Technology Co., Ltd.

Master TRF..... : Dated 2011-01

Date of Receipt..... : Nov. 29, 2018

Date of Test Date..... : Nov. 29, 2018 - Dec. 13, 2018

Data of Issue..... : Dec. 14, 2018

Result..... : **Pass**

Shenzhen CTL Testing Technology Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen CTL Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen CTL Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

TEST REPORT

Test Report No. :	CTL1811123012-WF02	Dec. 14, 2018 Date of issue
-------------------	--------------------	--------------------------------

Equipment under Test : TWS Bluetooth earphones

Model /Type : T2

Listed Models : WS1, T1,T3,T4,T5

Applicant : Shenzhen Globalegrow E-Commerce Co.,Limited

Address : 6th Floor, Building 8.Zhongxing Industrial City.
Chuangye Road, Nanshan District, Shenzhen, China

Manufacturer : ORIVER (HONGKONG) LIMITED

Address : RM510, BLK A, Qi Xing Chuang Yi Yuan, District 28,
BaoAn, ShenZhen, China 518101

Test result	Pass *
-------------	--------

* In the configuration tested, the EUT complied with the standards specified page 5.


The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

**** Modified History ****



	Table of Contents	Page
1. SUMMARY		5
1.1. TEST STANDARDS.....		5
1.2. TEST DESCRIPTION.....		5
1.3. TEST FACILITY		6
1.4. STATEMENT OF THE MEASUREMENT UNCERTAINTY.....		6
2. GENERAL INFORMATION		7
2.1. ENVIRONMENTAL CONDITIONS.....		7
2.2. GENERAL DESCRIPTION OF EUT.....		7
2.3. DESCRIPTION OF TEST MODES AND TEST FREQUENCY.....		7
2.4. EQUIPMENTS USED DURING THE TEST		8
2.5. SPECIAL ACCESSORIES		8
2.6. RELATED SUBMITTAL(s) / GRANT (s).....		8
2.7. MODIFICATIONS.....		8
3. TEST CONDITIONS AND RESULTS		9
3.1. CONDUCTED EMISSIONS TEST		9
3.2. RADIATED EMISSIONS AND BAND EDGE		12
3.3. MAXIMUM CONDUCTED OUTPUT POWER.....		19
3.4. POWER SPECTRAL DENSITY		20
3.5. 6DB BANDWIDTH.....		22
3.6. OUT-OF-BAND EMISSIONS		24
3.7. ANTENNA REQUIREMENT.....		29
4. TEST SETUP PHOTOS OF THE EUT		30
5. EXTERNAL AND INTERNAL PHOTOS OF THE EUT.....		31

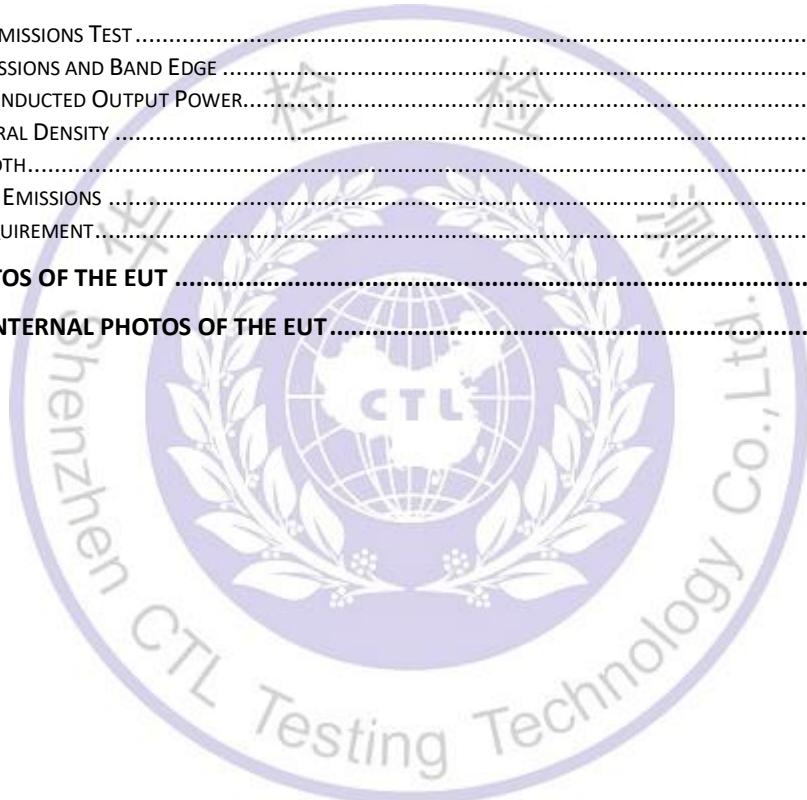

1. SUMMARY

1.1. TEST STANDARDS

The tests were performed according to following standards:

[FCC Rules Part 15.247](#): Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz

[ANSI C63.10: 2013](#): American National Standard for Testing Unlicensed Wireless Devices

[ANSI C63.4: 2014](#): –American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40GHz Range of 9 kHz to 40GHz

[KDB558074 D01 V05](#): Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247

1.2. Test Description

FCC PART 15.247		
FCC Part 15.207	AC Power Conducted Emission	PASS
FCC Part 15.247(a)(2)	6dB Bandwidth	PASS
FCC Part 15.247(d)	Spurious RF Conducted Emission	PASS
FCC Part 15.247(b)	Maximum Conducted Output Power	PASS
FCC Part 15.247(e)	Power Spectral Density	PASS
FCC Part 15.109/ 15.205/ 15.209	Radiated Emissions	PASS
FCC Part 15.247(d)	Band Edge	PASS
FCC Part 15.203/15.247 (b)	Antenna Requirement	PASS

1.3. Test Facility

1.3.1 Address of the test laboratory

Shenzhen CTL Testing Technology Co., Ltd.

Floor 1-A, Baisha Technology Park, No. 3011, Shahexi Road, Nanshan, Shenzhen 518055 China

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.4:2014 and CISPR 16-1-4:2010 SVSWR requirement for radiated emission above 1GHz.

1.3.2 Laboratory accreditation

The test facility is recognized, certified, or accredited by the following organizations:

IC Registration No.: 9618B

The 3m alternate test site of Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration No.: 9618B on November 13, 2013.

FCC-Registration No.: 399832

Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 399832, December 08, 2017.

1.4. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 "Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements" and is documented in the Shenzhen CTL Testing Technology Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CTL laboratory is reported:

Test	Measurement Uncertainty	Notes
Transmitter power conducted	±0.57 dB	(1)
Transmitter power Radiated	±2.20 dB	(1)
Conducted spurious emission 9KHz-40 GHz	±2.20 dB	(1)
Occupied Bandwidth	±0.01ppm	(1)
Radiated Emission 30~1000MHz	±4.10dB	(1)
Radiated Emission Above 1GHz	±4.32dB	(1)
Conducted Disturbance 0.15~30MHz	±3.20dB	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

2. GENERAL INFORMATION

2.1. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Normal Temperature:	25°C
Relative Humidity:	55 %
Air Pressure:	101 kPa

2.2. General Description of EUT

Product Name:	TWS Bluetooth earphones
Model/Type reference:	T2
Power supply:	DC 3.7V from battery
Bluetooth LE	
Supported type:	Bluetooth Low Energy
Modulation:	GFSK
Operation frequency:	2402MHz to 2480MHz
Channel number:	40
Channel separation:	2 MHz
Antenna type:	Integral Antenna
Antenna gain:	0dBi

Note: For more details, please refer to the user's manual of the EUT.

2.3. Description of Test Modes and Test Frequency

The Applicant provides communication tools software (Airoha.AB152x_verC_LabTestTool) to control the EUT for staying in continuous transmitting (Duty Cycle more than 98%) and receiving mode for testing.

There are 39 channels provided to the EUT and Channel 00/19/39 were selected for BLE test.

Operation Frequency List :

Channel	Frequency (MHz)
00	2402
01	2404
02	2406
:	:
19	2440
:	:
37	2476
38	2478
39	2480

Note: The line display in grey were the channel selected for testing

2.4. Equipments Used during the Test

Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date recent	Calibration Due Date
LISN	R&S	ENV216	3560.6550.12	2018/06/01	2019/05/31
LISN	R&S	ESH2-Z5	860014/010	2018/06/01	2019/05/31
Power Meter	Agilent	U2531A	TW53323507	2018/06/01	2019/05/31
Power Sensor	Agilent	U2021XA	MY5365004	2018/05/20	2019/05/19
EMI Test Receiver	R&S	ESCI	103710	2018/06/01	2019/05/31
Spectrum Analyzer	Agilent	E4407B	MY41440676	2018/05/20	2019/05/19
Spectrum Analyzer	Agilent	N9020	US46220290	2018/01/16	2019/01/15
Controller	EM Electronics	Controller EM 1000	N/A	2018/05/20	2019/05/19
Active Loop Antenna	Daze	ZN30900A	N/A	2018/05/18	2019/05/17
Bilog Antenna	Schwarzbeck	VULB 9168	00824	2018/10/25	2019/10/24
Horn Antenna	Sunol Sciences Corp.	DRH-118	A062013	2018/05/18	2019/05/17
Horn Antenna	SCHWARZBACK	BBHA 9170	BBHA9170184	2018/05/18	2019/05/17
Amplifier	Agilent	8349B	3008A02306	2018/05/18	2019/05/17
Amplifier	Agilent	8447D	2944A10176	2018/05/18	2019/05/17
Temperature/Humidity Meter	Gangxing	CTH-608	02	2018/05/19	2019/05/18
High-Pass Filter	K&L	9SH10-2700/X12750-O/O	N/A	2018/05/19	2019/05/18
High-Pass Filter	K&L	41H10-1375/U12750-O/O	N/A	2018/05/19	2019/05/18
Coaxial Cables	HUBER+SUHNER	SUCOFLEX 104PEA-10M	10m	2018/06/01	2019/05/31
Coaxial Cables	HUBER+SUHNER	SUCOFLEX 104PEA-3M	3m	2018/06/01	2019/05/31
Coaxial Cables	HUBER+SUHNER	SUCOFLEX 104PEA-3M	3m	2018/06/01	2019/05/31
RF Cable	Megalon	RF-A303	N/A	2018/06/01	2019/05/31
EMI Test Software	R&S	ES-K1	V1.7.1	2018/06/01	2019/05/31
EMI Test Software	AUDIX	E3	V6.0	2018/06/01	2019/05/31

The calibration interval was one year

2.5. Special Accessories

Manufacturer	Description	Model	Serial Number	Certificate
ASUS	Notebook PC	FL5900U	9014	FCC ID:PPD-QCNFA335
Delta	AC Adapter	ADP-65DW A	00A99	SDOC

2.6. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

2.7. Modifications

No modifications were implemented to meet testing criteria.

3. TEST CONDITIONS AND RESULTS

3.1. Conducted Emissions Test


LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.207

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST CONFIGURATION

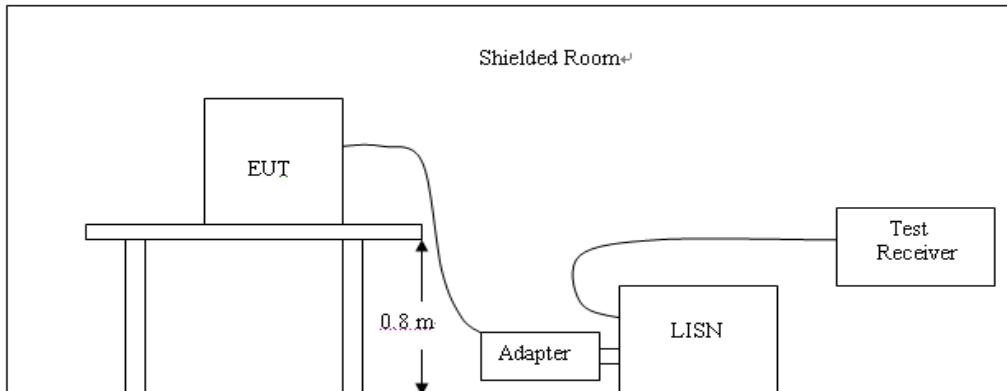

TEST PROCEDURE


1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system; a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10:2013.
2. Support equipment, if needed, was placed as per ANSI C63.10:2013.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10:2013.
4. The adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
5. All support equipments received AC power from a second LISN, if any.
6. The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.

TEST RESULTS

Remark:

Both 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz power supply (charge from PC mode) have been tested, only the worst result of 120 VAC, 60 Hz with BLE 1M middle channel was reported as below:

SCAN TABLE: "Voltage (9K-30M) FIN"
Short Description: 150K-30M Voltage

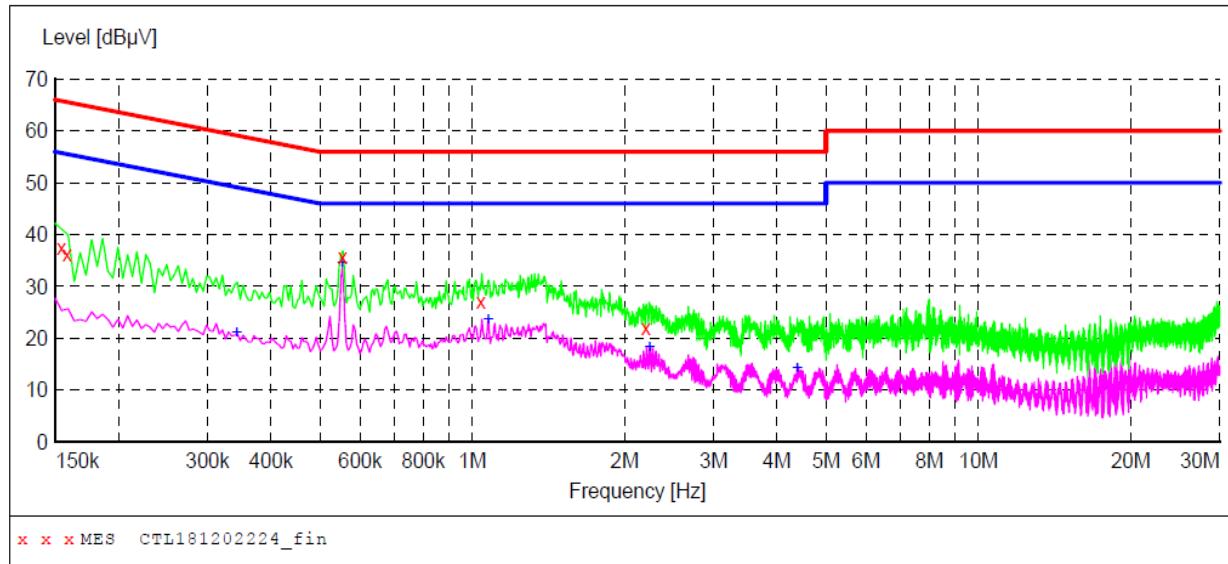

MEASUREMENT RESULT: "CTL181202224_fin"

2018-12-3 05:18??


Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Detector	Line	PE
0.154000	37.40	10.2	66	28.4	QP	L1	GND
0.158000	36.20	10.2	66	29.4	QP	L1	GND
0.554000	35.80	10.2	56	20.2	QP	L1	GND
1.040000	27.10	10.3	56	28.9	QP	L1	GND
2.204000	22.00	10.4	56	34.0	QP	L1	GND

MEASUREMENT RESULT: "CTL181202224_fin2"

2018-12-3 05:18??

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Detector	Line	PE
0.342000	21.10	10.2	49	28.1	AV	L1	GND
0.554000	34.50	10.2	46	11.5	AV	L1	GND
1.076000	23.50	10.3	46	22.5	AV	L1	GND
2.240000	18.20	10.4	46	27.8	AV	L1	GND
4.388000	14.30	10.4	46	31.7	AV	L1	GND

SCAN TABLE: "Voltage (9K-30M) FIN"
 Short Description: 150K-30M Voltage

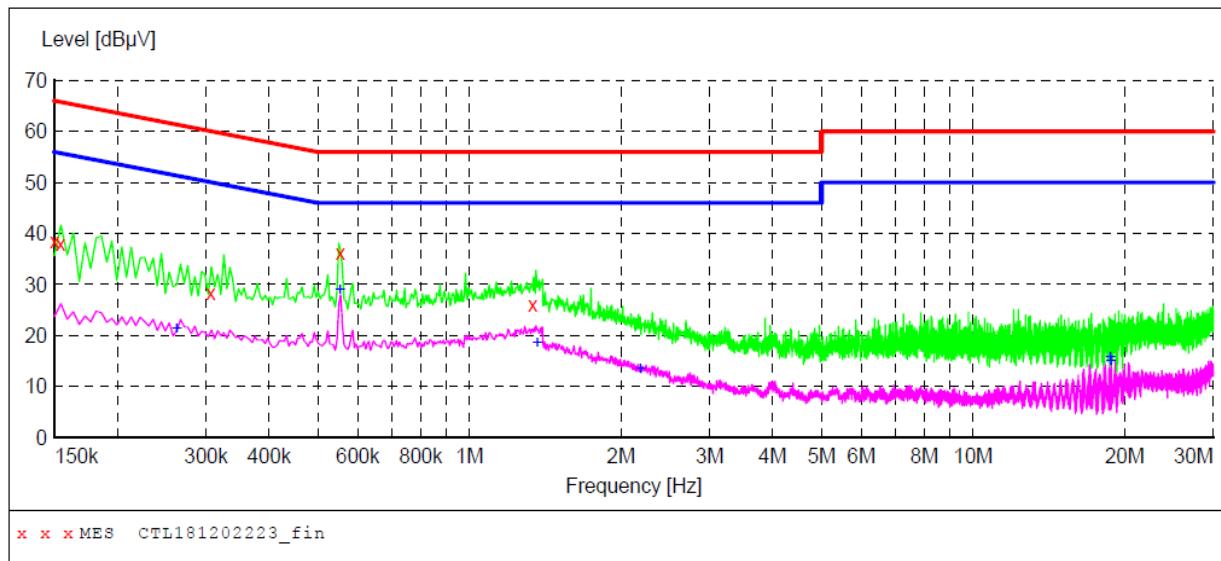

MEASUREMENT RESULT: "CTL181202223_fin"

2018-12-3 05:15??

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Detector	Line	PE
0.150000	38.60	10.2	66	27.4	QP	N	GND
0.154000	38.10	10.2	66	27.7	QP	N	GND
0.306000	28.30	10.2	60	31.8	QP	N	GND
0.554000	36.20	10.2	56	19.8	QP	N	GND
1.334000	26.20	10.3	56	29.8	QP	N	GND

MEASUREMENT RESULT: "CTL181202223_fin2"

2018-12-3 05:15??

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Detector	Line	PE
0.262000	21.20	10.2	51	30.2	AV	N	GND
0.554000	28.80	10.2	46	17.2	AV	N	GND
1.364000	18.40	10.3	46	27.6	AV	N	GND
2.186000	13.50	10.4	46	32.5	AV	N	GND
18.734000	15.80	10.9	50	34.2	AV	N	GND
18.764000	15.00	10.9	50	35.0	AV	N	GND

3.2. Radiated Emissions and Band Edge

Limit

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emission out of authorized band shall not exceed the following table at a 3 meters measurement distance.


In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a)

Radiated emission limits


Frequency (MHz)	Distance (Meters)	Radiated (dB μ V/m)	Radiated (μ V/m)
0.009-0.49	3	$20\log(2400/F(\text{KHz}))+40\log(300/3)$	$2400/F(\text{KHz})$
0.49-1.705	3	$20\log(24000/F(\text{KHz}))+40\log(30/3)$	$24000/F(\text{KHz})$
1.705-30	3	$20\log(30)+40\log(30/3)$	30
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

TEST CONFIGURATION


(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

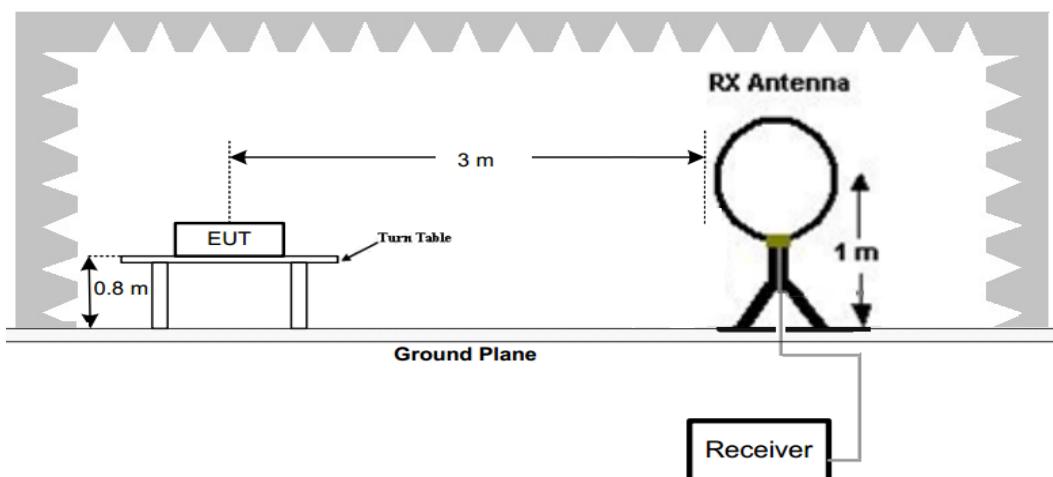

(B) Radiated Emission Test Set-Up, Frequency below 1000MHz

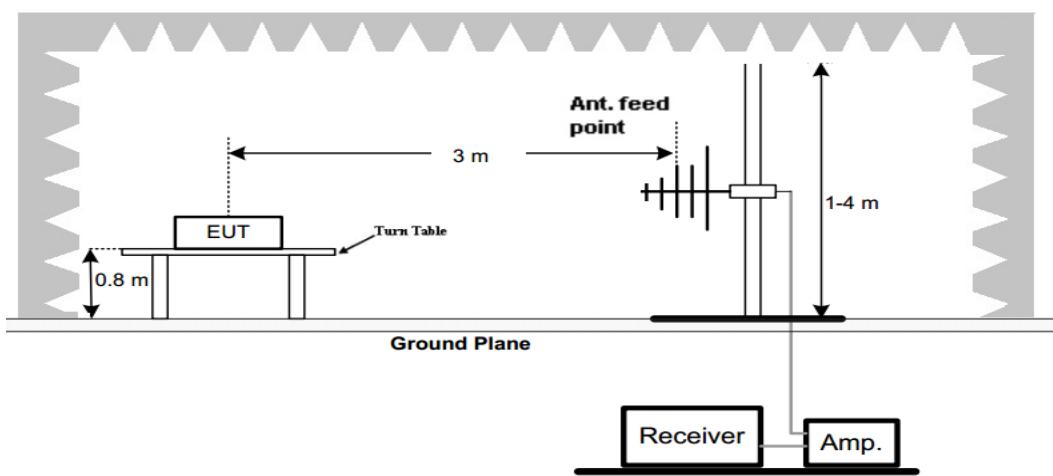

(C) Radiated Emission Test Set-Up, Frequency above 1000MHz

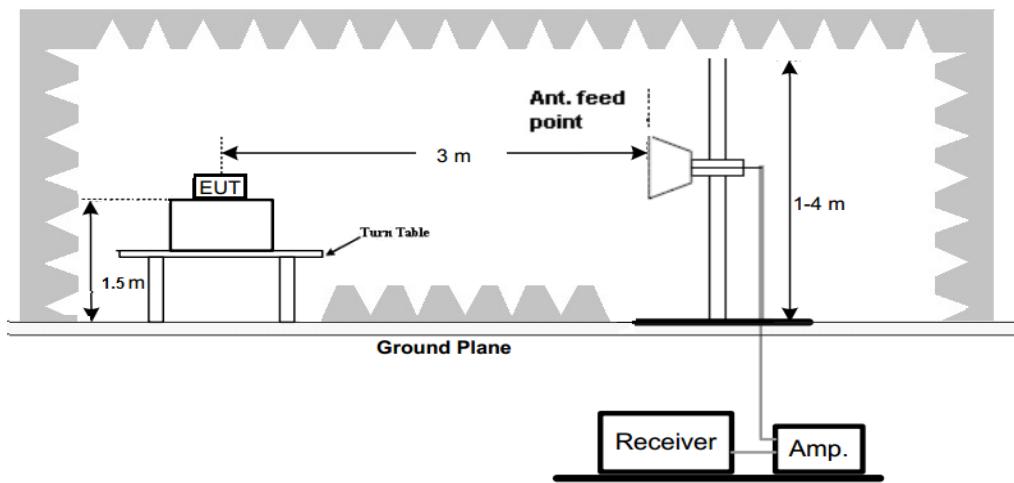

Test Procedure

1. Below 1GHz measurement the EUT is placed on a turntable which is 0.8m above ground plane, and above 1GHz measurement EUT was placed on a low permittivity and low loss tangent turn table which is 1.5m above ground plane.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0°C to 360°C to acquire the highest emissions from EUT
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed.
5. Radiated emission test frequency band from 9KHz to 25GHz.
6. The distance between test antenna and EUT as following table states:

Test Frequency range	Test Antenna Type	Test Distance
9KHz-30MHz	Active Loop Antenna	3
30MHz-1GHz	Bilog Antenna	3
1GHz-18GHz	Horn Antenna	3
18GHz-25GHz	Horn Anternna	1

7. Setting test receiver/spectrum as following table states:

Test Frequency range	Test Receiver/Spectrum Setting	Detector
9KHz-150KHz	RBW=200Hz/VBW=3KHz,Sweep time=Auto	QP
150KHz-30MHz	RBW=9KHz/VBW=100KHz,Sweep time=Auto	QP
30MHz-1GHz	RBW=120KHz/VBW=1000KHz,Sweep time=Auto	QP
1GHz-40GHz	Peak Value: RBW=1MHz/VBW=3MHz, Sweep time=Auto Average Value: RBW=1MHz/VBW=10Hz, Sweep time=Auto	Peak

TEST RESULTS

Remark:


1. We measured Radiated Emission at BLE 1M and BLE 2M mode from 9 KHz to 25GHz and recorded worst case at BLE 1M mode.
2. For below 1GHz testing recorded worst at BLE 1M low channel.
3. Radiated emission test from 9 KHz to 10th harmonic of fundamental was verified, and no emission found except system noise floor in 9 KHz to 30MHz and not recorded in this report.
4. This test was performed with EUT in X, Y, Z position and the worse case was found when EUT in X position.

For 30MHz-1GHz

Horizontal

SWEET TABLE: "test (30M-1G)"

Short Description: Field Strength
 Start Stop Detector Meas. IF Transducer
 Frequency Frequency Time Bandw.
 30.0 MHz 1.0 GHz MaxPeak 200.0 ms 120 kHz VULB 9168

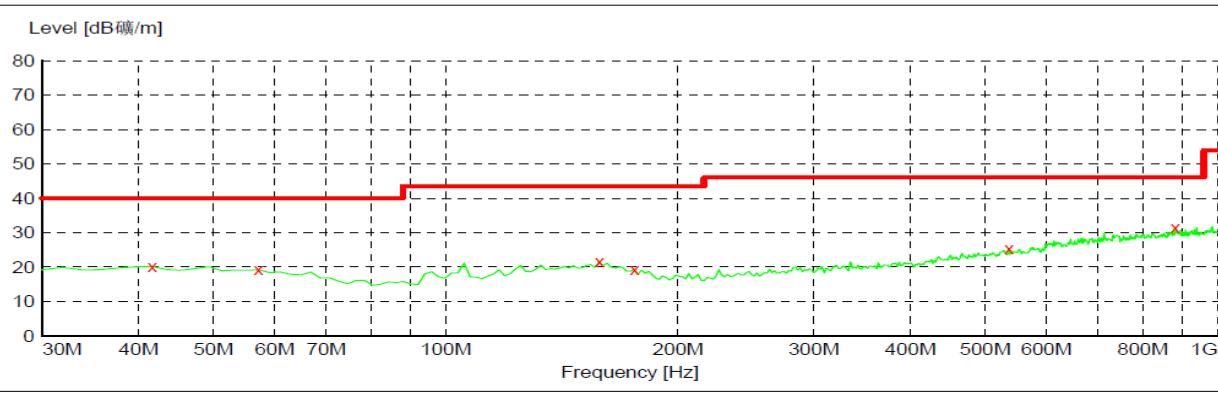**MEASUREMENT RESULT: "CTL181128287_red"**


2018-11-30 19:08

Frequency MHz	Level dB 磨/m	Transd dB	Limit dB 磗/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
41.640000	20.10	14.7	40.0	19.9	---	0.0	0.00	HORIZONTAL
57.160000	19.20	13.6	40.0	20.8	---	0.0	0.00	HORIZONTAL
158.040000	21.50	15.2	43.5	22.0	---	0.0	0.00	HORIZONTAL
175.500000	19.30	13.4	43.5	24.2	---	0.0	0.00	HORIZONTAL
536.340000	25.40	18.9	46.0	20.6	---	0.0	0.00	HORIZONTAL
881.660000	31.50	23.5	46.0	14.5	---	0.0	0.00	HORIZONTAL

Vertical

SWEET TABLE: "test (30M-1G)"

Short Description: Field Strength
 Start Stop Detector Meas. IF Transducer
 Frequency Frequency Time Bandw.
 30.0 MHz 1.0 GHz MaxPeak 200.0 ms 120 kHz VULB 9168

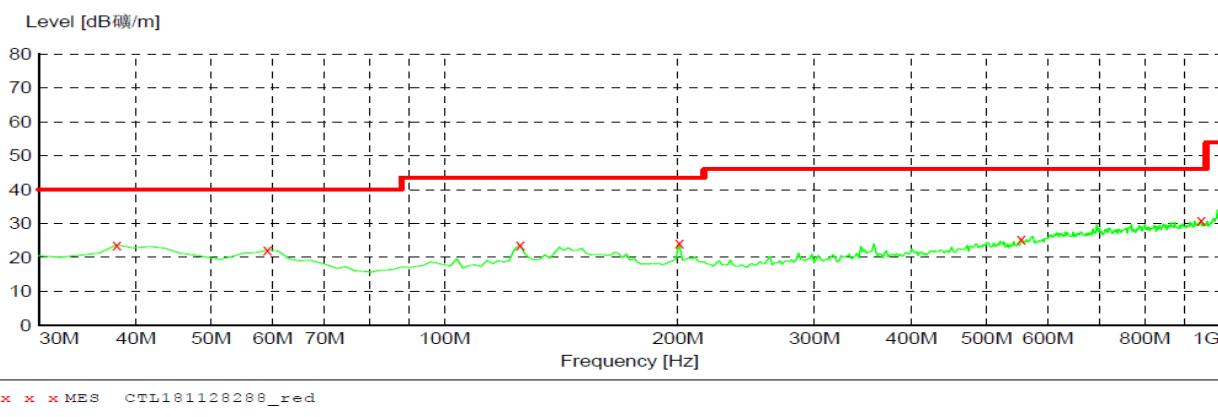**MEASUREMENT RESULT: "CTL181128288_red"**

2018-11-30 19:09

Frequency MHz	Level dB 磨/m	Transd dB	Limit dB 磗/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
37.760000	23.70	14.5	40.0	16.3	---	0.0	0.00	VERTICAL
59.100000	22.20	13.5	40.0	17.8	---	0.0	0.00	VERTICAL
125.060000	23.70	13.5	43.5	19.8	---	0.0	0.00	VERTICAL
200.720000	24.20	11.1	43.5	19.3	---	0.0	0.00	VERTICAL
553.800000	25.50	19.2	46.0	20.5	---	0.0	0.00	VERTICAL
945.680000	30.80	24.2	46.0	15.2	---	0.0	0.00	VERTICAL

For 1GHz to 25GHz

BLE 1M GFSK Mode (above 1GHz)

Frequency(MHz):			2402.00		Polarity:			HORIZONTAL	
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre- amplifier (dB)	Correction Factor (dB/m)
4804.00	50.33	PK	74.00	23.67	45.82	33.49	6.91	35.89	4.51
4804.00	--	AV	54.00	--	--	--	--	--	--
5115.50	46.58	PK	74.00	27.42	39.37	34.38	7.10	34.27	7.21
5115.50	--	AV	54.00	--	--	--	--	--	--
7206.00	46.41	PK	74.00	27.59	35.31	36.95	9.18	35.03	11.10
7206.00	--	AV	54.00	--	--	--	--	--	--

Frequency(MHz):			2402.00		Polarity:			VERTICAL	
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre- amplifier (dB)	Correction Factor (dB/m)
4804.00	50.83	PK	74.00	23.17	46.32	33.49	6.91	35.89	4.51
4804.00	--	AV	54.00	--	--	--	--	--	--
5310.45	47.15	PK	74.00	26.85	39.59	34.69	7.23	34.36	7.56
5310.45	--	AV	54.00	--	--	--	--	--	--
7206.00	46.48	PK	74.00	27.52	35.38	36.95	9.18	35.03	11.10
7206.00	--	AV	54.00	--	--	--	--	--	--

Frequency(MHz):			2440.00		Polarity:			HORIZONTAL	
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre- amplifier (dB)	Correction Factor (dB/m)
4880.00	47.08	PK	74.00	26.92	40.83	33.60	6.95	34.30	6.25
4880.00	--	AV	54.00	--	--	--	--	--	--
5311.75	43.82	PK	74.00	30.18	36.19	34.57	7.16	34.10	7.63
5311.75	--	AV	54.00	--	--	--	--	--	--
7320.00	45.46	PK	74.00	28.54	33.77	37.46	9.23	35.00	11.69
7320.00	--	AV	54.00	--	--	--	--	--	--

Frequency(MHz):			2440.00		Polarity:			VERTICAL	
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre- amplifier (dB)	Correction Factor (dB/m)
4880.00	47.26	PK	74.00	26.74	41.01	33.60	6.95	34.30	6.25
4880.00	--	AV	54.00	--	--	--	--	--	--
5215.75	43.08	PK	74.00	30.92	35.44	34.58	7.16	34.10	7.64
5215.75	--	AV	54.00	--	--	--	--	--	--
7320.00	45.74	PK	74.00	28.26	34.05	37.46	9.23	35.00	11.69
7320.00	--	AV	54.00	--	--	--	--	--	--

Frequency(MHz):			2480.00		Polarity:			HORIZONTAL	
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre- amplifier (dB)	Correction (dB/m)
4960.00	48.54	PK	74.00	25.46	43.62	33.84	7.00	35.92	4.92
4960.00	--	AV	54.00	--	--	--	--	--	--
5445.55	44.12	PK	74.00	29.88	36.58	34.67	7.22	34.35	7.54
5445.55	--	AV	54.00	--	--	--	--	--	--
7440.00	45.49	PK	74.00	28.51	33.54	37.64	9.28	34.97	11.95
7440.00	--	AV	54.00	--	--	--	--	--	--

Frequency(MHz):			2480.00		Polarity:			VERTICAL	
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre- amplifier (dB)	Correction (dB/m)
4960.00	48.96	PK	74.00	25.04	44.04	33.84	7.00	35.92	4.92
4960.00	--	AV	54.00	--	--	--	--	--	--
5075.25	44.56	PK	74.00	29.44	37.37	34.36	7.10	34.27	7.19
5075.25	--	AV	54.00	--	--	--	--	--	--
7440.00	44.85	PK	74.00	29.15	32.90	37.64	9.28	34.97	11.95
7440.00	--	AV	54.00	--	--	--	--	--	--

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV)+Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
3. Margin value = Limit value- Emission level.
4. -- Mean the PK detector measured value is below average limit.
5. The other emission levels were very low against the limit.
6. RBW1MHz VBW3MHz Peak detector is for PK value; RBW 1MHz VBW10Hz Peak detector is for AV value.

Results of Band Edges Test (Radiated)

Frequency(MHz):		2402.00		Polarity:			HORIZONTAL	
Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2402.00	96.93	PK	--	--	63.54	28.78	4.61	0.00
2402.00	90.48	AV	--	--	57.09	28.78	4.61	0.00
2312.12	45.81	PK	74.00	28.19	12.73	28.52	4.56	0.00
2312.12	--	AV	54.00	--	--	--	--	--
2390.00	45.20	PK	74.00	28.80	11.88	28.72	4.60	0.00
2390.00	--	AV	54.00	--	--	--	--	--
2400.00	47.85	PK	74.00	26.15	14.46	28.78	4.61	0.00
2400.00	--	AV	54.00	--	--	--	--	--

Frequency(MHz):		2402.00		Polarity:			VERTICAL	
Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2402.00	95.71	PK	--	--	62.32	28.78	4.61	0.00
2402.00	89.22	AV	--	--	55.83	28.78	4.61	0.00
2351.45	45.07	PK	74.00	28.93	11.99	28.52	4.56	0.00
2351.45	--	AV	54.00	--	--	--	--	--
2390.00	46.08	PK	74.00	27.92	12.76	28.72	4.60	0.00
2390.00	--	AV	54.00	--	--	--	--	--
2400.00	48.16	PK	74.00	25.84	14.77	28.78	4.61	0.00
2400.00	--	AV	54.00	--	--	--	--	--

Frequency(MHz):		2480.00		Polarity:			HORIZONTAL	
Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2480.00	95.11	PK	--	--	61.49	28.92	4.70	0.00
2480.00	88.35	AV	--	--	54.73	28.92	4.70	0.00
2483.50	42.12	PK	74.00	31.88	8.49	28.93	4.70	0.00
2483.50	--	AV	54.00	--	--	--	--	--
2488.95	43.46	PK	74.00	30.54	9.80	28.95	4.71	0.00
2488.95	--	AV	54.00	--	--	--	--	--
2500.00	45.62	PK	74.00	28.38	11.94	28.96	4.72	0.00
2500.00	--	AV	54.00	--	--	--	--	--

Frequency(MHz):		2480.00		Polarity:			VERTICAL	
Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2480.00	93.87	PK	--	--	60.25	28.92	4.70	0.00
2480.00	89.04	AV	--	--	55.42	28.92	4.70	0.00
2483.50	43.46	PK	74.00	30.54	9.83	28.93	4.70	0.00
2483.50	--	AV	54.00	--	--	--	--	--
2489.75	42.48	PK	74.00	31.52	8.82	28.95	4.71	0.00
2489.75	--	AV	54.00	--	--	--	--	--
2500.00	46.25	PK	74.00	27.75	12.57	28.96	4.72	0.00
2500.00	--	AV	54.00	--	--	--	--	--

REMARKS:

1. Emission level (dB_{UV}/m) = Raw Value (dB_{UV}) + Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
3. Margin value = Limit value - Emission level.
4. -- Mean the PK detector measured value is below average limit.
5. The other emission levels were very low against the limit.
6. RBW1MHz VBW3MHz Peak detector is for PK value; RBW 1MHz VBW10Hz Peak detector is for AV value.
7. For fundamental frequency, RBW 3MHz VBW 3MHz Peak detector is for PK Value; RMS detector is for AV value.



3.3. Maximum Conducted Output Power

Limit

The Maximum Peak Output Power Measurement is 30dBm.

Test Procedure

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power sensor.

Test Configuration



Test Results

Type	Channel	Output power (dBm)	Limit (dBm)	Result
BLE 1M	00	2.011	30.00	Pass
	19	1.639		
	39	1.843		
BLE 2M	00	2.205	30.00	Pass
	19	1.811		
	39	2.241		

Note: 1.The test results including the cable lose.

3.4. Power Spectral Density

Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

Test Procedure

1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
2. Set the RBW \geq 3 kHz.
3. Set the VBW $\geq 3 \times$ RBW.
4. Set the span to 1.5 times the DTS channel bandwidth.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum power level.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.
11. The resulting peak PSD level must be 8dBm.


Test Configuration



Test Results

Type	Channel	Power Spectral Density (dBm/3KHz)	Limit (dBm/3KHz)	Result
BLE 1M	00	-14.469	8.00	Pass
	19	-13.621		
	39	-12.749		
BLE 2M	00	-16.069	8.00	Pass
	19	-16.469		
	39	-15.941		

Test plot as follows:

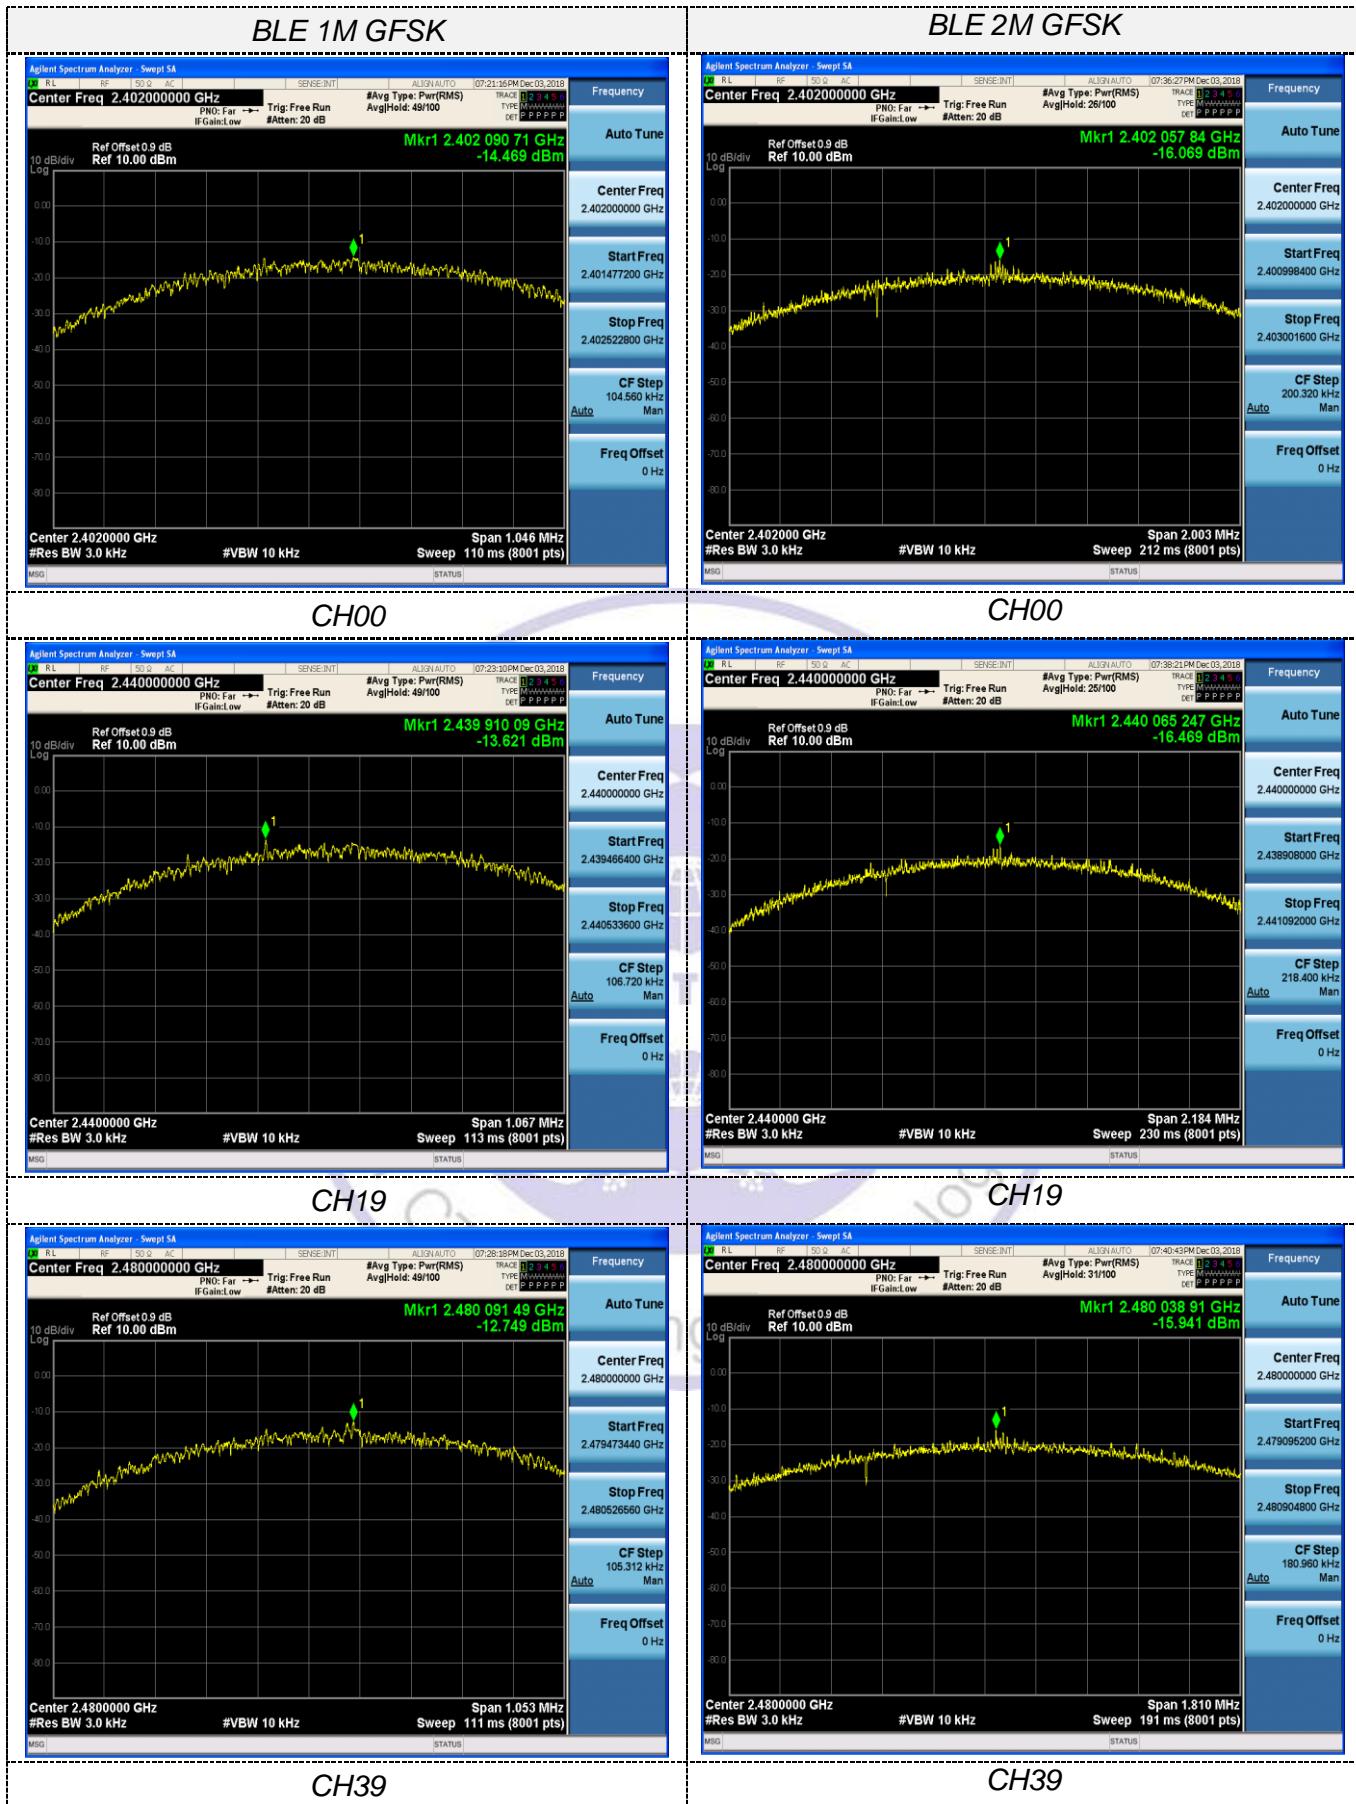

3.5. 6dB Bandwidth

Limit

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz

Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 KHz RBW and 300 KHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.


Test Configuration



Test Results

Type	Channel	6dB Bandwidth (MHz)	99% OBW (MHz)	Limit (KHz)	Result
BLE 1M	00	0.6535	1.0411	≥500	Pass
	19	0.6670	1.0439		
	39	0.6582	1.0462		
BLE 2M	00	1.252	2.0585	≥500	Pass
	19	1.365	2.0606		
	39	1.131	2.0616		

Test plot as follows:

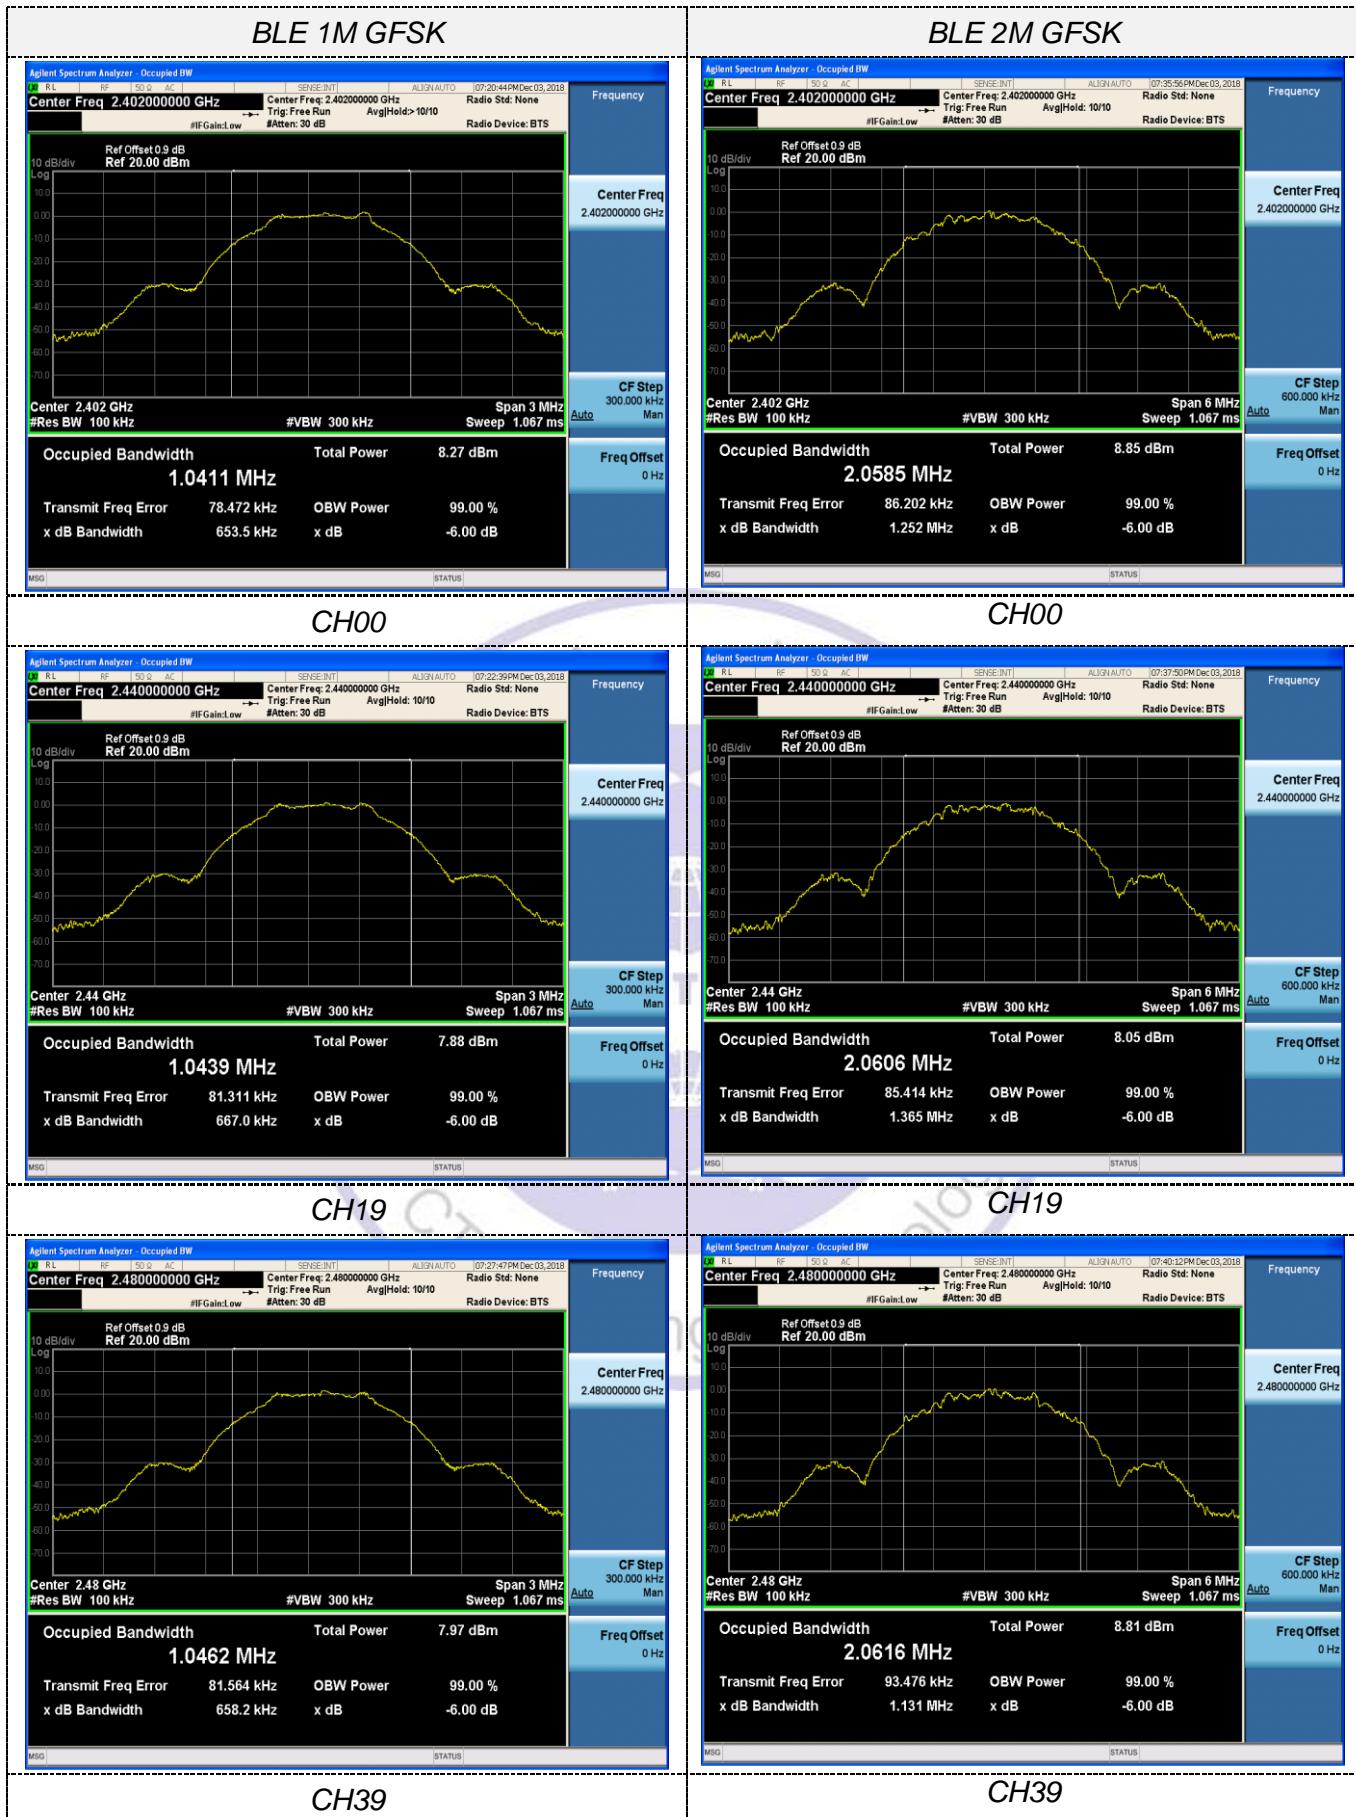

3.6. Out-of-band Emissions

Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.

Test Procedure

Connect the transmitter output to spectrum analyzer using a low loss RF cable, and set the spectrum analyzer to RBW=100 kHz, VBW= 300 kHz, peak detector, and max hold. Measurements utilizing these setting are made of the in-band reference level, bandedge and out-of-band emissions.


Test Configuration









Test Results


Remark: The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions and bandage measurement data.

Test plot as follows:

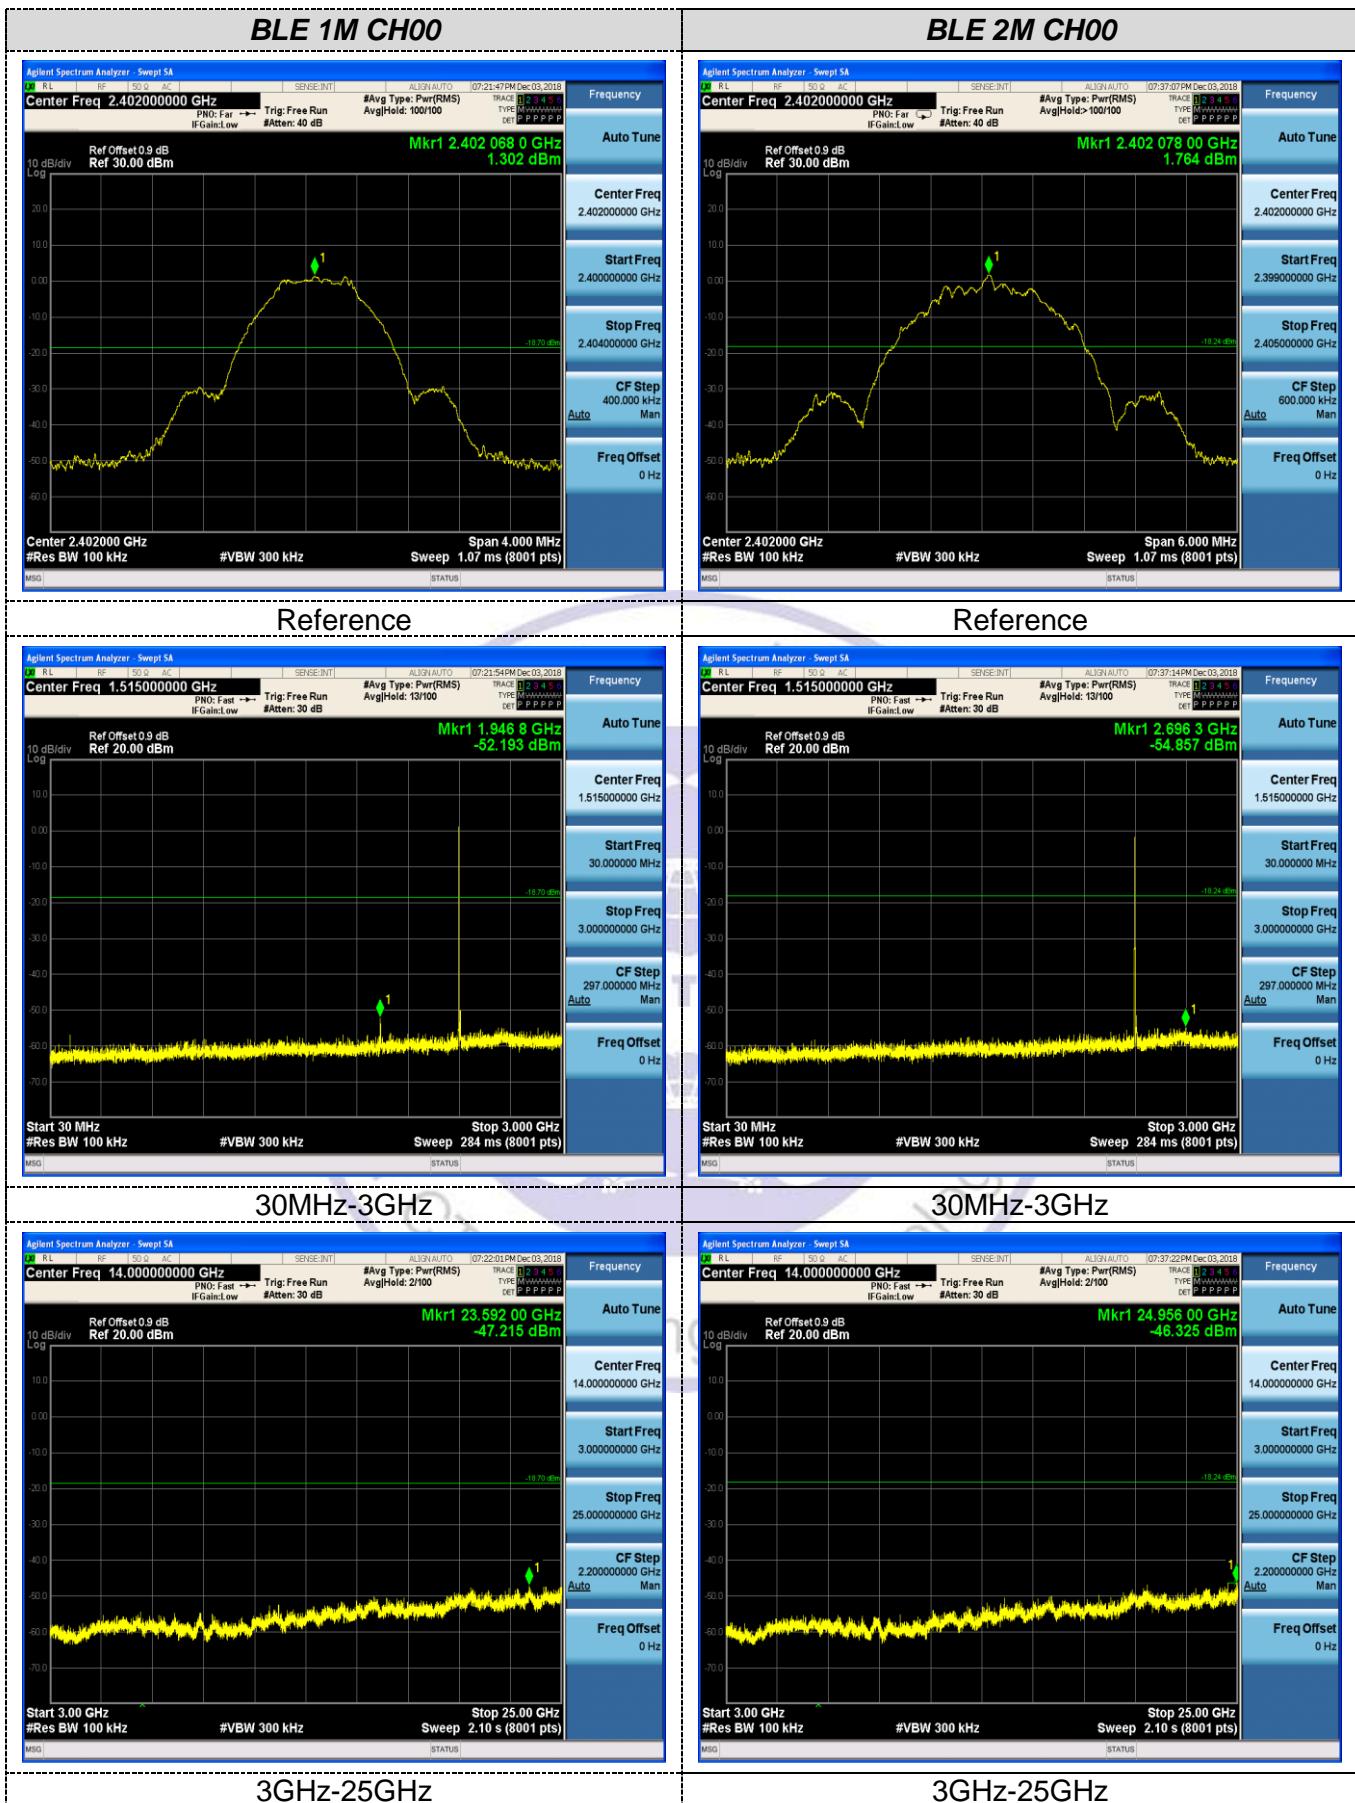

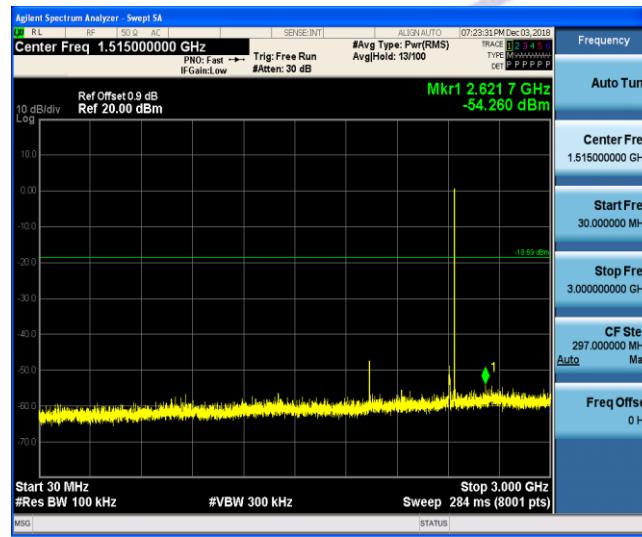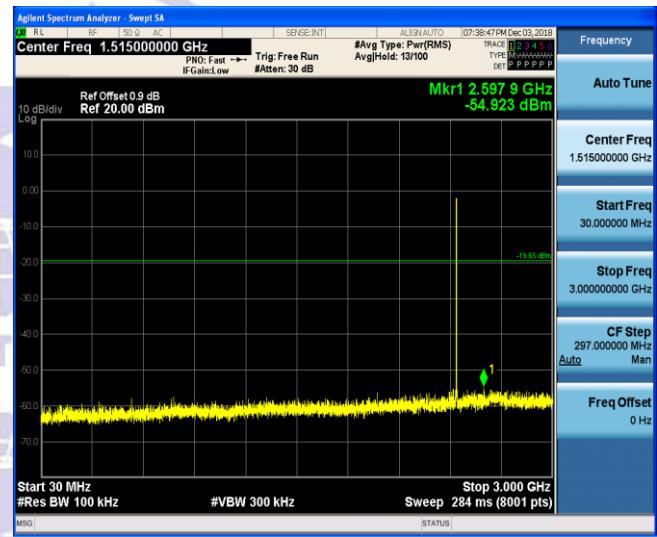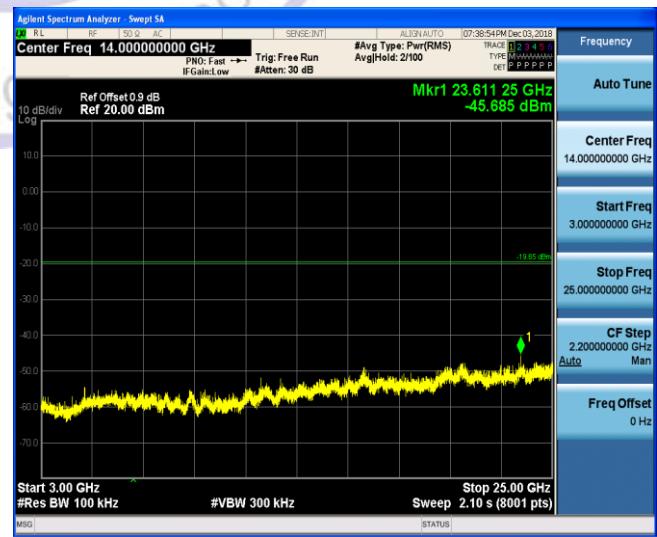
BLE 1M CH19**BLE 1M CH19****Reference****Reference****30MHz-3GHz****30MHz-3GHz****3GHz-25GHz****3GHz-25GHz**

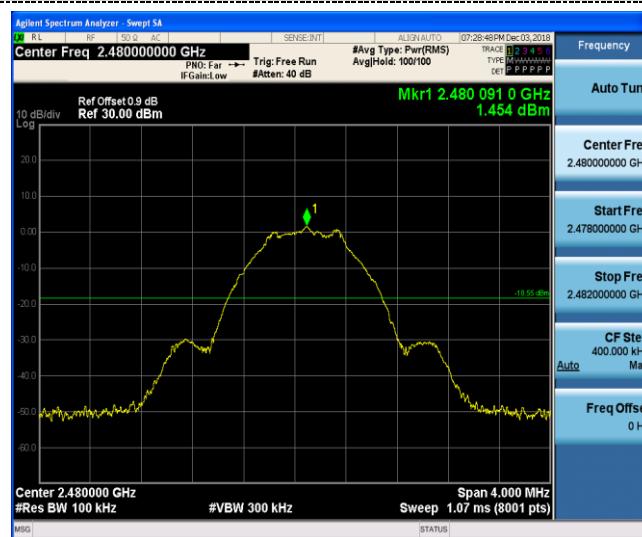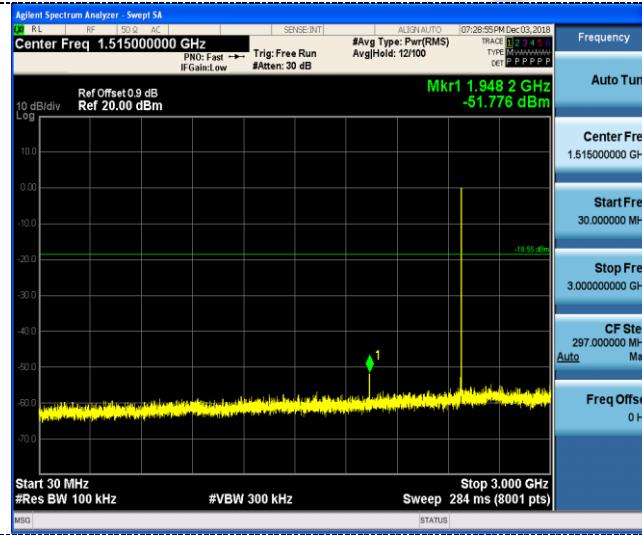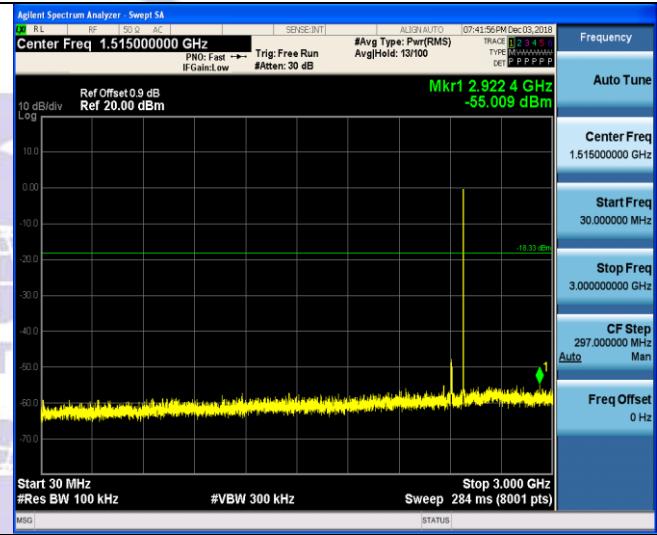BLE 1M CH39**BLE 1M CH39****Reference****Reference****30MHz-3GHz****30MHz-3GHz****3GHz-25GHz****3GHz-25GHz**

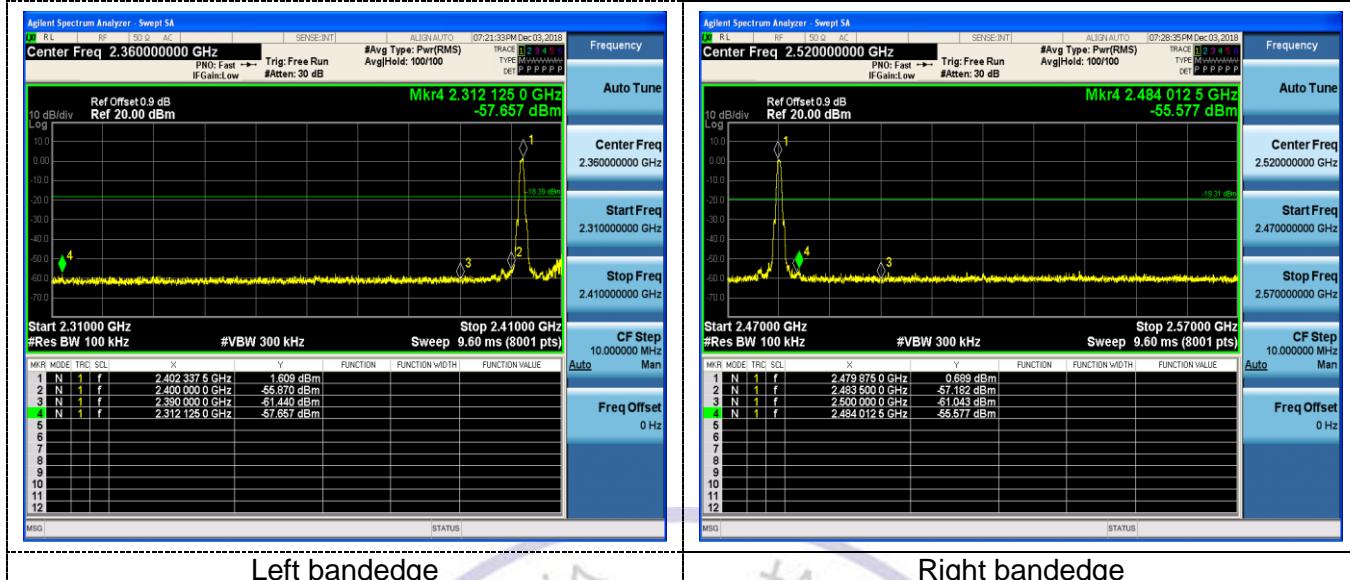Band-edge Measurements for RF Conducted Emissions:BLE 1M GFSK

Left bandedge

Right bandedge

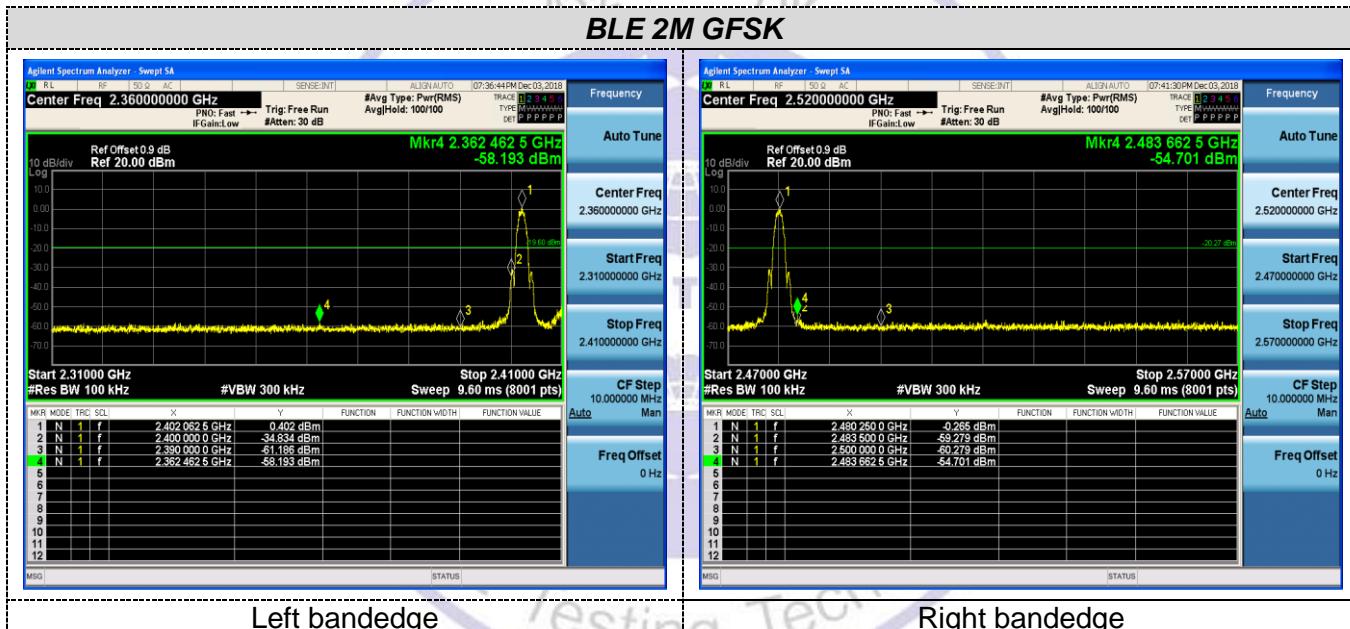BLE 2M GFSK

Left bandedge

Right bandedge

3.7. Antenna Requirement

Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited

FCC CFR Title 47 Part 15 Subpart C Section 15.247(c) (1) (I):


(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

Test Result:

The maximum gain of antenna was 0dBi.



4. Test Setup Photos of the EUT

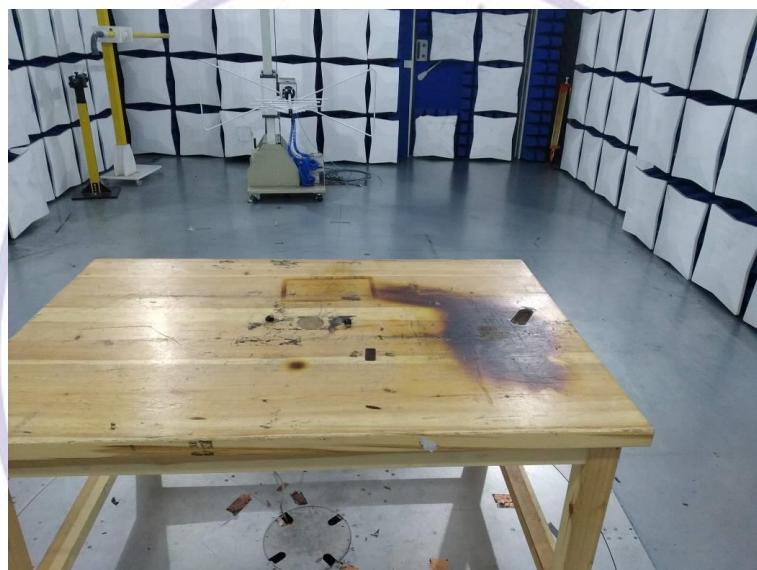

5. External and Internal Photos of the EUT

Reference to the test report No. CTL1811123012-WF01

***** End of Report *****

