

# FCC TEST REPORT

## FCC ID: 2A16IHV-888

Product : Bluetooth LAN

Model Name : HV-888, HV-WU725,HV-WU720,HV-WU721,HV-WU723,  
HV-WU726,HV-WU727,HV-WU728,HV-WU729,HV-WU730

Brand : HAVIT

Report No. : PTC801714160722E-FC01

### Prepared for

Guangzhou Havit Technology Co.,LTD  
ROOM 1307,13F,PHASE 2(B,C BUILDING) OF POLY WORLD TRADE CENTER,NO.1000,  
XINGANG EAST ROAD, HAIZHU DISTRICT,GUANGZHOU, GUANGDONG, China

### Prepared by

DongGuan Precise Testing Service Co.,Ltd.  
Building D, Baoding Technology Park, Guangming Road 2, Guangming Community  
Dongcheng District, Dongguan, Guangdong, China



TEST RESULT CERTIFICATION

Applicant's name : Guangzhou Havit Technology Co.,LTD

Address : ROOM 1307,13F,PHASE 2(B,C BUILDING) OF POLY WORLD TRADE CENTER,NO.1000, XINGANG EAST ROAD, HAIZHU DISTRICT,GUANGZHOU, GUANGDONG, China

Manufacture's name : Guangzhou Havit Technology Co.,LTD

Address : ROOM 1307,13F,PHASE 2(B,C BUILDING) OF POLY WORLD TRADE CENTER,NO.1000, XINGANG EAST ROAD, HAIZHU DISTRICT,GUANGZHOU, GUANGDONG, China

Product name : bluetooth LAN

Model name : HV-888, HV-WU725,HV-WU720,HV-WU721,HV-WU723, HV-WU726,HV-WU727,HV-WU728,HV-WU729,HV-WU730 HV-WU726,HV-WU727,HV-WU728,HV-WU729,HV-WU730

Standards : FCC CFR47 Part 15 Section 15.247

Test procedure : ANSI C63.10:2013, KDB 558074 D01 DTS MEAS GUIDANCE V03R05

Test Date : Jul.24,2016 - Aug. 11, 2016

Date of Issue : Aug. 12, 2016

Test Result : Pass

This device described above has been tested by PTC, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of PTC, this document may be altered or revised by PTC, personal only, and shall be noted in the revision of the document.

Testing Engineer

August Qiu

Technical Manager

Hack Ye

Authorized Signatory

Chris Du



## Contents

	<b>Page</b>
<b>2 GENERAL INFORMATION.....</b>	<b>5</b>
2.1 GENERAL DESCRIPTION OF E.U.T.....	5
2.2 CHANNEL LIST .....	6
2.3 TEST MODE .....	6
2.4 TEST SITE .....	6
<b>3 EQUIPMENT DURING TEST.....</b>	<b>7</b>
3.1 EQUIPMENTS LIST.....	7
3.2 DESCRIPTION OF SUPPORT UNITS.....	8
3.3 MEASUREMENT UNCERTAINTY.....	8
<b>4 CONDUCTED EMISSION.....</b>	<b>9</b>
4.1 E.U.T. OPERATION.....	9
4.2 EUT SETUP .....	9
4.3 MEASUREMENT DESCRIPTION.....	10
4.4 CONDUCTED EMISSION TEST RESULT .....	10
<b>5 RADIATED SPURIOUS EMISSIONS.....</b>	<b>12</b>
5.1 EUT OPERATION .....	12
5.2 TEST SETUP.....	13
5.3 SPECTRUM ANALYZER SETUP.....	14
5.4 TEST PROCEDURE .....	15
5.5 SUMMARY OF TEST RESULTS.....	16
<b>6 CONDUCTED SPURIOUS EMISSION.....</b>	<b>23</b>
6.1 TEST PROCEDURE .....	23
6.2 TEST RESULT.....	23
<b>7 BAND EDGE MEASUREMENT .....</b>	<b>25</b>
7.1 TEST PROCEDURE .....	25
7.2 TEST RESULT.....	26
<b>8 6DB BANDWIDTH MEASUREMENT.....</b>	<b>27</b>
8.1 TEST PROCEDURE .....	27
8.2 TEST RESULT.....	27
<b>9 MAXIMUM PEAK OUTPUT POWER .....</b>	<b>30</b>
9.1 TEST PROCEDURE .....	30
9.2 TEST RESULT.....	30



**10 POWER SPECTRAL DENSITY.....33**

    10.1 TEST PROCEDURE.....33

    10.2 TEST RESULT .....33

**11 ANTENNA REQUIREMENT.....36**

Test Summary

Test Items	Test Requirement	Result
Conduct Emission	15.207	PASS
Radiated Spurious Emissions	15.205(a) 15.209 15.247(d)	PASS
Conducted Spurious Emission	15.247(d)	PASS
Band edge	15.247(d) 15.205(a)	PASS
6dB Bandwidth	15.247(a)(2)	PASS
Maximum Peak Output Power	15.247(b)(1)	PASS
Power Spectral Density	15.247(e)	PASS
Antenna Requirement	15.203	PASS
Remark: N/A: Not Applicable		



## 2 General Information

### 2.1 General Description of E.U.T.

Product Name	:	Bluetooth LAN
Model Name	:	HV-888, HV-WU725,HV-WU720,HV-WU721,HV-WU723, HV-WU726,HV-WU727,HV-WU728,HV-WU729,HV-WU730
Model Description	:	Only the model names and colors are different
Bluetooth Version:	:	V4.0(BLE Only)
Frequency Range:	:	2402-2480MHz, 40 channels
Antenna installation:	:	PCB Print Antenna
Antenna Gain:	:	0dBi
Type of Modulation	:	GFSK
The lowest oscillator:	:	26MHz
Power supply	:	DC 5V power by USB port



### 2.2 Channel List

BLE							
Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

### 2.3 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Modulation	Test mode	Low channel	Middle channel	High channel
GFSK(BLE)	Transmitting	2402MHz	2440MHz	2480MHz

### 2.4 Test Site

Dongguan Precise Testing Service Co., Ltd.

Building D, Baoding Technology Park, Guangming Road2, Dongcheng District, Dongguan,

Guangdong, China, Dongguan, 523129

China

FCC Registration Number: 371540

IC Registration Number: 12191A-1



### 3 Equipment During Test

#### 3.1 Equipments List

RF Conducted Test							
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	EMC Analyzer (9k~26.5GHz)	Agilent	E4407B	MY45109572	Aug.04, 2016	Aug.03, 2017	1 year
2	EXA Signal Analyzer	Keysight	N9010A	MY505202075 26B25MPBW7 X	Aug.04, 2016	Aug.03, 2017	1 year
3	EMI Test Receiver	R&S	ESCI	101155	July 15, 2016	July 14, 2017	1 year
Radiated Emissions							
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	EMI Test Receiver	Rohde&Schwarz	ESCI	101417	July 15, 2016	July 14, 2017	1 year
2	Trilog Broadband Antenna	SCHWARZECK	VULB9160	9160-3355	July 15, 2016	July 14, 2017	1 year
3	1-18GHz Amplifier	EM	EM-30180	060538	July 15, 2016	July 14, 2017	1 year
4	Horn Antenna	SCHWARZECK	BBHA9120D	9120D-1246	July 15, 2016	July 14, 2017	1 year
5	Loop Antenna	SCHWARZECK	FMZB1516	9130D-1243	July 15, 2016	July 14, 2017	1 year
6	3m Anechoic Chamber	CHENGYU	966	PTC-002	June 6, 2014	June 6, 2017	3 year
7	EMC Analyzer (9k~26.5GHz)	Agilent	E4407B	MY45109572	Aug.04, 2016	Aug.03, 2017	1 year
8	Horn Antenna	Schwarzbeck	BBHA 9170	9170-0741	July 15, 2016	July 14, 2017	1 year
9	18-26.5GHz Amplifier	Rohde&Schwarz	TS-PR22	100044	July 15, 2016	July 14, 2017	1 year
Conducted Emissions							
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	EMI Test Receiver	R&S	ESCI	101155	July 15, 2016	July 14, 2017	1 year
2	LISN	SCHWARZECK	NSLK 8128	8128-289	July 15, 2016	July 14, 2017	1 year
3	Cable	LARGE	RF300	-	July 15, 2016	July 14, 2017	1 year



### 3.2 Description of Support Units

Equipment	Manufacturer	Model No.	Series No.
Note Book	Sony	PCG-51111T	X16-96081
AC Adapter	Sony	NSW24063	SNPA-1900-11SY
AC power line(1.0m)	Cold come	JYD-20	C-2201

### 3.3 Measurement Uncertainty

Parameter	Uncertainty
RF output power, conducted	±1.0dB
Power Spectral Density, conducted	±2.2dB
Radio Frequency	± 1 x 10 <sup>-6</sup>
Bandwidth	± 1.5 x 10 <sup>-6</sup>
Time	±2%
Duty Cycle	±2%
Temperature	±1°C
Humidity	±5%
DC and low frequency voltages	±3%
Conducted Emissions (150kHz~30MHz)	±3.64dB
Radiated Emission(30MHz~1GHz)	±5.03dB
Radiated Emission(1GHz~25GHz)	±4.74dB



## 4 Conducted Emission

Test Requirement:	:	FCC CFR 47 Part 15 Section 15.207
Test Method:	:	ANSI C63.10:2013
Test Result:	:	PASS
Frequency Range:	:	150kHz to 30MHz
Class/Severity:	:	Class B
Limit:	:	66-56 dB $\mu$ V between 0.15MHz & 0.5MHz
	:	56 dB $\mu$ V between 0.5MHz & 5MHz
	:	60 dB $\mu$ V between 5MHz & 30MHz
Detector:	:	Peak for pre-scan (9kHz Resolution Bandwidth)


### 4.1 E.U.T. Operation

Operating Environment :

Temperature:	:	25.5 °C
Humidity:	:	51 % RH
Atmospheric Pressure:	:	101.2kPa
EUT Operation :	:	Refer to section 3.3

### 4.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10:2013.

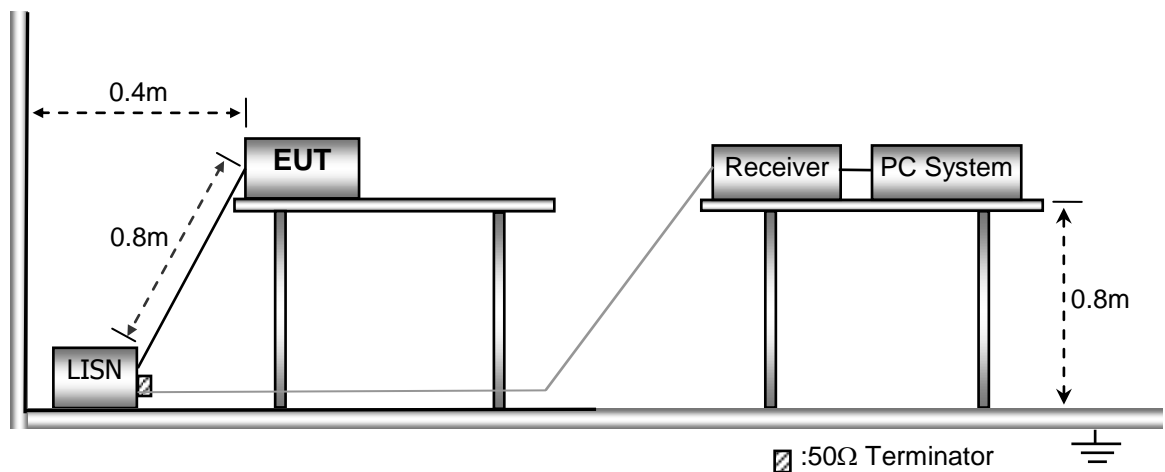



### 4.3 Measurement Description


The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

Remark: emission level= AMN factor+ Cable Loss +Receiver reading

### 4.4 Conducted Emission Test Result

Only show the worst cast mode (BT transmitting, Low CH) data in this report


Live line:

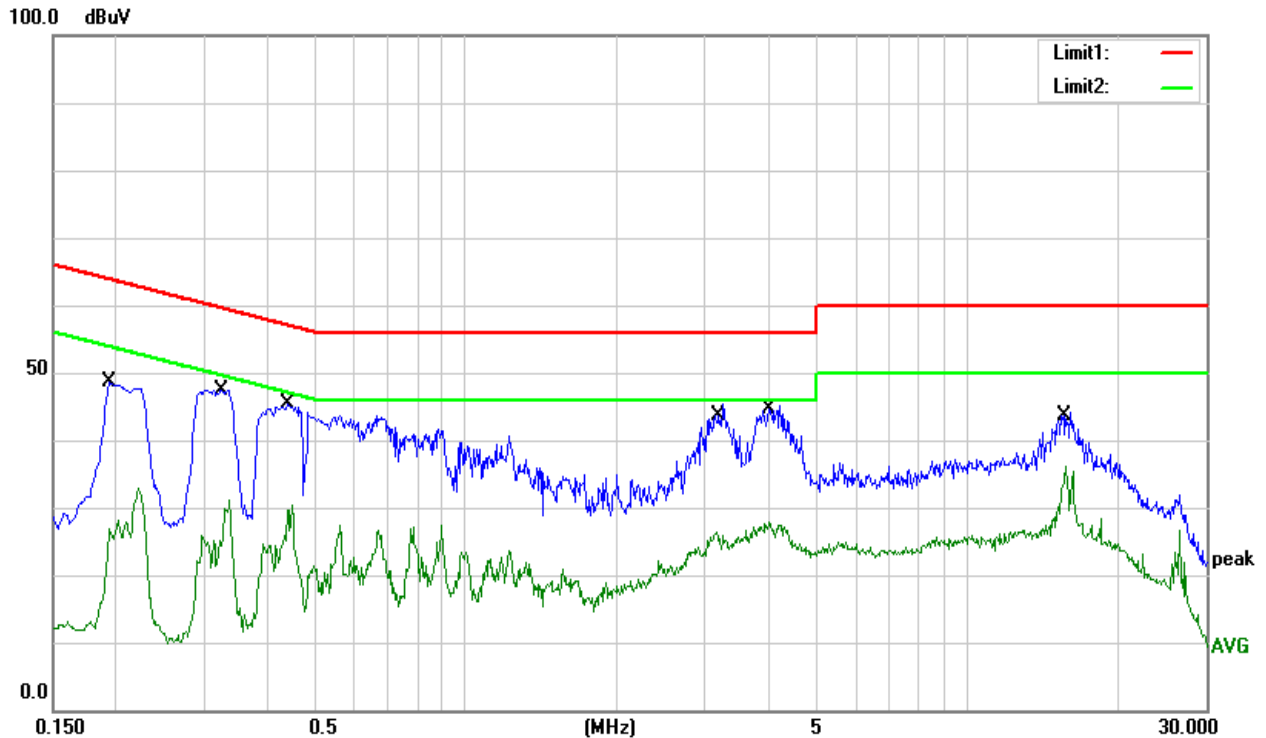

Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
0.1940	39.41	9.23	48.64	63.86	-15.22	QP
0.1940	17.65	9.23	26.88	53.86	-26.98	AVG
0.3260	38.27	9.21	47.48	59.55	-12.07	QP
0.3260	21.80	9.21	31.01	49.55	-18.54	AVG
0.4420	35.96	9.31	45.27	57.02	-11.75	QP
0.4420	20.95	9.31	30.26	47.02	-16.76	AVG
3.1620	36.00	9.26	45.26	56.00	-10.74	QP
3.1620	17.17	9.26	26.43	46.00	-19.57	AVG
4.0300	35.82	9.27	45.09	56.00	-10.91	QP
4.0300	18.66	9.27	27.93	46.00	-18.07	AVG
15.7420	34.73	9.51	44.24	60.00	-15.76	QP
15.7420	26.59	9.51	36.10	50.00	-13.90	AVG



Neutral line:

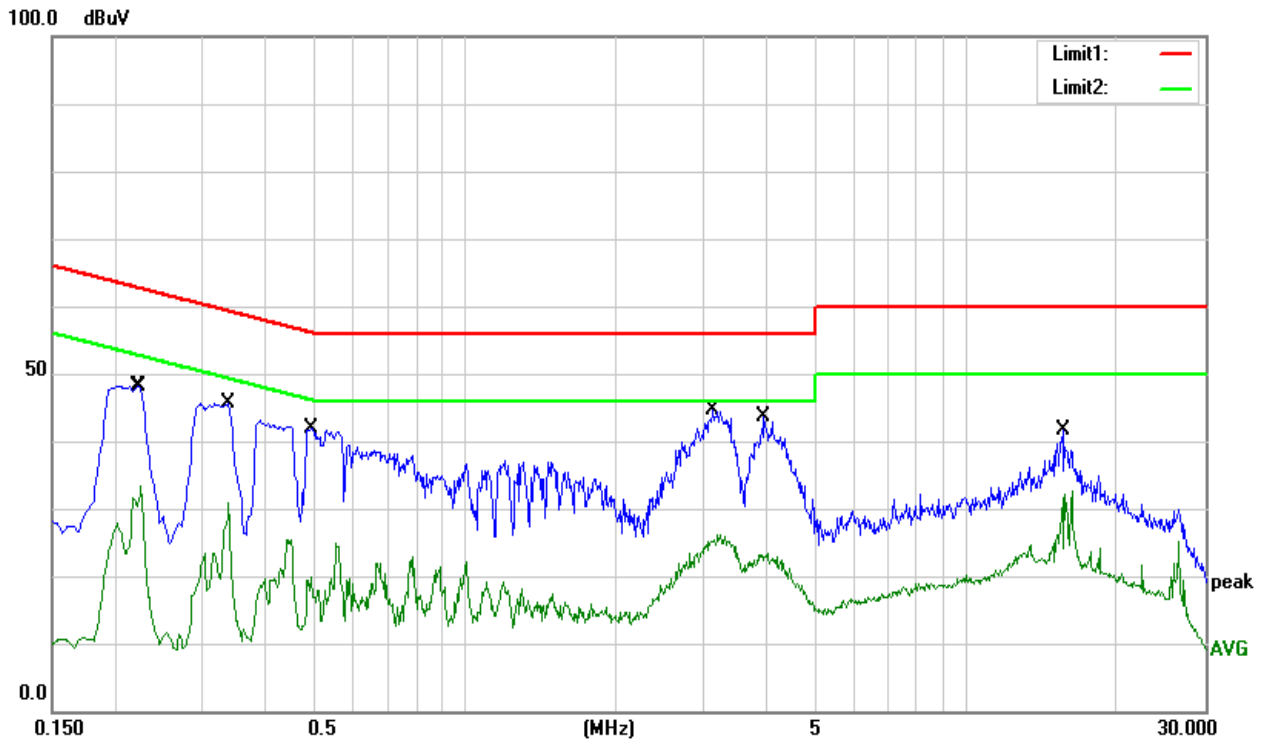

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
0.2220	38.87	9.21	48.08	62.74	-14.66	QP
0.2260	24.19	9.20	33.39	52.60	-19.21	AVG
0.3380	36.44	9.17	45.61	59.25	-13.64	QP
0.3380	21.78	9.17	30.95	49.25	-18.30	AVG
0.4940	32.64	9.15	41.79	56.10	-14.31	QP
0.4940	15.65	9.15	24.80	46.10	-21.30	AVG
3.1340	35.32	9.26	44.58	56.00	-11.42	QP
3.1340	16.81	9.26	26.07	46.00	-19.93	AVG
3.9580	34.34	9.26	43.60	56.00	-12.40	QP
3.9580	14.04	9.26	23.30	46.00	-22.70	AVG
15.6180	32.24	9.48	41.72	60.00	-18.28	QP
15.6180	23.04	9.48	32.52	50.00	-17.48	AVG



## 5 Radiated Spurious Emissions

Test Requirement: : FCC CFR47 Part 15 Section 15.209 & 15.247  
 Test Method: : ANSI C63.10:2013,KDB 558074 D01 DTS MEAS GUIDANCE V03R05  
 Test Result: : PASS  
 Measurement Distance: : 3m  
 Limit: : See the follow table

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	2400/F(kHz)	300	10000 * 2400/F(kHz)	20log <sup>(2400/F(kHz))</sup> + 80
0.490 ~ 1.705	24000/F(kHz)	30	100 * 24000/F(kHz)	20log <sup>(24000/F(kHz))</sup> + 40
1.705 ~ 30	30	30	100 * 30	20log <sup>(30)</sup> + 40
30 ~ 88	100	3	100	20log <sup>(100)</sup>
88 ~ 216	150	3	150	20log <sup>(150)</sup>
216 ~ 960	200	3	200	20log <sup>(200)</sup>
Above 960	500	3	500	20log <sup>(500)</sup>

### 5.1 EUT Operation


Operating Environment :

Temperature: : 23.5 °C  
 Humidity: : 51.1 % RH  
 Atmospheric Pressure: : 101.2kPa  
 EUT Operation : : Refer to section 3.3


### 5.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site


The test setup for emission measurement below 30MHz

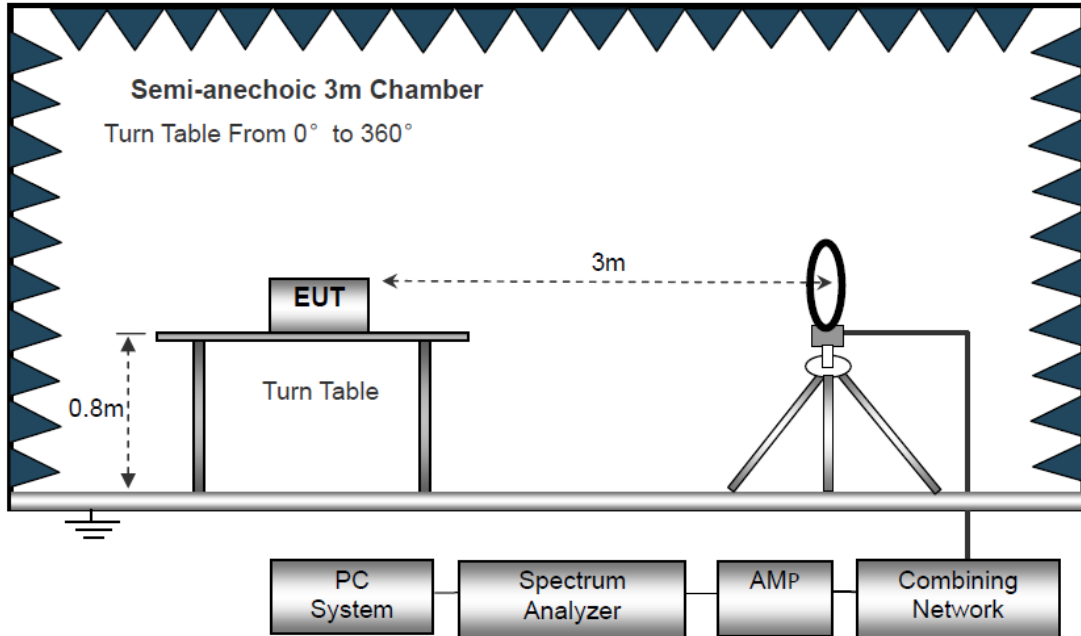

The test setup for emission measurement from 30 MHz to 1 GHz.

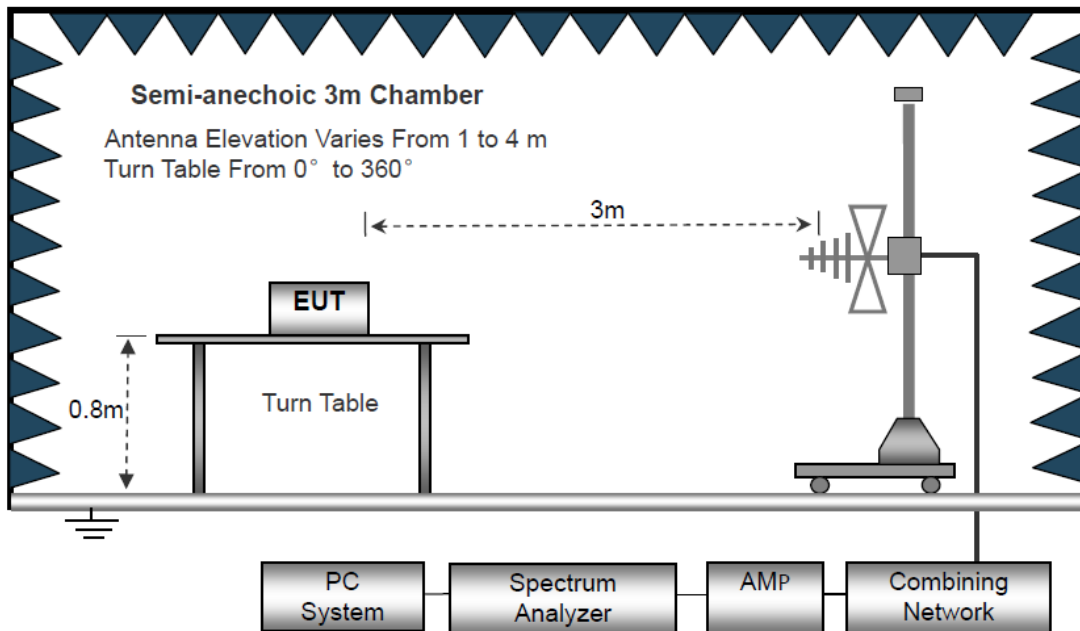

The test setup for emission measurement above 1 GHz

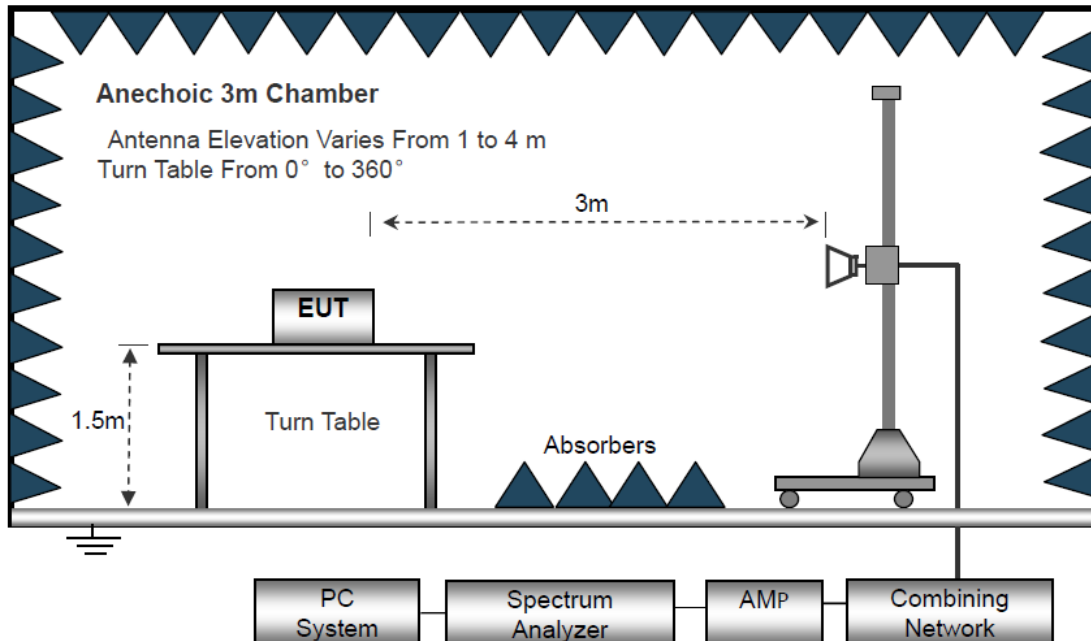

### 5.3 Spectrum Analyzer Setup

Below 30MHz

IF Bandwidth	10kHz
Resolution Bandwidth	10kHz
Video Bandwidth	10kHz

30MHz ~ 1GHz

Detector	: PK
Resolution Bandwidth	: 100kHz
Video Bandwidth	: 300kHz
Detector	: QP
Resolution Bandwidth	: 120kHz
Video Bandwidth	: 300kHz

Above 1GHz

Detector	: PK
Resolution Bandwidth	: 1MHz
Video Bandwidth	: 3MHz
Detector	: AV
Resolution Bandwidth	: 1MHz
Video Bandwidth	: 10Hz



## 5.4 Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above ground plane for below 1GHz and 1.5m for above 1GHz.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions. The spectrum was investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are tested under 3-axes(X,Y,Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the X position. So the data shown was the X position only.



**PRECISE TESTING**

Report No.: PTC801714160722E-FC01

## **5.5 Summary of Test Results**

**Test Frequency: Below 30MHz**

The measurements were more than 20 dB below the limit and not reported.






**Test Frequency: 30MHz ~ 1GHz**

All applicable test modes have been tested and only the worst case (BLE TX in middle channel) is recorded.

Antenna Polarization: Horizontal

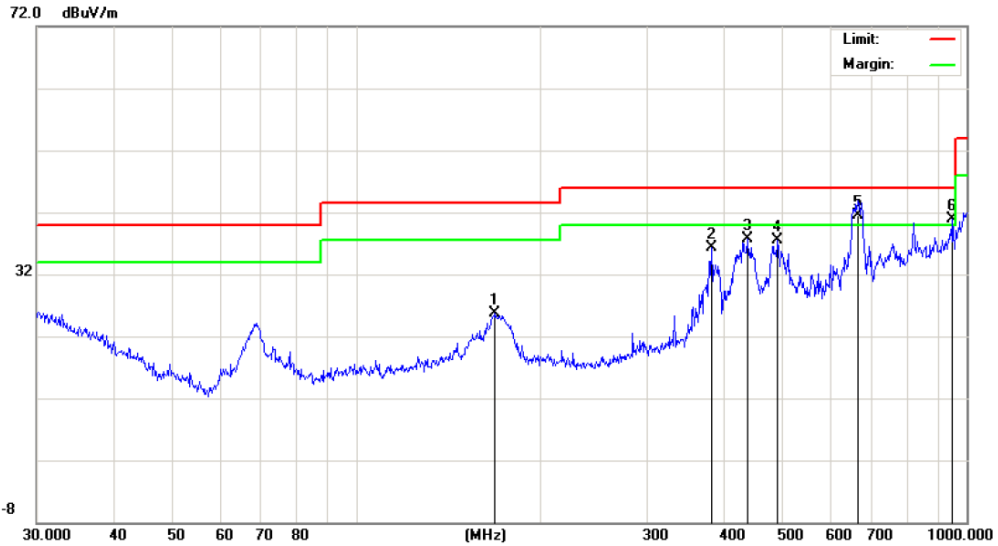

Site NTEK 9\*6\*6 Chamber #1      Polarization: **Horizontal**      Temperature: 24  
 Limit: FCC\_PART15\_B\_03m\_QP      Power: AC 230V/50Hz      Humidity: 50 %  
 Mode: Mode 1  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		30.4237	6.74	19.42	26.16	40.00	-13.84	QP		
2	*	49.8813	26.79	9.60	36.39	40.00	-3.61	QP		
3	!	77.0504	26.55	9.54	36.09	40.00	-3.91	QP		
4		197.8926	18.28	11.45	29.73	43.50	-13.77	QP		
5		601.4265	16.00	19.49	35.49	46.00	-10.51	QP		
6		833.3170	13.62	23.16	36.78	46.00	-9.22	QP		

\*:Maximum data    x:Over limit    !:over margin


Remark:

Correct Factor= Cable Loss+ANT Factor

Measure-ment=Reading level + Correct Factor



Antenna Polarization: Vertical

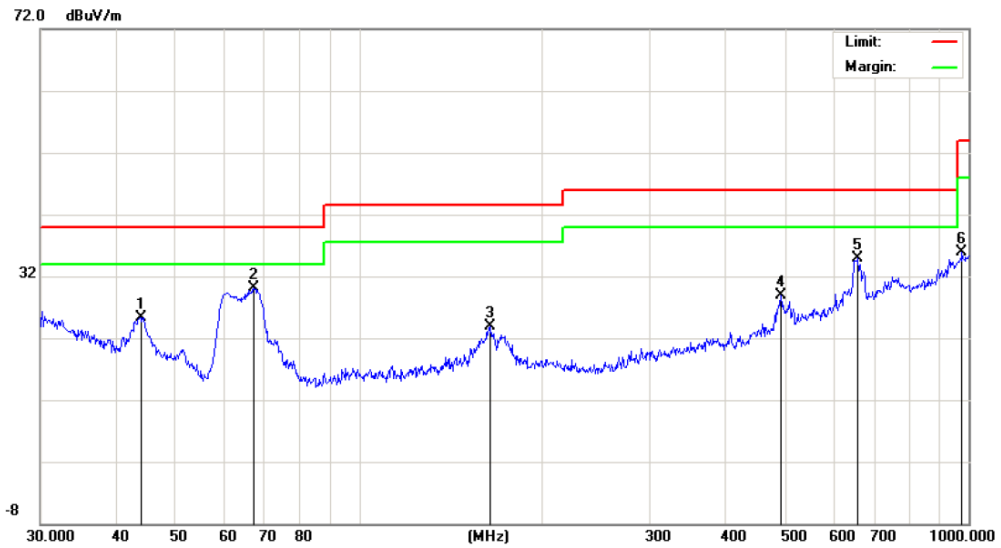

Site NTEK 9\*6\*6 Chamber #1      Polarization: **Vertical**      Temperature: 24  
 Limit: FCC\_PART15\_B\_03m\_QP      Power: AC 230V/50Hz      Humidity: 50 %

Mode: Mode 1  
 Note:

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1 !	31.7313	16.65	18.95	35.60	40.00	-4.40	QP			
2 !	39.2991	21.76	14.97	36.73	40.00	-3.27	QP			
3 !	49.8813	27.15	9.60	36.75	40.00	-3.25	QP			
4 *	71.8319	27.41	9.59	37.00	40.00	-3.00	QP			
5 !	77.0504	27.46	9.54	37.00	40.00	-3.00	QP			
6	601.4265	16.79	19.49	36.28	46.00	-9.72	QP			

\*:Maximum data    x:Over limit    !:over margin

Remark:

Correct Factor= Cable Loss+ANT Factor

Measure-ment=Reading level + Correct Factor



**Test Frequency: 1GHz ~ 18GHz**

Frequency	Receiver Reading	Detector	Corrected Factor	Measurement	Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
GFSK(BLE) Low Channel						
Harmonic & Spurious Emission						
1184.32	44.28	PK	-18.92	25.36	43.50	-17.14
1184.32	38.51	Ave	-18.92	19.59	43.50	-23.83
4804.00	49.38	PK	-1.06	48.32	74.00	-25.68
4804.00	42.68	Ave	-1.06	41.62	54.00	-12.38
7206.00	46.83	PK	1.33	48.16	74.00	-25.84
7206.00	42.69	Ave	1.33	44.02	54.00	-9.98
Restricted bands Emission						
2348.03	45.02	PK	-13.19	31.83	74.00	-42.17
2348.03	39.30	Ave	-13.19	26.11	54.00	-27.89
2379.65	42.91	PK	-13.14	29.77	74.00	-44.23
2379.65	38.12	Ave	-13.14	24.98	54.00	-29.02
2486.01	42.47	PK	-13.08	29.39	74.00	-44.61
2486.01	40.29	Ave	-13.08	27.21	54.00	-26.79

Remark: Measurement= Receiver Reading + Correct Factor  
 Corrected Factor=ANT Factor + Cable Loss –Pre-amp Gain  
 The test were performed at both of Vertical and Horizontal antenna polarization and only the worst-case mode data at Horizontal were reported



Frequency	Receiver Reading	Detector	Corrected Factor	Measurement	Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
GFSK(BLE) Middle Channel						
Harmonic & Spurious Emission						
1184.32	45.54	PK	-18.92	26.62	43.50	-16.88
1184.32	39.02	Ave	-18.92	20.10	43.50	-23.40
4880.00	50.12	PK	-0.93	49.19	74.00	-24.81
4880.00	42.32	Ave	-0.93	41.39	54.00	-12.61
7320.00	46.72	PK	1.67	48.39	74.00	-25.61
7320.00	42.09	Ave	1.67	43.76	54.00	-10.24
Restricted bands Emission						
2339.48	45.86	PK	-13.19	32.67	74.00	-41.33
2339.48	38.66	Ave	-13.19	25.47	54.00	-28.53
2376.97	43.06	PK	-13.14	29.92	74.00	-44.08
2376.97	37.60	Ave	-13.14	24.46	54.00	-29.54
2495.22	42.31	PK	-13.08	29.23	74.00	-44.77
2495.22	39.93	Ave	-13.08	26.85	54.00	-27.15
Remark: Measure-ment= Receiver Reading + Correct Factor Corrected Factor=ANT Factor + Cable Loss –Pre-amp Gain The test were performed at both of Vertical and Horizontal antenna polarization and only the worst-case mode data at Horizontal were reported						



Frequency	Receiver Reading	Detector	Corrected Factor	Measurement	Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
GFSK(BLE) High Channel						
Harmonic & Spurious Emission						
1184.32	45.58	PK	-18.92	26.66	43.50	-16.84
1184.32	39.86	Ave	-18.92	20.94	43.50	-22.56
4960.00	50.55	PK	-0.87	49.68	74.00	-24.32
4960.00	42.10	Ave	-0.87	41.23	54.00	-12.77
7440.00	45.90	PK	1.84	47.74	74.00	-26.26
7440.00	42.43	Ave	1.84	44.27	54.00	-9.73
Restricted bands Emission						
2334.44	45.96	PK	-13.19	32.77	74.00	-41.23
2334.44	39.50	Ave	-13.19	26.31	54.00	-27.69
2376.54	43.81	PK	-13.14	30.67	74.00	-43.33
2376.54	38.51	Ave	-13.14	25.37	54.00	-28.63
2499.86	41.65	PK	-13.08	28.57	74.00	-45.43
2499.86	40.60	Ave	-13.08	27.52	54.00	-26.48
Remark: Measure-ment= Receiver Reading + Correct Factor Corrected Factor=ANT Factor + Cable Loss –Pre-amp Gain The test were performed at both of Vertical and Horizontal antenna polarization and only the worst-case mode data at Horizontal were reported						



**Radiated band edge:**

Frequency	Receiver Reading	Detector	Corrected Factor	Measurement	Limit	Margin
(MHz)	(dBµV)	(PK/QP/Ave)	(dB)	(dBµV/m)	(dBµV/m)	(dB)
GFSK(BLE)@2402MHz						
2400.00	48.63	PK	-13.12	35.51	74.00	-38.49
2400.00	41.15	PK	-13.12	28.03	74.00	-45.97
GFSK(BLE)@2480MHz						
2483.50	48.25	PK	-13.06	35.19	74.00	-38.81
2483.50	43.88	PK	-13.06	30.82	74.00	-43.18
Remark: The PK value is below the AV limit, The AV value was not recorded. Measurement= Receiver Reading + Correct Factor Corrected Factor=ANT Factor + Cable Loss –Pre-amp Gain The test were performed at both of Vertical and Horizontal antenna polarization and only the worst-case mode data at Horizontal were reported						

**Test Frequency: 18-25GHz**

The measurements were more than 20 dB below the limit and not reported



## 6 Conducted Spurious Emission

Test Requirement : FCC CFR47 Part 15 Section 15.247  
 Test Method : ANSI C63.10:2013,KDB 558074 D01 DTS MEAS GUIDANCE V03R05  
 Test Limit : Regulation 15.247 (d),In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).


Test Mode : Refer to section 3.3

### 6.1 Test Procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz, Sweep = auto  
 Detector function = peak, Trace = max hold

### 6.2 Test Result


BLE Low Channel

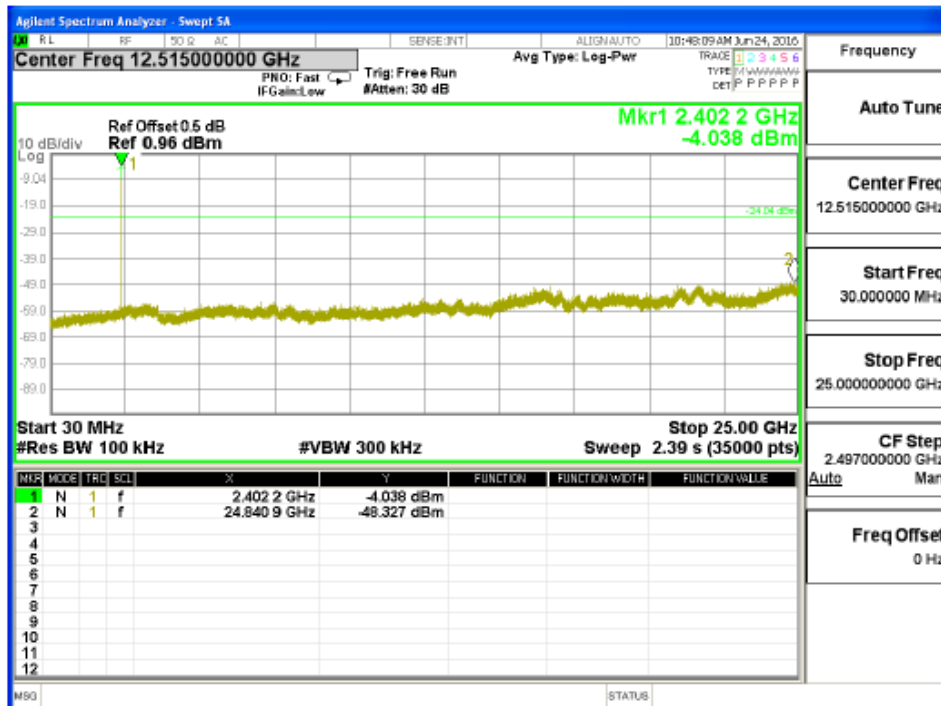

BLE Middle Channel

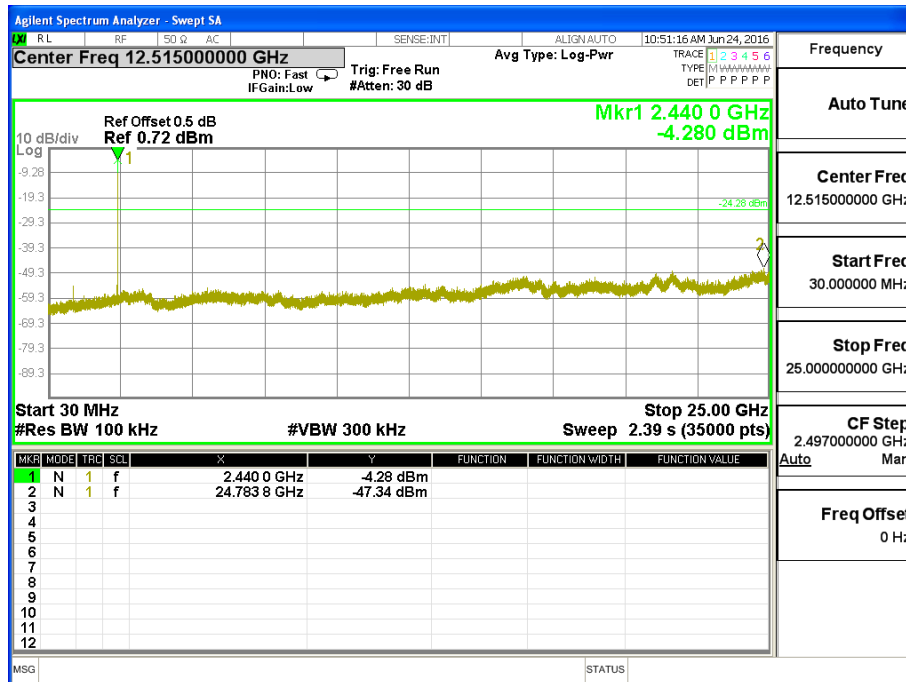

BLE High Channel

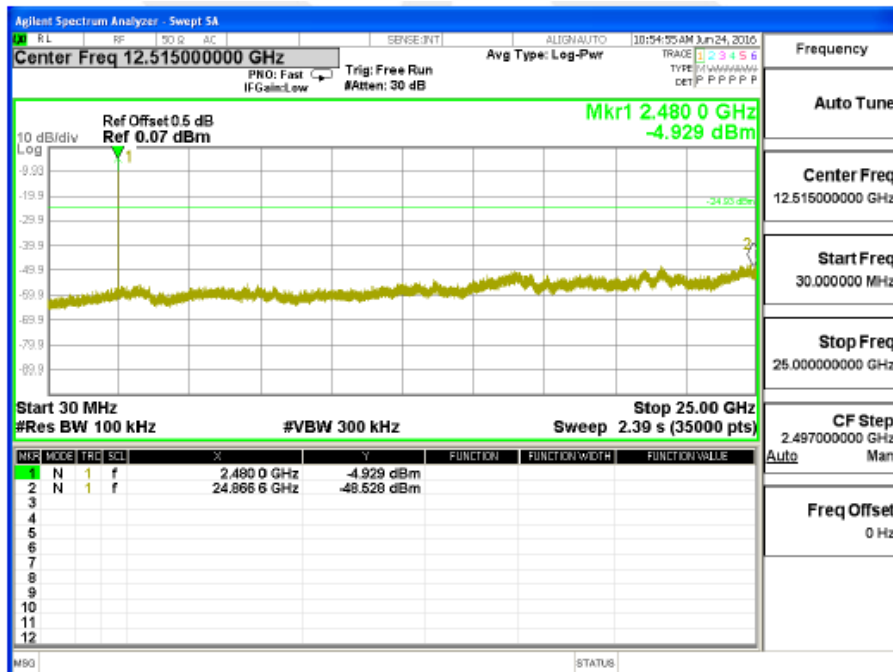





## 7 Band Edge Measurement

Test Requirement	:	Section 15.247(d) In addition, radiated emissions which fall in the restricted bands. as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).
Test Method	:	ANSI C63.10:2013,KDB 558074 D01 DTS MEAS GUIDANCE V03R05
Test Limit	:	Regulation 15.247 (d),In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
Test Mode	:	Refer to section 3.3


### 7.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz, Sweep = auto  
Detector function = peak, Trace = max hold




### 7.2 Test Result

GFSK Band Low Ch edge-left side

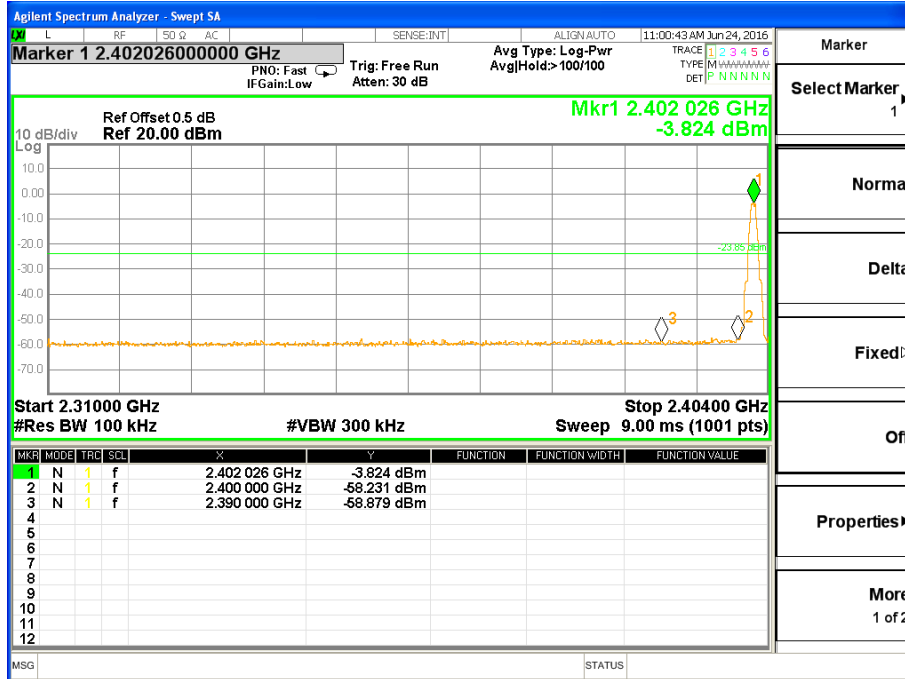

GFSK Band High Ch edge-right side

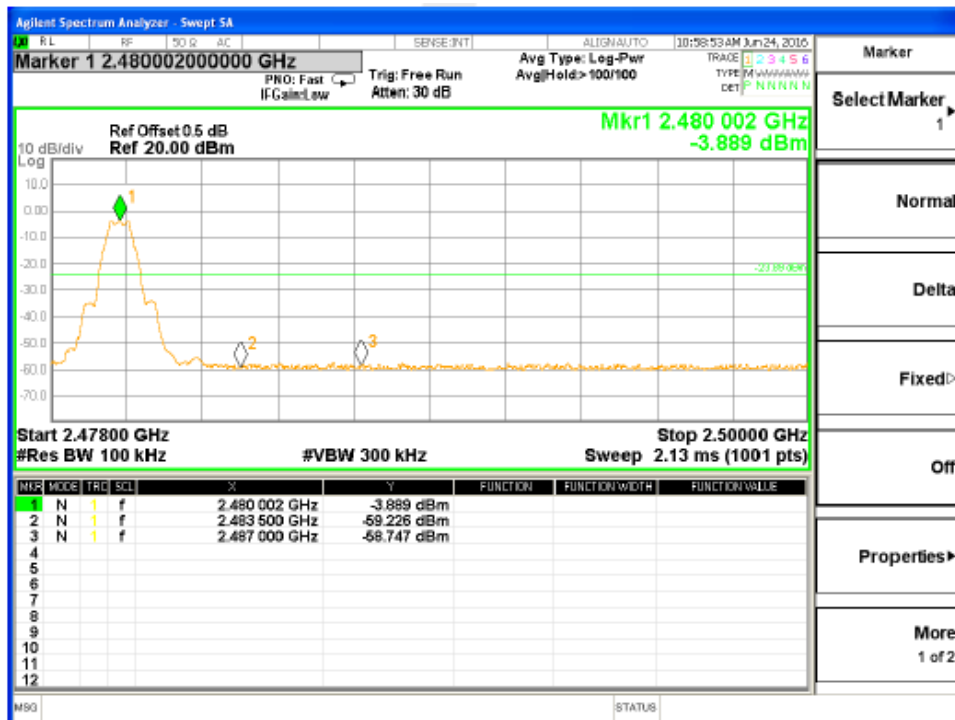



### 8 6dB Bandwidth Measurement

- Test Requirement : FCC CFR47 Part 15 Section 15.247
- Test Method : ANSI C63.10:2013, KDB 558074 D01 DTS MEAS GUIDANCE V03R05
- Test Limit : Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.
- Test Mode : Refer to section 3.3

#### 8.1 Test Procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: For BLE, RBW = 100 kHz, VBW = 300kHz, For WIFI, RBW = 100kHz, VBW = 300kHz,

#### 8.2 Test Result


Modulation	Bandwidth(MHz)			Limit
	Low Channel	Middle Channel	High Channel	
GFSK(BLE)	0.690	0.689	0.693	≥500kHz



GFSK(BLE) Low Channel

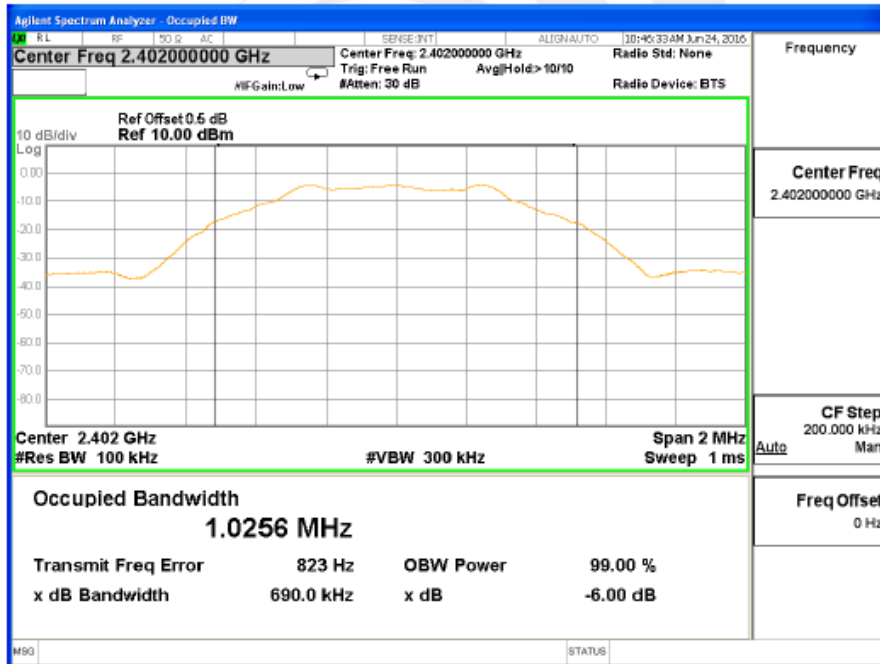


GFSK(BLE) Middle Channel

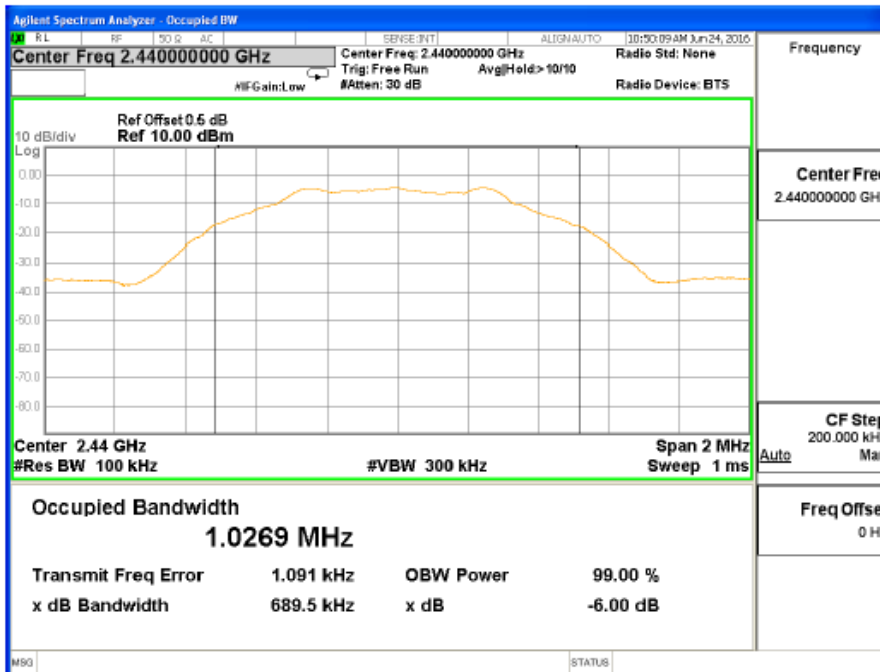



GFSK(BLE) High Channel

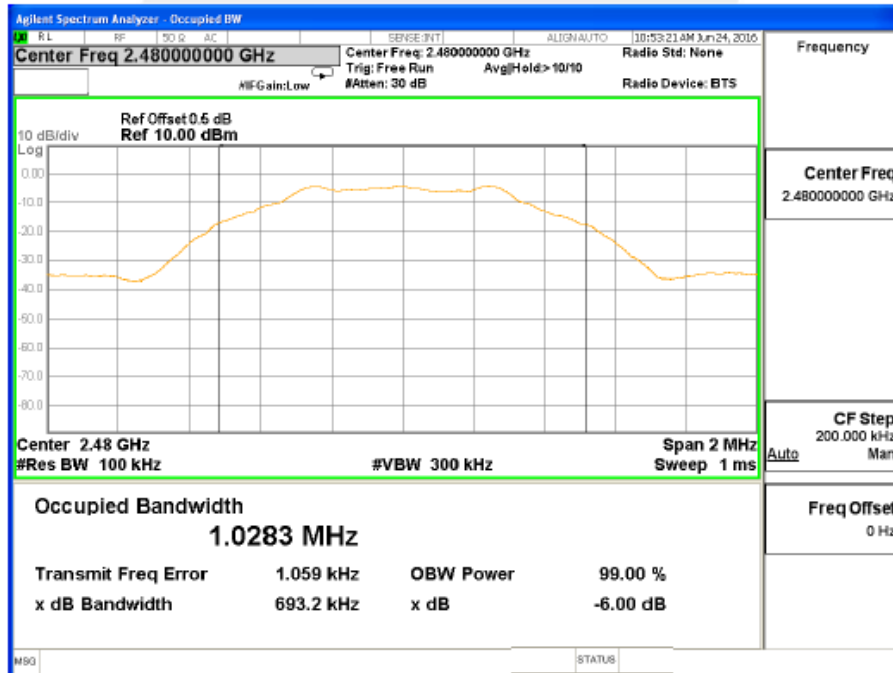



### 9 Maximum Peak Output Power

- Test Requirement : FCC CFR47 Part 15 Section 15.247
- Test Method : ANSI C63.10:2013, KDB 558074 D01 DTS MEAS GUIDANCE V03R05
- Test Limit : Regulation 15.247 (b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power.
- Test Mode : Refer to section 3.3

#### 9.1 Test Procedure

KDB 558074 D01 DTS Meas Guidance V03R05

section 9.1.1 (For BLE)

This procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the DTS bandwidth.


- a)Set the RBW  $\geq$  DTS bandwidth.
- b)Set VBW  $\geq$  3 RBW.
- c)Set span  $\geq$  3 x RBW
- d)Sweep time = auto couple.
- e)Detector = peak.
- f)Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.

#### 9.2 Test Result


Modulation	Maximum Peak Output Power (dBm)			Limit
	Low Channel	Middle Channel	High Channel	
GFSK(BLE)	4.32	5.22	5.12	1W(30dBm)




### GFSK(BLE) Low Channel

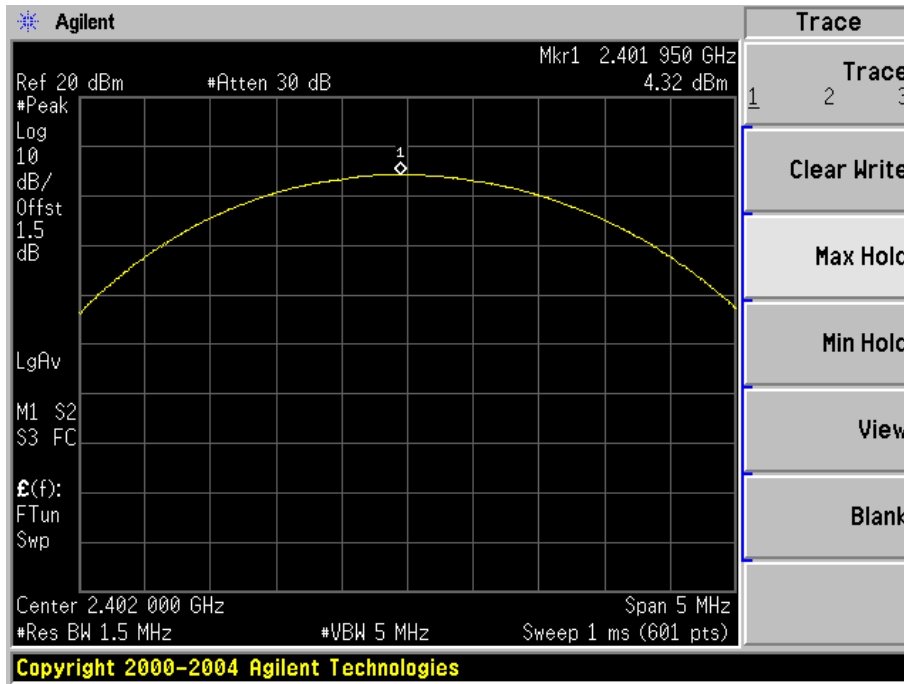

### GFSK(BLE) Middle Channel

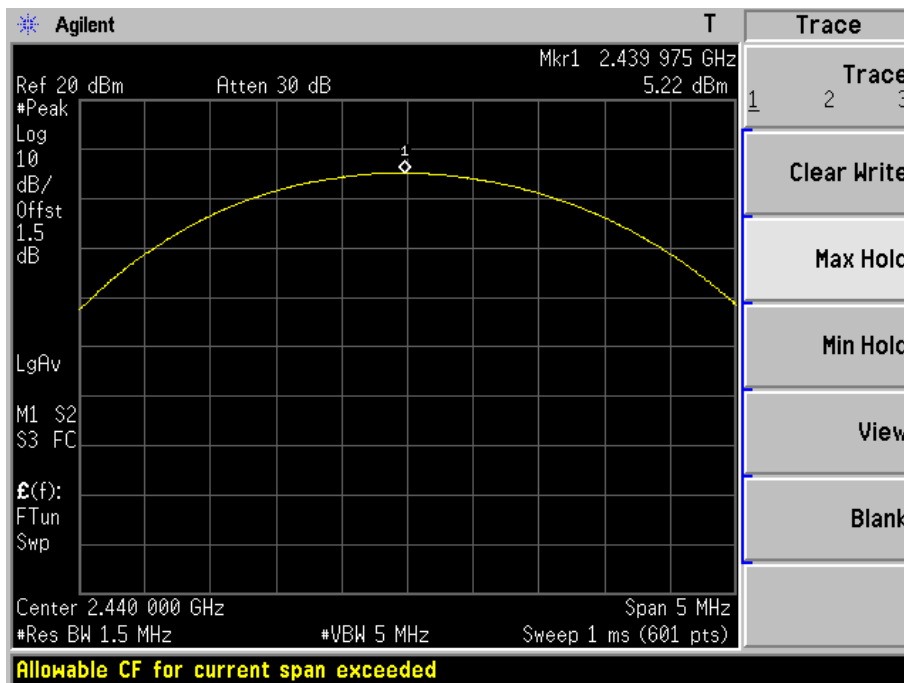

GFSK(BLE) High Channel

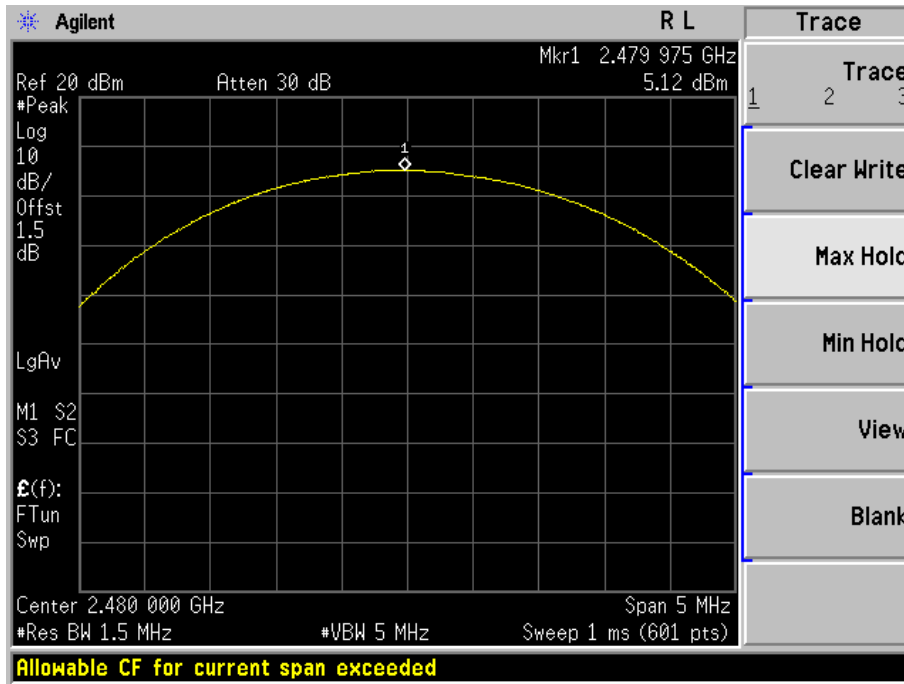





### 10 Power Spectral density

- Test Requirement : FCC CFR47 Part 15 Section 15.247
- Test Method : ANSI C63.10:2013, KDB 558074 D01 DTS MEAS GUIDANCE V03R05
- Test Limit : Regulation 15.247(f) The power spectral density conducted from the intentional radiator to the antenna due to the digital modulation operation of the hybrid system, with the frequency hopping operation turned off, shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.
- Test Mode : Refer to section 3.3

#### 10.1 Test Procedure

KDB 558074 D01 DTS Meas Guidance V03R05


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 3kHz. VBW = 10kHz , Span = 1.5 times the DTS channel bandwidth(6 dB bandwidth). Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.

#### 10.2 Test Result


Modulation	Power Spectral density ( dBm/3kHz )			Limit
	Low Channel	Middle Channel	High Channel	
GFSK(BLE)	-7.861	-5.749	-6.158	8dBm/3kHz



### GFSK(BLE) Low Channel

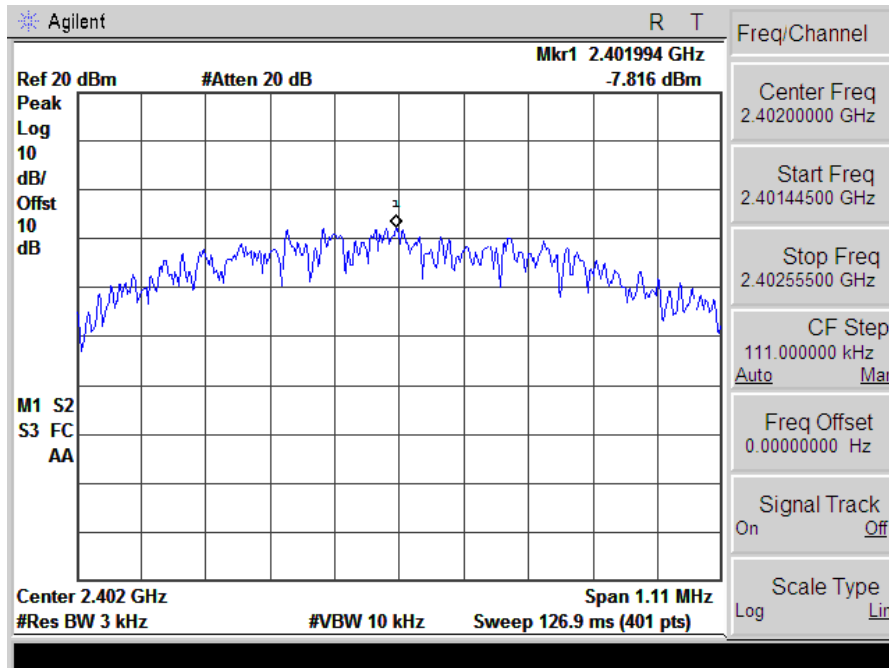


### GFSK(BLE) Middle Channel

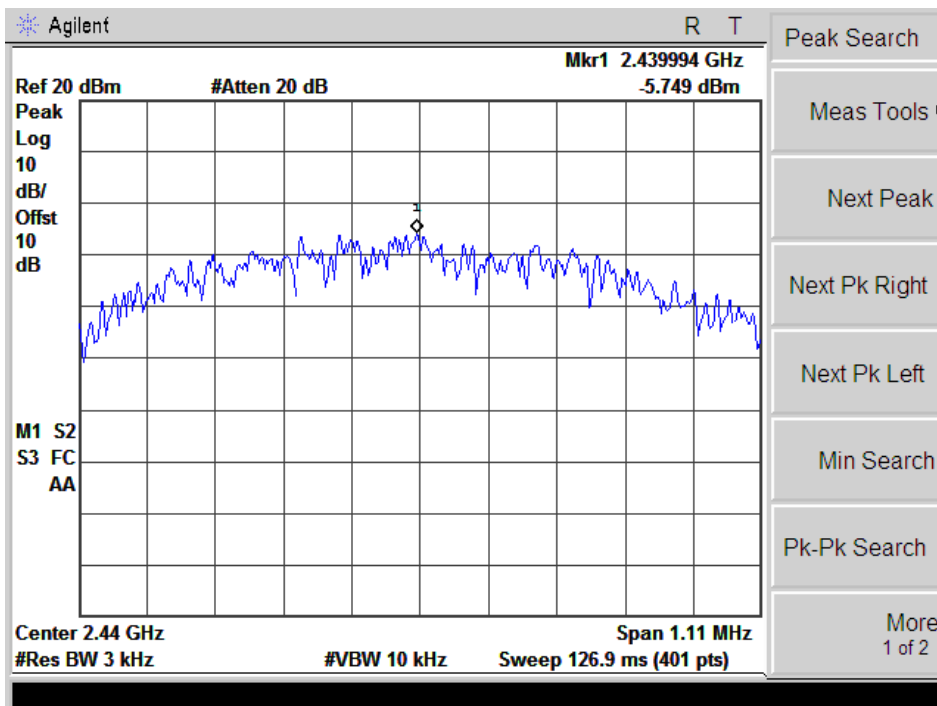



GFSK(BLE) High Channel

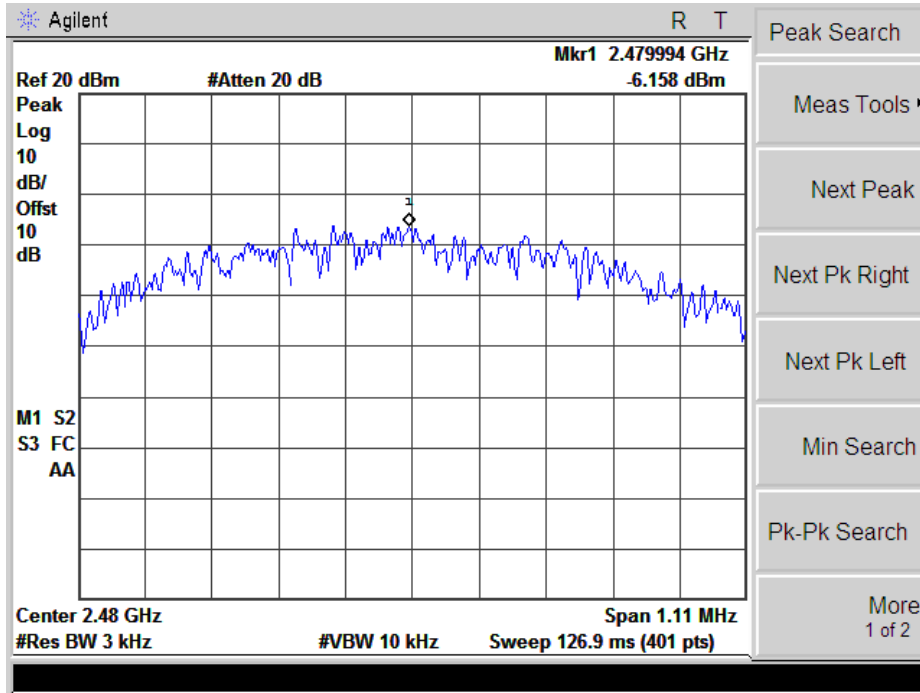



## 11 Antenna Requirement

According to the FCC part15.203, a transmitter can only be sold or operated with antennas with which it was approved. This product has an PCB print antenna which meet the requirement of this section.

**\*\*\*\*\*THE END REPORT\*\*\*\*\***