

FCC RADIO TEST REPORT

FCC ID:2AICB-ORIGINAL

Product : AM/FM DIGITAL CLOCK RADIO

Trade Name : SmartCuckoo

Model Name : Original

Serial Model : CK011,CK011BLE

Report No. : UNIA21111517-01

Prepared for

Ultra Creation Limited

Unit B215, 1/F., New East Sun Industrial building, 18 Shing Yip Street,
Kwun Tong, Hong Kong

Prepared by

Shenzhen United Testing Technology Co., Ltd.

2F, Annex Bldg, Jiahuangyuan Tech Park, #365 Baotian 1 Rd, Tiegang
Community, Xixiang Str, Bao'an District, Shenzhen, China

TEST RESULT CERTIFICATION

Applicant's name : Ultra Creation Limited
Address : Unit B215, 1/F., New East Sun Industrial building, 18 Shing Yip Street, Kwun Tong, Hong Kong
Manufacture's Name..... : Ultra Creation Limited
Address : Unit B215, 1/F., New East Sun Industrial building, 18 Shing Yip Street, Kwun Tong, Hong Kong

Product description

Product name : AM/FM DIGITAL CLOCK RADIO
Trade Mark : SmartCuckoo
Model and/or type reference : Reference P1
Standards : FCC Rules and Regulations Part 15 Subpart C Section 15.247
 ANSI C63.10: 2013

This device described above has been tested by Shenzhen United Testing Technology Co., Ltd., and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of UNI, this document may be altered or revised by Shenzhen United Testing Technology Co., Ltd., personnel only, and shall be noted in the revision of the document.

Date of Test :
Date (s) of performance of tests : Oct. 08, 2021 ~ Nov. 10, 2021
Date of Issue..... : Nov. 10, 2021
Test Result..... : Pass

Prepared by: Bob Liao

Bob liao/Editor

Reviewer: kahn.yang

Kahn yang/Supervisor

Approved & Authorized Signer: Liuzze

Liuzze/Manager

Table of Contents

Page

1 . TEST SUMMARY	5
2 . GENERAL INFORMATION	7
2.1 GENERAL DESCRIPTION OF EUT	7
2.2 Carrier Frequency of Channels	8
2.3 Operation of EUT during testing	8
2.4 DESCRIPTION OF TEST SETUP	9
2.5 MEASUREMENT INSTRUMENTS LIST	9
3 . CONDUCTED EMISSIONS TEST	11
3.1 Conducted Power Line Emission Limit	11
3.2 Test Setup	11
3.3 Test Procedure	11
3.4 Test Result	11
4 RADIATED EMISSION TEST	14
4.1 Radiation Limit	14
4.2 Test Setup	14
4.3 Test Procedure	16
4.4 Test Result	16
5 OCCUPIED BANDWIDTH MEASUREMENT	30
5.1 Test Limit	30
5.2 Test Procedure	30
5.3 TEST SETUP	30
5.4 Test Result	30
6 POWER SPECTRAL DENSITY	37
6.1 TEST LIMIT	37
6.2 TEST PROCEDURE	37
6.3 TEST SETUP	37
6.4 TEST RESULT	37
7 PEAK OUTPUT POWER	44
7.1 TEST LIMIT	44
7.2 TEST PROCEDURE	44
7.3 TEST SETUP	44
7.4 TEST RESULT	44
8 OUT OF BAND EMISSIONS	46
8.1 TEST LIMIT	46

Table of Contents	Page
8.2 TEST SETUP	46
8.3 TEST PROCEDURE	46
8.4 TEST RESULT	46
9 ANTENNA REQUIREMENT	56
10 PHOTO OF TEST	57
10.1 RADIATED EMISSION	57

1. TEST SUMMARY

1.1 TEST PROCEDURES AND RESULTS

DESCRIPTION OF TEST	STANDARD	RESULT
CONDUCTED EMISSION	FCC Part 15.207	COMPLIANT
RADIATED EMISSION	FCC Part 15.209(a)	COMPLIANT
OCCUPIED BANDWIDTH	FCC Part 15.247(a)(2)	COMPLIANT
POWER SPECTRAL DENSITY	FCC Part 15.247(e)	COMPLIANT
PEAK OUTPUT POWER	FCC Part 15.247(b)	COMPLIANT
OUT OF BAND EMISSIONS	FCC Part 15.247(d)	COMPLIANT
CONDUCTED SPURIOUS EMISSION	FCC Part 15.247(d)	COMPLIANT
ANTENNA REQUIREMENT	FCC Part 15.203	COMPLIANT

1.2 TEST FACILITY

Test Firm : Shenzhen United Testing Technology Co., Ltd.
 Address : 2F, Annex Bldg, Jiahuangyuan Tech Park, #365 Baotian 1 Rd, Tiegang Community, Xixiang Str, Bao'an District, Shenzhen, China

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19. The testing quality system of our laboratory meets with ISO/IEC-17025 requirements. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

A2LA Certificate Number: 4747.01

The EMC Laboratory has been accredited by A2LA, and in compliance with ISO/IEC 17025:2017 General Requirements for testing Laboratories.

FCC Registration Number: 674885

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission.

IC Registration Number: 21947

The EMC Laboratory has been registered and fully described in a report filed with the (IC) Industry Canada.

1.3 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

Measurement Uncertainty

Conducted Emission Expanded Uncertainty	=	2.23dB, k=2
Radiated emission expanded uncertainty(9kHz-30MHz)	=	3.08dB, k=2
Radiated emission expanded uncertainty(30MHz-1000MHz)	=	4.42dB, k=2
Radiated emission expanded uncertainty(Above 1GHz)	=	4.06dB, k=2

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	AM/FM DIGITAL CLOCK RADIO
Trade Mark	SmartCuckoo
Model Name	Original
Serial No.	CK011,CK011BLE
Model Difference	Only the model name is different.
FCC ID	2AICB-ORIGINAL
Antenna Type	FPCB Antenna
Antenna Gain	2.0dBi
Frequency Range	2412~2462MHz@802.11b/g/n20
Bit Rate of Transmitter	802.11b: 1/2/5.5/11Mbps 802.11g: 6/9/12/18/24/36/48/54Mbps 802.11n: up to 150Mbps
Number of Channels	11
Modulation Type	BPSK/QPSK16-QAM/64-QAM
Power Source	DC5V from Adapter or DC3.0V from battery
Adapter	N/A

2.2 Carrier Frequency of Channels

Channel List							
802.11b/ g/ n(20MHz)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	05	2432	09	2452	/	/
02	2417	06	2437	10	2457	/	/
03	2422	07	2442	11	2462	/	/
04	2427	08	2447	/	/	/	/

2.3 Operation of EUT during testing

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	802.11b: All Rate
Mode 2	802.11g: All Rate
Mode 3	802.11n(20MHz): All Rate

For Conducted Emission	
Final Test Mode	Description
Mode 1	802.11b: Rate 1Mbps


For Radiated Emission	
Final Test Mode	Description
Mode 1	802.11b: Rate 1Mbps
Mode 2	802.11g: Rate 6Mbps
Mode 3	802.11n(20MHz) : Rate 6.5Mbps

Note:

- (1) The measurements are performed at the highest, middle, lowest available channels.
- (2) This product can be powered by adapter, have pretested powered by adapter, found to be the worst case is powered by the adapter, and recorded the data in the report.
- (3) EUT DC power supply.

2.4 DESCRIPTION OF TEST SETUP

Operation of EUT during Conducted testing:



Operation of EUT during Radiation and Above1GHz Radiation testing:



Table for auxiliary equipment:

Equipment Description	Manufacturer	Model	Calibration Due Date
N/A	N/A	N/A	N/A

2.5 MEASUREMENT INSTRUMENTS LIST

Item	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
CONDUCTED EMISSIONS TEST					
1	AMN	Schwarzbeck	NNLK8121	8121370	2022.9.9
2	AMN	ETS	3810/2	00020199	2022.9.9
3	EMI TEST RECEIVER	Rohde&Schwarz	ESCI	101210	2022.9.9
4	AAN	TESEQ	T8-Cat6	38888	2022.9.9
RADIATED EMISSION TEST					
1	Horn Antenna	Sunol	DRH-118	A101415	2022.9.9
2	BicoNILog Antenna	Sunol	JB1 Antenna	A090215	2022.9.9
3	PREAMP	HP	8449B	3008A00160	2022.9.9
4	PREAMP	HP	8447D	2944A07999	2022.9.9
5	EMI TEST RECEIVER	Rohde&Schwarz	ESR3	101891	2022.9.9
6	VECTOR Signal Generator	Rohde&Schwarz	SMU200A	101521	2022.9.28
7	Signal Generator	Agilent	E4421B	MY4335105	2022.9.28
8	MXA Signal Analyzer	Agilent	N9020A	MY50510140	2022.9.28
9	MXA Signal Analyzer	Agilent	N9020A	MY51110104	2022.9.9
10	ANT Tower&Turn table Controller	Champro	EM 1000	60764	2022.9.28
11	Anechoic Chamber	Taihe Maorui	9m*6m*6m	966A0001	2022.9.9
12	Shielding Room	Taihe Maorui	6.4m*4m*3m	643A0001	2022.9.9
13	RF Power sensor	DARE	RPR3006W	15I00041SNO88	2022.3.14

14	RF Power sensor	DARE	RPR3006W	15I00041SNO89	2022.3.14
15	RF power divider	Anritsu	K241B	992289	2022.9.28
16	Wideband radio communication tester	Rohde&Schwarz	CMW500	154987	2022.9.28
17	Biconical antenna	Schwarzbeck	VHA 9103	91032360	2022.9.8
18	Biconical antenna	Schwarzbeck	VHA 9103	91032361	2022.9.8
19	Broadband Hybrid Antennas	Schwarzbeck	VULB9163	VULB9163#958	2022.9.8
20	Horn Antenna	Schwarzbeck	BBHA9120D	9120D-1680	2022.1.12
21	Active Receive Loop Antenna	Schwarzbeck	FMZB 1919B	00023	2022.9.8
22	Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170651	2022.03.14
23	Microwave Broadband Preamplifier	Schwarzbeck	BBV 9721	100472	2022.9.8
24	Active Loop Antenna	Com-Power	AL-130R	10160009	2022.05.10
25	Power Meter	KEYSIGHT	N1911A	MY50520168	2022.05.10
26	Frequency Meter	VICTOR	VC2000	997406086	2022.05.10
27	DC Power Source	HYELEC	HY5020E	055161818	2022.05.10
24*	Active Loop Antenna	Com-Power	AL-130R	10160009	2022.05.09
25*	Power Meter	KEYSIGHT	N1911A	MY50520168	2022.05.09
26*	Frequency Meter	VICTOR	VC2000	997406086	2022.05.09
27*	DC Power Source	HYELEC	HY5020E	055161818	2022.05.09

3. CONDUCTED EMISSIONS TEST

3.1 Conducted Power Line Emission Limit


For unintentional device, according to § 15.207(a) Line Conducted Emission Limits is as following

Frequency (MHz)	Maximum RF Line Voltage(dB V)			
	CLASS A		CLASS B	
	Q.P.	Ave.	Q.P.	Ave.
0.15~0.50	79	66	66~56*	56~46*
0.50~5.00	73	60	56	46
5.00~30.0	73	60	60	50

* Decreasing linearly with the logarithm of the frequency

For intentional device, according to §15.207(a) Line Conducted Emission Limit is same as above table.

3.2 Test Setup

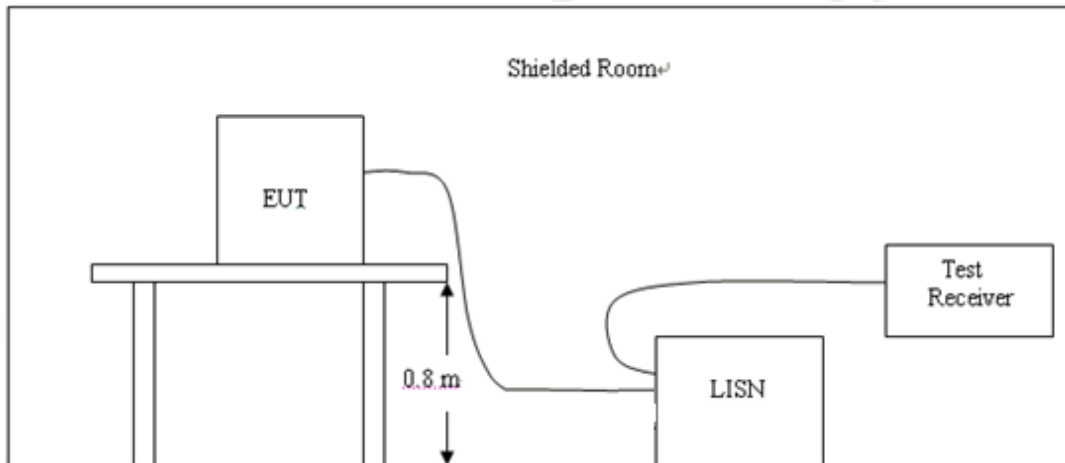

3.3 Test Procedure

- 1, The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. A wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10.
- 2, Support equipment, if needed, was placed as per ANSI C63.10.
- 3, All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4, If a EUT received DC power from the USB Port of Notebook PC, the PC's adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5, All support equipments received AC power from a second LISN, if any.
- 6, The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7, Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.


3.4 Test Result

Pass

Remark:

1. All modes were tested at AC 120V and 240V, only the worst result of AC 120V was reported.

Temperature:	24°C	Relative Humidity:	48%
Test Date:	2021-10-28	Pressure:	1010hPa
Test Voltage:	DC5V from Adapter	Phase:	Line
Test Mode:	Mode 1		

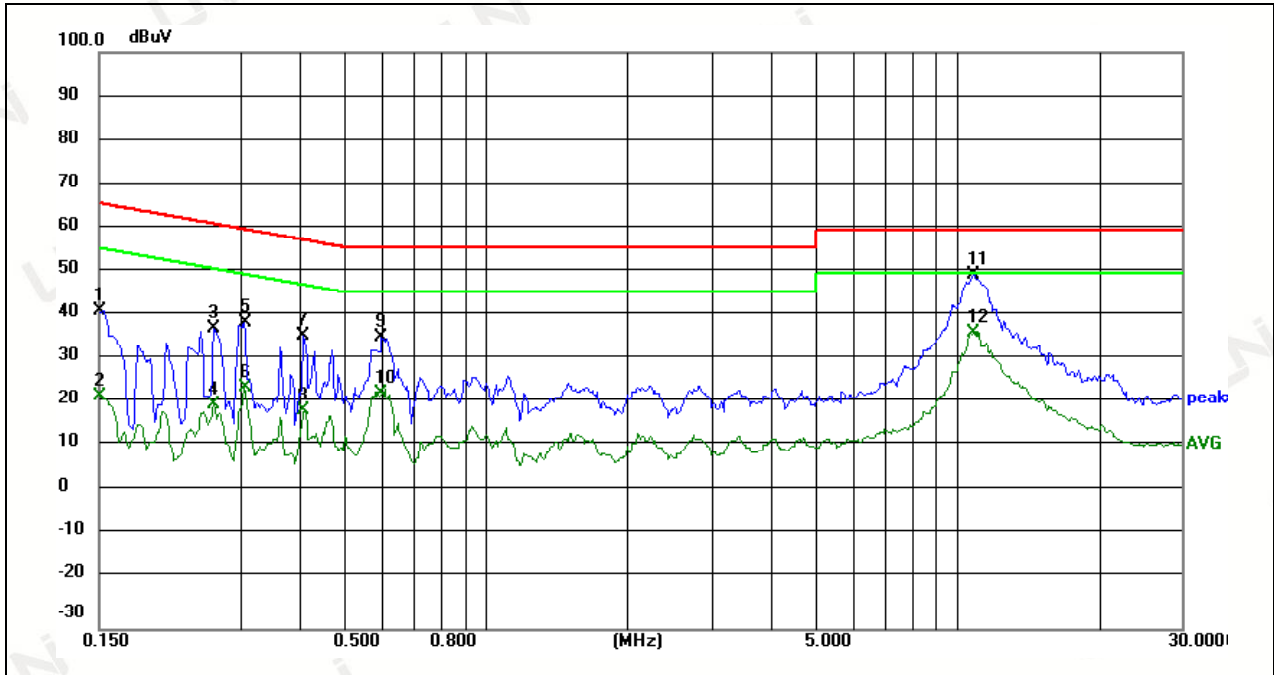


Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss + Pulse limit.
3. '*' means the worst case

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1500	31.97	9.79	41.76	66.00	-24.24	peak	P
2	0.1500	12.59	9.79	22.38	56.00	-33.62	AVG	P
3	0.2631	28.14	9.75	37.89	61.33	-23.44	peak	P
4	0.2631	10.88	9.75	20.63	51.33	-30.70	AVG	P
5	0.3060	29.40	9.76	39.16	60.08	-20.92	peak	P
6	0.3060	14.77	9.76	24.53	50.08	-25.55	AVG	P
7	0.4074	26.23	9.76	35.99	57.70	-21.71	peak	P
8	0.4074	9.56	9.76	19.32	47.70	-28.38	AVG	P
9	0.5985	25.98	9.77	35.75	56.00	-20.25	peak	P
10	0.5985	13.27	9.77	23.04	46.00	-22.96	AVG	P
11 *	10.8390	39.66	10.20	49.86	60.00	-10.14	peak	P
12	10.8390	26.65	10.20	36.85	50.00	-13.15	AVG	P

Temperature:	24°C	Relative Humidity:	48%
Test Date:	2021-10-28	Pressure:	1010hPa
Test Voltage:	DC5V from Adapter	Phase:	Neutral
Test Mode:	Mode 1		

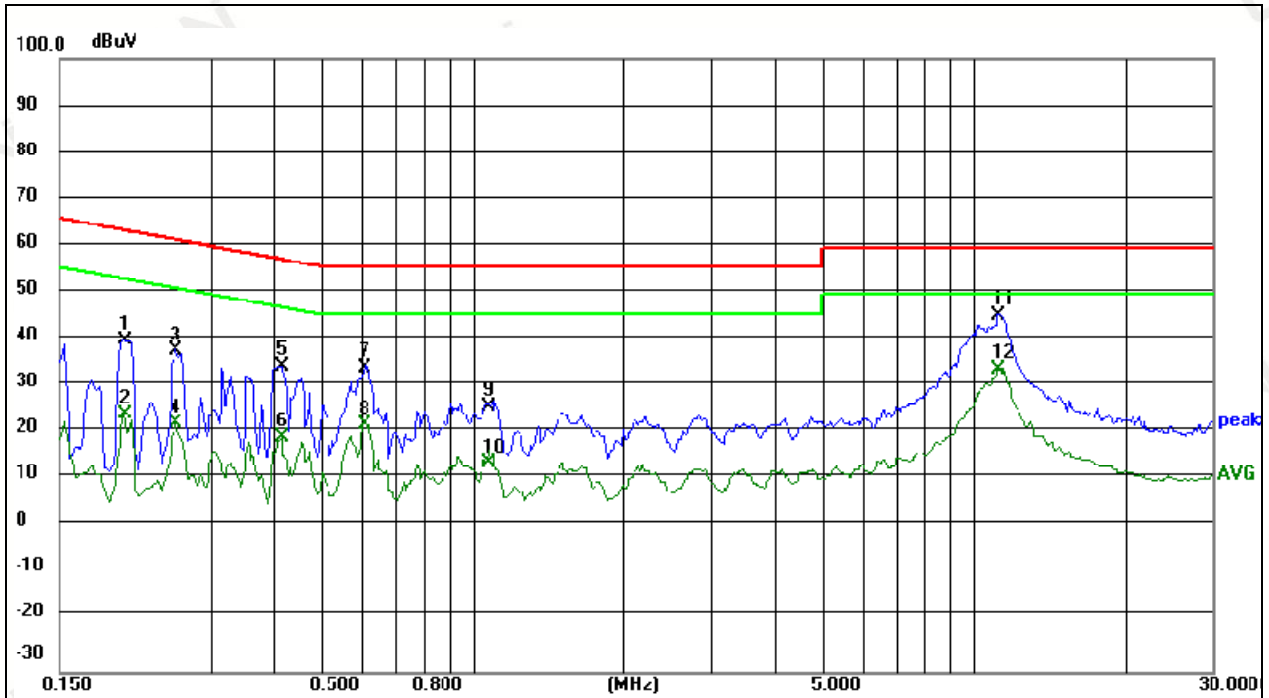

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss + Pulse limit.
3. '*' means the worst case

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.2007	30.52	9.75	40.27	63.58	-23.31	peak	P
2	0.2007	14.93	9.75	24.68	53.58	-28.90	AVG	P
3	0.2553	28.50	9.75	38.25	61.58	-23.33	peak	P
4	0.2553	12.94	9.75	22.69	51.58	-28.89	AVG	P
5	0.4152	25.09	9.76	34.85	57.54	-22.69	peak	P
6	0.4152	10.14	9.76	19.90	47.54	-27.64	AVG	P
7	0.6063	24.77	9.78	34.55	56.00	-21.45	peak	P
8	0.6063	12.78	9.78	22.56	46.00	-23.44	AVG	P
9	1.0859	16.64	9.79	26.43	56.00	-29.57	peak	P
10	1.0859	4.47	9.79	14.26	46.00	-31.74	AVG	P
11 *	11.1510	35.24	10.21	45.45	60.00	-14.55	peak	P
12	11.1510	23.90	10.21	34.11	50.00	-15.89	AVG	P

4 RADIATED EMISSION TEST

4.1 Radiation Limit

For unintentional device, according to § 15.209(a), except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F (kHz)	-	Quasi-peak	300
0.490MHz-1.705MHz	24000/F (kHz)	-	Quasi-peak	30
1.705MHz-30MHz	30	-	Quasi-peak	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3
		74.0	Peak	3


Limit calculation and transfer to 3m distance as showed in the following table:

Frequency (MHz)	Limit (dBuV/m)	Distance (m)
0.009-0.490	$20\log(2400/F(KHz))+40\log(300/3)$	3
0.490-1.705	$20\log(24000/F(KHz))+40\log(30/3)$	3
1.705-30.0	69.5	3
30-88	40.0	3
88-216	43.5	3
216-960	46.0	3
Above 960	54.0	3


For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emissions from intentional radiators at a distance of 3 meters shall not exceed the above table.

4.2 Test Setup


1. Radiated Emission Test-Up Frequency Below 30MHz

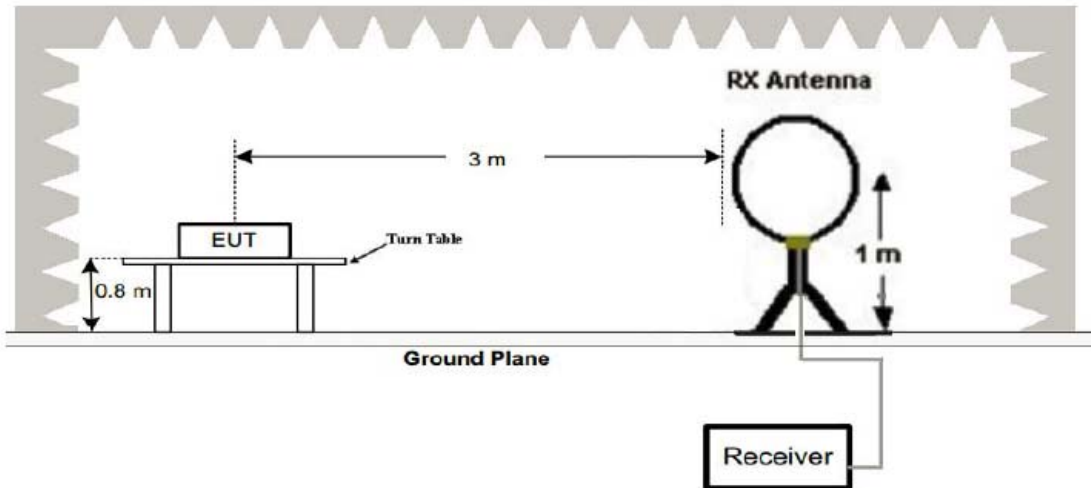

2. Radiated Emission Test-Up Frequency 30MHz~1GHz

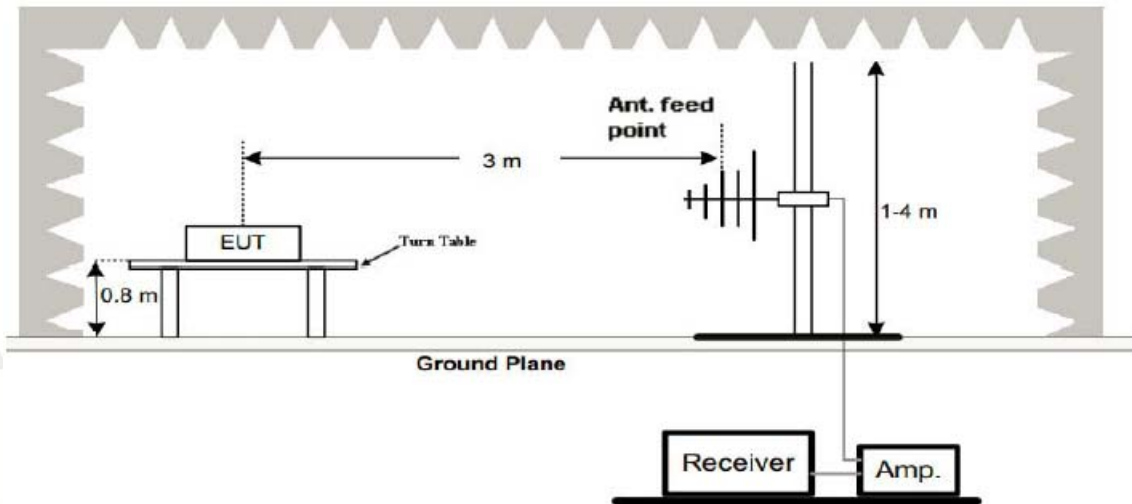

3. Radiated Emission Test-Up Frequency Above 1GHz

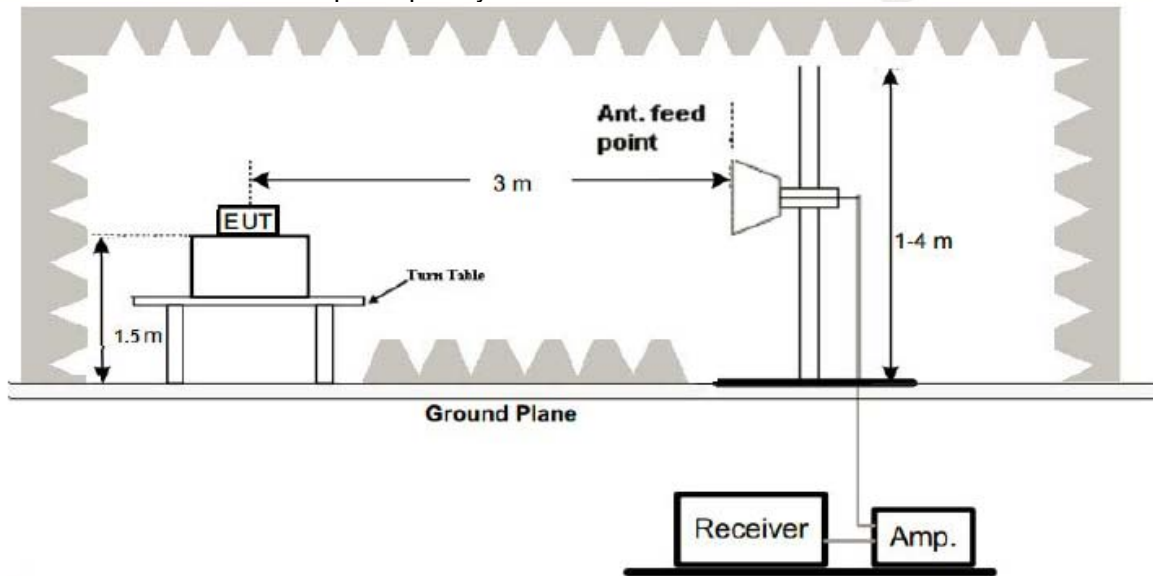

4.3 Test Procedure

1. Below 1GHz measurement the EUT is placed on turntable which is 0.8m above ground plane. And above 1GHz measurement EUT was placed on low permittivity and low tangent turn table which is 1.5m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The test frequency range from 9KHz to 25GHz per FCC PART 15.33(a).

Note:

For battery operated equipment, the equipment tests shall be performed using a new battery.

4.4 Test Result

PASS

Remark:

1. By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that "Z axis" position was the worst, and test data recorded in this report.

Below 30M

Temperature:	22°C	Relative Humidity:	48%
Test Date:	2021-11-02	Pressure:	1010hPa
Test Voltage:	DC3V from battery	Polarization:	Horizontal
Test Mode:	TX		

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	P
--	--	--	--	P

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor = 20 log (specific distance/test distance)(dB);

Limit line = specific limits(dBuv) + distance extrapolation factor



Below 1GHz Test Results:


Temperature:	22°C	Relative Humidity:	48%
Test Date:	2021-10-28	Pressure:	1010hPa
Test Voltage:	DC3V from battery	Polarization:	Vertical
Test Mode:	TX		

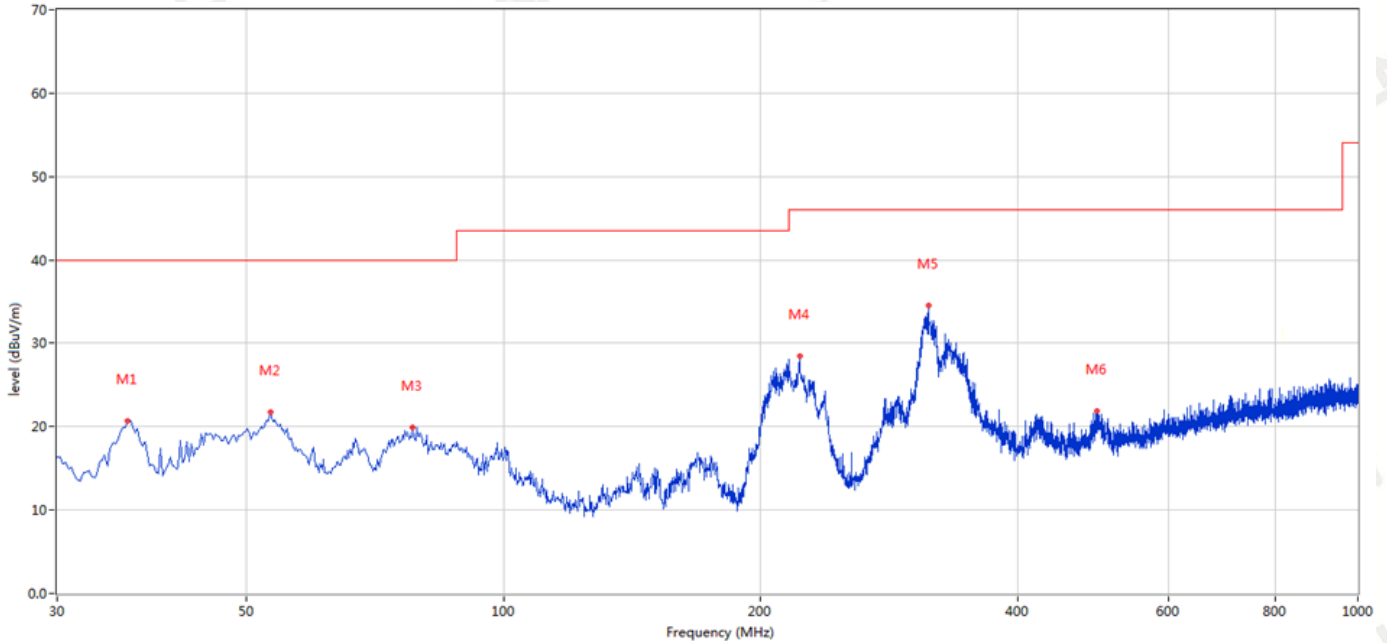

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	ANT	Verdict
1	36.303	20.71	-13.57	40.0	-19.29	Peak	Vertical	Pass
2	53.274	21.70	-11.51	40.0	-18.30	Peak	Vertical	Pass
3	78.245	19.97	-17.48	40.0	-20.03	Peak	Vertical	Pass
4	222.254	28.45	-13.21	46.0	-17.55	Peak	Vertical	Pass
5	314.139	34.53	-10.84	46.0	-11.47	Peak	Vertical	Pass
6	495.241	21.91	-7.13	46.0	-24.09	Peak	Vertical	Pass

Remark: Absolute Level = Reading Level + Factor, Margin = Absolute Level – Limit
 Factor = Ant. Factor + Cable Loss – Pre-amplifier

Temperature:	22°C	Relative Humidity:	48%
Test Date:	2021-10-28	Pressure:	1010hPa
Test Voltage:	DC3V from battery	Polarization:	Horizontal
Test Mode:	TX		

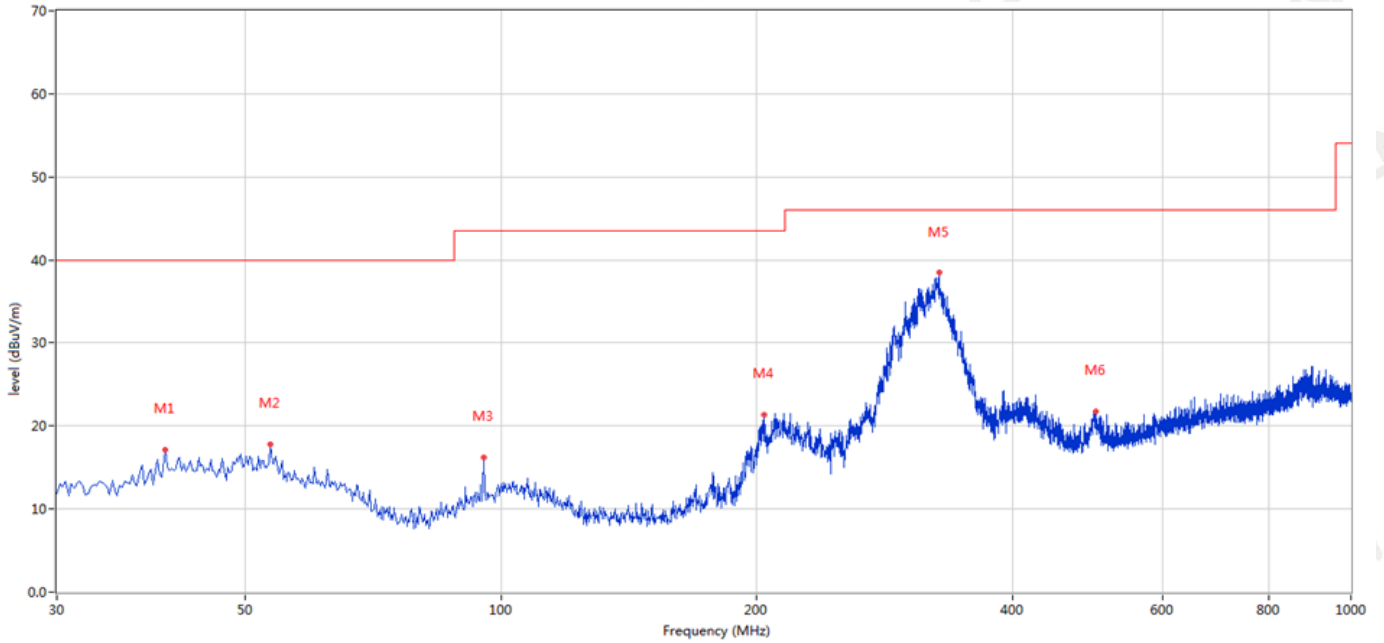

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	ANT	Verdict
1	40.182	17.18	-12.35	40.0	-22.82	Peak	Horizontal	Pass
2	53.517	31.83	-11.52	40.0	-8.17	Peak	Horizontal	Pass
3	95.459	16.24	-14.22	43.5	-27.26	Peak	Horizontal	Pass
4	204.071	21.38	-13.51	43.5	-22.12	Peak	Horizontal	Pass
5	327.958	38.43	-10.32	46.0	-7.57	Peak	Horizontal	Pass
6	500.575	21.72	-6.97	46.0	-24.28	Peak	Horizontal	Pass

Remark: Absolute Level = Reading Level + Factor, Margin = Absolute Level – Limit
 Factor = Ant. Factor + Cable Loss – Pre-amplifier

Remark:

- (1) Measuring frequencies from 9 KHz to the 1 GHz, Radiated emission test from 9KHz to 30MHz was verified, and no any emission was found except system noise floor.
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.

Above 1 GHz Test Results:

EUT:	AM/FM DIGITAL CLOCK RADIO	Model Name :	Original
Temperature:	25 °C	Test Date:	2021-10-28
Pressure:	1010 hPa	Relative Humidity:	60%
Test Mode :	TX	Test Voltage :	DC3V from battery
Measurement Distance	3 m	Frenqucy Range	1GHz to 25GHz

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (2412 MHz)-Above 1G							
Vertical	4824.000	49.31	10.44	59.75	74	-14.25	Pk
Vertical	4824.000	28.83	10.44	39.27	54	-14.73	AV
Vertical	7236.000	37.27	12.39	49.66	74	-24.34	pk
Horizontal	4824.000	46.87	10.44	57.31	74	-16.69	pk
Horizontal	4824.000	29.41	10.44	39.85	54	-14.15	AV
Horizontal	7236.000	35.03	12.39	47.42	74	-26.58	pk
Mid Channel (2437 MHz)-Above 1G							
Vertical	4874.000	47.82	10.4	58.22	74	-15.78	pk
Vertical	4874.000	34.21	10.4	44.61	54	-9.39	AV
Vertical	7311.000	37.06	12.75	49.81	74	-24.19	Pk
Horizontal	4874.000	48.33	10.4	58.73	74	-15.27	Pk
Horizontal	4874.000	31.24	10.4	41.64	54	-12.36	AV
Horizontal	7311.000	33.06	12.75	45.81	74	-28.19	Pk
High Channel (2462 MHz)- Above 1G							
Vertical	4924.000	48.08	10.39	58.47	74	-15.53	pk
Vertical	4924.000	32.12	10.39	42.51	54	-11.49	AV
Vertical	7386.000	36.11	12.68	48.79	74	-25.21	pk
Horizontal	4924.000	46.42	10.39	56.81	74	-17.19	pk
Horizontal	4924.000	30.23	10.39	40.62	54	-13.38	AV
Horizontal	7386.000	33.28	12.68	45.96	74	-28.04	pk

Note: "802.11b" mode is the worst mode. When PK value is lower than the Average value limit, average didn't record.

Remark :

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency.
- (3) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for peak measurement with peak detector at frequency above 1GHz. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average measurement with peak detection at frequency above 1GHz.
- (6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

RESTRICTED BANDS REQUIREMENTS


EUT:	AM/FM RADIO	DIGITAL	CLOCK	Model Name :	Original
Temperature:	24 °C			Relative Humidity:	51%
Pressure:	1010 hPa			Test Voltage :	DC3V
Test Date :	2021-10-28				
Test Mode :	802.11b Data rate 1Mbps				
Note:	1. The transmitter was setup to transmit at the lowest channel (CH01). Then the field strength was measured at 2310-2390 MHz. 2. The transmitter was setup to transmit at the highest channel (CH11). Then the field strength was measured at 2483.5-2500 MHz. 3. The data of 2390MHz and 2483.5MHz was the worst.				

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant/CF CF(dB)	Act		Limit		Note
		Peak (dBuv)	AV (dBuv)		Peak (dBuv/m)	AV (dBuv/m)	Peak (dBuv/m)	AV (dBuv/m)	
2390.00	H	46.54	--	-5.79	40.75	--	74.00	54.00	CH01
2390.00	V	46.52	--	-5.79	40.73	--	74.00	54.00	CH01
2483.50	H	45.59	--	-4.98	40.61	--	74.00	54.00	CH11
2483.50	V	46.00	--	-4.98	41.02	--	74.00	54.00	CH11


Remark :

- (1) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode
- (2) EUT Orthogonal Axis:
"X" - denotes Laid on Table; "Y" - denotes Vertical Stand; "Z" - denotes Side Stand
- (3) During the measurements above 1 GHz it is taken care of that the EUT is always within the 3 dB cone of radiation BW of the used antenna
- (4) Corr.Factor = Antenna Factor + Cable Loss – Pre-amplifier.


Horizontal

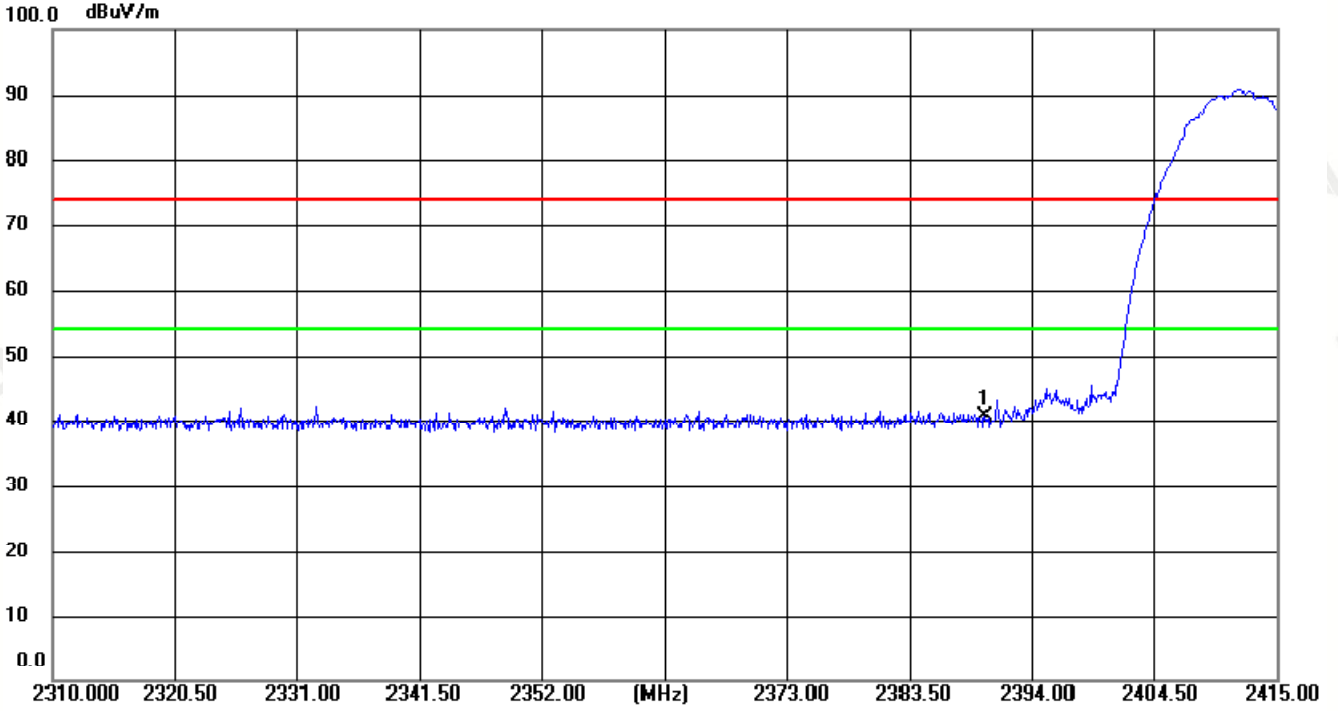


Vertical

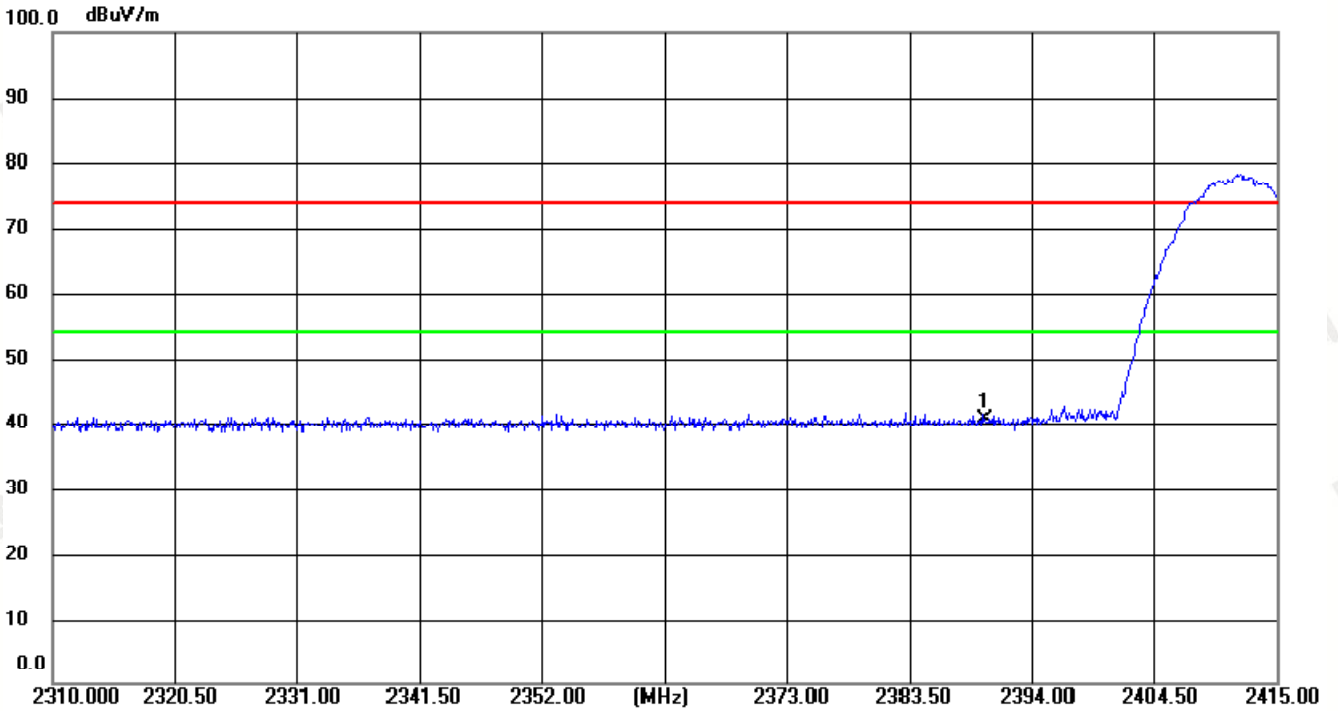

Horizontal

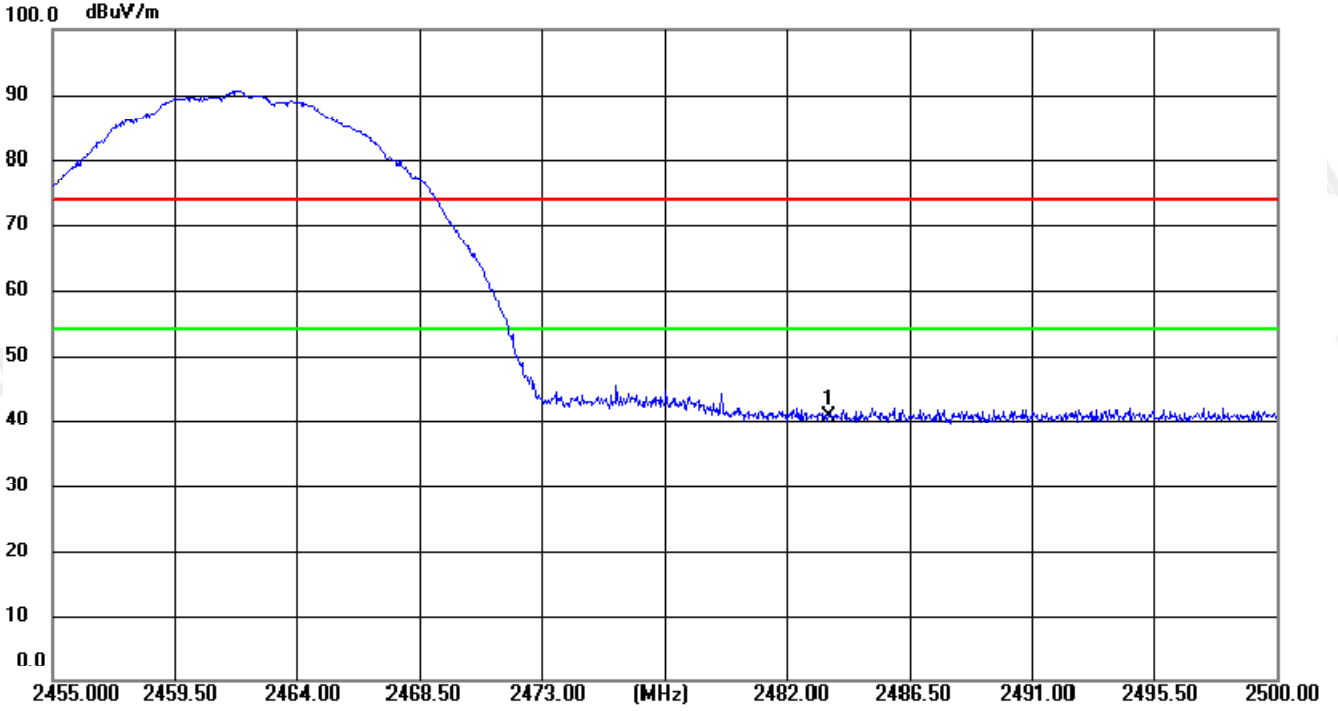

Vertical

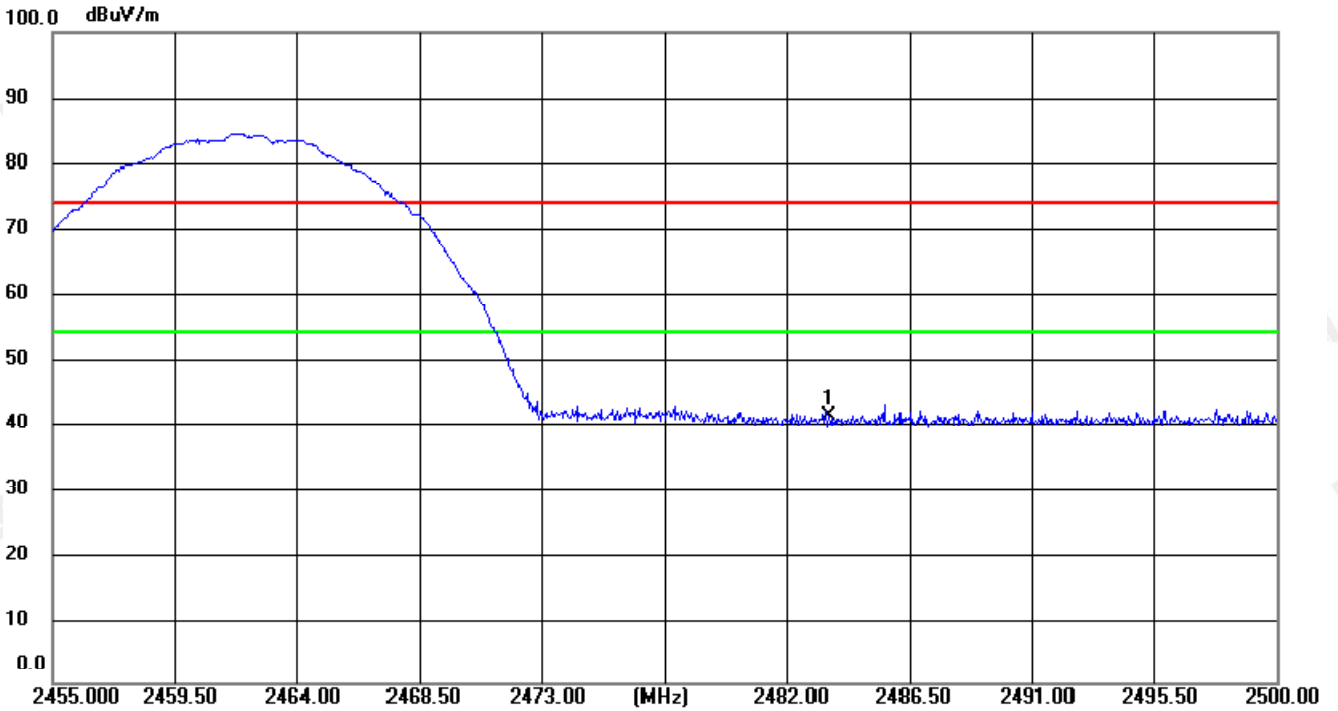


EUT:	AM/FM DIGITAL CLOCK RADIO	Model Name :	Original
Temperature:	24 °C	Relative Humidity:	51%
Pressure:	1010 hPa	Test Voltage :	DC3V
Test Date :	2021-10-28		
Test Mode :	802.11G Data rate 6Mbps		
Note:	1. The transmitter was setup to transmit at the lowest channel (CH01). Then the field strength was measured at 2310-2390 MHz. 2. The transmitter was setup to transmit at the highest channel (CH11). Then the field strength was measured at 2483.5-2500 MHz. 3. The data of 2390MHz and 2483.5MHz was the worst.		

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant/CF CF(dB)	Act		Limit		Note
		Peak (dBuv)	AV (dBuv)		Peak (dBuv/m)	AV (dBuv/m)	Peak (dBuv/m)	AV (dBuv/m)	
2390.00	H	48.85	--	-5.79	43.06	--	74.00	54.00	CH01
2390.00	V	46.19	--	-5.79	40.40	--	74.00	54.00	CH01
2483.50	H	52.38	--	-4.98	47.40	--	74.00	54.00	CH11
2483.50	V	46.68	--	-4.98	41.70	--	74.00	54.00	CH11


Remark :

- (1) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode
- (2) EUT Orthogonal Axis:
"X" - denotes Laid on Table; "Y" - denotes Vertical Stand; "Z" - denotes Side Stand
- (3) During the measurements above 1 GHz it is taken care of that the EUT is always within the 3 dB cone of radiation BW of the used antenna
- (4) Corr.Factor = Antenna Factor + Cable Loss – Pre-amplifier.


Horizontal

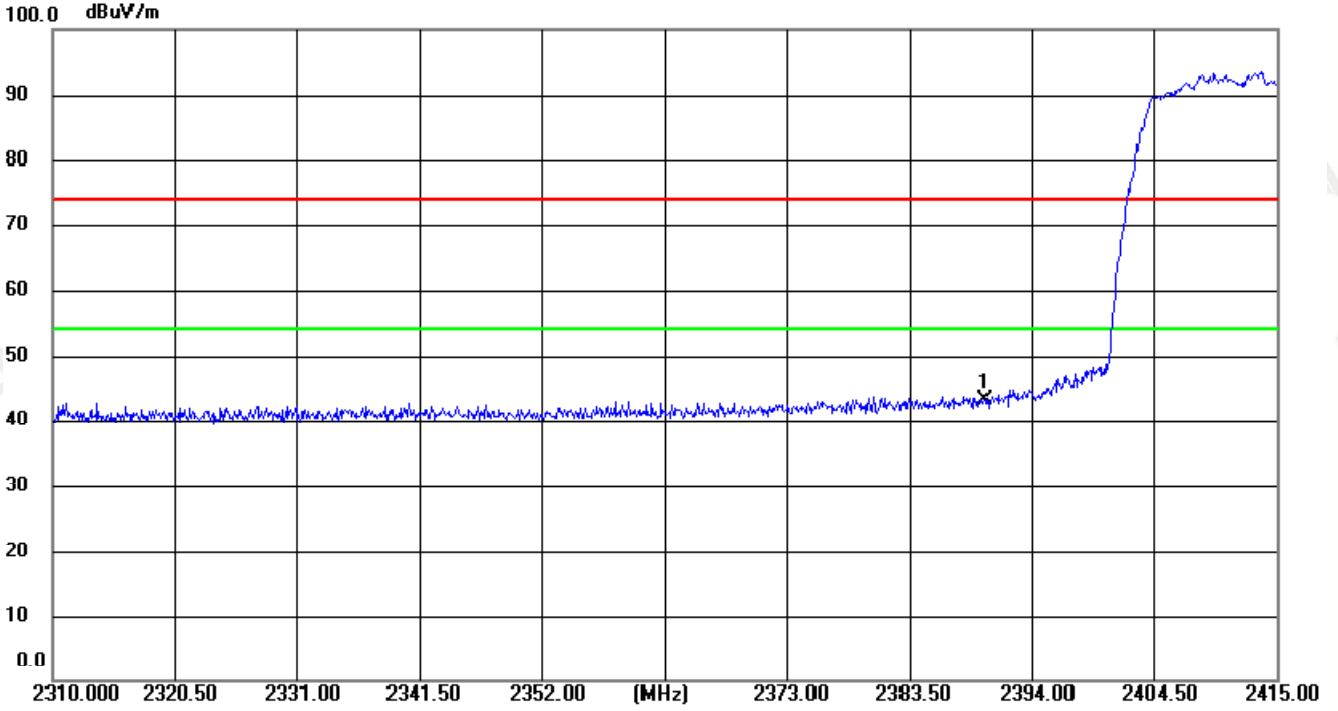


Vertical

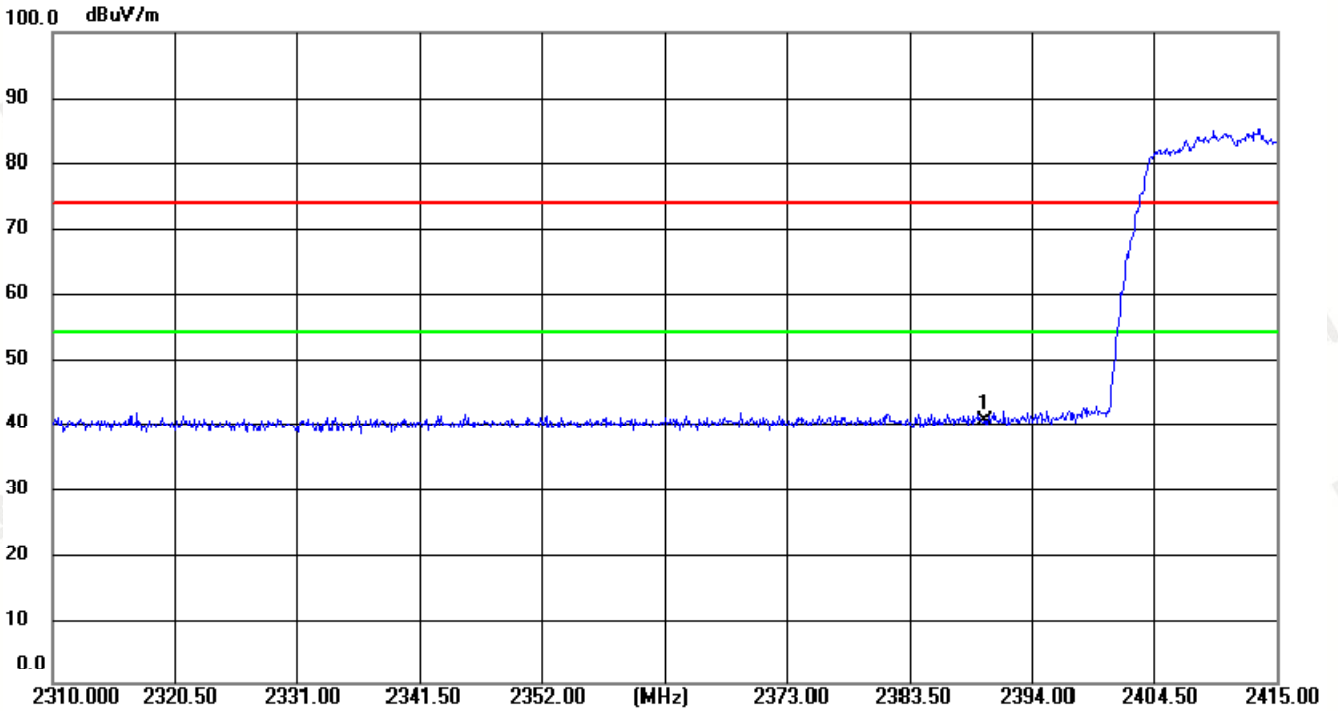

Horizontal

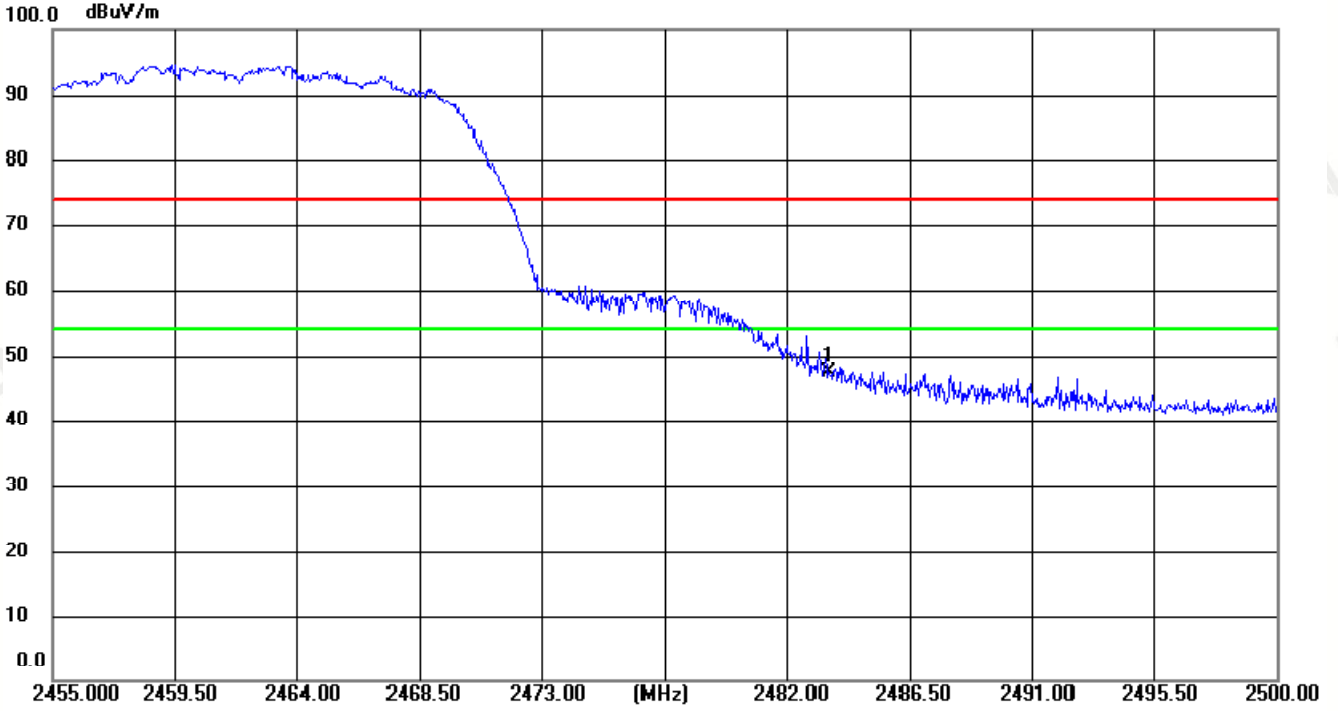

Vertical

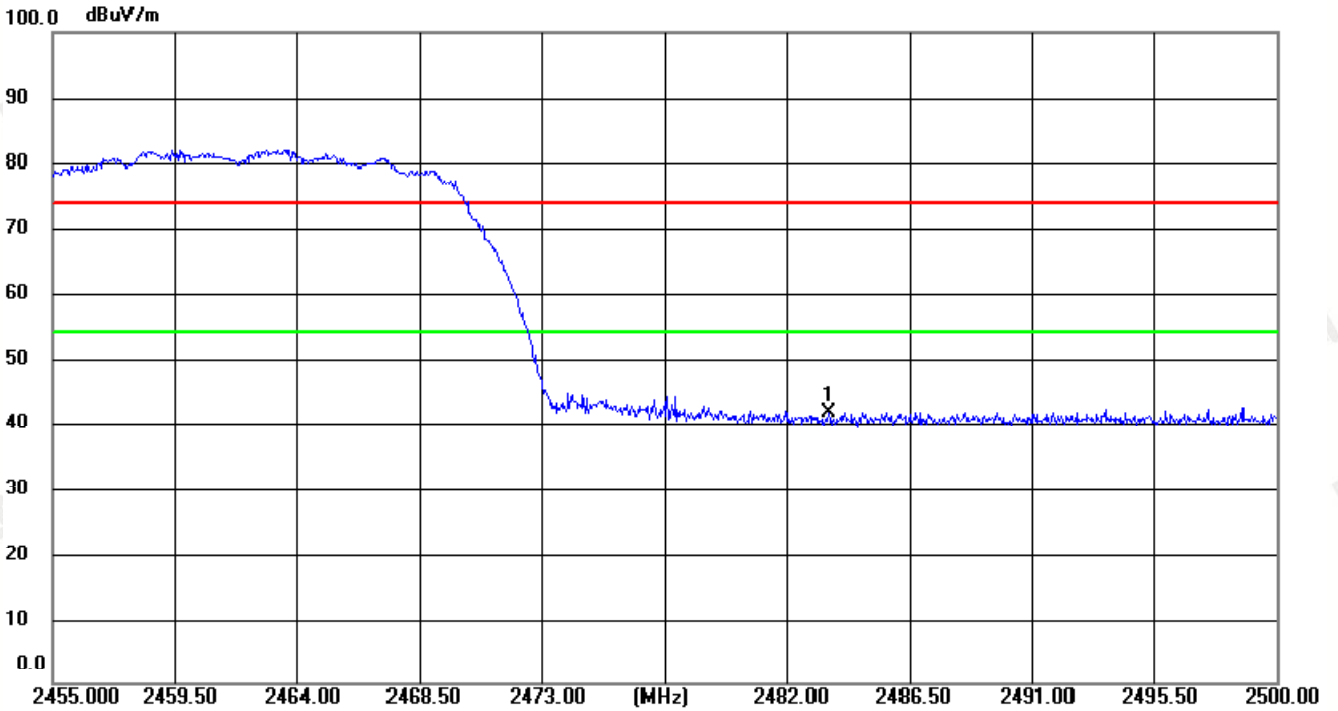


EUT:	AM/FM DIGITAL CLOCK RADIO	Model Name :	Original
Temperature:	24 °C	Relative Humidity:	51%
Pressure:	1010 hPa	Test Voltage :	DC3V
Test Date :	2021-10-28		
Test Mode :	802.11n20 Data rate 6.5Mbps		
Note:	1. The transmitter was setup to transmit at the lowest channel (CH01). Then the field strength was measured at 2310-2390 MHz. 2. The transmitter was setup to transmit at the highest channel (CH11). Then the field strength was measured at 2483.5-2500 MHz. 3. The data of 2390MHz and 2483.5MHz was the worst.		

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant/CF CF(dB)	Act		Limit		Note
		Peak (dBuv)	AV (dBuv)		Peak (dBuv/m)	AV (dBuv/m)	Peak (dBuv/m)	AV (dBuv/m)	
2390.00	H	50.55	--	-5.79	44.76	--	74.00	54.00	CH01
2390.00	V	45.62	--	-5.79	39.83	--	74.00	54.00	CH01
2483.50	H	46.89	--	-4.98	41.91	--	74.00	54.00	CH11
2483.50	V	45.44	--	-4.98	40.46	--	74.00	54.00	CH11


Remark :

- (1) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode
- (2) EUT Orthogonal Axis:
"X" - denotes Laid on Table; "Y" - denotes Vertical Stand; "Z" - denotes Side Stand
- (3) During the measurements above 1 GHz it is taken care of that the EUT is always within the 3 dB cone of radiation BW of the used antenna
- (4) Corr.Factor = Antenna Factor + Cable Loss – Pre-amplifier.


Horizontal

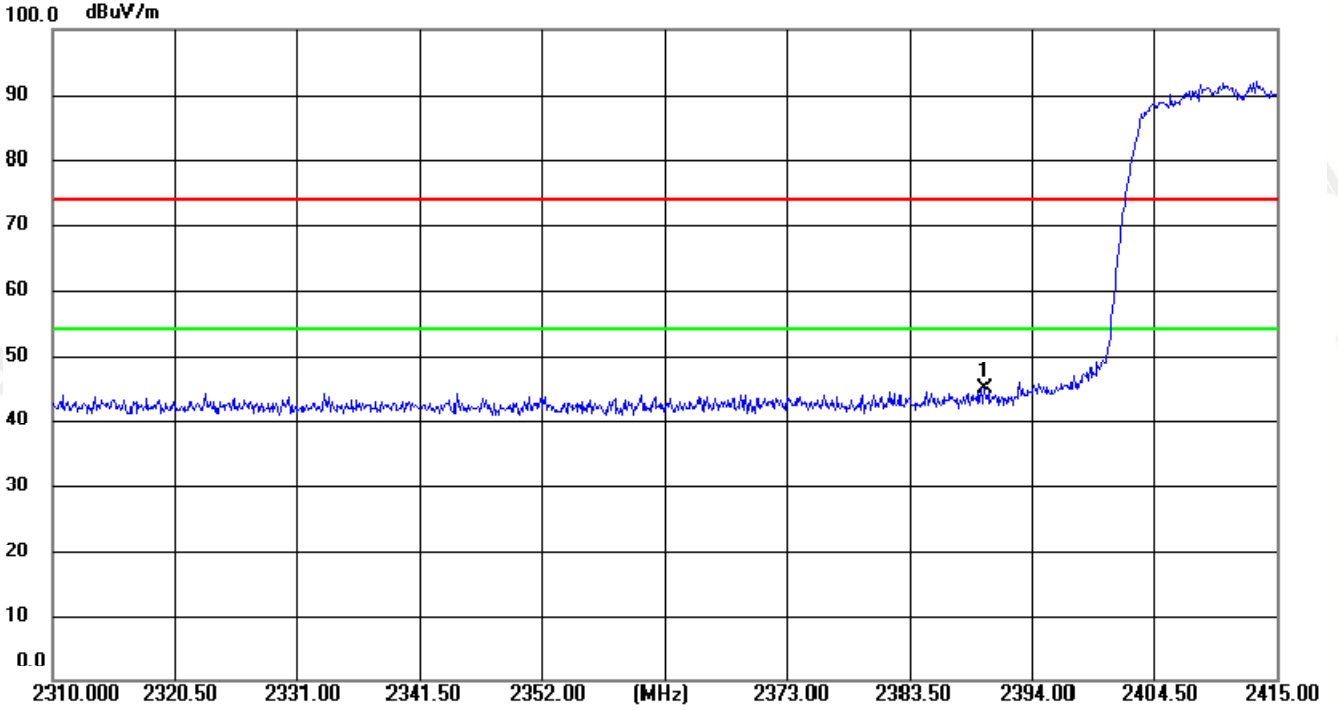


Vertical

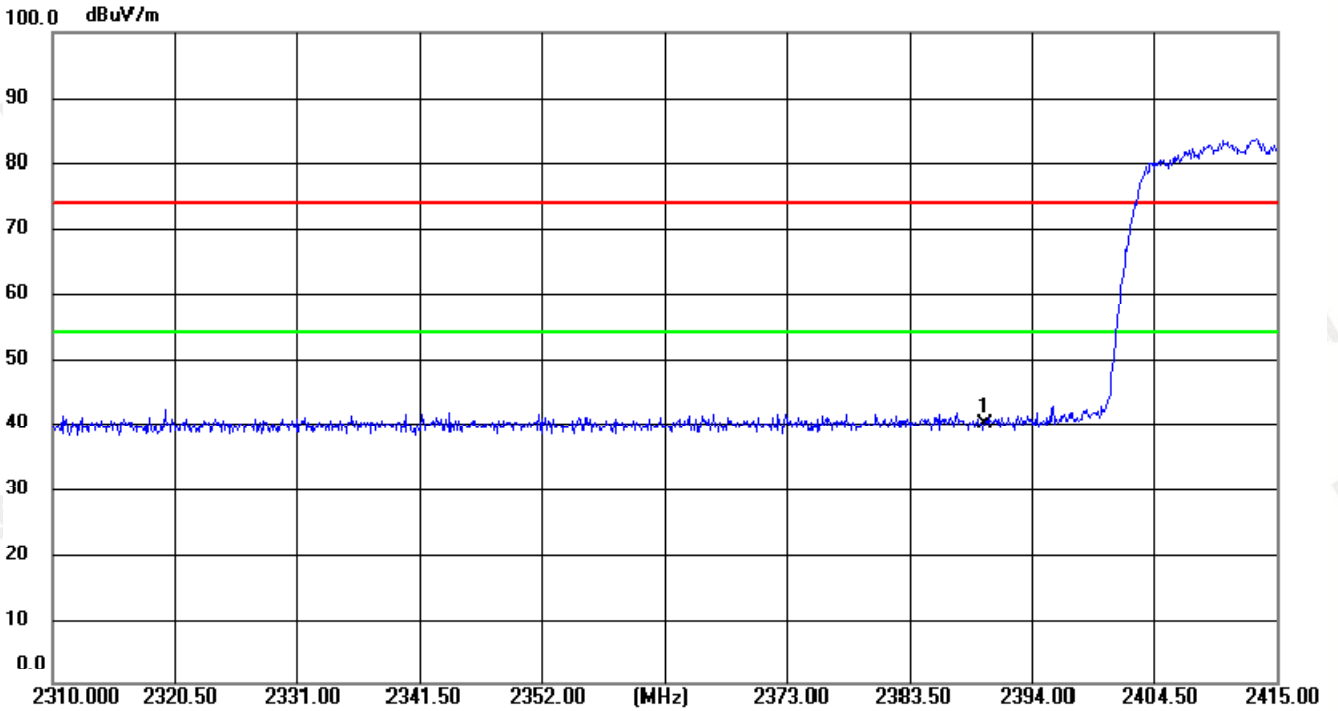

Horizontal

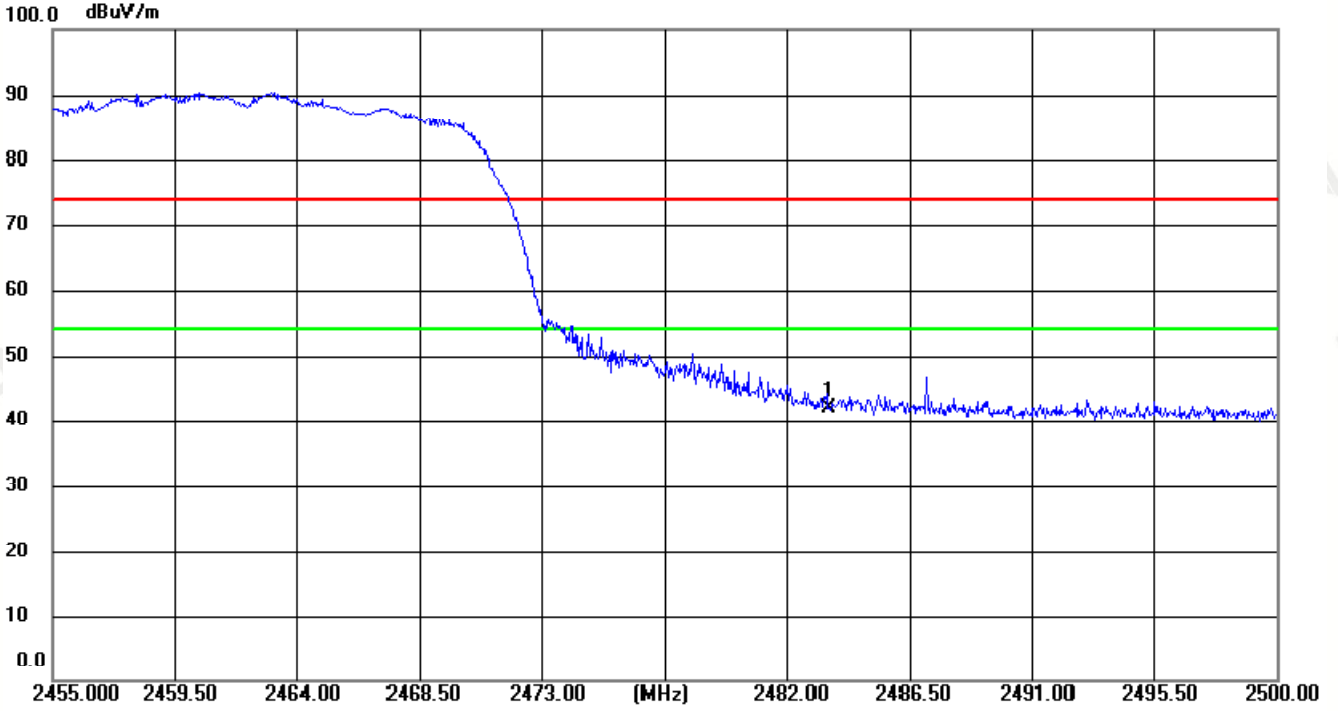

Vertical

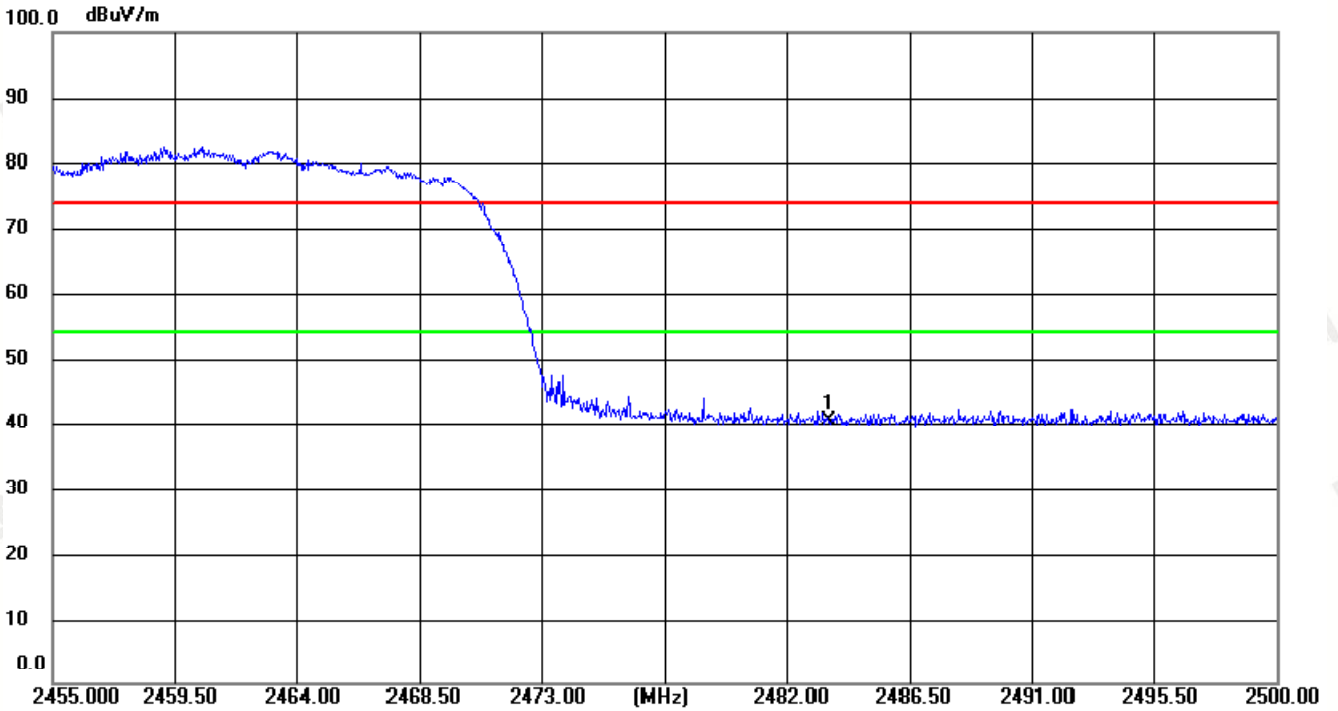

5 OCCUPIED BANDWIDTH MEASUREMENT

5.1 Test Limit

FCC Part15(15.247), Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS

5.2 Test Procedure

1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
2. Spectrum Setting: RBW= 100KHz, VBW=300KHz, Sweep time = Auto, Span=6MHz.

5.3 TEST SETUP




5.4 Test Result

PASS


EUT :	AM/FM DIGITAL CLOCK RADIO	Model Name :	Original
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1010 hPa	Test Voltage :	DC3V
Test Mode :	CH01 / CH06 /CH11(802.11b Data rate 1Mbps)		
Test Date :	2021-10-23		

Frequency	6dB Bandwidth (MHz)	Limit (kHz)	Result
2412 MHz	8.321	≥ 500	Pass
2437 MHz	8.322	≥ 500	Pass
2462 MHz	8.399	≥ 500	Pass


CH01

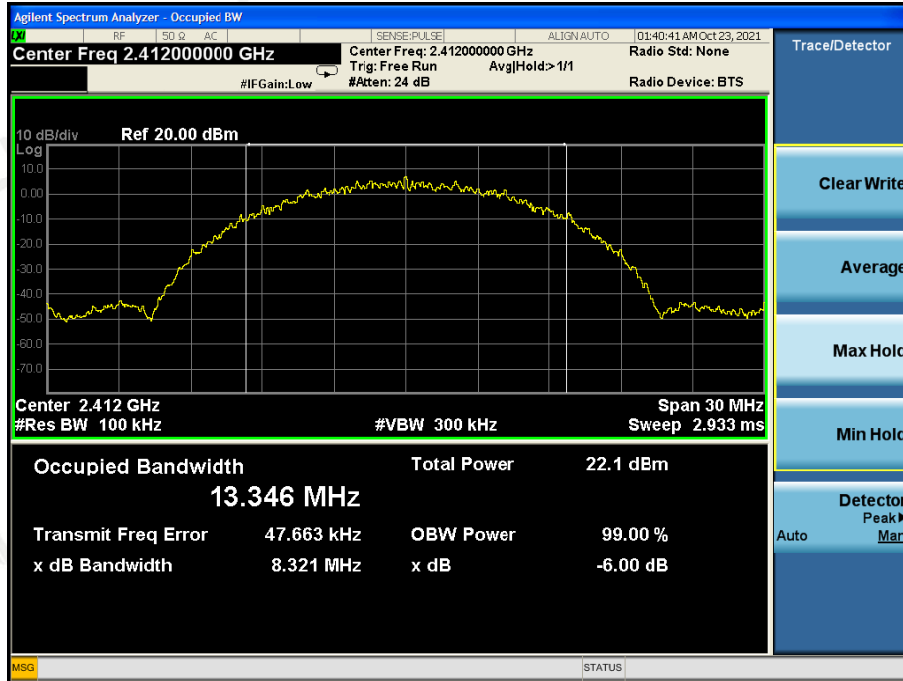

CH06

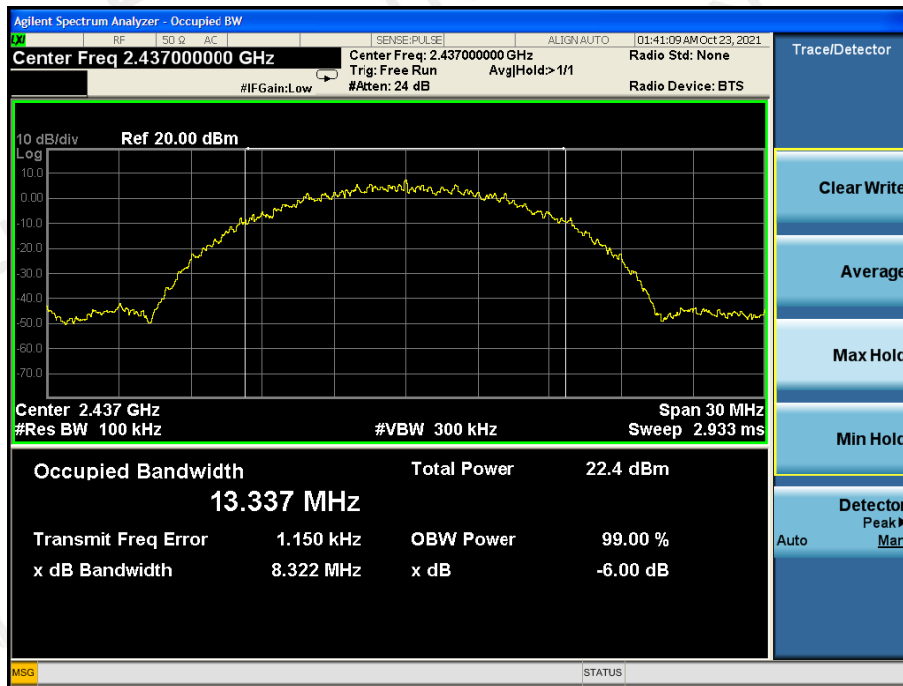


CH11

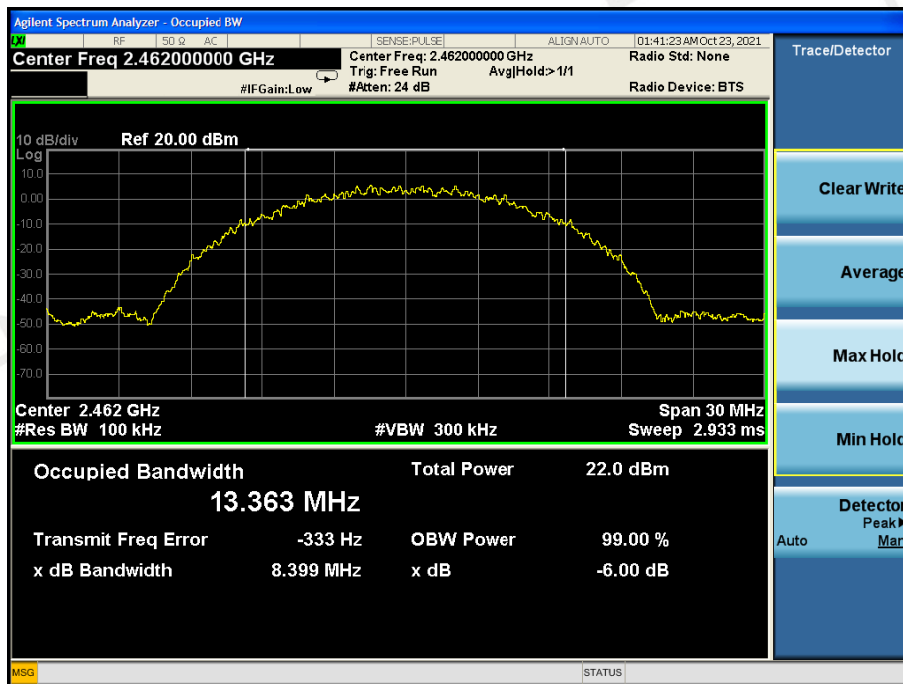


EUT :	AM/FM DIGITAL CLOCK RADIO	Model Name :	Original
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1010 hPa	Test Voltage :	DC3V
Test Mode :	CH01 / CH06 / CH11(802.11g Data rate 6Mbps)		
Test Date :	2021-10-23		

Frequency	6dB Bandwidth (MHz)	Limit (kHz)	Result
2412 MHz	15.73	≧ 500	Pass
2437 MHz	15.73	≧ 500	Pass
2462 MHz	16.31	≧ 500	Pass


CH01

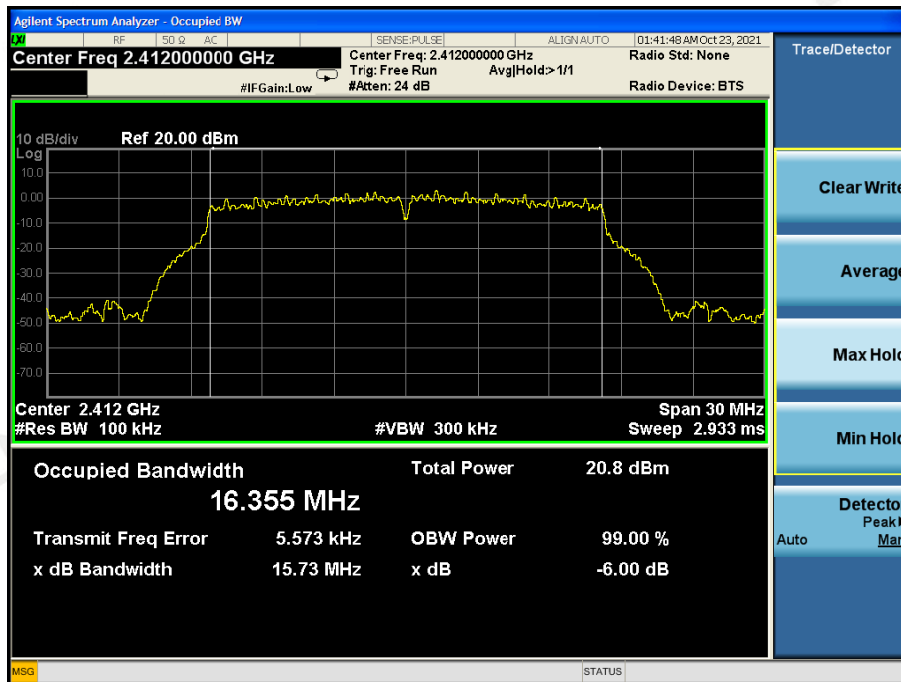

CH06

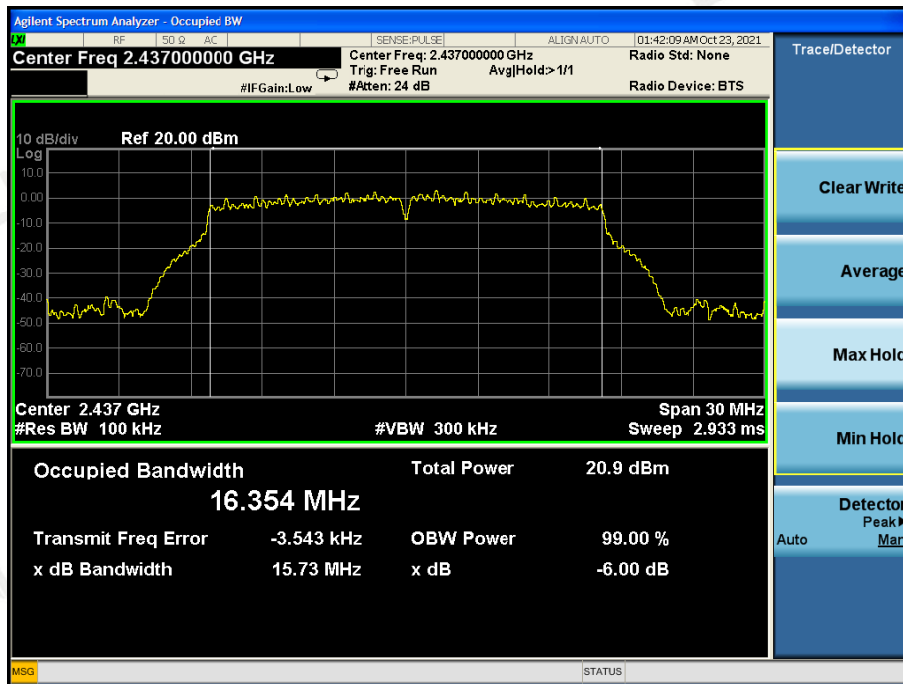


CH11

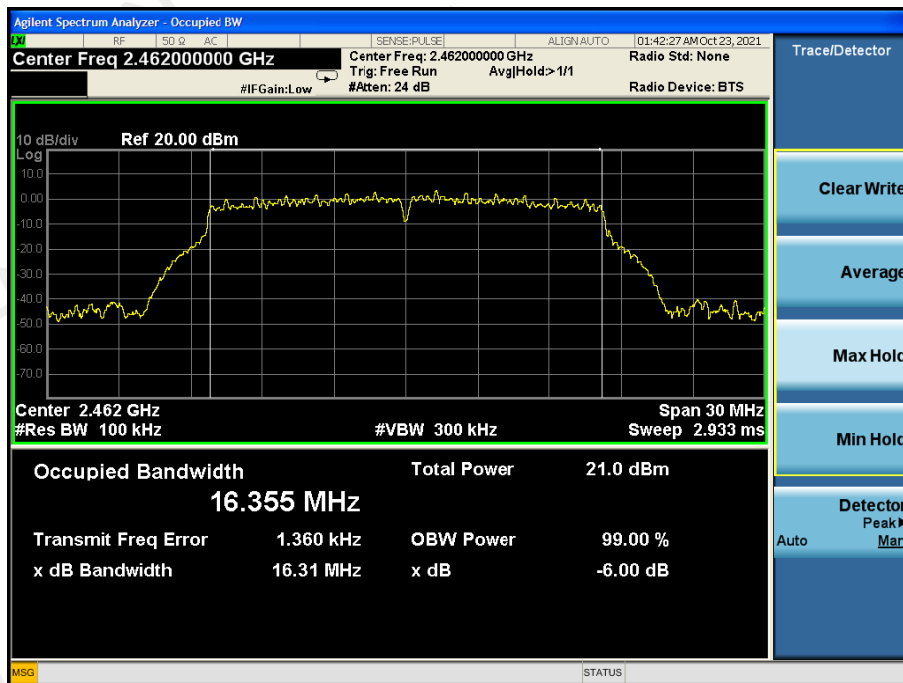


EUT :	AM/FM DIGITAL CLOCK RADIO	Model Name :	Original
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1010 hPa	Test Voltage :	DC3V
Test Mode :	CH01 / CH06/ CH11(802.11n20 Data rate 6.5Mbps)		
Test Date :	2021-10-23		

Frequency	6dB Bandwidth (MHz)	Limit (kHz)	Result
2412 MHz	16.23	≧ 500	Pass
2437 MHz	16.06	≧ 500	Pass
2462 MHz	16.06	≧ 500	Pass


CH01

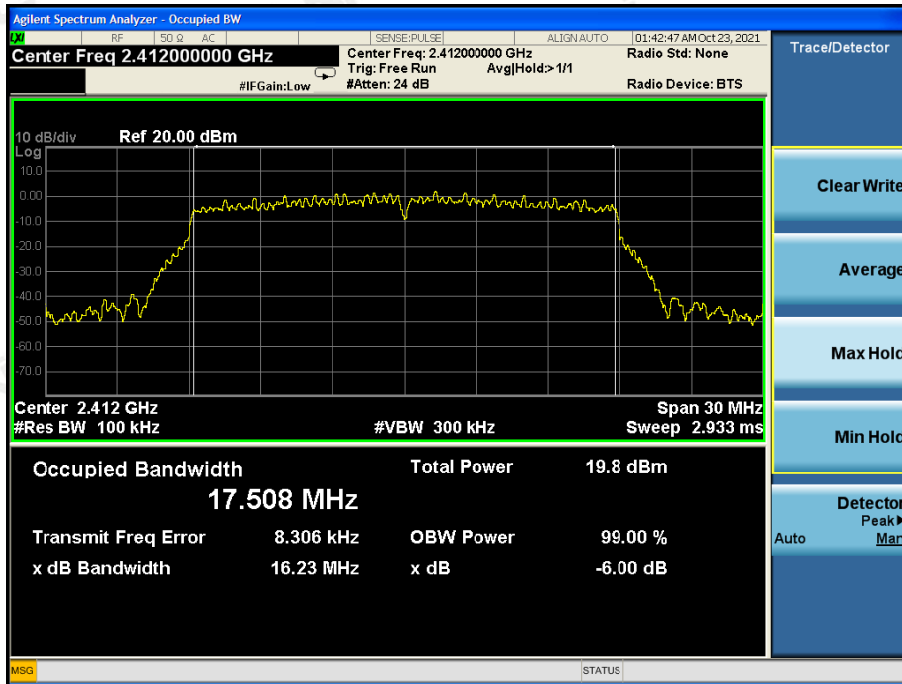

CH06

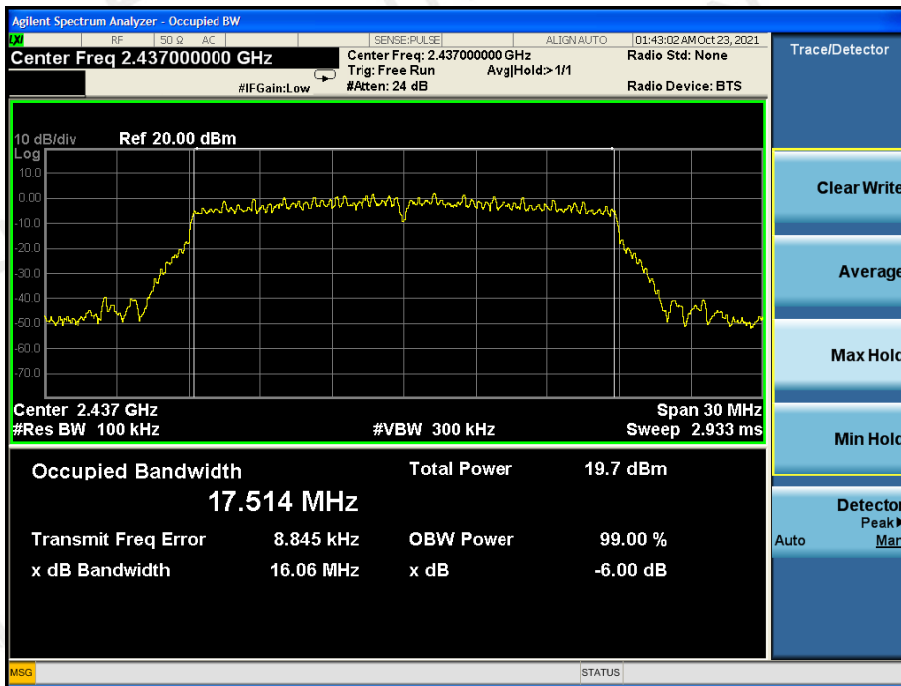

CH11

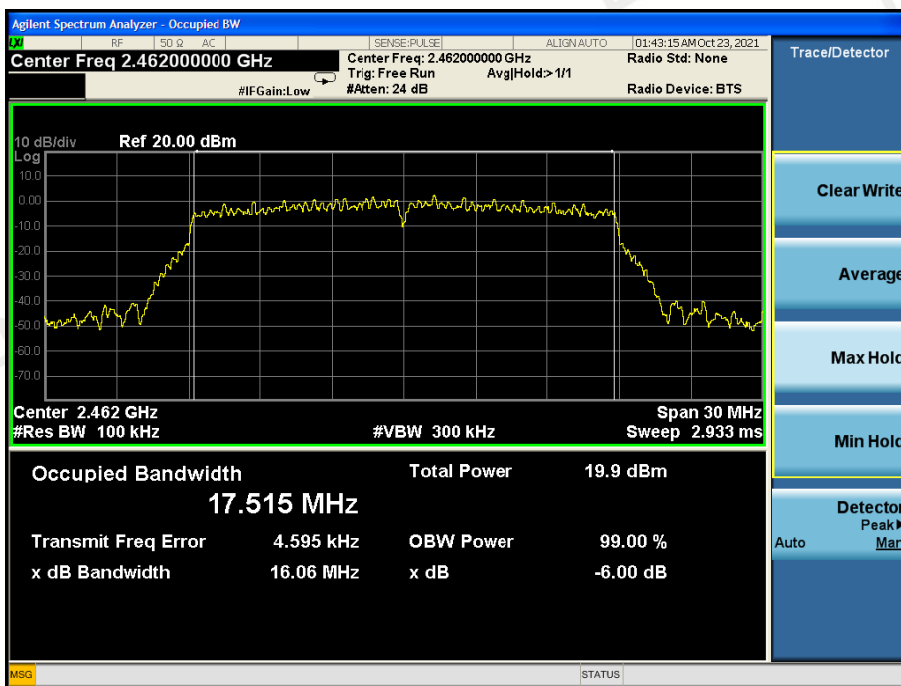

6 POWER SPECTRAL DENSITY

6.1 TEST LIMIT

FCC Part15(15.247), Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3kHz)	2400-2483.5	PASS

6.2 TEST PROCEDURE

1. The EUT was directly connected to the spectrum analyzer.
2. Set EUT as normal operation.
3. Based on FCC Part15 C Section 15.247: RBW=3kHz, VBW=10kHz.
4. Set detected by the spectrum analyzer with peak detector.

6.3 TEST SETUP




6.4 TEST RESULT


EUT :	AM/FM DIGITAL CLOCK RADIO	Model Name :	Original
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1010 hPa	Test Voltage :	DC3V
Test Mode :	CH01 /CH06 /CH11 (802.11b Data rate 1Mbps)		
Test Date :	2021-10-23		

Test Channel	Frequency (MHz)	Power Density (dBm)	LIMIT (dBm)
CH01	2412 MHz	-8.965	8
CH06	2437 MHz	-8.734	8
CH11	2462 MHz	-8.645	8


CH01

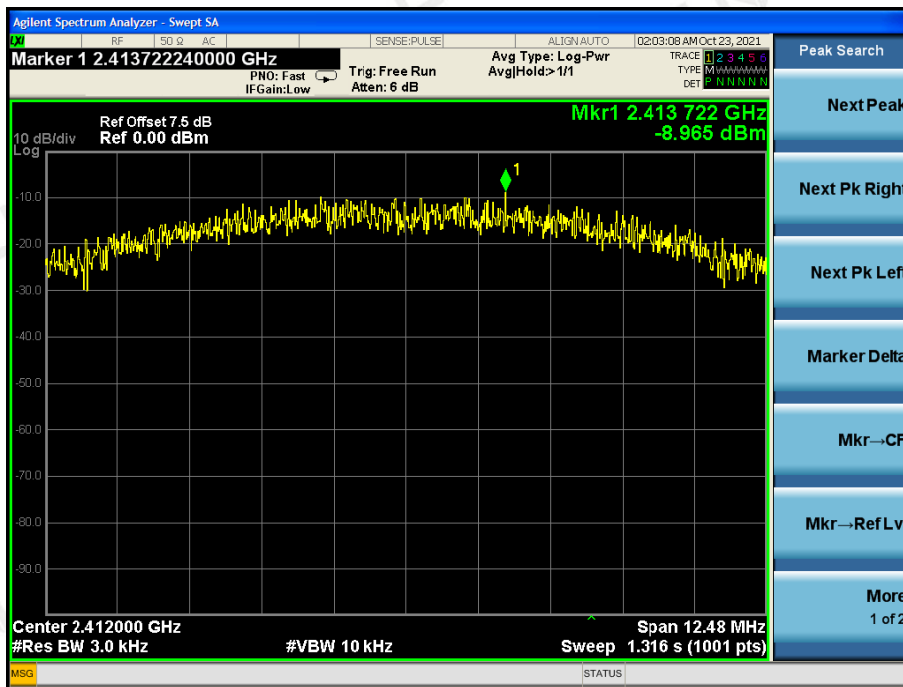

CH06

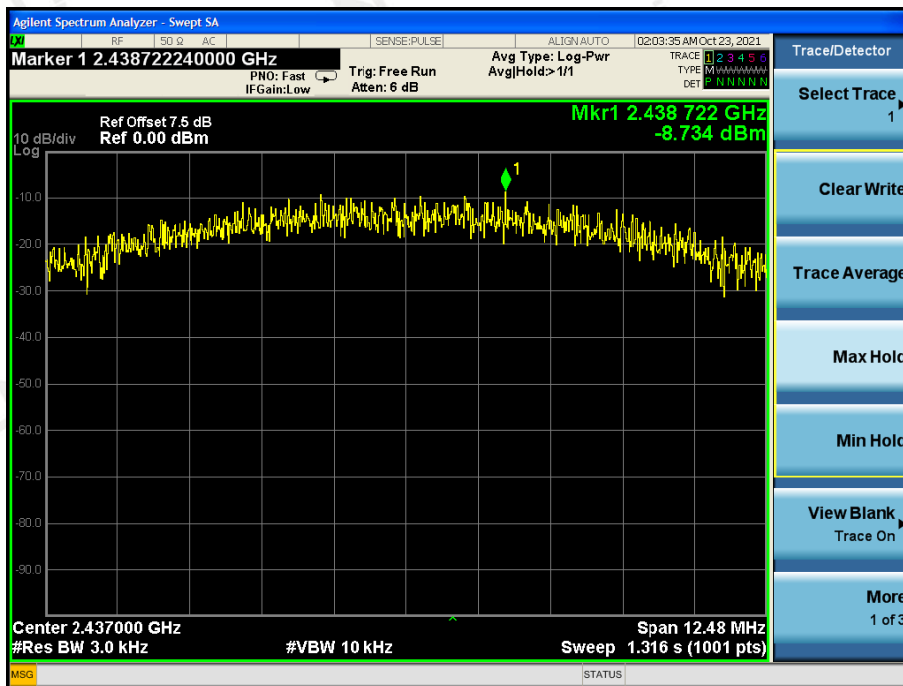


CH11

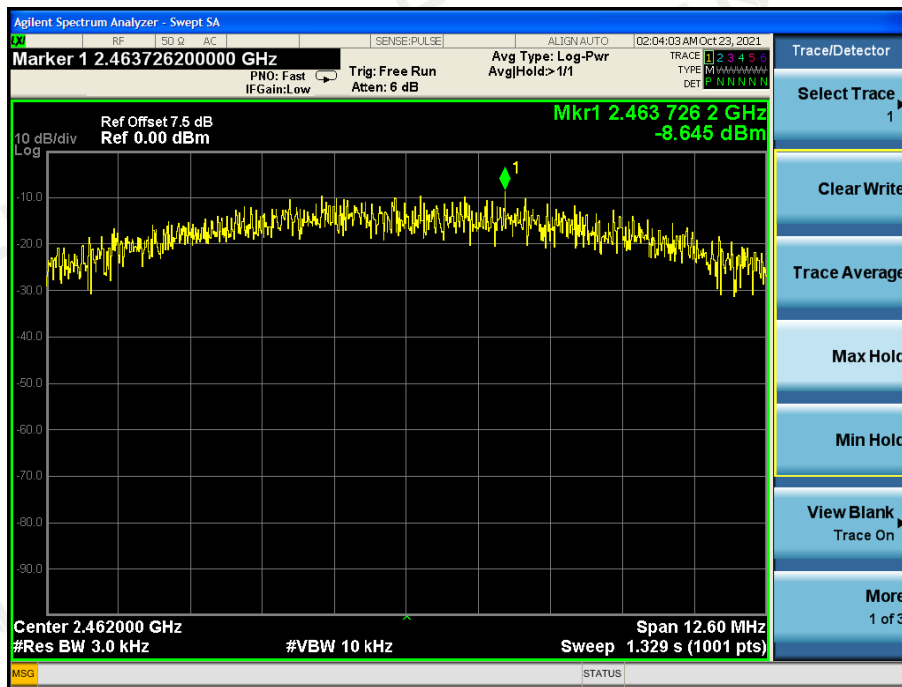


EUT :	AM/FM DIGITAL CLOCK RADIO	Model Name :	Original
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1010 hPa	Test Voltage :	DC3V
Test Mode :	CH01 / CH06/CH11 (802.11g Data rate 6Mbps)		
Test Date :	2021-10-23		

Test Channel	Frequency (MHz)	Power Density (dBm)ANT 1	LIMIT (dBm)
CH01	2412 MHz	-13.673	8
CH06	2437 MHz	-13.587	8
CH11	2462 MHz	-13.428	8


CH01

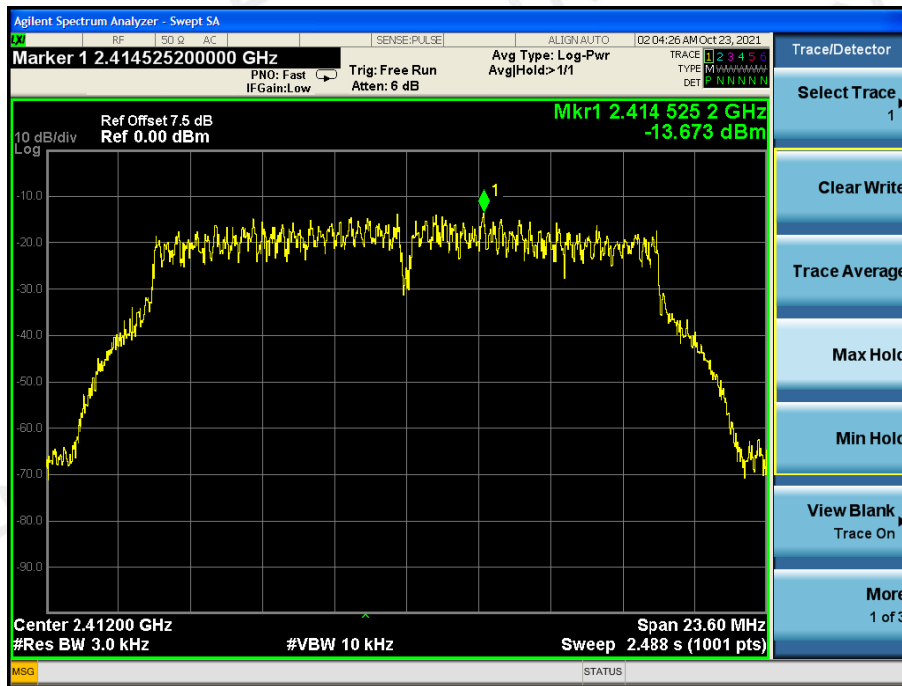

CH06

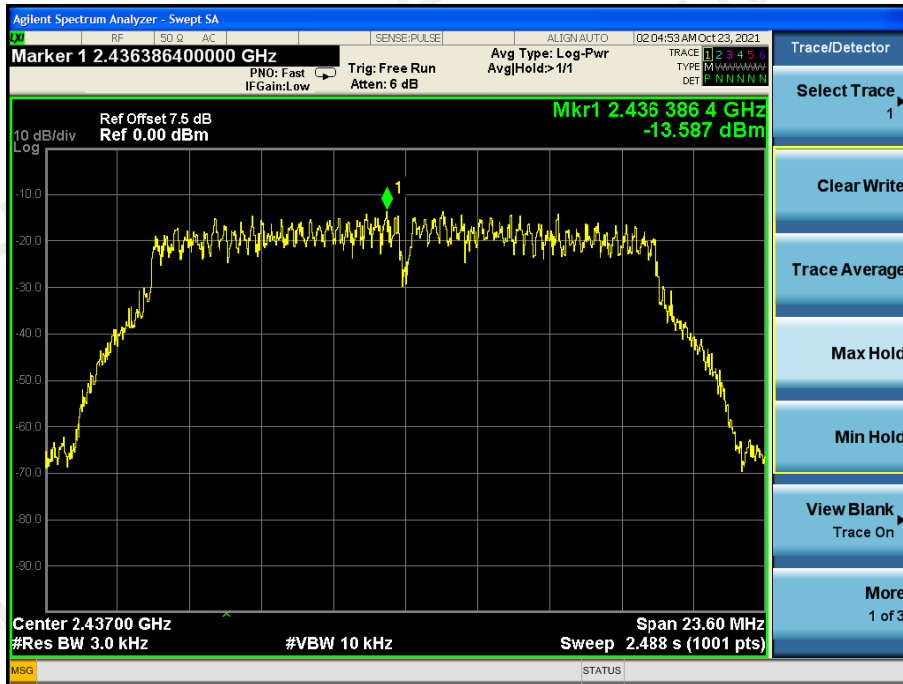


CH11

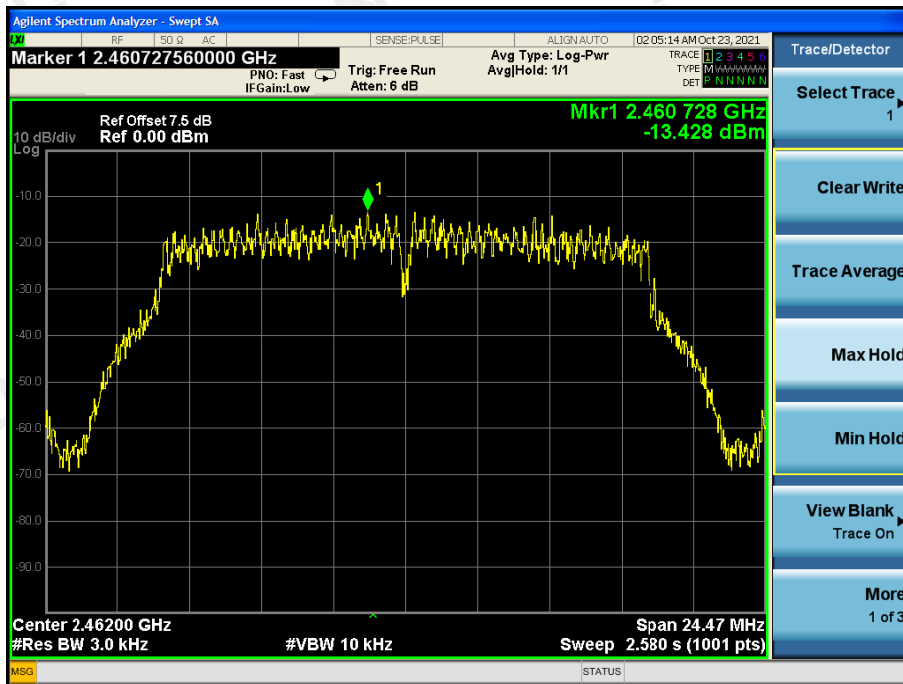


EUT :	AM/FM DIGITAL CLOCK RADIO	Model Name :	Original
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1010 hPa	Test Voltage :	DC3V
Test Mode :	CH01 / CH06/ CH11 (802.11n20 Data rate 6.5Mbps)		
Test Date :	2021-10-23		

Test Channel	Frequency (MHz)	Power Density (dBm)	LIMIT (dBm)
CH01	2412 MHz	-14.432	5.99
CH06	2437 MHz	-14.402	5.99
CH11	2462 MHz	-14.246	5.99


CH01

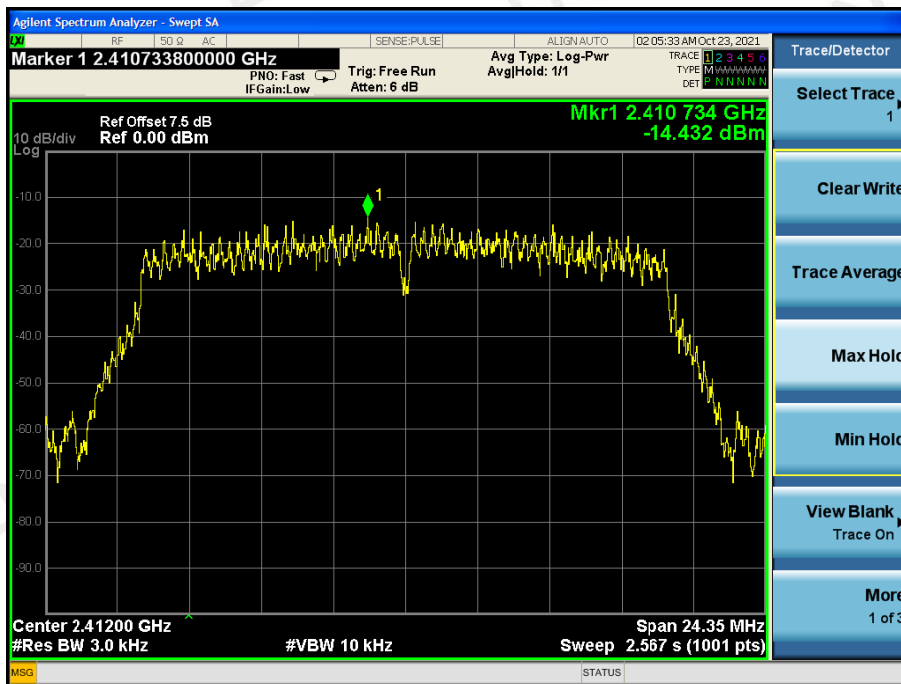

CH06

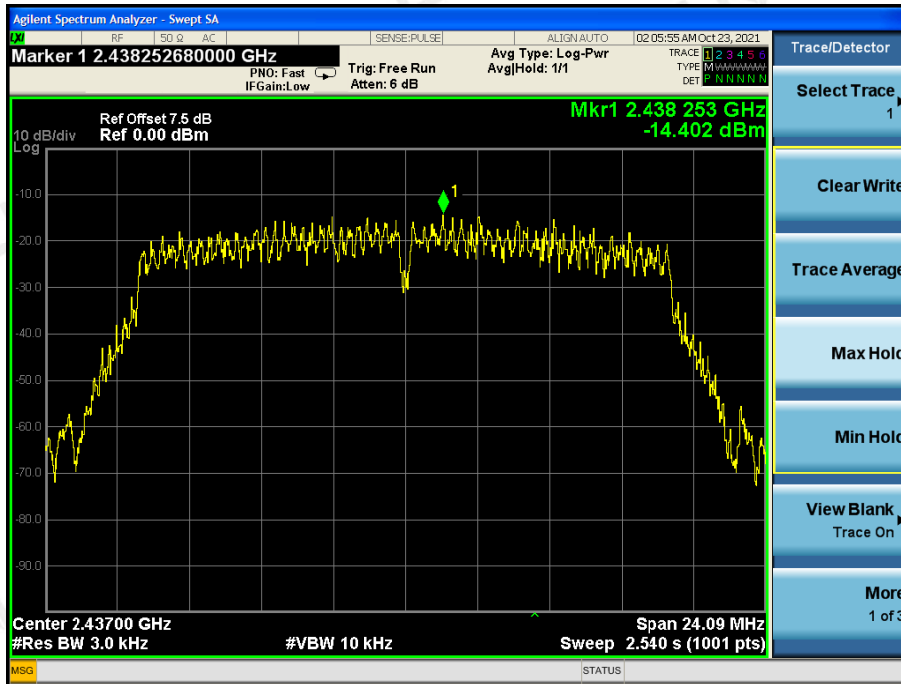

CH11

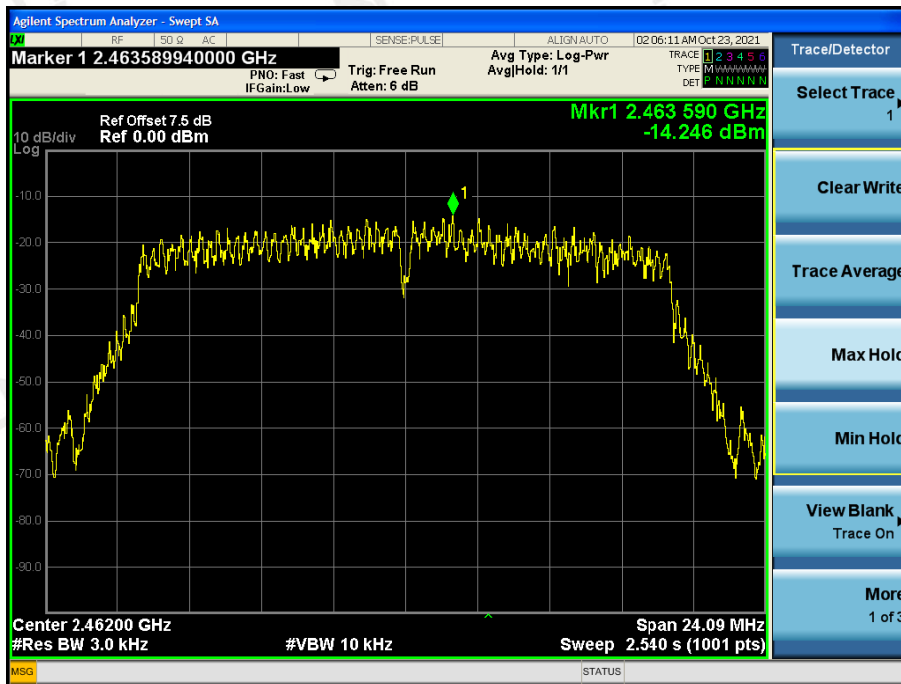

7 PEAK OUTPUT POWER

7.1 TEST LIMIT

FCC Part15(15.247), Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS

7.2 TEST PROCEDURE

1. The EUT was directly connected to the Power meter.

7.3 TEST SETUP



7.4 TEST RESULT

PASS

EUT :	AM/FM DIGITAL CLOCK RADIO	Model Name :	Original
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1010 hPa	Test Voltage :	DC3V
Test Mode :	CH01/ CH06 /CH11 (802.11b Data rate 1Mbps)		
Test Date :	2021-10-23		


Test Channel	Frequency (MHz)	Output Power (dBm)	LIMIT (dBm)	LIMIT (W)
802.11b				
CH01	2412 MHz	9.45	30	1
CH06	2437MHz	9.24	30	1
CH11	2462 MHz	9.36	30	1
802.11g				
CH01	2412 MHz	9.23	30	1
CH06	2437MHz	9.34	30	1
CH11	2462 MHz	9.52	30	1
802.11n20				
CH01	2412 MHz	8.76	30	1
CH06	2437MHz	8.65	30	1
CH11	2462 MHz	8.36	30	1

8 OUT OF BAND EMISSIONS

8.1 TEST LIMIT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

8.2 TEST SETUP

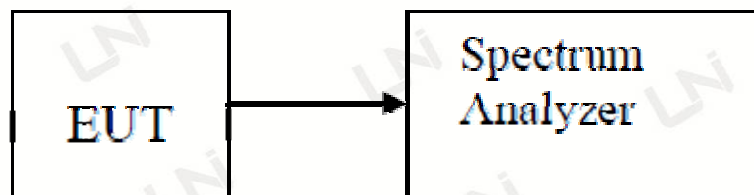

8.3 TEST PROCEDURE


1. Set EUT as TX operation and connect directly to the spectrum analyzer.
2. Based on FCC Part15 C Section 15.247: RBW=100kHz, VBW=300kHz.
3. Set detected by the spectrum analyzer with peak detector.

8.4 TEST RESULT


PASS

EUT :	AM/FM DIGITAL CLOCK RADIO	Model Name :	Original
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1010 hPa	Test Voltage :	DC3V
Test Mode :	CH01/ CH11 (802.11b Data rate 1Mbps)		
Test Date :	2021-10-23		


CH01 (Lower)

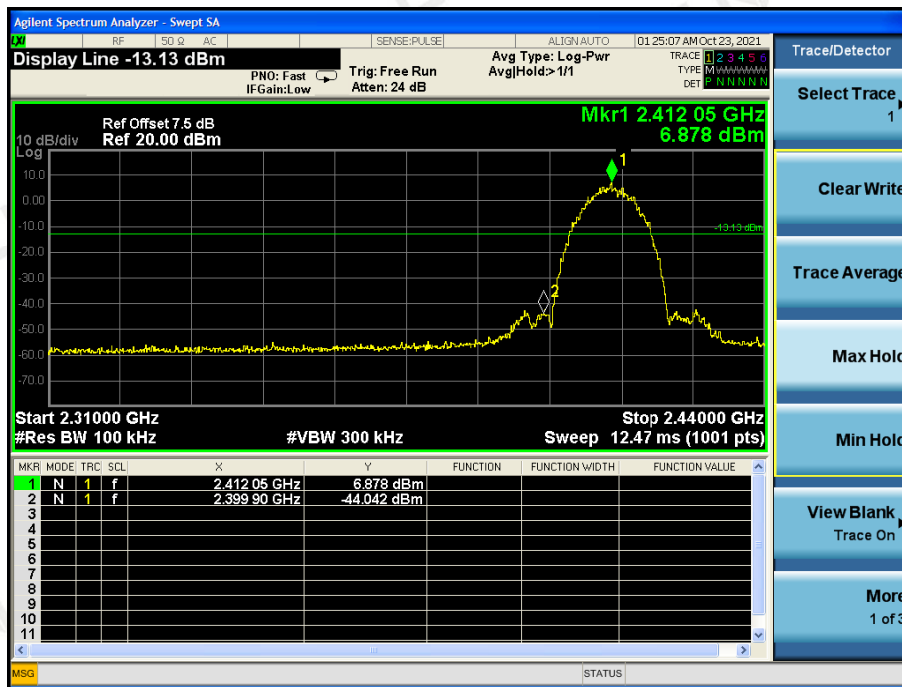


CH 11(Upper)

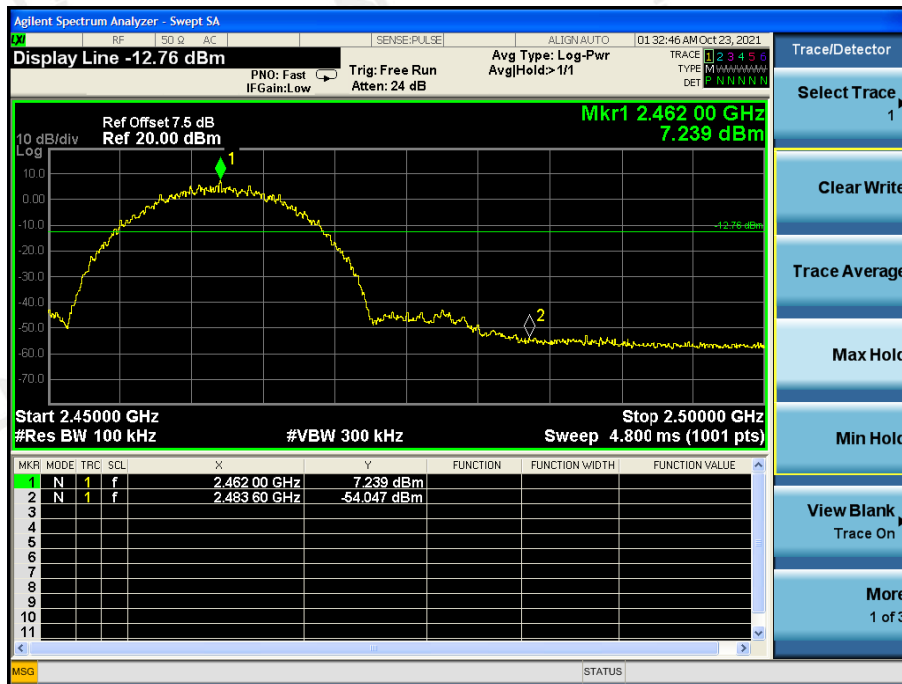


CH01

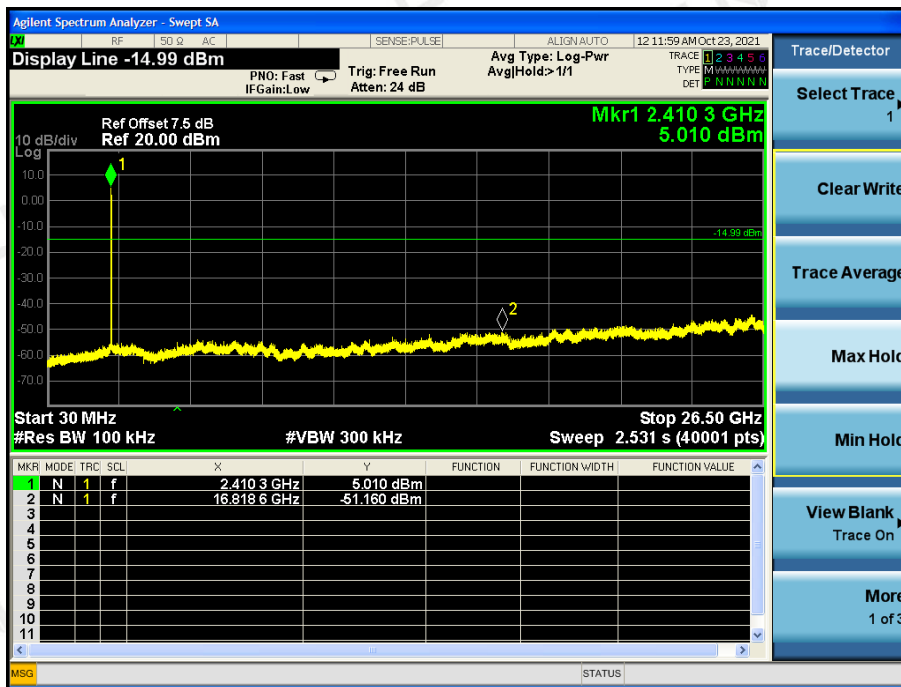

CH06

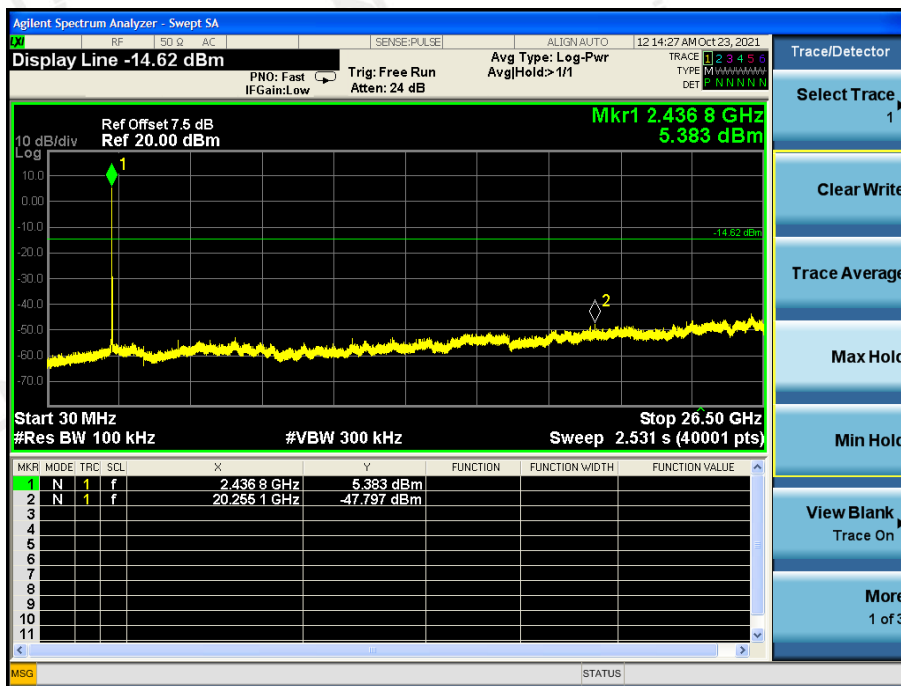


CH11

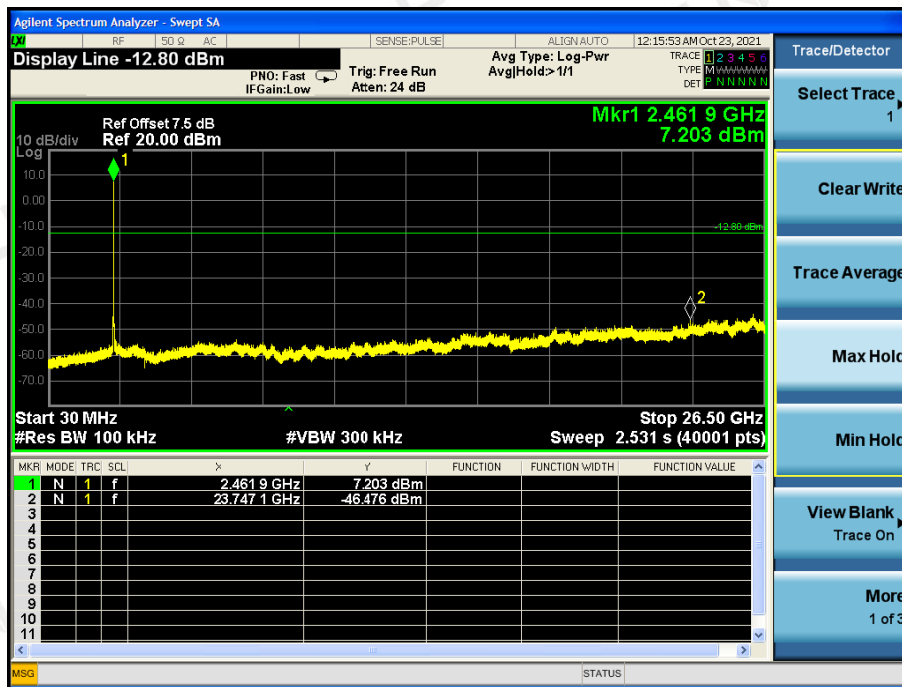


EUT :	AM/FM DIGITAL CLOCK RADIO	Model Name :	Original
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1010 hPa	Test Voltage :	DC3V
Test Mode :	CH01/ CH11 (802.11g Data rate 6Mbps)		
Test Date :	2021-10-23		

in any 100kHz bandwidth outside the low frequency band	in any 100 kHz bandwidth outside the high frequency band
Pass	Pass
Result	
In any 100kHz bandwidth outside the frequency band, the radio frequency power is at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.	


CH01 (Lower)

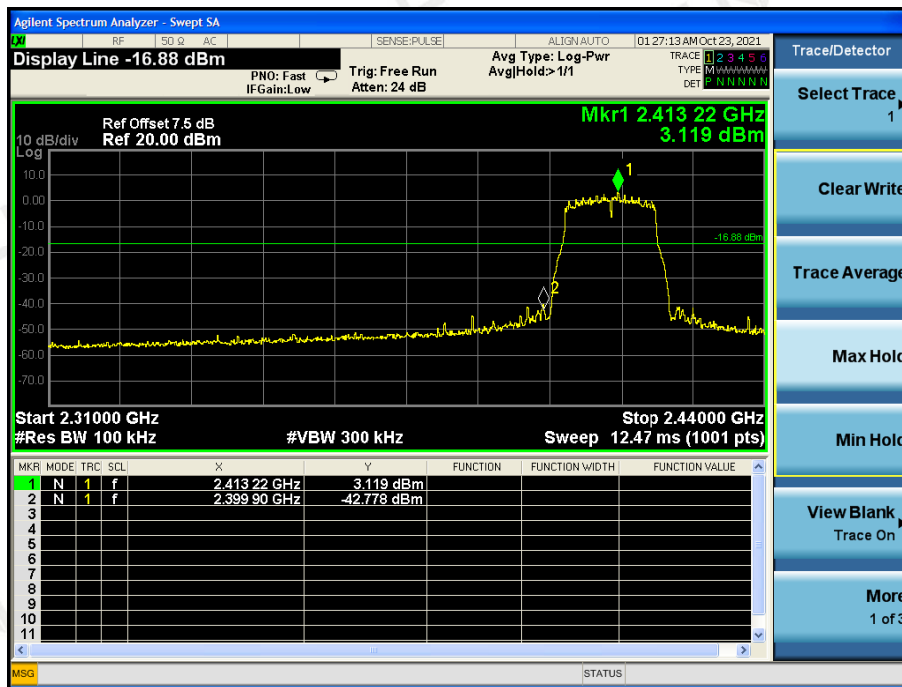


CH 11(Upper)

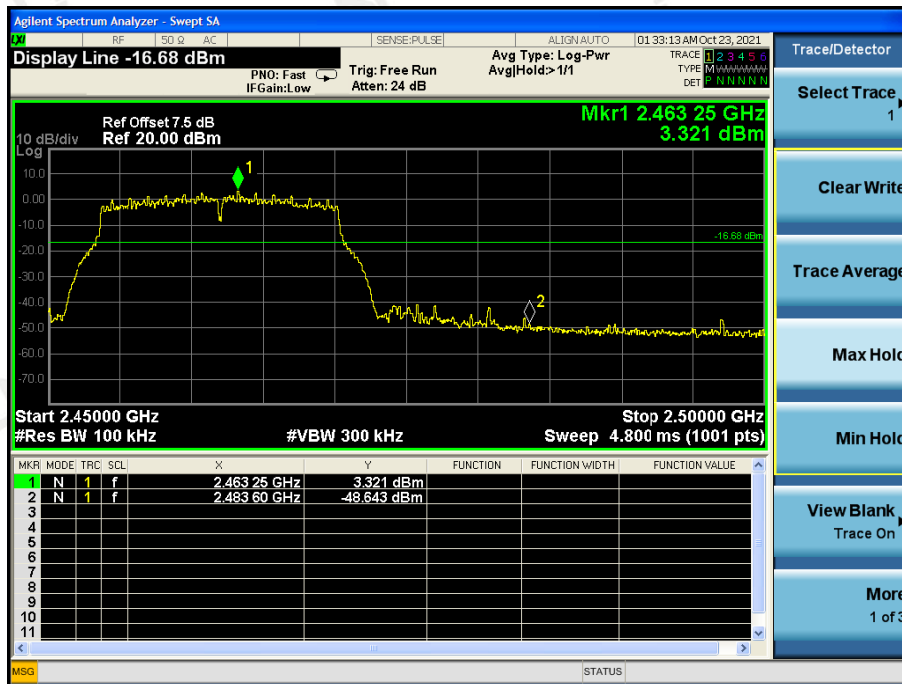


CH01

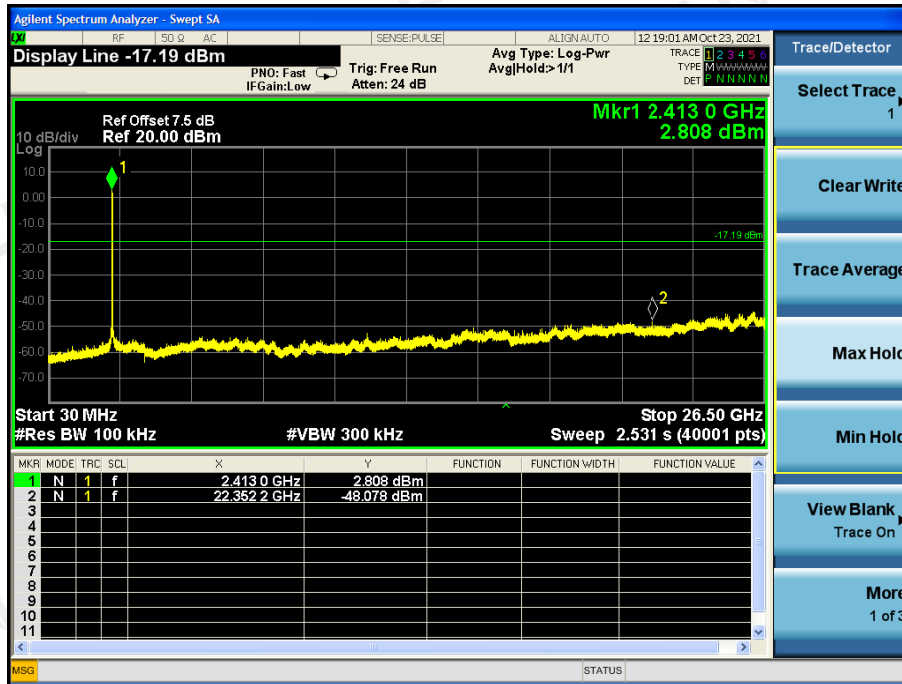

CH06

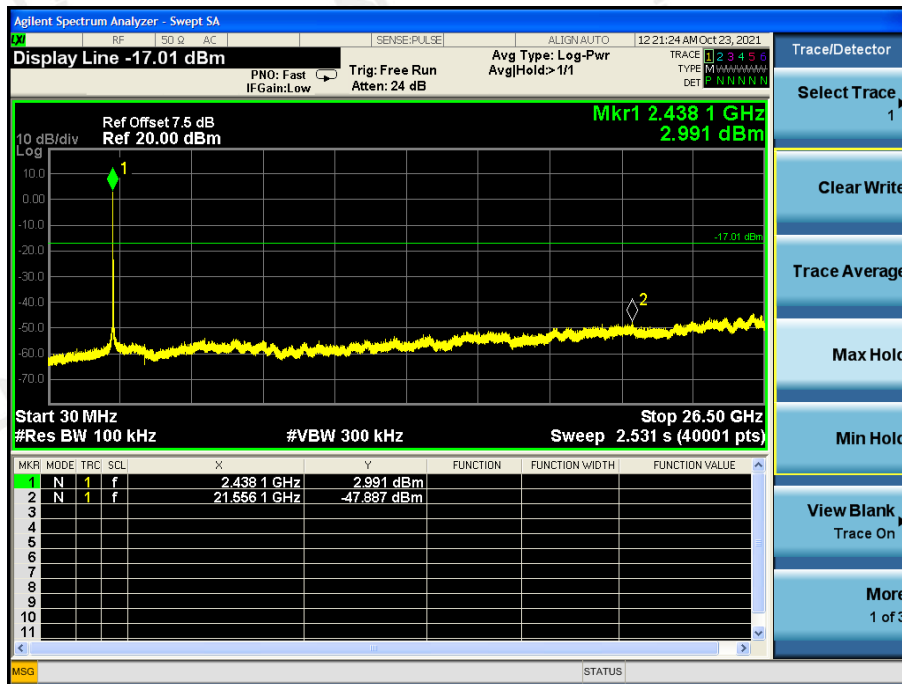


CH11

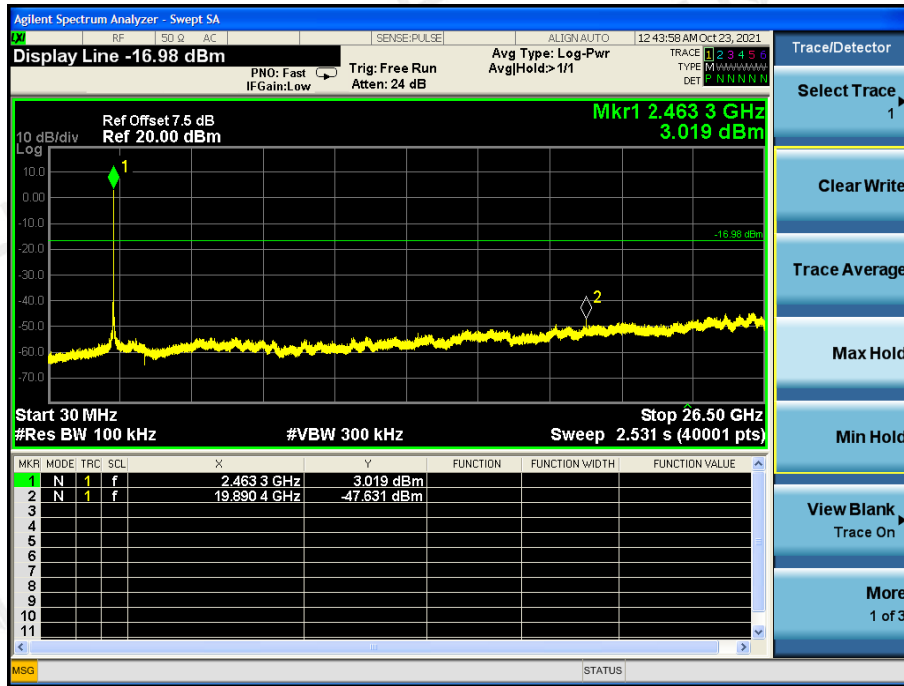


EUT :	AM/FM DIGITAL CLOCK RADIO	Model Name :	Original
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1010 hPa	Test Voltage :	DC3V
Test Mode :	CH01/ CH11 (802.11n20 Data rate 6.5Mbps)		
Test Date :	2021-10-23		

in any 100kHz bandwidth outside the low frequency band	in any 100 kHz bandwidth outside the high frequency band
Pass	Pass
Result	
In any 100kHz bandwidth outside the frequency band, the radio frequency power is at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.	


CH01 (Lower)

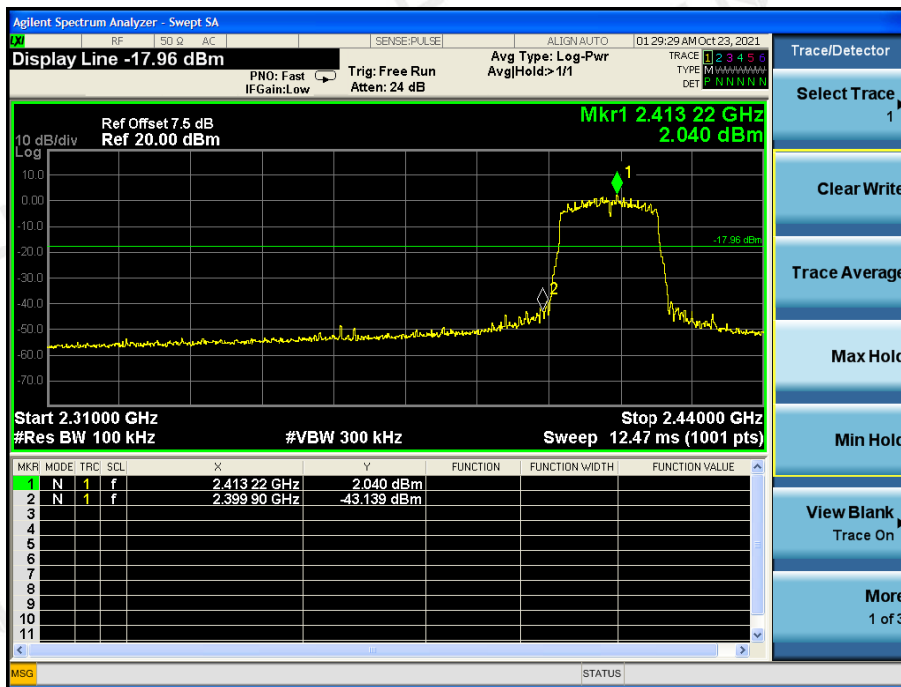


CH 11(Upper)

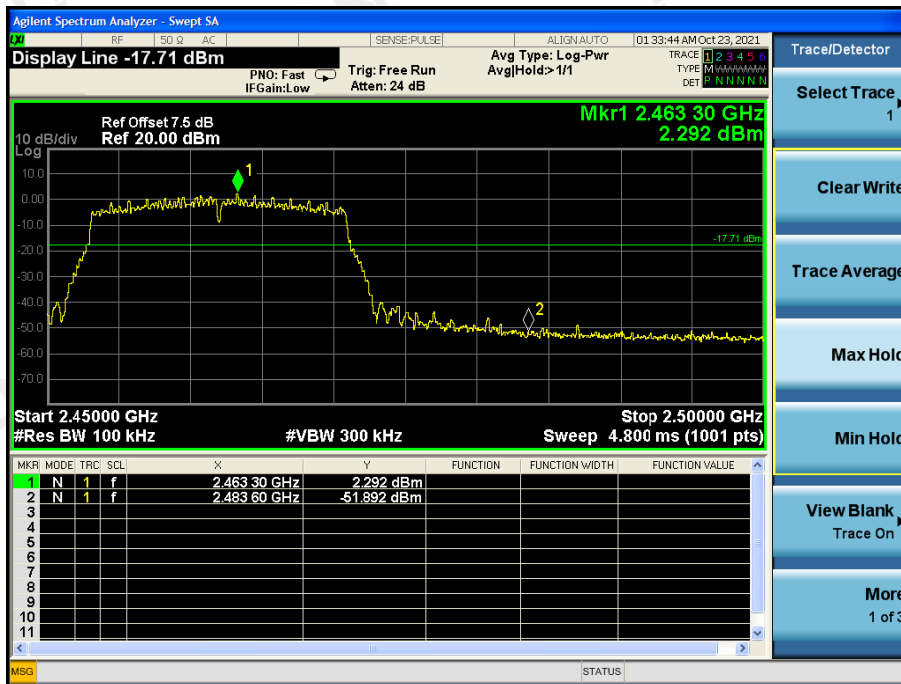


CH01

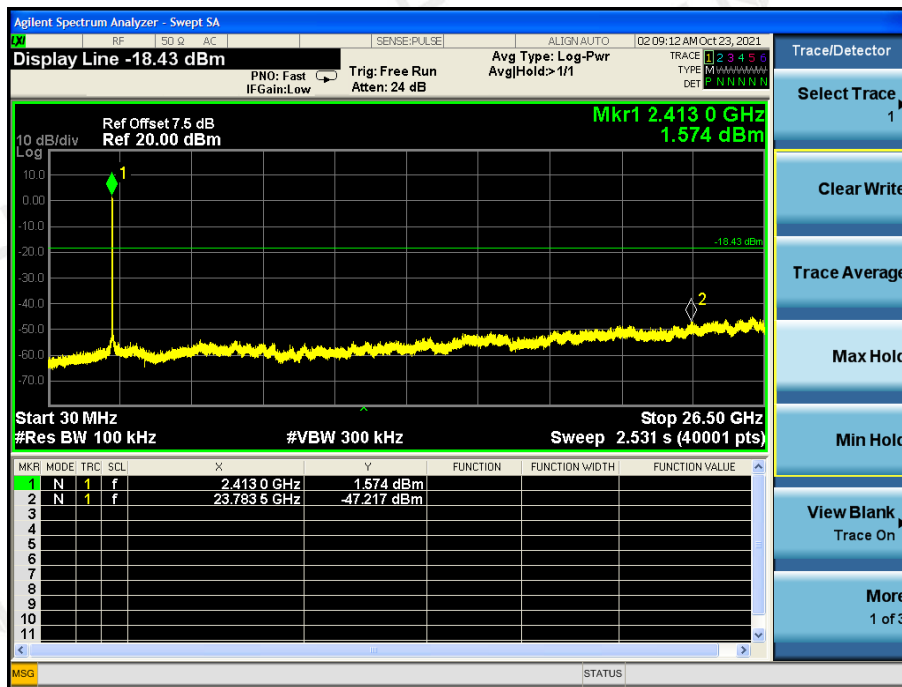

CH06

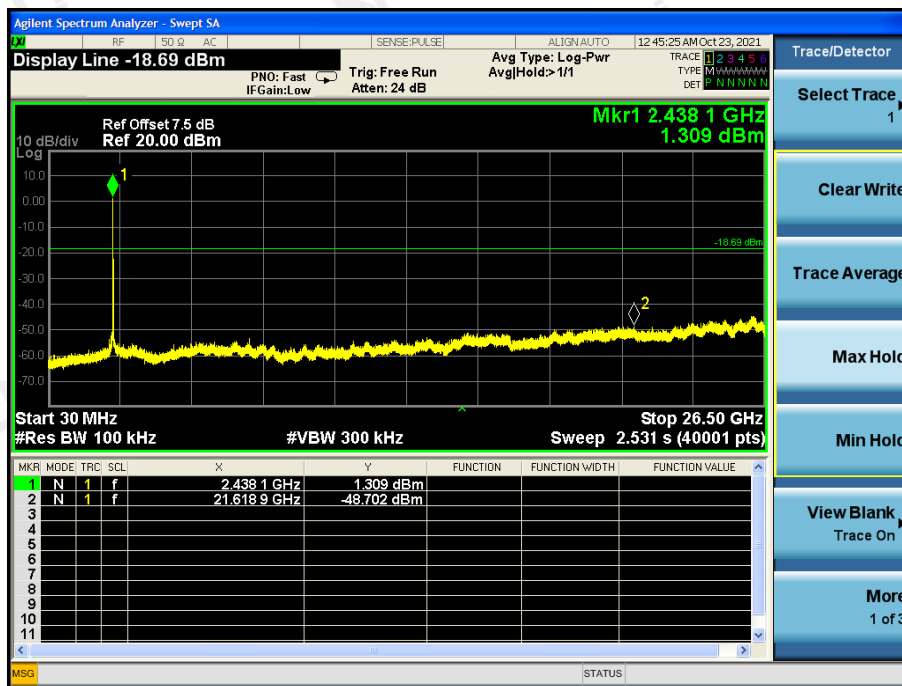

CH11

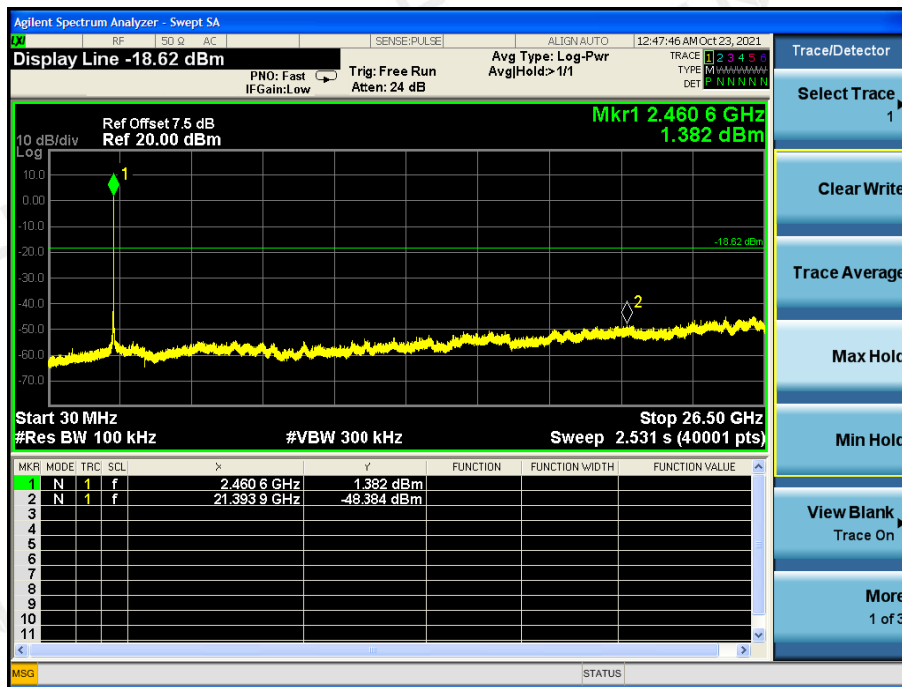

9 ANTENNA REQUIREMENT


Standard Applicable:

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Antenna Connected Construction

The antenna used in this product is a FPCB Antenna, The directional gains of antenna used for transmitting is 2.0 dBi.

ANTENNA:

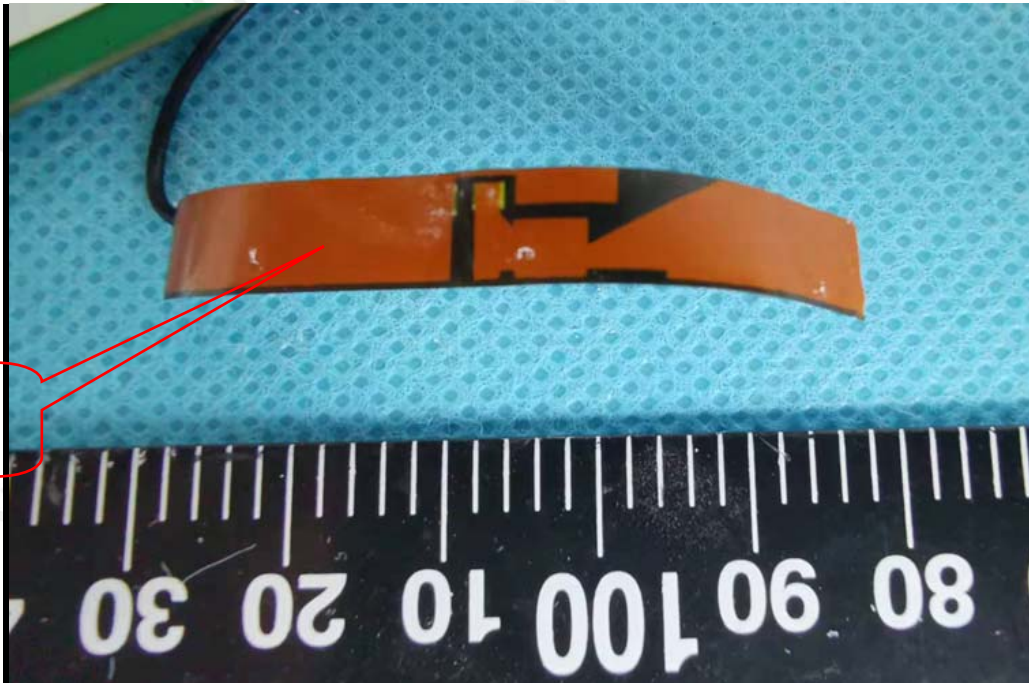

ANTENNA

10 PHOTO OF TEST

10.1 RADIATED EMISSION



Conducted Measurement Photos



End of Report