

TEST REPORT

Product Name: COMPACT

Trade Mark: 

Model No. / HVIN: COMPACT-AAAA-R01

Add. Model No. / HVIN: N/A

Report Number: 2212163242RFC-1

Test Standards: FCC 47 CFR Part 15 Subpart C
RSS-210 Issue 10
RSS-Gen Issue 5

FCC ID: 2AIKG-COMPACT

IC: 25270-COMPACT

Test Result: PASS

Date of Issue: April 28, 2023

Prepared for:

VIX Technology (Aust) Pty Ltd
Level 1, 50 St Georges Terrace, Perth WA 6000 Australia


Prepared by:

Shenzhen UnionTrust Quality and Technology Co., Ltd.
Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and
technology park, Longhua district, Shenzhen, China

TEL: +86-755-2823 0888

FAX: +86-755-2823 0886

Prepared by:



Calvin Chen
Senior Project Engineer

Reviewed by:



Henry Lu
Team Leader

Approved by:



Kevin Liang
Assistant Manager

Date:

April 28, 2023

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS210-V1.1

Version

Version No.	Date	Description
V1.0	April 28, 2023	Original



Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com
<http://www.uttlab.com>

UTTR-RF-RSS210-V1.1

CONTENTS

1. GENERAL INFORMATION	4
1.1 CLIENT INFORMATION	4
1.2 EUT INFORMATION	4
1.2.1 GENERAL DESCRIPTION OF EUT	4
1.2.2 DESCRIPTION OF ACCESSORIES	4
1.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD	4
1.4 OTHER INFORMATION	5
1.5 DESCRIPTION OF SUPPORT UNITS	5
1.6 TEST LOCATION	5
1.7 TEST FACILITY	5
1.8 DEVIATION FROM STANDARDS	6
1.9 ABNORMALITIES FROM STANDARD CONDITIONS	6
1.10 OTHER INFORMATION REQUESTED BY THE CUSTOMER	6
1.11 MEASUREMENT UNCERTAINTY	6
2. TEST SUMMARY	7
3. EQUIPMENT LIST	8
4. TEST CONFIGURATION	9
4.1 ENVIRONMENTAL CONDITIONS FOR TESTING	9
4.1.1 NORMAL OR EXTREME TEST CONDITIONS	9
4.1.2 RECORD OF NORMAL ENVIRONMENT AND TEST SAMPLE	9
4.2 TEST CHANNELS	9
4.3 EUT TEST STATUS	9
4.4 PRE-SCAN	10
4.4.1 USED FOR TESTING OF WORST-CASE DATA RATES	10
4.5 TEST SETUP	10
4.5.1 FOR RADIATED EMISSIONS TEST SETUP	10
4.5.2 FOR CONDUCTED EMISSIONS TEST SETUP	11
4.5.3 FOR CONDUCTED RF TEST SETUP	12
4.6 SYSTEM TEST CONFIGURATION	12
5. RADIO TECHNICAL REQUIREMENTS SPECIFICATION	13
5.1 REFERENCE DOCUMENTS FOR TESTING	13
5.2 ANTENNA REQUIREMENT	13
5.3 99% & 20DB BANDWIDTH	13
5.4 THE FIELD STRENGTH OF ANY EMISSIONS APPEARING OUTSIDE OF THE 13.110-14.010 MHz BAND	15
5.5 FUNDAMENTAL FIELD STRENGTH AND EMISSION MASK 13.110 MHz TO 14.010 MHz	19
5.6 FREQUENCY TOLERANCE	21
5.7 AC POWER LINE CONDUCTED EMISSION	22
APPENDIX 1 PHOTOS OF TEST SETUP	25
APPENDIX 2 PHOTOS OF EUT CONSTRUCTIONAL DETAILS	25


1. GENERAL INFORMATION

1.1 CLIENT INFORMATION

Applicant:	VIX Technology (Aust) Pty Ltd
Address of Applicant:	Level 1, 50 St Georges Terrace, Perth WA 6000 Australia
Manufacturer:	VIX Technology (Aust) Pty Ltd
Address of Manufacturer:	Level 1, 50 St Georges Terrace, Perth WA 6000 Australia

1.2 EUT INFORMATION

1.2.1 General Description of EUT

Product Name:	COMPACT
Model No. / HVIN:	COMPACT-AAAA-R01
Add. Model No. / HVIN:	N/A
Trade Mark:	
DUT Stage:	Production Unit
EUT Supports Function: (Provided by the customer)	NFC: 13.110 MHz to 14.010 MHz
Software Version:	1.0.2147.CR (Provided by the customer)
Hardware Version:	N/A (Provided by the customer)
Sample Received Date:	December 21, 2022
Sample Tested Date:	December 28, 2022 to January 30, 2023
Remark: The above EUT's information was provided by customer. Please refer to the specifications or user's manual for more detailed description.	

1.2.2 Description of Accessories

None.

1.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD

Frequency Band:	13.110 MHz to 14.010 MHz
Nominal Operating Frequency:	13.56 MHz
Work in Modes:	<input type="checkbox"/> Card Emulation
	<input checked="" type="checkbox"/> Reader/Writer
	<input type="checkbox"/> Peer-to-Peer
NFC Type:	<input checked="" type="checkbox"/> NFC A Type
	<input checked="" type="checkbox"/> NFC B Type
	<input checked="" type="checkbox"/> NFC F Type
	<input checked="" type="checkbox"/> NFC V Type
Max. Data Rates:	848 Kbps
Type of Modulation:	ASK
Number of Channels:	1
Antenna Type: (Provided by the customer)	PCB Antenna
Maximum Field Strength:	77.61 dBμV/m at 3 meter
Normal Test Voltage:	24 Vdc from DC Power Supply or 48Vdc from IEEE 802.3at Type 2 POE PSE
Extreme Test Voltage:	9 to 36 Vdc (DC Power Supply) or 100~240V 50/60Hz (PoE PSE)
Extreme Test Temperature:	-25 °C to +55 °C

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS210-V1.1

1.4 OTHER INFORMATION

None

1.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested with associated equipment below.

1) Support Equipment

Description	Manufacturer	Model No.	Serial Number	Supplied by
Storage Battery*2	Camel	58500 6-QWLZ-48	2602010594	UnionTrust
Power over Ethernet Injector	Cisco	MA-INJ-4	QS-6593-01N A02	Applicant
Notebook	Lenovo	E450	SL10G10780	UnionTrust
Mouse	DELL	MS111	CN-011D3V-738	UnionTrust

2) Support Cable

Cable No.	Description	Connector	Length	Supplied by
1	Ethernet Cable	RJ45	2 meters	UnionTrust

1.6 TEST LOCATION

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China, China 518109

Telephone: +86 (0) 755 2823 0888

Fax: +86 (0) 755 2823 0886

1.7 TEST FACILITY

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L9069

The measuring equipment utilized to perform the tests documented in this report has been calibrated once a year or in accordance with the manufacturer's recommendations, and is traceable under the ISO/IEC 17025 to international or national standards. Equipment has been calibrated by accredited calibration laboratories.

A2LA-Lab Certificate No.: 4312.01

Shenzhen UnionTrust Quality and Technology Co., Ltd. has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

ISED Wireless Device Testing Laboratories

CAB identifier: CN0032

FCC Accredited Lab.

Designation Number: CN1194

Test Firm Registration Number: 259480

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS210-V1.1

1.8 DEVIATION FROM STANDARDS

None.

1.9 ABNORMALITIES FROM STANDARD CONDITIONS

None.

1.10 OTHER INFORMATION REQUESTED BY THE CUSTOMER

None.

1.11 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

No.	Item	Measurement Uncertainty
1	Conducted emission 9KHz-150KHz	± 3.8 dB
2	Conducted emission 150KHz-30MHz	± 3.4 dB
3	Radiated emission 9KHz-30MHz	± 4.9 dB
4	Radiated emission 30MHz-1GHz	± 4.7 dB
5	Radiated emission 1GHz-18GHz	± 5.1 dB
6	Radiated emission 18GHz-26GHz	± 5.2 dB
7	Radiated emission 26GHz-40GHz	± 5.2 dB
8	Occupied Channel Bandwidth	$\pm 1.88\%$

2. TEST SUMMARY

FCC 47 CFR Part 15 Subpart C Test Cases			
Test Item	Test Requirement	Test Method	Result
Antenna Requirement	FCC 47 CFR Part 15 Subpart C Section 15.203 RSS-Gen Issue 5, Section 6.8	N/A	PASS
AC Power Line Conducted Emission	FCC 47 CFR Part 15 Subpart C Section 15.207 RSS-Gen Issue 5, Section 8.8	ANSI C63.10-2013 Clause 6.2	PASS
The field strength of any emissions appearing outside of the 13.110-14.010 MHz band	FCC 47 CFR Part 15 Subpart C Section 15.225(d) /15.209 RSS-210 Issue 10, Annex B.6 RSS-Gen Issue 5, section 8.9	ANSI C63.10-2013 Section 6.3/ 6.4/ 6.5	PASS
Fundamental Field Strength and Emission Mask 13.110 MHz to 14.010 MHz	FCC 47 CFR Part 15 Subpart C Section 15.225(a) (b) (c) /15.205 RSS-210 Issue 10, Annex B.6 RSS-Gen Issue 5, section 8.9	ANSI C63.10-2013 Section 6.3/ 6.4	PASS
99% & 20DB Bandwidth	FCC 47 CFR Part 15 Subpart C Section 15.215(c) RSS-Gen Issue 5, section 6.7	ANSI C63.10-2013 Section 6.9	Pass
Frequency Tolerance	FCC 47 CFR Part 15 Subpart C Section 15.225(e) RSS-210 Issue 10, Annex B.6	ANSI C63.10-2013 Section 6.8	Pass
Note: 1) N/A: In this whole report not applicable.			

3. EQUIPMENT LIST

Radiated Emission Test - 3M Chamber						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date	Cal. Due date
<input checked="" type="checkbox"/>	3M Chamber & Accessory Equipment	ETS-LINDGREN	3M	Euroshiedpn-C T001270-1317	22-Jan-2021	21-Jan-2024
<input checked="" type="checkbox"/>	Receiver	R&S	ESIB26	100114	3-Nov-2022	2-Nov-2023
<input checked="" type="checkbox"/>	Spectrum Analyzer	R&S	FSV40-N	101653	15-Apr-2022	14-Apr-2023
<input checked="" type="checkbox"/>	Loop Antenna	ETS-LINDGREN	6502	00202525	21-Nov-2022	20-Nov-2023
<input checked="" type="checkbox"/>	Broadband Antenna	ETS-LINDGREN	3142E	00201566	13-Dec-2022	12-Dec-2023
<input checked="" type="checkbox"/>	6dB Attenuator	Talent	RA6A5-N-18	18103001	13-Dec-2022	12-Dec-2023
<input checked="" type="checkbox"/>	Preamplifier	HP	8447F	2805A02960	1-Nov-2022	31-Oct-2023
<input checked="" type="checkbox"/>	Multi device Controller	ETS-LINDGREN	7006-001	00160105	N/A	N/A
<input checked="" type="checkbox"/>	Test Software	Audix	e3	Software Version: 9.160323		

Conducted Emission Test						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date	Cal. Due date
<input checked="" type="checkbox"/>	LISN	R&S	ESH2-Z5	860014/024	1-Nov-2022	31-Oct-2023
<input checked="" type="checkbox"/>	LISN	ETS-Lindgren	3816/2SH	00201088	1-Nov-2022	31-Oct-2023
<input checked="" type="checkbox"/>	Receiver	R&S	ESR7	101181	1-Nov-2022	31-Oct-2023
<input checked="" type="checkbox"/>	Pulse Limiter	R&S	ESH3-Z2	0357.8810.54	1-Nov-2022	31-Oct-2023
<input checked="" type="checkbox"/>	Shielding room	ETS-Lindgren	843	Euroshiedpn-CT001270-1246	5-Nov-2021	4-Nov-2024
<input checked="" type="checkbox"/>	Test Software	Audix	e3	Software Version: 9 20151119i		

4. TEST CONFIGURATION

4.1 ENVIRONMENTAL CONDITIONS FOR TESTING

4.1.1 Normal or Extreme Test Conditions

Test Environment	Selected Values During Tests		
Test Condition	Ambient		
	Temperature (°C)	Voltage (V)	Relative Humidity (%)
TN/VN	+15 to +35	24	20 to 75
TL/VL	-25	9	20 to 75
TH/VL	+55	9	20 to 75
TL/VH	-25	36	20 to 75
TH/VH	+55	36	20 to 75

Remark:

- The EUT just work in such extreme temperature of -25 °C to +55 °C and the extreme voltage of 9 V to 36 V, so here the EUT is tested in the temperature of -25 °C to +55 °C and the voltage of 9 V to 36 V.
- VN: Normal Voltage; TN: Normal Temperature;
TL: Low Extreme Test Temperature; TH: High Extreme Test Temperature;
VL: Low Extreme Test Voltage; VH: High Extreme Test Voltage.

4.1.2 Record of Normal Environment and Test Sample

Test Item	Temp. (°C)	Relative Humidity (%)	Pressure (kPa)	Sample No.	Tested by
Conducted Emission	N/A	N/A	N/A	N/A	N/A
The field strength of any emissions appearing outside of the 13.110-14.010 MHz band	25.1	58.3	100.1	S20221221959-ZJA01/2	Fire Huo
Fundamental Field Strength and Emission Mask 13.110 MHz to 14.010 MHz	25.1	58.3	100.1	S20221221959-ZJA01/2	Fire Huo
99%&20DB Bandwidth	24.5	45.6	100.6	S20221221959-ZJA01/2	Hark Wu

4.2 TEST CHANNELS

Frequency	Test RF Channel
13.56 MHz	Channel 1
	13.56 MHz

4.3 EUT TEST STATUS

Frequency	Tx Function	Description
13.56 MHz	1Tx	1. Keep the EUT in continuously transmitting during the test.

Power Setting (Provided by the customer)
Power Setting: not applicable, test used software default power level.

4.4 PRE-SCAN

4.4.1 Used for testing of worst-case data rates

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, work in modes and data rates. Selected for the final test as listed below.

Frequency	Work in Modes	Type	Data Rate (Kbps)
13.56 MHz	<input type="checkbox"/> Card Emulation <input checked="" type="checkbox"/> Reader/Writer <input type="checkbox"/> Peer-to-Peer	<input checked="" type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> F <input type="checkbox"/> V	<input type="checkbox"/> 106 <input type="checkbox"/> 212 <input type="checkbox"/> 424 <input checked="" type="checkbox"/> 848

Remark:

The mark "☑" means is chosen for testing;

The mark "☐" means is not chosen for testing.

4.5 TEST SETUP

4.5.1 For Radiated Emissions test setup

Figure 1. Below 30MHz


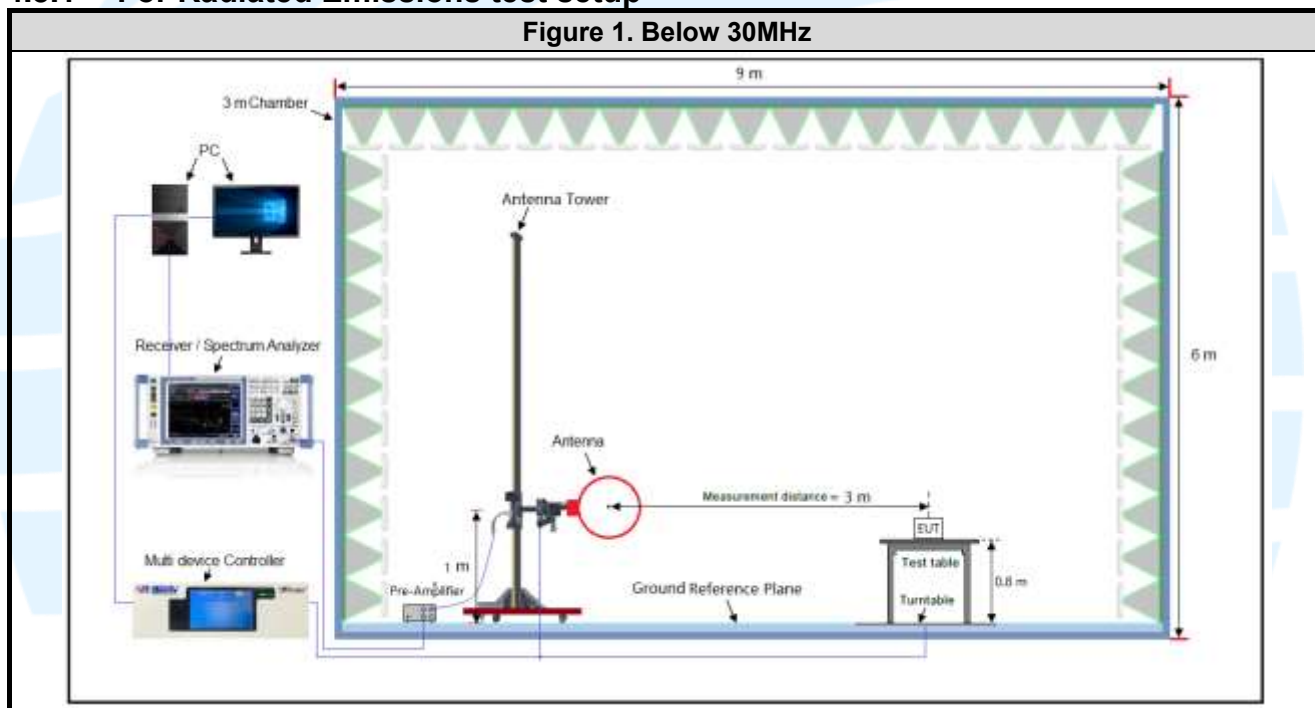


Figure 2. 30MHz to 1GHz

The diagram illustrates a measurement setup for frequencies from 30 MHz to 1 GHz within a 3 m chamber. The chamber has a width of 9 m and a height of 6 m. The setup includes an Antenna Tower, a Broadband Antenna, a Pre-Amplifier, a Receiver / Spectrum Analyzer, a Multi device Controller, and a PC. The Antenna Tower is positioned 1 m to 4 m from the chamber wall. The Broadband Antenna is mounted on the tower, and the measurement distance between the antenna and the EUT (Equipment Under Test) is 3 m. The EUT is placed on a Test table at a height of 0.8 m. The Ground Reference Plane is indicated at the base of the chamber. The Receiver / Spectrum Analyzer is connected to the PC and the Multi device Controller. The Multi device Controller is connected to the Pre-Amplifier and the Broadband Antenna.

The diagram illustrates a Shielding Room setup for EMI testing. On the left, a PC and a Receiver are connected to a Pulse Limiter. The Pulse Limiter is connected to LISN 1, which is connected to the AC Mains. The AC Mains is connected to the Test table. The Test table is supported by two vertical poles. On the Test table, there are two EUT/AE units and a PSU. The distance between the EUT/AE units is 10 cm, and the distance between the EUT/AE unit and the PSU is 10 cm. The Test table is 80 cm high. The AC Mains is connected to LISN 2, which is connected to the AC Mains. The AC Mains is connected to the Test table. The Test table is 40 cm high. The distance between the Test table and the floor is 40 cm. The floor is insulated with a material having an insulation value of ≤ 0.15 m. The entire setup is enclosed in a Shielding Room.

4.5.3 For Conducted RF test setup

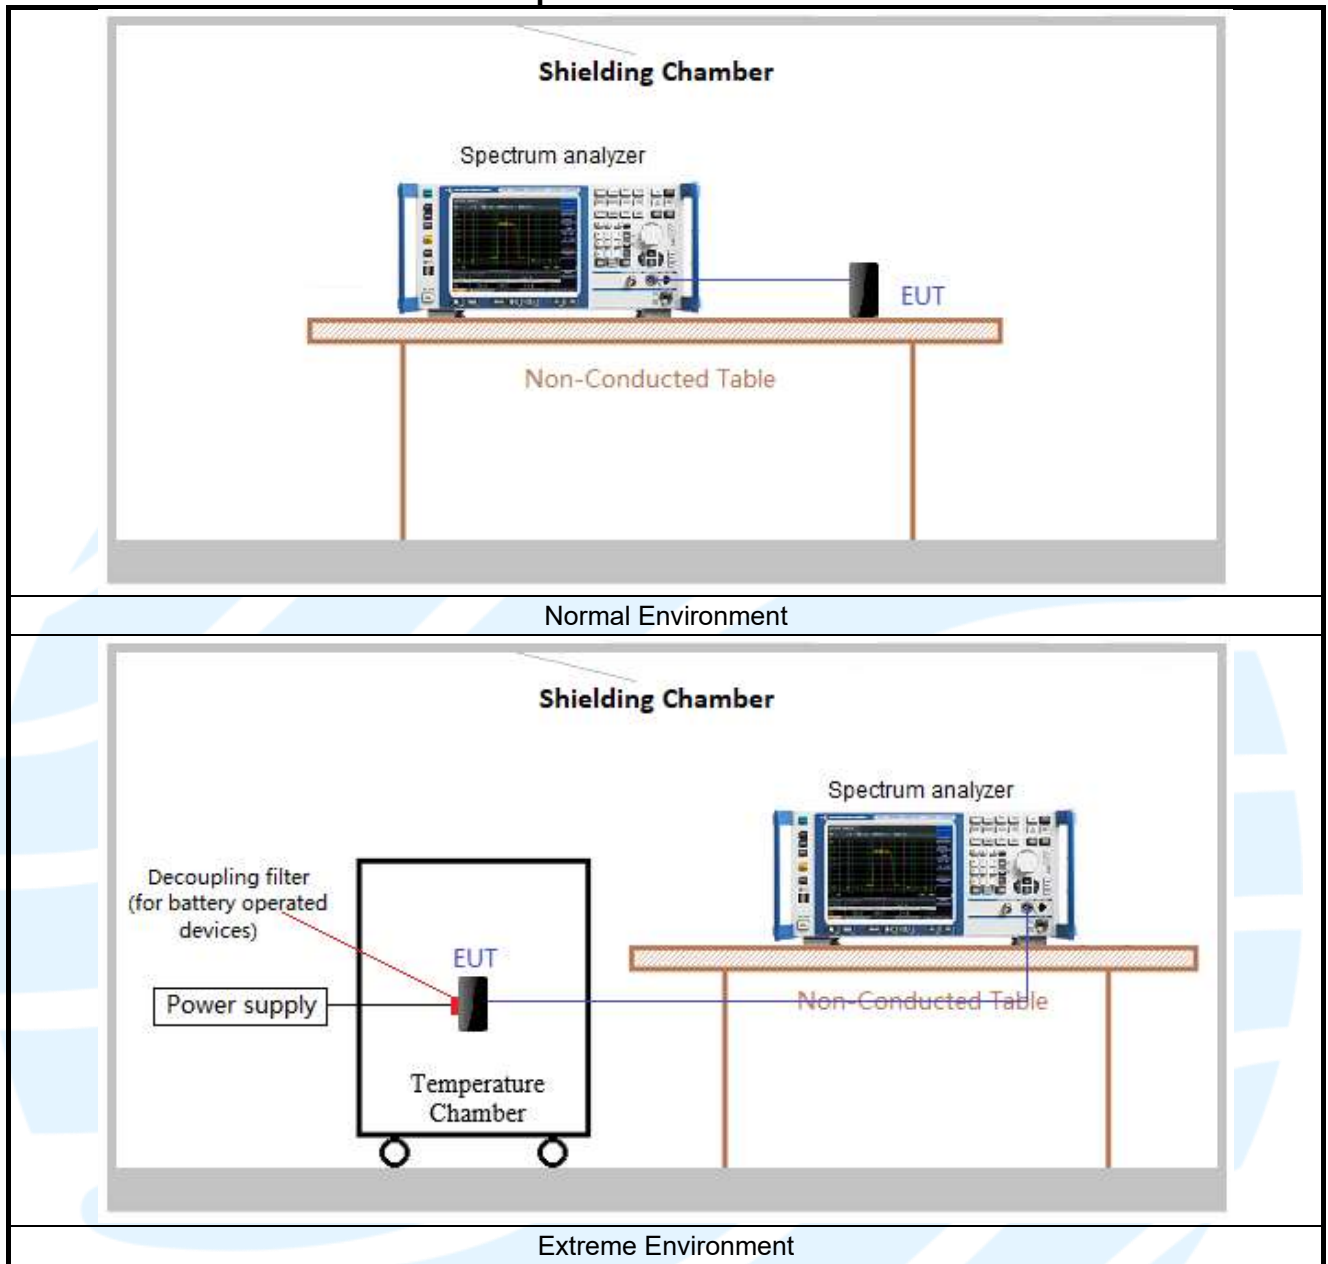

4.6 SYSTEM TEST CONFIGURATION

For emissions testing, the equipment under test (EUT) setup to transmit continuously to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing. During testing, radiated emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario. It is powered by the vehicle system with a supply voltage of 24Vdc. Only the worst case data were recorded in this test report.

All readings are extrapolated back to the equivalent three meter reading using inverse scaling with distance. Analyzer resolution is 100 kHz or greater for frequencies below 1000 MHz. The resolution is 1 MHz or greater for frequencies above 1000 MHz. The spurious emissions more than 20 dB below the permissible value are not reported.

Radiated emission measurement were performed from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS210-V1.1

5. RADIO TECHNICAL REQUIREMENTS SPECIFICATION

5.1 REFERENCE DOCUMENTS FOR TESTING

No.	Identity	Document Title
1	FCC 47 CFR Part 15	Radio Frequency Devices
2	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices
3	RSS-Gen Issue 5	General Requirements for Compliance of Radio Apparatus
4	RSS-210 Issue 10	Licence-Exempt Radio Apparatus: Category I Equipment

5.2 ANTENNA REQUIREMENT

Standard Requirement
<p>15.203& requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p> <p>RSS-Gen Issue 5, Section 6.8 requirement: According to RSS-Gen Issue 5, Section 6.8, a transmitter can only be sold or operated with antennas with which it was certified. A transmitter may be certified with multiple antenna types. An antenna type comprises antennas having similar in-band and out-of-band radiation patterns.</p> <p>EUT Antenna: This product has a permanent antenna, fulfill the requirement of this section.</p>

5.3 99% & 20DB BANDWIDTH

Test Requirement:	FCC 47 CFR Part 15 Subpart C Section 15.215(c) RSS-Gen Issue 5, section 6.7
Test Method:	ANSI C63.10-2013 Section 6.9
Limit:	Operation within the band 13.110 MHz to 14.010 MHz
Requirement:	Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§15.217 through 15.257 and in subpart E of this part, must be designed to ensure that 20dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equip compliance with the 20dB attenuation specification may base on measurement at the intentional radiator's antenna output terminal unless the intentional radiator uses a permanently attached antenna, in which case compliance shall be. Demonstrated by measuring the radiated emissions.
Test Procedure:	<p>Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer. Use the following spectrum analyzer settings:</p> <ol style="list-style-type: none"> The spectrum analyzer center frequency is set to the nominal EUT channel center frequency Span = approximately 2 to 5 times the OBW RBW = 1% to 5% of the OBW VBW \geq 3*RBW Sweep = auto; Detector function = peak Trace = max hold All the trace to stabilize, use the marker-to-peak function to set the marker to the peak of the emission, use the marker-delta function to measure and record the 20dB down bandwidth of the emission.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS210-V1.1

Test Setup: Refer to section 4.5.3 for details.
Instruments Used: Refer to section 3 for details
Test Mode: Transmitter mode (DC 24V Power Supply)
Test Results: Pass
Test Data:

Frequency (MHz)	20 dB Bandwidth (kHz)	99% Bandwidth (kHz)	Limit	Pass / Fail
13.56 MHz	26.0	471.78	Operation within the band 13.110 MHz to 14.010 MHz	Pass

The test plot as follows:



Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS210-V1.1

5.4 THE FIELD STRENGTH OF ANY EMISSIONS APPEARING OUTSIDE OF THE 13.110-14.010 MHZ BAND

FCC 47 CFR Part 15 Subpart C Section 15.225(d) /15.209

Test Requirement: RSS-210 Issue 10, Annex B.6
RSS-Gen Issue 5, section 8.9

Test Method: ANSI C63.10-2013 Section 6.3/ 6.4/ 6.5

Receiver Setup:

Frequency	RBW
0.009 MHz-0.150 MHz	200/300 kHz
0.150 MHz -30 MHz	9/10 kHz
30 MHz-1 GHz	100/120 kHz
Above 1 GHz	1 MHz

Limits:

The field strength of any emissions appearing outside of the 13.110-14.010 MHz band shall not exceed the general radiated emission limits in §15.209.

Spurious Emissions

Frequency	Field strength (microvolt/meter)	Limit (dBμV/m)	Remark	Measurement distance (m)
0.009 MHz-0.490 MHz	2400/F(kHz)	--	--	300
0.490 MHz-1.705 MHz	24000/F(kHz)	--	--	30
1.705 MHz-30 MHz	30	--	--	30
30 MHz-88 MHz	100	40.0	Quasi-peak	3
88 MHz-216 MHz	150	43.5	Quasi-peak	3
216 MHz-960 MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1 GHz	500	54.0	Average	3

Remark:

- The lower limit shall apply at the transition frequencies.
- Emission level (dBμV/m) = 20 log Emission level (μV/m).
- For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.
- For Below 30MHz, the measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

Field strength limit for 13.56MHz = 30 μV/m at 30m
= 29.54 dBμV/m at 30m
= 29.54 dBμV/m + 40log(30/3) dB at 3m
= 69.54 dBμV/m at 3m

Test Setup: Refer to section 4.5.1 for details.

Test Procedures:

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS210-V1.1


heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.

- 5) The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- 6) If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- 7) The radiation measurements are performed in X, Y, Z axis positioning. And found the Y axis positioning which it is worse case, only the test worst case mode is recorded in the report.(for portable and mobile devices)


Equipment Used: Refer to section 3 for details.

Test Result: Pass

Radiated Emission Test Data (9 KHz ~ 30 MHz):
DC 24V Power Supply Mode

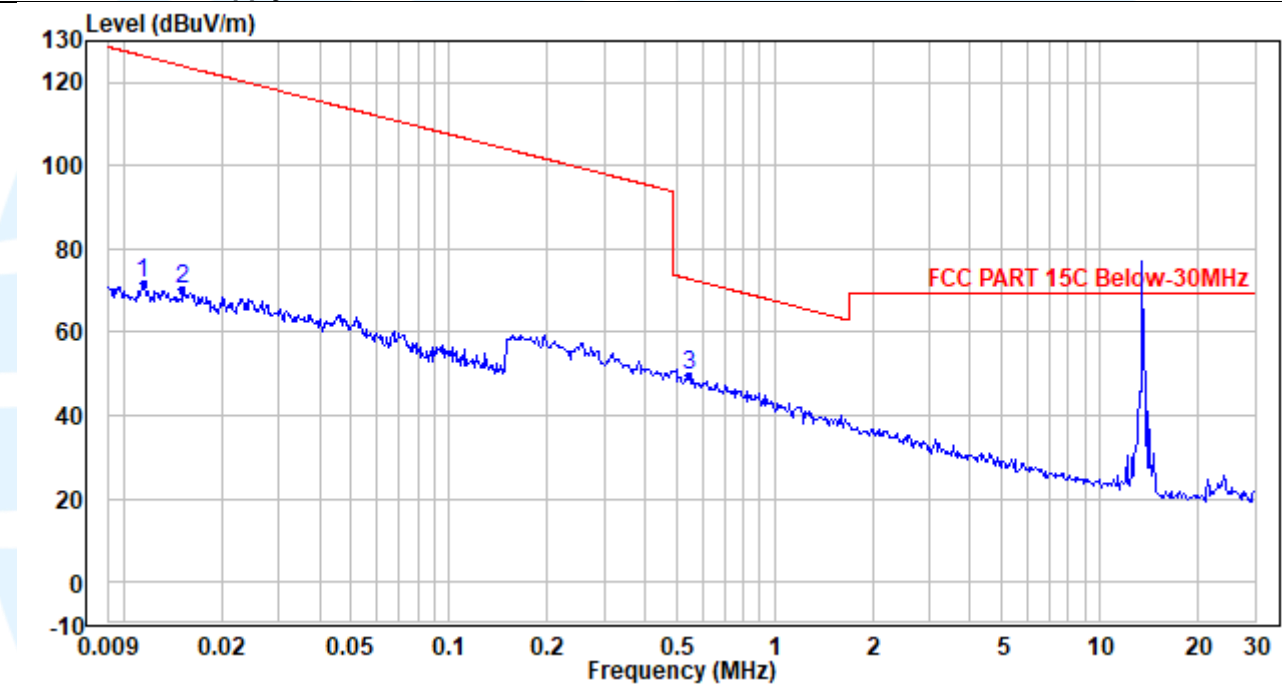

No.	Frequency (MHz)	Reading (dBUV)	Correction factor (dB/m)	Result (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	0.011	81.31	-9.54	73.67	126.40	-52.73	Peak
2	0.015	81.34	-10.87	72.56	123.95	-51.39	Peak
3	0.548	66.77	-17.00	51.23	72.82	-21.59	Peak

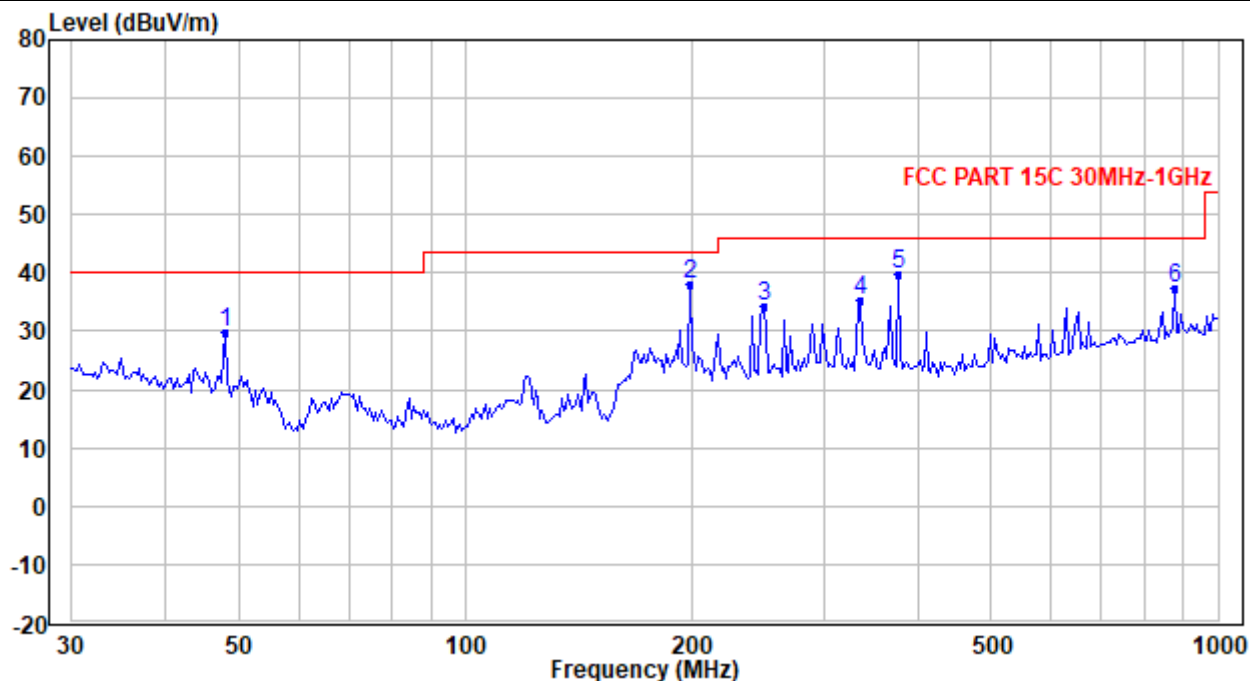Radiated Emission Test Data (30 MHz ~ 1 GHz):
DC 24V Power Supply Mode
Horizontal


No.	Frequency (MHz)	Reading (dBuV)	Correction factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	48.039	43.31	-13.39	29.92	40.00	-10.08	QP
2	198.642	48.64	-10.48	38.16	43.50	-5.34	QP
3	248.732	43.25	-8.83	34.42	46.00	-11.58	QP
4	334.126	40.98	-5.69	35.29	46.00	-10.71	QP
5	376.523	44.90	-5.26	39.64	46.00	-6.36	QP
6	875.013	33.65	3.87	37.52	46.00	-8.48	QP

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS210-V1.1

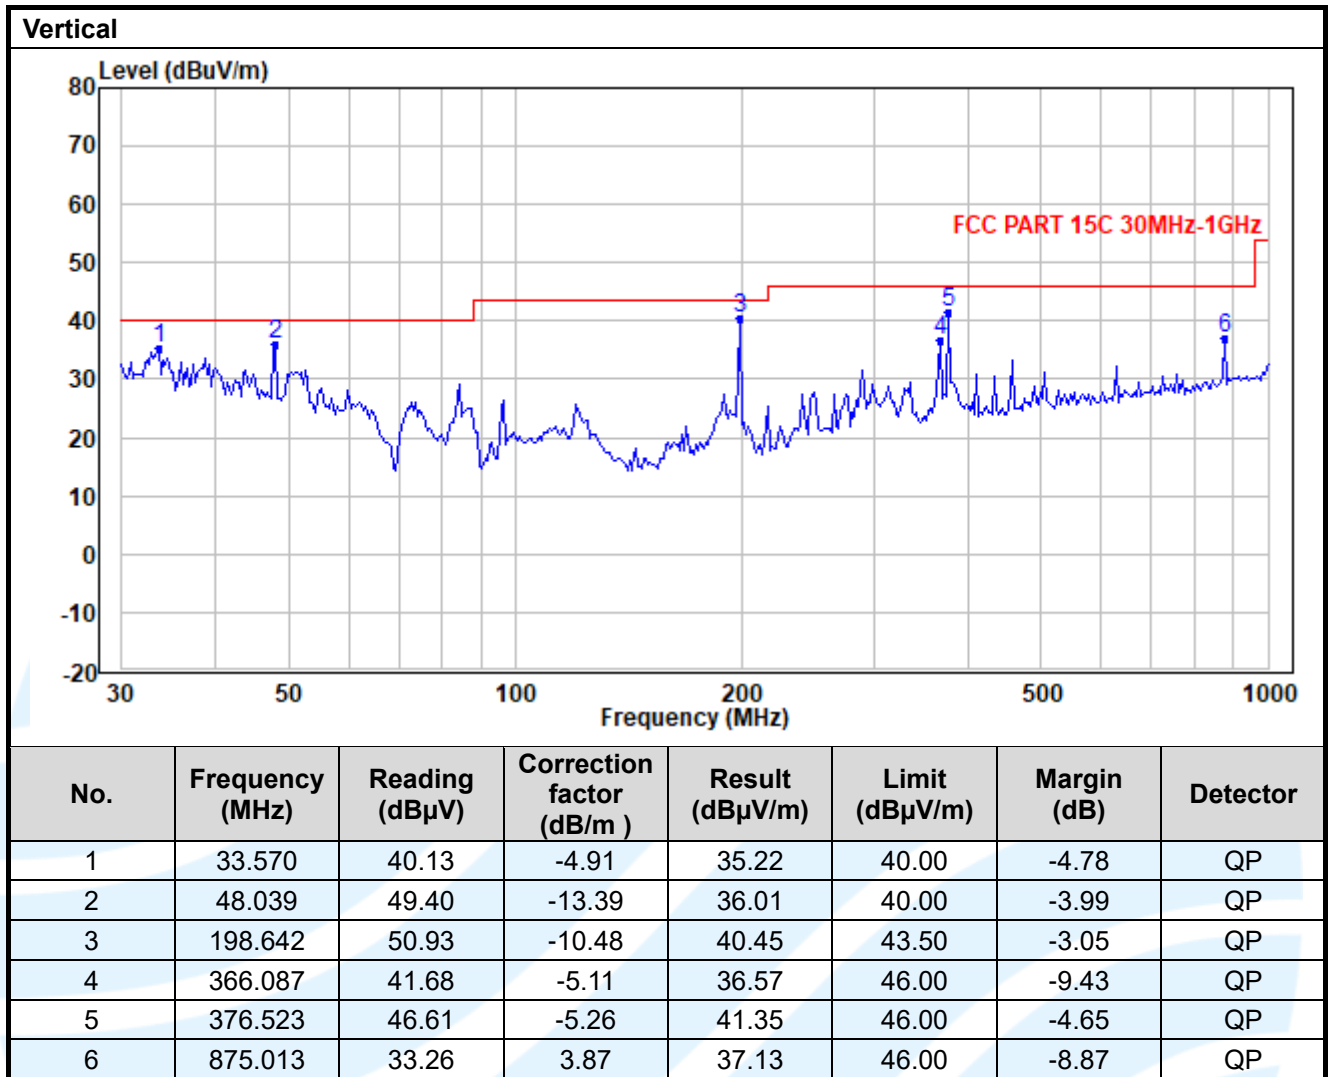

Remark:

1. Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain, the value was added to Original Receiver Reading by the software automatically.
2. Result = Reading + Correct Factor.
3. Margin = Result – Limit
4. Testing at two nominal voltages of 24VDC and 48VDC (PoE Adapter), only the worst case emissions reported.

5.5 FUNDAMENTAL FIELD STRENGTH AND EMISSION MASK 13.110 MHZ TO 14.010 MHZ

FCC 47 CFR Part 15 Subpart C Section 15.225(a) (b) (c) /15.205

Test Requirement: RSS-210 Issue 10, Annex B.6
RSS-Gen Issue 5, section 8.9

Test Method: ANSI C63.10-2013 Section 6.3/ 6.4

Limits:

(a) The field strength of any emissions within the band 13.553-13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.

(b) Within the bands 13.410-13.553 MHz and 13.567-13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.

(c) Within the bands 13.110-13.410 MHz and 13.710-14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.

Remark:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dB μ V/m) = 20 log Emission level (μ V/m).
3. For Below 30MHz, the measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

Field strength limit for 13.56MHz	=	15848 μ V/m	at 30m
	=	84 dB μ V/m	at 30m
	=	84 dB μ V/m + 40log(30/3) dB	at 3m
	=	124 dB μ V/m	at 3m

Test Setup: Refer to section 4.5.1 for details.

Test Procedures:

As the radiation test, set the RBW=10kHz VBW=30kHz, observed the inside band of 13.110 MHz to 14.010 MHz, then mark the highest emission for comparing with the FCC rules.

Equipment Used: Refer to section 3 for details.

Test Result: Pass


Maximum Field Strength:

Fundamental frequency	Polarization	Detector	Result at 3m (dB μ V/m)	Limit at 3m (dB μ V/m)	Margin (dB)
13.56 MHz	H	Peak	77.61	124	46.39

Emission Mask:

The worst case test plots as below.

Horizontal

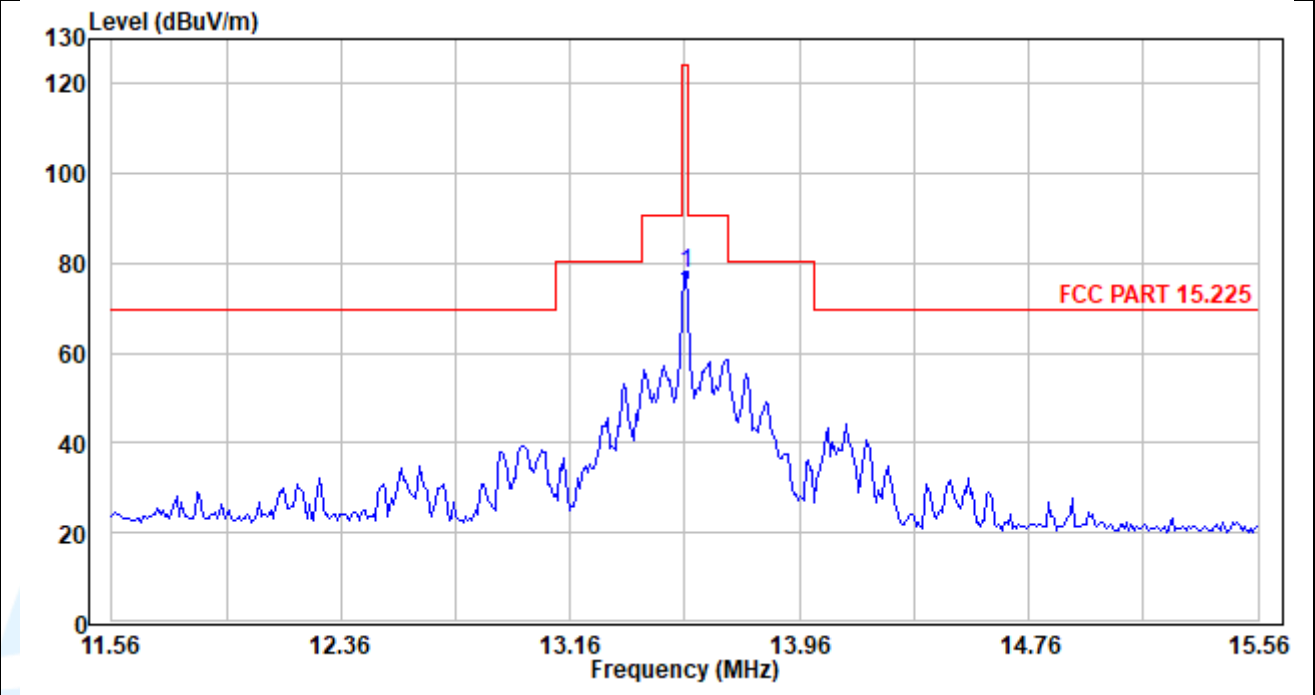

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS210-V1.1

5.6 FREQUENCY TOLERANCE

Test Requirement: FCC 47 CFR Part 15 Subpart C Section 15.225(e)
RSS-210 Issue 10, Annex B.6

Test Method: ANSI C63.10-2013 Section 6.8

Limits:

The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency over a temperature variation of -20 degrees to $+50$ degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

Test Setup: Refer to section 4.5.3 for details.

Test Procedures:

- 1) The EUT was placed inside the environmental test chamber and powered by nominal DC voltage.
- 2) Turn the EUT on and couple its output to a spectrum analyzer.
- 3) Turn the EUT off and set the chamber to the highest temperature specified.
- 4) Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 minutes.
- 5) Repeat step c) and d) with the temperature chamber set to the lowest temperature.
- 6) The test chamber was allowed to stabilize at $+20$ degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

Equipment Used: Refer to section 3 for details.

Test Result: Pass

Frequency Tolerance VS Temperature and Voltage									
Temp.(°C)	Voltage	Test time (minutes)							
		0	2	5	10	0	2	5	10
		Measured Frequency (MHz)				Frequency Drift (%)			
50	VN	13.5608	13.5607	13.5608	13.5607	0.006	0.005	0.006	0.005
40	VN	13.5609	13.5590	13.5595	13.5602	0.006	-0.007	-0.004	0.001
30	VN	13.5609	13.5596	13.5609	13.5608	0.007	-0.003	0.007	0.006
20	VN	13.5599	13.5591	13.5596	13.5596	-0.001	-0.007	-0.003	-0.003
	VL	13.5607	13.5608	13.5593	13.5604	0.005	0.006	-0.005	0.003
	VH	13.5605	13.5603	13.5598	13.5605	0.004	0.002	-0.002	0.003
10	VN	13.5593	13.5596	13.5595	13.5597	-0.005	-0.003	-0.004	-0.002
0	VN	13.5602	13.5593	13.5599	13.5605	0.001	-0.006	-0.001	0.003
-10	VN	13.5592	13.5610	13.5602	13.5591	-0.006	0.007	0.001	-0.007
-20	VN	13.5610	13.5604	13.5608	13.5592	0.007	0.003	0.006	-0.006
Limit: $\pm 0.01\%$									

Remark:

VN=DC 24V

5.7 AC POWER LINE CONDUCTED EMISSION

Test Requirement: FCC 47 CFR Part 15 Subpart C Section 15.207
RSS-Gen Issue 5, Section 8.8

Test Method: ANSI C63.10-2013 Clause 6.2

Limits:

Frequency range (MHz)	Limits (dB(μV))	
	Quasi-peak	Average
0,15 to 0,50	66 to 56	56 to 46
0,50 to 5	56	46
5 to 30	60	50

Remark:

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 to 0.50 MHz.

Test Setup: Refer to section 4.5.2 for details.

Test Procedures:

Test frequency range :150KHz-30MHz

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50Ω/50μH + 5Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

Equipment Used: Refer to section 3 for details.


Test Result: Pass.

The measurement data as follows:

Quasi Peak and Average:

Test Mode1: PoE Adapter Power Supply

Live Line

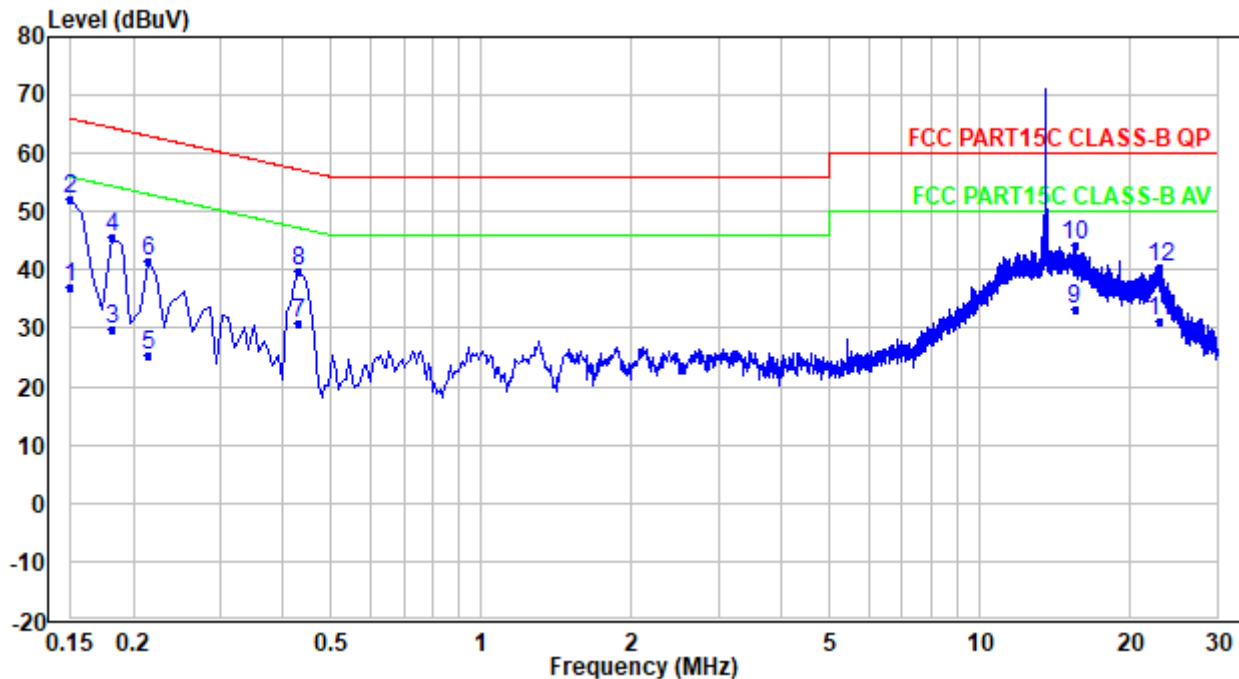

No.	Frequency (MHz)	Reading (dBμV)	Correction factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.150	27.03	10.02	37.05	56.00	-18.95	Average
2	0.150	42.03	10.02	52.05	66.00	-13.95	QP
3	0.182	19.79	10.00	29.79	54.39	-24.60	Average
4	0.182	35.79	10.00	45.79	64.39	-18.60	QP
5	0.214	15.48	10.00	25.48	53.05	-27.57	Average
6	0.214	31.48	10.00	41.48	63.05	-21.57	QP
7	0.430	20.67	10.02	30.69	47.25	-16.56	Average
8	0.430	29.67	10.02	39.69	57.25	-17.56	QP
9	15.539	22.51	10.87	33.38	50.00	-16.62	Average
10	15.539	33.51	10.87	44.38	60.00	-15.62	QP
11	23.017	20.05	11.28	31.33	50.00	-18.67	Average
12	23.017	29.05	11.28	40.33	60.00	-19.67	QP

Remark:

1. Correct Factor = LISN Factor + Cable Loss + Pulse Limiter Factor, the value was added to Original Receiver Reading by the software automatically.
2. Result = Reading + Correct Factor.
3. Margin = Result - Limit
4. An initial pre-scan was performed on the Phase and neutral lines with peak detector. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.
5. The frequency which is out of the limit, is the fundamental frequency of the product.

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888


Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS210-V1.1

Neutral Line

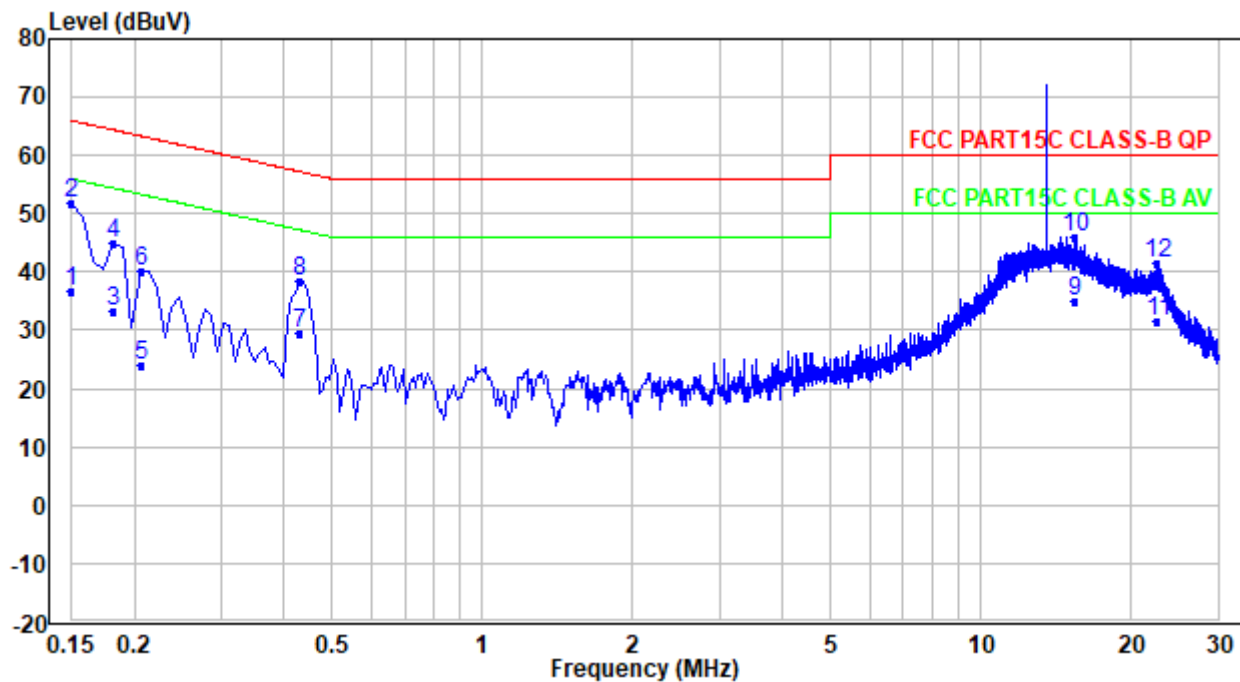

No.	Frequency (MHz)	Reading (dBμV)	Correction factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.150	26.77	10.03	36.80	56.00	-19.20	Average
2	0.150	41.77	10.03	51.80	66.00	-14.20	QP
3	0.182	23.09	10.02	33.11	54.39	-21.28	Average
4	0.182	35.09	10.02	45.11	64.39	-19.28	QP
5	0.206	14.02	10.02	24.04	53.37	-29.33	Average
6	0.206	30.02	10.02	40.04	63.37	-23.33	QP
7	0.430	19.35	10.04	29.39	47.25	-17.86	Average
8	0.430	28.35	10.04	38.39	57.25	-18.86	QP
9	15.419	24.21	10.85	35.06	50.00	-14.94	Average
10	15.419	35.21	10.85	46.06	60.00	-13.94	QP
11	22.697	20.06	11.37	31.43	50.00	-18.57	Average
12	22.697	30.06	11.37	41.43	60.00	-18.57	QP

Remark:

1. Correct Factor = LISN Factor + Cable Loss + Pulse Limiter Factor, the value was added to Original Receiver Reading by the software automatically.
2. Result = Reading + Correct Factor.
3. Margin = Result - Limit
4. An initial pre-scan was performed on the Phase and neutral lines with peak detector. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.
5. The frequency which is out of the limit, is the fundamental frequency of the product.

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS210-V1.1

APPENDIX 1 PHOTOS OF TEST SETUP

See test photos attached in Appendix 1 for the actual connections between Product and support equipment.

APPENDIX 2 PHOTOS OF EUT CONSTRUCTIONAL DETAILS

Refer to Appendix 2 for EUT external and internal photos.

*** End of Report ***

The test report is effective only with both signature and specialized stamp. The result(s) shown in this report refer only to the sample(s) tested. Without written approval of UnionTrust, this report can't be reproduced except in full.
