



Shenzhen CTL Testing Technology Co., Ltd.
Tel: +86-755-89486194 Fax: +86-755-26636041

TEST REPORT

FCC Part 15 Subpart C 15.247

Report Reference No. : CTL1603280934-WF-02

Compiled by:
(position+printed name+signature)

Jacky Chen
(File administrators)

Jacky Chen

Tested by:
(position+printed name+signature)

Allen Wang
(Test Engineer)

Allen Wang

Approved by:
(position+printed name+signature)

Tracy Qi
(Manager)

Tracy Qi

Product Name : GSM WIFI GPRS home alarm system

Model/Type reference : G90B

List Model(s)..... : See next page

Trade Mark..... : N/A

FCC ID..... : 2AIKI-G90

Applicant's name : **Shenzhen Golden Security Technology Co.,Ltd**

Address of applicant..... : 2nd floor, Bldg. 3, PuHua Technology Park, GongYeYuan Road,
DaLang Administration, LongHua New District, Shenzhen,
Guangdong, China(Mainland)

Test Firm..... : **Shenzhen CTL Testing Technology Co., Ltd.**

Address of Test Firm : Floor 1-A, Baisha Technology Park, No.3011, Shahexi Road,
Nanshan District, Shenzhen, China 518055

Test specification..... :

Standard : **FCC Part 15.247:** Operation within the bands 902-928 MHz,
2400-2483.5 MHz and 5725-5850 MHz.

TRF Originator : Shenzhen CTL Testing Technology Co., Ltd.

Master TRF..... : Dated 2011-01

Date of Receipt..... : Mar. 28, 2016

Date of Test Date..... : May 04, 2016–May 23, 2016

Data of Issue..... : May 25, 2016

Result..... : Pass

Shenzhen CTL Testing Technology Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen CTL Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen CTL Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

TEST REPORT

Test Report No. :	CTL1603280934-WF-02	May 25, 2016
		Date of issue

Equipment under Test : GSM WIFI GPRS home alarm system

Model /Type : G90B

Listed Models : G90C, G90E, GS-WSD02, GS-WGD01, GS-SS01, GS-WPD01, GS-SS07, GS-SS02B, GS-K07, GS-WDS07, GS-S07, GS-I910, GS-WMS07, GS-RMC08, GS-N650, GS-WDB08, GS-SS08, GS-XHZZQ, GS-WSD08

Applicant : Shenzhen Golden Security Technology Co.,Ltd

Address : 2nd floor, Bldg. 3, PuHua Technology Park, GongYeYuan Road, DaLang Administration, LongHua New District, Shenzhen, Guangdong, China(Mainland)

Manufacturer : Shenzhen Golden Security Technology Co.,Ltd

Address : 2nd floor, Bldg. 3, PuHua Technology Park, GongYeYuan Road, DaLang Administration, LongHua New District, Shenzhen, Guangdong, China(Mainland)

Test result	Pass *
-------------	--------

* In the configuration tested, the EUT complied with the standards specified page 5.

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

**** Modified History ****


Revisions	Description	Issued Data	Report No.	Remark
Version 1.0	Initial Test Report Release	2016-05-25	CTL1603280934-WF-02	Tracy Qi



Table of Contents

Page

1. SUMMARY.....	5
1.1. TEST STANDARDS	5
1.2. TEST DESCRIPTION.....	5
1.3. TEST FACILITY	6
1.4. STATEMENT OF THE MEASUREMENT UNCERTAINTY.....	6
2. GENERAL INFORMATION	7
2.1. ENVIRONMENTAL CONDITIONS	7
2.2. GENERAL DESCRIPTION OF EUT	7
2.3. DESCRIPTION OF TEST MODES AND TEST FREQUENCY	8
2.4. EQUIPMENTS USED DURING THE TEST	9
2.5. RELATED SUBMITTAL(S) / GRANT (S)	9
2.6. MODIFICATIONS.....	9
3. TEST CONDITIONS AND RESULTS	10
3.1. CONDUCTED EMISSIONS TEST.....	10
3.2. RADIATED EMISSIONS AND BAND EDGE.....	13
3.3. MAXIMUM CONDUCTED OUTPUT POWER	19
3.4. POWER SPECTRAL DENSITY	20
3.5. 6dB BANDWIDTH.....	23
3.6. OUT-OF-BAND EMISSIONS	25
3.7. ANTENNA REQUIREMENT	33
4. TEST SETUP PHOTOS OF THE EUT	34
5. EXTERNAL AND INTERNAL PHOTOS OF THE EUT.....	36

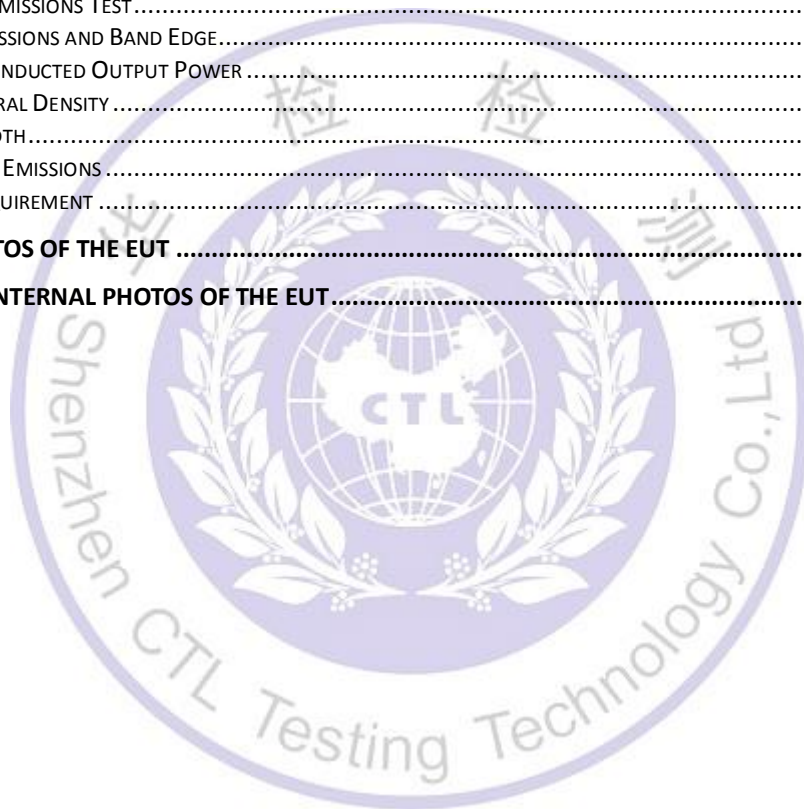

1. SUMMARY

1.1. TEST STANDARDS

The tests were performed according to following standards:

[FCC Rules Part 15.247](#): Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz

[ANSI C63.10:2013](#) : American National Standard for Testing Unlicensed Wireless Devices

[ANSI C63.4: 2014](#): American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40GHz
Range of 9 kHz to 40GHz

[KDB558074 D01 V03r05](#): Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247

1.2. Test Description

FCC PART 15.247		
FCC Part 15.207	AC Power Conducted Emission	PASS
FCC Part 15.247(a)(2)	6dB Bandwidth	PASS
FCC Part 15.247(d)	Spurious RF Conducted Emission	PASS
FCC Part 15.247(b)	Maximum Conducted Output Power	PASS
FCC Part 15.247(e)	Power Spectral Density	PASS
FCC Part 15.109/ 15.205/ 15.209	Radiated Emissions	PASS
FCC Part 15.247(d)	Band Edge	PASS
FCC Part 15.203/15.247 (b)	Antenna Requirement	PASS

1.3. Test Facility

1.3.1 Address of the test laboratory

Shenzhen CTL Testing Technology Co., Ltd.

Floor 1-A, Baisha Technology Park, No. 3011, Shahexi Road, Nanshan, Shenzhen 518055 China

There is one 3m semi-anechoic chamber and two line conducted labs for final test. The Test Sites meet the requirements in documents ANSI C63.4 and CISPR 22/EN 55022 requirements.

1.3.2 Laboratory accreditation

The test facility is recognized, certified, or accredited by the following organizations:

IC Registration No.: 9618B

The 3m alternate test site of Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration No.: 9618B on November 13, 2013.

FCC-Registration No.: 970318

Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 970318, December 19, 2013.

1.4. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 "Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements" and is documented in the Shenzhen CTL Testing Technology Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CTL laboratory is reported:

Test	Measurement Uncertainty	Notes
Transmitter power conducted	± 0.57 dB	(1)
Transmitter power Radiated	± 2.20 dB	(1)
Conducted spurious emission 9KHz-40 GHz	± 2.20 dB	(1)
Occupied Bandwidth	± 0.01 ppm	(1)
Radiated Emission 30~1000MHz	± 4.10 dB	(1)
Radiated Emission Above 1GHz	± 4.32 dB	(1)
Conducted Disturbance 0.15~30MHz	± 3.20 dB	(1)

- (1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

2. GENERAL INFORMATION

2.1. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Normal Temperature:	25°C
Relative Humidity:	55 %
Air Pressure:	101 kPa

2.2. General Description of EUT

Product Name:	GSM WIFI GPRS home alarm system
Model/Type reference:	G90B
Power supply:	DC 12V from adapter or DC 3.7V from internal battery
Adapter Information:	Model: G90 Input: 100-240V~50/60Hz 0.3A Output: 12VDC---1000mA
WIFI :	
Supported type:	802.11b/802.11g/802.11n(H20)/802.11n(H40)
Modulation:	802.11b: DSSS 802.11g/802.11n(H20)/802.11n(H40): OFDM
Operation frequency:	802.11b/802.11g/802.11n(H20): 2412MHz~2462MHz 802.11n(H40): 2422MHz~2452MHz
Channel number:	802.11b/802.11g/802.11n(H20): 11 802.11n(H40): 7
Channel separation:	5MHz
Antenna type:	FPC Antenna
Antenna gain:	1.0dBi

Note: For more details, please refer to the user's manual of the EUT.

2.3. Description of Test Modes and Test Frequency

The Applicant provides communication tools software to control the EUT for staying in continuous transmitting (Duty Cycle more than 98%) and receiving mode for testing.

All test performed at the low, middle and high of operational frequency range of each mode.

Operation Frequency WIFI :

Channel	Frequency(MHz)	Channel	Frequency(MHz)
1	2412	8	2447
2	2417	9	2452
3	2422	10	2457
4	2427	11	2462
5	2432		
6	2437		
7	2442		

Note: The line display in grey were the channel selected for testing

Data Rate Used:

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel
Maximum Conducted Output Power Power Spectral Density 6dB Bandwidth Spurious RF conducted emission Radiated Emission 9kHz~1GHz& Radiated Emission 1GHz~10th Harmonic	11b/DSSS	1 Mbps	1/6/11
	11g/OFDM	6 Mbps	1/6/11
	11n(20MHz)/OFDM	6.5Mbps	1/6/11
	11n(40MHz)/OFDM	13.5 Mbps	3/6/9
Band Edge	11b/DSSS	1 Mbps	1/11
	11g/OFDM	6 Mbps	1/11
	11n(20MHz)/OFDM	6.5Mbps	1/11
	11n(40MHz)/OFDM	13.5 Mbps	3//9

2.4. Equipments Used during the Test

Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
LISN	R&S	ENV216	3560.6550.1 2	2015/06/02	2016/06/01
LISN	R&S	ESH2-Z5	860014/010	2015/06/02	2016/06/01
Power Meter	Anritsu	ML2487B	110553	2015/06/02	2016/06/01
Power Sensor	Anritsu	MA2411B	100345	2016/05/21	2017/05/20
Bilog Antenna	Sunol Sciences Corp.	JB1	A061713	2015/06/02	2016/06/01
EMI Test Receiver	R&S	ESCI	103710	2015/06/02	2016/06/01
Spectrum Analyzer	Agilent	E4407B	MY41440676	2016/05/21	2017/05/20
Spectrum Analyzer	Agilent	N9020	US46220290	2016/01/17	2017/01/16
Controller	EM Electronics	Controller EM 1000	N/A	2016/05/21	2017/05/20
Horn Antenna	Sunol Sciences Corp.	DRH-118	A062013	2016/05/19	2017/05/18
Active Loop Antenna	SCHWARZBECK	FMZB1519	1519-037	2016/05/19	2017/05/18
Amplifier	Agilent	8349B	3008A02306	2016/05/19	2017/05/18
Amplifier	Agilent	8447D	2944A10176	2016/05/19	2017/05/18
Temperature/Humidity Meter	Gangxing	CTH-608	02	2016/05/20	2017/05/19
High-Pass Filter	K&L	9SH10-2700/X1 2750-O/O	N/A	2016/05/20	2017/05/19
High-Pass Filter	K&L	41H10-1375/U1 2750-O/O	N/A	2016/05/20	2017/05/19
Coaxial Cables	HUBER+SUHNER	SUCOFLEX 104PEA-10M	10m	2015/06/02	2016/06/01
Coaxial Cables	HUBER+SUHNER	SUCOFLEX 104PEA-3M	3m	2015/06/02	2016/06/01
Coaxial Cables	HUBER+SUHNER	SUCOFLEX 104PEA-3M	3m	2015/06/02	2016/06/01
RF Cable	Megalon	RF-A303	N/A	2015/06/02	2016/06/01

The calibration interval was one year

2.5. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

2.6. Modifications

No modifications were implemented to meet testing criteria.

3. TEST CONDITIONS AND RESULTS

3.1. Conducted Emissions Test


LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.207

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST CONFIGURATION

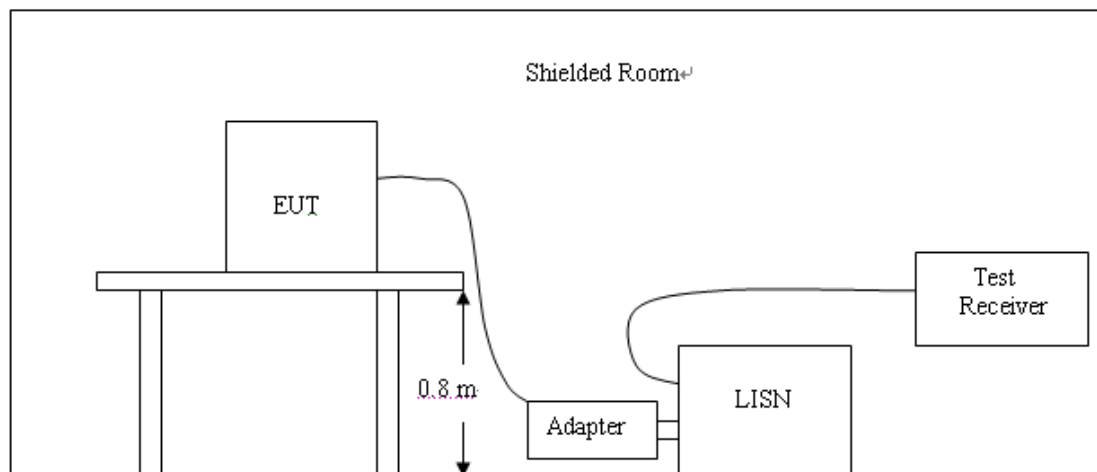

TEST PROCEDURE


1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system; a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10:2013.
2. Support equipment, if needed, was placed as per ANSI C63.10:2013.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10:2013.
4. The EUT received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
5. All support equipments received AC power from a second LISN, if any.
6. The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.

TEST RESULTS

Remark: 802.11b/802.11g/802.11n (H20)/802.11n (H40) mode all have been tested, only worse case is reported

SCAN TABLE: "Voltage (9K-30M) FIN"

Short Description: 150K-30M Voltage

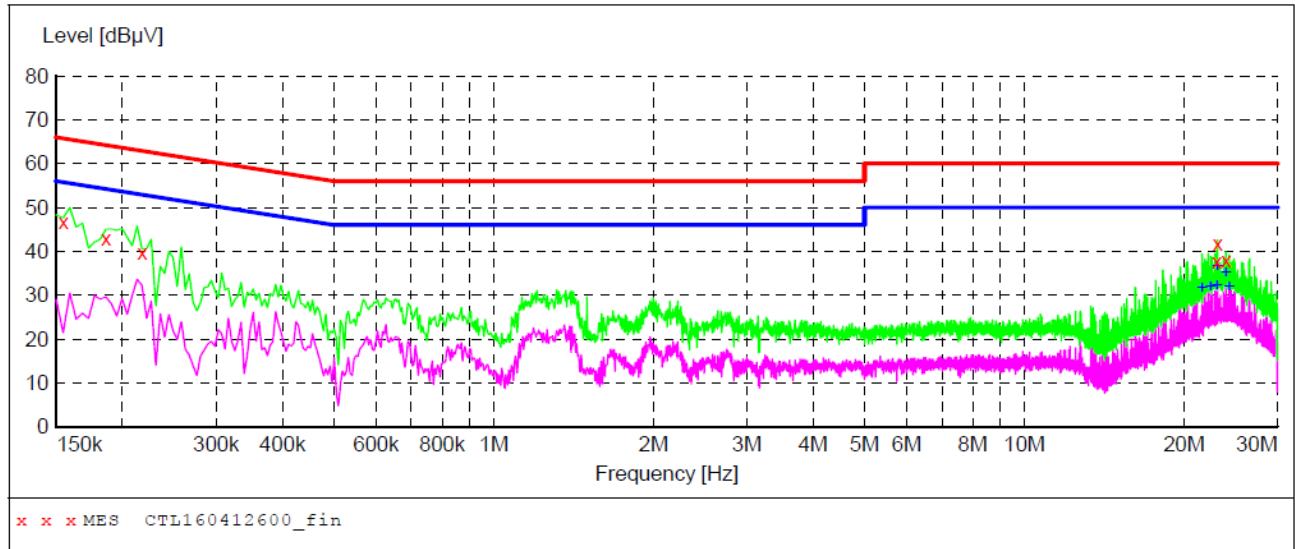**MEASUREMENT RESULT: "CTL160412600_fin"**

4/12/2016 10:43AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.154501	46.80	10.2	66	19.0	QP	L1	GND
0.186001	42.90	10.2	64	21.3	QP	L1	GND
0.217501	39.70	10.2	63	23.2	QP	L1	GND
23.068501	37.70	11.1	60	22.3	QP	L1	GND
23.127001	41.80	11.1	60	18.2	QP	L1	GND
24.000001	37.80	11.1	60	22.2	QP	L1	GND


MEASUREMENT RESULT: "CTL160412600_fin2"

4/12/2016 10:43AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
21.664501	31.60	11.0	50	18.4	AV	L1	GND
22.456501	31.90	11.0	50	18.1	AV	L1	GND
23.068501	32.10	11.1	50	17.9	AV	L1	GND
23.127001	36.50	11.1	50	13.5	AV	L1	GND
24.000001	35.00	11.1	50	15.0	AV	L1	GND
24.346501	31.80	11.1	50	18.2	AV	L1	GND

SCAN TABLE: "Voltage (9K-30M)FIN"

Short Description: 150K-30M Voltage

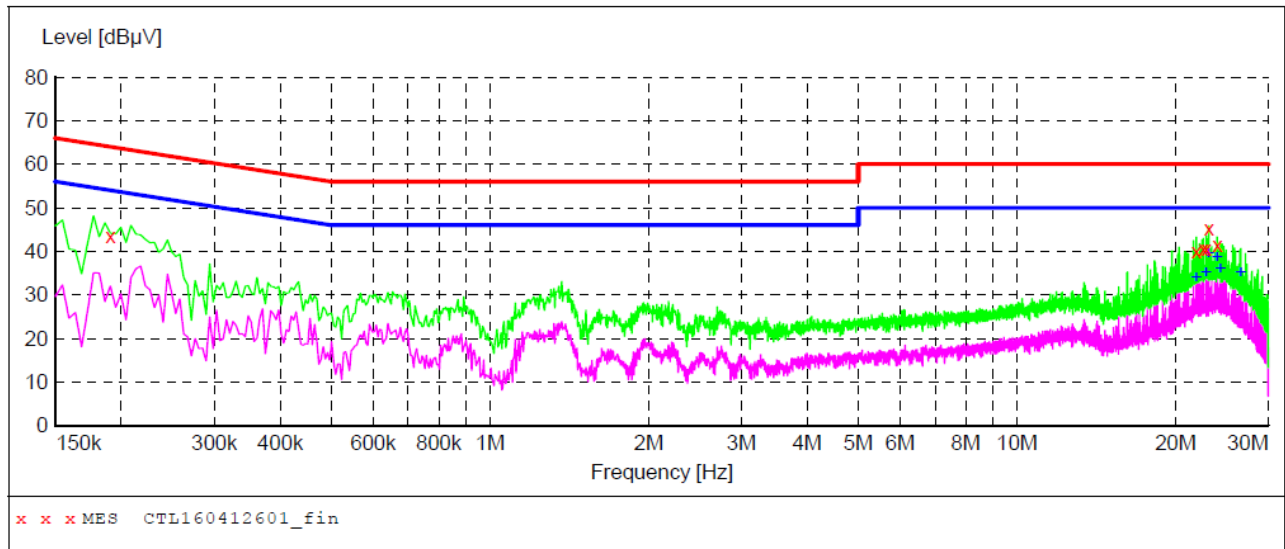**MEASUREMENT RESULT: "CTL160412601_fin"**

4/12/2016 10:47AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.190501	43.50	10.2	64	20.5	QP	N	GND
21.907501	39.90	11.0	60	20.1	QP	N	GND
22.578001	40.60	11.0	60	19.4	QP	N	GND
22.884001	40.70	11.1	60	19.3	QP	N	GND
23.127001	45.20	11.1	60	14.8	QP	N	GND
24.000001	41.30	11.1	60	18.7	QP	N	GND

MEASUREMENT RESULT: "CTL160412601_fin2"

4/12/2016 10:47AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
21.907501	33.90	11.0	50	16.1	AV	N	GND
22.884001	34.90	11.1	50	15.1	AV	N	GND
23.127001	39.50	11.1	50	10.5	AV	N	GND
24.000001	38.50	11.1	50	11.5	AV	N	GND
24.351001	35.80	11.1	50	14.2	AV	N	GND
26.610001	35.10	11.2	50	14.9	AV	N	GND

3.2. Radiated Emissions and Band Edge

Limit

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emission out of authorized band shall not exceed the following table at a 3 meters measurement distance.


In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a)

Radiated emission limits


Frequency (MHz)	Distance (Meters)	Radiated (dBμV/m)	Radiated (μV/m)
0.009-0.49	3	$20\log(2400/F(\text{KHz}))+40\log(300/3)$	$2400/F(\text{KHz})$
0.49-1.705	3	$20\log(24000/F(\text{KHz}))+40\log(30/3)$	$24000/F(\text{KHz})$
1.705-30	3	$20\log(30)+40\log(30/3)$	30
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

TEST CONFIGURATION


(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

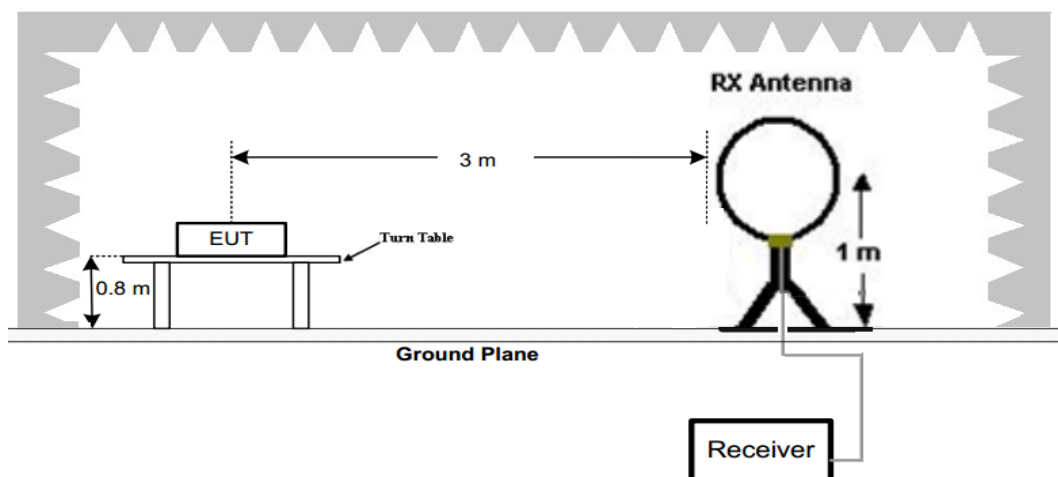

(B) Radiated Emission Test Set-Up, Frequency below 1000MHz

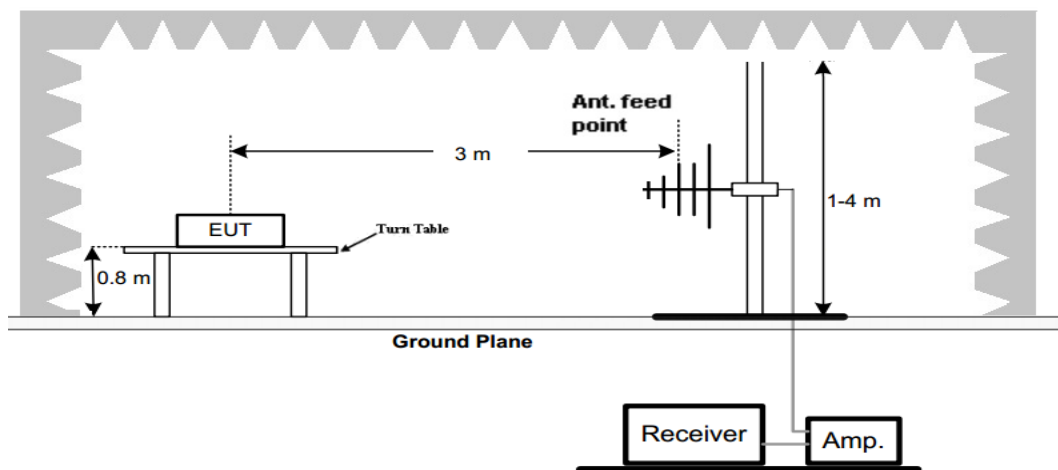

(C) Radiated Emission Test Set-Up, Frequency above 1000MHz

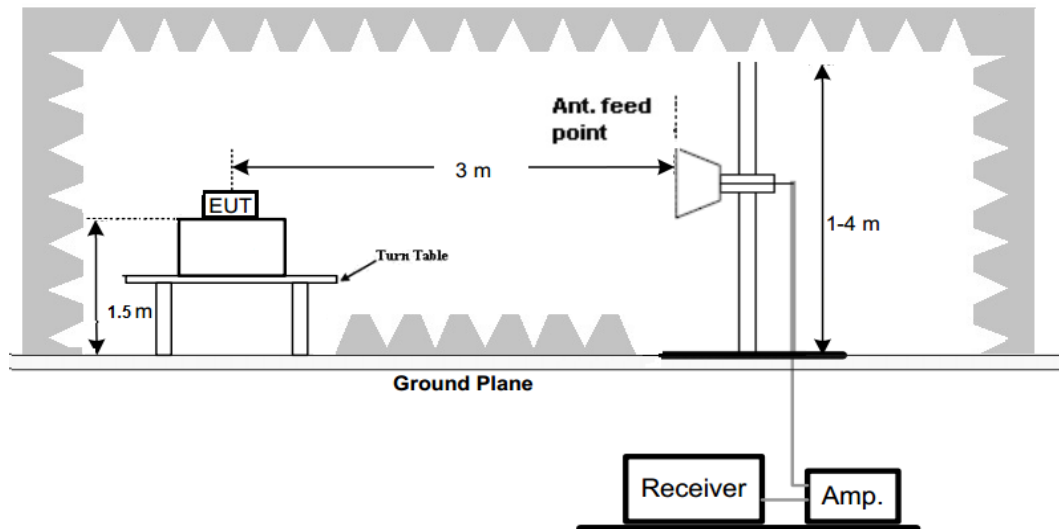**Test Procedure**

1. Below 1GHz measurement the EUT is placed on a turntable which is 0.8m above ground plane, and above 1GHz measurement EUT was placed on a low permittivity and low loss tangent turn table which is 1.5m above ground plane.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed.

TEST RESULTS

Remark:


1. We tested three channels (lowest/middle/highest) of each mode and recorded worst case at 802.11b low channel for measurement below 1GHz.
2. We tested three channels (lowest/middle/highest) of each mode and recorded worst case at 802.11b mode above 1GHz.
3. Radiated emission test from 9 KHz to 10th harmonic of fundamental was verified, and no emission found except system noise floor in 9 KHz to 30MHz and not recorded in this report.

For 30MHz-1GHz

Horizontal

SWEEP TABLE: "test (30M-1G)"

Short Description:		Field Strength		Transducer	
Start	Stop	Detector	Meas. Time	IF Bandw.	
Frequency 30.0 MHz	Frequency 1.0 GHz	MaxPeak	300.0 ms	120 kHz	JB1

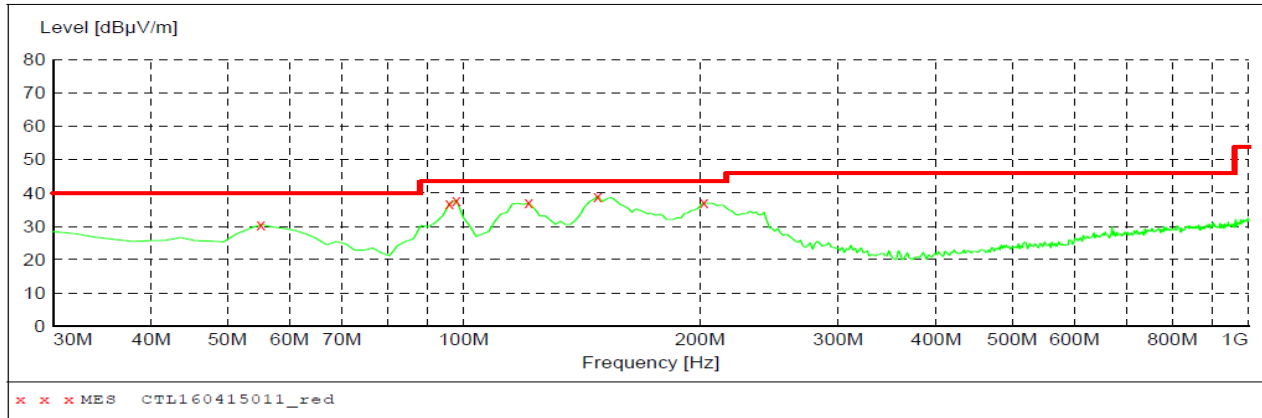**MEASUREMENT RESULT: "CTL160415011_red"**


4/15/2016 3:22PM

Frequency MHz	Level dBμV/m	Transd dB	Limit dBμV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
55.220000	30.60	8.0	40.0	9.4	---	0.0	0.00	HORIZONTAL
95.960000	36.70	10.2	43.5	6.8	---	0.0	0.00	HORIZONTAL
97.900000	37.90	10.7	43.5	5.6	---	0.0	0.00	HORIZONTAL
121.180000	37.00	14.7	43.5	6.5	---	0.0	0.00	HORIZONTAL
148.340000	39.00	13.8	43.5	4.5	---	0.0	0.00	HORIZONTAL
202.660000	37.10	14.1	43.5	6.4	---	0.0	0.00	HORIZONTAL

Vertical

SWEEP TABLE: "test (30M-1G)"

Short Description:		Field Strength		Transducer	
Start	Stop	Detector	Meas. Time	IF Bandw.	
Frequency 30.0 MHz	Frequency 1.0 GHz	MaxPeak	300.0 ms	120 kHz	JB1

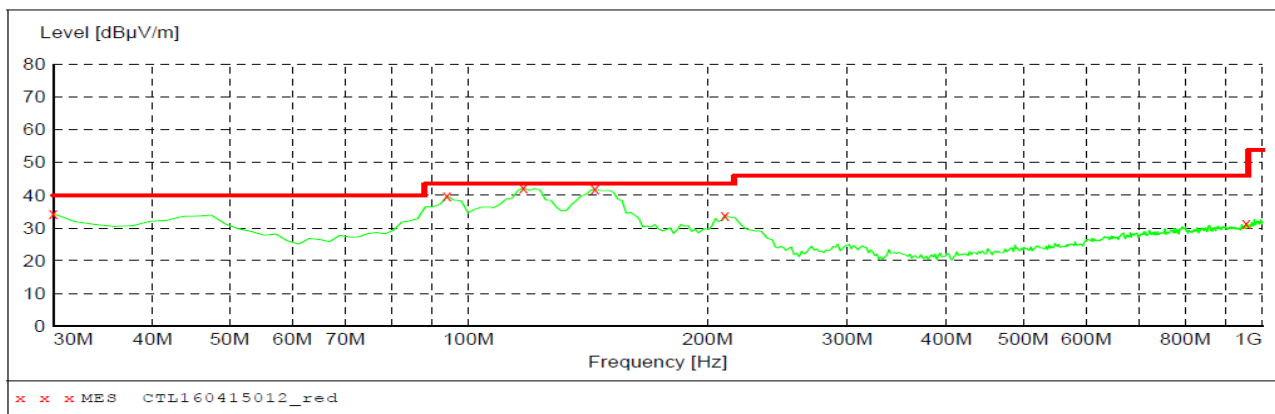**MEASUREMENT RESULT: "CTL160415012_red"**

4/15/2016 4:36PM

Frequency MHz	Level dBμV/m	Transd dB	Limit dBμV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
30.000000	34.30	20.8	40.0	5.7	---	0.0	0.00	VERTICAL
94.020000	39.80	9.9	43.5	3.7	---	0.0	0.00	VERTICAL
117.300000	42.40	14.7	43.5	1.1	---	0.0	0.00	VERTICAL
144.460000	41.90	14.1	43.5	1.6	---	0.0	0.00	VERTICAL
210.420000	33.90	14.0	43.5	9.6	---	0.0	0.00	VERTICAL
955.380000	31.30	26.6	46.0	14.7	---	0.0	0.00	VERTICAL

For 1GHz to 25GHz

Note: 802.11b/802.11g/802.11n (H20)/802.11n (H40) all have been tested; only worse case 802.11b is reported.

802.11b Mode (above 1GHz)

Frequency(MHz):				2412		Polarity:			HORIZONTAL	
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	2402.00	97.58	PK	--	--	64.18	28.78	4.61	0.00	33.40
1	2402.00	90.36	AV	--	--	56.96	28.78	4.61	0.00	33.40
2	2390.00	50.11	PK	74	23.89	16.79	28.72	4.60	0.00	33.32
2	2390.00	--	AV	54	--	--	--	--	--	--
3	2400.00	60.85	PK	74	13.15	27.46	28.78	4.61	0.00	33.39
3	2400.00	53.65	AV	54	0.35	20.26	28.78	4.61	0.00	33.39
4	4824.00	60.21	PK	74	13.79	55.66	33.52	6.92	35.89	4.55
4	4824.00	51.52	AV	54	2.48	46.97	33.52	6.92	35.89	4.55
5	5325.50	48.69	PK	74	25.31	41.16	34.67	7.22	34.35	7.53
5	5325.50	--	AV	54	--	--	--	--	--	--
6	7236.00	55.24	PK	74	18.76	43.97	37.10	9.19	35.02	11.27
6	7236.00	46.54	AV	54	7.46	35.27	37.10	9.19	35.02	11.27

Frequency(MHz):				2412		Polarity:			VERTICAL	
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	2402.00	97.89	PK	--	--	64.49	28.78	4.61	0.00	33.40
1	2402.00	90.45	AV	--	--	57.05	28.78	4.61	0.00	33.40
2	2390.00	50.36	PK	74	23.64	17.04	28.72	4.60	0.00	33.32
2	2390.00	--	AV	54	--	--	--	--	--	--
3	2400.00	60.44	PK	74	13.56	27.05	28.78	4.61	0.00	33.39
3	2400.00	52.57	AV	54	1.43	19.18	28.78	4.61	0.00	33.39
4	4824.00	61.87	PK	74	12.13	57.32	33.52	6.92	35.89	4.55
4	4824.00	51.65	AV	54	2.35	47.10	33.52	6.92	35.89	4.55
5	5150.25	48.48	PK	74	25.52	41.21	34.44	7.12	34.28	7.27
5	5150.25	--	AV	54	--	--	--	--	--	--
6	7236.00	55.59	PK	74	18.41	44.32	37.10	9.19	35.02	11.27
6	7236.00	46.34	AV	54	7.66	35.07	37.10	9.19	35.02	11.27

REMARKS:

1. Emission level (dBuV/m) =Raw Value (dBuV)+Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
3. Margin value = Limit value- Emission level.
4. -- Mean the PK detector measured value is below average limit.
5. The other emission levels were very low against the limit.
6. RBW1MHz VBW3MHz Peak detector is for PK value; RBW 1MHz VBW10Hz Peak detector is for AV value.

Frequency(MHz):				2437		Polarity:			HORIZONTAL	
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	2437.00	97.55	PK	--	--	64.05	28.85	4.65	0.00	33.50
1	2437.00	90.39	AV	--	--	56.89	28.85	4.65	0.00	33.50
2	3725.50	48.58	PK	74	25.42	44.68	32.80	6.09	34.99	3.90
2	3725.50	--	AV	54	--	--	--	--	--	--
3	4874.00	60.65	PK	74	13.35	54.31	33.59	6.95	34.20	6.34
3	4874.00	51.21	AV	54	2.79	44.87	33.59	6.95	34.20	6.34
4	5375.50	48.32	PK	74	25.68	40.38	34.72	7.25	34.02	7.94
4	5375.50	--	AV	54	--	--	--	--	--	--
5	7311.00	56.84	PK	74	17.16	45.18	37.44	9.22	35.00	11.66
5	7311.00	46.25	AV	54	7.75	34.59	37.44	9.22	35.00	11.66

Frequency(MHz):				2437		Polarity:			VERTICAL	
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	2437.00	98.85	PK	--	--	65.35	28.85	4.65	0.00	33.50
1	2437.00	90.41	AV	--	--	56.91	28.85	4.65	0.00	33.50
2	4122.50	48.69	PK	74	25.31	44.13	32.81	6.47	34.73	4.56
2	4122.50	--	AV	54	--	--	--	--	--	--
3	4874.00	60.32	PK	74	13.68	54.08	33.59	6.95	34.30	6.24
3	4874.00	51.24	AV	54	2.76	45.00	33.59	6.95	34.30	6.24
4	5125.25	48.31	PK	74	25.69	40.98	34.38	7.10	34.16	7.33
4	5125.25	--	AV	54	--	--	--	--	--	--
5	7311.00	56.85	PK	74	17.15	45.19	37.44	9.22	35.00	11.66
5	7311.00	47.22	AV	54	6.78	35.56	37.44	9.22	35.00	11.66

REMARKS:

1. Emission level (dBuV/m) =Raw Value (dBuV)+Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
3. Margin value = Limit value- Emission level.
4. -- Mean the PK detector measured value is below average limit.
5. The other emission levels were very low against the limit.
6. RBW1MHz VBW3MHz Peak detector is for PK value; RBW 1MHz VBW10Hz Peak detector is for AV value.

Frequency(MHz):				2462		Polarity:			HORIZONTAL	
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	2480.00	97.27	PK	--	--	63.65	28.92	4.70	0.00	33.62
1	2480.00	90.33	AV	--	--	56.71	28.92	4.70	0.00	33.62
2	2483.50	62.47	PK	74	11.53	28.84	28.93	4.70	0.00	33.63
2	2483.50	52.52	AV	54	1.48	18.89	28.93	4.70	0.00	33.63
3	2500.00	49.77	PK	74	24.23	16.09	28.96	4.72	0.00	33.68
3	2500.00	--	AV	54	--	--	--	--	--	--
4	4924.00	60.45	PK	74	13.55	55.67	33.71	6.98	35.91	4.78
4	4924.00	51.52	AV	54	2.48	46.74	33.71	6.98	35.91	4.78
5	5211.50	48.36	PK	74	25.64	40.97	34.55	7.15	34.31	7.39
5	5211.50	--	AV	54	--	--	--	--	--	--
6	7386.00	56.48	PK	74	17.52	44.60	37.61	9.25	34.98	11.88
6	7386.00	47.52	AV	54	6.48	35.64	37.61	9.25	34.98	11.88

Frequency(MHz):				2462		Polarity:			VERTICAL	
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	2480.00	98.39	PK	--	--	64.77	28.92	4.70	0.00	33.62
1	2480.00	90.45	AV	--	--	56.83	28.92	4.70	0.00	33.62
2	2483.50	62.52	PK	74	11.48	28.89	28.93	4.70	0.00	33.63
2	2483.50	52.84	AV	54	1.16	19.21	28.93	4.70	0.00	33.63
3	2500.00	50.33	PK	74	23.67	16.65	28.96	4.72	0.00	33.68
3	2500.00	--	AV	54	--	--	--	--	--	--
4	4924.00	60.45	PK	74	13.55	55.67	33.71	6.98	35.91	4.78
4	4924.00	51.82	AV	54	2.18	47.04	33.71	6.98	35.91	4.78
5	5315.75	48.54	PK	74	25.46	41.02	34.66	7.21	34.34	7.52
5	5315.75	--	AV	54	--	--	--	--	--	--
6	7386.00	56.39	PK	74	17.61	44.51	37.61	9.25	34.98	11.88
6	7386.00	47.47	AV	54	6.53	35.59	37.61	9.25	34.98	11.88

REMARKS:

1. Emission level (dBuV/m) =Raw Value (dBuV)+Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
3. Margin value = Limit value- Emission level.
4. -- Mean the PK detector measured value is below average limit.
5. The other emission levels were very low against the limit.
6. RBW1MHz VBW3MHz Peak detector is for PK value; RBW 1MHz VBW10Hz Peak detector is for AV value.

3.3. Maximum Conducted Output Power


Limit

The Maximum Peak Output Power Measurement is 30dBm.

Test Procedure

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power sensor.

Test Configuration



Test Results

WIFI				
Type	Channel	Output power (dBm)	Limit (dBm)	Result
802.11b	01	22.45	30.00	Pass
	06	23.43		
	11	23.05		
802.11g	01	23.08	30.00	Pass
	06	23.66		
	11	23.21		
802.11n(HT20)	01	20.62	30.00	Pass
	06	21.01		
	11	21.16		
802.11n(HT40)	03	21.29	30.00	Pass
	06	21.61		
	09	21.92		

Note: 1.The test results including the cable lose.

3.4. Power Spectral Density

Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

Test Procedure

1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
2. Set the RBW ≥ 3 kHz.
3. Set the VBW $\geq 3 \times$ RBW.
4. Set the span to 1.5 times the DTS channel bandwidth.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum power level.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.
11. The resulting peak PSD level must be 8dBm.


Test Configuration




Test Results

WIFI				
Type	Channel	Power Spectral Density (dBm/3KHz)	Limit (dBm/3KHz)	Result
802.11b	01	-6.709	8.00	Pass
	06	-6.970		
	11	-6.932		
802.11g	01	-11.250	8.00	Pass
	06	-10.300		
	11	-10.019		
802.11n(HT20)	01	-10.418	8.00	Pass
	06	-10.365		
	11	-10.165		
802.11n(HT40)	03	-13.902	8.00	Pass
	06	-13.637		
	09	-13.632		

Test plot as follows:

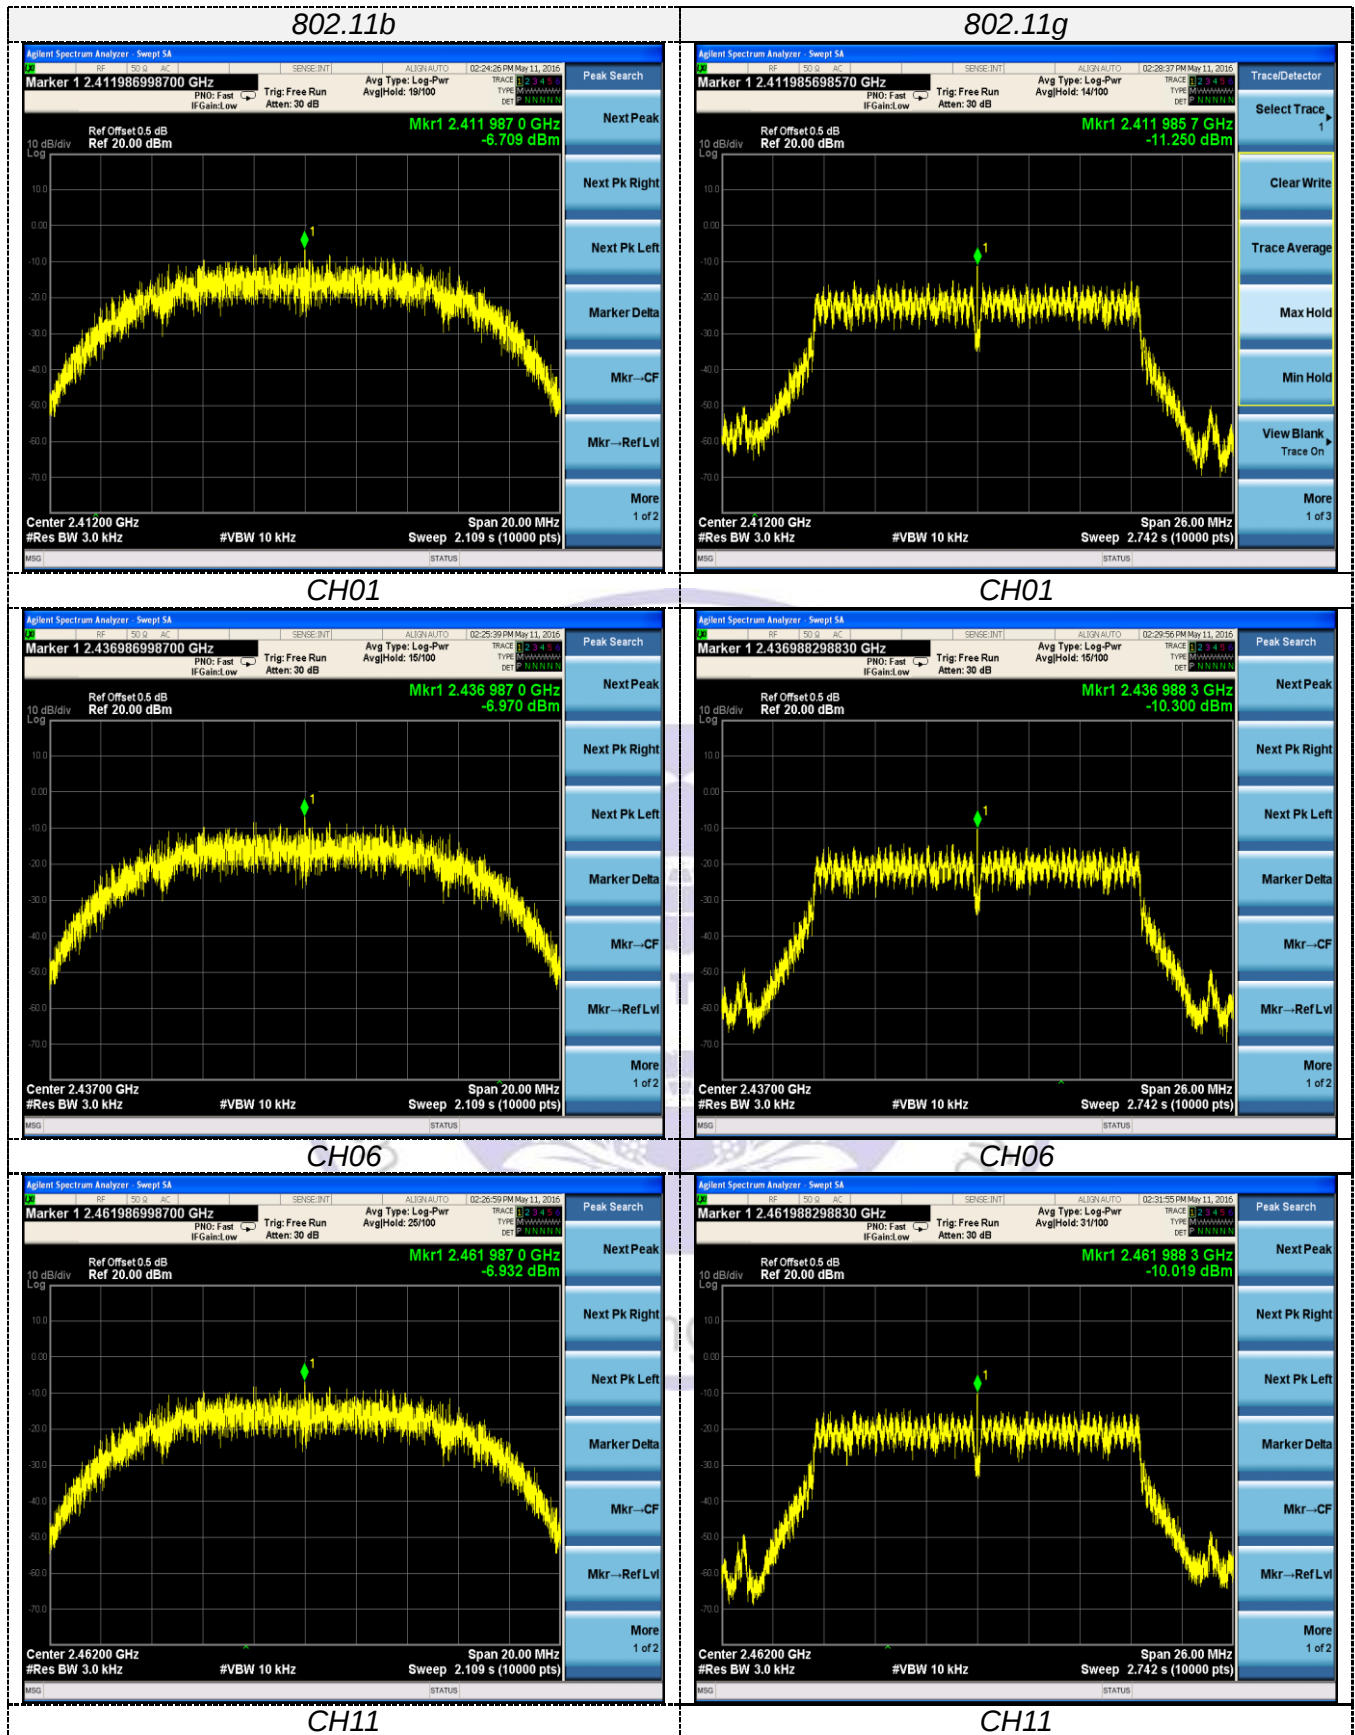

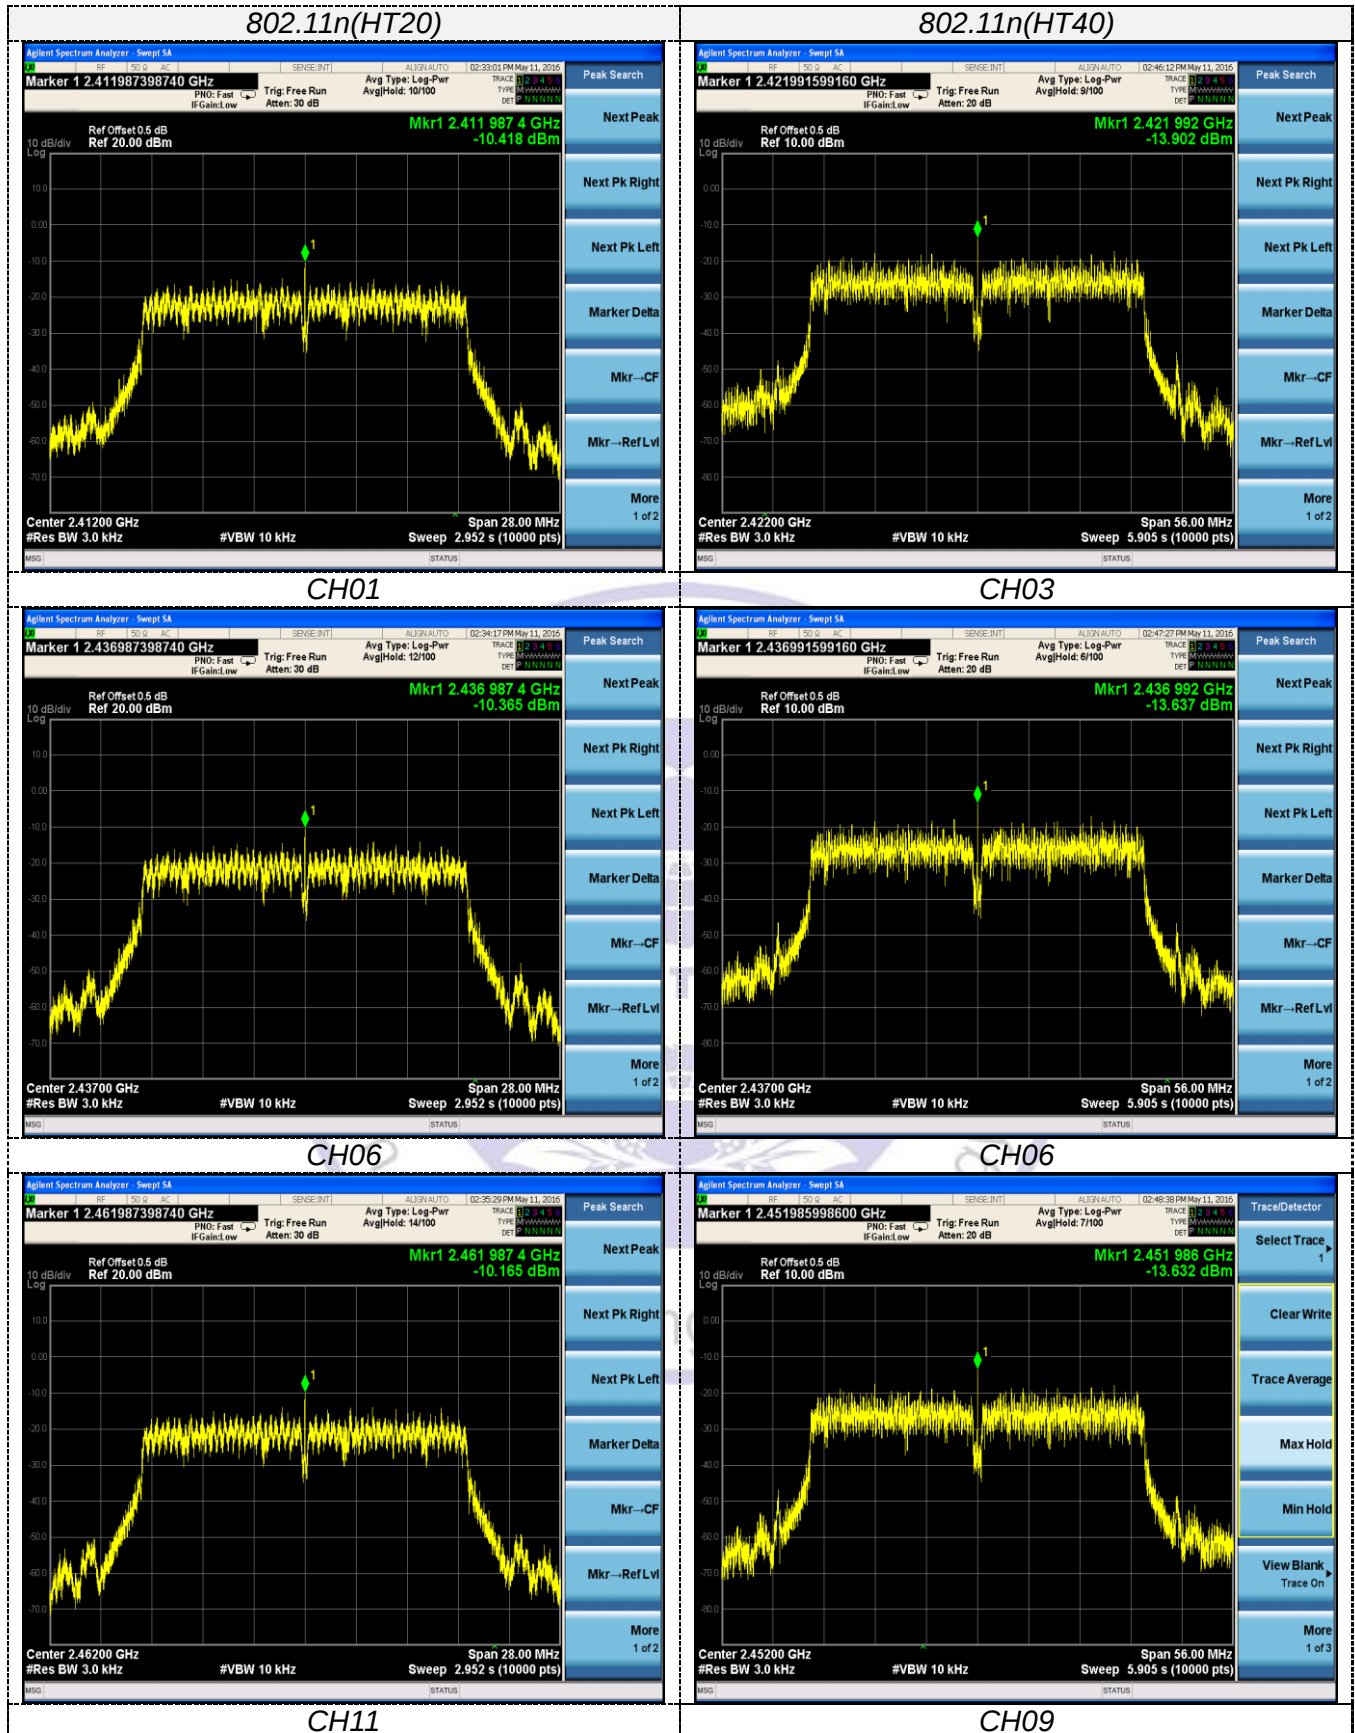

3.5. 6dB Bandwidth

Limit

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz

Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 KHz RBW and 300 KHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

Test Configuration




Test Results


WIFI					
Type	Channel	99% OBW (MHz)	6dB Bandwidth (MHz)	Limit (KHz)	Result
802.11b	01	14.978	12.080	≥500	Pass
	06	14.984	12.080		
	11	14.980	12.080		
802.11g	01	16.414	16.410	≥500	Pass
	06	16.424	16.410		
	11	16.445	16.440		
802.11n(HT20)	01	17.587	17.650	≥500	Pass
	06	17.579	17.650		
	11	17.604	17.690		
802.11n(HT40)	03	36.009	36.090	≥500	Pass
	06	35.963	36.020		
	09	36.005	36.270		

Test plot as follows:


802.11b

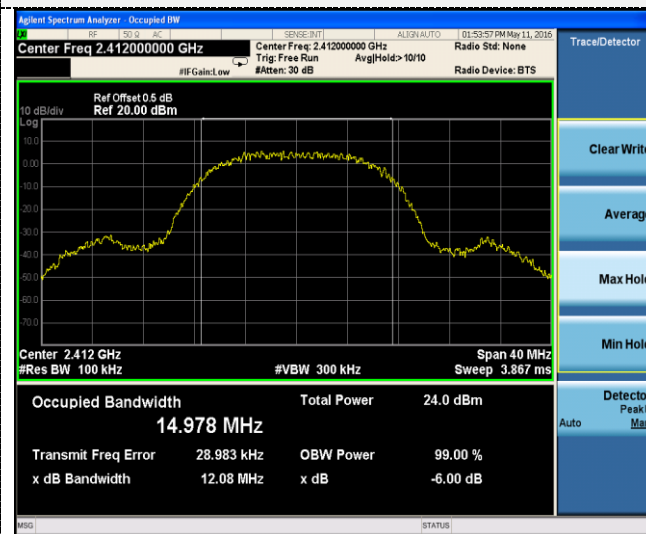


802.11g

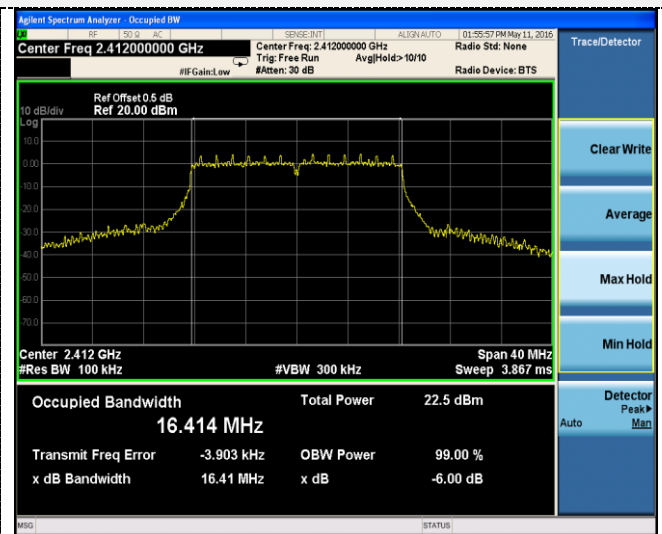


CH01

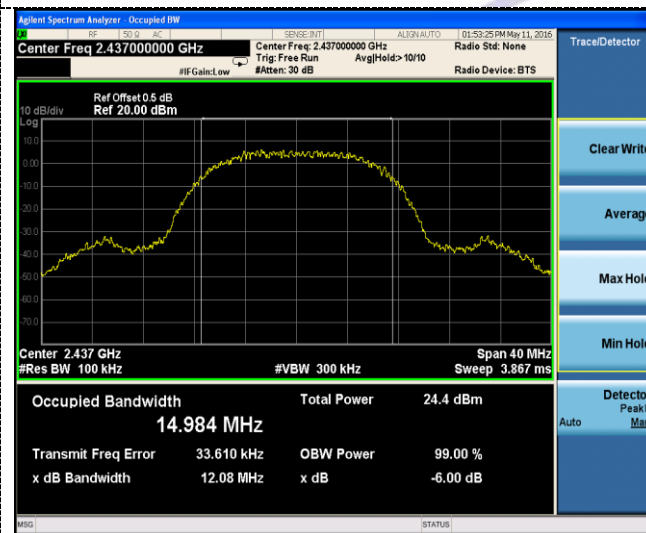


CH01

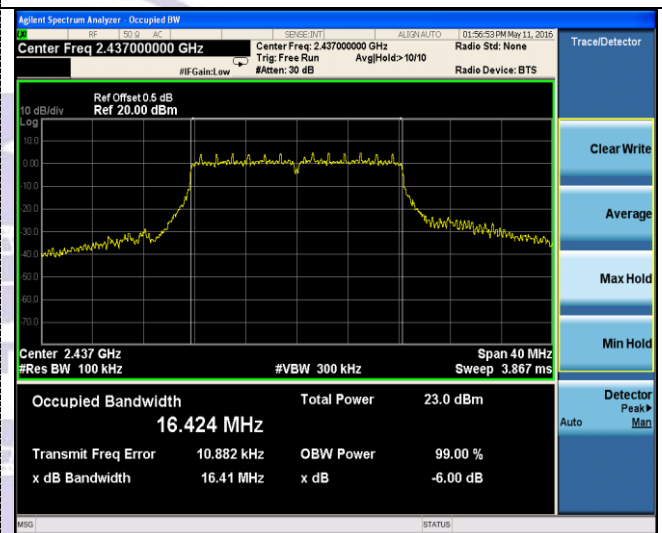

CH06

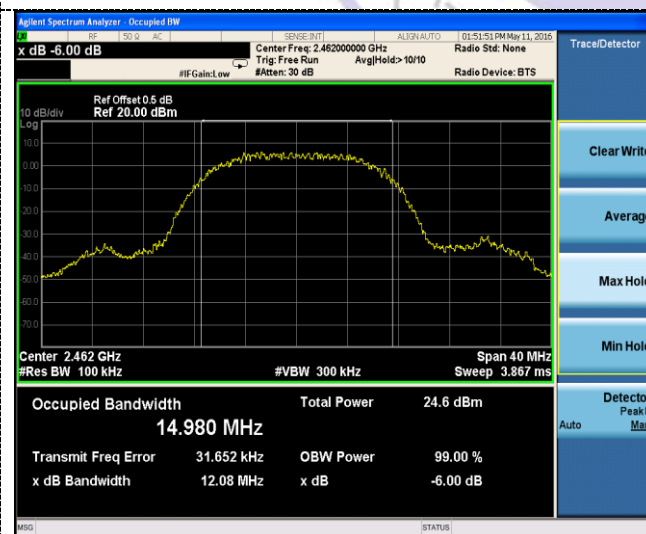

CH06

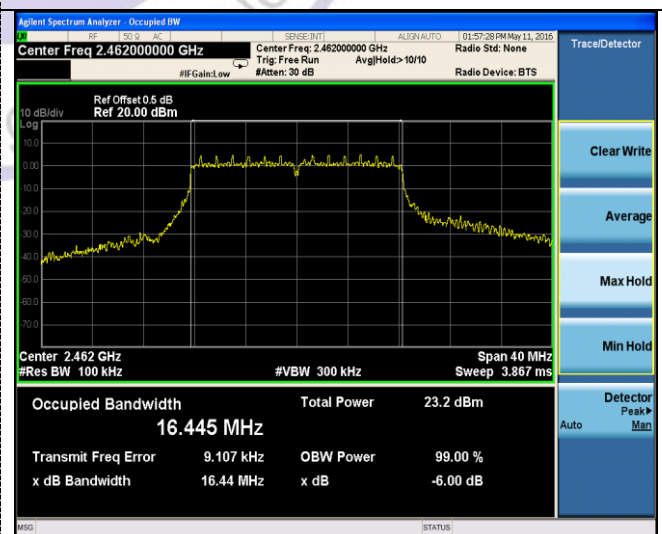


CH11




CH11




802.11n(HT20)

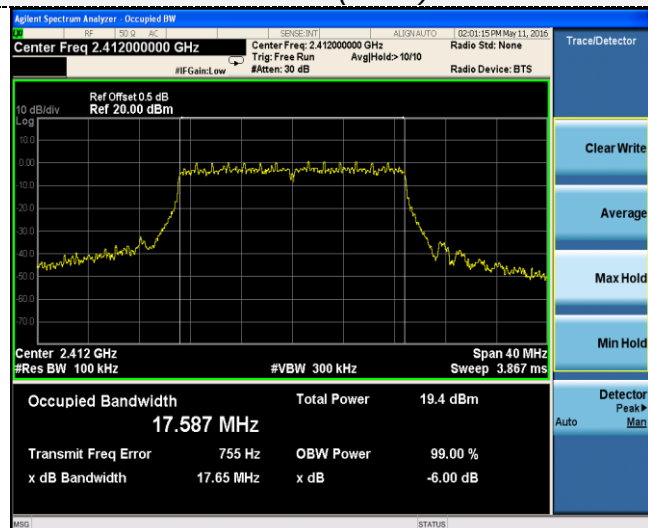


802.11n(HT40)

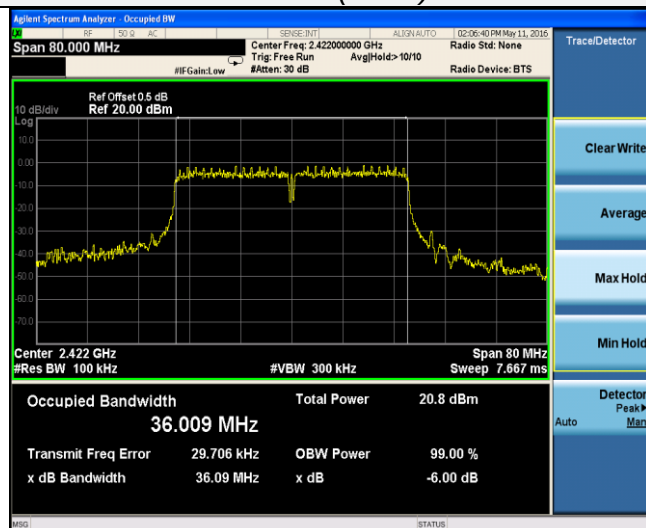


CH01

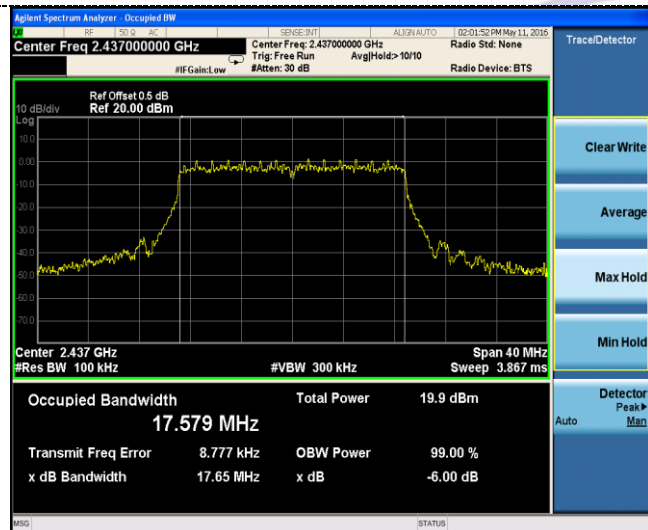


CH03

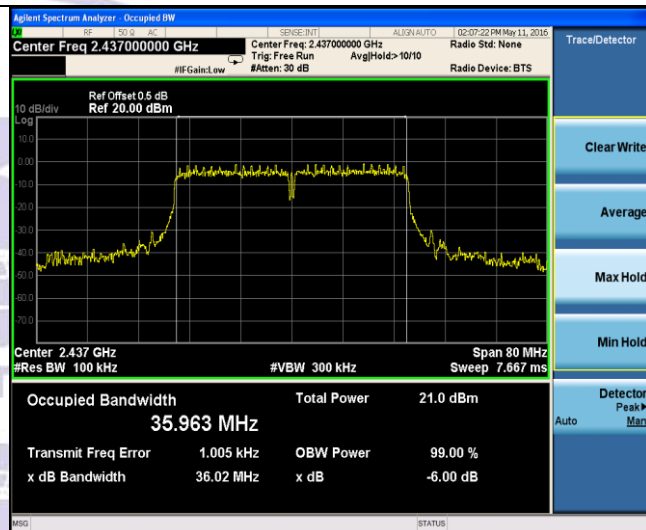

CH06

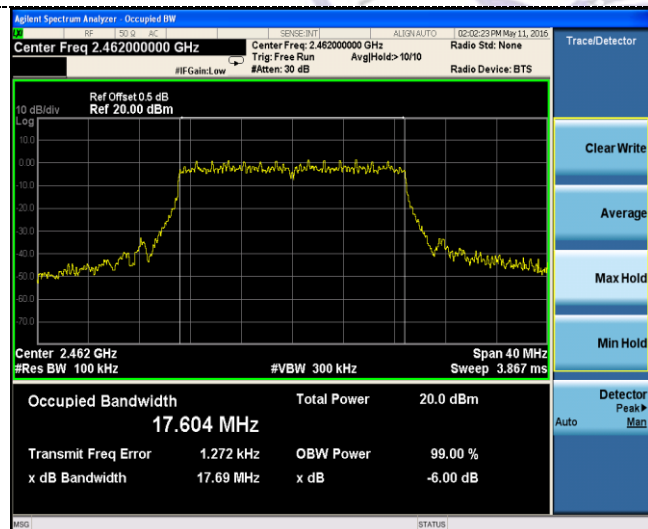

CH06

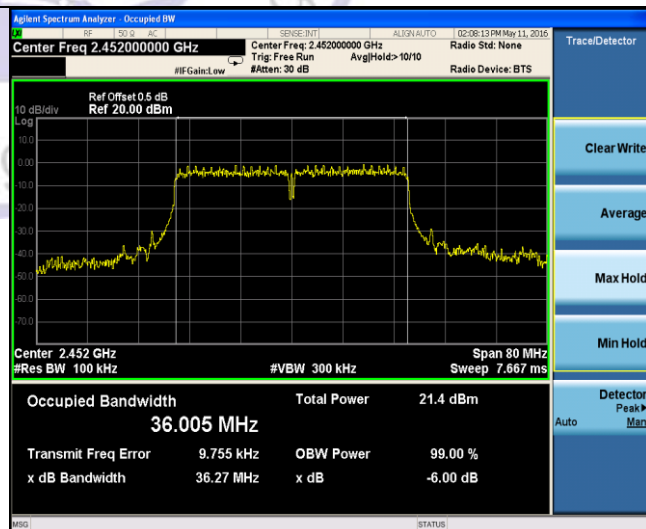

CH11

CH09

3.6. Out-of-band Emissions

Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.

Test Procedure

Connect the transmitter output to spectrum analyzer using a low loss RF cable, and set the spectrum analyzer to RBW=100 kHz, VBW= 300 kHz, peak detector, and max hold. Measurements utilizing these settings are made of the in-band reference level, band edge and out-of-band emissions.

Test Configuration





Test Results



Remark: The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions and band edge measurement data.

Test plot as follows:



802.11b

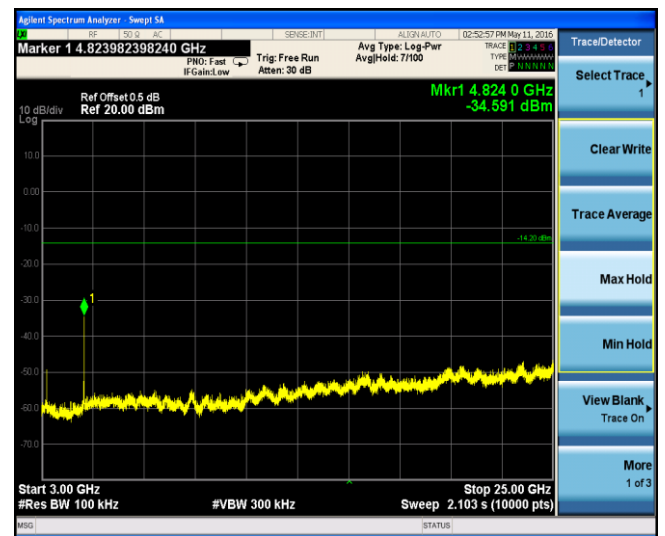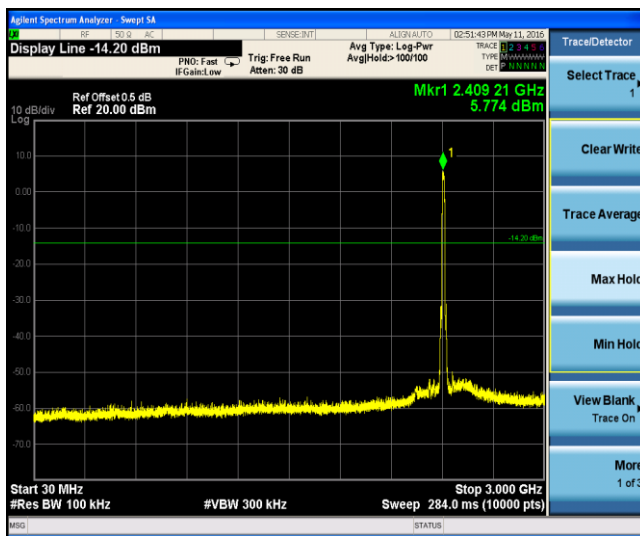


CH01

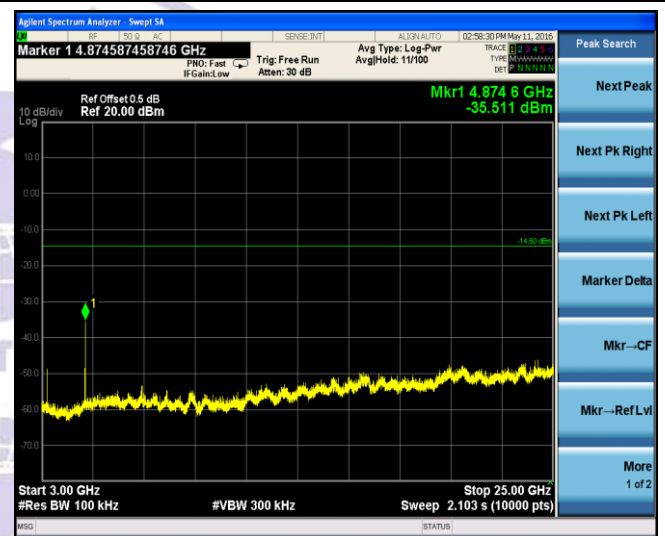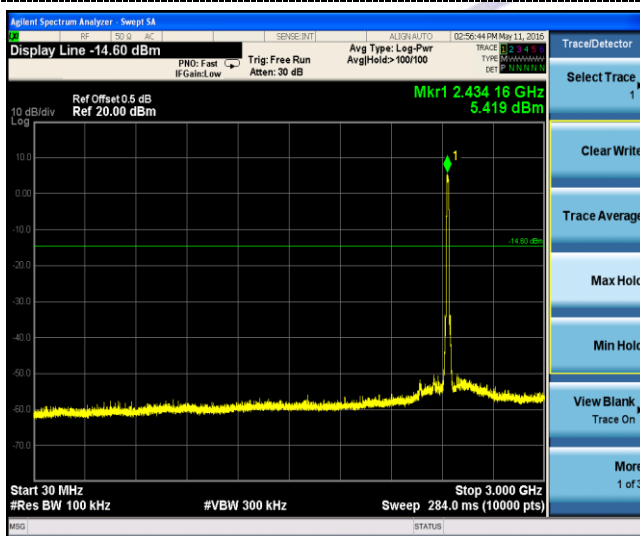


CH06

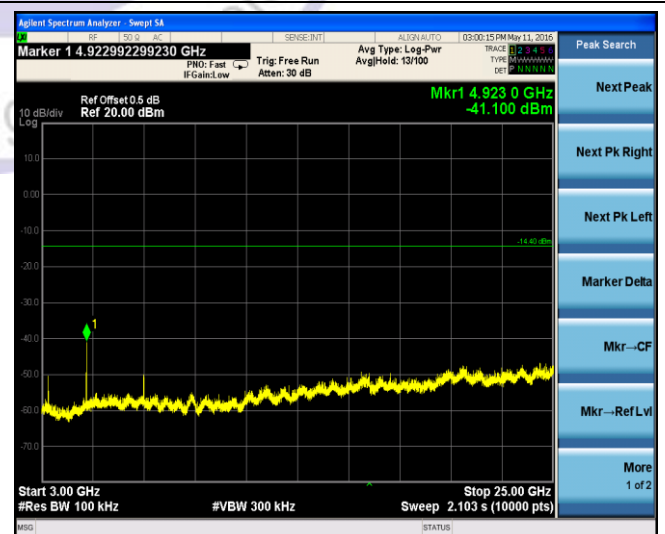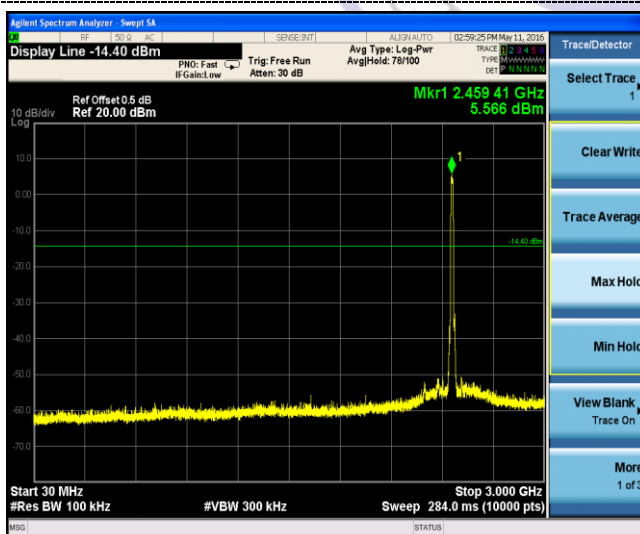

CH11


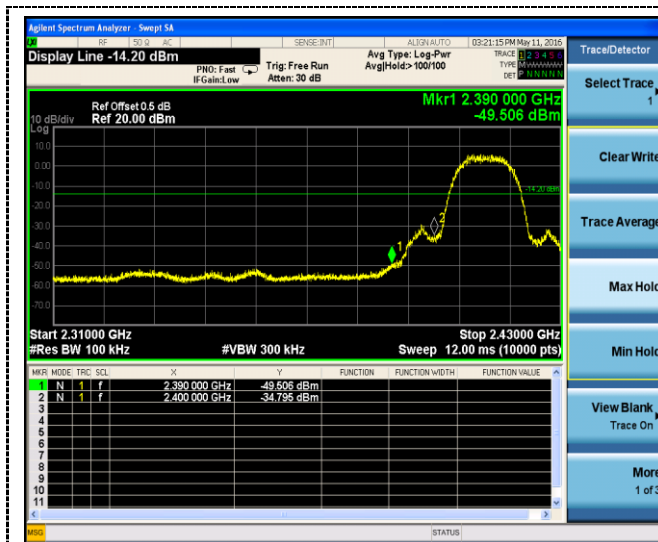


Left Band edge


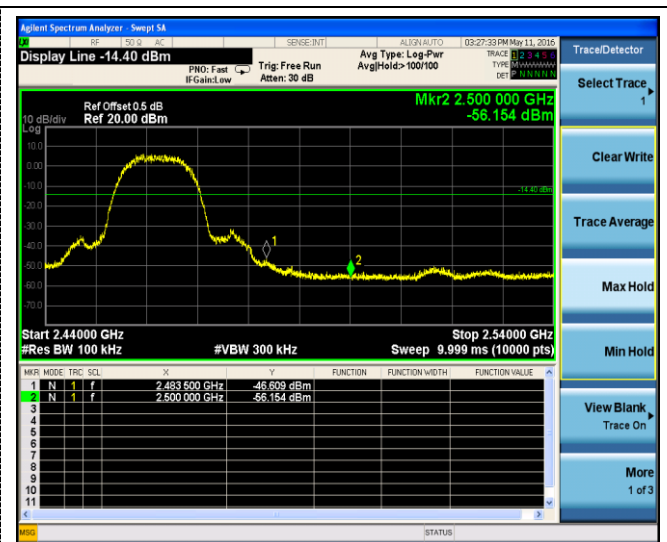


Right Band edge


802.11g

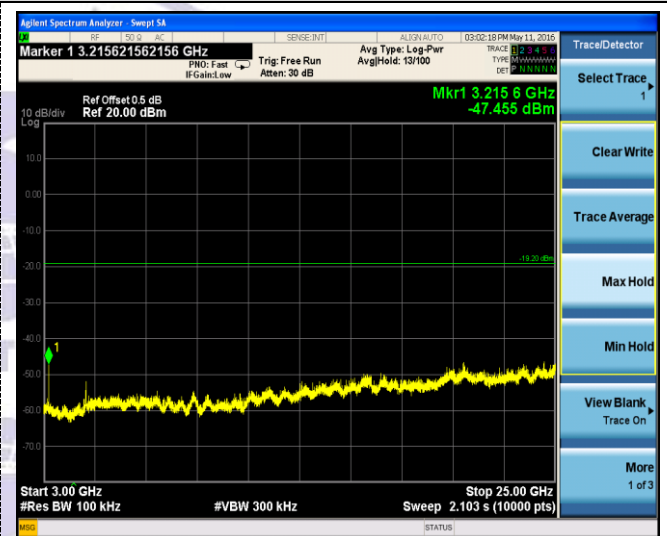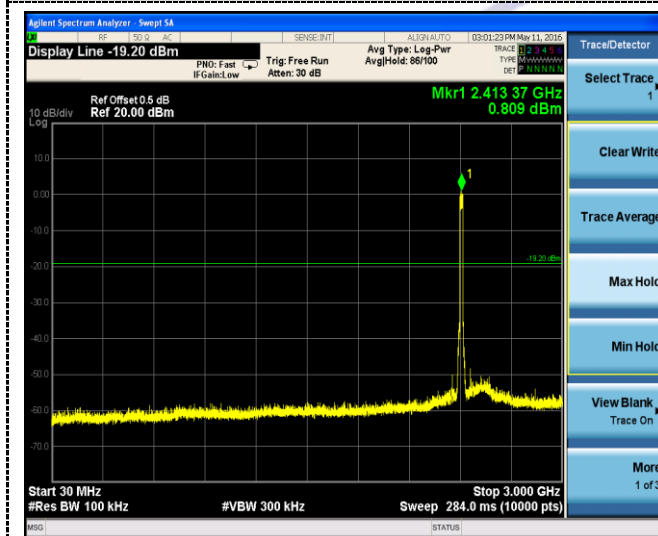


CH01

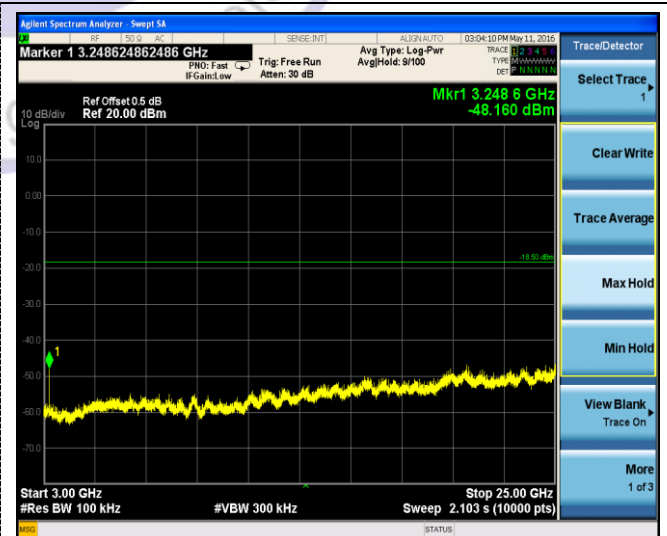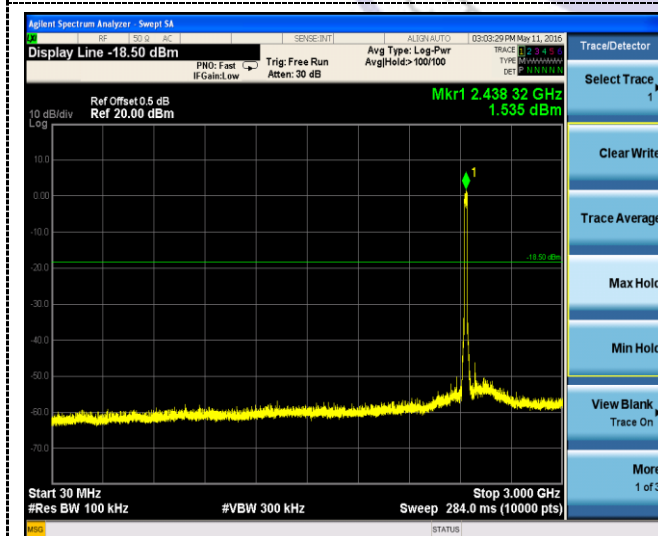

CH06

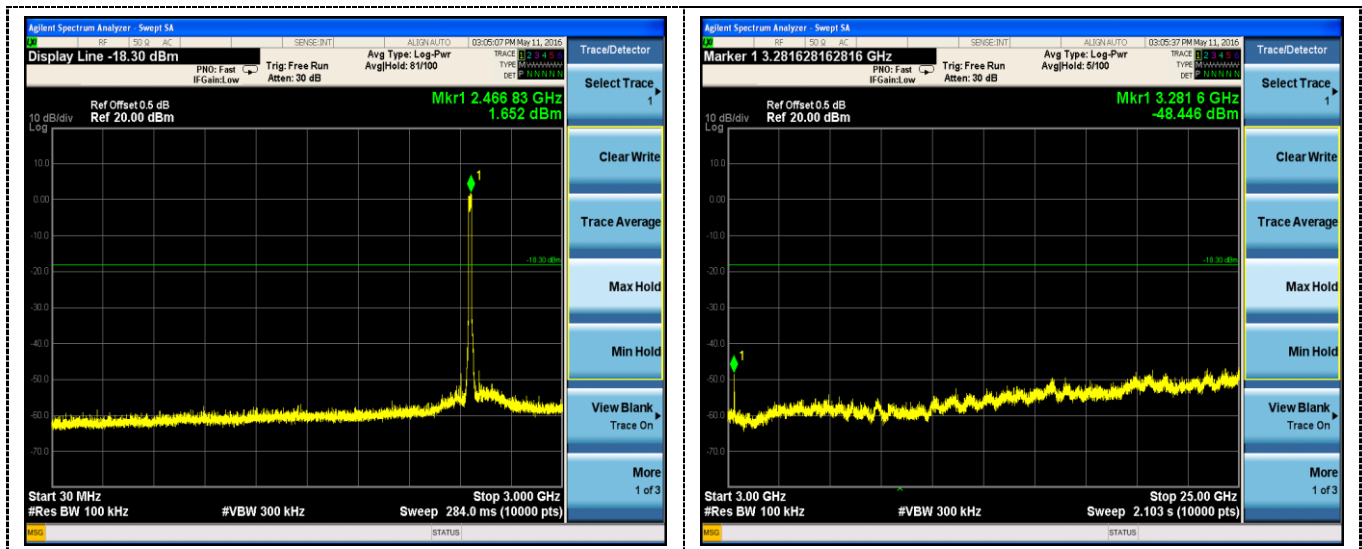


CH11

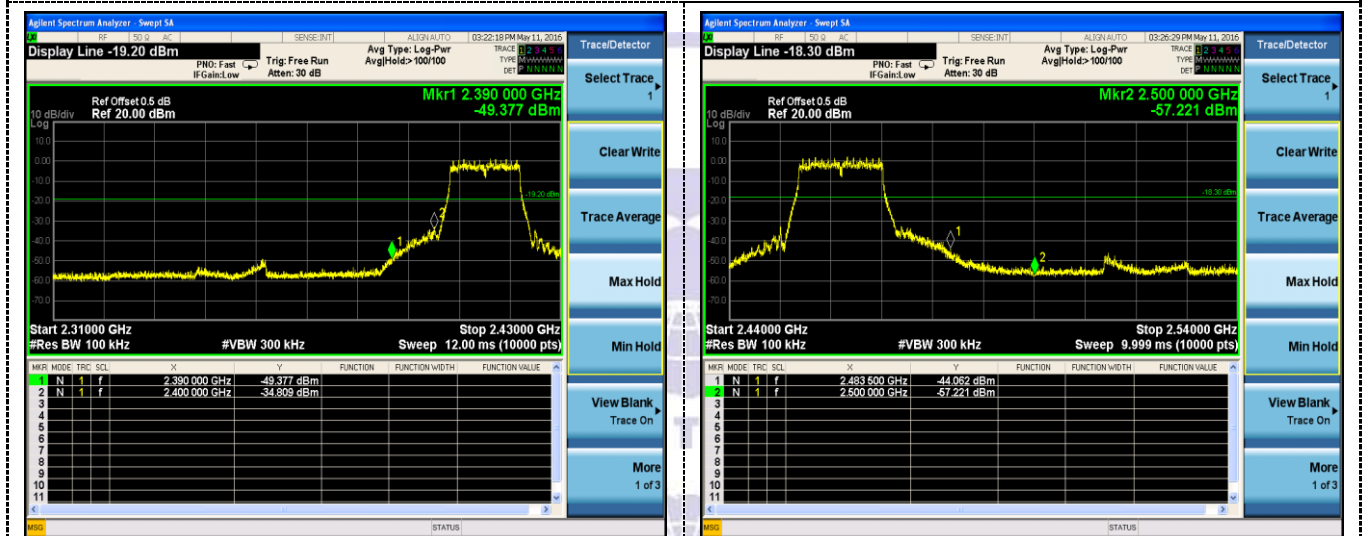


Left Band edge

Right Band edge


802.11n(HT20)

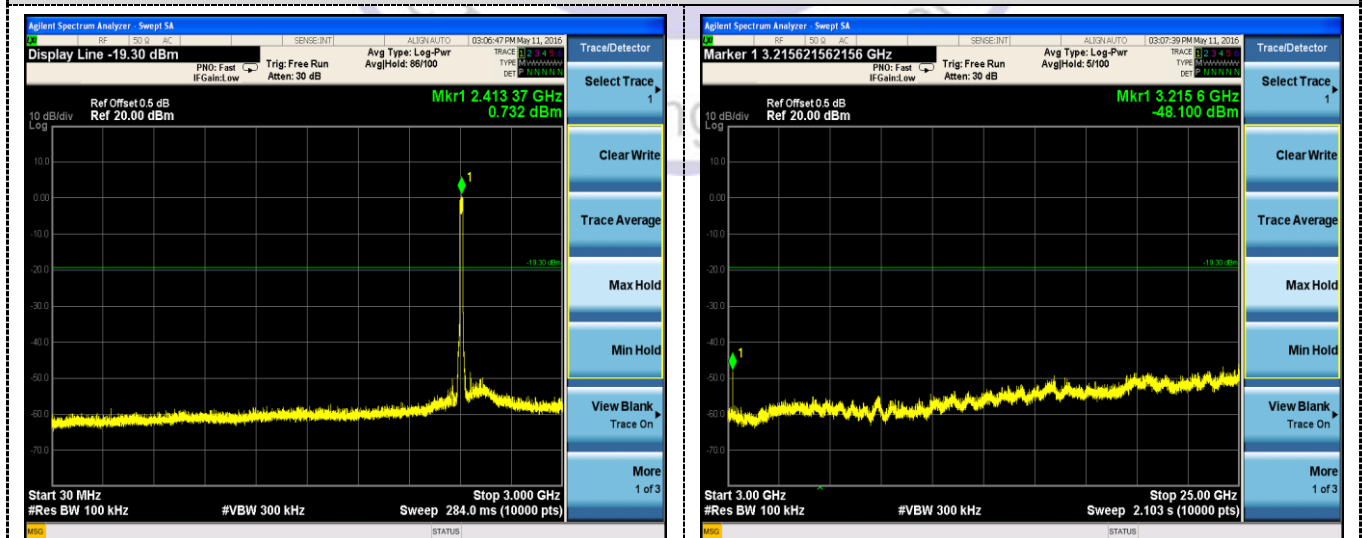


CH01

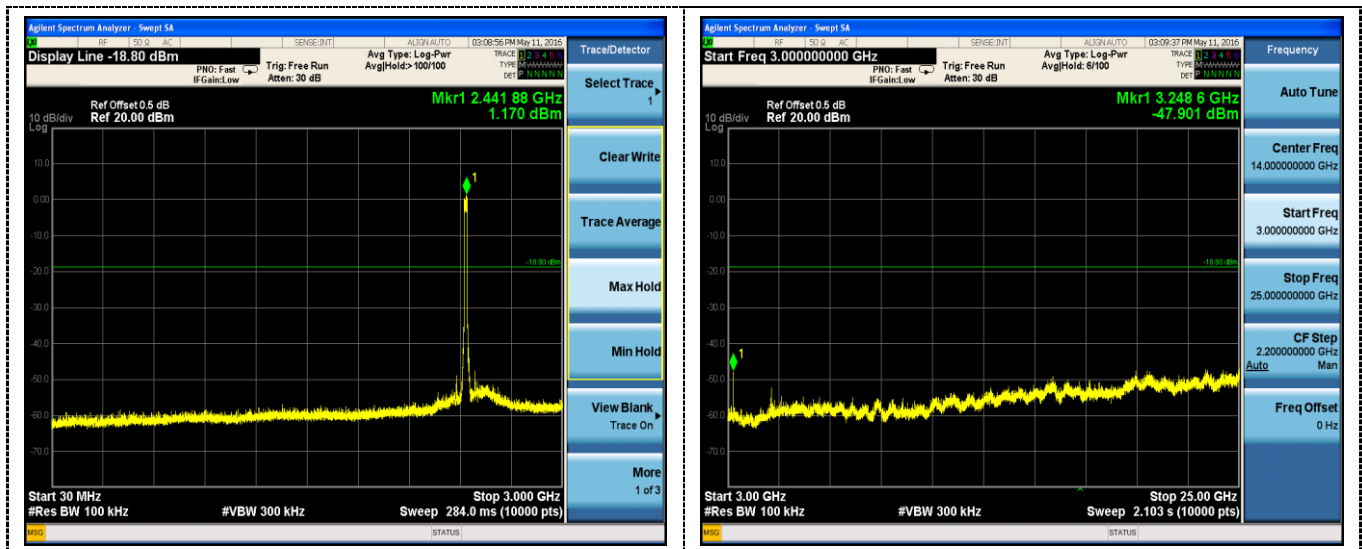

CH06

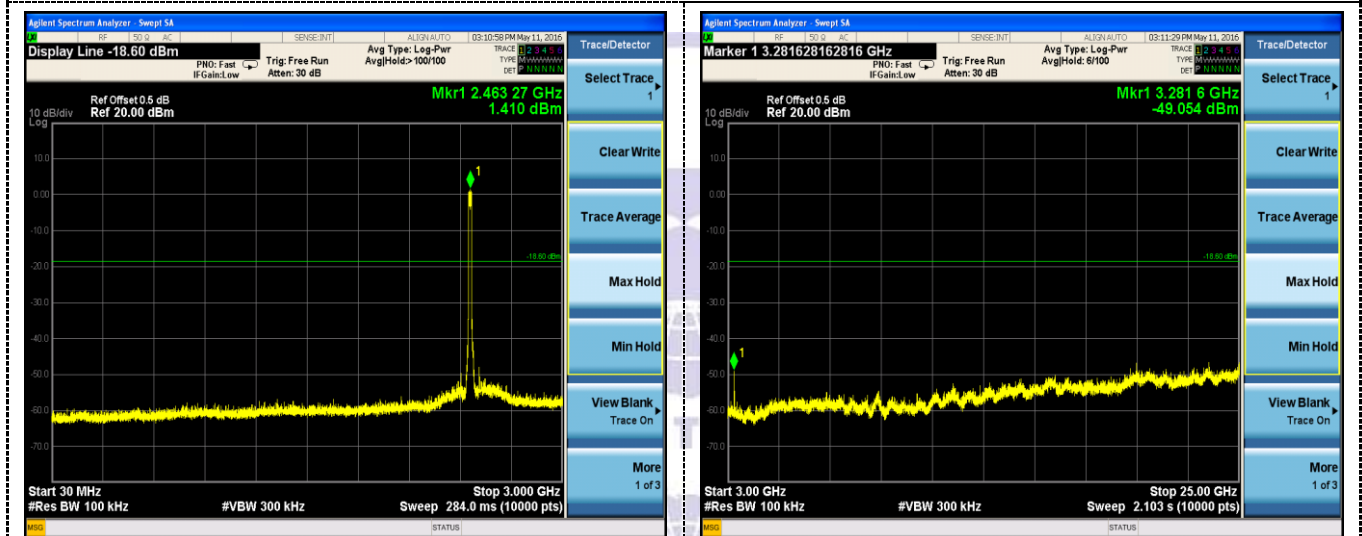

CH11

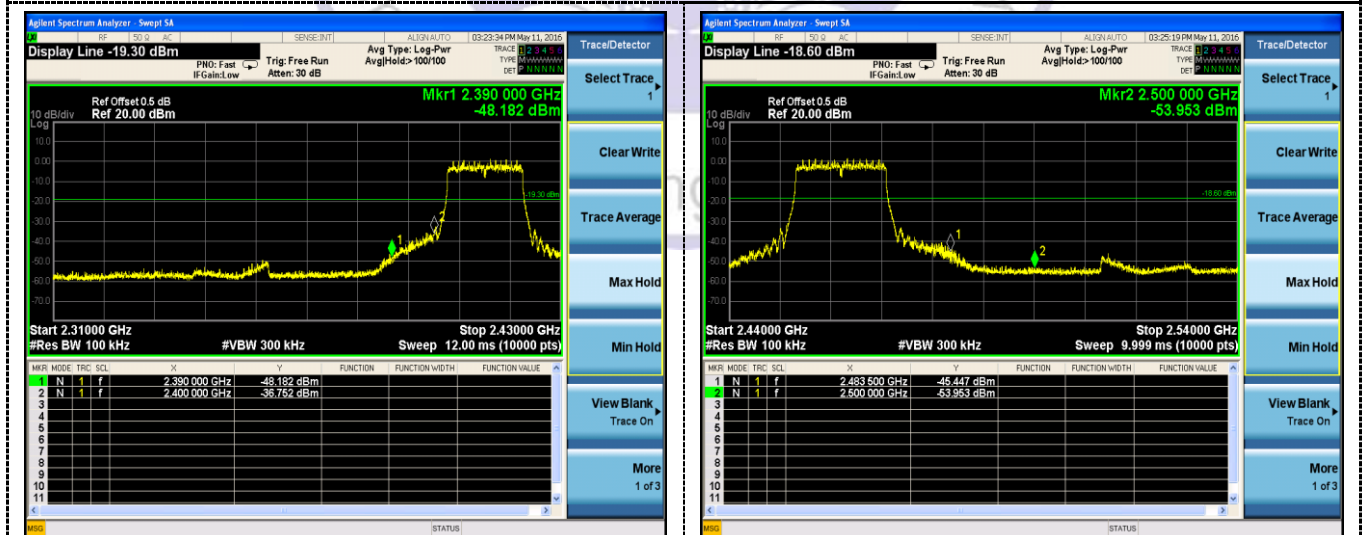

Left Band edge

Right Band edge