




TEST REPORT No: (5220)004-0063(A)

TEST REPORT

To: INTERNATIONALTOY	To: -
Attn: Scott Quon	Attn: -
Address: 2151 Michelson Drive, STE 185, Irvine, CA 92612	Address: -
Fax: 949-336-4808	Fax: -
E-mail: tscottquon@internationaltoy.com	E-mail: -
Folder No.: --	
Factory name: --	
Location: --	
Product: WSB20 FEAT SPIDER BOT	
	Sample No: (5220)004-0063
	Date of Receipt: January 08, 2020
	Test date: February 27, 2020 to March 03, 2020
	Test Requested: FCC Part 15 - 2017
	Test Method: ANSI C63.10 - 2013
	FCC ID: 2AIRRINT124
The results given in this report are related to the tested specimen of the described electrical apparatus.	
CONCLUSION: The submitted sample was found to <u>COMPLY</u> with requirement of FCC Part 15 Subpart C.	
Authorized Signature:	
	
Reviewed by: Kinko Wong	Approved by: Sze Tsz Man
Date: March 16, 2020	Date: March 16, 2020



TEST REPORT No: (5220)004-0063(A)
Test Result Summary

EMISSION TEST			
Test requirement: FCC Part 15 - 2017			
Test Condition	Test Method	Test Result	
		Pass	Failed
Radiated Emission Test, 9kHz to 24GHz	ANSI C63.10	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Frequency range of Fundamental Emission	ANSI C63.10	<input checked="" type="checkbox"/>	<input type="checkbox"/>
26dB Bandwidth of Fundamental Emission	ANSI C63.10	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Duty Cycle Correction During 100msec	ANSI C63.10	<input checked="" type="checkbox"/>	<input type="checkbox"/>

Report Revision & Sample Re-submit History:

--



TEST REPORT No: (5220)004-0063(A)

Location of the test laboratory

Bureau Veritas Hong Kong Limited

Room 03, 6/F, Westin Centre, 26 Hung To Road, Kwun Tong, Kowloon, Hong Kong

Radiated measurements are investigated and taken pursuant to the procedures of ANSI C63.10 – 2013. Semi-anechoic Chamber are set up for investigation and located at:

LG1/F., HKPC Building, 78 Tat Chee Avenue, Kowloon, Hong Kong

List of measuring equipment

Radiated Emission

EQUIPMENT	MANUFACTURER	MODEL NO.	SERIAL NO.	CAL. DATE	CAL. DUE DATE
EMI TEST RECEIVER	R&S	ESU40	100190	12-JUN-2019	12-JUN-2020
SEMI-ANECHOIC CHAMBER	FRANKONIA	--	--	23-APR-2019	23-APR-2020
BICONICAL ANTENNA	R&S	HK116	100241	21-MAR-2018	21-MAR-2020
LOG-PERIODIC ANTENNA	R&S	HL223	841516/017	21-MAR-2018	21-MAR-2020
ACTIVE LOOP ANTENNA	EMCO	6502	9107-2651	30-OCT-2019	30-OCT-2021
STANDARD GAIN HORN (8.2 – 12.4GHZ)	ETS-LINDGREN	3160-07	00205404	04-SEP-2018	04-SEP-2020
STANDARD GAIN HORN (12.4 – 18GHZ)	ETS-LINDGREN	3160-08	002056363	26-SEP-2018	26-SEP-2020
DOUBLE RIDGED HORN (1 – 8.2GHZ)	ETS-LINDGREN	3117	00094998	30-AUG-2018	30-AUG-2020
STANDARD GAIN HORN (26.5 – 40GHZ)	ETS-LINDGREN	3160-10	00205696	03-OCT-2018	03-OCT-2020
DOUBLE RIDGED HORN (18-26.5GHZ)	ETS-LINDGREN	3116	00109210	05-OCT-2018	05-OCT-2020
MICROWAVE PREAMPLIFIER	COM-POWER CORPORATION	PAM-118A	551091	25-JUN-2019	25-JUN-2020
PREAMPLIFIER (18 -40GHZ WITH CABLE)	A.H. Systems, Inc.	Pam-1840VH	168	29-JAN-2020	29-JAN-2021
COAXIAL CABLE	Huber+Suhner	CNM-NMCMILX800-473	A2803 #0001	04-OCT-2018	04-OCT-2020

Measurement Uncertainty

MEASUREMENT	FREQUENCY	UNCERTAINTY
Radiated emissions	30MHz to 200MHz	±5.1dB
	200MHz to 1GHz	±6.2dB
	1GHz to 8.2GHz	±4.9dB
	8.2GHz to 12.4GHz	±4.4dB
	12.4GHz to 18GHz	±4.6dB

Remarks:-

N/A : Not Applicable or Not Available

Measurement uncertainty is calculated in accordance with CISPR 16-4-2.

The statement of compliance is based on a 95% coverage probability for the expanded uncertainty of the measurement result. Compliance is based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.



TEST REPORT No: (5220)004-0063(A)

General Information	
Product:	WSB20 FEAT SPIDER BOT
Model Number:	--
Data Cable:	--
Power Line Cable:	--
Accessory Device:	--
Additional Product Name:	--
Additional Model Number:	--
Additional Model Information:	--
Adaptor:	--
Model:	--
Input:	--
Input power line cable:	--
Output:	--
Output power line cable:	--
Technical Information	
Rated Voltage:	6Vd.c. ("AA" size battery x 4)
Power supply:	6Vd.c. ("AA" size battery x 4)
Other information:	--
Disclaimer Note: Technical information stated on this table are provided by client. All tests were conducted base on the technical information provided above.	

TEST REPORT No: (5220)004-0063(A)

Description of EUT Operation:

The Equipment Under Test (EUT) is a **INTERNATIONALTOY** of Remote Control Toy. It is a 1 switch transceiver and operating at 2412MHz to 2468MHz. The lowest, middle and highest frequencies were tested and the results are shown in the report. The EUT transmit while corresponding remote controller buttons is being pressed, Modulation by IC, and type is GFSK.

There are total 57 channels and below is the frequency list :

2412	2413	2414	2415	2416	2417	2418	2419	2420	2421
2422	2423	2424	2425	2426	2427	2428	2429	2430	2431
2432	2433	2434	2435	2436	2437	2438	2439	2440	2441
2442	2443	2444	2445	2446	2447	2448	2449	2450	2451
2452	2453	2454	2455	2456	2457	2458	2459	2460	2461
2462	2463	2464	2465	2466	2467	2468			


The transceiver has different control:

1. ON/OFF switch – control power on/off

Antenna Requirement (Section 15.203)

The EUT is use of a permanently antenna. It is soldered on the PCB. The antenna consists of 2.8cm long wire The antenna is not replaceable or user serviceable. The requirements of S15.203 are met. There are no deviations or exceptions to the specifications.

Photo of Antenna

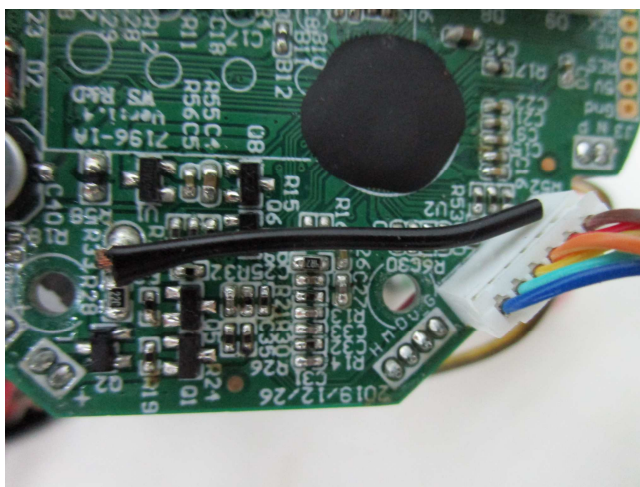

TEST REPORT No: (5220)004-0063(A)

Test Results

Radiated Emissions (Fundamental)

Test Requirement:	FCC Part 15 Section 15.249
Test Method:	ANSI C63.10
Test Date(s):	2020-02-27
Temperature:	21.0 °C
Humidity:	60.0 %
Mode of Operation:	Transmission mode
Tested Voltage:	6Vd.c. ("AA" size battery x 4)

Test Procedure:


Radiated emissions measurements are investigated and taken pursuant to the procedures of ANSI C63.10 – 2013.

The equipment under test (EUT) was placed on a non-conductive turntable with dimensions of 1.5m x 1m and 0.8m high above the ground for measurement frequency below 1GHz and 1.5m high above the ground for measurement frequency above 1GHz. 3m from the EUT, a broadband antenna mounting on the mast received the signal strength. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, For battery operated equipment, the equipment tests shall be perform using new battery. The turntable was rotated to maximize the emission level. The antenna was then moving along the mast from 1m up to 4m until no more higher value was found. Both horizontal and vertical polarization of the antenna were placed and investigated.

For below 30MHz, a loop antenna with its vertical plane is place 3m from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. And the centre of the loop shall be 1m above the ground.

Location: Hong Kong Productivity Council – Electromagnetic Compatibility Centre

Test Setup: Semi-anechoic chamber

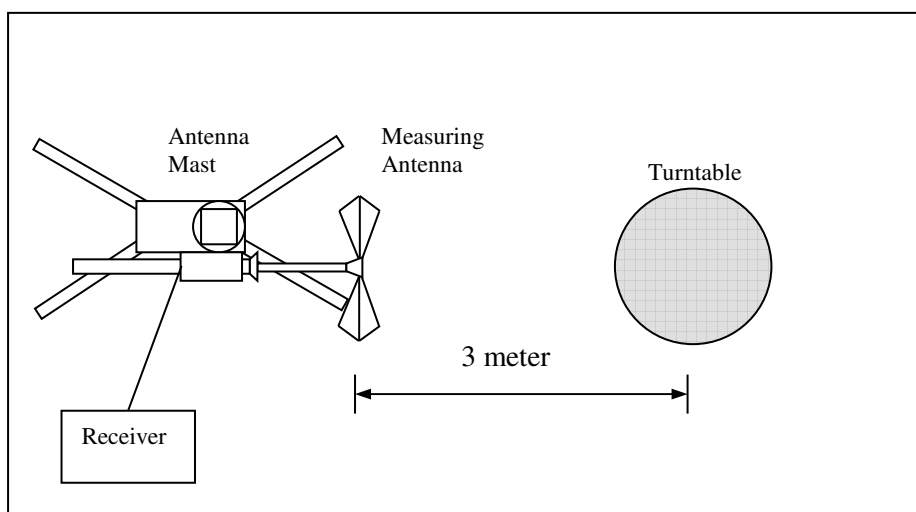

TEST REPORT No: (5220)004-0063(A)

Limits for Field Strength of Fundamental Emissions [FCC 47CFR 15.249]:

Frequency Range of Fundamental [MHz]	Field Strength of Fundamental Emission (Average) [mV/m]	Field Strength of Harmonics Emission (Average) [μV/m]
2400-2483.5	50	500

Measurement Data

Test Result of (Transmission mode, Lowest frequency): PASS

Frequency (MHz)	Polarity (H/V)	Antenna Factor & Cable Loss (dB/m)	Duty-cycle correction (dB)	Field Strength at 3m – Peak (dBμV/m)	Limit at 3m – Peak (dBμV/m)	Margin - Peak (dB)	**Field Strength at 3m – Average (dBμV/m)	Limit at 3m – Average (dBμV/m)	Margin - Average (dB)
2411.96	H	-4.3	-24.7	89.2	114.0	-24.8	64.5	94.0	-29.5
2411.96	V	-4.3	-24.7	88.8	114.0	-25.2	64.1	94.0	-29.9

Test Result of (Transmission mode, Middle frequency): PASS

Frequency (MHz)	Polarity (H/V)	Antenna Factor & Cable Loss (dB/m)	Duty-cycle correction (dB)	Field Strength at 3m – Peak (dBμV/m)	Limit at 3m – Peak (dBμV/m)	Margin - Peak (dB)	**Field Strength at 3m – Average (dBμV/m)	Limit at 3m – Average (dBμV/m)	Margin - Average (dB)
2439.96	H	-4.3	-24.7	89.8	114.0	-24.2	65.1	94.0	-28.9
2439.96	V	-4.3	-24.7	90.4	114.0	-23.6	65.7	94.0	-28.3

Test Result of (Transmission mode, Highest frequency): PASS

Frequency (MHz)	Polarity (H/V)	Antenna Factor & Cable Loss (dB/m)	Duty-cycle correction (dB)	Field Strength at 3m – Peak (dBμV/m)	Limit at 3m – Peak (dBμV/m)	Margin - Peak (dB)	**Field Strength at 3m – Average (dBμV/m)	Limit at 3m – Average (dBμV/m)	Margin - Average (dB)
2467.95	H	-4.3	-24.7	90.8	114.0	-23.2	66.1	94.0	-27.9
2467.95	V	-4.3	-24.7	87.7	114.0	-26.3	63.0	94.0	-31.0

For pulse modulated devices and using measuring equipment employing a peak detection mode, properly adjusted for such factor as pulse desensitisation.

**Duty Cycle Correction = $20\log(0.05796) = -24.7\text{dB}$.

Note: Field Strength = Receiver Reading + Antenna Factor + Cable Loss

Margin = Field Strength - Limit

Receiver setting: RBW = 1MHz

VBW = 1MHz



TEST REPORT No: (5220)004-0063(A)

Radiated Emissions (Spurious Emission)

Test Requirement: FCC Part 15 Section 15.249
 Test Method: ANSI C63.10
 Test Date(s): 2020-02-27
 Temperature: 21.0 °C
 Humidity: 60.0 %
 Mode of Operation: Transmission mode
 Tested Voltage: Spider: 6Vd.c. ("AA" size battery x 4)
 Remote: 3Vd.c. ("AA" size battery x 2)

Measurement Data

Test Result of (Transmission mode, Lowest frequency): PASS

Frequency (MHz)	Polarity (H/V)	Antenna Factor & Cable Loss (dB/m)	Duty-cycle correction (dB)	Field Strength at 3m – Peak (dB μ V/m)	Limit at 3m – Peak (dB μ V/m)	Margin - Peak (dB)	**Field Strength at 3m – Average (dB μ V/m)	Limit at 3m – Average (dB μ V/m)	Margin - Average (dB)
2400.00	H	-4.3	-24.7	48.9	74.0	-25.1	24.2	54.0	-29.8
4823.93	H	-0.9	-24.7	50.3	74.0	-23.7	25.6	54.0	-28.4
7235.90	H	1.4	-24.7	51.3	74.0	-22.7	26.6	54.0	-27.4
9647.87	H	2.1	-24.7	46.8	74.0	-27.2	22.1	54.0	-31.9
12059.00	H	4.3	-24.7	47.4	74.0	-26.6	22.7	54.0	-31.3
14471.00	H	5.8	-24.7	51.2	74.0	-22.8	26.5	54.0	-27.5
16883.00	H	9.0	-24.7	48.6	74.0	-25.4	23.9	54.0	-30.1
19295.00	H	19.0	-24.7	48.6	74.0	-25.4	23.9	54.0	-30.1
21707.00	H	20.6	-24.7	31.9	74.0	-42.1	7.2	54.0	-46.8
24119.00	H	25.1	-24.7	34.1	74.0	-39.9	9.4	54.0	-44.6

For pulse modulated devices and using measuring equipment employing a peak detection mode, properly adjusted for such factor as pulse desensitisation.

**Duty Cycle Correction = $20\text{Log}(0.05796) = -24.7\text{dB}$.

Note: Field Strength = Receiver Reading + Antenna Factor + Cable Loss

Margin = Field Strength - Limit

Receiver setting: RBW = 1MHz

VBW = 1MHz



TEST REPORT No: (5220)004-0063(A)

Measurement Data

Test Result of (Transmission mode, Lowest frequency): PASS

Frequency (MHz)	Polarity (H/V)	Antenna Factor & Cable Loss (dB/m)	Duty-cycle correction (dB)	Field Strength at 3m – Peak (dB μ V/m)	Limit at 3m – Peak (dB μ V/m)	Margin - Peak (dB)	**Field Strength at 3m – Average (dB μ V/m)	Limit at 3m – Average (dB μ V/m)	Margin - Average (dB)
2400.00	V	-4.3	-24.7	46.8	74.0	-27.2	22.1	54.0	-31.9
4823.93	V	-0.9	-24.7	49.7	74.0	-24.3	25.0	54.0	-29.0
7235.90	V	1.4	-24.7	51.0	74.0	-23.0	26.3	54.0	-27.7
9647.87	V	2.1	-24.7	46.2	74.0	-27.8	21.5	54.0	-32.5
12059.00	V	4.3	-24.7	48.1	74.0	-25.9	23.4	54.0	-30.6
14471.00	V	5.8	-24.7	51.6	74.0	-22.4	26.9	54.0	-27.1
16883.00	V	9.0	-24.7	48.6	74.0	-25.4	23.9	54.0	-30.1
19295.00	V	19.0	-24.7	42.7	74.0	-31.3	18.0	54.0	-36.0
21707.00	V	20.6	-24.7	31.7	74.0	-42.3	7.0	54.0	-47.0
24119.00	V	25.1	-24.7	33.3	74.0	-40.7	8.6	54.0	-45.4

For pulse modulated devices and using measuring equipment employing a peak detection mode, properly adjusted for such factor as pulse desensitisation.

**Duty Cycle Correction = $20\text{Log}(0.05796) = -24.7\text{dB}$.

Note: Field Strength = Receiver Reading + Antenna Factor + Cable Loss

Margin = Field Strength - Limit

Receiver setting: RBW = 1MHz

VBW = 1MHz



TEST REPORT No: (5220)004-0063(A)

Measurement Data

Test Result of (Transmission mode, Middle frequency): PASS

Frequency (MHz)	Polarity (H/V)	Antenna Factor & Cable Loss (dB/m)	Duty-cycle correction (dB)	Field Strength at 3m – Peak (dB μ V/m)	Limit at 3m – Peak (dB μ V/m)	Margin - Peak (dB)	**Field Strength at 3m – Average (dB μ V/m)	Limit at 3m – Average (dB μ V/m)	Margin - Average (dB)
4879.92	H	-0.9	-24.7	53.6	74.0	-20.4	28.9	54.0	-25.1
7319.89	H	1.4	-24.7	51.6	74.0	-22.4	26.9	54.0	-27.1
9759.85	H	2.2	-24.7	47.5	74.0	-26.5	22.8	54.0	-31.2
12199.00	H	4.4	-24.7	47.8	74.0	-26.2	23.1	54.0	-30.9
14639.00	H	9.0	-24.7	50.0	74.0	-24.0	25.3	54.0	-28.7
17079.00	H	9.3	-24.7	50.3	74.0	-23.7	25.6	54.0	-28.4
19519.00	H	17.9	-24.7	43.7	74.0	-30.3	19.0	54.0	-35.0
21959.00	H	20.6	-24.7	32.2	74.0	-41.8	7.5	54.0	-46.5
24399.00	H	25.1	-24.7	33.3	74.0	-40.7	8.6	54.0	-45.4

For pulse modulated devices and using measuring equipment employing a peak detection mode, properly adjusted for such factor as pulse desensitisation.

**Duty Cycle Correction = $20\text{Log}(0.05796) = -24.7\text{dB}$.

Note: Field Strength = Receiver Reading + Antenna Factor + Cable Loss

Margin = Field Strength - Limit

Receiver setting: RBW = 1MHz

VBW = 1MHz



TEST REPORT No: (5220)004-0063(A)

Measurement Data

Test Result of (Transmission mode, Middle frequency): PASS

Frequency (MHz)	Polarity (H/V)	Antenna Factor & Cable Loss (dB/m)	Duty-cycle correction (dB)	Field Strength at 3m – Peak (dB μ V/m)	Limit at 3m – Peak (dB μ V/m)	Margin - Peak (dB)	**Field Strength at 3m – Average (dB μ V/m)	Limit at 3m – Average (dB μ V/m)	Margin - Average (dB)
4879.92	V	-0.9	-24.7	52.7	74.0	-21.3	28.0	54.0	-26.0
7319.89	V	1.4	-24.7	53.1	74.0	-20.9	28.4	54.0	-25.6
9759.85	V	2.2	-24.7	46.9	74.0	-27.1	22.2	54.0	-31.8
12199.00	V	4.4	-24.7	47.8	74.0	-26.2	23.1	54.0	-30.9
14639.00	V	9.0	-24.7	50.6	74.0	-23.4	25.9	54.0	-28.1
17079.00	V	9.3	-24.7	49.8	74.0	-24.2	25.1	54.0	-28.9
19519.00	V	17.9	-24.7	44.1	74.0	-29.9	19.4	54.0	-34.6
21959.00	V	20.6	-24.7	31.8	74.0	-42.2	7.1	54.0	-46.9
24399.00	V	25.1	-24.7	33.3	74.0	-40.7	8.6	54.0	-45.4

For pulse modulated devices and using measuring equipment employing a peak detection mode, properly adjusted for such factor as pulse desensitisation.

**Duty Cycle Correction = $20\text{Log}(0.05796) = -24.7\text{dB}$.

Note: Field Strength = Receiver Reading + Antenna Factor + Cable Loss

Margin = Field Strength - Limit

Receiver setting: RBW = 1MHz

VBW = 1MHz



TEST REPORT No: (5220)004-0063(A)

Measurement Data

Test Result of (Transmission mode, Highest frequency): PASS

Frequency (MHz)	Polarity (H/V)	Antenna Factor & Cable Loss (dB/m)	Duty-cycle correction (dB)	Field Strength at 3m – Peak (dB μ V/m)	Limit at 3m – Peak (dB μ V/m)	Margin - Peak (dB)	**Field Strength at 3m – Average (dB μ V/m)	Limit at 3m – Average (dB μ V/m)	Margin - Average (dB)
2483.50	H	-4.3	-24.7	52.3	74.0	-21.7	27.6	54.0	-26.4
4935.91	H	-0.9	-24.7	54.5	74.0	-19.5	29.8	54.0	-24.2
7403.87	H	1.4	-24.7	49.8	74.0	-24.2	25.1	54.0	-28.9
9871.83	H	2.1	-24.7	46.9	74.0	-27.1	22.2	54.0	-31.8
12339.00	H	4.3	-24.7	48.4	74.0	-25.6	23.7	54.0	-30.3
14807.00	H	5.8	-24.7	50.5	74.0	-23.5	25.8	54.0	-28.2
17275.00	H	9.3	-24.7	49.6	74.0	-24.4	24.9	54.0	-29.1
19743.00	H	17.9	-24.7	39.0	74.0	-35.0	14.3	54.0	-39.7
22211.00	H	20.3	-24.7	31.8	74.0	-42.2	7.1	54.0	-46.9
24679.00	H	25.4	-24.7	33.6	74.0	-40.4	8.9	54.0	-45.1

For pulse modulated devices and using measuring equipment employing a peak detection mode, properly adjusted for such factor as pulse desensitisation.

**Duty Cycle Correction = $20\text{Log}(0.05796) = -24.7\text{dB}$.

Note: Field Strength = Receiver Reading + Antenna Factor + Cable Loss

Margin = Field Strength - Limit

Receiver setting: RBW = 1MHz

VBW = 1MHz



TEST REPORT No: (5220)004-0063(A)

Measurement Data

Test Result of (Transmission mode, Highest frequency): PASS

Frequency (MHz)	Polarity (H/V)	Antenna Factor & Cable Loss (dB/m)	Duty-cycle correction (dB)	Field Strength at 3m – Peak (dB μ V/m)	Limit at 3m – Peak (dB μ V/m)	Margin - Peak (dB)	Field Strength at 3m – Average (dB μ V/m)	Limit at 3m – Average (dB μ V/m)	Margin - Average (dB)
2483.50	V	-4.3	-24.7	42.8	74.0	-31.2	18.1	54.0	-35.9
4935.91	V	-0.9	-24.7	53.3	74.0	-20.7	28.6	54.0	-25.4
7403.87	V	1.4	-24.7	51.4	74.0	-22.6	26.7	54.0	-27.3
9871.83	V	2.1	-24.7	46.9	74.0	-27.1	22.2	54.0	-31.8
12339.00	V	4.3	-24.7	47.6	74.0	-26.4	22.9	54.0	-31.1
14807.00	V	5.8	-24.7	50.4	74.0	-23.6	25.7	54.0	-28.3
17275.00	V	9.3	-24.7	49.2	74.0	-24.8	24.5	54.0	-29.5
19743.00	V	17.9	-24.7	37.8	74.0	-36.2	13.1	54.0	-40.9
22211.00	V	20.3	-24.7	31.7	74.0	-42.3	7.0	54.0	-47.0
24679.00	V	25.4	-24.7	33.8	74.0	-40.2	9.1	54.0	-44.9

For pulse modulated devices and using measuring equipment employing a peak detection mode, properly adjusted for such factor as pulse desensitisation.

**Duty Cycle Correction = $20\text{Log}(0.05796) = -24.7\text{dB}$.

Note: Field Strength = Receiver Reading + Antenna Factor + Cable Loss

Margin = Field Strength - Limit

Receiver setting: RBW = 1MHz

VBW = 1MHz



TEST REPORT No: (5220)004-0063(A)

Radiated Emissions (30MHz – 2.4GHz)

Test Requirement: FCC Part 15 Section 15.209
 Test Method: ANSI C63.10
 Test Date(s): 2020-02-28
 Temperature: 21.0 °C
 Humidity: 61.0 %
 Mode of Operation: On mode
 Tested Voltage: 6Vd.c.(“AA” size battery x 4)

Limits for Radiated Emissions [FCC 47 CFR 15.209]:

Frequency Range [MHz]	Quasi-Peak Limits [$\mu\text{V/m}$]	Measurement Distance m
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above960	500	3

Measurement Data

Test Result of (On mode): PASS

Detection mode: Quasi-Peak

Frequency	Polarity (H/V)	Antenna Factor & Cable Loss (dB/m)	Field Strength (dB $\mu\text{V/m}$)	Limit (dB $\mu\text{V/m}$)	Margin (dB)
Emissions detected are more than 20 dB below the limit line(s) in 9kHz to 30MHz					

Note: Field Strength = Receiver Reading + Antenna Factor + Cable Loss
 Margin = Field Strength - Limit
 Receiver setting: RBW = 200Hz
 VBW = 200Hz



TEST REPORT No: (5220)004-0063(A)

Measurement Data

Test Result of (On mode): PASS

Detection mode: Quasi-Peak

Frequency (MHz)	Polarity (H/V)	Antenna Factor & Cable Loss (dB/m)	Field Strength at 3m (dBμV/m)	Limit at 3m (dBμV/m)	Margin (dB)
32.46	H	13.6	9.6	40.0	-30.4
47.76	H	11.4	6.8	40.0	-33.2
187.17	H	14.5	12.6	43.5	-30.9
368.36	H	16.3	24.0	46.0	-22.0
392.78	H	17.0	34.2	46.0	-11.8
932.36	H	24.4	36.2	46.0	-9.8

Frequency (MHz)	Polarity (H/V)	Antenna Factor & Cable Loss (dB/m)	Field Strength at 3m (dBμV/m)	Limit at 3m (dBμV/m)	Margin (dB)
63.75	V	8.8	8.4	40.0	-31.6
118.92	V	11.6	8.8	43.5	-34.7
173.97	V	14.1	14.5	43.5	-29.0
511.88	V	19.1	19.3	46.0	-26.7
637.58	V	21.8	32.8	46.0	-13.2
932.06	V	24.4	32.2	46.0	-13.8

Note: Field Strength = Receiver Reading + Antenna Factor + Cable Loss
Margin = Field Strength - Limit

Receiver setting: RBW = 120KHz
VBW = 120KHz



TEST REPORT No: (5220)004-0063(A)

Frequency range of Fundamental Emission

Test Requirement: FCC 47 CFR 15.249
Test Method: ANSI C63.10 Clause 6.10
Test Date(s): 2020-03-03
Temperature: 21.0 °C
Humidity: 61.0 %
Mode of Operation: Transmission mode
Tested Voltage: 6Vd.c. ("AA" size battery x 4)

Test Method:

The bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.

Limits for Frequency range of Fundamental Emission:


Frequency [MHz]	FCC Limits [MHz]
2412.00 – 2468.00	2400 – 2483.5

TEST REPORT No: (5220)004-0063(A)

Measurement Data


Test Result of Frequency Range of Fundamental Emission: PASS

Lowest Frequency – 2412.00MHz

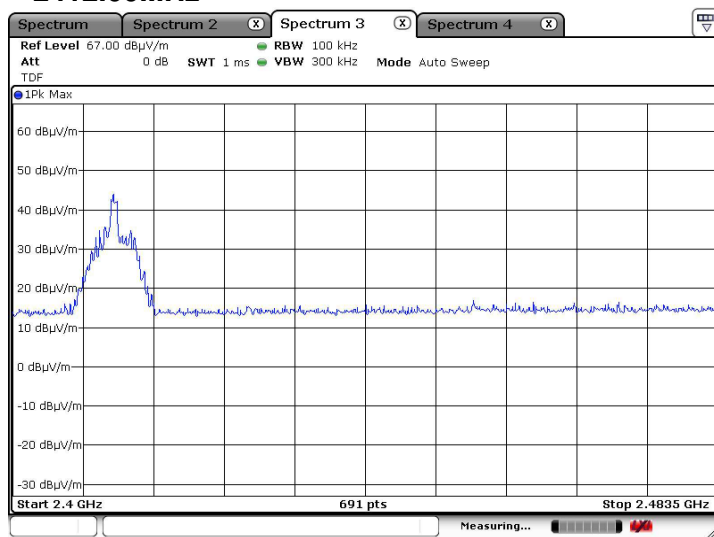

Date: 20.FEB.2020 16:26:58


Middle Frequency – 2440.00MHz

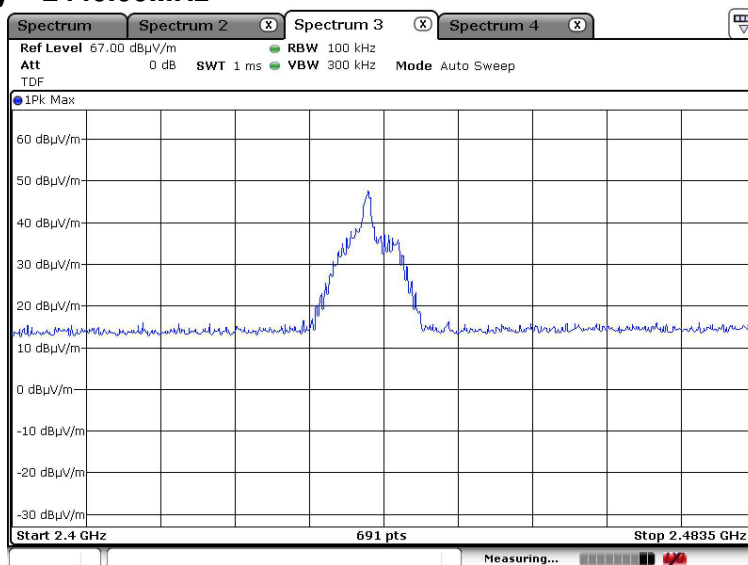

Date: 20.FEB.2020 16:29:05

TEST REPORT No: (5220)004-0063(A)

Highest Frequency – 2468.00MHz

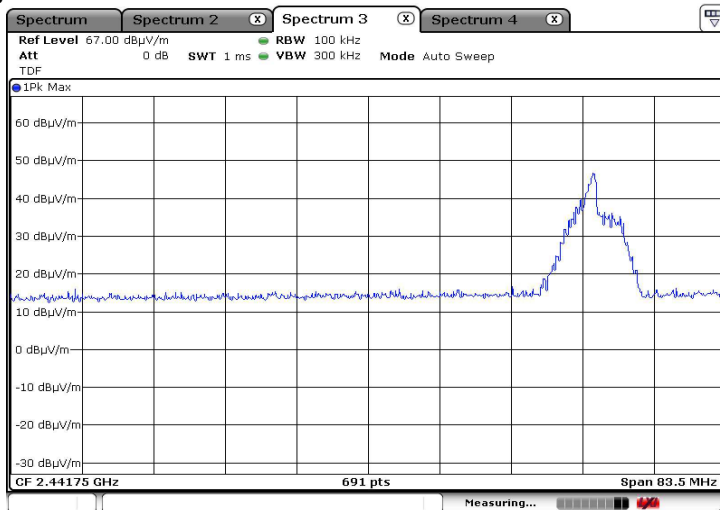


Date: 20.FEB.2020 16:29:58

TEST REPORT No: (5220)004-0063(A)

Measurement Data


Test Result of 26dB Bandwidth of Fundamental Emission: PASS

Lowest Frequency – 2412.00MHz

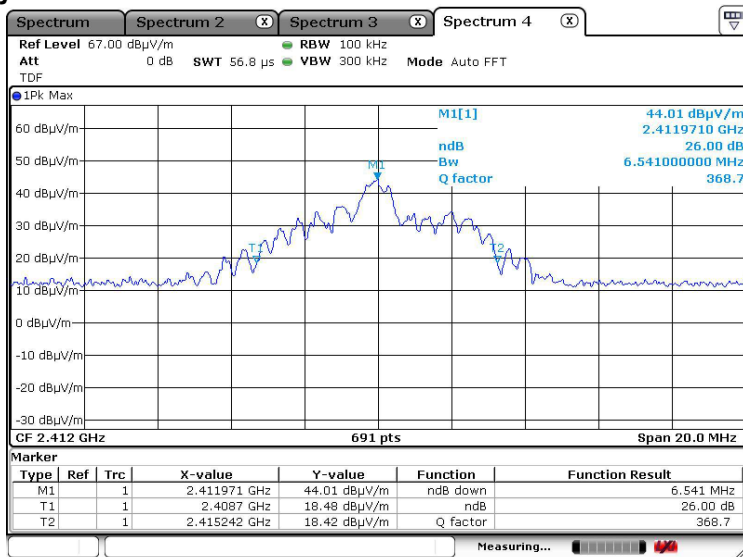

Date: 20.FEB.2020 16:27:39


Middle Frequency – 2440.00MHz

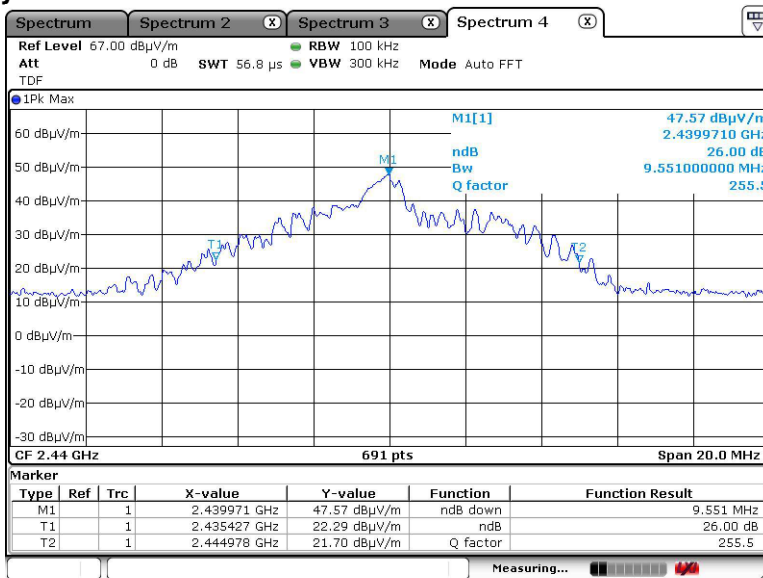

Date: 20.FEB.2020 16:28:33

TEST REPORT No: (5220)004-0063(A)

Highest Frequency – 2468.00MHz

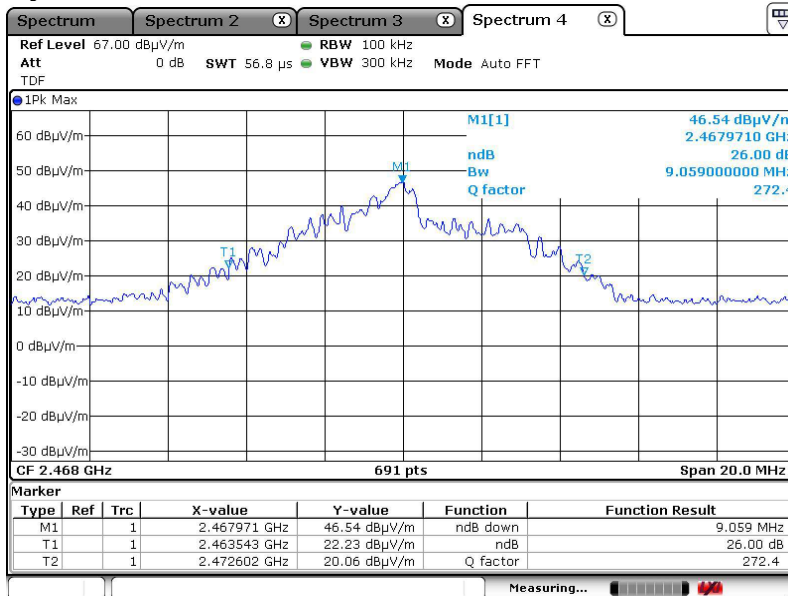

Date: 20.FEB.2020 16:30:40



TEST REPORT No: (5220)004-0063(A)

Duty Cycle Correction During 100msec:

Each function key sends a different series of characters, but each packet period (100msec) never exceeds a series of 4 pulses (1.449msec). Assuming any combination of short and long pulses maybe obtained due to encoding the worst case transmit duty cycle would be considered 4×1.449 per 100msec = 5.796% duty cycle.

Figure A show the characteristics of the pulse train for one of these functions

Remarks:


Duty Cycle Correction = $20\text{Log}(0.05796) = -24.7\text{dB}$

The following figures [Figure A] show the characteristics of the pulse train for one of these functions.

TEST REPORT No: (5220)004-0063(A)

Measurement Data :

Figure A [Long Pulse]

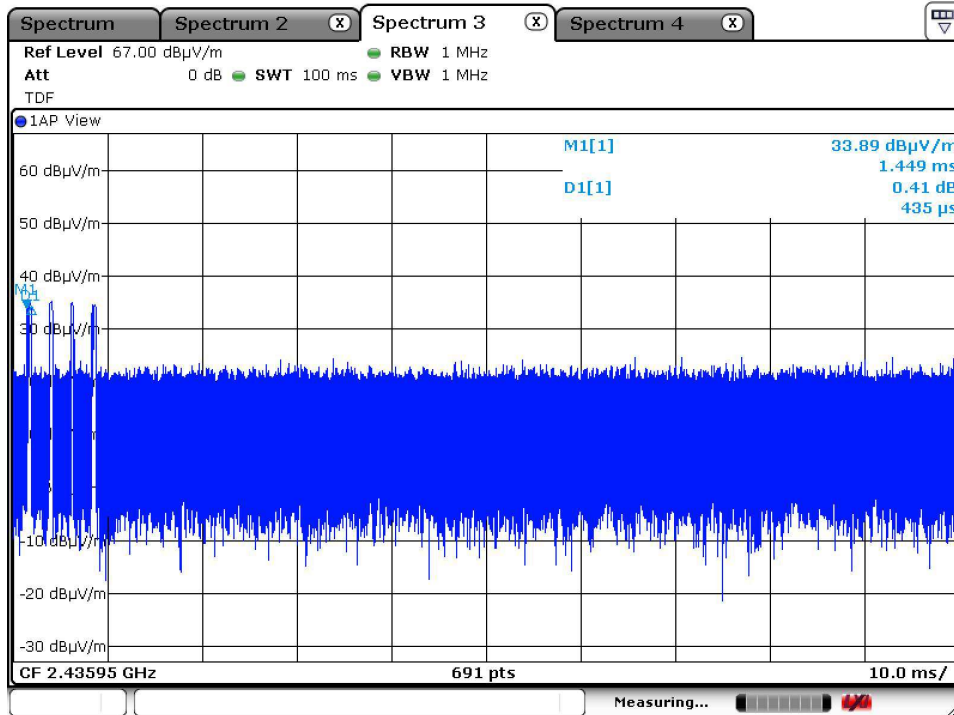

Date: 20.FEB.2020 16:40:46

TEST REPORT No: (5220)004-0063(A)

Photographs of EUT


Front View of the product



Rear View of the product



Top View of the product

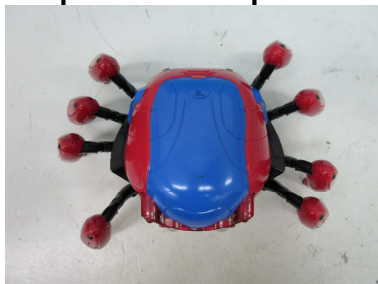

Bottom View of the product




Side View of the product



Side View of the product



Battery compartment

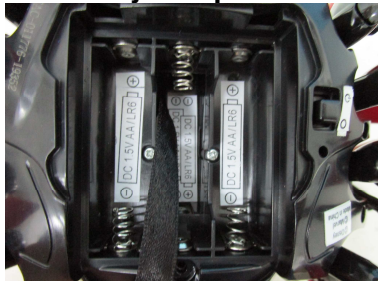


Battery Cover




TEST REPORT No: (5220)004-0063(A)

Photographs of EUT


Internal View of the product

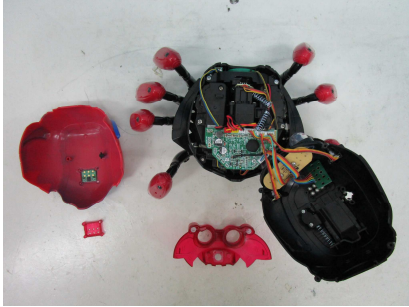


Internal View of the product

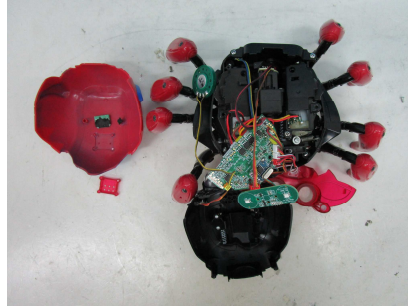

Inner Circuit Top View

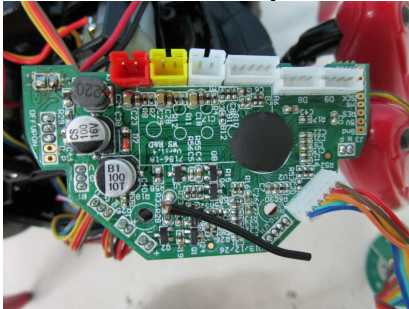


Inner Circuit Bottom View

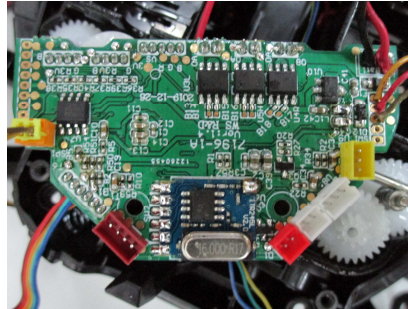


Inner Circuit Top View



Inner Circuit Bottom View

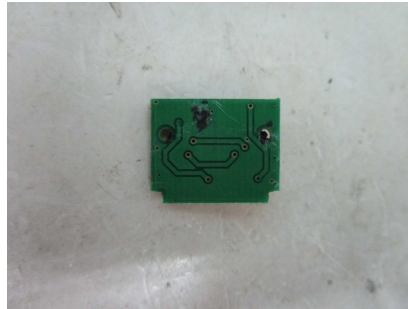


Antenna

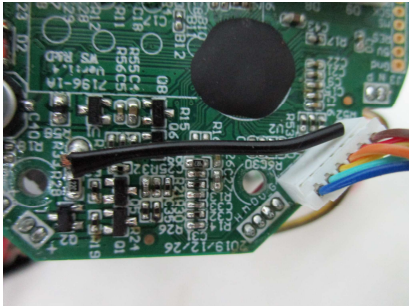

TEST REPORT No: (5220)004-0063(A)

Measurement of Radiated Emission Test Set Up

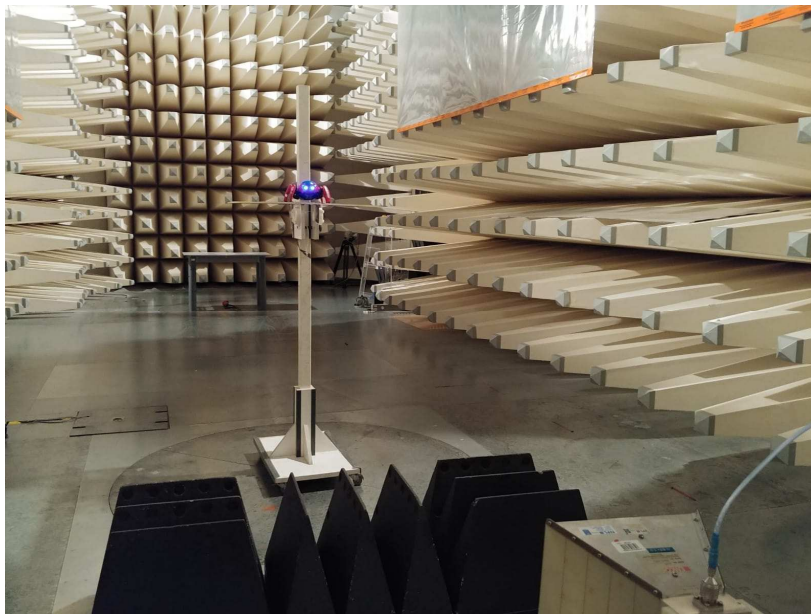

***** End of Report *****