

Produkte
Products


Prüfbericht - Nr.: 14048289 001		Seite 1 von 14 Page 1 of 14	
<i>Test Report No.:</i>			
Auftraggeber: <i>Client:</i>	BRIO AB Skeppsbron 1 BOX 305 211 20 MALMÖ Sweden		
Gegenstand der Prüfung: <i>Test Item:</i>	RFID Toys (item# 33834, 33873, 33874)		
Bezeichnung: <i>Identification:</i>	3834	Serien-Nr.: <i>Serial No.:</i>	Engineering sample
Wareneingangs-Nr.: <i>Receipt No.:</i>	A000518432-002	Eingangsdatum: <i>Date of Receipt:</i>	23.03.2017
Prüfport: <i>Testing Location:</i>	TÜV Rheinland Hong Kong Ltd. 3-4, 11/F., Fou Wah Industrial Building, 10-16 Pun Shan Street, Tsuen Wan, N.T., Hong Kong Hong Kong Productivity Council HKPC Building, 78 Tat Chee Avenue, Kowloon, Hong Kong		
Zustand des Prüfgegenstandes bei Anlieferung: <i>Condition of test item at delivery:</i>	Test samples are not damaged and suitable for testing.		
Prüfgrundlage: <i>Test Specification:</i>	FCC Part 15 Subpart C ANSI C63.10-2013 RSS-210 Issue 9 RSS-Gen Issue 4		
Prüfergebnis: <i>Test Results:</i>	Das vorstehend beschriebene Gerät wurde geprüft und entspricht oben genannter Prüfgrundlage. The above mentioned product was tested and passed .		
Prüflaboratorium: <i>Testing Laboratory:</i>	TÜV Rheinland Hong Kong Ltd. 3-4, 11/F., Fou Wah Industrial Building, 10-16 Pun Shan Street, Tsuen Wan, N.T., Hong Kong		
geprüft/ tested by:	kontrolliert/ reviewed by:		
05.05.2017	David Cheng Test Engineer		05.05.2017
			Benny Lau Senior Project Manager
Datum <i>Date</i>	Name/Stellung <i>Name/Position</i>	Unterschrift <i>Signature</i>	Datum <i>Date</i>
			Name/Stellung <i>Name/Position</i>
			Unterschrift <i>Signature</i>
Sonstiges: <i>Other Aspects</i>	FCC ID: 2AITT3834 IC: 21632-3834		
Abkürzungen:	P(ass) = entspricht Prüfgrundlage F(ail) = entspricht nicht Prüfgrundlage N/A = nicht anwendbar N/T = nicht getestet	Abbreviations:	P(ass) = passed F(ail) = failed N/A = not applicable N/T = not tested
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any safety mark on this or similar products.</i>			

Table of Content

	Page
Cover Page	1
Table of Content	2
Product information	4
Manufacturers declarations	4
Product function and intended use	4
Submitted documents.....	4
Independent Operation Modes	4
Related Submittal(s) Grants	4
Remark	4
Test Set-up and Operation Mode	5
Principle of Configuration Selection	5
Test Operation and Test Software.....	5
Special Accessories and Auxiliary Equipment.....	5
Countermeasures to achieve EMC Compliance.....	5
Test Methodology	6
Radiated Emission	6
Field Strength Calculation.....	6
Test Setup Diagram	7
List of Test and Measurement Instruments	9
Measurement Uncertainty	10
Results FCC Part 15 – Subpart C / RSS-210 Issue 9	11
FCC 15.203 – Antenna Requirement 1	Pass..... 11
FCC 15.204 – Antenna Requirement 2.....	N/A..... 11
RSS-Gen 6.3 – External Control.....	Pass..... 11
RSS-Gen 8.3 – Antenna Requirement	Pass..... 11
FCC 15.207 / RSS-Gen 8.8 – Conducted Emission on AC Mains.....	N/A..... 12
FCC 15.215 (c) – 20 dB Bandwidth	Pass..... 12
RSS-Gen 6.6 – Occupied Bandwidth.....	Pass..... 12
FCC 15.225 / RSS-210 B.6 (a)(b)(c) – Radiated Emission	Pass..... 13

FCC 15.225 / RSS-210 B.6 (d) – Radiated Emissions	Pass.....	13
FCC 15.225 (e) / RSS-210 B.6 – Frequency Tolerance	Pass.....	14
Appendix 1 – Test protocols		3 pages
Appendix 2 – Test setup		2 pages
Appendix 3 – EUT External Photos		3 pages
Appendix 4 – EUT Internal Photos		7 pages
Appendix 5 – RF exposure information.....		2 pages

Product information

Manufacturers declarations

	Transmitter
Operating frequency range	13.56 MHz
Type of modulation	ASK
Number of channels	1
Channel separation	N/A
Type of antenna	Integral Antenna
Antenna gain (dBi)	N/A
Power level	fix
Type of equipment	stand alone radio device
Connection to public utility power line	No
Nominal voltage	3.0 VDC
Independent Operation Modes	Transmitting

Product function and intended use

This device is a 13.56 MHz RFID toy powered by 3.0 Vdc (2 x 1.5V AA batteries). It has two loop antennas operating in switched mode by which at any moment in time only one antenna is used.

FCC ID: 2AITT3834/ IC: 21632-3834

Models	Product description
3834	RFID Toys (item# 33834, 33873, 33874)

Submitted documents

Circuit Diagram
 Block Diagram
 Technical Description
 User manual
 Label

Independent Operation Modes

The basic operation modes are:

- Transmitting mode.

For further information refer to User Manual

Related Submittal(s) Grants

This is a single application for certification of the transmitter

Remark

The test results in this test report are only relevant to the tested sample and does not involve any assessment in the production.

Test Set-up and Operation Mode

Principle of Configuration Selection

Emission: The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

Test Operation and Test Software

Test operation should refer to test methodology.

- Nil

Special Accessories and Auxiliary Equipment

- Nil

Countermeasures to achieve EMC Compliance

- Nil

Test Methodology

Radiated Emission

The radiated emission measurements were performed according to the procedures in ANSI C63.10-2013.

For measurement below 1GHz - the equipment under test (EUT) was placed at the middle of the 80 cm height turntable. For measurement above 1GHz - the EUT was placed at the middle of the 1.5 m height turntable and RF absorbing material was placed on ground plane between turntable and measuring antenna. During the testing, the EUT was operated standalone and arranged for maximum emissions. The EUT was tested in three orthogonal planes.

The investigation is performed with the EUT rotated 360°, the antenna height scanned between 1m and 4m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations. Repeat the measurement steps until the maximum emissions were obtained.

All radiated tests were performed at an antenna to EUT with 3 meters distance, unless stated otherwise in particular parts of this test report.

Field Strength Calculation

The field strength at 3 m was established by adding the meter reading of the spectrum analyzer to the factors associated with antenna correction factor, cable loss, preamplifiers and filter attenuation.

The equation is expressed as follow:


$$FS = R + AF + CF + FA - PA$$

Where FS = Field Strength in dBuV/m at 3 meters.
R = Reading of Spectrum Analyzer in dBuV.
AF = Antenna Factor in dB.
CF = Cable Attenuation Factor in dB.
FA = Filter Attenuation Factor in dB.
PA = Preamplifier Factor in dB.

FA and PA are only be used for the measuring frequency above 1 GHz.

Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test

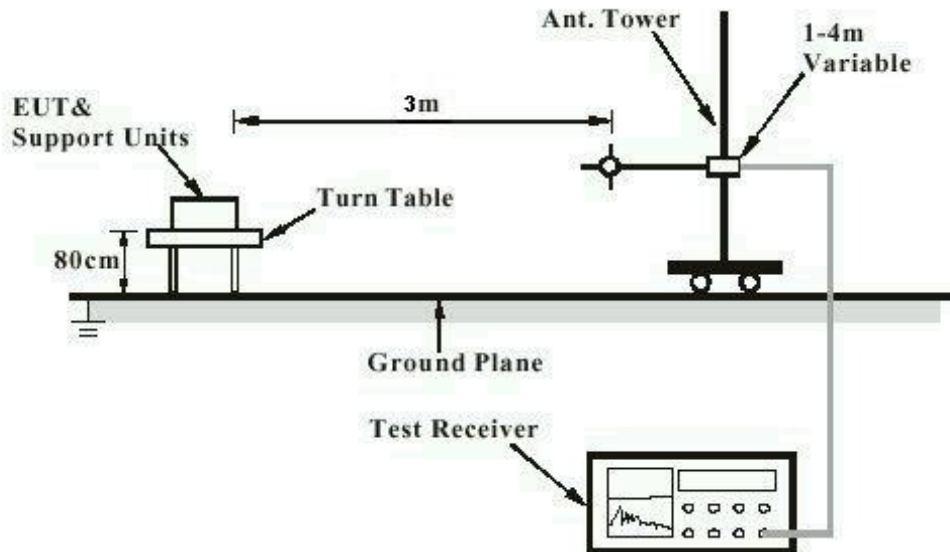

Note: Measurements above 1 GHz are done with a table height of 1.5m. In addition, there is RF absorbing material on the floor of the test site for above 1GHz measurement.

Diagram of Measurement Equipment Configuration for Mains Conduction Measurement (if applicable)


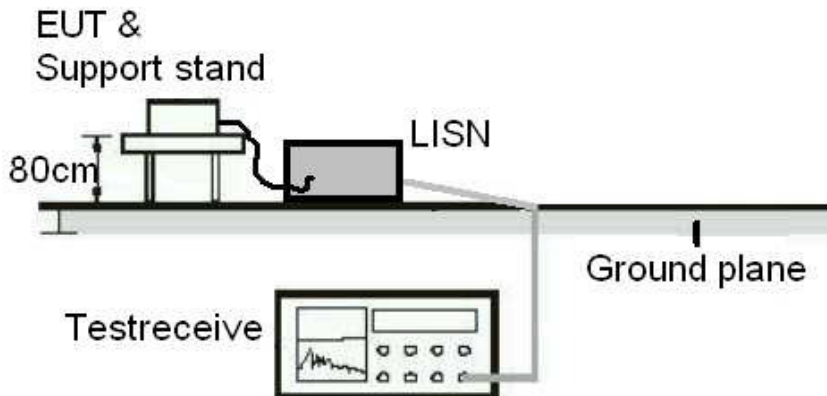


Diagram of Equipment Configuration for Antenna-port Conducted Measurement (if applicable)

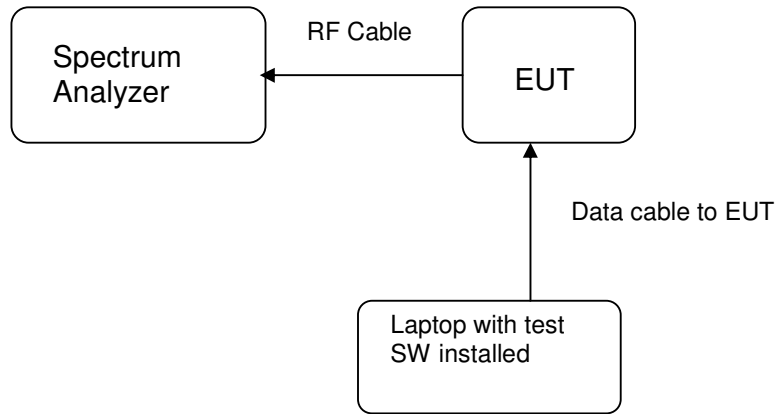

List of Test and Measurement Instruments

Hong Kong Productivity Council (FCC/ IC Registration number: 90656/ 4780A-1)

Radiated Emission

Equipment	Manufacturer	Type	Cal. Date	Due Date
Semi-anechoic Chamber	Frankonia	Nil	26-Apr-17	26-Apr-18
Test Receiver	R & S	ESU26	26-Jul-16	26-Jul-17
Bi-conical Antenna	R & S	HK116	1-Sep-15	1-Sep-17
Log Periodic Antenna	R & S	HL223	1-Sep-15	1-Sep-17
Coaxial cable	Harbour	LL335	10-Jun-16	10-Jun-18
Horn Antenna	EMCO	3115	27-Oct-16	27-Oct-17
Active Loop Antenna	EMCO	6502	25-Apr-16	25-Apr-17

TÜV Rheinland Hong Kong Ltd

Radio Test

Equipment	Manufacturer	Type	Cal. Date	Due Date
Spectrum Analyzer	R & S	FSP30	14-Oct-16	15-Oct-17
Thermometer	Fluke	50S	28-Jun-16	27-Jun-17
Temperature Chamber	Binder	MK 240	9020-0028	N/A

Measurement Uncertainty

The estimated combined standard uncertainty for power-line conducted emissions measurements is ± 2.42 dB.

The estimated combined standard uncertainty for radiated emissions measurements is ± 4.81 dB (9kHz to 30MHz) and ± 4.62 dB (30MHz to 200MHz) and ± 5.67 dB (200MHz to 1000MHz) and is ± 5.07 dB (1GHz to 8.2GHz) and ± 4.58 dB (8.2GHz to 12.4GHz) and ± 4.78 dB (12.4GHz to 18GHz)

The reported expanded uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor of $k=2$, which for the level of confidence is approximately 95%.

Results FCC Part 15 – Subpart C / RSS-210 Issue 9

FCC 15.203 – Antenna Requirement 1		Pass
FCC Requirement: No antenna other than that furnished by the responsible party shall be used with the device		
Results:	a) Antenna type:	Fixed Integral antenna
	b) Manufacturer and model no:	N/A
	c) Peak Gain:	N/A
Verdict:	Pass	

FCC 15.204 – Antenna Requirement 2		N/A
FCC Requirement: An intentional radiator may be operated only with the antenna with which it is authorized. If an antenna is marketed with the intentional radiator, it shall be of a type which is authorized with the intentional radiator.		
Results:	Only one integral antenna can be used.	
Verdict:	N/A	

RSS-Gen 6.3 – External Control		Pass
IC Requirement: The device shall not have any external controls accessible to the user that enable it to be adjusted, selected or programmed to operate in violation of the limits prescribed in the applicable RSS.		
Results:	The device does not have any transmitter external controls accessible to the user that can be adjusted and operated in violation of the limits of this standard.	
Verdict:	Pass	

RSS-Gen 8.3 – Antenna Requirement		Pass
IC Requirement: When a measurement at the antenna connector is used to determine RF output power, the effective gain of the device's antenna shall be stated, based on measurement or on data from the antenna manufacturer.		
Results:	a) Antenna type:	Fixed Integral wire antenna
	b) Manufacturer	N/A
	c) model no	N/A
	d) Gain with reference to an isotropic radiator:	0 dBi
Verdict:	Pass	

FCC 15.207 / RSS-Gen 8.8 – Conducted Emission on AC Mains	N/A
There is no AC power input or output ports on the EUT.	

FCC 15.215 (c) – 20 dB Bandwidth	Pass			
Requirement: The intentional radiators must be designed to ensure that the 20dB bandwidth of the emission, is contained within the frequency band designated in the rule section under which the equipment is operated.				
Test Specification : ANSI C63.10-2013 Mode of operation : TX Mode Supply voltage : 3.0Vdc Temperature : 23°C Humidity : 50%				
Results: For test protocols refer to Appendix 1.				
Frequency (MHz)	20 dB left (MHz)	Limit (MHz)	20 dB right (MHz)	Limit (MHz)
13.56088	13.56059	> 13.110	13.56113	< 14.010

RSS-Gen 6.6 – Occupied Bandwidth	Pass		
Requirement : N/A			
Test Specification : RSS-Gen Mode of operation : Tx mode Supply voltage : 3.0Vdc Temperature : 23°C Humidity : 50%			
Results: Pre-scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and packet types. For test protocols refer to Appendix 1.			
Frequency (MHz)	Left (MHz)	Right (MHz)	99% bandwidth (MHz)
13.56086	13.560040	13.56157	1.53

FCC 15.225 / RSS-210 B.6 (a)(b)(c) – Radiated Emission		Pass
Test Specification : ANSI C63.10 – 2013 Mode of operation : Tx mode Port of testing : Enclosure Supply voltage : 3.0Vdc Temperature : 23°C Humidity : 50%		
Requirement: (a) The field strength of any emissions within the band 13.553-13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters (b) Within the bands 13.410-13.553 MHz and 13.567-13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters (c) Within the bands 13.110–13.410 MHz and 13.710–14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters		
Results: For test protocols refer to Appendix 1.		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
13.560	25.00	84.0 / PK
No peak found	---	50.5 / PK
No peak found	---	40.5 / PK

FCC 15.225 / RSS-210 B.6 (d) – Radiated Emissions		Pass
Test Specification : ANSI C63.10 – 2013 Mode of operation : TX mode Port of testing : Enclosure Frequency range : 9kHz to 1GHz Supply voltage : 3.0Vdc Temperature : 23°C Humidity : 50%		
Requirement: The field strength of any emissions appearing outside of the 13.110-14.010 MHz band shall not exceed the general radiated emission limits in §15.209.		
Results: Pre-scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and data rate. Simultaneous transmission was investigated and no new emissions were found. All three transmit frequency modes comply with the field strength within the restricted bands. There is no spurious found below 30MHz.		
Vertical Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
94.926	22.1	43.5 / QP
200.000	8.5	43.5 / QP
400.000	15.6	46.0 / QP

Horizontal Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
30.000	11.5	43.0 / QP
200.000	8.5	43.5 / QP
600.000	19.4	46.0 / QP

FCC 15.225 (e) / RSS-210 B.6 – Frequency Tolerance		Pass			
Test Specification : ANSI C63.10-2013 Mode of operation : Tx mode Port of testing : Antenna port					
Requirement: The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% of the operating frequency over a temperature variation of -20 degrees to +50 degrees C in 10 degrees C steps at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage or battery end point at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.					
Results: Pass					
Frequency stability with respect to ambient teperature					
Temp. (°C)	Supply Voltage (VDC)	Frequency (MHz)	Frequency error (%)	Limit (%)	Verdict
50	3	13.560760	-0.001254	+/- 0.01	Pass
40	3	13.560810	-0.000885	+/- 0.01	Pass
30	3	13.560860	-0.000516	+/- 0.01	Pass
20	3	13.560930	0.000000	+/- 0.01	Reference
10	3	13.560980	0.000369	+/- 0.01	Pass
0	3	13.561020	0.000664	+/- 0.01	Pass
-10	3	13.561030	0.000737	+/- 0.01	Pass
-20	3	13.561020	0.000664	+/- 0.01	Pass