

Test report

Number: T251-0139/18 A1
Project file: C20172786
Date: 2018-04-04
Pages: 63

Product: Wireless Communication module

Type reference: Flush 1 Relay

Ratings: 230 V; 50 Hz
Operating clock frequency: 916 MHz
Protection class: II

Trademark: Qubino, NETIChome

Applicant: GOAP d.o.o. Nova Gorica
Ulica Klementa Juga 7, SI-5250 Solkan, Slovenia

Manufacturer: GOAP d.o.o. Nova Gorica
Ulica Klementa Juga 7, SI-5250 Solkan, Slovenia

Place of manufacture: see page 3 for details

Summary of testing

Testing method: FCC Part 15, Subpart C

Testing location: SIQ Ljubljana, Mašera-Spasičeva ulica 10, SI-1000 Ljubljana, Slovenia

Remarks: Date of receipt of test items: 2018-01-09
Number of items tested: 1
Date of performance of tests: 2018-01-17 - 2018-01-19
The test results presented in this report relate only to the items tested.
The product complies with the requirements of the testing methods.

Tested by: Andrej Škof

Approved by: Luka Tosec

The report shall not be reproduced except in full.

CONTENTS	page
<u>1 GENERAL</u>	<u>3</u>
1.1 EQUIPMENT UNDER TEST	3
1.2 ANSI C63.4 SUBPART SELECTION	5
1.3 OCCUPIED BANDWIDTH MEASUREMENT	5
1.4 QUASI-PEAK DETECTOR	5
1.5 PEAK, RMS, AND AVERAGE DETECTORS	5
<u>2 LIMITS</u>	<u>6</u>
2.1 SUBPART C: INTENTIONAL RADIATORS	6
<u>3 ALL TEST EQUIPMENT AND THEIR DESCRIPTION</u>	<u>8</u>
3.1 GENERAL INFORMATION	8
3.2 OTHER INSTRUMENT INFORMATION AND AUXILIARY EQUIPMENT	9
<u>4 CONVERSION FACTORS AND ALL OTHER FORMULAS</u>	<u>29</u>
<u>5 GENERAL AND SPECIAL CONDITIONS DESCRIPTION</u>	<u>30</u>
5.1 GENERAL CONDITION DESCRIPTION	30
5.2 SPECIAL CONDITION DESCRIPTION	33
<u>6 TEST SUMMARY</u>	<u>34</u>
6.1 OPERATING VOLTAGES/FREQUENCIES USED FOR TESTING	34
<u>7 EMISSION TESTS</u>	<u>35</u>
7.1 CONDUCTED EMISSION MEASUREMENT (INTENTIONAL RADIATOR)	35
7.2 RADIATED EMISSION MEASUREMENT (INTENTIONAL RADIATOR)	44

1 GENERAL

History sheet			
Date	Report No.	Change	Revision
2016-06-13	T251-0646/16	Initial Test Report issued.	--
2016-09-02	T251-0646/16 A1	Corrected initial test report due to required changes in: - general product information, - test setup picture	1.0
2016-09-29	T251-0646/16 A2	- Added Occupied Bandwidth emission test procedure. - Updated Occupied Bandwidth result table. - Added additional note at Occupied Bandwidth and Emission of the Carrier result table.	2.0
2018-02-20	T251-0139/18	Update of test report due to new type reference with different power supply (RF modul is not changed).	3.0
2018-04-04	T251-0139/18 A1	Update of test report due to typing errors and added picture of label.	4.0

Environmental conditions:

Ambient temperature: 15°C to 35°C

Relative humidity: 30% to 60%

Atmospheric pressure: 860 mbar to 1060 mbar

Places of manufacture:

1) DEC elettronica srl, Via dell'Artigianato 12/1, IT-31040 Chiarano (TV), Italy


2) ASTREL S.R.L., Via Isonzo 21/e, IT-34070 Mossa (GO), Italy

1.1 Equipment under test


Wireless Communication module

Type: **Flush 1 Relay**

Tested SIQ sample number: S20180093

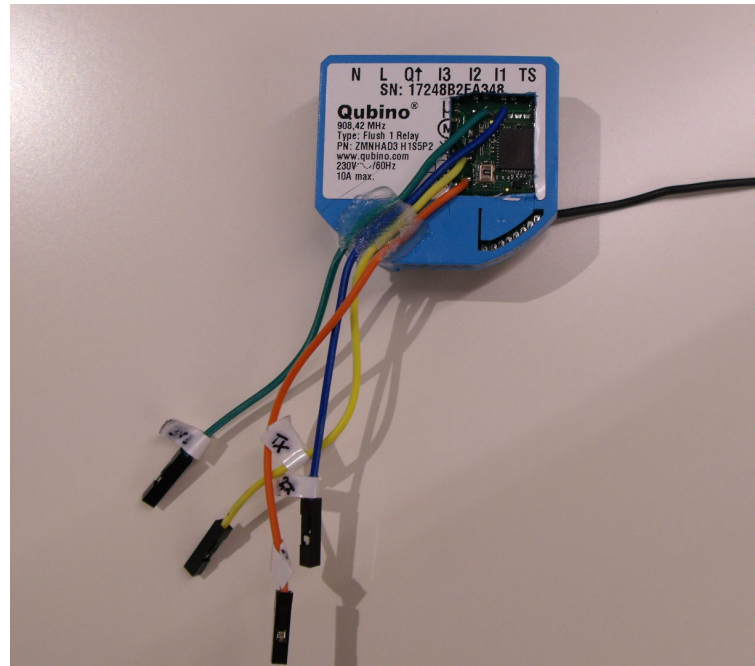

Picture of EUT

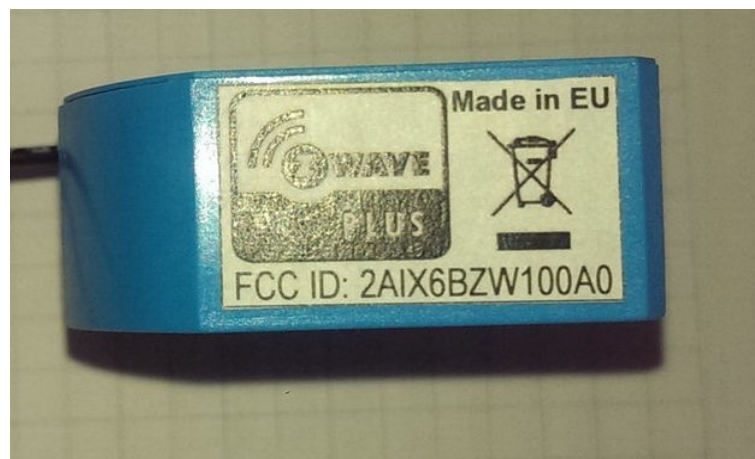

Picture of label

1.1.1 General product information

Operating Channels/frequencies:

Channel	Frequency (MHz)
1 (Lo)	908,4
0 (Hi)	916,0

1.2 ANSI C63.4 Subpart selection

Subpart B: Unintentional Radiators

Subpart C: Intentional Radiators

1.3 Occupied bandwidth measurement

Fundamental frequency	Minimum resolution bandwidth
9 kHz to 30 MHz	1 kHz
30 to 1000 MHz	10 kHz
1000 MHz to 40 GHz	100 kHz

1.4 Quasi-peak detector

Frequency range	Bandwidth (-6dB)
10 Hz to 20 kHz	Full range (wideband)
10 kHz to 150 kHz	200 Hz
150 kHz to 30 MHz	9 kHz
30 MHz to 1 GHz	120 kHz

1.5 Peak, rms, and average detectors

Frequency range	Bandwidth (-6dB)
10 Hz to 20 kHz	10, 100, 1000 Hz
10 kHz to 150 kHz	1 and 10 kHz
150 kHz to 30 MHz	1 and 10 kHz
30 MHz to 1 GHz	10 and 100 kHz
1 GHz to 40 GHz	0.1, 1.0 and 10 MHz

2 LIMITS

2.1 Subpart C: Intentional Radiators

2.1.1 Section 15.207, Conducted emission limits:

Limits:

Frequency Range (MHz)	Limits (dBμV)	
	Quasi-peak	Average
0.15 to 0.5	66 – 56*	56 – 46*
0.5 to 5.0	56	46
5.0 to 30.0	60	50

* Decreases with the logarithm of the frequency.

The shown limits in table shall not apply to carrier current systems operating as intentional radiators on frequencies below 30 MHz. In lieu thereof, these carrier current systems shall be subject to the following standards:

- For carrier current systems containing their fundamental emission within the frequency band 535-1705 kHz and intended to be received using a standard AM broadcast receiver: no limit on conducted emissions.
- For all other carrier current systems: 1000 μV within the frequency band 535-1705 kHz, as measured using a 50 μH/50 ohms LISN.
- Carrier current systems operating below 30 MHz are also subject to the radiated emission limits as appropriate.

2.1.2 Section 15.209, Radiated emission limits:

Limits:

Frequency Range (MHz)	Limits (dBμV/m)		Test distance (m)
	VERTICAL	HORIZONTAL	
0,009 to 0,490	$20 \cdot \log(2400/F(\text{kHz}))$	$20 \cdot \log(2400/F(\text{kHz}))$	300
0,490 to 1,705	$20 \cdot \log(24000/F(\text{kHz}))$	$20 \cdot \log(24000/F(\text{kHz}))$	30
1,705 to 30,0	30	30	30
30 to 88	40**	40**	3
88 to 216	43.5**	43.5**	3
216 to 960	46**	46**	3
Above 960	54	54	3

** Except as provided in paragraph below, fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz.

Perimeter protection systems may operate in the 54-72 MHz and 76-88 MHz bands under the provisions of this section. The use of such perimeter protection systems is limited to industrial, business and commercial applications.

Additional FCC requirements per clause 15.249.

Fundamental Frequency (MHz)	Field strength of fundamental (mV/m)	Field strength of harmonics (μV/m)	Test distance (m)
902-928	50	500	3

NOTE (Additional provisions to the general radiated emission limitations – 15.215): In no case shall the level of the unwanted emissions from an intentional radiator operating under these additional provisions exceed the field strength of the fundamental emission as per clause 15.209.



Intentional radiators operating under the alternative provisions to the general emission limits must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

3 ALL TEST EQUIPMENT AND THEIR DESCRIPTION

3.1 General information

Description	Model No.	SIQ No.	Last calibration	Calibrated until	Calibration period	Used
Rohde-Schwarz, RFI receiver	ESU8	105187	2015-11	2017-11	24 months	X
Rohde-Schwarz, RFI receiver	ESU26	100428	2016-02	2018-02	24 months	X
Rohde & Schwarz, Artificial main network	ESH2-Z5	106899	2017-05	2019-05	24 months	
Rohde & Schwarz, Artificial main network	ENV216	106765	2016-09	2018-09	24 months	X
Comtest Engineering, Semi Anechoic Chamber SAC 1	SAC 3m	NPS001	2017-05	2019-05	24 months	
Comtest Engineering, Semi Anechoic Chamber SAC 2	SAC 3m	NPS003	2017-05	2019-05	24 months	X
Rohde & Schwarz, Horn Antenna	HF907 (SN 102508)	102508	2016-03	2018-03	24 months	
Rohde & Schwarz, Ultra Broadband Antenna	HL562E (SN 100842)	102842	2016-03	2018-03	24 months	
Rohde & Schwarz, Horn Antenna	HF907 (SN 102494)	102494	2016-03	2018-03	24 months	
Rohde & Schwarz, Ultra Broadband Antenna	HL562E (SN 100843)	102843	2016-03	2018-03	24 months	X
Maturo, Turn table (2 m diameter)	TT 2.0 SI	/	N/A	N/A	N/A	X
Maturo, Bore-sight antenna mast	BAM-4.0-P	/	N/A	N/A	N/A	X
Maturo, Multi-channel positioning equipment	Maturo NCD	/	N/A	N/A	N/A	X
Schwarzbeck, Biconical antenna	VHBB9124 (SN 9124-317)	105112	2016-11	2018-11	24 months	X
Rohde & Schwarz, Loop Antenna	FMZB 1519 B	/	2016-08	2018-08	24 months	

3.2 Other instrument information and auxiliary equipment

Description	Model No.	Bandwidth	Detector functions	Antenna factors	Cable loss	Range
Rohde-Schwarz, AMN	ENV216	/	/	/	/	9 kHz – 30 MHz
Rohde & Schwarz, Artificial main network	ESH 2-Z5	/	/	/	/	9 kHz – 30 MHz
Rohde-Schwarz, RFI receiver	ESU8	200Hz, 9kHz, 120kHz, 1MHz	Peak, Q-peak, Average	/	/	20 Hz – 8 GHz
Rohde-Schwarz, RFI receiver	ESU26	200Hz, 9kHz, 120kHz, 1MHz	Peak, Q-peak, Average	/	/	20 Hz – 26.5 GHz
Hewlett Packard, RF Spectrum Analyzer	8593E	200Hz, 9kHz, 120kHz, 1MHz	Peak, Q-peak, Average	/	/	9 kHz – 26.5 GHz
Comtest Engineering, Semi Anechoic Chamber SAC 1	SAC 3m	/	/	/	/	30 MHz – 18 GHz
Comtest Engineering, Semi Anechoic Chamber SAC 2	SAC 3m	/	/	/	/	30 MHz – 18 GHz
Rohde & Schwarz, Horn Antenna	HF907 (SN 102508)	/	/	See section 3.2.2	/	0.8 GHz – 18 GHz
Rohde & Schwarz, Ultra Broadband Antenna	HL562E (SN 100842)	/	/	See section 3.2.2	/	30 MHz – 6 GHz
Rohde & Schwarz, Horn Antenna	HF907 (SN 102494)	/	/	See section 3.2.2	/	0.8 GHz – 18 GHz
Rohde & Schwarz, Ultra Broadband Antenna	HL562E (SN 100843)	/	/	See section 3.2.2	/	30 MHz – 6 GHz
Schwarzbeck, Biconical antenna	VHBB9124 (SN 9124-317)	/	/	See section 3.2.2	/	30 MHz – 300 MHz
Rohde & Schwarz, Loop Antenna	FMZB 1519 B	/	/	See section 3.2.2	/	9 kHz – 30 MHz

3.2.1 Cable loss and attenuation of radiated emission

3.2.1.1 Conducted emission cable (SIQ-K024)

Point	Frequency (9kHz-30MHz)	Cable length (meters)	Loss (dB)
1	190 kHz	1	0,4
2	530 kHz	1	0,26
3	2,53 MHz	1	0,16
4	5,19 MHz	1	0,07
5	11,05 MHz	1	0,03
6	22,01 MHz	1	0,06
7	24,03 MHz	1	0,04

3.2.1.2 Radiated emission attenuation

Point	Frequency (30 MHz – 26,5 GHz)	Attenuation (dB)
1	30 MHz	0,501
2	150 MHz	1,174
3	400 MHz	2,034
4	800 MHz	2,995
5	1 GHz	3,416
6	1,363	1,666667
7	2,686	3,583333
8	5,332	5,25
9	7,978	6,25
10	10,624	7,5
11	13,27	8,333333
12	15,916	9,166666
13	18,562	9,833333
14	21,208	10,666667
15	23,854	11,5
16	26,5	12,166667

3.2.2 Antenna factors

3.2.2.1 Antenna VHBB9124

Frequency (MHz)	Antenna factor VHBB9124 (SN 9124-317)
20	15,3
21	15,1
22	14,8
23	14,5
24	14,3
25	14,1
26	13,8
27	13,6
28	13,3
29	13,1
30	12,6
31	12,4
32	12,2
33	12,0
34	11,8
35	11,7
36	11,4
37	11,3
38	11,1
39	11,0
40	10,8
41	10,7
42	10,5
43	10,3
44	10,2
45	10,1
46	9,9
47	9,9
48	9,7
49	9,7
50	9,5
51	9,5
52	9,3
53	9,3
54	9,2
55	9,1
56	9,0
57	9,0
58	9,0
59	9,0
60	9,0
61	9,0
62	8,9
63	8,9
64	8,8
65	8,8
66	8,8
67	8,9
68	8,9

69	8,9
70	8,9
71	8,9
72	8,9
73	8,9
74	8,9
75	8,9
76	8,9
77	8,9
78	8,9
79	9,0
80	9,0
81	9,0
82	9,1
83	9,0
84	9,0
85	9,0
86	9,1
87	9,1
88	9,2
89	9,2
90	9,3
91	9,3
92	9,3
93	9,3
94	9,3
95	9,3
96	9,4
97	9,4
98	9,5
99	9,5
100	9,6
102	9,7
104	9,7
106	9,9
108	10,0
110	10,2
112	10,2
114	10,3
116	10,4
118	10,5
120	10,5
122	10,7
124	10,7
126	10,8
128	10,9
130	11,0
132	11,1
134	11,2
136	11,4
138	11,5
140	11,6
142	11,8
144	11,8
146	12,0
148	11,9
150	12,0

152	12,1
154	12,4
156	12,6
158	12,8
160	12,9
162	12,9
164	13,0
166	13,0
168	12,8
170	12,8
172	12,9
174	13,0
176	13,2
178	13,3
180	13,4
182	13,5
184	13,5
186	13,5
188	13,6
190	13,7
192	13,8
194	13,8
196	13,9
198	14,0
200	14,1
202	14,2
204	14,3
206	14,4
208	14,3
210	14,4
212	14,7
214	14,6
216	14,5
218	14,5
220	14,6
222	14,4
224	14,6
226	14,8
228	14,9
230	15,0
232	15,0
234	15,0
236	15,0
238	15,2
240	15,3
242	15,3
244	15,4
246	15,3
248	15,2
250	15,2
252	15,2
254	15,4
256	15,4
258	15,5
260	15,6
262	15,7
264	15,7

266	15,8
268	15,9
270	15,9
272	16,0
274	16,0
276	16,2
278	16,2
280	16,4
282	16,7
284	16,8
286	17,0
288	16,9
290	16,9
292	17,2
294	17,4
296	17,6
298	17,9
300	18,2

3.2.2.2 Antenna FMZB 1519 B

Frequency (MHz)	Antenna factor (dB)
0,009	-30,60
0,010	-30,80
0,020	-31,80
0,030	-32,00
0,040	-32,10
0,050	-32,20
0,060	-32,20
0,070	-32,20
0,080	-32,20
0,090	-32,30
0,100	-32,30
0,150	-32,30
0,200	-32,40
0,300	-32,40
0,400	-32,40
0,500	-32,40
0,600	-32,40
0,700	-32,50
0,800	-32,50
0,900	-32,50
1,000	-32,50
2,000	-32,50
3,000	-32,50
4,000	-32,50
5,000	-32,50
6,000	-32,50
7,000	-32,50
8,000	-32,50
9,000	-32,50
10,000	-32,50
11,000	-32,50
12,000	-32,50
13,000	-32,50
14,000	-32,40
15,000	-32,40
16,000	-32,40
17,000	-32,40
18,000	-32,30
19,000	-32,30
20,000	-32,20
21,000	-32,10
22,000	-32,10
23,000	-32,00
24,000	-31,90
25,000	-31,80
26,000	-31,70
27,000	-31,60
28,000	-31,50
29,000	-31,40
30,000	-31,30

3.2.2.3 Antenna HL562E

Frequency (MHz)	Antenna factor HL562E (SN 100842)	Antenna factor HL562E (SN 100843)
30	18.12	18.17
32	17.08	17.07
34	16.01	16.00
36	14.91	14.94
38	13.76	13.75
40	12.64	12.61
42	11.43	11.40
44	10.17	10.15
46	8.86	8.81
48	7.42	7.44
50	6.01	5.96
52	4.59	4.56
54	3.38	3.37
56	2.84	2.85
58	3.06	3.14
60	3.78	3.76
62	4.44	4.40
64	5.36	5.32
66	6.19	6.18
68	6.96	6.92
70	7.56	7.52
72	8.04	8.01
74	8.38	8.35
76	8.67	8.64
78	8.88	8.85
80	9.04	9.03
82	9.14	9.09
84	9.20	9.14
86	9.22	9.16
88	9.22	9.17
90	9.21	9.17
92	9.22	9.15
94	9.22	9.16
96	9.21	9.16
98	9.22	9.17
100	9.33	9.05
105	9.38	9.39
110	9.67	9.74
115	9.55	10.33
120	10.51	9.88
125	10.15	9.87
130	9.23	9.13
135	8.79	8.71
140	8.40	8.40
145	7.93	7.82
150	7.74	7.75
155	7.68	7.76
160	7.86	7.78
165	8.47	8.33
170	9.83	9.66
175	10.29	10.30
180	7.86	7.93

185	7.19	7.27
190	7.54	7.21
195	7.32	7.20
200	7.56	7.49
205	7.56	7.68
210	7.71	7.95
215	8.68	8.29
220	8.43	8.49
225	8.51	8.62
230	8.85	8.82
235	9.10	9.05
240	9.31	9.29
245	9.33	9.33
250	9.50	9.45
255	9.71	9.64
260	9.86	9.81
265	9.95	9.90
270	10.00	10.02
275	10.15	10.15
280	10.37	10.36
285	10.58	10.61
290	10.76	10.80
295	10.84	10.90
300	10.83	11.12
305	11.38	11.37
310	11.36	11.32
315	11.53	11.48
320	11.70	11.67
325	11.84	11.81
330	11.98	11.94
335	12.32	12.13
340	12.19	12.22
345	12.29	12.35
350	12.43	12.47
355	12.59	12.61
360	12.72	12.73
365	12.83	12.81
370	12.99	12.99
375	13.08	13.10
380	13.12	13.11
385	13.21	13.20
390	13.38	13.33
395	13.54	13.50
400	13.65	13.63
405	13.74	13.73
410	13.84	13.83
415	14.14	13.96
420	14.10	14.00
425	14.13	14.08
430	14.24	14.20
435	14.40	14.40
440	14.55	14.49
445	14.70	14.65
450	14.82	14.79
455	14.89	14.91
460	14.90	15.09
465	15.16	15.19



470	15.24	15.22
475	15.31	15.25
480	15.38	15.32
485	15.48	15.43
490	15.58	15.52
495	15.66	15.60
500	15.72	15.70
505	15.74	15.75
510	15.83	15.82
515	16.05	15.92
520	15.95	15.93
525	15.97	15.97
530	16.05	16.01
535	16.09	16.07
540	16.16	16.15
545	16.21	16.21
550	16.29	16.30
555	16.38	16.41
560	16.51	16.53
565	16.67	16.68
570	16.78	16.85
575	16.87	17.02
580	17.03	17.11
585	17.06	17.08
590	17.10	17.09
595	17.15	17.13
600	17.22	17.18
605	17.28	17.25
610	17.35	17.33
615	17.42	17.37
620	17.41	17.42
625	17.48	17.48
630	17.56	17.55
635	17.67	17.65
640	17.80	17.79
645	17.94	17.95
650	18.08	18.13
655	18.16	18.12
660	18.18	18.03
665	18.12	17.99
670	18.13	18.01
675	18.19	18.09
680	18.26	18.24
685	18.42	18.41
690	18.56	18.56
695	18.62	18.61
700	18.67	18.67
705	18.70	18.74
710	18.74	18.79
715	18.81	18.86
720	18.89	18.95
725	19.09	19.09
730	19.22	19.26
735	19.17	19.23
740	19.19	19.14
745	19.14	19.10
750	19.13	19.09

755	19.17	19.10
760	19.19	19.15
765	19.24	19.21
770	19.34	19.29
775	19.37	19.36
780	19.36	19.36
785	19.43	19.41
790	19.51	19.48
795	19.59	19.56
800	19.70	19.66
805	19.83	19.79
810	19.98	19.95
815	20.07	20.04
820	20.10	19.96
825	20.11	19.92
830	20.09	19.94
835	20.09	19.96
840	20.14	20.05
845	20.19	20.11
850	20.27	20.20
855	20.36	20.29
860	20.42	20.37
865	20.46	20.44
870	20.50	20.51
875	20.52	20.55
880	20.59	20.61
885	20.70	20.69
890	20.82	20.77
895	20.89	20.83
900	20.88	20.92
905	20.83	21.08
910	20.93	21.21
915	21.19	21.17
920	21.22	21.10
925	21.09	21.03
930	20.98	21.00
935	20.95	21.00
940	20.96	21.01
945	21.00	21.04
950	21.05	21.06
955	21.09	21.07
960	21.15	21.13
965	21.23	21.20
970	21.27	21.26
975	21.31	21.30
980	21.36	21.37
985	21.43	21.44
990	21.52	21.53
995	21.63	21.64
1000	21.73	21.73

3.2.2.4 Antenna HF907

Frequency (GHz)	Antenna factor HF907 (SN 102508)	Antenna factor HF907 (SN 102494)
1.00	24.36	24.36
1.01	24.34	24.38
1.02	24.53	24.55
1.03	24.60	24.63
1.04	24.46	24.51
1.05	24.35	24.41
1.06	24.48	24.49
1.07	24.51	24.56
1.08	24.32	24.37
1.09	24.26	24.29
1.10	24.33	24.35
1.11	24.38	24.44
1.12	24.23	24.25
1.13	24.18	24.19
1.14	24.23	24.24
1.15	24.35	24.38
1.16	24.30	24.30
1.17	24.23	24.26
1.18	24.37	24.40
1.19	24.56	24.57
1.20	24.52	24.55
1.21	24.39	24.42
1.22	24.51	24.52
1.23	24.66	24.70
1.24	24.64	24.68
1.25	24.51	24.54
1.26	24.53	24.55
1.27	24.69	24.72
1.28	24.65	24.65
1.29	24.46	24.47
1.30	24.48	24.52
1.31	24.66	24.68
1.32	24.64	24.65
1.33	24.49	24.50
1.34	24.53	24.53
1.35	24.75	24.75
1.36	24.73	24.76
1.37	24.62	24.65
1.38	24.74	24.76
1.39	24.96	24.99
1.40	25.02	25.05
1.41	24.94	24.95
1.42	25.02	25.03
1.43	25.31	25.37
1.44	25.39	25.43
1.45	25.27	25.29
1.46	25.37	25.42
1.47	25.70	25.70
1.48	25.77	25.76
1.49	25.66	25.67
1.50	25.76	25.77

1.51	26.04	26.03
1.52	26.12	26.12
1.53	26.01	26.03
1.54	26.06	26.03
1.55	26.29	26.29
1.56	26.35	26.36
1.57	26.25	26.25
1.58	26.27	26.27
1.59	26.41	26.45
1.60	26.51	26.50
1.61	26.37	26.36
1.62	26.33	26.33
1.63	26.48	26.52
1.64	26.58	26.57
1.65	26.42	26.44
1.66	26.35	26.37
1.67	26.51	26.53
1.68	26.64	26.59
1.69	26.46	26.47
1.70	26.36	26.34
1.71	26.52	26.50
1.72	26.70	26.70
1.73	26.54	26.53
1.74	26.40	26.38
1.75	26.62	26.64
1.76	26.85	26.83
1.77	26.72	26.73
1.78	26.59	26.57
1.79	26.75	26.80
1.80	27.08	27.07
1.81	26.92	26.92
1.82	26.77	26.76
1.83	27.00	27.00
1.84	27.26	27.23
1.85	27.09	27.06
1.86	26.92	26.88
1.87	27.17	27.14
1.88	27.40	27.35
1.89	27.27	27.22
1.90	27.14	27.12
1.91	27.43	27.38
1.92	27.72	27.71
1.93	27.59	27.56
1.94	27.55	27.52
1.95	27.90	27.90
1.96	28.25	28.24
1.97	28.13	28.10
1.98	28.06	28.04
1.99	28.43	28.44
2.00	28.67	28.63
2.01	28.50	28.45
2.02	28.37	28.39
2.03	28.67	28.63
2.04	28.76	28.76
2.05	28.48	28.46
2.06	28.37	28.36
2.07	28.49	28.48



2.08	28.52	28.51
2.09	28.31	28.29
2.10	28.16	28.14
2.11	28.24	28.23
2.12	28.28	28.27
2.13	28.15	28.13
2.14	28.01	28.00
2.15	28.10	28.09
2.16	28.22	28.21
2.17	28.14	28.10
2.18	28.02	28.00
2.19	28.11	28.08
2.20	28.29	28.28
2.21	28.24	28.21
2.22	28.11	28.08
2.23	28.21	28.18
2.24	28.37	28.36
2.25	28.31	28.28
2.26	28.16	28.13
2.27	28.21	28.19
2.28	28.40	28.38
2.29	28.37	28.35
2.30	28.21	28.19
2.31	28.28	28.25
2.32	28.46	28.43
2.33	28.47	28.44
2.34	28.35	28.33
2.35	28.41	28.38
2.36	28.56	28.54
2.37	28.62	28.59
2.38	28.54	28.49
2.39	28.56	28.55
2.40	28.73	28.71
2.41	28.77	28.74
2.42	28.72	28.69
2.43	28.74	28.72
2.44	28.86	28.85
2.45	28.90	28.89
2.46	28.86	28.84
2.47	28.89	28.88
2.48	29.02	29.01
2.49	29.08	29.07
2.50	29.05	29.03
2.51	29.10	29.09
2.52	29.30	29.29
2.53	29.39	29.39
2.54	29.38	29.35
2.55	29.39	29.38
2.56	29.58	29.57
2.57	29.74	29.73
2.58	29.65	29.62
2.59	29.54	29.52
2.60	29.71	29.68
2.61	29.90	29.87
2.62	29.71	29.68
2.63	29.53	29.50
2.64	29.67	29.65

2.65	29.87	29.84
2.66	29.72	29.66
2.67	29.50	29.48
2.68	29.60	29.58
2.69	29.82	29.79
2.70	29.71	29.69
2.71	29.51	29.48
2.72	29.59	29.55
2.73	29.77	29.76
2.74	29.72	29.68
2.75	29.56	29.51
2.76	29.59	29.56
2.77	29.74	29.71
2.78	29.69	29.63
2.79	29.53	29.48
2.80	29.54	29.51
2.81	29.65	29.61
2.82	29.60	29.55
2.83	29.44	29.42
2.84	29.49	29.47
2.85	29.63	29.60
2.86	29.60	29.56
2.87	29.49	29.47
2.88	29.59	29.57
2.89	29.79	29.78
2.90	29.79	29.77
2.91	29.73	29.71
2.92	29.88	29.86
2.93	30.10	30.09
2.94	30.16	30.14
2.95	30.08	30.06
2.96	30.23	30.21
2.97	30.54	30.52
2.98	30.57	30.55
2.99	30.46	30.43
3.00	30.58	30.56
3.05	31.17	31.18
3.10	31.68	31.64
3.15	31.58	31.55
3.20	31.75	31.72
3.25	31.89	31.85
3.30	31.71	31.68
3.35	31.64	31.60
3.40	31.70	31.67
3.45	31.84	31.83
3.50	31.95	31.91
3.55	32.01	31.96
3.60	32.09	32.07
3.65	32.32	32.29
3.70	32.52	32.48
3.75	32.62	32.57
3.80	32.85	32.80
3.85	32.93	32.89
3.90	32.94	32.91
3.95	33.02	32.98
4.00	32.97	32.91
4.05	33.07	33.01



4.10	33.21	33.17
4.15	33.33	33.31
4.20	33.48	33.43
4.25	33.71	33.66
4.30	33.87	33.83
4.35	34.02	33.99
4.40	33.83	33.82
4.45	33.57	33.53
4.50	33.61	33.58
4.55	33.61	33.59
4.60	33.51	33.49
4.65	33.44	33.39
4.70	33.60	33.58
4.75	33.93	33.92
4.80	34.06	34.05
4.85	34.13	34.13
4.90	34.27	34.25
4.95	34.38	34.36
5.00	34.38	34.34
5.05	34.19	34.17
5.10	33.99	33.97
5.15	33.93	33.93
5.20	33.97	33.96
5.25	33.92	33.91
5.30	33.93	33.93
5.35	34.17	34.18
5.40	34.37	34.38
5.45	34.43	34.44
5.50	34.38	34.38
5.55	34.42	34.42
5.60	34.45	34.45
5.65	34.28	34.28
5.70	34.05	34.04
5.75	34.04	34.05
5.80	34.20	34.20
5.85	34.31	34.31
5.90	34.35	34.35
5.95	34.47	34.49
6.00	34.69	34.70
6.05	34.87	34.86
6.10	34.82	34.82
6.15	34.75	34.75
6.20	34.78	34.79
6.25	34.77	34.79
6.30	34.68	34.69
6.35	34.66	34.68
6.40	34.84	34.87
6.45	35.03	35.07
6.50	35.13	35.14
6.55	35.13	35.13
6.60	35.26	35.26
6.65	35.36	35.36
6.70	35.29	35.29
6.75	35.17	35.16
6.80	35.16	35.15
6.85	35.26	35.28
6.90	35.37	35.38

6.95	35.35	35.36
7.00	35.44	35.45
7.05	35.59	35.61
7.10	35.74	35.76
7.15	35.73	35.74
7.20	35.61	35.63
7.25	35.65	35.66
7.30	35.65	35.67
7.35	35.64	35.64
7.40	35.63	35.64
7.45	35.71	35.74
7.50	35.89	35.90
7.55	35.99	36.01
7.60	36.09	36.10
7.65	36.18	36.21
7.70	36.23	36.25
7.75	36.26	36.29
7.80	36.21	36.22
7.85	36.20	36.20
7.90	36.14	36.16
7.95	36.16	36.17
8.00	36.14	36.15
8.05	36.19	36.19
8.10	36.30	36.32
8.15	36.46	36.47
8.20	36.50	36.50
8.25	36.51	36.53
8.30	36.51	36.50
8.35	36.48	36.48
8.40	36.46	36.45
8.45	36.40	36.39
8.50	36.41	36.40
8.55	36.45	36.45
8.60	36.56	36.58
8.65	36.70	36.71
8.70	36.71	36.70
8.75	36.79	36.83
8.80	36.85	36.88
8.85	36.88	36.85
8.90	36.79	36.75
8.95	36.79	36.81
9.00	36.87	36.84
9.05	36.82	36.75
9.10	36.85	36.81
9.15	36.90	36.88
9.20	36.89	36.90
9.25	36.92	36.91
9.30	36.97	36.97
9.35	37.07	37.07
9.40	37.11	37.11
9.45	37.14	37.16
9.50	37.20	37.19
9.55	37.10	37.08
9.60	37.06	37.03
9.65	37.04	37.05
9.70	36.96	36.97
9.75	36.93	36.93



9.80	37.00	37.00
9.85	37.15	37.16
9.90	37.23	37.24
9.95	37.25	37.22
10.00	37.31	37.30
10.05	37.31	37.30
10.10	37.23	37.20
10.15	37.15	37.13
10.20	37.11	37.13
10.25	37.11	37.15
10.30	37.11	37.13
10.35	37.15	37.19
10.40	37.21	37.24
10.45	37.25	37.27
10.50	37.27	37.28
10.55	37.24	37.24
10.60	37.18	37.18
10.65	37.17	37.19
10.70	37.19	37.19
10.75	37.16	37.17
10.80	37.16	37.18
10.85	37.26	37.26
10.90	37.32	37.32
10.95	37.33	37.32
11.00	37.36	37.35
11.05	37.34	37.33
11.10	37.34	37.36
11.15	37.35	37.34
11.20	37.34	37.33
11.25	37.29	37.29
11.30	37.28	37.29
11.35	37.34	37.31
11.40	37.31	37.30
11.45	37.32	37.33
11.50	37.38	37.39
11.55	37.41	37.42
11.60	37.44	37.43
11.65	37.44	37.42
11.70	37.43	37.42
11.75	37.48	37.48
11.80	37.39	37.38
11.85	37.40	37.38
11.90	37.45	37.39
11.95	37.45	37.43
12.00	37.48	37.47
12.05	37.51	37.50
12.10	37.54	37.51
12.15	37.58	37.58
12.20	37.59	37.60
12.25	37.62	37.60
12.30	37.62	37.60
12.35	37.61	37.62
12.40	37.61	37.65
12.45	37.65	37.63
12.50	37.67	37.66
12.55	37.71	37.71
12.60	37.80	37.76

12.65	37.86	37.82
12.70	37.89	37.86
12.75	37.92	37.90
12.80	38.00	37.98
12.85	38.05	38.02
12.90	38.06	38.02
12.95	38.09	38.05
13.00	38.14	38.10
13.05	38.21	38.19
13.10	38.29	38.24
13.15	38.36	38.35
13.20	38.44	38.47
13.25	38.57	38.55
13.30	38.63	38.59
13.35	38.68	38.67
13.40	38.77	38.73
13.45	38.84	38.77
13.50	38.90	38.80
13.55	38.92	38.88
13.60	39.03	39.00
13.65	39.15	39.11
13.70	39.30	39.23
13.75	39.42	39.33
13.80	39.53	39.49
13.85	39.66	39.59
13.90	39.74	39.65
13.95	39.81	39.70
14.00	39.89	39.83
14.05	39.96	39.92
14.10	40.02	39.96
14.15	40.08	40.04
14.20	40.16	40.11
14.25	40.25	40.18
14.30	40.33	40.27
14.35	40.37	40.28
14.40	40.44	40.32
14.45	40.50	40.40
14.50	40.62	40.56
14.55	40.70	40.61
14.60	40.77	40.64
14.65	40.83	40.71
14.70	40.86	40.77
14.75	40.83	40.72
14.80	40.79	40.65
14.85	40.76	40.65
14.90	40.84	40.76
14.95	40.87	40.77
15.00	40.89	40.79
15.05	40.95	40.85
15.10	41.03	40.94
15.15	41.08	40.96
15.20	41.02	40.93
15.25	40.99	40.88
15.30	41.01	40.91
15.35	41.04	40.88
15.40	41.08	40.92
15.45	41.12	40.96



15.50	41.15	40.97
15.55	41.18	41.00
15.60	41.14	41.01
15.65	41.05	40.99
15.70	40.99	40.95
15.75	40.99	40.92
15.80	41.03	41.00
15.85	41.14	41.11
15.90	41.18	41.15
15.95	41.27	41.22
16.00	41.34	41.33
16.05	41.40	41.36
16.10	41.39	41.34
16.15	41.33	41.32
16.20	41.31	41.31
16.25	41.40	41.37
16.30	41.47	41.43
16.35	41.53	41.52
16.40	41.66	41.66
16.45	41.77	41.75
16.50	41.82	41.77
16.55	41.84	41.87
16.60	41.83	41.95
16.65	41.85	41.94
16.70	41.91	42.00
16.75	42.09	42.20
16.80	42.23	42.35
16.85	42.36	42.39
16.90	42.50	42.49
16.95	42.61	42.59
17.00	42.63	42.60
17.05	42.63	42.57
17.10	42.64	42.54
17.15	42.76	42.58
17.20	42.82	42.63
17.25	42.86	42.75
17.30	43.02	42.90
17.35	43.15	42.98
17.40	43.28	43.10
17.45	43.30	43.17
17.50	43.32	43.16
17.55	43.37	43.19
17.60	43.39	43.23
17.65	43.50	43.35
17.70	43.52	43.41
17.75	43.62	43.49
17.80	43.74	43.60
17.85	43.89	43.69
17.90	43.92	43.81
17.95	44.02	43.89
18.00	44.18	43.98

4 CONVERSION FACTORS AND ALL OTHER FORMULAS

Unit	Conversion unit	Formula of conversion
$\text{dB}\mu\text{V}$	$\text{dB}\mu\text{V}/\text{m}$	$\text{dB}\mu\text{V}/\text{m} = \text{dB}\mu\text{V} + \text{AF}$
$\mu\text{V}/\text{m}$	$\text{dB}\mu\text{V}/\text{m}$	$\text{dB}\mu\text{V}/\text{m} = 20\log(X(\mu\text{V}/\text{m})/1\mu\text{V})$

	Test distance stated in standard	Test distance of measurement	Conversion factor
Class B	3 m	3 m	/
Class A	10 m	3 m	20dB/decade



5 GENERAL AND SPECIAL CONDITIONS DESCRIPTION

5.1 General condition description

Interconnect and power cabling (or wiring)

5.1.1 Test arrangement for conducted emissions

Interconnecting cables that hang closer than 40 cm to the ground-plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.

I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.

EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω . LISN can be placed on top of, or immediately beneath, reference ground-plane.

All other equipment powered from additional LISN(s).

Multiple outlet strip can be used for multiple power cords of non-EUT equipment.

LISN at least 80 cm from nearest part of EUT chassis.

Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.

Non-EUT components of EUT system being tested.

Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.

Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground-plane.

5.1.2 Test arrangement for conducted emissions- floor-standing equipment

Excess I/O cables shall be bundled in the center. If bundling is not possible, the cables shall be arranged in serpentine fashion. Bundling shall not exceed 40 cm in length.

Excess power cords shall be bundled in the center or shortened to appropriate length.

I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. If bundling is not possible, the cable shall be arranged in serpentine fashion.

EUT and all cables shall be insulated, if required, from the ground-plane by up to 12 mm of insulating material.

EUT connected to one LISN. LISN can be placed on top of, or immediately beneath, the ground-plane.

All other equipment powered from a second LISN or additional LISN(s).

Multiple outlet strip can be used for multiple power cords of non-EUT equipment.

5.1.3 Test arrangement for radiated emissions tabletop equipment

Interconnecting cables that hang closer than 40 cm to the ground-plane shall be folded back and forth in the center, forming a bundle 30 to 40 cm long.

I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated if required using the correct terminating impedance. The total length shall not exceed 1 m.

If LISNs are kept in the test setup for radiated emissions, it is preferred that they be installed under the ground-plane with the receptacle flush with the ground-plane.

Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.

Non-EUT components of EUT system being tested.

Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.

No vertical conducting plane used.

Power cords drape to the floor and are routed over to receptacle.

5.1.4 Test arrangement for radiated emissions floor-standing equipment

Excess I/O cables shall be bundled in center. If bundling is not possible, the cables shall be arranged in serpentine fashion. Bundling not to exceed 40 cm in length.

Excess power cords shall be bundled in the center or shortened to appropriate length.

I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. If bundling is not possible, the cable shall be arranged in a serpentine fashion.

EUT and all cables shall be insulated, if required, from the ground-plane by up to 12 mm of insulating material.

If LISNs are kept in the test setup for radiated emissions, it is preferred that they be installed under the ground-plane with the receptacle flush with the ground plane.



Overhead cable trays and suspended ceilings

5.1.5 Test arrangement for floor-standing equipment

Only one vertical riser may be used where typical of system under test.

Excess power cord shall be bundled in the center or shortened to appropriate length.

EUT and cables shall be insulated from ground-plane by up to 12 mm. Where the manual has specified or there exists a code of practice for installation of the EUT, the test arrangement shall allow the use of this practice for the tests.

Power cords being measured connected to one LISN. All other system power cords powered through other LISN(s). A multiple receptacle strip may be used for other power cords.

For *conducted* tests, the LISNs may be placed on top of or immediately beneath and bonded directly to the ground-plane. For *radiated* tests, the LISN(s), if used, should be installed under, with the receptacle flush with the ground-plane.

5.1.6 Placement and manipulation of interconnect cabling (or wiring) of tabletop equipment

LISN(s) may have to be positioned to the side of the table to meet the criterion that the LISN receptacle shall be 80 cm away from the EUT. LISN(s) may be above ground-plane only for conducted emission measurements.

Accessories, such as ac power adapter, if typically table-mounted, shall occupy peripheral positions as is applicable.

Accessories, which are typically floor-mounted, shall occupy a floor position directly below the portion of the EUT to which they are typically connected. T

Table length may be extended beyond 1.5 m with peripherals aligned with the back edge. The table depth may be extended beyond 1 m. The 40 cm distance to the vertical conducting plane shall be maintained for conducted emission testing.

Placement of wall-mounted equipment

5.1.7 Test configuration/arrangement for combination floor-standing and tabletop equipment

Interconnecting cables that hang closer than 40 cm to the ground-plane shall be folded back and forth in the center, forming a bundle 30 to 40 cm long.

I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated if required using the correct terminating impedance.

If LISNs are kept in the test setup for radiated emissions, it is preferred that they be installed under the ground-plane with the receptacle flush with the ground-plane.

Cables of hand-operated devices, such as keyboards, mice, etc., have to be placed as for normal use.

Non-EUT components of EUT system being tested.

I/O cable to floor-standing unit drapes to the ground-plane and shortened or excess bundled. Cables not reaching the metal ground-plane are draped to the height of the connector or 40 cm, whichever is lower.

Power cords and signal cables shall drape to the floor. No extension cords shall be used to the power receptacles.

The floor-standing unit can be placed under the table if its height permits.

5.2 Special condition description

If for some reason the above measurement conditions can't be met, the description below should be used as an appropriate measurement condition and placement.

(Description is written additionally as the measurements differ – all is within test procedure)

6 TEST SUMMARY

STANDARDS (details on first page)	Tested		Sample	
	yes	no	pass	not pass
ANSI C63.10-2013; FCC Part 15, Subpart C	☒	☐	☒	☐

Test	Section within the report	Class	Conclusion
Conducted emission	3.1	/	PASS
Radiated emission	3.2	/	PASS

6.1 Operating voltages/frequencies used for testing

Section	Test	Operating conditions
7.1	Conducted emission measurement (intentional radiator)	120 V; 60 Hz
7.2	Radiated emission measurement (intentional radiator)	120 V; 60 Hz

7 EMISSION TESTS

7.1 Conducted emission measurement (intentional radiator)


7.1.1 Test instruments

Description	Model No.	SIQ No.	Last calibration	Calibrated until	Calibration period	Used
Rohde-Schwarz, RFI receiver	ESU8	105187	2017-11	2019-11	24 months	X
Rohde-Schwarz, RFI receiver	ESU26	100428	2016-02	2018-02	24 months	
Rohde & Schwarz, Artificial main network	ESH2-Z5	106899	2017-05	2019-05	24 months	
Rohde & Schwarz, Artificial main network	ENV216	106765	2016-09	2018-09	24 months	X

7.1.2 Test procedure

- The EUT is placed on a non-conductive 0.8 meters high table, 0.4 meters from the vertical conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). LISN provide 50 Ohm / 50 μ H + 5 Ohm of coupling impedance for the measuring instrument.
- Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition.
- AC power lines of EUT are checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz is searched using PEAK, QUASI-PEAK and AVERAGE function of the receiver. Bandwidth is set to 9 kHz.
- If applicable functions are changed (data transfer speed, clock speed,...) it should be noted in the test report.

7.1.3 Test setup

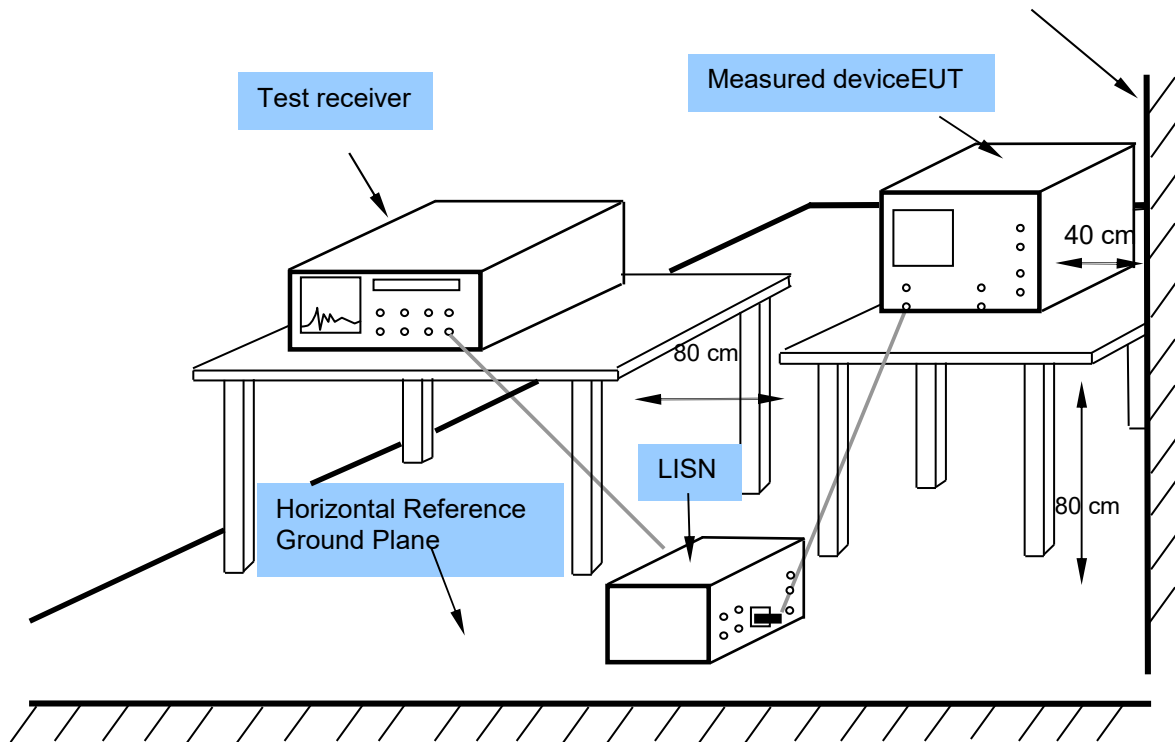


For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

7.1.4 Test results

S20172786

Meas Type CONDUCTED EMISSION
Equipment under Test Flush 1Relay
Manufacturer GOPA
OP Condition Uin: 230 V, 50 Hz; 908,42 MHz MAX POWER
Operator Andrej Skof
Test Spec
PHASE

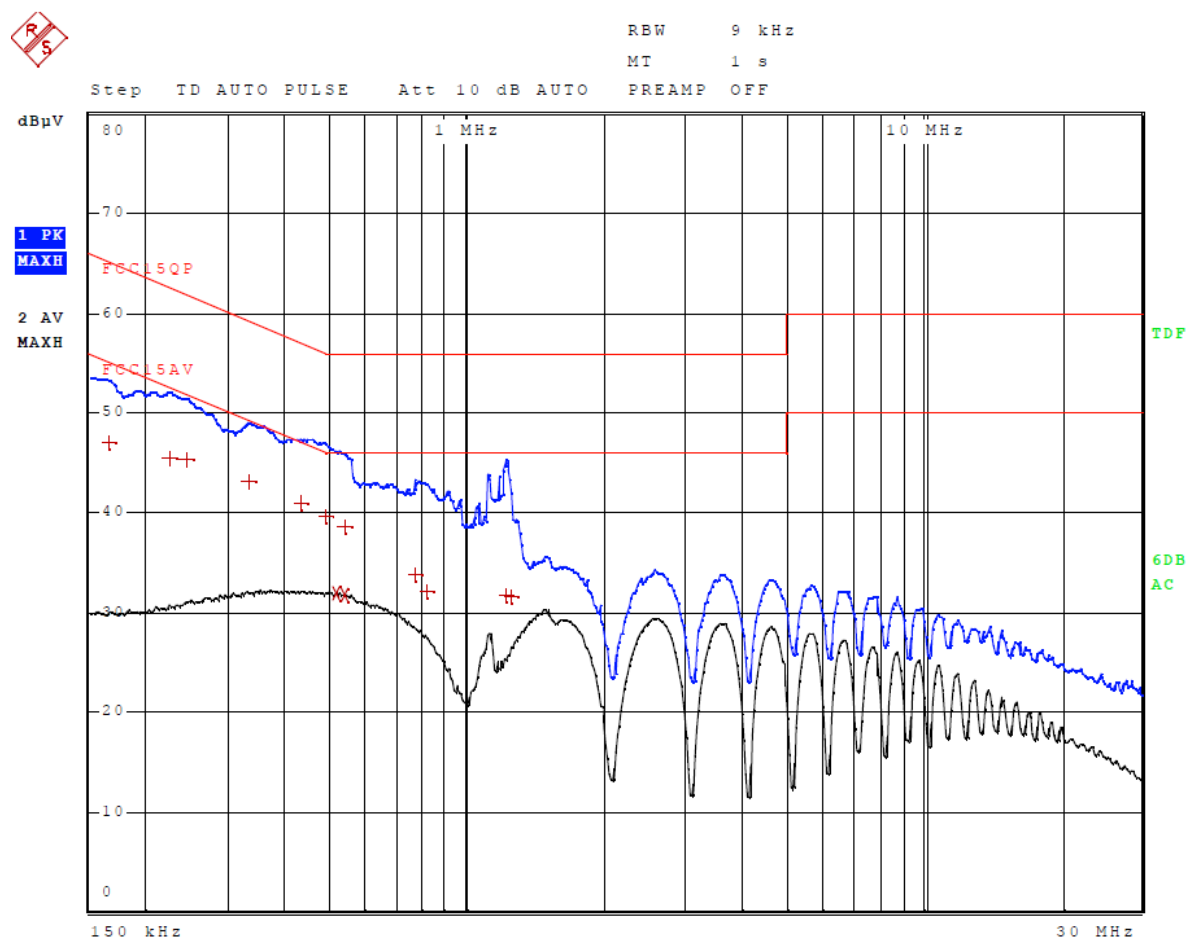

S20172786

Meas Type CONDUCTED EMISSION
Equipment under Test Flush 1Relay
Manufacturer GOPA
OP Condition Uin: 230 V, 50 Hz; 908,42 MHz MAX POWER
Operator Andrej Skof
Test Spec
 PHASE


Final Measurement

Meas Time: 1 s
Margin: 15 dB
Subranges: 13

Trace	Frequency	Level (dBμV)	Detector	Delta Limit/dB
2	516.750000000 kHz	31.79	CISPR Averag	-14.21
2	539.250000000 kHz	31.68	CISPR Averag	-14.32
1	431.250000000 kHz	41.01	Quasi Peak	-16.22
1	332.250000000 kHz	43.08	Quasi Peak	-16.32
1	489.750000000 kHz	39.66	Quasi Peak	-16.51
1	242.250000000 kHz	45.32	Quasi Peak	-16.70
1	222.000000000 kHz	45.48	Quasi Peak	-17.27
1	539.250000000 kHz	38.63	Quasi Peak	-17.37
1	163.500000000 kHz	47.01	Quasi Peak	-18.27
1	771.000000000 kHz	33.72	Quasi Peak	-22.28
1	818.250000000 kHz	32.01	Quasi Peak	-23.99
1	1.218750000 MHz	31.67	Quasi Peak	-24.33
1	1.250250000 MHz	31.46	Quasi Peak	-24.54

S20172786

Meas Type CONDUCTED EMISSION
Equipment under Test Flush 1Relay
Manufacturer GOPA
OP Condition Uin: 230 V, 50 Hz; 908,42 MHz MAX POWER
Operator Andrej Skof
Test Spec
 NEUTRAL

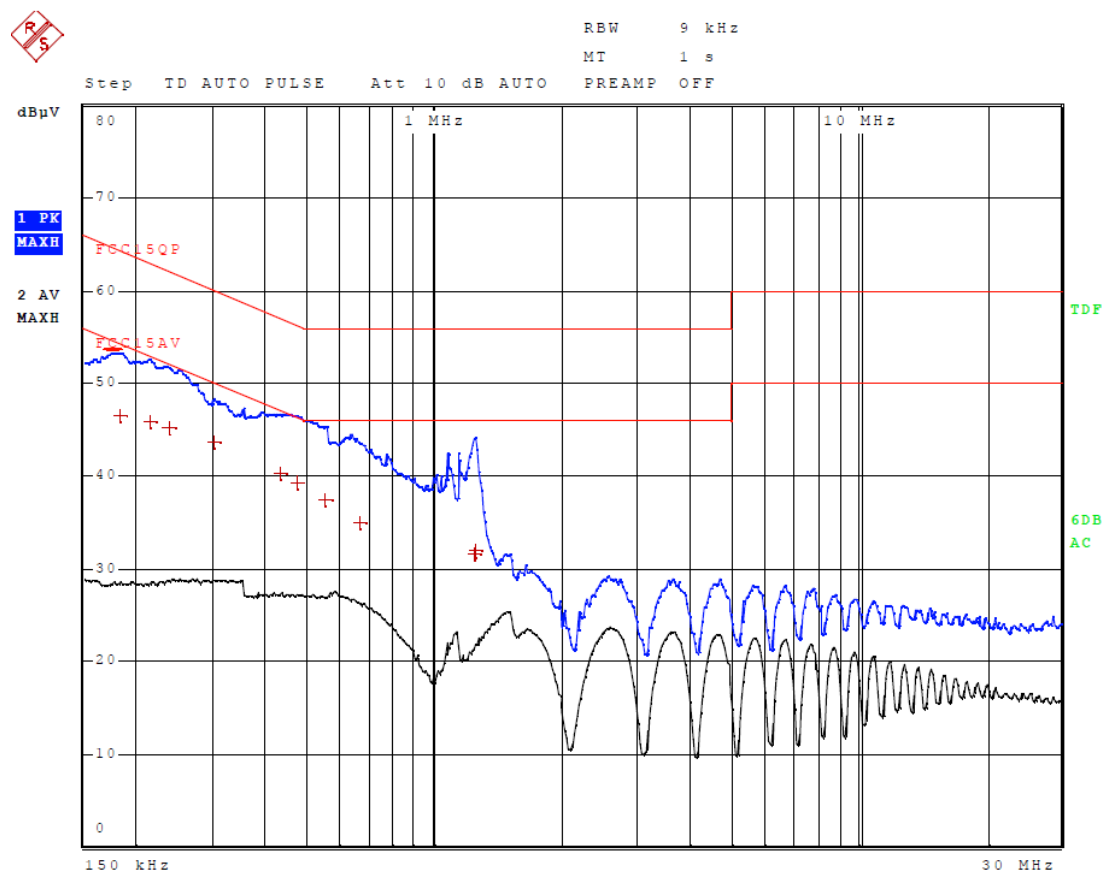

Final Measurement

Meas Time: 1 s
Margin: 15 dB
Subranges: 10

Trace	Frequency	Level (dBμV)	Detector	Delta Limit/dB
1	300.750000000 kHz	43.57	Quasi Peak	-16.66
1	431.250000000 kHz	40.22	Quasi Peak	-17.01
1	235.500000000 kHz	45.15	Quasi Peak	-17.10
1	471.750000000 kHz	39.24	Quasi Peak	-17.24
1	213.000000000 kHz	45.76	Quasi Peak	-17.33
1	181.500000000 kHz	46.54	Quasi Peak	-17.88
1	552.750000000 kHz	37.42	Quasi Peak	-18.58
1	663.000000000 kHz	34.87	Quasi Peak	-21.13
1	1.252500000 MHz	31.81	Quasi Peak	-24.19
1	1.248000000 MHz	31.58	Quasi Peak	-24.42

S20172786


Meas Type	CONDUCTED EMISSION
Equipment under Test	Flush 1Relay
Manufacturer	GOPA
OP Condition	Uin: 230 V, 50 Hz; 916,0 MHz MAX POWER
Operator	Andrej Skof
Test Spec	
PHASE	



RBW 9 kHz

MT 1 s

Step TD AUTO PULSE Att 10 dB AUTO PREAMP OFF

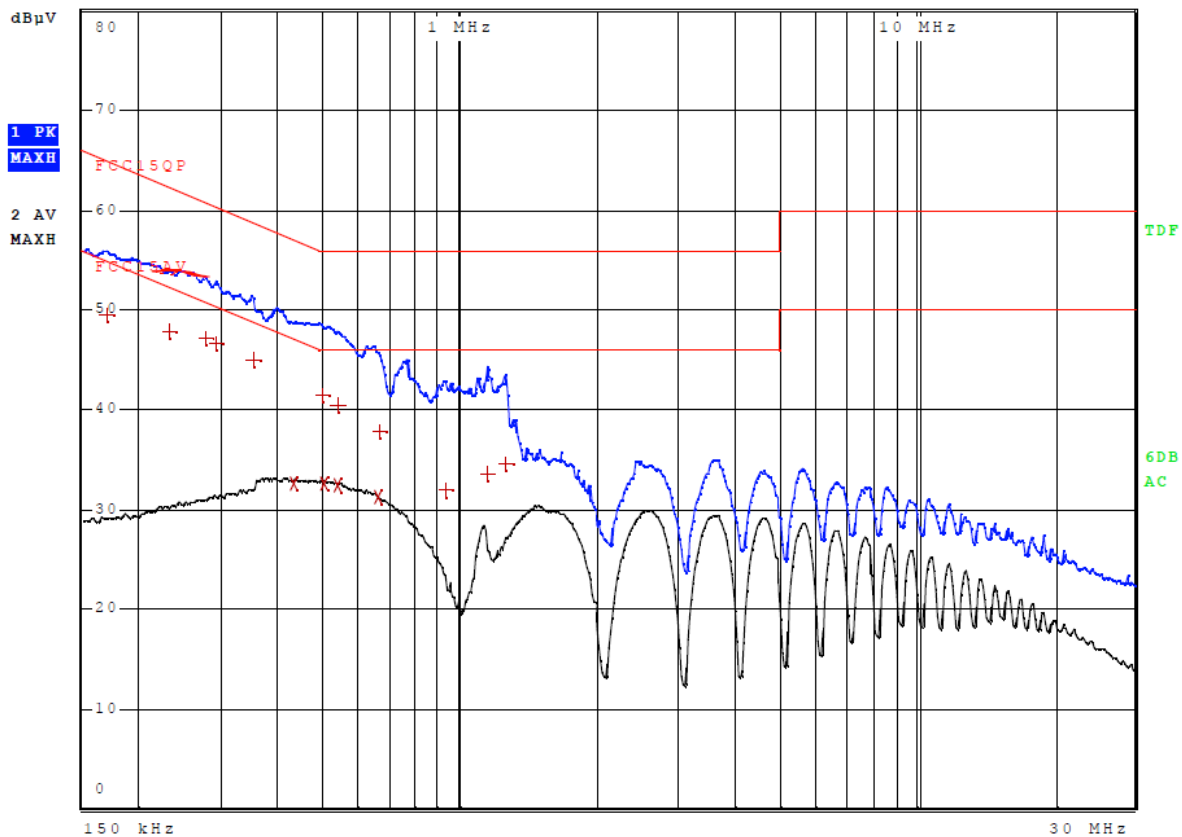

S20172786

Meas Type CONDUCTED EMISSION
Equipment under Test Flush 1Relay
Manufacturer GOPA
OP Condition Uin: 230 V, 50 Hz; 916,0 MHz MAX POWER
Operator Andrej Skof
Test Spec
PHASE

Final Measurement

Meas Time: 1 s
Margin: 15 dB
Subranges: 15

Trace	Frequency	Level (dBμV)	Detector	Delta Limit/dB
2	501.000000000 kHz	32.45	CISPR Averag	-13.55
2	537.000000000 kHz	32.30	CISPR Averag	-13.70
1	276.000000000 kHz	47.10	Quasi Peak	-13.83
1	291.750000000 kHz	46.56	Quasi Peak	-13.92
1	350.250000000 kHz	45.00	Quasi Peak	-13.96
1	496.500000000 kHz	41.50	Quasi Peak	-14.56
2	431.250000000 kHz	32.60	CISPR Averag	-14.63
1	228.750000000 kHz	47.84	Quasi Peak	-14.66
2	663.000000000 kHz	31.13	CISPR Averag	-14.87
1	168.000000000 kHz	49.54	Quasi Peak	-15.52
1	539.250000000 kHz	40.47	Quasi Peak	-15.53
1	663.000000000 kHz	37.69	Quasi Peak	-18.31
1	1.257000000 MHz	34.53	Quasi Peak	-21.47
1	1.153500000 MHz	33.54	Quasi Peak	-22.46
1	926.250000000 kHz	31.85	Quasi Peak	-24.15

S20172786


Meas Type CONDUCTED EMISSION
Equipment under Test Flush 1Relay
Manufacturer GOPA
OP Condition Uin: 230 V, 50 Hz; 916,0 MHz MAX POWER
Operator Andrej Skof
Test Spec
NEUTRAL



RBW 9 kHz

MT 1 s

Step TD AUTO PULSE Att 10 dB AUTO PREAMP OFF

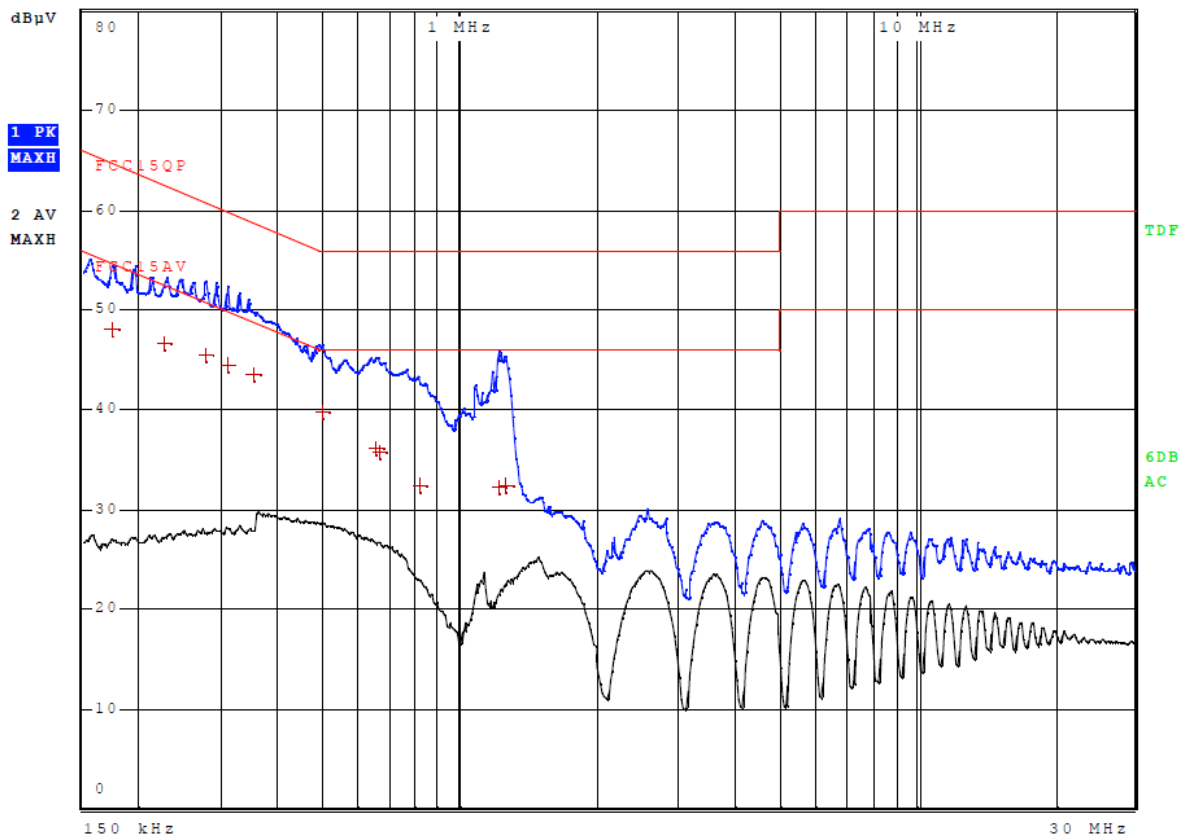

S20172786

Meas Type CONDUCTED EMISSION
Equipment under Test Flush 1Relay
Manufacturer GOPA
OP Condition Uin: 230 V, 50 Hz; 916,0 MHz MAX POWER
Operator Andrej Skof
Test Spec
 NEUTRAL

Final Measurement

Meas Time: 1 s
Margin: 15 dB
Subranges: 11

Trace	Frequency	Level (dBμV)	Detector	Delta Limit/dB
1	276.000000000 kHz	45.51	Quasi Peak	-15.43
1	350.250000000 kHz	43.39	Quasi Peak	-15.57
1	309.750000000 kHz	44.40	Quasi Peak	-15.58
1	226.500000000 kHz	46.56	Quasi Peak	-16.02
1	498.750000000 kHz	39.74	Quasi Peak	-16.28
1	174.750000000 kHz	47.99	Quasi Peak	-16.74
1	656.250000000 kHz	36.02	Quasi Peak	-19.98
1	663.000000000 kHz	35.72	Quasi Peak	-20.28
1	818.250000000 kHz	32.39	Quasi Peak	-23.61
1	1.259250000 MHz	32.31	Quasi Peak	-23.69
1	1.221000000 MHz	32.18	Quasi Peak	-23.82

7.2 Radiated emission measurement (intentional radiator)

7.2.1 Test instruments


Description	Model No.	SIQ No.	Last calibration	Calibrated until	Calibration period	Used
Rohde-Schwarz, RFI receiver	ESU8	105187	2015-11	2017-11	24 months	X
Rohde-Schwarz, RFI receiver	ESU26	100428	2016-02	2018-02	24 months	X
Comtest Engineering, Semi Anechoic Chamber SAC 1	SAC 3m	NPS001	2017-05	2019-05	24 months	
Comtest Engineering, Semi Anechoic Chamber SAC 2	SAC 3m	NPS003	2017-05	2019-05	24 months	X
Rohde & Schwarz, Horn Antenna	HF907 (SN 102508)	102508	2016-03	2018-03	24 months	
Rohde & Schwarz, Ultra Broadband Antenna	HL562E (SN 100842)	102842	2016-03	2018-03	24 months	X
Rohde & Schwarz, Horn Antenna	HF907 (SN 102494)	102494	2016-03	2018-03	24 months	
Rohde & Schwarz, Ultra Broadband Antenna	HL562E (SN 100843)	102843	2016-03	2018-03	24 months	
Maturo, Turn table (2 m diameter)	TT 2.0 SI	/	N/A	N/A	N/A	X
Maturo, Bore-sight antenna mast	BAM-4.0-P	/	N/A	N/A	N/A	X
Maturo, Multi-channel positioning equipment	Maturo NCD	/	N/A	N/A	N/A	X
Schwarzbeck, Biconical antenna	VHBB9124 (SN 9124-317)	105112	2016-11	2018-11	24 months	X
Rohde & Schwarz, Loop Antenna	FMZB 1519 B	/	2016-08	2018-08	24 months	

7.2.2 Test procedure

1. The EUT was placed on the top of a rotating table 0.8 meters above the ground in an Anechoic Chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The EUT was set 3 m away from the interference-receiving antenna, which was mounted on the top of variable-height antenna tower.

3. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the turn table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. The test-receiver system was set to PEAK and QUAS-PEAK Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The highest points would be re-tested one by one using the quasi-peak method.

7.2.3 Test setup

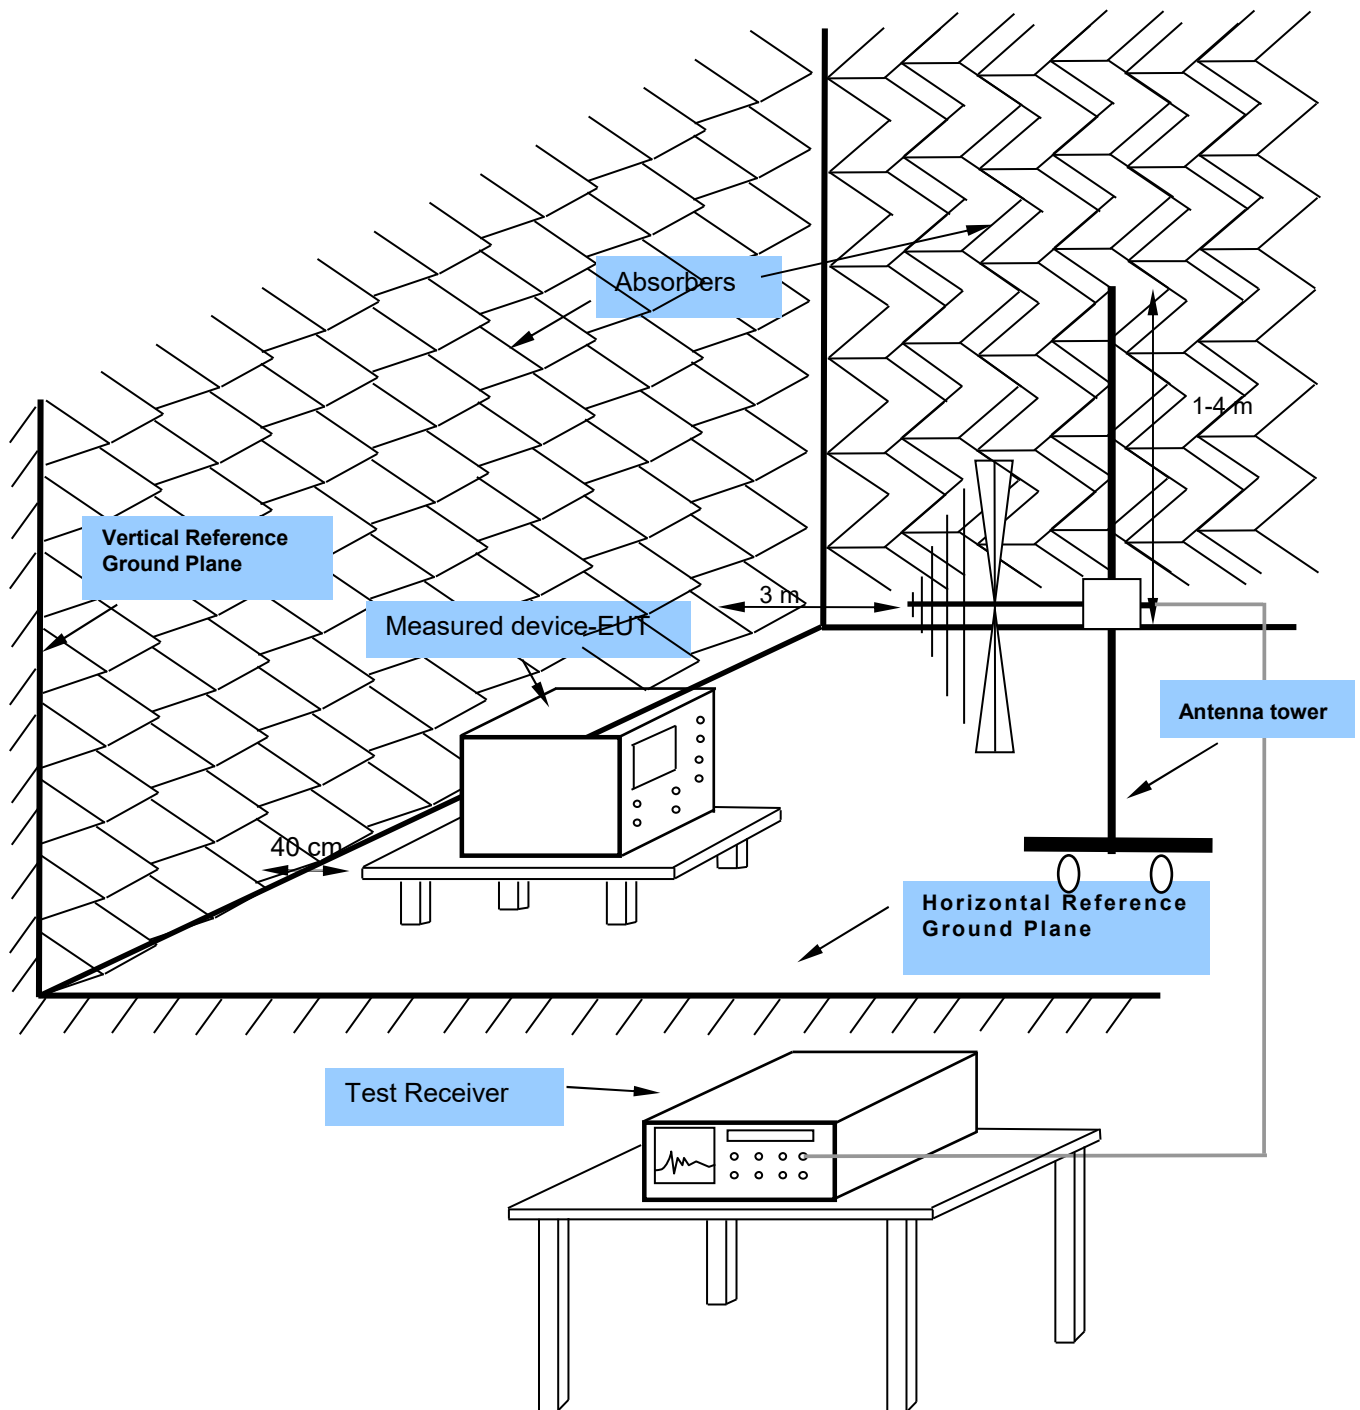

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

7.2.4 Test result (15.209)

Flush 1Relay 916M 9k-30M

1 / 2


Radiated emission

EUT Information

Product
OP Condition

Flush 1Relay
908,0 MHz, Max power

Full Spectrum

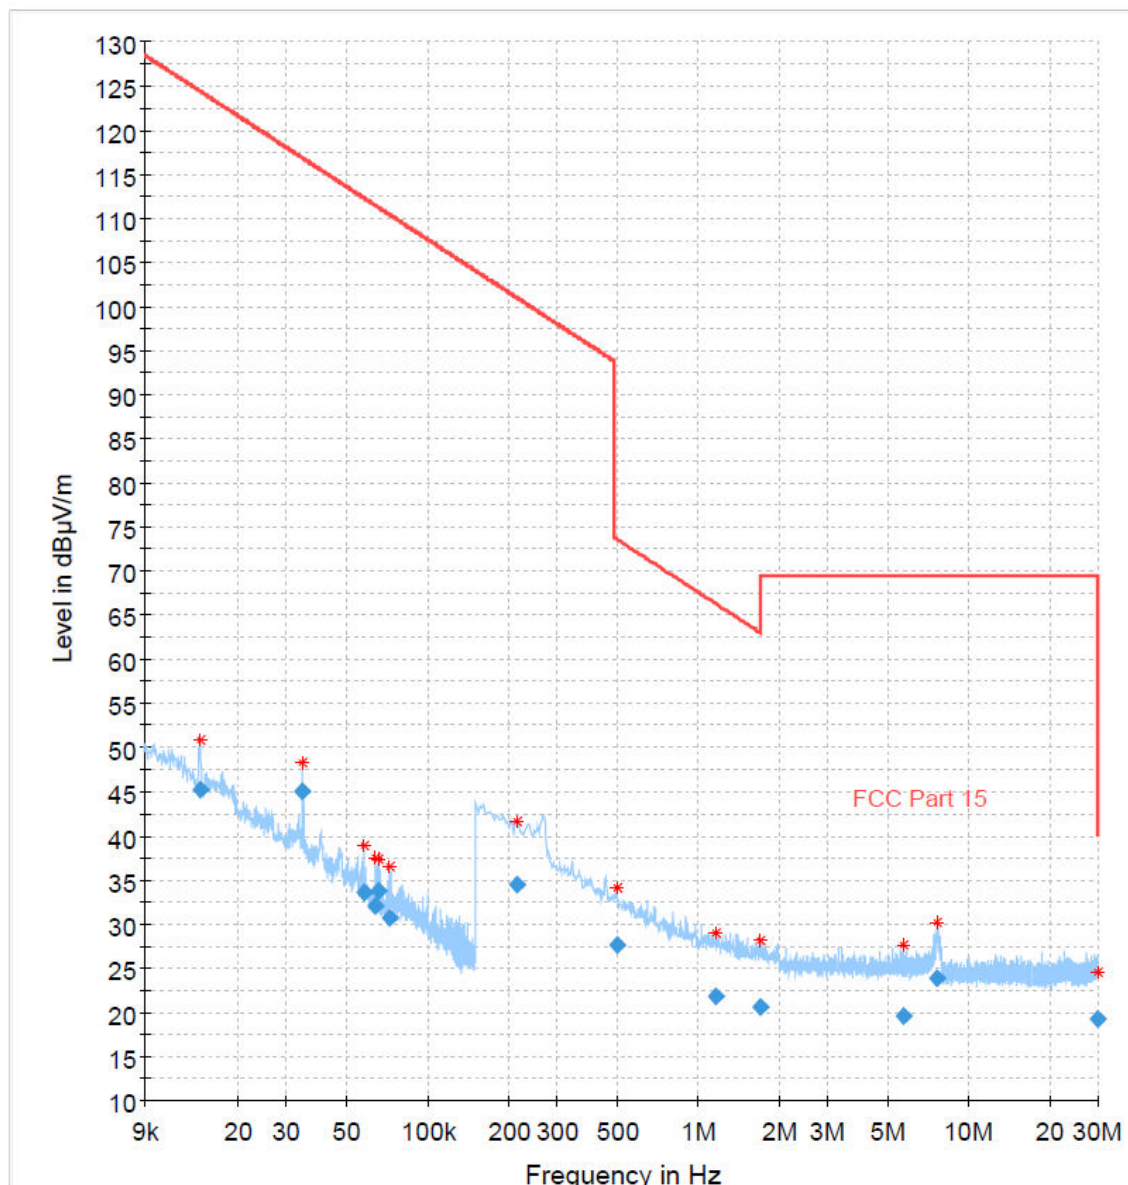

Preview Result 1-PK+
FCC Part 15 Class B

* Critical_Freqs PK+
◆ Final_Result QPK

Flush 1Relay 916M 9k-30M

2 / 2

Final Result


Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Pol	Azimuth h (deg)	Corr. (dB)
30.000000	19.23	40.00	20.77	H	279.0	20.7
1.704750	20.61	63.00	42.40	H	6.0	19.1
1.160250	21.76	66.33	44.57	H	346.0	19.1
7.676250	23.78	69.50	45.72	H	77.0	19.2
0.501000	27.58	73.61	46.03	H	77.0	19.1
5.730000	19.56	69.50	49.94	H	346.0	19.2
0.213000	34.51	101.03	66.52	H	6.0	19.2
0.034500	44.98	116.84	71.86	H	83.0	19.5
0.065500	33.84	111.27	77.43	H	83.0	19.3
0.058250	33.58	112.29	78.71	H	83.0	19.3
0.014450	45.18	124.39	79.21	H	83.0	20.3
0.064450	32.13	111.41	79.28	H	113.0	19.3
0.072700	30.62	110.36	79.75	H	113.0	19.3

Radiated emission

EUT Information

Product Flush 1Relay
OP Condition 916,0 MHz, Max power

Full Spectrum

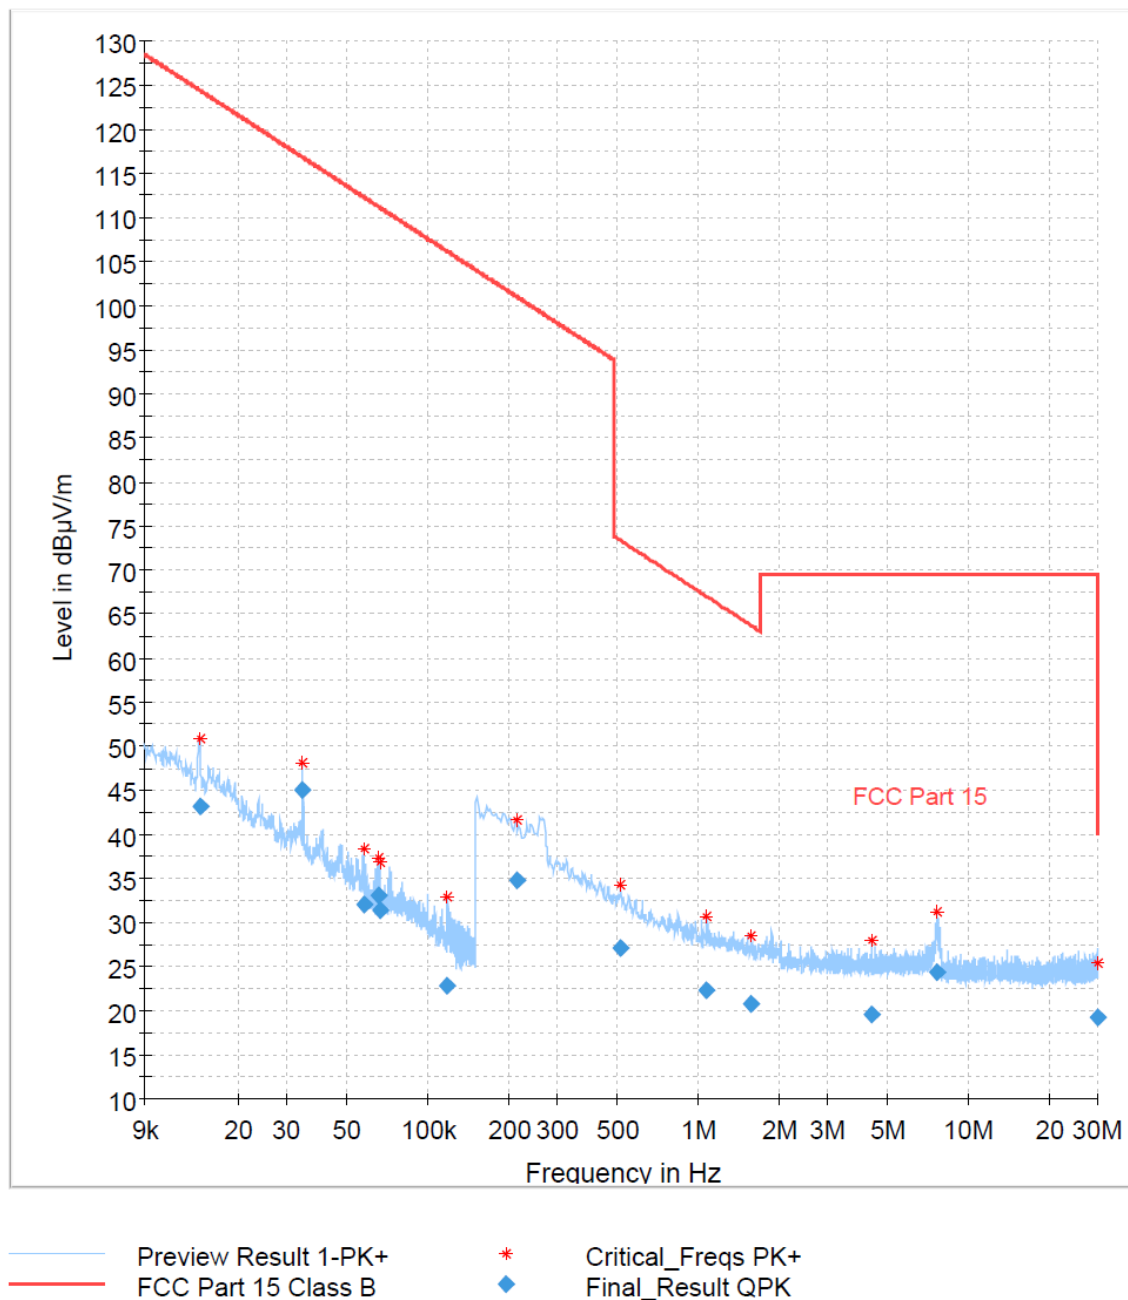

EMI Auto Test(1)

2 / 2

Final Result


Frequency (MHz)	QuasiPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Azimuth h (deg)	Corr. (dB)
30.000000	19.15	40.00	20.85	H	220.0	20.7
1.572000	20.72	63.70	42.98	H	220.0	19.1
1.079250	22.24	66.96	44.72	H	153.0	19.0
7.656000	24.43	69.50	45.07	H	220.0	19.2
0.516750	27.09	73.34	46.25	H	153.0	19.1
4.395750	19.63	69.50	49.87	H	356.0	19.2
0.213000	34.71	101.03	66.32	H	153.0	19.2
0.034500	45.03	116.84	71.80	H	37.0	19.5
0.065450	33.05	111.28	78.23	H	98.0	19.3
0.066500	31.34	111.14	79.79	H	37.0	19.3
0.058400	32.08	112.27	80.19	H	67.0	19.3
0.014400	43.18	124.42	81.24	H	37.0	20.3
0.118700	22.76	106.11	83.35	H	37.0	19.2

Radiated emission

EUT Information

Product Flush 1Relay
OP Condition 908,42 MHz, Max power

Full Spectrum

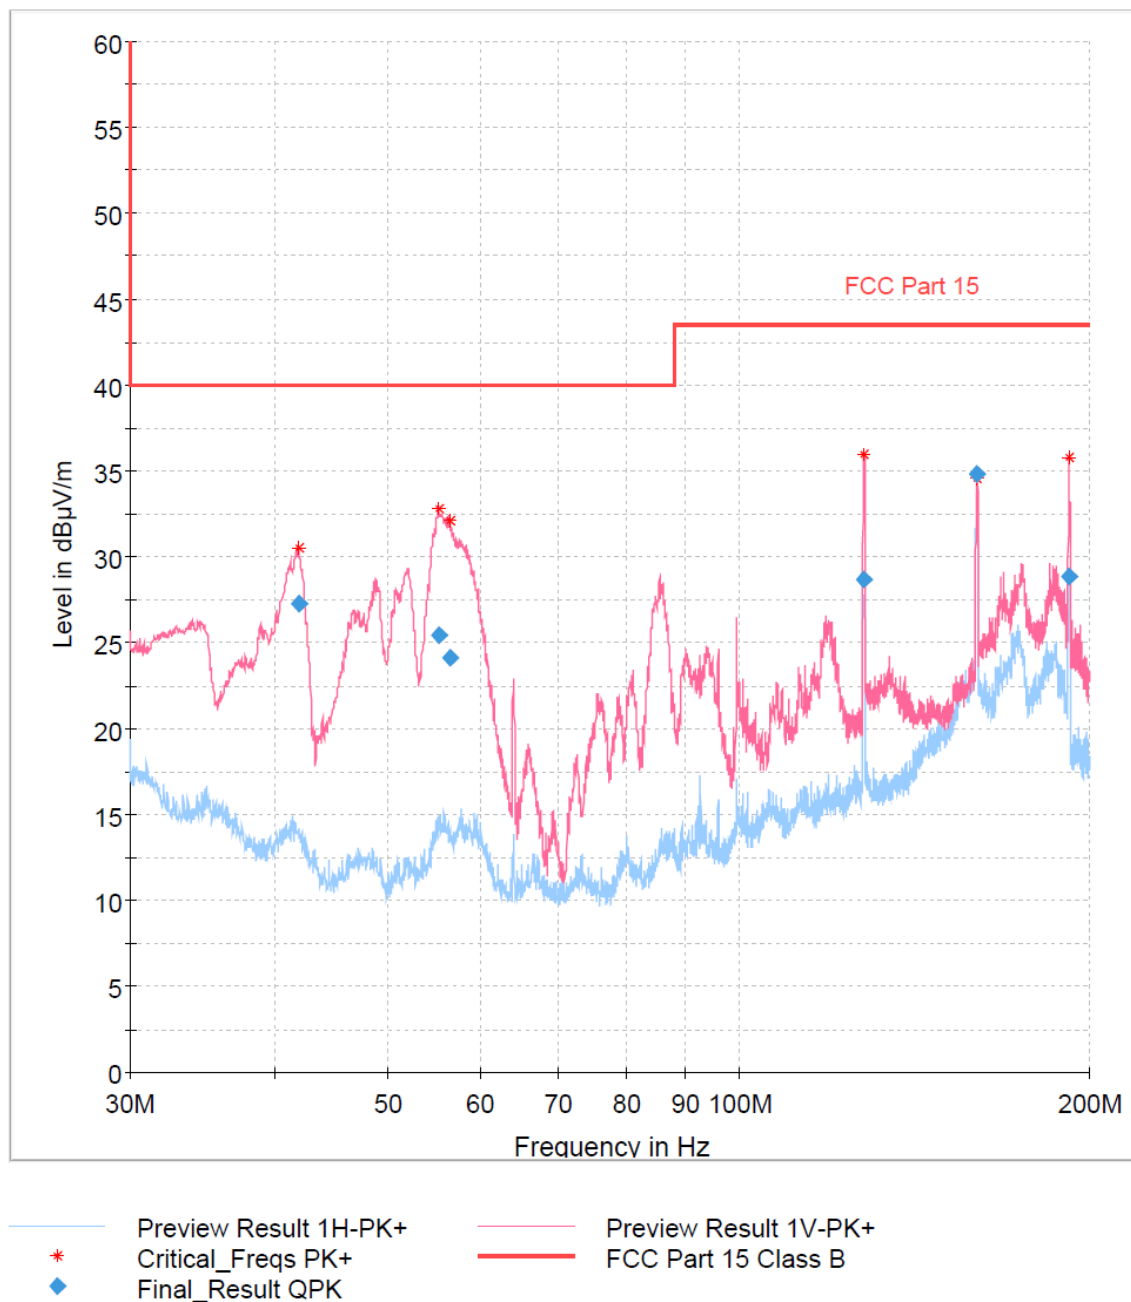

EMI Auto Test(1)

2 / 2

Final Result


Frequency (MHz)	QuasiPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)
160.190000	34.81	43.50	8.69	100.0	V	10.0
41.840000	27.30	40.00	12.70	100.0	V	33.0
55.160000	25.46	40.00	14.54	100.0	V	108.0
191.990000	28.88	43.50	14.62	100.0	V	0.0
128.000000	28.69	43.50	14.81	100.0	V	320.0
56.450000	24.16	40.00	15.84	100.0	V	100.0

Radiated emission

EUT Information

Product Flush 1Relay
OP Condition 916,0 MHz, Max power

Full Spectrum

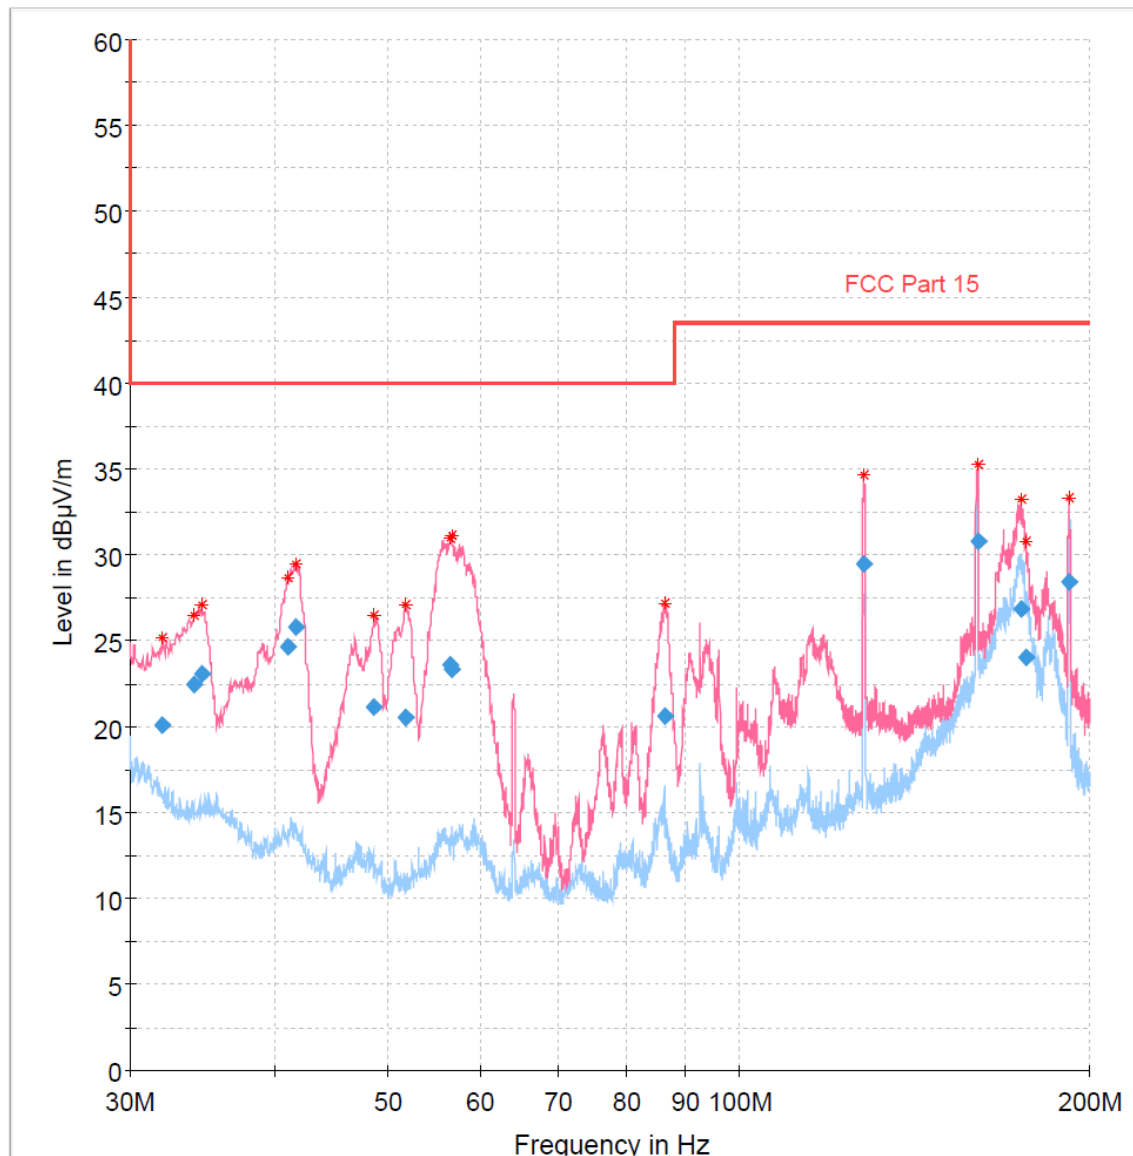

— Preview Result 1H-PK+
* Critical_Freqs PK+
◆ Final_Result QPK
— Preview Result 1V-PK+
— FCC Part 15 Class B

Final Result

Frequency (MHz)	QuasiPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)
160.340000	30.79	43.50	12.71	100.0	V	0.0
127.970000	29.52	43.50	13.98	104.0	V	72.0
41.660000	25.79	40.00	14.21	100.0	V	38.0
191.990000	28.40	43.50	15.10	100.0	V	18.0
40.970000	24.67	40.00	15.33	100.0	V	224.0
56.420000	23.57	40.00	16.43	100.0	V	302.0
56.570000	23.37	40.00	16.63	100.0	V	302.0
174.590000	26.86	43.50	16.64	100.0	V	0.0
34.550000	23.04	40.00	16.96	100.0	V	148.0
34.010000	22.45	40.00	17.55	100.0	V	61.0
48.560000	21.15	40.00	18.85	100.0	V	353.0
86.450000	20.58	40.00	19.42	123.0	V	103.0
176.240000	24.05	43.50	19.45	100.0	V	18.0
51.650000	20.49	40.00	19.51	100.0	V	302.0
31.940000	20.11	40.00	19.89	100.0	V	82.0

Radiated emission

EUT Information



Product

Flush 1Relay

OP Condition

908 MHz, Max power

Full Spectrum

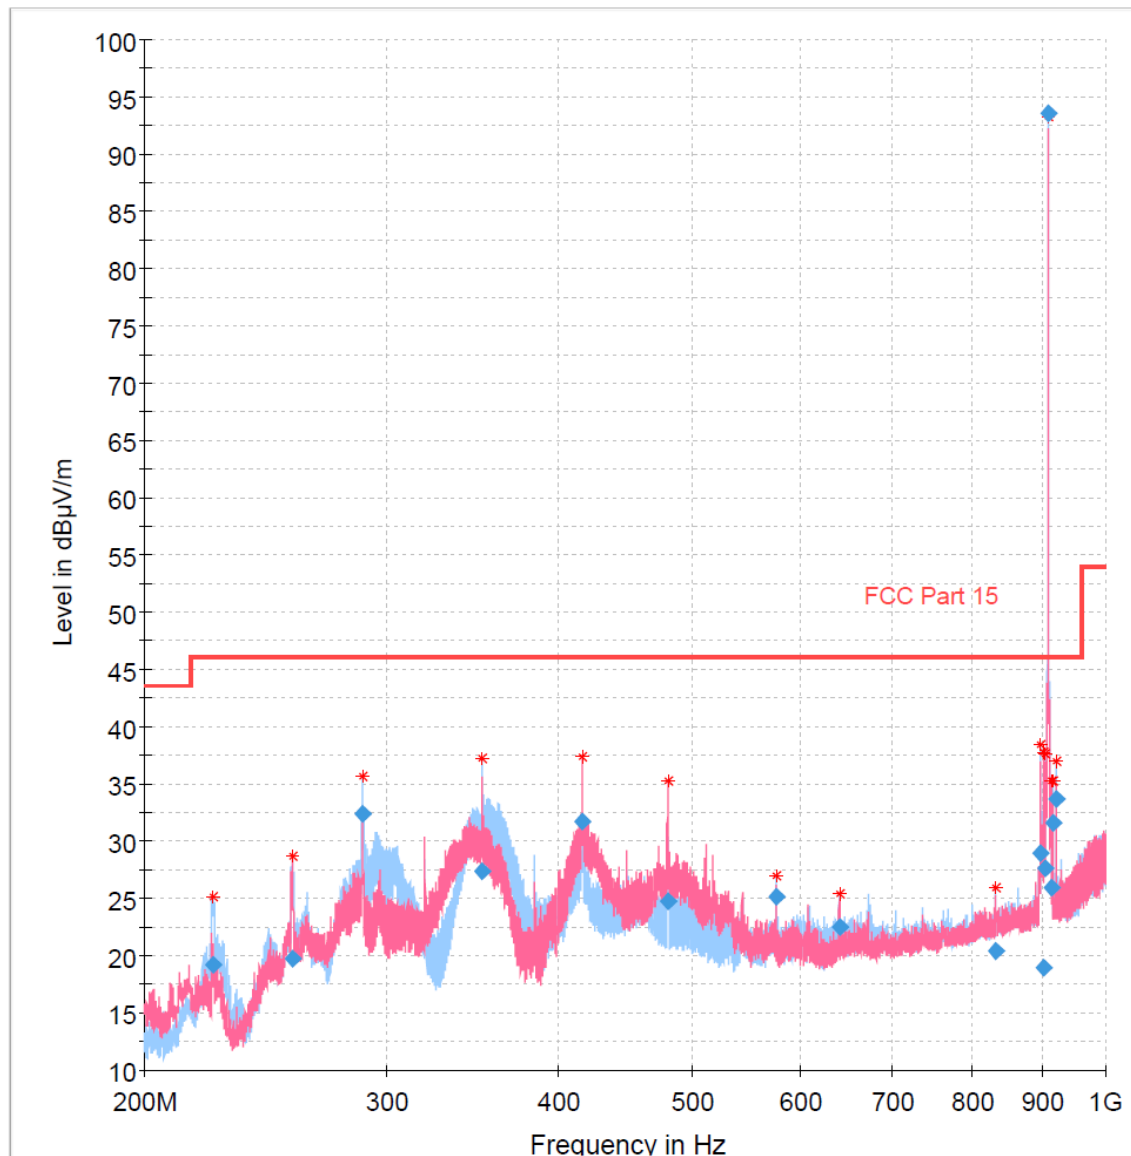

EMI Auto Test(1)

2 / 2

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)
908.400000	93.59	46.00	-47.59	150.0	H	354.0
920.790000	33.70	46.00	12.30	140.0	H	354.0
288.000000	32.40	46.00	13.60	110.0	H	69.0
416.010000	31.75	46.00	14.25	104.0	V	230.0
915.600000	31.55	46.00	14.45	141.0	H	354.0
896.010000	28.94	46.00	17.06	145.0	H	32.0
903.210000	27.60	46.00	18.40	100.0	H	39.0
352.020000	27.32	46.00	18.68	100.0	H	234.0
913.590000	25.92	46.00	20.08	105.0	V	321.0
576.000000	25.17	46.00	20.83	154.0	H	132.0
480.000000	24.73	46.00	21.27	150.0	V	129.0
640.020000	22.55	46.00	23.45	125.0	H	39.0
832.020000	20.38	46.00	25.62	103.0	H	113.0
255.990000	19.72	46.00	26.28	105.0	V	230.0
224.460000	19.15	46.00	26.85	150.0	H	94.0
901.170000	18.97	46.00	27.03	150.0	V	309.0

Flush 1Relay 916M 200M-1G


1 / 2

Radiated emission

EUT Information

Product Flush 1Relay
OP Condition 916 MHz, Max power

Full Spectrum

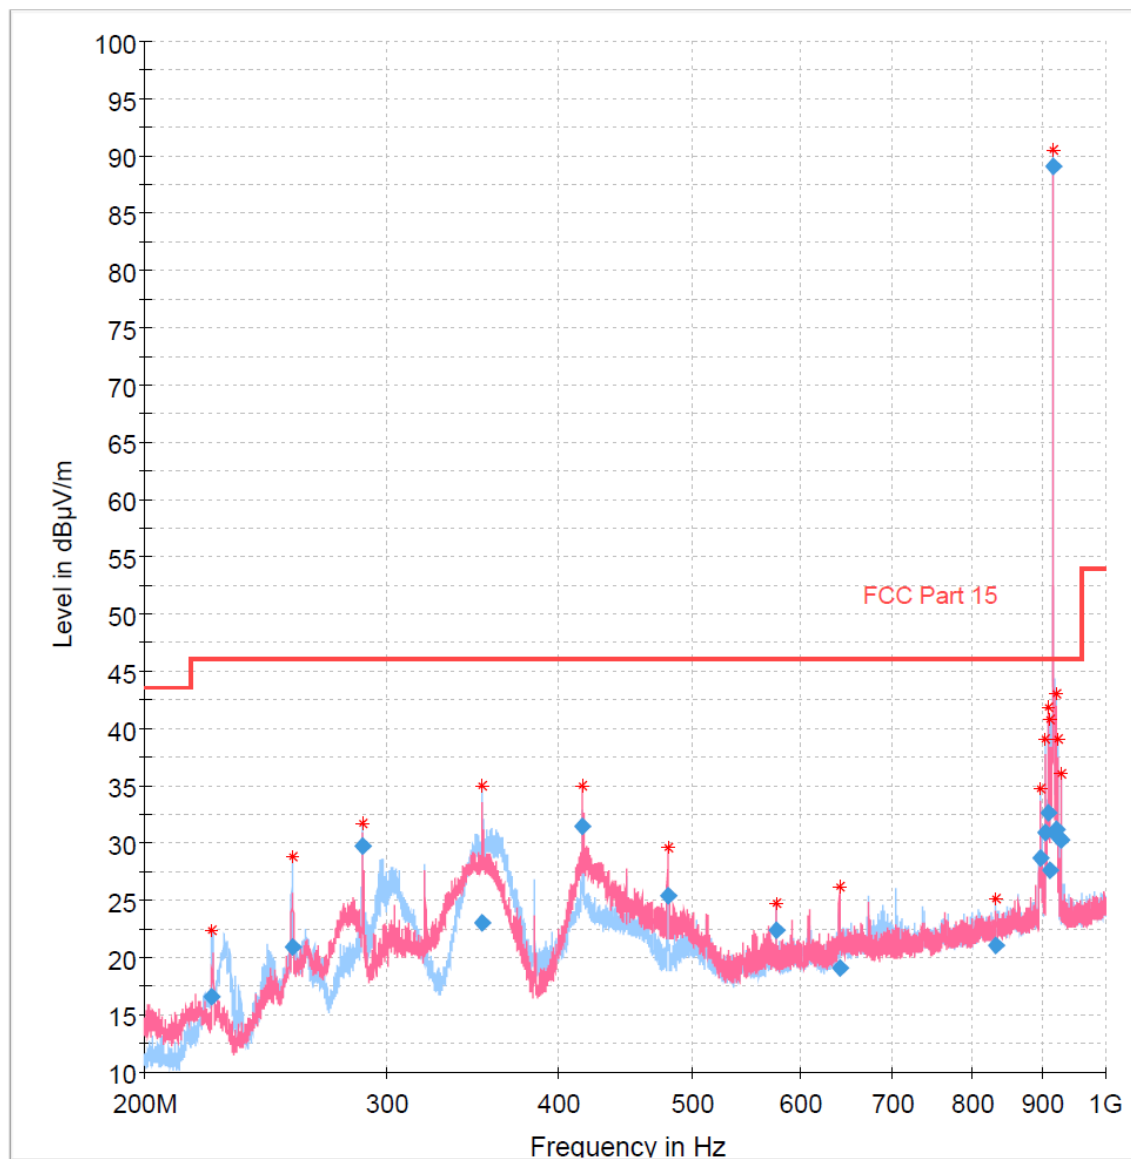

— Preview Result 1H-PK+
— Preview Result 1V-PK+
* Critical_Freqs PK+
◆ Final_Result QPK
— FCC Part 15 Class B

Flush 1Relay 916M 200M-1G

2 / 2

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)
916.020000	89.06	46.00	-43.06	104.0	H	212.0
907.980000	32.63	46.00	13.37	109.0	V	310.0
416.010000	31.40	46.00	14.60	150.0	V	212.0
919.980000	31.16	46.00	14.84	100.0	H	205.0
903.960000	30.94	46.00	15.06	103.0	H	230.0
923.910000	30.53	46.00	15.47	103.0	H	217.0
927.990000	30.33	46.00	15.67	100.0	V	292.0
288.000000	29.68	46.00	16.32	105.0	H	70.0
896.010000	28.72	46.00	17.28	100.0	H	199.0
911.970000	27.63	46.00	18.37	100.0	H	205.0
480.030000	25.36	46.00	20.64	125.0	V	83.0
352.020000	23.08	46.00	22.92	107.0	H	230.0
576.000000	22.32	46.00	23.68	100.0	V	29.0
831.990000	21.06	46.00	24.94	100.0	H	148.0
256.140000	20.88	46.00	25.12	126.0	H	267.0
640.020000	19.13	46.00	26.87	106.0	V	29.0
223.950000	16.59	46.00	29.41	150.0	H	59.0

Radiated emission

EUT Information



Product

Flush 1Relay

OP Condition

908,42 MHz, Max power

Full Spectrum

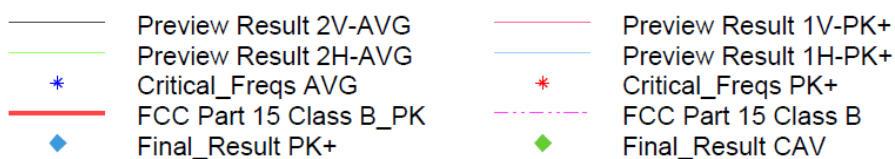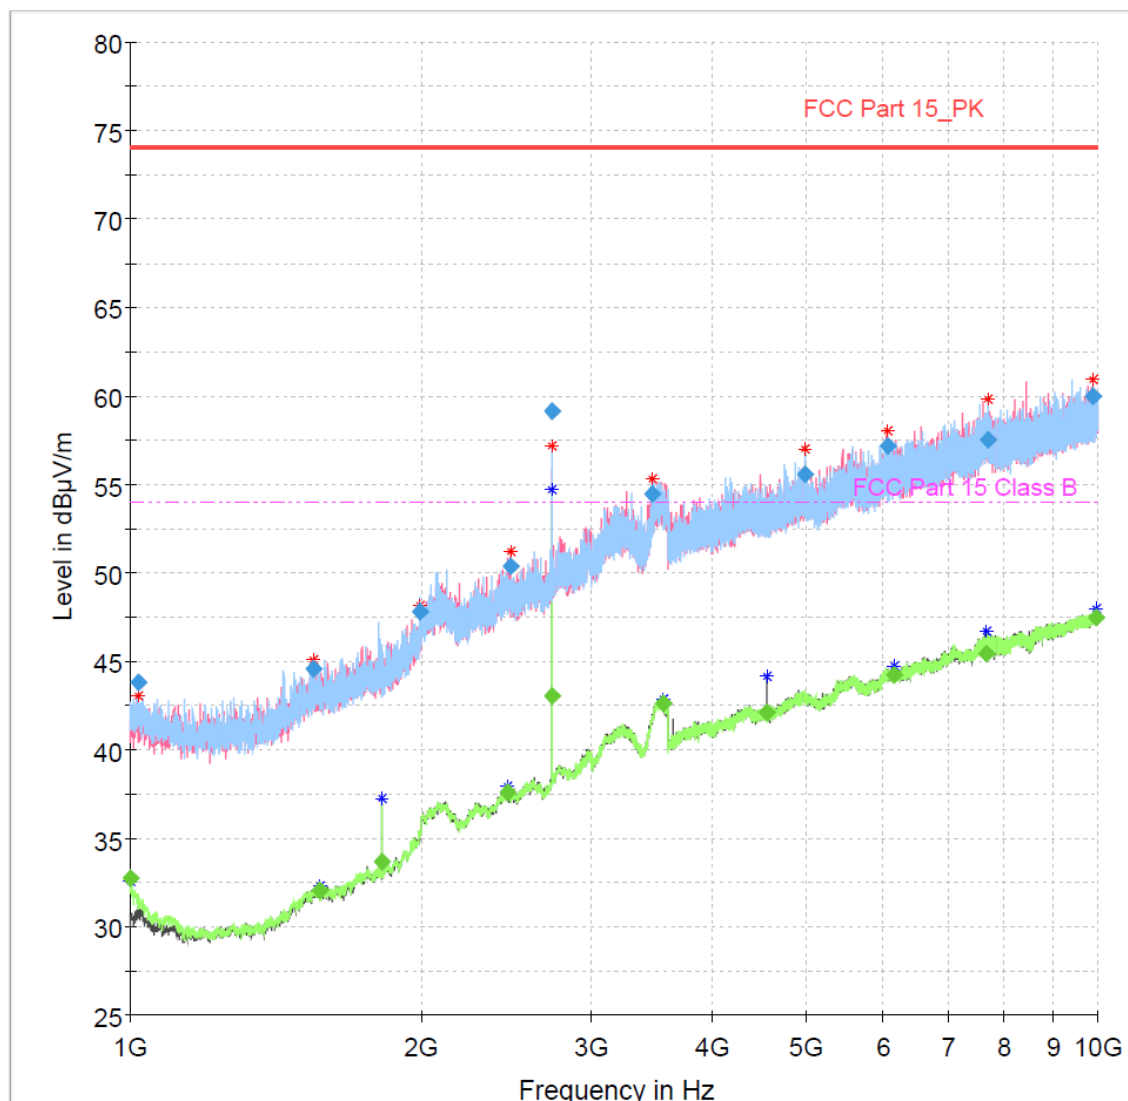

Final Result


Frequency (MHz)	MaxPeak (dBμV/m)	CAverage (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)
9977.500000	---	47.46	54.00	6.54	155.0	V	10.0
7685.250000	---	45.41	54.00	8.59	155.0	V	338.0
6149.750000	---	44.20	54.00	9.80	155.0	V	60.0
2725.250000	---	43.03	54.00	10.97	155.0	H	7.0
3559.750000	---	42.61	54.00	11.39	155.0	H	10.0
4542.000000	---	42.09	54.00	11.91	155.0	V	198.0
9891.500000	60.02	---	74.00	13.98	155.0	H	208.0
2725.250000	59.10	---	74.00	14.90	155.0	H	10.0
2450.500000	---	37.59	54.00	16.41	155.0	H	265.0
7697.250000	57.51	---	74.00	16.49	155.0	H	74.0
6077.000000	57.20	---	74.00	16.80	155.0	V	8.0
4973.000000	55.52	---	74.00	18.48	155.0	H	8.0
3468.500000	54.42	---	74.00	19.58	155.0	H	320.0
1816.750000	---	33.67	54.00	20.33	155.0	V	285.0
1001.000000	---	32.78	54.00	21.22	155.0	H	349.0
1567.000000	---	32.03	54.00	21.97	155.0	H	37.0
2469.000000	50.39	---	74.00	23.61	155.0	V	198.0
1995.000000	47.84	---	74.00	26.16	155.0	V	-7.0
1543.750000	44.55	---	74.00	29.45	155.0	V	294.0
1017.500000	43.81	---	74.00	30.19	155.0	V	107.0

Radiated emission

EUT Information

Product Flush 1Relay
OP Condition 916,0 MHz, Max power

Full Spectrum

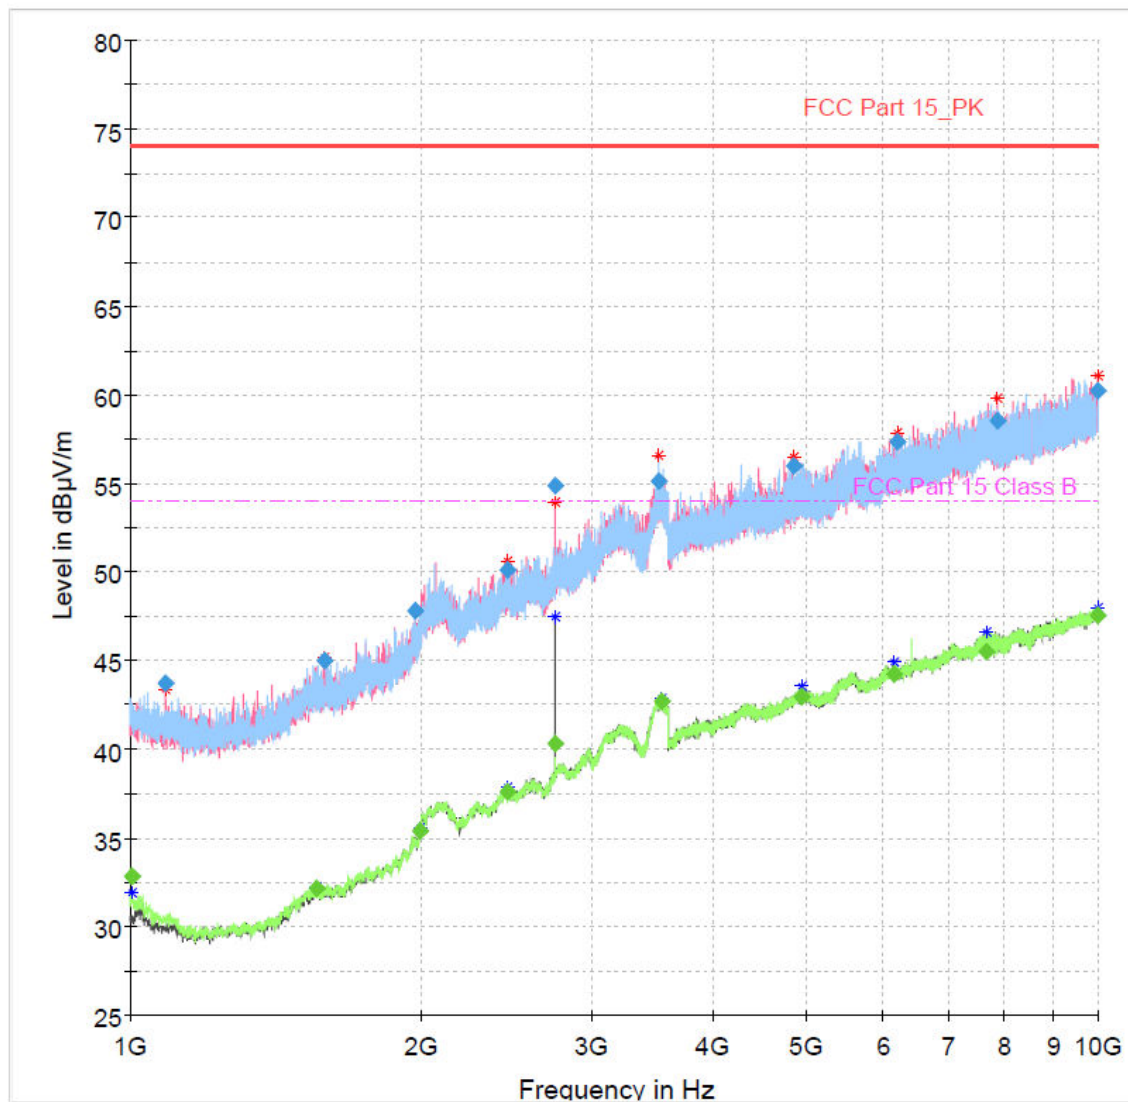

Preview Result 2V-AVG	Preview Result 1V-PK+
Preview Result 2H-AVG	Preview Result 1H-PK+
* Critical_Freqs AVG	* Critical_Freqs PK+
— FCC Part 15 Class B_PK	--- FCC Part 15 Class B
◆ Final_Result PK+	◆ Final_Result CAV

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	CAverage (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)
1003.500000	---	32.87	54.00	21.13	155.0	H	347.0
1088.500000	43.75	---	74.00	30.25	155.0	V	296.0
1557.500000	---	32.17	54.00	21.83	155.0	H	318.0
1584.500000	45.01	---	74.00	28.99	155.0	V	140.0
1967.250000	47.78	---	74.00	26.22	155.0	H	269.0
1994.250000	---	35.36	54.00	18.64	155.0	H	27.0
2451.000000	50.15	---	74.00	23.85	155.0	V	296.0
2451.500000	---	37.63	54.00	16.37	155.0	V	-6.0
2748.000000	---	40.36	54.00	13.64	155.0	V	-8.0
2748.000000	54.90	---	74.00	19.10	155.0	V	-8.0
3520.750000	55.17	---	74.00	18.83	155.0	H	7.0
3540.500000	---	42.70	54.00	11.30	155.0	V	137.0
4859.750000	56.00	---	74.00	18.00	155.0	H	80.0
4949.750000	---	42.94	54.00	11.06	155.0	V	199.0
6149.500000	---	44.23	54.00	9.77	155.0	H	125.0
6195.750000	57.33	---	74.00	16.67	155.0	H	24.0
7685.500000	---	45.48	54.00	8.52	155.0	V	2.0
7871.250000	58.53	---	74.00	15.47	155.0	V	96.0
9983.250000	60.28	---	74.00	13.72	155.0	V	282.0
9983.750000	---	47.54	54.00	6.46	155.0	H	177.0

7.2.5 Test result (15.215)

Test has previously been performed. For test results refer to test report T251-0646/16.

7.2.6 Test result (15.249)

Test has previously been performed. For test results refer to test report T251-0646/16.