




Test Data

Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	Ant1	-4.205	30	Pass
NVNT	BLE	2442	Ant1	-3.055	30	Pass
NVNT	BLE	2480	Ant1	-3.676	30	Pass



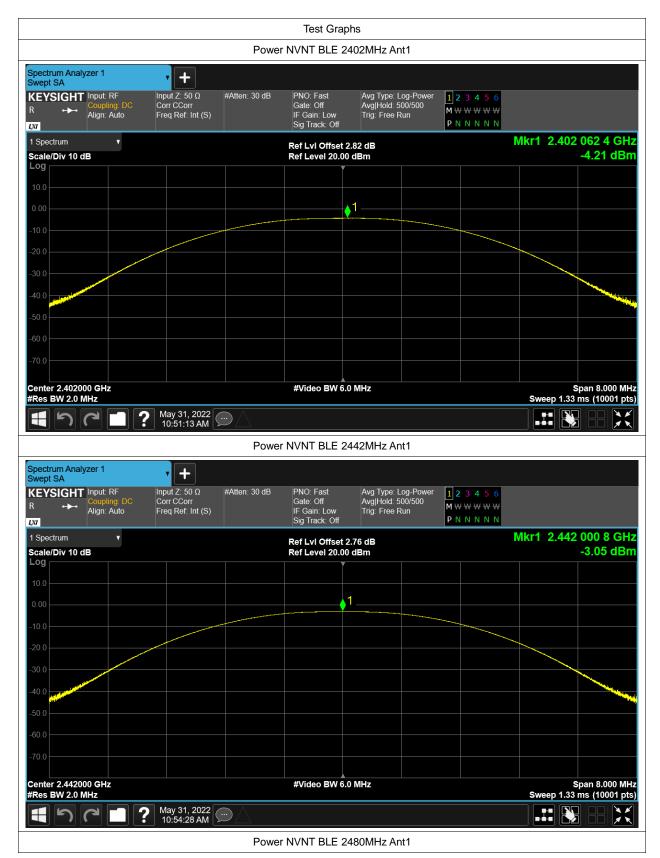










-6dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	limit	Verdic
NVNT	BLE	2402	Ant1	0.66	0.5	Pass
NVNT	BLE	2442	Ant1	0.679	0.5	Pass
NVNT	BLE	2480	Ant1	0.662	0.5	Pass







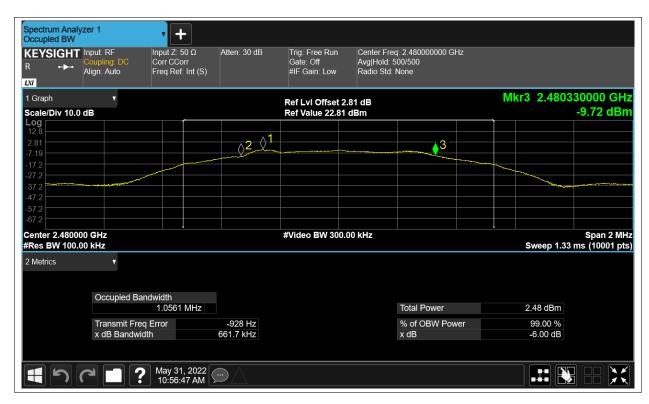





Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)	
NVNT	BLE	2402	Ant1	1.023276452	
NVNT	BLE	2442	Ant1	1.028560442	
NVNT	BLE	2480	Ant1	1.033747191	

Project No.: JYTSZR2205027













Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	Ant1	-10.689	8	Pass
NVNT	BLE	2442	Ant1	-9.601	8	Pass
NVNT	BLE	2480	Ant1	-10.085	8	Pass














Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant1	-51.39	-20	Pass
NVNT	BLE	2480	Ant1	-51.73	-20	Pass



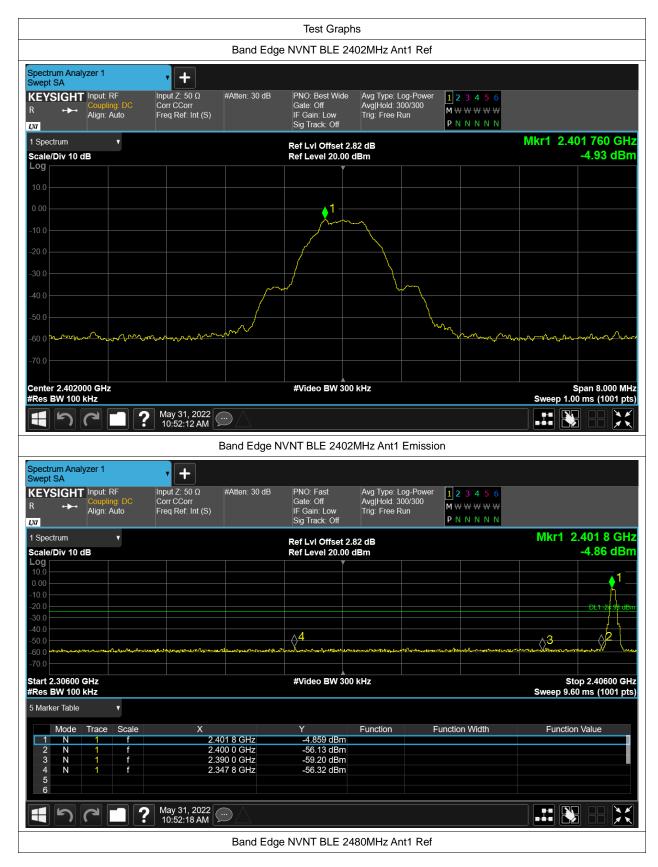









Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant1	-45.47	-20	Pass
NVNT	BLE	2442	Ant1	-46.61	-20	Pass
NVNT	BLE	2480	Ant1	-45.87	-20	Pass









Tx. Spurious NVNT BLE 2480MHz Ant1 Ref

-53.89 dBm

-50.22 dBm

24.426 GHz



