


Test Data


Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	Ant1	-3.255	30	Pass
NVNT	BLE	2442	Ant1	-2.438	30	Pass
NVNT	BLE	2480	Ant1	-1.885	30	Pass



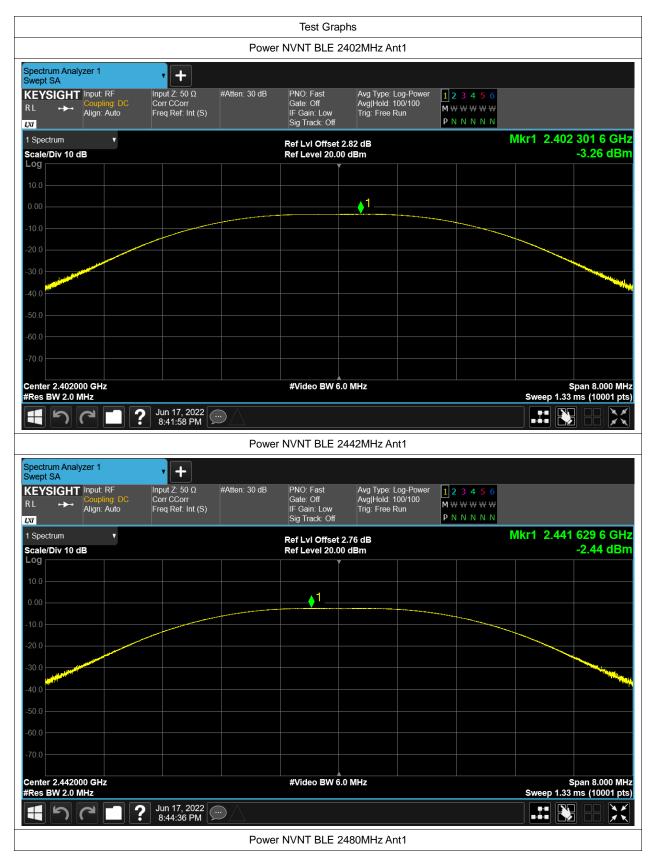



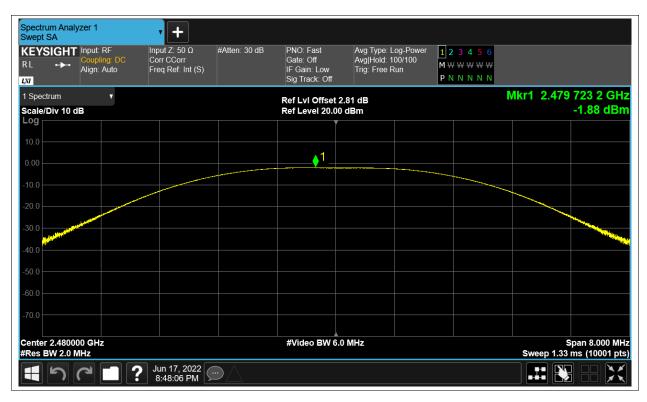



-6dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	limit	Verdic
NVNT	BLE	2402	Ant1	1.08	0.5	Pass
NVNT	BLE	2442	Ant1	1.366	0.5	Pass
NVNT	BLE	2480	Ant1	1.354	0.5	Pass











Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	BLE	2402	Ant1	2.083518735
NVNT	BLE	2442	Ant1	2.084632955
NVNT	BLE	2480	Ant1	2.073575763












Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	Ant1	-21.931	8	Pass
NVNT	BLE	2442	Ant1	-21.005	8	Pass
NVNT	BLE	2480	Ant1	-20.586	8	Pass







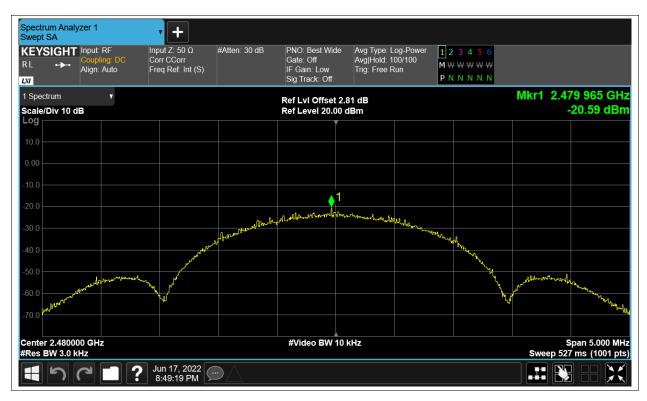



Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant1	-44.61	-20	Pass
NVNT	BLE	2480	Ant1	-46.63	-20	Pass











Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant1	-40.4	-20	Pass
NVNT	BLE	2442	Ant1	-42.74	-20	Pass
NVNT	BLE	2480	Ant1	-43.32	-20	Pass



