

---

# FCC Test Report

---

Report No.: AGC03626160601FE03

**FCC ID** : 2AIZY16V-01

**APPLICATION PURPOSE** : Original Equipment

**PRODUCT DESIGNATION** : Wireless Headphones

**BRAND NAME** : iDeaUSA, iDeaPLAY, iDeaGAMER, atomicx

**MODEL NAME** : V202, V200, V201, V203, V204, V205, V206, V207, V402,  
V403, V404, V405

**CLIENT** : IDEA ELECTRONICS INC

**DATE OF ISSUE** : July 11, 2016

**STANDARD(S)** : FCC Part 15 Rules

**TEST PROCEDURE(S)**

**REPORT VERSION** : V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd



**CAUTION:**

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



**Report Revise Record**

<b>Report Version</b>	<b>Revise Time</b>	<b>Issued Date</b>	<b>Valid Version</b>	<b>Notes</b>
V1.0	/	July 11, 2016	Valid	Original Report

## TABLE OF CONTENTS

<b>1. VERIFICATION OF CONFORMITY .....</b>	<b>4</b>
<b>2. GENERAL INFORMATION .....</b>	<b>5</b>
2.1. PRODUCT DESCRIPTION.....	5
2.2. TABLE OF CARRIER FREQUENCYS.....	5
<b>3. MEASUREMENT UNCERTAINTY.....</b>	<b>7</b>
<b>4. DESCRIPTION OF TEST MODES.....</b>	<b>7</b>
<b>5. SYSTEM TEST CONFIGURATION .....</b>	<b>9</b>
5.1. CONFIGURATION OF EUT SYSTEM .....	9
5.2. EQUIPMENT USED IN EUT SYSTEM .....	9
5.3. SUMMARY OF TEST RESULTS .....	9
<b>6. TEST FACILITY .....</b>	<b>10</b>
<b>7. ALL TEST EQUIPMENT LIST .....</b>	<b>10</b>
<b>8. RADIATED EMISSION .....</b>	<b>12</b>
8.1TEST LIMIT.....	12
8.2. MEASUREMENT PROCEDURE .....	13
8.3. TEST SETUP.....	15
8.4. TEST RESULT .....	17
<b>9. BAND EDGE EMISSION .....</b>	<b>45</b>
9.1. MEASUREMENT PROCEDURE .....	45
9.2 TEST SETUP .....	45
9.3 RADIATED TEST RESULT .....	46
<b>10. 20DB BANDWIDTH.....</b>	<b>54</b>
10.1. MEASUREMENT PROCEDURE .....	54
10.2. TEST SET-UP .....	54
10.3. LIMITS AND MEASUREMENT RESULTS.....	54
<b>11. FCC LINE CONDUCTED EMISSION TEST .....</b>	<b>63</b>
11.1. LIMITS OF LINE CONDUCTED EMISSION TEST .....	63
11.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST.....	63
11.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST .....	64
11.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST.....	64
11.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST.....	65
<b>APPENDIX A: PHOTOGRAPHS OF TEST SETUP .....</b>	<b>69</b>
<b>APPENDIX B: PHOTOGRAPHS OF EUT .....</b>	<b>72</b>
<b>APPENDIX B: PHOTOGRAPHS OF EUT .....</b>	<b>72</b>

### 1. VERIFICATION OF CONFORMITY

<b>Applicant</b>	IDEA ELECTRONICS INC
<b>Address</b>	9701 W PICO BLVD LA,CA 90035
<b>Manufacturer</b>	Shenzhen Wanchuangbo Industry Development Co., Ltd.
<b>Address</b>	FLOOR 3, BUILDING 4, NO.7 LIPU STREET, BANTIAN AREA, LONGGANG DISTRICT, SHENZHEN
<b>Product Designation</b>	Wireless Headphones
<b>Brand Name</b>	iDeaUSA, iDeaPLAY, iDeaGAMER, atomicx
<b>Test Model</b>	V202
<b>Series Model</b>	V200, V201, V203, V204, V205, V206, V207, V402, V403, V404, V405
<b>Difference Description</b>	All the same except for the appearance color.
<b>Date of test</b>	July 01, 2016 to July 11,2016
<b>Deviation</b>	None
<b>Condition of Test Sample</b>	Normal
<b>Report Template</b>	AGCRT-US-BR/RF

We hereby certify that:

The above equipment was tested by Dongguan Precise Testing Service Co., Ltd. The test data, the energy emitted by the sample tested as described in this report is in compliance with the requirements of FCC Rules Part 15.249.

*Strive Liang*

Tested By \_\_\_\_\_  
Strive Liang(Liang Faqiang) July 11, 2016

*Forrest Lei*

Reviewed By \_\_\_\_\_  
Forrest Lei(Lei Yonggang) July 11, 2016

*Solger Zhang*

Approved By \_\_\_\_\_  
Solger Zhang(Zhang Hongyi)  
Authorized Officer July 11, 2016

## 2. GENERAL INFORMATION

### 2.1. PRODUCT DESCRIPTION

A major technical description of EUT is described as following

<b>Operation Frequency</b>	2.402 GHz to 2.480GHz
<b>RF Output Power</b>	3.68dBm(Max EIRP Power=Max radiation field-95.2)
<b>Bluetooth Version</b>	V4.0
<b>Modulation</b>	GFSK, $\pi/4$ -DQPSK, 8DPSK for BR/EDR, GFSK for BLE
<b>Number of channels</b>	79 for BR/EDR, 40 for BLE
<b>Hardware Version</b>	0F
<b>Software Version</b>	1.0
<b>Antenna Designation</b>	Entity Antenna
<b>Antenna Gain</b>	2dBi
<b>Power Supply</b>	DC 3.7V

Note: The USB port only used for charging and can't be used to transfer data with PC.

### 2.2. TABLE OF CARRIER FREQUENCIES

BR/EDR channel List

Frequency Band	Channel Number	Frequency
2400~2483.5MHZ	0	2402MHZ
	1	2403MHZ
	:	:
	38	2440 MHZ
	39	2441 MHZ
	40	2442 MHZ
	:	:
	77	2479 MHZ
	78	2480 MHZ

BLE Channel List

Frequency Band	Channel Number	Frequency
2400~2483.5MHZ	0	2402MHZ
	1	2404MHZ
	:	:
	38	2478 MHZ
	39	2480 MHZ

### 3. MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95 %.


No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 3.18\text{dB}$
2	All emissions, radiated	$\pm 3.91\text{dB}$
3	Temperature	$\pm 0.5^\circ\text{C}$
4	Humidity	$\pm 2\%$

### 4. DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION
1	Low channel GFSK
2	Middle channel GFSK
3	High channel GFSK
4	Low channel $\pi/4$ -DQPSK
5	Middle channel $\pi/4$ -DQPSK
6	High channel $\pi/4$ -DQPSK
7	Low channel 8DPSK
8	Middle channel 8DPSK
9	High channel 8DPSK
10	BT Link with charging
11	BT Link

**Note:**

1. All the test modes can be supply by battery, only the result of the worst case was recorded in the report, if no other cases.
2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
3. The EUT used fully-charged battery when tested.

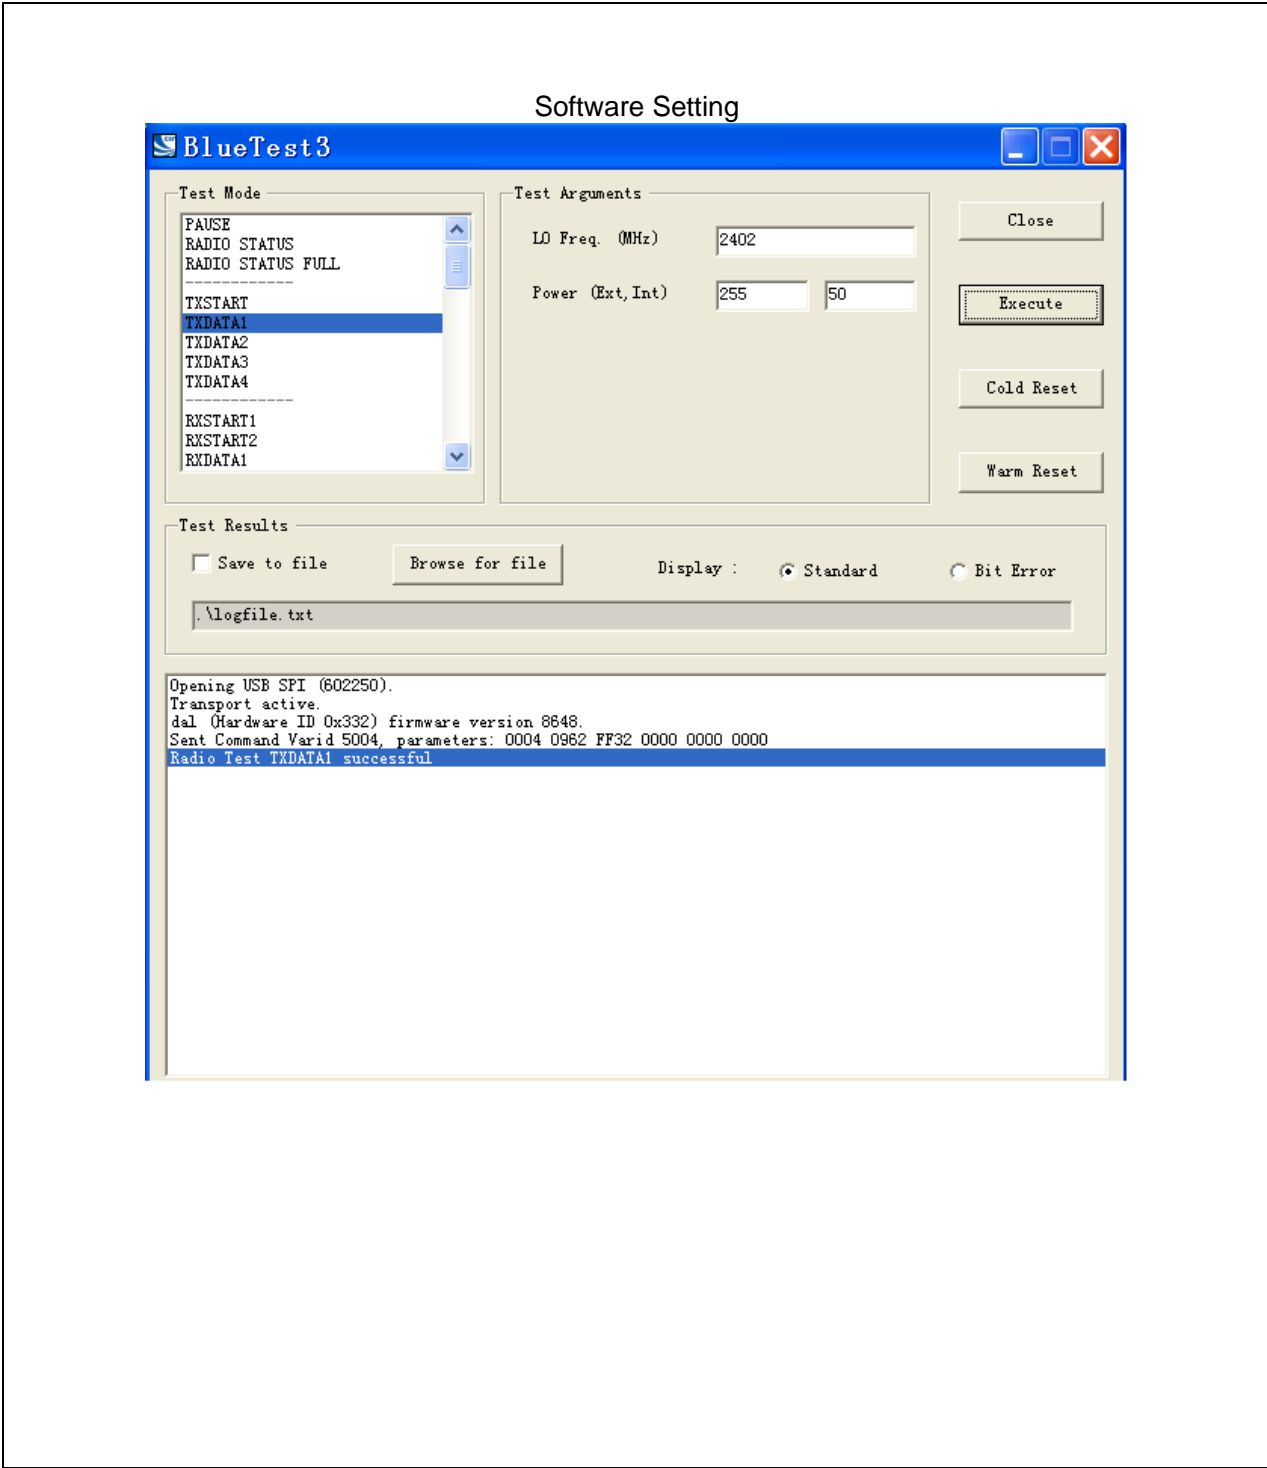




## 5. SYSTEM TEST CONFIGURATION


### 5.1. CONFIGURATION OF EUT SYSTEM

Configure 1: (Normal hopping)

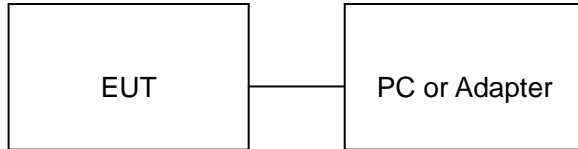

**Note:** Owing to the EUT has own battery, Testing will be performed while PC or adapter remove.

Configure 2: (Control continuous TX)

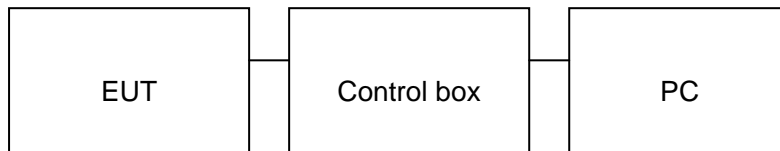

### 5.2. EQUIPMENT USED IN EUT SYSTEM

Item	Equipment	Mfr/Brand	Model/Type No.	Remark
1	Wireless Headphones	iDeaUSA	V202	EUT
2	Battery	CEL	402030	Accessory
3	PC	Sony	E1412AYCW	A.E
4	Control box	CSR	N/A	A.E
5	Adapter	ETPCA	ETPCA-050100U3W	A.E

### 5.3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.249	Radiated Emission	Compliant
§15.249	Band Edges	Compliant
§15.207	Conduction Emission	Compliant
§15.215	Bandwidth	Compliant

## 6. TEST FACILITY

<b>Site</b>	Dongguan Precise Testing Service Co., Ltd.
<b>Location</b>	Building D, Baoding Technology Park, Guangming Road2, Dongcheng District, Dongguan, Guangdong, China,
<b>FCC Registration No.</b>	371540
<b>Description</b>	The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.4:2014.

## TEST METHODOLOGY

All measurements contained in this report were conducted with ANSI C63.10-2013

## 7. ALL TEST EQUIPMENT LIST

FOR RADIATED EMISSION TEST (BELOW 1GHZ)

Radiated Emission Test Site					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
EMI Test Receiver	Rohde & Schwarz	ESCI	101417	July 4, 2015	July 3, 2016
Trilog Broadband Antenna (25M-1GHz)	SCHWARZBECK	VULB9160	9160-3355	July 4, 2015	July 3, 2016
Signal Amplifier	SCHWARZBECK	BBV 9475	9745-0013	July 4, 2015	July 3, 2016
RF Cable	SCHWARZBECK	AK9515E	96221	July 4, 2015	July 3, 2016
3m Anechoic Chamber	CHENGYU	966	PTS-001	June 6, 2016	June 5, 2017
MULTI-DEVICE Positioning Controller	Max-Full	MF-7802	MF780208339	N/A	N/A
Active loop antenna (9K-30MHz)	Schwarzbeck	FMZB1519	1519-038	June 6, 2016	June 5, 2017
Spectrum analyzer	Agilent	E4407B	MY46185649	June 6, 2016	June 5, 2017
Radiation Cable 1	MXT	RS1	R005	June 6, 2016	June 5, 2017
Radiation Cable 2	MXT	RS1	R006	June 6, 2016	June 5, 2017

FOR RADIATED EMISSION TEST (1GHZ ABOVE)

Radiated Emission Test Site					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
EMI Test Receiver	Rohde & Schwarz	ESCI	101417	July 4, 2015	July 3, 2016
Horn Antenna (1G-18GHz)	SCHWARZBECK	BBHA9120D	9120D-1246	July 11, 2015	July 10, 2016
Spectrum Analyzer	Agilent	E4411B	MY4511453	July 4, 2015	July 3, 2016
Signal Amplifier	SCHWARZBECK	BBV 9718	9718-269	July 7, 2015	July 6, 2016
RF Cable	SCHWARZBECK	AK9515H	96220	July 8, 2015	July 7, 2016
3m Anechoic Chamber	CHENGYU	966	PTS-001	June 6, 2016	June 5, 2017
MULTI-DEVICE Positioning Controller	Max-Full	MF-7802	MF780208339	N/A	N/A
Horn Ant (18G-40GHz)	Schwarzbeck	BBHA 9170	9170-181	June 6, 2016	June 5, 2017
Radiation Cable 1	MXT	RS1	R005	June 6, 2016	June 5, 2017
Radiation Cable 2	MXT	RS1	R006	June 6, 2016	June 5, 2017

Conducted Emission Test Site					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
EMI Test Receiver	Rohde & Schwarz	ESCI	101417	July 4, 2015	July 3, 2016
Artificial Mains Network	Narda	L2-16B	000WX31025	July 8, 2015	July 7, 2016
Artificial Mains Network (AUX)	Narda	L2-16B	000WX31026	July 8, 2015	July 7, 2016
RF Cable	SCHWARZBECK	AK9515E	96222	July 4, 2015	July 3, 2016
Shielded Room	CHENGYU	843	PTS-002	June 6, 2016	June 5, 2017
Conduction Cable	MXT	SE1	S003	June 6, 2016	June 5, 2017

## 8. RADIATED EMISSION

### 8.1 TEST LIMIT

#### Standard FCC15.249

Fundamental Frequency	Field Strength of Fundamental (millivolts/meter)	Field Strength of Harmonics (microvolts/meter)
900-928MHz	50	500
2400-2483.5MHz	50	500
5725-5875MHz	50	500
24.0-24.25GHz	250	2500

#### Standard FCC 15.209

Frequency (MHz)	Distance Meters	Field Strengths Limit	
		$\mu$ V/m	dB( $\mu$ V)/m
0.009 ~ 0.490	300	2400/F(kHz)	---
0.490 ~ 1.705	30	24000/F(kHz)	---
1.705 ~ 30	30	30	---
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	Other:74.0 dB( $\mu$ V)/m (Peak) 54.0 dB( $\mu$ V)/m (Average)	

Remark: (1) Emission level  $\text{dB}\mu\text{V} = 20 \log \text{Emission level } \mu\text{V/m}$   
(2) The smaller limit shall apply at the cross point between two frequency bands.  
(3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

## 8.2. MEASUREMENT PROCEDURE


1. The measuring distance of 3m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation(Below 1GHz)
2. The measuring distance of 3m shall used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation(Above 1GHz)
3. The height of the test antenna shall vary between 1m to 4m.Both horizontal and vertical polarization Of the antenna are set to make the measurement.
4. The initial step in collecting radiated emission data is a receive peak detector mode. Pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
5. All readings are peak unless otherwise stated QP in column of Note. Peak denoted that the Peak reading compliance with the QP limits and then QP Mode measurement didn't perform(Below 1GHz)
6. All readings are Peak mode value unless otherwise stated AVG in column of Note. If the Peak mode measured value compliance with the Peak limits and lower than AVG Limits, the EUT shall be deemed to meet Peak&AVG limits and then only Peak mode was measured, but AVG mode didn't perform.(Above 1GHz)

The following table is the setting of spectrum analyzer and receiver.


<b>Spectrum Parameter</b>	<b>Setting</b>
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP
Start ~Stop Frequency	1GHz~26.5GHz 1MHz/3MHz for Peak, 1MHz/10Hz for Average
<b>Receiver Parameter</b>	<b>Setting</b>
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP

8.3. TEST SETUP


Radiated Emission Test-Setup Frequency Below 30MHz

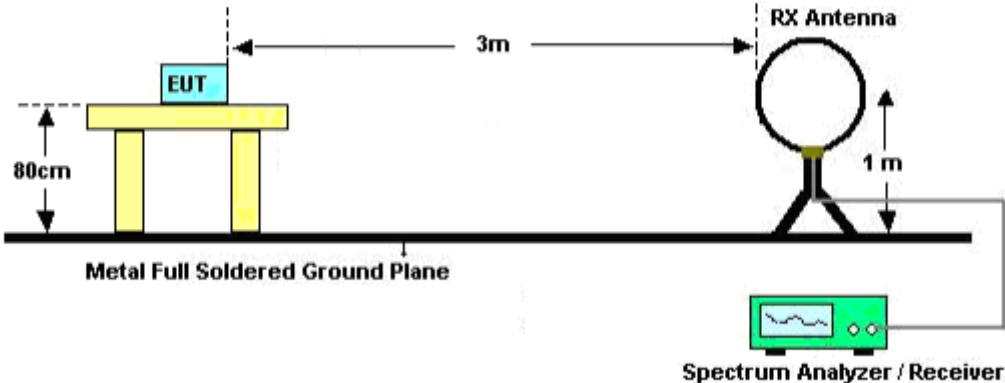

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

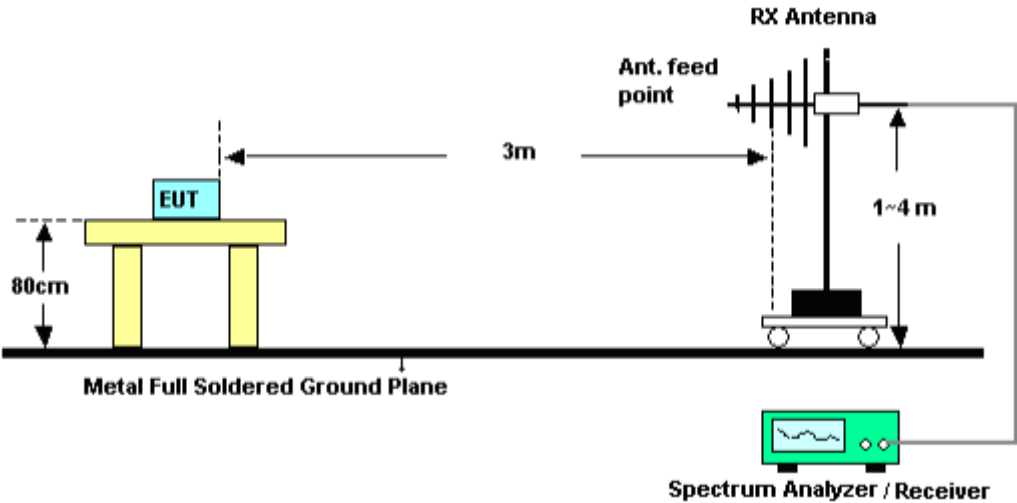

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

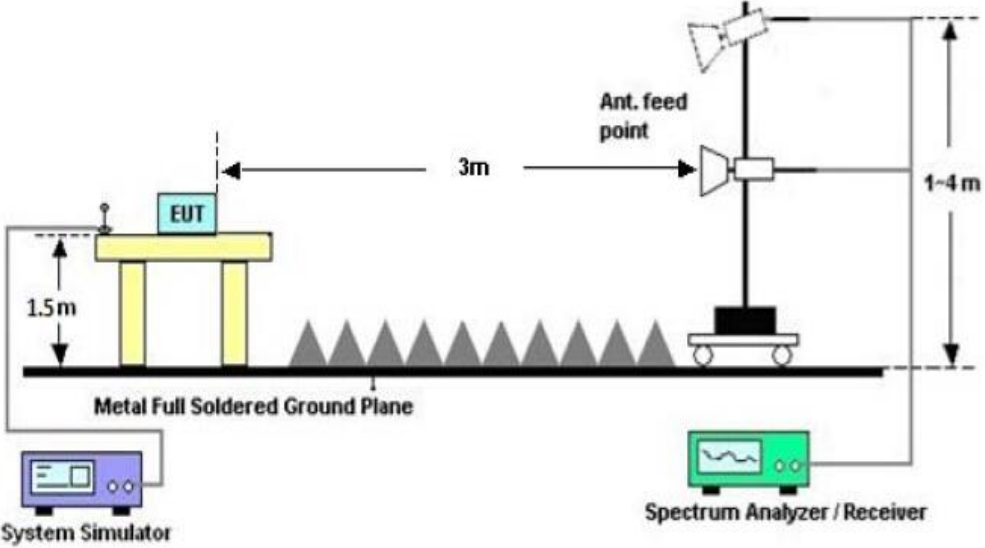



**8.4. TEST RESULT**


**(Worst modulation:GFSK)  
 FOR BR/EDR**

**RADIATED EMISSION BELOW 30MHZ**

No emission found between lowest internal used/generated frequencies to 30MHz.

**RADIATED EMISSION BELOW 1GHZ**

**RADIATED EMISSION TEST- (30MHZ-1GHZ)-LOW CHANNEL-HORIZONTAL**

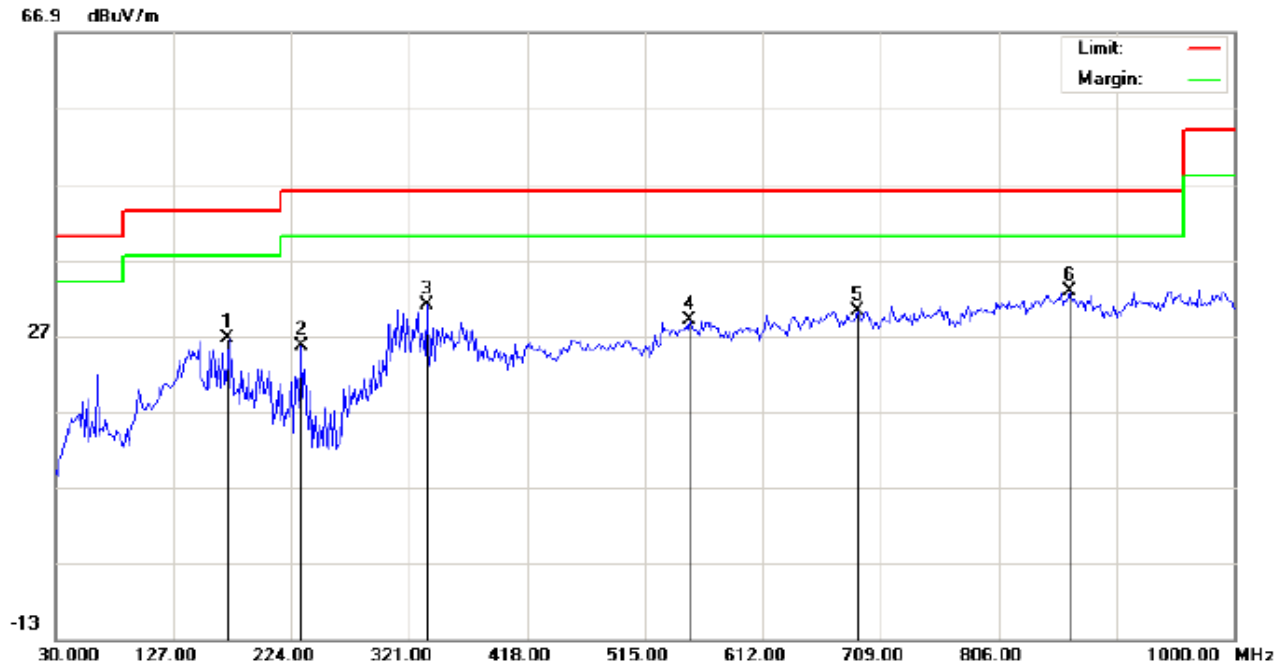


Site: site #1	Polarization: <i>Horizontal</i>	Temperature: 22.9
Limit: FCC Class B 3M Radiation	Power:	Humidity: 54.9 %
EUT:Wireless Headphones	Distance:	
M/N:V202		
Mode:Low Channel TX		
Note:		

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		172.2666	15.86	10.78	26.64	43.50	-16.86	peak			
2		232.0833	16.84	8.73	25.57	46.00	-20.43	peak			
3		335.5500	13.25	17.78	31.03	46.00	-14.97	peak			
4		552.1833	6.41	22.53	28.94	46.00	-17.06	peak			
5		689.6000	5.32	24.91	30.23	46.00	-15.77	peak			
6	*	864.2000	5.09	27.68	32.77	46.00	-13.23	peak			

**RESULT: PASS**

RADIATED EMISSION TEST- (30MHZ-1GHZ)-LOW CHANNEL -VERTICAL

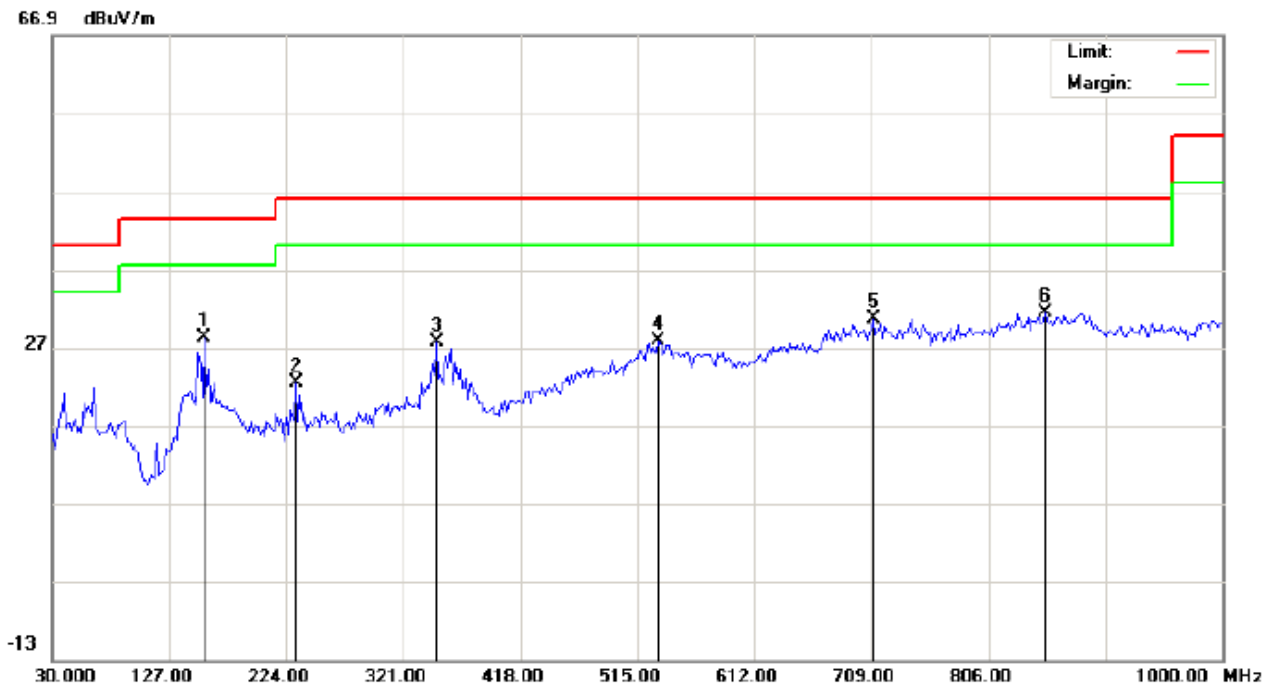

Site: site #1  
Limit: FCC Class B 3M Radiation  
EUT: Wireless Headphones  
M/N: V202  
Mode: Low Channel TX  
Note:

Polarization: **Vertical**  
Power:  
Distance:

Temperature: 22.9  
Humidity: 54.9 %


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		156.1000	12.90	15.30	28.20	43.50	-15.30	peak			
2		232.0833	10.20	12.14	22.34	46.00	-23.66	peak			
3		348.4833	8.93	18.64	27.57	46.00	-18.43	peak			
4		532.7833	5.74	22.02	27.76	46.00	-18.24	peak			
5		710.6167	5.17	25.50	30.67	46.00	-15.33	peak			
6	*	852.8833	3.93	27.38	31.31	46.00	-14.69	peak			

**RESULT: PASS**

**Note:** 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

RADIATED EMISSION TEST- (30MHZ-1GHZ)-MIDDLE CHANNEL-HORIZONTAL

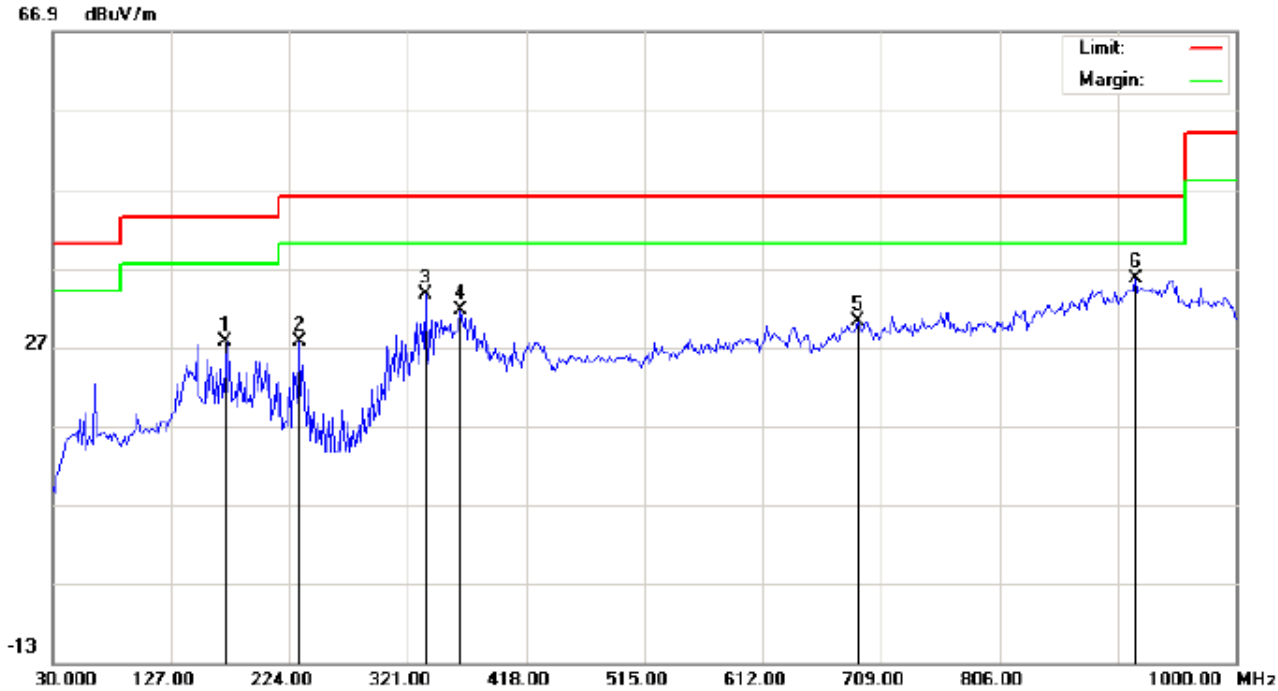

Site: site #1  
 Limit: FCC Class B 3M Radiation  
 EUT:Wireless Headphones  
 M/N:V202  
 Mode:Middle Channel TX  
 Note:

Polarization: *Horizontal*  
 Power:  
 Distance:

Temperature: 22.9  
 Humidity: 54.9 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		172.2666	16.86	10.78	27.64	43.50	-15.86	peak			
2		232.0833	18.84	8.73	27.57	46.00	-18.43	peak			
3		335.5500	15.75	17.78	33.53	46.00	-12.47	peak			
4		364.6500	12.76	18.84	31.60	46.00	-14.40	peak			
5		689.6000	5.32	24.91	30.23	46.00	-15.77	peak			
6	*	917.5500	6.42	29.10	35.52	46.00	-10.48	peak			

RESULT: PASS

RADIATED EMISSION TEST- (30MHZ-1GHZ)- MIDDLE CHANNEL -VERTICAL



Site: site #1  
 Limit: FCC Class B 3M Radiation  
 EUT:Wireless Headphones  
 M/N:V202  
 Mode:Middle Channel TX  
 Note:

Polarization: *Vertical*  
 Power:  
 Distance:

Temperature: 22.9  
 Humidity: 54.9 %


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	156.1000	15.90	15.30	31.20	43.50	-12.30	peak			
2		348.4833	9.43	18.64	28.07	46.00	-17.93	peak			
3		532.7833	5.24	22.02	27.26	46.00	-18.74	peak			
4		710.6167	5.17	25.50	30.67	46.00	-15.33	peak			
5		830.2500	4.79	27.31	32.10	46.00	-13.90	peak			
6		949.8833	3.24	30.00	33.24	46.00	-12.76	peak			

**RESULT: PASS**

**Note:** 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

RADIATED EMISSION TEST- (30MHZ-1GHZ)-HIGH CHANNEL-HORIZONTAL

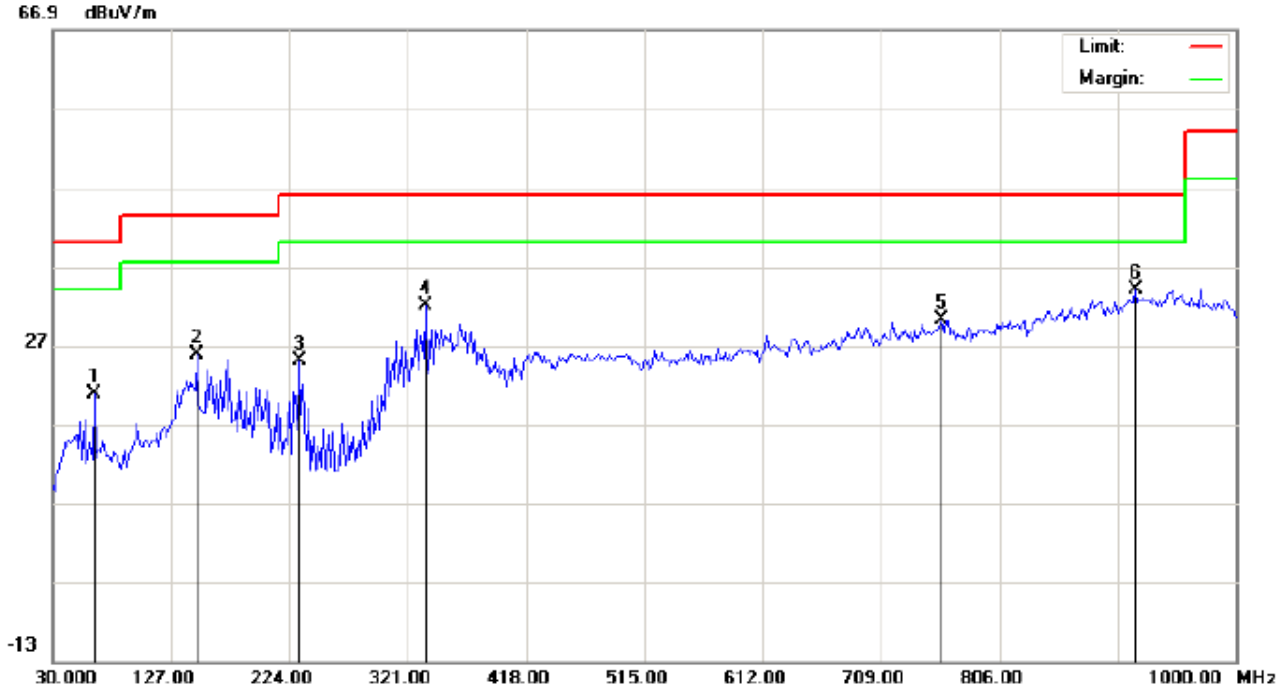

Site: site #1  
 Limit: FCC Class B 3M Radiation  
 EUT:Wireless Headphones  
 M/N:V202  
 Mode:High Channel TX  
 Note:


Polarization: *Horizontal*  
 Power:  
 Distance:

Temperature: 22.9  
 Humidity: 54.9 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		63.9500	16.37	4.36	20.73	40.00	-19.27	peak			
2		148.0166	12.55	13.25	25.80	43.50	-17.70	peak			
3		232.0833	16.34	8.73	25.07	46.00	-20.93	peak			
4		335.5500	14.25	17.78	32.03	46.00	-13.97	peak			
5		759.1167	3.54	26.76	30.30	46.00	-15.70	peak			
6	*	917.5500	4.92	29.10	34.02	46.00	-11.98	peak			

**RESULT: PASS**

RADIATED EMISSION TEST- (30MHZ-1GHZ)-HIGH CHANNEL -VERTICAL

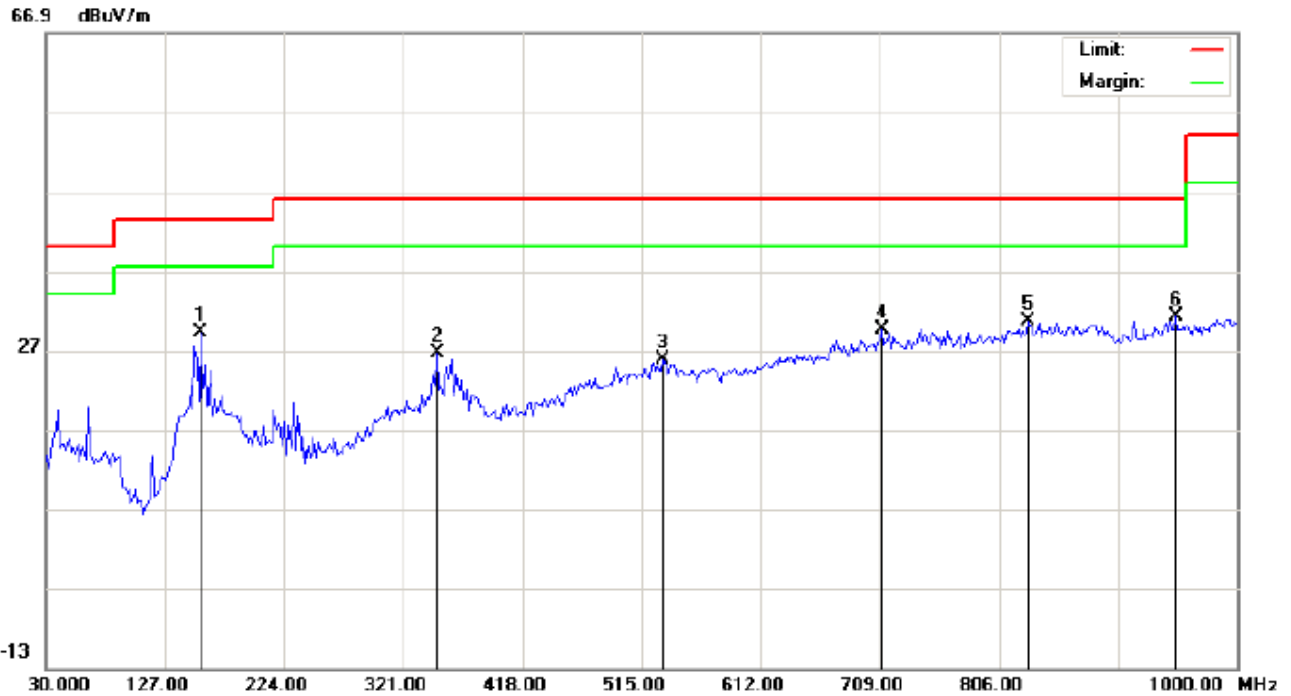

Site: site #1  
Limit: FCC Class B 3M Radiation  
EUT: Wireless Headphones  
M/N: V202  
Mode: High Channel TX  
Note:

Polarization: *Vertical*  
Power:  
Distance:

Temperature: 22.9  
Humidity: 54.9 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	156.1000	13.90	15.30	29.20	43.50	-14.30	peak			
2		348.4833	7.93	18.64	26.57	46.00	-19.43	peak			
3		532.7833	3.74	22.02	25.76	46.00	-20.24	peak			
4		710.6167	4.17	25.50	29.67	46.00	-16.33	peak			
5		830.2500	3.29	27.31	30.60	46.00	-15.40	peak			
6		949.8833	1.24	30.00	31.24	46.00	-14.76	peak			

**RESULT: PASS**

**Note:** 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.


FOR BLE

**RADIATED EMISSION BELOW 30MHZ**

No emission found between lowest internal used/generated frequencies to 30MHz.

**RADIATED EMISSION BELOW 1GHZ**

**RADIATED EMISSION TEST- (30MHZ-1GHZ)-LOW CHANNEL-HORIZONTAL**

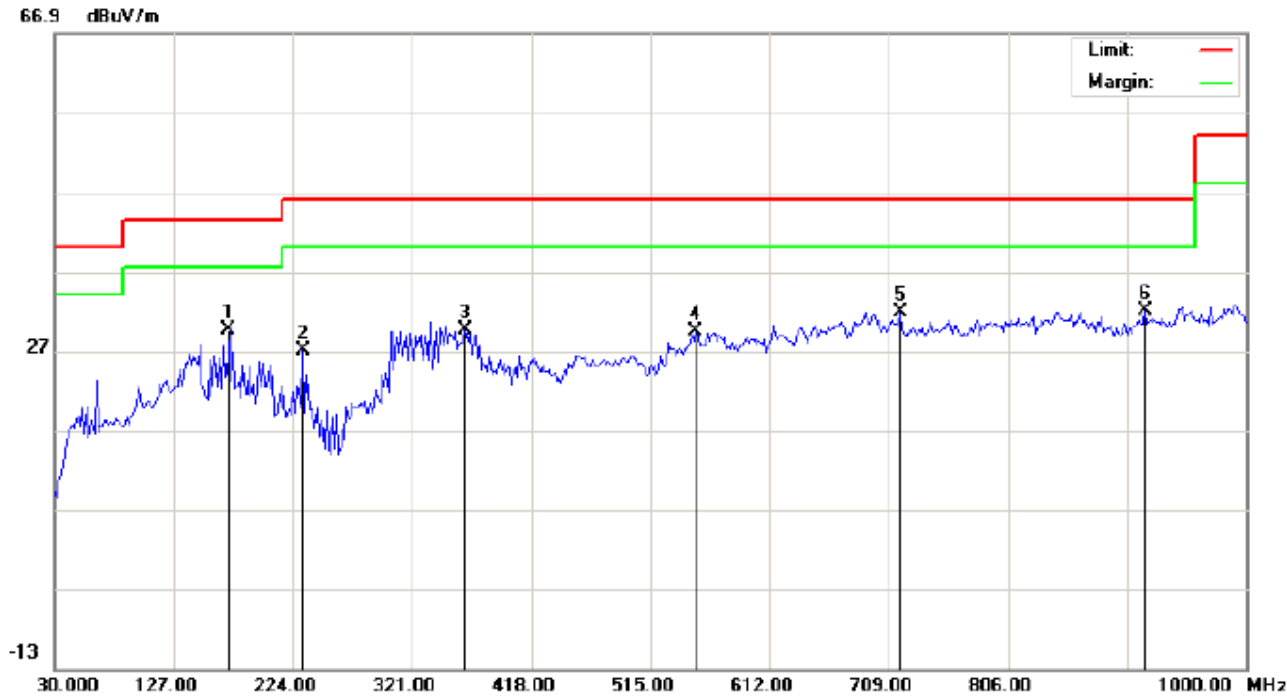

Site: site #1	Polarization: <i>Horizontal</i>	Temperature: 22.9
Limit: FCC Class B 3M Radiation	Power:	Humidity: 54.9 %
EUT:Wireless Headphones	Distance:	
M/N:V202		
Mode:Low Channel TX		
Note:		

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	172.2666	18.86	10.78	29.64	43.50	-13.86	peak			
2		232.0833	18.34	8.73	27.07	46.00	-18.93	peak			
3		364.6500	10.76	18.84	29.60	46.00	-16.40	peak			
4		552.1833	6.91	22.53	29.44	46.00	-16.56	peak			
5		718.7000	6.09	25.73	31.82	46.00	-14.18	peak			
6		917.5500	2.92	29.10	32.02	46.00	-13.98	peak			

**RESULT: PASS**

RADIATED EMISSION TEST- (30MHZ-1GHZ)-LOW CHANNEL -VERTICAL



Site: site #1  
 Limit: FCC Class B 3M Radiation  
 EUT:Wireless Headphones  
 M/N:V202  
 Mode:Low Channel TX  
 Note:

Polarization: *Vertical*  
 Power:  
 Distance:

Temperature: 22.9  
 Humidity: 54.9 %


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		156.1000	13.90	15.30	29.20	43.50	-14.30	peak			
2		232.0833	12.70	12.14	24.84	46.00	-21.16	peak			
3		348.4833	9.43	18.64	28.07	46.00	-17.93	peak			
4		532.7833	7.74	22.02	29.76	46.00	-16.24	peak			
5		710.6167	6.17	25.50	31.67	46.00	-14.33	peak			
6	*	830.2500	5.29	27.31	32.60	46.00	-13.40	peak			

**RESULT: PASS**

- Note:** 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.  
 2. The "Factor" value can be calculated automatically by software of measurement system.



RADIATED EMISSION TEST- (30MHZ-1GHZ)-MIDDLE CHANNEL-HORIZONTAL

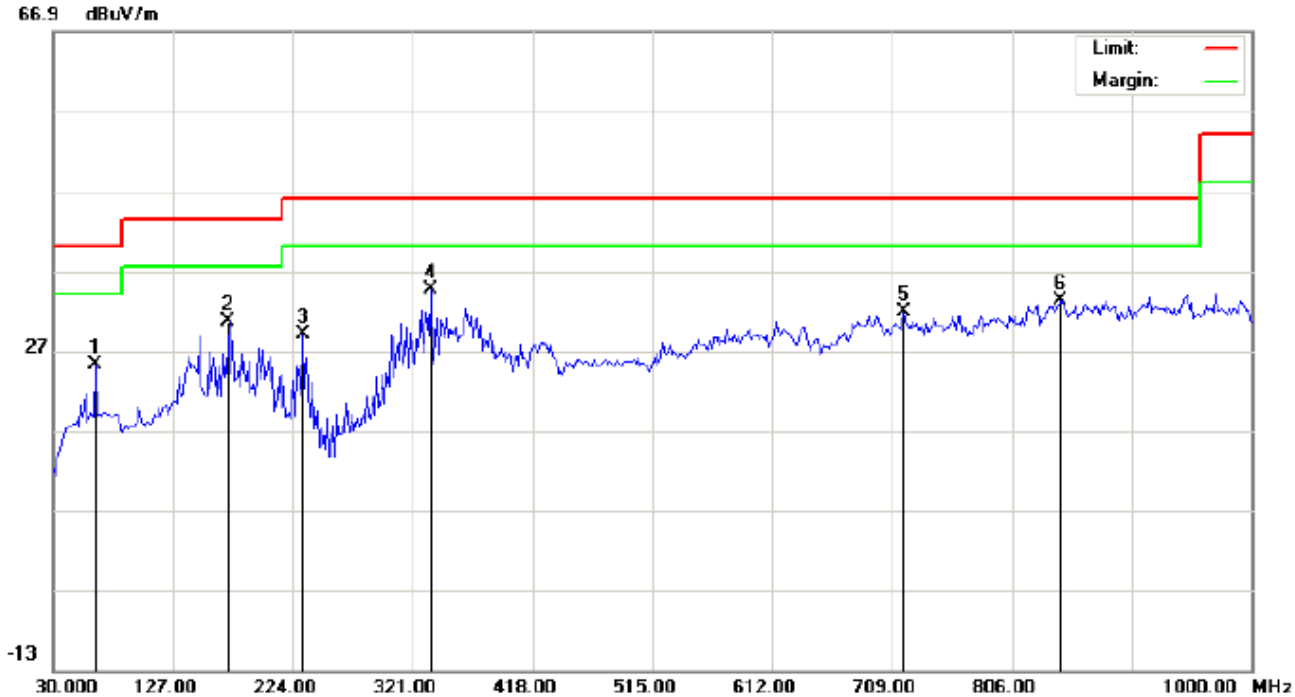

Site: site #1  
 Limit: FCC Class B 3M Radiation  
 EUT: Wireless Headphones  
 M/N: V202  
 Mode: Middle Channel TX  
 Note:


Polarization: *Horizontal*  
 Power:  
 Distance:

Temperature: 22.9  
 Humidity: 54.9 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		63.9500	20.87	4.36	25.23	40.00	-14.77	peak			
2		172.2666	19.86	10.78	30.64	43.50	-12.86	peak			
3		232.0833	20.34	8.73	29.07	46.00	-16.93	peak			
4	*	335.5500	16.75	17.78	34.53	46.00	-11.47	peak			
5		718.7000	6.09	25.73	31.82	46.00	-14.18	peak			
6		844.8000	5.95	27.31	33.26	46.00	-12.74	peak			

RESULT: PASS

RADIATED EMISSION TEST- (30MHZ-1GHZ)- MIDDLE CHANNEL -VERTICAL

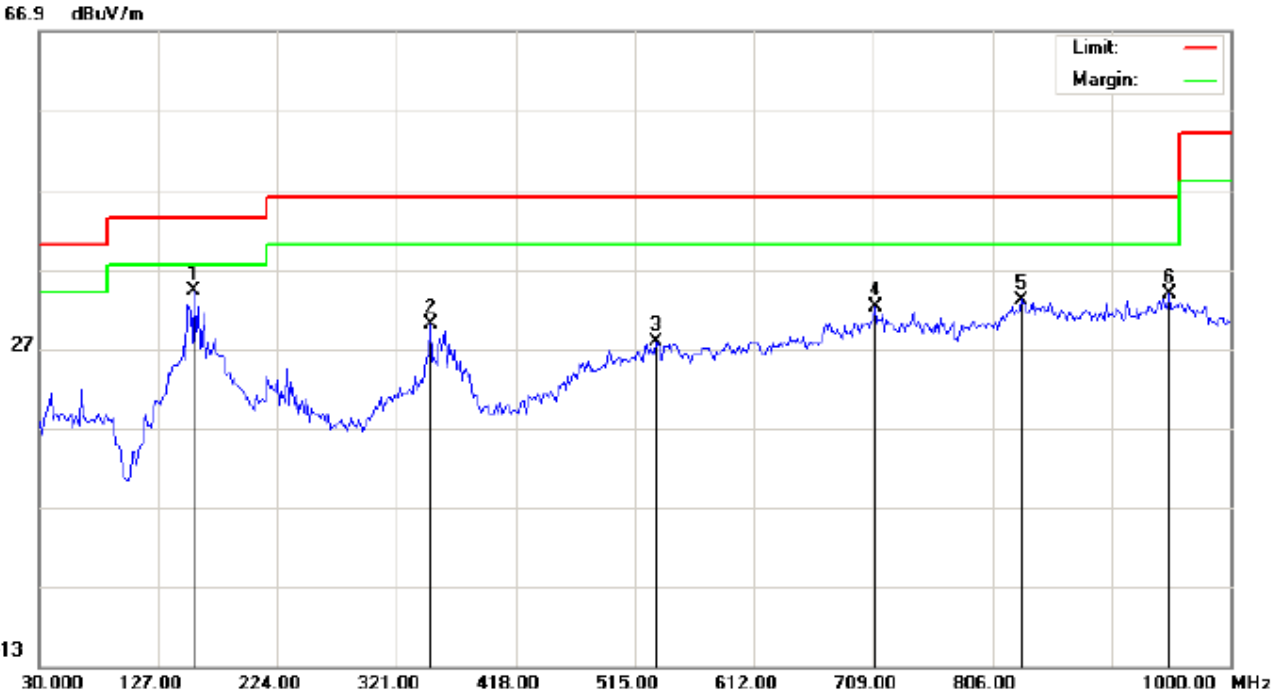

Site: site #1  
 Limit: FCC Class B 3M Radiation  
 EUT:Wireless Headphones  
 M/N:V202  
 Mode:Middle Channel TX  
 Note:

Polarization: *Vertical*  
 Power:  
 Distance:


Temperature: 22.9  
 Humidity: 54.9 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	156.1000	18.90	15.30	34.20	43.50	-9.30	peak			
2		348.4833	11.43	18.64	30.07	46.00	-15.93	peak			
3		532.7833	5.74	22.02	27.76	46.00	-18.24	peak			
4		710.6167	6.67	25.50	32.17	46.00	-13.83	peak			
5		830.2500	5.79	27.31	33.10	46.00	-12.90	peak			
6		949.8833	3.74	30.00	33.74	46.00	-12.26	peak			

**RESULT: PASS**

- Note:** 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.  
 2. The "Factor" value can be calculated automatically by software of measurement system.

RADIATED EMISSION TEST- (30MHZ-1GHZ)-HIGH CHANNEL-HORIZONTAL

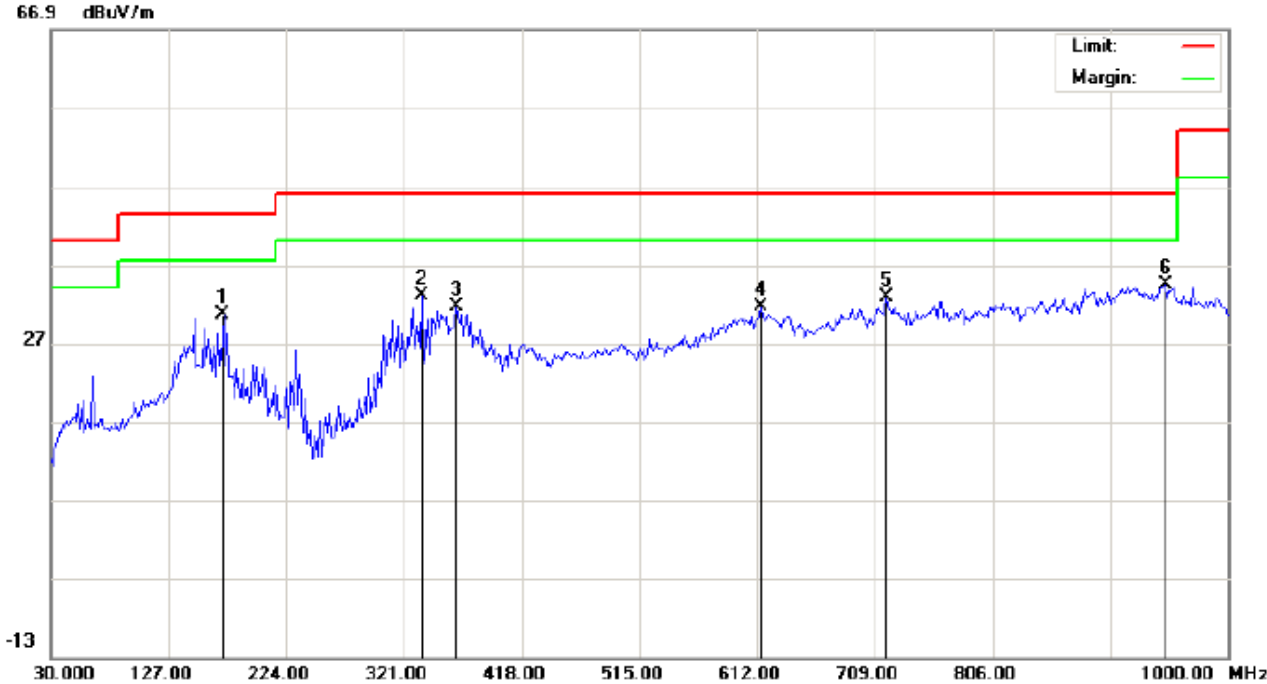

Site: site #1  
 Limit: FCC Class B 3M Radiation  
 EUT:Wireless Headphones  
 M/N:V202  
 Mode:High Channel TX  
 Note:

Polarization: *Horizontal*  
 Power:  
 Distance:

Temperature: 22.9  
 Humidity: 54.9 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		172.2666	19.86	10.78	30.64	43.50	-12.86	peak			
2		335.5500	15.25	17.78	33.03	46.00	-12.97	peak			
3		364.6500	12.76	18.84	31.60	46.00	-14.40	peak			
4		615.2333	7.89	23.77	31.66	46.00	-14.34	peak			
5		718.7000	7.09	25.73	32.82	46.00	-13.18	peak			
6	*	948.2667	4.42	29.95	34.37	46.00	-11.63	peak			

RESULT: PASS

RADIATED EMISSION TEST- (30MHZ-1GHZ)-HIGH CHANNEL -VERTICAL



Site: site #1  
 Limit: FCC Class B 3M Radiation  
 EUT: Wireless Headphones  
 M/N: V202  
 Mode: High Channel TX  
 Note:

Polarization: *Vertical*  
 Power:  
 Distance:

Temperature: 22.9  
 Humidity: 54.9 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	151.2500	15.15	15.27	30.42	43.50	-13.08	peak			
2		207.8333	15.14	9.77	24.91	43.50	-18.59	peak			
3		348.4833	9.43	18.64	28.07	46.00	-17.93	peak			
4		532.7833	6.24	22.02	28.26	46.00	-17.74	peak			
5		710.6167	5.67	25.50	31.17	46.00	-14.83	peak			
6		830.2500	4.79	27.31	32.10	46.00	-13.90	peak			


**RESULT: PASS**

**Note:** 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

**RADIATED EMISSION ABOVE 1GHZ**  
**(Worst modulation: GFSK)**  
**FOR BR/EDR**

**RADIATED EMISSION TEST- (ABOVE 1GHZ)-LOW CHANNEL-HORIZONTAL**

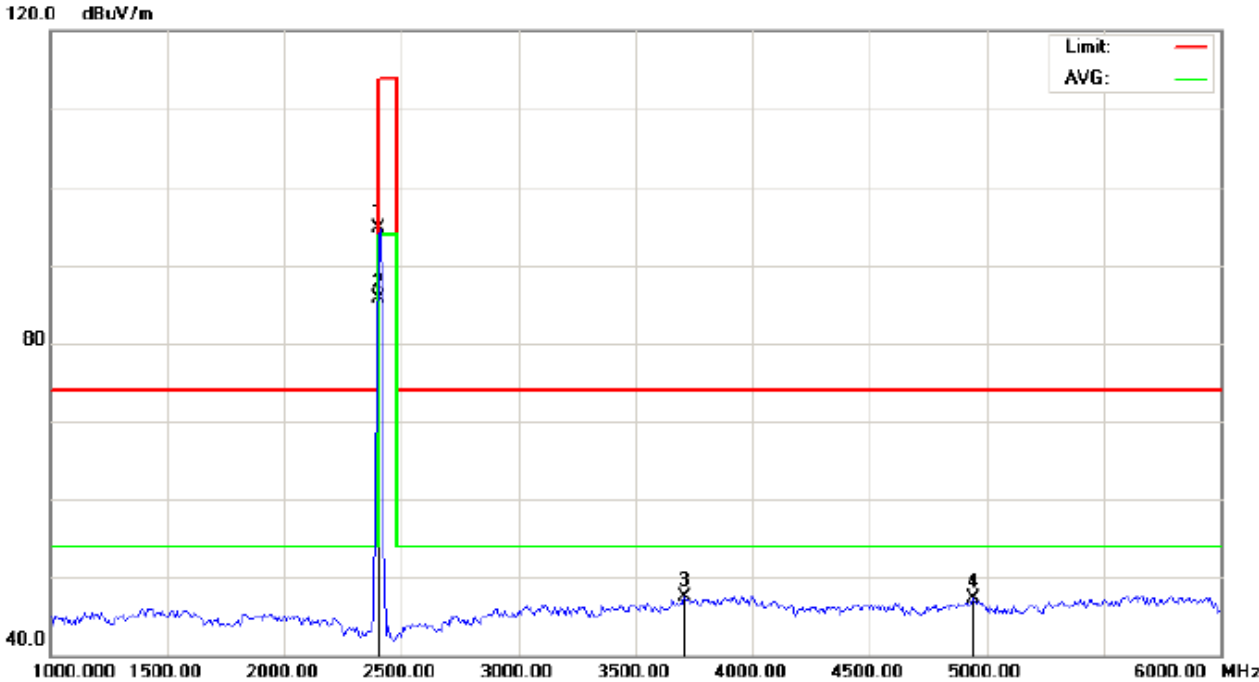

Site: site #1  
 Limit: FCC Class B 3M Radiation above 1GHZ(PK)-  
 EUT:Wireless Headphones  
 M/N:V202  
 Mode: Low Channel TX  
 Note:


Polarization: *Horizontal*  
 Power:  
 Distance: 3m

Temperature: 26  
 Humidity: 60 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2402.000	104.31	-9.68	94.63	114.00	-19.37	peak			
2	*	2402.000	95.39	-9.68	85.71	94.00	-8.29	AVG	100	247	
3		3708.333	54.15	-6.61	47.54	74.00	-26.46	peak			
4		4941.667	49.20	-1.95	47.25	74.00	-26.75	peak			

**RESULT: PASS**

RADIATED EMISSION TEST- (ABOVE 1GHZ)-LOW CHANNEL- VERTICAL

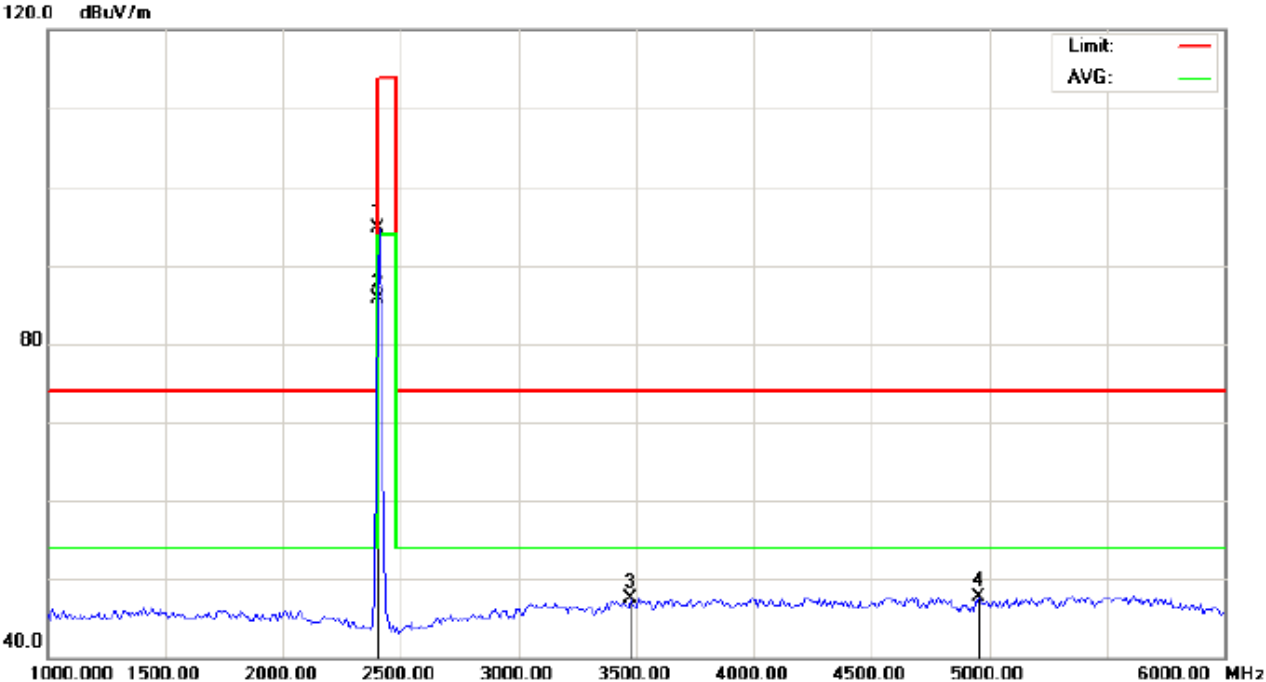

Site: site #1  
 Limit: FCC Class B 3M Radiation above 1GHZ(PK)-  
 EUT:Wireless Headphones  
 M/N:V202  
 Mode: Low Channel TX  
 Note:


Polarization: **Vertical**  
 Power:  
 Distance: 3m

Temperature: 26  
 Humidity: 60 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2402.000	104.36	-9.68	94.68	114.00	-19.32	peak			
2	*	2402.000	95.46	-9.68	85.78	94.00	-8.22	AVG	150	166	
3		3475.000	55.34	-7.91	47.43	74.00	-26.57	peak			
4		4958.333	49.59	-1.91	47.68	74.00	-26.32	peak			

**RESULT: PASS**

RADIATED EMISSION TEST- (ABOVE 1GHZ)-MIDDLE CHANNEL-HORIZONTAL

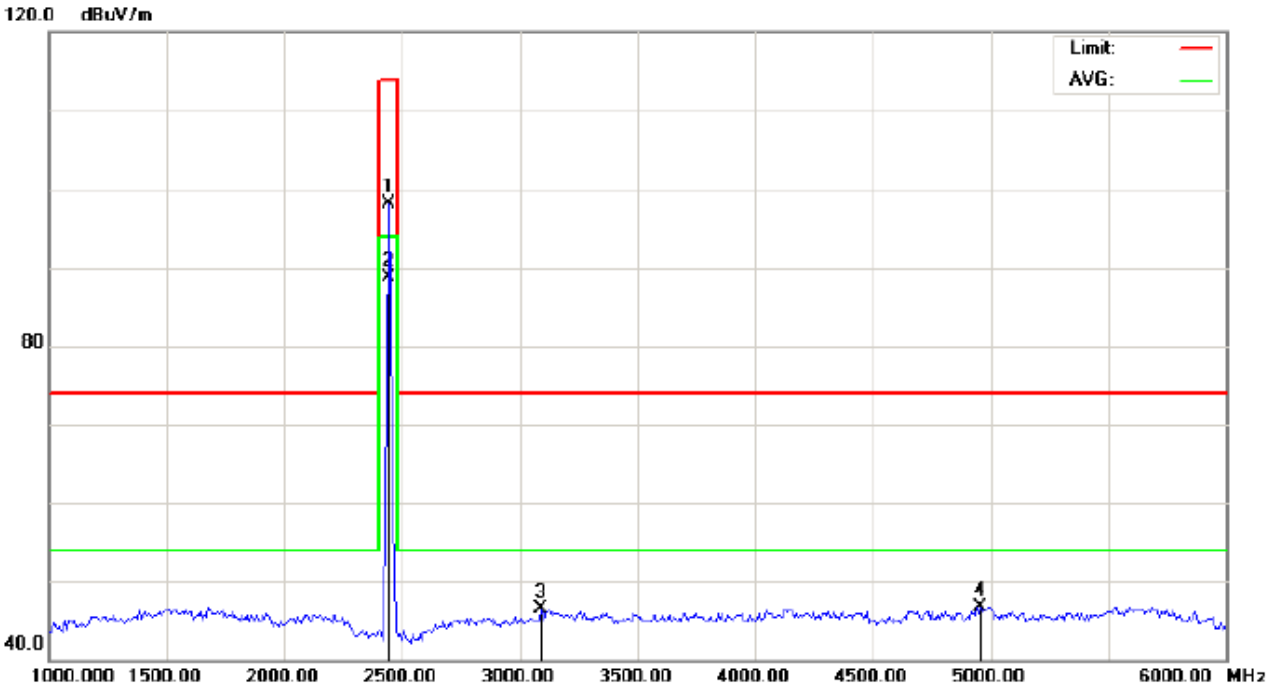

Site: site #1  
 Limit: FCC Class B 3M Radiation above 1GHZ(PK)-  
 EUT:Wireless Headphones  
 M/N:V202  
 Mode: Middle Channel TX  
 Note:


Polarization: *Horizontal*  
 Power:  
 Distance: 3m

Temperature: 26  
 Humidity: 60 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2441.000	107.76	-9.63	98.13	114.00	-15.87	peak			
2	*	2441.000	97.42	-9.63	87.79	94.00	-6.21	AVG	100	169	
3		3091.667	54.68	-8.27	46.41	74.00	-27.59	peak			
4		4958.333	48.64	-1.91	46.73	74.00	-27.27	peak			

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHZ)-MIDDLE CHANNEL- VERTICAL

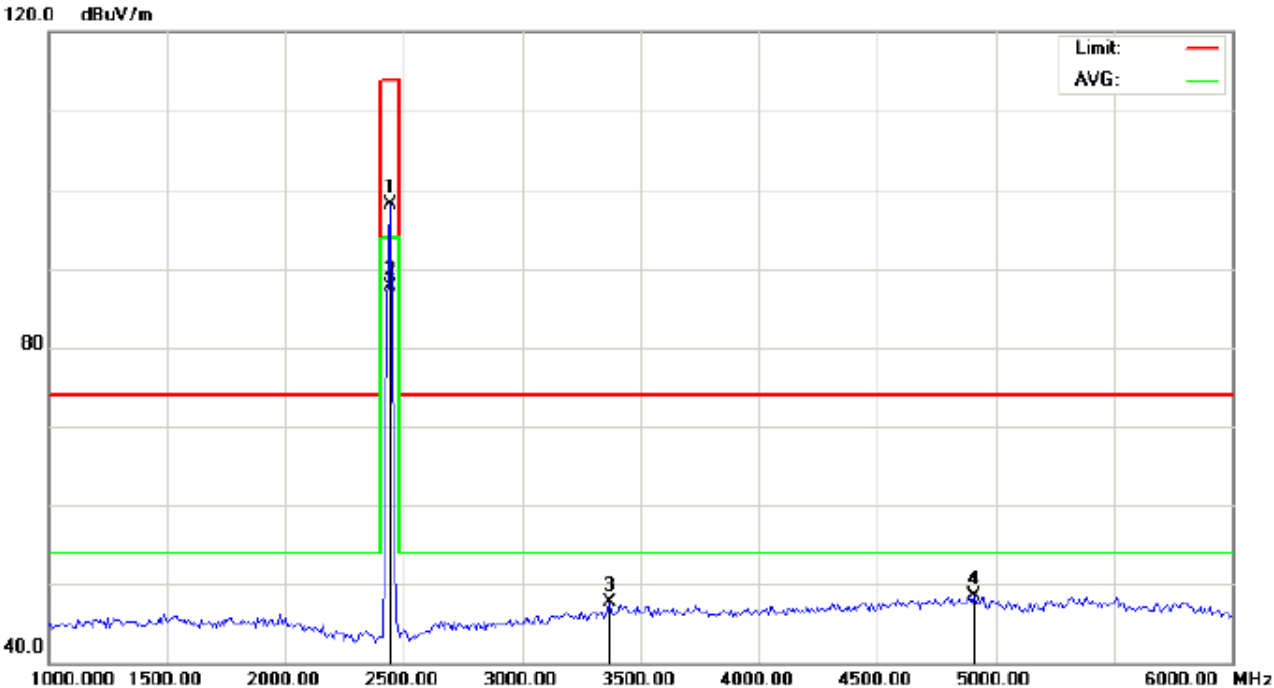

Site: site #1  
 Limit: FCC Class B 3M Radiation above 1GHZ(PK)-  
 EUT:Wireless Headphones  
 M/N:V202  
 Mode: Middle Channel TX  
 Note:

Polarization: *Vertical*  
 Power:  
 Distance: 3m


Temperature: 26  
 Humidity: 60 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2441.000	107.73	-9.63	98.10	114.00	-15.90	peak			
2	*	2441.000	97.39	-9.63	87.76	94.00	-6.24	AVG	100	257	
3		3366.667	55.70	-8.02	47.68	74.00	-26.32	peak			
4		4908.333	50.58	-2.04	48.54	74.00	-25.46	peak			

**RESULT: PASS**



RADIATED EMISSION TEST- (ABOVE 1GHZ)-HIGH CHANNEL-HORIZONTAL

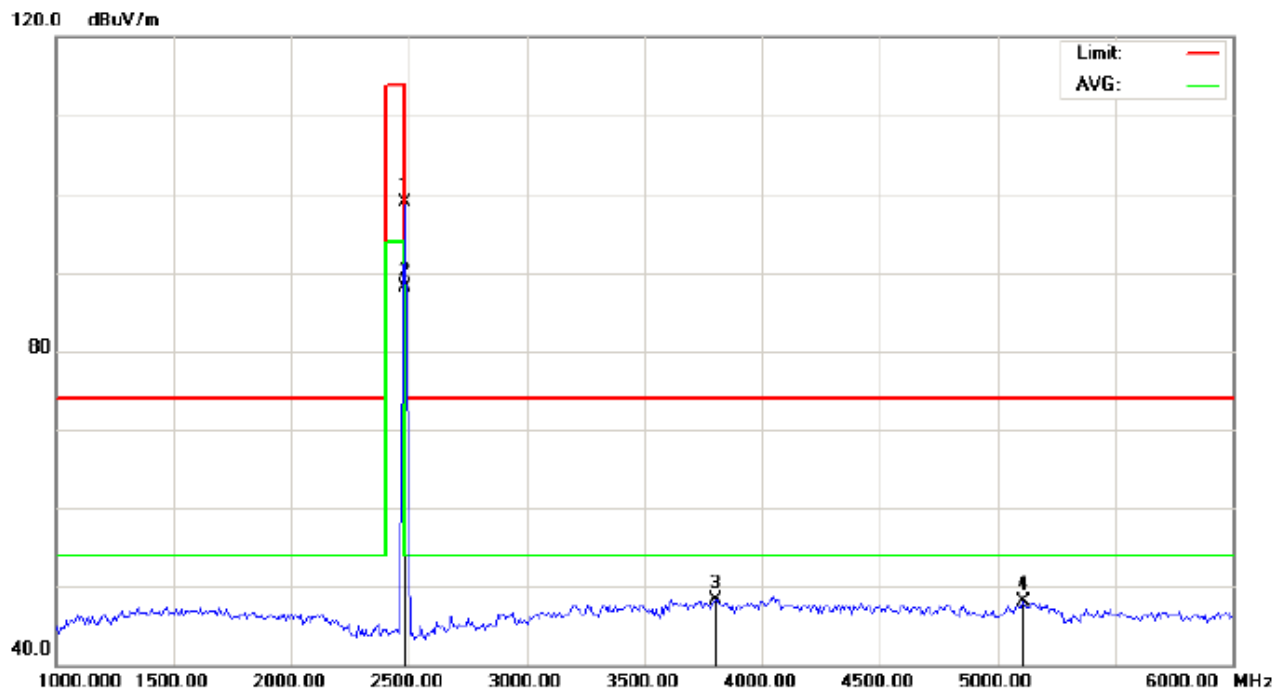


Site: site #1	Polarization: <i>Horizontal</i>	Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)-	Power:	Humidity: 60 %
EUT:Wireless Headphones	Distance: 3m	
M/N:V202		
Mode: High Channel TX		
Note:		

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna	Table	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		Height	Degree	
									cm	degree	
1		2480.000	108.47	-9.59	98.88	114.00	-15.12	peak			
2	*	2480.000	97.62	-9.59	88.03	94.00	-5.97	AVG	100	97	
3		3800.000	54.35	-6.04	48.31	74.00	-25.69	peak			
4		5108.333	49.89	-1.80	48.09	74.00	-25.91	peak			

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHZ)-HIGH CHANNEL- VERTICAL

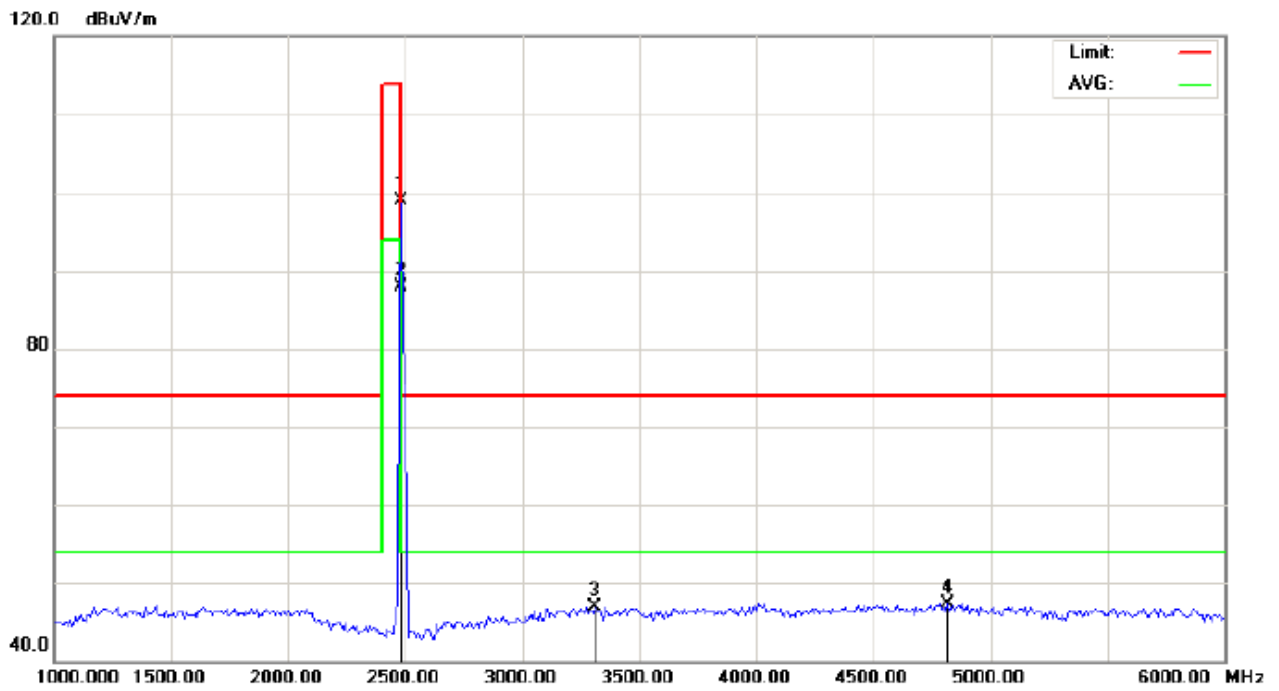

Site: site #1  
Limit: FCC Class B 3M Radiation above 1GHZ(PK)-  
EUT:Wireless Headphones  
M/N:V202  
Mode: High Channel TX  
Note:

Polarization: *Vertical*  
Power:  
Distance: 3m

Temperature: 26  
Humidity: 60 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2480.000	108.42	-9.59	98.83	114.00	-15.17	peak			
2	*	2480.000	97.56	-9.59	87.97	94.00	-6.03	AVG	150	314	
3		3308.333	54.97	-8.07	46.90	74.00	-27.10	peak			
4		4816.667	49.63	-2.28	47.35	74.00	-26.65	peak			

**RESULT: PASS**

**Note:** 6~25GHz at least have 20dB margin. No recording in the test report.

Factor=Antenna Factor + Cable loss - Amplifier gain, Margin=Measurement-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

**Field strength of the fundamental signal****1Mbps Result:****Peak value**

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	104.31	-9.68	94.63	114	-19.37	Horizontal
2402	104.36	-9.68	94.68	114	-19.32	Vertical
2441	107.76	-9.63	98.13	114	-15.87	Horizontal
2441	107.73	-9.63	98.10	114	-15.90	Vertical
2480	108.47	-9.59	98.88	114	-15.12	Horizontal
2480	108.42	-9.59	98.83	114	-15.17	Vertical

**Average value**

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	95.39	-9.68	85.71	94	-8.29	Horizontal
2402	95.46	-9.68	85.78	94	-8.22	Vertical
2441	97.42	-9.63	87.79	94	-6.21	Horizontal
2441	97.39	-9.63	87.76	94	-6.24	Vertical
2480	97.62	-9.59	88.03	94	-5.97	Horizontal
2480	97.56	-9.59	87.97	94	-6.03	Vertical

**2Mbps Result:**

**Peak value**

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	103.86	-9.68	94.18	114	-19.82	Horizontal
2402	103.89	-9.68	94.21	114	-19.79	Vertical
2441	107.29	-9.63	97.66	114	-16.34	Horizontal
2441	107.30	-9.63	97.67	114	-16.33	Vertical
2480	107.93	-9.59	98.34	114	-15.66	Horizontal
2480	107.95	-9.59	98.36	114	-15.64	Vertical

**Average value**

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	94.97	-9.68	85.29	94	-8.71	Horizontal
2402	95.00	-9.68	85.32	94	-8.68	Vertical
2441	96.86	-9.63	87.23	94	-6.77	Horizontal
2441	96.88	-9.63	87.25	94	-6.75	Vertical
2480	97.15	-9.59	87.56	94	-6.44	Horizontal
2480	97.17	-9.59	87.58	94	-6.42	Vertical

**3Mbps Result:**

**Peak value**


Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	103.53	-9.68	93.85	114	-20.15	Horizontal
2402	103.55	-9.68	93.87	114	-20.13	Vertical
2441	106.74	-9.63	97.11	114	-16.89	Horizontal
2441	106.78	-9.63	97.15	114	-16.85	Vertical
2480	108.42	-9.59	98.83	114	-15.17	Horizontal
2480	108.45	-9.59	98.86	114	-15.14	Vertical

**Average value**

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	94.63	-9.68	84.95	94	-9.05	Horizontal
2402	94.64	-9.68	84.96	94	-9.04	Vertical
2441	97.39	-9.63	87.76	94	-6.24	Horizontal
2441	97.42	-9.63	87.79	94	-6.21	Vertical
2480	96.61	-9.59	87.02	94	-6.98	Horizontal
2480	96.63	-9.59	87.04	94	-6.96	Vertical

**FOR BLE**

**RADIATED EMISSION TEST- (ABOVE 1GHZ)-LOW CHANNEL-HORIZONTAL**

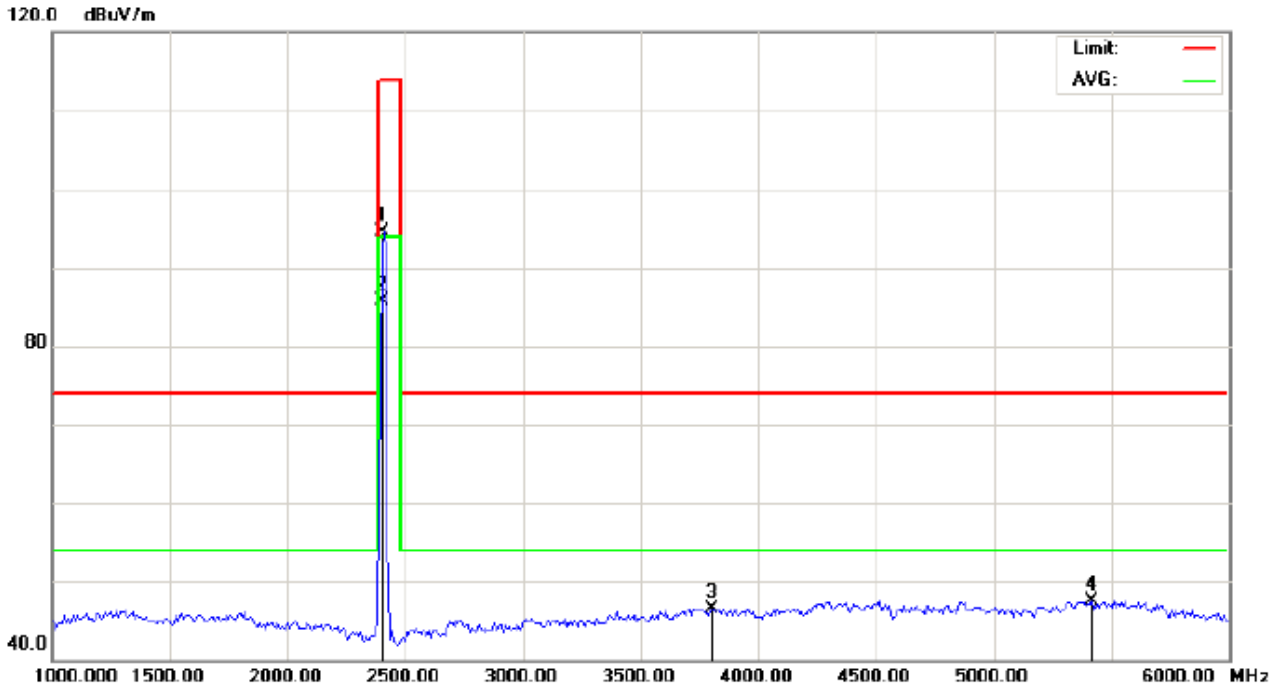


Site: site #1 Polarization: *Horizontal* Temperature: 26  
 Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %  
 EUT:Wireless Headphones Distance: 3m  
 M/N:V202  
 Mode: Low Channel TX  
 Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2402.000	104.23	-9.68	94.55	114.00	-19.45	peak			
2	*	2402.000	95.42	-9.68	85.74	94.00	-8.26	AVG	100	85	
3		3800.000	52.62	-6.04	46.58	74.00	-27.42	peak			
4		5416.667	49.31	-1.81	47.50	74.00	-26.50	peak			

**RESULT: PASS**

RADIATED EMISSION TEST- (ABOVE 1GHZ)-LOW CHANNEL- VERTICAL

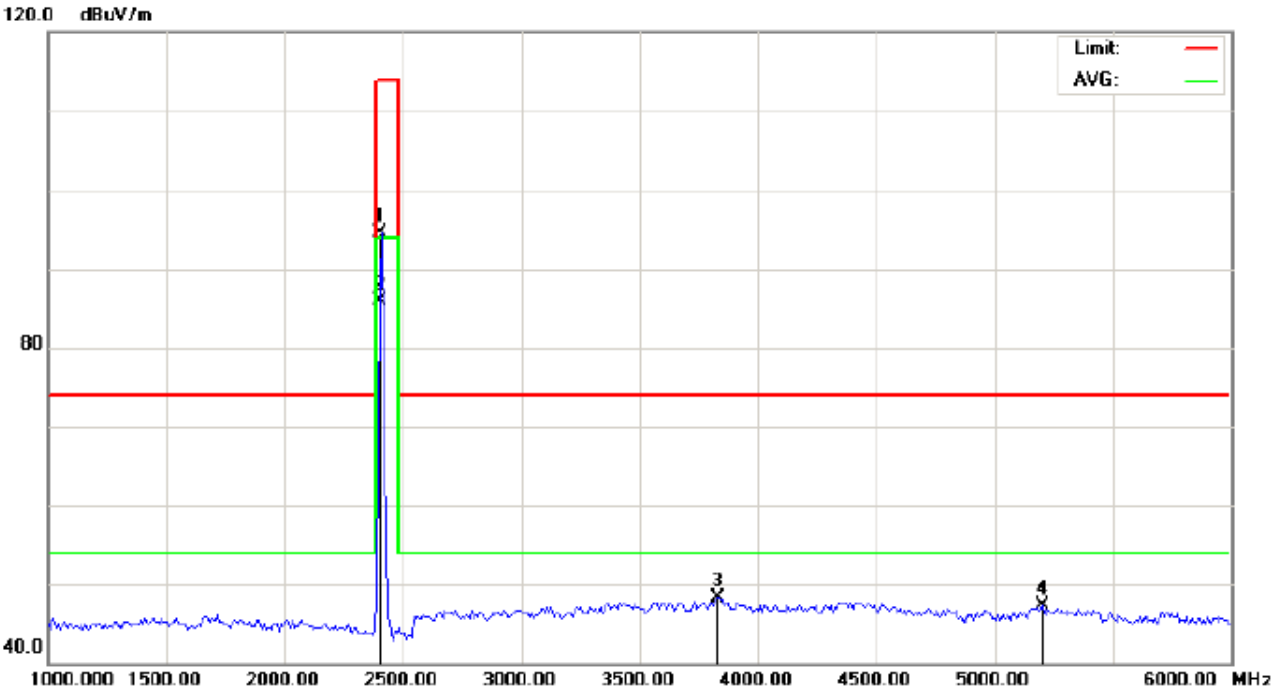

Site: site #1  
 Limit: FCC Class B 3M Radiation above 1GHZ(PK)-  
 EUT:Wireless Headphones  
 M/N:V202  
 Mode: Low Channel TX  
 Note:


Polarization: *Vertical*  
 Power:  
 Distance: 3m

Temperature: 26  
 Humidity: 60 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2402.000	104.27	-9.68	94.59	114.00	-19.41	peak			
2	*	2402.000	95.49	-9.68	85.81	94.00	-8.19	AVG	150	307	
3		3833.333	54.12	-5.84	48.28	74.00	-25.72	peak			
4		5200.000	49.07	-1.80	47.27	74.00	-26.73	peak			

**RESULT: PASS**

RADIATED EMISSION TEST- (ABOVE 1GHZ)-MIDDLE CHANNEL-HORIZONTAL

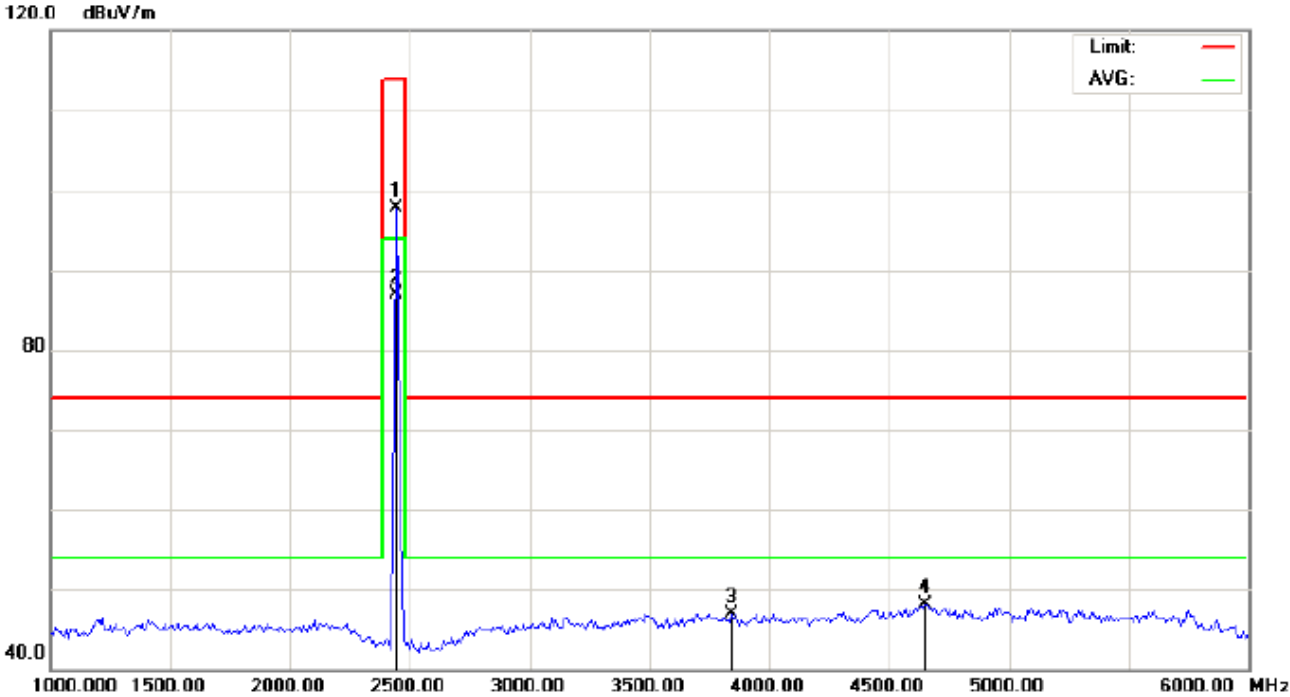


Site: site #1 Polarization: *Horizontal* Temperature: 26  
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %  
EUT:Wireless Headphones Distance: 3m  
M/N:V202  
Mode: Middle Channel TX  
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2440.000	107.29	-9.63	97.66	114.00	-16.34	peak			
2	*	2440.000	96.54	-9.63	86.91	94.00	-7.09	AVG	100	176	
3		3841.667	52.68	-5.79	46.89	74.00	-27.11	peak			
4		4650.000	50.89	-2.72	48.17	74.00	-25.83	peak			

**RESULT: PASS**



RADIATED EMISSION TEST- (ABOVE 1GHZ)-MIDDLE CHANNEL- VERTICAL

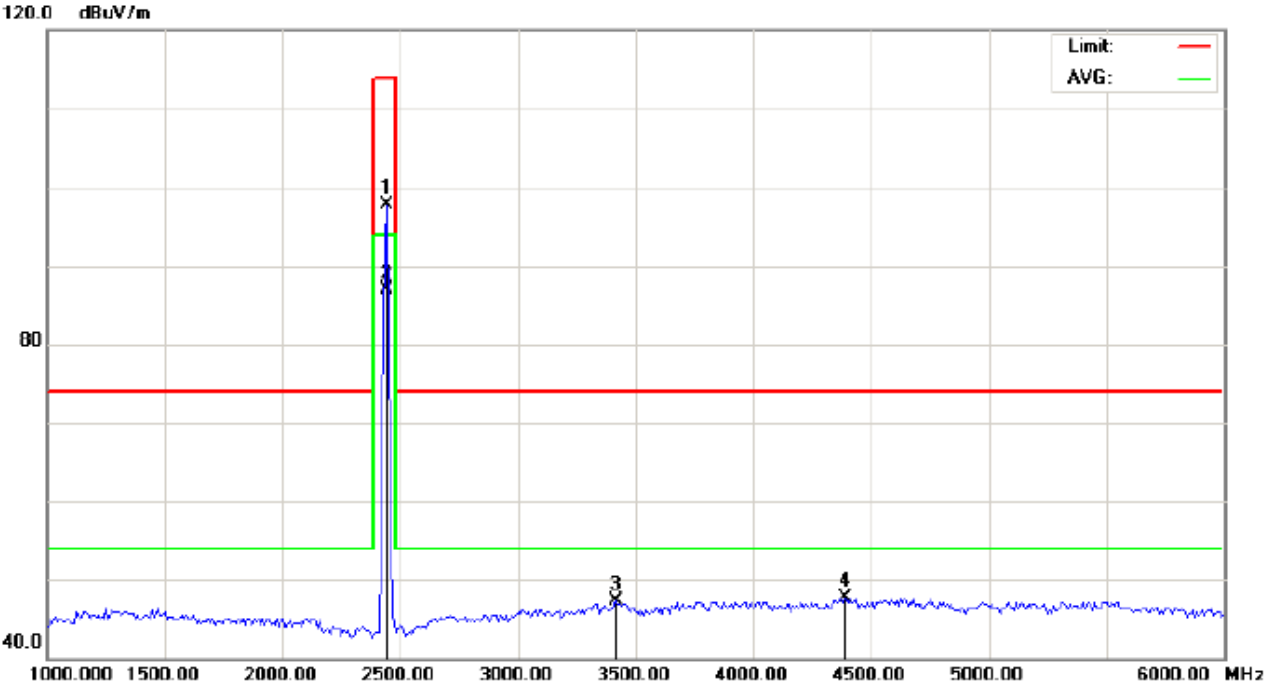

Site: site #1  
 Limit: FCC Class B 3M Radiation above 1GHZ(PK)-  
 EUT:Wireless Headphones  
 M/N:V202  
 Mode: Middle Channel TX  
 Note:


Polarization: *Vertical*  
 Power:  
 Distance: 3m

Temperature: 26  
 Humidity: 60 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2440.000	107.24	-9.63	97.61	114.00	-16.39	peak			
2	*	2440.000	96.47	-9.63	86.84	94.00	-7.16	AVG	100	246	
3		3416.667	55.23	-7.97	47.26	74.00	-26.74	peak			
4		4391.667	51.15	-3.48	47.67	74.00	-26.33	peak			

**RESULT: PASS**

RADIATED EMISSION TEST- (ABOVE 1GHZ)-HIGH CHANNEL-HORIZONTAL

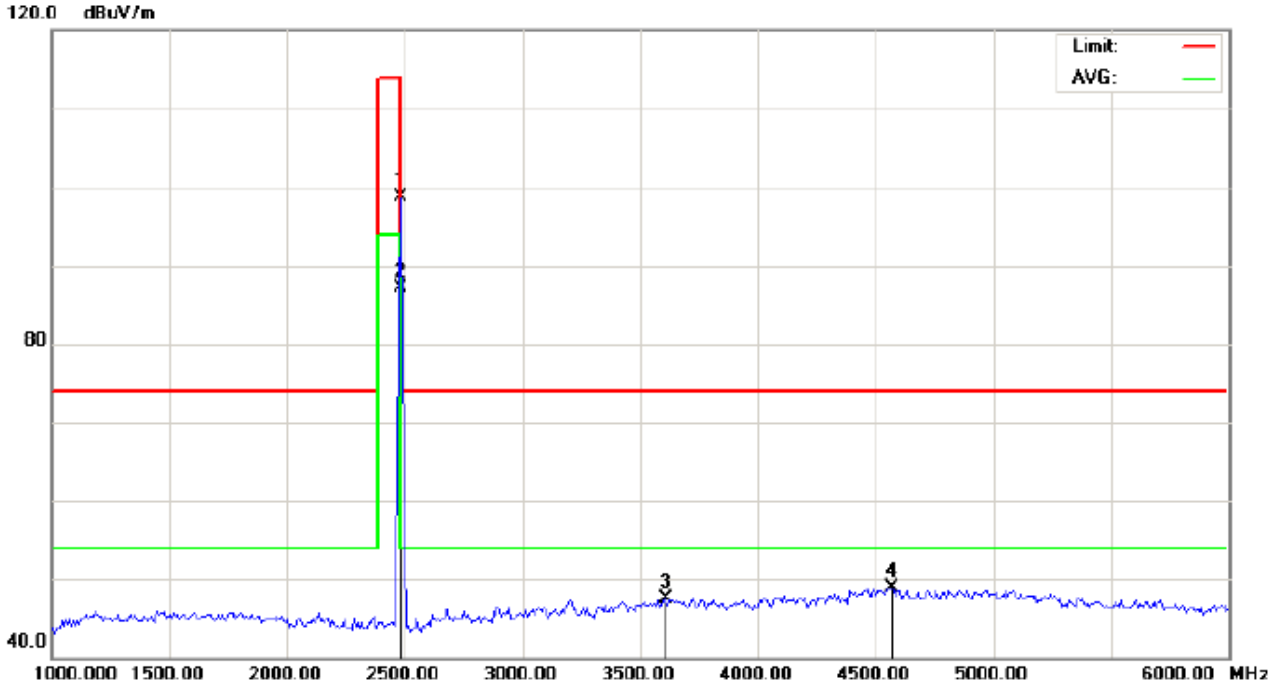

Site: site #1  
Limit: FCC Class B 3M Radiation above 1GHZ(PK)-  
EUT:Wireless Headphones  
M/N:V202  
Mode: High Channel TX  
Note:


Polarization: *Horizontal*  
Power:  
Distance: 3m

Temperature: 26  
Humidity: 60 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2480.000	108.37	-9.59	98.78	114.00	-15.22	peak			
2	*	2480.000	96.65	-9.59	87.06	94.00	-6.94	AVG	150	176	
3		3608.333	54.72	-7.22	47.50	74.00	-26.50	peak			
4		4566.667	51.78	-2.94	48.84	74.00	-25.16	peak			

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHZ)-HIGH CHANNEL- VERTICAL

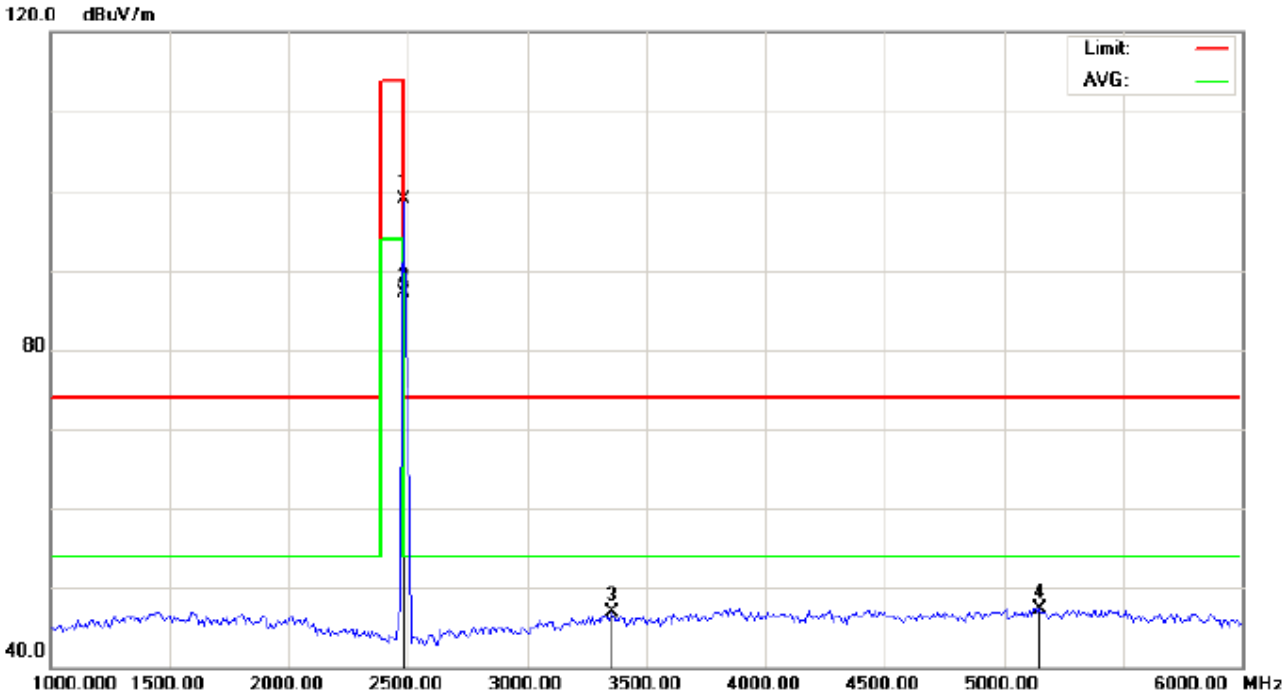

Site: site #1 Polarization: *Vertical* Temperature: 26  
 Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %  
 EUT:Wireless Headphones Distance: 3m  
 M/N:V202  
 Mode: High Channel TX  
 Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2480.000	108.41	-9.59	98.82	114.00	-15.18	peak			
2	*	2480.000	96.74	-9.59	87.15	94.00	-6.85	AVG	100	149	
3		3358.333	54.88	-8.02	46.86	74.00	-27.14	peak			
4		5150.000	49.15	-1.80	47.35	74.00	-26.65	peak			

**RESULT: PASS**

**Note:** 6~25GHz at least have 20dB margin. No recording in the test report.

Factor=Antenna Factor + Cable loss - Amplifier gain, Margin=Measurement-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

**Field strength of the fundamental signal**

**Peak value**

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	104.23	-9.68	94.55	114	-19.45	Horizontal
2402	104.27	-9.68	94.59	114	-19.41	Vertical
2440	107.29	-9.63	97.66	114	-16.34	Horizontal
2440	107.24	-9.63	97.61	114	-16.39	Vertical
2480	108.37	-9.59	98.78	114	-15.22	Horizontal
2480	108.41	-9.59	98.82	114	-15.18	Vertical

**Average value**

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	95.42	-9.68	85.74	94	-8.26	Horizontal
2402	95.49	-9.68	85.81	94	-8.19	Vertical
2440	96.54	-9.63	86.91	94	-7.09	Horizontal
2440	96.47	-9.63	86.84	94	-7.16	Vertical
2480	96.65	-9.59	87.06	94	-6.94	Horizontal
2480	96.74	-9.59	87.15	94	-6.85	Vertical

## 9. BAND EDGE EMISSION

### 9.1. MEASUREMENT PROCEDURE


1The EUT operates at hopping-off test mode. The lowest or highest channels are tested to verify the largest transmission and spurious emissions power at the continuous transmission mode.

2Max hold the trace of the setup 1, and the EUT operates at hopping-on test mode to verify the largest spurious emissions power.

3Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission


### 9.2 TEST SETUP

RADIATED EMISSION TEST SETUP

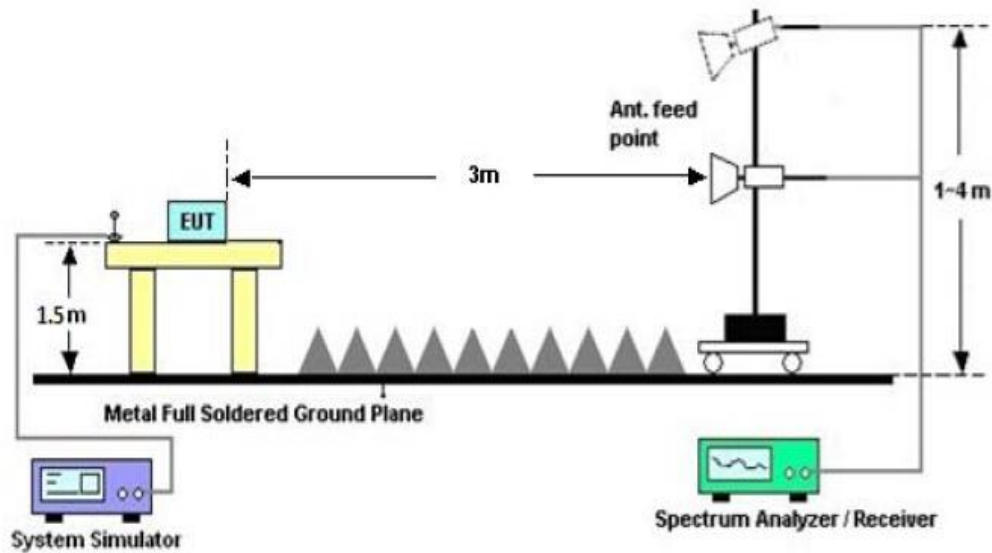

**9.3 RADIATED TEST RESULT**  
**(Worst modulation: GFSK)**  
**FOR BR/EDR**


TEST PLOT OF BAND EDGE FOR LOW CHANNEL-Horizontal

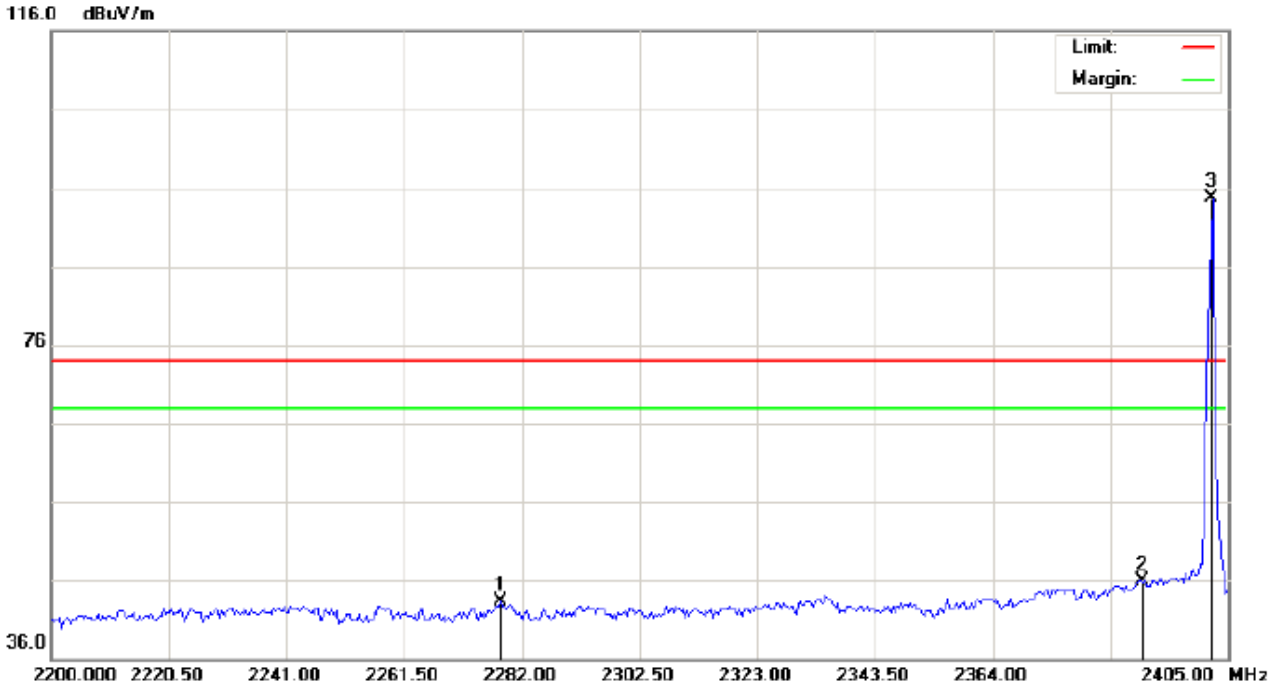

Site: site #1	Polarization: <i>Horizontal</i>	Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)	Power:	Humidity: 60 %
EUT:Wireless Headphones	Distance:	
M/N:V202		
Mode: Low Channel TX		
Note:		

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2278.242	33.13	10.19	43.32	74.00	-30.68	peak			
2		2390.000	35.62	10.31	45.93	74.00	-28.07	peak			
3	*	2402.000	84.41	10.32	94.73	74.00	20.73	peak			


TEST PLOT OF BAND EDGE FOR LOW CHANNEL -Vertical

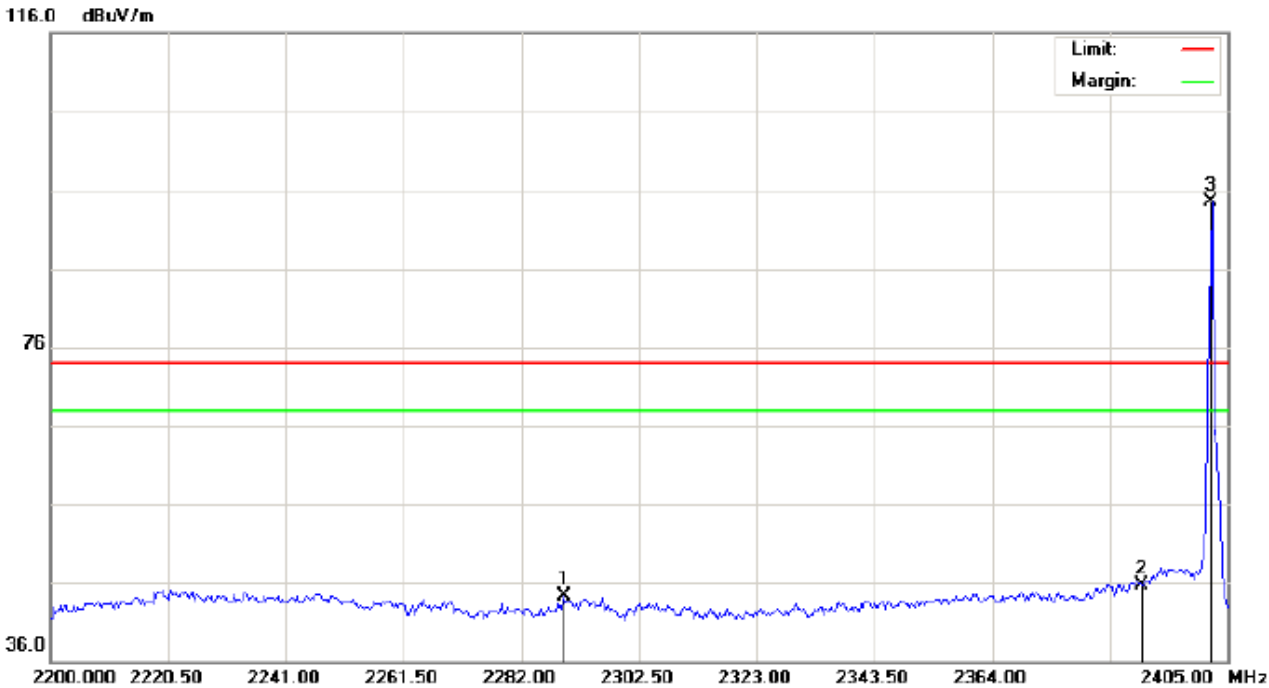

Site: site #1                      Polarization: *Vertical*                      Temperature: 26  
 Limit: FCC Class B 3M Radiation above 1GHZ(PK)      Power:                                      Humidity: 60 %  
 EUT:Wireless Headphones                      Distance:  
 M/N:V202  
 Mode: Low Channel TX  
 Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna	Table	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		Height	Degree	
1		2289.517	34.02	10.20	44.22	74.00	-29.78	peak	cm	degree	
2		2390.000	35.35	10.31	45.66	74.00	-28.34	peak			
3	*	2402.000	84.26	10.32	94.58	74.00	20.58	peak			

TEST PLOT OF BAND EDGE FOR HIGH CHANNEL -Horizontal

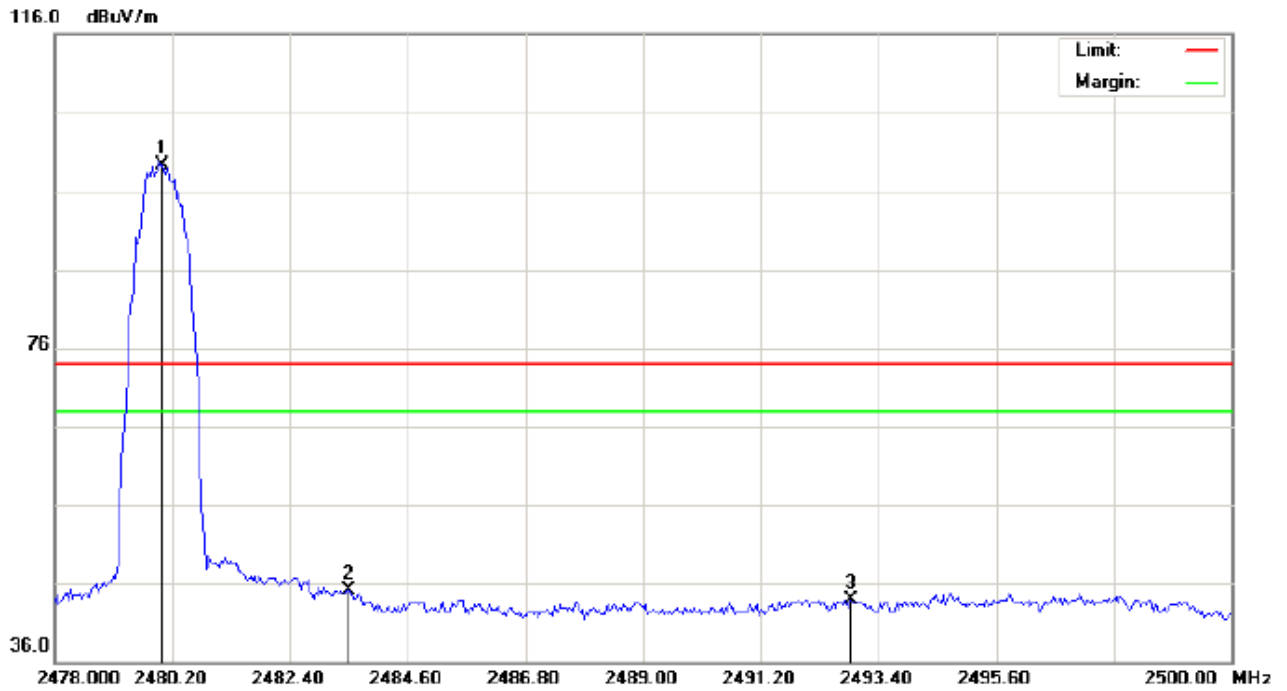


Site: site #1 Polarization: *Horizontal* Temperature: 26  
 Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %  
 EUT:Wireless Headphones Distance:  
 M/N:V202  
 Mode: High Channel TX  
 Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2480.000	88.96	10.41	99.37	74.00	25.37	peak			
2		2483.500	34.75	10.41	45.16	74.00	-28.84	peak			
3		2492.887	33.47	10.42	43.89	74.00	-30.11	peak			



TEST PLOT OF BAND EDGE FOR HIGH CHANNEL-Vertical

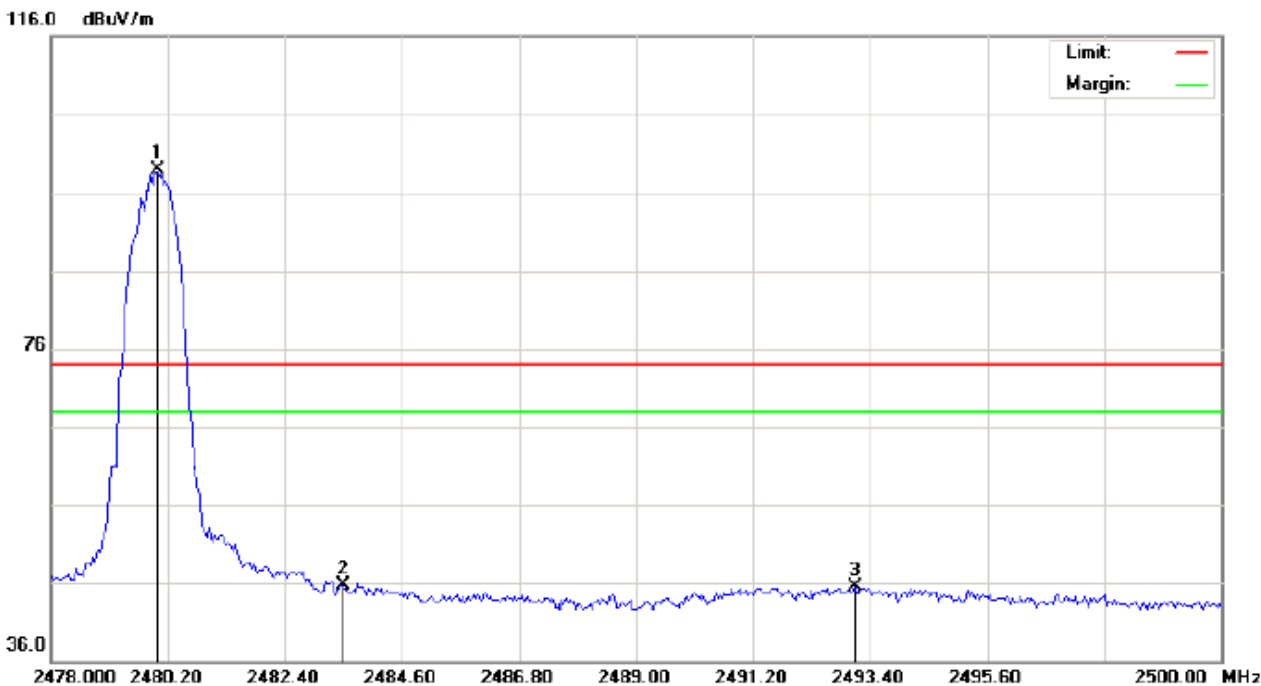

Site: site #1      Polarization: *Vertical*      Temperature: 26  
Limit: FCC Class B 3M Radiation above 1GHZ(PK)      Power:      Humidity: 60 %  
EUT:Wireless Headphones      Distance:  
M/N:V202  
Mode: High Channel TX  
Note:


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2480.000	88.45	10.41	98.86	74.00	24.86	peak			
2		2483.500	35.37	10.41	45.78	74.00	-28.22	peak			
3		2493.107	35.15	10.42	45.57	74.00	-28.43	peak			

**RESULT: PASS**

**Note:** The other modes radiation emission have enough 20dB margin.  
Factor=Antenna Factor + Cable loss - Amplifier gain, Over=Measure-Limit.  
The "Factor" value can be calculated automatically by software of measurement system.  
Hopping on mode and Hopping off mode have been tested, but only worst case reported.

FOR BLE


TEST PLOT OF BAND EDGE FOR LOW CHANNEL-Horizontal

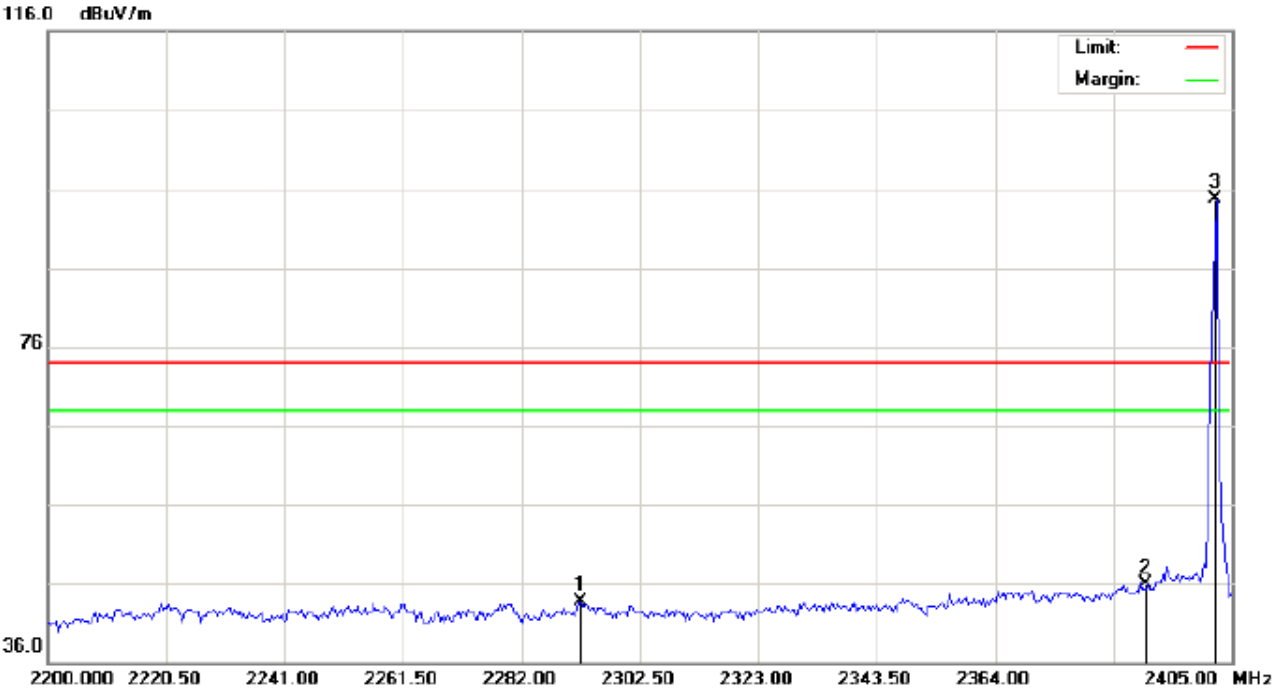

Site: site #1 Polarization: *Horizontal* Temperature: 26  
 Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %  
 EUT:Wireless Headphones Distance:  
 M/N:V202  
 Mode: Low Channel TX  
 Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2292.250	33.52	10.20	43.72	74.00	-30.28	peak			
2		2390.000	35.62	10.31	45.93	74.00	-28.07	peak			
3	*	2402.000	84.31	10.32	94.63	74.00	20.63	peak			

TEST PLOT OF BAND EDGE FOR LOW CHANNEL -Vertical

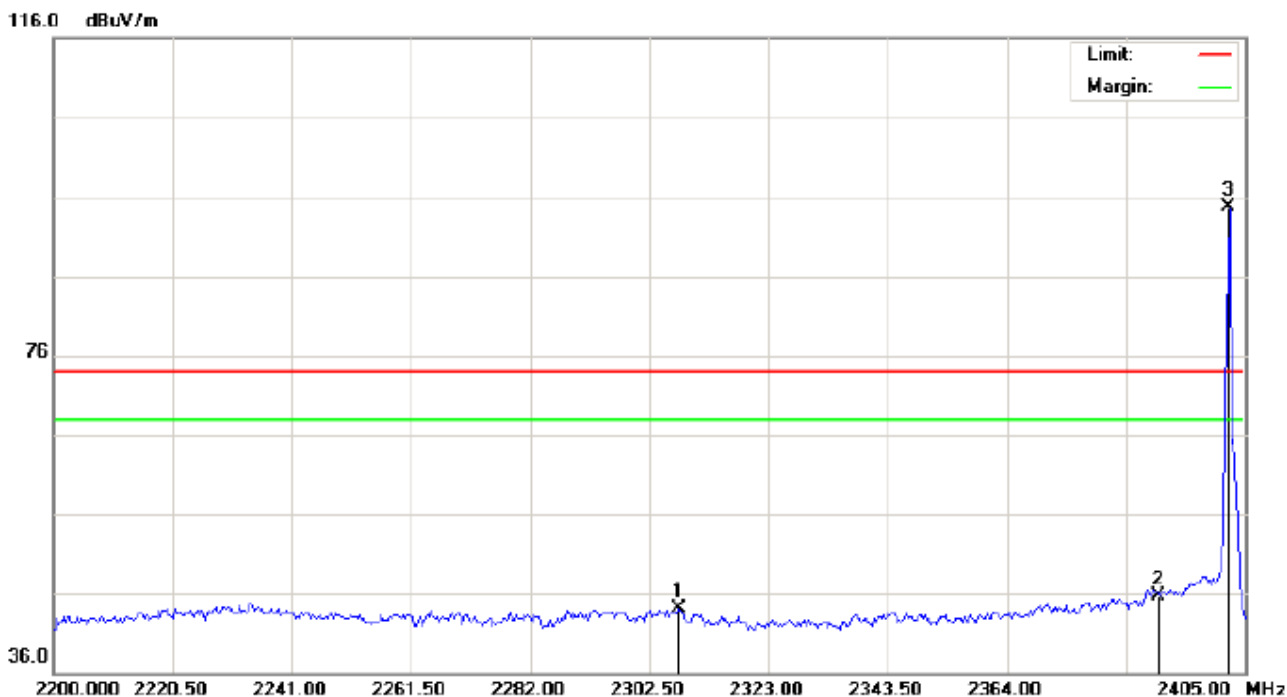


Site: site #1  
Limit: FCC Class B 3M Radiation above 1GHZ(PK)  
EUT:Wireless Headphones  
M/N:V202  
Mode: Low Channel TX  
Note:

Polarization: **Vertical**  
Power:  
Distance:

Temperature: 26  
Humidity: 60 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2307.625	33.84	10.22	44.06	74.00	-29.94	peak			
2		2390.000	35.35	10.31	45.66	74.00	-28.34	peak			
3	*	2402.000	84.36	10.32	94.68	74.00	20.68	peak			


TEST PLOT OF BAND EDGE FOR HIGH CHANNEL -Horizontal

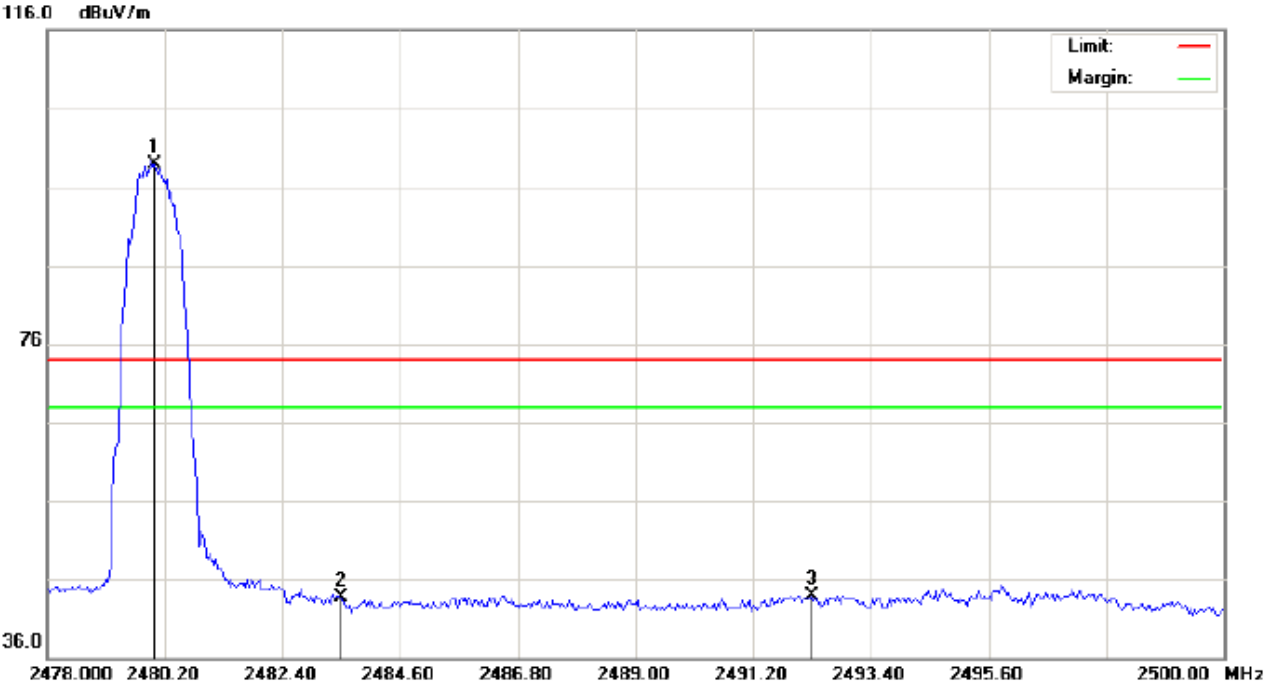

Site: site #1 Polarization: *Horizontal* Temperature: 26  
 Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %  
 EUT:Wireless Headphones Distance:  
 M/N:V202  
 Mode: High Channel TX  
 Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2480.000	88.44	10.41	98.85	74.00	24.85	peak			
2		2483.500	33.25	10.41	43.66	74.00	-30.34	peak			
3		2492.300	33.46	10.42	43.88	74.00	-30.12	peak			

TEST PLOT OF BAND EDGE FOR HIGH CHANNEL-Vertical

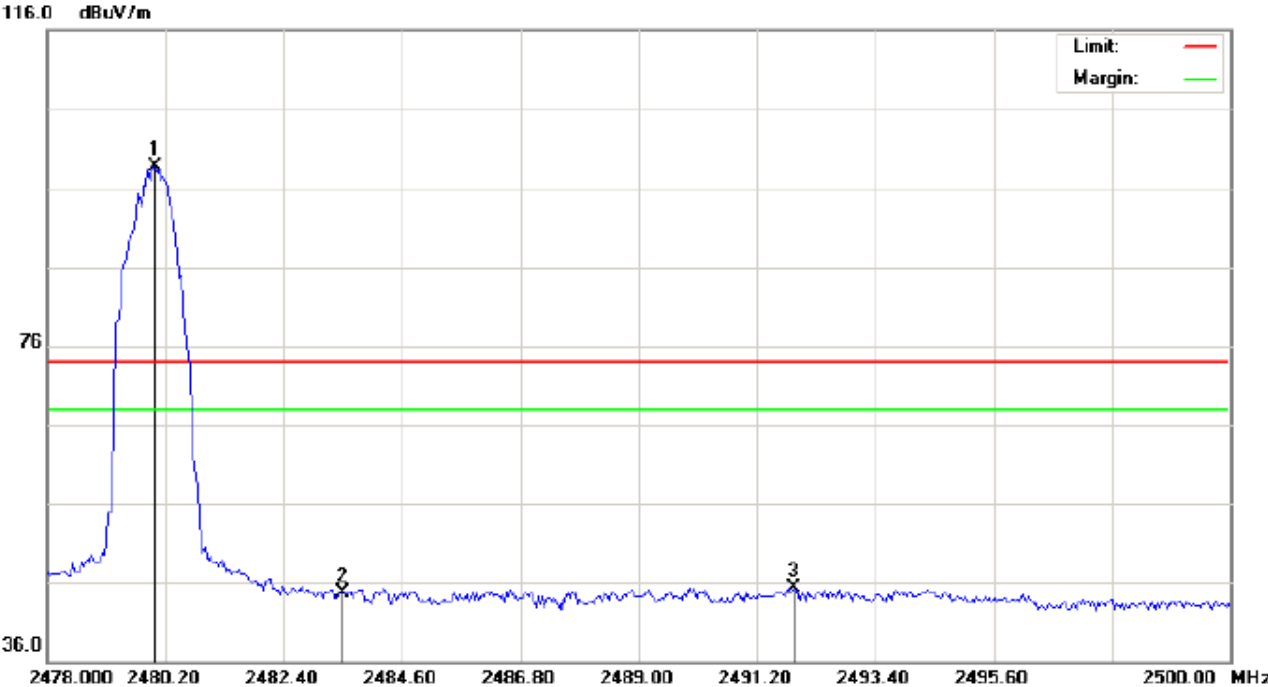

Site: site #1      Polarization: **Vertical**      Temperature: 26  
 Limit: FCC Class B 3M Radiation above 1GHZ(PK)      Power:      Humidity: 60 %  
 EUT:Wireless Headphones      Distance:  
 M/N:V202  
 Mode: High Channel TX  
 Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2480.000	88.38	10.41	98.79	74.00	24.79	peak			
2		2483.500	34.37	10.41	44.78	74.00	-29.22	peak			
3		2491.897	34.87	10.42	45.29	74.00	-28.71	peak			

**RESULT: PASS**

**Note:** The other modes radiation emission have enough 20dB margin.  
 Factor=Antenna Factor + Cable loss - Amplifier gain, Over=Measure-Limit.  
 The "Factor" value can be calculated automatically by software of measurement system.


**10. 20DB BANDWIDTH**

**10.1. MEASUREMENT PROCEDURE**

1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
2. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
3. Set Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hoping channel  
 RBW ≥ 1% of the 20 dB bandwidth, VBW ≥ RBW; Sweep = auto; Detector function = peak
4. Set SPA Trace 1 Max hold, then View.

**10.2. TEST SET-UP**

**(BLOCK DIAGRAM OF CONFIGURATION)**

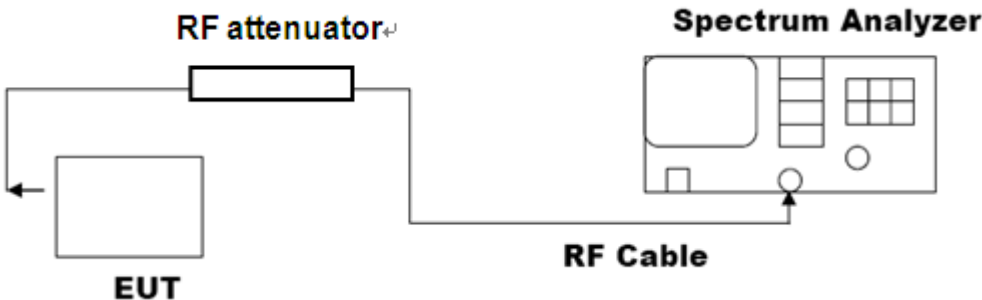


Note: The EUT has been used temporary antenna connector for testing.

**10.3. LIMITS AND MEASUREMENT RESULTS**


**FOR BR/EDR**

BLUETOOTH 1MBPS LIMITS AND MEASUREMENT RESULT				
Applicable Limits	Measurement Result			
	Test Data (MHz)			Result
		99%OBW (MHz)	-20dB BW(MHz)	
N/A	Low Channel	0.930	1.092	PASS
	Middle Channel	0.921	1.102	PASS
	High Channel	0.920	1.095	PASS


TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

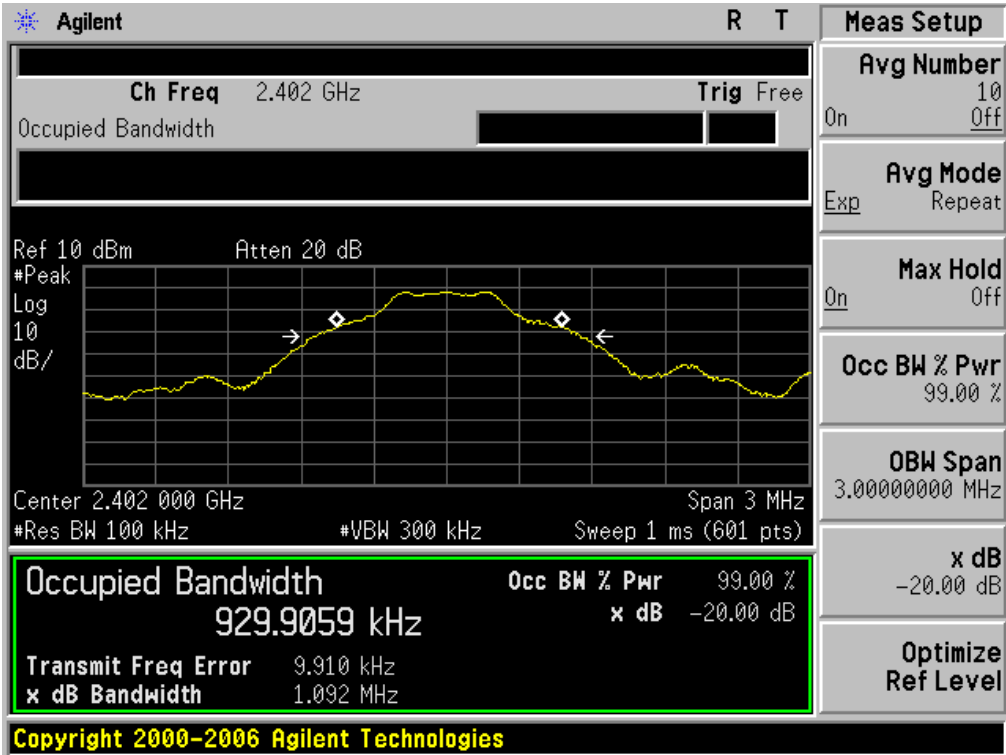

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

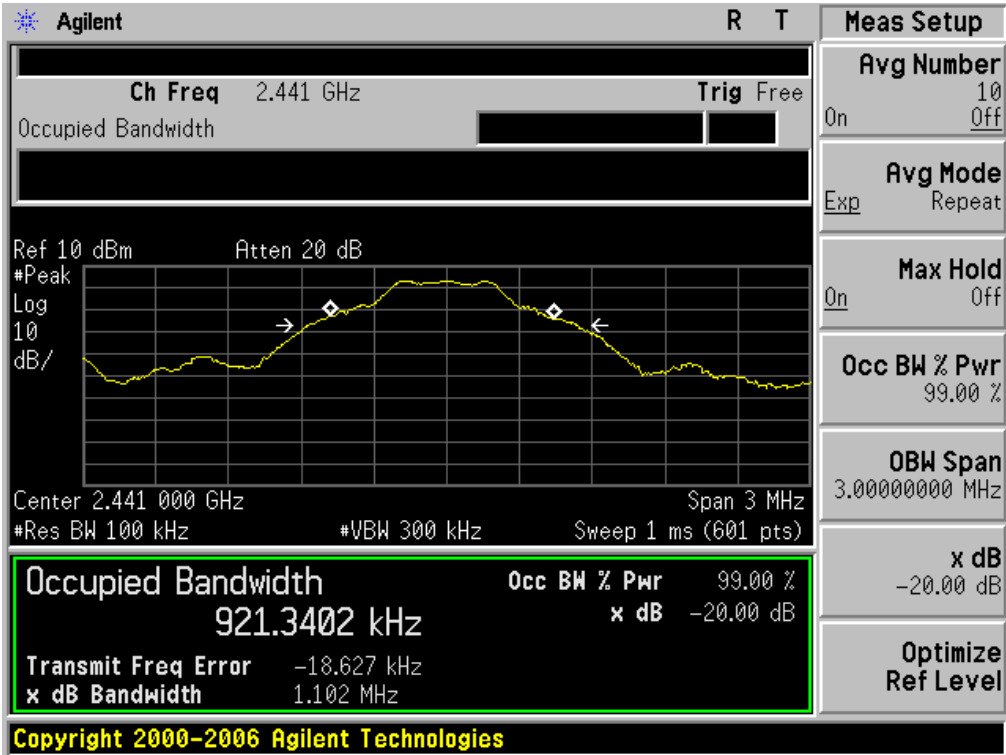


TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

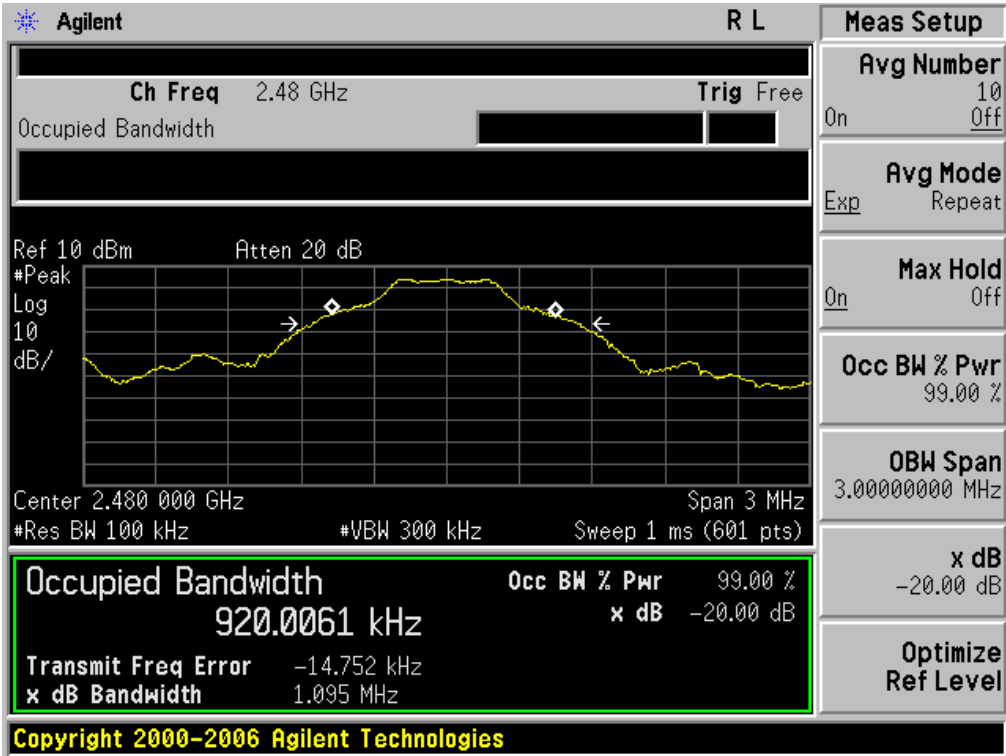




BLUETOOTH 2MBPS LIMITS AND MEASUREMENT RESULT				
Applicable Limits	Measurement Result			
	Test Data (MHz)			Result
		99%OBW (MHz)	-20dB BW(MHz)	
N/A	Low Channel	1.183	1.335	PASS
	Middle Channel	1.194	1.341	PASS
	High Channel	1.194	1.343	PASS


TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

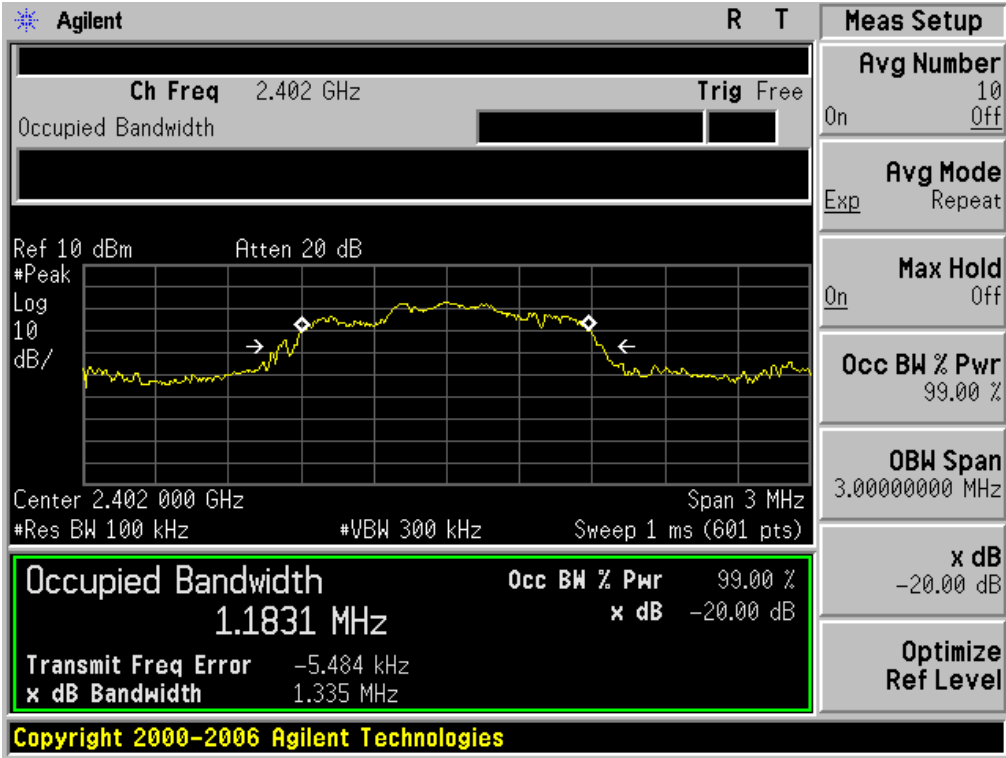

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

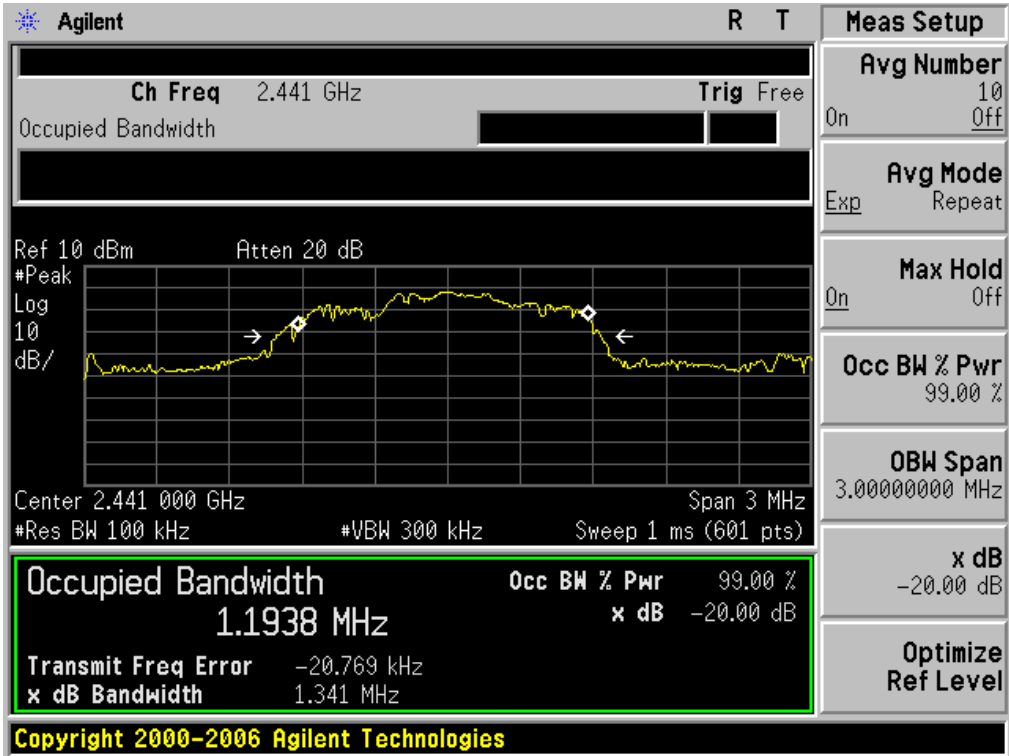


TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

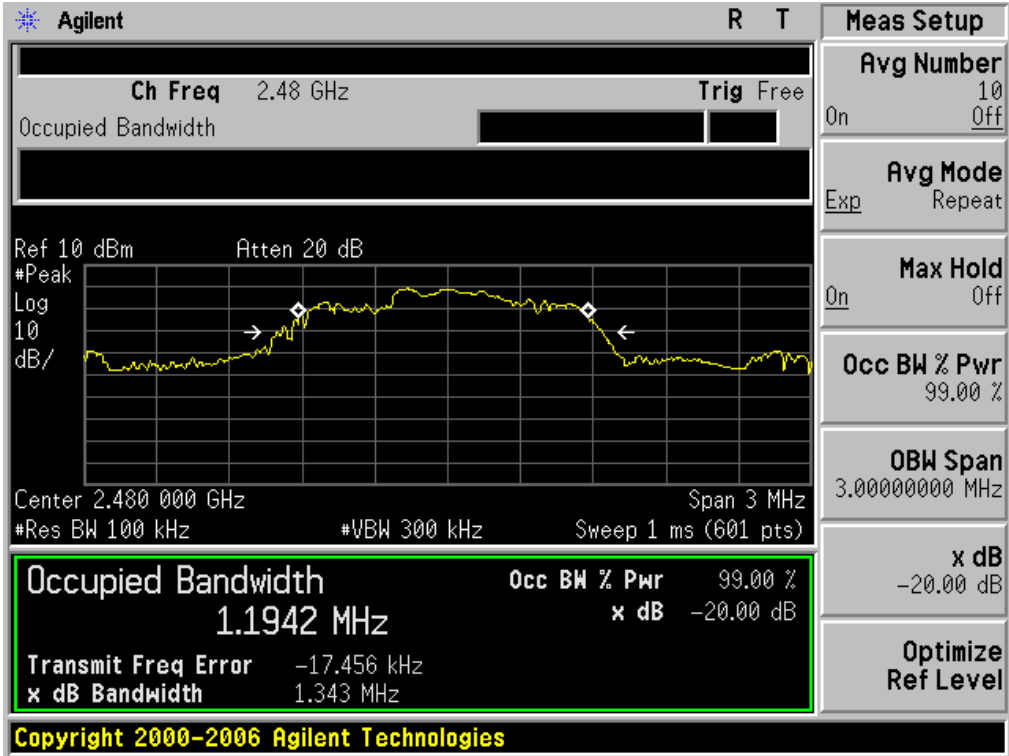


BLUETOOTH 3MBPS LIMITS AND MEASUREMENT RESULT				
Applicable Limits	Measurement Result			
	Test Data (MHz)			Result
		99%OBW (MHz)	-20dB BW(MHz)	
N/A	Low Channel	1.158	1.297	PASS
	Middle Channel	1.156	1.267	PASS
	High Channel	1.156	1.262	PASS


TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

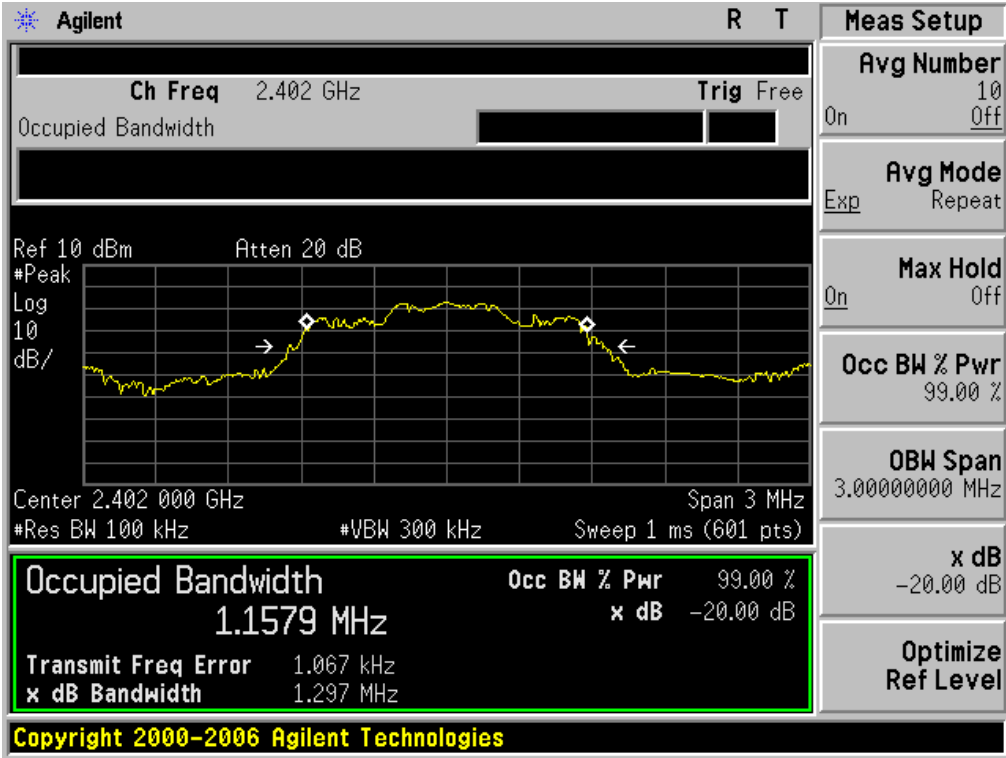

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

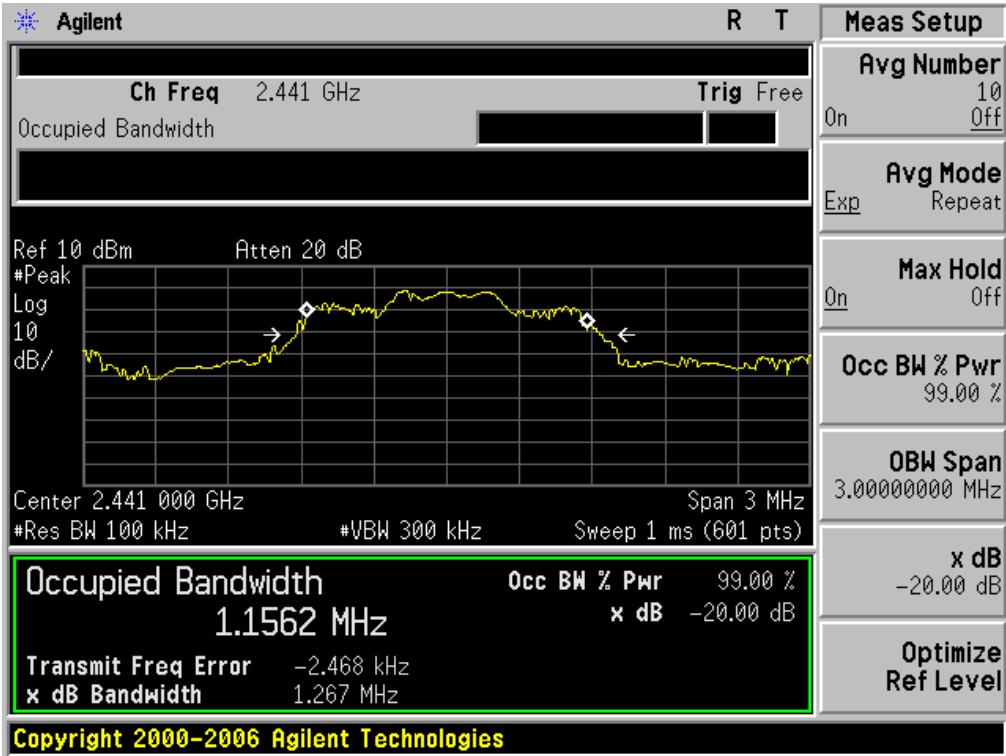


TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

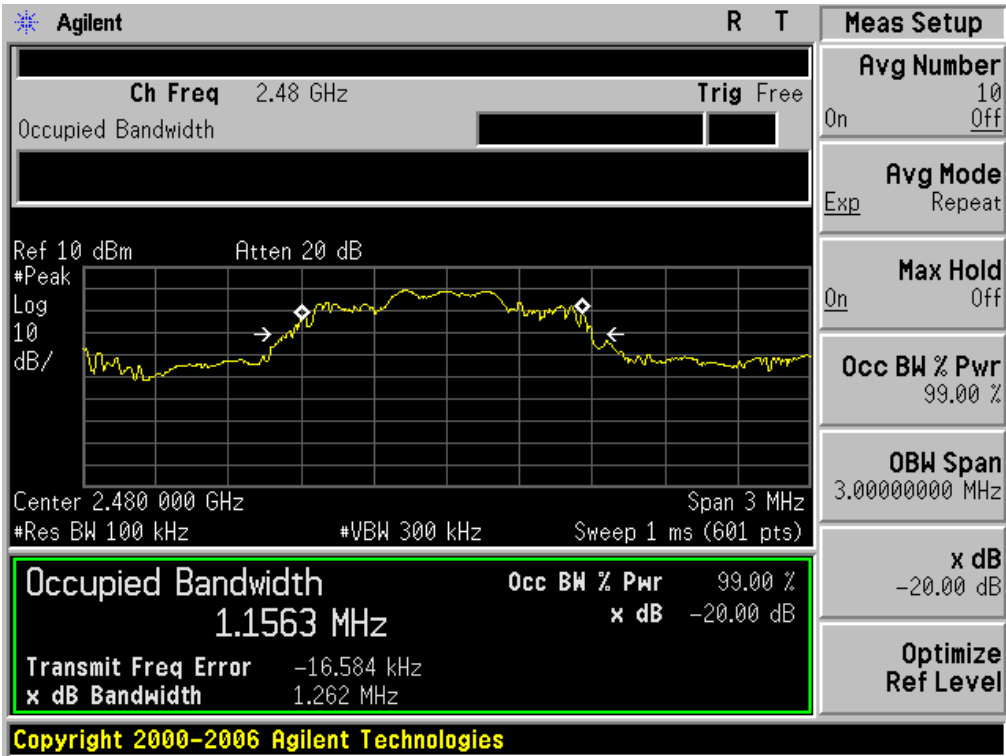


FOR BLE

BLUETOOTH 1MBPS LIMITS AND MEASUREMENT RESULT				
Applicable Limits	Measurement Result			
	Test Data (MHz)			Result
		99%OBW (MHz)	-20dB BW(MHz)	
N/A	Low Channel	1.047	1.206	PASS
	Middle Channel	1.045	1.208	PASS
	High Channel	1.046	1.208	PASS


TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

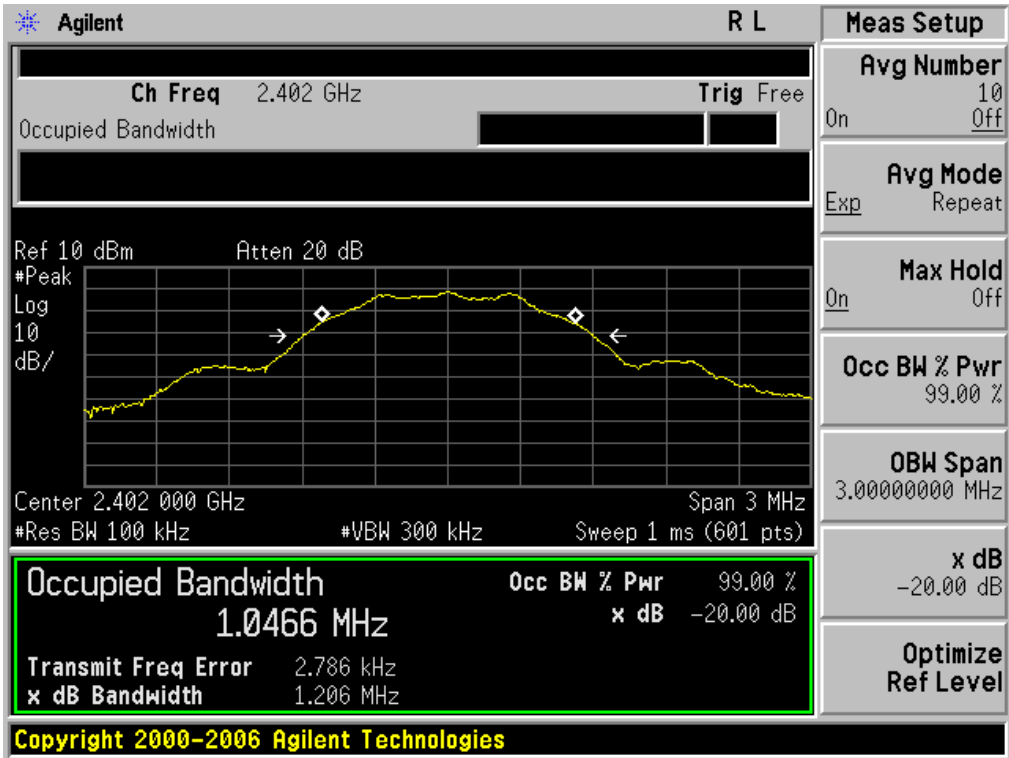

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

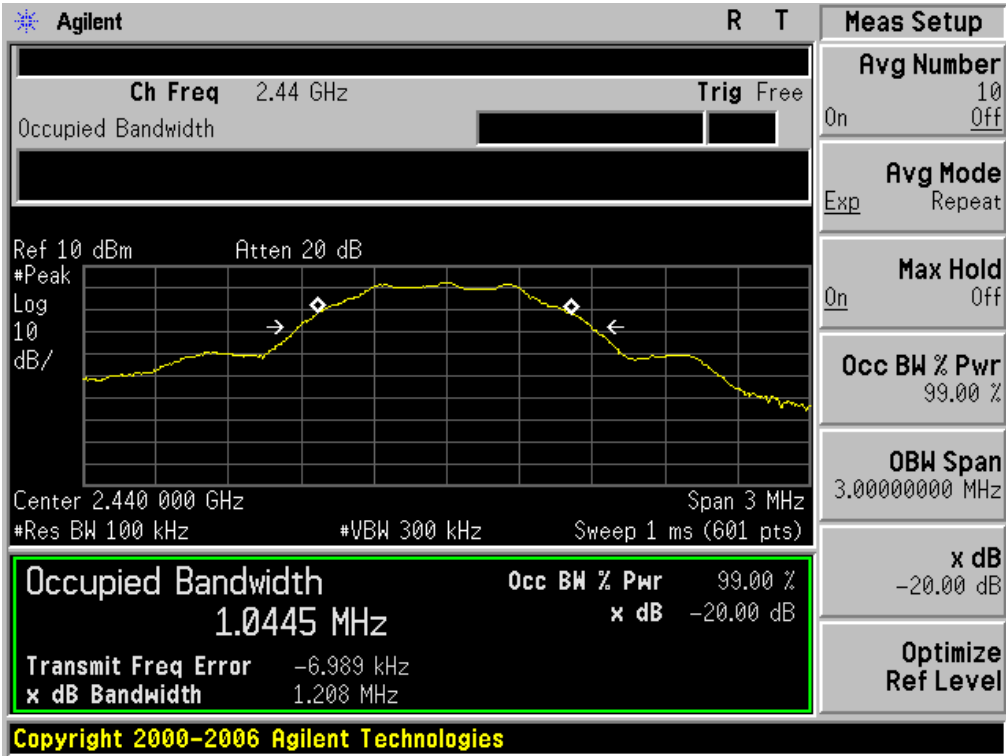

TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

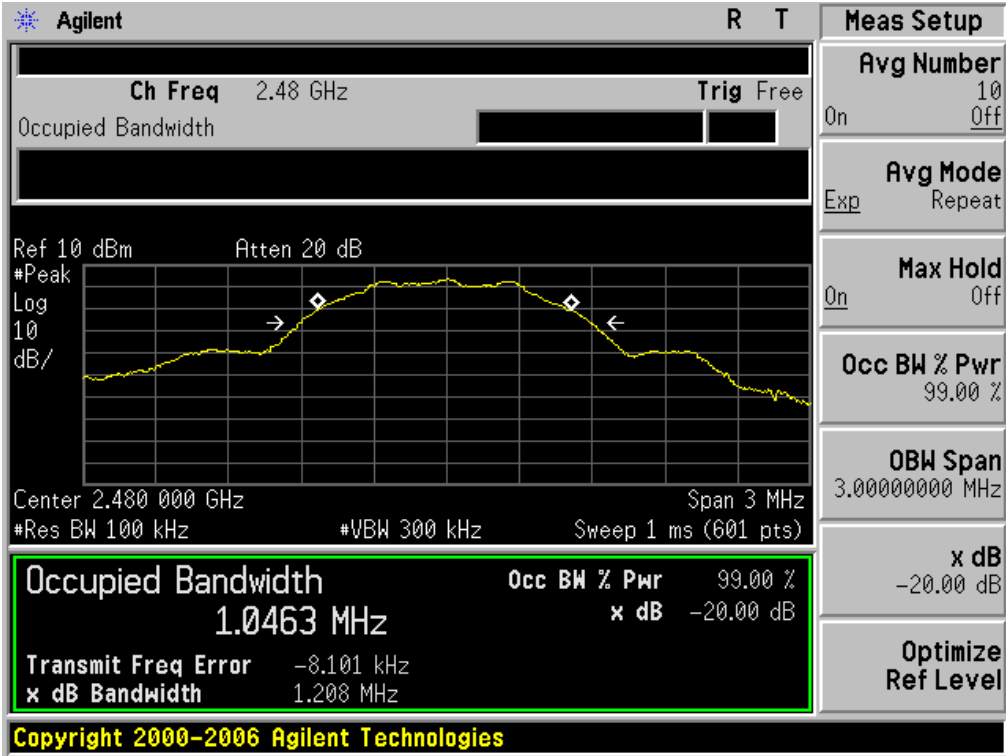

**11. FCC LINE CONDUCTED EMISSION TEST**


**11.1. LIMITS OF LINE CONDUCTED EMISSION TEST**

Frequency	Maximum RF Line Voltage	
	Q.P.( dBuV)	Average( dBuV)
150kHz~500kHz	66-56	56-46
500kHz~5MHz	56	46
5MHz~30MHz	60	50

Note:

1. The lower limit shall apply at the transition frequency.
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

**11.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST**

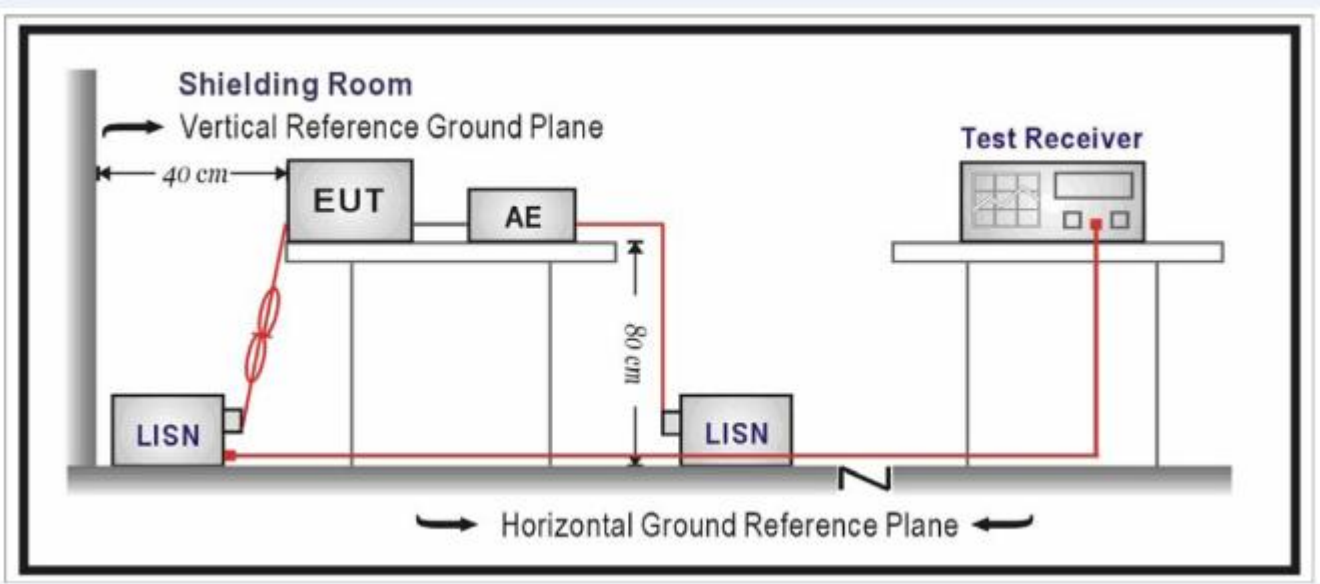

### **11.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST**

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
2. Support equipment, if needed, was placed as per ANSI C63.10.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
4. All support equipments received AC120V/60Hz power from a LISN, if any.
5. The EUT received DC charging voltage by adapter or PC which received 120V/60Hz power by a LISN.
6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.
9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

### **11.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST**

1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less -2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
3. The test data of the worst case condition(s) was reported on the Summary Data page.




**11.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST**

**By adapter(worst case)**

**Test mode: BT Link with charging**

**FOR BR/EDR**

Line Conducted Emission Test Line 1-L

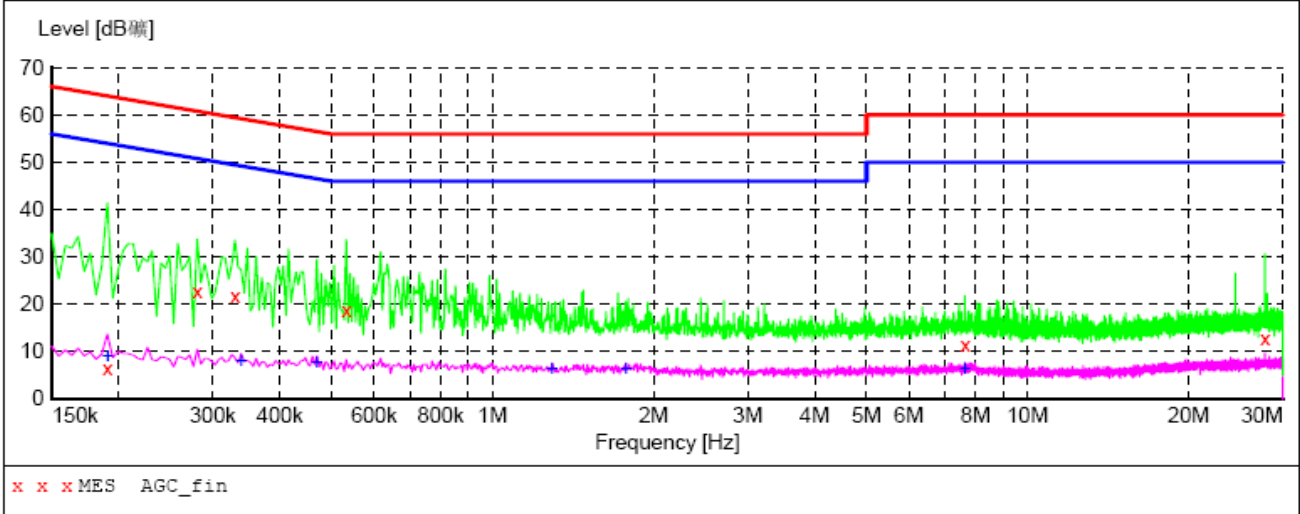

**MEASUREMENT RESULT: "AGC\_fin"**

2016/6/30 14:18


Frequency	Level	Transd	Limit	Margin	Detector	Line	PE	AUX STATE
MHz	dBμV	dB	dBμV	dB				
0.190500	6.40	10.3	64	57.6	QP	L1	FLO	ON
0.280500	22.60	10.3	61	38.2	QP	L1	FLO	ON
0.330000	21.70	10.3	60	37.8	QP	L1	FLO	ON
0.532500	18.60	10.3	56	37.4	QP	L1	FLO	ON
7.638000	11.50	10.7	60	48.5	QP	L1	FLO	ON
27.775500	12.60	11.8	60	47.4	QP	L1	FLO	ON

**MEASUREMENT RESULT: "AGC\_fin2"**

2016/6/30 14:18

Frequency	Level	Transd	Limit	Margin	Detector	Line	PE	AUX STATE
MHz	dBμV	dB	dBμV	dB				
0.190500	9.10	10.3	54	44.9	AV	L1	FLO	ON
0.339000	8.00	10.3	49	41.2	AV	L1	FLO	ON
0.469500	7.60	10.3	47	38.9	AV	L1	FLO	ON
1.293000	6.50	10.4	46	39.5	AV	L1	FLO	ON
1.774500	6.40	10.4	46	39.6	AV	L1	FLO	ON
7.638000	6.30	10.7	50	43.7	AV	L1	FLO	ON

Line Conducted Emission Test Line 2-N

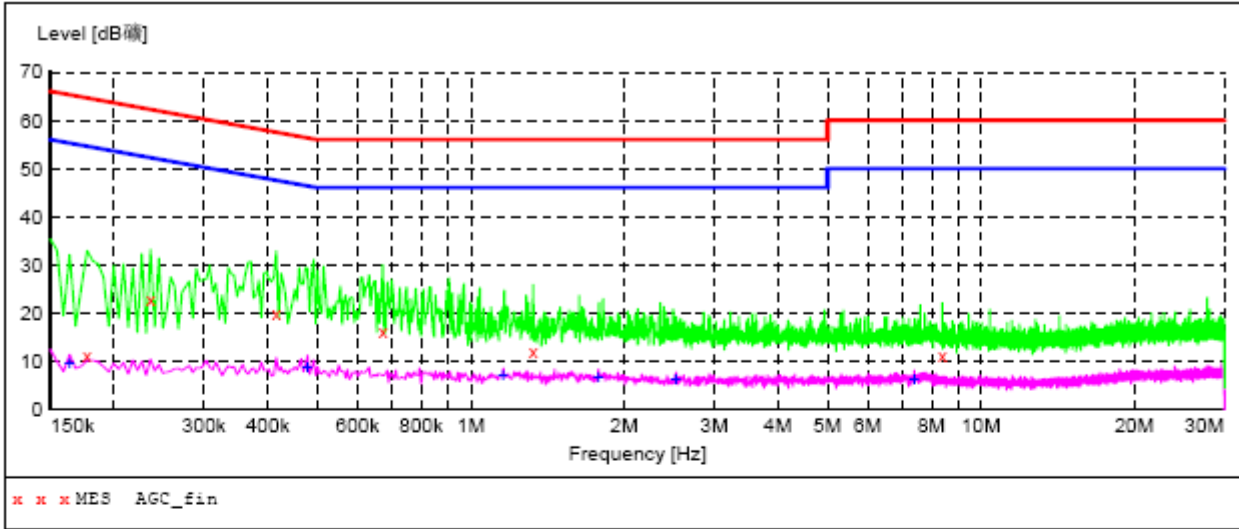

**MEASUREMENT RESULT: "AGC\_fin"**

2016/6/30 14:13

Frequency	Level	Transd	Limit	Margin	Detector	Line	PE	AUX STATE
MHz	dB	dB	dB	dB				
0.177000	11.20	10.3	65	53.4	QP	N	FLO	ON
0.235500	22.80	10.3	62	39.5	QP	N	FLO	ON
0.415500	20.00	10.3	58	37.5	QP	N	FLO	ON
0.672000	16.10	10.3	56	39.9	QP	N	FLO	ON
1.324500	11.80	10.4	56	44.2	QP	N	FLO	ON
8.394000	11.10	10.7	60	48.9	QP	N	FLO	ON


**MEASUREMENT RESULT: "AGC\_fin2"**

2016/6/30 14:13

Frequency	Level	Transd	Limit	Margin	Detector	Line	PE	AUX STATE
MHz	dB	dB	dB	dB				
0.163500	9.70	10.3	55	45.6	AV	N	FLO	ON
0.478500	8.60	10.3	46	37.8	AV	N	FLO	ON
1.158000	6.90	10.4	46	39.1	AV	N	FLO	ON
1.779000	6.50	10.4	46	39.5	AV	N	FLO	ON
2.526000	6.00	10.5	46	40.0	AV	N	FLO	ON
7.399500	6.40	10.7	50	43.6	AV	N	FLO	ON

FOR BLE

Line Conducted Emission Test Line 1-L

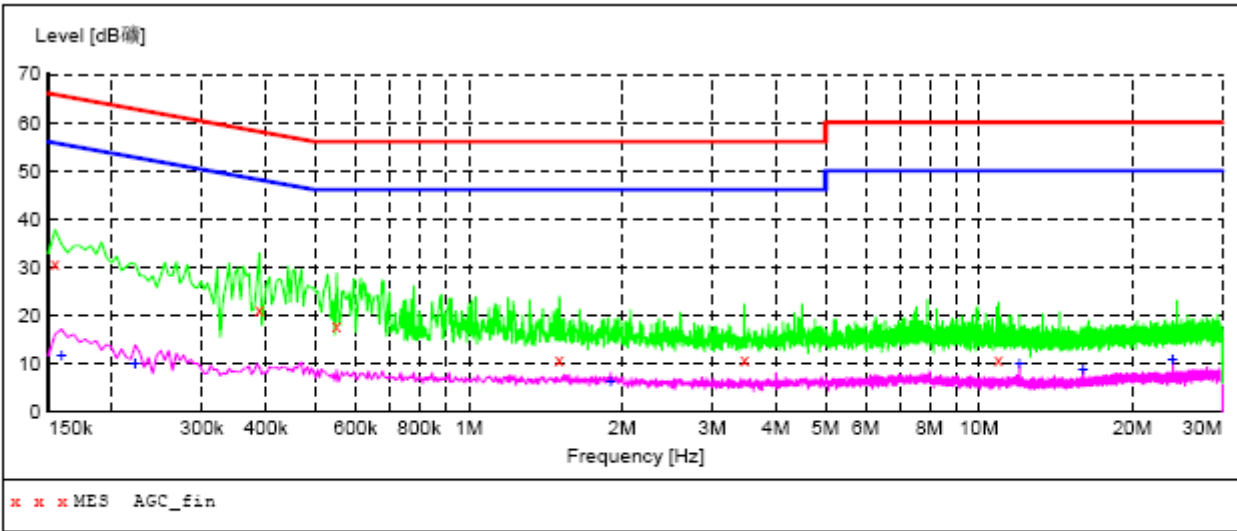

MEASUREMENT RESULT: "AGC\_fin"

2016/6/30 13:59


Frequency	Level	Transd	Limit	Margin	Detector	Line	PE	AUX STATE
MHz	dB	dB	dB	dB				
0.154500	30.60	10.3	66	35.2	QP	L1	FLO	ON
0.388500	21.20	10.3	58	36.9	QP	L1	FLO	ON
0.550500	18.00	10.3	56	38.0	QP	L1	FLO	ON
1.504500	10.90	10.4	56	45.1	QP	L1	FLO	ON
3.466500	10.80	10.5	56	45.2	QP	L1	FLO	ON
10.923000	10.80	10.8	60	49.2	QP	L1	FLO	ON

MEASUREMENT RESULT: "AGC\_fin2"

2016/6/30 13:59

Frequency	Level	Transd	Limit	Margin	Detector	Line	PE	AUX STATE
MHz	dB	dB	dB	dB				
0.159000	11.70	10.3	56	43.8	AV	L1	FLO	ON
0.222000	10.10	10.3	53	42.6	AV	L1	FLO	ON
1.896000	6.40	10.4	46	39.6	AV	L1	FLO	ON
11.998500	10.00	10.9	50	40.0	AV	L1	FLO	ON
15.999000	8.60	11.3	50	41.4	AV	L1	FLO	ON
24.000000	10.80	11.9	50	39.2	AV	L1	FLO	ON

Line Conducted Emission Test Line 2-N

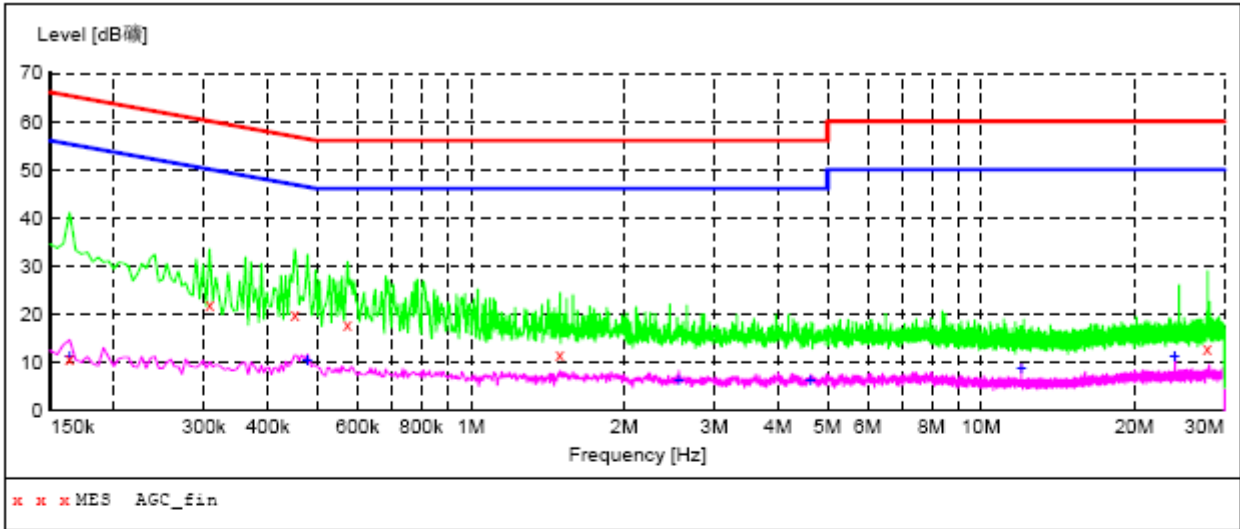

**MEASUREMENT RESULT: "AGC\_fin"**

2016/6/30 14:06

Frequency	Level	Transd	Limit	Margin	Detector	Line	PE	AUX STATE
MHz	dB	dB	dB	dB				
0.163500	10.80	10.3	65	54.5	QP	N	FLO	ON
0.307500	22.20	10.3	60	37.8	QP	N	FLO	ON
0.451500	19.90	10.3	57	36.9	QP	N	FLO	ON
0.573000	17.80	10.3	56	38.2	QP	N	FLO	ON
1.495500	11.60	10.4	56	44.4	QP	N	FLO	ON
27.771000	12.70	11.8	60	47.3	QP	N	FLO	ON

**MEASUREMENT RESULT: "AGC\_fin2"**


2016/6/30 14:06



Frequency	Level	Transd	Limit	Margin	Detector	Line	PE	AUX STATE
MHz	dB	dB	dB	dB				
0.163500	11.10	10.3	55	44.2	AV	N	FLO	ON
0.478500	10.20	10.3	46	36.2	AV	N	FLO	ON
2.557500	6.40	10.5	46	39.6	AV	N	FLO	ON
4.641000	6.40	10.6	46	39.6	AV	N	FLO	ON
11.998500	8.80	10.9	50	41.2	AV	N	FLO	ON
24.000000	11.20	11.9	50	38.8	AV	N	FLO	ON

**APPENDIX A: PHOTOGRAPHS OF TEST SETUP**  
FCC LINE CONDUCTED EMISSION TEST SETUP



FCC RADIATED EMISSION TEST SETUP

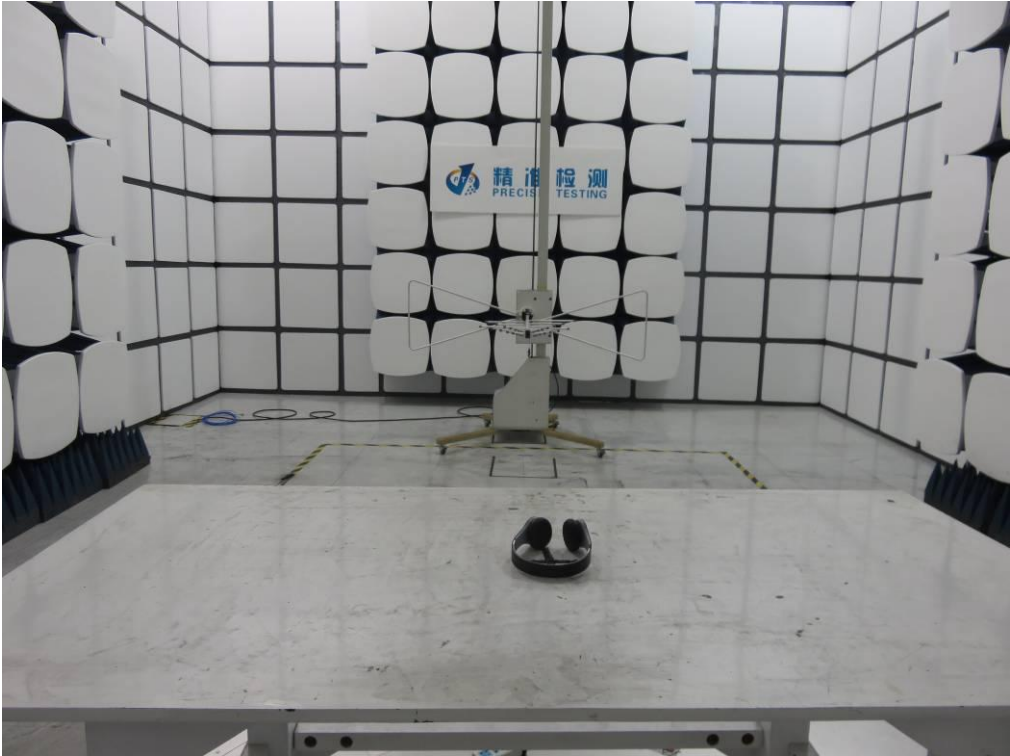

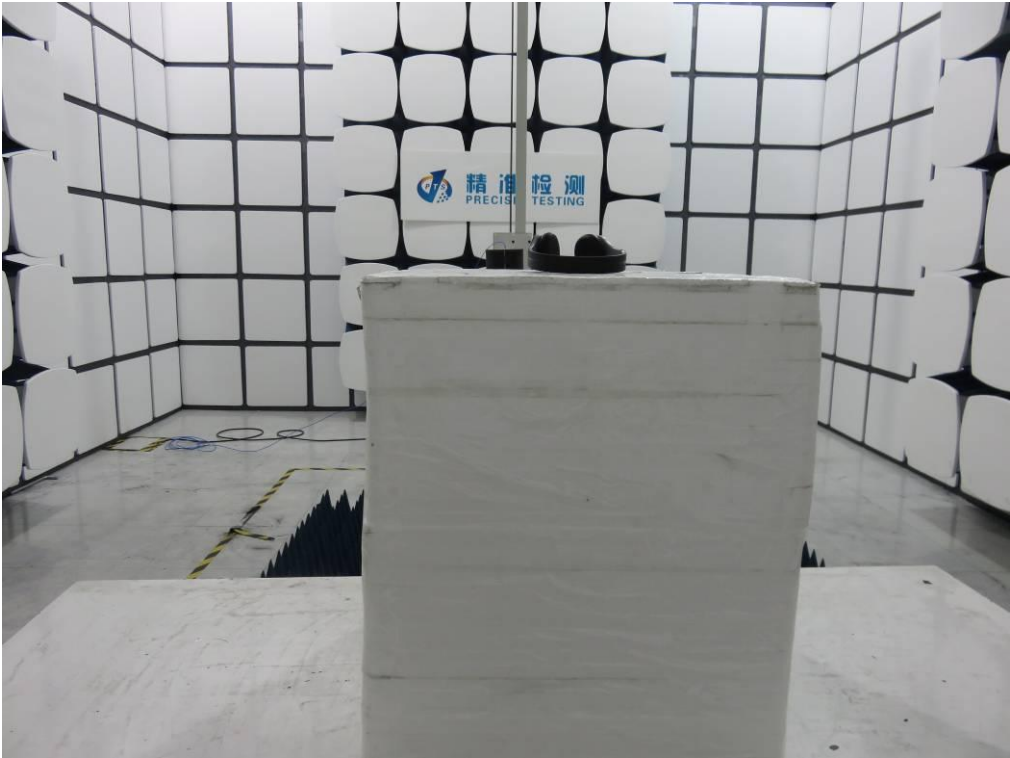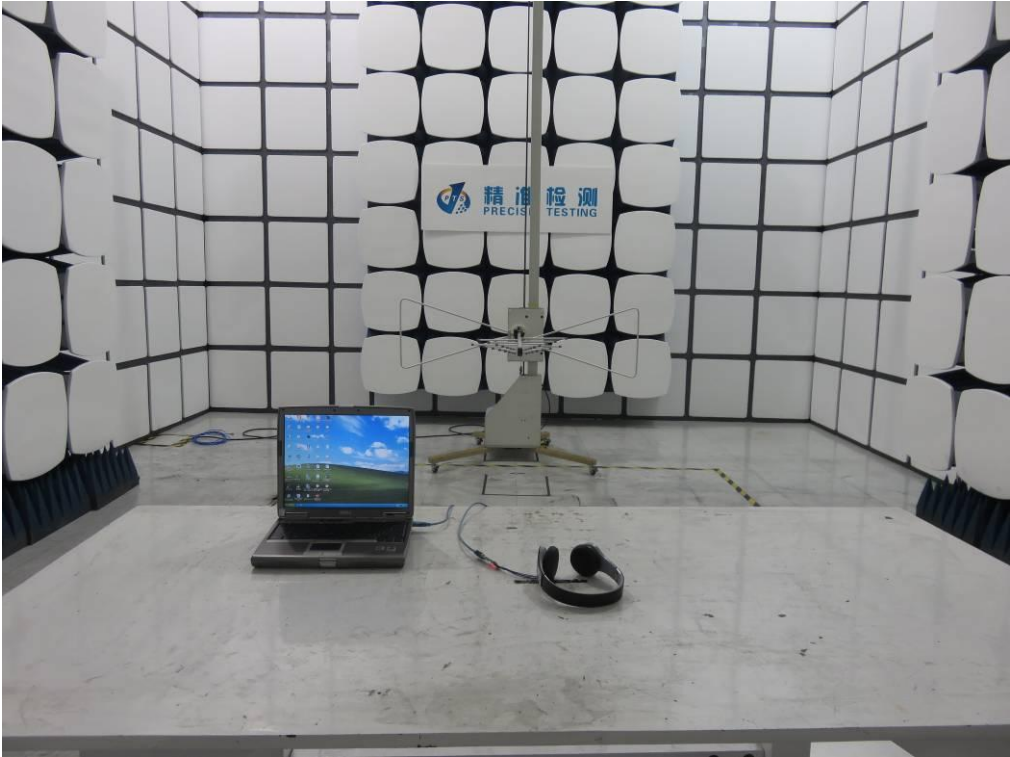



**APPENDIX B: PHOTOGRAPHS OF EUT**  
TOP VIEW OF EUT



BOTTOM VIEW OF EUT





FRONT VIEW OF EUT



BACK VIEW OF EUT



LEFT VIEW OF EUT



RIGHT VIEW OF EUT




VIEW OF EUT (PORT)




OPEN VIEW OF EUT




INTERNAL VIEW OF EUT-1

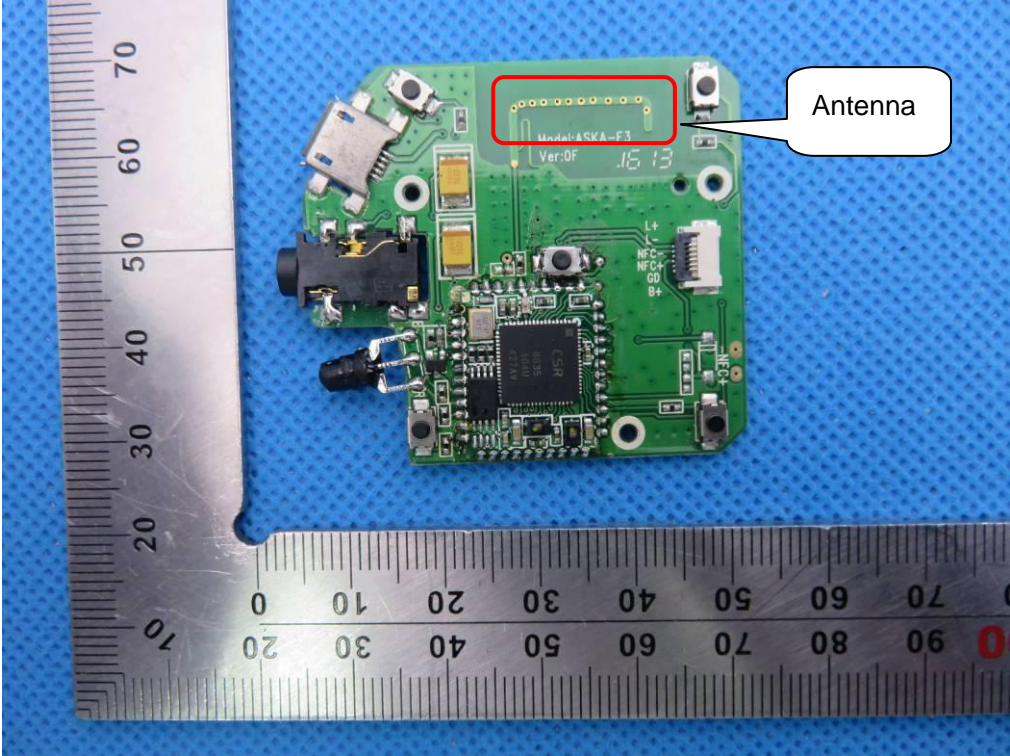


INTERNAL VIEW OF EUT-2

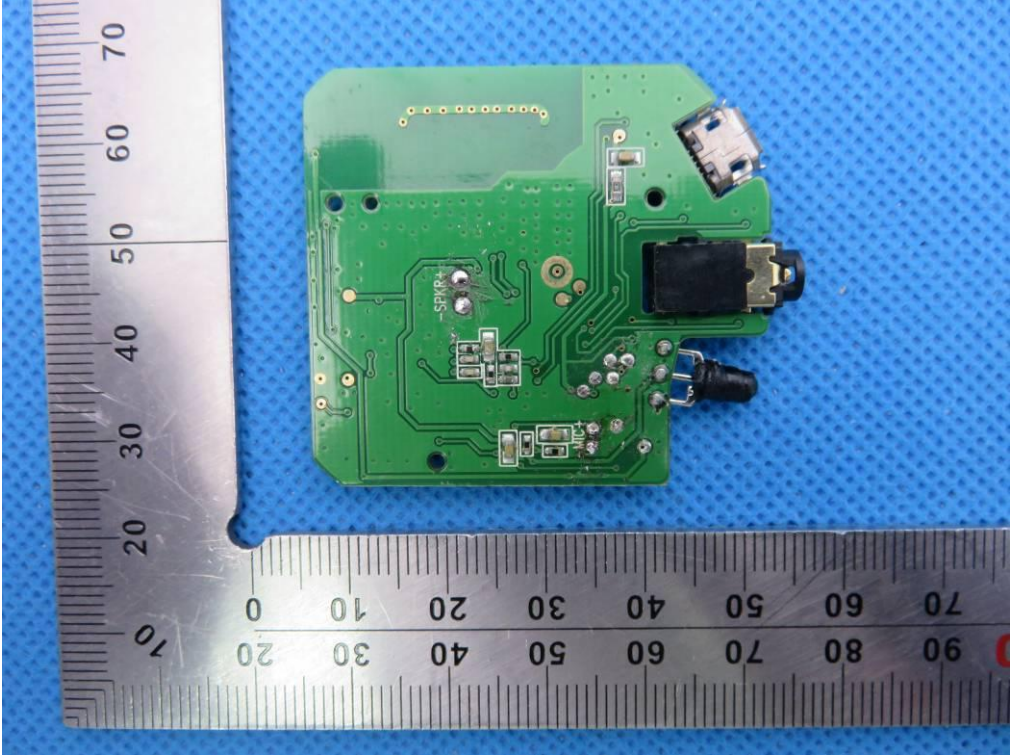


INTERNAL VIEW OF EUT-3

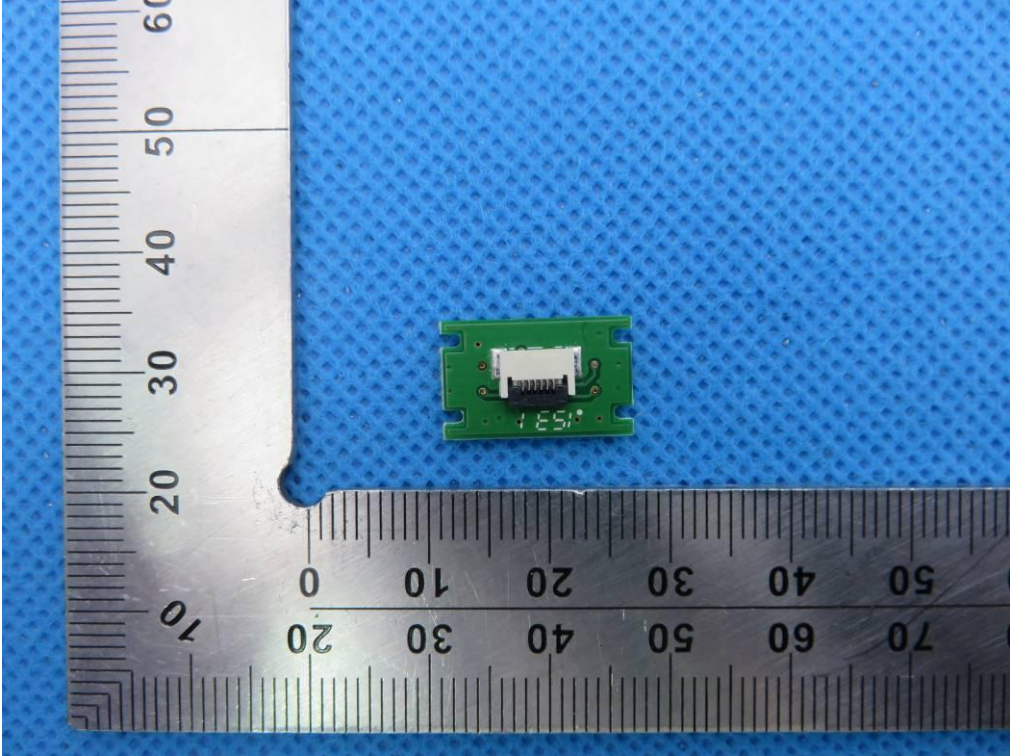

INTERNAL VIEW OF EUT-4

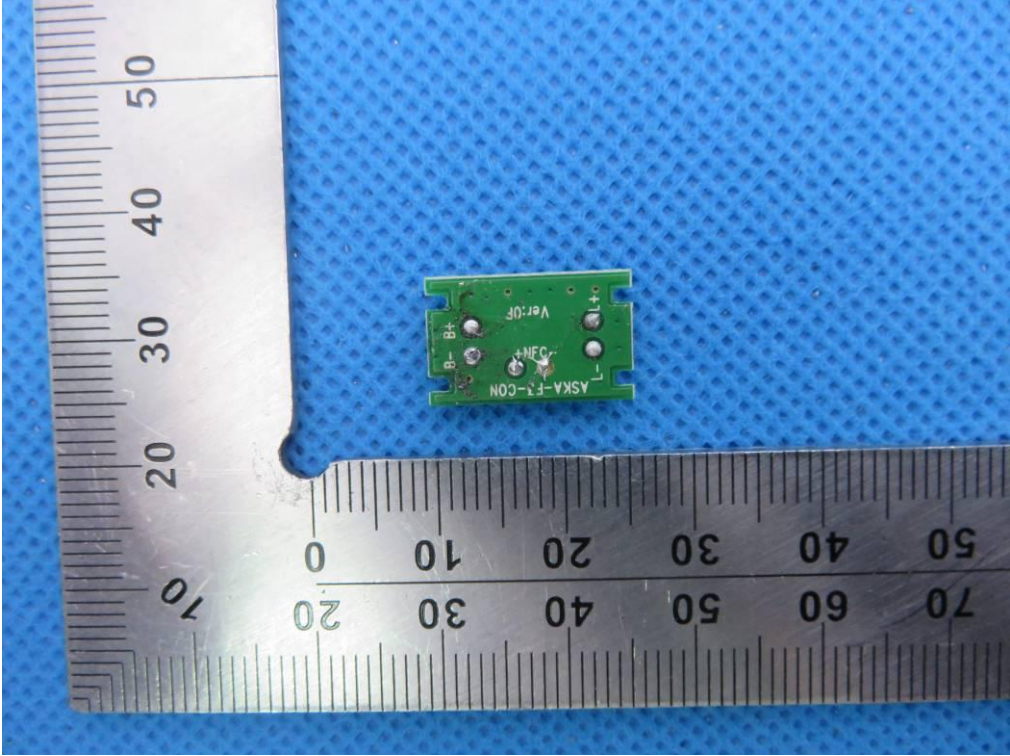

INTERNAL VIEW OF EUT-5

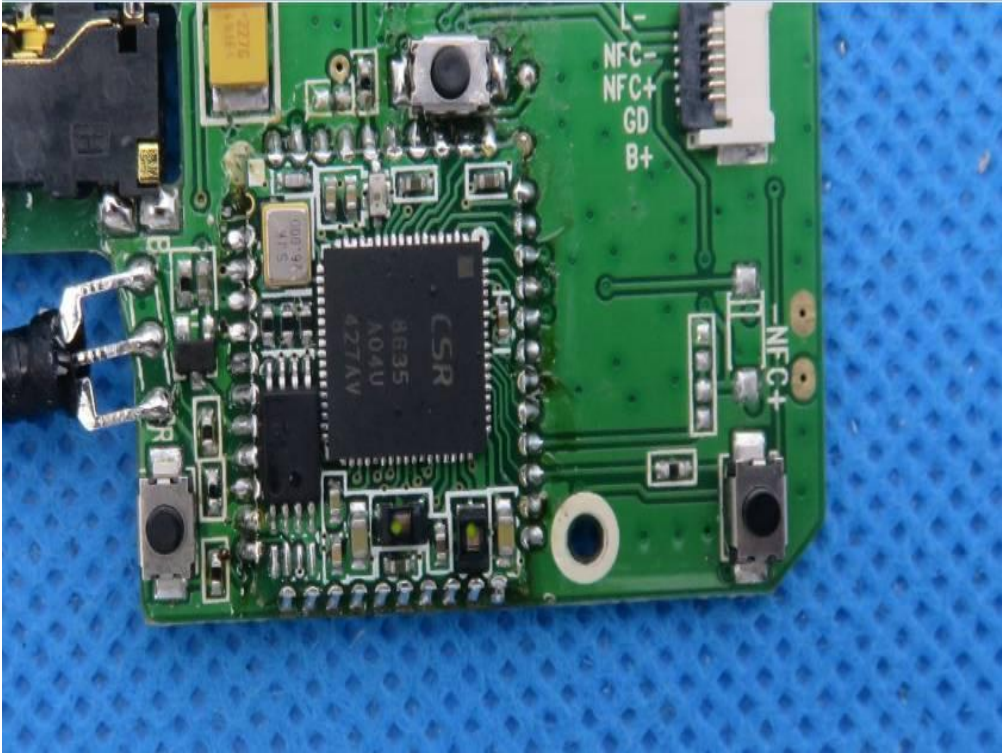

VIEW OF ADAPTER(AE)



THE ADAPTER SUPPLIED BY AGC  
----END OF REPORT----