

# TEST REPORT

Applicant Name: Telepower Communication Co., Ltd.  
Address: 5 Bld, Zone A, Hantian Technology Town No.17 ShenHai RD,  
Nanhai District Foshan China  
Report Number: 2401S34482E-RF-00B  
FCC ID: 2AJ2B-T10

**Test Standard (s)**

FCC PART 15.247

**Sample Description**

Product Type: Ticket Validator  
Model No.: T10  
Multiple Model(s) No.: N/A  
Trade Mark: Telpo  
Date Received: 2024/04/26  
Issue Date: 2024/08/09

Test Result:	Pass▲
--------------	-------

▲ In the configuration tested, the EUT complied with the standards above.

**Prepared and Checked By:***Gala Liu*

Gala Liu  
RF Engineer

**Approved By:***Nancy Wang*

Nancy Wang  
RF Supervisor

Note: The information marked<sup>#</sup> is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Customer model name, addresses, names, trademarks etc. are included.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP or any agency of the U.S. Government.

This report may contain data that are not covered by the NVLAP accreditation and are marked with an asterisk "▼".

**Bay Area Compliance Laboratories Corp. (Shenzhen)**

5F(B-West) , 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China  
Tel: +86-755-33320018    Fax: +86-755-33320008    www.baclcorp.com.cn

## **TABLE OF CONTENTS**

<b>DOCUMENT REVISION HISTORY .....</b>	<b>4</b>
<b>GENERAL INFORMATION.....</b>	<b>5</b>
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....	5
OBJECTIVE .....	5
TEST METHODOLOGY .....	5
MEASUREMENT UNCERTAINTY .....	6
TEST FACILITY .....	6
<b>SYSTEM TEST CONFIGURATION.....</b>	<b>7</b>
DESCRIPTION OF TEST CONFIGURATION .....	7
EQUIPMENT MODIFICATIONS .....	7
EUT EXERCISE SOFTWARE .....	8
DUTY CYCLE .....	8
SUPPORT EQUIPMENT LIST AND DETAILS .....	11
EXTERNAL I/O CABLE.....	11
BLOCK DIAGRAM OF TEST SETUP .....	12
<b>SUMMARY OF TEST RESULTS .....</b>	<b>14</b>
<b>TEST EQUIPMENT LIST .....</b>	<b>15</b>
<b>FCC §1.1307 (B) &amp; §2.1091- MPE-BASED EXEMPTION .....</b>	<b>16</b>
APPLICABLE STANDARD .....	16
RESULT .....	17
<b>FCC §15.203 - ANTENNA REQUIREMENT.....</b>	<b>19</b>
APPLICABLE STANDARD .....	19
ANTENNA CONNECTOR CONSTRUCTION .....	19
<b>FCC §15.207 (A) - AC LINE CONDUCTED EMISSIONS.....</b>	<b>20</b>
APPLICABLE STANDARD .....	20
EUT SETUP.....	20
EMI TEST RECEIVER SETUP.....	20
TEST PROCEDURE .....	20
FACTOR & OVER LIMIT CALCULATION.....	21
TEST DATA .....	21
<b>FCC §15.209, §15.205 &amp; §15.247(D) - SPURIOUS EMISSIONS.....</b>	<b>28</b>
APPLICABLE STANDARD .....	28
EUT SETUP .....	28
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP .....	29
TEST PROCEDURE .....	30
FACTOR & OVER LIMIT/MARGIN CALCULATION .....	30
TEST DATA .....	30
<b>FCC §15.247(A) (2) - 6 DB EMISSION BANDWIDTH.....</b>	<b>53</b>
APPLICABLE STANDARD .....	53
TEST PROCEDURE .....	53
TEST DATA .....	53

<b>FCC §15.247(B) (3) - MAXIMUM CONDUCTED OUTPUT POWER .....</b>	<b>60</b>
APPLICABLE STANDARD .....	60
TEST PROCEDURE .....	60
TEST DATA .....	61
<b>FCC §15.247(D) - 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE.....</b>	<b>63</b>
APPLICABLE STANDARD .....	63
TEST PROCEDURE .....	63
TEST DATA .....	63
<b>FCC §15.247(E) - POWER SPECTRAL DENSITY.....</b>	<b>69</b>
APPLICABLE STANDARD .....	69
TEST PROCEDURE .....	69
TEST DATA .....	69
<b>EUT PHOTOGRAPHS.....</b>	<b>76</b>
<b>TEST SETUP PHOTOGRAPHS .....</b>	<b>77</b>

## DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	2401S34482E-RF-00B	Original Report	2024/08/09

## GENERAL INFORMATION

### Product Description for Equipment under Test (EUT)

Product	Ticket Validator
Tested Model	T10
Multiple Model(s)	N/A
Frequency Range	BLE: 2402-2480MHz Wi-Fi: 2412-2462MHz
Maximum Conducted Output Peak Power	BLE: -1.77dBm Wi-Fi: 25.26dBm
Modulation Technique	BLE: GFSK Wi-Fi: DSSS, OFDM
Antenna Specification <sup>#</sup>	2.48dBi (provided by the applicant)
Voltage Range	DC 9-40V from DC Port or DC 12/24V from POE
Sample serial number	2KGH-1 for Conducted and Radiated Emissions Test 2KGH-2 for RF Conducted Test (Assigned by BACL, Shenzhen)
Sample/EUT Status	Good condition
Adapter Information	N/A

### Objective

This test report is in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commission's rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

### Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

And KDB 558074 D01 15.247 Meas Guidance v05r02.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Each test item follows test standards and with no deviation.

## Measurement Uncertainty

Parameter	Uncertainty	
Occupied Channel Bandwidth	±5%	
RF output power, conducted	0.72 dB(k=2, 95% level of confidence)	
AC Power Lines Conducted Emissions	3.94dB(k=2, 95% level of confidence) 3.84dB(k=2, 95% level of confidence)	
Radiated Emissions	9kHz~150 kHz 150 kHz ~30MHz 9kHz - 30MHz 30MHz~200MHz (Horizontal) 30MHz~200MHz (Vertical) 200MHz~1000MHz (Horizontal) 200MHz~1000MHz (Vertical) 1GHz - 6GHz 6GHz - 18GHz 18GHz - 40GHz Temperature Humidity Supply voltages	3.30dB(k=2, 95% level of confidence) 4.48dB(k=2, 95% level of confidence) 4.55dB(k=2, 95% level of confidence) 4.85dB(k=2, 95% level of confidence) 5.05dB(k=2, 95% level of confidence) 5.35dB(k=2, 95% level of confidence) 5.44dB(k=2, 95% level of confidence) 5.16dB(k=2, 95% level of confidence) ±1°C ±1% ±0.4%

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

## Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 5F(B-West) , 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 715558, the FCC Designation No. : CN5045.

## SYSTEM TEST CONFIGURATION

### Description of Test Configuration

For 2.4GHz Wi-Fi mode, total 11 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437	/	/

802.11b, 802.11g and 802.11n-HT20 mode was tested with Channel 1, 6 and 11.  
802.11n-HT40 mode was tested with Channel 3, 6 and 9.

For BLE mode, 40 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2442
1	2404	21	2444
2	2406	22	2446
3	2408	23	2448
4	2410	24	2450
5	2412	25	2452
6	2414	26	2454
7	2416	27	2456
8	2418	28	2458
9	2420	29	2460
10	2422	30	2462
11	2424	31	2464
12	2426	32	2466
13	2428	33	2468
14	2430	34	2470
15	2432	35	2472
16	2434	36	2474
17	2436	37	2476
18	2438	38	2478
19	2440	39	2480

EUT was tested with Channel 0, 19 and 39.

### Equipment Modifications

No modification was made to the EUT tested.

## EUT Exercise Software

“QRCT3”# exercise software was used.


The device was tested with the worst case was performed as below:

Mode	Data rate	Power Level <sup>#</sup>		
		Low Channel	Middle Channel	High Channel
802.11b	1Mbps	20	20	20
802.11g	6Mbps	19	19	19
802.11n-HT20	MCS0	18	18	18
802.11n-HT40	MCS0	16	16	16
BLE	1Mbps	Default	Default	Default



Note: the power level was provided by applicant.


## Duty cycle

Test Modes	Ton (ms)	Ton+off (ms)	Duty Cycle (%)	1/T (Hz)	VBW Setting (Hz)
BLE 1M	0.381	0.626	60.86	2625	3000
802.11b	12.196	12.404	98.32	/	10
802.11g	2.003	2.067	96.90	499	1000
802.11n-HT20	1.696	1.744	97.25	590	1000
802.11n-HT40	0.830	0.889	93.36	1205	2000

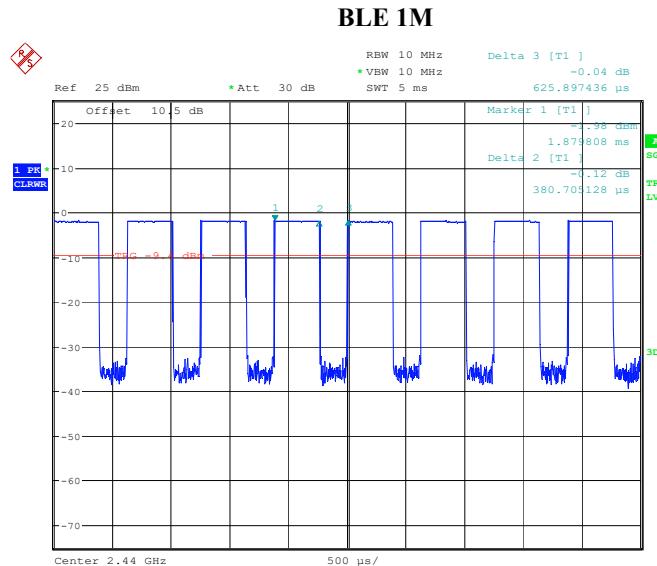


ProjectNo.:2401S34482E-RF Tester:Allen Bai  
 Date: 17.MAY.2024 00:50:33

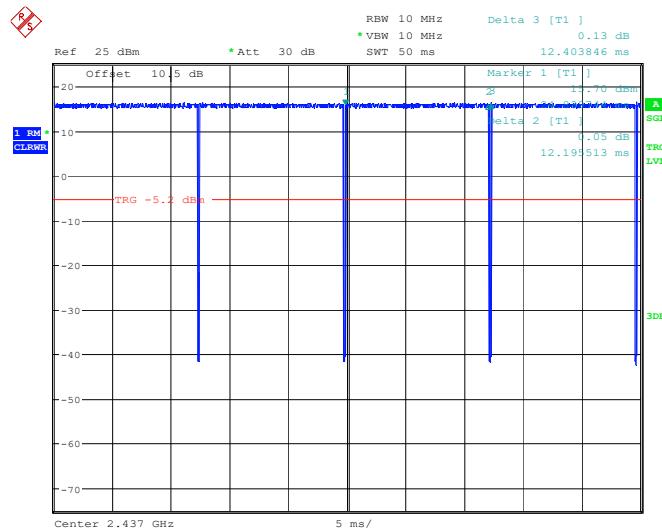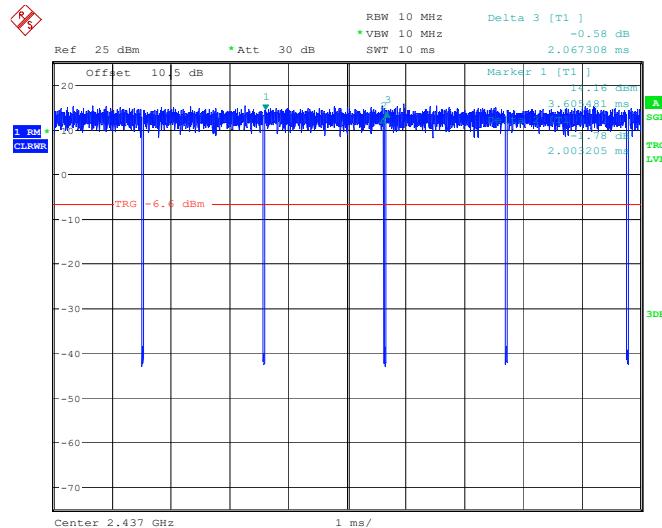**802.11b****802.11g**

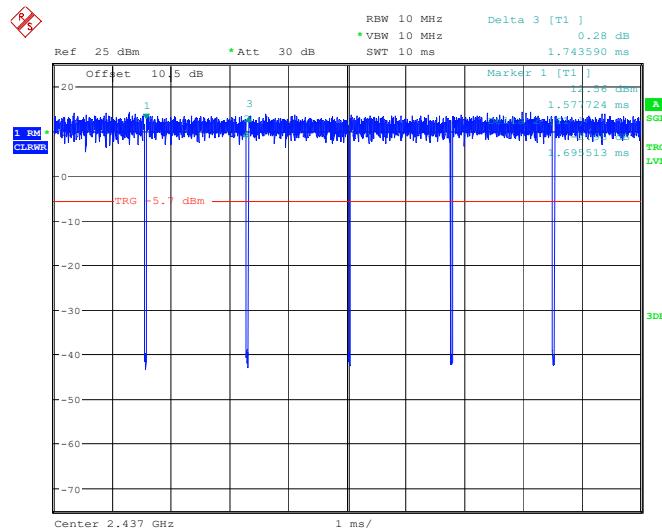**802.11n20**

ProjectNo.:2401S34482E-RF Tester:Allen Bai  
Date: 20.MAY.2024 18:51:54

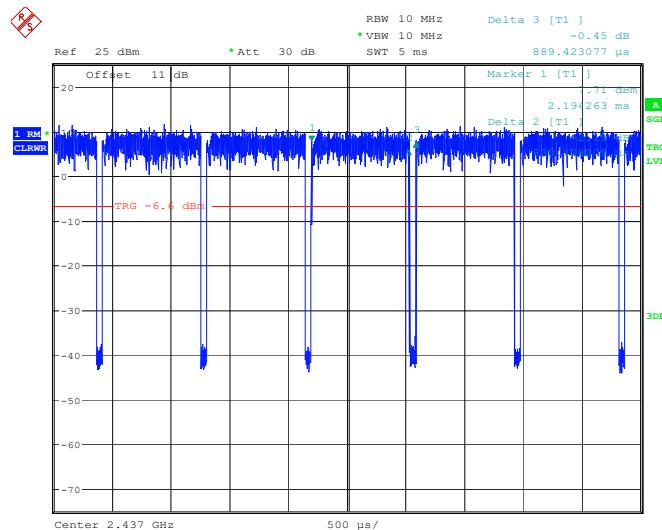**802.11n40**

ProjectNo.:2401S34482E-RF Tester:Allen Bai  
Date: 20.MAY.2024 19:08:08

## Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
FOSHAN SHUNDE GUANYUDA POWER SUPPLY.CO.,LTD	Adapter	GMB36-120300-F	B136-120200-E2
TP-LINK	TL-POE	TL-POE2412G	T240050-2-PoE
Unknown	USB Flash Disk	Unknown	Unknown
HIKVISION	Router	DS-3WR03	10021642429
BACL	Load 1#	Unknown	Unknown
BACL	Load 2#	Unknown	Unknown
BACL	Load 3#	Unknown	Unknown
Unknown	Receptacle	Unknown	Unknown

## External I/O Cable


Cable Description	Length (m)	From Port	To
Un-shielding Detachable AC Cable	1.5	Adapter	LISN/Receptacle
Un-shielding Un-Detachable DC Cable	1.0	EUT_DC Port	Adapter
Un-shielding Detachable RJ45 Cable	10.0	EUT_RJ45 Port	Router
Un-shielding Detachable DC Cable	0.2	EUT_RS485 Port	Load 1#
Un-shielding Detachable DC Cable	3.0	EUT_RS232 Port	Load 2#
Un-shielding Detachable DC Cable	3.0	EUT_WG IN/OUT Port	Load 3#
Un-shielding Un-Detachable AC Cable	1.5	Receptacle	LISN/AC Mains
Un-shielding Detachable AC Cable	0.5	Receptacle	TL-POE
Un-shielding Detachable RJ45 Cable	1.5	TL-POE	EUT_RJ45 Port

## Block Diagram of Test Setup


For Conducted Emissions (Adapter):

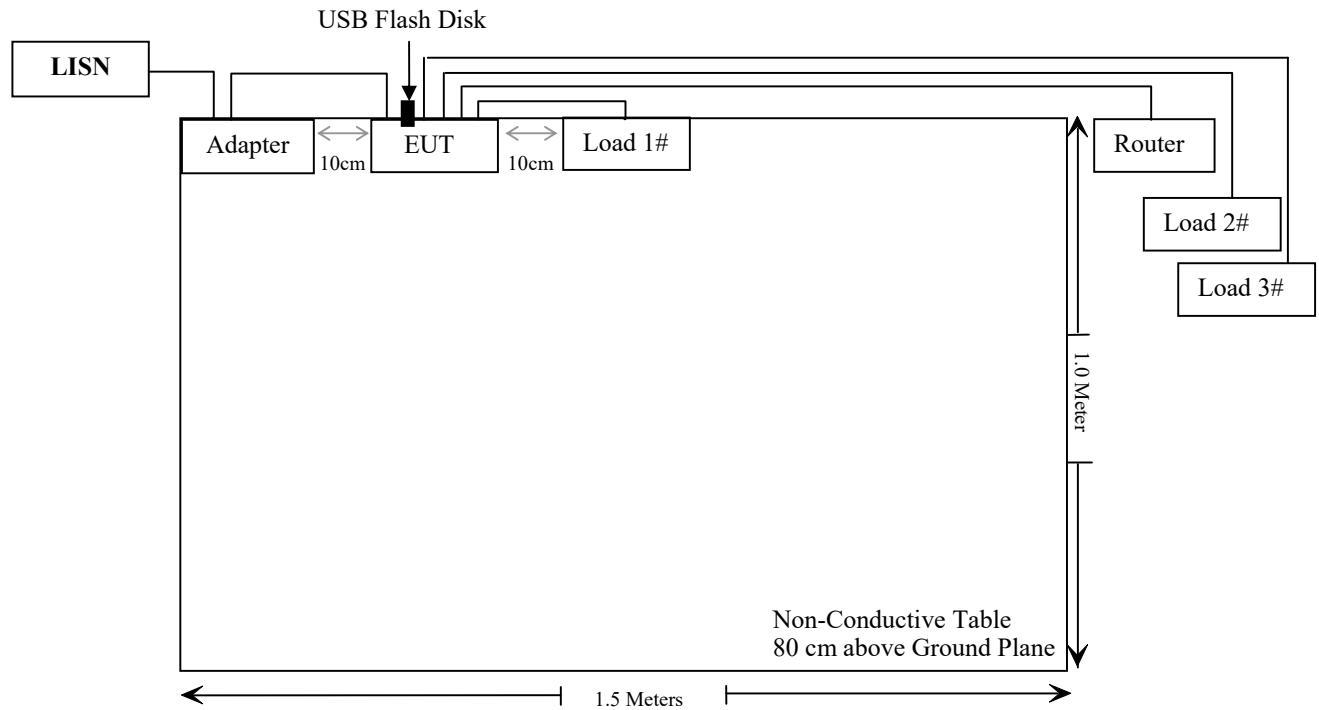


For Conducted Emissions (TL-POE):

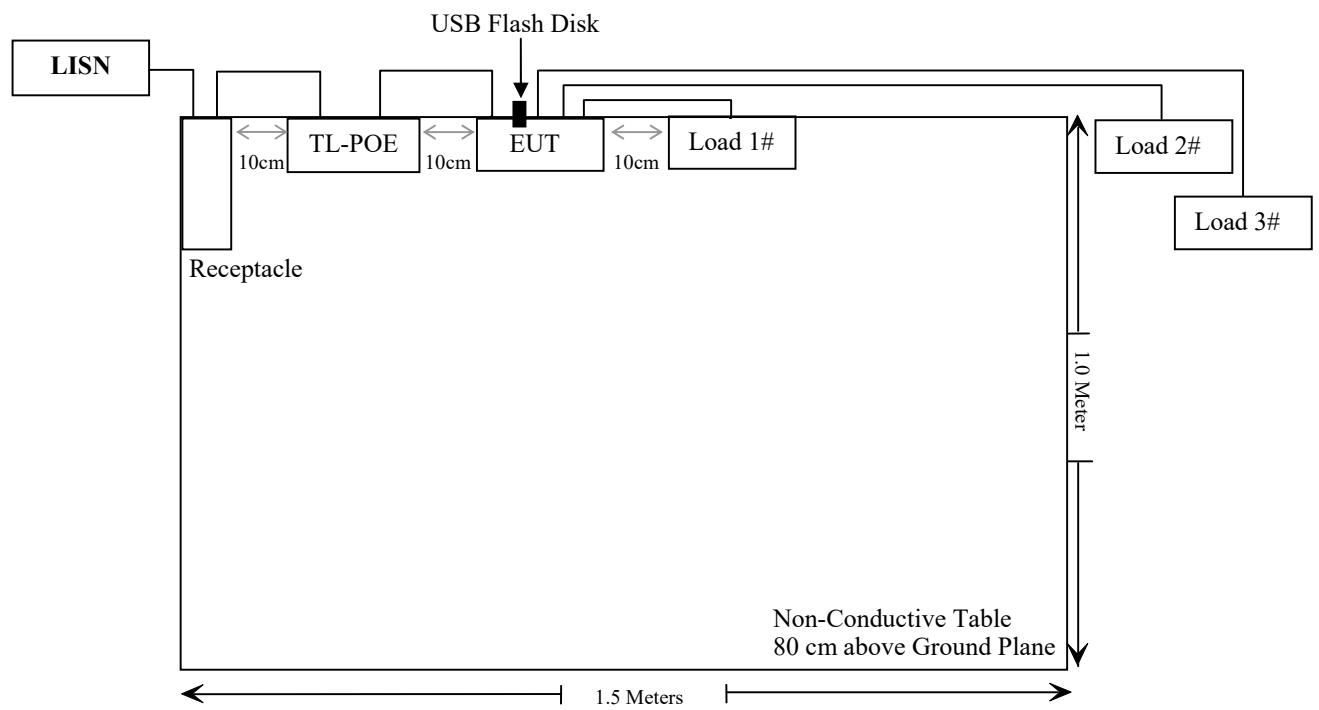

For Radiated Emissions (Adapter):

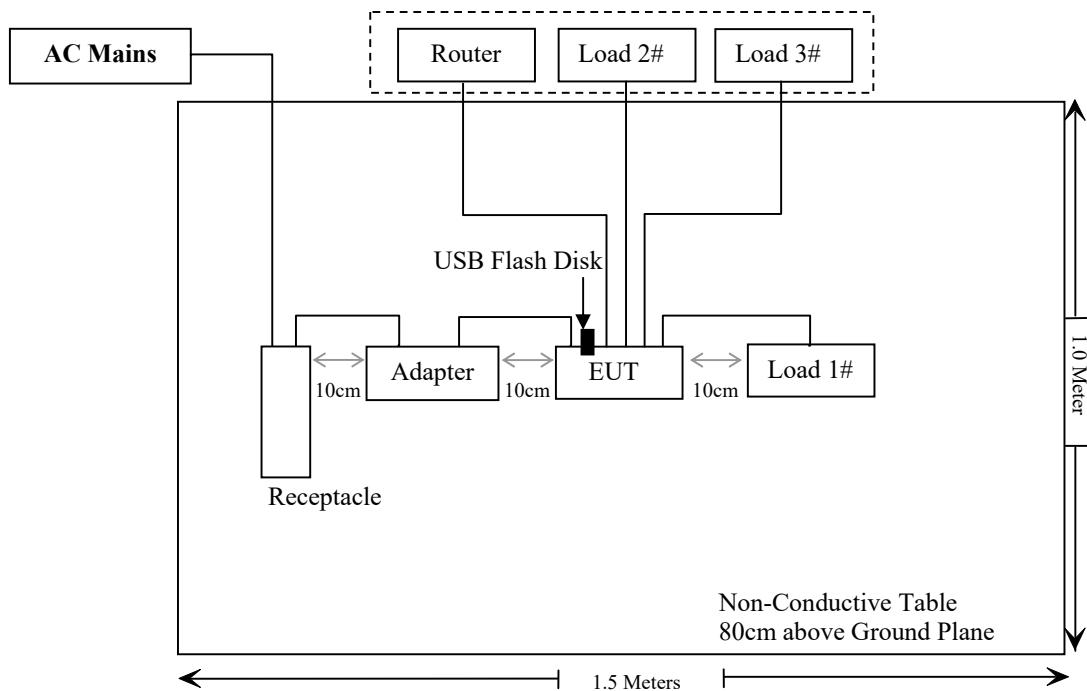

For Radiated Emissions (TL-POE):

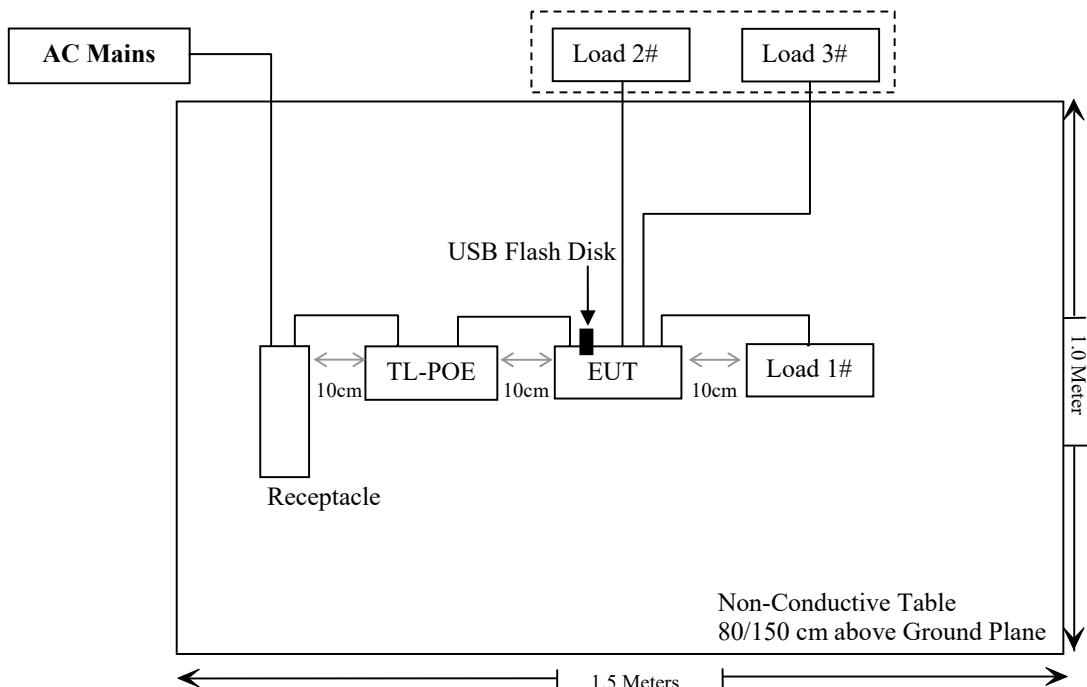

## SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§1.1307 ,§2.1091	MPE-Based Exemption	Compliant
§15.203	Antenna Requirement	Compliant
§15.207 (a)	AC Line Conducted Emissions	Compliant
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliant
§15.247 (a)(2)	6 dB Emission Bandwidth	Compliant
§15.247(b)(3)	Maximum Conducted Output Power	Compliant
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliant
§15.247(e)	Power Spectral Density	Compliant

## TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
<b>Conducted Emission Test</b>					
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2024/01/16	2025/01/15
Rohde & Schwarz	LISN	ENV216	101613	2024/01/16	2025/01/15
Rohde & Schwarz	Transient Limiter	ESH3Z2	DE25985	2023/08/03	2024/08/02
Unknown	CE Cable	CE Cable	UF A210B-1-0720-504504	2023/08/03	2024/08/02
Audix	EMI Test software	E3	191218(V9)	NCR	NCR
<b>Radiated Emission Test_ Below 1GHz</b>					
R&S	EMI Test Receiver	ESR3	102455	2024/01/16	2025/01/15
Sonoma instrument	Pre-amplifier	310 N	186238	2023/06/08	2024/06/07
Sonoma instrument	Pre-amplifier	310 N	186238	2024/05/21	2025/05/20
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2023/07/20	2026/07/19
BACL	Active Loop Antenna	1313-1A	4031911	2024/03/21	2025/03/20
Unknown	Cable	Chamber Cable 1	F-03-EM236	2023/08/03	2024/08/02
Unknown	Cable	Chamber Cable 4	EC-007	2023/08/03	2024/08/02
Audix	EMI Test software	E3	19821b(V9)	NCR	NCR
<b>Radiated Emission Test_ Above 1GHz</b>					
Rohde & Schwarz	Spectrum Analyzer	FSV40	101605	2024/03/27	2025/03/26
COM-POWER	Pre-amplifier	PA-122	181919	2023/06/29	2024/06/28
Schwarzbeck	Horn Antenna	BBHA9120D(1201)	1143	2023/07/26	2026/07/25
Unknown	RF Cable	KMSE	0735	2023/10/08	2024/10/07
Unknown	RF Cable	UFA147	219661	2023/10/08	2024/10/07
JD	Multiplex Switch Test Control Set	DT7220FSU	DQ77926	NCR	NCR
A.H.System	Pre-amplifier	PAM-1840VH	190	2023/08/02	2024/08/01
Electro-Mechanics Co	Horn Antenna	3116	2026	2023/09/18	2026/09/17
UTIFLEX	RF Cable	NO. 13	232308-001	2023/08/03	2024/08/02
Audix	EMI Test software	E3	191218(V9)	NCR	NCR
<b>RF Conducted Test</b>					
Rohde & Schwarz	SPECTRUM ANALYZER	FSU26	200982	2023/12/18	2024/12/17
ANRITSU	Microwave peak power sensor	MA24418A	12622	2024/05/21	2025/05/20
Unknown	10dB Attenuator	Unknown	F-03-EM190	2023/07/04	2024/07/03

**\* Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

## FCC §1.1307 (B) & §2.1091- MPE-BASED EXEMPTION

### Applicable Standard

According to subpart 2.1091 systems operating under the provisions of this section shall be operated in a manner that ensures the public is not exposed to RF energy level in excess of the communication guidelines.

According to KDB 447498 D04 Interim General RF Exposure Guidance

MPE-Based Exemption:

General frequency and separation-distance dependent MPE-based effective radiated power(ERP) thresholds are in Table B.1 [Table 1 of § 1.1307(b)(1)(i)(C)] to support an exemption from further evaluation from 300 kHz through 100 GHz.

Table 1 to § 1.1307(b)(3)(i)(C) - Single RF Sources Subject to Routine Environmental Evaluation

RF Source frequency (MHz)	Threshold ERP (watts)
0.3-1.34	1,920 R <sup>2</sup> .
1.34-30	3,450 R <sup>2</sup> /f <sup>2</sup> .
30-300	3.83 R <sup>2</sup> .
300-1,500	0.0128 R <sup>2</sup> f.
1,500-100,000	19.2R <sup>2</sup> .

For multiple RF sources: Multiple RF sources are exempt if:

in the case of fixed RF sources operating in the same time-averaging period, or of multiple mobile or portable RF sources within a device operating in the same time averaging period, if the sum of the fractional contributions to the applicable thresholds is less than or equal to 1 as indicated in the following equation:

$$\sum_{i=1}^a \frac{P_i}{P_{th,i}} + \sum_{j=1}^b \frac{ERP_j}{ERP_{th,j}} + \sum_{k=1}^c \frac{Evaluated_k}{Exposure\ Limit_k} \leq 1$$

## Result

Mode	Frequency (MHz)	Tune up conducted power <sup>#</sup>	Antenna Gain <sup>#</sup>		ERP		Evaluation Distance (cm)	ERP Limit (mW)
		(dBm)	(dBi)	(dBd)	(dBm)	(mW)		
BT	2402-2480	7.5	2.48	0.33	7.83	6.07	25	1200
BLE	2402-2480	-1.5	2.48	0.33	-1.17	0.76	25	1200
2.4G Wi-Fi	2412-2462	25.5	2.48	0.33	25.83	382.82	25	1200
5.2G Wi-Fi	5180-5240	11.0	2.49	0.34	11.34	13.61	25	1200
GSM850*	824-849	25.49	0.69	-1.46	24.03	252.93	25	659
PCS1900*	1850-1910	22.49	1.31	-0.84	21.65	146.22	25	1200
WCDMA B2	1850-1910	22.5	1.31	-0.84	21.66	146.55	25	1200
WCDMA B5	824-849	22.0	0.69	-1.46	20.54	113.24	25	659
LTE B2	1850-1910	22.5	1.31	-0.84	21.66	146.55	25	1200
LTE B4	1710-1755	21.5	0.07	-2.08	19.42	87.50	25	1200
LTE B7	2500-2570	21.5	4.54	2.39	23.89	244.91	25	1200
LTE B38	2570-2620	21.5	4.07	1.92	23.42	219.79	25	1200

Note: 1. The tune up conducted power and antenna gain was declared by the applicant.  
 2. The BT, 2.4G Wi-Fi and 5G Wi-Fi cannot transmit at same time.  
 3. 0dBd=2.15dBi

Note\*: It was the time average power according to the duty cycle.

Mode		Tune-up Peak Output Power (dBm)			Tune-up Average Output Power (dBm)		
		Low	Middle	High	Low	Middle	High
GPRS850	1 slot	33.0	33.0	33.0	23.97	23.97	23.97
	2 slots	31.5	31.5	31.5	25.48	25.48	25.48
	3 slots	29.5	29.5	29.5	25.24	25.24	25.24
	4 slots	28.5	28.5	28.5	25.49	25.49	25.49
GPRS1900	1 slot	29.5	29.5	29.5	20.47	20.47	20.47
	2 slots	28.5	28.5	28.5	22.48	22.48	22.48
	3 slots	26.5	26.5	26.5	22.24	22.24	22.24
	4 slots	25.5	25.5	25.5	22.49	22.49	22.49

Note: the duty cycle for 1 slot is 1/8, 2 slots is 1/4, 3 slots is 3/8, 4 slots is 1/2

The average power=Peak power+ duty cycle factor

Duty cycle factor=10\*log (duty cycle)

**NFC:**

Mode	Frequency (MHz)	Maximum E-Field (dBuV/m@3m)	Maximum EIRP (dBm)	ERP		Evaluation Distance (cm)	ERP Limit (mW)
				(dBm)	(mW)		
NFC	13.56	71.68	-23.52	-25.67	0.0027	25	1173

Note: EIRP = E-Field – 95.2 @3m, ERP = EIRP-2.15

Simultaneous transmitting consideration (worst case):

The ratio=  $\text{ERP}_{\text{2.4G Wi-Fi}}/\text{limit} + \text{ERP}_{\text{GSM850}}/\text{limit} + \text{ERP}_{\text{NFC}}/\text{limit} = 382.82/1200 + 252.93/659 + 0.0027/1173 = 0.703 < 1.0$

So simultaneous exposure is compliant.

To maintain compliance with the FCC's RF exposure guidelines, place the equipment at least 25cm from nearby persons.

**Result: Compliant.**

## FCC §15.203 - ANTENNA REQUIREMENT

### Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

### Antenna Connector Construction

The EUT has one internal antenna arrangement, which was permanently attached, the antenna gain<sup>#</sup> is 2.48dBi, fulfill the requirement of this section. Please refer to the EUT photos.


### Result: Compliant

## FCC §15.207 (a) - AC LINE CONDUCTED EMISSIONS

### Applicable Standard

FCC§15.207

### EUT Setup

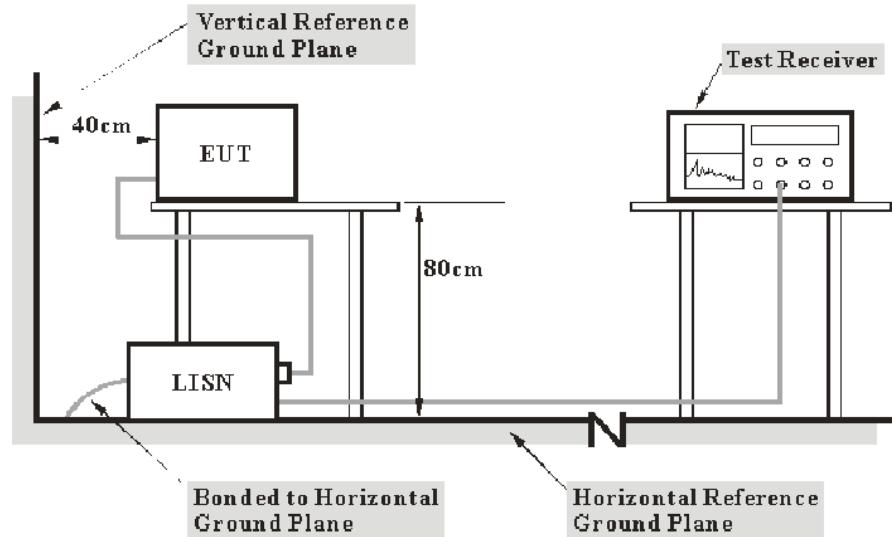

Note: 1. Support units were connected to second LISN.  
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

### EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

### Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

## Factor & Over Limit Calculation

The factor is calculated by adding LISN VDF (Voltage Division Factor) and Cable Loss. The basic equation is as follows:

$$\text{Factor} = \text{LISN VDF} + \text{Cable Loss}$$

The “**Over limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over limit of -7 dB means the emission is 7 dB below the limit. The equation for calculation is as follows:

$$\begin{aligned}\text{Over Limit} &= \text{Level} - \text{Limit} \\ \text{Level} &= \text{Read Level} + \text{Factor}\end{aligned}$$

Note: The term "cable loss" refers to the combination of a cable and a 10dB transient limiter (attenuator).

## Test Data

### Environmental Conditions

<b>Temperature:</b>	25~26 °C
<b>Relative Humidity:</b>	54~72 %
<b>ATM Pressure:</b>	101 kPa


*The testing was performed by Macy Shi from 2024-05-23 to 2024-07-30.*

*EUT operation mode: Transmitting*

**BLE:** (Maximum output power mode, BLE 1M Middle Channel)


For Adapter power supply:

AC 120V/60 Hz, Line

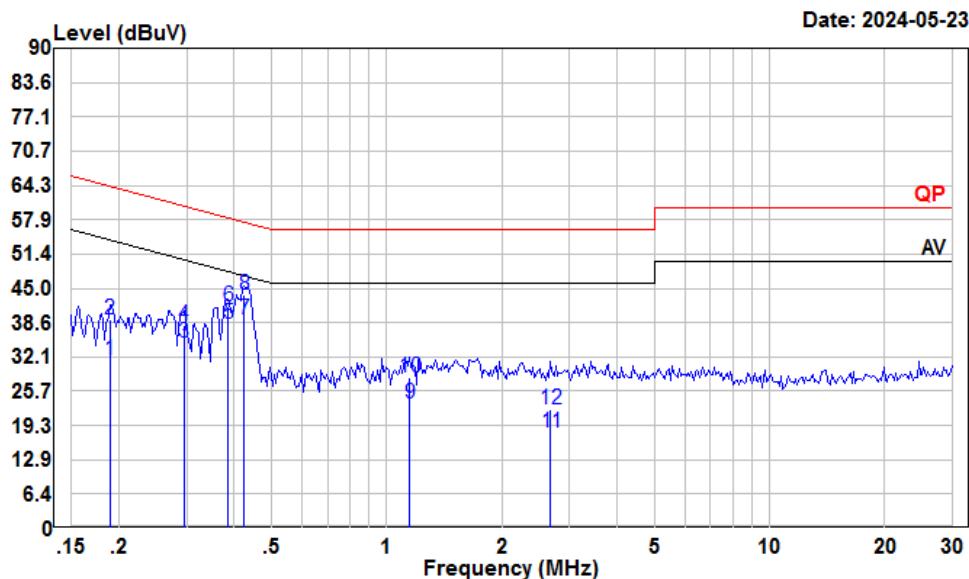

Condition: Line  
 Project : 2401S34482E-RF  
 tester : Macy.shi  
 Note : BLE

	Freq	Read Level	LISN Level	Cable Factor	Limit Loss	Over Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.19	10.99	31.50	10.40	10.11	54.06	-22.56	Average
2	0.19	18.67	39.18	10.40	10.11	64.06	-24.88	QP
3	0.30	14.37	34.81	10.31	10.13	50.37	-15.56	Average
4	0.30	17.76	38.20	10.31	10.13	60.37	-22.17	QP
5	0.39	18.00	38.46	10.26	10.20	48.17	-9.71	Average
6	0.39	21.20	41.66	10.26	10.20	58.17	-16.51	QP
7	0.42	18.86	39.30	10.24	10.20	47.37	-8.07	Average
8	0.42	23.41	43.85	10.24	10.20	57.37	-13.52	QP
9	1.15	2.72	23.35	10.54	10.09	46.00	-22.65	Average
10	1.15	7.64	28.27	10.54	10.09	56.00	-27.73	QP
11	2.68	-2.57	18.00	10.34	10.23	46.00	-28.00	Average
12	2.68	1.77	22.34	10.34	10.23	56.00	-33.66	QP

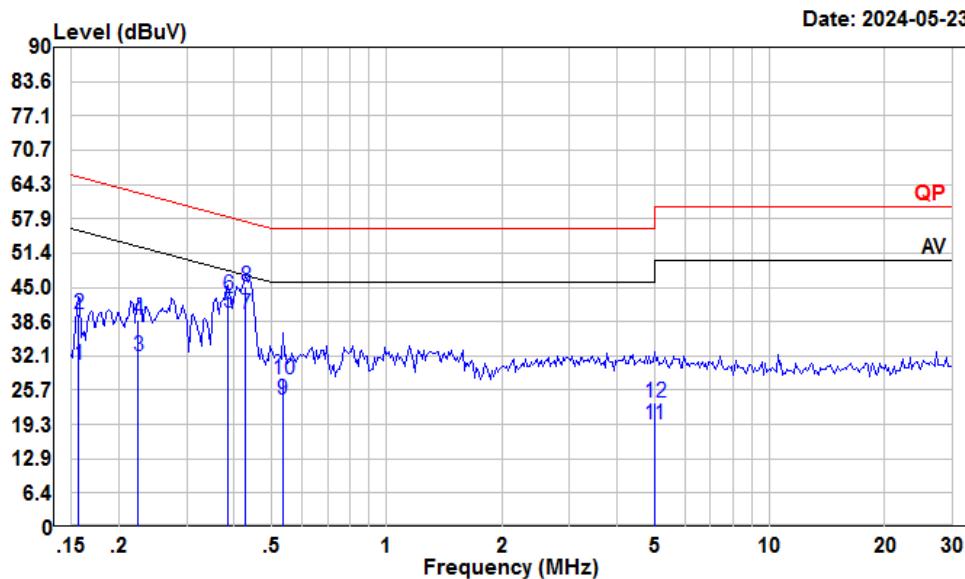
**AC 120V/60 Hz, Neutral**

Condition: Neutral  
 Project : 2401S34482E-RF  
 tester : Macy.shi  
 Note : BLE

Freq	Read	LISN	Cable	Limit	Over	Remark
	MHz	Level	Level Factor	Loss	Line	
1	0.16	10.07	30.48	10.26	10.15	55.65 -25.17 Average
2	0.16	19.56	39.97	10.26	10.15	65.65 -25.68 QP
3	0.22	11.22	32.00	10.63	10.15	52.66 -20.66 Average
4	0.22	18.08	38.86	10.63	10.15	62.66 -23.80 QP
5	0.39	19.41	40.35	10.74	10.20	48.17 -7.82 Average
6	0.39	22.61	43.55	10.74	10.20	58.17 -14.62 QP
7	0.43	18.95	39.92	10.77	10.20	47.29 -7.37 Average
8	0.43	24.09	45.06	10.77	10.20	57.29 -12.23 QP
9	0.53	2.95	23.86	10.74	10.17	46.00 -22.14 Average
10	0.53	6.94	27.85	10.74	10.17	56.00 -28.15 QP
11	5.00	-1.22	19.40	10.40	10.22	50.00 -30.60 Average
12	5.00	2.74	23.36	10.40	10.22	60.00 -36.64 QP

For POE power supply:

**AC 120V/60 Hz, Line**

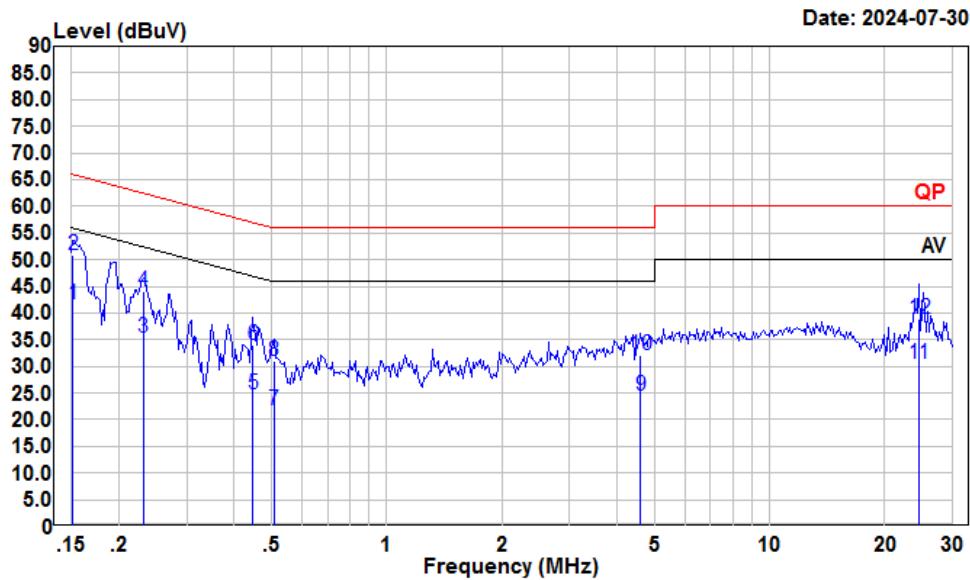


Condition: Line

Project : 2401S34482E-RF

tester : Macy.shi


Note : BLE

Freq	Read	LISN	Cable	Limit	Over	Remark
	MHz	Level	Level	Factor	Loss	
1	0.15	20.65	41.68	10.90	10.13	55.91 -14.23 Average
2	0.15	29.70	50.73	10.90	10.13	65.91 -15.18 QP
3	0.23	14.41	35.24	10.75	10.08	52.39 -17.15 Average
4	0.23	23.19	44.02	10.75	10.08	62.39 -18.37 QP
5	0.45	3.99	24.65	10.54	10.12	46.93 -22.28 Average
6	0.45	13.32	33.98	10.54	10.12	56.93 -22.95 QP
7	0.51	1.21	21.85	10.50	10.14	46.00 -24.15 Average
8	0.51	10.29	30.93	10.50	10.14	56.00 -25.07 QP
9	4.60	3.81	24.35	10.35	10.19	46.00 -21.65 Average
10	4.60	11.43	31.97	10.35	10.19	56.00 -24.03 QP
11	24.53	9.49	30.38	10.70	10.19	50.00 -19.62 Average
12	24.53	17.98	38.87	10.70	10.19	60.00 -21.13 QP

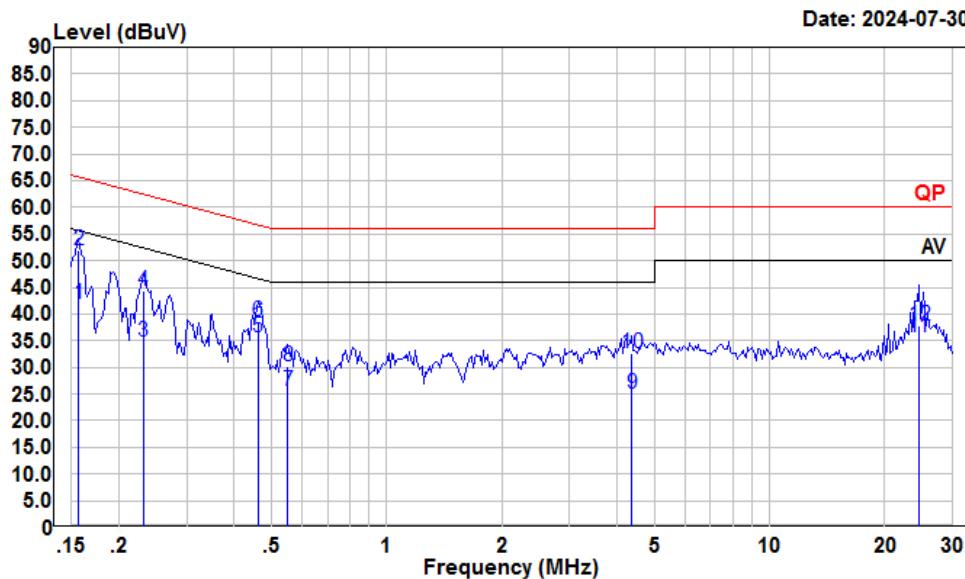**AC 120V/60 Hz, Neutral**


Condition: Neutral  
 Project : 2401S34482E-RF  
 tester : Macy.shi  
 Note : BLE

Freq	Read	LISN	Cable	Limit	Over	Remark
	MHz	Level	Level Factor	Loss	Line	
1	0.16	21.21	41.90	10.57	10.12	55.65 -13.75 Average
2	0.16	31.37	52.06	10.57	10.12	65.65 -13.59 QP
3	0.23	14.32	34.85	10.45	10.08	52.39 -17.54 Average
4	0.23	23.69	44.22	10.45	10.08	62.39 -18.17 QP
5	0.46	14.87	35.66	10.67	10.12	46.67 -11.01 Average
6	0.46	17.82	38.61	10.67	10.12	56.67 -18.06 QP
7	0.55	4.74	25.57	10.70	10.13	46.00 -20.43 Average
8	0.55	9.36	30.19	10.70	10.13	56.00 -25.81 QP
9	4.36	4.30	24.95	10.45	10.20	46.00 -21.05 Average
10	4.36	12.10	32.75	10.45	10.20	56.00 -23.25 QP
11	24.53	14.85	35.64	10.60	10.19	50.00 -14.36 Average
12	24.53	16.95	37.74	10.60	10.19	60.00 -22.26 QP

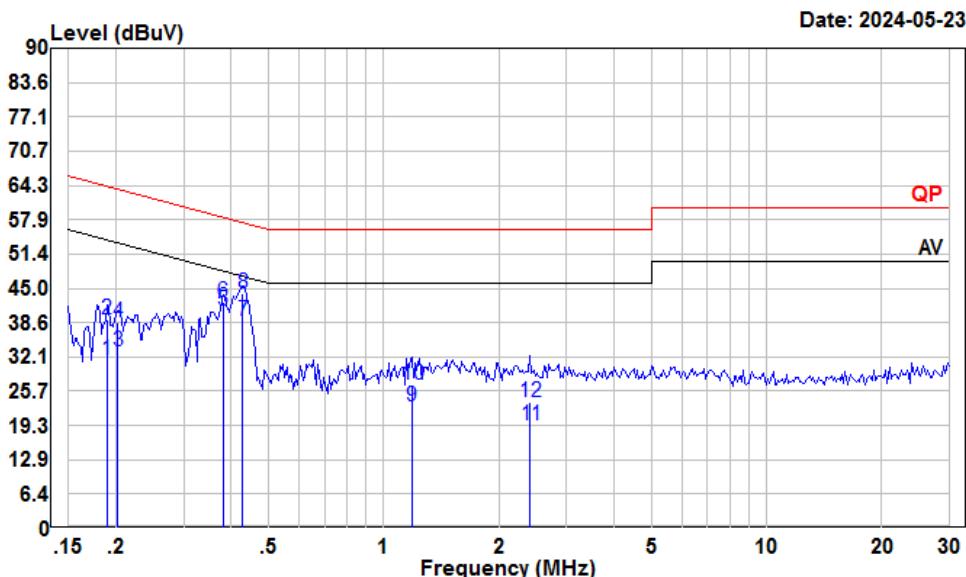**2.4G Wi-Fi: (Maximum output power mode, 802.11g Low Channel)***Worst case is adapter power supply:***AC 120V/60 Hz, Line**

Condition: Line  
 Project : 2401S34482E-RF  
 tester : Macy.shi  
 Note : 2.4G WIFI

Freq	Read		LISN	Cable	Limit	Over	Remark
	MHz	dBuV	Level	Factor	Loss	Line	
1	0.19	10.99	31.50	10.40	10.11	54.06	-22.56 Average
2	0.19	18.62	39.13	10.40	10.11	64.06	-24.93 QP
3	0.20	12.65	33.14	10.40	10.09	53.54	-20.40 Average
4	0.20	18.08	38.57	10.40	10.09	63.54	-24.97 QP
5	0.38	20.30	40.76	10.26	10.20	48.25	-7.49 Average
6	0.38	22.10	42.56	10.26	10.20	58.25	-15.69 QP
7	0.43	18.57	39.00	10.23	10.20	47.29	-8.29 Average
8	0.43	23.63	44.06	10.23	10.20	57.29	-13.23 QP
9	1.18	2.15	22.74	10.53	10.06	46.00	-23.26 Average
10	1.18	6.21	26.80	10.53	10.06	56.00	-29.20 QP
11	2.41	-1.16	19.38	10.33	10.21	46.00	-26.62 Average
12	2.41	3.21	23.75	10.33	10.21	56.00	-32.25 QP


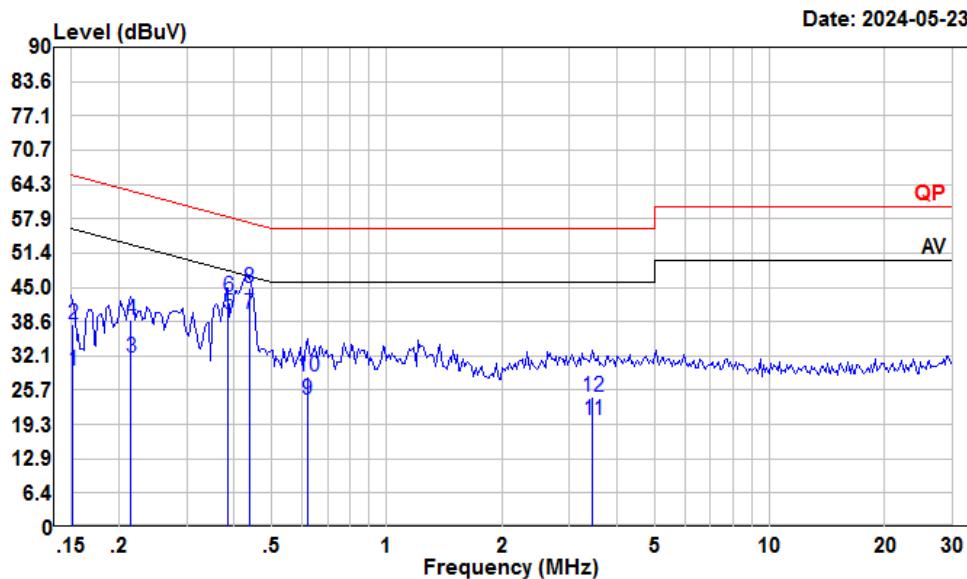
**AC 120V/60 Hz, Neutral**


Condition: Neutral  
 Project : 2401S34482E-RF  
 tester : Macy.shi  
 Note : 2.4G WIFI

Freq	Read	LISN	Cable	Limit	Over	Remark
	MHz	Level	Level Factor	Loss	Line	
1	0.15	9.01	29.37	10.21	10.15	55.91 -26.54 Average
2	0.15	17.85	38.21	10.21	10.15	65.91 -27.70 QP
3	0.22	11.20	31.95	10.62	10.13	53.01 -21.06 Average
4	0.22	18.07	38.82	10.62	10.13	63.01 -24.19 QP
5	0.39	18.91	39.85	10.74	10.20	48.17 -8.32 Average
6	0.39	22.31	43.25	10.74	10.20	58.17 -14.92 QP
7	0.44	18.99	39.95	10.77	10.19	47.11 -7.16 Average
8	0.44	23.89	44.85	10.77	10.19	57.11 -12.26 QP
9	0.62	3.23	24.06	10.61	10.22	46.00 -21.94 Average
10	0.62	7.38	28.21	10.61	10.22	56.00 -27.79 QP
11	3.45	-0.44	20.17	10.34	10.27	46.00 -25.83 Average
12	3.45	3.96	24.57	10.34	10.27	56.00 -31.43 QP

**FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS****Applicable Standard**

FCC §15.247 (d); §15.209; §15.205;

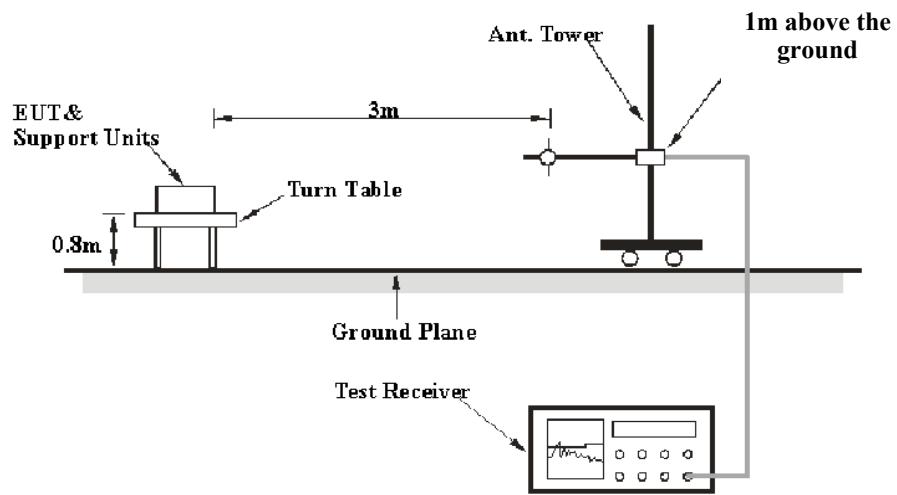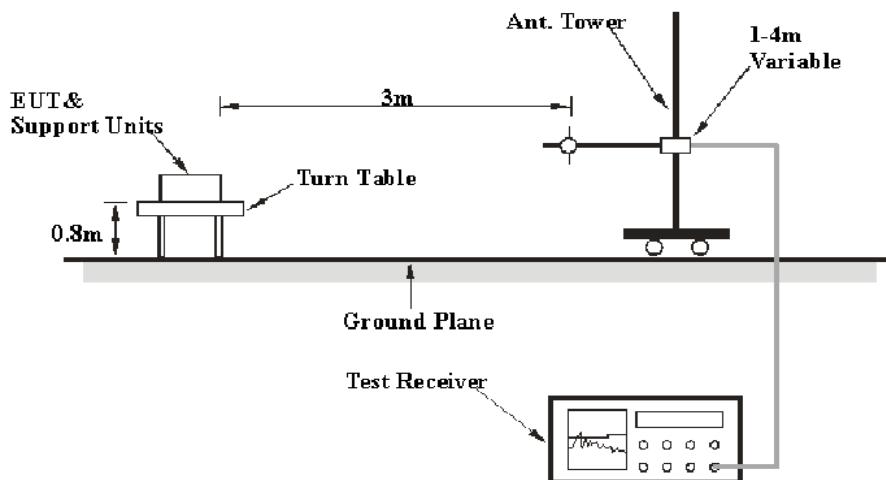**EUT Setup****9 kHz-30MHz:****30MHz-1GHz:**

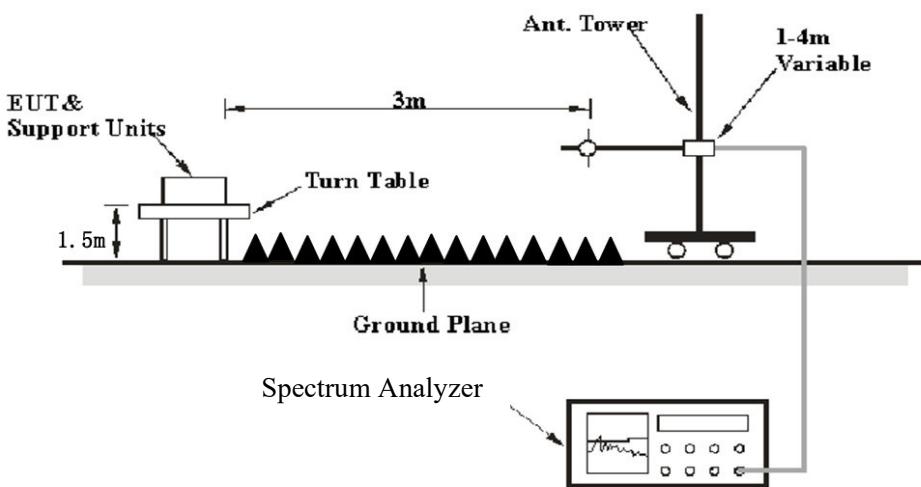**Above 1GHz:**

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

**EMI Test Receiver & Spectrum Analyzer Setup**

The system was investigated from 9 kHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

9 kHz-1GHz:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
9 kHz – 150 kHz	/	/	200 Hz	QP
	300 Hz	1 kHz	/	PK
150 kHz – 30 MHz	/	/	9 kHz	QP
	10 kHz	30 kHz	/	PK
30 MHz – 1000 MHz	/	/	120 kHz	QP
	100 kHz	300 kHz	/	PK

1-25GHz:

Measurement	Duty cycle	RBW	Video B/W
PK	Any	1MHz	3 MHz
AV	>98%	1MHz	10 Hz
	<98%	1MHz	≥1/Ton

Note: Ton is minimum transmission duration

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

## Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in Quasi-peak detection mode except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz, average detection modes for frequency bands 9–90 kHz and 110–490 kHz, peak and average detection modes for frequencies above 1 GHz.

For 9 kHz-30MHz, the report shall list the six emissions with the smallest margin relative to the limit, for each of the three antenna orientations (parallel, perpendicular, and ground-parallel) unless the margin is greater than 20 dB.

All emissions under the average limit and under the noise floor have not recorded in the report.

## Factor & Over Limit/Margin Calculation

The Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain. The basic equation is as follows:

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “Over Limit/Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit/margin of -7dB means the emission is 7dB below the limit. The equation for calculation is as follows:

$$\begin{aligned}\text{Over Limit/Margin} &= \text{Level/Corrected Amplitude} - \text{Limit} \\ \text{Level / Corrected Amplitude} &= \text{Read Level} + \text{Factor}\end{aligned}$$

## Test Data

### Environmental Conditions

Temperature:	23~25.5 °C
Relative Humidity:	50~57 %
ATM Pressure:	101 kPa

*The testing was performed by Warren Huang and Anson Su from 2024-05-17 to 2024-07-29 for below 1GHz and Zenos Qiao from 2024-05-15 to 2024-05-16 for above 1GHz.*

*EUT operation mode: Transmitting*


*Note: Pre-scan in the X, Y and Z axes of orientation, the worst case z-axis of orientation was recorded.*

**9 kHz-30MHz:** (Maximum output power mode, 802.11g Low Channel)

*The amplitude of spurious emissions attenuated more than 20 dB below the limit was not recorded.*


**30MHz-1GHz:****BLE (Maximum output power mode, BLE 1M Middle Channel)**

For adapter power supply:

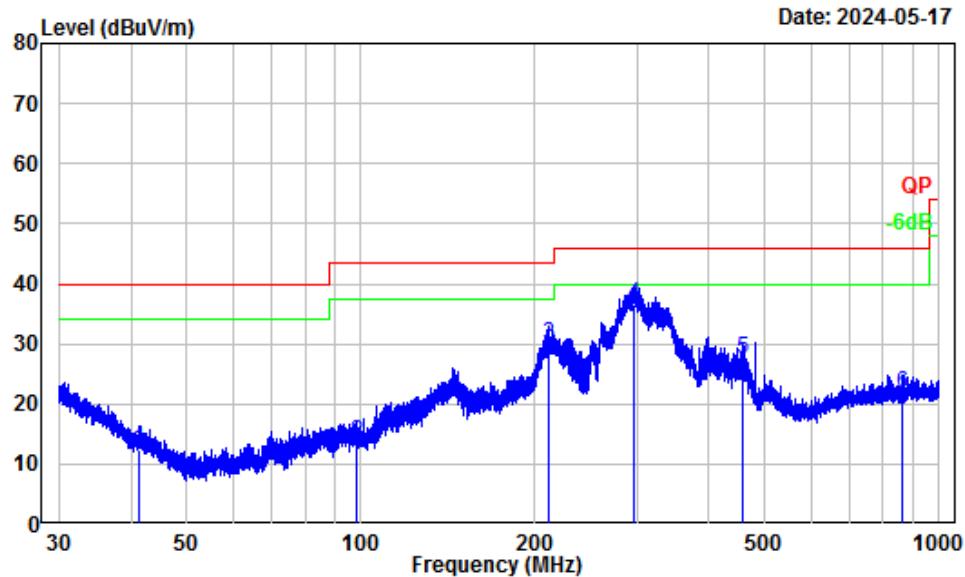**Horizontal**

Site : Chamber A  
Condition : 3m Horizontal  
Project Number: 2401S34482E-RF  
Note : BLE  
Tester : Warren Huang

Freq	Factor	Read Level	Limit Level	Over Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	41.44	-12.44	24.82	12.38	40.00	-27.62 QP
2	98.14	-15.95	29.43	13.48	43.50	-30.02 QP
3	211.71	-13.71	43.57	29.86	43.50	-13.64 QP
4	296.57	-12.90	49.36	36.46	46.00	-9.54 QP
5	456.11	-9.43	36.79	27.36	46.00	-18.64 QP
6	864.19	-4.71	26.45	21.74	46.00	-24.26 QP

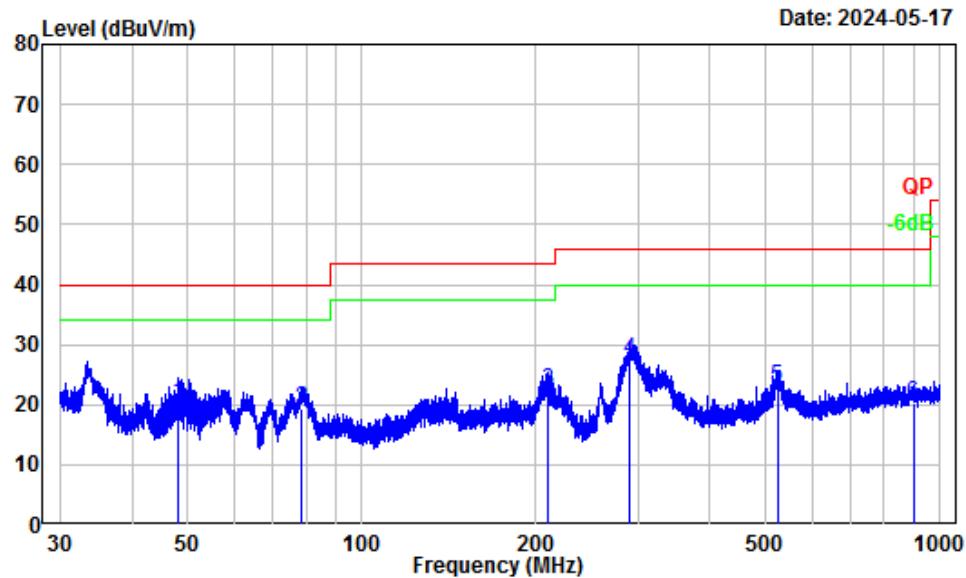
**Vertical**

Site : Chamber A  
Condition : 3m Vertical  
Project Number: 2401S34482E-RF  
Note : BLE  
Tester : Warren Huang

Freq	Factor	Read		Limit		Over	Remark
		MHz	dB/m	dB <sub>UV</sub>	dB <sub>UV</sub> /m	Line	
1	48.23	-17.67	37.96	20.29	40.00	-19.71	QP
2	78.76	-18.73	38.11	19.38	40.00	-20.62	QP
3	209.86	-14.72	36.93	22.21	43.50	-21.29	QP
4	289.76	-13.54	41.05	27.51	46.00	-18.49	QP
5	522.95	-8.38	31.23	22.85	46.00	-23.15	QP
6	898.96	-4.85	25.05	20.20	46.00	-25.80	QP


For POE power supply:

**Horizontal**

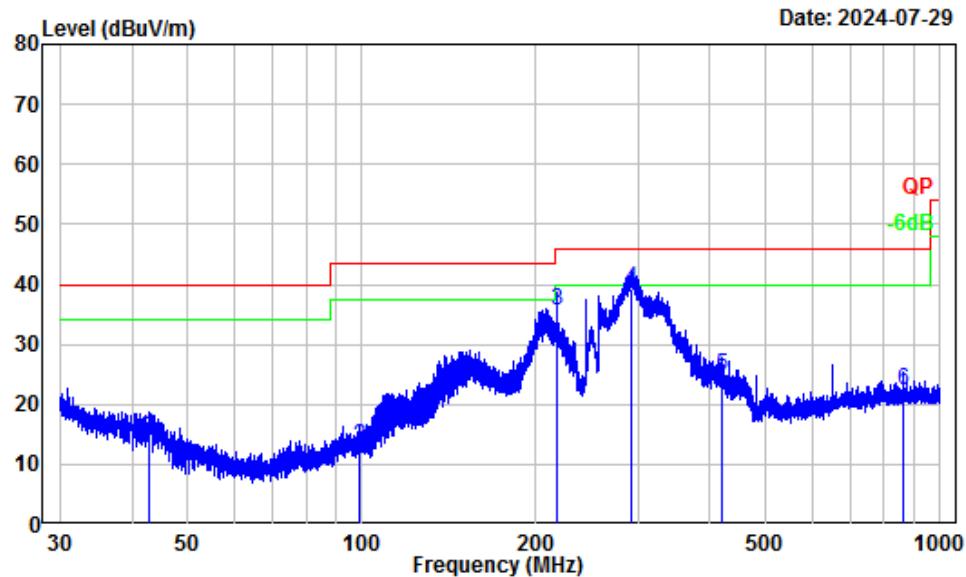


Site : Chamber A  
Condition : 3m Horizontal  
Project Number: 2401S34482E-RF  
Test Mode : BLE  
Tester : Anson Su

Freq Factor	Read Level		Limit Level		Over Limit		Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	42.98	-14.71	29.55	14.84	40.00	-25.16	QP
2	99.27	-17.08	29.99	12.91	43.50	-30.59	QP
3	216.97	-14.77	50.42	35.65	46.00	-10.35	QP
4	292.06	-13.45	52.77	39.32	46.00	-6.68	QP
5	418.74	-10.53	35.41	24.88	46.00	-21.12	QP
6	864.19	-5.04	27.28	22.24	46.00	-23.76	QP

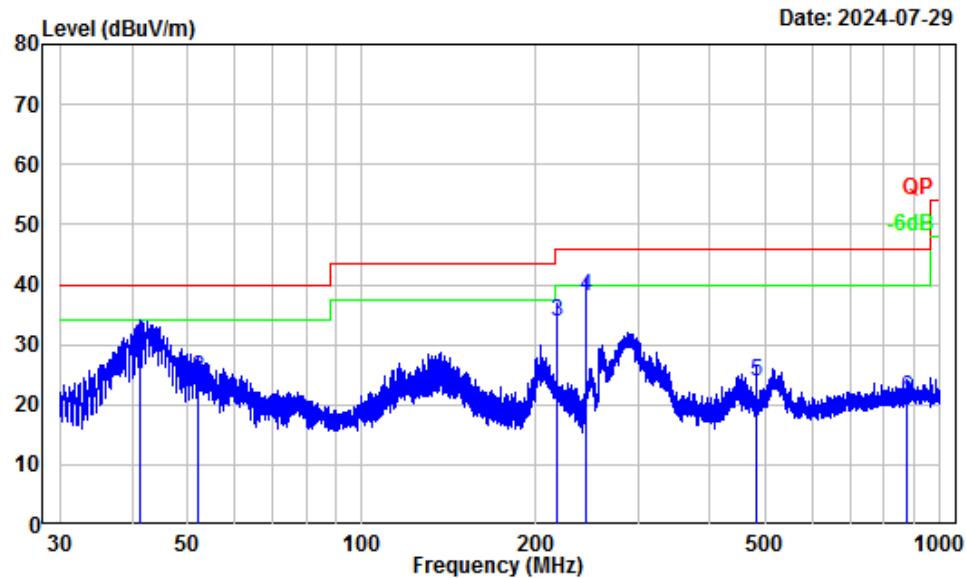**Vertical**


Site : Chamber A  
Condition : 3m Vertical  
Project Number: 2401S34482E-RF  
Test Mode : BLE  
Tester : Anson Su

	Freq	Factor	Read Level	Limit Level	Line	Over Limit	Remark
	MHz	dB/m	dB <sub>UV</sub>	dB <sub>UV</sub> /m	dB <sub>UV</sub> /m	dB	
1	41.20	-13.70	43.76	30.06	40.00	-9.94	QP
2	52.09	-18.66	43.24	24.58	40.00	-15.42	QP
3	216.97	-14.77	48.48	33.71	46.00	-12.29	QP
4	244.13	-14.91	52.96	38.05	46.00	-7.95	QP
5	480.11	-9.12	32.92	23.80	46.00	-22.20	QP
6	878.71	-4.95	26.14	21.19	46.00	-24.81	QP

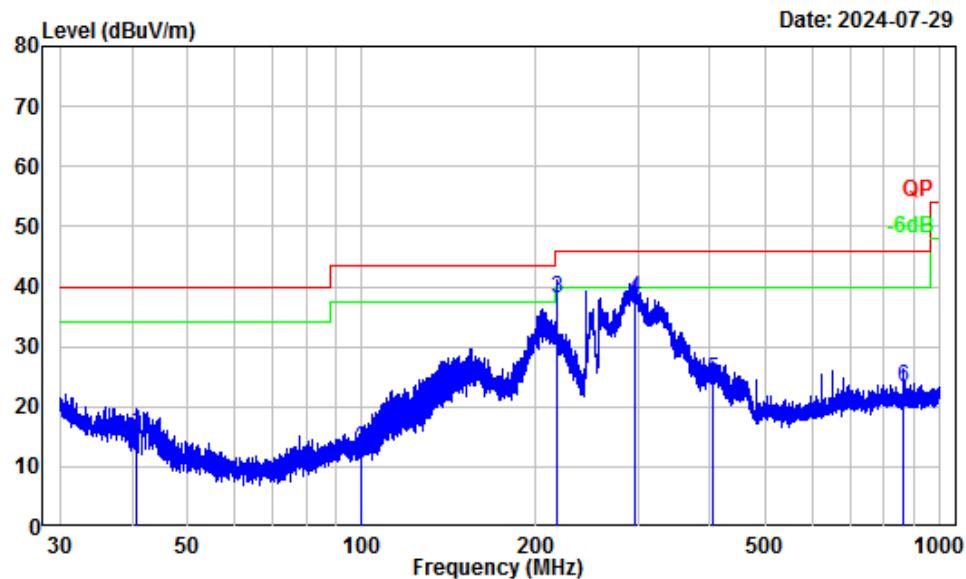**2.4G Wi-Fi (Maximum output power mode, 802.11g Low Channel)***Worst case is POE power supply:***Horizontal**

Site : Chamber A  
Condition : 3m Horizontal  
Project Number: 2401S34482E-RF  
Test Mode : 2.4G WIFI  
Tester : Anson Su

Freq	Factor	Read		Limit		Over	Remark
		MHz	dB/m	dBuV	dBuV/m	dBuV/m	
1	40.67	-13.39	29.05	15.66	40.00	-24.34	QP
2	99.62	-17.01	29.87	12.86	43.50	-30.64	QP
3	216.97	-14.77	52.81	38.04	46.00	-7.96	QP
4	296.31	-13.30	51.34	38.04	46.00	-7.96	QP
5	405.20	-10.72	35.29	24.57	46.00	-21.43	QP
6	864.19	-5.04	28.16	23.12	46.00	-22.88	QP

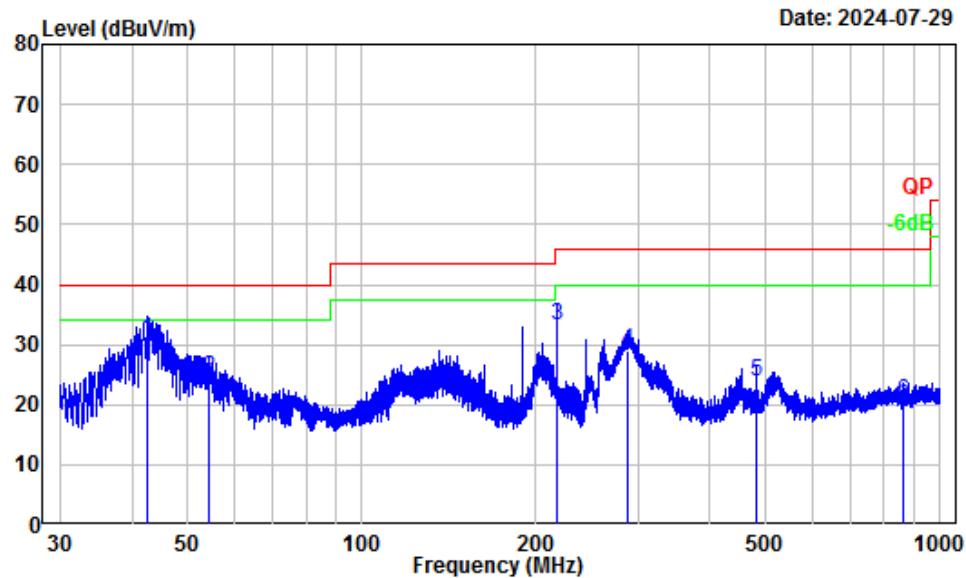**Vertical**

Site : Chamber A  
Condition : 3m Vertical  
Project Number: 2401S34482E-RF  
Test Mode : 2.4G WIFI  
Tester : Anson Su

	Freq	Factor	Read Level	Limit Level	Line	Over Limit	Remark
	MHz	dB/m	dB <sub>UV</sub>	dB <sub>UV</sub> /m	dB <sub>UV</sub> /m	dB	
1	42.62	-14.51	45.27	30.76	40.00	-9.24	QP
2	54.21	-18.71	43.23	24.52	40.00	-15.48	QP
3	216.97	-14.77	48.05	33.28	46.00	-12.72	QP
4	287.99	-13.59	42.69	29.10	46.00	-16.90	QP
5	480.11	-9.12	32.92	23.80	46.00	-22.20	QP
6	864.57	-5.03	25.64	20.61	46.00	-25.39	QP

**1-25 GHz:**

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)					
	Reading (dB $\mu$ V)	PK/AV										
BLE 1M												
Low Channel 2402MHz												
2378.45	55.29	PK	H	-2.93	52.36	74	-21.64					
2378.45	41.97	AV	H	-2.93	39.04	54	-14.96					
2379.18	55.41	PK	V	-2.93	52.48	74	-21.52					
2379.18	42.08	AV	V	-2.93	39.15	54	-14.85					
4804.00	47.14	PK	H	2.42	49.56	74	-24.44					
4804.00	32.93	AV	H	2.42	35.35	54	-18.65					
4804.00	47.27	PK	V	2.42	49.69	74	-24.31					
4804.00	33.09	AV	V	2.42	35.51	54	-18.49					
Middle Channel 2440MHz												
4880.00	46.92	PK	H	2.58	49.50	74	-24.50					
4880.00	32.84	AV	H	2.58	35.42	54	-18.58					
4880.00	47.13	PK	V	2.58	49.71	74	-24.29					
4880.00	32.97	AV	V	2.58	35.55	54	-18.45					
High Channel 2480MHz												
2483.75	55.69	PK	H	-3.17	52.52	74	-21.48					
2483.75	42.21	AV	H	-3.17	39.04	54	-14.96					
2483.64	55.94	PK	V	-3.17	52.77	74	-21.23					
2483.64	42.37	AV	V	-3.17	39.20	54	-14.80					
4960.00	46.69	PK	H	2.68	49.37	74	-24.63					
4960.00	32.71	AV	H	2.68	35.39	54	-18.61					
4960.00	46.95	PK	V	2.68	49.63	74	-24.37					
4960.00	32.88	AV	V	2.68	35.56	54	-18.44					


**Note:**

Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor


Corrected Amplitude = Corrected Factor + Reading

Margin = Corrected. Amplitude - Limit

The other spurious emission which is in the noise floor level was not recorded.

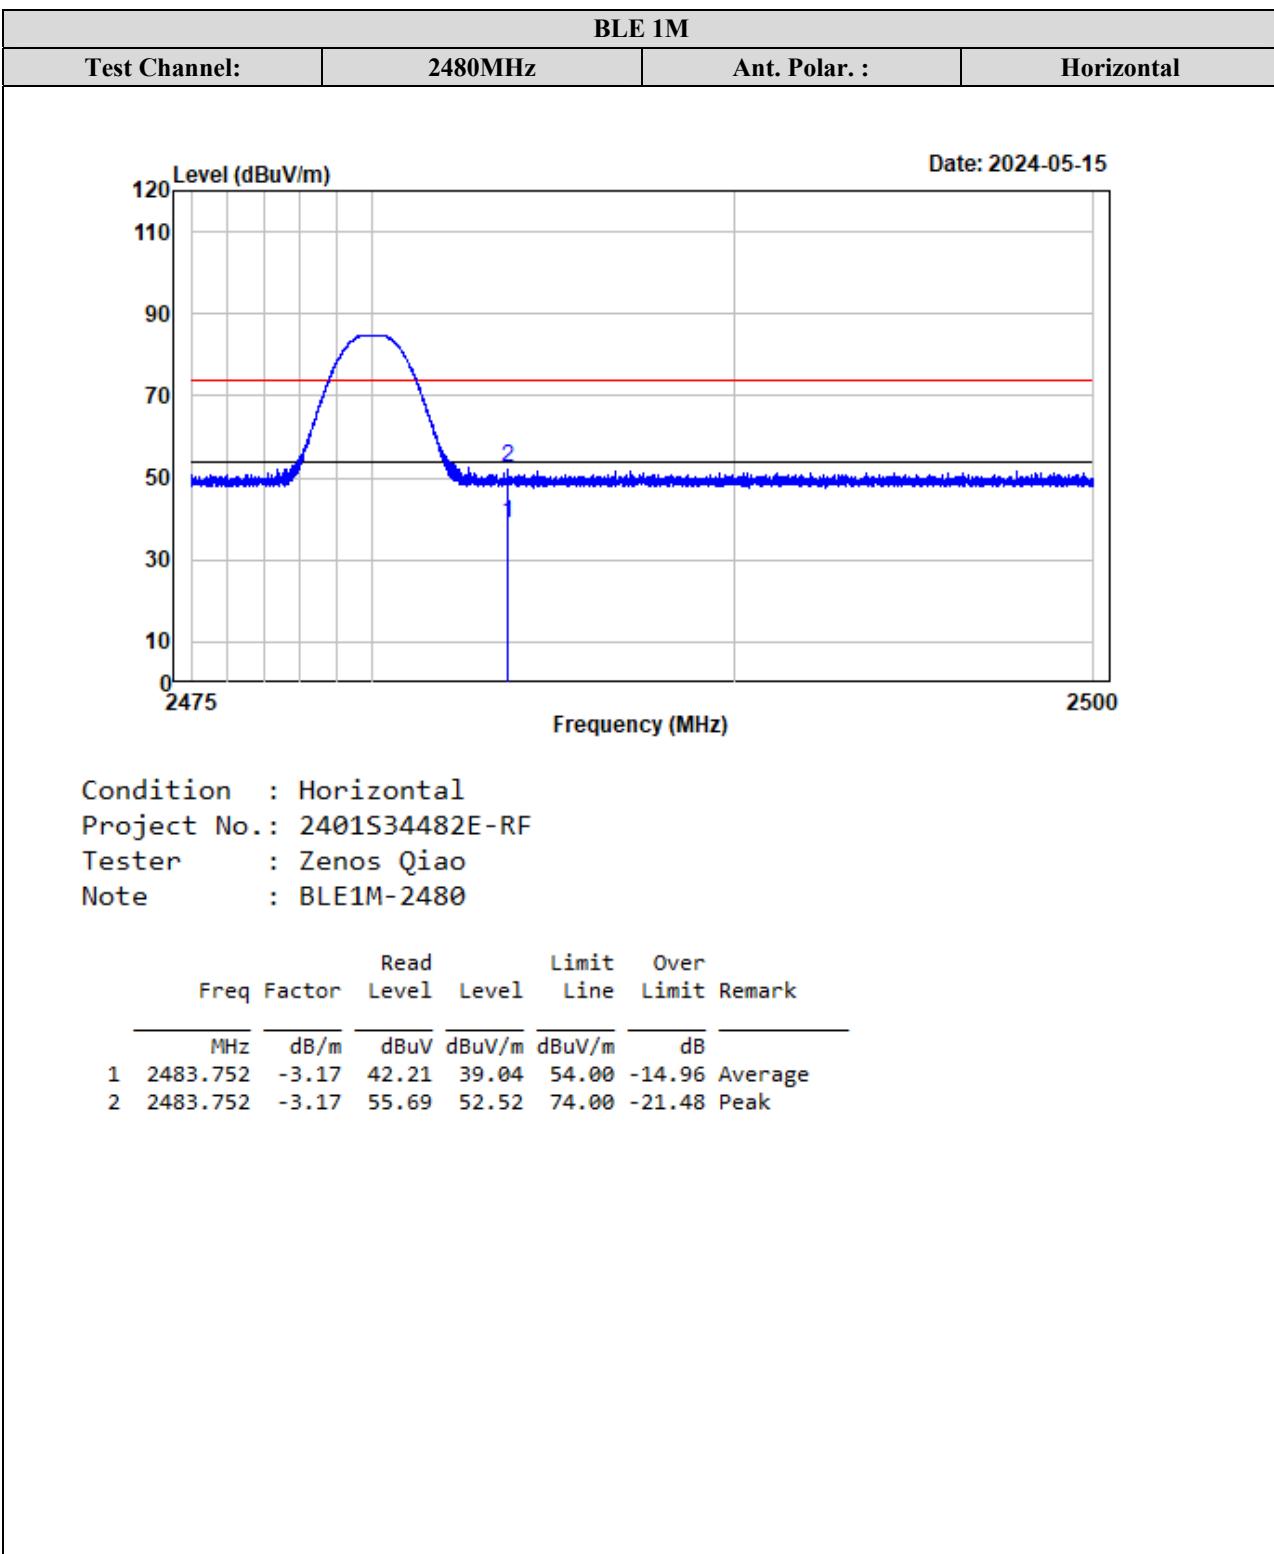**Test plots for Band Edge Measurements (Radiated):**

BLE 1M			
Test Channel:	2480MHz	Ant. Polar. :	Vertical

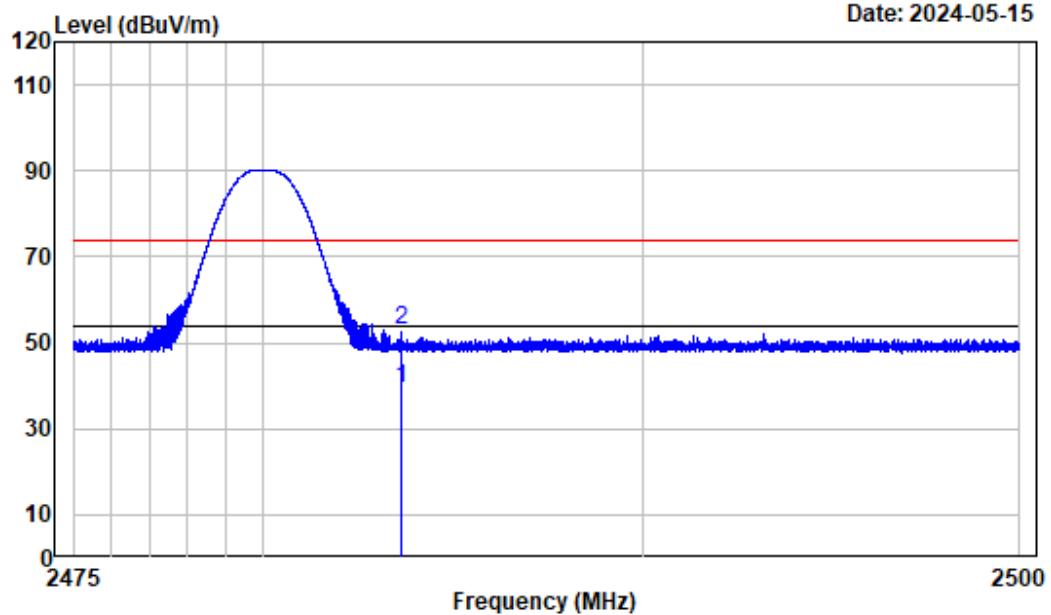

**2.4G Wi-Fi**

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)					
	Reading (dB $\mu$ V)	PK/AV										
<b>802.11b</b>												
Low Channel 2412MHz												
2388.08	54.42	PK	H	-2.93	51.49	74	-22.51					
2388.08	41.89	AV	H	-2.93	38.96	54	-15.04					
2387.63	55.64	PK	V	-2.93	52.71	74	-21.29					
2387.63	42.35	AV	V	-2.93	39.42	54	-14.58					
4824.00	49.78	PK	H	2.45	52.23	74	-21.77					
4824.00	37.54	AV	H	2.45	39.99	54	-14.01					
4824.00	49.32	PK	V	2.45	51.77	74	-22.23					
4824.00	37.23	AV	V	2.45	39.68	54	-14.32					
Middle Channel 2437MHz												
4874.00	49.15	PK	H	2.56	51.71	74	-22.29					
4874.00	36.27	AV	H	2.56	38.83	54	-15.17					
4874.00	48.73	PK	V	2.56	51.29	74	-22.71					
4874.00	35.86	AV	V	2.56	38.42	54	-15.58					
High Channel 2462MHz												
2486.59	55.76	PK	H	-3.17	52.59	74	-21.41					
2486.59	42.19	AV	H	-3.17	39.02	54	-14.98					
2484.99	56.38	PK	V	-3.17	53.21	74	-20.79					
2484.99	42.81	AV	V	-3.17	39.64	54	-14.36					
4924.00	48.64	PK	H	2.63	51.27	74	-22.73					
4924.00	34.71	AV	H	2.63	37.34	54	-16.66					
4924.00	48.25	PK	V	2.63	50.88	74	-23.12					
4924.00	34.18	AV	V	2.63	36.81	54	-17.19					

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)					
	Reading (dB $\mu$ V)	PK/AV										
<b>802.11g</b>												
Low Channel 2412MHz												
2389.83	61.16	PK	H	-2.93	58.23	74	-15.77					
2389.83	47.83	AV	H	-2.93	44.90	54	-9.10					
2389.94	62.24	PK	V	-2.93	59.31	74	-14.69					
2389.94	48.35	AV	V	-2.93	45.42	54	-8.58					
4824.00	48.26	PK	H	2.45	50.71	74	-23.29					
4824.00	32.91	AV	H	2.45	35.36	54	-18.64					
4824.00	48.08	PK	V	2.45	50.53	74	-23.47					
4824.00	32.77	AV	V	2.45	35.22	54	-18.78					
Middle Channel 2437MHz												
4874.00	47.89	PK	H	2.56	50.45	74	-23.55					
4874.00	32.68	AV	H	2.56	35.24	54	-18.76					
4874.00	47.71	PK	V	2.56	50.27	74	-23.73					
4874.00	32.54	AV	V	2.56	35.10	54	-18.90					
High Channel 2462MHz												
2483.58	69.19	PK	H	-3.17	66.02	74	-7.98					
2483.58	52.78	AV	H	-3.17	49.61	54	-4.39					
2483.51	70.25	PK	V	-3.17	67.08	74	-6.92					
2483.51	53.43	AV	V	-3.17	50.26	54	-3.74					
4924.00	47.57	PK	H	2.63	50.20	74	-23.80					
4924.00	32.46	AV	H	2.63	35.09	54	-18.91					
4924.00	47.29	PK	V	2.63	49.92	74	-24.08					
4924.00	32.35	AV	V	2.63	34.98	54	-19.02					

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)					
	Reading (dB $\mu$ V)	PK/AV										
<b>802.11n20</b>												
Low Channel 2412MHz												
2389.63	58.84	PK	H	-2.93	55.91	74	-18.09					
2389.63	47.36	AV	H	-2.93	44.43	54	-9.57					
2389.78	59.98	PK	V	-2.93	57.05	74	-16.95					
2389.78	47.07	AV	V	-2.93	44.14	54	-9.86					
4824.00	47.61	PK	H	2.45	50.06	74	-23.94					
4824.00	32.88	AV	H	2.45	35.33	54	-18.67					
4824.00	47.46	PK	V	2.45	49.91	74	-24.09					
4824.00	32.73	AV	V	2.45	35.18	54	-18.82					
Middle Channel 2437MHz												
4874.00	47.28	PK	H	2.56	49.84	74	-24.16					
4874.00	32.64	AV	H	2.56	35.20	54	-18.80					
4874.00	47.12	PK	V	2.56	49.68	74	-24.32					
4874.00	32.47	AV	V	2.56	35.03	54	-18.97					
High Channel 2462MHz												
2483.64	64.96	PK	H	-3.17	61.79	74	-12.21					
2483.64	51.25	AV	H	-3.17	48.08	54	-5.92					
2483.57	66.08	PK	V	-3.17	62.91	74	-11.09					
2483.57	51.91	AV	V	-3.17	48.74	54	-5.26					
4924.00	46.96	PK	H	2.63	49.59	74	-24.41					
4924.00	32.35	AV	H	2.63	34.98	54	-19.02					
4924.00	46.81	PK	V	2.63	49.44	74	-24.56					
4924.00	32.22	AV	V	2.63	34.85	54	-19.15					

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)					
	Reading (dB $\mu$ V)	PK/AV										
<b>802.11n40</b>												
Low Channel 2422MHz												
2389.63	58.84	PK	H	-2.93	55.91	74	-18.09					
2389.63	47.36	AV	H	-2.93	44.43	54	-9.57					
2389.78	59.98	PK	V	-2.93	57.05	74	-16.95					
2389.78	47.07	AV	V	-2.93	44.14	54	-9.86					
4824.00	47.61	PK	H	2.45	50.06	74	-23.94					
4824.00	32.88	AV	H	2.45	35.33	54	-18.67					
4824.00	47.46	PK	V	2.45	49.91	74	-24.09					
4824.00	32.73	AV	V	2.45	35.18	54	-18.82					
Middle Channel 2437MHz												
4874.00	47.28	PK	H	2.56	49.84	74	-24.16					
4874.00	32.64	AV	H	2.56	35.20	54	-18.80					
4874.00	47.12	PK	V	2.56	49.68	74	-24.32					
4874.00	32.47	AV	V	2.56	35.03	54	-18.97					
High Channel 2462MHz												
2483.64	64.96	PK	H	-3.17	61.79	74	-12.21					
2483.64	51.25	AV	H	-3.17	48.08	54	-5.92					
2483.57	66.08	PK	V	-3.17	62.91	74	-11.09					
2483.57	51.91	AV	V	-3.17	48.74	54	-5.26					
4924.00	46.96	PK	H	2.63	49.59	74	-24.41					
4924.00	32.35	AV	H	2.63	34.98	54	-19.02					
4924.00	46.81	PK	V	2.63	49.44	74	-24.56					
4924.00	32.22	AV	V	2.63	34.85	54	-19.15					


**Note:**

Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor


Corrected Amplitude = Factor + Reading

Margin = Corrected. Amplitude - Limit

The other spurious emission which is in the noise floor level was not recorded.

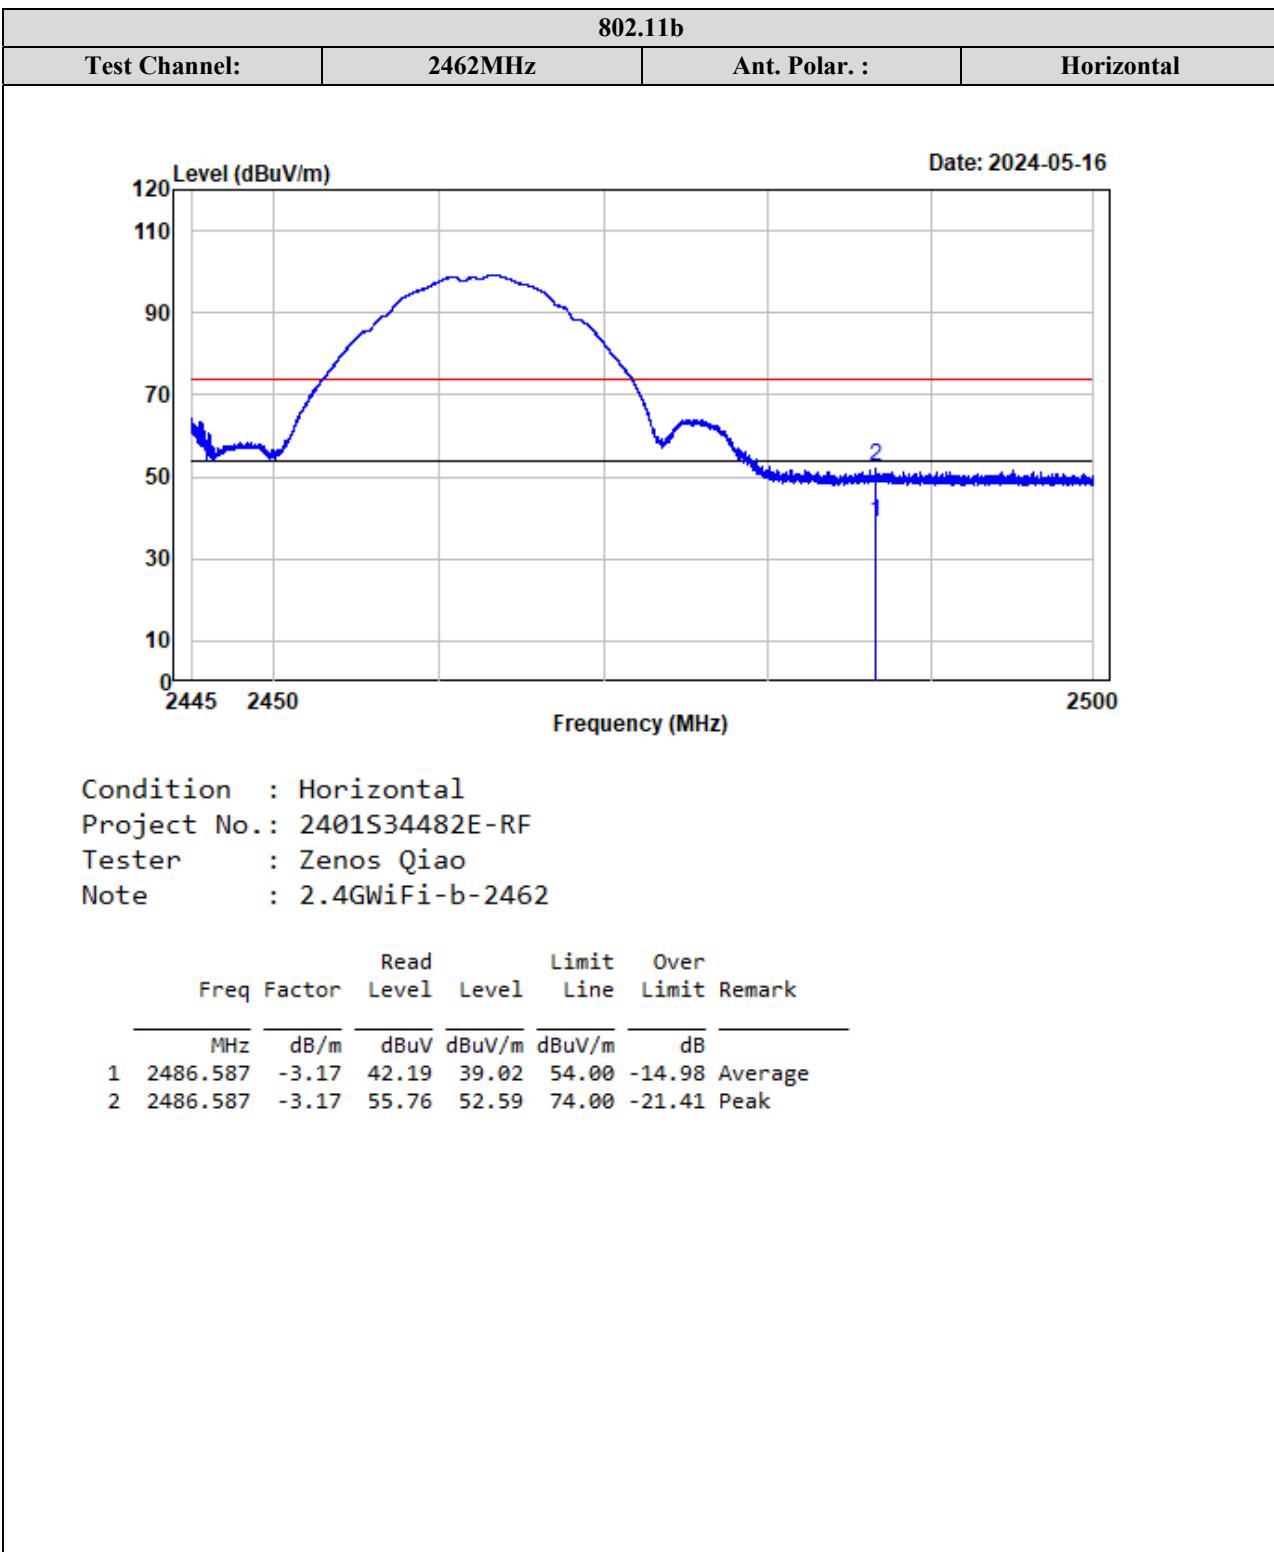
**Test plots for Band Edge Measurements (Radiated):**


802.11b			
Test Channel:	2462MHz	Ant. Polar. :	Vertical

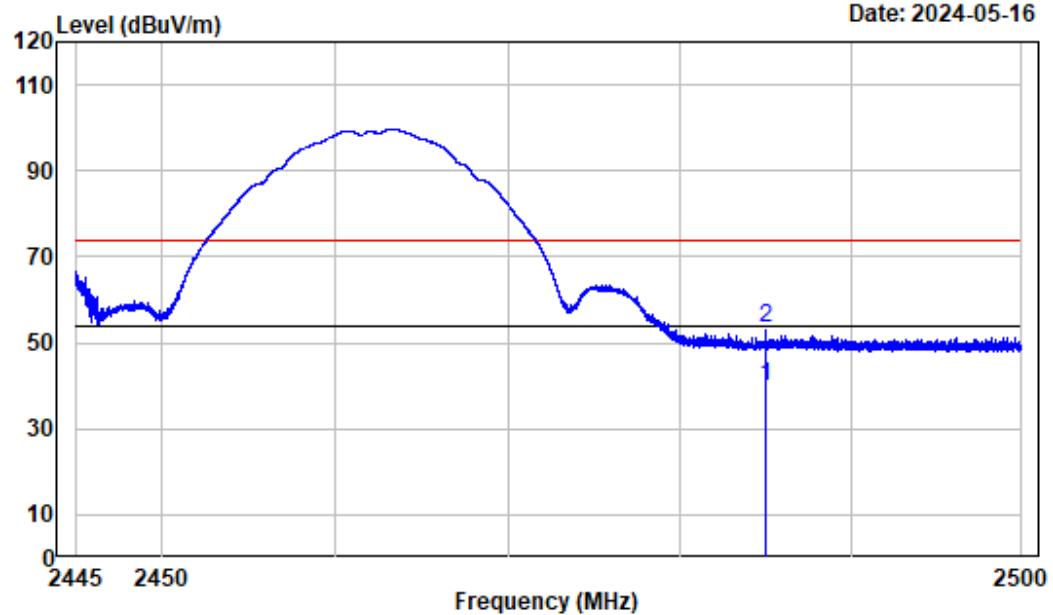



Condition : Vertical  
Project No.: 2401S34482E-RF  
Tester : Zenos Qiao  
Note : 2.4GWiFi-b-2462


	Freq	Factor	Read Level	Limit Level	Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2484.985	-3.17	42.81	39.64	54.00	-14.36	Average
2	2484.985	-3.17	56.38	53.21	74.00	-20.79	Peak

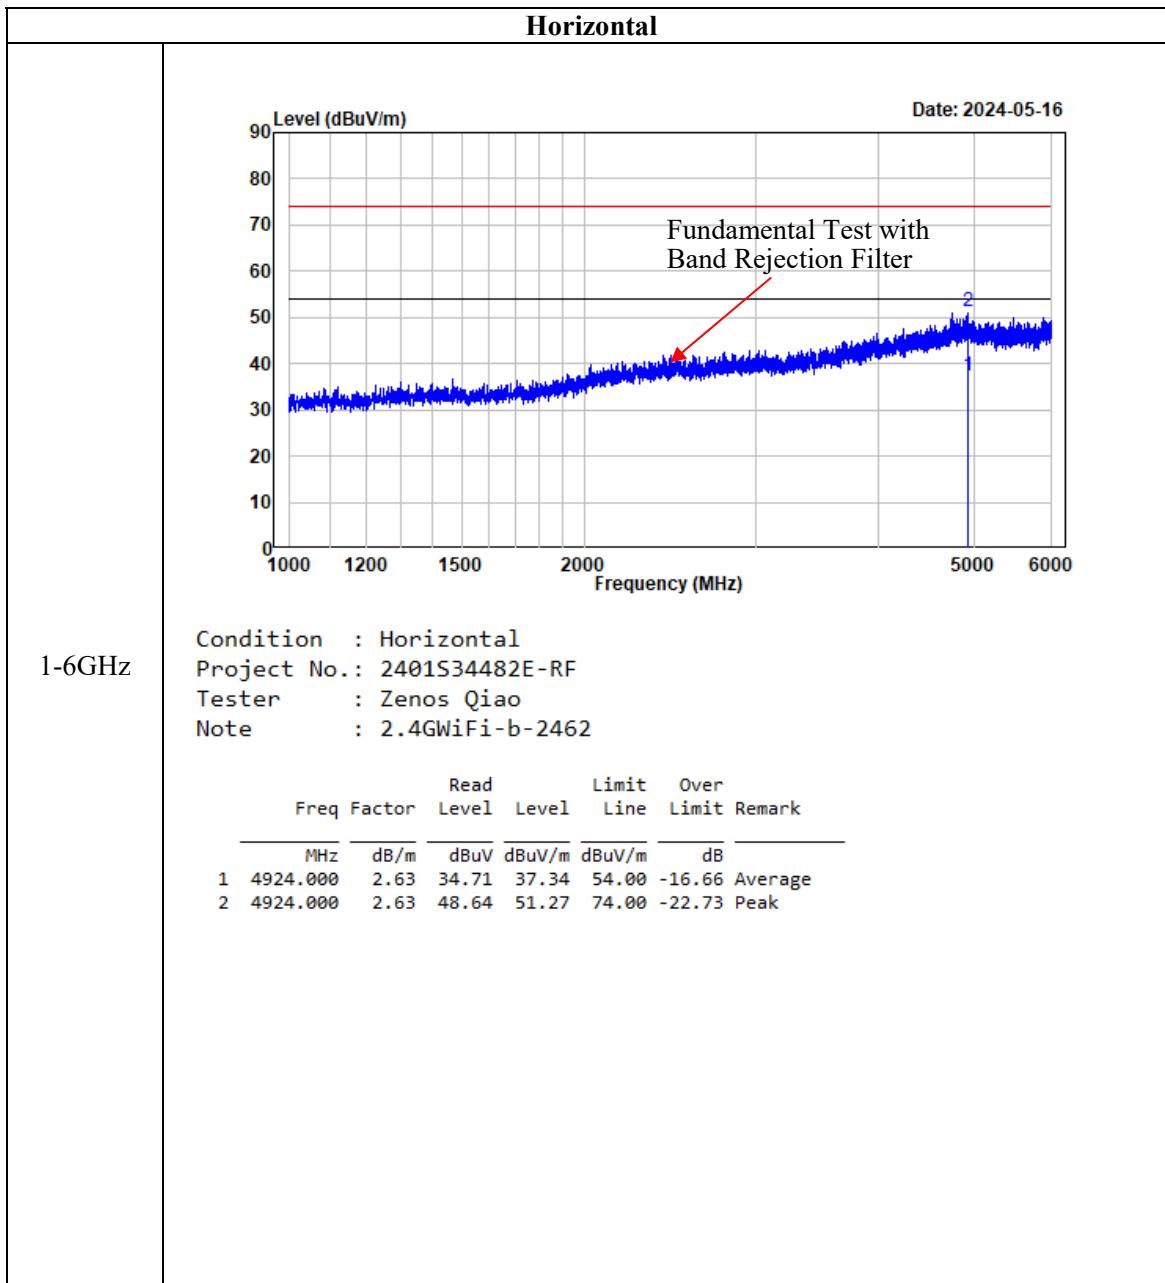
**Test plots for Harmonic and Emissions Measurements:**

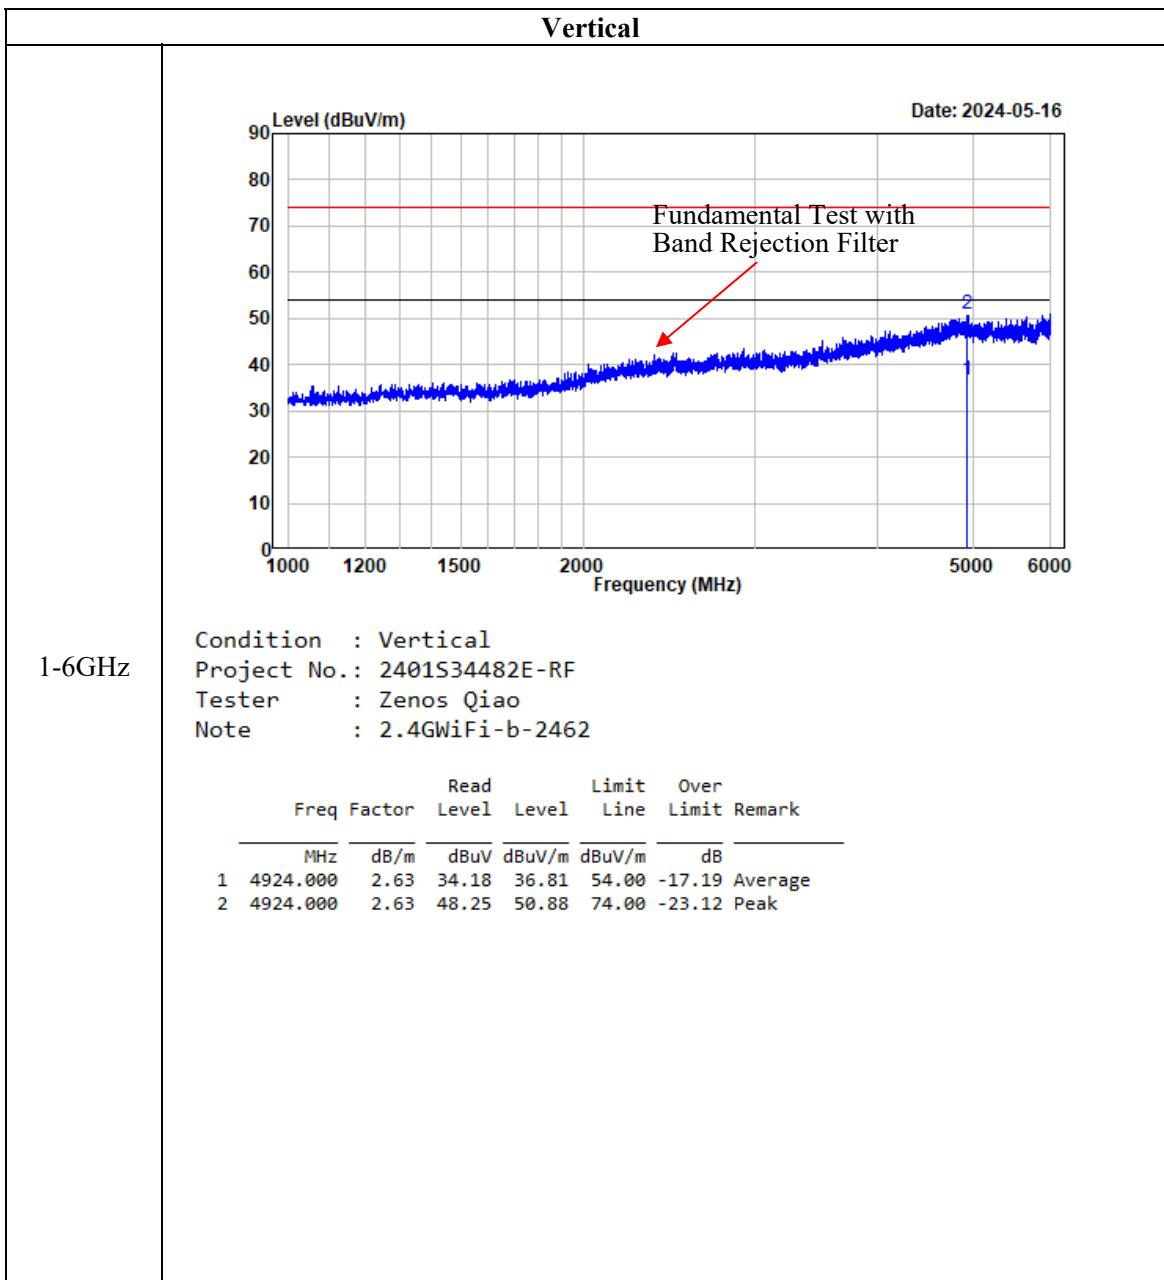

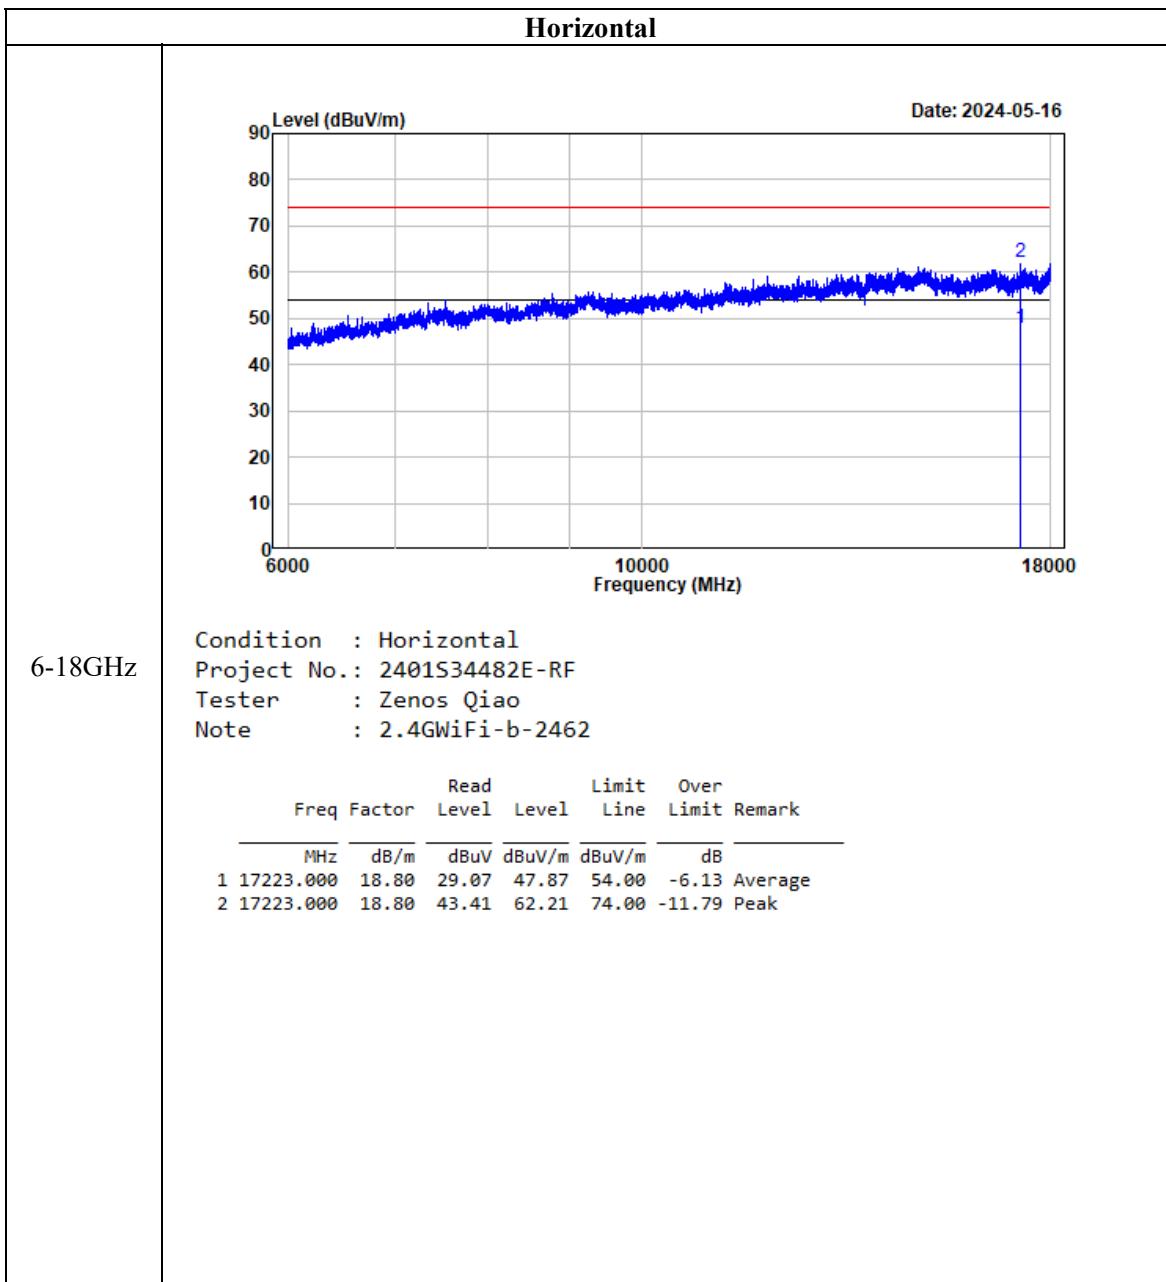

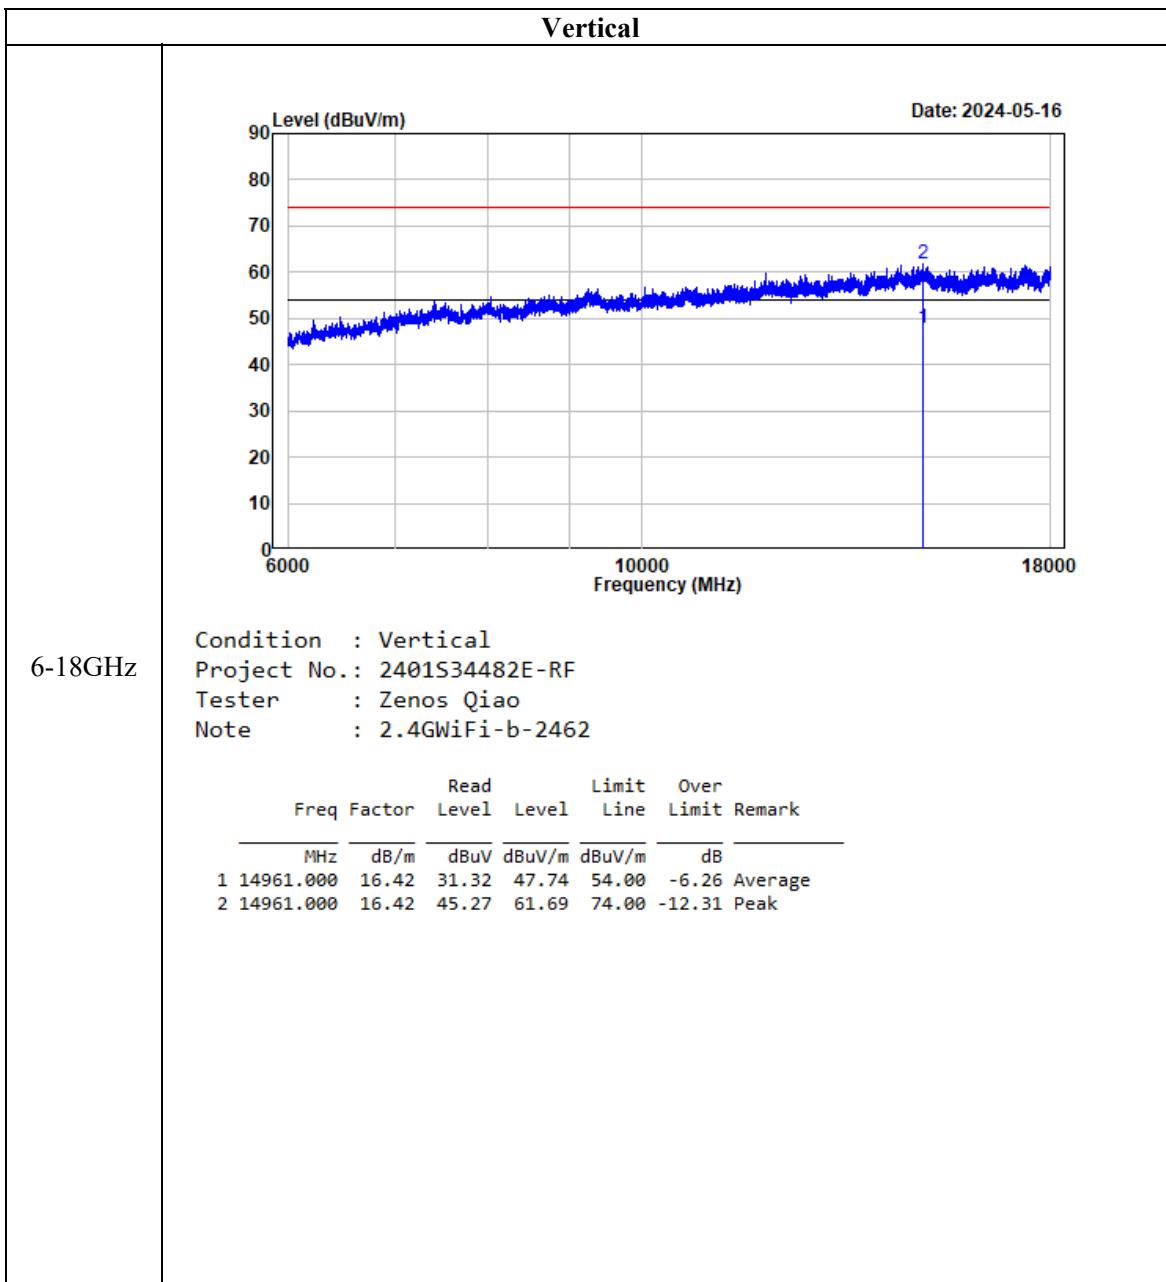

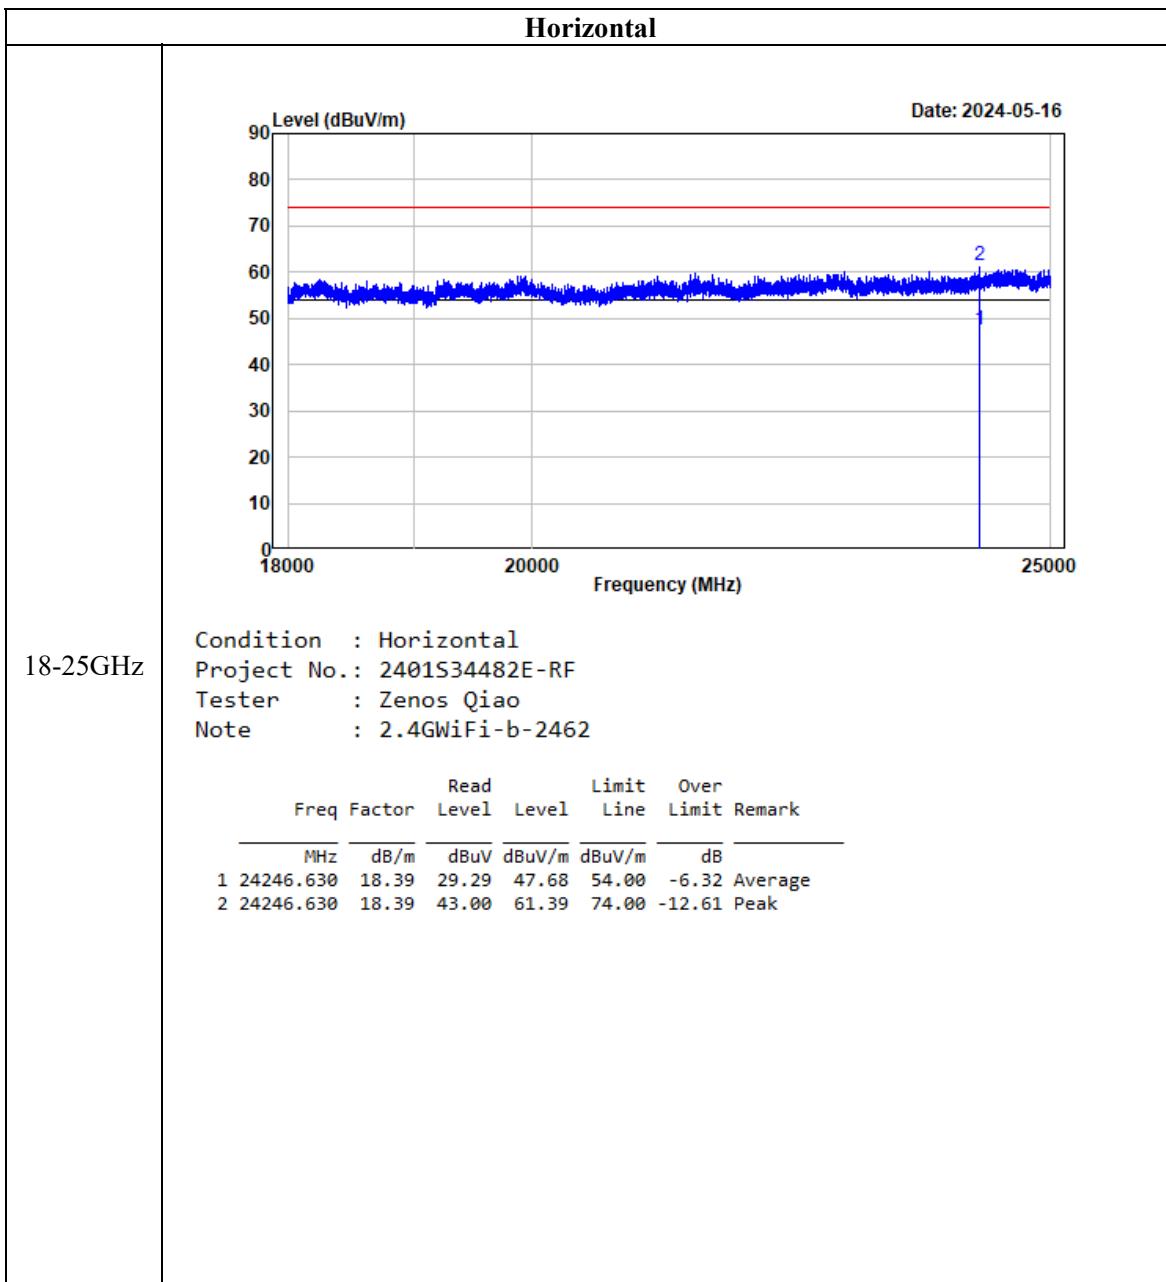

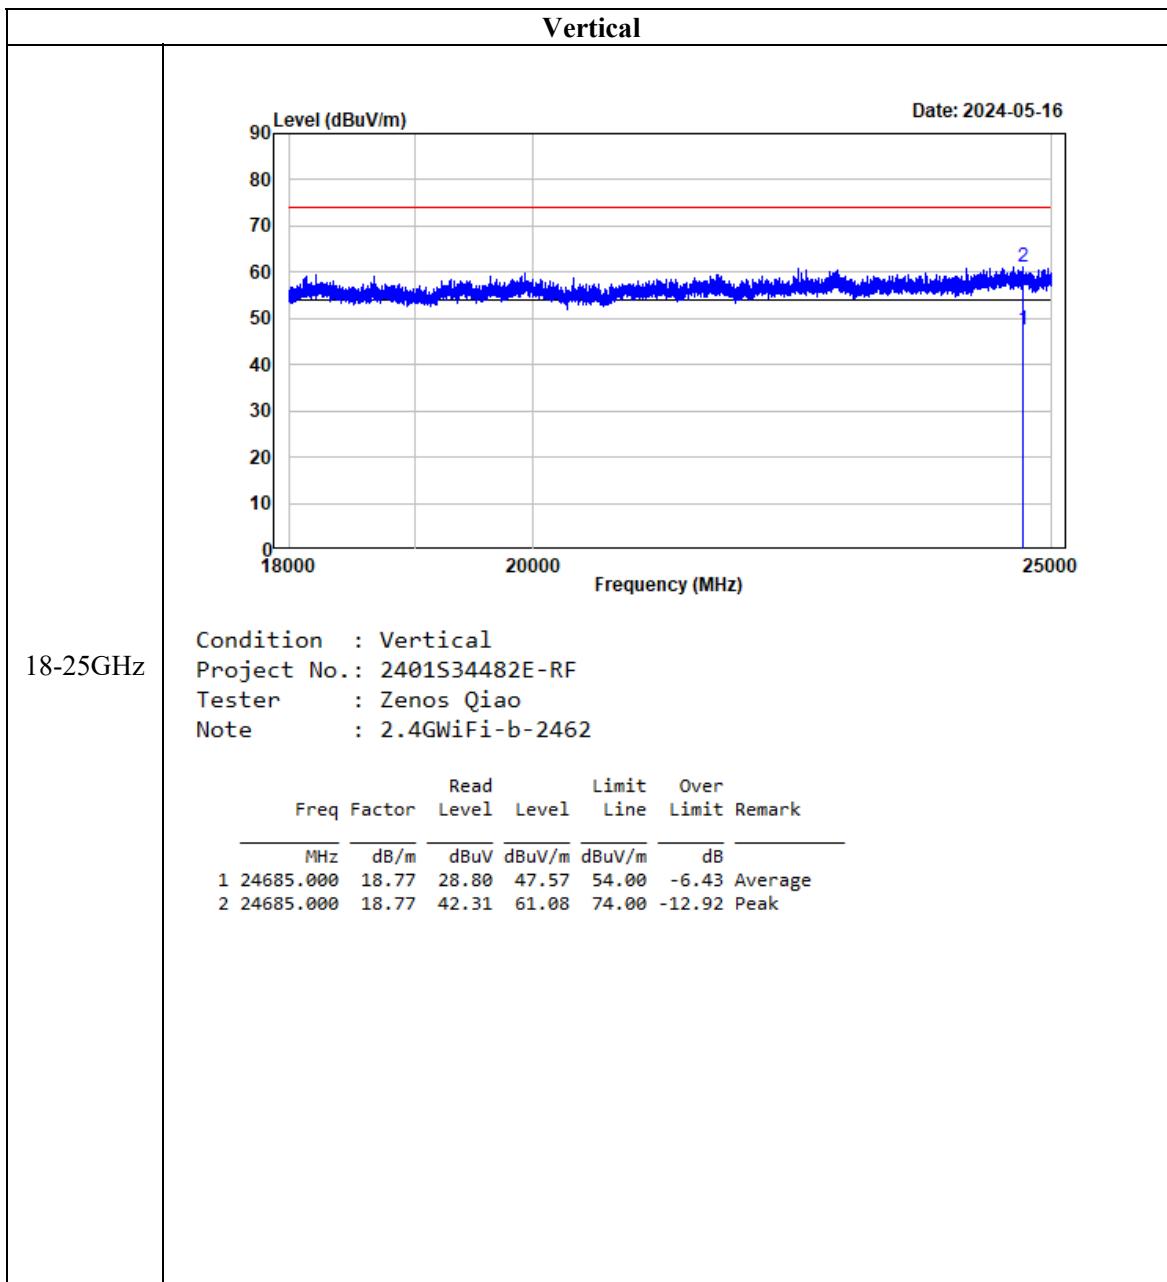

## FCC §15.247(a) (2) - 6 dB EMISSION BANDWIDTH

### Applicable Standard


According to FCC §15.247(a) (2)

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

### Test Procedure

Test Method: ANSI C63.10-2013 Clause 11.8.1 & Clause 6.9.3

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 6 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

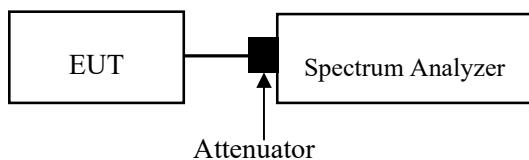

### Test Data

#### Environmental Conditions


Temperature:	24~25 °C
Relative Humidity:	45~46 %
ATM Pressure:	100~101 kPa


The testing was performed by Allen Bai from 2024-05-17 to 2024-05-20.


EUT operation mode: Transmitting


Test Result: Compliant.


Test Modes	Test Frequency (MHz)	6 dB Bandwidth (MHz)	Limit (MHz)
BLE 1M	2402	0.669	≥0.5
	2440	0.666	≥0.5
	2480	0.669	≥0.5
802.11b	2412	9.12	≥0.5
	2437	9.09	≥0.5
	2462	9.60	≥0.5
802.11g	2412	15.48	≥0.5
	2437	15.99	≥0.5
	2462	15.78	≥0.5
802.11n20	2412	16.59	≥0.5
	2437	16.86	≥0.5
	2462	16.20	≥0.5
802.11n40	2422	35.94	≥0.5
	2437	35.94	≥0.5
	2452	35.28	≥0.5

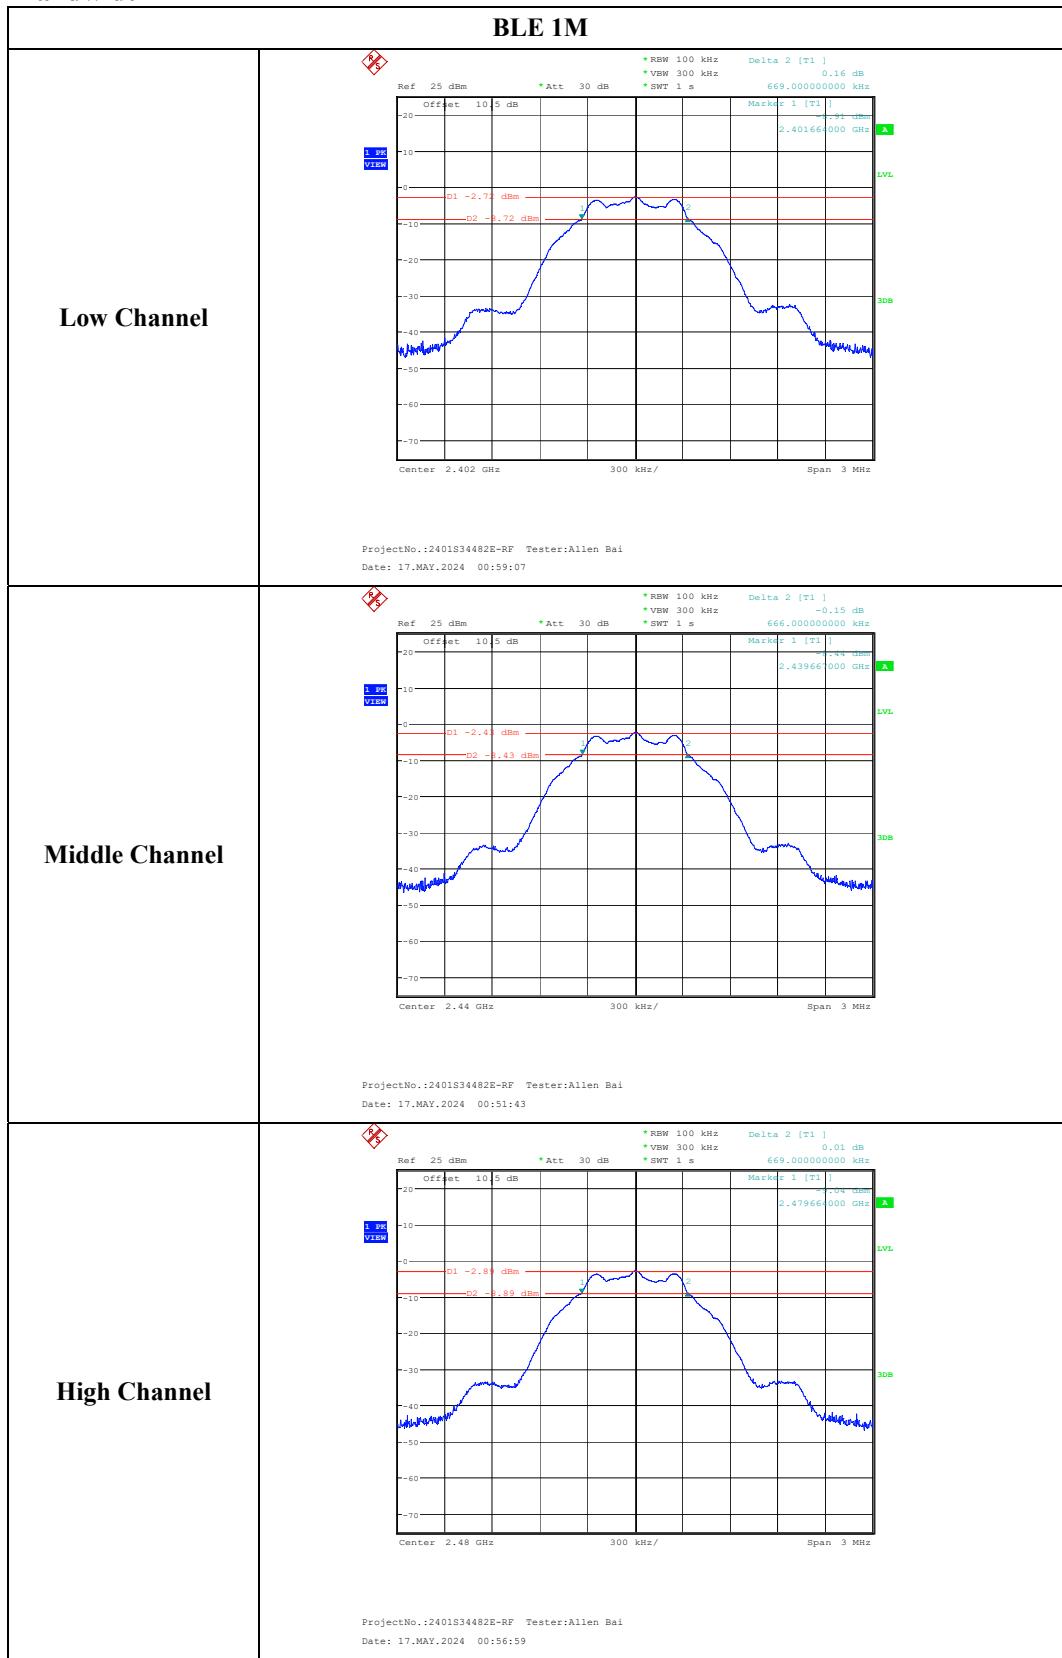**6 dB Bandwidth**

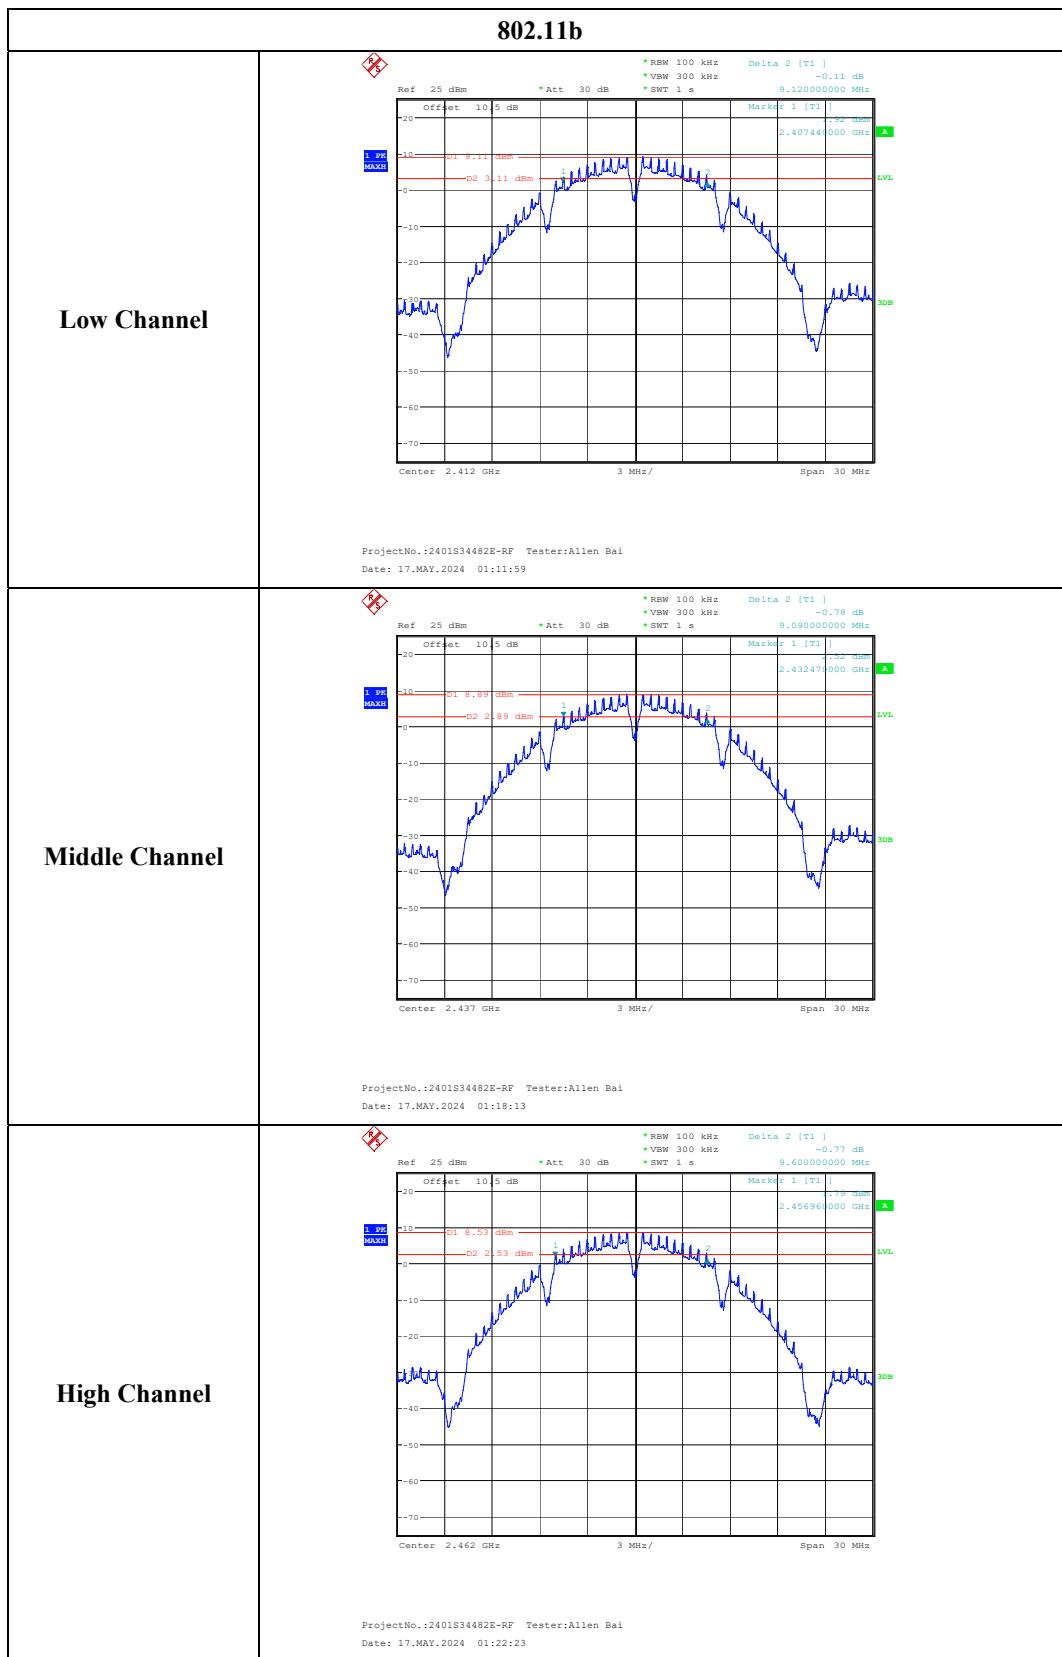

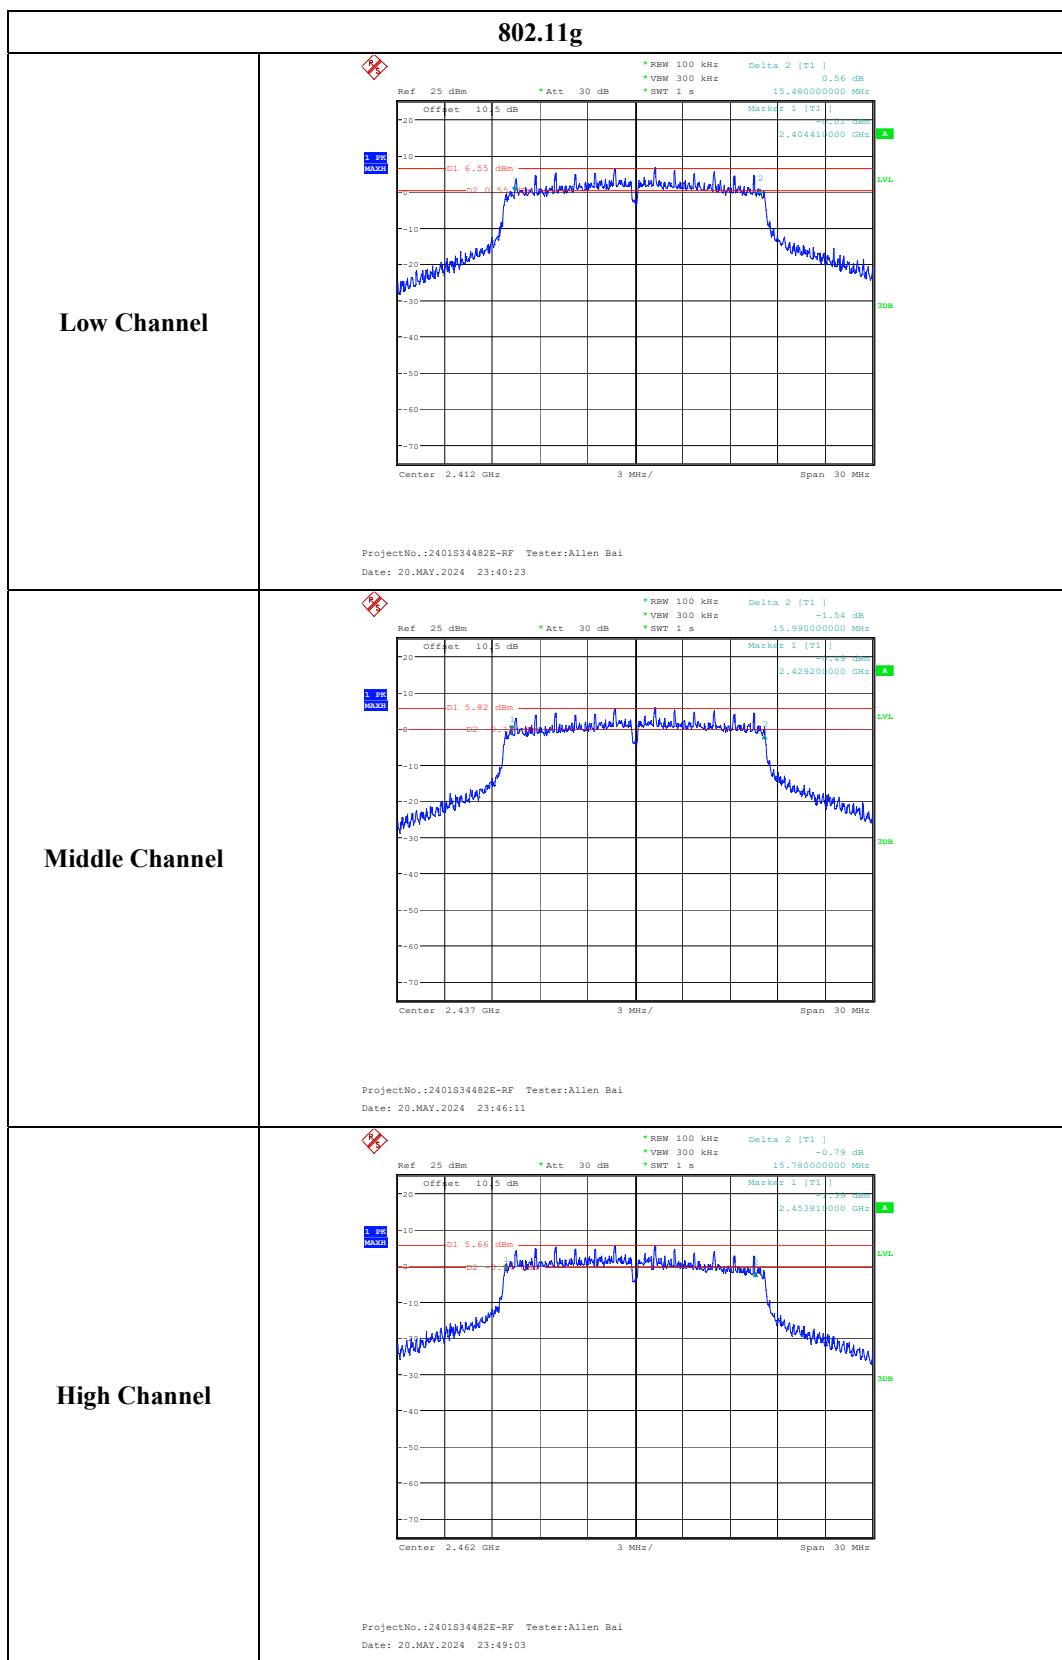

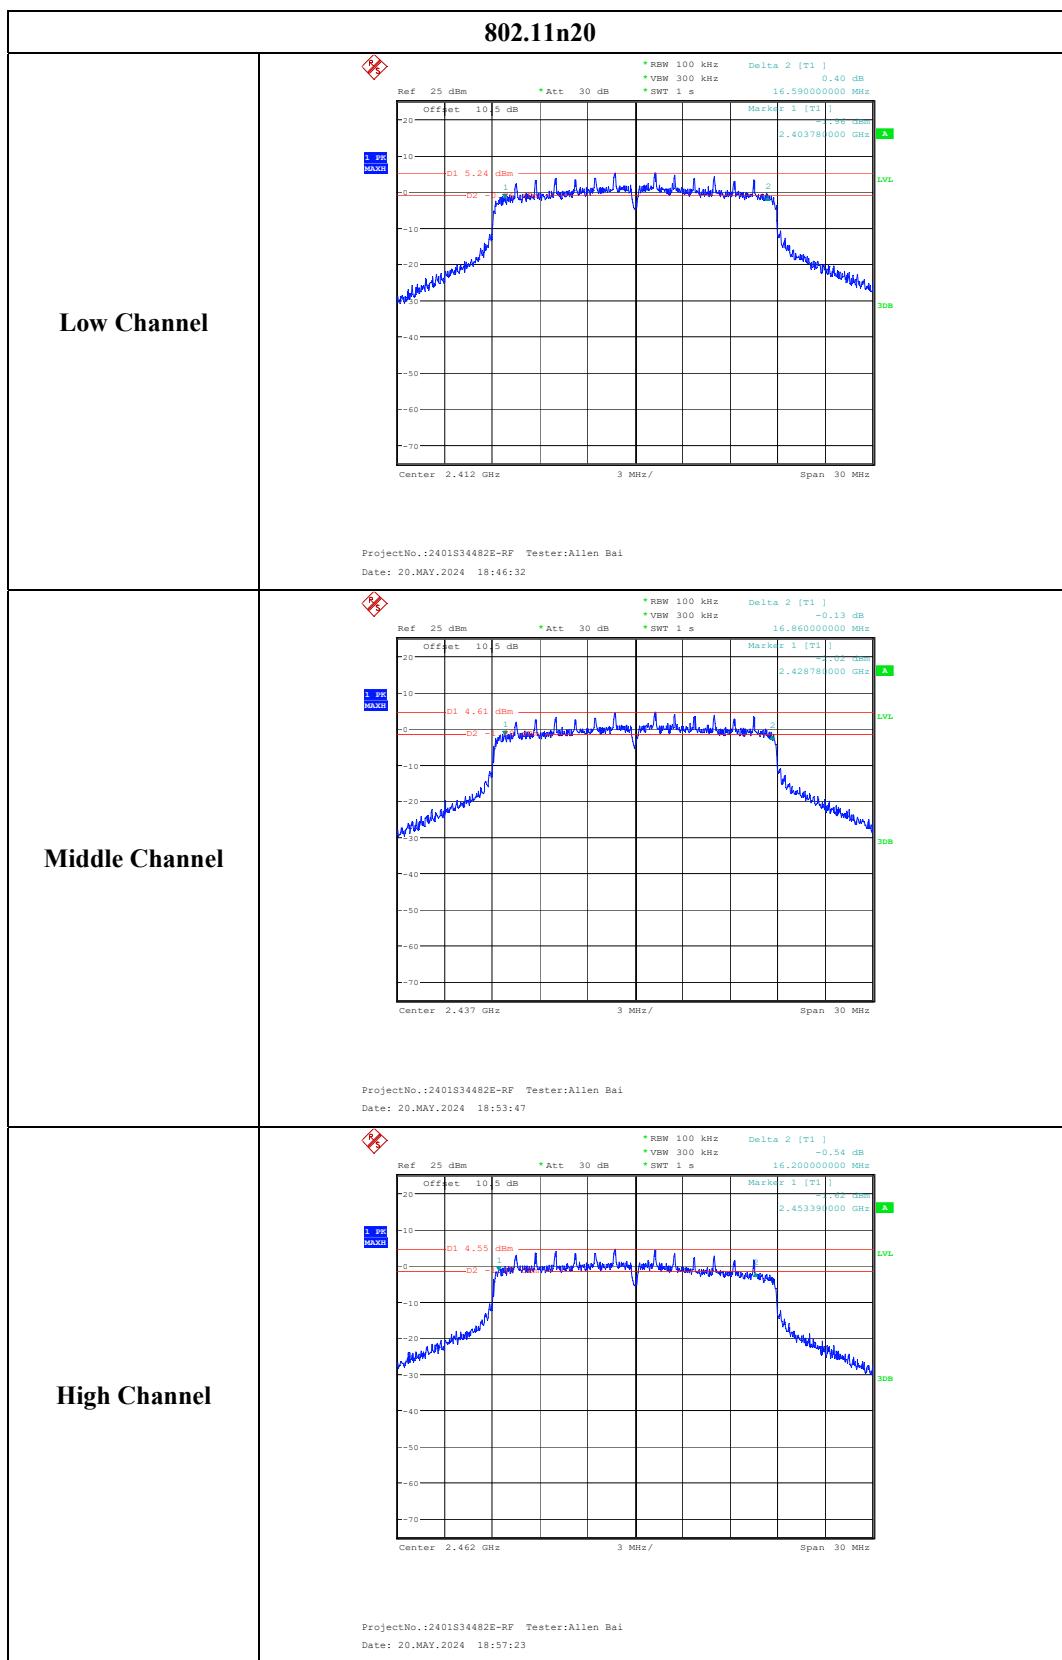

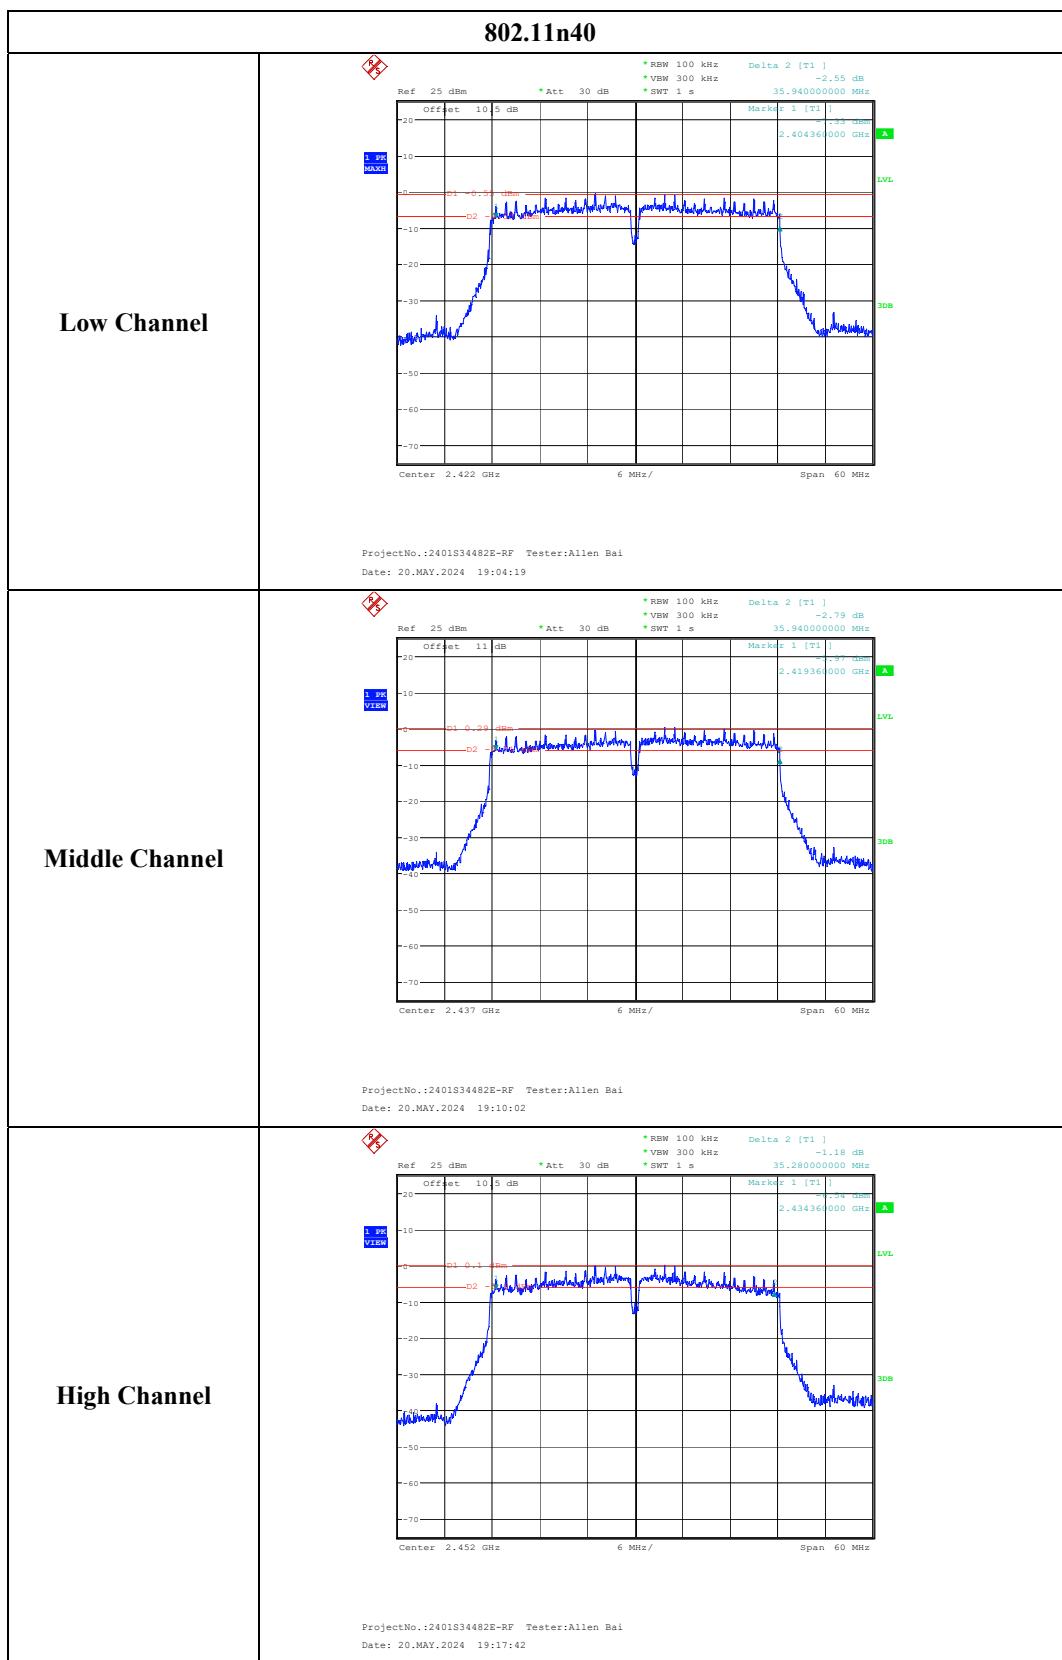

## FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER

### Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power.


Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

### Test Procedure


Test Method: ANSI C63.10-2013 Clause 11.9.1.1 for BLE & Clause 11.9.1.3 for Wi-Fi

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.

For Wi-Fi mode:

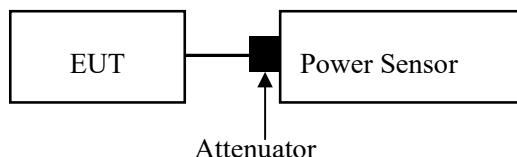

For BLE mode:

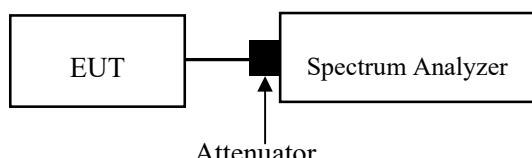

## Test Data

### Environmental Conditions


Temperature:	24~25 °C
Relative Humidity:	45~46 %
ATM Pressure:	100~101 kPa

The testing was performed by Allen Bai from 2024-05-17 to 2024-05-20.

EUT operation mode: Transmitting

**Test Result: Compliant.**

Test Modes	Test Frequency (MHz)	Maximum Conducted Power (dBm)	Peak Output (dBm)	Limit (dBm)
BLE 1M	2402	-2.04		30
	2440	-1.77		30
	2480	-2.20		30
802.11b	2412	21.15		30
	2437	20.72		30
	2462	20.61		30
802.11g	2412	25.26		30
	2437	24.62		30
	2462	24.42		30
802.11n20	2412	24.26		30
	2437	23.78		30
	2462	23.63		30
802.11n40	2422	22.15		30
	2437	23.06		30
	2452	22.52		30

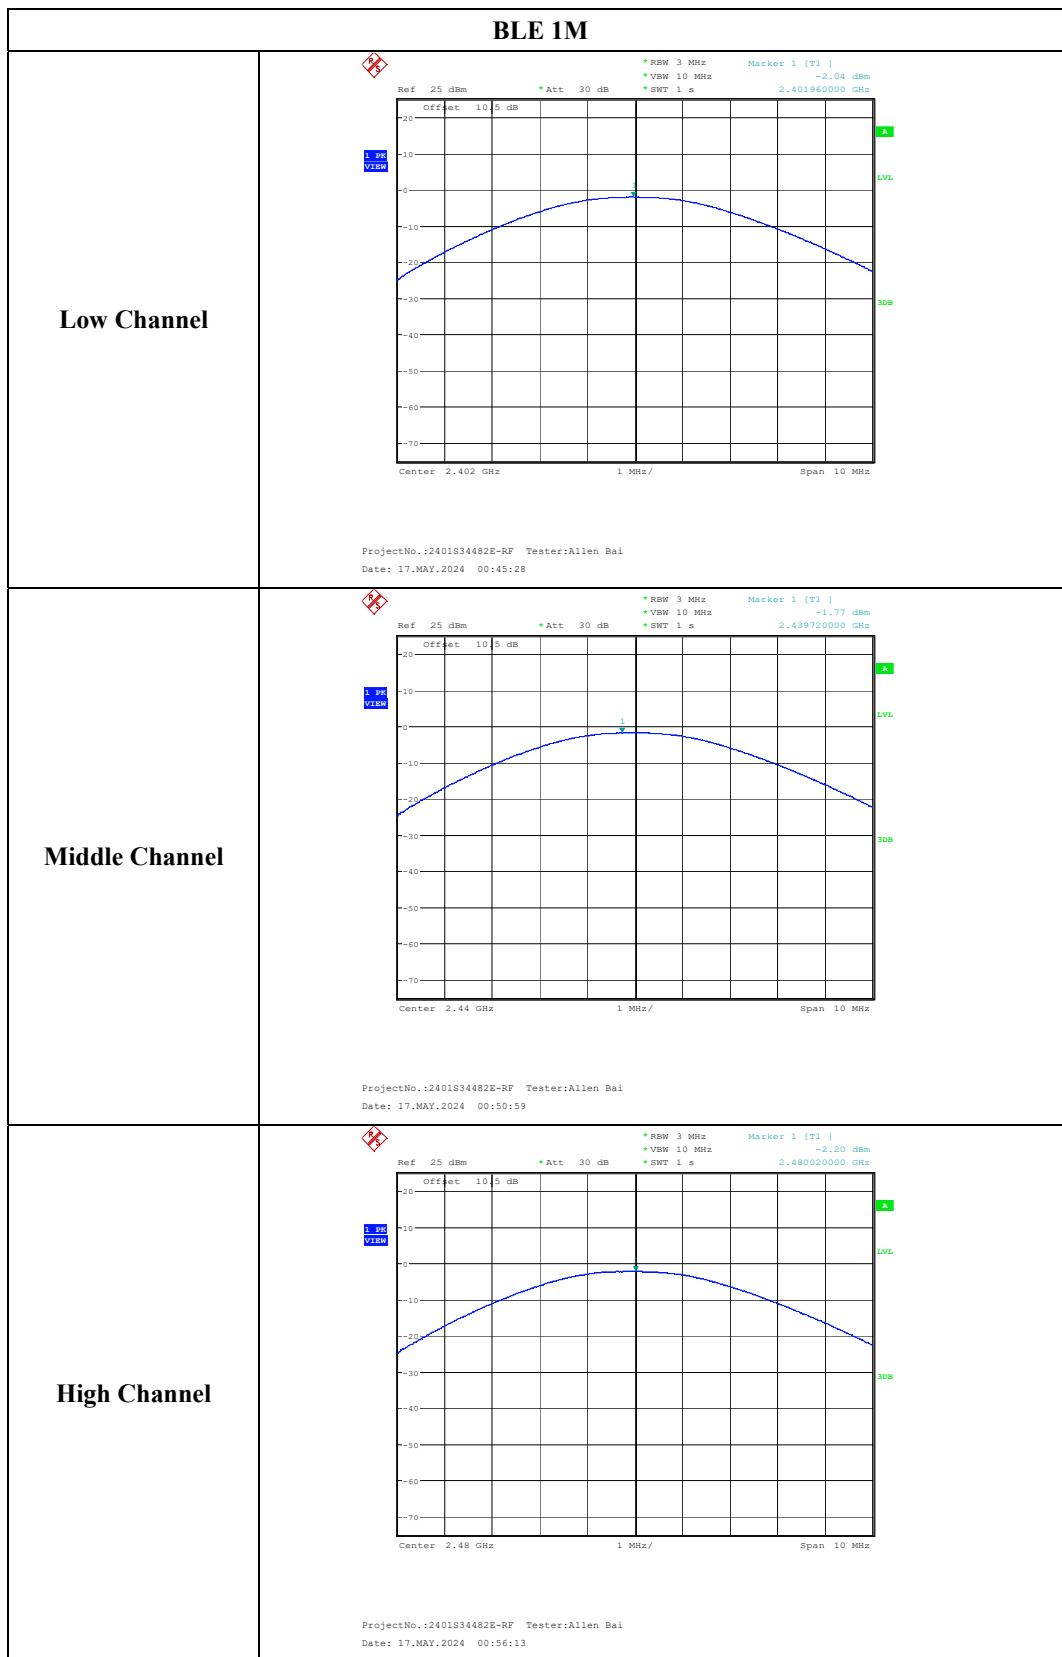

## FCC §15.247(d) - 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE


### Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### Test Procedure

Test Method: ANSI C63.10-2013 Clause 11.11

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

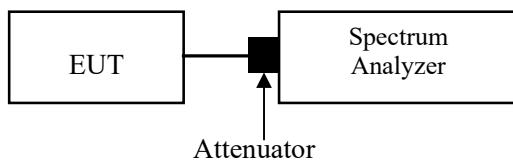

### Test Data


#### Environmental Conditions


Temperature:	24~25 °C
Relative Humidity:	45~46 %
ATM Pressure:	100~101 kPa


The testing was performed by Allen Bai from 2024-05-17 to 2024-05-20.


EUT operation mode: Transmitting


**Test Result: Compliant.**

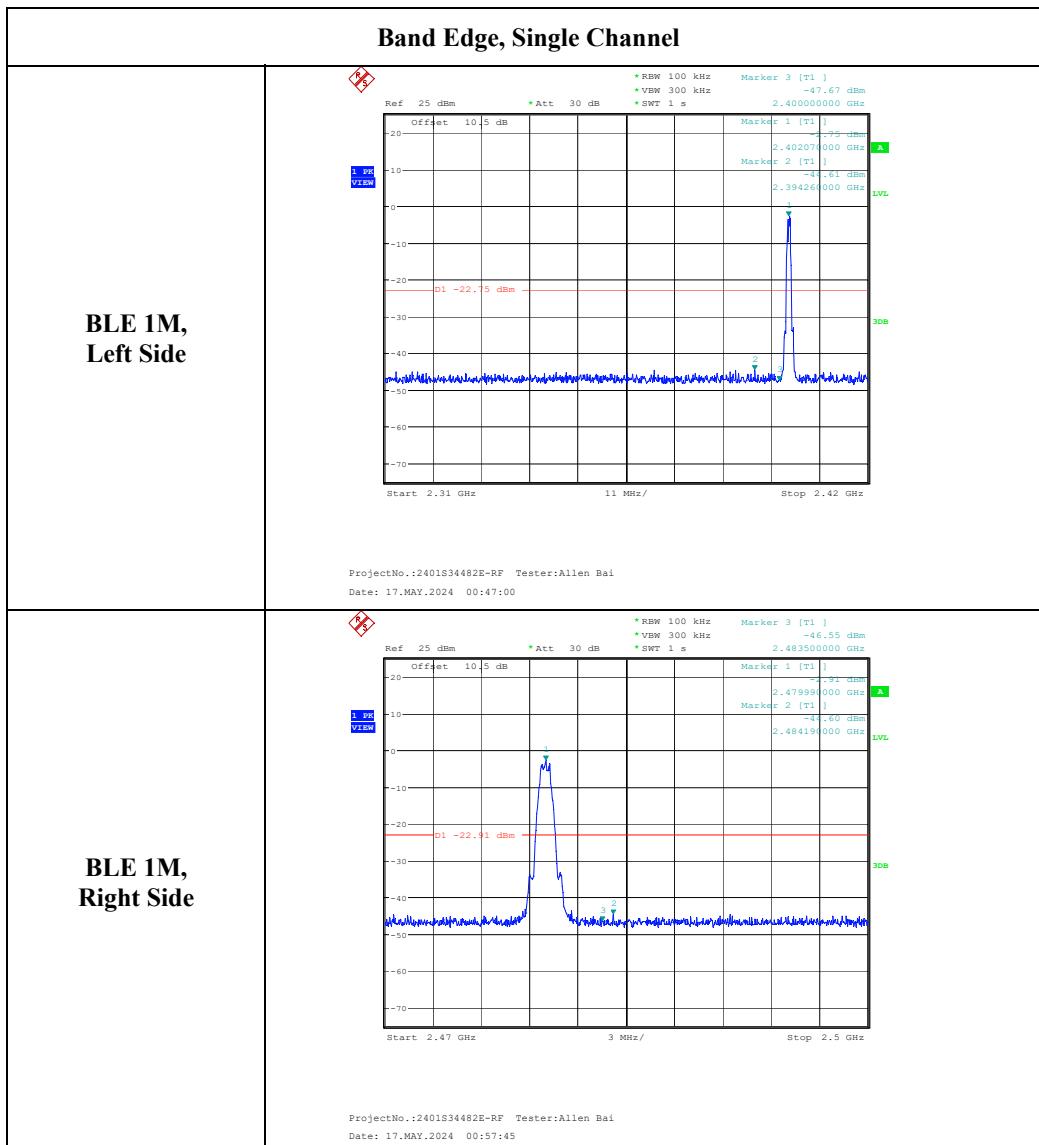

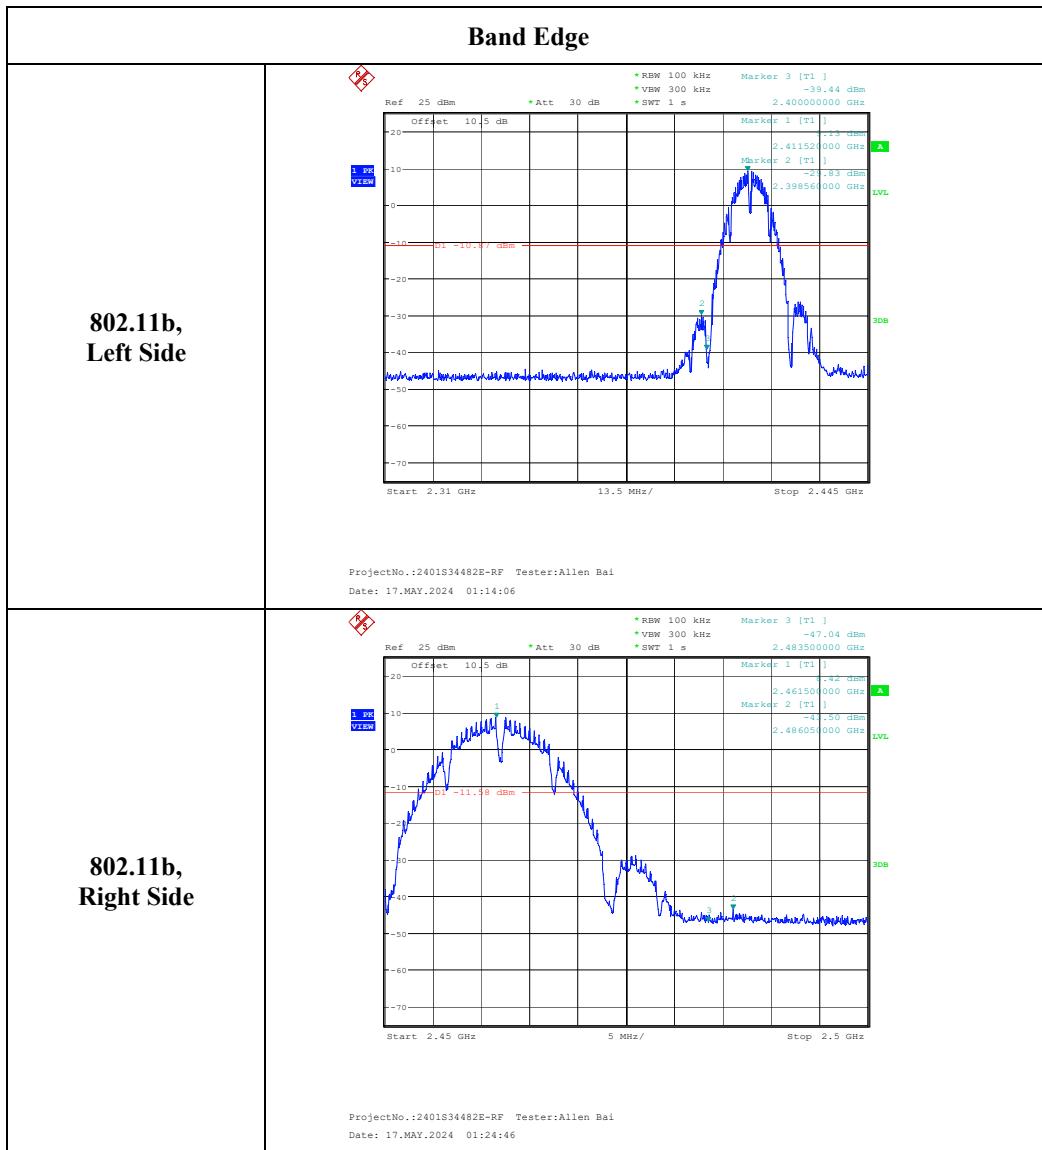

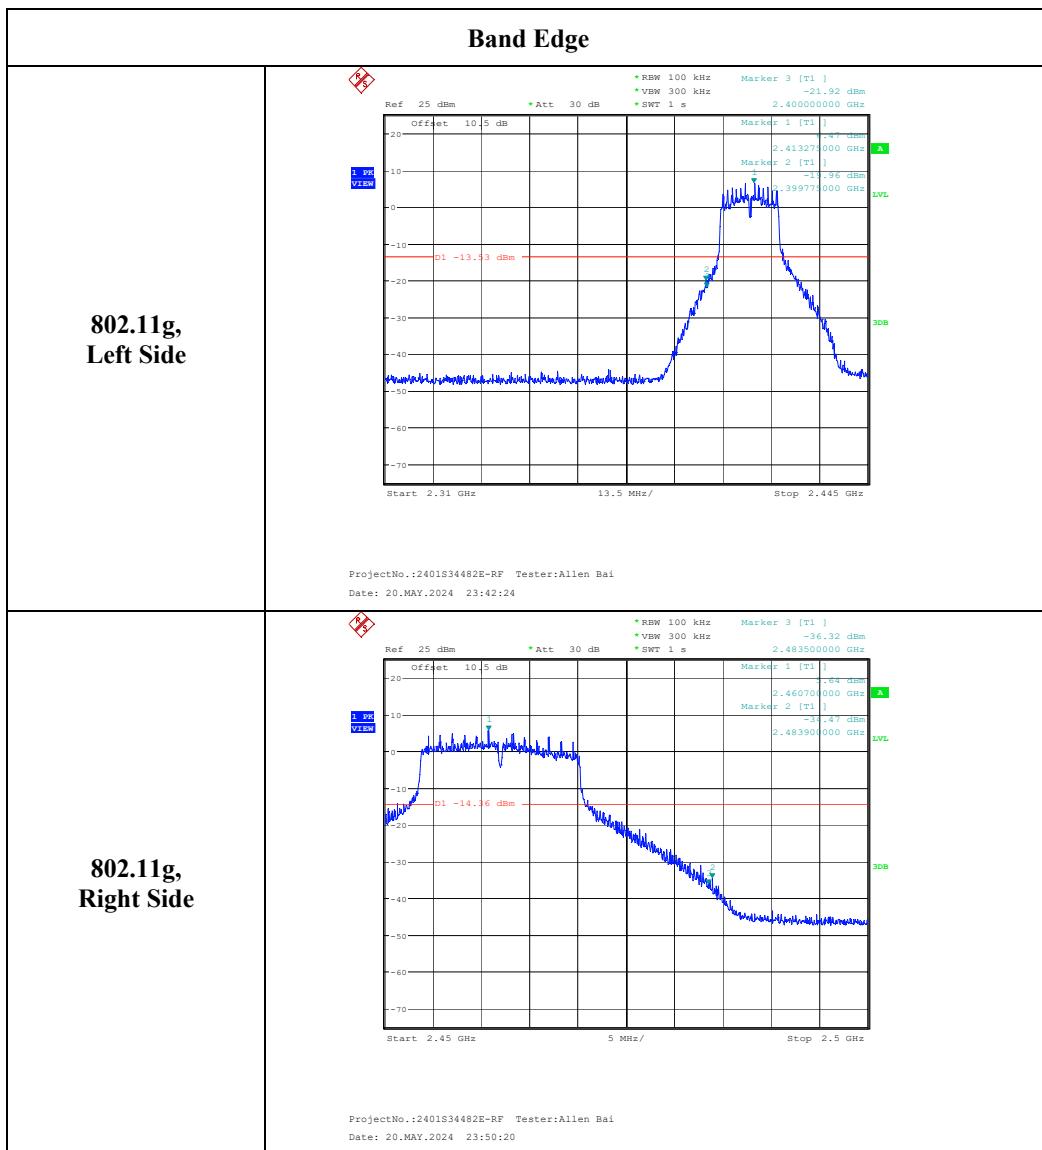

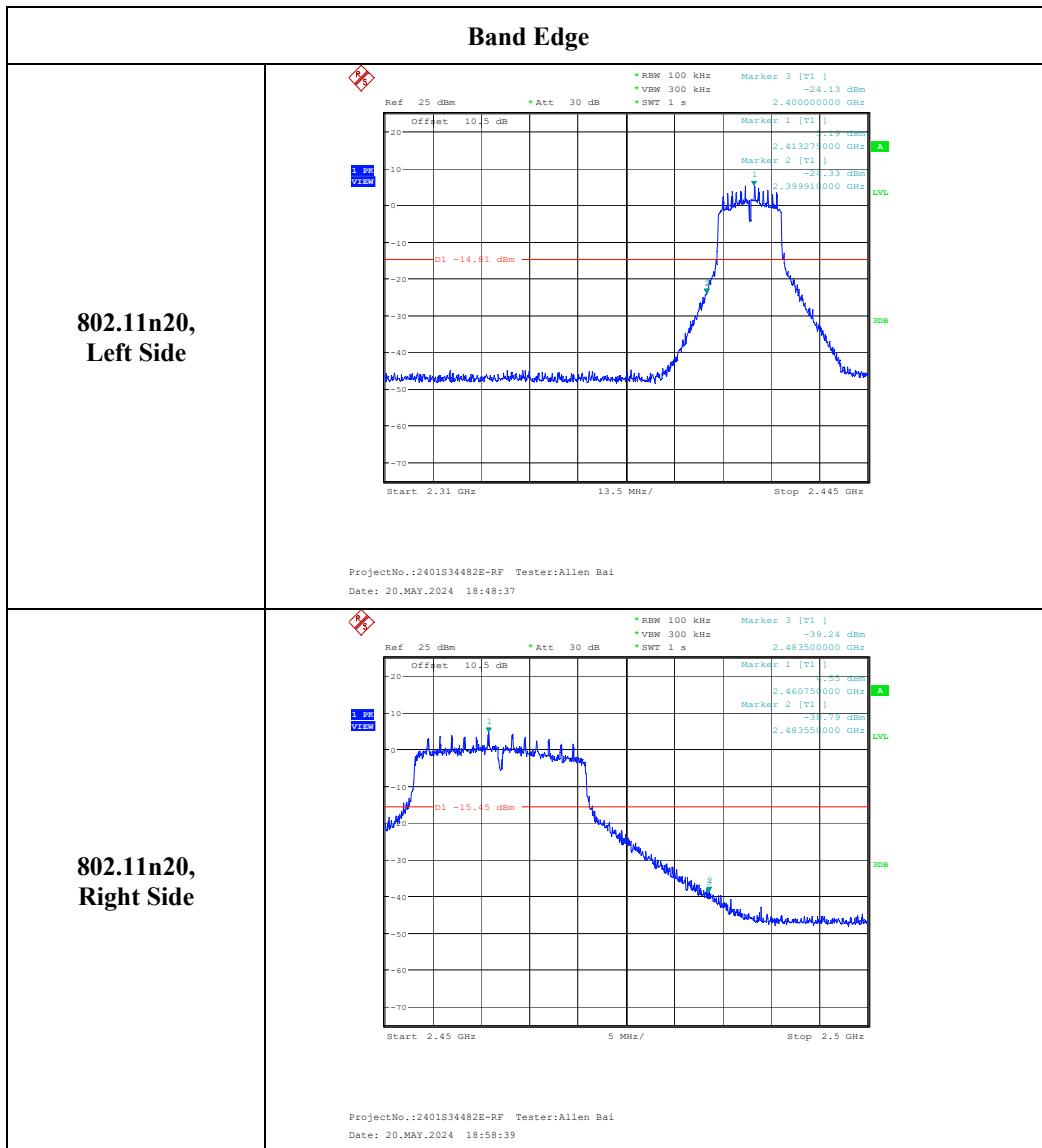

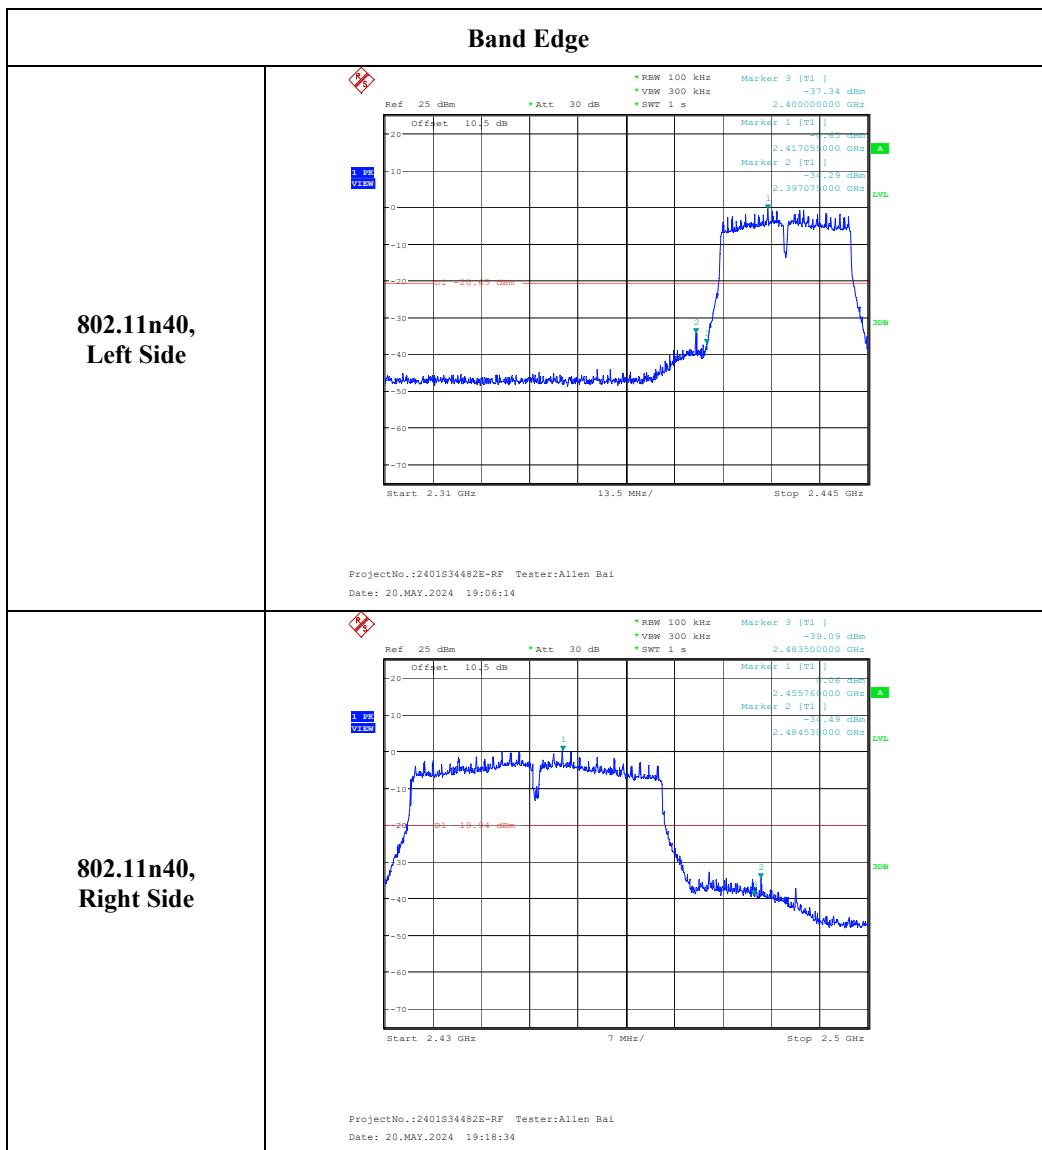

## FCC §15.247(e) - POWER SPECTRAL DENSITY

### Applicable Standard


For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

### Test Procedure

Test Method: ANSI C63.10-2013 Clause 11.10.2

Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.

1. Set the RBW to:  $3\text{kHz} \leq \text{RBW} \leq 100\text{ kHz}$ .
2. Set the VBW  $\geq 3 \times \text{RBW}$ .
3. Set the span to 1.5 times the DTS bandwidth.
4. Detector = peak.
5. Sweep time = auto couple.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the maximum amplitude level within the RBW.
9. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

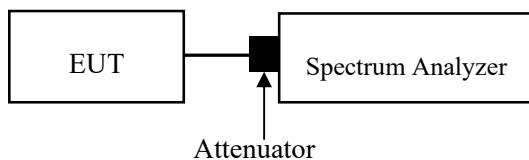

### Test Data

#### Environmental Conditions


<b>Temperature:</b>	24~25 °C
<b>Relative Humidity:</b>	45~46 %
<b>ATM Pressure:</b>	100~101 kPa


The testing was performed by Allen Bai from 2024-05-17 to 2024-05-20.


EUT operation mode: Transmitting


**Test Result: Compliant.**


Test Modes	Test Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)
BLE 1M	2402	-17.53	8.00
	2440	-17.27	8.00
	2480	-17.68	8.00
802.11b	2412	-3.74	8.00
	2437	-4.90	8.00
	2462	-4.48	8.00
802.11g	2412	-8.70	8.00
	2437	-7.78	8.00
	2462	-8.39	8.00
802.11n20	2412	-9.92	8.00
	2437	-11.47	8.00
	2462	-10.55	8.00
802.11n40	2422	-14.43	8.00
	2437	-14.09	8.00
	2452	-15.55	8.00

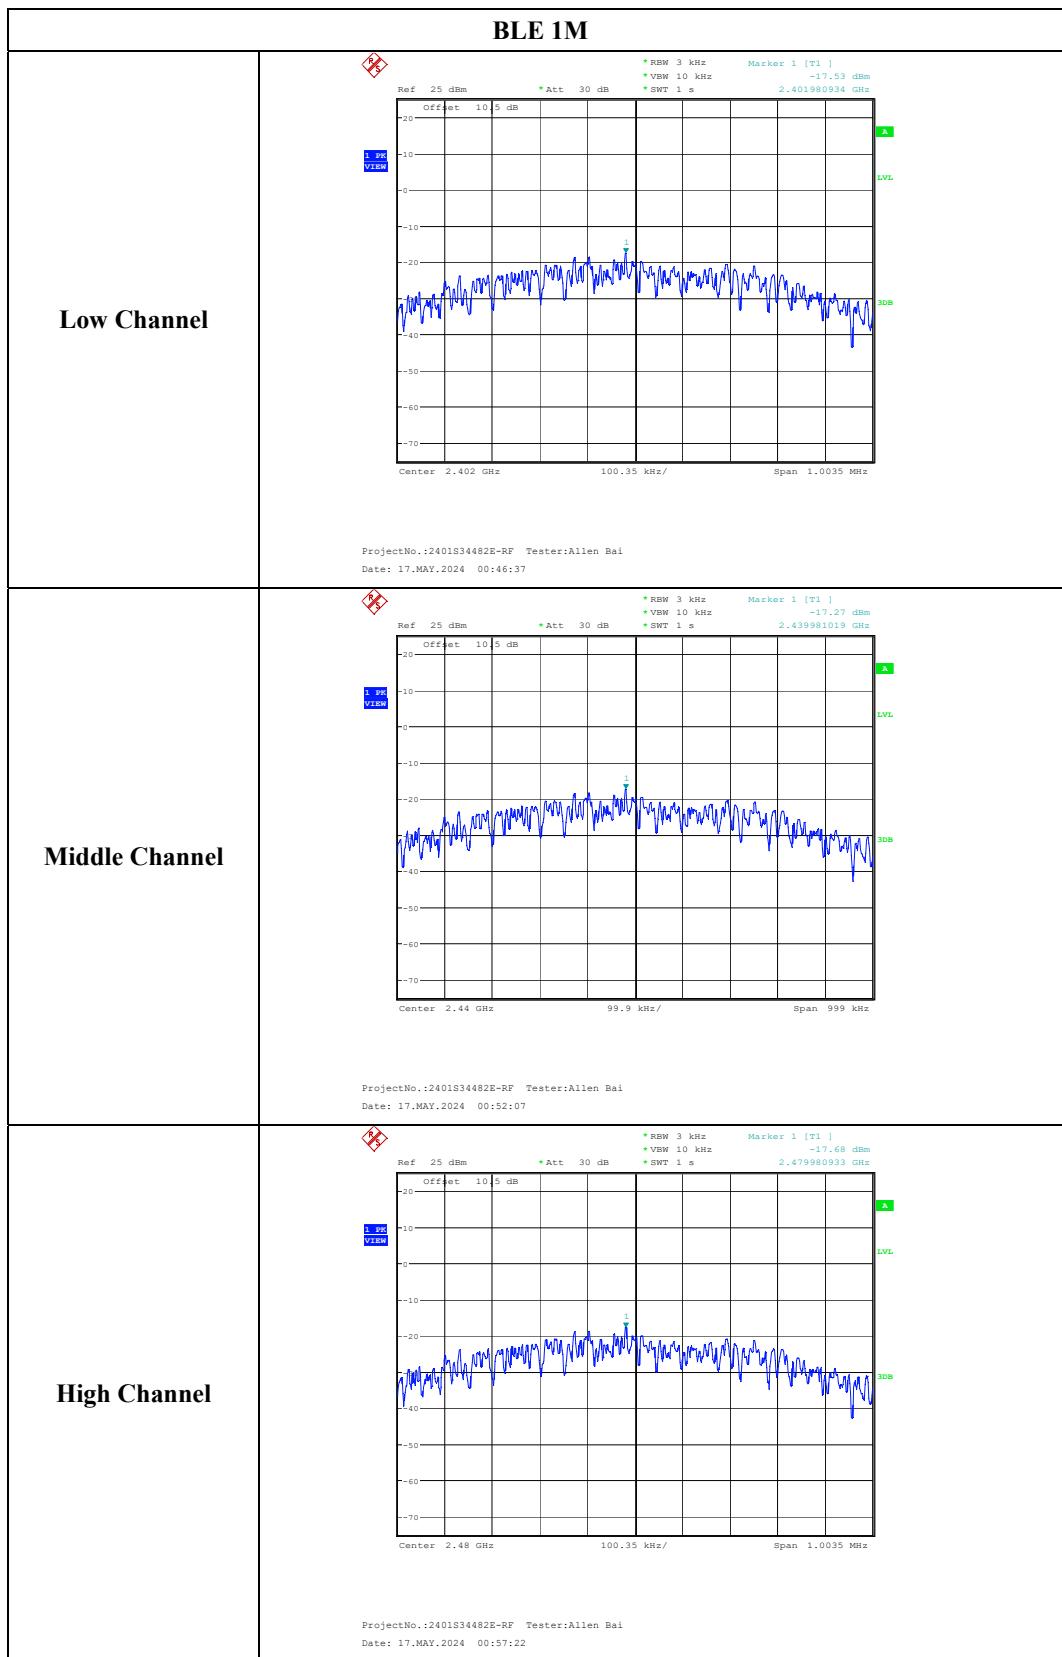

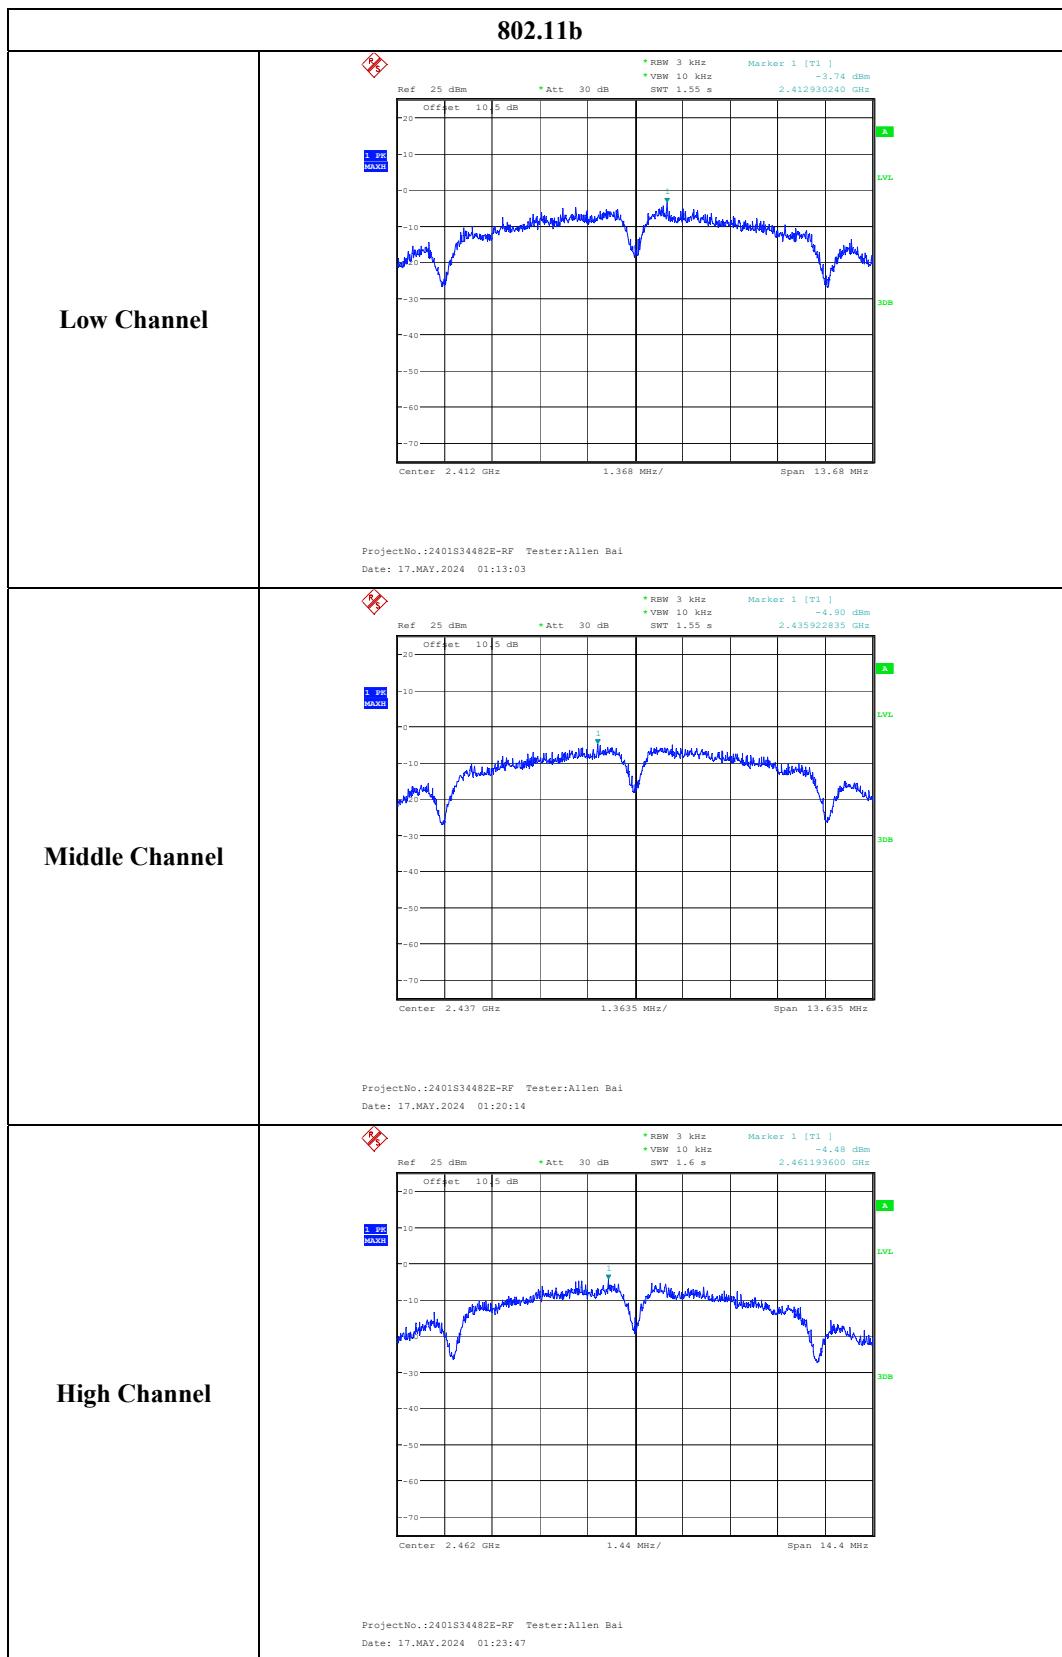

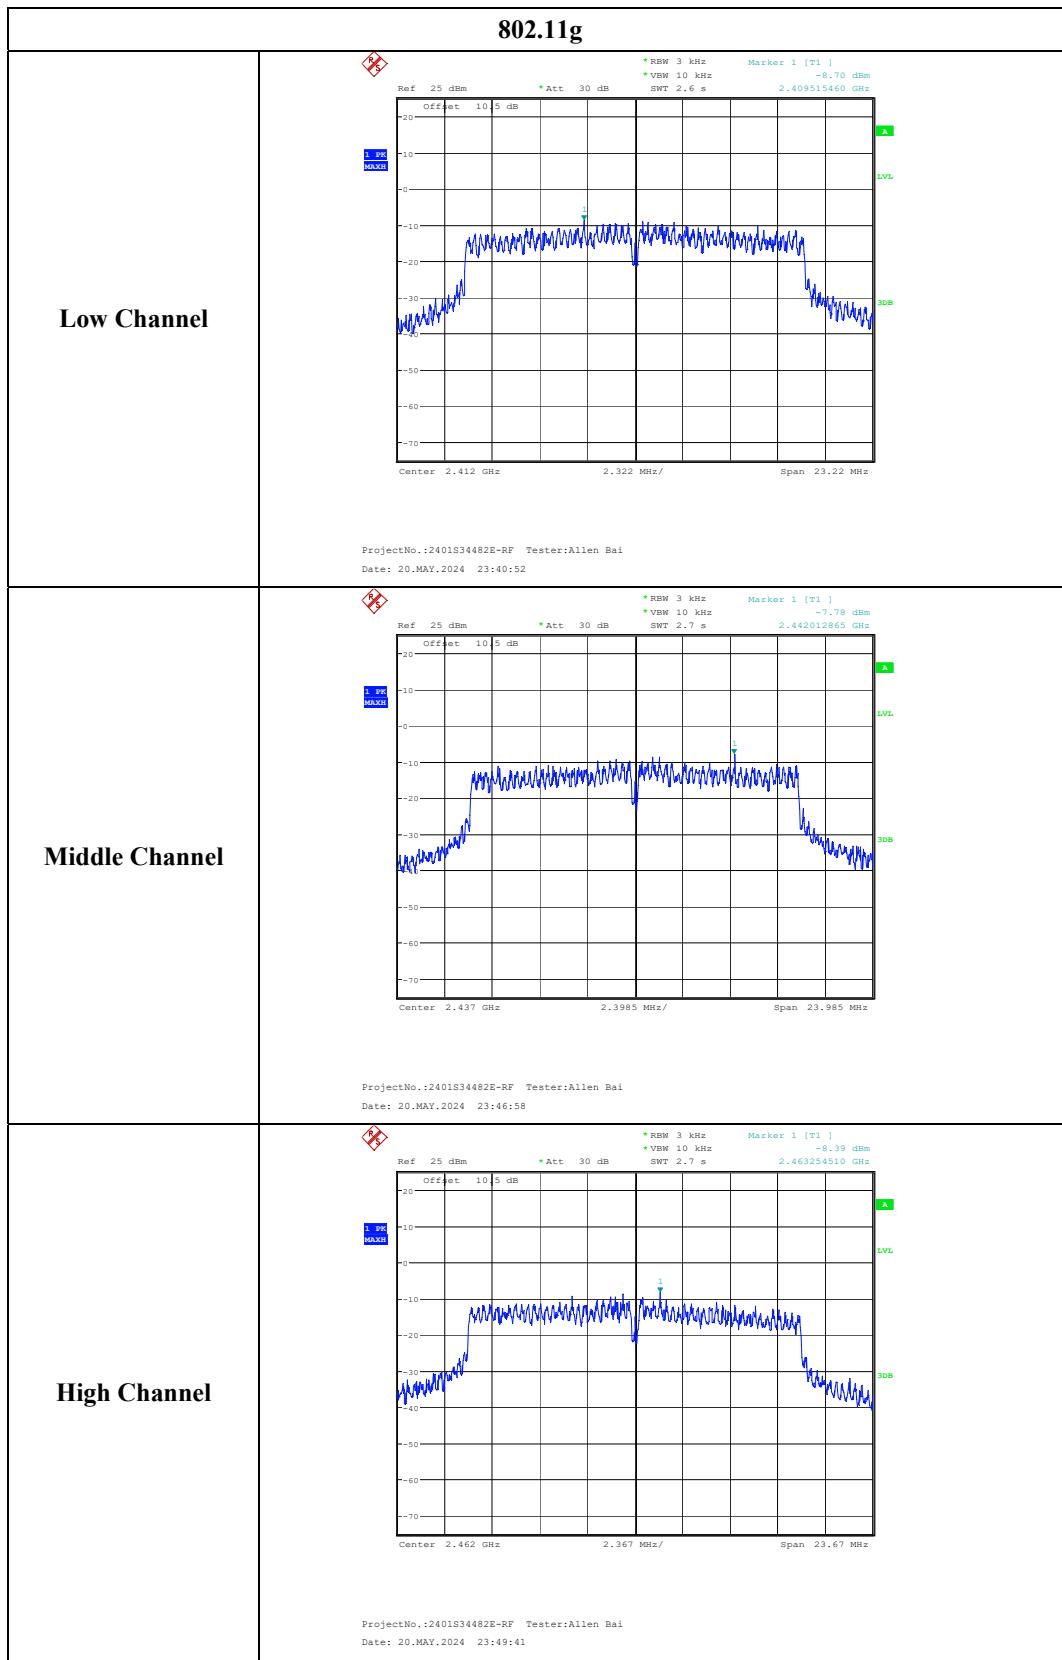

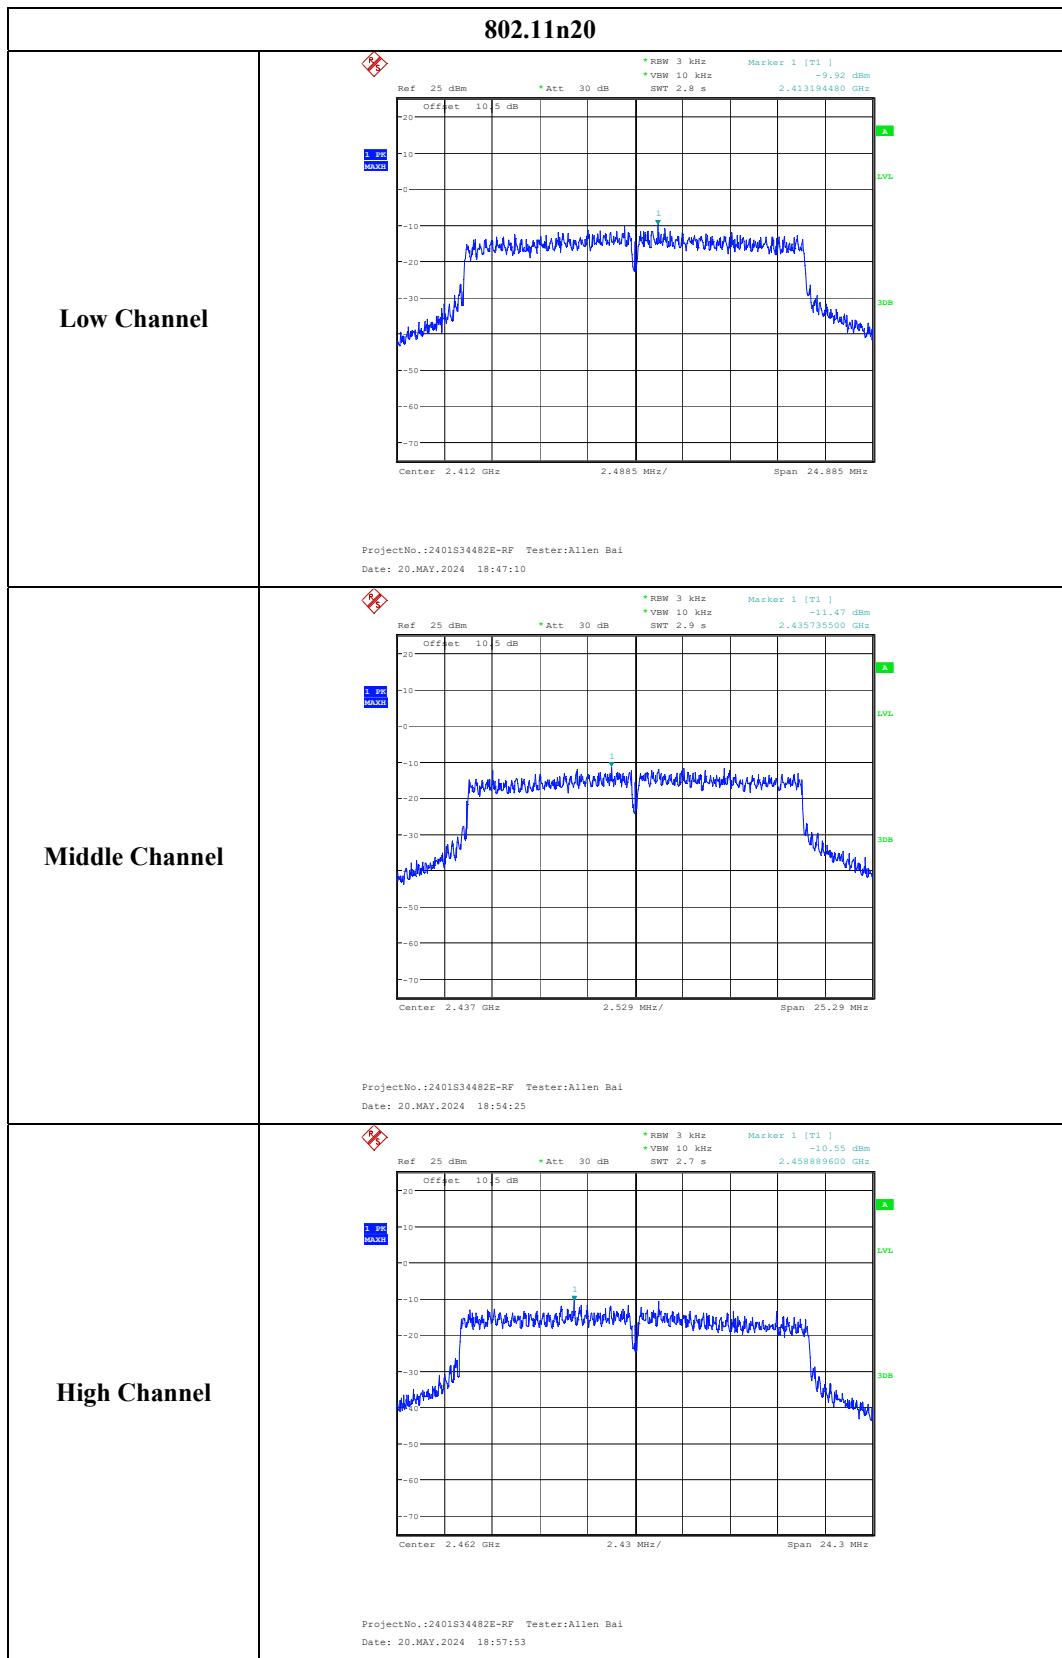

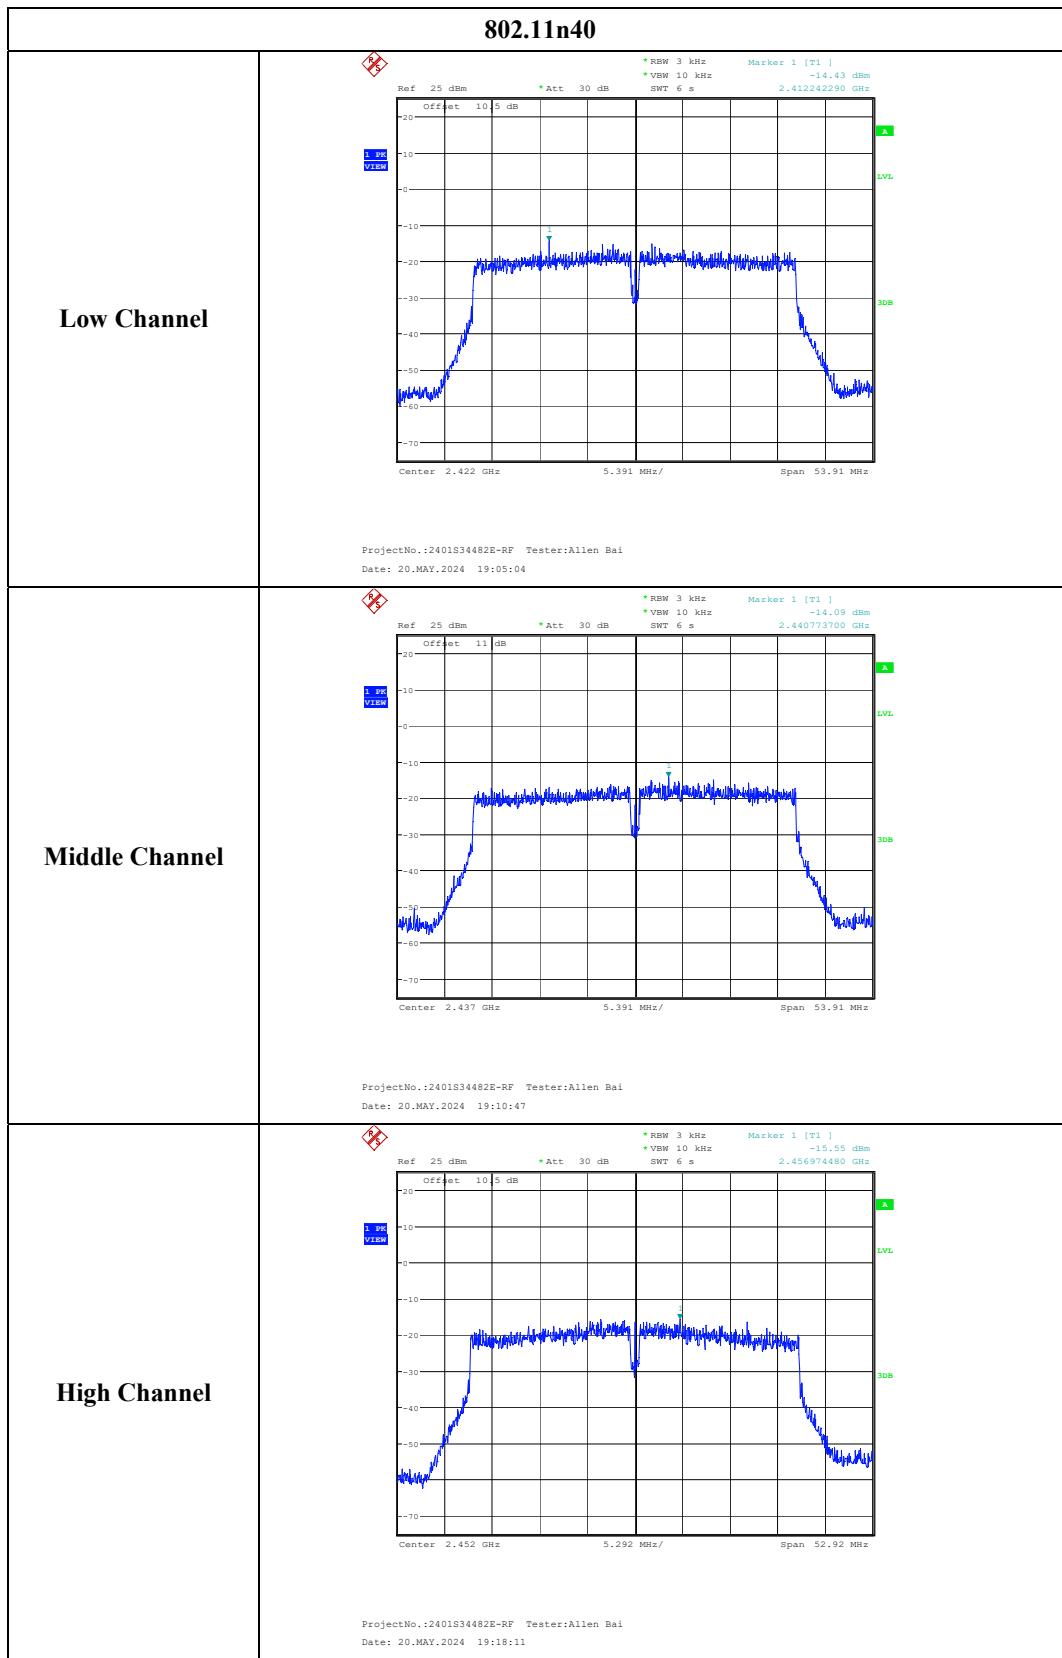

## **EUT PHOTOGRAPHS**

Please refer to the attachment 2401S34482E-RF External photo and 2401S34482E-RF Internal photo.

## **TEST SETUP PHOTOGRAPHS**

Please refer to the attachment 2401S34482E-RFA Test Setup photo.

\*\*\*\*\* END OF REPORT \*\*\*\*\*