

# FCC TEST REPORT

**FCC ID: 2AJ4T-MS-WMW1A**

**Report Number** .....: ZKT-220728L5277

**Date of Test** .....: July 12, 2022 -- July 31, 2022

**Date of issue** .....: July 31, 2022

**Total number of pages** .....: 63

**Test Result** .....: PASS

**Testing Laboratory** .....: Shenzhen ZKT Technology Co., Ltd.

**Address** .....: 1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue, Fuhai Street, Bao'an District, Shenzhen, China

**Applicant's name** .....: Meet International Ltd.

**Address** .....: Flat 1901, 19/F., Westin Centre, 26 Hung To Road, Kwun Tong, Hong Kong

**Manufacturer's name** .....: MEET ELECTRONICS LTD.

**Address** .....: 4/F., Block 4, Guanchen Science Park, 22 Bihu Road, Fenggang, Dongguan, Guangdong Province, China.

**Test specification:**

**Standard** .....: FCC CFR Title 47 Part 15 Subpart C Section 15.247

ANSI C63.10:2013

KDB558074 D0115.247 Meas Guidance v 05r02

**Test procedure** .....: /

**Test Report Form No.** .....: TRF-EL-110\_V0

**Test Report Form(s) Originator** .....: ZKT Testing

**Master TRF** .....: Dated: 2020-01-06

This device described above has been tested by ZKT, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of ZKT, this document may be altered or revised by ZKT, personal only, and shall be noted in the revision of the document.

**Product name** .....: Wi-Fi Connectivity Module

**Trademark** .....: MEET

**Model** .....: MS-WMW1A


**Ratings** .....: DC 5.0V from usb port

**Testing procedure and testing location:**

**Testing Laboratory .....** : Shenzhen ZKT Technology Co., Ltd.

**Address .....** : 1/F, No. 101, Building B, No. 6, Tangwei Community  
Industrial Avenue, Fuhai Street, Bao'an District, Shenzhen,  
China

**Tested by (name + signature).....** : Alen He



**Reviewer (name + signature) .....** : Joe Liu



**Approved (name + signature).....** : Lake Xie



## Table of Contents

	Page
<b>1. VERSION</b>	<b>5</b>
<b>2. SUMMARY OF TEST RESULTS</b>	<b>6</b>
<b>3. GENERAL INFORMATION</b>	<b>7</b>
<b>3.1 GENERAL DESCRIPTION OF EUT</b>	<b>7</b>
<b>3.2 DESCRIPTION OF TEST MODES</b>	<b>8</b>
<b>3.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED</b>	<b>10</b>
<b>3.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)</b>	<b>10</b>
<b>3.5 EQUIPMENTS LIST FOR ALL TEST ITEMS</b>	<b>11</b>
<b>4. EMC EMISSION TEST</b>	<b>12</b>
<b>4.1 CONDUCTED EMISSION MEASUREMENT</b>	<b>12</b>
<b>4.1.1 POWER LINE CONDUCTED EMISSION LIMITS</b>	<b>12</b>
<b>4.1.2 TEST PROCEDURE</b>	<b>12</b>
<b>4.1.3 DEVIATION FROM TEST STANDARD</b>	<b>12</b>
<b>4.1.4 TEST SETUP</b>	<b>13</b>
<b>4.1.5 EUT OPERATING CONDITIONS</b>	<b>13</b>
<b>4.1.6 TEST RESULT</b>	<b>14</b>
<b>4.2 RADIATED EMISSION MEASUREMENT</b>	<b>16</b>
<b>4.2.1 RADIATED EMISSION LIMITS</b>	<b>16</b>
<b>4.2.2 TEST PROCEDURE</b>	<b>17</b>
<b>4.2.3 DEVIATION FROM TEST STANDARD</b>	<b>17</b>
<b>4.2.4 TEST SETUP</b>	<b>18</b>
<b>4.2.5 EUT OPERATING CONDITIONS</b>	<b>19</b>
<b>4.2.6 TEST RESULTS</b>	<b>20</b>
<b>5. RADIATED BAND EMISSION MEASUREMENT</b>	<b>26</b>
<b>5.1 TEST REQUIREMENT:</b>	<b>26</b>
<b>5.2 TEST PROCEDURE</b>	<b>26</b>
<b>5.3 DEVIATION FROM TEST STANDARD</b>	<b>27</b>
<b>5.4 TEST SETUP</b>	<b>27</b>
<b>5.5 EUT OPERATING CONDITIONS</b>	<b>27</b>
<b>5.6 TEST RESULT</b>	<b>28</b>
<b>6. POWER SPECTRAL DENSITY TEST</b>	<b>30</b>
<b>6.1 APPLIED PROCEDURES / LIMIT</b>	<b>30</b>
<b>6.2 TEST PROCEDURE</b>	<b>30</b>
<b>6.3 DEVIATION FROM STANDARD</b>	<b>30</b>

<b>6.4 TEST SETUP</b>	<b>30</b>
<b>6.5 EUT OPERATION CONDITIONS</b>	<b>30</b>
<b>6.6 TEST RESULT</b>	<b>31</b>
<b>7. CHANNEL BANDWIDTH</b>	<b>37</b>
<b>7.1 APPLIED PROCEDURES / LIMIT</b>	<b>37</b>
<b>7.2 TEST PROCEDURE</b>	<b>37</b>
<b>7.3 DEVIATION FROM STANDARD</b>	<b>37</b>
<b>7.4 TEST SETUP</b>	<b>37</b>
<b>7.5 EUT OPERATION CONDITIONS</b>	<b>37</b>
<b>7.6 TEST RESULT</b>	<b>38</b>
<b>8. OUTPUT POWER TEST</b>	<b>41</b>
<b>8.1 APPLIED PROCEDURES/LIMIT</b>	<b>41</b>
<b>8.2 TEST PROCEDURE</b>	<b>41</b>
<b>8.3 DEVIATION FROM STANDARD</b>	<b>41</b>
<b>8.4 TEST SETUP</b>	<b>41</b>
<b>8.5 EUT OPERATION CONDITIONS</b>	<b>41</b>
<b>8.6 TEST RESULT</b>	<b>42</b>
<b>9. CONDUCTED BAND EDGE AND SPURIOUS EMISSION</b>	<b>43</b>
<b>9.1 APPLICABLE STANDARD</b>	<b>43</b>
<b>9.2 TEST PROCEDURE</b>	<b>43</b>
<b>9.3 DEVIATION FROM STANDARD</b>	<b>43</b>
<b>9.4 TEST SETUP</b>	<b>43</b>
<b>9.5 EUT OPERATION CONDITIONS</b>	<b>43</b>
<b>9.6 TEST RESULTS</b>	<b>43</b>
<b>10. ANTENNA REQUIREMENT</b>	<b>56</b>
<b>11. TEST SETUP PHOTO</b>	<b>57</b>
<b>12. EUT CONSTRUCTIONAL DETAILS</b>	<b>59</b>

**1. VERSION**

ReportNo.	Version	Description	Approved
ZKT-220728L5277	Rev.01	Initial issue of report	July 27, 2022

## 2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.247) , Subpart C			
Standard Section	Test Item	Result	Remark
FCC part 15.203/15.247 (c)	Antenna requirement	PASS	
FCC part 15.207	AC Power Line Conducted Emission	PASS	
FCC part 15.247 (b)(3)	Conducted Peak Output Power	PASS	
FCC part 15.247 (a)(2)	Channel Bandwidth& 99% OCB	PASS	
FCC part 15.247 (e)	Power Spectral Density	PASS	
FCC part 15.247(d)	Band Edge	PASS	
FCC part 15.205/15.209	Spurious Emission	PASS	

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report

### 2.1 TEST FACILITY

Shenzhen ZKT Technology Co., Ltd.

Add. : 1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue, Fuhai Street, Bao'an District, Shenzhen, China

FCC Test Firm Registration Number: 692225

Designation Number: CN1299

IC Registered No.: 27033

### 2.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $y \pm U$ , where expended uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	3m camber Radiated spurious emission(9KHz-30MHz)	$U=4.5\text{dB}$
2	3m camber Radiated spurious emission(30MHz-1GHz)	$U=4.8\text{dB}$

3	3m chamber Radiated spurious emission(1GHz-6GHz)	U=4.9dB
4	3m chamber Radiated spurious emission(6GHz-40GHz)	U=5.0dB
5	Conducted disturbance	U=3.2dB
6	RF Band Edge	U=1.68dB
7	RF power conducted	U=1.86dB
8	RF conducted Spurious Emission	U=2.2dB
9	RF Occupied Bandwidth	U=1.8dB
10	RF Power Spectral Density	U=1.75dB
11	humidity uncertainty	U=5.3%
12	Temperature uncertainty	U=0.59°C

### 3. GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

Product Name:	Wi-Fi Connectivity Module
Model No.:	MS-WMW1A
Serial No.:	/
Hardware Version:	V1.0
Software Version:	V3.2
Sample(s) Status:	Engineer sample
Channel numbers:	802.11b/802.11g /802.11n(HT20):11
Channel separation:	5MHz
Modulation technology:	802.11b: Direct Sequence Spread Spectrum(DSSS) 802.11g/802.11n(H20): Orthogonal Frequency Division Multiplexing(OFDM)
Antenna Type:	PCB antenna
Antenna gain:	1.2dBi
Power supply:	DC 5.0V from usb port


Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Test channel	Frequency (MHz)
	802.11b/802.11g/802.11n(HT20)
Lowest channel	2412MHz
Middle channel	2437MHz
Highest channel	2462MHz

### 3.2 DESCRIPTION OF TEST MODES

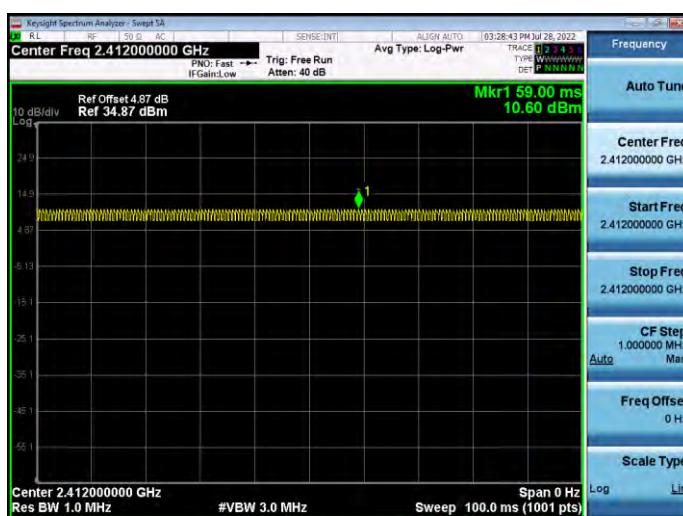Transmitting mode	Keep the EUT in continuously transmitting mode
Remark: During the test, the dutycycle >98%, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.	
	

We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:

Pre-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.

Mode	802.11b	802.11g	802.11n(HT20)
Data rate	11Mbps	54Mbps	MCS7


Test Software	<b>Test Tool</b> 
Powerlevelsetup	<20dBm

### 3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED


Conducted Emission



Radiated Emission



Conducted Spurious



### 3.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
1	PC	HP	HP40	/	SDOC

Item	Shielded Type	Ferrite Core	Length	Note

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in „Length „ column.

### 3.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

#### Radiation Test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	KEYSIGHT	9020A	MY55370835	Oct. 18, 2021	Oct. 17, 2022
2	Spectrum Analyzer (1GHz-40GHz)	R&S	FSQ	100363	Oct. 17, 2021	Oct. 16, 2022
3	EMI Test Receiver (9kHz-7GHz)	R&S	ESCI7	101169	Oct. 18, 2021	Oct. 17, 2022
4	Bilog Antenna (30MHz-1500MHz)	Schwarzbeck	VULB9168	N/A	Oct. 17, 2021	Oct. 16, 2022
5	Horn Antenna (1GHz-18GHz)	Agilent	AH-118	071145	Oct. 17, 2021	Oct. 16, 2022
6	Loop Antenna	TESEQ	HLA6121	58357	Oct. 17, 2021	Oct. 16, 2022
7	Amplifier (30-1000MHz)	EM Electronics	EM330 Amplifier	060747	Oct. 18, 2021	Oct. 17, 2022
8	Amplifier (1GHz-26.5GHz)	Agilent	8449B	3008A00315	Oct. 18, 2021	Oct. 17, 2022
9	RF cables1 (9kHz-30MHz)	N/A	9kHz-30MHz	N/A	Oct. 18, 2021	Oct. 17, 2022
10	RF cables2 (30MHz-1GHz)	N/A	30MHz-1GHz	N/A	Oct. 18, 2021	Oct. 17, 2022
11	RF cables3 (1GHz-40GHz)	N/A	1GHz-40GHz	N/A	Oct. 18, 2021	Oct. 17, 2022
12	ESG Signal Generator	Agilent	E4421B	N/A	Oct. 22, 2021	Oct. 21, 2022
13	Signal Generator	Agilent	N5182A	N/A	Oct. 22, 2021	Oct. 21, 2022
14	Magnetic Field Probe Tester	Narda	ELT-400	0-0344	Oct. 17, 2021	Oct. 16, 2022
15	MWRF Power Meter Test system	MW	MW100-RPC B	N/A	Oct. 22, 2021	Oct. 21, 2022
16	D.C. Power Supply	LongWei	TPR-6405D	N/A	\	\
17	EMC Software	Frad	EZ-EMC	Ver.EMC-CO N 3A1.1	\	\
18	RF Software	MW	MTS8310	V2.0.0.0	\	\
19	Turntable	MF	MF-7802BS	N/A	\	\
20	Antenna tower	MF	MF-7802BS	N/A	\	\

#### Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	LISN	R&S	ENV216	101471	Oct. 22, 2021	Oct. 21, 2022
2	LISN	CYBERTEK	EM5040A	E1850400149	Oct. 22, 2021	Oct. 21, 2022
3	Test Cable	N/A	C01	N/A	Oct. 18, 2021	Oct. 17, 2022
4	Test Cable	N/A	C02	N/A	Oct. 18, 2021	Oct. 17, 2022
5	EMI Test Receiver	R&S	ESCI3	101393	Oct. 17, 2021	Oct. 16, 2022
6	EMC Software	Frad	EZ-EMC	Ver.EMC-CON 3A1.1	\	\

## 4. EMC EMISSION TEST

### 4.1 CONDUCTED EMISSION MEASUREMENT

Test Requirement:	FCC Part15 C Section 15.207
Test Method:	ANSI C63.10:2013
Test Frequency Range:	150KHz to 30MHz
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto

#### 4.1.1 POWER LINE CONDUCTED EMISSION LIMITS

FREQUENCY (MHz)	Limit (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

(1) \*Decreases with the logarithm of the frequency.


#### 4.1.2 TEST PROCEDURE

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system; a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10:2013.
2. Support equipment, if needed, was placed as per ANSI C63.10:2013
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10:2013.
4. The adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
5. All support equipments received AC power from a second LISN, if any.
6. The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.e.
8. For the actual test configuration, please refer to the related Item –EUT Test Photos.

#### 4.1.3 DEVIATION FROM TEST STANDARD

No deviation

#### 4.1.4 TEST SETUP

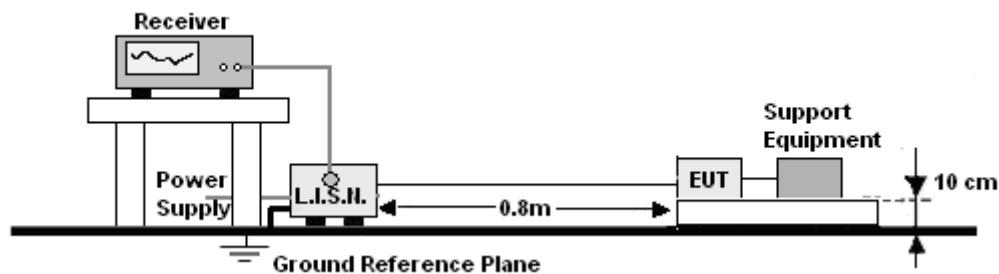


#### 4.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.


We pretest AC 120V, the worst voltage was AC 120V and the data recording in the report.

#### 4.1.6 TEST RESULT

Temperature :	26°C	Relative Humidity:	54%
Pressure :	101kPa	Phase :	L
Test Voltage :	AC 120V/60Hz		

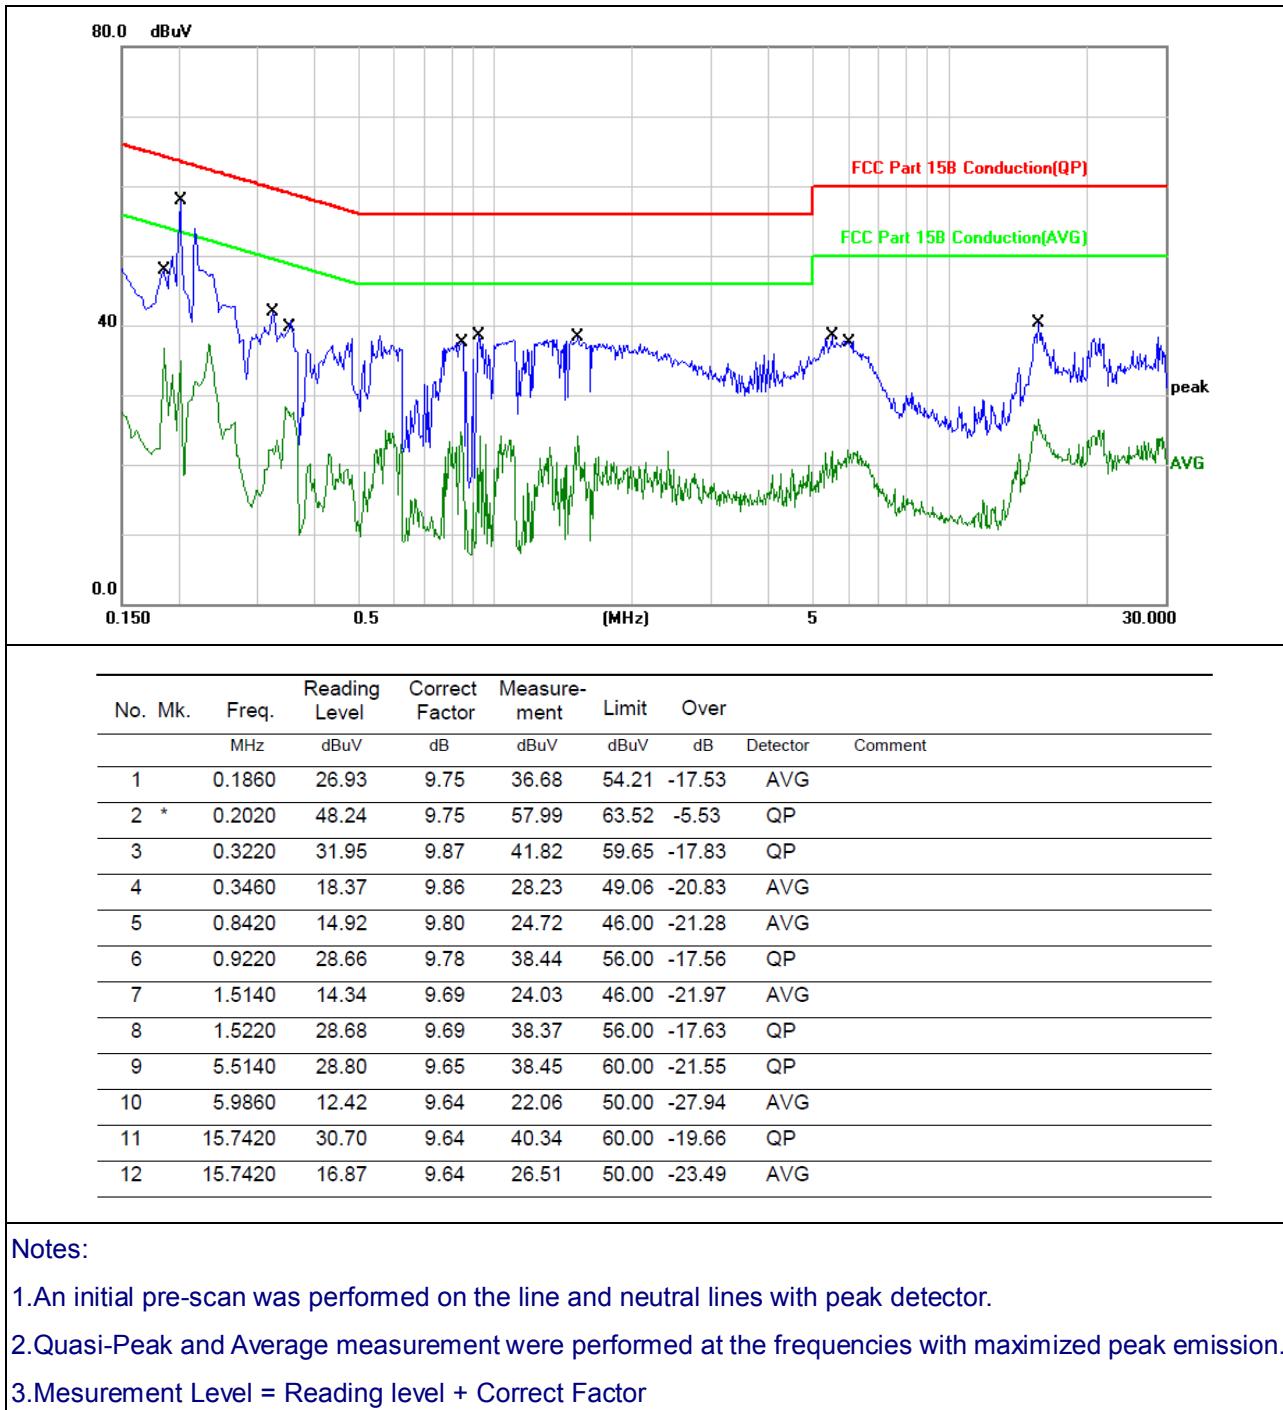

Temperature :	26°C	Relative Humidity:	54%
Pressure :	101kPa	Phase :	N
Test Voltage :	AC 120V/60Hz		

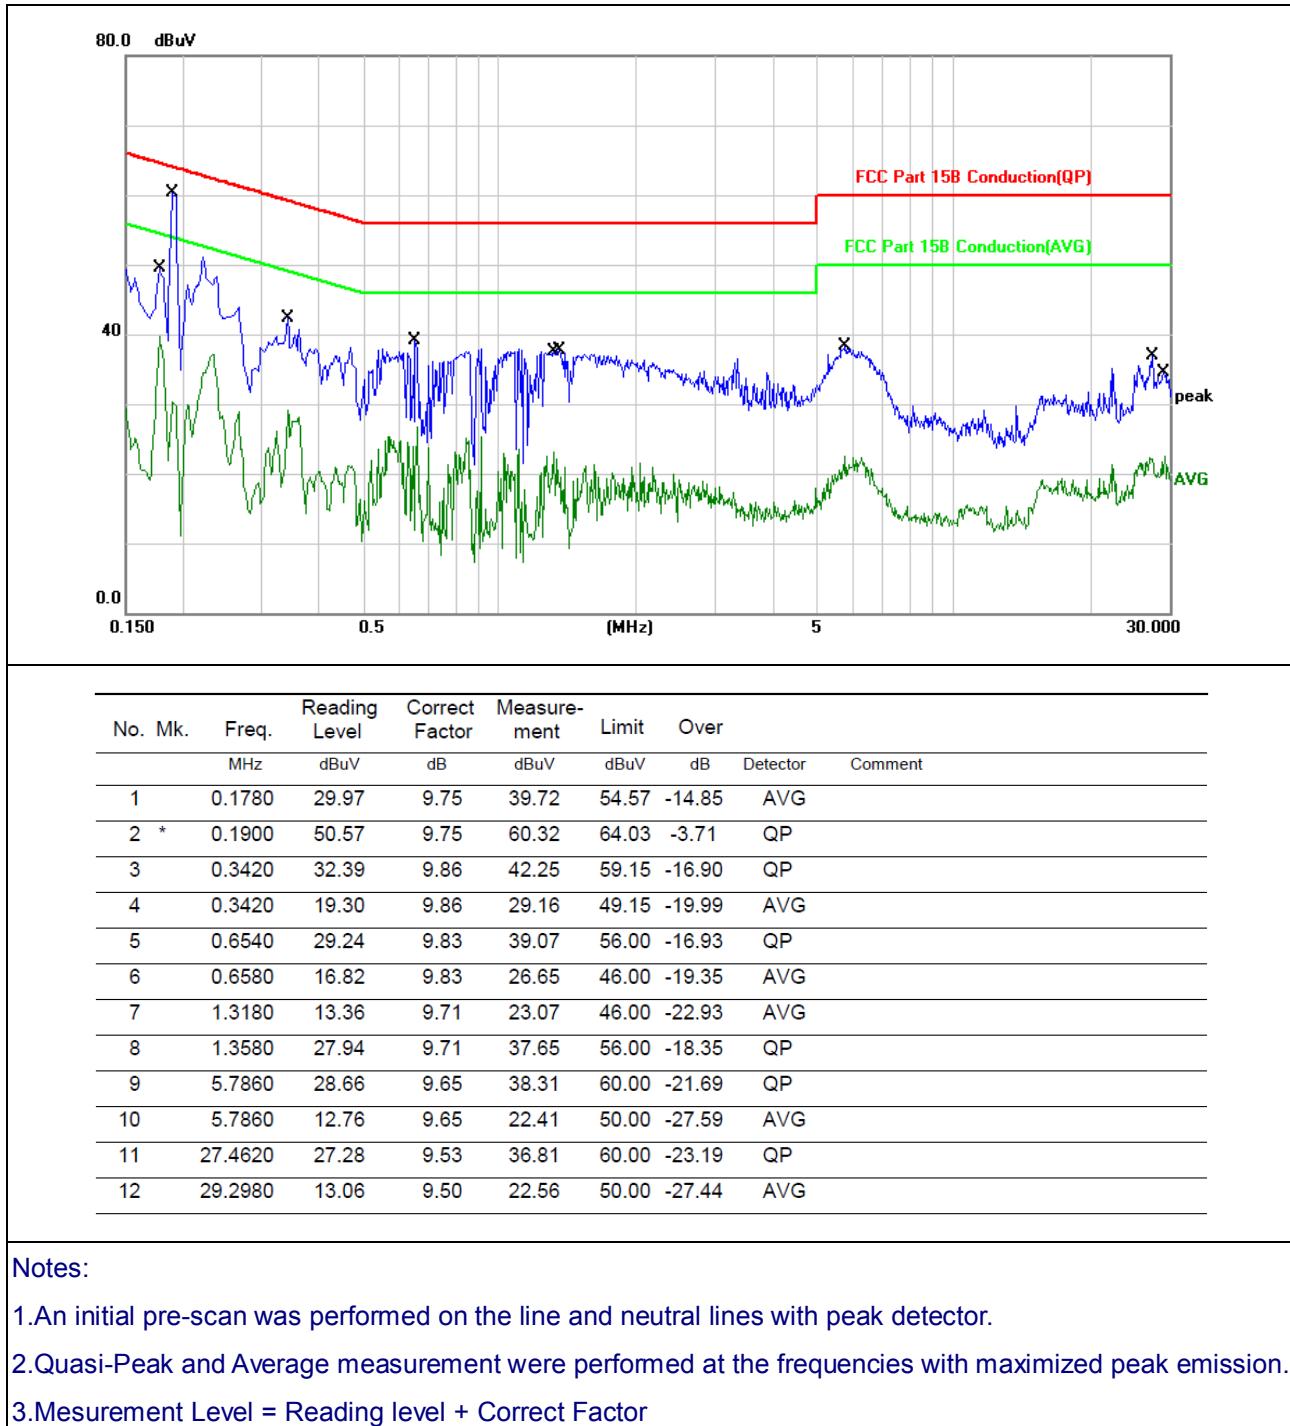

## 4.2 RADIATED EMISSION MEASUREMENT

Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	9kHz to 25GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak
	150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average

### 4.2.1 RADIATED EMISSION LIMITS

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

### LIMITS OF RADIATED EMISSION MEASUREMENT

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

#### 4.2.2 TEST PROCEDURE

Below 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 0.1 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 metre to 1.5 metre( Above 18GHz the distance is 1 meter and table is 1.5 metre).
- h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

#### 4.2.3 DEVIATION FROM TEST STANDARD


No deviation

#### 4.2.4 TEST SETUP


##### (A) Radiated Emission Test-Up Frequency Below 30MHz

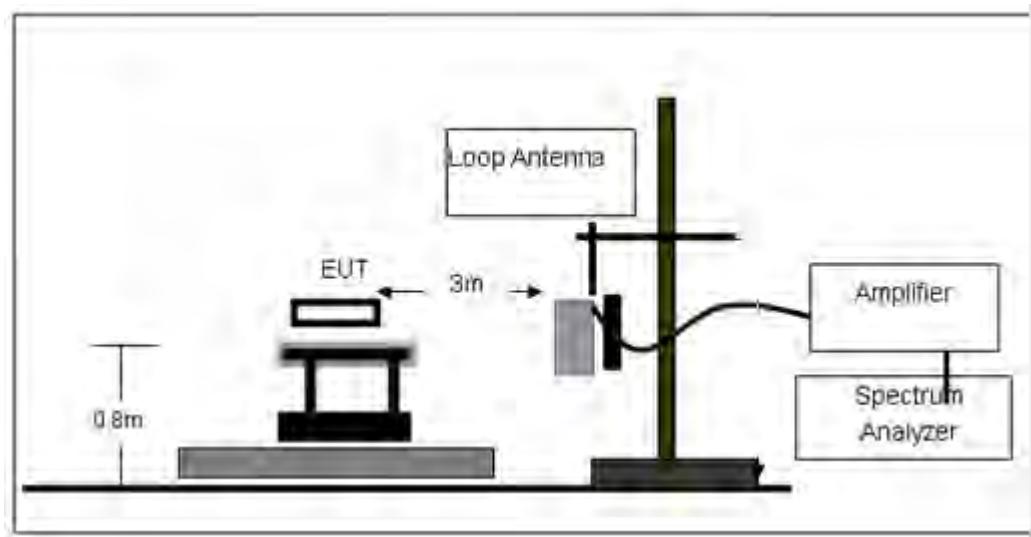

##### (B) Radiated Emission Test-Up Frequency 30MHz~1GHz

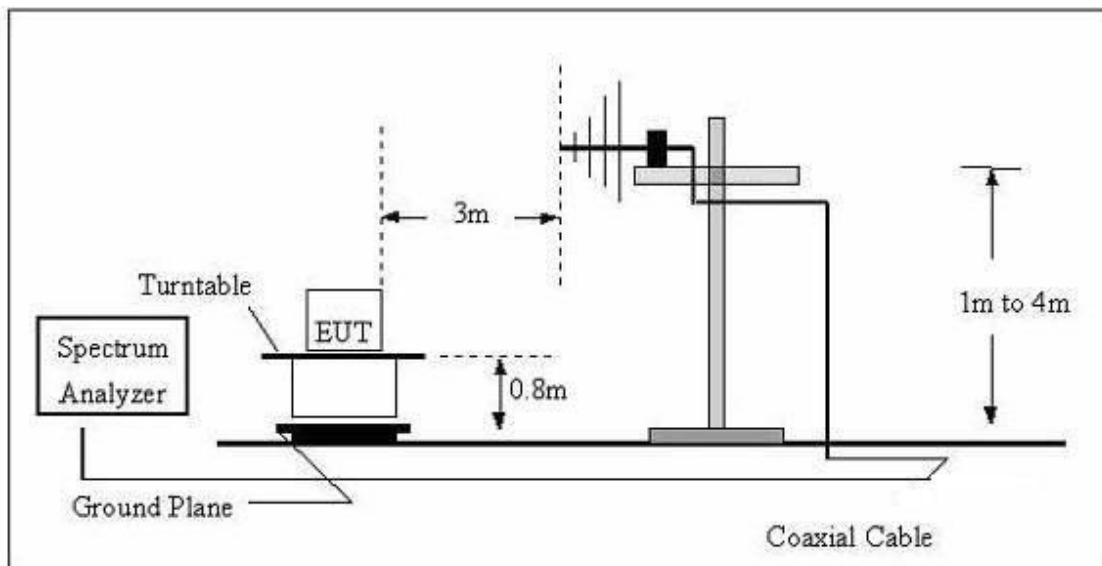

### (C) Radiated Emission Test-Up Frequency Above 1GHz

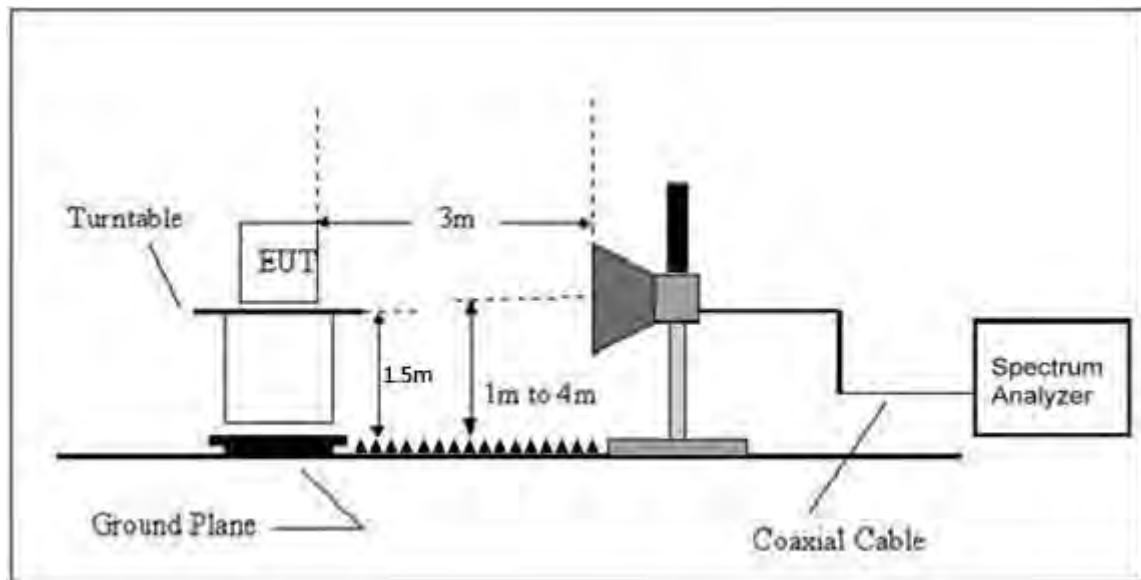

#### 4.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.


#### 4.2.6 TEST RESULTS

##### Between 9KHz – 30MHz


The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and according to 15.31(o) & RSS-Gen 6.13, the test result no need to reported.

##### Between 30MHz – 1GHz

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	AC 120V/60Hz		

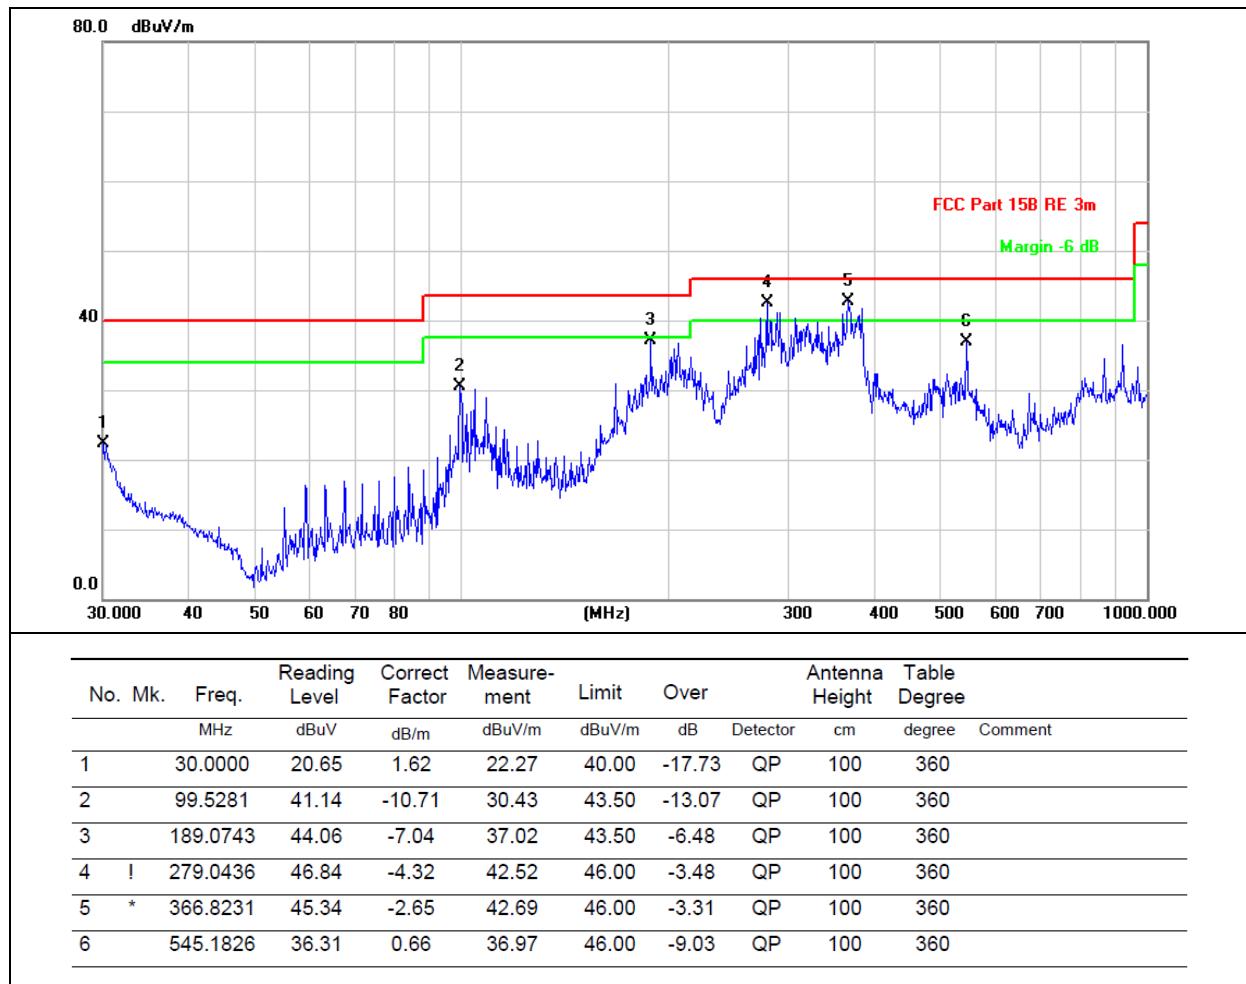

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	AC 120V/60Hz		

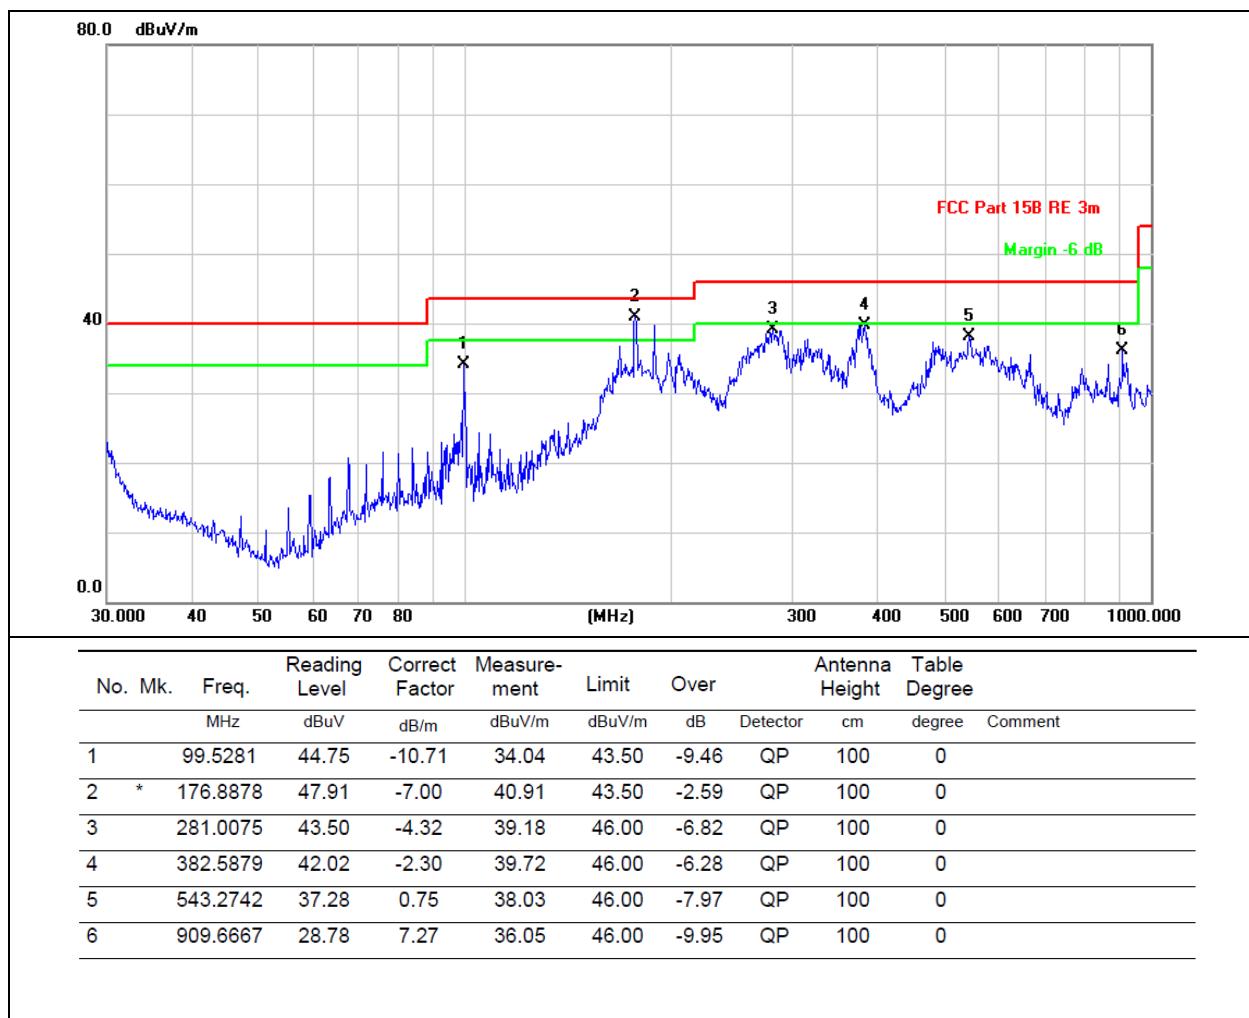

Remarks:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

1GHz~25GHz

802.11b

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:2412MHz									
V	4824	47.93	30.55	5.77	24.66	47.81	74.00	-26.19	PK
V	4824	35.53	30.55	5.77	24.66	35.41	54.00	-18.59	AV
V	7236	46.07	30.33	6.32	24.55	46.61	74.00	-27.39	PK
V	7236	34.95	30.33	6.32	24.55	35.49	54.00	-18.51	AV
V	9648	41.15	30.85	7.45	24.69	42.44	74.00	-31.56	PK
V	9648	32.51	30.85	7.45	24.69	33.80	54.00	-20.20	AV
H	4824	47.11	30.55	5.77	24.66	46.99	74.00	-27.01	PK
H	4824	38.03	30.55	5.77	24.66	37.91	54.00	-16.09	AV
H	7236	47.39	30.33	6.32	24.55	47.93	74.00	-26.07	PK
H	7236	35.10	30.33	6.32	24.55	35.64	54.00	-18.36	AV
H	9648	42.56	30.85	7.45	24.69	43.85	74.00	-30.15	PK
H	9648	33.36	30.85	7.45	24.69	34.65	54.00	-19.35	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:2437MHz									
V	4874	48.36	30.55	5.77	24.66	48.24	74.00	-25.76	PK
V	4874	36.07	30.55	5.77	24.66	35.95	54.00	-18.05	AV
V	7311	46.06	30.33	6.32	24.55	46.60	74.00	-27.40	PK
V	7311	34.15	30.33	6.32	24.55	34.69	54.00	-19.31	AV
V	9748	41.10	30.85	7.45	24.69	42.39	74.00	-31.61	PK
V	9748	32.70	30.85	7.45	24.69	33.99	54.00	-20.01	AV
H	4874	46.45	30.55	5.77	24.66	46.33	74.00	-27.67	PK
H	4874	37.69	30.55	5.77	24.66	37.57	54.00	-16.43	AV
H	7311	46.04	30.33	6.32	24.55	46.58	74.00	-27.42	PK
H	7311	33.32	30.33	6.32	24.55	33.86	54.00	-20.14	AV
H	9748	41.97	30.85	7.45	24.69	43.26	74.00	-30.74	PK
H	9748	32.95	30.85	7.45	24.69	34.24	54.00	-19.76	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:2462MHz									
V	4924	47.75	30.55	5.77	24.66	47.63	74.00	-26.37	PK
V	4924	36.78	30.55	5.77	24.66	36.66	54.00	-17.34	AV
V	7386	45.93	30.33	6.32	24.55	46.47	74.00	-27.53	PK
V	7386	34.85	30.33	6.32	24.55	35.39	54.00	-18.61	AV
V	9848	43.14	30.85	7.45	24.69	44.43	74.00	-29.57	PK
V	9848	33.17	30.85	7.45	24.69	34.46	54.00	-19.54	AV
H	4924	48.36	30.55	5.77	24.66	48.24	74.00	-25.76	PK
H	4924	35.52	30.55	5.77	24.66	35.40	54.00	-18.60	AV
H	7386	46.12	30.33	6.32	24.55	46.66	74.00	-27.34	PK
H	7386	34.18	30.33	6.32	24.55	34.72	54.00	-19.28	AV

H	9848	42.44	30.85	7.45	24.69	43.73	74.00	-30.27	PK
H	9848	33.96	30.85	7.45	24.69	35.25	54.00	-18.75	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,  
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

802.11g

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:2412MHz									
V	4824	47.09	30.55	5.77	24.66	46.97	74.00	-27.03	PK
V	4824	37.06	30.55	5.77	24.66	36.94	54.00	-17.06	AV
V	7236	47.07	30.33	6.32	24.55	47.61	74.00	-26.39	PK
V	7236	34.33	30.33	6.32	24.55	34.87	54.00	-19.13	AV
V	9648	43.20	30.85	7.45	24.69	44.49	74.00	-29.51	PK
V	9648	34.51	30.85	7.45	24.69	35.80	54.00	-18.20	AV
H	4824	48.26	30.55	5.77	24.66	48.14	74.00	-25.86	PK
H	4824	37.88	30.55	5.77	24.66	37.76	54.00	-16.24	AV
H	7236	47.64	30.33	6.32	24.55	48.18	74.00	-25.82	PK
H	7236	34.12	30.33	6.32	24.55	34.66	54.00	-19.34	AV
H	9648	42.22	30.85	7.45	24.69	43.51	74.00	-30.49	PK
H	9648	35.23	30.85	7.45	24.69	36.52	54.00	-17.48	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amp lifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:2437MHz									
V	4874	48.40	30.55	5.77	24.66	48.28	74.00	-25.72	PK
V	4874	36.99	30.55	5.77	24.66	36.87	54.00	-17.13	AV
V	7311	46.48	30.33	6.32	24.55	47.02	74.00	-26.98	PK
V	7311	35.37	30.33	6.32	24.55	35.91	54.00	-18.09	AV
V	9748	43.64	30.85	7.45	24.69	44.93	74.00	-29.07	PK
V	9748	35.20	30.85	7.45	24.69	36.49	54.00	-17.51	AV
H	4874	46.96	30.55	5.77	24.66	46.84	74.00	-27.16	PK
H	4874	37.87	30.55	5.77	24.66	37.75	54.00	-16.25	AV
H	7311	46.35	30.33	6.32	24.55	46.89	74.00	-27.11	PK
H	7311	35.51	30.33	6.32	24.55	36.05	54.00	-17.95	AV
H	9748	41.06	30.85	7.45	24.69	42.35	74.00	-31.65	PK
H	9748	34.06	30.85	7.45	24.69	35.35	54.00	-18.65	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:2462MHz									
V	4924	48.59	30.55	5.77	24.66	48.47	74.00	-25.53	PK
V	4924	35.75	30.55	5.77	24.66	35.63	54.00	-18.37	AV
V	7386	45.91	30.33	6.32	24.55	46.45	74.00	-27.55	PK
V	7386	35.29	30.33	6.32	24.55	35.83	54.00	-18.17	AV
V	9848	41.30	30.85	7.45	24.69	42.59	74.00	-31.41	PK
V	9848	34.57	30.85	7.45	24.69	35.86	54.00	-18.14	AV
H	4924	46.29	30.55	5.77	24.66	46.17	74.00	-27.83	PK
H	4924	36.61	30.55	5.77	24.66	36.49	54.00	-17.51	AV
H	7386	47.12	30.33	6.32	24.55	47.66	74.00	-26.34	PK
H	7386	33.22	30.33	6.32	24.55	33.76	54.00	-20.24	AV
H	9848	42.68	30.85	7.45	24.69	43.97	74.00	-30.03	PK
H	9848	32.74	30.85	7.45	24.69	34.03	54.00	-19.97	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
- Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

802.11n20

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low Channel:2412MHz									
V	4824	47.63	30.55	5.77	24.66	47.51	74.00	-26.49	PK
V	4824	37.65	30.55	5.77	24.66	37.53	54.00	-16.47	AV
V	7236	45.77	30.33	6.32	24.55	46.31	74.00	-27.69	PK
V	7236	34.37	30.33	6.32	24.55	34.91	54.00	-19.09	AV
V	9648	41.20	30.85	7.45	24.69	42.49	74.00	-31.51	PK
V	9648	34.31	30.85	7.45	24.69	35.60	54.00	-18.40	AV
H	4824	47.13	30.55	5.77	24.66	47.01	74.00	-26.99	PK
H	4824	36.23	30.55	5.77	24.66	36.11	54.00	-17.89	AV
H	7236	47.17	30.33	6.32	24.55	47.71	74.00	-26.29	PK
H	7236	33.09	30.33	6.32	24.55	33.63	54.00	-20.37	AV
H	9648	42.33	30.85	7.45	24.69	43.62	74.00	-30.38	PK
H	9648	33.66	30.85	7.45	24.69	34.95	54.00	-19.05	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Middle Channel:2437MHz									
V	4874	48.18	30.55	5.77	24.66	48.06	74.00	-25.94	PK
V	4874	37.83	30.55	5.77	24.66	37.71	54.00	-16.29	AV
V	7311	45.76	30.33	6.32	24.55	46.30	74.00	-27.70	PK
V	7311	34.00	30.33	6.32	24.55	34.54	54.00	-19.46	AV
V	9748	40.93	30.85	7.45	24.69	42.22	74.00	-31.78	PK

V	9748	32.60	30.85	7.45	24.69	33.89	54.00	-20.11	AV
H	4874	46.28	30.55	5.77	24.66	46.16	74.00	-27.84	PK
H	4874	36.17	30.55	5.77	24.66	36.05	54.00	-17.95	AV
H	7311	46.98	30.33	6.32	24.55	47.52	74.00	-26.48	PK
H	7311	35.62	30.33	6.32	24.55	36.16	54.00	-17.84	AV
H	9748	43.12	30.85	7.45	24.69	44.41	74.00	-29.59	PK
H	9748	34.76	30.85	7.45	24.69	36.05	54.00	-17.95	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:2462MHz									
V	4924	46.76	30.55	5.77	24.66	46.64	74.00	-27.36	PK
V	4924	37.72	30.55	5.77	24.66	37.60	54.00	-16.40	AV
V	7386	46.95	30.33	6.32	24.55	47.49	74.00	-26.51	PK
V	7386	35.69	30.33	6.32	24.55	36.23	54.00	-17.77	AV
V	9848	42.09	30.85	7.45	24.69	43.38	74.00	-30.62	PK
V	9848	34.34	30.85	7.45	24.69	35.63	54.00	-18.37	AV
H	4924	47.77	30.55	5.77	24.66	47.65	74.00	-26.35	PK
H	4924	35.75	30.55	5.77	24.66	35.63	54.00	-18.37	AV
H	7386	45.83	30.33	6.32	24.55	46.37	74.00	-27.63	PK
H	7386	35.29	30.33	6.32	24.55	35.83	54.00	-18.17	AV
H	9848	42.89	30.85	7.45	24.69	44.18	74.00	-29.82	PK
H	9848	32.85	30.85	7.45	24.69	34.14	54.00	-19.86	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,  
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

## 5.RADIATED BAND EMISSIONMEASUREMENT

### 5.1 TEST REQUIREMENT:

Test Requirement:	FCC Part15 C Section 15.209 and 15.205				
Test Method:	ANSI C63.10: 2013				
Test Frequency Range:	All of the restrict bands were tested, only the worst band's (2310MHz to 2500MHz) data was showed.				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	Above	Peak	1MHz	3MHz	Peak
	1GHz	Average	1MHz	3MHz	Average

### LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

### 5.2 TEST PROCEDURE

Above 1GHz test procedure as below:

- a. 1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

g. Test the EUT in the lowest channel, the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

### 5.3 DEVIATION FROM TEST STANDARD

No deviation

### 5.4 TEST SETUP

Radiated Emission Test-Up Frequency Above 1GHz

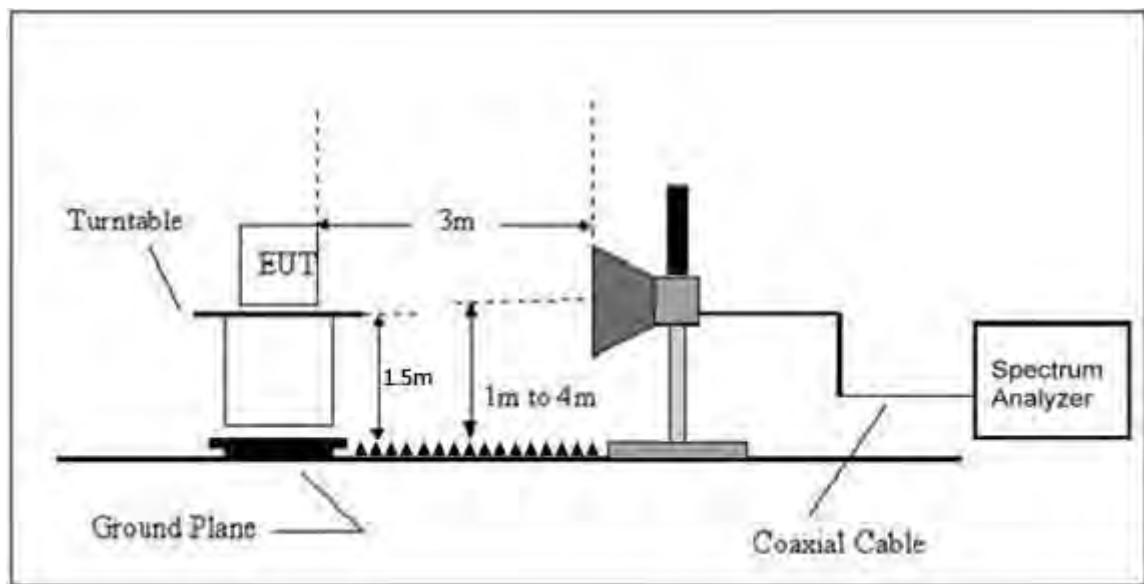

### 5.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.

## 5.6 TEST RESULT

	Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limit (dBuV/m)	Detector Type	Result	
LowChannel 2412MHz											
802.11b	H	2390.00	54.67	30.22	4.85	23.98	53.28	74.00	PK	PASS	
	H	2390.00	36.34	30.22	4.85	23.98	34.95	54.00	AV	PASS	
	H	2400.00	53.68	30.22	4.85	23.98	52.29	74.00	PK	PASS	
	H	2400.00	39.29	30.22	4.85	23.98	37.90	54.00	AV	PASS	
	V	2390.00	52.82	30.22	4.85	23.98	51.43	74.00	PK	PASS	
	V	2390.00	41.06	30.22	4.85	23.98	39.67	54.00	AV	PASS	
	V	2400.00	52.44	30.22	4.85	23.98	51.05	74.00	PK	PASS	
	V	2400.00	39.18	30.22	4.85	23.98	37.79	54.00	AV	PASS	
	HighChannel 2462MHz										
	H	2483.50	48.52	30.22	4.85	23.98	47.13	74.00	PK	PASS	
	H	2483.50	36.58	30.22	4.85	23.98	35.19	54.00	AV	PASS	
	H	2500.00	55.56	30.22	4.85	23.98	54.17	74.00	PK	PASS	
	H	2500.00	39.62	30.22	4.85	23.98	38.23	54.00	AV	PASS	
	V	2483.50	55.37	30.22	4.85	23.98	53.98	74.00	PK	PASS	
	V	2483.50	37.87	30.22	4.85	23.98	36.48	54.00	AV	PASS	
	V	2500.00	54.37	30.22	4.85	23.98	52.98	74.00	PK	PASS	
	V	2500.00	39.76	30.22	4.85	23.98	38.37	54.00	AV	PASS	

	LowChannel 2412MHz									
802.11g	H	2390.00	53.97	30.22	4.85	23.98	52.58	74.00	PK	PASS
	H	2390.00	37.16	30.22	4.85	23.98	35.77	54.00	AV	PASS
	H	2400.00	52.95	30.22	4.85	23.98	51.56	74.00	PK	PASS
	H	2400.00	37.95	30.22	4.85	23.98	36.56	54.00	AV	PASS
	V	2390.00	50.62	30.22	4.85	23.98	49.23	74.00	PK	PASS
	V	2390.00	42.59	30.22	4.85	23.98	41.20	54.00	AV	PASS
	V	2400.00	53.31	30.22	4.85	23.98	51.92	74.00	PK	PASS
	V	2400.00	37.80	30.22	4.85	23.98	36.41	54.00	AV	PASS
	High Channel 2462MHz									
	H	2483.50	49.71	30.22	4.85	23.98	48.32	74.00	PK	PASS
	H	2483.50	36.55	30.22	4.85	23.98	35.16	54.00	AV	PASS
	H	2500.00	55.23	30.22	4.85	23.98	53.84	74.00	PK	PASS
	H	2500.00	34.02	30.22	4.85	23.98	32.63	54.00	AV	PASS
	V	2483.50	52.01	30.22	4.85	23.98	50.62	74.00	PK	PASS
	V	2483.50	40.05	30.22	4.85	23.98	38.66	54.00	AV	PASS
	V	2500.00	57.06	30.22	4.85	23.98	55.67	74.00	PK	PASS
	V	2500.00	38.75	30.22	4.85	23.98	37.36	54.00	AV	PASS

	LowChannel 2412MHz									
802.11n20	H	2390.00	54.31	30.22	4.85	23.98	52.92	74.00	PK	PASS
	H	2390.00	36.45	30.22	4.85	23.98	35.06	54.00	AV	PASS
	H	2400.00	54.56	30.22	4.85	23.98	53.17	74.00	PK	PASS
	H	2400.00	40.50	30.22	4.85	23.98	39.11	54.00	AV	PASS
	V	2390.00	52.85	30.22	4.85	23.98	51.46	74.00	PK	PASS
	V	2390.00	42.35	30.22	4.85	23.98	40.96	54.00	AV	PASS
	V	2400.00	53.36	30.22	4.85	23.98	51.97	74.00	PK	PASS
	V	2400.00	37.51	30.22	4.85	23.98	36.12	54.00	AV	PASS
	High Channel 2462MHz									
	H	2483.50	49.41	30.22	4.85	23.98	48.02	74.00	PK	PASS

	H	2483.50	36.66	30.22	4.85	23.98	35.27	54.00	AV	PASS
	H	2500.00	52.21	30.22	4.85	23.98	50.82	74.00	PK	PASS
	H	2500.00	36.35	30.22	4.85	23.98	34.96	54.00	AV	PASS
	V	2483.50	54.71	30.22	4.85	23.98	53.32	74.00	PK	PASS
	V	2483.50	39.26	30.22	4.85	23.98	37.87	54.00	AV	PASS
	V	2500.00	57.93	30.22	4.85	23.98	56.54	74.00	PK	PASS
	V	2500.00	42.29	30.22	4.85	23.98	40.90	54.00	AV	PASS

**Remark:**

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit

## 6. POWER SPECTRAL DENSITY TEST

Test Requirement:	FCC Part15 C Section 15.247 (e)
Test Method:	KDB558074 D0115.247 Meas Guidancev05r02

### 6.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8dBm/3kHz	2400-2483.5	PASS

### 6.2 TEST PROCEDURE

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
4. Set the VBW  $\geq 3 \times \text{RBW}$ .
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

### 6.3 DEVIATION FROM STANDARD

No deviation.

### 6.4 TEST SETUP




### 6.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.


## 6.6 TEST RESULT

Temperature :	26°C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC5.0V
Test Mode :	TX b Mode		

Frequency	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
2412 MHz	-10.578	8	PASS
2437 MHz	-13.678	8	PASS
2462 MHz	-13.992	8	PASS

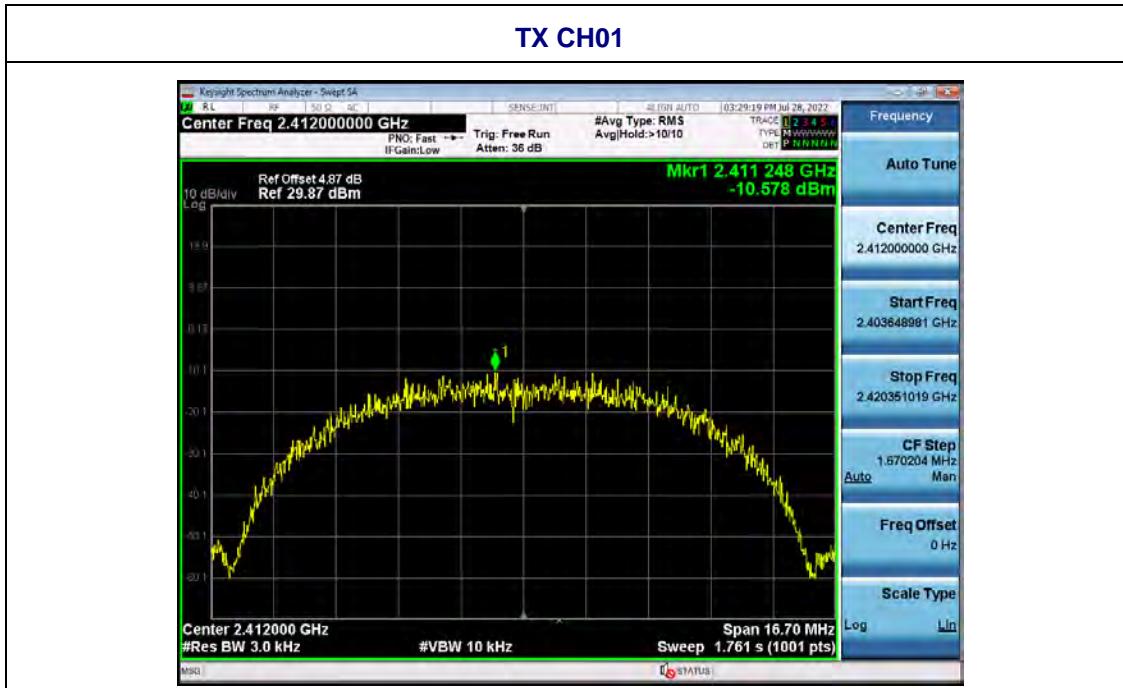

### TX CH06

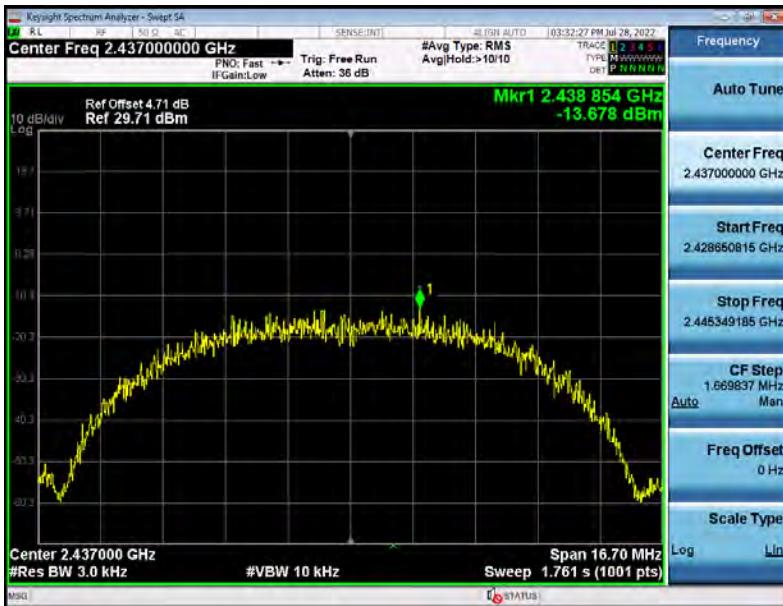


### TX CH11




Temperature :	26°C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC5.0V
Test Mode :	TX g Mode		


Frequency	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
2412 MHz	-13.997	8	PASS
2437 MHz	-16.543	8	PASS
2462 MHz	-17.892	8	PASS

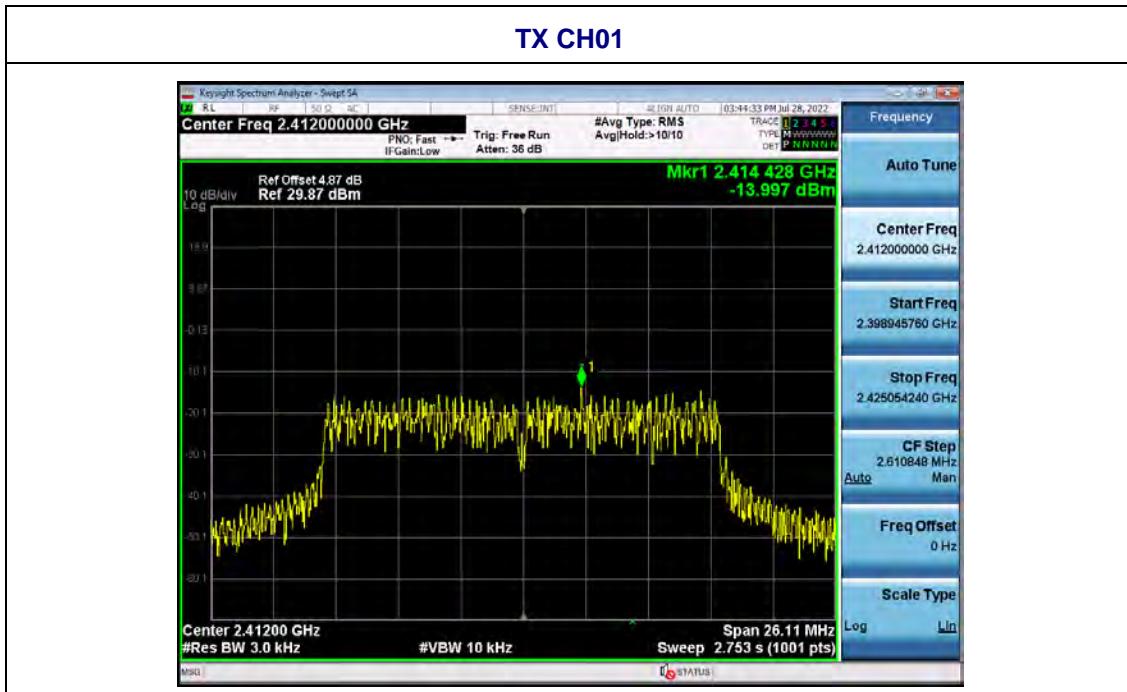

### TX CH06

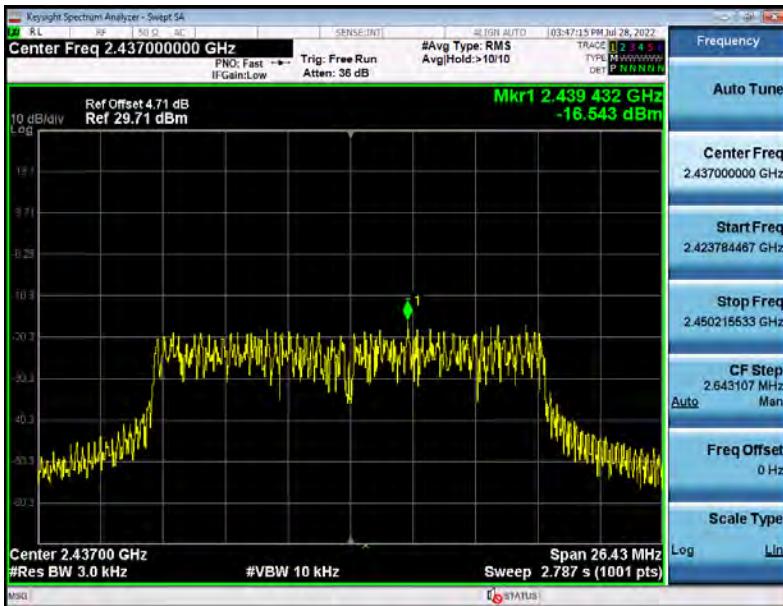




### TX CH11

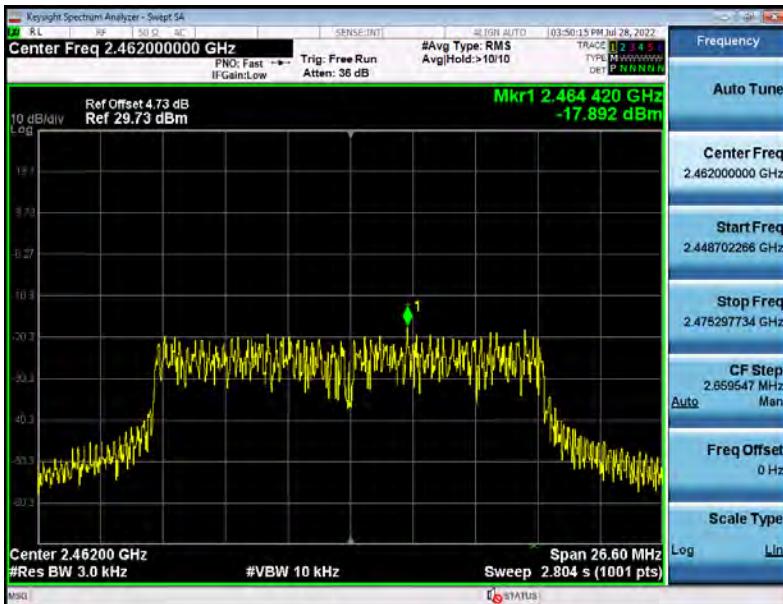

Temperature :	26°C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC5.0V
Test Mode :	TX n Mode(20M)		

Frequency	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
2412 MHz	-14.405	8	PASS
2437 MHz	-17.306	8	PASS
2462 MHz	-18.672	8	PASS

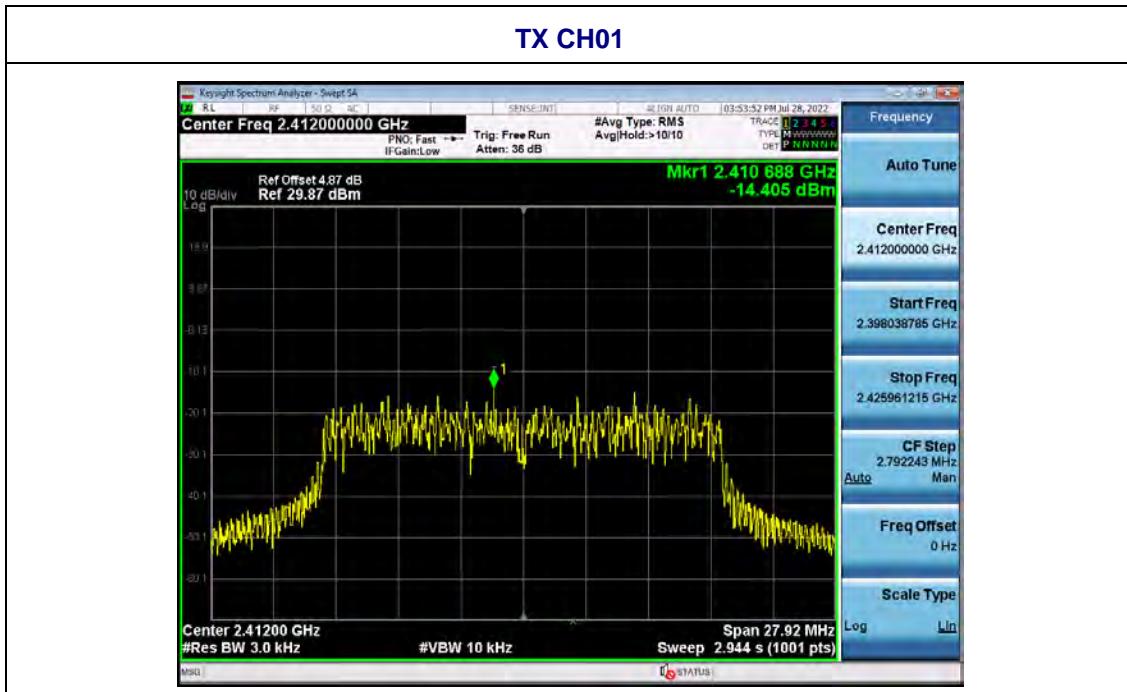

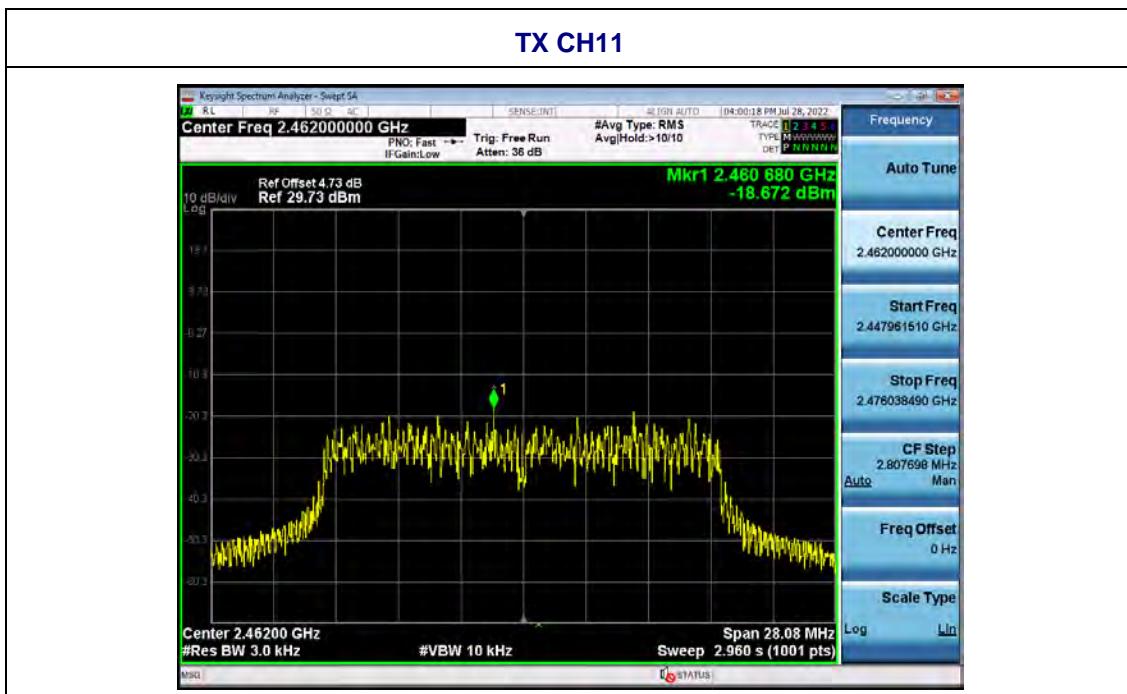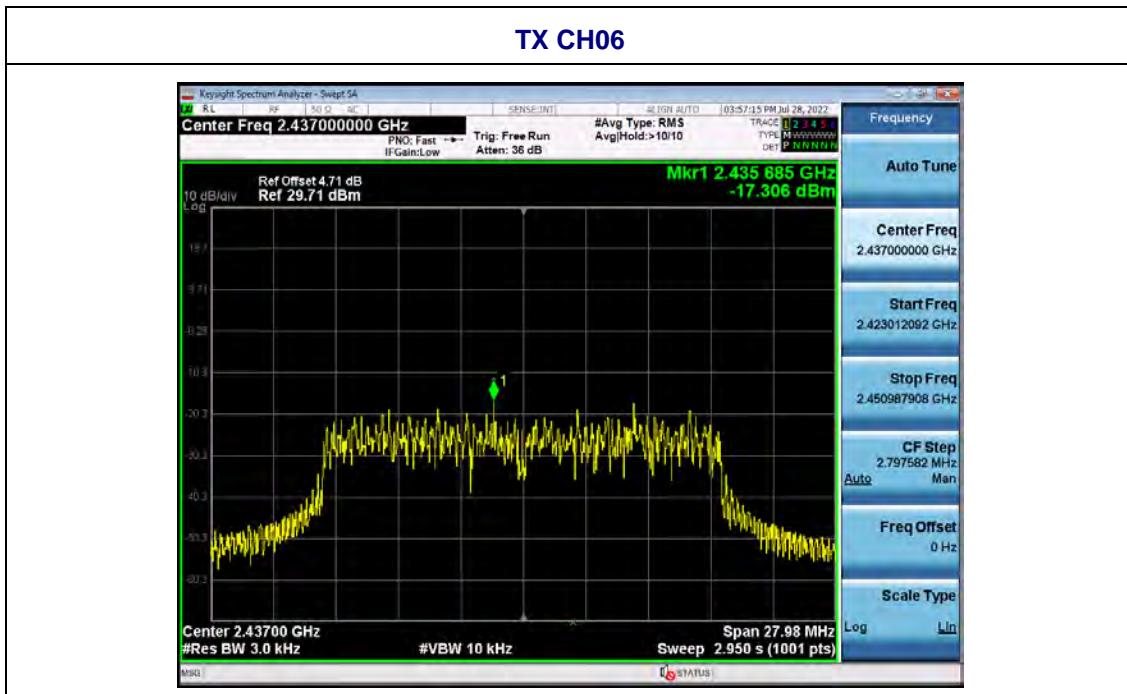

## 7. CHANNEL BANDWIDTH

Test Requirement:	FCC Part15 C Section 15.247 (a)(2)
Test Method:	KDB558074 D0115.247 Meas Guidancev05r02

### 7.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	>= 500KHz (6dB bandwidth)	2400-2483.5	PASS

### 7.2 TEST PROCEDURE

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

### 7.3 DEVIATION FROM STANDARD

No deviation.

### 7.4 TEST SETUP



### 7.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

## 7.6 TEST RESULT

Temperature :	26°C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 5.0V
Test Mode :	TX Mode		


Test CH	Channel Bandwidth (MHz)			Limit(KHz)	Result
	802.11b	802.11g	802.11n(HT20)		
Lowest	8.103	16.40	17.48	>500	Pass
Middle	8.137	16.42	17.49		
Highest	7.895	16.38	17.30		

Test plot as follows:


802.11b

802.11g


Lowest channel

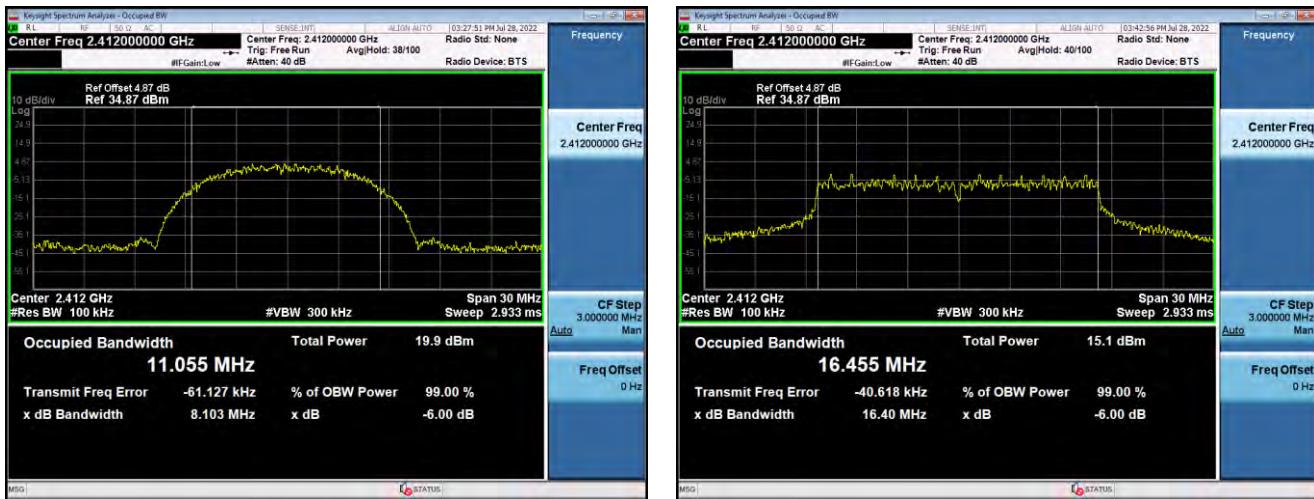

Middle channel

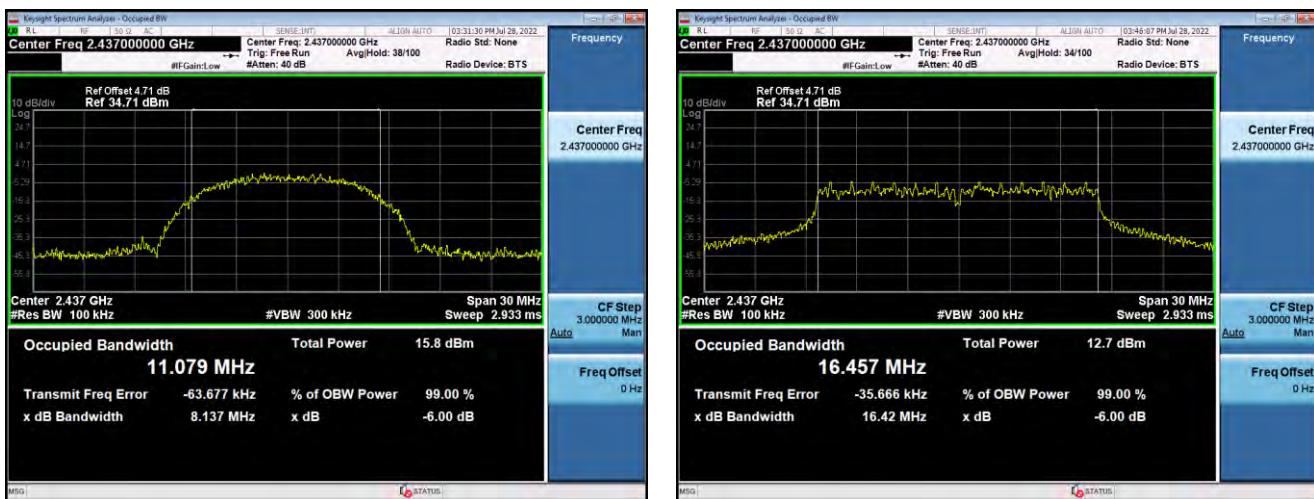


Highest channel

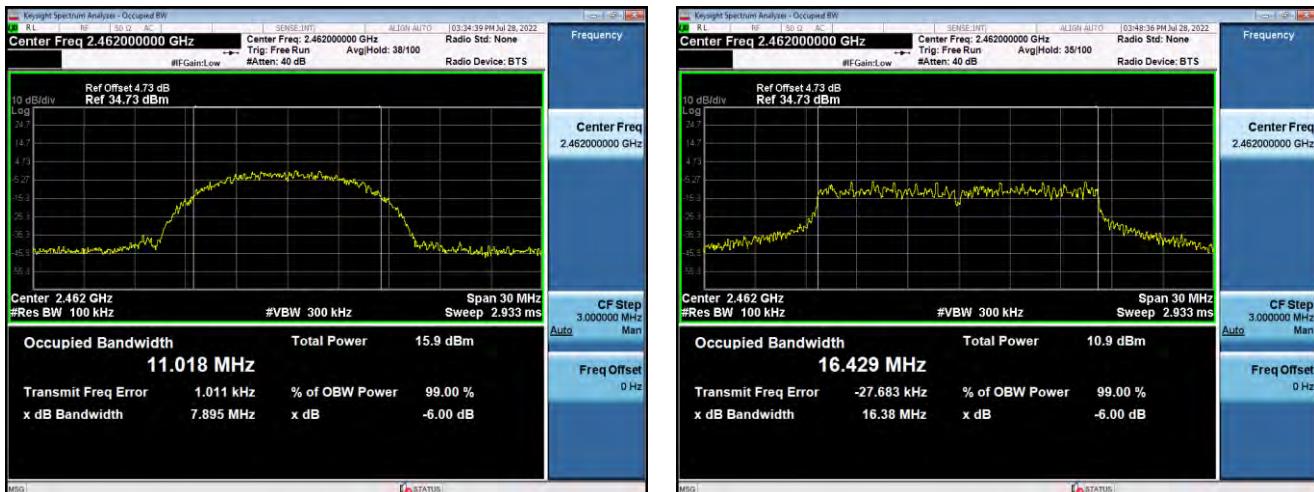

802.11n20


Lowest channel

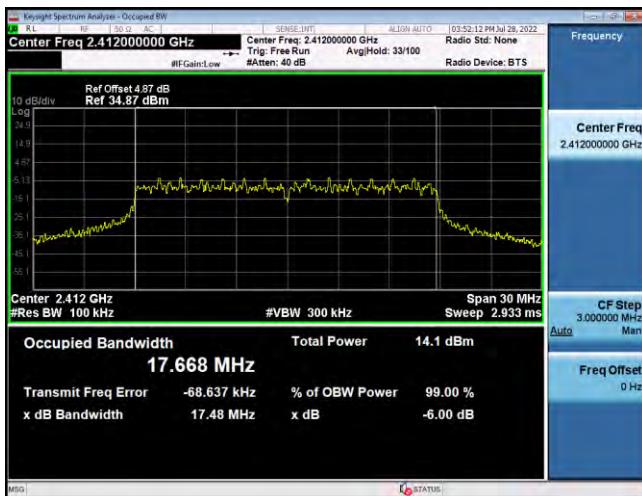

Middle channel



Highest channel

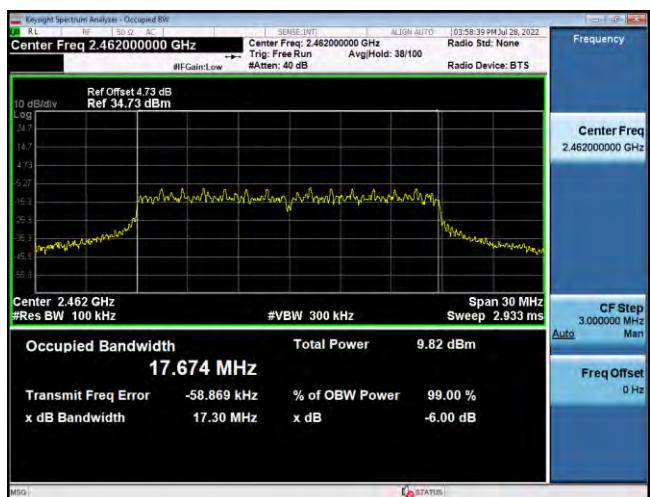

## 8.OUTPUT POWER TEST

Test Requirement:	FCC Part15 C Section 15.247 (b)(3)
Test Method:	KDB558074 D0115.247 Meas Guidancev05r02

### 8.1 APPLIED PROCEDURES/LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS

### 8.2 TEST PROCEDURE

- The EUT was directly connected to the Power meter

### 8.3 DEVIATION FROM STANDARD

No deviation.

### 8.4 TEST SETUP



### 8.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

## 8.6 TEST RESULT

Temperature :	26°C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC5.0V

Test CH	Peak Output Power (dBm)			Limit(dBm)	Result
	802.11b	802.11g	802.11n(HT20)		
Lowest	17.26	14.75	13.42		
Middle	15.28	12.62	10.95	30.00	Pass
Highest	13.89	10.90	9.18		

## 9. CONDUCTED BAND EDGE AND SPURIOUS EMISSION

Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	KDB558074 D0115.247 Meas Guidancev05r02

### 9.1 APPLICABLE STANDARD

in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in§15.205(a), must also comply with the radiated emission limits specified in15.209(a).

### 9.2 TEST PROCEDURE

Using the following spectrum analyzer setting:

- A) Set the RBW = 100KHz.
- B) Set the VBW = 300KHz.
- C) Sweep time = auto couple.
- D) Detector function = peak.
- E) Trace mode = max hold.
- F) Allow trace to fully stabilize.

### 9.3 DEVIATION FROM STANDARD

No deviation.

### 9.4 TEST SETUP



### 9.5 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

### 9.6 TEST RESULTS

Test plot as follows:

Test mode:

802.11b

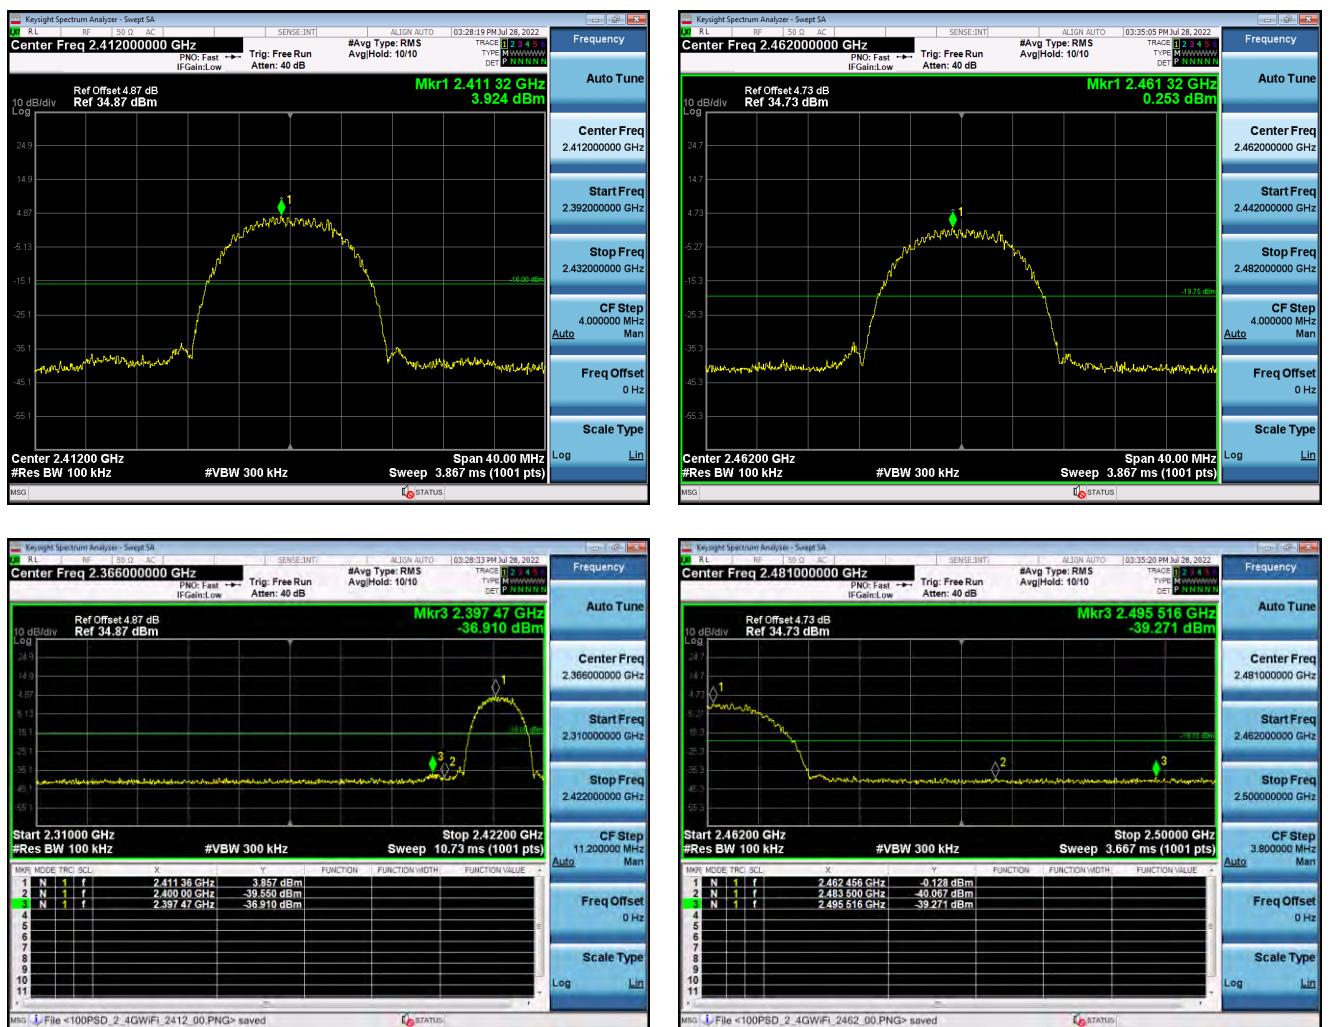


Lowest channel

Highest channel

Test mode:

802.11g

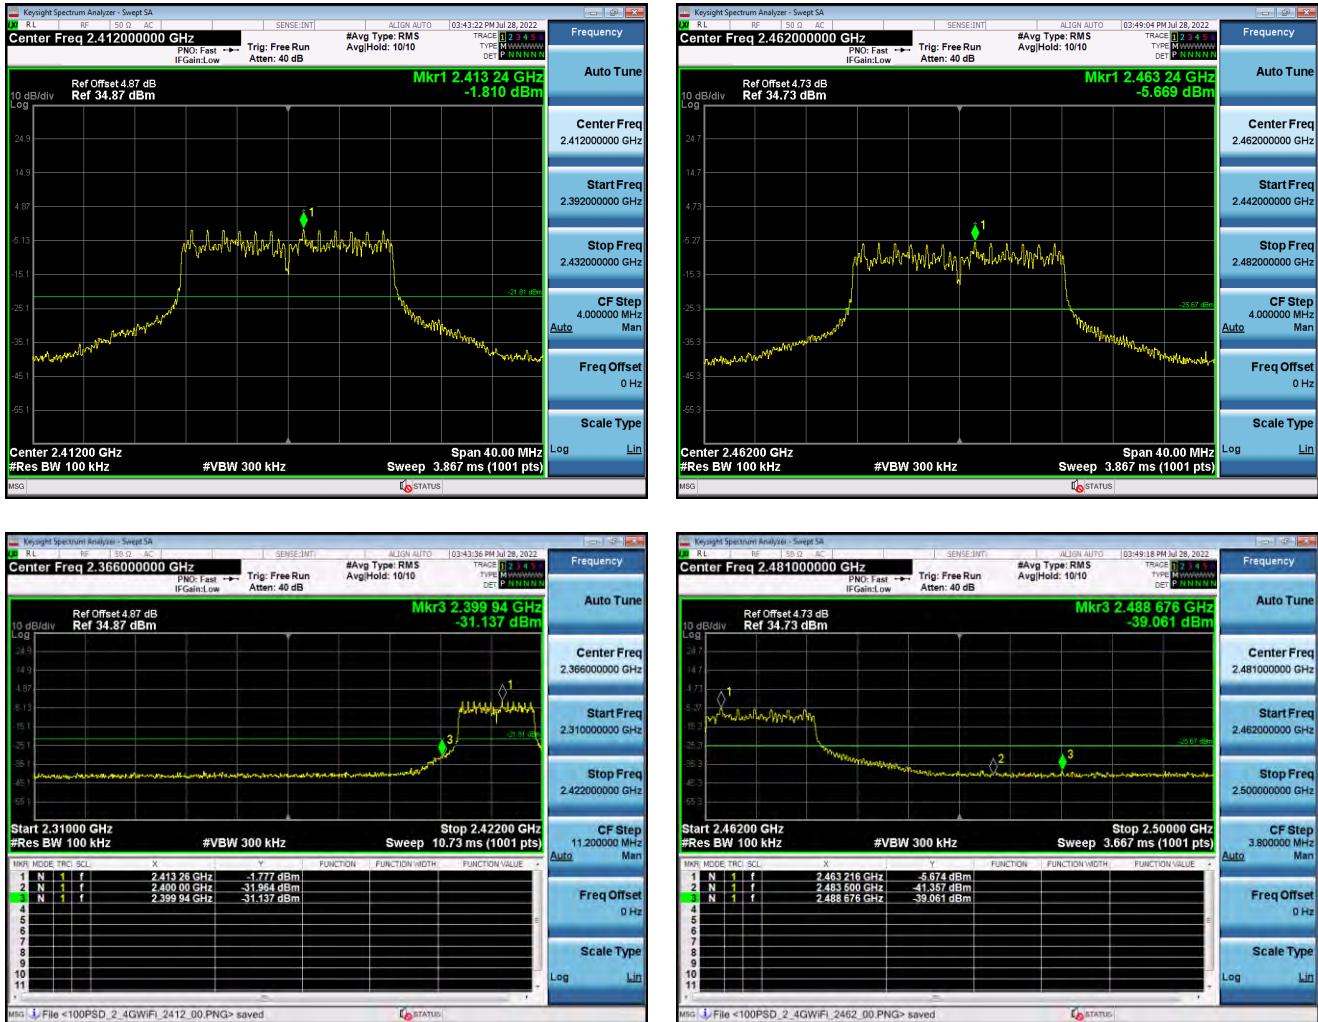


Lowest channel

Highest channel

Test mode:

802.11n(HT20)

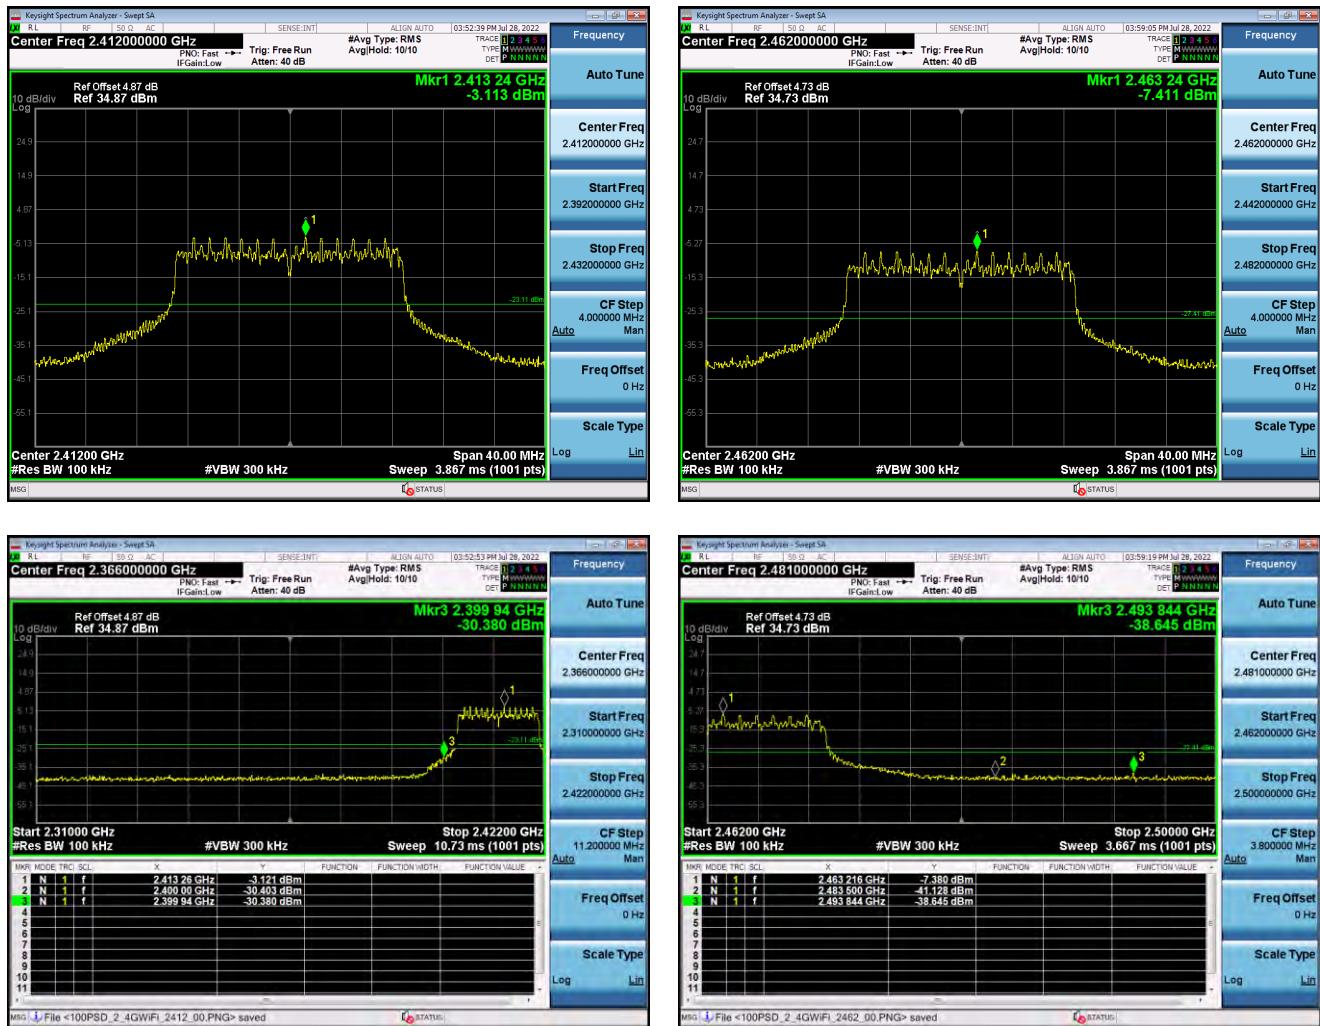


Lowest channel



Highest channel

Test plot as follows:



802.11b Lowest channel

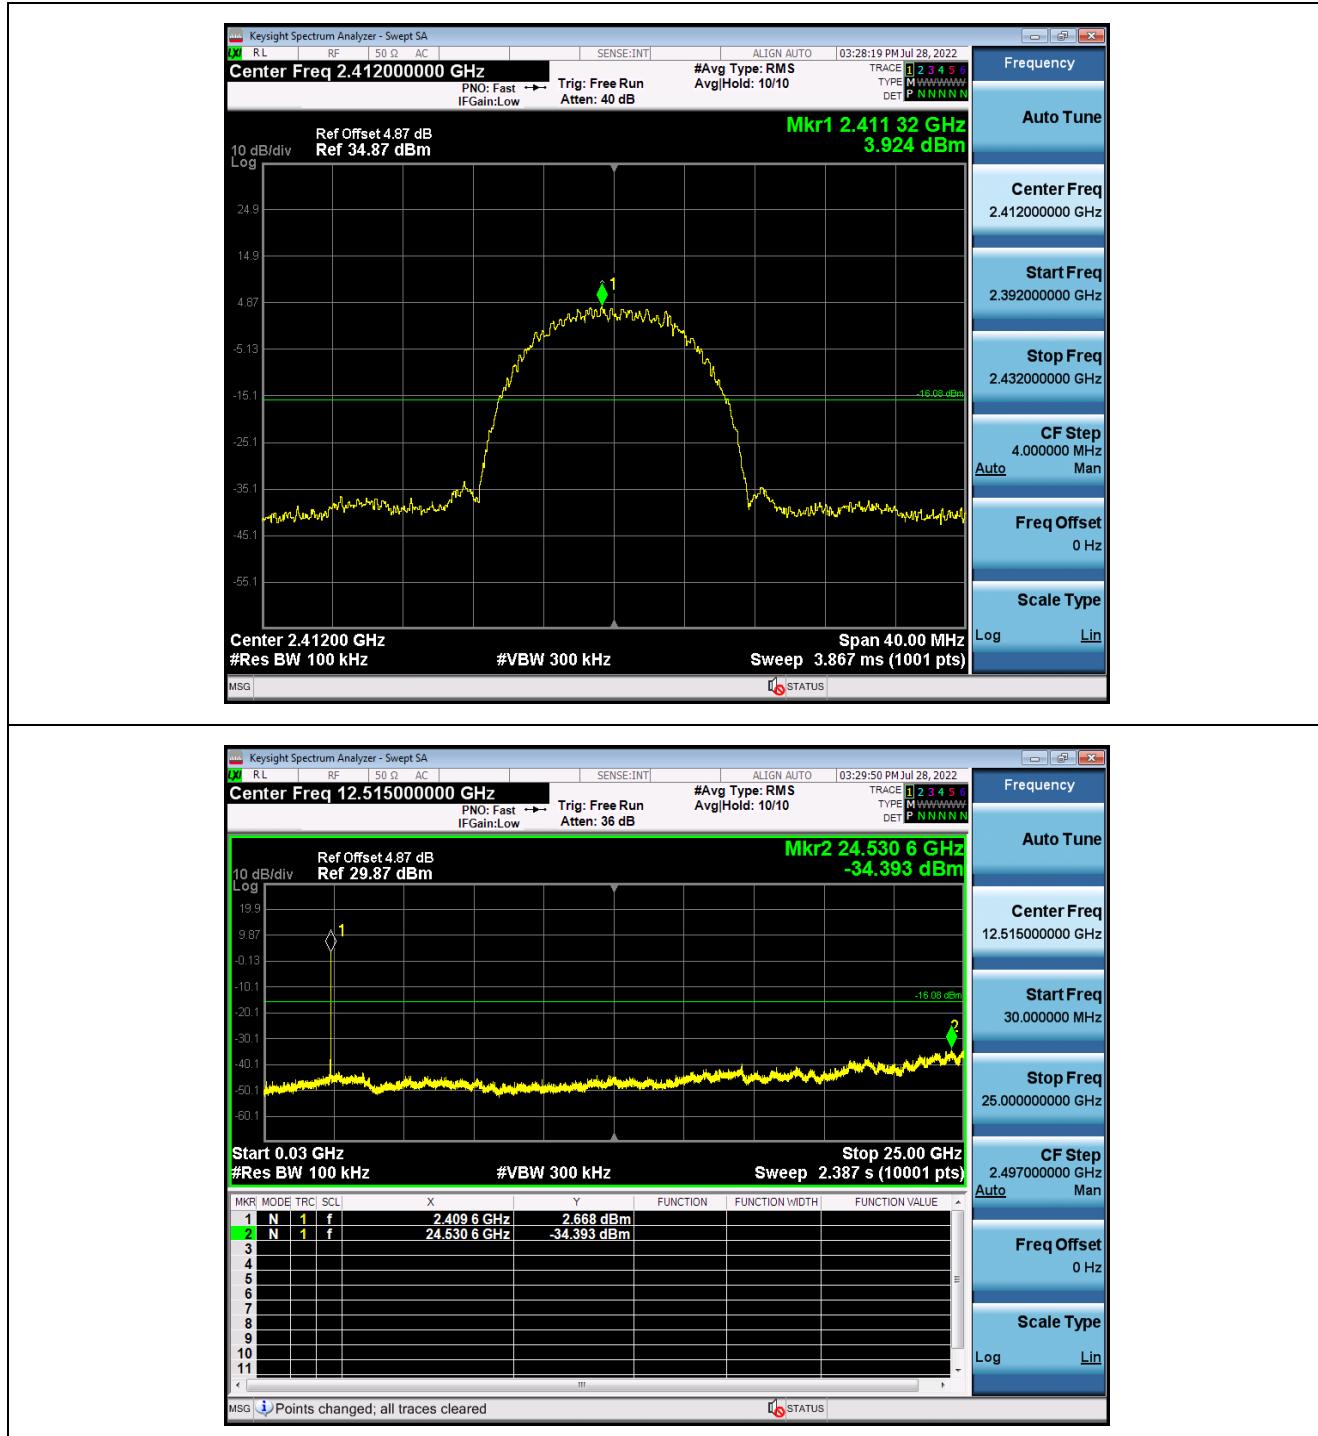



## 802.11b Middle channel

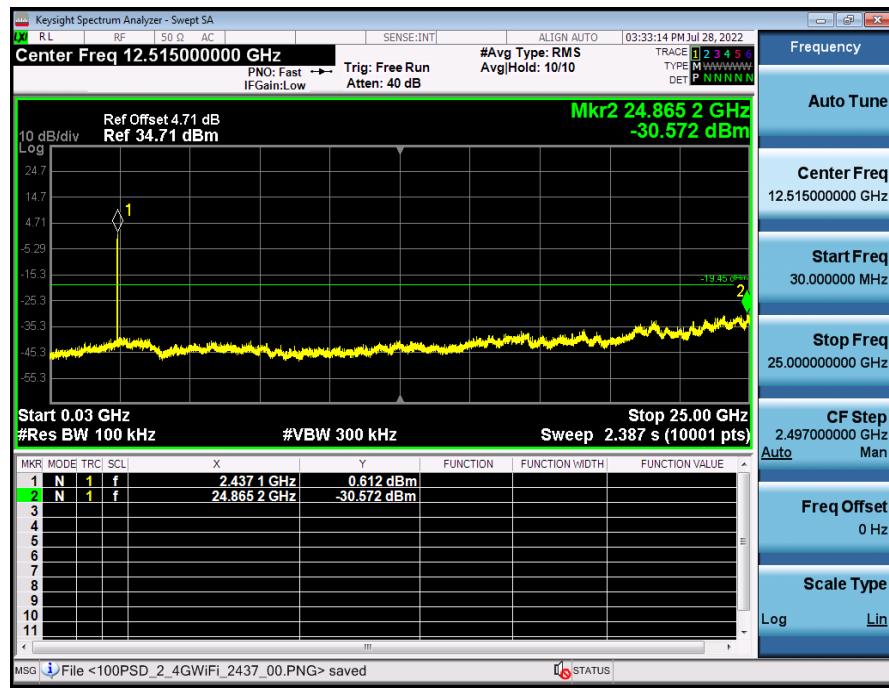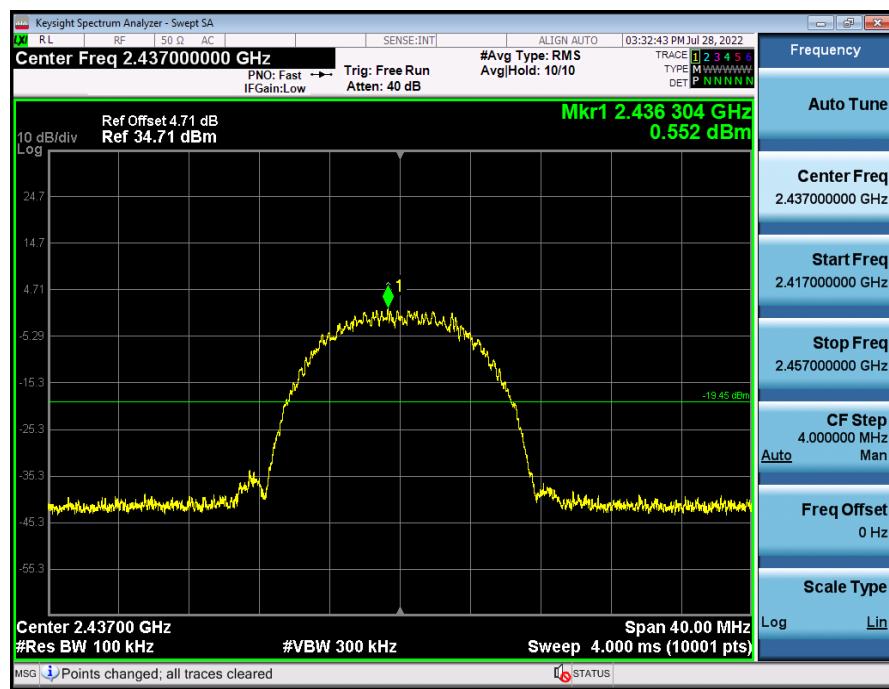



802.11b Highest channel

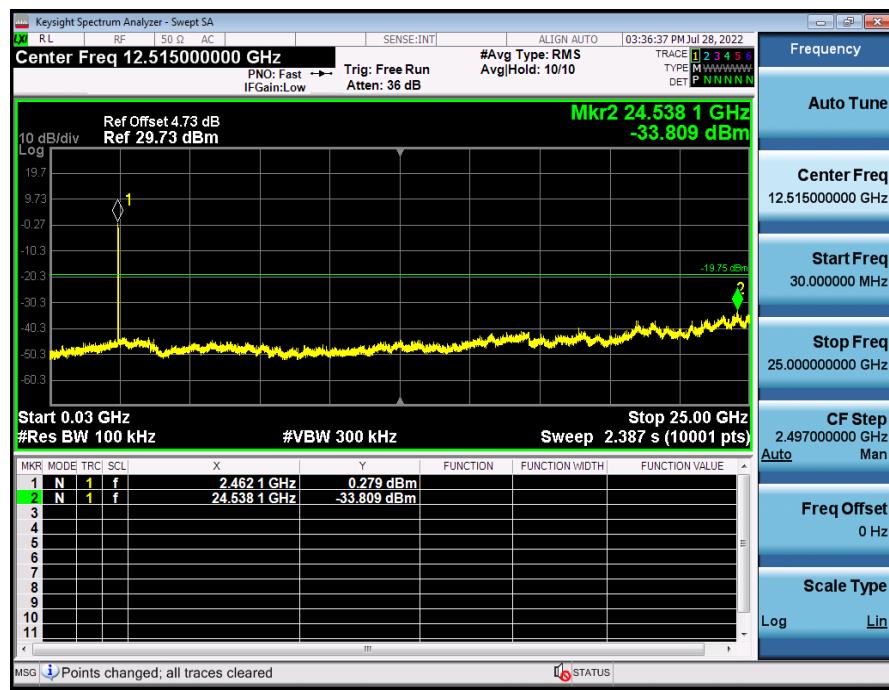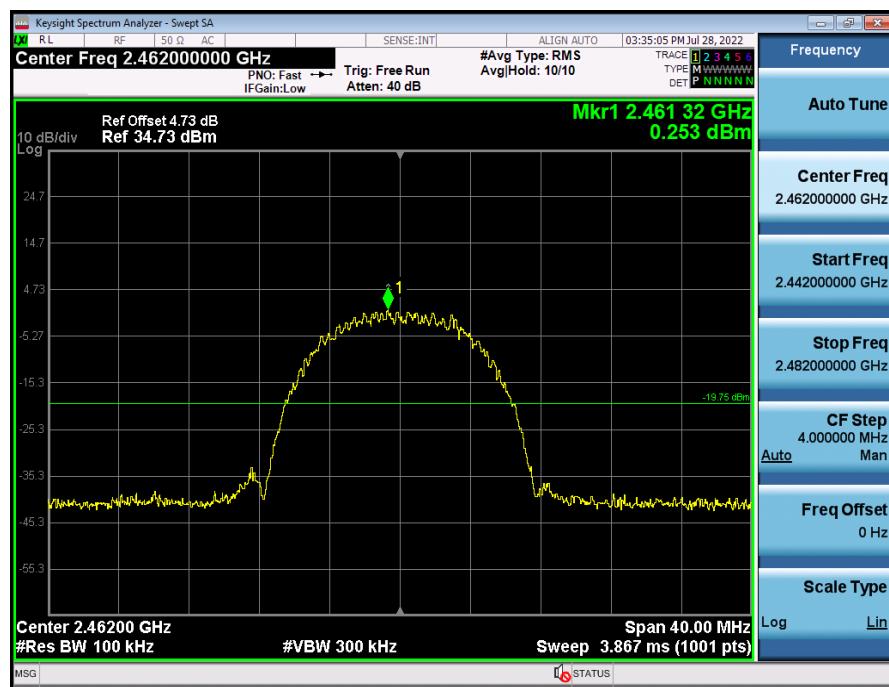



## 802.11g Lowest channel

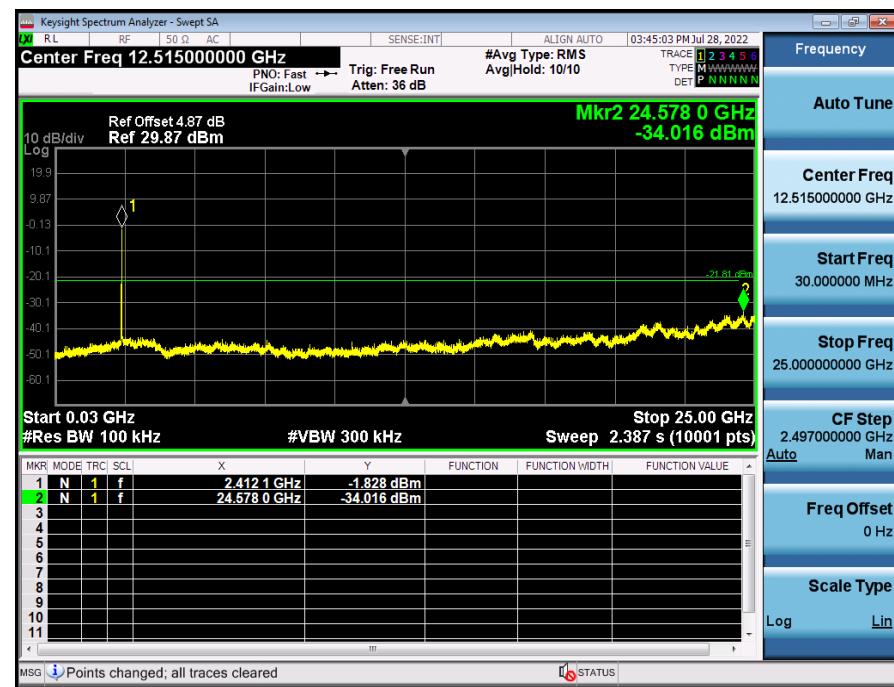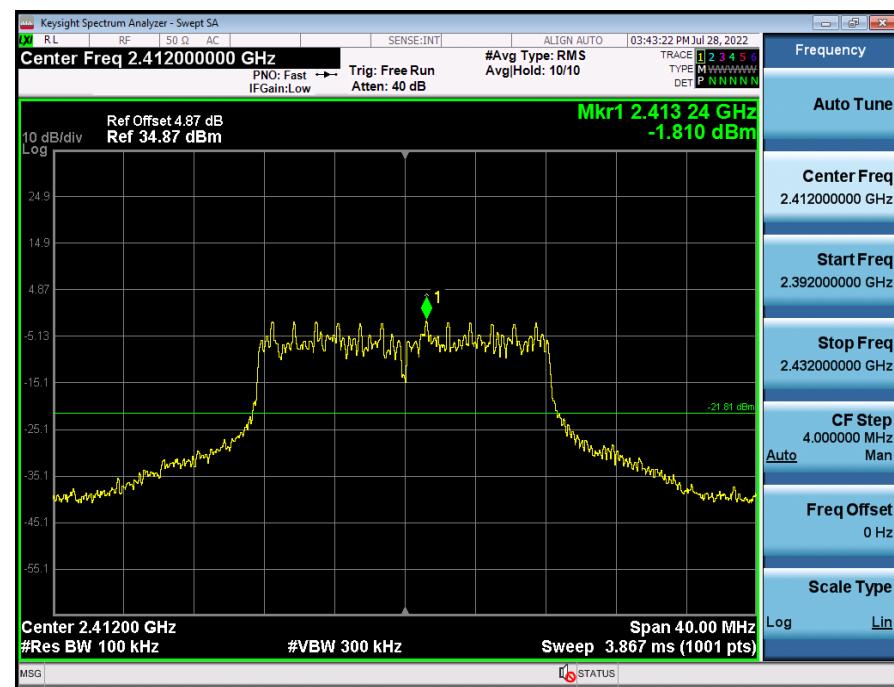



## 802.11g Middle channel

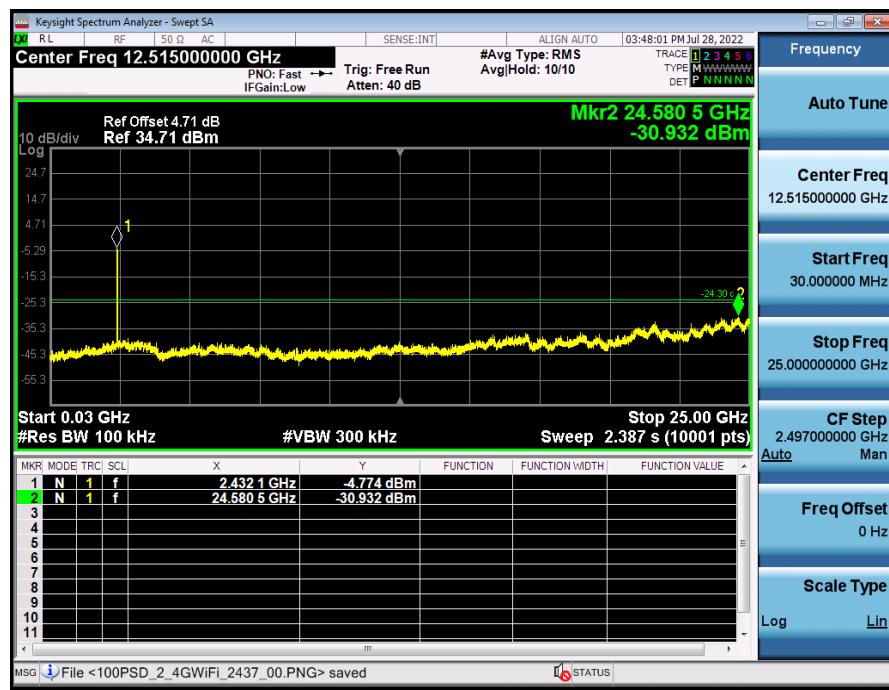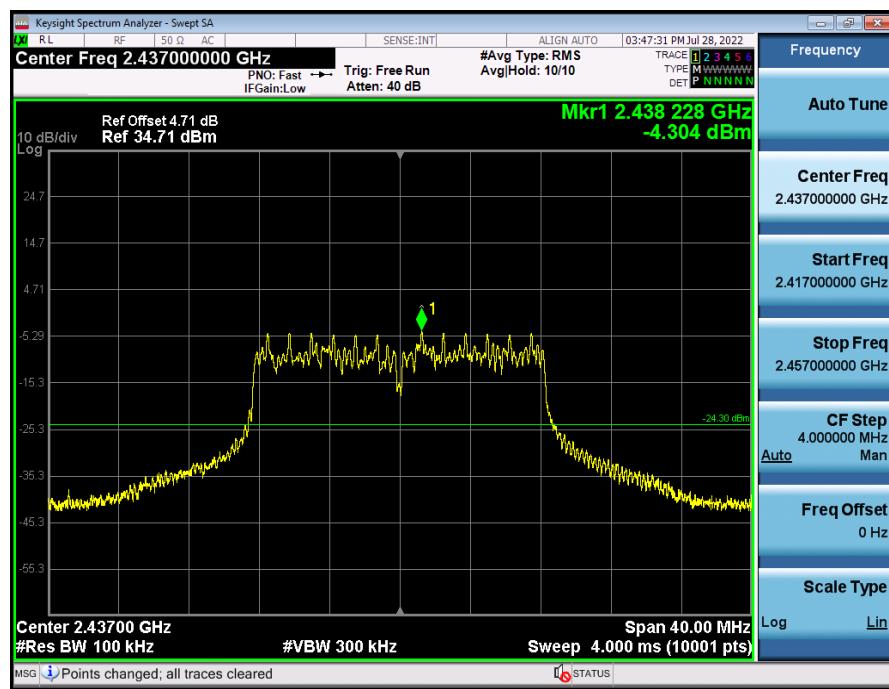



802.11g Highest channel

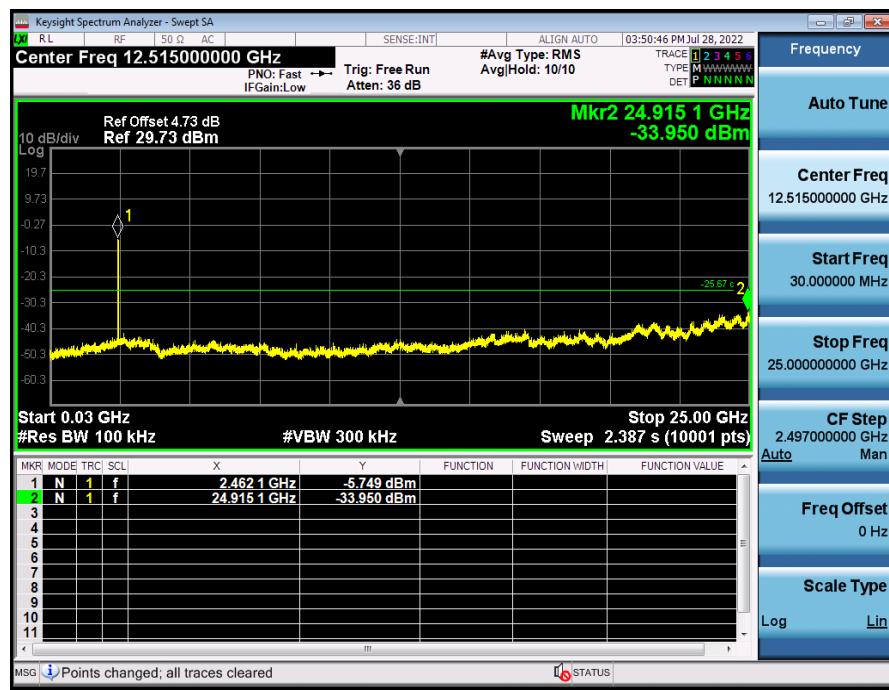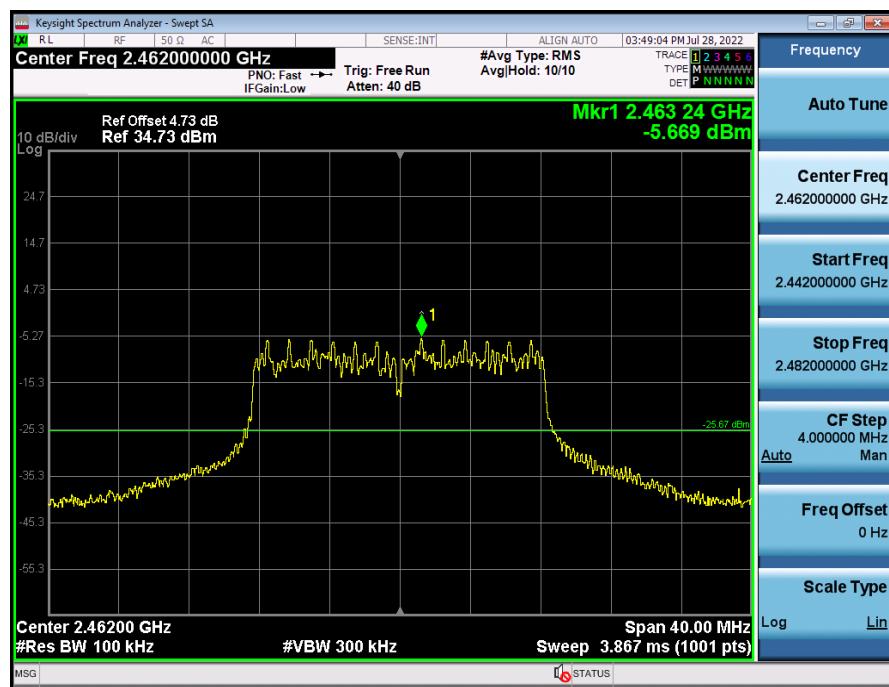



## 802.11n(HT20) Lowest channel

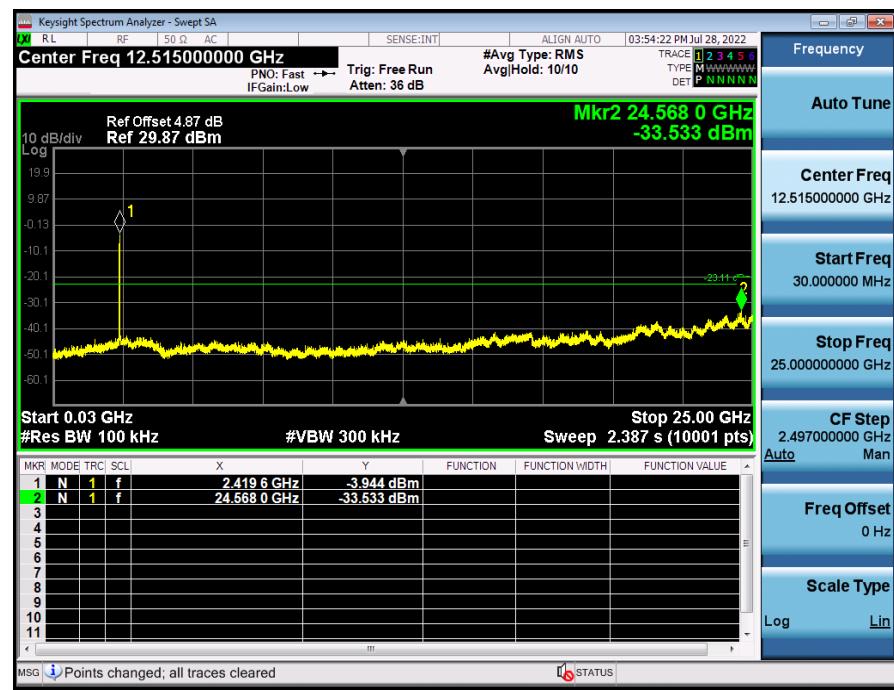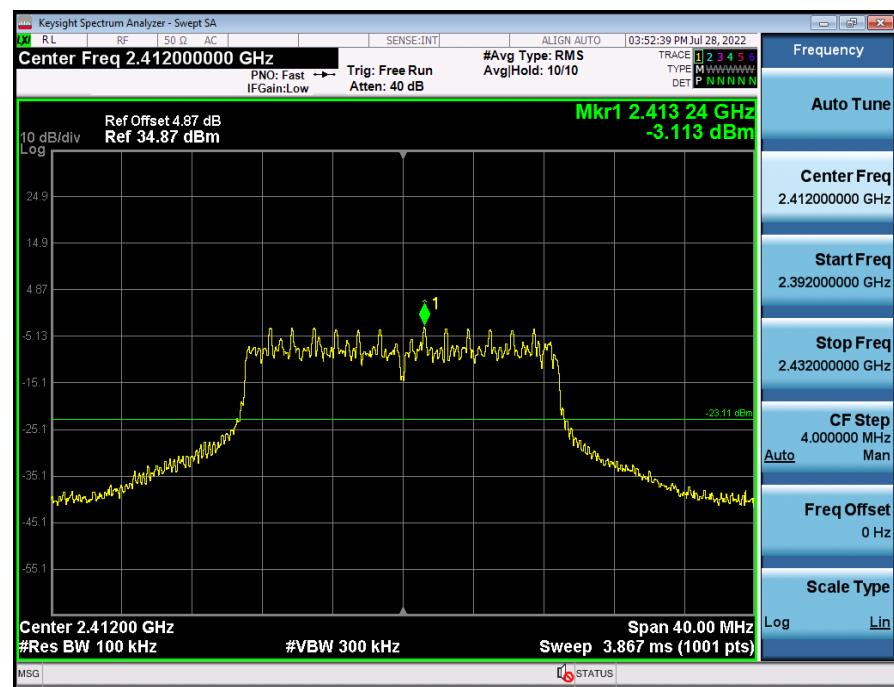


## 802.11n(HT20)Middle channel

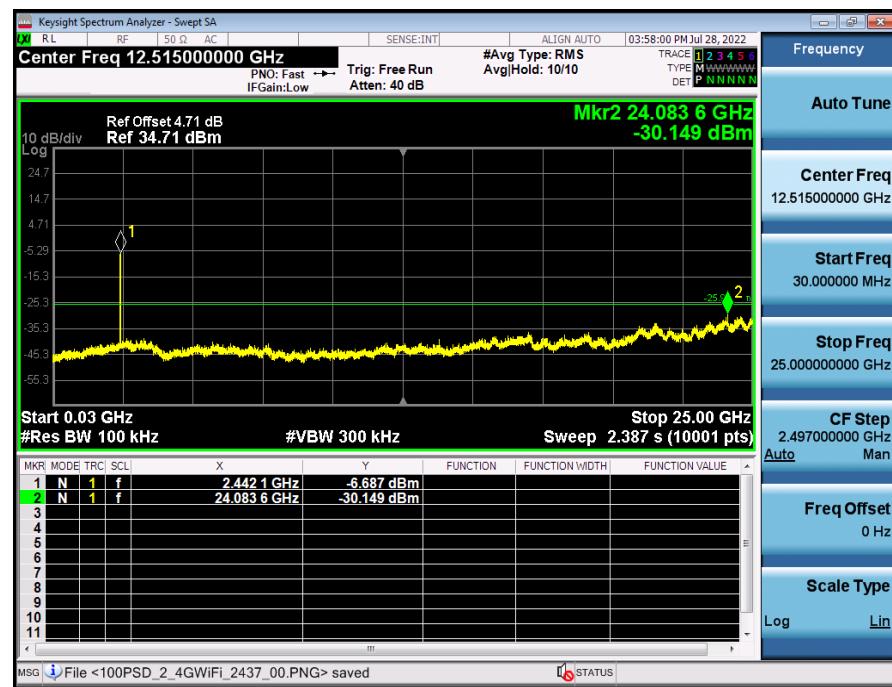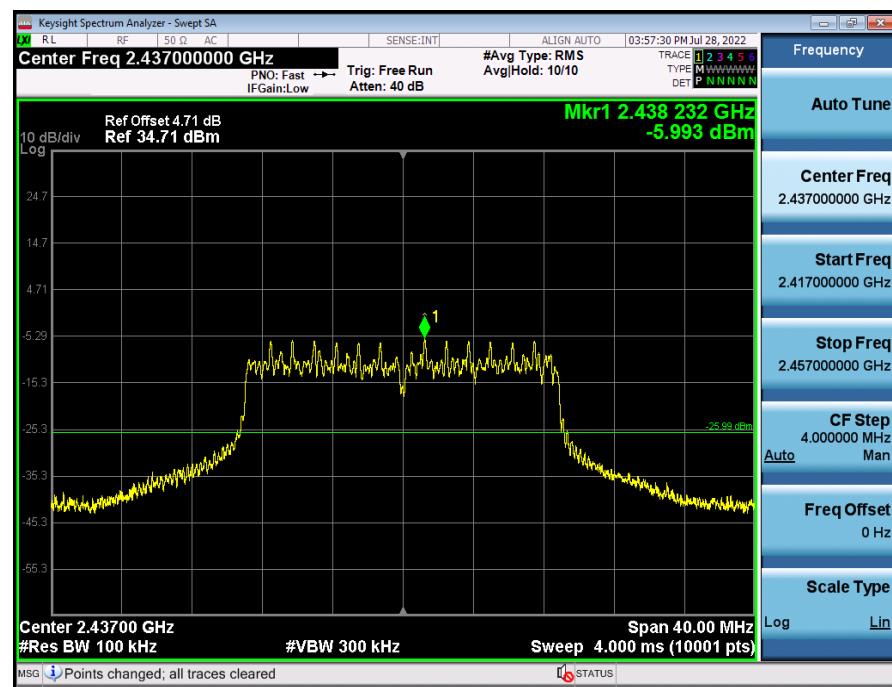


## 802.11n(HT20)Highest channel

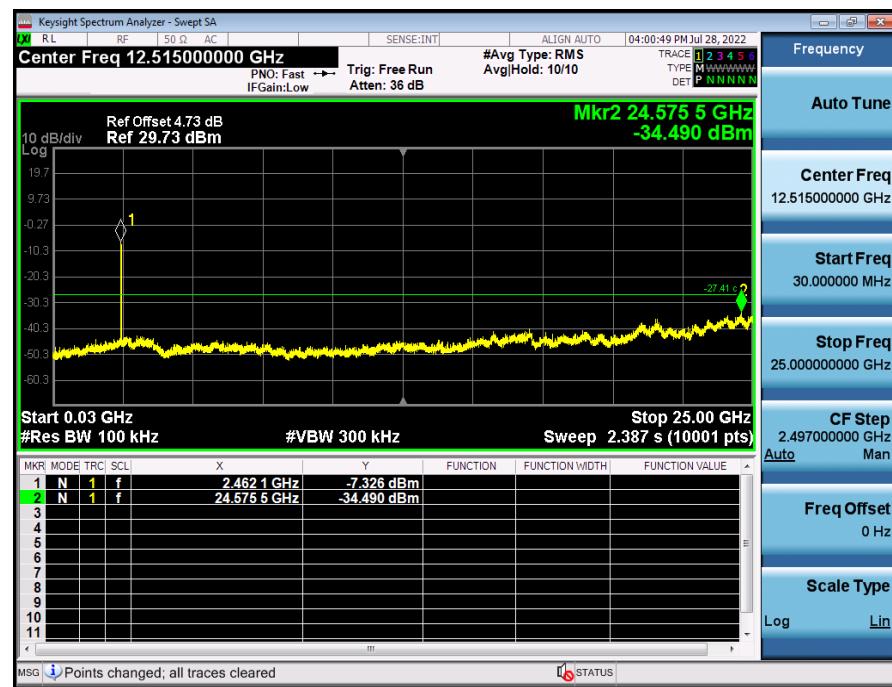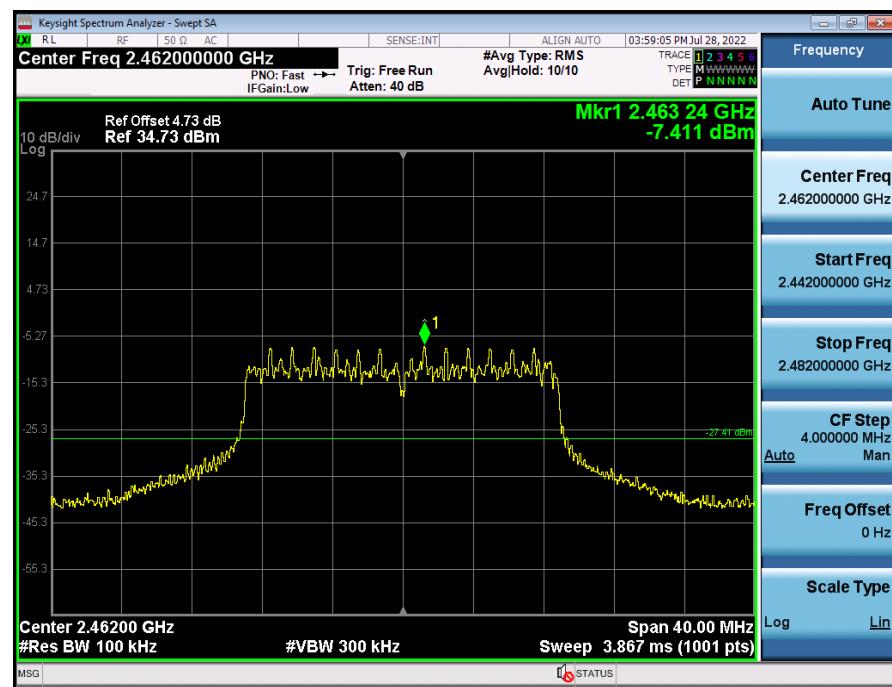

## 10. ANTENNA REQUIREMENT

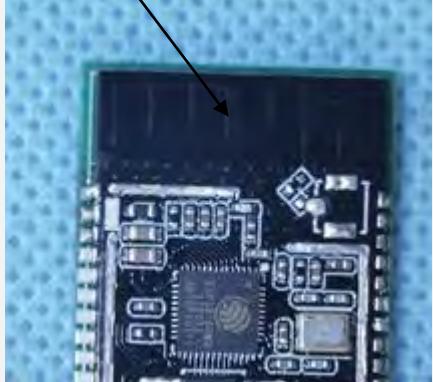Standard requirement:	FCC Part15 C Section 15.203 /247(c)
<p>For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247, if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.</p> <p>Refer to statement below for compliance.</p> <p>The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.</p> <p>Antenna Connected Construction</p> <p>The PCB antenna used in the product is a permanently connected antenna that complies with the provisions of part 15.203 requirement in this section. The antenna used in this product is a PCB antenna, The directional gains of antenna used for transmitting is 1.2dBi.</p>	
<p><b>EUT Antenna:</b></p> 	


**11. TEST SETUP PHOTO**

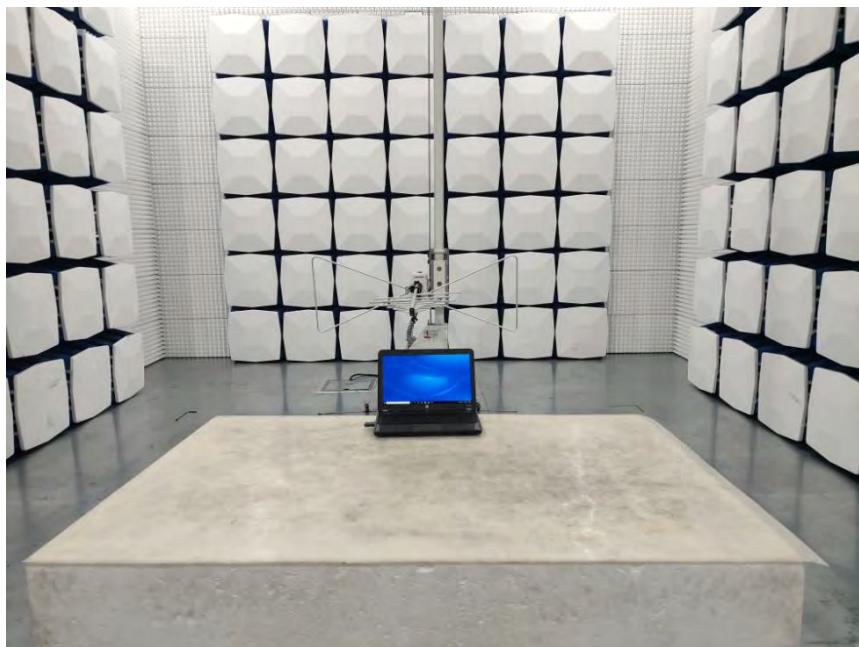





## 12. EUT CONSTRUCTIONAL DETAILS



external photos

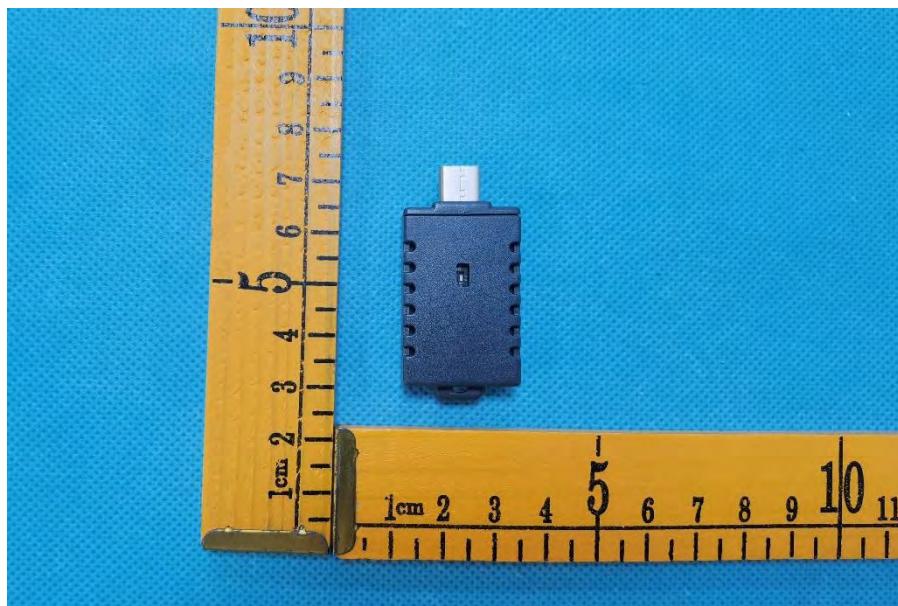




internal photos

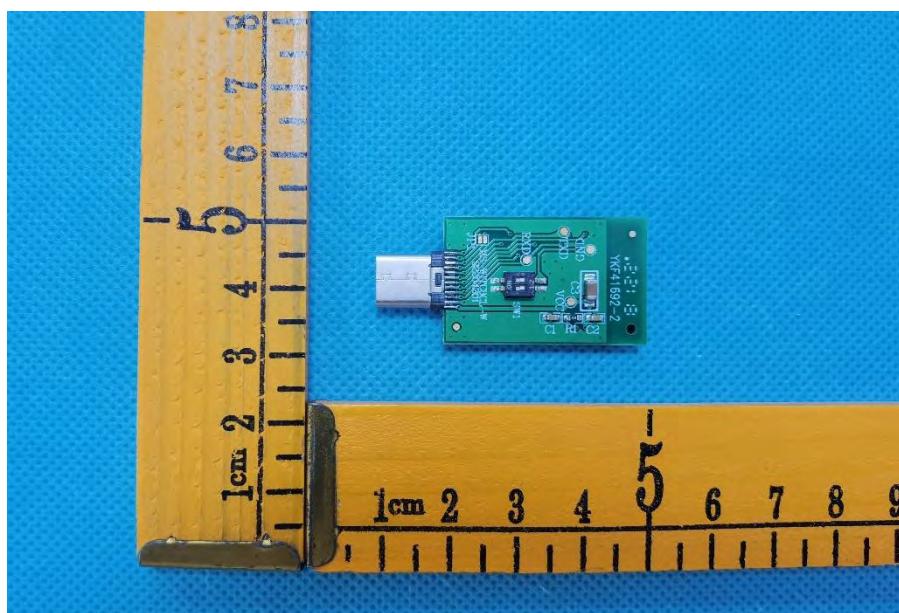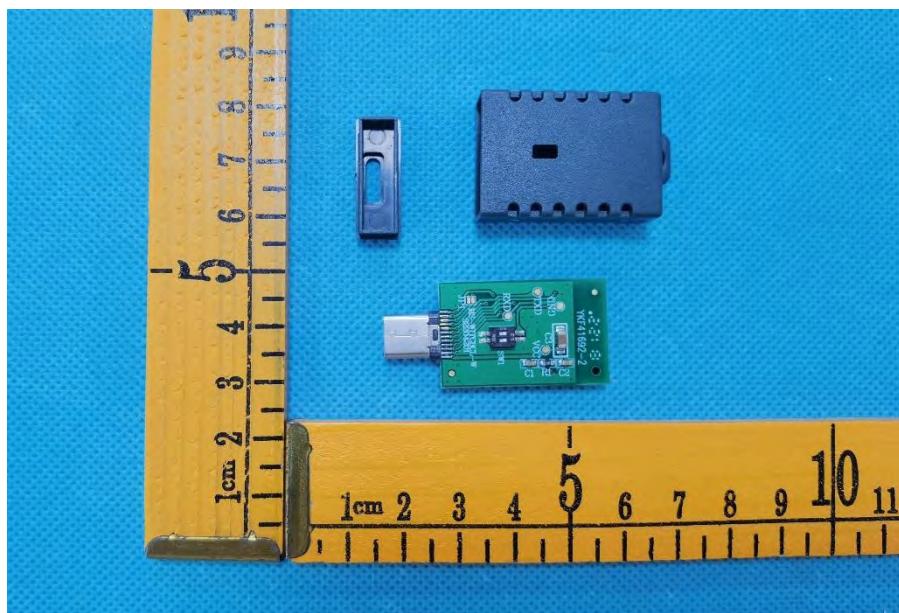

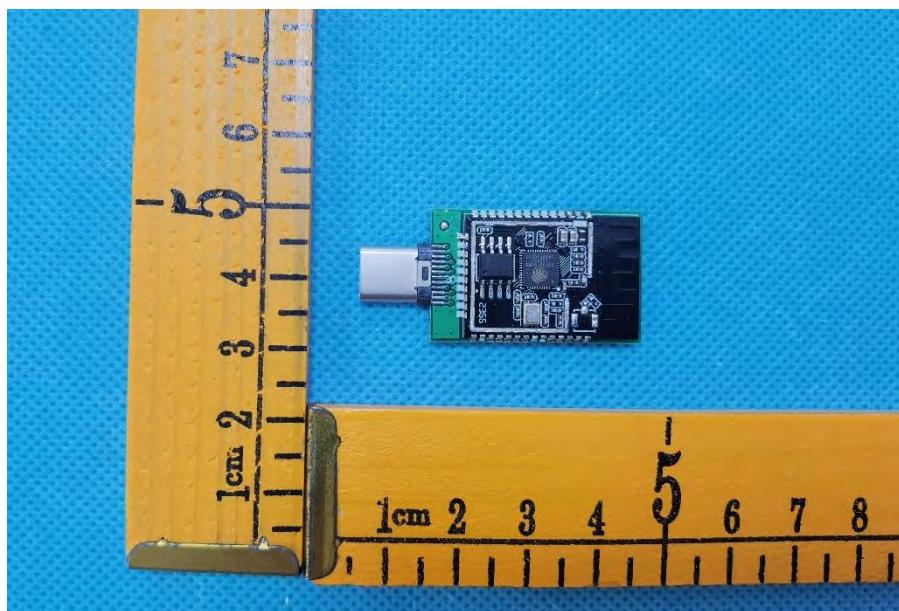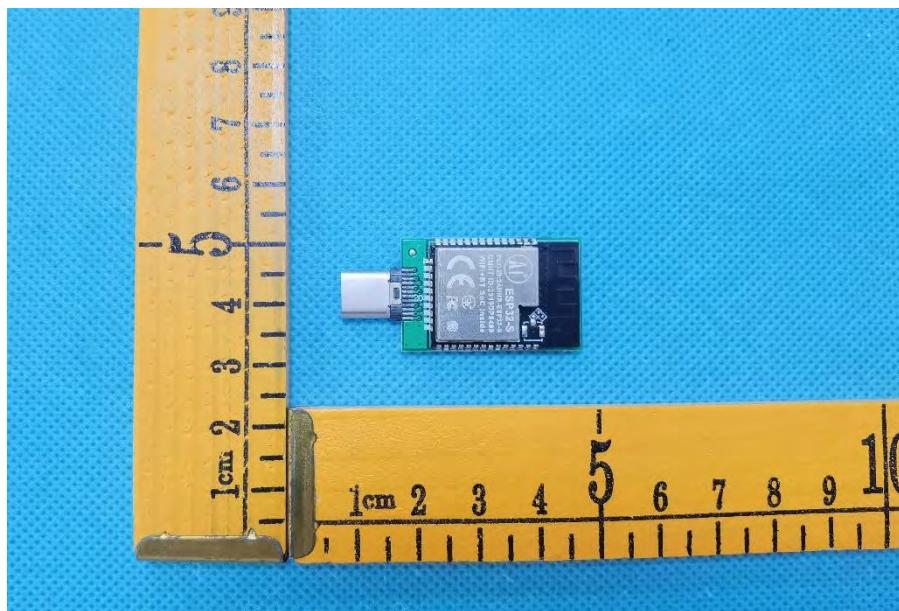

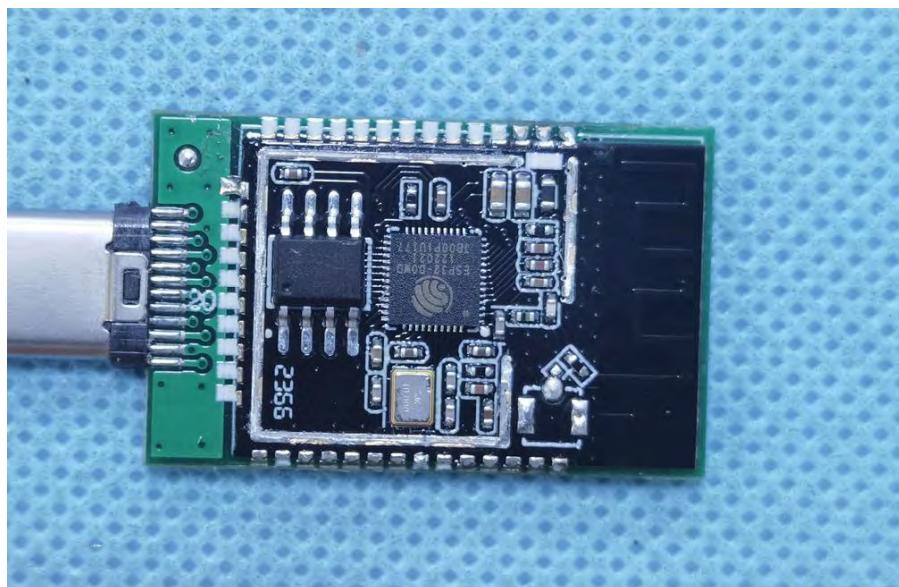

\*\*\*\*\* END OF REPORT \*\*\*\*\*