

## TEST REPORT

Test report no.: 1-1380/20-02-02-A

BNetzA-CAB-02/21-102

### Testing laboratory

**CTC advanced GmbH**

Untertuerkheimer Strasse 6 – 10

66117 Saarbruecken / Germany

Phone: + 49 681 5 98 - 0

Fax: + 49 681 5 98 - 9075

Internet: <https://www.ctcadvanced.com>

e-mail: [mail@ctcadvanced.com](mailto:mail@ctcadvanced.com)

**Accredited Testing Laboratory:**

The testing laboratory (area of testing) is accredited according to DIN EN ISO/IEC 17025 (2018-03) by the Deutsche Akkreditierungsstelle GmbH (DAkKS)

The accreditation is valid for the scope of testing procedures as stated in the accreditation certificate starting with the registration number: D-PL-12076-01.

### Applicant

**EUCHNER GmbH + Co. KG**

Kohlhammerstraße 16

70771 Leinfelden-Echterdingen / GERMANY

Phone: +49 711 7597-0

Contact: Tobias König

e-mail: [tobias.koenig@euchner.de](mailto:tobias.koenig@euchner.de)

### Manufacturer

**EUCHNER GmbH + Co. KG**

Kohlhammerstraße 16

70771 Leinfelden-Echterdingen / GERMANY

### Test standard/s

FCC - Title 47 CFR Part 15

FCC - Title 47 of the Code of Federal Regulations; Chapter I; Part 15 - Radio frequency devices

RSS - 210 Issue 10

Spectrum Management and Telecommunications Radio Standards Specification - Licence-Exempt Radio Apparatus: Category I Equipment

RSS - Gen Issue 5 incl. Amendment 1

Spectrum Management and Telecommunications Radio Standards Specification - General Requirements for Compliance of Radio Apparatus

For further applied test standards please refer to section 3 of this test report.

### Test Item

**Kind of test item:** Guard Locking Safety Switch  
**Model name:** CTA-L1-BR-U-HA-AZ-SAB-164972  
 CTP-L1-BR-U-HA-AE-SA-165455  
**FCC ID:** 2AJ58-13  
**IC:** 22052-13  
 Frequency: 125 kHz  
 Technology tested: RFID  
 Antenna: Integrated air coil antenna  
 Power supply: 20.4 V to 27.6 V DC by external power supply  
 Temperature range: -20°C to +55°C

This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

### Test report authorized:

Christoph Schneider  
Lab Manager  
Radio Communications

### Test performed:

Tobias Wittenmeier  
Testing Manager  
Radio Communications

## 1 Table of contents

1	Table of contents .....	2
2	General information .....	3
2.1	Notes and disclaimer .....	3
2.2	Application details .....	3
2.3	Test laboratories sub-contracted .....	3
3	Test standard/s, references and accreditations .....	4
4	Reporting statements of conformity – decision rule .....	5
5	Test environment .....	5
6	Test item .....	6
6.1	General description .....	6
6.2	Additional information .....	7
7	Description of the test setup .....	8
7.1	Shielded semi anechoic chamber .....	9
7.2	Shielded fully anechoic chamber .....	11
7.3	AC conducted .....	12
7.4	Radiated measurements RF laboratory .....	13
8	Sequence of testing .....	14
8.1	Sequence of testing radiated spurious 9 kHz to 30 MHz .....	14
8.2	Sequence of testing radiated spurious 30 MHz to 1 GHz .....	15
9	Measurement uncertainty .....	16
10	Summary of measurement results .....	17
11	Additional comments .....	17
12	Measurement results .....	18
12.1	Occupied bandwidth .....	18
12.2	Field strength of the fundamental .....	20
12.3	Field strength of the harmonics and spurious .....	22
12.4	Conducted limits .....	26
13	Observations .....	31
14	Glossary .....	32
15	Document history .....	33
16	Accreditation Certificate – D-PL-12076-01-04 .....	33
17	Accreditation Certificate – D-PL-12076-01-05 .....	34

## 2 General information

### 2.1 Notes and disclaimer

The test results of this test report relate exclusively to the test item specified in this test report. CTC advanced GmbH does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item.

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CTC advanced GmbH.

The testing service provided by CTC advanced GmbH has been rendered under the current "General Terms and Conditions for CTC advanced GmbH".

CTC advanced GmbH will not be liable for any loss or damage resulting from false, inaccurate, inappropriate or incomplete product information provided by the customer.

Under no circumstances does the CTC advanced GmbH test report include any endorsement or warranty regarding the functionality, quality or performance of any other product or service provided.

Under no circumstances does the CTC advanced GmbH test report include or imply any product or service warranties from CTC advanced GmbH, including, without limitation, any implied warranties of merchantability, fitness for purpose, or non-infringement, all of which are expressly disclaimed by CTC advanced GmbH.

All rights and remedies regarding vendor's products and services for which CTC advanced GmbH has prepared this test report shall be provided by the party offering such products or services and not by CTC advanced GmbH. In no case this test report can be considered as a Letter of Approval.

This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

**This test report replaces the test report with the number 1-1380/20-02-02 and dated 2021-02-05.**

### 2.2 Application details

Date of receipt of order:	2021-01-25
Date of receipt of test item:	2021-01-29
Start of test:*	2021-02-04
End of test:*	2021-02-04
Person(s) present during the test:	-/-

\*Date of each measurement, if not shown in the plot, can be requested. Dates are stored in the measurement software.





### 2.3 Test laboratories sub-contracted

None

### 3 Test standard/s, references and accreditations

Test standard	Date	Description
FCC - Title 47 CFR Part 15		FCC - Title 47 of the Code of Federal Regulations; Chapter I; Part 15 - Radio frequency devices
RSS - 210 Issue 10	December 2019	Spectrum Management and Telecommunications Radio Standards Specification - Licence-Exempt Radio Apparatus: Category I Equipment
RSS - Gen Issue 5 incl. Amendment 1	March 2019	Spectrum Management and Telecommunications Radio Standards Specification - General Requirements for Compliance of Radio Apparatus

Guidance	Version	Description
ANSI C63.4-2014	-/-	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
ANSI C63.10-2013	-/-	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices


Accreditation	Description	
D-PL-12076-01-04	Telecommunication and EMC Canada <a href="https://www.dakks.de/as/ast/d/D-PL-12076-01-04e.pdf">https://www.dakks.de/as/ast/d/D-PL-12076-01-04e.pdf</a>	 
D-PL-12076-01-05	Telecommunication FCC requirements <a href="https://www.dakks.de/as/ast/d/D-PL-12076-01-05e.pdf">https://www.dakks.de/as/ast/d/D-PL-12076-01-05e.pdf</a>	 

#### 4 Reporting statements of conformity – decision rule

Only the measured values related to their corresponding limits will be used to decide whether the equipment under test meets the requirements of the test standards listed in chapter 3.

The measurement uncertainty is mentioned in this test report, see chapter 9, but is not taken into account - neither to the limits nor to the measurement results. Measurement results with a smaller margin to the corresponding limits than the measurement uncertainty have a potential risk of more than 5% that the decision might be wrong."

measured value, measurement uncertainty, verdict

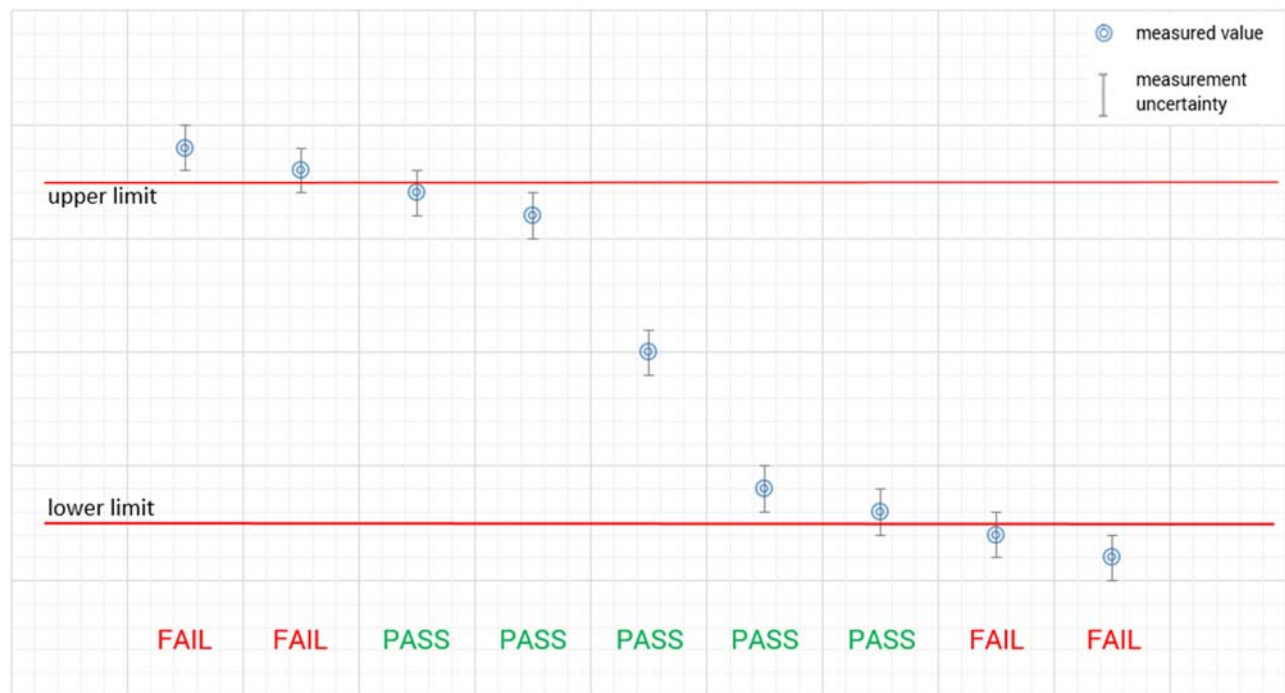

#### 5 Test environment

Temperature	:	$T_{nom}$ +22 °C during room temperature tests $T_{max}$ +55 °C during high temperature tests $T_{min}$ -20 °C during low temperature tests
Relative humidity content	:	55 %
Barometric pressure	:	1021 hpa
Power supply	:	$V_{nom}$ 24.0 V DC by external power supply $V_{max}$ 27.6 V $V_{min}$ 20.4 V

## 6 Test item

### 6.1 General description

Kind of test item	:	Guard Locking Safety Switch
Model name	:	CTA-L1-BR-U-HA-AZ-SAB-164972 CTP-L1-BR-U-HA-AE-SA-165455
HMN	:	-/-
PMN	:	CTA-BR series CTP-BR series CTA-BP series CTP-BP series CTP-I-AR SERIES CTP-I1-AR SERIES CTP-I2-AR SERIES CTP-IBI-AR SERIES CTP-L1-AR SERIES CTP-L2-AR SERIES CTP-LBI-AR SERIES CTP-I-AP SERIES CTP-I1-AP SERIES CTP-I2-AP SERIES CTP-IBI-AP SERIES CTP-L1-AP SERIES CTP-L2-AP SERIES CTP-LBI-AP SERIES
HVIN	:	13
FVIN	:	-/-
S/N serial number	:	CTA-L1-BR-U-HA-AZ-SAB-164972: 000022 CTP-L1-BR-U-HA-AE-SA-165455: 000014
Hardware status	:	LP-PRG CTA_BR_L1_L2 V3.1
Firmware status	:	- Channel A -> SW SubDevice V0.0.1.1 - Channel B -> SW SubDevice V0.0.1.1 - Channel C and D -> SW SubDevice V0.0.0.1 - PIC -> SW SubDevice V0.0.0.1
Frequency band	:	125 kHz
Type of radio transmission	:	Modulated carrier
Use of frequency spectrum	:	
Type of modulation	:	ASK
Number of channels	:	1
Antenna	:	Integrated air coil antenna
Power supply	:	20.4 V to 27.6 V DC by external power supply
Temperature range	:	-20°C to +55°C

## 6.2 Additional information

The content of the following annexes is defined in the QA. It may be that not all of the listed annexes are necessary for this report, thus some values in between may be missing.

Test setup and EUT photos are included in test report:

- 1-1380/20-02-01\_AnnexA
- 1-1380/20-02-01\_AnnexB
- 1-1380/20-02-01\_AnnexD

## 7 Description of the test setup

Typically, the calibrations of the test apparatus are commissioned to and performed by an accredited calibration laboratory. The calibration intervals are determined in accordance with the DIN EN ISO/IEC 17025. In addition to the external calibrations, the laboratory executes comparison measurements with other calibrated test systems or effective verifications. Weekly chamber inspections and range calibrations are performed. Where possible, RF generating and signaling equipment as well as measuring receivers and analyzers are connected to an external high-precision 10 MHz reference (GPS-based or rubidium frequency standard).

In order to simplify the identification of the equipment used at some special tests, some items of test equipment and ancillaries can be provided with an identifier or number in the equipment list below (Lab/Item).


### **Agenda:** Kind of Calibration

k	calibration / calibrated	EK	limited calibration
ne	not required (k, ev, izw, zw not required)	zw	cyclical maintenance (external cyclical maintenance)
ev	periodic self verification	izw	internal cyclical maintenance
Ve	long-term stability recognized	g	blocked for accredited testing
vlk!	Attention: extended calibration interval		
NK!	Attention: not calibrated	*)	next calibration ordered / currently in progress



## 7.1 Shielded semi anechoic chamber

The radiated measurements are performed in vertical and horizontal plane in the frequency range from 30 MHz to 1 GHz in semi-anechoic chambers. The EUT is positioned on a non-conductive support with a height of 0.80 m above a conductive ground plane that covers the whole chamber. The receiving antennas are conform to specifications ANSI C63. These antennas can be moved over the height range between 1.0 m and 4.0 m in order to search for maximum field strength emitted from EUT. The measurement distances between EUT and receiving antennas are indicated in the test setups for the various frequency ranges. For each measurement, the EUT is rotated in all three axes until the maximum field strength is received. The wanted and unwanted emissions are received by spectrum analyzers where the detector modes and resolution bandwidths over various frequency ranges are set according to requirement ANSI C63.

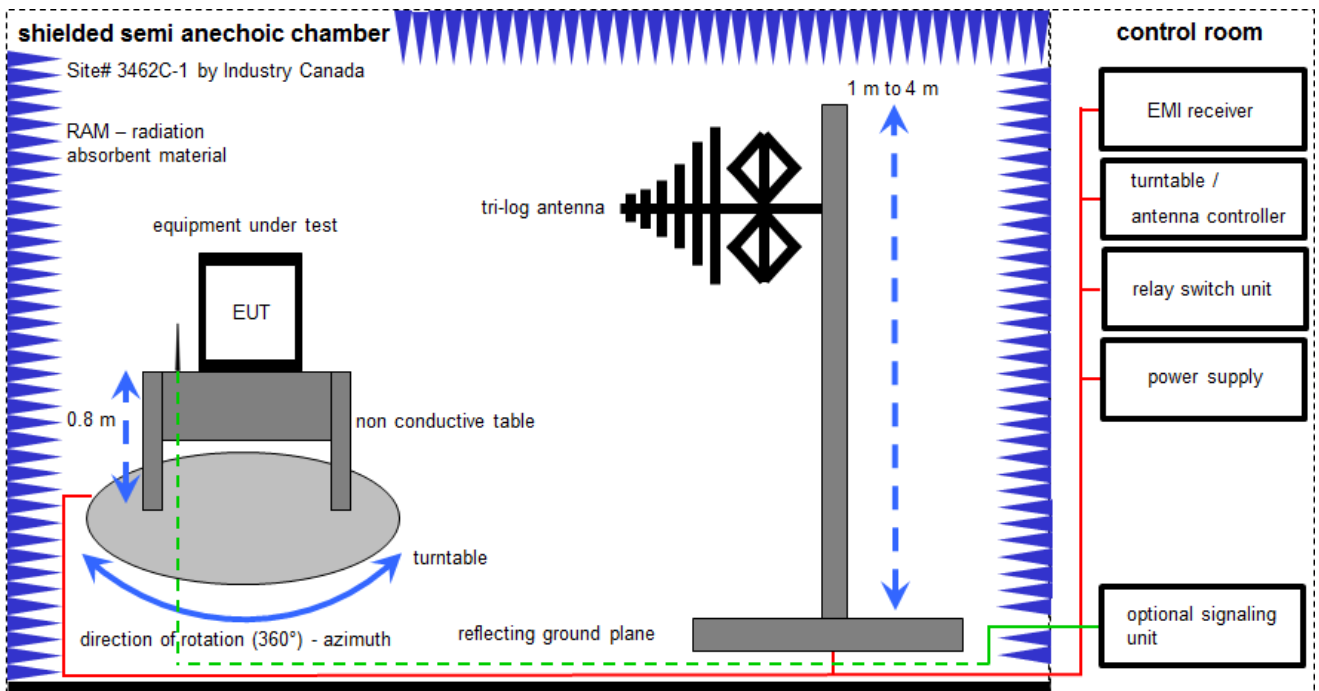

Measurement distance: tri-log antenna 10 meter  
EMC32 software version: 10.59.00


$FS = UR + CL + AF$   
(FS-field strength; UR-voltage at the receiver; CL-loss of the cable; AF-antenna factor)

*Example calculation:*  
 $FS [dB\mu V/m] = 12.35 [dB\mu V/m] + 1.90 [dB] + 16.80 [dB/m] = 31.05 [dB\mu V/m] (35.69 \mu V/m)$

**Equipment table:**

No.	Lab / Item	Equipment	Type	Manufacturer	Serial No.	INV. No.	Kind of Calibration	Last Calibration	Next Calibration
1	A	Switch-Unit	3488A	HP	2719A14505	300000368	ev	-/-	-/-
2	A	Semi anechoic chamber	3000023	MWB AG		300000551	ne	-/-	-/-
3	A	Analyzer-Reference-System (Harmonics and Flicker)	ARS 16/1	SPS	A3509 07/0 0205	300003314	vKI!	17.01.2020	16.01.2022
4	A	Antenna Tower	Model 2175	ETS-Lindgren	64762	300003745	izw	-/-	-/-
5	A	Positioning Controller	Model 2090	ETS-Lindgren	64672	300003746	izw	-/-	-/-
6	A	Turntable Interface-Box	Model 105637	ETS-Lindgren	44583	300003747	izw	-/-	-/-
7	A	TRILOG Broadband Test-Antenna 30 MHz - 3 GHz	VULB9163	Schwarzbeck Mess - Elektronik	295	300003787	vKI!	19.02.2019	18.02.2021
8	A	Turntable	2089-4.0	EMCO		300004394	ne	-/-	-/-
9	A	PC	TecLine	F+W		300004388	ne	-/-	-/-
10	A	EMI Test Receiver	ESR3	Rohde & Schwarz	102587	300005771	k	10.12.2020	09.06.2022

## 7.2 Shielded fully anechoic chamber

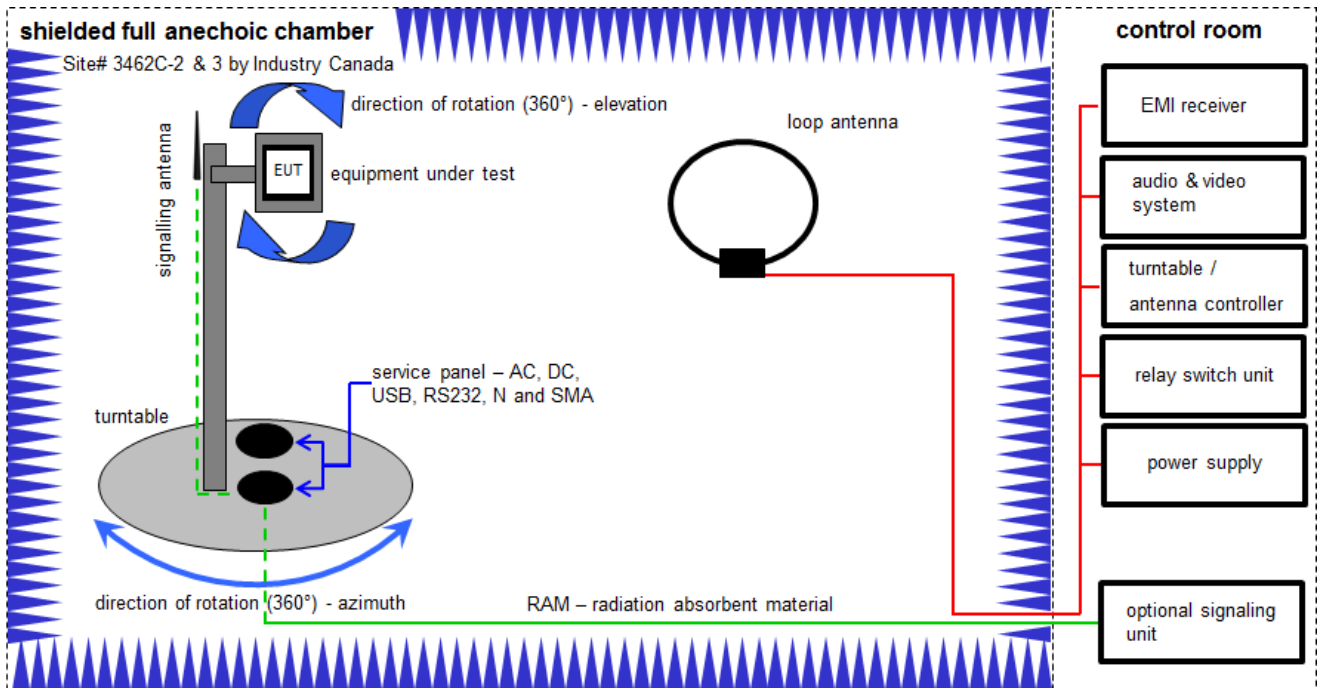

Measurement distance: loop antenna 3 meter / 1 meter

$$FS = UR + CA + AF$$

(FS-field strength; UR-voltage at the receiver; CA-loss of the signal path; AF-antenna factor)


Example calculation:

$$FS [dB\mu V/m] = 40.0 [dB\mu V/m] + (-35.8) [dB] + 32.9 [dB/m] = 37.1 [dB\mu V/m] (71.61 \mu V/m)$$

### Equipment table:

No.	Lab / Item	Equipment	Type	Manufacturer	Serial No.	INV. No.	Kind of Calibration	Last Calibration	Next Calibration
1	A	Active Loop Antenna 9 kHz to 30 MHz	6502	EMCO	2210	300001015	vKI!	13.06.2019	12.06.2021
2	A	DC power supply, 60Vdc, 50A, 1200 W	6032A	HP	2920A04590	300001041	vKI!	09.12.2020	08.12.2023
3	A	4U RF Switch Platform	L4491A	Agilent Technologies	MY50000032	300004510	ne	-/-	-/-
4	A	Computer	Intel Core i3 3220/3,3 GHz, Prozessor		2V2403033A54 21	300004591	ne	-/-	-/-
5	A	NEXIO EMV- Software	BAT EMC V3.20.0.13	EMCO		300004682	ne	-/-	-/-
6	A	Anechoic chamber		TDK		300003726	ne	-/-	-/-
7	A	EMI Test Receiver 9kHz-26,5GHz	ESR26	R&S	101376	300005063	k	09.12.2020	08.12.2021

### 7.3 AC conducted

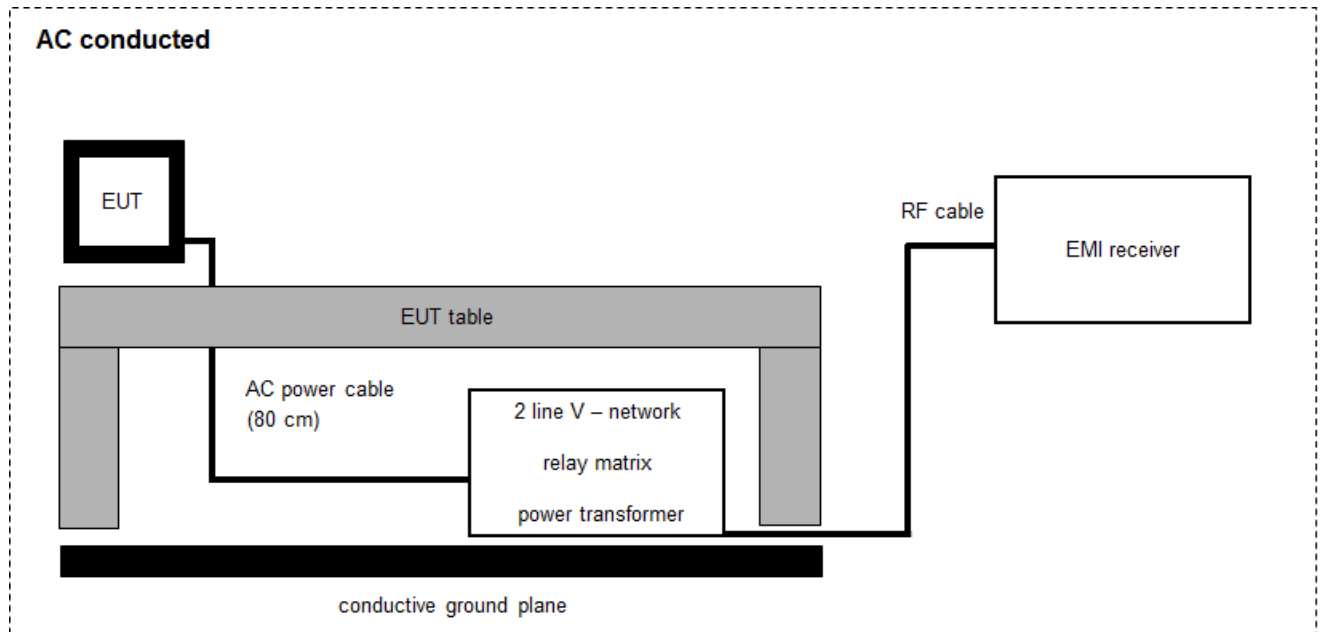

$$FS = UR + CF + VC$$

(FS-field strength; UR-voltage at the receiver; CR-loss of the cable and filter; VC-correction factor of the ISN)


Example calculation:

$$FS [dB\mu V/m] = 37.62 [dB\mu V/m] + 9.90 [dB] + 0.23 [dB] = 47.75 [dB\mu V/m] (244.06 \mu V/m)$$

**Equipment table:**

No.	Lab / Item	Equipment	Type	Manufacturer	Serial No.	INV. No.	Kind of Calibration	Last Calibration	Next Calibration
1	A	Two-line V-Network (LISN) 9 kHz to 30 MHz	ESH3-Z5	R&S	892475/017	300002209	vIKI!	11.12.2019	10.12.2021
2	A	RF-Filter-section	85420E	HP	3427A00162	300002214	NK!	-/-	-/-
3	A	EMI Test Receiver	ESCI 3	R&S	100083	300003312	k	09.12.2020	08.12.2021
4	A	Analyzer-Reference-System (Harmonics and Flicker)	ARS 16/1	SPS	A3509 07/0 0205	300003314	vIKI!	17.01.2020	16.01.2022
5	A	Hochpass 150 kHz	EZ-25	R&S	100010	300003798	ev	-/-	-/-
6	A	PC	TecLine	F+W		300003532	ne	-/-	-/-

## 7.4 Radiated measurements RF laboratory

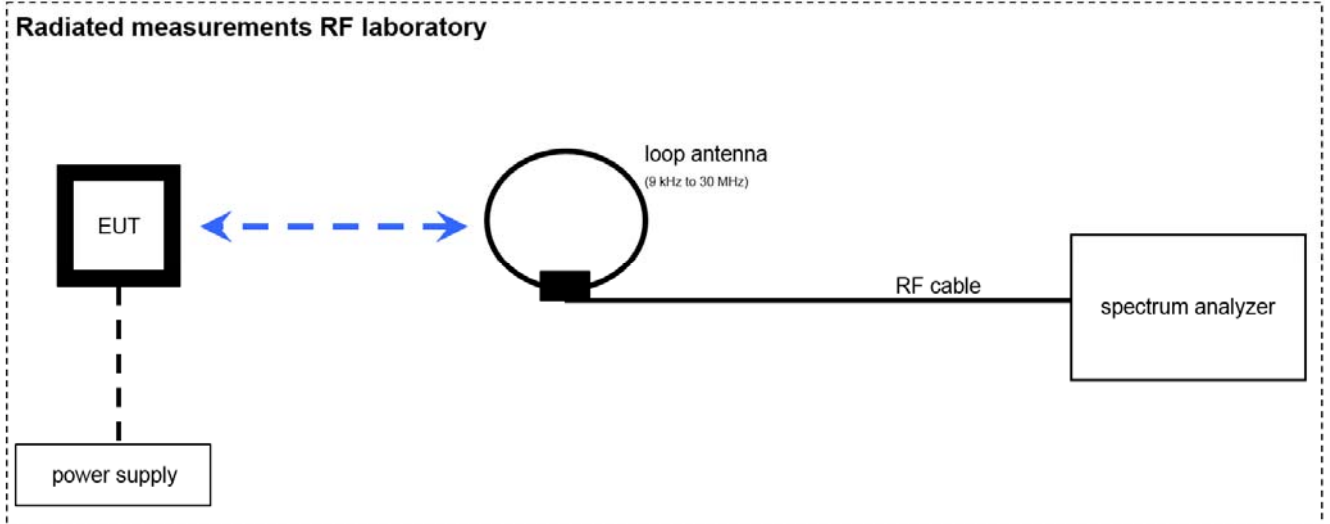

### Equipment table:

No.	Lab / Item	Equipment	Type	Manufacturer	Serial No.	INV. No.	Kind of Calibration	Last Calibration	Next Calibration
1	A	Loop Antenna		ZEG TS Steinfurt		400001208	ev	-/-	-/-
2	A	RF Cable BNC	RG58	Huber & Suhner		400001209	ev	-/-	-/-
3	A	Shielding Box	JRE2218	JRE Test LLC	0001110	400001265	ne	-/-	-/-
4	A	Spectrum Analyzer	FSV30	Rohde & Schwarz	104365	300005923	k	16.12.2020	15.03.2022

## 8 Sequence of testing

### 8.1 Sequence of testing radiated spurious 9 kHz to 30 MHz

#### Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- If the EUT is a tabletop system, it is placed on a table with 0.8 m height.
- If the EUT is a floor standing device, it is placed directly on the turn table.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- Measurement distance is 3 m (see ANSI C 63.4) – see test details.
- EUT is set into operation.

#### Premeasurement\*

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna height is 1 m.
- At each turntable position the analyzer sweeps with positive-peak detector to find the maximum of all emissions.

#### Final measurement

- Identified emissions during the pre-measurement are maximized by the software by rotating the turntable from 0° to 360°.
- Loop antenna is rotated about its vertical axis for maximum response at each azimuth about the EUT. (For certain applications, the loop antenna plane may also need to be positioned horizontally at the specified distance from the EUT)
- The final measurement is done in the position (turntable and elevation) causing the highest emissions with quasi-peak (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. A plot with the graph of the premeasurement and the limit is stored.

\*)Note: The sequence will be repeated three times with different EUT orientations.

## 8.2 Sequence of testing radiated spurious 30 MHz to 1 GHz

### Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- Measurement distance is 10 m or 3 m (see ANSI C 63.4) – see test details.
- EUT is set into operation.

### Premeasurement

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height changes from 1 m to 3 m.
- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

### Final measurement

- The final measurement is performed for at least six highest peaks according to the requirements of the ANSI C63.4.
- Based on antenna and turntable positions at which the peak values are measured the software maximize the peaks by changing turntable position  $\pm 45^\circ$  and antenna height between 1 and 4 m.
- The final measurement is done with quasi-peak detector (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit are recorded. A plot with the graph of the premeasurement with marked maximum final results and the limit is stored.

**9 Measurement uncertainty**

Measurement uncertainty	
Test case	Uncertainty
Occupied bandwidth	± used RBW
Field strength of the fundamental	± 3 dB
Field strength of the harmonics and spurious	± 3 dB
Receiver spurious emissions and cabinet radiations	± 3 dB
Conducted limits	± 2.6 dB



## 10 Summary of measurement results

<input checked="" type="checkbox"/>	No deviations from the technical specifications were ascertained
<input type="checkbox"/>	There were deviations from the technical specifications ascertained
<input type="checkbox"/>	This test report is only a partial test report. The content and verdict of the performed test cases are listed below.

TC Identifier	Description	Verdict	Date	Remark
RF-Testing	CFR Part 15 RSS 210 Issue 8 RSS Gen Issue 4	See table!	2021-09-22	-/-

Test specification clause	Test case	Temperature conditions	Power source conditions	C	NC	NA	NP	Remark
RSS Gen Issue 4 (6.6)	Occupied bandwidth	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§ 15.209	Field strength of the fundamental	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§ 15.209 RSS Gen Issue 4 (6.13)	Field strength of the harmonics and spurious	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§ 15.109	Receiver spurious emissions and cabinet radiations	Nominal	Nominal	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	-/-
§15.107 §15.207	Conducted limits	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-

**Note:** NA = Not applicable; NP = Not performed; C = Compliant; NC = Not compliant

## 11 Additional comments

Reference documents: None

Special test descriptions: CTA-L1-BR-U-HA-AZ-SAB-164972 (zinc die casting cover and case) and CTP-L1-BR-U-HA-AE-SA-165455 (plastic cover and case) have been tested as representative for all models.

Configuration descriptions: None

## 12 Measurement results

### 12.1 Occupied bandwidth

**Measurement:**

The emission bandwidth (x dB) is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated x dB below the maximum in-band spectral density of the modulated signal.

Measurement parameters	
Detector:	Peak
Resolution bandwidth:	1 % – 5 % of the occupied bandwidth
Video bandwidth:	≥ 3x RBW
Trace mode:	Max hold
Analyser function:	99 % power function
Used test setup:	See sub clause 7.4 – A
Measurement uncertainty:	See sub clause 9

**Limit:**

<b>IC</b>
for RSP-100 test report coversheet only

**Result:**

CTA-L1-BR-U-HA-AZ-SAB-164972


<b>99% emission bandwidth</b>
41.4616 kHz

CTP-L1-BR-U-HA-AE-SA-165455


<b>99% emission bandwidth</b>
43.5601 kHz

**Plot:**

**Plot 1:** 99 % emission bandwidth CTA-L1-BR-U-HA-AZ-SAB-164972

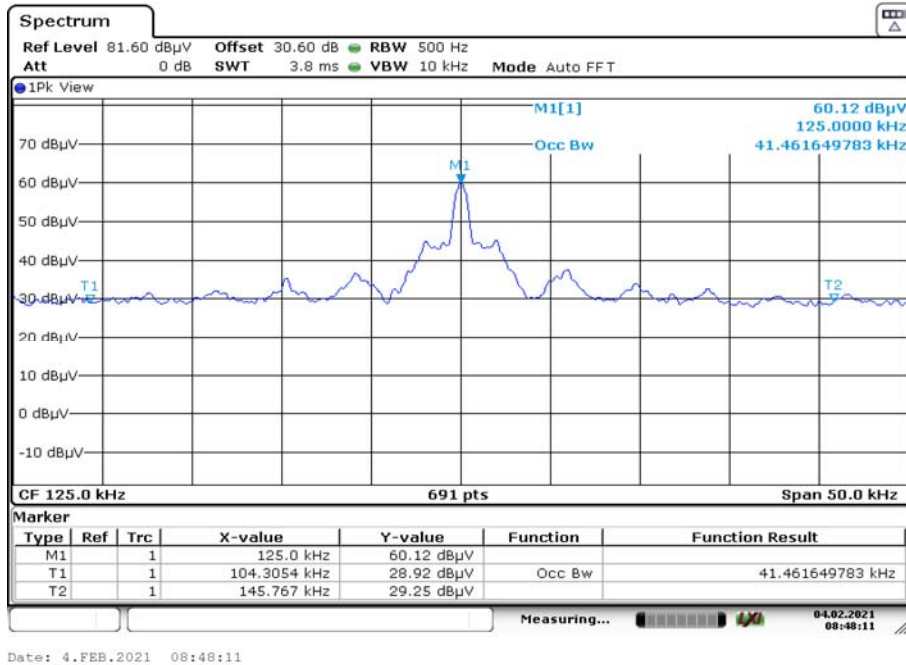

**Plot 2:** 99 % emission bandwidth CTP-L1-BR-U-HA-AE-SA-165455

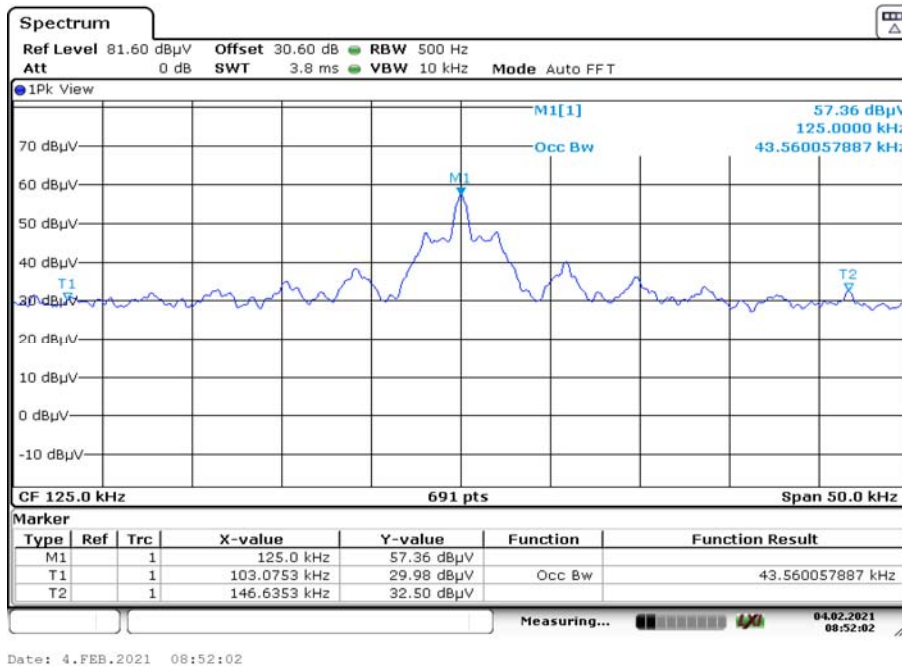

## 12.2 Field strength of the fundamental

### Measurement:

The maximum detected field strength for the carrier signal.

Measurement parameters	
Detector:	average
Resolution bandwidth:	10 kHz
Video bandwidth:	≥ 3x RBW
Trace mode:	Max hold
Used test setup	See sub clause 7.2 – A
Measurement uncertainty:	See sub clause 9

### Limit:

FCC & IC		
Frequency (MHz)	Field strength (dBµV/m)	Measurement distance (m)
0.009 – 0.049	2400/F (kHz) (25.67 dBµV/m @ 125 kHz)	300

### Recalculation:

According to ANSI C63.10		
Frequency	Formula	Correction value
125 kHz	$FS_{limit} = FS_{max} - 40 \log \left( \frac{d_{limit}}{d_{measure}} \right)$ <p> <math>FS_{limit}</math> is the calculation of field strength at the limit distance, expressed in dBµV/m  <math>FS_{max}</math> is the measured field strength, expressed in dBµV/m  <math>d_{near\ field}</math> is the <math>\lambda/2\pi</math> distance  <math>d_{measure}</math> is the distance of the measurement point from EUT  <math>d_{limit}</math> is the reference limit distance                 </p> <p>Single point and limit distance closer to the EUT than <math>\lambda/2\pi</math> (382 m)                      Refer to equation (4), ANSI C63.10-2013, section 6.4.4.2.</p>	-99.1 (from 1 to 300m)

**Result:**

CTA-L1-BR-U-HA-AZ-SAB-164972

Field strength of the fundamental		
Frequency	125 kHz	
Distance	@ 1 m	@ 300 m
Measured / calculated value (peak measurement)	60.1 dB $\mu$ V/m	-39.0 dB $\mu$ V/m
Measured / calculated value (QP measurement)	60.0 dB $\mu$ V/m	-39.1 dB $\mu$ V/m

CTP-L1-BR-U-HA-AE-SA-165455

Field strength of the fundamental		
Frequency	125 kHz	
Distance	@ 1 m	@ 300 m
Measured / calculated value (peak measurement)	57.4 dB $\mu$ V/m	-41.7 dB $\mu$ V/m
Measured / calculated value (QP measurement)	57.2 dB $\mu$ V/m	-41.9 dB $\mu$ V/m

### 12.3 Field strength of the harmonics and spurious

**Measurement:**

The maximum detected field strength for the harmonics and spurious.

Measurement parameters	
Detector:	Quasi peak / average or peak (worst case – pre-scan)
Resolution bandwidth:	F < 150 kHz: 200 Hz 150 kHz < F < 30 MHz: 9 kHz 30 MHz < F < 1 GHz: 120 kHz
Video bandwidth:	F < 150 kHz: 1 kHz 150 kHz < F < 30 MHz: 100 kHz 30 MHz < F < 1 GHz: 300 kHz
Trace mode:	Max hold
Used test setup:	9 kHz to 30 MHz: see sub clause 7.2 – A 30 MHz to 1 GHz: see sub clause 7.1 – A
Measurement uncertainty:	See sub clause 9

**Limit:**


FCC & IC		
Frequency (MHz)	Field strength (dBµV/m)	Measurement distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30	30 (29.5 dBµV/m)	30
30 – 88	100 (40 dBµV/m)	3
88 – 216	150 (43.5 dBµV/m)	3
216 – 960	200 (46 dBµV/m)	3

**Result:**


Detected emissions			
Frequency (MHz)	Detector	Resolution bandwidth (kHz)	Detected value
All detected peak emissions below 30 MHz are more than 20 dB below the average limit. For emissions above 30 MHz, please look at the table below the 1 GHz plot.			

**Plots:**


**Plot 1:** 9 kHz – 30 MHz, magnetic spurious emissions CTA-L1-BR-U-HA-AZ-SAB-164972

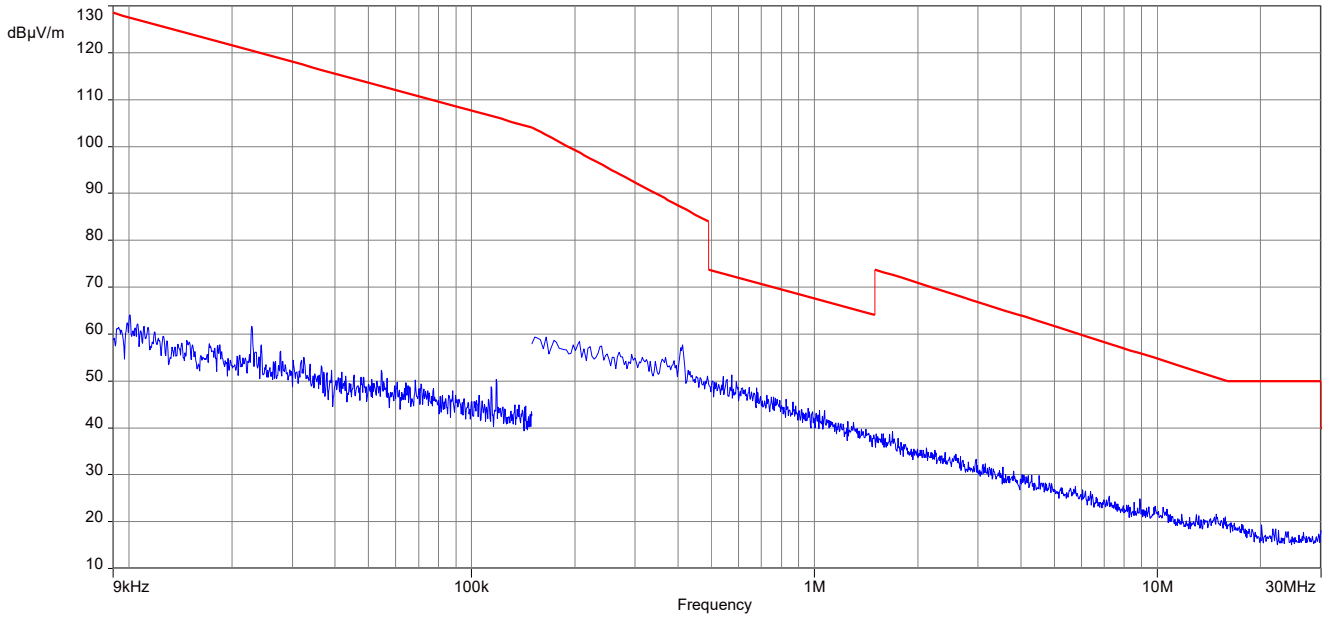

**Plot 2:** 9 kHz – 30 MHz, magnetic spurious emissions CTP-L1-BR-U-HA-AE-SA-165455

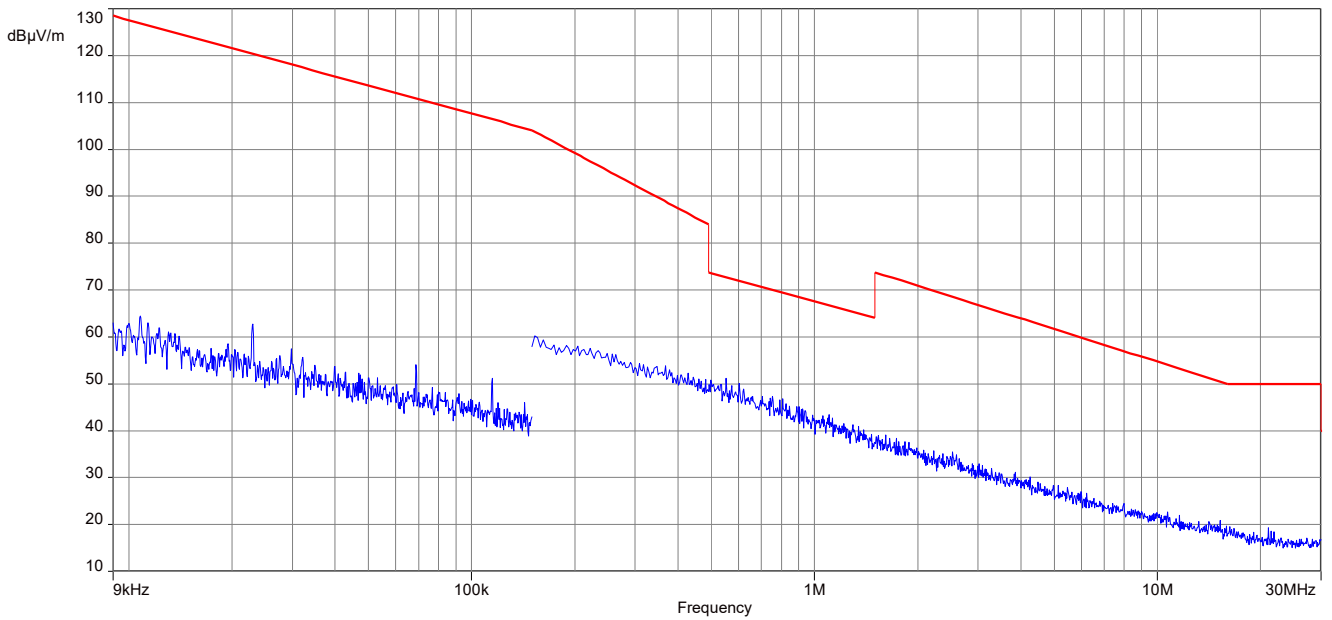

**Plot 3:** 30 MHz – 1 GHz, vertical and horizontal polarization CTA-L1-BR-U-HA-AZ-SAB-164972

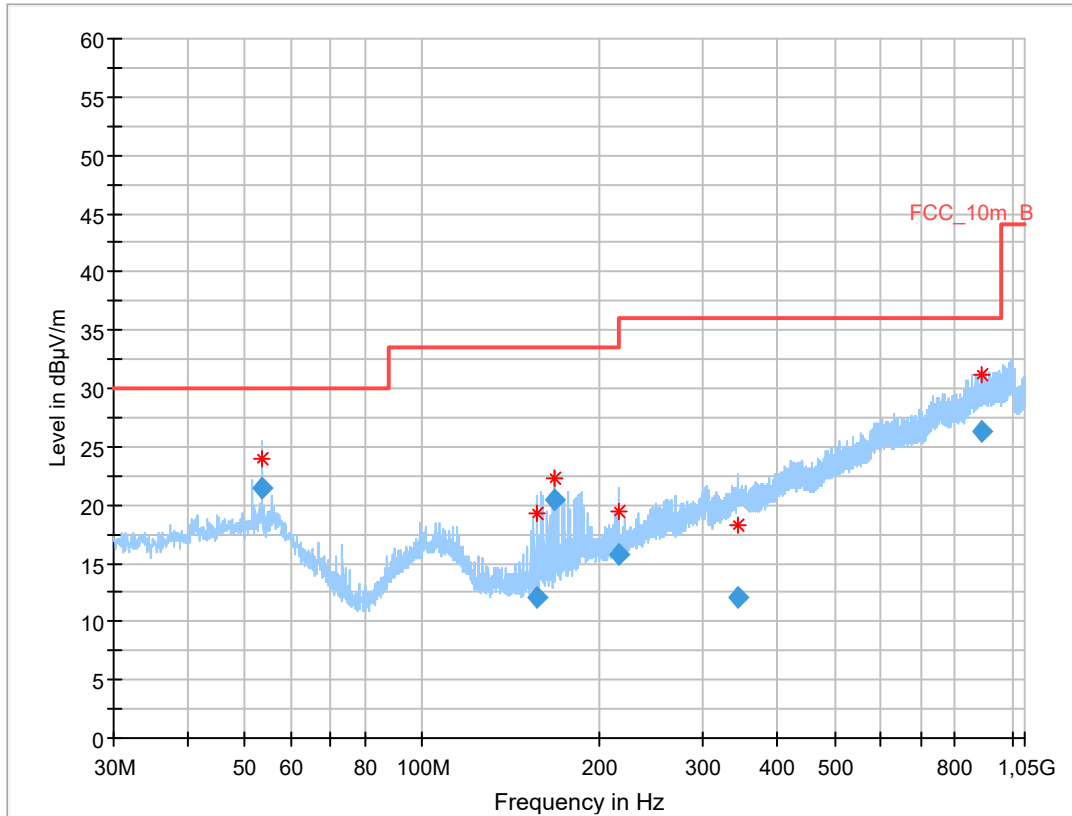


**Final\_Result**

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
53.478	21.45	30.0	8.6	1000	120.0	106.0	V	315	14
156.572	12.14	33.5	21.4	1000	120.0	129.0	V	-8	9
168.000	20.52	33.5	13.0	1000	120.0	104.0	V	347	10
216.003	15.82	36.0	20.2	1000	120.0	209.0	V	-45	12
342.561	12.02	36.0	24.0	1000	120.0	149.0	V	270	16
888.005	26.37	36.0	9.6	1000	120.0	113.0	H	177	23



**Plot 4:** 30 MHz – 1 GHz, vertical and horizontal polarization CTP-L1-BR-U-HA-AE-SA-165455

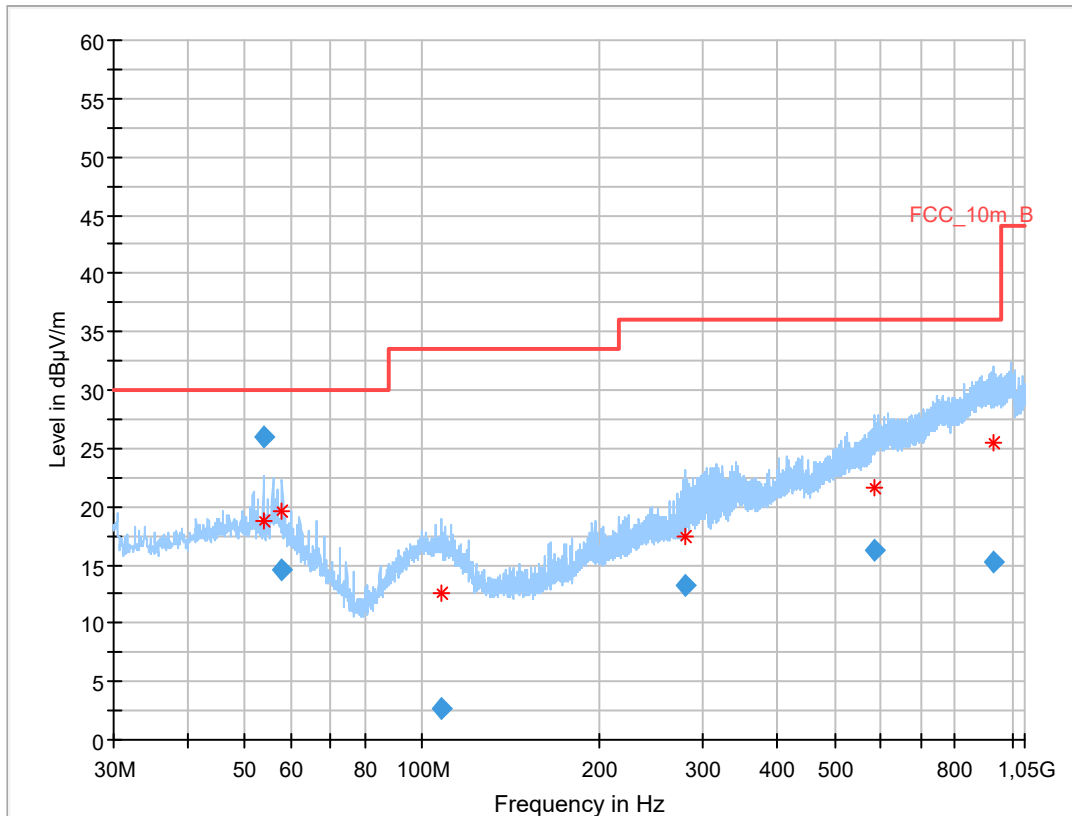

**Final\_Result**

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
53.785	26.03	30.0	4.0	1000	120.0	156.0	V	131	14
57.914	14.53	30.0	15.5	1000	120.0	200.0	V	45	14
107.549	2.63	33.5	30.9	1000	120.0	200.0	V	228	13
279.169	13.17	36.0	22.8	1000	120.0	131.0	V	180	14
582.508	16.33	36.0	19.7	1000	120.0	298.0	H	117	20
930.387	15.26	36.0	20.7	1000	120.0	332.0	H	45	24

## 12.4 Conducted limits

### Measurement:

Measurement of the conducted spurious emissions for an intentional radiator that is designed to be connected to the public utility (AC) power line.

Measurement parameters	
Detector:	Quasi peak / average or peak (worst case – pre-scan)
Resolution bandwidth:	F < 150 kHz: 200 Hz F > 150 kHz: 9 kHz
Video bandwidth:	F < 150 kHz: 1 kHz F > 150 kHz: 100 kHz
Trace mode:	Max hold
Used test setup	See sub clause 7.3A
Measurement uncertainty:	See sub clause 9

### Limit:


FCC & IC		
Frequency (MHz)	Quasi-peak (dBµV/m)	Average (dBµV/m)
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30.0	60	50

### Result:

Detected emissions			
Frequency (MHz)	Detector	Resolution bandwidth (kHz)	Detected value
See result table below the plots.			

**Plots:** CTA-L1-BR-U-HA-AZ-SAB-164972


**Plot 1:** 150 kHz to 30 MHz, phase line

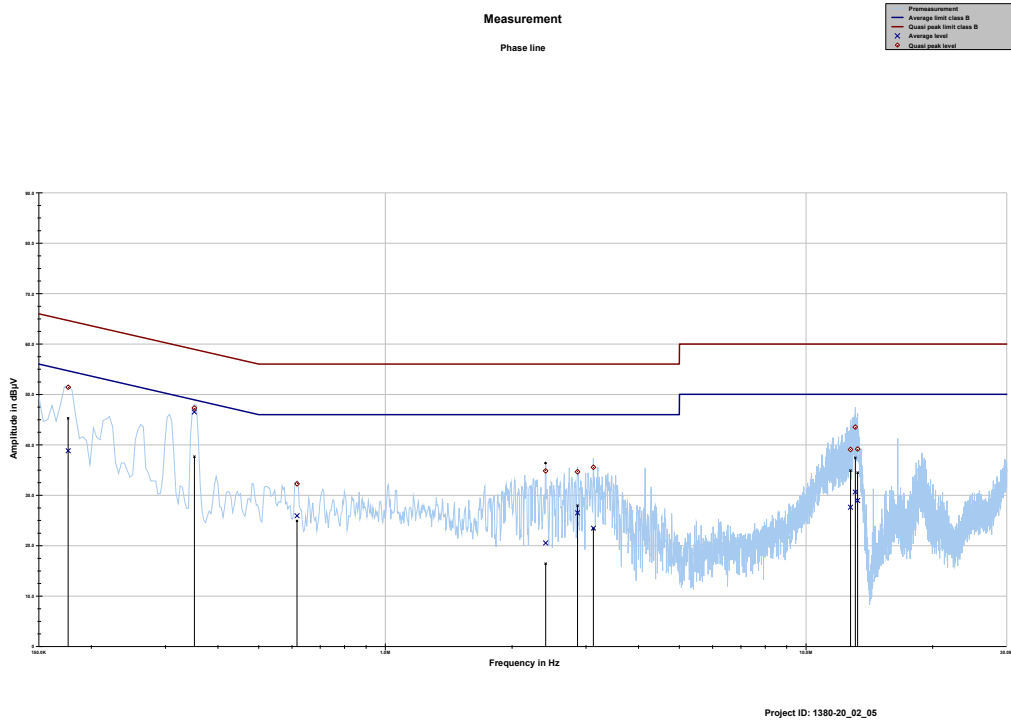

**Final\_Result**

Frequency MHz	Quasi peak level dBµV	Margin quasi peak dB	Limit QP dBµV	Average level dBµV	Margin average dB	Limit AV dBµV
0.176119	51.42	13.25	64.667	38.83	16.42	55.254
0.351488	47.31	11.62	58.927	46.51	3.73	50.243
0.616406	32.25	23.75	56.000	25.93	20.07	46.000
2.403675	34.82	21.18	56.000	20.54	25.46	46.000
2.862619	34.67	21.33	56.000	26.50	19.50	46.000
3.123806	35.54	20.46	56.000	23.48	22.52	46.000
12.757894	39.06	20.94	60.000	27.63	22.37	50.000
13.097437	43.51	16.49	60.000	30.66	19.34	50.000
13.265344	39.16	20.84	60.000	28.96	21.04	50.000

**Plot 2:** 150 kHz to 30 MHz, neutral line

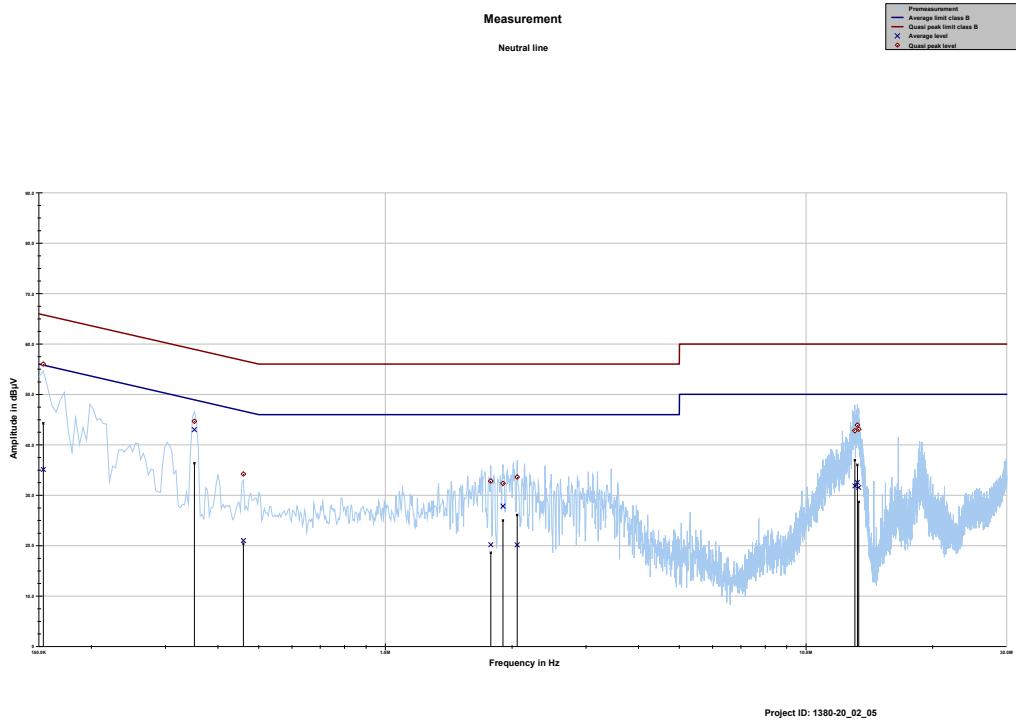


**Final\_Result**

Frequency MHz	Quasi peak level dBµV	Margin quasi peak dB	Limit QP dBµV	Average level dBµV	Margin Average dB	Limit AV dBµV
0.153731	56.01	9.78	65.796	35.13	20.76	55.893
0.351488	44.66	14.27	58.927	43.01	7.24	50.243
0.459694	34.21	22.49	56.698	21.02	26.13	47.152
1.780556	32.81	23.19	56.000	20.18	25.82	46.000
1.903687	32.36	23.64	56.000	27.82	18.18	46.000
2.056669	33.61	22.39	56.000	20.14	25.86	46.000
13.063856	42.81	17.19	60.000	31.85	18.15	50.000
13.246688	43.91	16.09	60.000	32.55	17.45	50.000
13.351162	43.09	16.91	60.000	31.54	18.46	50.000

**Plots:** CTP-L1-BR-U-HA-AE-SA-165455

**Plot 1:** 150 kHz to 30 MHz, phase line

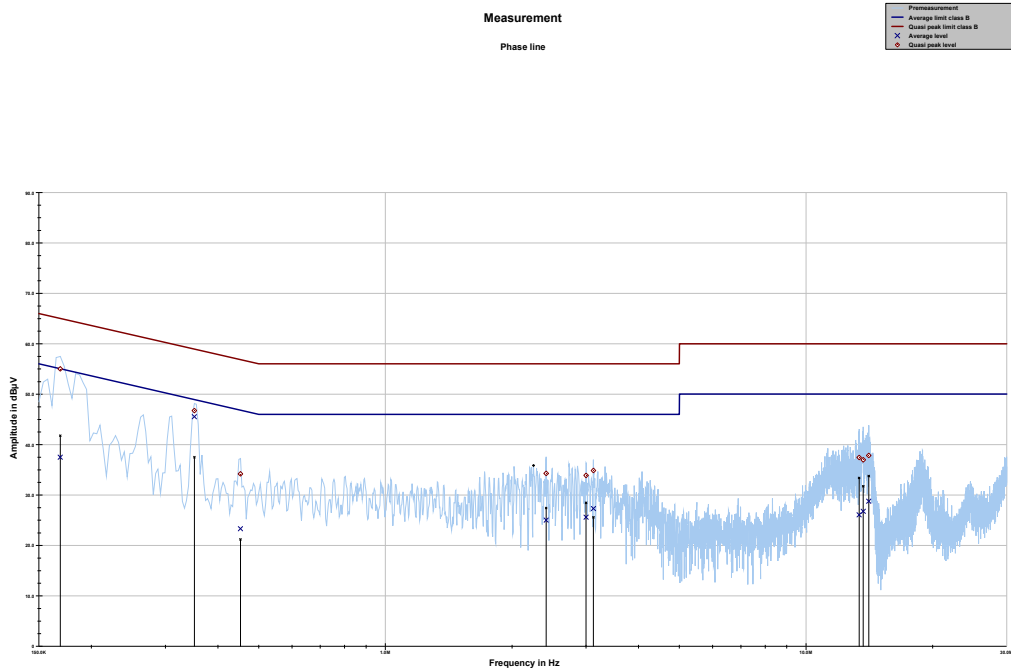


Project ID: 1380-20\_02\_05

**Final\_Result**

Frequency MHz	Quasi peak level dBµV	Margin quasi peak dB	Limit QP dBµV	Average level dBµV	Margin average dB	Limit AV dBµV
0.168656	55.01	10.01	65.026	37.49	17.97	55.467
0.351488	46.74	12.19	58.927	45.53	4.71	50.243
0.452231	34.19	22.64	56.834	23.30	24.07	47.365
2.411138	34.27	21.73	56.000	25.01	20.99	46.000
3.000675	33.89	22.11	56.000	25.59	20.41	46.000
3.123806	34.85	21.15	56.000	27.31	18.69	46.000
13.377281	37.44	22.56	60.000	26.06	23.94	50.000
13.675781	36.96	23.04	60.000	26.75	23.25	50.000
14.093681	37.84	22.16	60.000	28.75	21.25	50.000

**Plot 2:** 150 kHz to 30 MHz, neutral line

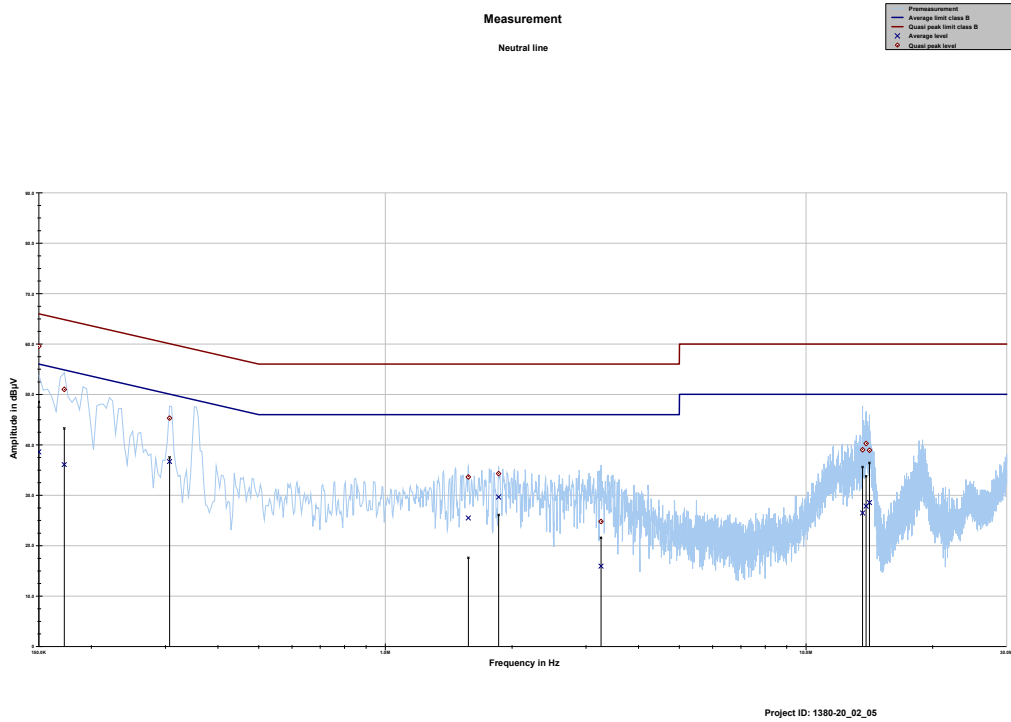

**Final\_Result**

Frequency MHz	Quasi peak level dBµV	Margin quasi peak dB	Limit QP dBµV	Average level dBµV	Margin Average dB	Limit AV dBµV
0.150000	59.56	6.44	66.000	38.60	17.40	56.000
0.172387	51.00	13.85	64.845	36.09	19.27	55.360
0.306712	45.29	14.77	60.059	36.69	14.84	51.523
1.575338	33.62	22.38	56.000	25.51	20.49	46.000
1.858912	34.30	21.70	56.000	29.63	16.37	46.000
3.254400	24.79	31.21	56.000	15.94	30.06	46.000
13.627275	39.01	20.99	60.000	26.49	23.51	50.000
13.899656	40.25	19.75	60.000	27.84	22.16	50.000
14.157113	38.93	21.07	60.000	28.55	21.45	50.000

## 13 Observations

No observations except those reported with the single test cases have been made.

## 14 Glossary

<b>EUT</b>	Equipment under test
<b>DUT</b>	Device under test
<b>UUT</b>	Unit under test
<b>GUE</b>	GNSS User Equipment
<b>ETSI</b>	European Telecommunications Standards Institute
<b>EN</b>	European Standard
<b>FCC</b>	Federal Communications Commission
<b>FCC ID</b>	Company Identifier at FCC
<b>IC</b>	Industry Canada
<b>PMN</b>	Product marketing name
<b>HMN</b>	Host marketing name
<b>HVIN</b>	Hardware version identification number
<b>FVIN</b>	Firmware version identification number
<b>EMC</b>	Electromagnetic Compatibility
<b>HW</b>	Hardware
<b>SW</b>	Software
<b>Inv. No.</b>	Inventory number
<b>S/N or SN</b>	Serial number
<b>C</b>	Compliant
<b>NC</b>	Not compliant
<b>NA</b>	Not applicable
<b>NP</b>	Not performed
<b>PP</b>	Positive peak
<b>QP</b>	Quasi peak
<b>AVG</b>	Average
<b>OC</b>	Operating channel
<b>OCW</b>	Operating channel bandwidth
<b>OBW</b>	Occupied bandwidth
<b>OOB</b>	Out of band
<b>DFS</b>	Dynamic frequency selection
<b>CAC</b>	Channel availability check
<b>OP</b>	Occupancy period
<b>NOP</b>	Non occupancy period
<b>DC</b>	Duty cycle
<b>PER</b>	Packet error rate
<b>CW</b>	Clean wave
<b>MC</b>	Modulated carrier
<b>WLAN</b>	Wireless local area network
<b>RLAN</b>	Radio local area network
<b>DSSS</b>	Dynamic sequence spread spectrum
<b>OFDM</b>	Orthogonal frequency division multiplexing
<b>FHSS</b>	Frequency hopping spread spectrum
<b>GNSS</b>	Global Navigation Satellite System
<b>C/N<sub>0</sub></b>	Carrier to noise-density ratio, expressed in dB-Hz



## 15 Document history

Version	Applied changes	Date of release
-/-	Initial release	2021-02-05
A	<ol style="list-style-type: none"> <li>1. Changing PMNs (section 6.1).</li> <li>2. Adding comment/description for models CTA-L1-BR-U-HA-AZ-SAB-164972 and CTP-L1-BR-U-HA-AE-SA-165455.</li> <li>3. Changing limit and correction factor (section 12.2).</li> </ol>	2021-22-09

## 16 Accreditation Certificate – D-PL-12076-01-04

first page	last page
 <p>Deutsche Akkreditierungsstelle GmbH</p> <p>Entrusted according to Section 8 subsection 1 AkkStelleG in connection with Section 1 subsection 1 AkkStelleGBV Signatory to the Multilateral Agreements of EA, ILAC and IAF for Mutual Recognition</p> <p><b>Accreditation</b> </p> <p>The Deutsche Akkreditierungsstelle GmbH attests that the testing laboratory <b>CTC advanced GmbH</b> Untertürkheimer Straße 6-10, 66117 Saarbrücken is competent under the terms of DIN EN ISO/IEC 17025:2018 to carry out tests in the following fields: <b>Telecommunication (TC) and Electromagnetic Compatibility (EMC) for Canadian Standards</b></p> <p>The accreditation certificate shall only apply in connection with the notice of accreditation of 09.06.2020 with the accreditation number D-PL-12076-01. It comprises the cover sheet, the reverse side of the cover sheet and the following annex with a total of 07 pages. Registration number of the certificate: D-PL-12076-01-04</p> <p>Frankfurt am Main, 09.06.2020 by order Prof.-Ing. (FH) Ralf Egner Head of Division</p> <p><small>The certificate together with its annex reflects the status at the time of the date of issue. The current status of the scope of accreditation can be found in the database of accredited bodies of Deutsche Akkreditierungsstelle GmbH. <a href="https://www.dakks.de/en/content/accredited-bodies-dakks">https://www.dakks.de/en/content/accredited-bodies-dakks</a> See notes on file.</small></p>	<p>Deutsche Akkreditierungsstelle GmbH</p> <p>Office Berlin Spittelmarkt 10 10117 Berlin</p> <p>Office Frankfurt am Main Europa-Allee 52 60327 Frankfurt am Main</p> <p>Office Braunschweig Bundesallee 100 38116 Braunschweig</p> <p>The publication of extracts of the accreditation certificate is subject to the prior written approval by Deutsche Akkreditierungsstelle GmbH (DAKKS). Exempted is the unchanged form of separate disseminations of the cover sheet by the conformity assessment body mentioned overleaf.</p> <p>No impression shall be made that the accreditation also extends to fields beyond the scope of accreditation attested by DAKKS.</p> <p>The accreditation was granted pursuant to the Act on the Accreditation Body (AkkStelleG) of 31 July 2009 (Federal Law Gazette I p. 2625) and the Regulation (EC) No 765/2008 of the European Parliament and of the Council of 9 July 2008 setting out the requirements for accreditation and market surveillance relating to the marketing of products (Official Journal of the European Union L 218 of 9 July 2008, p. 30). DAKKS is a signatory to the Multilateral Agreements for Mutual Recognition of the European co-operation for Accreditation (EA), International Accreditation Forum (IAF) and International Laboratory Accreditation Cooperation (ILAC). The signatories to these agreements recognise each other's accreditations.</p> <p>The up-to-date state of membership can be retrieved from the following websites: EA: <a href="http://www.european-accreditation.org">www.european-accreditation.org</a> ILAC: <a href="http://www.ilac.org">www.ilac.org</a> IAF: <a href="http://www.iaf.nu">www.iaf.nu</a></p>

**Note: The current certificate annex is published on the website (link see below) of the Accreditation Body DAKKS or may be received by CTC advanced GmbH on request**

<https://www.dakks.de/as/ast/d/D-PL-12076-01-04e.pdf>

**17 Accreditation Certificate – D-PL-12076-01-05**

first page	last page			
 <p>Deutsche Akkreditierungsstelle GmbH</p> <p>Entrusted according to Section 8 subsection 1 AkkStelleG in connection with Section 1 subsection 1 AkkStelleGBV Signatory to the Multilateral Agreements of EA, ILAC and IAF for Mutual Recognition</p> <p><b>Accreditation</b> </p> <p>The Deutsche Akkreditierungsstelle GmbH attests that the testing laboratory <b>CTC advanced GmbH</b> Untertürkheimer Straße 6-10, 66117 Saarbrücken is competent under the terms of DIN EN ISO/IEC 17025:2018 to carry out tests in the following fields: <b>Telecommunication (FCC Requirements)</b></p> <p>The accreditation certificate shall only apply in connection with the notice of accreditation of 09.06.2020 with the accreditation number D-PL-12076-01. It comprises the cover sheet, the reverse side of the cover sheet and the following annex with a total of 05 pages. Registration number of the certificate: <b>D-PL-12076-01-05</b></p> <p>Frankfurt am Main, 09.06.2020  by <i>Dr. Ingrid Egner</i> Head of Division</p> <p><small>The certificate together with its annex reflects the status at the time of the date of issue. The current status of the scope of accreditation can be found in the database of accredited bodies of Deutsche Akkreditierungsstelle GmbH. <a href="https://www.dakks.de/en/content/accredited-bodies-dakks">https://www.dakks.de/en/content/accredited-bodies-dakks</a> 09/2020/09/2020</small></p>	<p>Deutsche Akkreditierungsstelle GmbH</p> <table border="0"> <tr> <td>Office Berlin Spittelmarkt 10 10117 Berlin</td> <td>Office Frankfurt am Main Europa-Allee 52 60327 Frankfurt am Main</td> <td>Office Braunschweig Bundesallee 100 38116 Braunschweig</td> </tr> </table> <p>The publication of extracts of the accreditation certificate is subject to the prior written approval by Deutsche Akkreditierungsstelle GmbH (DAkKS). Exempted is the unchanged form of separate disseminations of the cover sheet by the conformity assessment body mentioned overleaf. No impression shall be made that the accreditation also extends to fields beyond the scope of accreditation attested by DAkKS.</p> <p>The accreditation was granted pursuant to the Act on the Accreditation Body (AkkStelleG) of 31 July 2009 (Federal Law Gazette I p. 2625) and the Regulation (EC) No 765/2008 of the European Parliament and of the Council of 9 July 2008 setting out the requirements for accreditation and market surveillance relating to the marketing of products (Official Journal of the European Union L 218 of 9 July 2008, p. 30). DAkKS is a signatory to the Multilateral Agreements for Mutual Recognition of the European co-operation for Accreditation (EA), International Accreditation Forum (IAF) and International Laboratory Accreditation Cooperation (ILAC). The signatories to these agreements recognise each other's accreditations.</p> <p>The up-to-date state of membership can be retrieved from the following websites: EA: <a href="http://www.european-accreditation.org">www.european-accreditation.org</a> ILAC: <a href="http://www.ilac.org">www.ilac.org</a> IAF: <a href="http://www.iaf.nu">www.iaf.nu</a></p>	Office Berlin Spittelmarkt 10 10117 Berlin	Office Frankfurt am Main Europa-Allee 52 60327 Frankfurt am Main	Office Braunschweig Bundesallee 100 38116 Braunschweig
Office Berlin Spittelmarkt 10 10117 Berlin	Office Frankfurt am Main Europa-Allee 52 60327 Frankfurt am Main	Office Braunschweig Bundesallee 100 38116 Braunschweig		

**Note: The current certificate annex is published on the website (link see below) of the Accreditation Body DAkKS or may be received by CTC advanced GmbH on request**

<https://www.dakks.de/as/ast/d/D-PL-12076-01-05e.pdf>

##### END OF TEST REPORT #####