

TEST REPORT

Report No.: BCTC2304047810E

Applicant: ZKTECO CO., LTD.

Product Name: UHF reader

Model/Type reference: UHF 5F Lite

Tested Date: 2023-04-13 to 2023-05-05

Issued Date: 2023-05-06

Shenzhen BCTC Testing Co., Ltd.



FCC ID: 2AJ9T-UHF5FLITE

Product Name: UHF reader
Trademark: N/A
Model/Type Reference: UHF 5F Lite
UR30RW-F, UHF 10F Lite
Prepared For: ZKTECO CO., LTD.
Address: No.32, Pingshan Industrial Avenue, Tangxia Town, Dongguan City, Guangdong Province, China 523728
Manufacturer: ZKTECO CO., LTD.
Address: No.32, Pingshan Industrial Avenue, Tangxia Town, Dongguan City, Guangdong Province, China 523728
Prepared By: Shenzhen BCTC Testing Co., Ltd.
Address: 1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China
Sample Received Date: 2023-04-13
Sample tested Date: 2023-04-13 to 2023-05-05
Issue Date: 2023-05-06
Report No.: BCTC2304047810E
Test Standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247
FCC KDB 558074 D01 15.247 Meas Guidance v05r02
ANSI C63.10:2013
Test Results: PASS

Tested by:



Lei Chen/Project Handler

Approved by:



Zero Zhou/Reviewer

The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen BCTC Testing Co., Ltd, this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.




Table Of Content

	Page
Test Report Declaration	
1. Version	5
2. Test Summary	6
3. Measurement Uncertainty	7
4. Product Information And Test Setup	8
4.1 Product Information.....	8
4.2 Test Setup Configuration	8
4.3 Support Equipment	9
4.4 Channel List.....	9
4.5 Test Mode	10
4.6 Table Of Parameters Of Text Software Setting.....	10
5. Test Facility And Test Instrument Used.....	11
5.1 Test Facility.....	11
5.2 Test Instrument Used.....	11
6. Conducted Emissions.....	13
6.1 Block Diagram Of Test Setup.....	13
6.2 Limit	13
6.3 Test procedure.....	13
6.4 EUT operating Conditions	13
6.5 Test Result.....	14
7. Radiated Emissions.....	16
7.1 Block Diagram Of Test Setup.....	16
7.2 Limit	17
7.3 Test procedure.....	18
7.4 EUT operating Conditions	19
7.5 Test Result.....	19
8. Radiated Band Emission Measurement And Restricted Bands Of Operation	23
8.1 Block Diagram Of Test Setup.....	23
8.2 Limit	23
8.3 Test procedure.....	24
8.4 EUT operating Conditions	24
8.5 Test Result.....	25
9. Conducted Spurious Emission Measurement.....	26
9.1 Block Diagram Of Test Setup.....	26
9.2 Limit	26
9.3 Test procedure.....	26
9.4 Test Result.....	27
10. Occupy Bandwidth	30
10.1 Block Diagram Of Test Setup.....	30
10.2 Limit	30
10.3 Test procedure.....	30
11. Conducted Output Power	33
11.1 Block Diagram Of Test Setup.....	33
11.2 Limit	33
11.3 Test procedure.....	33

BCTC
 3C
 PPR
 检测

11.4	Test Result.....	33
12.	Hopping Channel Separation	36
12.1	Block Diagram Of Test Setup.....	36
12.2	Limit	36
12.3	Test procedure.....	36
12.4	Test Result.....	36
13.	Number Of Hopping Frequency.....	39
13.1	Block Diagram Of Test Setup.....	39
13.2	Limit	39
13.3	Test procedure.....	39
13.4	Test Result.....	40
14.	Dwell Time.....	41
14.1	Block Diagram Of Test Setup.....	41
14.2	Limit	41
14.3	Test procedure.....	41
14.4	Test Result.....	42
15.	Antenna Requirement	43
15.1	Limit	43
15.2	Test Result.....	43
16.	EUT Photographs.....	44
17.	EUT Test Setup Photographs.....	45


(Note: N/A Means Not Applicable)

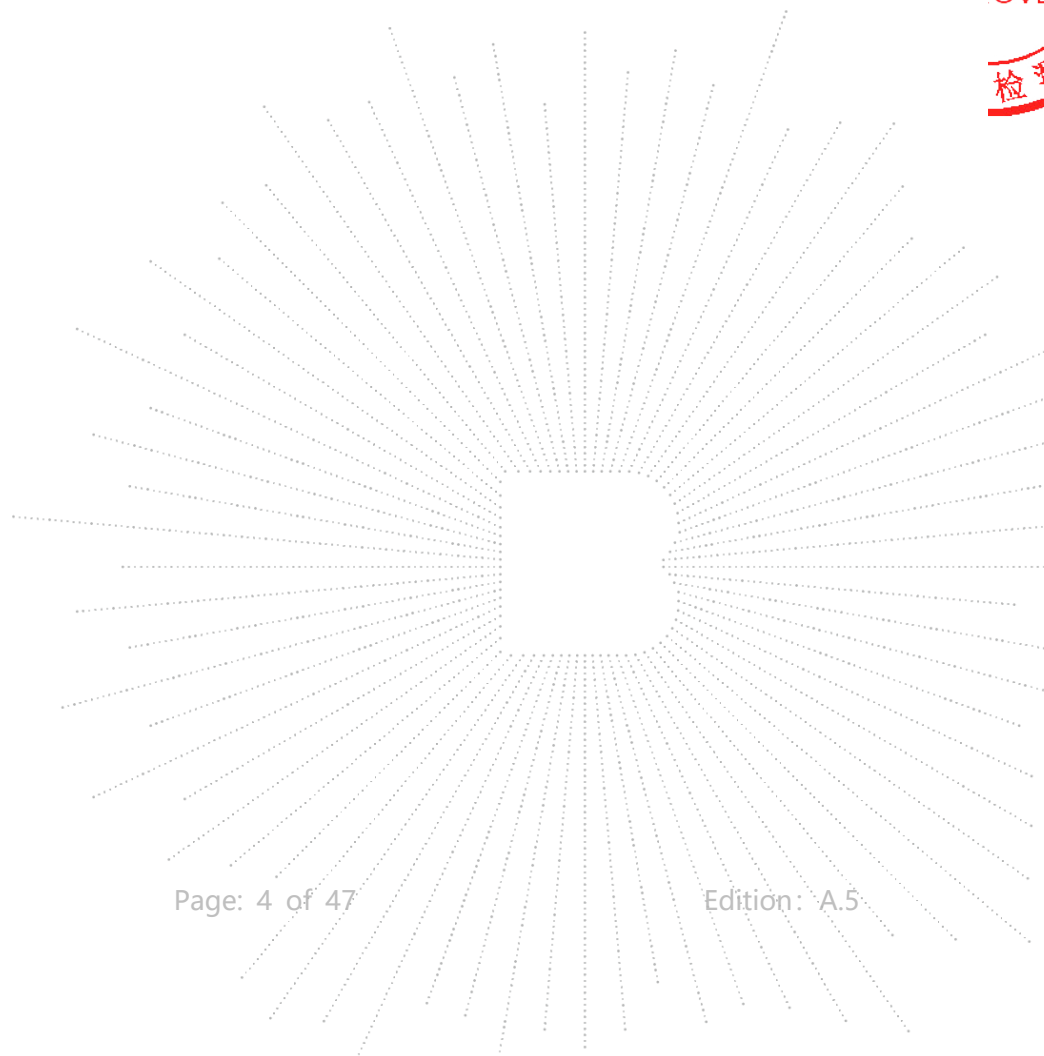

TE
TC
OV
檢

1. Version

Report No.	Issue Date	Description	Approved
BCTC2304047810E	2023-05-06	Original	Valid

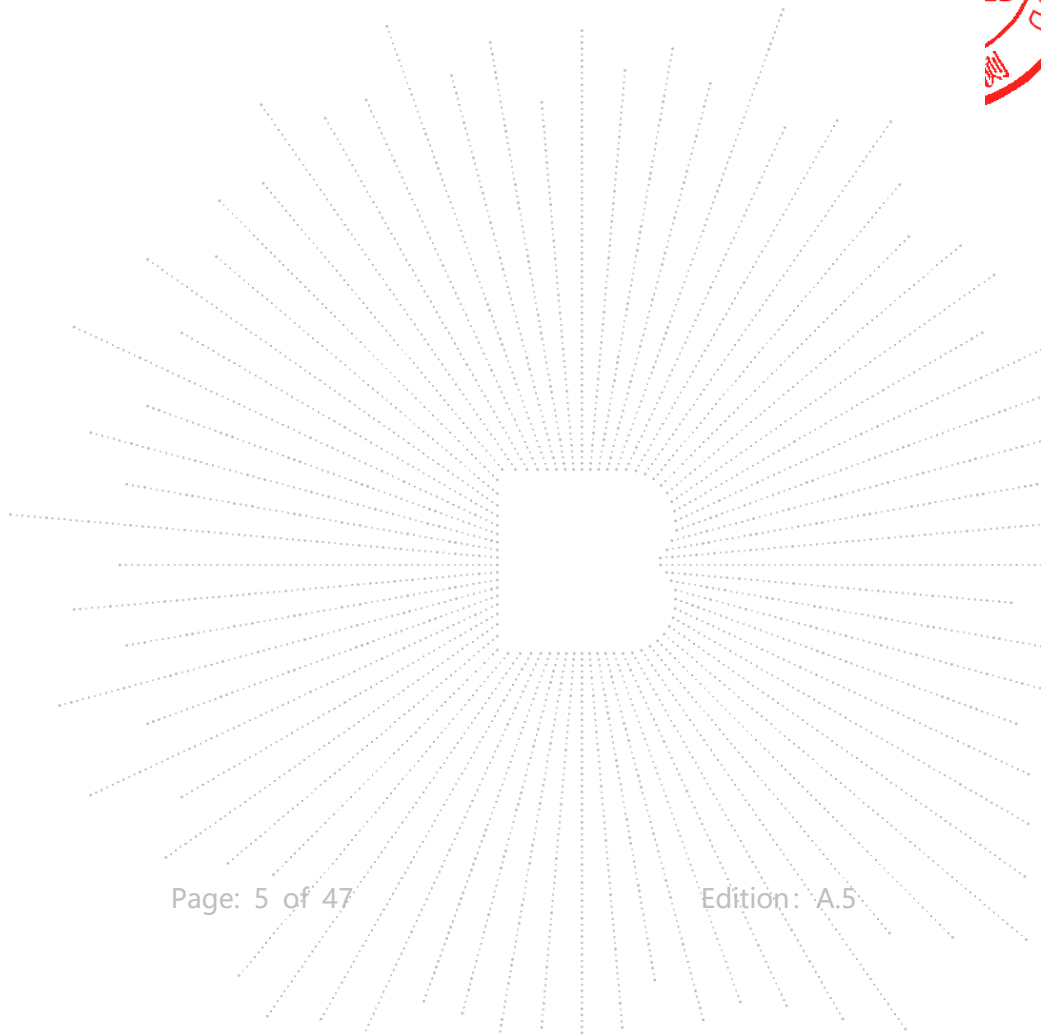


2. Test Summary

The Product has been tested according to the following specifications:

No.	Test Parameter	Clause No.	Results
1	Conducted Emission AC Power Port	§15.207	PASS
2	Conducted Peak Output Power	§15.247(b)	PASS
3	Occupied Bandwidth	§15.247(a)	PASS
4	Carrier Frequencies Separation	§15.247 (a)	PASS
5	Hopping Channel Number	§15.247 (a)(1)	PASS
6	Dwell Time	§15.247 (f)	PASS
7	Radiated Emission	§15.205/§15.209	PASS
8	Band Edge	§15.247(d)	PASS

CO., LTD.

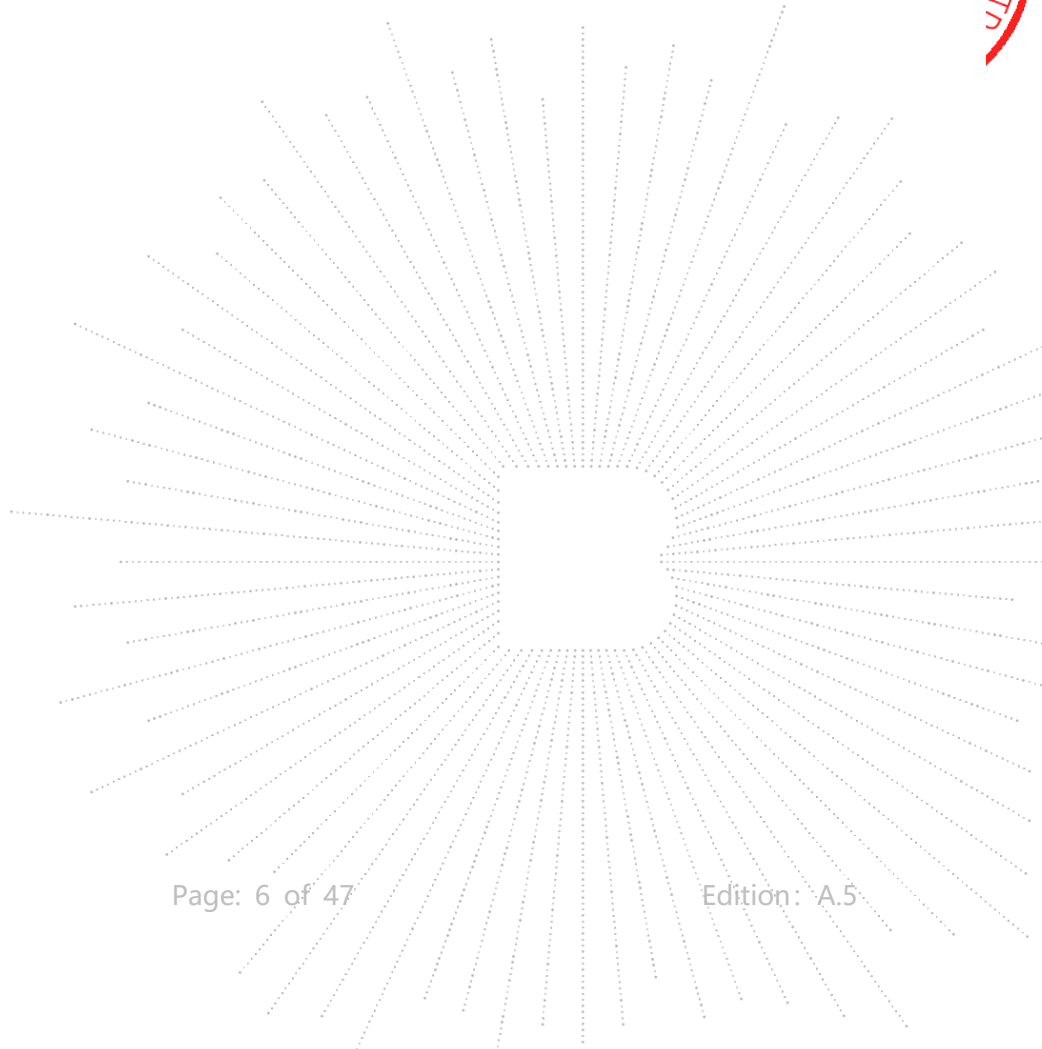

3. Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

No.	Item	Uncertainty
1	3m Chamber Radiated spurious Emission(30MHz-1GHz)	U=4.3dB
2	3m Chamber Radiated Spurious Emission(9KHz-30MHz)	U=3.7dB
3	3m Chamber Radiated Spurious Emission(1GHz-18GHz)	U=4.5dB
4	3m Chamber Radiated Spurious Emission(18GHz-40GHz)	U=3.34dB
5	Conducted Emission (150kHz-30MHz)	U=3.20dB
6	Conducted Adjacent Channel Power	U=1.38dB
7	Conducted Output Power Uncertainty Above 1G	U=1.576dB
8	Conducted Output Power Uncertainty Below 1G	U=1.28dB
9	Humidity Uncertainty	U=5.3%
10	Temperature Uncertainty	U=0.59°C



4. Product Information And Test Setup


4.1 Product Information

Model/Type reference:	UHF 5F Lite UR30RW-F, UHF 10F Lite
Model differences:	All the model are the same circuit and RF module, except model names and color.
Hardware Version:	N/A
Software Version:	N/A
Operation Frequency:	902.25MHz -927.75MHz
Type of Modulation:	ASK
Number Of Channel	52 CH
Antenna installation:	Internal antenna
Antenna Gain:	2.09 dBi
Ratings:	DC 12V


4.2 Test Setup Configuration

See test photographs attached in *EUT TEST SETUP PHOTOGRAPHS* for the actual connections between Product and support equipment.

Conducted Emission:



Radiated Spurious Emission



4.3 Support Equipment

No.	Device Type	Brand	Model	Series No.	Note
E-1	UHF reader	N/A	UHF 5F Lite	More models Ref. the 4.1	EUT
E-2	Adapter	N/A	ADP-36C2	N/A	Auxiliary

Item	Shielded Type	Ferrite Core	Length	Note
C-1	N/A	N/A	0.5M	DC cable unshielded

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
1	902.25	25	914.25	49	926.25
2	902.75	26	914.75	50	926.75
3	903.25	27	915.25	51	927.25
4	903.75	28	916.25	52	927.75
5	904.25	29	916.75		
6	904.75	30	917.25		
7	905.25	31	917.75		
8	905.75	32	918.25		
9	906.25	33	918.75		
10	906.75	34	919.25		
11	907.25	35	919.75		
12	907.75	36	920.25		
13	908.25	37	920.75		
14	908.75	38	921.25		
15	909.25	39	921.75		
16	909.75	40	922.25		
17	910.25	41	922.75		
18	910.75	42	923.25		
19	911.25	43	923.75		
20	911.75	44	924.25		
21	912.25	45	924.75		
22	912.75	46	925.25		
23	913.25	47	925.75		
24	913.75	48	926.25		

BCTC
 3C
 PPR
 检测

4.5 Test Mode

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Test Mode	Low channel	Middle channel	High channel
1	902.25MHz	914.75MHz	927.75MHz
2	Hopping Mode		
3	Transmitting (Conducted emission & Radiated emission)		

Note:

- (1) The measurements are performed at the highest, middle, lowest available channels.
- (2) Fully-charged battery is used during the test

4.6 Table Of Parameters Of Text Software Setting

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters

Test software Version	RFIDDemo.exe		
Frequency	902.25MHz	914.75MHz	927.75MHz
Parameters	DEF	DEF	DEF

5. Test Facility And Test Instrument Used

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at Shenzhen BCTC Testing Co., Ltd. Address: 1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

FCC Test Firm Registration Number: 712850

A2LA certificate registration number is: CN1212

ISED Registered No.: 23583

ISED CAB identifier: CN0017


5.2 Test Instrument Used

Conducted Emissions Test					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
Receiver	R&S	ESR3	102075	May 24, 2022	May 23, 2023
LISN	R&S	ENV216	101375	May 24, 2022	May 23, 2023
Software	Frad	EZ-EMC	EMC-CON 3A1	\	\
Attenuator	\	10dB DC-6GHz	1650	May 24, 2022	May 23, 2023

RF Conducted Test					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
Power Metter	Keysight	E4419	\	May 24, 2022	May 23, 2023
Power Sensor (AV)	Keysight	E9300A	\	May 24, 2022	May 23, 2023
Signal Analyzer20kHz-26.5GHz	Keysight	N9020A	MY49100060	May 24, 2022	May 23, 2023
Spectrum Analyzer9kHz-40GHz	R&S	FSP40	100363	May 24, 2022	May 23, 2023


Radiated Emissions Test (966 Chamber01)					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
966 chamber	ChengYu	966 Room	966	Jun. 06. 2020	Jun. 05, 2023
Receiver	R&S	ESR3	102075	May 24, 2022	May 23, 2023
Receiver	R&S	ESRP	101154	May 24, 2022	May 23, 2023
Amplifier	Schwarzbeck	BBV9744	9744-0037	May 24, 2022	May 23, 2023
TRILOG Broadband Antenna	Schwarzbeck	VULB9163	942	May 26, 2022	May 25, 2023
Loop Antenna(9KHz-30MHz)	Schwarzbeck	FMZB1519B	00014	May 26, 2022	May 25, 2023
Amplifier	SKET	LAPA_01G18 G-45dB	\	May 24, 2022	May 23, 2023
Horn Antenna	Schwarzbeck	BBHA9120D	1541	Jun. 06, 2022	Jun. 05, 2023
Amplifier(18G Hz-40GHz)	MITEQ	TTA1840-35-HG	2034381	May 26, 2022	May 25, 2023
Horn Antenna(18G Hz-40GHz)	Schwarzbeck	BBHA9170	00822	Jun. 06, 2022	Jun. 05, 2023
Spectrum Analyzer9kHz-40GHz	R&S	FSP40	100363	May 24, 2022	May 23, 2023
Software	Frad	EZ-EMC	FA-03A2 RE	\	\

CO., LTD

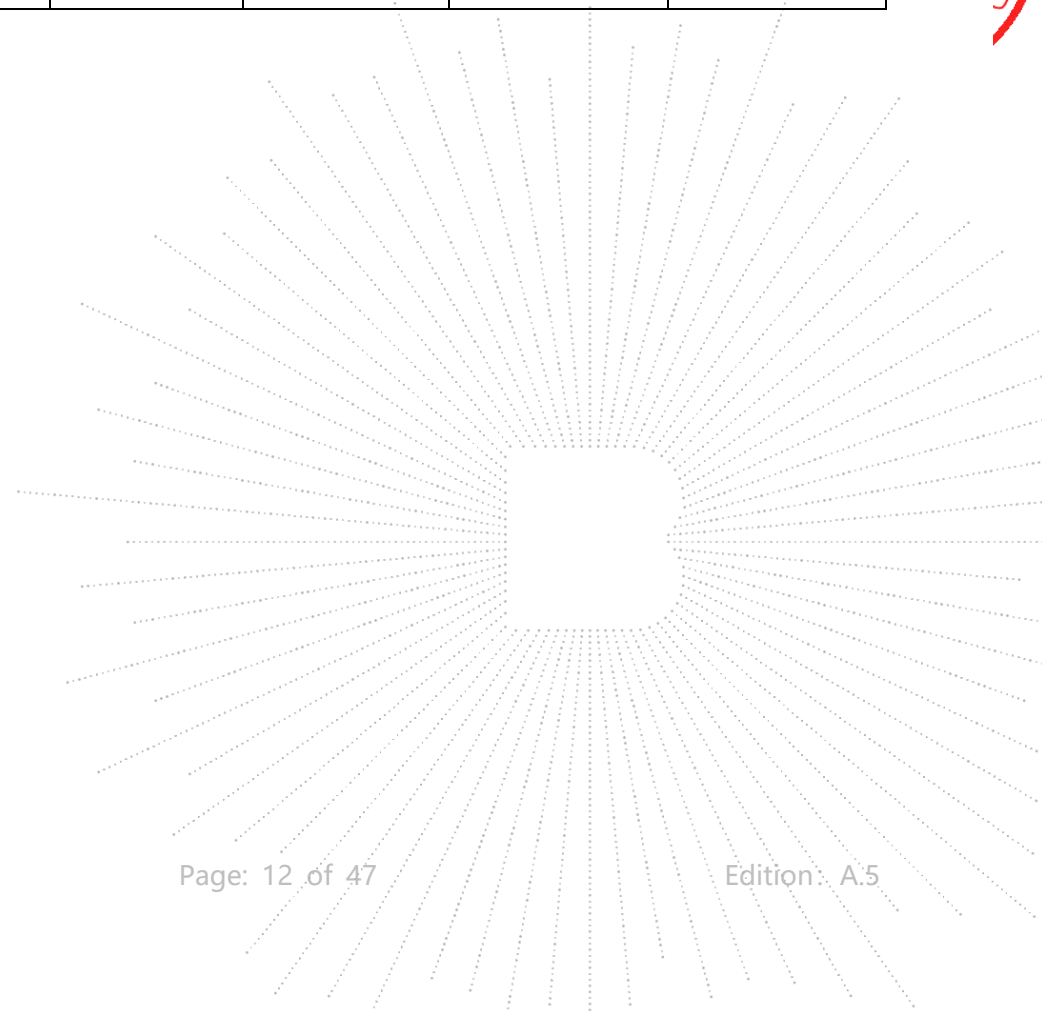

6. Conducted Emissions

6.1 Block Diagram Of Test Setup

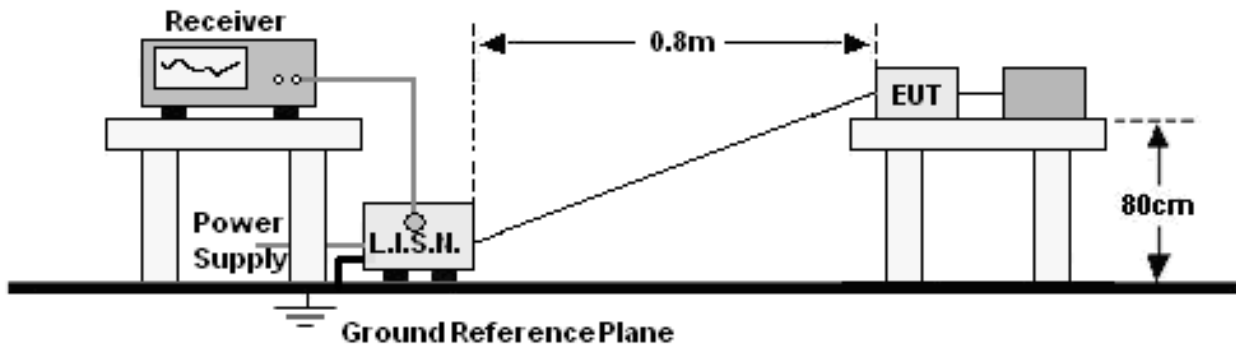

6.2 Limit

Frequency (MHz)	Limit (dBuV)	
	Quas-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Notes:

- *Decreasing linearly with logarithm of frequency.
- The lower limit shall apply at the transition frequencies.

6.3 Test procedure

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


- The Product was placed on a nonconductive table 0.8 m above the horizontal ground reference plane, and 0.4 m from the vertical ground reference plane, and connected to the main through Line Impedance Stability Network (L.I.S.N).
- The RBW of the receiver was set at 9 kHz in 150 kHz ~ 30MHz with Peak and AVG detector in Max Hold mode. Run the receiver's pre-scan to record the maximum disturbance generated from Product in all power lines in the full band.
- For each frequency whose maximum record was higher or close to limit, measure its QP and AVG values and record.

6.4 EUT operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

6.5 Test Result

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Phase :	L
Test Mode:	Mode 3	Test Voltage :	AC 120V/60Hz

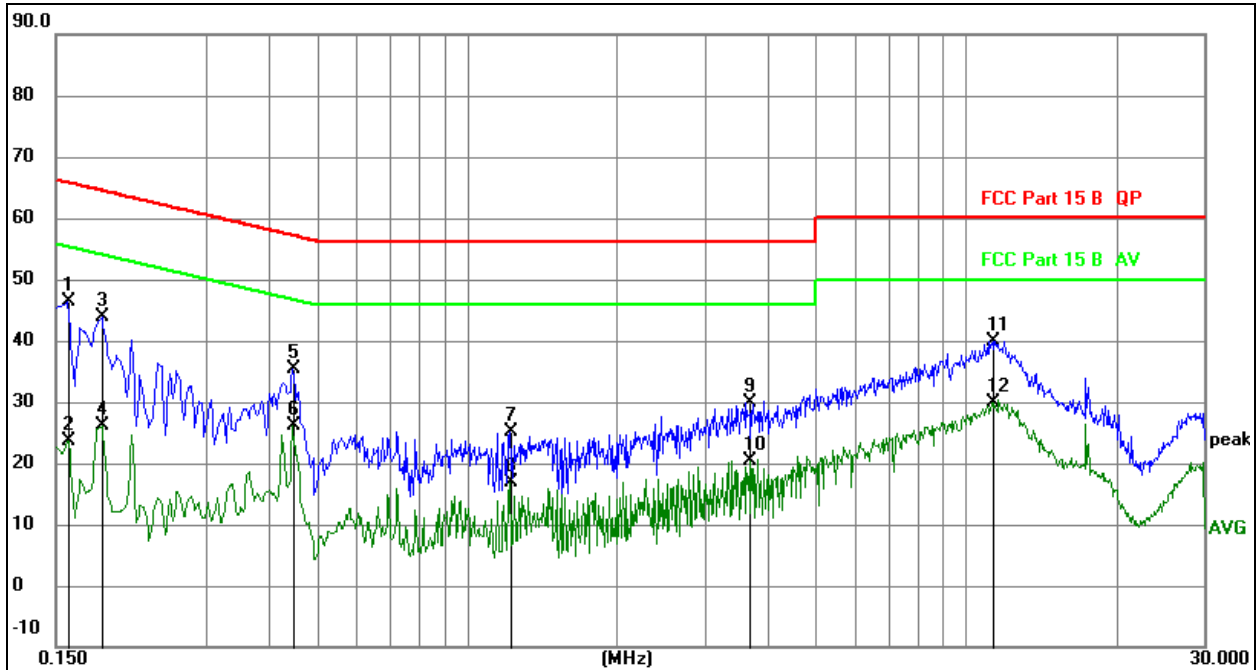


Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.
3. Measurement = Reading Level + Correct Factor
4. Over = Measurement - Limit

No.	Mk.	Freq. MHz	Reading Level	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1	*	0.1590	26.64	19.69	46.33	65.52	-19.19	QP
2		0.1590	3.98	19.69	23.67	55.52	-31.85	AVG
3		0.1860	24.16	19.76	43.92	64.21	-20.29	QP
4		0.1860	6.48	19.76	26.24	54.21	-27.97	AVG
5		0.4470	15.63	19.73	35.36	56.93	-21.57	QP
6		0.4470	6.28	19.73	26.01	46.93	-20.92	AVG
7		1.2164	5.31	19.79	25.10	56.00	-30.90	QP
8		1.2164	-3.03	19.79	16.76	46.00	-29.24	AVG
9		3.6915	9.71	20.07	29.78	56.00	-26.22	QP
10		3.6915	0.22	20.07	20.29	46.00	-25.71	AVG
11		11.3055	19.66	20.28	39.94	60.00	-20.06	QP
12		11.3055	9.65	20.28	29.93	50.00	-20.07	AVG

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Phase :	N
Test Mode:	Mode 3	Test Voltage :	AC 120V/60Hz

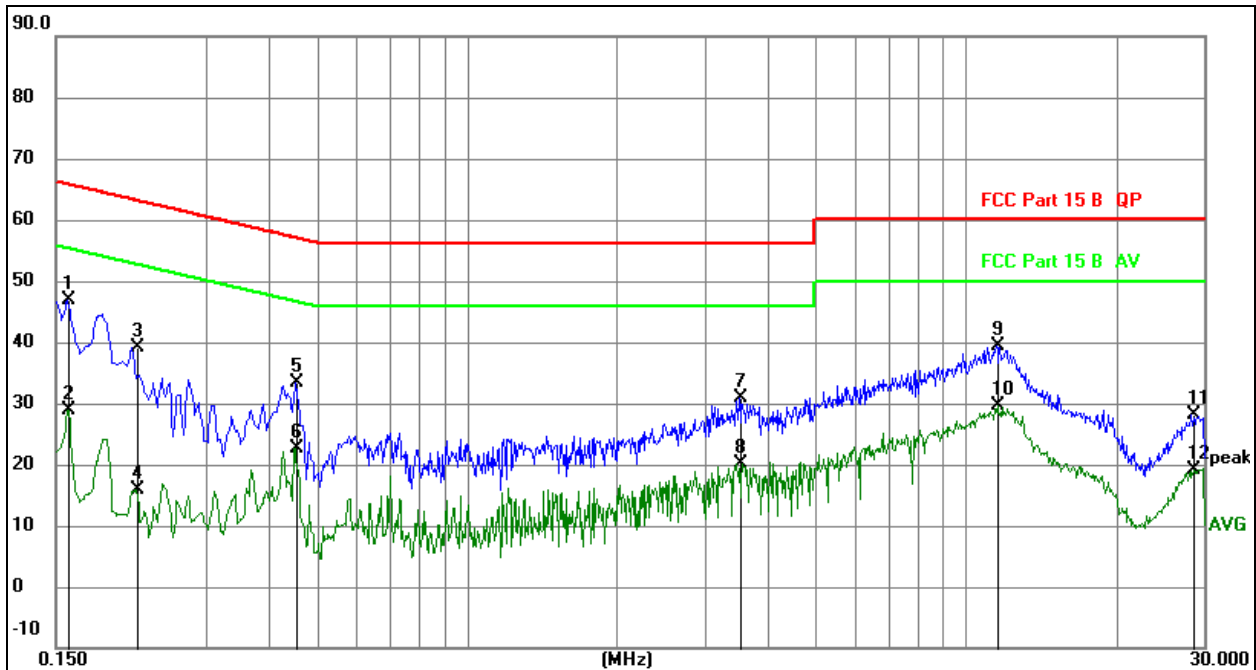
Remark:


1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.
3. Measurement = Reading Level + Correct Factor
4. Over = Measurement - Limit

No.	Mk.	Freq. MHz	Reading Level	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1	*	0.1582	27.26	19.69	46.95	65.56	-18.61	QP
2		0.1582	9.26	19.69	28.95	55.56	-26.61	AVG
3		0.2174	19.32	19.80	39.12	62.92	-23.80	QP
4		0.2174	-3.98	19.80	15.82	52.92	-37.10	AVG
5		0.4560	13.53	19.73	33.26	56.77	-23.51	QP
6		0.4560	3.01	19.73	22.74	46.77	-24.03	AVG
7		3.5250	10.75	20.05	30.80	56.00	-25.20	QP
8		3.5250	0.16	20.05	20.21	46.00	-25.79	AVG
9		11.5594	19.18	20.28	39.46	60.00	-20.54	QP
10		11.5594	9.30	20.28	29.58	50.00	-20.42	AVG
11		28.6030	7.54	20.53	28.07	60.00	-31.93	QP
12		28.6030	-1.36	20.53	19.17	50.00	-30.83	AVG


7. Radiated Emissions

7.1 Block Diagram Of Test Setup


(A) Radiated Emission Test-Up Frequency Below 30MHz

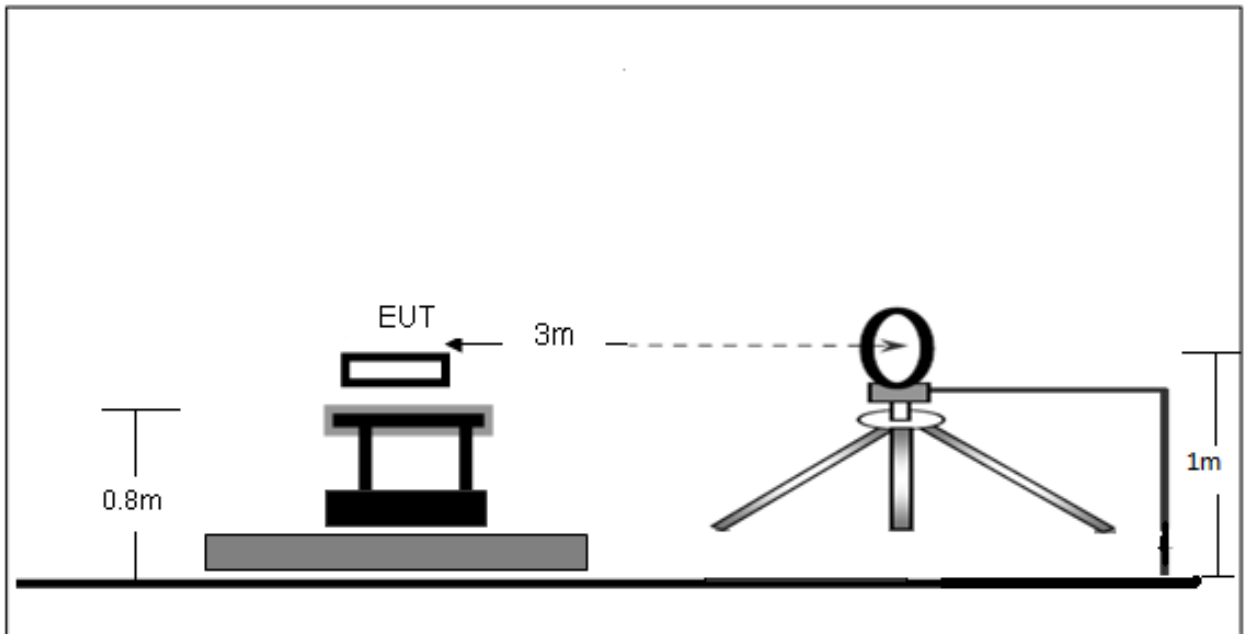

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

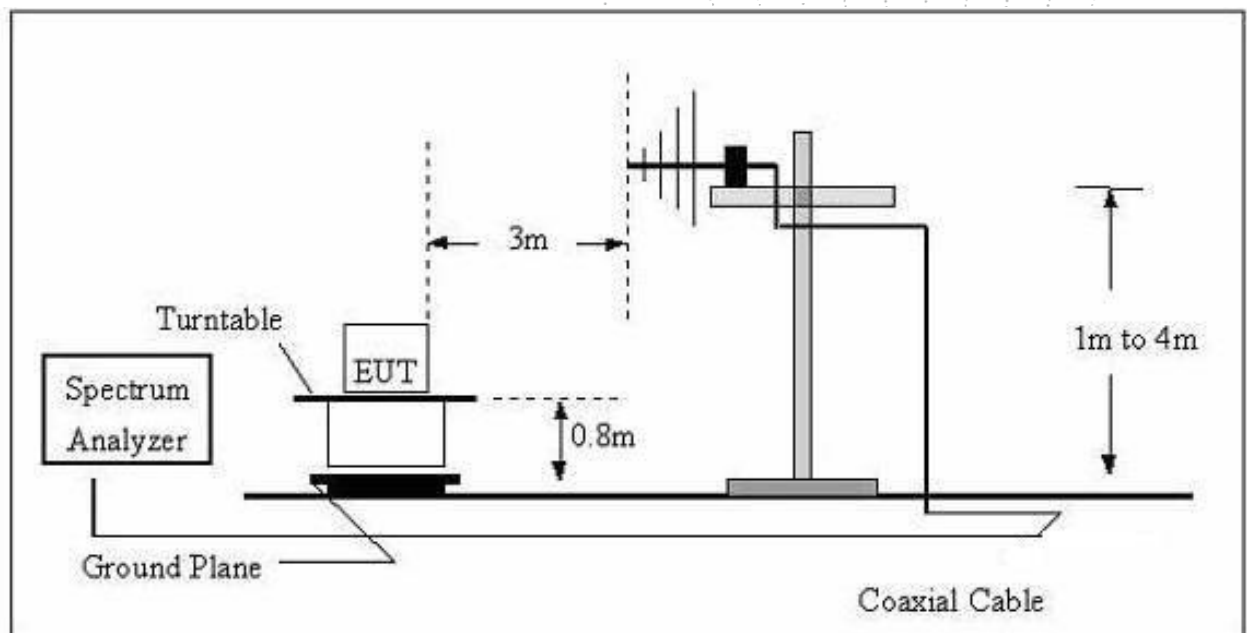

(C) Radiated Emission Test-Up Frequency Above 1GHz

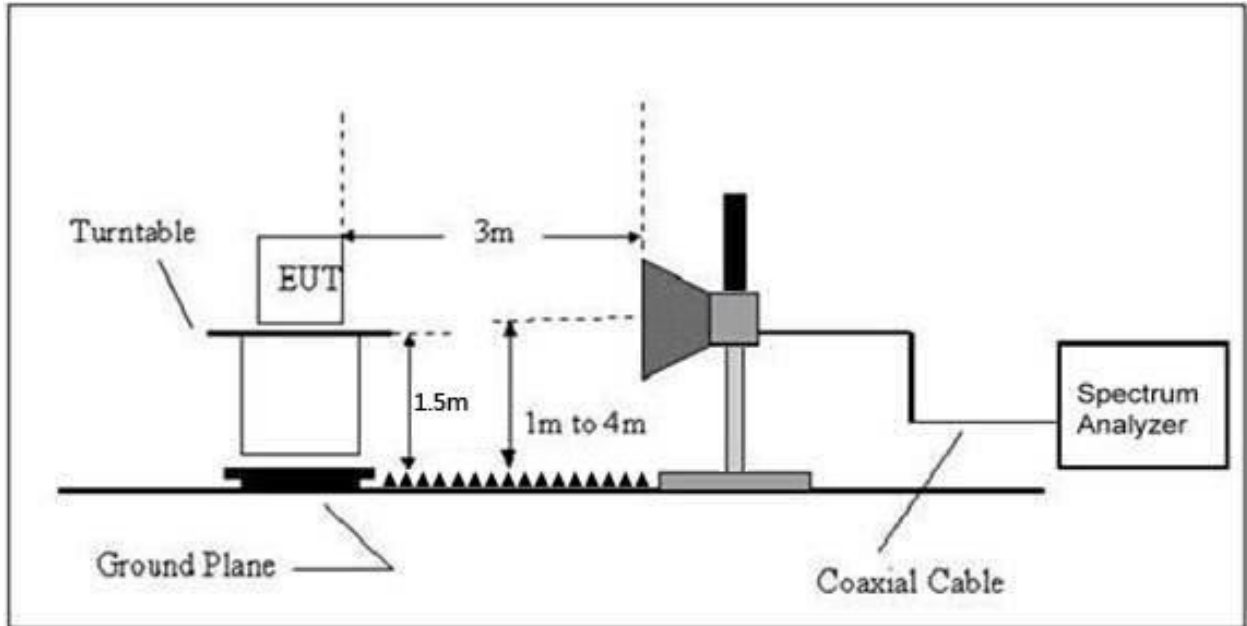

7.2 Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequency (MHz)	Field Strength uV/m	Distance (m)	Field Strength Limit at 3m Distance	
			uV/m	dBuV/m
0.009 ~ 0.490	2400/F(kHz)	300	10000 * 2400/F(kHz)	$20\log^{(2400/F(kHz))} + 80$
0.490 ~ 1.705	24000/F(kHz)	30	100 * 24000/F(kHz)	$20\log^{(24000/F(kHz))} + 40$
1.705 ~ 30	30	30	100 * 30	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

Limits Of Radiated Emission Measurement (Above 1000MHz)

Frequency (MHz)	Limit (dBuV/m) (at 3M)	
	Peak	Average
Above 1000	74	54

Notes:

- (1)The limit for radiated test was performed according to FCC PART 15C.
- (2)The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Frequency Range Of Radiated Measurement

(a) For an intentional radiator the spectrum shall be investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to at least the frequency shown in this paragraph:

- (1) If the intentional radiator operates below 10 GHz: to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
- (2) If the intentional radiator operates at or above 10 GHz and below 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 100 GHz, whichever is lower.
- (3) If the intentional radiator operates at or above 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 200 GHz, whichever is lower, unless specified otherwise elsewhere in the rules.
- (4) If the intentional radiator operates at or above 95 GHz: To the third harmonic of the highest fundamental frequency or to 750 GHz, whichever is lower, unless specified otherwise elsewhere in the rules.
- (5) If the intentional radiator contains a digital device, regardless of whether this digital device controls the functions of the intentional radiator or the digital device is used for additional control or function purposes other than to enable the operation of the intentional radiator, the frequency range shall be investigated up to the range specified in paragraphs (a) (1)through (4) of this section or the range applicable to the digital device, as shown in paragraph (b)(1) of this section, whichever is the higher frequency range of investigation.

7.3 Test procedure

Receiver Parameter	Setting
Attenuation	Auto
9kHz~150kHz	RBW 200Hz for QP
150kHz~30MHz	RBW 9kHz for QP
30MHz~1000MHz	RBW 120kHz for QP

Spectrum Parameter	Setting
1-25GHz	RBW 1 MHz /VBW 1 MHz for Peak, RBW 1 MHz / VBW 10Hz for Average

Below 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.

c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.

e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

g. Test the EUT in the lowest channel, the middle channel, the Highest channel.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

7.4 EUT operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

7.5 Test Result

Below 30MHz

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage :	AC120V/60Hz
Test Mode:	Mode 3		

Freq. (MHz)	Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	State P/F
--	--	--	--	PASS
--	--	--	--	PASS

Note:


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log(\text{specific distance}/\text{test distance})(\text{dB})$;

Limit line = specific limits(dBuv) + distance extrapolation factor.

Between 30MHz – 1GHz

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Phase :	Horizontal
Test Mode:	Mode 3	Test Voltage:	AC 120V/60Hz

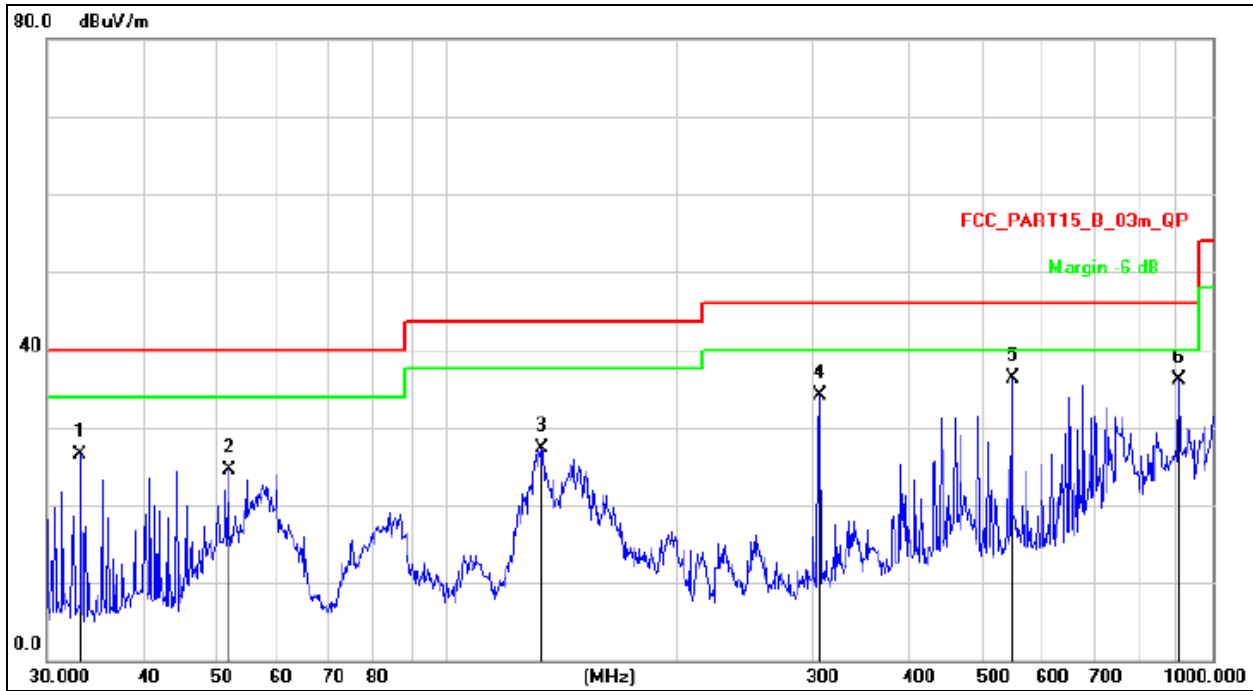


Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
2. Measurement = Reading Level + Correct Factor
3. Over = Measurement - Limit

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		33.2112	44.30	-17.85	26.45	40.00	-13.55	QP
2		51.8430	40.30	-15.87	24.43	40.00	-15.57	QP
3		132.6850	47.26	-19.91	27.35	43.50	-16.15	QP
4		306.7537	48.49	-14.34	34.15	46.00	-11.85	QP
5	*	547.0977	45.81	-9.56	36.25	46.00	-9.75	QP
6		903.3093	40.67	-4.55	36.12	46.00	-9.88	QP

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Phase :	Vertical
Test Mode:	Mode 3	Test Voltage:	AC 120V/60Hz

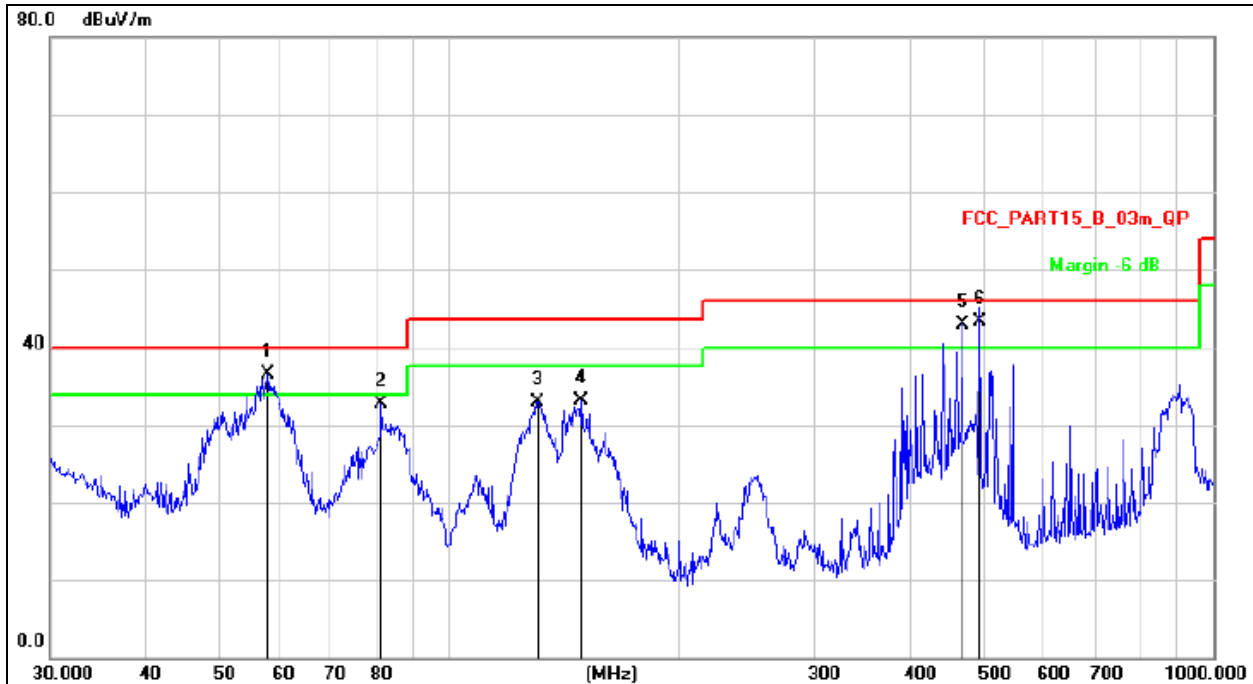
Remark:

- Factor = Antenna Factor + Cable Loss – Pre-amplifier.
- Measurement = Reading Level + Correct Factor
- Over = Measurement - Limit

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1	!	57.7962	53.28	-16.76	36.52	40.00	-3.48	QP
2		81.4970	53.90	-21.21	32.69	40.00	-7.31	QP
3		130.3789	52.67	-19.76	32.91	43.50	-10.59	QP
4		148.9625	54.08	-20.98	33.10	43.50	-10.40	QP
5	!	468.8762	54.02	-11.02	43.00	46.00	-3.00	QP
6	*	493.9784	53.65	-10.40	43.25	46.00	-2.75	QP

Between 1GHz – 25GHz

Polar (H/V)	Frequency	Reading Level	Correct Factor	Measure- ment	Limits	Over	Detector Type
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
ASK Low channel							
V	1804.50	54.89	1.25	56.14	74.00	-17.86	PK
V	1804.50	44.50	1.25	45.75	54.00	-8.25	AV
V	2706.75	46.70	1.59	48.29	74.00	-25.71	PK
V	2706.75	35.83	1.59	37.42	54.00	-16.58	AV
H	1804.50	50.58	1.25	51.83	74.00	-22.17	PK
H	1804.50	40.40	1.25	41.65	54.00	-12.35	AV
H	2706.75	43.80	1.59	45.39	74.00	-28.61	PK
H	2706.75	35.37	1.59	36.96	54.00	-17.04	AV
ASK Middle channel							
V	1829.50	50.96	1.28	52.24	74.00	-21.76	PK
V	1829.50	42.01	1.28	43.29	54.00	-10.71	AV
V	2744.25	42.00	1.63	43.63	74.00	-30.37	PK
V	2744.25	32.77	1.63	34.4	54.00	-19.6	AV
H	1829.50	46.20	1.28	47.48	74.00	-26.52	PK
H	1829.50	36.70	1.28	37.98	54.00	-16.02	AV
H	2744.25	40.16	1.63	41.79	74.00	-32.21	PK
H	2744.25	31.82	1.63	33.45	54.00	-20.55	AV
ASK High channel							
V	1855.50	53.45	1.34	54.79	74.00	-19.21	PK
V	1855.50	42.91	1.34	44.25	54.00	-9.75	AV
V	2783.25	46.37	1.69	48.06	74.00	-25.94	PK
V	2783.25	35.60	1.69	37.29	54.00	-16.71	AV
H	1855.50	51.95	1.34	53.29	74.00	-20.71	PK
H	1855.50	42.82	1.34	44.16	54.00	-9.84	AV
H	2783.25	43.84	1.69	45.53	74.00	-28.47	PK
H	2783.25	34.96	1.69	36.65	54.00	-17.35	AV

Remark:


1. Emission Level = Meter Reading + Factor, Factor = Antenna Factor + Cable Loss – Pre-amplifier. Over = Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. In restricted bands of operation, The spurious emissions below the permissible value more than 20dB
4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

 TE
 TC
 OVE
 检

8. Radiated Band Emission Measurement And Restricted Bands Of Operation

8.1 Block Diagram Of Test Setup

Radiated Emission Test-Up Frequency Above 1GHz

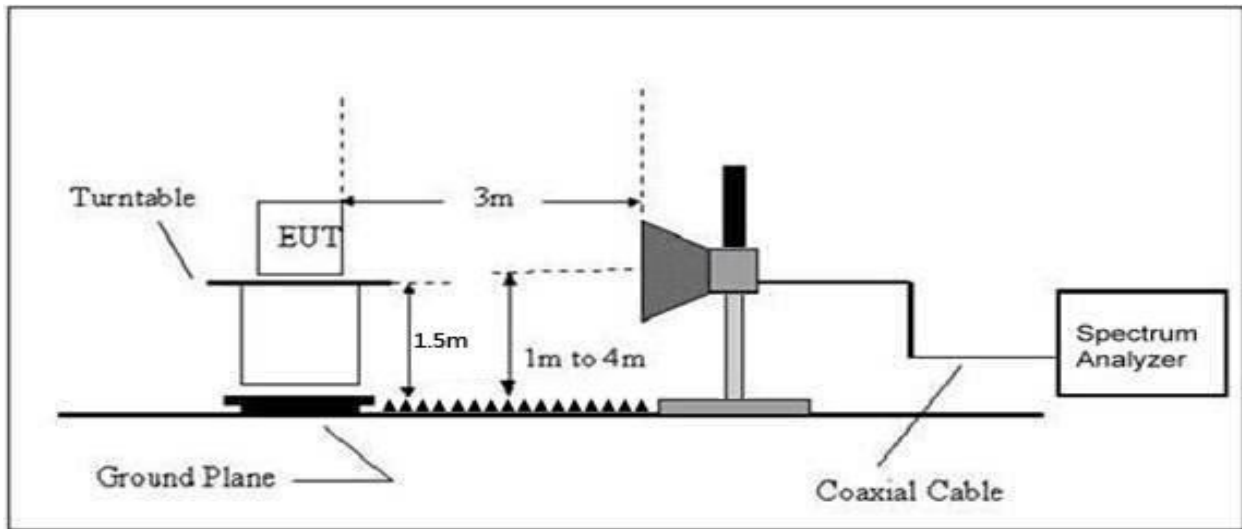

8.2 Limit

FCC Part15 C Section 15.209 and 15.205

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

Limits Of Radiated Emission Measurement (Above 1000MHz)

Frequency (MHz)	Limit (dBuV/m) (at 3M)	
	Peak	Average
Above 1000	74	54

Notes:

- (1)The limit for radiated test was performed according to FCC PART 15C.
- (2)The tighter limit applies at the band edges.
- (3)Emission level (dBuV/m)=20log Emission level (uV/m).

8.3 Test procedure

Receiver Parameter	Setting
Attenuation	Auto
Start Frequency	2300MHz
Stop Frequency	2520
RB / VB (Emission In Restricted Band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Above 1GHz test procedure as below:

- a.The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b.The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c.The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d.For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e.The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middlest channel, the Highest channel.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

8.4 EUT operating Conditions


The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

8.5 Test Result

Test mode	Polar (H/V)	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Measurement (dBuV/m)	Limits (dBuV/m)		Result	
					PK	PK	AV		
Low Channel 902.25MHz									
ASK	H	900	53.72	-5.67	48.05	74.00	54.00	PASS	
	H	902	57.20	-5.18	52.02	74.00	54.00	PASS	
	V	900	53.12	-5.67	47.45	74.00	54.00	PASS	
	V	902	57.86	-5.18	52.68	74.00	54.00	PASS	
	High Channel 927.75MHz								
	H	928	56.32	-4.04	52.28	74.00	54.00	PASS	
	H	930	52.77	-3.77	49.00	74.00	54.00	PASS	
	V	928	55.14	-4.04	51.10	74.00	54.00	PASS	
V	930	52.43	-3.77	48.66	74.00	54.00	PASS		

Remark:

1. Emission Level = Meter Reading + Factor, Factor = Antenna Factor + Cable Loss – Pre-amplifier.
Over= Emission Level – Limit
2. If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit.
- 3 In restricted bands of operation, The spurious emissions below the permissible value more than 20dB
4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

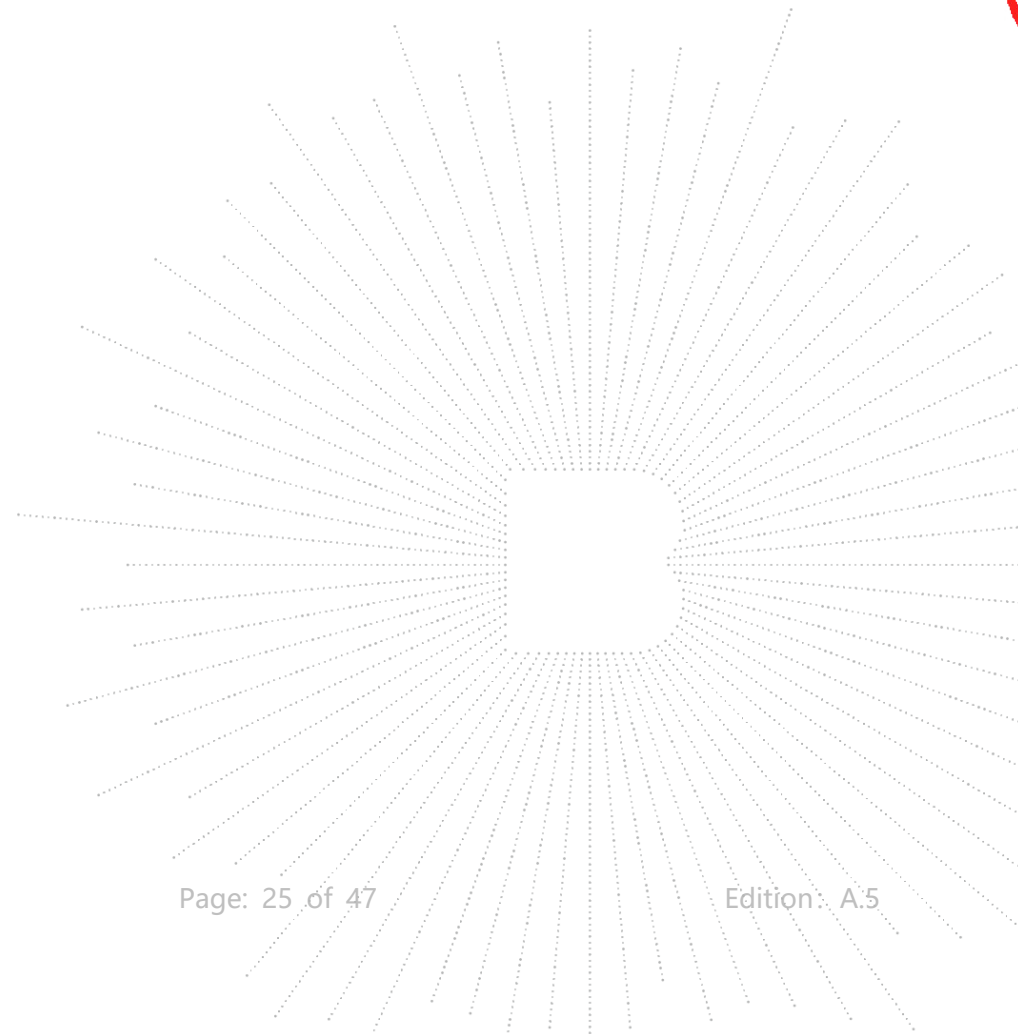

9. Conducted Spurious Emission Measurement

9.1 Block Diagram Of Test Setup



9.2 Limit

Regulation 15.247 (d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c))

9.3 Test procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:
Below 30MHz:
RBW = 100kHz, VBW = 300kHz, Sweep = auto
Detector function = peak, Trace = max hold
Above 30MHz:
RBW = 100KHz, VBW = 300KHz, Sweep = auto
Detector function = peak, Trace = max hold




9.4 Test Result

30MHz – 25GHz


L

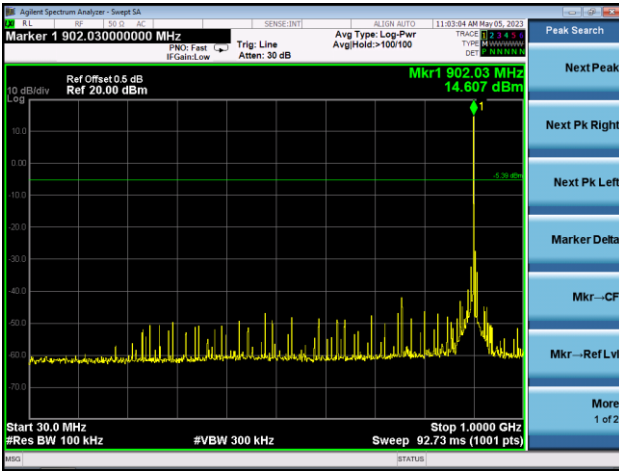


M

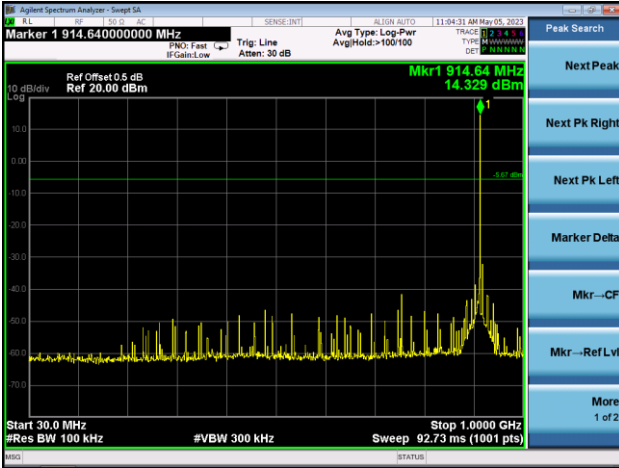


H

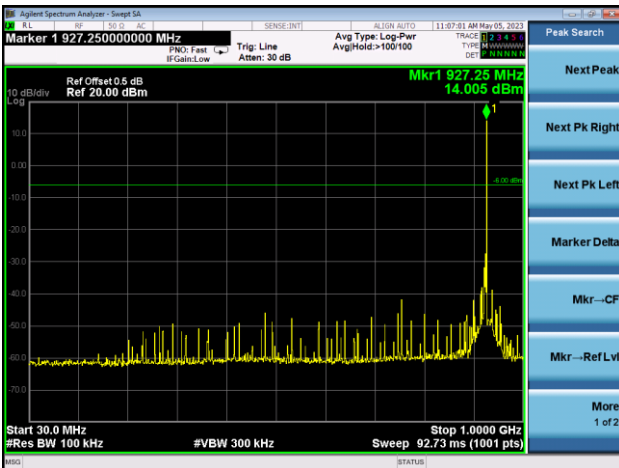
 BCTC
 3C
 PPR
 检测


ASK Transmitting Band edge-left side

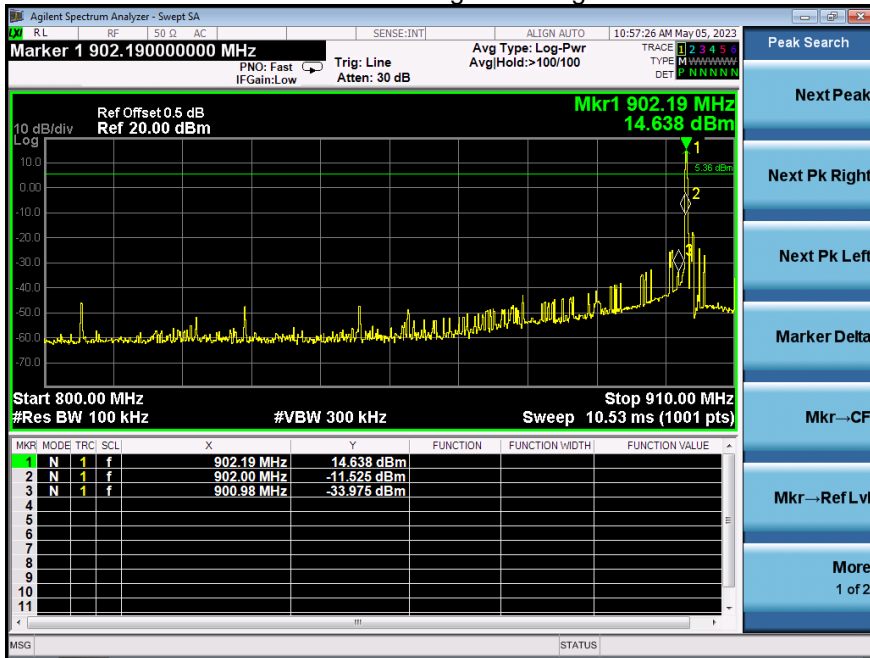


ASK Hopping Band edge-left side

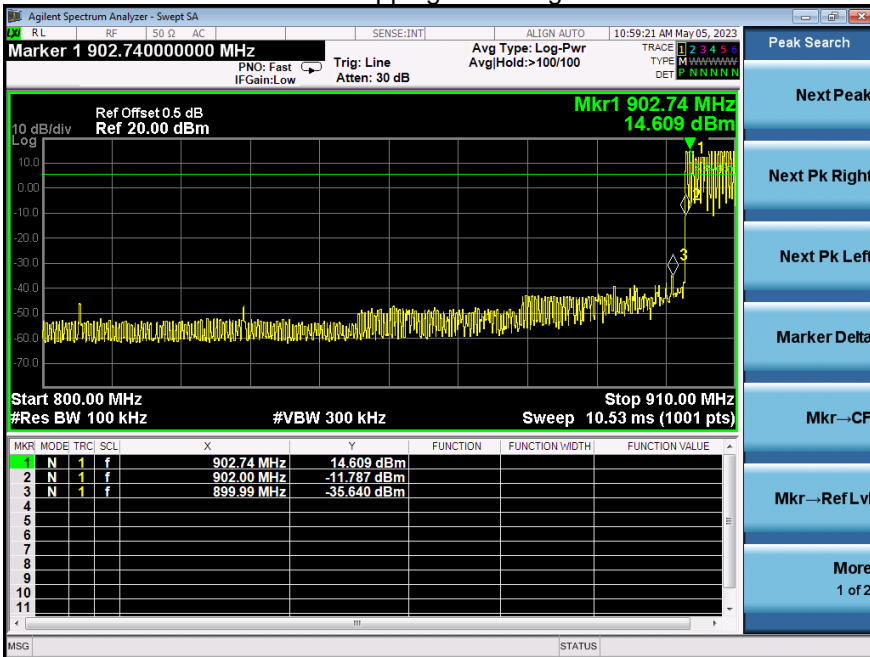

ASK Transmitting Band edge-right side

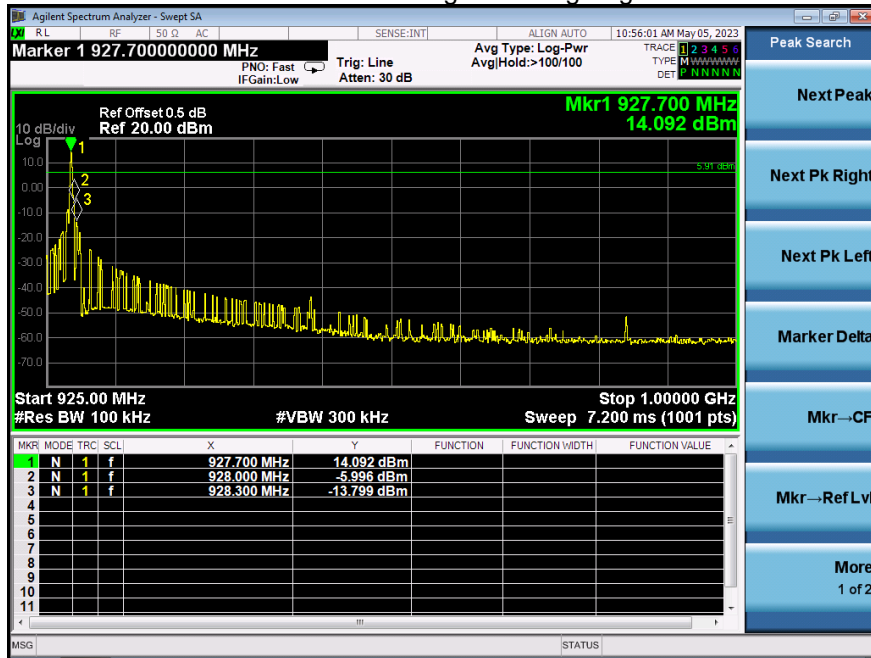

ASK Hopping Band edge-right side

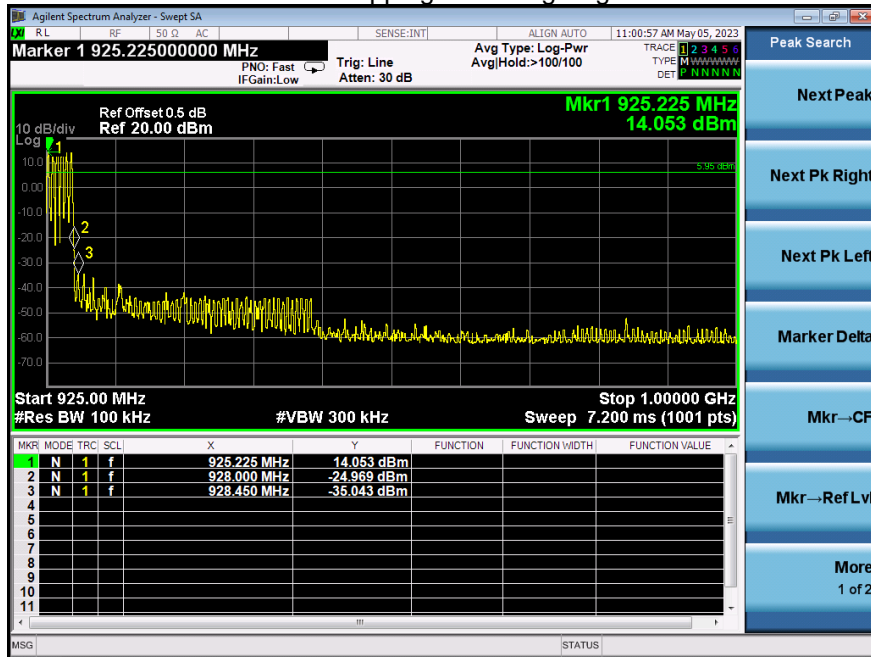

10. Occupy Bandwidth

10.1 Block Diagram Of Test Setup



10.2 Limit

For frequency hopping systems operating in the 902-928 MHz band: The maximum allowed 20 dB bandwidth of the hopping channel is 250 kHz


10.3 Test procedure

1. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Use the following spectrum analyzer settings for 20dB Bandwidth measurement.
 Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hopping channel; $1\% \leq RBW \leq 5\%$ of the 20 dB bandwidth; $VBW \geq 3RBW$;
 Sweep = auto; Detector function = peak; Trace = max hold.
4. Measure and record the results in the test report.


10.4 Test Result

Test channel	ASK		
	20dB(KHz)	Limit(KHz)	Conclusion
Lowest	171.3	≤ 250	PASS
Middlest	171.3	≤ 250	PASS
Highest	170.9	≤ 250	PASS



Lowest channel

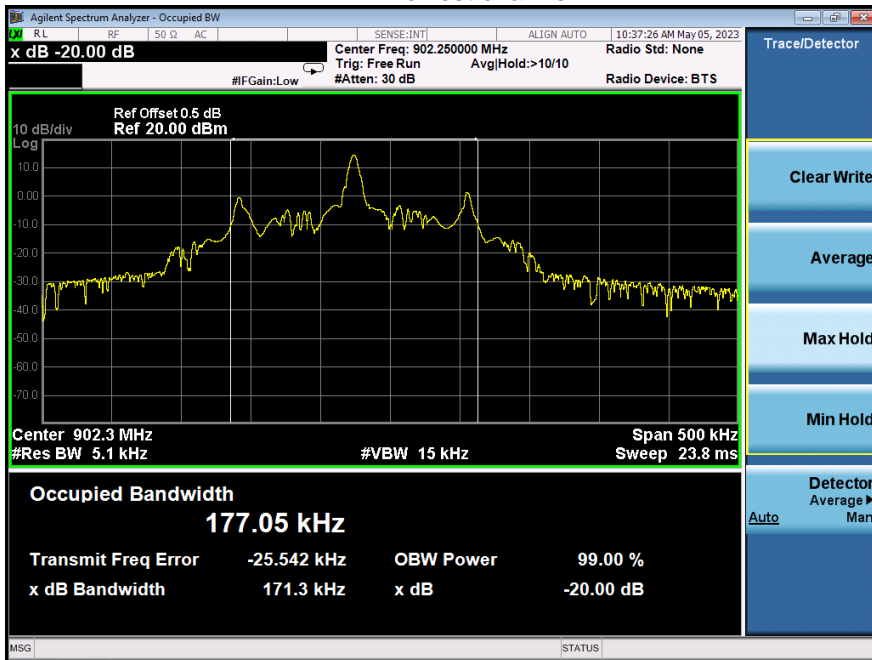

Middlest channel

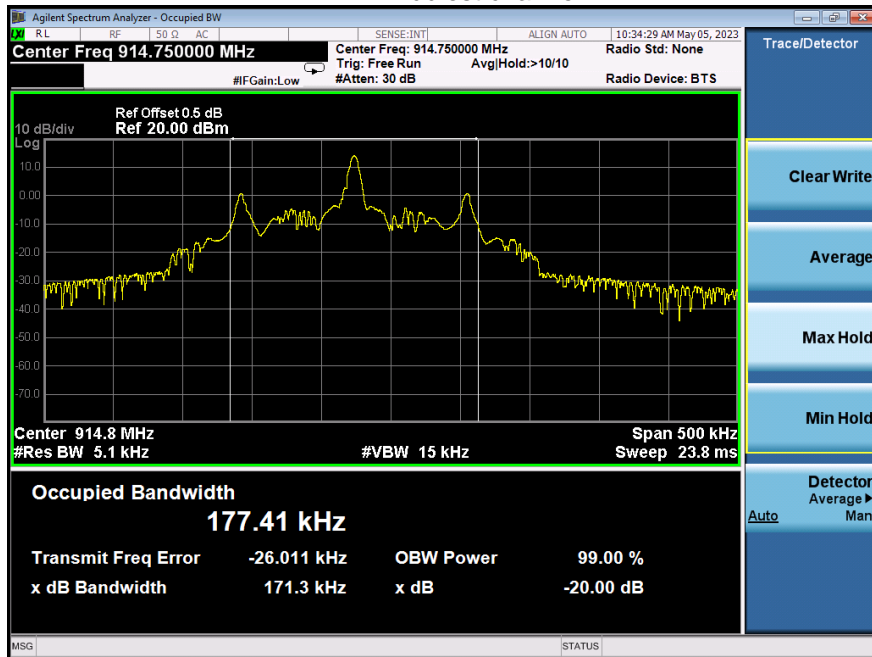

Highest channel

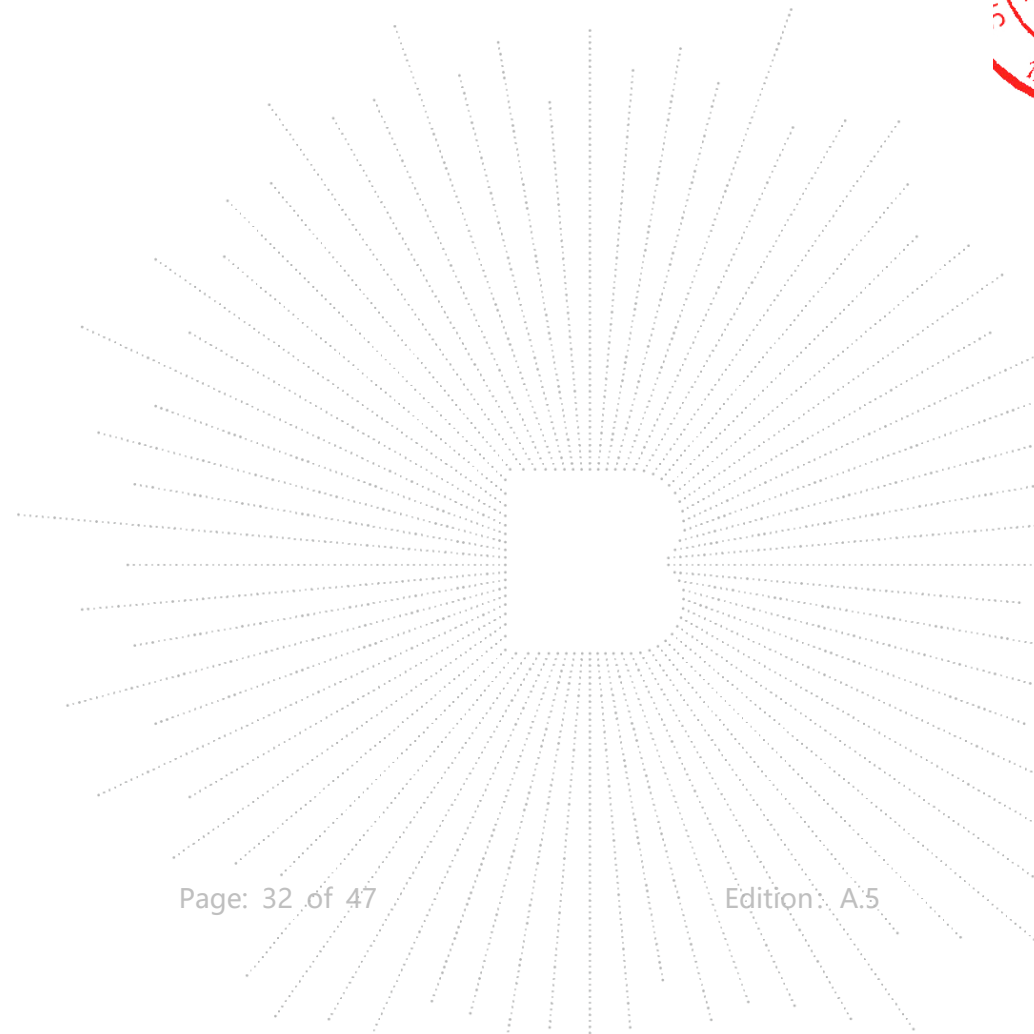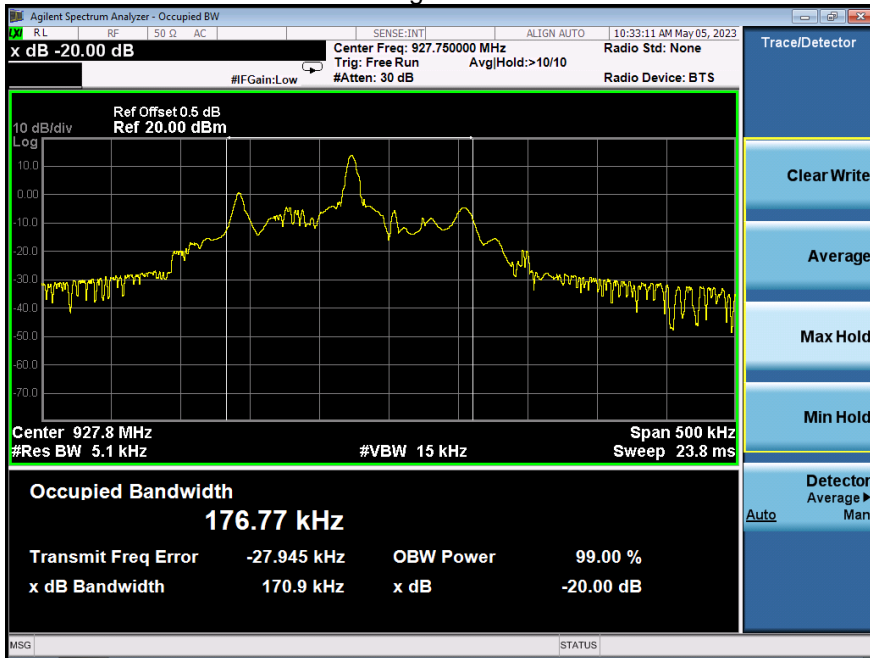

11. Conducted Output Power

11.1 Block Diagram Of Test Setup



11.2 Limit

For frequency hopping systems operating in the 902-928 MHz band: 1 watt for systems employing at least 50 hopping channels; and, 0.25 watts for systems employing less than 50 hopping channels, but at least 25 hopping channels, as permitted under paragraph (a)(1)(i) of this section.

11.3 Test procedure

Use the following spectrum analyzer settings:

Span = approximately 5 times the 20 dB bandwidth,
centered on a hopping channel

RBW > the 20 dB bandwidth of the emission being measured $VBW \geq RBW$

Sweep = auto

Detector function = peak

Trace = max hold


Allow the trace to stabilize.

Use the marker-to-peak function to set the marker to the peak of the emission.


11.4 Test Result

ASK			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	14.791	30.00	PASS
Middlest	14.499	30.00	PASS
Highest	14.186	30.00	PASS

Lowest channel


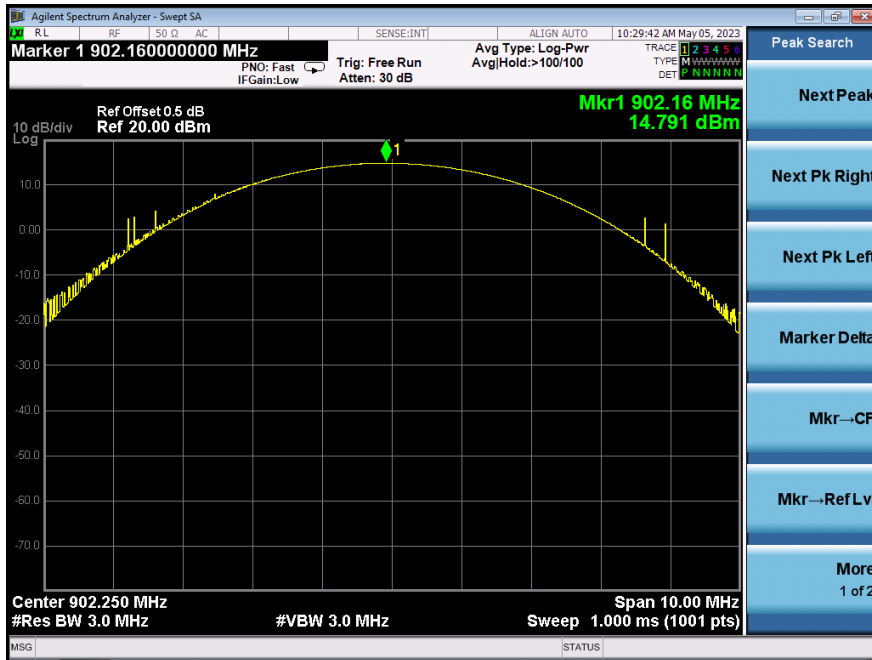


Middlest channel

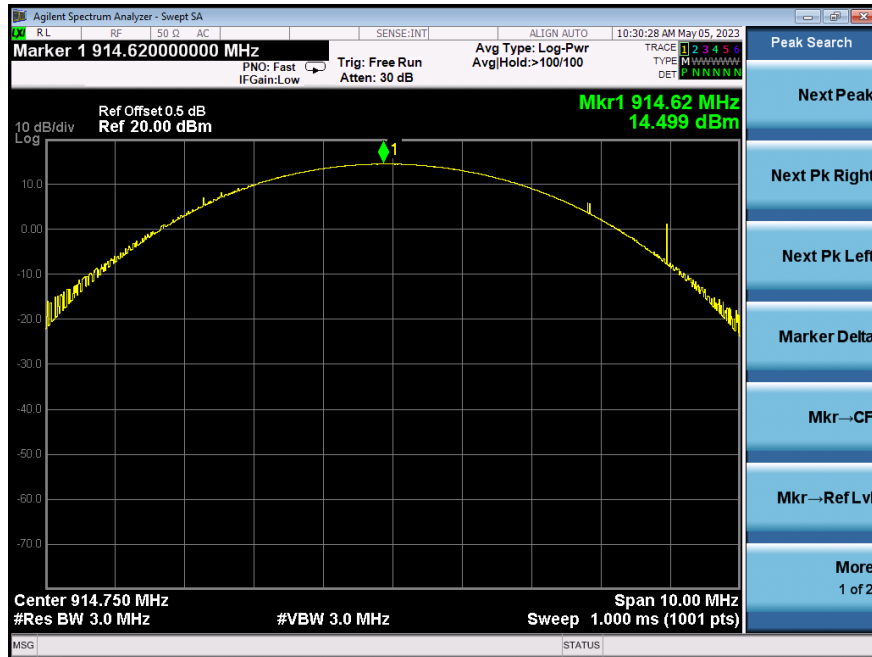

TEC
TO
OVB
檢

Highest channel

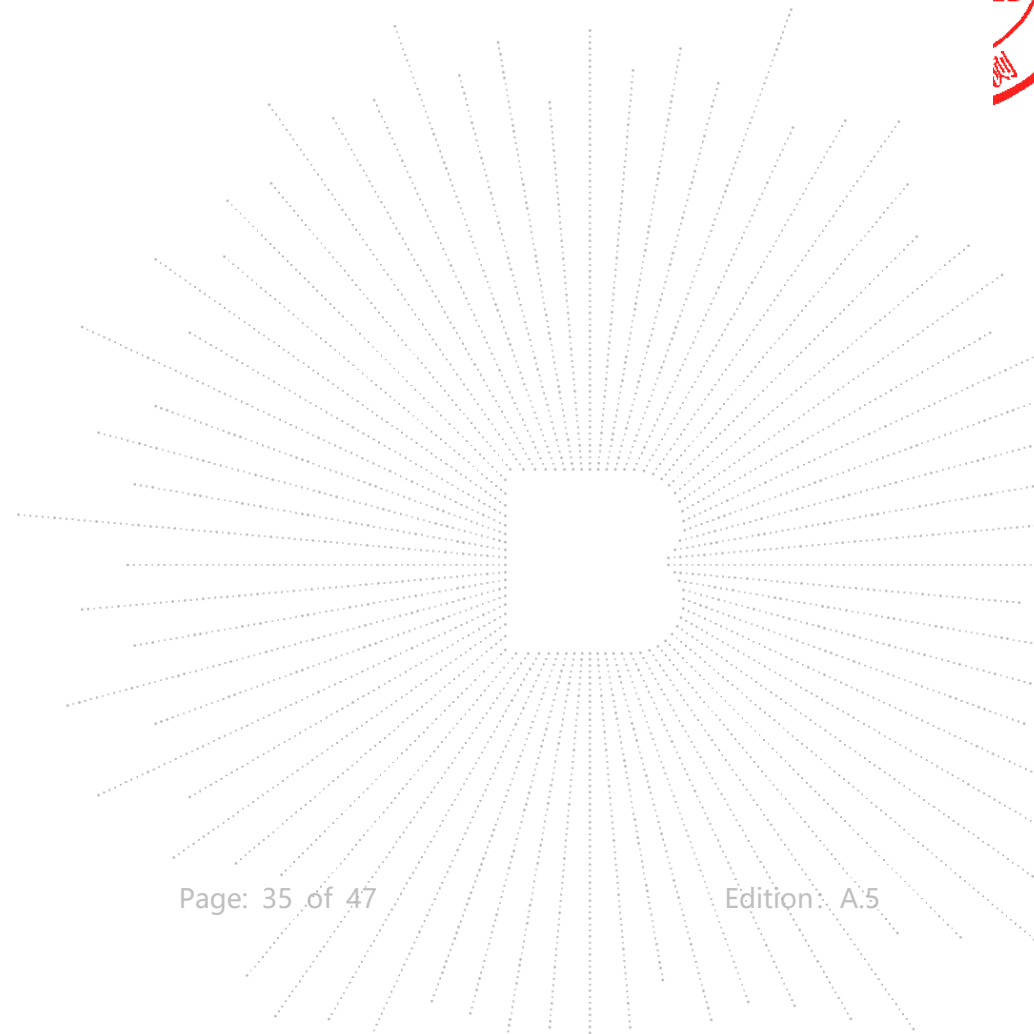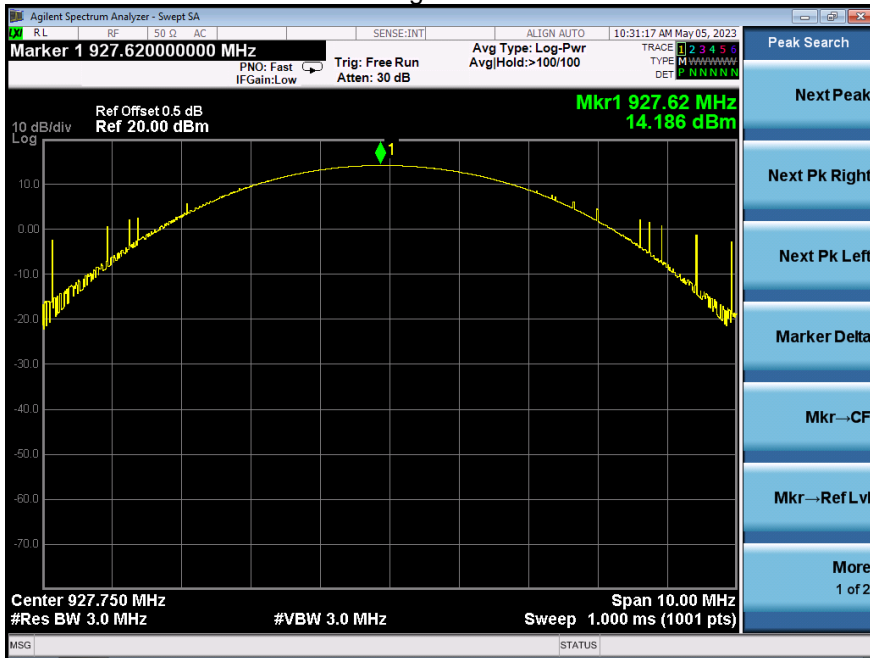

12. Hopping Channel Separation

12.1 Block Diagram Of Test Setup



12.2 Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

12.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 30kHz. VBW = 100kHz , Span = 1.0MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.

12.4 Test Result

For FHSS:

ASK			
Test channel	Carrier Frequencies Separation (kHz)	Limit (kHz)	Result
Lowest	500	171.3	PASS
Middlest	500	171.3	PASS
Highest	499	171.3	PASS


Lowest channel



Middlest channel



Highest channel

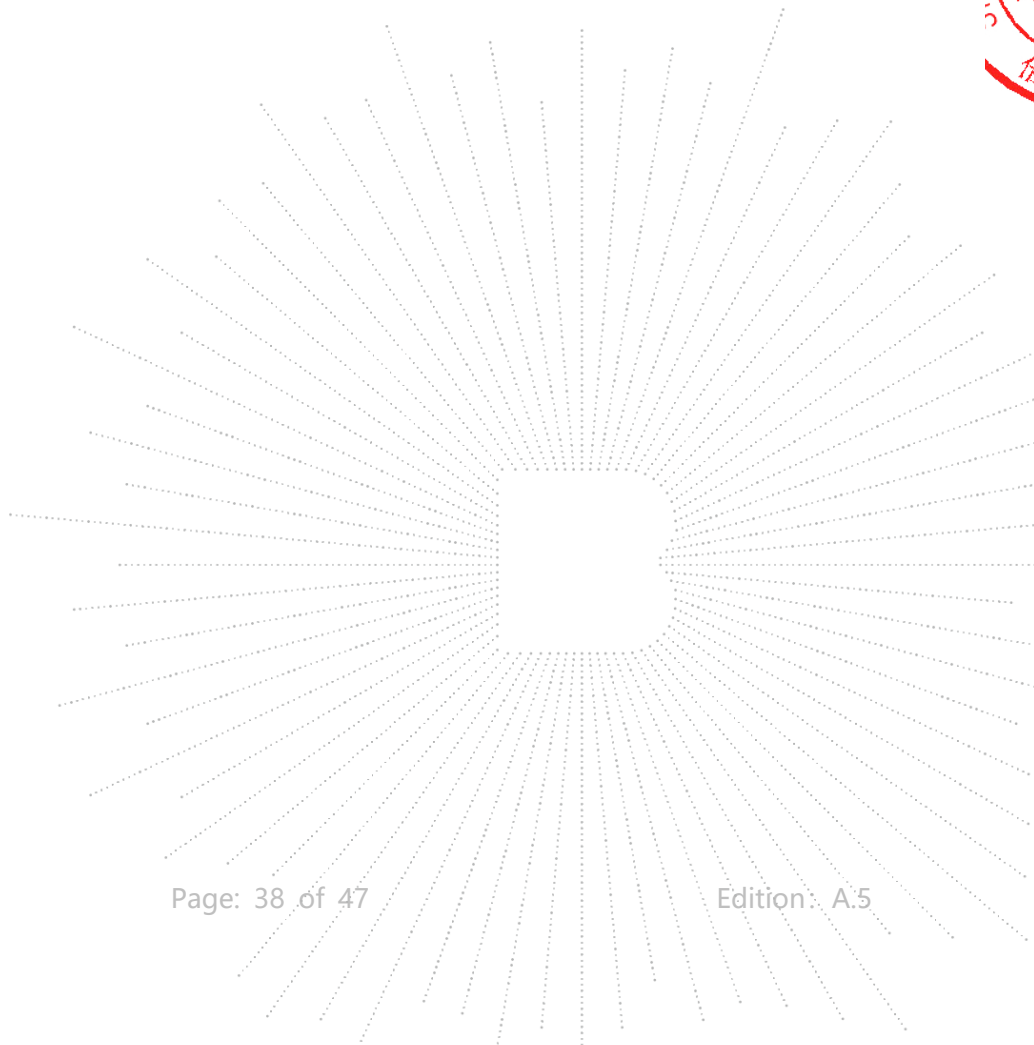

13. Number Of Hopping Frequency

13.1 Block Diagram Of Test Setup



13.2 Limit

For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies.


13.3 Test procedure

1. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Enable the EUT hopping function.
4. Use the following spectrum analyzer settings: Span = the frequency band of operation; set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold
5. The number of hopping frequency used is defined as the number of total channel.
6. Record the measurement data in report.

TC
3C
PPR
测

13.4 Test Result

Mode	Hopping channel numbers	Limit	Result
ASK	52	50	PASS

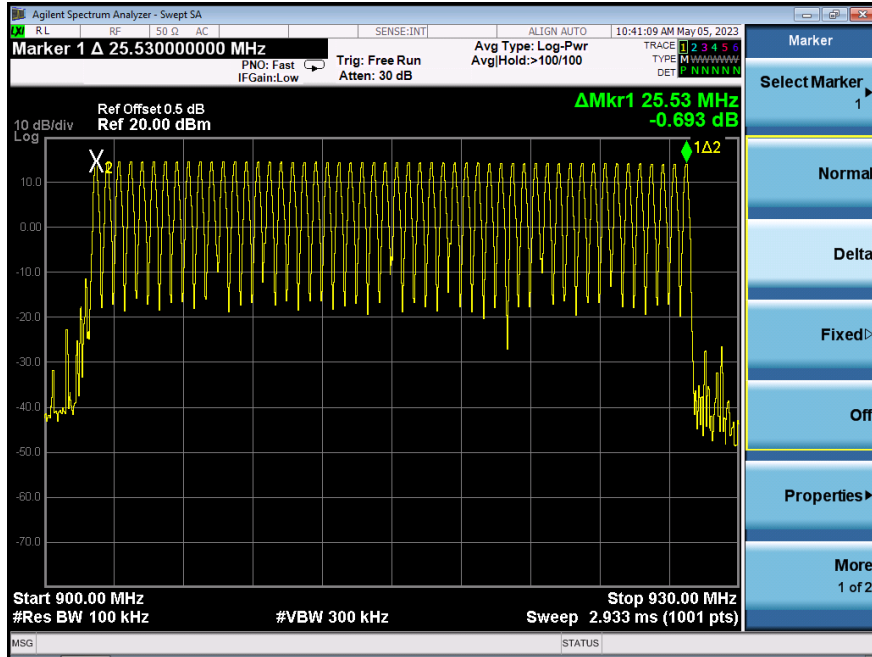

14. Dwell Time

14.1 Block Diagram Of Test Setup



14.2 Limit

For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.


14.3 Test procedure

1. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Enable the EUT hopping function.
4. The spectrum analyzer is set to:
Center frequency = 914.75MHz, Span = zero
RBW = 100 kHz (RBW shall be \leq channel spacing and where possible RBW should be set $\gg 1 / T$, where T is the expected dwell time per channel),
VBW \geq RBW Detector function = peak,
Trace = max hold
5. Measure and record the results in the test report.


14.4 Test Result

Length (ms)	Number	Dwell time (ms)	Limit (ms)	Result
13.32	8	106.56	400	PASS

Note: Dwell time= Length* Number

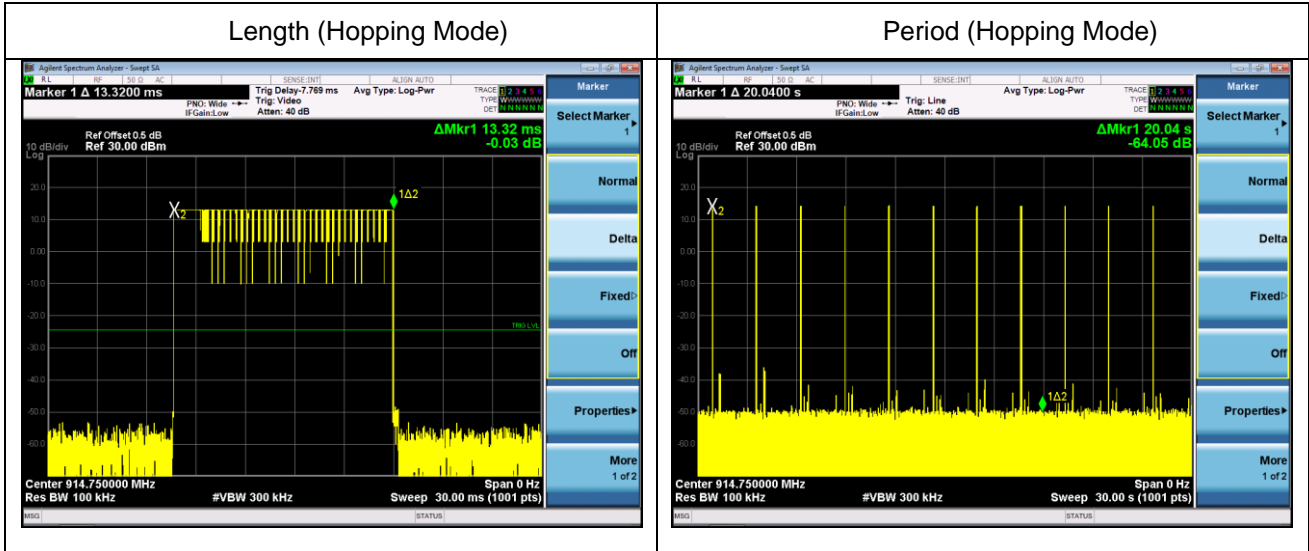

CO., LTD

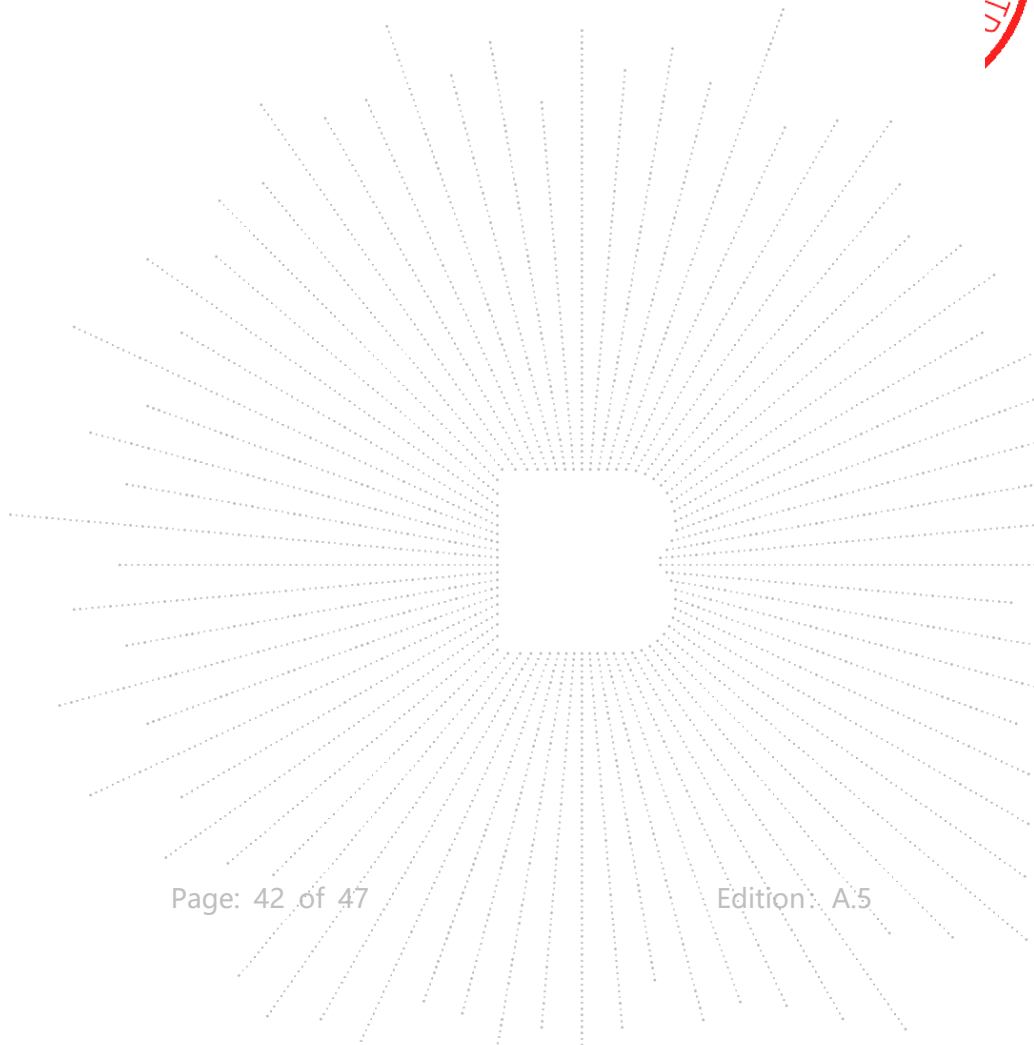


15. Antenna Requirement

15.1 Limit

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

15.2 Test Result

The EUT antenna is Internal antenna, antenna gain is 2.09dBi, fulfill the requirement of this section.

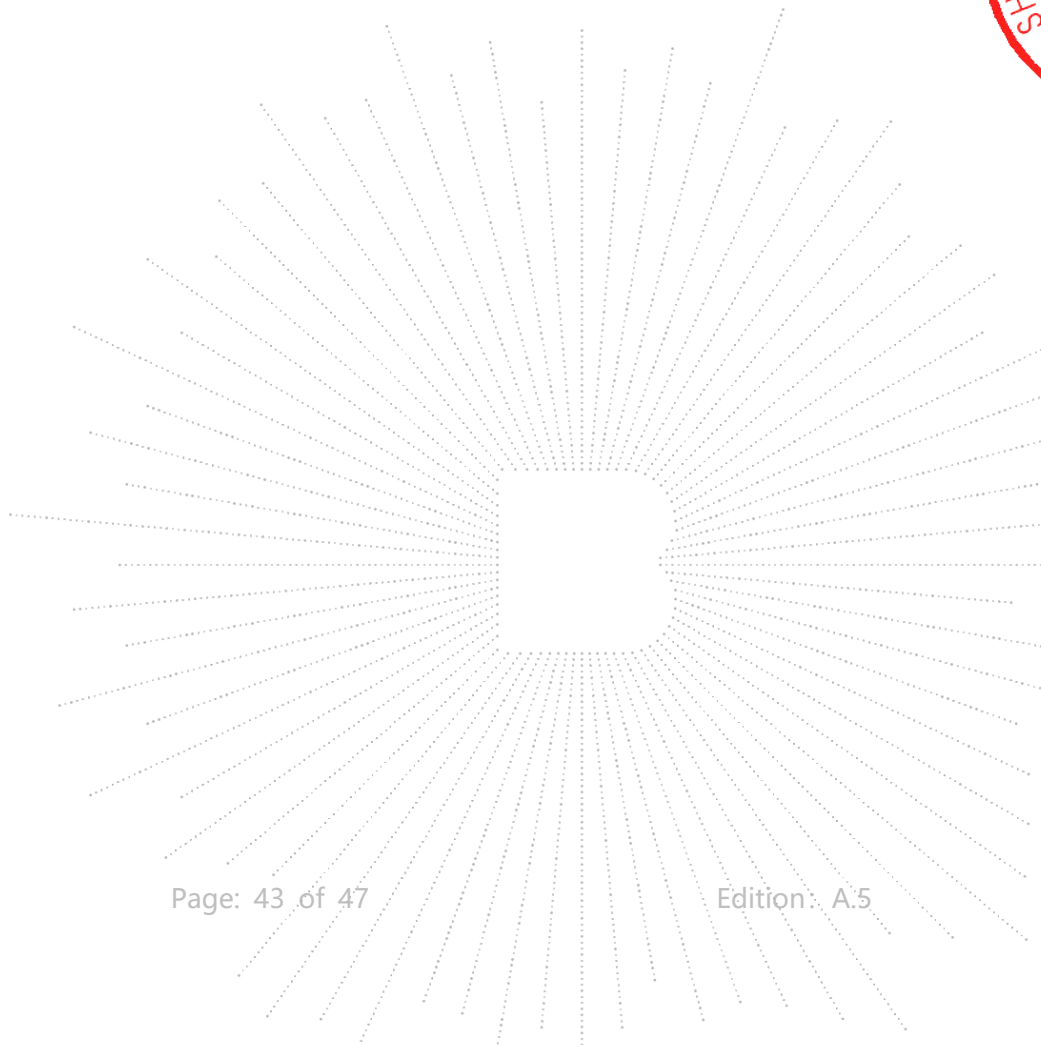


16. EUT Photographs

EUT Photo 1



EUT Photo 2

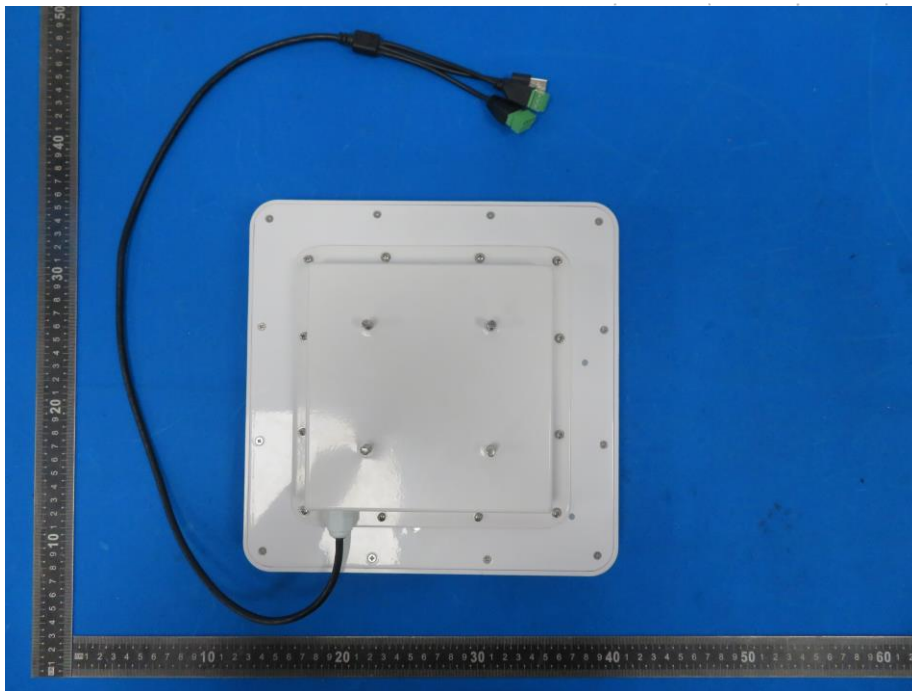


17. EUT Test Setup Photographs


Conducted emissions



Radiated Measurement Photos

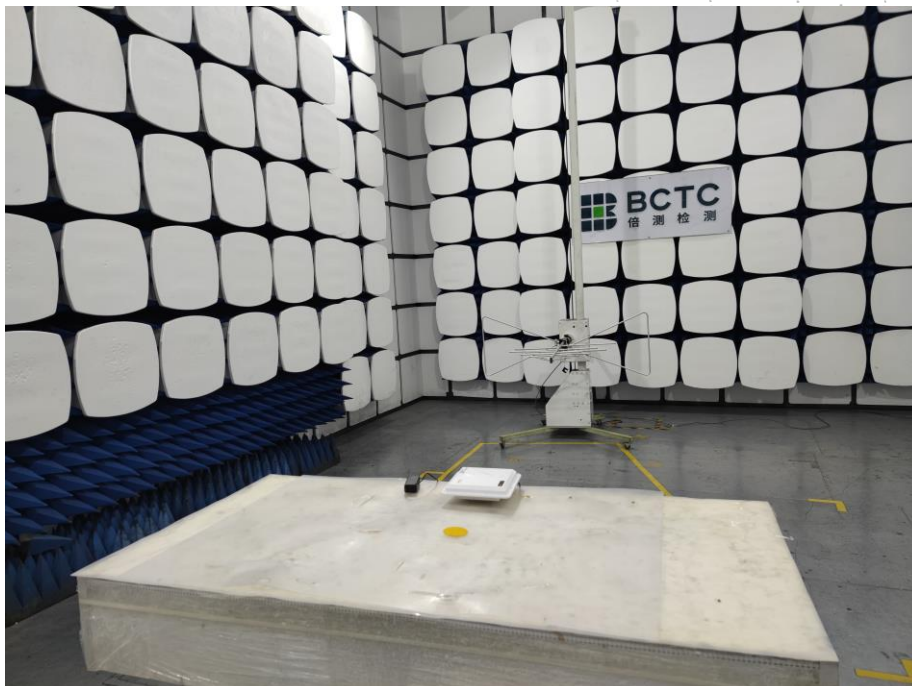

C T
CT
PRO
测检

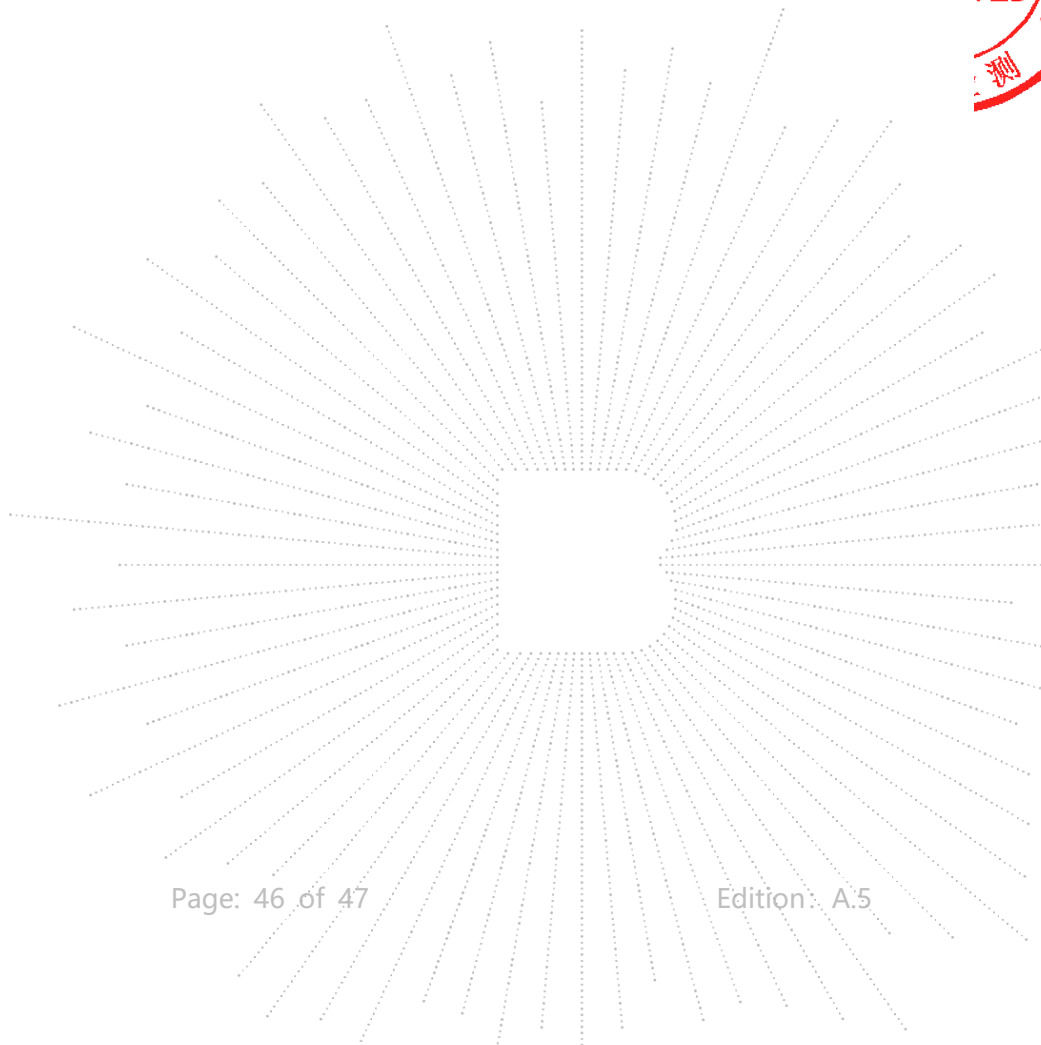

STATEMENT

1. The equipment lists are traceable to the national reference standards.
2. The test report can not be partially copied unless prior written approval is issued from our lab.
3. The test report is invalid without the "special seal for inspection and testing".
4. The test report is invalid without the signature of the approver.
5. The test process and test result is only related to the Unit Under Test.
6. Sample information is provided by the client and the laboratory is not responsible for its authenticity.
7. The test report without CMA mark is only used for scientific research, teaching, enterprise product development and internal quality control purposes.
8. The quality system of our laboratory is in accordance with ISO/IEC17025.
9. If there is any objection to this test report, the client should inform issuing laboratory within 15 days from the date of receiving test report.

Address:

1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China

TEL: 400-788-9558

P.C.: 518103

FAX: 0755-33229357

Website: <http://www.chnbctc.com>E-Mail: bctc@bctc-lab.com.cn******* END *******