

FCC Part 15C Measurement and Test Report

For

Honeywell Integrated Technology(China) Co.,LTD

430 Li Bing Road, Shanghai ,P.R. China

FCC ID: 2AJAWVCU-X3YYYYEN

FCC Rule(s):	<u>FCC Part 15C</u>
Product Description:	<u>Tema-Voyager TM Compact</u>
Tested Model:	<u>VCU-X3YYYYEN1N01</u>
Report No.:	<u>STR16078131I-1</u>
Tested Date:	<u>2016-07-15 to 2016-08-10</u>
Issued Date:	<u>2016-08-10</u>
Tested By:	<u>Tink Zeng / Engineer</u> 
Reviewed By:	<u>Silin Chen / EMC Manager</u> 
Approved & Authorized By:	<u>Jandy So / PSQ Manager</u> 
Prepared By:	

Shenzhen SEM.Test Technology Co., Ltd.
1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road,
Bao'an District, Shenzhen, P.R.C. (518101)
Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen SEM.Test Technology Co., Ltd.

TABLE OF CONTENTS

1. GENERAL INFORMATION	3
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	3
1.2 TEST STANDARDS	4
1.3 TEST METHODOLOGY	4
1.4 TEST FACILITY	4
1.5 EUT SETUP AND TEST MODE	5
1.6 MEASUREMENT UNCERTAINTY	5
1.7 TEST EQUIPMENT LIST AND DETAILS	6
2. SUMMARY OF TEST RESULTS	7
3. ANTENNA REQUIREMENT	8
3.1 STANDARD APPLICABLE	8
3.2 TEST RESULT	8
4. CONDUCTED EMISSIONS	9
4.1 TEST PROCEDURE	9
4.2 BASIC TEST SETUP BLOCK DIAGRAM	9
4.3 ENVIRONMENTAL CONDITIONS	9
4.4 TEST RECEIVER SETUP	10
4.5 SUMMARY OF TEST RESULTS/PLOTS	10
4.6 CONDUCTED EMISSIONS TEST DATA	10
5. RADIATED EMISSIONS	13
5.1 STANDARD APPLICABLE	13
5.2 TEST PROCEDURE	13
5.3 CORRECTED AMPLITUDE & MARGIN CALCULATION	15
5.4 ENVIRONMENTAL CONDITIONS	15
5.5 SUMMARY OF TEST RESULTS/PLOTS	15
6. OUT OF BAND EMISSIONS	19
6.1 STANDARD APPLICABLE	19
6.2 TEST PROCEDURE	19
6.3 ENVIRONMENTAL CONDITIONS	19
6.4 SUMMARY OF TEST RESULTS/PLOTS	19
7. FREQUENCY STABILITY	21
7.1 STANDARD APPLICABLE	21
7.2 TEST PROCEDURE	21
7.3 ENVIRONMENTAL CONDITIONS	21
7.4 SUMMARY OF TEST RESULTS/PLOTS	21
8. EMISSION BANDWIDTH	23
8.1 APPLICABLE STANDARD	23
8.2 TEST PROCEDURE	23
8.3 ENVIRONMENTAL CONDITIONS	23
8.4 SUMMARY OF TEST RESULTS/PLOTS	23

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: Honeywell Integrated Technology(China) Co.,LTD
 Address of applicant: 430 Li Bing Road, Shanghai ,P.R. China

Manufacturer: Honeywell S.r.l.
 Address of manufacturer: Via PHILIPS 12, 20052, MONZA- ITALY

General Description of EUT	
Product Name:	Tema-Voyager TM Compact
Trade Name:	Honeywell
Model No.:	VCU-X3YYYYEN1N01
Adding Model(s):	VCU-X2YYYYEN1N01 <i>X=0,A,B,C size of the cardholder Capacity; YYYY=color of the enclosure and may be any color of the RAL table</i>
Rated Voltage:	DC12V From Power Supply
Power Adapter Model:	RTU Q03 I/P: AC 120V/60Hz; O/P: DC 12V
<i>Note: The test data is gathered from a production sample, provided by the manufacturer.</i>	

Technical Characteristics of EUT	
Frequency Range:	13.56MHz, 125KHz
Radiated H-Field:	51.7 dBuV/m@3m(13.56MHz) 54.71dBuV/m@3m(125KHz)
Type of Modulation:	FSK
No. of Channel	2
Type of Antenna:	Coil Antenna

1.2 Test Standards

The following report is prepared on behalf of the Honeywell Integrated Technology(China) Co.,LTD in accordance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.225 of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.225 rules.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission/immunity, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard for Testing Unlicensed Wireless Devices, and ANSI C63.4-2014, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

1.4 Test Facility

FCC – Registration No.: 934118

Shenzhen SEM.Test Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files and the Registration is 934118.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Shenzhen SEM.Test Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

CNAS Registration No.: L4062

Shenzhen SEM.Test Technology Co., Ltd. is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L4062. All measurement facilities used to collect the measurement data are located at 1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road, Bao'an District, Shenzhen, P.R.C (518101).

1.5 EUT Setup and Test Mode

The EUT was operated in the continuous transmitting mode that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	Transmitting	/

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
RJ45 Cable*2	3.0	Shielded	Without Ferrite
AC Cable	1.3	Unshielded	Without Ferrite
Signal Cable	1.8	Unshielded	Without Ferrite

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
Notebook	Lenovo	E23	/
Power Supply	Honeywell	RTU Q03	/

1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
Frequency Deviation	2.3%	± 5%
Transmitter Spurious Emissions	Radiated	± 5.1dB

1.7 Test Equipment List and Details

No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due Date
SEMT-1072	Spectrum Analyzer	Agilent	E4407B	MY41440400	2016-06-04	2017-06-03
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2016-06-04	2017-06-03
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2016-06-04	2017-06-03
SEMT-1008	Amplifier	Agilent	8447F	3113A06717	2016-06-04	2017-06-03
SEMT-1043	Amplifier	C&D	PAP-1G18	2002	2016-06-04	2017-06-03
SEMT-1011	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2016-06-04	2017-06-03
SEMT-1042	Horn Antenna	ETS	3117	00086197	2016-06-04	2017-06-03
SEMT-1069	Loop Antenna	Schwarz beck	FMZB 1516	9773	2016-06-04	2017-06-03
SEMT-1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2016-06-04	2017-06-03
SEMT-1003	L.I.S.N	Schwarz beck	NSLK8126	8126-224	2016-06-04	2017-06-03
SEMT-1002	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2016-06-04	2017-06-03

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§15.203	Antenna Requirement	Compliant
§15.205	Restricted Band of Operation	Compliant
§ 15.207(a)	Conducted Emission	Compliant
§15.209	Radiated Emission Limit	Compliant
§15.225(a)	Field Strength	Compliant
§15.225(b)(c)	Out of Band Emission	Compliant
§15.225(e)	Frequency Stability	Compliant
§ 15.215(c)	Emission Bandwidth	Compliant

N/A: not applicable

3. Antenna Requirement

3.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.2 Test Result

This product has an integral Coil antenna and a PCB Coil antenna, fulfill the requirement of this section.


4. Conducted Emissions

4.1 Test Procedure

The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

4.2 Basic Test Setup Block Diagram

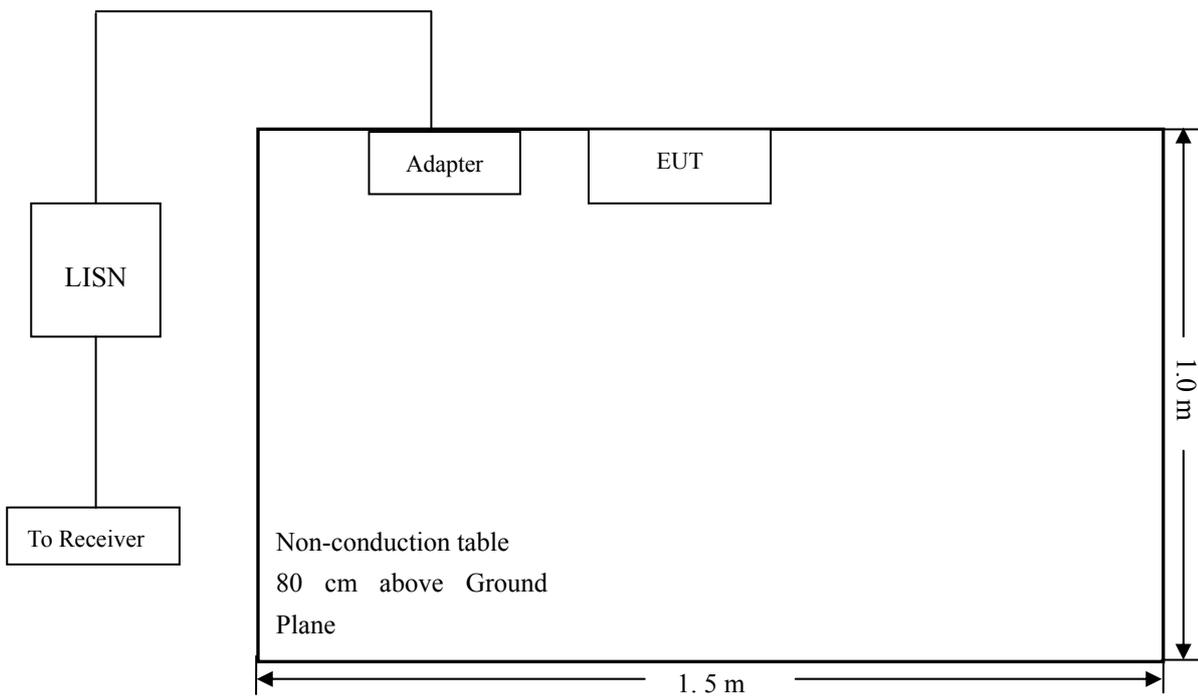

4.3 Environmental Conditions

Temperature:	25 °C
Relative Humidity:	52%
ATM Pressure:	1012 mbar

4.4 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency 150 kHz
Stop Frequency..... 30 MHz
Sweep Speed Auto
IF Bandwidth..... 10 kHz
Quasi-Peak Adapter Bandwidth 9 kHz
Quasi-Peak Adapter Mode Normal

4.5 Summary of Test Results/Plots

According to the data in section 4.6, the EUT complied with the FCC Part 15.207 Conducted margin for this device, with the *worst* margin reading of:


-0.92 dB at 8.4660 MHz in the Line, Average detector, 0.15-30MHz

4.6 Conducted Emissions Test Data

Plot of Conducted Emissions Test Data


EUT: *Tema-Voyager TM Compact*
 Tested Model: *VCU-X3YYYYEN1N01*
 Operating Condition: *TM1*
 Comment: *AC 120V/60Hz; Power Supply DC 12V*

Test Specification: *Neutral*

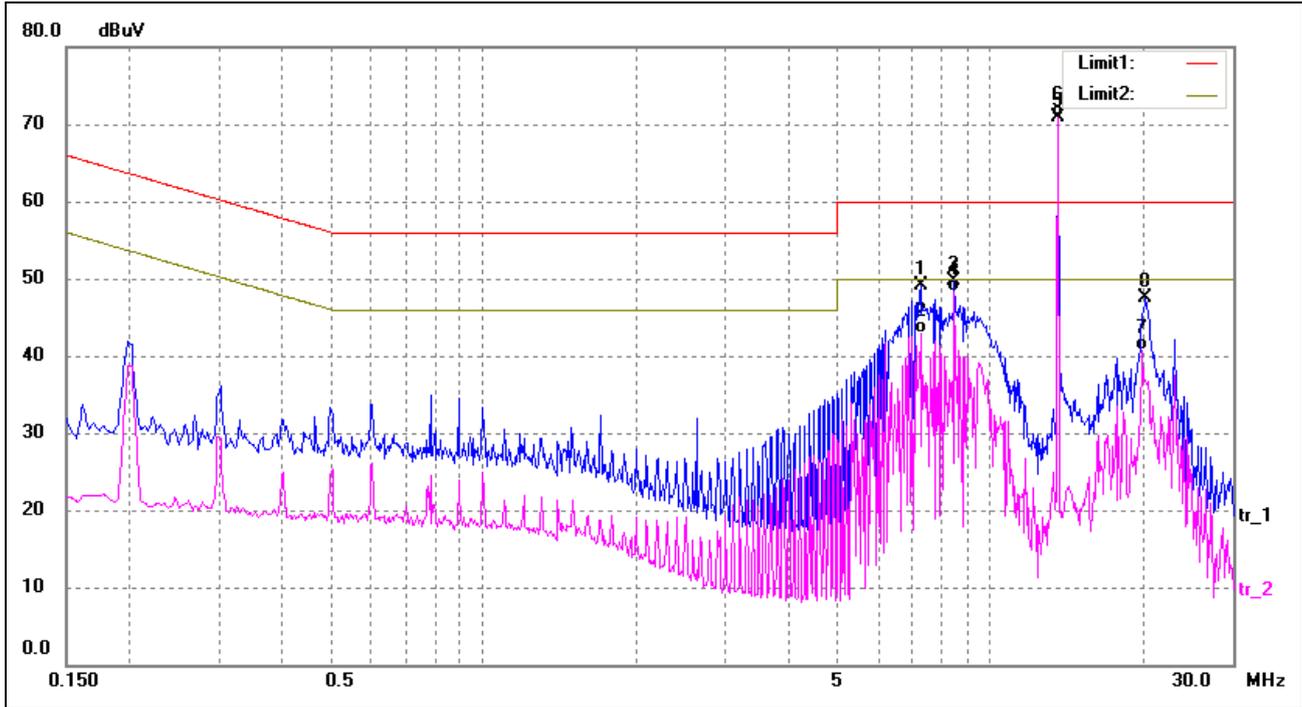

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	7.2580	38.86	10.29	49.15	60.00	-10.85	peak
2	7.2580	32.66	10.29	42.95	50.00	-7.05	AVG
3	8.4660	39.37	10.32	49.69	60.00	-10.31	peak
4	8.4660	38.06	10.32	48.38	50.00	-1.62	AVG
5X	13.5580	60.56	10.40	70.96	/	/	Fundamental
6*	13.5580	60.54	10.40	70.94	/	/	
7	19.9220	30.31	10.46	40.77	50.00	-9.23	AVG
8	20.1700	37.02	10.46	47.48	60.00	-12.52	peak

Test Specification: Line

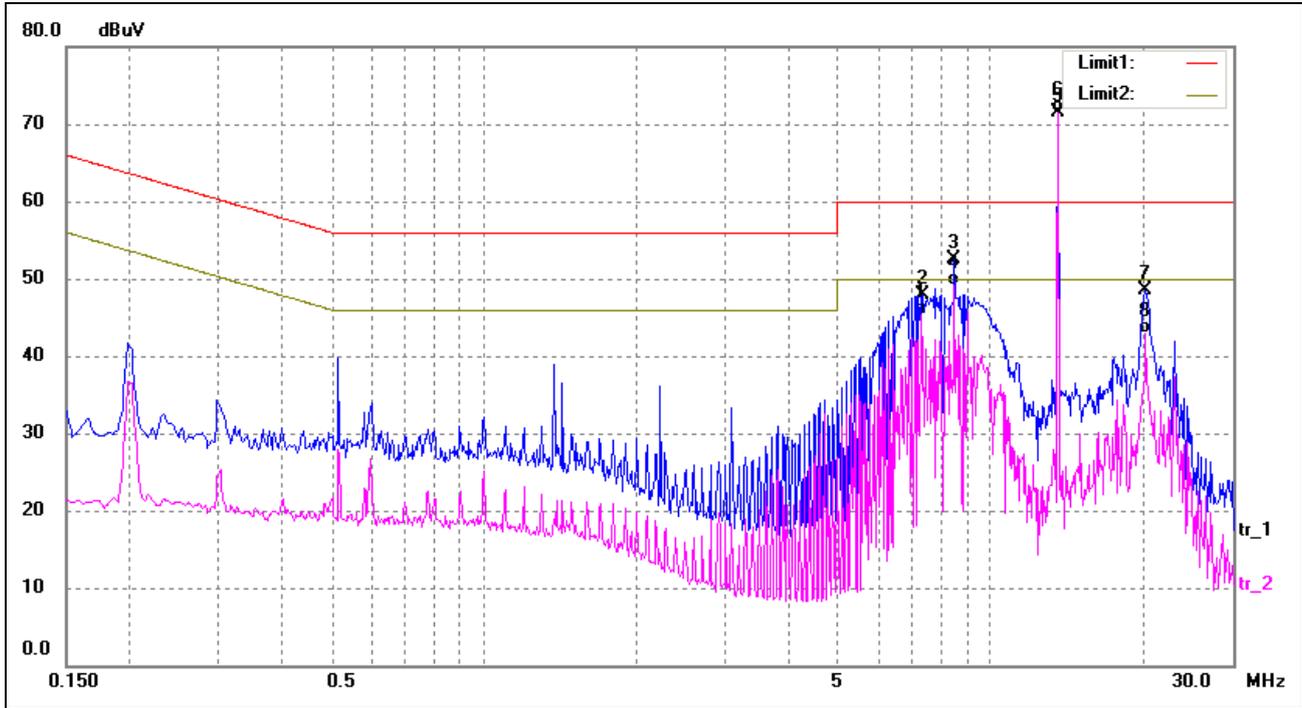

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	7.3060	34.97	10.30	45.27	50.00	-4.73	AVG
2	7.3620	37.61	10.30	47.91	60.00	-12.09	peak
3	8.4660	42.21	10.32	52.53	60.00	-7.47	peak
4	8.4660	38.76	10.32	49.08	50.00	-0.92	AVG
5X	13.5580	61.16	10.40	71.56	/	/	Fundamental
6*	13.5580	61.10	10.40	71.50	/	/	
7	20.1260	38.13	10.46	48.59	60.00	-11.41	peak
8	20.2500	32.42	10.46	42.88	50.00	-7.12	AVG

5. Radiated Emissions

5.1 Standard Applicable

According to §15.225(a), The field strength of any emissions within the band 13.553–13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.

According to §15.225(d) The field strength of any emissions which appear outside of this band shall not exceed the general radiated emission limits in §15.209.

Frequency of emission [MHz]	Field strength [microvolts/meter]	Measurement distance [meters]
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3



Note: Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.

5.2 Test Procedure

The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC Part 15.205 15.225(d) and FCC Part 15.209 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

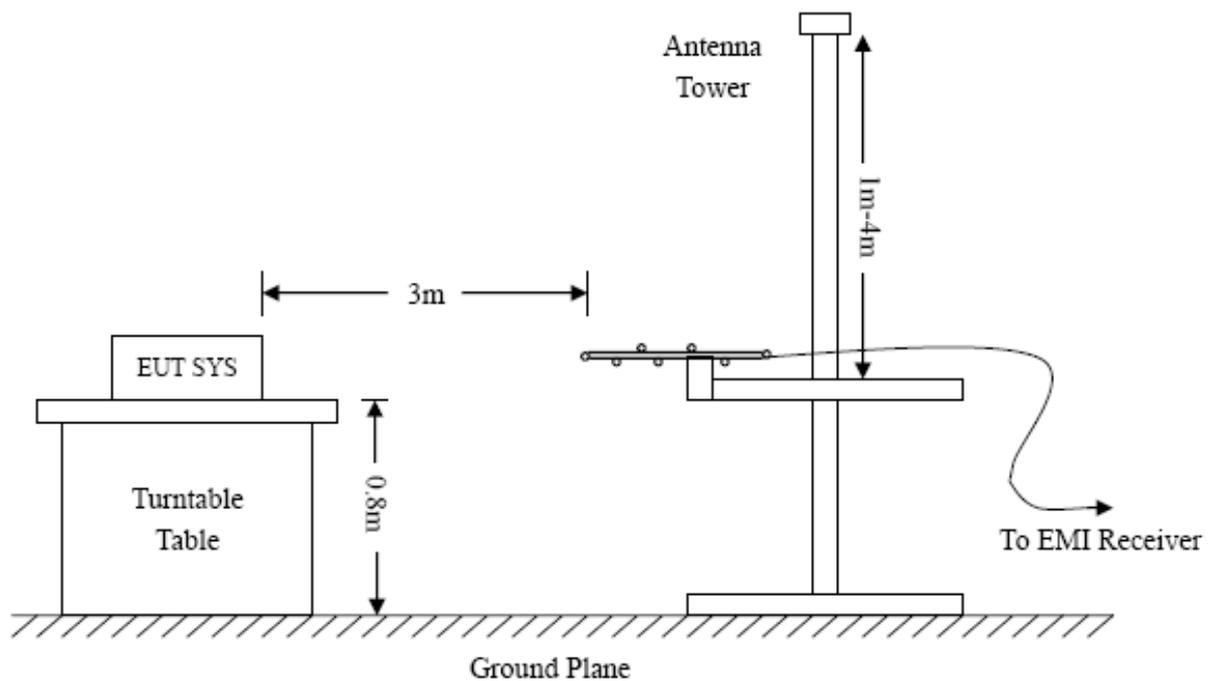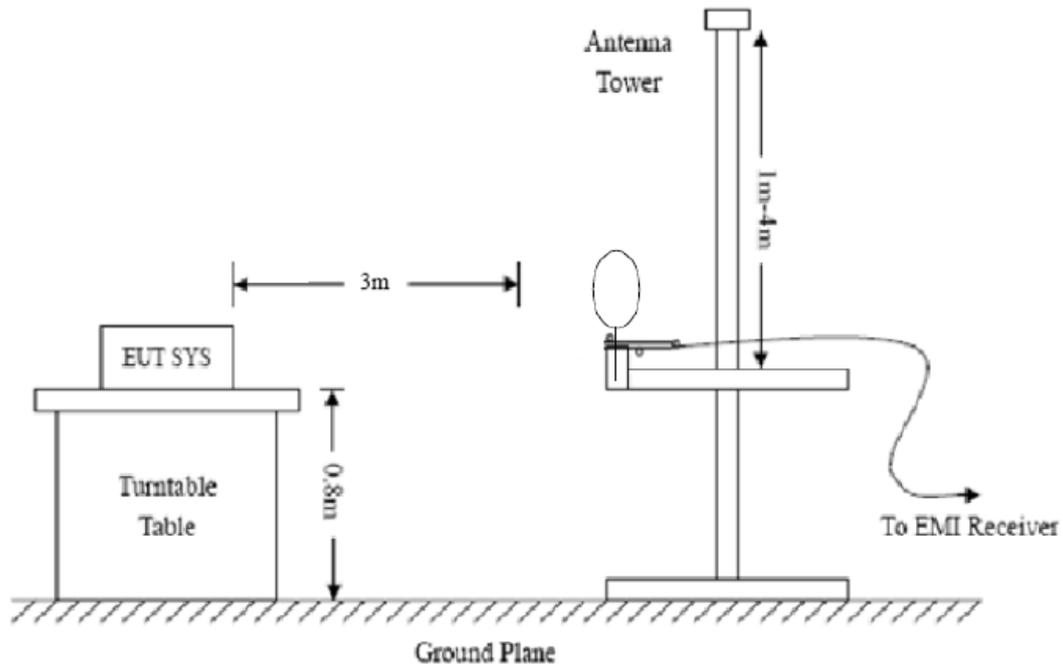

Frequency :9kHz-30MHz

RBW=10KHz,

VBW =30KHz

Sweep time= Auto

Trace = max hold

Detector function = peak

Frequency :30MHz-1GHz

RBW=120KHz,

VBW=300KHz

Sweep time= Auto

Trace = max hold

Detector function = peak, QP

5.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} - \text{Corr. Factor}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB μ V means the emission is 6dB μ V below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$

5.4 Environmental Conditions

Temperature:	26° C
Relative Humidity:	52%
ATM Pressure:	1022 mbar

5.5 Summary of Test Results/Plots


According to the data below, the FCC Part 15.205, 15.209 and 15.225 standards, and had the worst margin of:

Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.

Test plot

Spurious Emission Below 30MHz


Test Mode: Transmitting mode

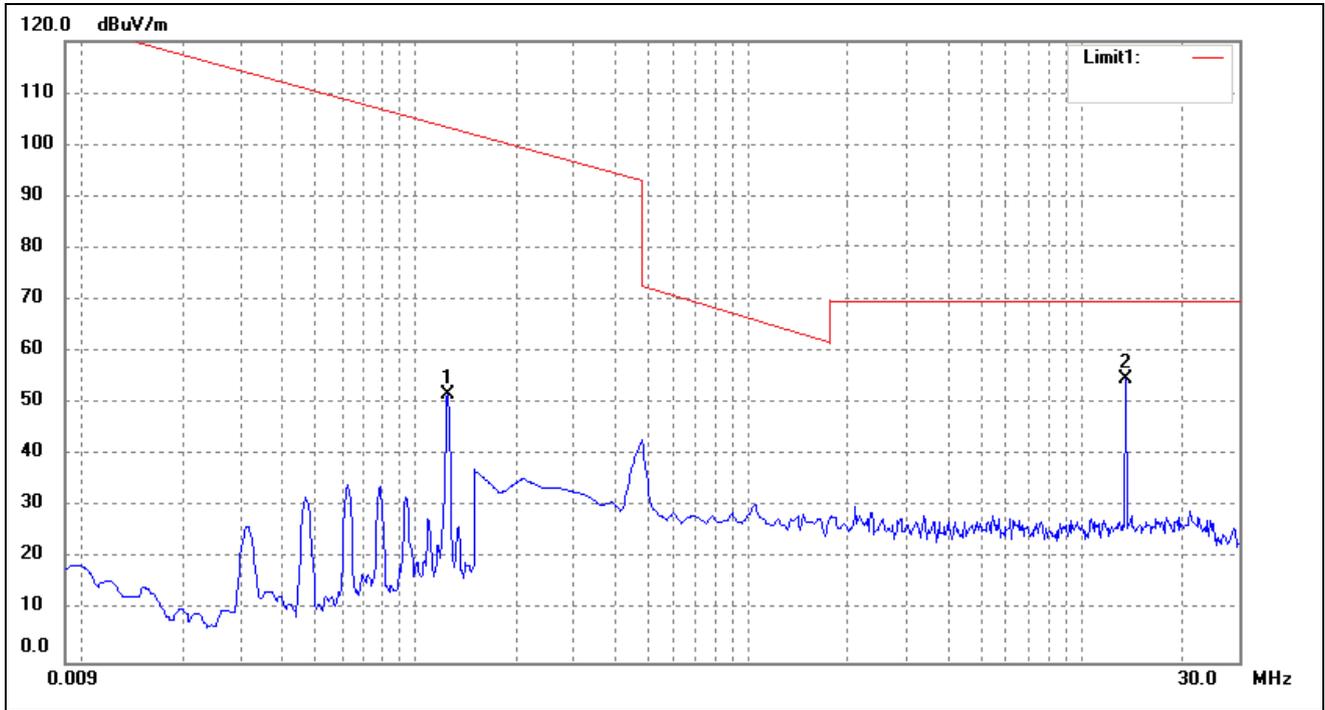

No.	Frequency (MHz)	Reading (dBm)	Correct (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	0.1250	51.62	0.09	51.71	105.67	-53.96	ERP
2	13.5600	57.24	-2.53	54.71	69.50	-14.79	ERP


Plot of Radiated Emissions Test Data

EUT: *Tema-Voyager TM Compact*
 Tested Model: *VCU-X3YYYYEN1N01*
 Operating Condition: *TM1*
 Comment: *AC 120V/60Hz; Power Supply DC12V*
 Test Specification: *Horizontal*

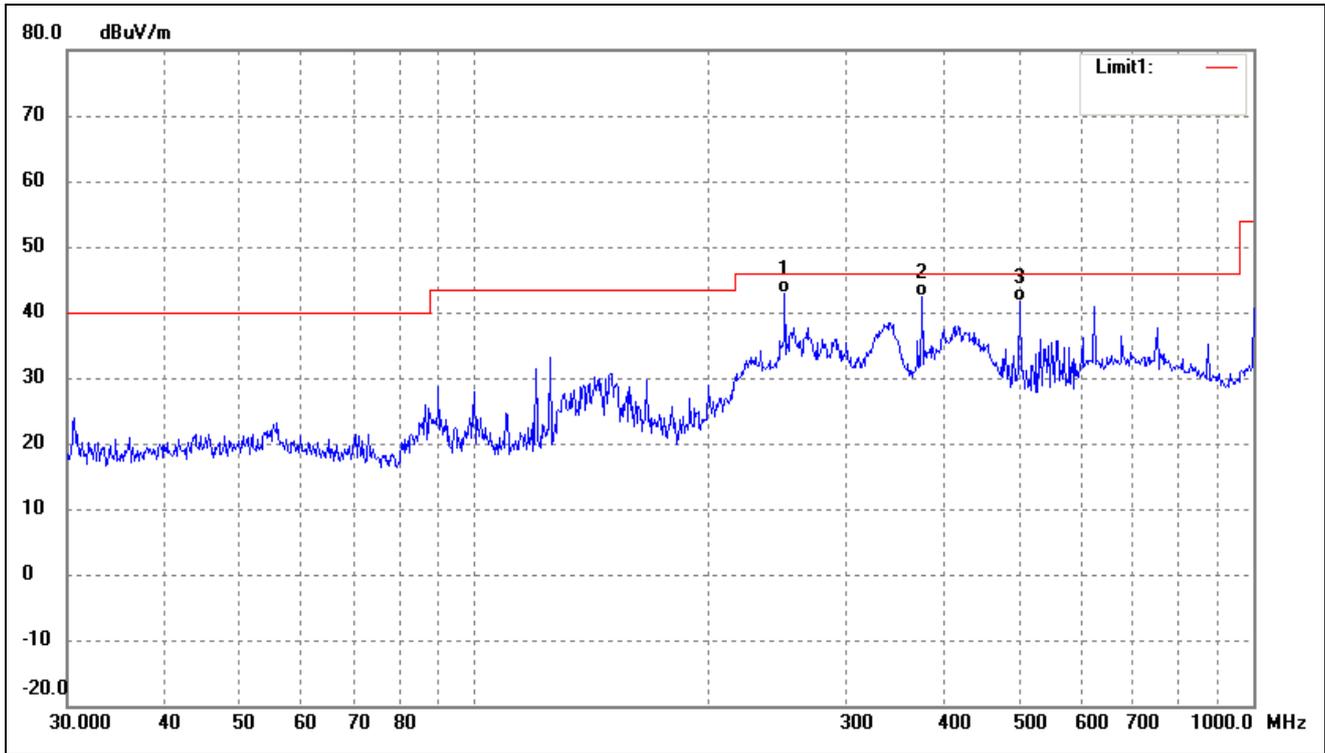

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	250.3012	33.44	9.32	42.76	46.00	-3.24	246	100	QP
2	375.9385	30.59	11.81	42.40	46.00	-3.60	186	100	QP
3	501.1790	28.26	13.37	41.63	46.00	-4.37	360	100	QP

Test Specification: Vertical

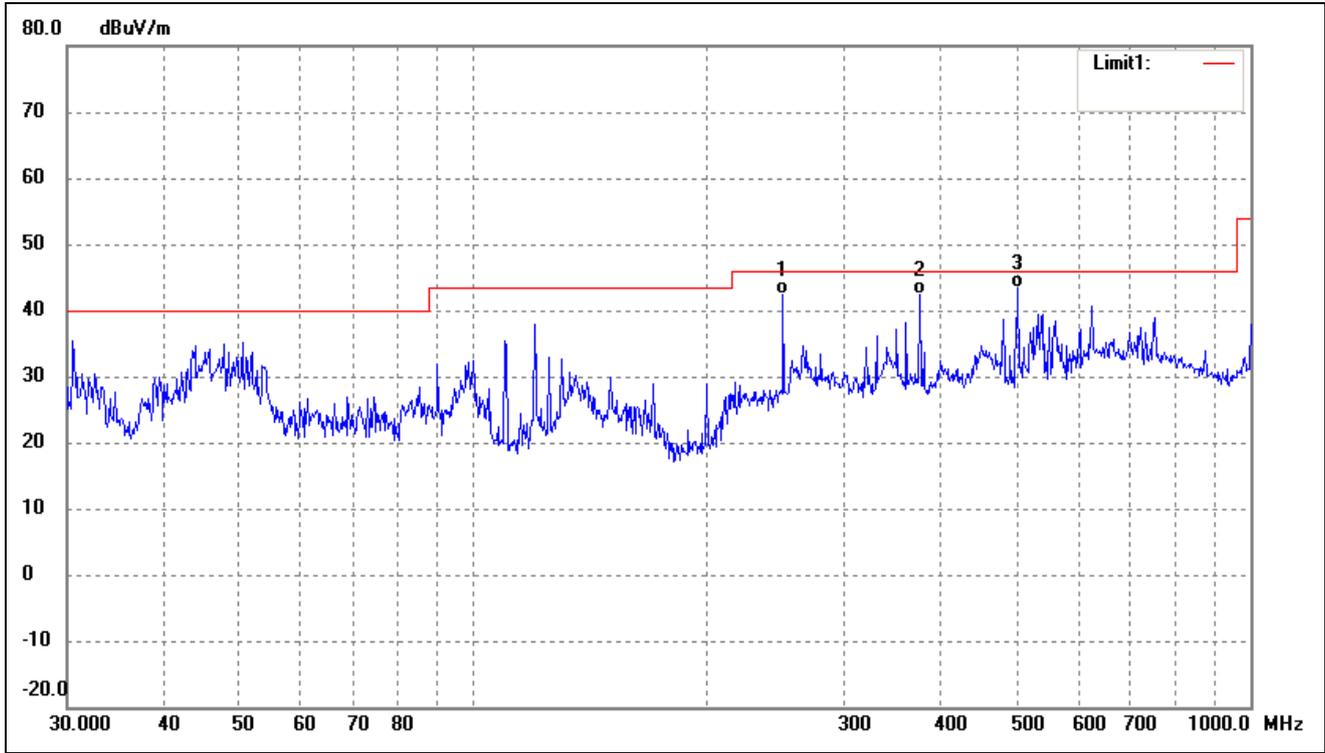

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	250.3012	33.16	9.32	42.48	46.00	-3.52	251	100	QP
2	375.9385	30.64	11.81	42.45	46.00	-3.55	355	100	QP
3	501.1790	29.96	13.37	43.33	46.00	-2.67	138	100	QP

6. OUT OF BAND EMISSIONS

6.1 Standard Applicable

According to FCC 15.225 (b) Within the bands 13.410–13.553 MHz and 13.567–13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters. (c) Within the bands 13.110–13.410 MHz and 13.710–14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.

6.2 Test Procedure


As the radiation test, set the RBW=10kHz VBW=30kHz, observed the outside band of 13.11MHz to 14.01MHz, than mark the higher-level emission for comparing with the FCC rules.

6.3 Environmental Conditions

Temperature:	26° C
Relative Humidity:	57%
ATM Pressure:	1022 mbar

6.4 Summary of Test Results/Plots

Out of band emission

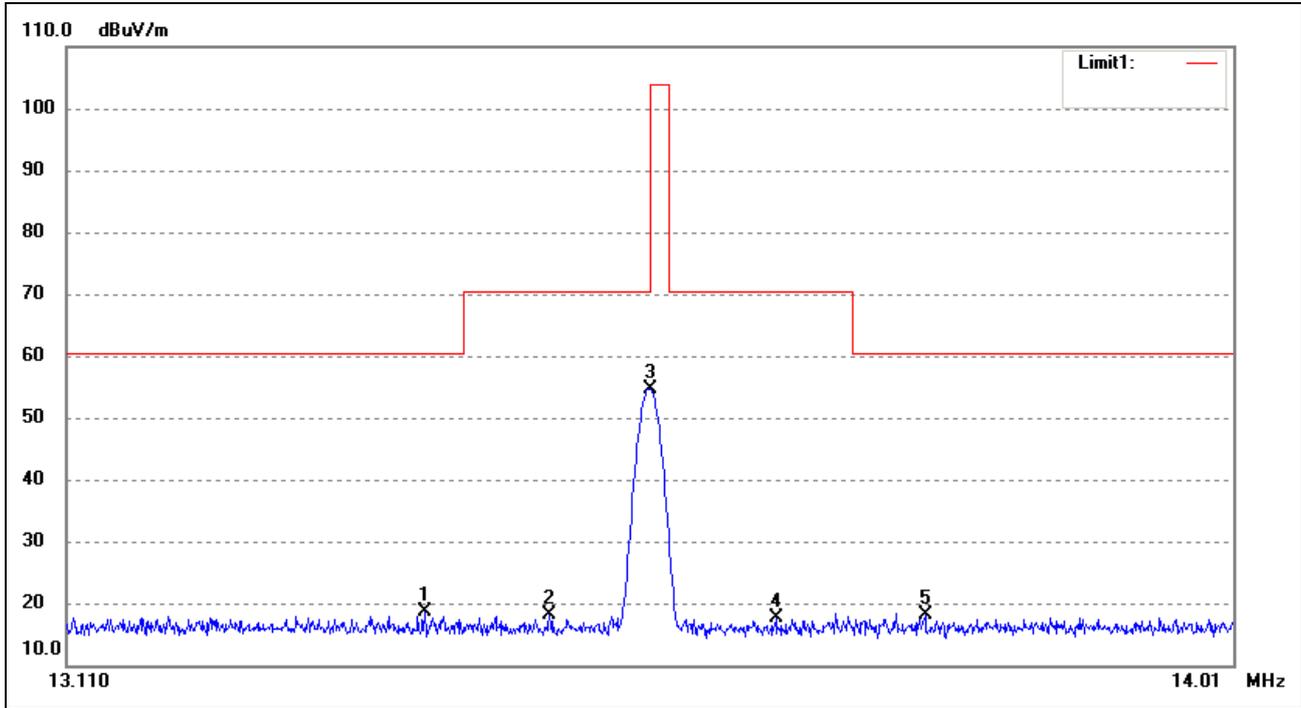

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	13.3800	5.98	12.57	18.55	60.50	-41.95	351	100	peak
2	13.4754	5.55	12.57	18.12	70.50	-52.38	351	100	peak
3	13.5525	42.16	12.56	54.72	70.50	-15.78	351	100	peak
4	13.6501	5.09	12.56	17.65	70.50	-52.85	351	100	peak
5	13.7666	5.67	12.56	18.23	60.50	-42.27	351	100	peak

7. Frequency Stability

7.1 Standard Applicable

According to 15.225(e) The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency over a temperature variation of -20 degrees to $+50$ degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

7.2 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure.

7.3 Environmental Conditions

Relative Humidity:	55%
ATM Pressure:	1015 mbar

7.4 Summary of Test Results/Plots

Reference Frequency: 13.56MHz, Limit: 100ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Error	
		Error (Hz)	Error (ppm)
50	12	163	12.02
40	12	142	10.47
30	12	129	9.51
20	12	106	7.82
10	12	95	7.01
0	12	71	5.26
-10	12	54	3.98
-20	12	25	1.84

Reference Frequency: 13.56MHz, Limit: 100ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Error	
		Error (Hz)	Error (ppm)
20	10.8	98	7.23
	12	106	7.82
	13.2	110	8.11

8. EMISSION BANDWIDTH

8.1 Applicable Standard

According to FCC 15.225 (b), the upper and lower frequency limits of the emission bandwidth shall at all times remain within the operating frequency limits, and the maximum emission bandwidth is no restricted.

8.2 Test Procedure

Test is conducting under the description of FCC 15.225 (b)

8.3 Environmental Conditions


Temperature:	26 °C
Relative Humidity:	45%
ATM Pressure:	1019 mbar

8.4 Summary of Test Results/Plots


Tx Frequency	99% Emission bandwidth
125 kHz	19.1946kHz
13.56MHz	18.1154kHz

Please refer to the test plots as below:

125 kHz

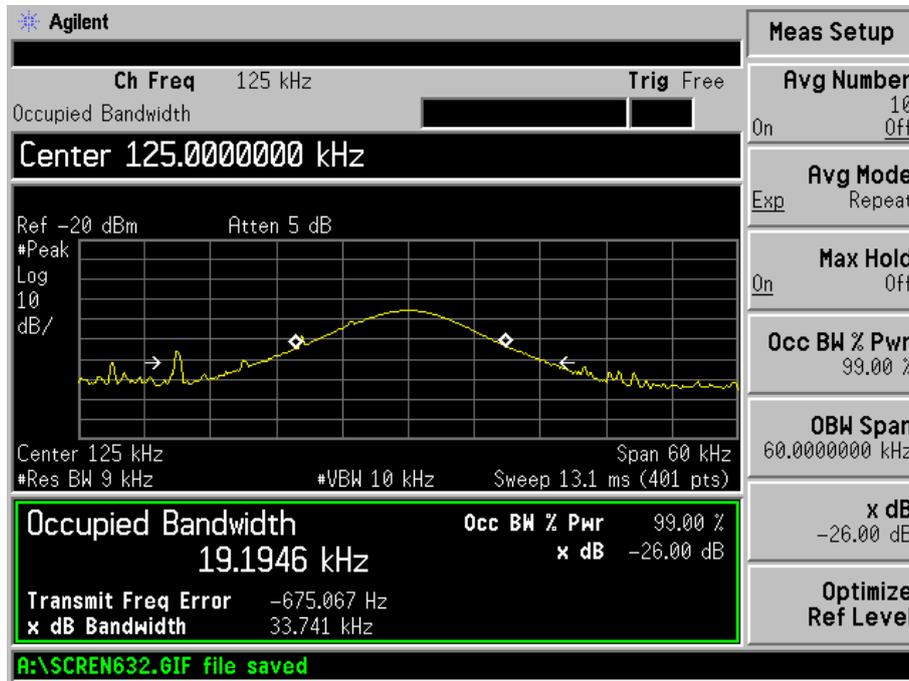

13.56 MHz

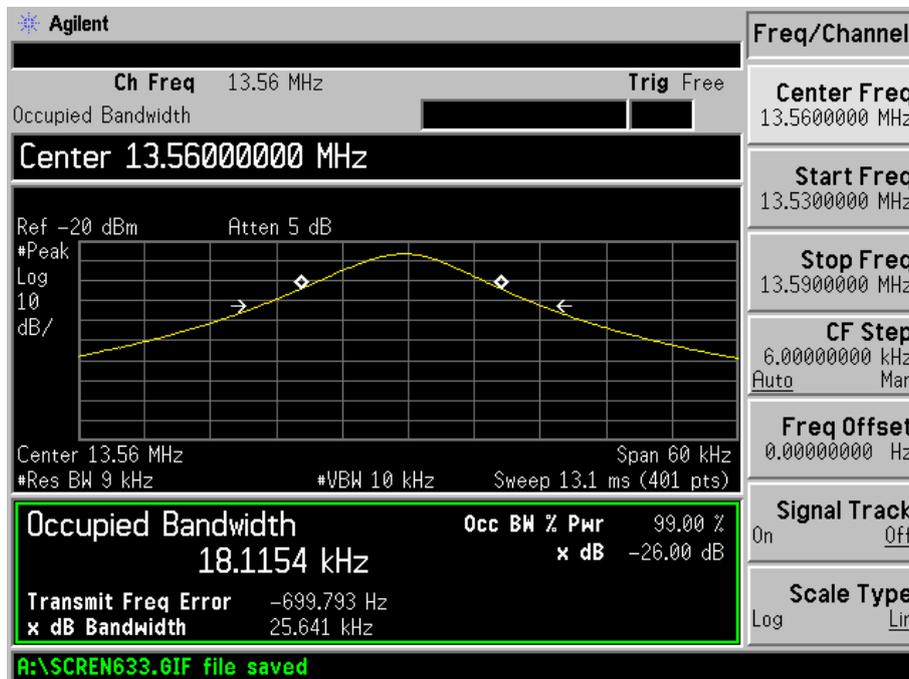

***** END OF REPORT *****