



# FCC Test Report

## Part 15 subpart C

### Client Information:

Applicant: TCL Air conditioner (Zhong Shan) Co.,Ltd.

Applicant add.: N0.59.Nantou Road West, Nantou Town Zhongshan City, Guangdong P.R. China

Manufacturer: TCL Air conditioner (Zhong Shan) Co.,Ltd.

Manufacturer add.: N0.59.Nantou Road West, Nantou Town Zhongshan City, Guangdong P.R. China

### Product Information:

EUT Name: Windows Type Air-condition

Model No.: TWAC-15CRA1/K8U(ES), TWAC-24CRA2/J3U(ES)

Brand Name: N/A

FCC ID: 2AJCLETWAC-TUWF

Standards: FCC PART 15 Subpart C: 2017 section 15.247

Prepared By:

### UL-CCIC Company Limited

Add. : Electronic Building, Parage Electronic Industrial Park, No. 8 Nanyun Er Road, Guangzhou Science Park, Guangzhou, 510663 China

Date of Receipt: May. 05, 2017

Date of Test: May. 05~ July. 09, 2017

Date of Issue: July. 10, 2017

Test Result: Pass

This device described above has been tested by BZT, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of UL-CCIC Company Limited.

Reviewed by: *Em Shan*

Approved by: *Linda Ni*



<b>Table of Contents</b>	<b>Page</b>
<b>1. SUMMARY OF TEST RESULTS</b>	<b>4</b>
1.1 TEST FACTORY	5
1.2 MEASUREMENT UNCERTAINTY	5
<b>2. GENERAL INFORMATION</b>	<b>6</b>
2.1 GENERAL DESCRIPTION OF EUT	6
2.2 DESCRIPTION OF TEST MODES	8
2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	9
2.4 DESCRIPTION OF SUPPORT UNITS	10
2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	11
<b>3. EMC EMISSION TEST</b>	<b>13</b>
3.1 CONDUCTED EMISSION MEASUREMENT	13
3.2 RADIATED EMISSION MEASUREMENT	17
<b>4. CONDUCTED SPURIOUS &amp; BAND EDGE EMISSION</b>	<b>27</b>
4.1 APPLIED PROCEDURES / LIMIT	27
4.2 TEST PROCEDURE	27
4.3 DEVIATION FROM STANDARD	27
4.4 TEST SETUP	27
4.5 EUT OPERATION CONDITIONS	27
4.6 TEST RESULTS	28
<b>5. POWER SPECTRAL DENSITY TEST</b>	<b>37</b>
5.1 APPLIED PROCEDURES / LIMIT	37
5.2 TEST PROCEDURE	37
5.3 DEVIATION FROM STANDARD	37
5.4 TEST SETUP	37
5.5 EUT OPERATION CONDITIONS	37
5.6 TEST RESULTS	38
<b>6. BANDWIDTH TEST</b>	<b>44</b>
6.1 APPLIED PROCEDURES / LIMIT	44
6.2 TEST PROCEDURE	44
6.3 DEVIATION FROM STANDARD	44
6.4 TEST SETUP	44
6.5 EUT OPERATION CONDITIONS	44



<b>Table of Contents</b>	<b>Page</b>
6.6 TEST RESULTS	45
<b>7. PEAK OUTPUT POWER TEST</b>	<b>51</b>
7.1 APPLIED PROCEDURES / LIMIT	51
7.2 TEST PROCEDURE	51
7.3 DEVIATION FROM STANDARD	51
7.4 TEST SETUP	51
7.5 EUT OPERATION CONDITIONS	51
7.6 TEST RESULTS	52
<b>8. ANTENNA REQUIREMENT</b>	<b>53</b>
8.1 STANDARD REQUIREMENT	53
8.2 EUT ANTENNA	53
<b>APPENDIX - PHOTOS OF TEST SETUP</b>	<b>54</b>



## 1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:  
KDB 558074 D01 DTS Meas Guidance v04

<b>FCC Part 15.247, Subpart C</b>			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	
15.247 (a)(2)	6dB Bandwidth	PASS	
15.247 (b)(3)	Output Power	PASS	
15.247 (c)	Radiated Spurious Emission	PASS	
15.247 (d)	Conducted Spurious & Band Edge Emission	PASS	
15.247 (e)	Power Spectral Density	PASS	
15.205	Restricted Band Edge Emission	PASS	
Part 15.247(d)/part 15.209(a)	Band Edge Emission	PASS	
15.203	Antenna Requirement	PASS	

### NOTE:

(1) "N/A" denotes test is not applicable in this Test Report

(2) all tests are according to ANSI C63.10-2013 .



### 1.1 TEST FACTORY

BZT Testing Technology Co., Ltd.

Add. : Buliding 17, Xinghua Road Xingwei industrial Park Fuyong,  
Baoan District, Shenzhen,Guangdong,China

FCC Registration No.: 701733

### 1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission (9KHz-150KHz)	$\pm 2.88\text{dB}$
2	Conducted Emission (150KHz-30MHz)	$\pm 2.67\text{dB}$
3	RF power,conducted	$\pm 0.70\text{dB}$
4	Spurious emissions,conducted	$\pm 1.19\text{dB}$
5	All emissions,radiated(<30M) (9KHz-30MHz)	$\pm 2.45\text{dB}$
6	All emissions,radiated(<1G) 30MHz-200MHz	$\pm 2.83\text{dB}$
7	All emissions,radiated(<1G) 200MHz-1000MHz	$\pm 2.94\text{dB}$
8	All emissions,radiated(>1G)	$\pm 3.03\text{dB}$
9	Temperature	$\pm 0.5^{\circ}\text{C}$
10	Humidity	$\pm 2\%$



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	Windows Type Air-condition	
Trade Name	N/A	
Model Name	TWAC-15CRA1/K8U(ES), TWAC-24CRA2/J3U(ES)	
Series Model	TWAC-06CRA1/L1U(ES), TWAC-08CRA1/L0U(ES), TWAC-10CRA1/L0U(ES), TWAC-12CRA1/L0U(ES), TWAC-15CRA1/K8U(ES), TWAC-18CRA2/K8U(ES), TWAC-22CRA2/J3U(ES), TWAC-24CRA2/J3U(ES), TWAC-05CRA1/K0U	
Model Difference	All types of electronic circuit and WIFI module are the same, the difference is compressor and motor(The motor and compressor are different from the winding of the motor to change their different input voltages).The input voltage is divided into two ways, one way to the linear transformer to supply the main board, and the other way to the main board's electronic relays control the compressor and motor.	
Product Description	The EUT is a Windows Type Air-condition	
	Operation Frequency:	802.11b/g/n 20: 2412~2462 MHz
	Modulation Type:	CCK/BPSK/QPSK/16QAM/64QAM
	Bit Rate of Transmitter:	802.11b:11/5.5/2/1 Mbps 802.11g:54/48/36/24/18/12/9/6 Mbps 802.11n(20MHz): 65/58.5/52/39/26/19.5/13/6.5 Mbps
	Number Of Channel:	802.11b/g/n20: 11CH
	Antenna Designation:	Please see Note 3.
	Antenna Gain (dBi):	0 dbi
	Duty Cycle:	>98%
Channel List	Please refer to the Note 2.	
Power rating	AC 120V	
Hardware version number	V1.1	
Software version number	V1.1.0	
Connecting I/O Port(s)	Please refer to the User's Manual	

Note:



1 For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2

Operation Frequency of channel	
802.11b/g/n(20MHz)	
Channel	Frequency
01	2412
02	2417
03	2422
04	2427
05	2432
06	2437
07	2442
08	2447
09	2452
10	2457
11	2462

3 Note:  
 In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:  
 Carrier Frequency Channel

2.4GHz Test Frequency:

For 802.11b/g/n (HT20)	
Channel	Freq.(MHz)
01	2412
06	2437
11	2462

4

Ant	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	NOTE
1	N/A	TWAC-15CRA1/K8U(ES), TWAC-24CRA2/J3U(ES)	integral Antenna	N/A	0	WIFI Antenna

5 The output power setting of EUT is set in the factory and followed the max. peak level in below:

Operating Mode	Test Channel	Output Power/dBm
802.11b	01	16.32
	06	15.75
	11	15.38
802.11g	01	14.32
	06	14.83
	11	14.71
802.11n (HT20)	01	12.65
	06	12.46
	11	12.33



## 2.2 DESCRIPTION OF TEST MODES

Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Worst Mode	Description	Data Rate
Mode 1	TX IEEE 802.11b CH1	1 Mbps
Mode 2	TX IEEE 802.11b CH6	1 Mbps
Mode 3	TX IEEE 802.11 b CH11	1 Mbps
Mode 4	TX IEEE 802.11g CH1	6 Mbps
Mode 5	TX IEEE 802.11g CH6	6 Mbps
Mode 6	TX IEEE 802.11g CH11	6 Mbps
Mode 7	TX IEEE 802.11n HT20 CH1	MCS 0
Mode 8	TX IEEE 802.11n HT20 CH6	MCS 0
Mode 9	TX IEEE 802.11n HT20 CH11	MCS 0

Note:

- (1) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported
- (2) We have be tested for all avaiable U.S. voltage and frequencies(For 120V,50/60Hz and 240V, 50/60Hz) for which the device is capable of operation, and the worst case of 120V,50/60Hz is shown in the report.
- (3) The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is not less than 98%.
- (4) Test soft provided by the client used to control the EUT for staying in continuous transmitting mode is programmed. EUT is connected PC by Wound plate and transmit the control instruction via test software(SecureCRT.v.1.1.1-kg).

### AC Conducted Emission


Test Case	
AC Conducted Emission	Mode10: Keeping WIFI TX






### 2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

#### Radiation Test Set

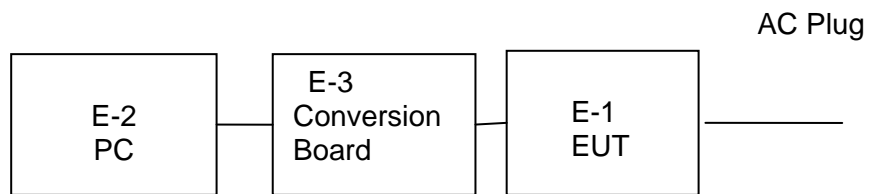

#### Conduction Test Set

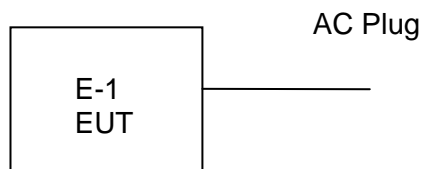



## 2.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Serial No.	Note
E-1	Windows Type Air-condition	N/A	TWAC-15CRA1/K8U(ES), TWAC-24CRA2/J3U(ES)	N/A	EUT
E-2	PC	Acer	N/A	N/A	N/A
E-3	Conversion Board	ZY	N/A	N/A	N/A

Item	Shielded Type	Ferrite Core	Length	Note
C-1	USB Cable (FTP)	NO	100cm	N/A

### Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) “YES” is means “shielded” “with core”; “NO” is means “unshielded” “without core”.



2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation Test equipment

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
EMI Test Receiver	R&S	ESW	101535	2017.06.01	2018.05.31
Bilog Antenna	TESEQ	CBL6111D	34678	2017.03.24	2018.03.23
Horn Antenna	Schwarzbeck	BBHA 9120D	9120D-1343	2017.03.06	2018.03.05
SHF-EHF Horn Antenna (15G-40GHz)	BBHA 9170	SCHWARZBECK	BBHA9170367	2017.05.02	2018.05.01
Temperature & Humidity	HH660	Mieo	N/A	2016.10.25	2017.10.24
Temperature & Humidity	HH660	Mieo	N/A	2016.10.25	2017.10.24
Pre-mpplier (0.1M-3GHz)	EM	EM330	60538	2017.03.12	2018.03.11
PreAmplifier (1G-26.5GHz)	Agilent	8449B	60538	2016.10.23	2017.10.22
Pre-mpplier (18G-40G)	MINI-CIRCUITS	AP-040G	1382501	2017.05.15	2018.05.14
Operational Manual Passive Loop (9K--30MHz)	ETS	6512	00165355	2017.03.06	2018.03.05
Low frequency cable (9K—1GHz)	EM	R01	N/A	2017.03.12	2018.03.11
High frequency cable (1GHz-25GHz)	SCHWARZBECK	R02	N/A	2017.03/12	2018.03.11
Semi-anechoic chamber	Changling	966	N/A	2016.10.23	2017.10.22
trun table	EM	SC100_1	60531	N/A	N/A
Antnna mast	EM	SC100	N/A	N/A	N/A
Max-full Antenna Corp	MF	MFA-440H	N/A	N/A	N/A

**Conduction Test equipment**

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
Test Receiver	R&S	ESCI	101427	2016.10.23	2017.10.22
LISN	R&S	ENV216	101242	2016.10.26	2017.10.25
conduction Cable (150KHz-30MHz)	EM	C01	N/A	2017.03.12	2018.03.11
Temperature & Humidity	Mieo	HH660	N/A	2016.10.23	2017.10.22

**RF Connected Test**

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
USB RF power sensor	DARE	RPR3006W	15I00041SNO03	2016.10.23	2017.10.22
Power Meter	R&S	NRP	100510	2016.10.23	2017.10.22
Spectrum Analyzer	Agilent	E4407B	MY50140340	2017.03.11	2018.03.10
Signal Analyzer	Agilent	N9020A	MY49100060	2017.03.11	2018.03.10
temporary antenna connector	Murrata	MXHS83Q E3000	201941	2017.03.11	2018.03.10

Note: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.



### 3. EMC EMISSION TEST

#### 3.1 CONDUCTED EMISSION MEASUREMENT

##### 3.1.1 POWER LINE CONDUCTED EMISSION LIMITS

operating frequency band. In case the emission fall within the restricted band specified on Part 15. 207(a) limit in the table below has to be followed.

FREQUENCY (MHz)	Conducted Emission limit (dBuV)	
	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.


The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

### 3.1.2 TEST PROCEDURE

- a. The EUT was 0.8 meters from the horizontal ground plane and 0.4 meters from the vertical ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

### 3.1.3 TEST SETUP

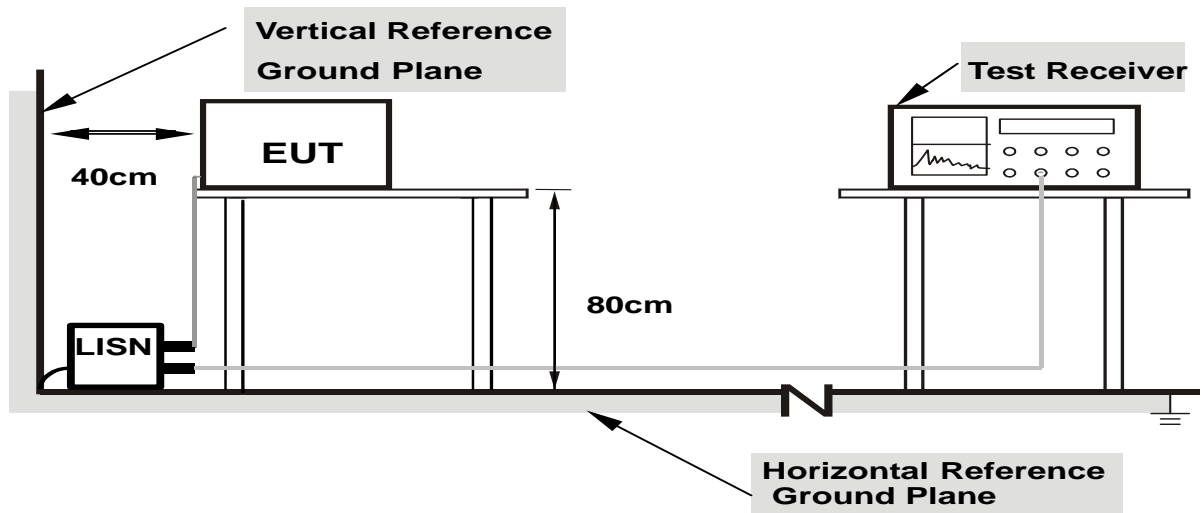

- Note: 1.Support units were connected to second LISN.**  
**2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes**

### 3.1.4 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.




3.1.5 TEST RESULT

Temperature:	23.1 °C	Relative Humidity:	60%
Pressure:	1010hPa	Phase:	L
Test Voltage:	AC 120V/60Hz	Test Mode:	Mode 10

Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
0.1700	24.77	9.23	34.00	64.96	-30.96	QP
0.1700	-0.36	9.23	8.87	54.96	-46.09	AVG
0.2940	23.09	9.14	32.23	60.41	-28.18	QP
0.2940	10.45	9.14	19.59	50.41	-30.82	AVG
0.6060	15.42	9.19	24.61	56.00	-31.39	QP
0.6060	0.64	9.19	9.83	46.00	-36.17	AVG
1.1220	14.57	9.16	23.73	56.00	-32.27	QP
1.1220	-0.25	9.16	8.91	46.00	-37.09	AVG
2.8540	10.92	9.26	20.18	56.00	-35.82	QP
2.8540	-3.05	9.26	6.21	46.00	-39.79	AVG
14.3340	13.38	9.44	22.82	60.00	-37.18	QP
14.3340	-0.82	9.44	8.62	50.00	-41.38	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Margin = Result (Result = Reading + Factor) – Limit

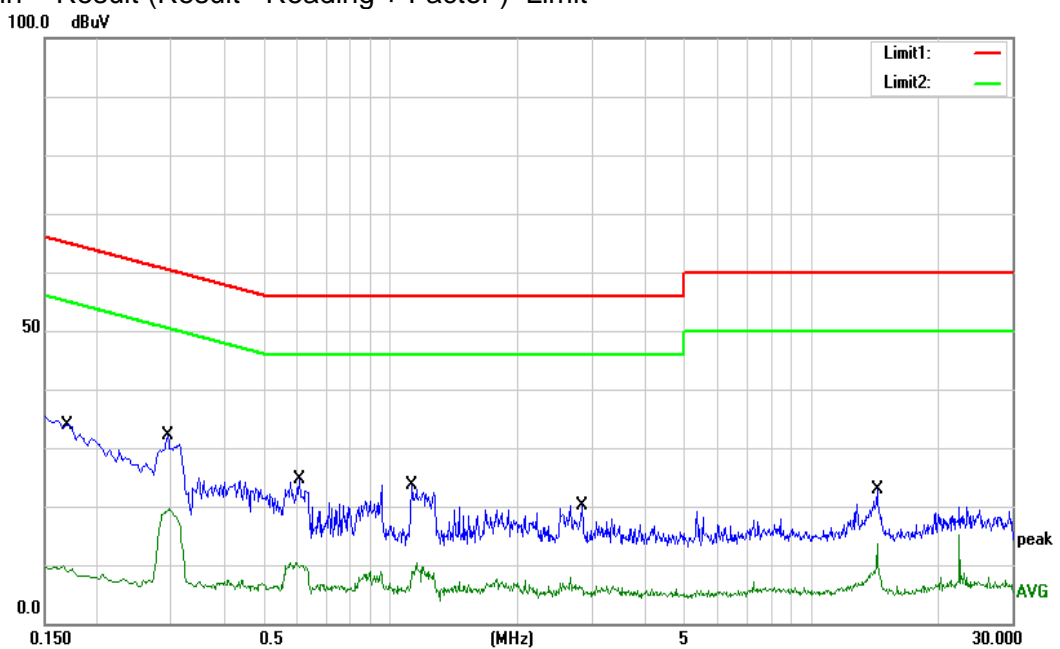




Temperature:	23.1 °C	Relative Humidity:	60%
Pressure:	1010hPa	Phase:	N
Test Voltage:	AC 120V/60Hz	Test Mode:	Mode 10

Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
0.1677	24.62	9.23	33.85	65.07	-31.22	QP
0.1677	-0.39	9.23	8.84	55.07	-46.23	AVG
0.2860	22.91	9.14	32.05	60.64	-28.59	QP
0.2860	10.15	9.14	19.29	50.64	-31.35	AVG
0.5860	14.41	9.18	23.59	56.00	-32.41	QP
0.5860	0.87	9.18	10.05	46.00	-35.95	AVG
1.1220	14.00	9.16	23.16	56.00	-32.84	QP
1.1220	0.00	9.16	9.16	46.00	-36.84	AVG
2.5180	10.90	9.26	20.16	56.00	-35.84	QP
2.5180	-3.22	9.26	6.04	46.00	-39.96	AVG
14.3380	16.94	9.44	26.38	60.00	-33.62	QP
14.3380	0.82	9.44	10.26	50.00	-39.74	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Margin = Result (Result =Reading + Factor )–Limit

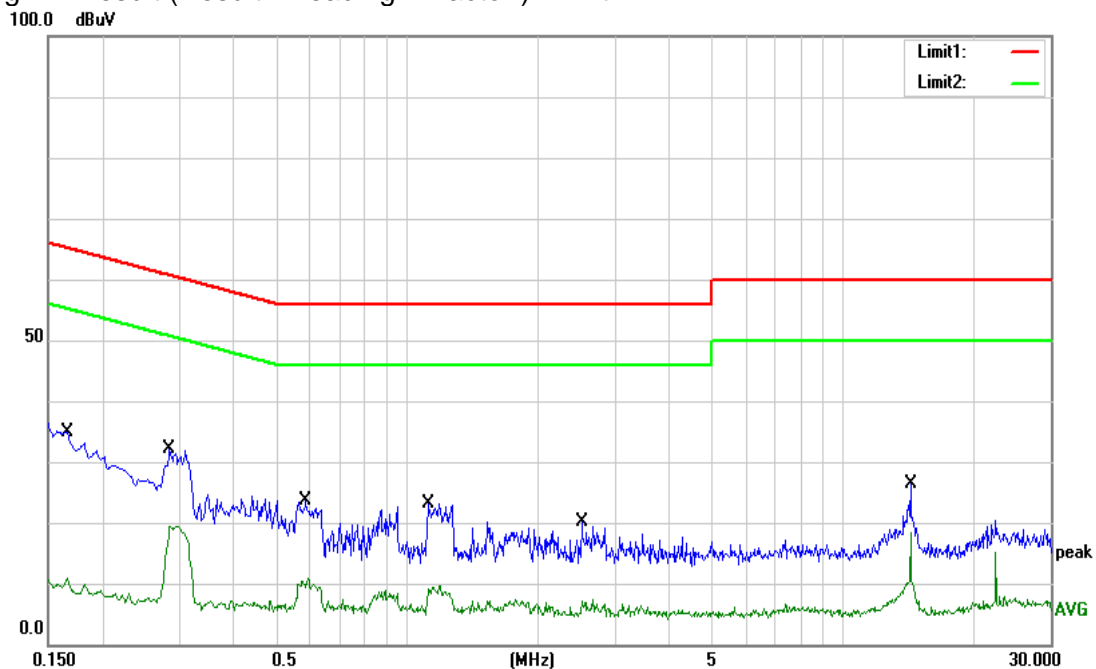





3.2 RADIATED EMISSION MEASUREMENT

3.2.1 RADIATED EMISSION LIMITS

in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the Restricted band specified on Part15.205(a)&209(a) limit in the table and according to ANSI C63.10-2013 below has to be followed.

LIMITS OF RADIATED EMISSION MEASUREMENT (0.009MHz - 1000MHz)

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (1000MHz-25GHz)

FREQUENCY (MHz)	(dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

For Radiated Emission

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak
Start Frequency	1000 MHz(Peak/AV)
Stop Frequency	10th carrier hamonic(Peak/AV)
RB / VB (emission in restricted band)	1 MHz /3MHz



For Band edge

Spectrum Parameter	Setting
Detector	Peak
Start/Stop Frequency	Lower Band Edge: 2300 to 2412 MHz Upper Band Edge: 2462 to 2500 MHz
RB / VB (emission in restricted band)	1 MHz /3MHz

Receiver Parameter	Setting
Start ~ Stop Frequency	9kHz~90kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	90kHz~110kHz / RB 200Hz for QP
Start ~ Stop Frequency	110kHz~490kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	490kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

3.2.2 TEST PROCEDURE


- a. The measuring distance of at 3 m shall be used for measurements at frequency 0.009MHz up to 1GHz, and above 1GHz
- b. The EUT was placed on the top of a rotating table 0.8 meters(above 1GHz is 1.5 m) above the ground at a 3 meter anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment shall be 0.8 m(above 1GHz is 1.5 m); the height of the test antenna shall vary between 1 m to 4 m. Horizontal and vertical polarizations of the antenna are set to make the measurement
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.
- g. For the radiated emission test above 1GHz:  
Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

Note:


Both horizontal and vertical antenna polarities were tested, The worst case emissions were reported

### 3.2.3 TEST SETUP


#### (A) Radiated Emission Test-Up Frequency Below 30MHz

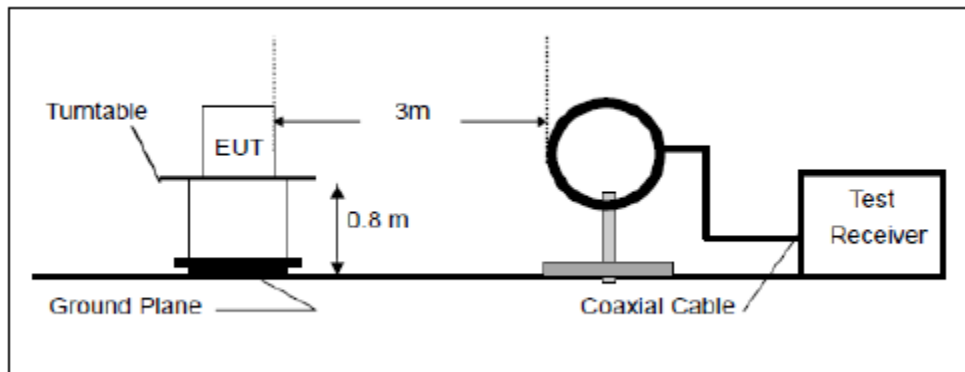

#### (B) Radiated Emission Test-Up Frequency 30MHz~1GHz

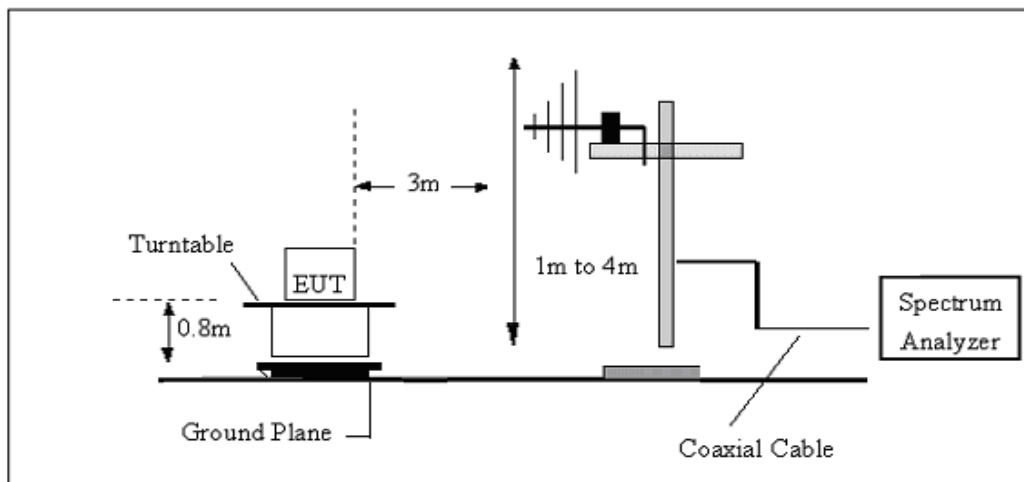

#### (C) Radiated Emission Test-Up Frequency Above 1GHz

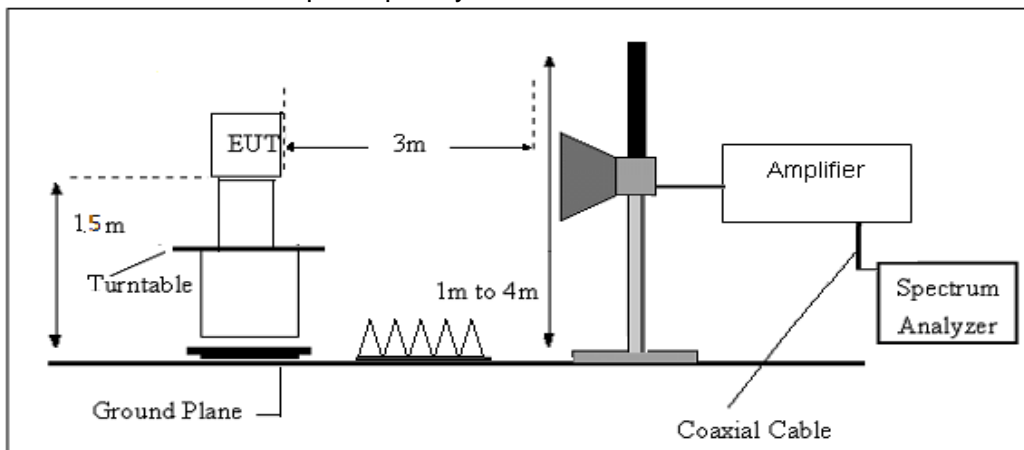

### 3.2.4 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 3.2 Unless otherwise a special operating condition is specified in the follows during the testing.



## 3.2.5 TEST RESULT

## 9KHz-30MHz

Temperature:	23.1 °C	Relative Humidity:	60%
Pressure:	1010 hPa	Test Voltage:	AC 120V/60Hz
Test Mode:	TX Mode	Polarization:	--

Freq. (MHz)	Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	State P/F	Test Result
--	--	--	--	--	PASS
--	--	--	--	--	PASS

## Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor =  $40 \log(\text{specific distance}/\text{test distance})$ (dB);

Limit line = specific limits(dBuv) + distance extrapolation factor.




(30MHz - 1000MHz)

Temperature:	26 °C	Relative Humidity:	60%
Pressure:	1010 hPa	Test Voltage:	AC 120V/60Hz
Test Mode:	Mode 1/2/3/4/5/6/7/8/9 (Mode 1-1M/Low channel is worst mode)	Polarization:	Horizontal

Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
48.5016	42.39	-20.71	21.68	40.00	-18.32	QP
86.2001	44.47	-21.15	23.32	40.00	-16.68	QP
125.0066	38.08	-17.61	20.47	43.50	-23.03	QP
210.0482	39.98	-19.74	20.24	43.50	-23.26	QP
400.4320	36.07	-11.22	24.85	46.00	-21.15	QP
776.8778	28.41	-3.18	25.23	46.00	-20.77	QP

Remark:

1. Margin = Result (Result =Reading + Factor)–Limit

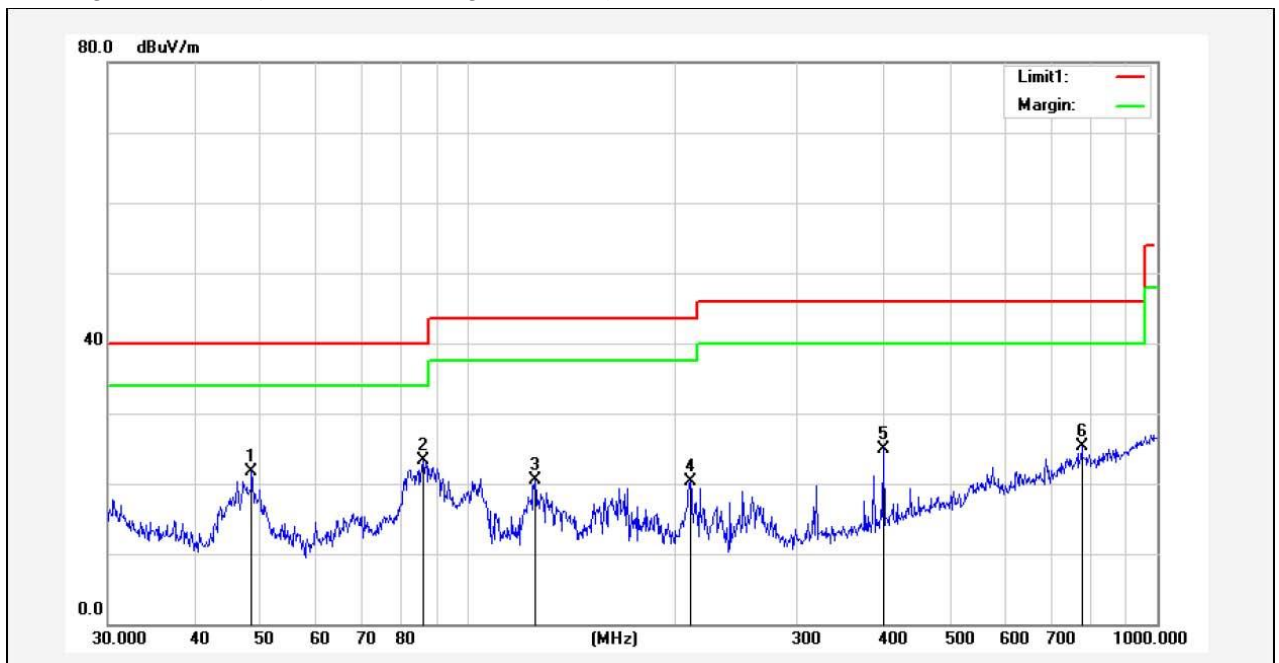




Temperature:	26 °C	Relative Humidity:	60%
Pressure:	1010 hPa	Test Voltage:	AC 120V/60HZ
Test Mode:	Mode 1/2/3/4/5/6/7/8/9 (Mode 1-1M/Low channel is worst mode)	Polarization:	Vertical

Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
43.8120	39.45	-18.29	21.16	40.00	-18.84	QP
81.7833	49.86	-22.24	27.62	40.00	-12.38	QP
125.0066	41.19	-17.61	23.58	43.50	-19.92	QP
270.3748	37.22	-15.48	21.74	46.00	-24.26	QP
400.4320	40.02	-11.22	28.80	46.00	-17.20	QP
776.8778	34.98	-3.18	31.80	46.00	-14.20	QP

Remark:.

1. Margin = Result (Result =Reading + Factor )–Limit

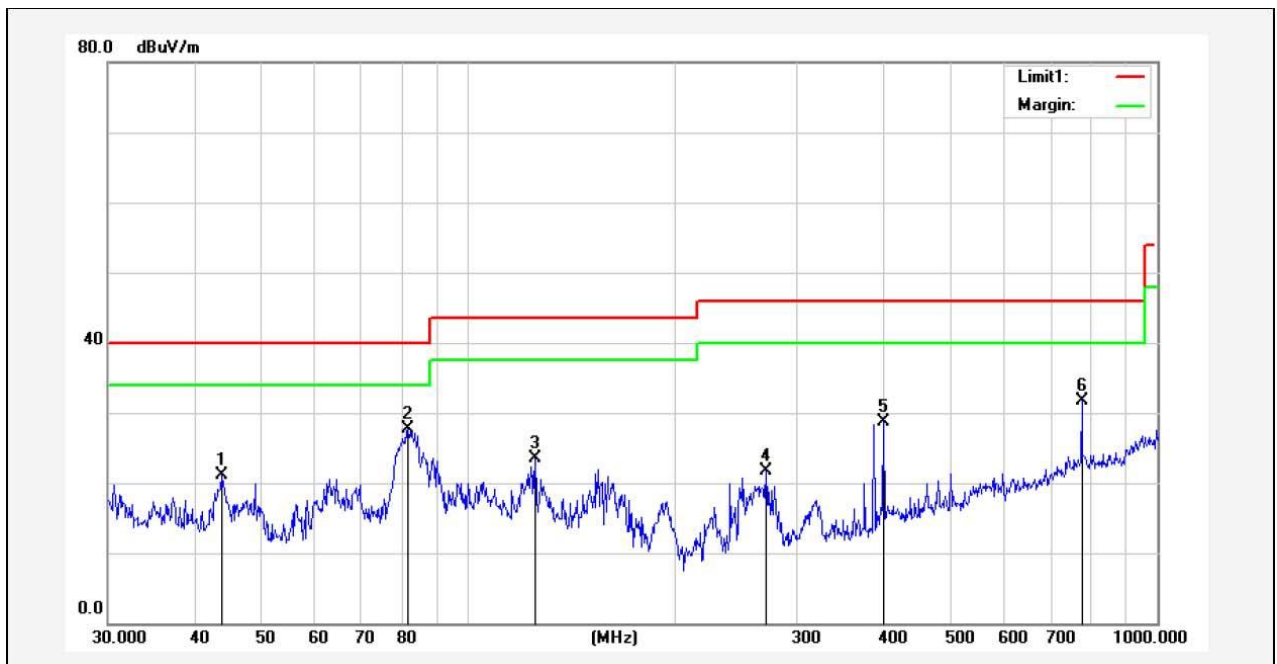



(1000MHz-25GHz) Restricted band and Spurious emission Requirements

802.11b Low Channel

Frequency (MHz)	Reading (dBμV)	Amplifier (dB)	Loss (dB)	Antenna Factor (dB/m)	Corrected Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type	Comment
Low Channel (2412 MHz)										
3264.74	48.69	44.70	6.70	28.20	-9.80	38.89	74.00	-35.11	PK	Vertical
3264.74	38.98	44.70	6.70	28.20	-9.80	29.18	54.00	-24.82	AV	Vertical
3264.83	48.94	44.70	6.70	28.20	-9.80	39.14	74.00	-34.86	PK	Horizontal
3264.83	38.17	44.70	6.70	28.20	-9.80	28.37	54.00	-25.63	AV	Horizontal
4824.31	58.68	44.20	9.04	31.60	-3.56	55.12	74.00	-18.88	PK	Vertical
4824.31	38.48	44.20	9.04	31.60	-3.56	34.92	54.00	-19.08	AV	Vertical
4824.50	58.17	44.20	9.04	31.60	-3.56	54.61	74.00	-19.39	PK	Horizontal
4824.50	39.08	44.20	9.04	31.60	-3.56	35.52	54.00	-18.48	AV	Horizontal
5359.61	46.11	44.20	9.86	32.00	-2.34	43.77	74.00	-30.23	PK	Vertical
5359.61	37.86	44.20	9.86	32.00	-2.34	35.52	54.00	-18.48	AV	Vertical
5359.86	45.15	44.20	9.86	32.00	-2.34	42.81	74.00	-31.19	PK	Horizontal
5359.86	38.33	44.20	9.86	32.00	-2.34	35.99	54.00	-18.01	AV	Horizontal
7235.76	51.98	43.50	11.40	35.50	3.40	55.38	74.00	-18.62	PK	Vertical
7235.76	32.51	43.50	11.40	35.50	3.40	35.91	54.00	-18.09	AV	Vertical
7235.80	51.81	43.50	11.40	35.50	3.40	55.21	74.00	-18.79	PK	Horizontal
7235.80	33.15	43.50	11.40	35.50	3.40	36.55	54.00	-17.45	AV	Horizontal
11035.86	40.94	43.60	14.30	39.50	10.20	51.14	74.00	-22.86	PK	Vertical
11035.86	30.05	43.60	14.30	39.50	10.20	40.25	54.00	-13.75	AV	Vertical
11036.21	39.94	43.60	14.30	39.50	10.20	50.14	74.00	-23.86	PK	Horizontal
11036.21	30.63	43.60	14.30	39.50	10.20	40.83	54.00	-13.17	AV	Horizontal
13299.27	41.02	42.60	15.90	38.90	12.20	53.22	74.00	-20.78	PK	Vertical
13299.27	28.54	42.60	15.90	38.90	12.20	40.74	54.00	-13.26	AV	Vertical
13299.37	40.76	42.60	15.90	38.90	12.20	52.96	74.00	-21.04	PK	Horizontal
13299.37	29.95	42.60	15.90	38.90	12.20	42.15	54.00	-11.85	AV	Horizontal
15999.78	40.87	42.70	18.00	37.10	12.40	53.27	74.00	-20.73	PK	Vertical
15999.78	28.64	42.70	18.00	37.10	12.40	41.04	54.00	-12.96	AV	Vertical
15999.75	39.82	42.70	18.00	37.10	12.40	52.22	74.00	-21.78	PK	Horizontal
15999.75	30.24	42.70	18.00	37.10	12.40	42.64	54.00	-11.36	AV	Horizontal
17997.73	31.11	42.70	19.40	46.50	23.20	54.31	74.00	-19.69	PK	Vertical
17997.73	19.72	42.70	19.40	46.50	23.20	42.92	54.00	-11.08	AV	Vertical
17997.68	30.17	42.70	19.40	46.50	23.20	53.37	74.00	-20.63	PK	Horizontal
17997.68	19.09	42.70	19.40	46.50	23.20	42.29	54.00	-11.71	AV	Horizontal



### 802.11b Mid Channel

Frequency (MHz)	Reading (dBµV)	Amplifier (dB)	Loss (dB)	Antenna Factor (dB/m)	Corrected Factor (dB)	Emission Level (dBµV/m)	Limits (dBµV/m)	Margin (dB)	Detector Type	Comment
Mid Channel (2437 MHz)										
3264.62	48.05	44.70	6.70	28.20	-9.80	38.25	74.00	-35.75	PK	Vertical
3264.62	38.59	44.70	6.70	28.20	-9.80	28.79	54.00	-25.21	AV	Vertical
3264.71	48.00	44.70	6.70	28.20	-9.80	38.20	74.00	-35.80	PK	Horizontal
3264.71	39.18	44.70	6.70	28.20	-9.80	29.38	54.00	-24.62	AV	Horizontal
4874.32	58.48	44.20	9.04	31.60	-3.56	54.92	74.00	-19.08	PK	Vertical
4874.32	38.46	44.20	9.04	31.60	-3.56	34.90	54.00	-19.10	AV	Vertical
4874.53	59.23	44.20	9.04	31.60	-3.56	55.67	74.00	-18.33	PK	Horizontal
4874.53	38.27	44.20	9.04	31.60	-3.56	34.71	54.00	-19.29	AV	Horizontal
5359.88	45.92	44.20	9.86	32.00	-2.34	43.58	74.00	-30.42	PK	Vertical
5359.88	37.81	44.20	9.86	32.00	-2.34	35.47	54.00	-18.53	AV	Vertical
5359.72	45.85	44.20	9.86	32.00	-2.34	43.51	74.00	-30.49	PK	Horizontal
5359.72	37.43	44.20	9.86	32.00	-2.34	35.09	54.00	-18.91	AV	Horizontal
7310.86	50.64	43.50	11.40	35.50	3.40	54.04	74.00	-19.96	PK	Vertical
7310.86	33.81	43.50	11.40	35.50	3.40	37.21	54.00	-16.79	AV	Vertical
7310.74	51.86	43.50	11.40	35.50	3.40	55.26	74.00	-18.74	PK	Horizontal
7310.74	33.37	43.50	11.40	35.50	3.40	36.77	54.00	-17.23	AV	Horizontal
9747.75	40.35	43.60	14.30	39.50	10.20	50.55	74.00	-23.45	PK	Vertical
9747.75	30.66	43.60	14.30	39.50	10.20	40.86	54.00	-13.14	AV	Vertical
9748.02	40.90	43.60	14.30	39.50	10.20	51.10	74.00	-22.90	PK	Horizontal
9748.02	29.99	43.60	14.30	39.50	10.20	40.19	54.00	-13.81	AV	Horizontal
13299.30	40.77	42.60	15.90	38.90	12.20	52.97	74.00	-21.03	PK	Vertical
13299.30	28.54	42.60	15.90	38.90	12.20	40.74	54.00	-13.26	AV	Vertical
13299.30	40.38	42.60	15.90	38.90	12.20	52.58	74.00	-21.42	PK	Horizontal
13299.30	29.12	42.60	15.90	38.90	12.20	41.32	54.00	-12.68	AV	Horizontal
15999.73	41.09	42.70	18.00	37.10	12.40	53.49	74.00	-20.51	PK	Vertical
15999.73	28.64	42.70	18.00	37.10	12.40	41.04	54.00	-12.96	AV	Vertical
15999.60	40.71	42.70	18.00	37.10	12.40	53.11	74.00	-20.89	PK	Horizontal
15999.60	29.44	42.70	18.00	37.10	12.40	41.84	54.00	-12.16	AV	Horizontal
17997.64	30.12	42.70	19.40	46.50	23.20	53.32	74.00	-20.68	PK	Vertical
17997.64	19.00	42.70	19.40	46.50	23.20	42.20	54.00	-11.80	AV	Vertical
17997.75	30.73	42.70	19.40	46.50	23.20	53.93	74.00	-20.07	PK	Horizontal
17997.75	18.67	42.70	19.40	46.50	23.20	41.87	54.00	-12.13	AV	Horizontal





### 802.11b High Channel

Frequency (MHz)	Reading (dBμV)	Amplifier (dB)	Loss (dB)	Antenna Factor (dB/m)	Corrected Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type	Comment
High Channel (2462 MHz)										
3264.79	49.24	44.70	6.70	28.20	-9.80	39.44	74.00	-34.56	PK	Vertical
3264.79	38.30	44.70	6.70	28.20	-9.80	28.50	54.00	-25.50	AV	Vertical
3264.67	48.04	44.70	6.70	28.20	-9.80	38.24	74.00	-35.76	PK	Horizontal
3264.67	38.95	44.70	6.70	28.20	-9.80	29.15	54.00	-24.85	AV	Horizontal
4924.58	58.83	44.20	9.04	31.60	-3.56	55.27	74.00	-18.73	PK	Vertical
4924.58	38.40	44.20	9.04	31.60	-3.56	34.84	54.00	-19.16	AV	Vertical
4924.33	58.95	44.20	9.04	31.60	-3.56	55.39	74.00	-18.61	PK	Horizontal
4924.33	38.81	44.20	9.04	31.60	-3.56	35.25	54.00	-18.75	AV	Horizontal
5359.80	45.27	44.20	9.86	32.00	-2.34	42.93	74.00	-31.07	PK	Vertical
5359.80	37.09	44.20	9.86	32.00	-2.34	34.75	54.00	-19.25	AV	Vertical
5359.80	46.00	44.20	9.86	32.00	-2.34	43.66	74.00	-30.34	PK	Horizontal
5359.80	37.54	44.20	9.86	32.00	-2.34	35.20	54.00	-18.80	AV	Horizontal
7385.72	51.67	43.50	11.40	35.50	3.40	55.07	74.00	-18.93	PK	Vertical
7385.72	33.22	43.50	11.40	35.50	3.40	36.62	54.00	-17.38	AV	Vertical
7385.76	51.52	43.50	11.40	35.50	3.40	54.92	74.00	-19.08	PK	Horizontal
7385.76	32.96	43.50	11.40	35.50	3.40	36.36	54.00	-17.64	AV	Horizontal
9848.00	40.13	43.60	14.30	39.50	10.20	50.33	74.00	-23.67	PK	Vertical
9848.00	30.93	43.60	14.30	39.50	10.20	41.13	54.00	-12.87	AV	Vertical
9847.97	40.02	43.60	14.30	39.50	10.20	50.22	74.00	-23.78	PK	Horizontal
9847.97	30.83	43.60	14.30	39.50	10.20	41.03	54.00	-12.97	AV	Horizontal
13299.33	40.98	42.70	18.00	37.10	12.40	53.38	74.00	-20.62	PK	Vertical
13299.33	28.54	42.70	18.00	37.10	12.40	40.94	54.00	-13.06	AV	Vertical
13299.28	40.77	42.70	18.00	37.10	12.40	53.17	74.00	-20.83	PK	Horizontal
13299.28	29.98	42.70	18.00	37.10	12.40	42.38	54.00	-11.62	AV	Horizontal
17997.80	31.28	42.70	19.40	46.50	23.20	54.48	74.00	-19.52	PK	Vertical
17997.80	18.82	42.70	19.40	46.50	23.20	42.02	54.00	-11.98	AV	Vertical
17997.74	29.85	42.70	19.40	46.50	23.20	53.05	74.00	-20.95	PK	Horizontal
17997.74	18.75	42.70	19.40	46.50	23.20	41.95	54.00	-12.05	AV	Horizontal

Remark:

- Factor = Antenna Factor + Cable Loss – Pre-amplifier.
- Scan with 802.11b, 802.11g, 802.11n (HT-20) the worst case is 802.11b.  
 Emission Level = Reading + Factor  
 Margin = Limit - Emission Level
- The frequency emission of peak points that did not show above the forms are at least 20dB below the limit, the frequency emission is mainly from the environment noise.



### 3.2.6 TEST RESULTS (Band edge Requirements)

Frequency (MHz)	Reading (dB $\mu$ V)	Amplifier (dB)	Loss (dB)	Antenna Factor (dB/m)	Corrected Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type	Comment
802.11b										
2390.00	68.25	43.80	4.91	25.90	-12.99	55.26	74.00	-18.74	PK	Vertical
2390.00	53.15	43.80	4.91	25.90	-12.99	40.16	54.00	-13.84	AV	Vertical
2390.00	68.83	43.80	4.91	25.90	-12.99	55.84	74.00	-18.16	PK	Horizontal
2390.00	53.48	43.80	4.91	25.90	-12.99	40.49	54.00	-13.51	AV	Horizontal
2483.50	69.39	43.80	5.12	25.90	-12.78	56.61	74.00	-17.39	PK	Vertical
2483.50	52.61	43.80	5.12	25.90	-12.78	39.83	54.00	-14.17	AV	Vertical
2483.50	70.41	43.80	5.12	25.90	-12.78	57.63	74.00	-16.37	PK	Horizontal
2483.50	53.33	43.80	5.12	25.90	-12.78	40.55	54.00	-13.45	AV	Horizontal
802.11g										
2390.00	67.33	43.80	4.91	25.90	-12.99	54.34	74.00	-19.66	PK	Vertical
2390.00	52.83	43.80	4.91	25.90	-12.99	39.84	54.00	-14.16	AV	Vertical
2390.00	65.54	43.80	4.91	25.90	-12.99	52.55	74.00	-21.45	PK	Horizontal
2390.00	54.29	43.80	4.91	25.90	-12.99	41.30	54.00	-12.70	AV	Horizontal
2483.50	65.33	43.80	5.12	25.90	-12.78	52.55	74.00	-21.45	PK	Vertical
2483.50	52.93	43.80	5.12	25.90	-12.78	40.15	54.00	-13.85	AV	Vertical
2483.50	66.45	43.80	5.12	25.90	-12.78	53.67	74.00	-20.33	PK	Horizontal
2483.50	52.73	43.80	5.12	25.90	-12.78	39.95	54.00	-14.05	AV	Horizontal
802.11n20										
2390.00	66.90	43.80	4.91	25.90	-12.99	53.91	74.00	-20.09	PK	Vertical
2390.00	53.12	43.80	4.91	25.90	-12.99	40.13	54.00	-13.87	AV	Vertical
2390.00	65.45	43.80	4.91	25.90	-12.99	52.46	74.00	-21.54	PK	Horizontal
2390.00	54.18	43.80	4.91	25.90	-12.99	41.19	54.00	-12.81	AV	Horizontal
2483.50	65.47	43.80	5.12	25.90	-12.78	52.69	74.00	-21.31	PK	Vertical
2483.50	53.24	43.80	5.12	25.90	-12.78	40.46	54.00	-13.54	AV	Vertical
2483.50	65.72	43.80	5.12	25.90	-12.78	52.94	74.00	-21.06	PK	Horizontal
2483.50	52.67	43.80	5.12	25.90	-12.78	39.89	54.00	-14.11	AV	Horizontal

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.  
 Low measurement frequencies is range from 2300 to 2412 MHz, high measurement frequencies is range from 2462 to 2500 MHz.  
 Only show the worst point data of the emissions in the frequency 2300-2412 MHz and 2462-2500 MHz.

#### 4. CONDUCTED SPURIOUS & BAND EDGE EMISSION

##### 4.1 APPLIED PROCEDURES / LIMIT

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

##### 4.2 TEST PROCEDURE

Spectrum Parameter	Setting
Detector	Peak
Start/Stop Frequency	30 MHz to 10th carrier harmonic
RB / VB (emission in restricted band)	100 KHz/300 KHz
Trace-Mode:	Max hold


For Band edge

Spectrum Parameter	Setting
Detector	Peak
Start/Stop Frequency	Lower Band Edge: 2300 to 2412 MHz Upper Band Edge: 2462 to 2500 MHz
RB / VB (emission in restricted band)	100 KHz/300 KHz
Trace-Mode:	Max hold

##### 4.3 DEVIATION FROM STANDARD

No deviation.

##### 4.4 TEST SETUP

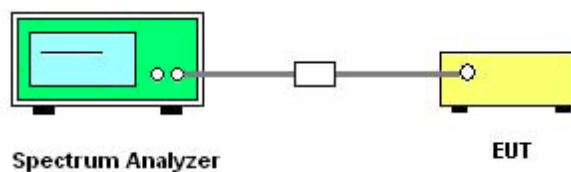

The EUT which is powered by the AC120V/60Hz, is connected to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

##### 4.5 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 4.4 Unless otherwise a special operating condition is specified in the follows during the testing.




4.6 TEST RESULTS

Temperature:	25 °C	Relative Humidity:	60%
Pressure:	1015 hPa	Test Voltage:	AC 120V/60Hz
Test Mode:	TX b Mode /CH01, CH06, CH11		

CH 01

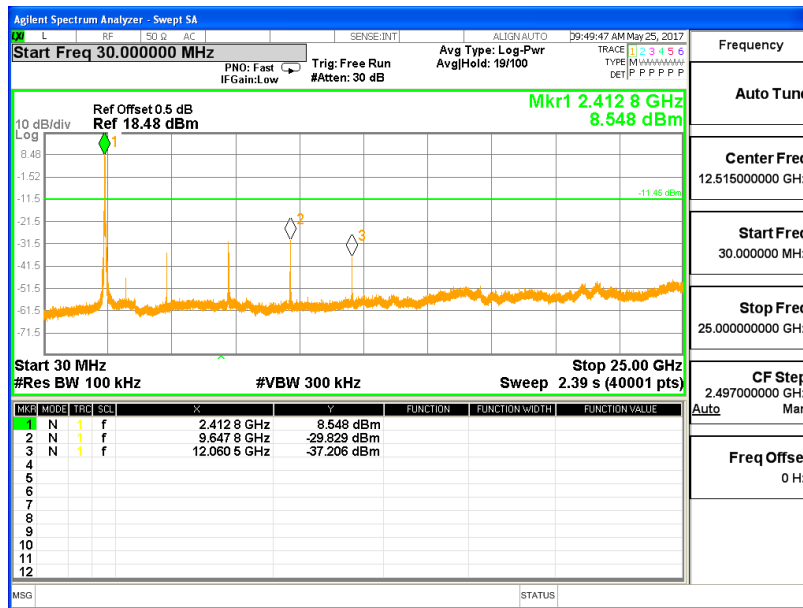


CH 06

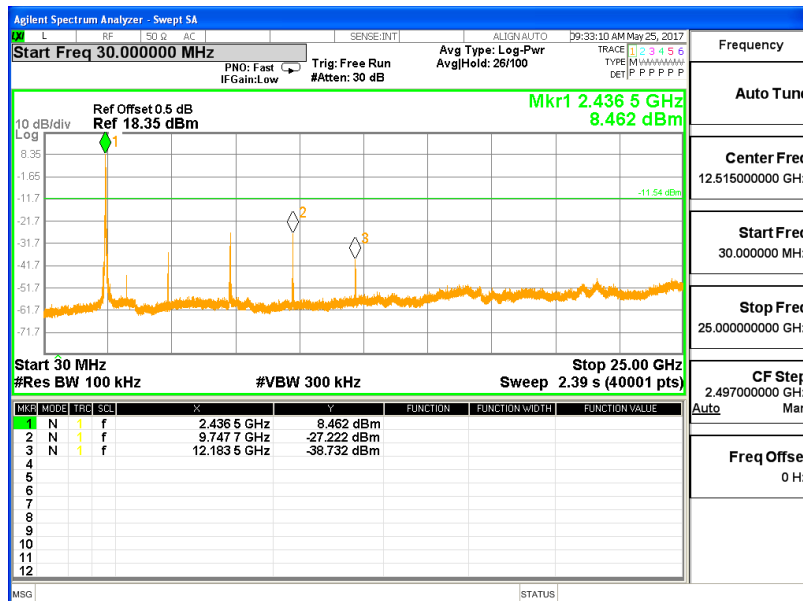



CH 11

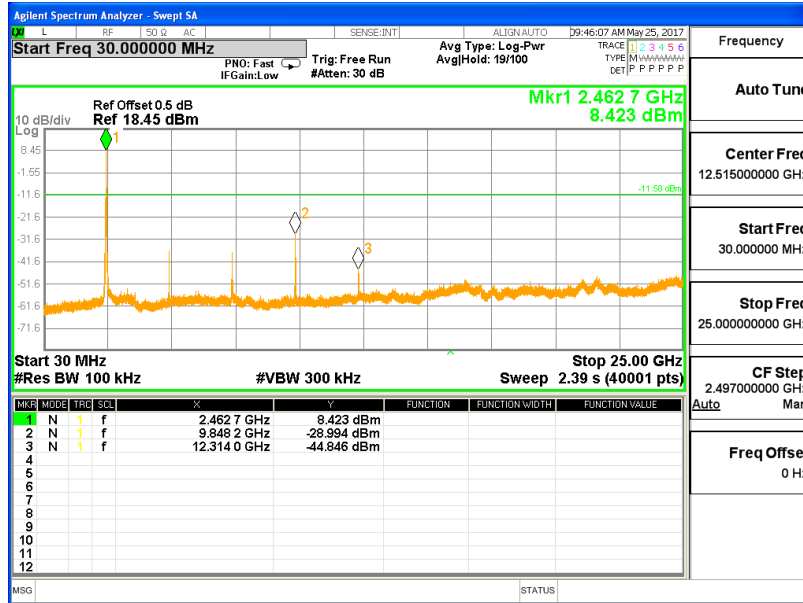


Frequency	
Auto Tune	
Center Freq	12.515000000 GHz
Start Freq	30.000000 MHz
Stop Freq	25.000000000 GHz
CF Step	2.497000000 GHz
Auto	Man
Freq Offset	0 Hz




Band edge

CH 01

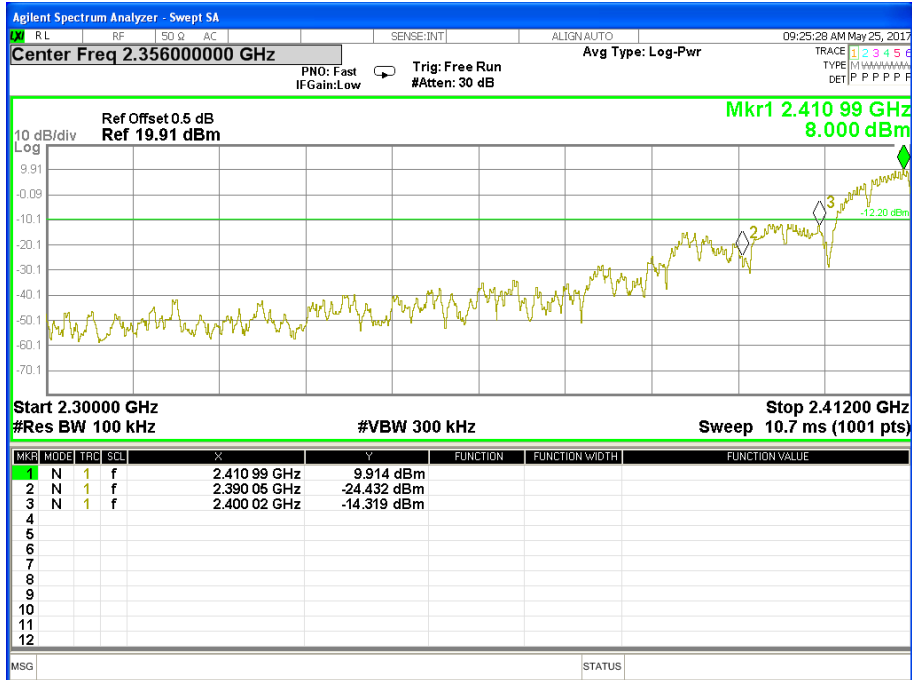


CH 11

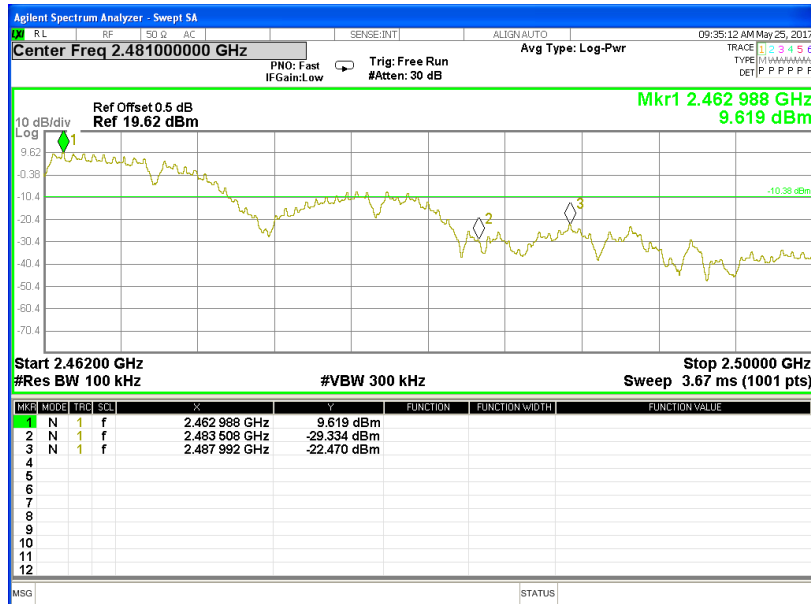




Temperature:	25 °C	Relative Humidity:	60%
Pressure:	1015 hPa	Test Voltage:	AC 120V/60Hz
Test Mode:	TX g Mode /CH01, CH06, CH11		

CH 01

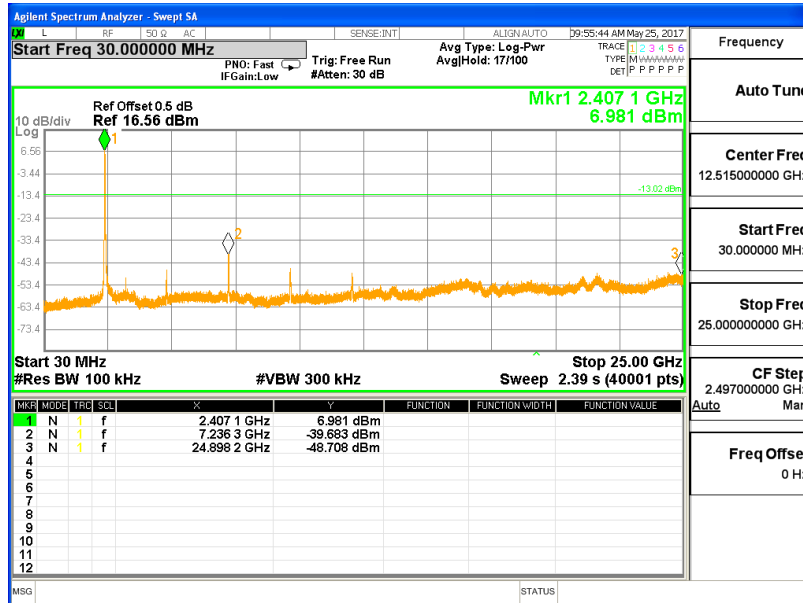


CH06

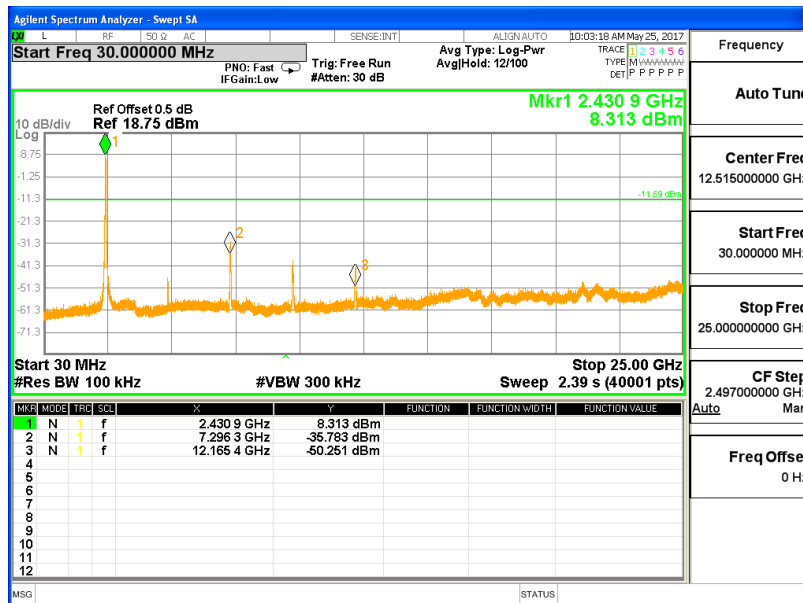



CH 11

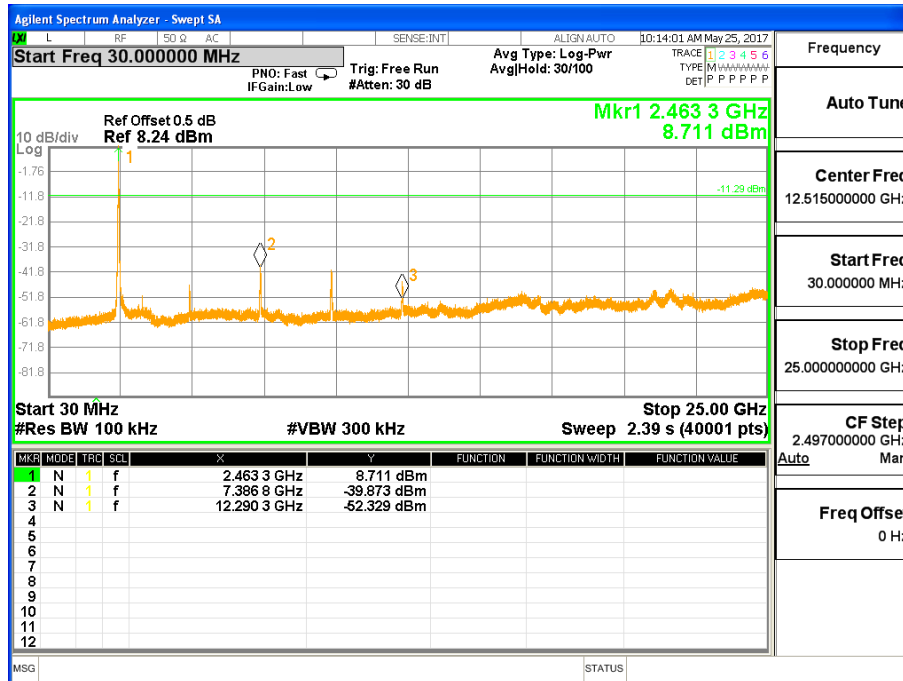







Band edge

CH 01

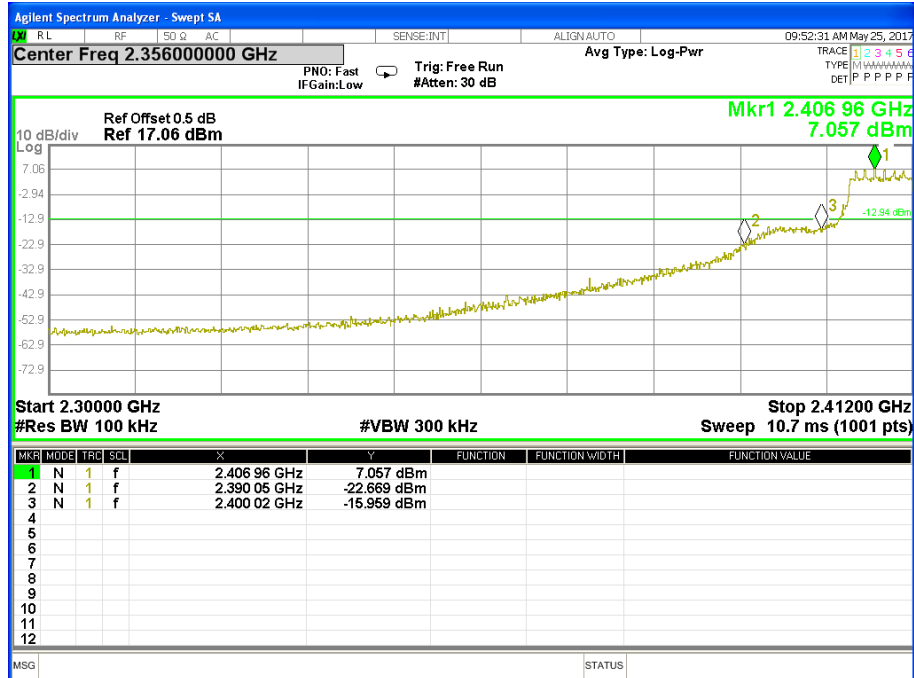


CH11

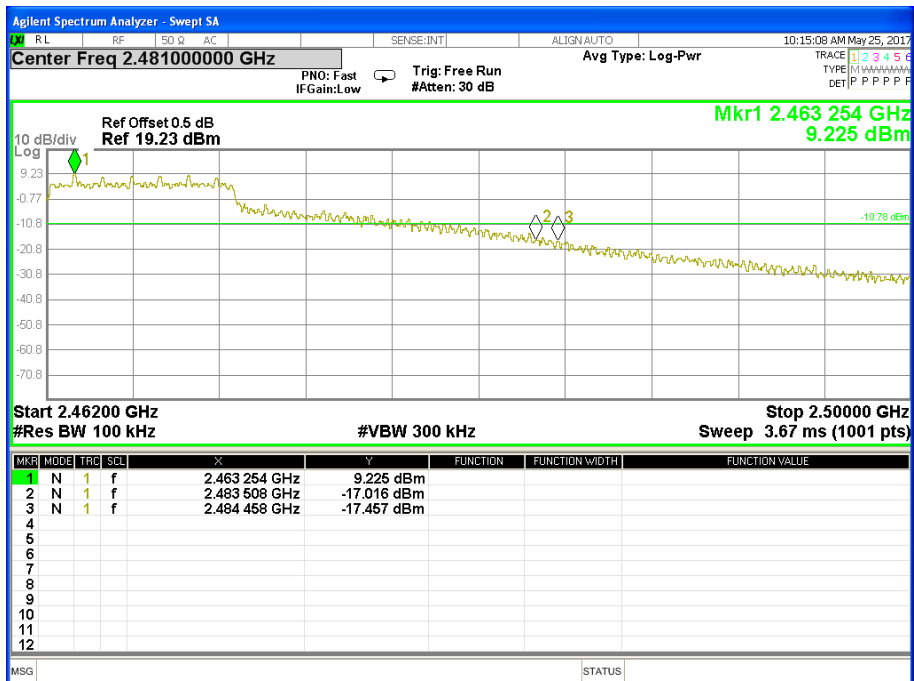




Temperature:	25 °C	Relative Humidity:	60%
Pressure:	1015 hPa	Test Voltage:	AC 120V/60Hz
Test Mode:	TX n Mode(20M) /CH01, CH06, CH11		

CH 01

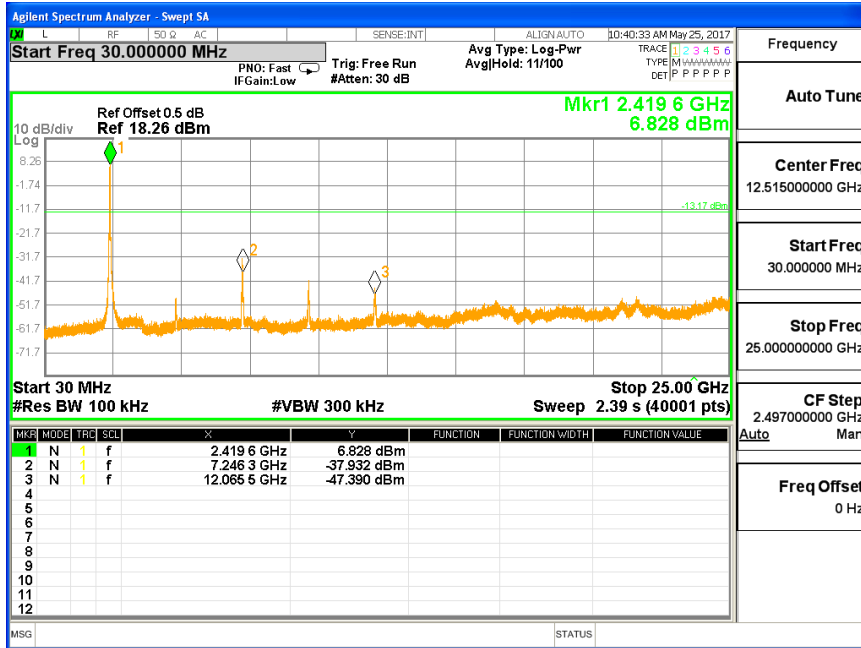


CH 06

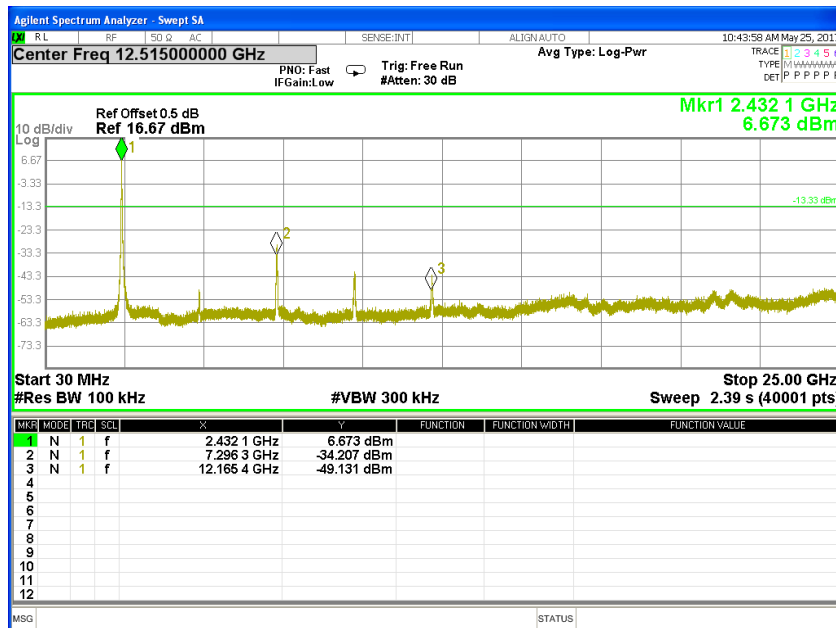




CH 11

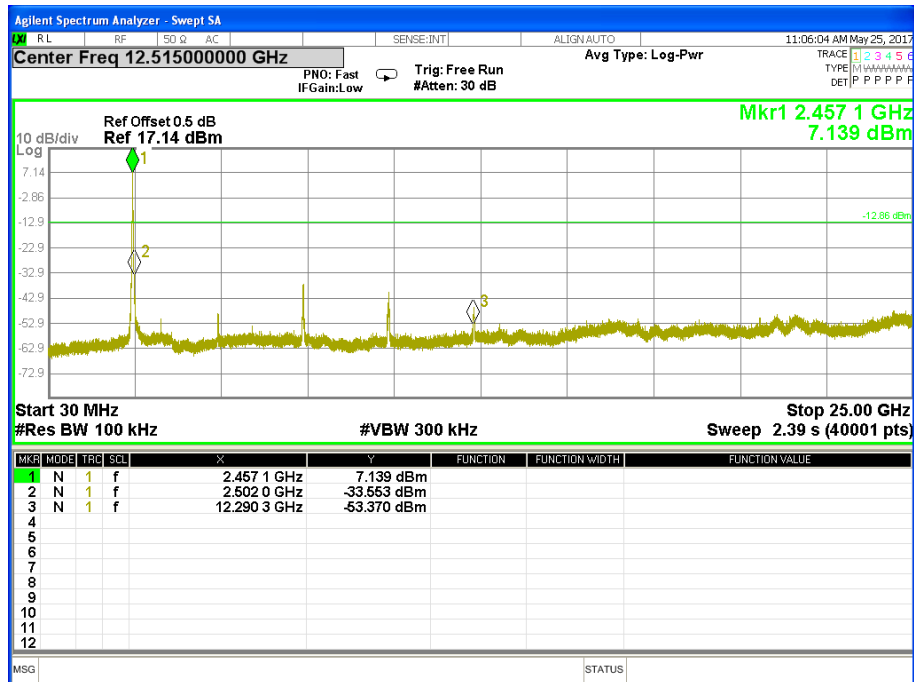




Band edge

CH 01

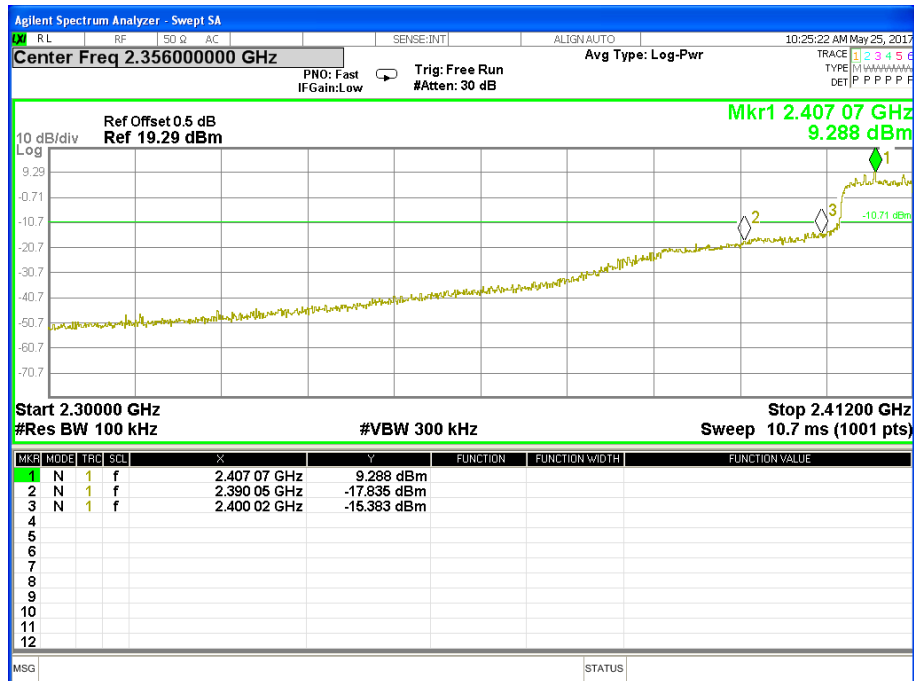

CH 11

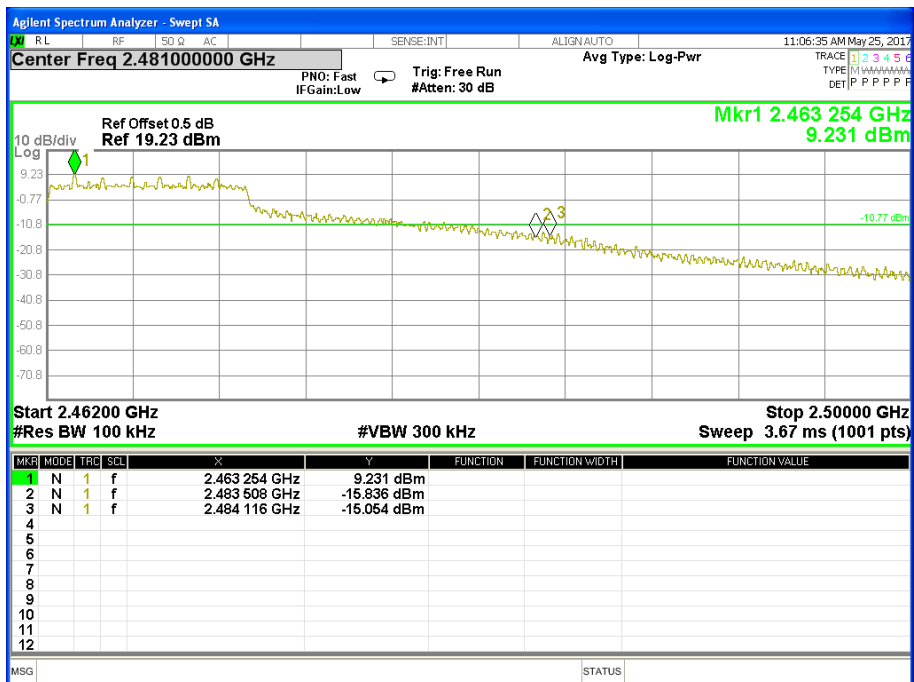



## 5. POWER SPECTRAL DENSITY TEST

### 5.1 APPLIED PROCEDURES / LIMIT

FCC Part15.247 , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(e)	Power Spectral Density	$\leq 8$ dBm/3KHz (RBW $\geq$ 3KHz)	2400-2483.5	PASS

### 5.2 TEST PROCEDURE

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS channel bandwidth.
3. Set the  $100\text{ kHz} \geq \text{RBW} \geq 3\text{ kHz}$ .
4. Set the  $\text{VBW} \geq 3 \times \text{RBW}$ .
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

### 5.3 DEVIATION FROM STANDARD

No deviation.

### 5.4 TEST SETUP



### 5.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 5.4 Unless otherwise a special operating condition is specified in the follows during the testing.




5.6 TEST RESULTS

Temperature:	25 °C	Relative Humidity:	60%
Pressure:	1015 hPa	Test Voltage:	AC 120V/60Hz
Test Mode:	TX b Mode /CH01, CH06, CH11		


Frequency	Power Density (dBm/3kHz)	Limit (dBm/3KHz)	Result
2412 MHz	-2.547	≤8	PASS
2437 MHz	-2.819	≤8	PASS
2462 MHz	-2.658	≤8	PASS

**TX CH01**

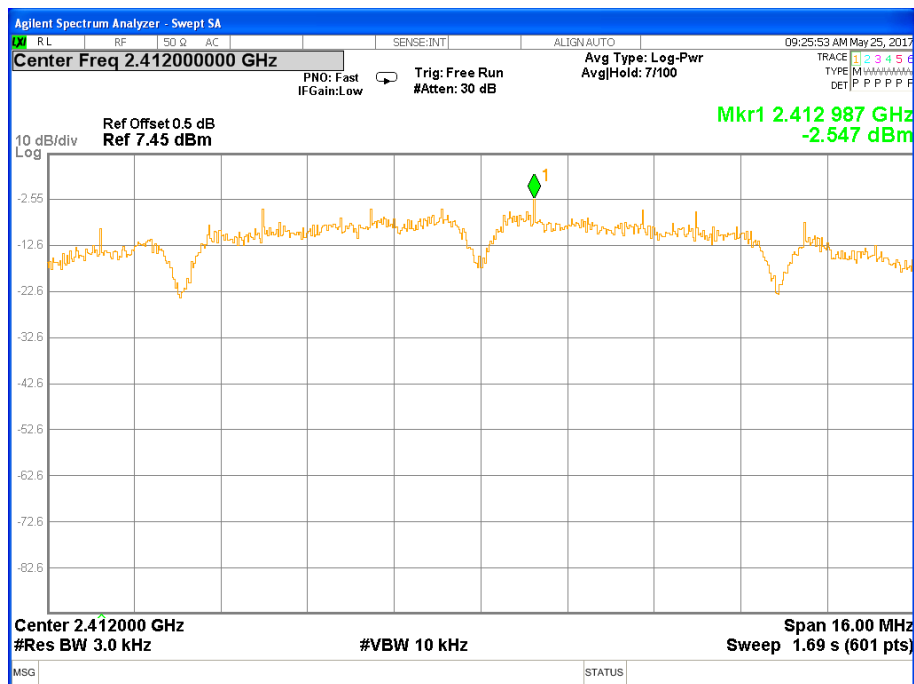




### TX CH06

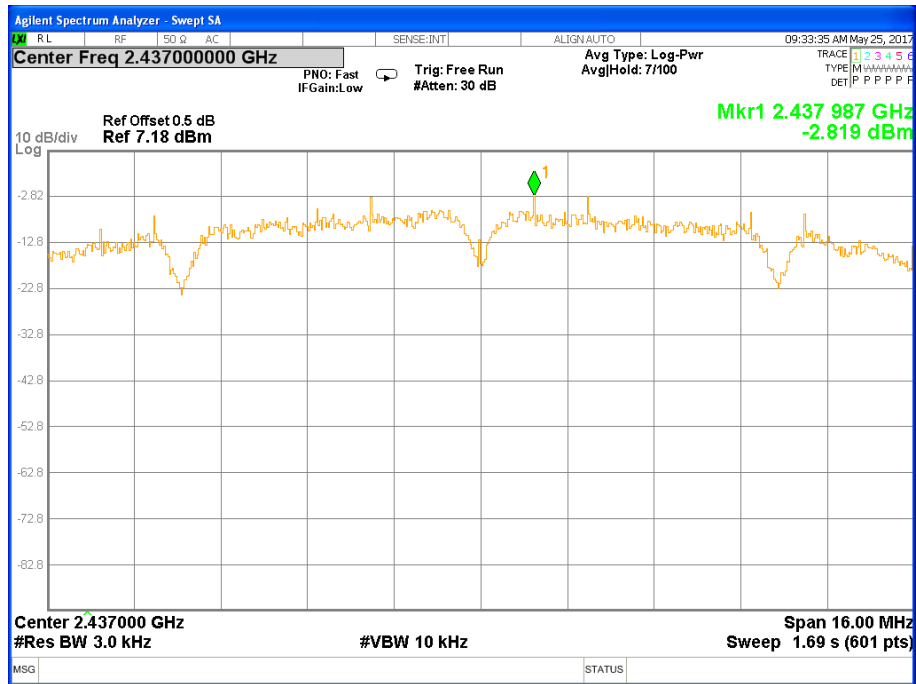

### TX CH11

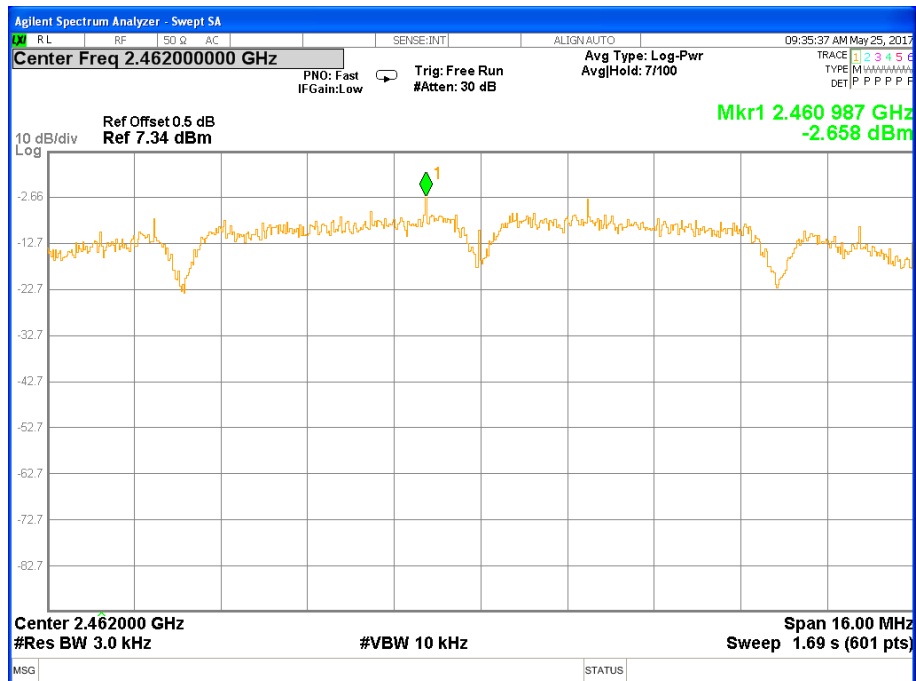




Temperature:	25 °C	Relative Humidity:	60%
Pressure:	1015 hPa	Test Voltage:	AC 120V/60Hz
Test Mode:	TX g Mode /CH01, CH06, CH11		

Frequency	Power Density (dBm/3kHz)	Limit (dBm/3KHz)	Result
2412 MHz	-8.029	≤8	PASS
2437 MHz	-5.583	≤8	PASS
2462 MHz	-7.131	≤8	PASS


**TX CH01**

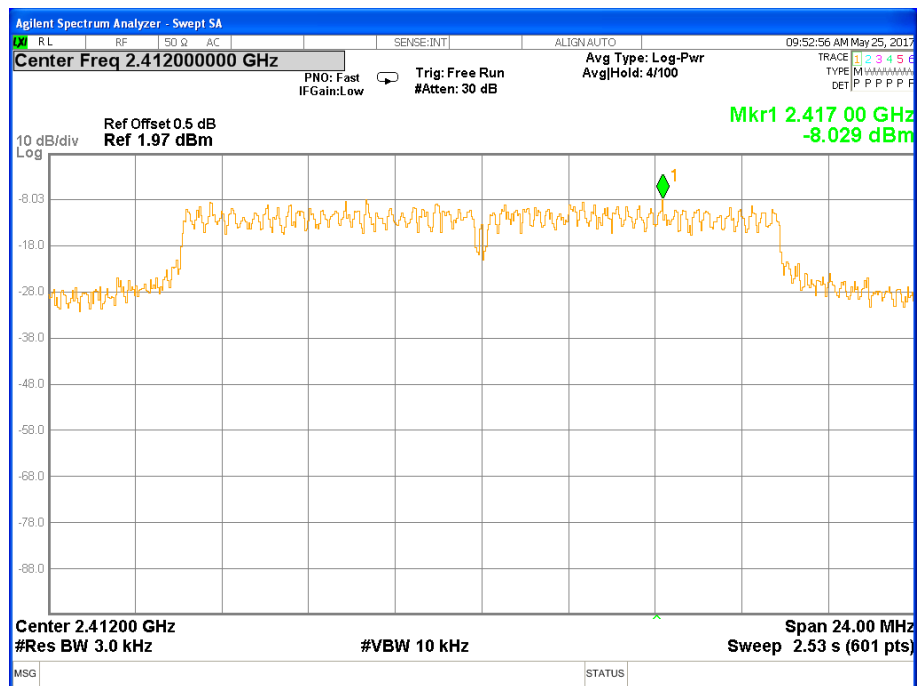






### TX CH06

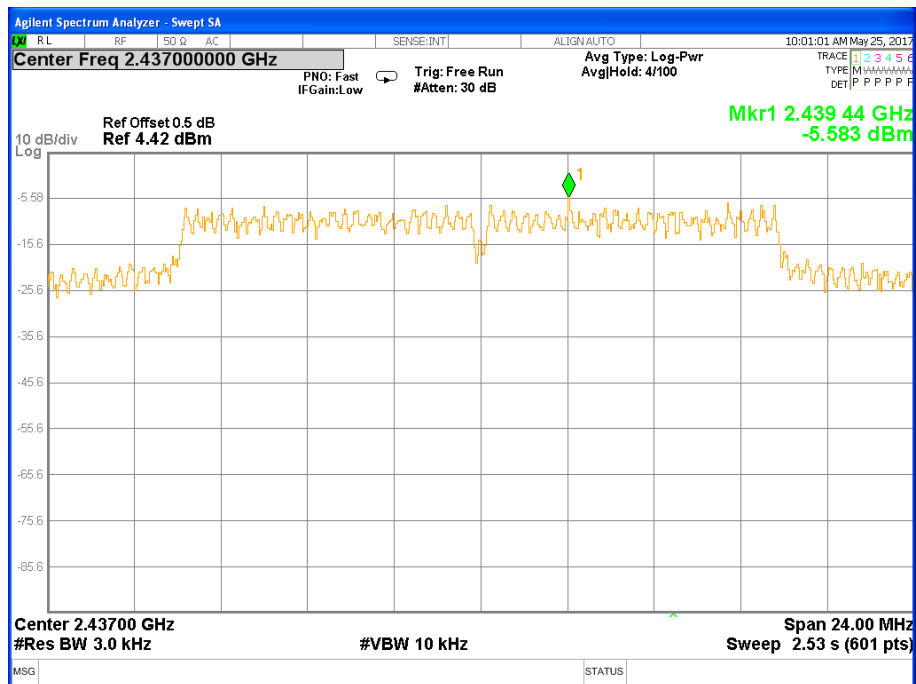

### TX CH11

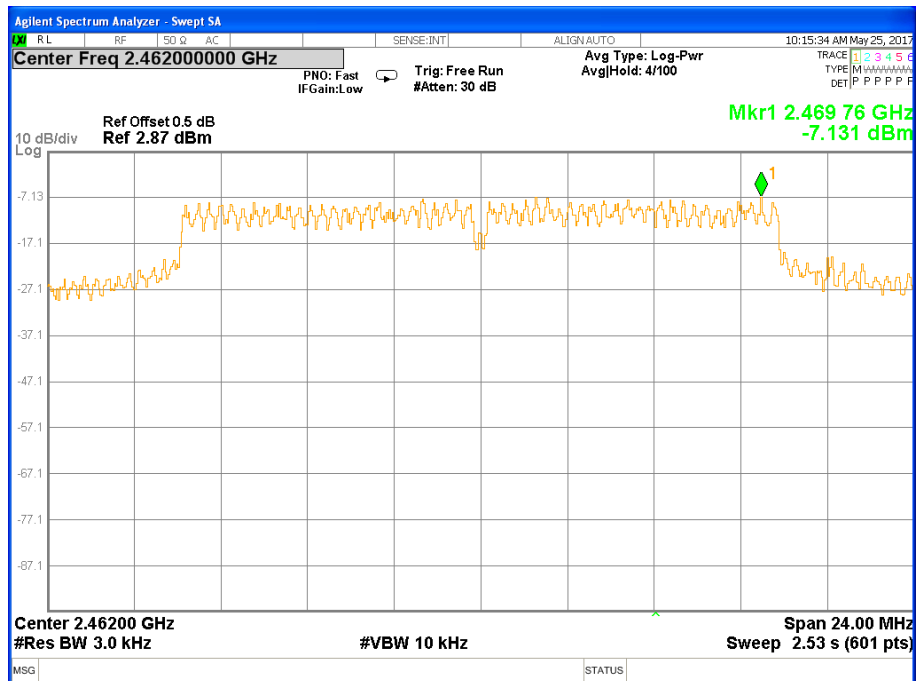




Temperature:	25 °C	Relative Humidity:	60%
Pressure:	1015 hPa	Test Voltage:	AC 120V/60Hz
Test Mode:	TX n Mode(20M) /CH01, CH06, CH11		


Frequency	Power Density (dBm/3kHz)	Limit (dBm/3KHz)	Result
2412 MHz	-6.390	≤8	PASS
2437 MHz	-5.951	≤8	PASS
2462 MHz	-5.990	≤8	PASS

**TX CH01**

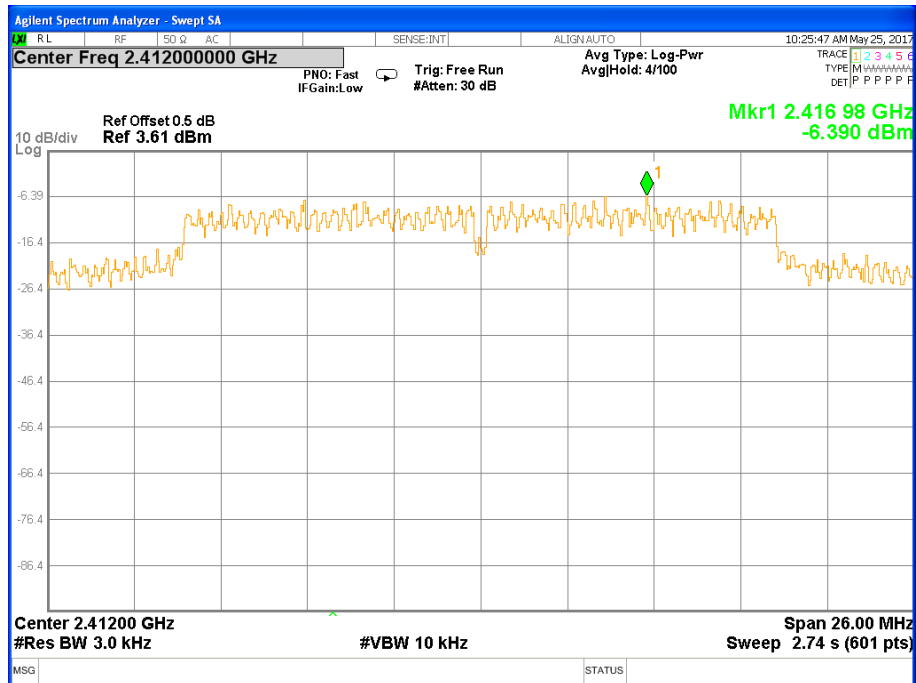




### TX CH06

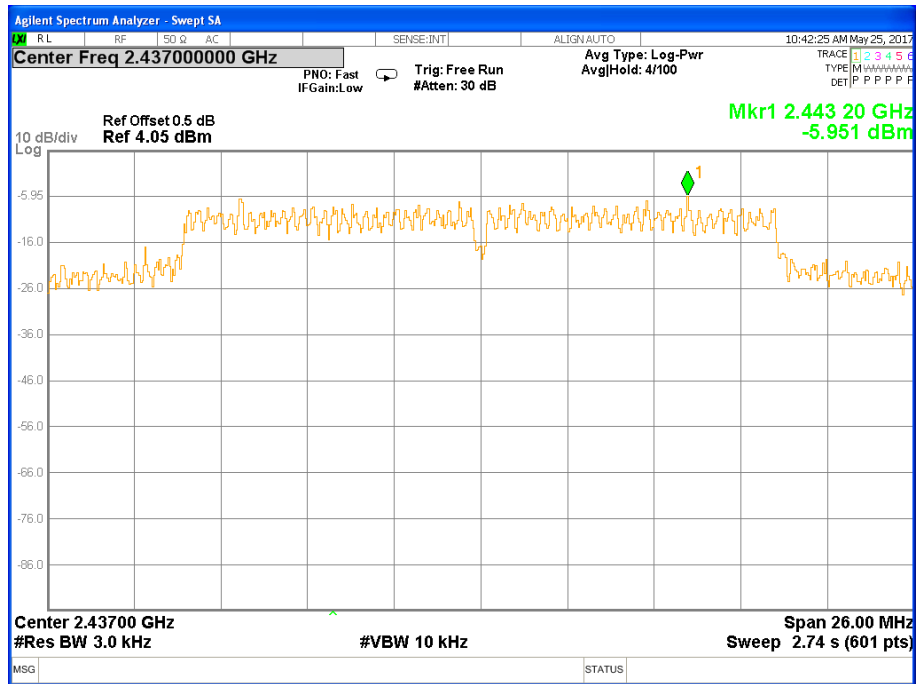

### TX CH11

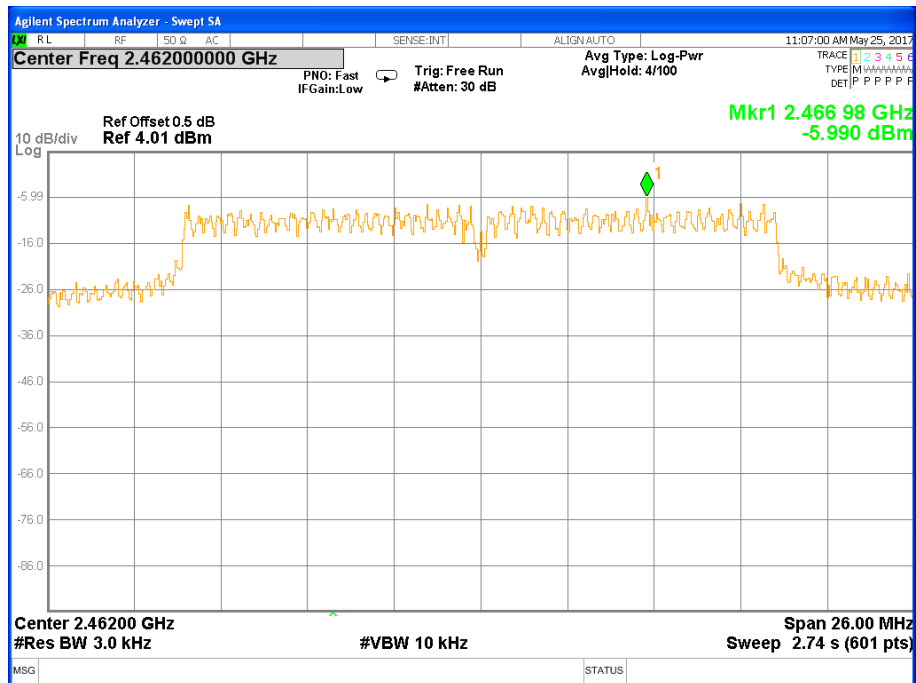



## 6. BANDWIDTH TEST

### 6.1 APPLIED PROCEDURES / LIMIT

FCC Part 15.247, Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS


### 6.2 TEST PROCEDURE

The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described above (i.e., RBW = 100 kHz, VBW  $\geq 3\text{RBW}$ , peak detector with maximum hold) is implemented by the instrumentation function. When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be  $\geq 6$  dB.

### 6.3 DEVIATION FROM STANDARD

No deviation.

### 6.4 TEST SETUP

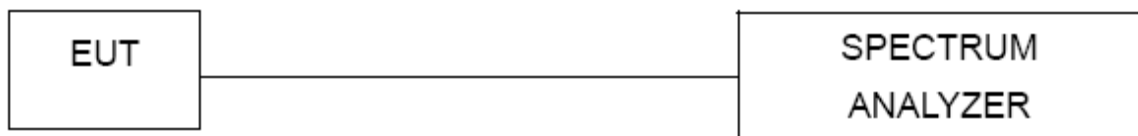

### 6.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 6.4 Unless otherwise a special operating condition is specified in the follows during the testing.




6.6 TEST RESULTS

Temperature:	25 °C	Relative Humidity:	60%
Pressure:	1012 hPa	Test Voltage:	AC 120V/60Hz
Test Mode:	TX b Mode /CH01, CH06, CH11		

Remark: PEAK DETECTOR IS USED


Frequency	6dB Bandwidth (MHz)	Channel Separation (KHz)	Result
2412 MHz	12.06	≥500KHz	PASS
2437 MHz	12.48	≥500KHz	PASS
2462 MHz	13.53	≥500KHz	PASS

**TX CH 01**

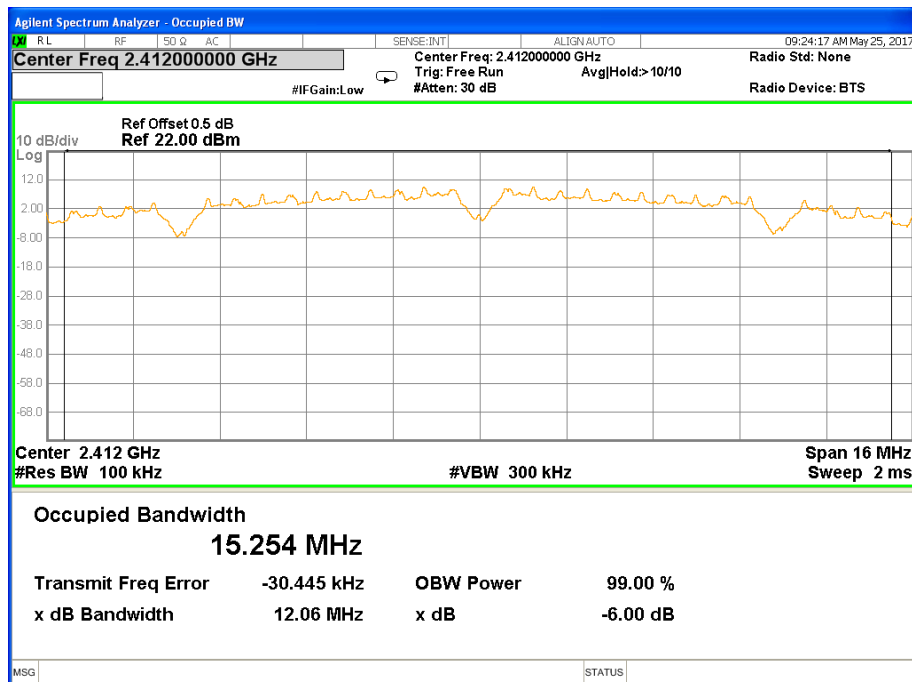




### TX CH 06

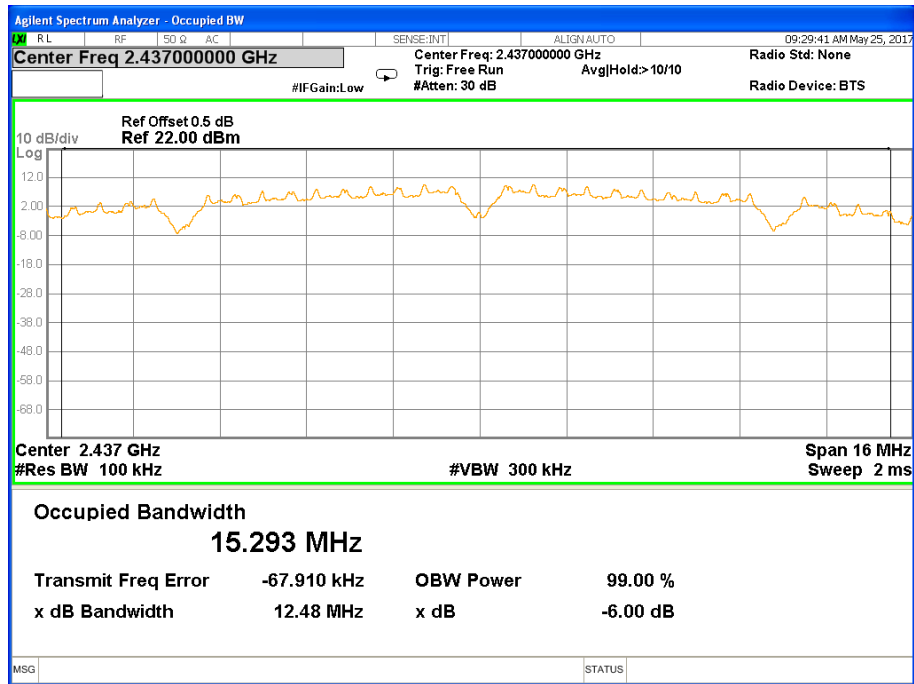

### TX CH 11

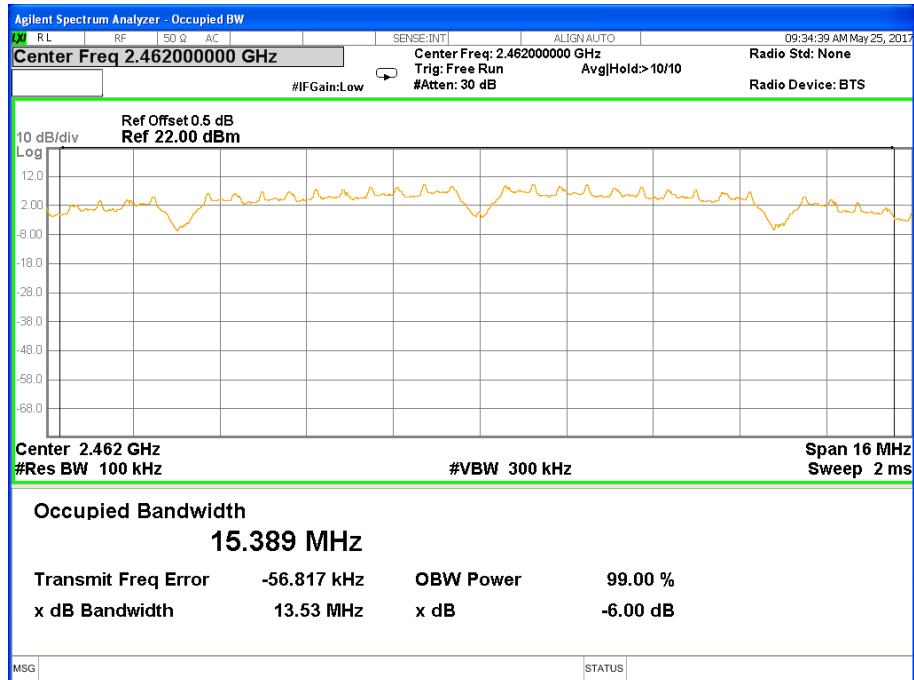




Temperature:	25 °C	Relative Humidity:	60%
Pressure:	1012 hPa	Test Voltage:	AC 120V/60Hz
Test Mode:	TX g Mode /CH01, CH06, CH11		


Frequency	6dB Bandwidth (MHz)	Channel Separation (KHz)	Result
2412 MHz	16.34	≥500KHz	PASS
2437 MHz	16.35	≥500KHz	PASS
2462 MHz	16.33	≥500KHz	PASS

**TX CH 01**

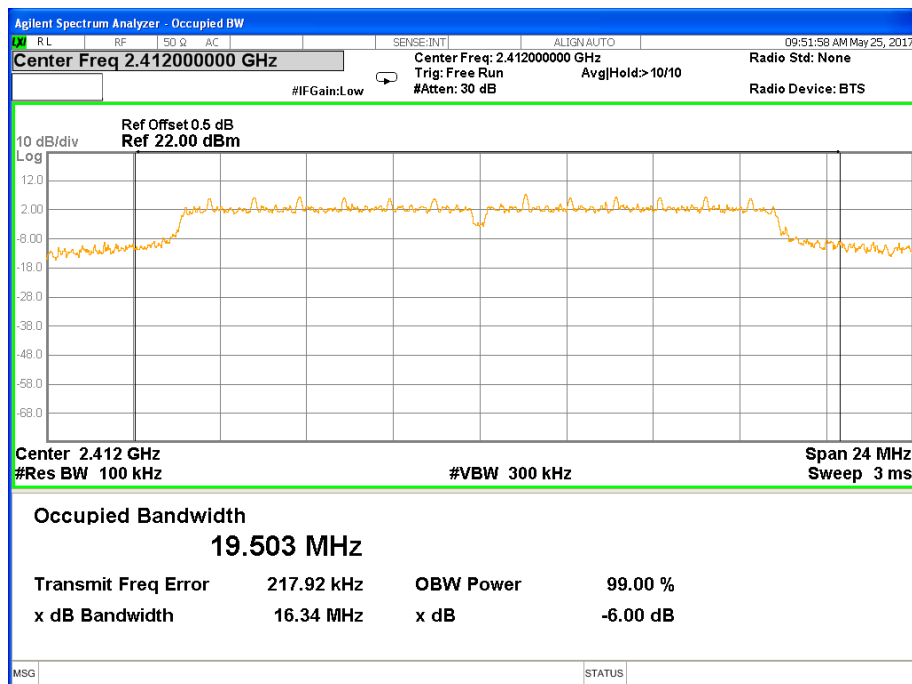




### TX CH 06

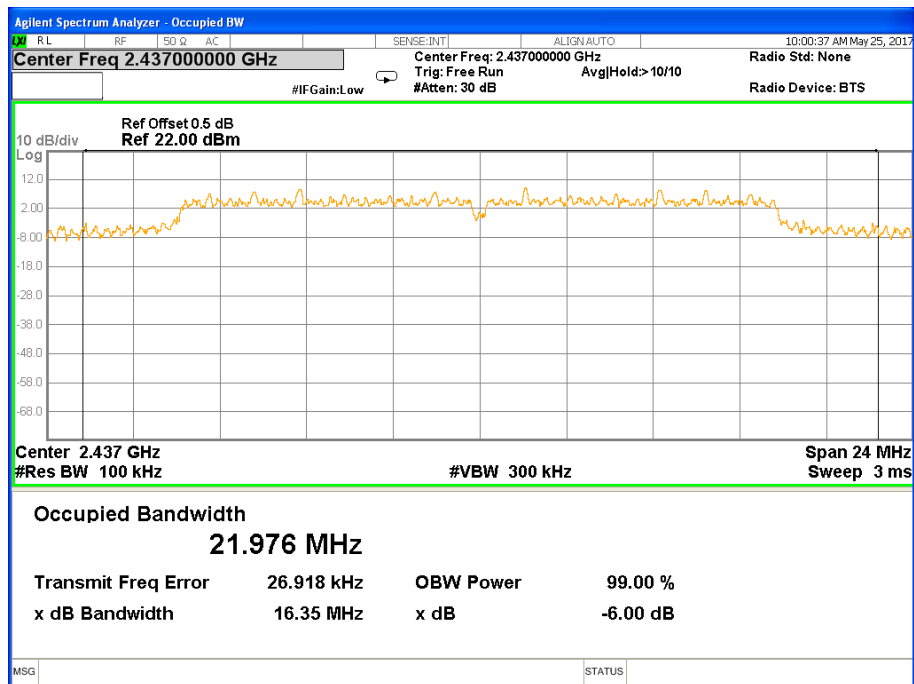

### TX CH 11

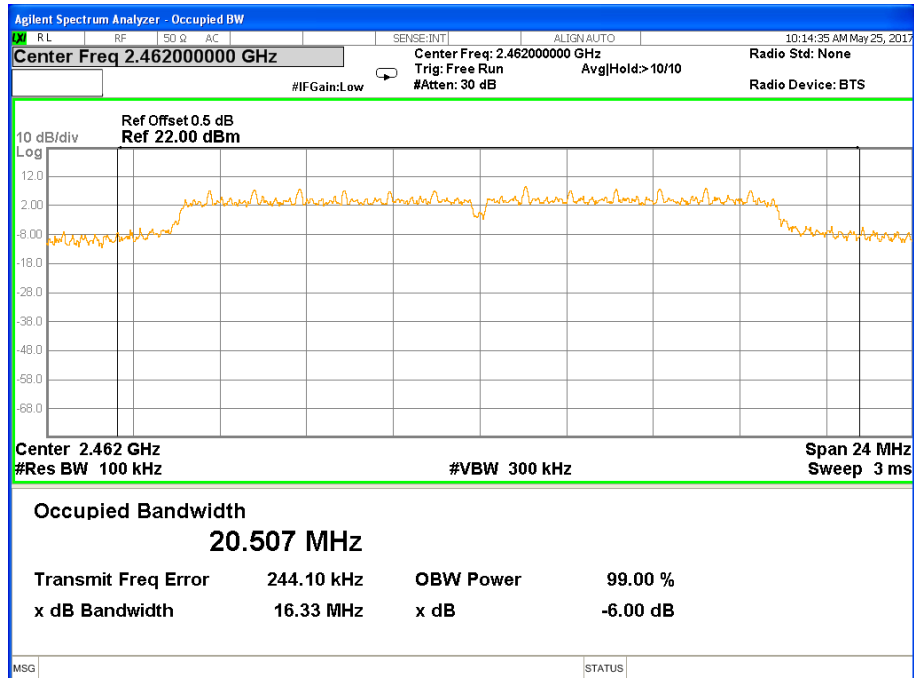






Temperature:	25 °C	Relative Humidity:	60%
Pressure:	1012 hPa	Test Voltage:	AC 120V/60Hz
Test Mode:	TX n Mode(20M) /CH01, CH06, CH11		


Frequency	6dB Bandwidth (MHz)	Channel Separation (KHz)	Result
2412 MHz	17.59	≥500KHz	PASS
2437 MHz	17.60	≥500KHz	PASS
2462 MHz	17.58	≥500KHz	PASS

**TX CH 01**

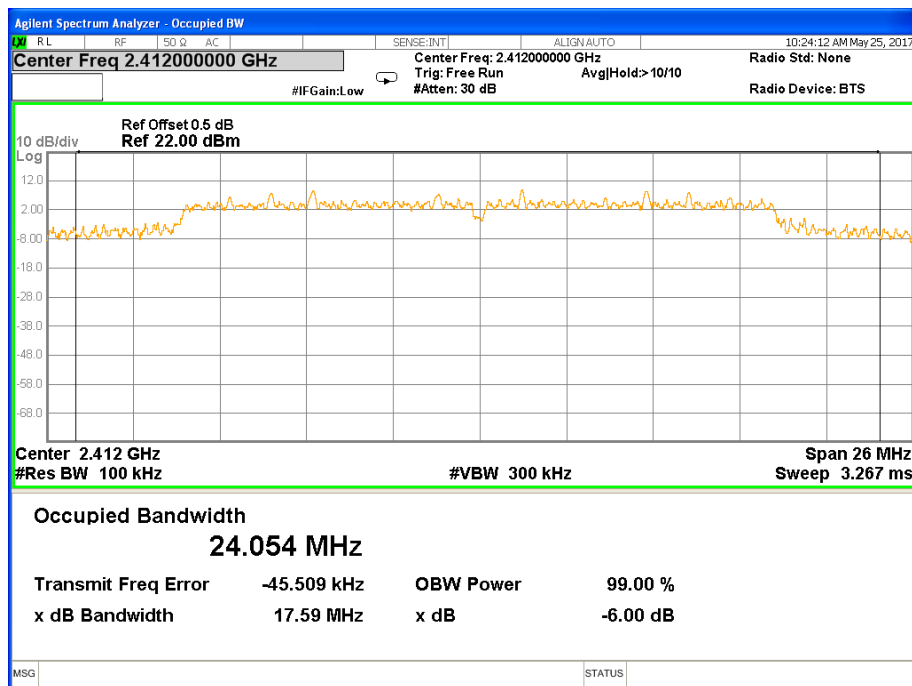




### TX CH 06

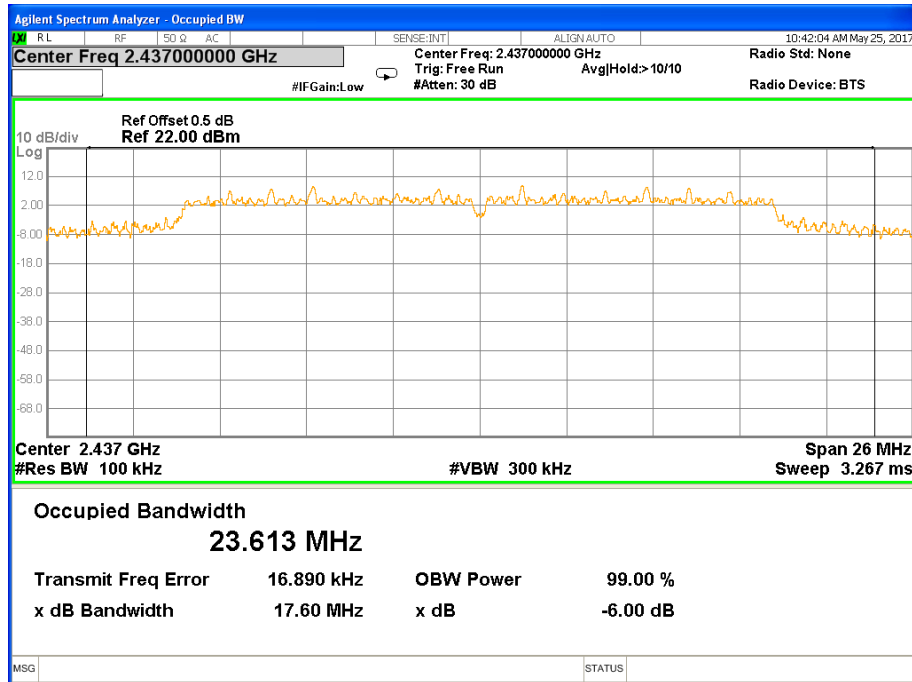

### TX CH 11

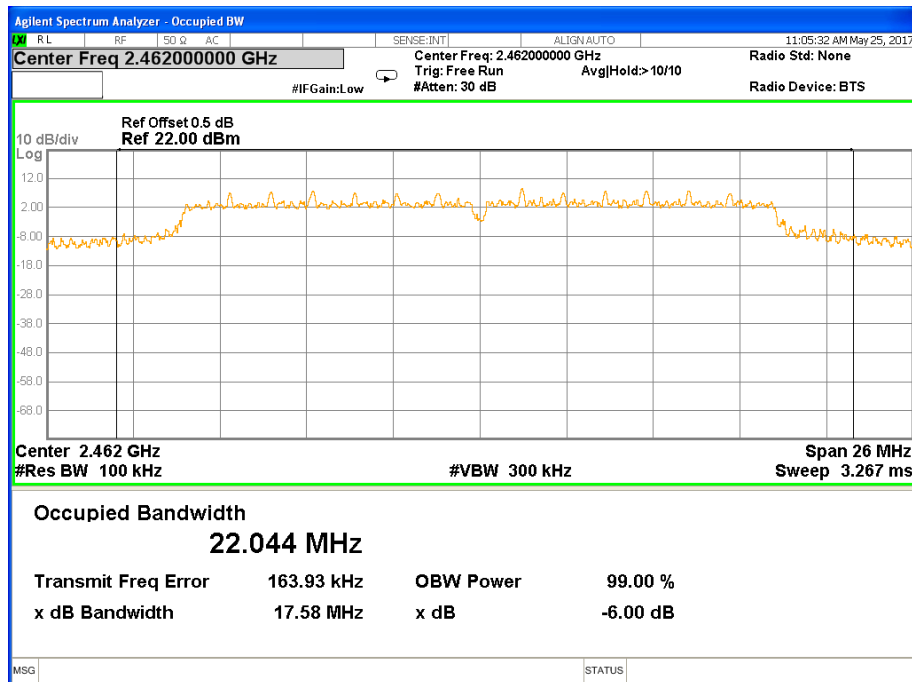



## 7. PEAK OUTPUT POWER TEST

### 7.1 APPLIED PROCEDURES / LIMIT

FCC Part 15.247,Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Output Power	1 watt or 30dBm	2400-2483.5	PASS

### 7.2 TEST PROCEDURE

- a. The EUT was directly connected to the Power Sensor&PC

### 7.3 DEVIATION FROM STANDARD

No deviation.

### 7.4 TEST SETUP



### 7.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 7.4 Unless otherwise a special operating condition is specified in the follows during the testing.



## 7.6 TEST RESULTS

Temperature:	25 °C	Relative Humidity:	60%
Pressure:	1012 hPa	Test Voltage:	AC 120V/60Hz

**TX 802.11b Mode**

Test Channel	Frequency	Conducted Output Power		LIMIT
	(MHz)	Peak(dBm)	AVG(dBm)	dBm
CH01	2412	16.32	15.28	30
CH06	2437	15.75	14.73	30
CH11	2462	15.38	14.35	30

**TX 802.11g Mode**

Test Channel	Frequency	Conducted Output Power		LIMIT
	(MHz)	Peak(dBm)	AVG(dBm)	dBm
CH01	2412	14.32	13.29	30
CH06	2437	14.83	13.81	30
CH11	2462	14.71	13.69	30

**TX 802.11n20 Mode**

Test Channel	Frequency	Conducted Output Power		LIMIT
	(MHz)	Peak(dBm)	AVG(dBm)	dBm
CH01	2412	12.65	10.62	30
CH06	2437	12.46	10.43	30
CH11	2462	12.33	10.31	30



## 8. ANTENNA REQUIREMENT

### 8.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

### 8.2 EUT ANTENNA

The EUT antenna is Integral Antenna. It comply with the standard requirement.

## APPENDIX - PHOTOS OF TEST SETUP

### Radiated Measurement Photos





### Conducted Measurement Photos



\*\*\*\*\*END OF THE REPORT\*\*\*\*\*