



MEASUREMENT REPORT FCC Part 15B

Applicant Name:
SMC Corporation
4-2-2, Kinunodai, Tsukubamirai-shi
Ibaraki-ken, 300-2493
Japan


Date of Testing:
2/26/2021 - 3/2/2021
Test Site/Location:
PCTEST Lab. Columbia, MD, USA
Test Report Serial No.:
1M2102080008-02.AJE7

FCC ID:	2AJE7SMC-WEX05
IC ID:	21344-WEX05
APPLICANT:	SMC Corporation

Application Type: Certification
Model/HVIN: EX600-WLXB1
Additional Model(s)/HVIN(s): EX600-WLYB1
EUT Type: Wireless I/O Device
FCC Classification: Part 15 Class B Computing Device Peripheral (JBP)
FCC Rule Part(s): FCC Part 15 Subpart B
Test Procedure(s): ANSI C63.4-2014

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and has been tested in accordance with the measurement procedures specified in ANSI C63.4-2014 (See Test Report). The results shown herein are also deemed satisfactory evidence of compliance with Industry Canada Interference-Causing Equipment Standard ICES-003. These measurements were performed with no deviation from the standards. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.




Randy Ortanez
President



FCC ID: 2AJE7SMC-WEX05 IC ID: 21344-WEX05	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2102080008-02.AJE7	Test Dates: 2/26/2021 - 3/2/2021	EUT Type: Wireless I/O Device	Page 1 of 16

TABLE OF CONTENTS

1.0	Introduction	3
1.1	Scope.....	3
1.1	PCTEST Test Location	3
1.2	Test Facility / Accreditations	3
2.0	PRODUCT INFORMATION	4
2.1	Equipment Description.....	4
2.2	Device Capabilities	4
2.3	Test Configuration	4
2.4	EMI Suppression Device(s)/Modifications.....	4
3.0	DESCRIPTION OF TESTS	5
3.1	Evaluation Procedure.....	5
3.2	Radiated Emissions	5
3.3	Environmental Conditions	6
4.0	SAMPLE CALCULATIONS	7
4.1	Radiated Emission Measurement Sample Calculation	7
5.0	Measurement Uncertainty	8
6.0	TEST EQUIPMENT CALIBRATION DATA.....	9
7.0	TEST DATA	10
7.1	Summary	10
7.2	Radiated Measurement Data	11
8.0	CONCLUSION	16

FCC ID: 2AJE7SMC-WEX05 IC ID: 21344-WEX05	 Proud to be part of  element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2102080008-02.AJE7	Test Dates: 2/26/2021 - 3/2/2021	EUT Type: Wireless I/O Device	Page 2 of 16	

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and Innovation, Science and Economic Development Canada.

1.1 PCTEST Test Location

These measurement tests were conducted at the PCTEST facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The facility is 0.4 miles North of the FCC laboratory, and the ambient signal and ambient signal strength are approximately equal to those of the FCC laboratory. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

1.2 Test Facility / Accreditations

Measurements were performed at PCTEST located in Columbia, MD 21046, U.S.A.

- PCTEST is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS)."
- PCTEST facility is a registered (2451B) test laboratory with the site description on file with ISED.

FCC ID: 2AJE7SMC-WEX05 IC ID: 21344-WEX05		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2102080008-02.AJE7	Test Dates: 2/26/2021 - 3/2/2021	EUT Type: Wireless I/O Device	Page 3 of 16	

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **SMC Wireless I/O Device FCC ID: 2AJE7SMC-WEX05**. The test data contained in this report pertains only to the emissions due to the digital circuitry of the EUT.

Test Device Serial No.: WLXB1, WLYB1

2.2 Device Capabilities

This device contains the following capabilities:

2.4GHz Frequency Hopper



2.3 Test Configuration

The EUT was connected to a power supply. The EUT's transmitter is initiated by the NFC device controlled by a laptop. The NFC device is then removed from the test set up. All equipment is placed on the test table top and arranged in a typical configuration in accordance with ANSI C63.4-2014.

For more information please see Section 7.0 for test data and the test setup photos document for the test setup photographs.

2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: 2AJE7SMC-WEX05 IC ID: 21344-WEX05	 <small>Proud to be part of  element</small>	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2102080008-02.AJE7	Test Dates: 2/26/2021 - 3/2/2021	EUT Type: Wireless I/O Device	Page 4 of 16	

3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedure described in the American National Standard for Methods of Measurement of Radio-Noise Emission from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40GHz (ANSI C63.4-2014) was used in the measurement of the EUT.

Deviation from measurement procedure.....None


3.2 Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Clause 5, Figure 5.7 of ANSI C63.4-2014. A raised turntable is used for radiated measurement. It is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. . An 80cm tall test table made of Styrodur is placed on top of the turn table. For measurements above 1GHz, an additional Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014. Additionally, radiated emissions below 30MHz are also validated on an Open Area Test Site to assert correlation with the chamber measurements per the requirements of KDB 474788 D01.

FCC ID: 2AJE7SMC-WEX05 IC ID: 21344-WEX05	 Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2102080008-02.AJE7	Test Dates: 2/26/2021 - 3/2/2021	EUT Type: Wireless I/O Device	Page 5 of 16	

3.3 Environmental Conditions

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

FCC ID: 2AJE7SMC-WEX05 IC ID: 21344-WEX05		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2102080008-02.AJE7	Test Dates: 2/26/2021 - 3/2/2021	EUT Type: Wireless I/O Device	Page 6 of 16	

4.0 SAMPLE CALCULATIONS

4.1 Radiated Emission Measurement Sample Calculation

@ 66.7 MHz

Class B limit	= 100 $\mu\text{V}/\text{m}$ = 40.0 dB $\mu\text{V}/\text{m}$
Reading	= - 76.0 dBm (calibrated level)
Convert to dB μV	= - 76.0 + 107 = 31.0 dB μV
Antenna Factor + Cable Loss	= 5.8 dB/m
Total	= 36.8 dB $\mu\text{V}/\text{m}$
Margin	= 36.8 - 40.0 = - 3.2 dB
	= 3.2 dB below limit

Note:

$$\text{Level [dB}\mu\text{V]} = 20 \log_{10} (\text{Level } [\mu\text{V}/\text{m}])$$



$$\text{Level [dB}\mu\text{V]} = \text{Level [dBm]} + 107$$

FCC ID: 2AJE7SMC-WEX05 IC ID: 21344-WEX05	 PCTEST [®] Proud to be part of  element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2102080008-02-AJE7	Test Dates: 2/26/2021 - 3/2/2021	EUT Type: Wireless I/O Device	Page 7 of 16	

5.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty (\pm dB)
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07

FCC ID: 2AJE7SMC-WEX05 IC ID: 21344-WEX05	 PCTEST [®] Proud to be part of  element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2102080008-02.AJE7	Test Dates: 2/26/2021 - 3/2/2021	EUT Type: Wireless I/O Device	Page 8 of 16	

6.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Emco	3115	Horn Antenna (1-18GHz)	6/18/2020	Biennial	6/18/2022	9704-5182
Keysight Technologies	N9030A	PXA Signal Analyzer (44GHz)	8/17/2020	Annual	8/17/2021	MY52350166
Keysight Technologies	N9020A	MXA Signal Analyzer	9/22/2020	Annual	9/22/2021	MY54500644
Rohde & Schwarz	ESU40	EMI Test Receiver (40GHz)	9/9/2020	Annual	9/9/2021	100348
Rohde & Schwarz	FSW67	Signal / Spectrum Analyzer	8/10/2020	Annual	8/10/2021	103200
Rohde & Schwarz	SFUNIT-Rx	Shielded Filter Unit	11/25/2020	Annual	11/25/2021	102138
Sunol Science	JB5	Bi-Log Antenna (30M - 5GHz)	7/27/2020	Biennial	7/27/2022	A051107

Table 6-1. Annual Test Equipment Calibration Schedule

FCC ID: 2AJE7SMC-WEX05 IC ID: 21344-WEX05		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2102080008-02.AJE7	Test Dates: 2/26/2021 - 3/2/2021	EUT Type: Wireless I/O Device	Page 9 of 16	

7.0 TEST DATA


7.1 Summary

Test Date(s): 2/26/2021 - 3/2/2021

Test Engineer: Nicholas Czumak

FCC Part 15 Section	Description	Result
15.107	Conducted Emissions	PASS
15.109	Radiated Emissions	PASS

Table 7-1. Summary of Test Results

FCC ID: 2AJE7SMC-WEX05 IC ID: 21344-WEX05	 PCTEST [®] Proud to be part of  element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2102080008-02.AJE7	Test Dates: 2/26/2021 - 3/2/2021	EUT Type: Wireless I/O Device	Page 10 of 16	

7.2 Radiated Measurement Data

§15.109; ICES-003 (6.2)

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at maximum power and at the appropriate frequencies. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.105 of the Title 47 CFR and ICES-003 (6.2) must not exceed the limits shown in Table 7-2 per Section 15.109 and ICES-003 (6.2).

Frequency [MHz]	Field Strength Limit [μ V/m]
30 – 88	100
88 – 216	150
216 – 960	200
> 960	500

Table 7-2. 3-Meter Radiated Limits (Section 15.109)

Test Procedures Used

ANSI C63.4-2014

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer frequency set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize


Test Setup

The EUT and measurement equipment were set up as shown test setup photos provided.


FCC ID: 2AJE7SMC-WEX05 IC ID: 21344-WEX05	 Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2102080008-02.AJE7	Test Dates: 2/26/2021 - 3/2/2021	EUT Type: Wireless I/O Device	Page 11 of 16	

Test Notes


1. All modes of operation were investigated and the worst-case emissions are reported.
2. Radiated emissions were measured from 30MHz – 30 to ensure that the provisions of 15.33(b)(1) are satisfied with respect to the upper frequency scanning range.
3. The radiated limits for unintentional radiators at a distance of 3 meters are used in the table above, as specified in 15.109(a).
4. All readings are calibrated by a signal generator with accuracy traceable to the National Institute of Standards and Technology (NIST).
5. AFCL (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)
6. Level (dB μ V/m) = Analyzer Reading (dBm) + AFCL (dB/m) + 107
7. Margin (dB) = Field strength (dB μ V/m) – Limit (dB μ V/m)
8. Measurements are made using a CISPR quasi-peak detector with a 120kHz resolution bandwidth. Above 1GHz, peak measurements are made using a peak detector with a resolution bandwidth of 1MHz and a video bandwidth of 3MHz and average measurements are made with a RMS detector using a resolution bandwidth of 1MHz and a video bandwidth of 3MHz.
9. Calibrated linearly polarized broadband and horn antennas were used for measurements below and above 1GHz, respectively. For measurements made below 1GHz, the results recorded using the broadband antenna are known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antennas was found to be less than 2:1.
10. Calibrated low-loss microwaves cables and broadband amplifiers are used.

FCC ID: 2AJE7SMC-WEX05 IC ID: 21344-WEX05	 <p>PCTEST Proud to be part of  element</p>	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2102080008-02.AJE7	Test Dates: 2/26/2021 - 3/2/2021	EUT Type: Wireless I/O Device	Page 12 of 16	

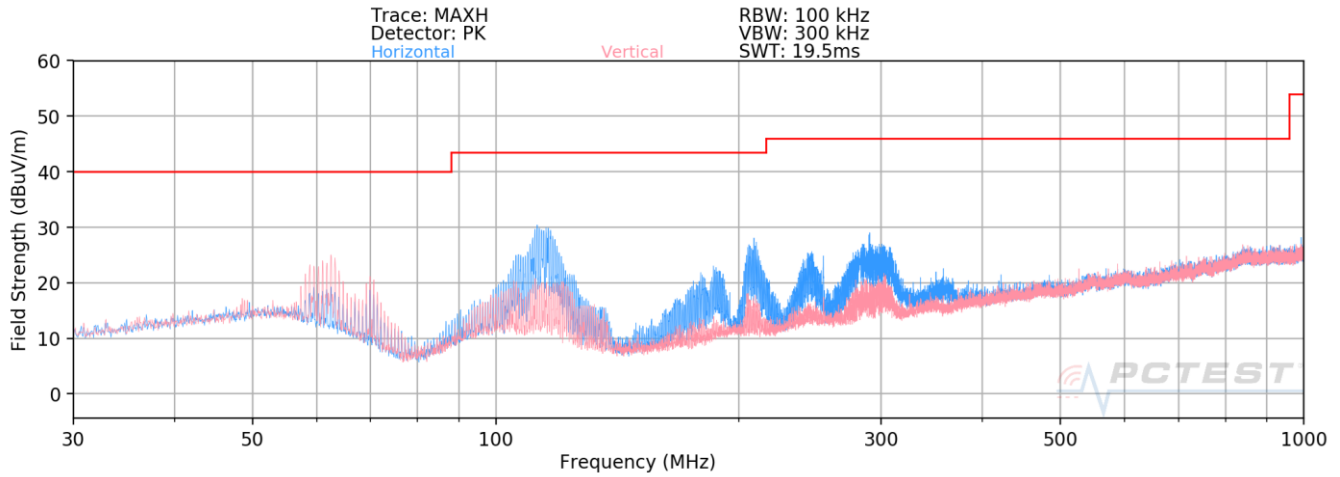

Radiated Spurious Emissions Measurements – Below 1GHz

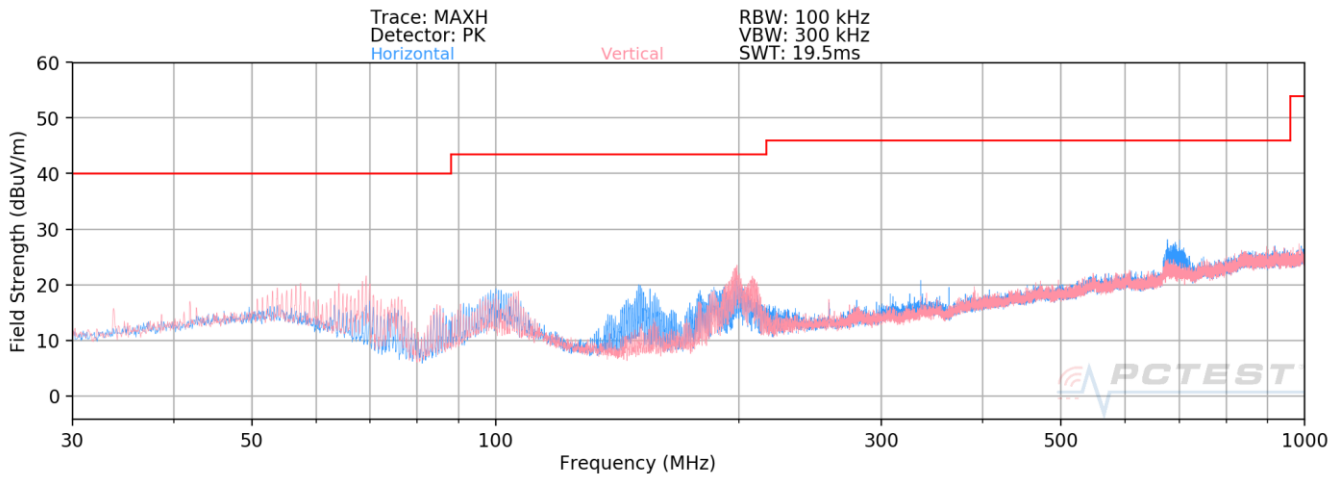


Plot 7-1. Radiated Spurious Plot Below 1GHz (WLXB1)




Plot 7-2. Radiated Spurious Plot Below 1GHz (WLYB1)

FCC ID: 2AJE7SMC-WEX05 IC ID: 21344-WEX05	 Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2102080008-02.AJE7	Test Dates: 2/26/2021 - 3/2/2021	EUT Type: Wireless I/O Device	Page 13 of 16	

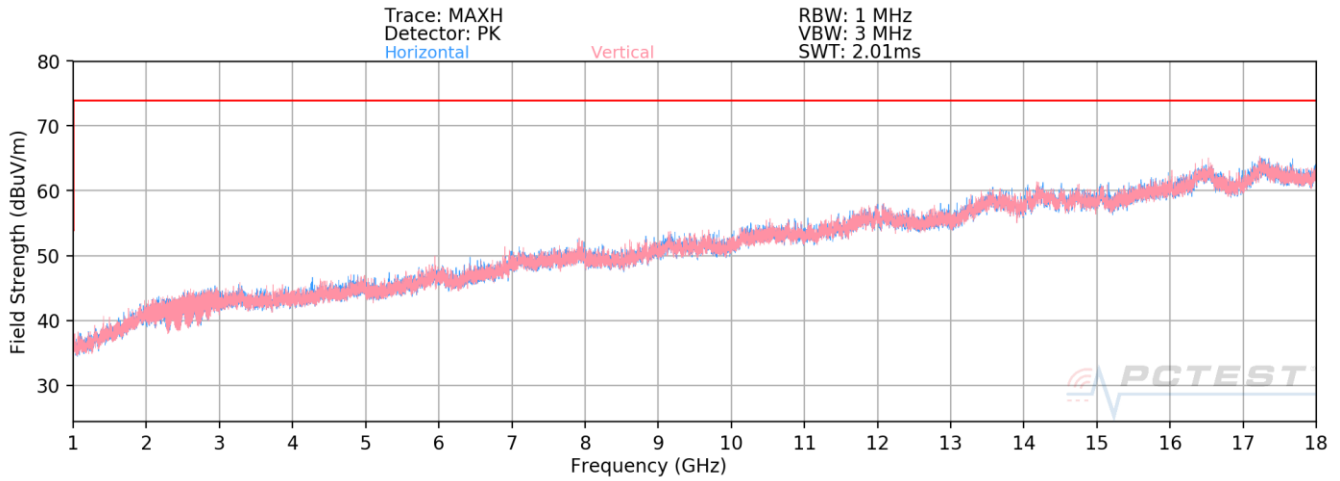

Radiated Spurious Emissions Measurements – Above 1GHz

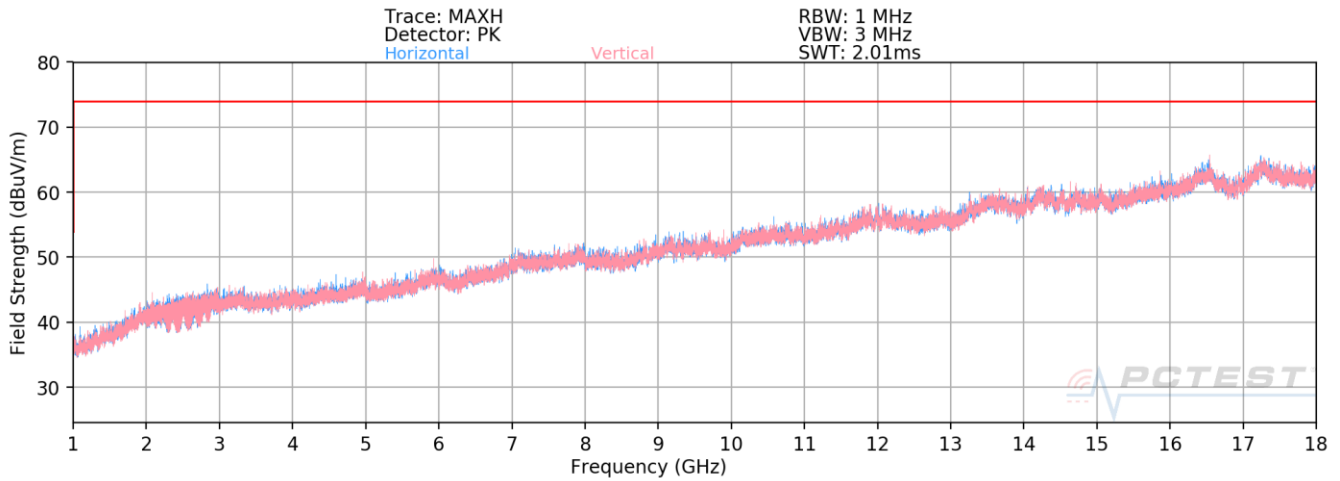

Plot 7-3. Radiated Spurious Plot Above 1GHz (WLXB1)



Plot 7-4. Radiated Spurious Plot Above 1GHz (WLYB1)

FCC ID: 2AJE7SMC-WEX05 IC ID: 21344-WEX05		MEASUREMENT REPORT (CERTIFICATION)	 Approved by: Technical Manager
Test Report S/N: 1M2102080008-02.AJE7	Test Dates: 2/26/2021 - 3/2/2021	EUT Type: Wireless I/O Device	Page 14 of 16


Radiated Spurious Emissions Measurements

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
62.52	Quasi-Peak	V	102	23	-74.40	-15.81	16.79	40.00	-23.21
112.47	Quasi-Peak	H	176	139	-68.51	-16.84	21.65	43.52	-21.88
185.87	Quasi-Peak	H	104	37	-75.91	-17.25	13.84	43.52	-29.68
208.72	Quasi-Peak	H	143	35	-73.27	-16.23	17.50	43.52	-26.02
243.21	Quasi-Peak	H	112	44	-69.90	-14.73	22.37	46.02	-23.65
290.21	Quasi-Peak	H	108	54	-68.88	-13.94	24.18	46.02	-21.84

Table 7-3. Radiated Measurements at 3-meters (WLXB1)


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
57.42	Quasi-Peak	V	106	22	-76.37	-14.48	16.15	40.00	-23.85
69.17	Quasi-Peak	V	102	16	-75.13	-17.99	13.88	40.00	-26.12
198.01	Quasi-Peak	V	178	131	-78.96	-15.84	12.20	43.52	-31.32
207.62	Quasi-Peak	V	186	130	-82.45	-16.34	8.21	43.52	-35.31
335.45	Quasi-Peak	H	117	74	-75.74	-12.43	18.83	46.02	-27.19
676.79	Quasi-Peak	H	125	15	-80.25	-6.20	20.55	46.02	-25.47

Table 7-4. Radiated Measurements at 3-meters (WLYB1)

FCC ID: 2AJE7SMC-WEX05 IC ID: 21344-WEX05	 PCTEST Proud to be part of  element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2102080008-02.AJE7	Test Dates: 2/26/2021 - 3/2/2021	EUT Type: Wireless I/O Device	Page 15 of 16	

8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **SMC Wireless I/O Device FCC ID: 2AJE7SMC-WEX05** has been tested to comply with the requirements specified in §15.107 and §15.109 of the FCC rules and ICES-003 of the Innovation, Science, and Economic Development Canada rules.

FCC ID: 2AJE7SMC-WEX05 IC ID: 21344-WEX05		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2102080008-02.AJE7	Test Dates: 2/26/2021 - 3/2/2021	EUT Type: Wireless I/O Device	Page 16 of 16	