


[TestMode: TX N20 high channel]; [Polarity: Vertical]

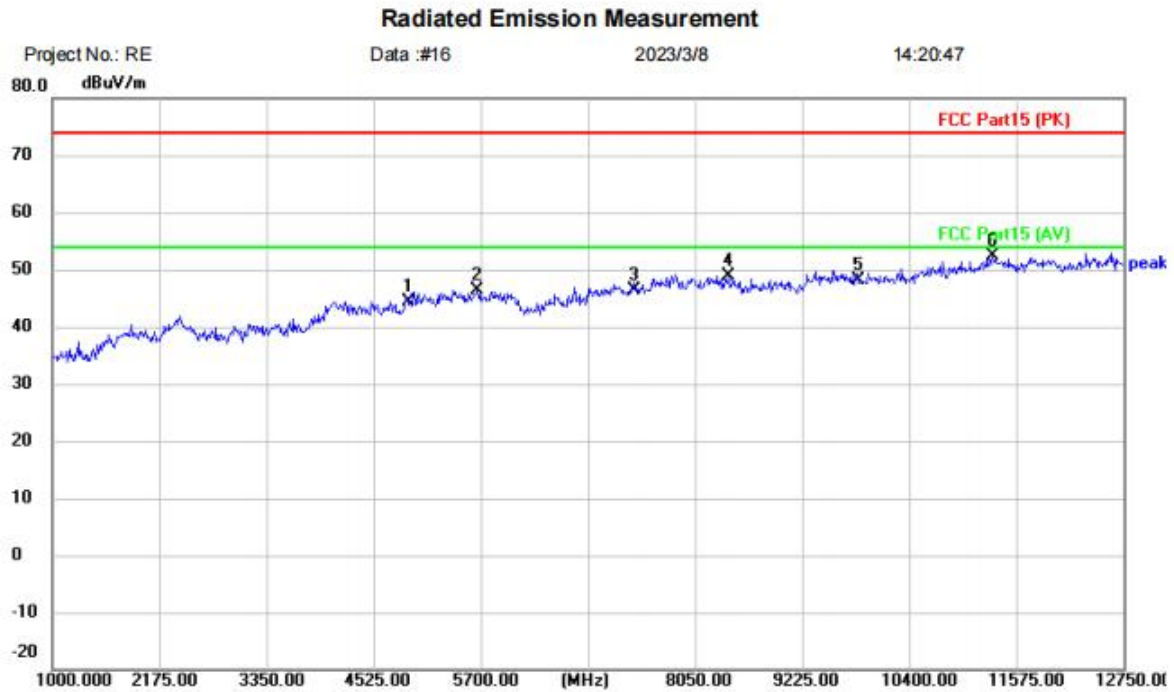


Site: Polarization: **Vertical** Temperature: (C)
 Limit: FCC Part15 (PK) Power: Humidity: %RH
 EUT: Dash Cam
 M/N: mini Pro
 Mode: 11N20 TX-H
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4924.000	39.66	4.82	44.48	74.00	-29.52	peak	
2		5664.750	39.66	6.77	46.43	74.00	-27.57	peak	
3		7386.000	37.98	8.36	46.34	74.00	-27.66	peak	
4		8414.250	39.84	9.08	48.92	74.00	-25.08	peak	
5		9848.000	36.51	11.52	48.03	74.00	-25.97	peak	
6	*	11316.500	38.72	13.59	52.31	74.00	-21.69	peak	

Test Result: Pass

[TestMode: TX N20 high channel]; [Polarity: Horizontal]

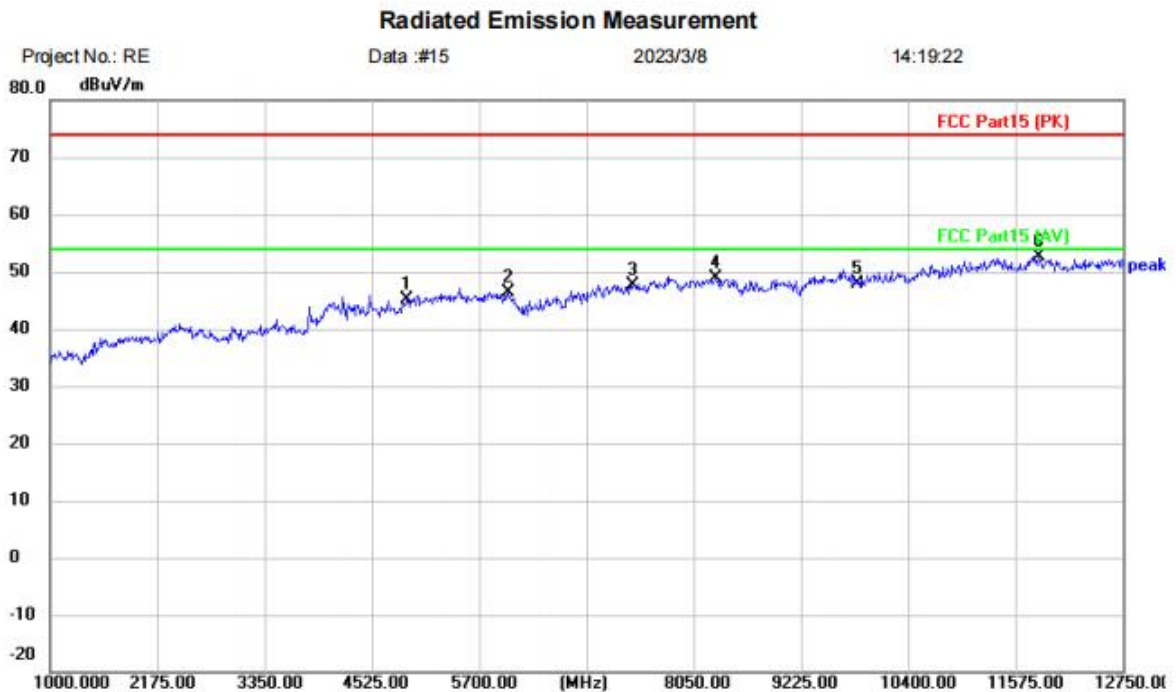

Site: Polarization: **Horizontal** Temperature: (C)
 Limit: FCC Part15 (PK) Power: Humidity: %RH
 EUT: Dash Cam
 MN: mini Pro
 Mode: 11N20 TX-H
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4924.000	40.20	4.82	45.02	74.00	-28.98	peak	
2		6017.250	42.47	3.97	46.44	74.00	-27.56	peak	
3		7386.000	39.37	8.36	47.73	74.00	-26.27	peak	
4		8296.750	39.76	9.03	48.79	74.00	-25.21	peak	
5		9848.000	36.43	11.52	47.95	74.00	-26.05	peak	
6	*	11833.500	38.90	13.82	52.72	74.00	-21.28	peak	

Test Result: Pass

12 RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS


Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 6.10.5
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	William
Temperature	25°C
Humidity	60%

12.1 LIMITS

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

12.2 BLOCK DIAGRAM OF TEST SETUP

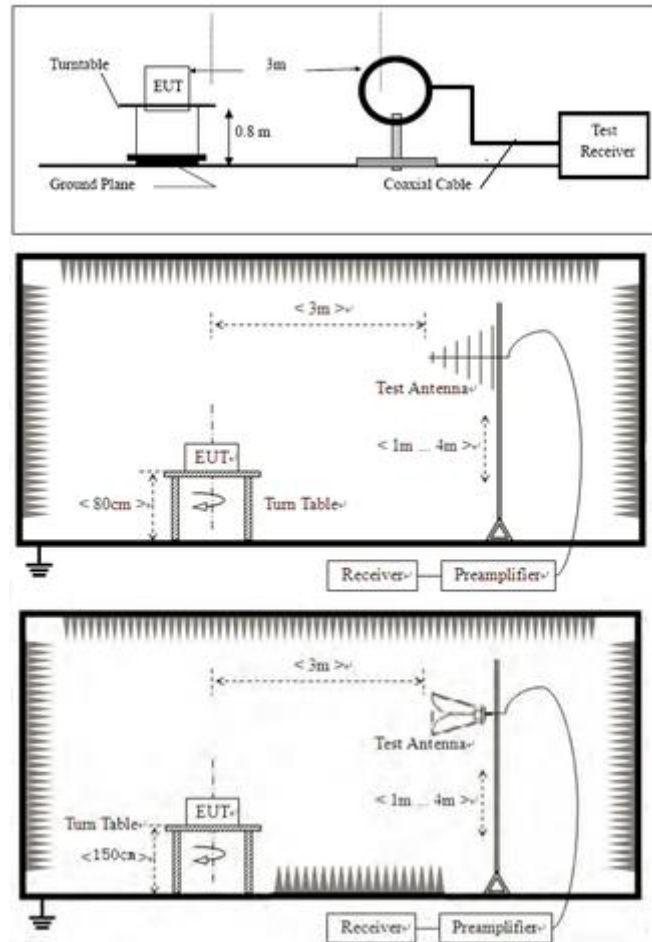

12.3 PROCEDURE

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.


Remark 1: $\text{Level} = \text{Read Level} + \text{Cable Loss} + \text{Antenna Factor} - \text{Preamp Factor}$

Remark 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

BlueAsia

12.4 TEST DATA

[TestMode: TX B low channel]; [Polarity: Horizontal]

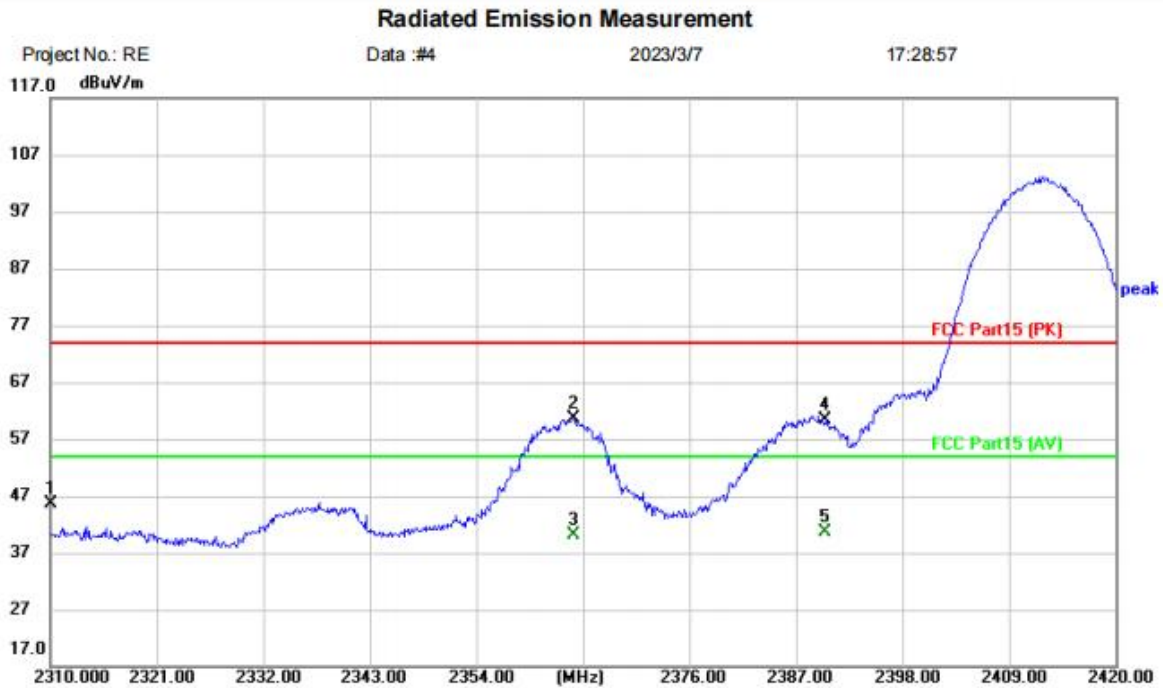


Site: Polarization: **Horizontal** Temperature: (C)
 Limit: FCC Part15 (PK) Power: Humidity: %RH
 EUT: Dash Cam
 M/N: mini Pro
 Mode: 11B TX-L
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1		2310.000	49.98	-4.27	45.71	74.00	-28.29	peak	
2	*	2364.010	64.69	-3.96	60.73	74.00	-13.27	peak	
3		2364.010	43.99	-3.96	40.03	54.00	-13.97	AVG	
4		2390.000	64.17	-3.82	60.35	74.00	-13.65	peak	
5		2390.000	44.46	-3.82	40.64	54.00	-13.36	AVG	

Test Result: Pass

[TestMode: TX B low channel]; [Polarity: Vertical]

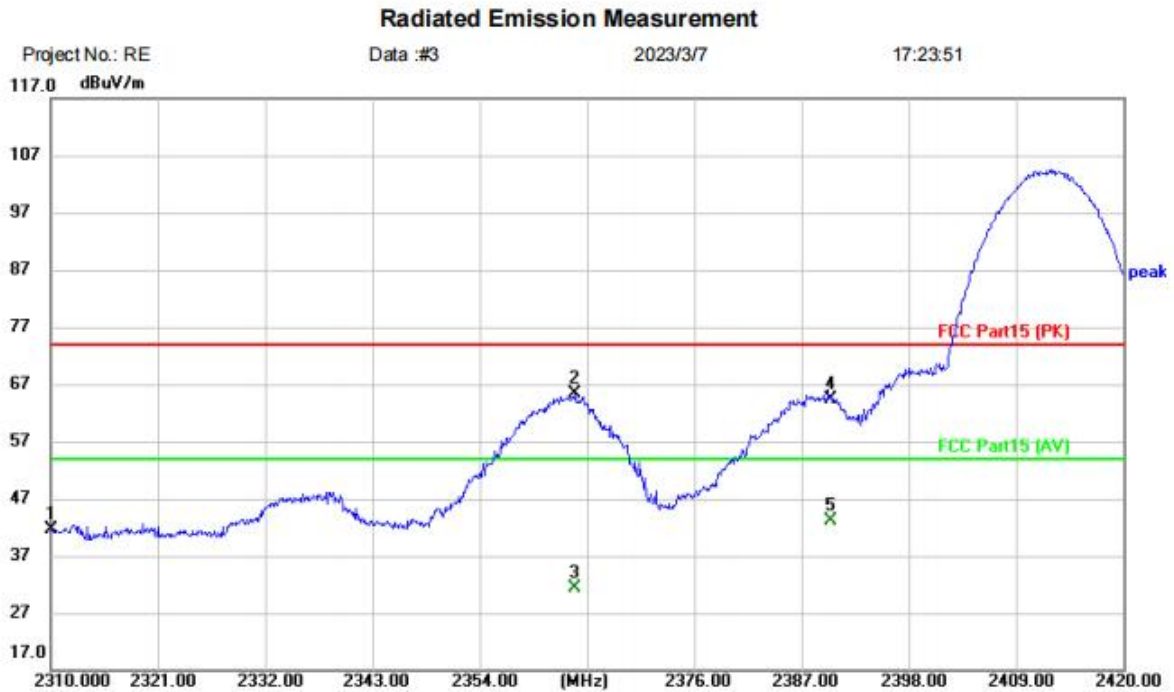


Site: Polarization: **Vertical** Temperature: (C)
 Limit: FCC Part15 (PK) Power: Humidity: %RH
 EUT: Dash Cam
 M/N: mini Pro
 Mode: 11B TX-L
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2310.000	45.93	-4.27	41.66	74.00	-32.34	peak	
2	*	2363.790	69.32	-3.96	65.36	74.00	-8.64	peak	
3		2363.790	35.40	-3.96	31.44	54.00	-22.56	AVG	
4		2390.000	68.15	-3.82	64.33	74.00	-9.67	peak	
5		2390.000	46.92	-3.82	43.10	54.00	-10.90	AVG	

Test Result: Pass

[TestMode: TX B high channel]; [Polarity: Horizontal]

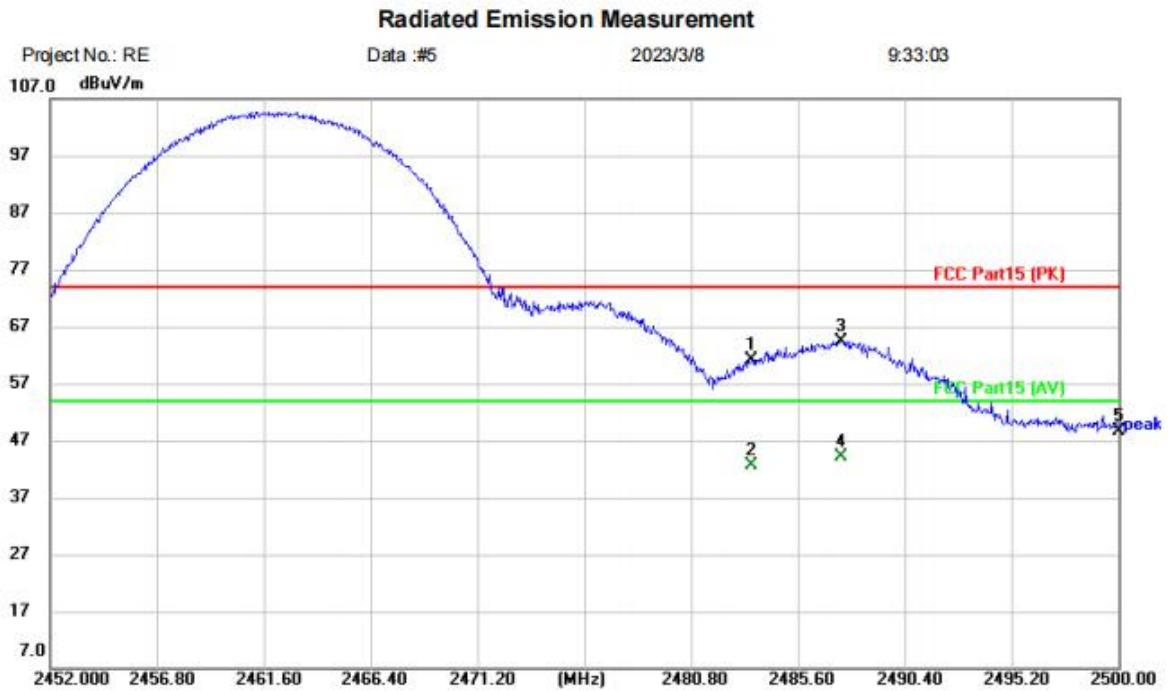


Site: Polarization: **Horizontal** Temperature: (C)
 Limit: FCC Part15 (PK) Power: Humidity: %RH
 EUT: Dash Cam
 M/N: mini Pro
 Mode: 11B TX-H
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2483.500	65.00	-3.96	61.04	74.00	-12.96	peak	
2		2483.500	46.56	-3.96	42.60	54.00	-11.40	AVG	
3	*	2487.520	68.45	-3.97	64.48	74.00	-9.52	peak	
4		2487.520	48.17	-3.97	44.20	54.00	-9.80	AVG	
5		2500.000	52.55	-4.00	48.55	74.00	-25.45	peak	

Test Result: Pass

[TestMode: TX B high channel]; [Polarity: Vertical]

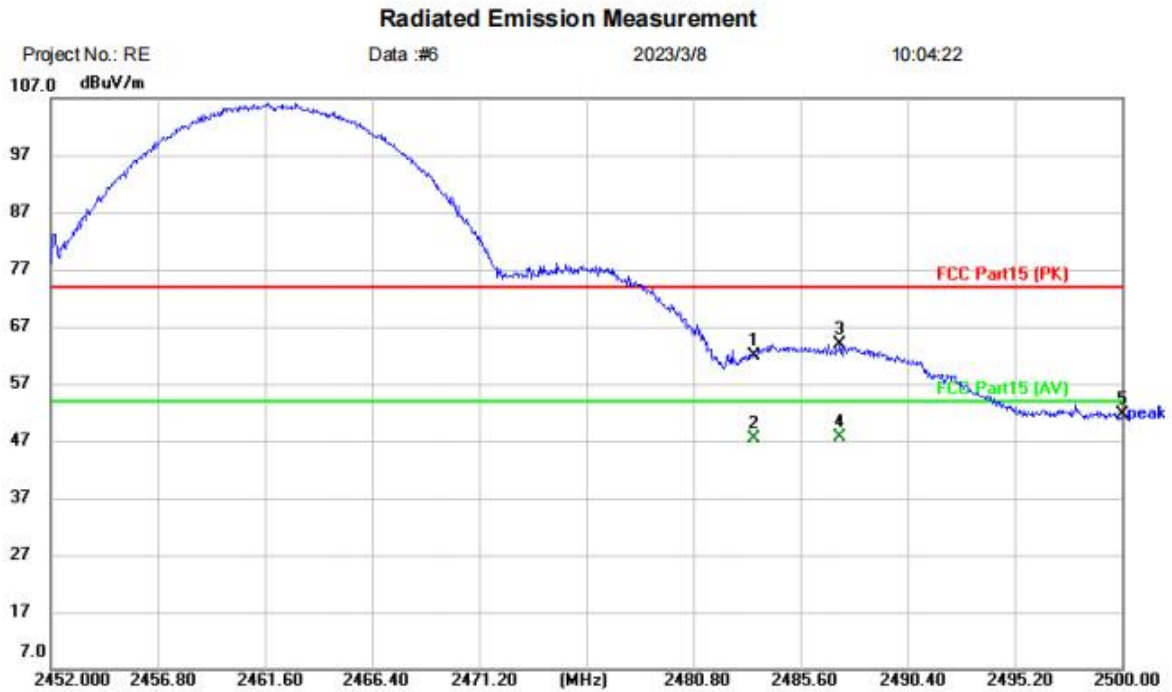


Site	Polarization: Vertical	Temperature: (C)
Limit: FCC Part15 (PK)	Power:	Humidity: %RH
EUT: Dash Cam		
M/N: mini Pro		
Mode: 11B TX-H		
Note:		

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2483.500	65.82	-3.96	61.86	74.00	-12.14	peak	
2		2483.500	51.29	-3.96	47.33	54.00	-6.67	AVG	
3		2487.376	67.88	-3.97	63.91	74.00	-10.09	peak	
4	*	2487.376	51.69	-3.97	47.72	54.00	-6.28	AVG	
5		2500.000	55.68	-4.00	51.68	74.00	-22.32	peak	

Test Result: Pass

[TestMode: TX G low channel]; [Polarity: Horizontal]

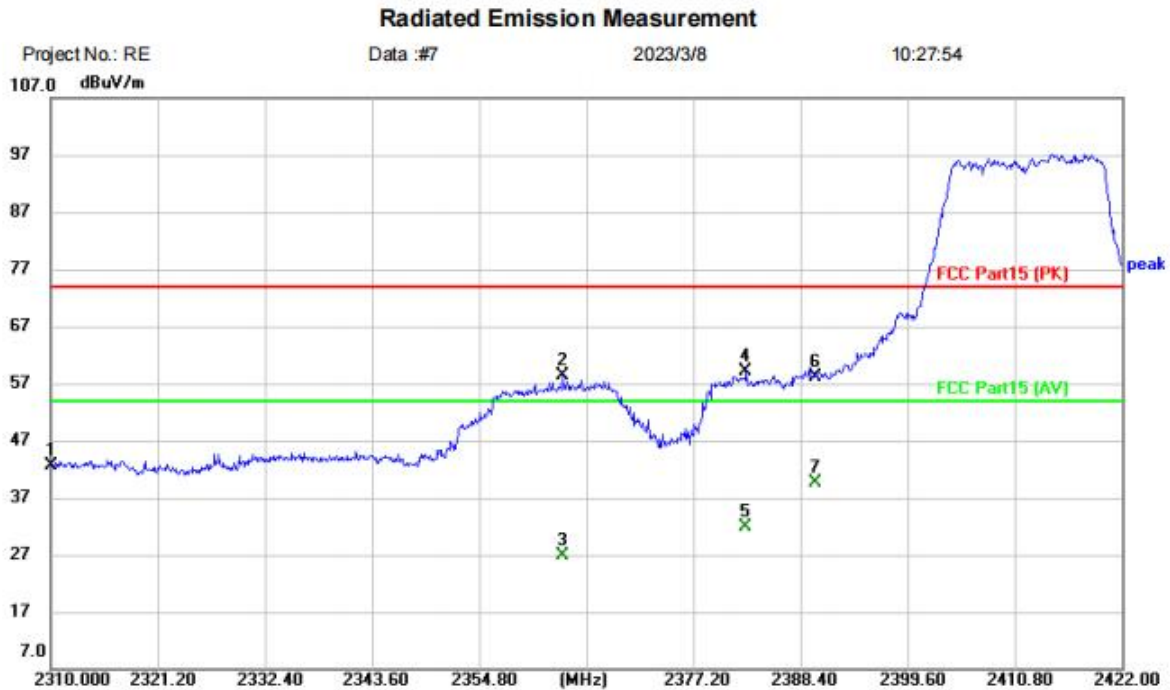


Site: Polarization: **Horizontal** Temperature: (C)
 Limit: FCC Part15 (PK) Power: Humidity: %RH
 EUT: Dash Cam
 M/N: mini Pro
 Mode: 11G TX-L
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2310.000	46.81	-4.27	42.54	74.00	-31.46	peak	
2		2363.536	62.43	-3.96	58.47	74.00	-15.53	peak	
3		2363.536	30.85	-3.96	26.89	54.00	-27.11	AVG	
4		2382.688	63.01	-3.86	59.15	74.00	-14.85	peak	
5		2382.688	35.76	-3.86	31.90	54.00	-22.10	AVG	
6		2390.000	61.99	-3.82	58.17	74.00	-15.83	peak	
7	*	2390.000	43.44	-3.82	39.62	54.00	-14.38	AVG	

Test Result: Pass

[TestMode: TX G low channel]; [Polarity: Vertical]

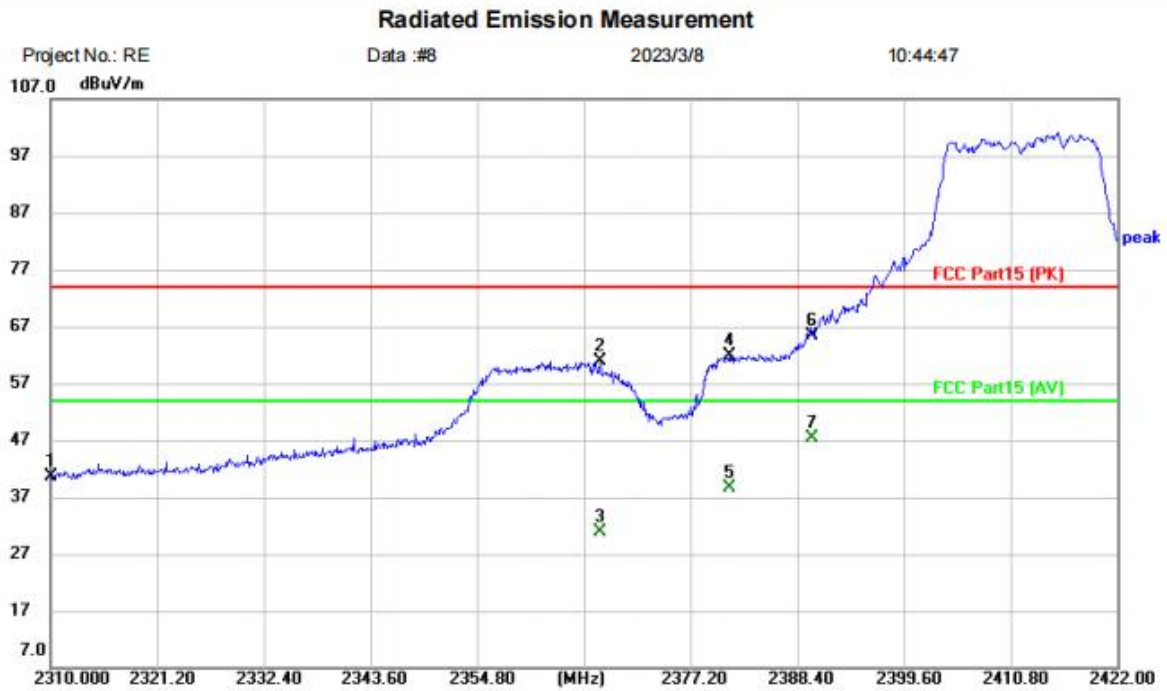


Site: Polarization: **Vertical** Temperature: (C)
 Limit: FCC Part15 (PK) Power: Humidity: %RH
 EUT: Dash Cam
 M/N: mini Pro
 Mode: 11G TX-L
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1		2310.000	44.90	-4.27	40.63	74.00	-33.37	peak	
2		2367.680	64.80	-3.94	60.86	74.00	-13.14	peak	
3		2367.680	34.71	-3.94	30.77	54.00	-23.23	AVG	
4		2381.344	65.65	-3.88	61.77	74.00	-12.23	peak	
5		2381.344	42.57	-3.88	38.69	54.00	-15.31	AVG	
6		2390.000	69.11	-3.82	65.29	74.00	-8.71	peak	
7	*	2390.000	51.30	-3.82	47.48	54.00	-6.52	AVG	

Test Result: Pass

[TestMode: TX G high channel]; [Polarity: Vertical]

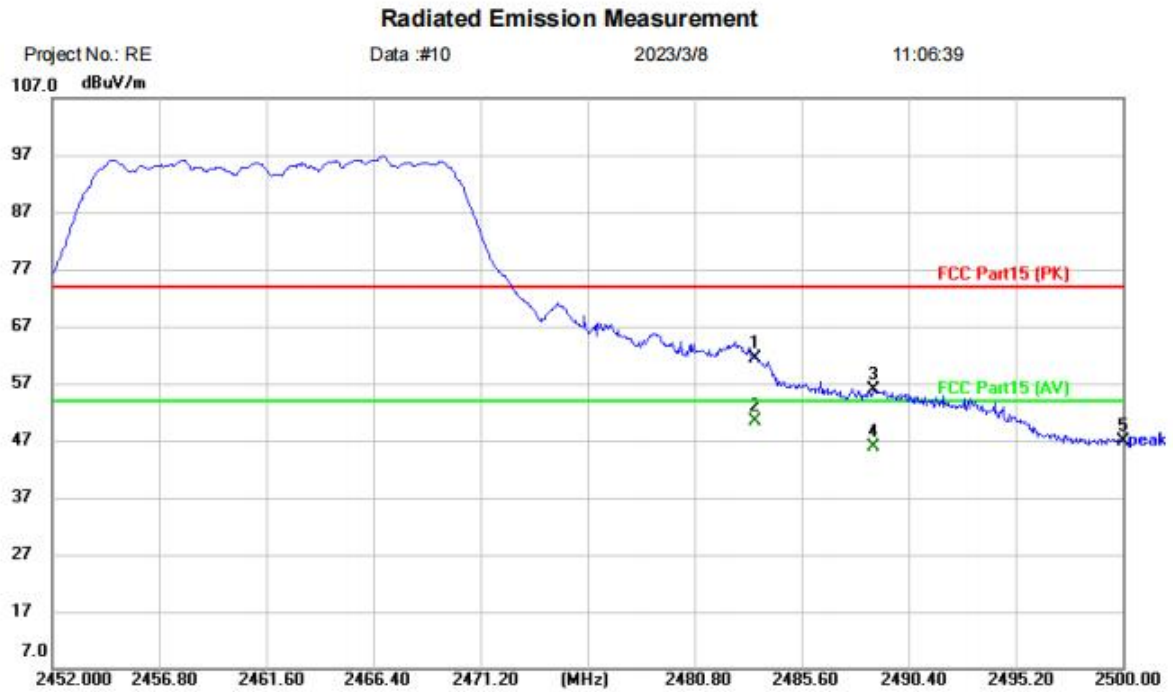


Site: Polarization: **Vertical** Temperature: (C)
 Limit: FCC Part15 (PK) Power: Humidity: %RH
 EUT: Dash Cam
 M/N: mini Pro
 Mode: 11G TX-H
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2483.500	65.45	-3.96	61.49	74.00	-12.51	peak	
2	*	2483.500	54.39	-3.96	50.43	54.00	-3.57	AVG	
3		2488.816	59.77	-3.97	55.80	74.00	-18.20	peak	
4		2488.816	49.91	-3.97	45.94	54.00	-8.06	AVG	
5		2500.000	50.76	-4.00	46.76	74.00	-27.24	peak	

Test Result: Pass

[TestMode: TX G high channel]; [Polarity: Horizontal]

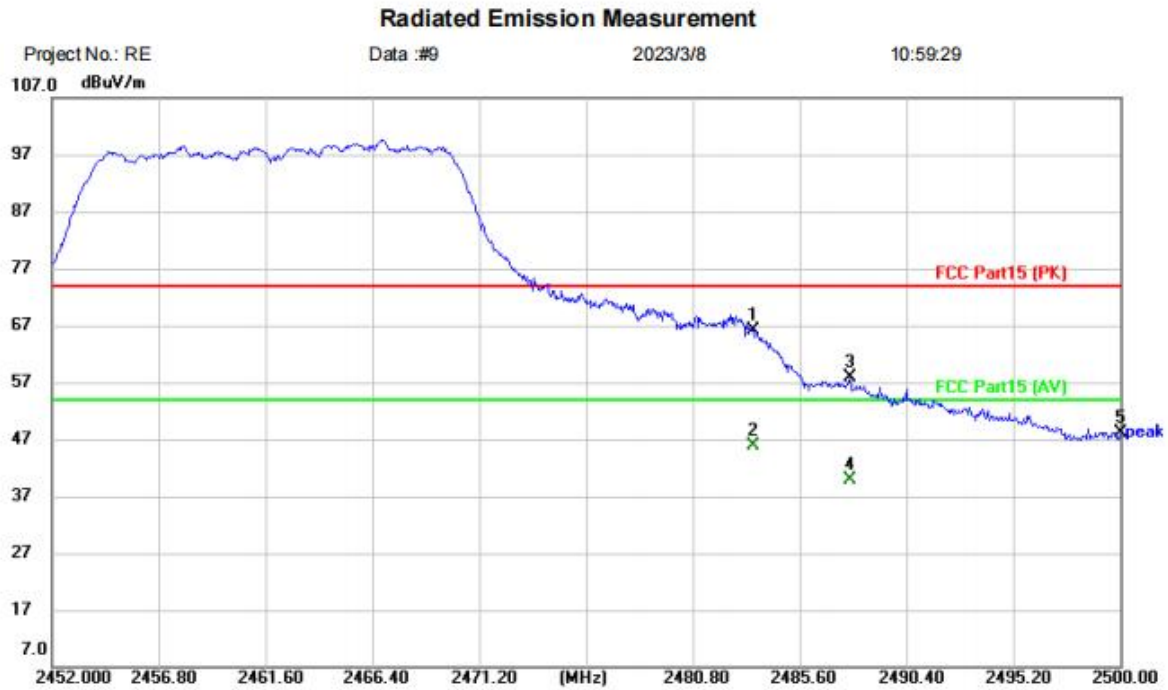


Site: Polarization: **Horizontal** Temperature: (C)
 Limit: FCC Part15 (PK) Power: Humidity: %RH
 EUT: Dash Cam
 M/N: mini Pro
 Mode: 11G TX-H
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1	*	2483.500	69.99	-3.96	66.03	74.00	-7.97	peak	
2		2483.500	49.83	-3.96	45.87	54.00	-8.13	AVG	
3		2487.856	61.85	-3.97	57.88	74.00	-16.12	peak	
4		2487.856	43.76	-3.97	39.79	54.00	-14.21	AVG	
5		2500.000	52.16	-4.00	48.16	74.00	-25.84	peak	

Test Result: Pass

[TestMode: TX N20 low channel]; [Polarity: Vertical]

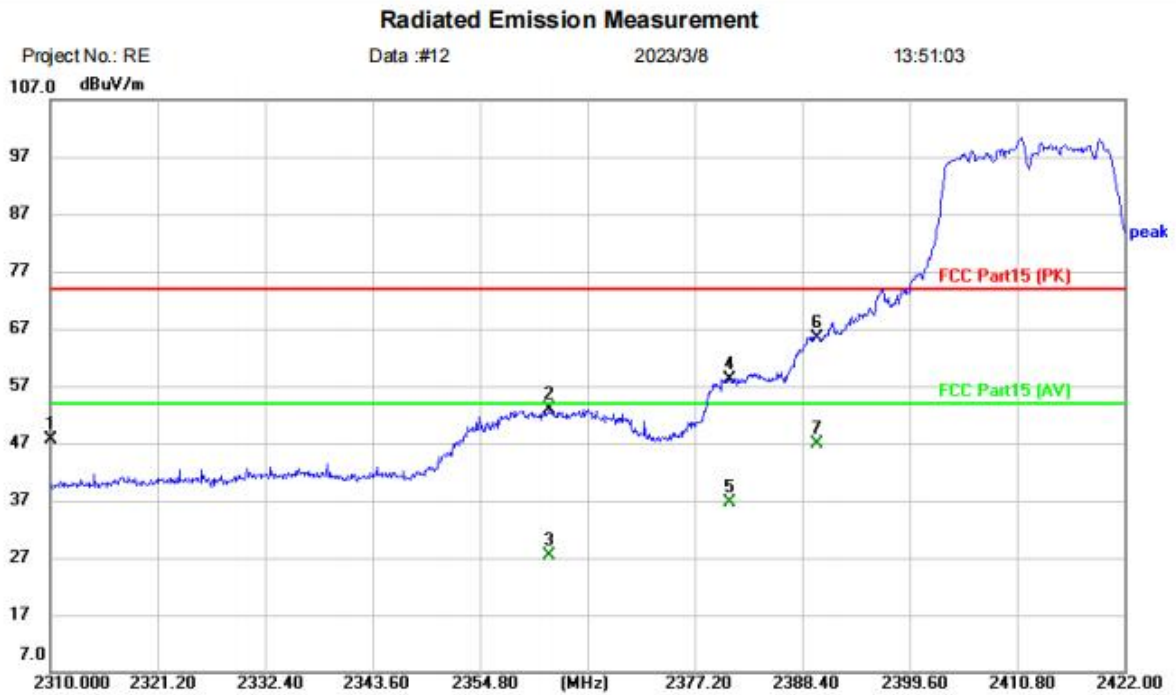


Site: Polarization: **Vertical** Temperature: (C)
 Limit: FCC Part15 (PK) Power: Humidity: %RH
 EUT: Dash Cam
 MN: mini Pro
 Mode: 11N20 TX-L
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2310.000	51.80	-4.27	47.53	74.00	-26.47	peak	
2		2362.080	56.92	-3.97	52.95	74.00	-21.05	peak	
3		2362.080	31.41	-3.97	27.44	54.00	-26.56	AVG	
4		2380.896	62.10	-3.88	58.22	74.00	-15.78	peak	
5		2380.896	40.54	-3.88	36.66	54.00	-17.34	AVG	
6		2390.000	69.14	-3.82	65.32	74.00	-8.68	peak	
7	*	2390.000	50.80	-3.82	46.98	54.00	-7.02	AVG	

Test Result: Pass

[TestMode: TX N20 low channel]; [Polarity: Horizontal]

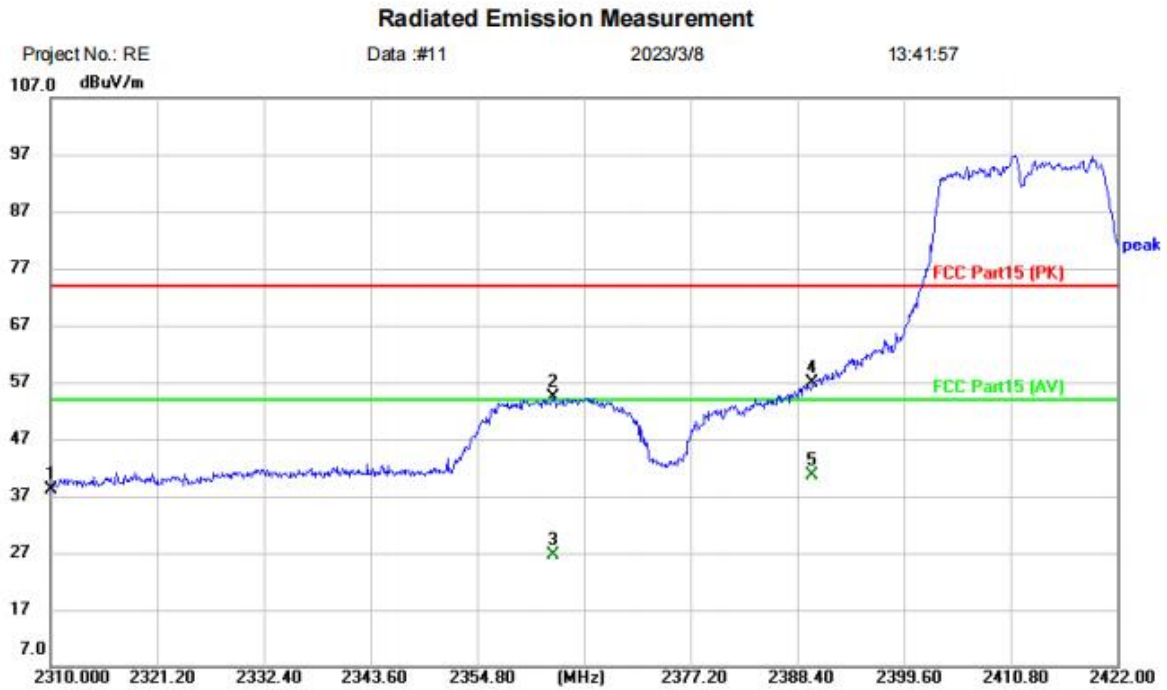


Site: Polarization: **Horizontal** Temperature: (C)
 Limit: FCC Part15 (PK) Power: Humidity: %RH
 EUT: Dash Cam
 M/N: mini Pro
 Mode: 11N20 TX-L
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1		2310.000	42.50	-4.27	38.23	74.00	-35.77	peak	
2		2362.752	58.40	-3.96	54.44	74.00	-19.56	peak	
3		2362.752	30.48	-3.96	26.52	54.00	-27.48	AVG	
4		2390.000	60.77	-3.82	56.95	74.00	-17.05	peak	
5	*	2390.000	44.34	-3.82	40.52	54.00	-13.48	AVG	

Test Result: Pass

[TestMode: TX N20 high channel]; [Polarity: Vertical]

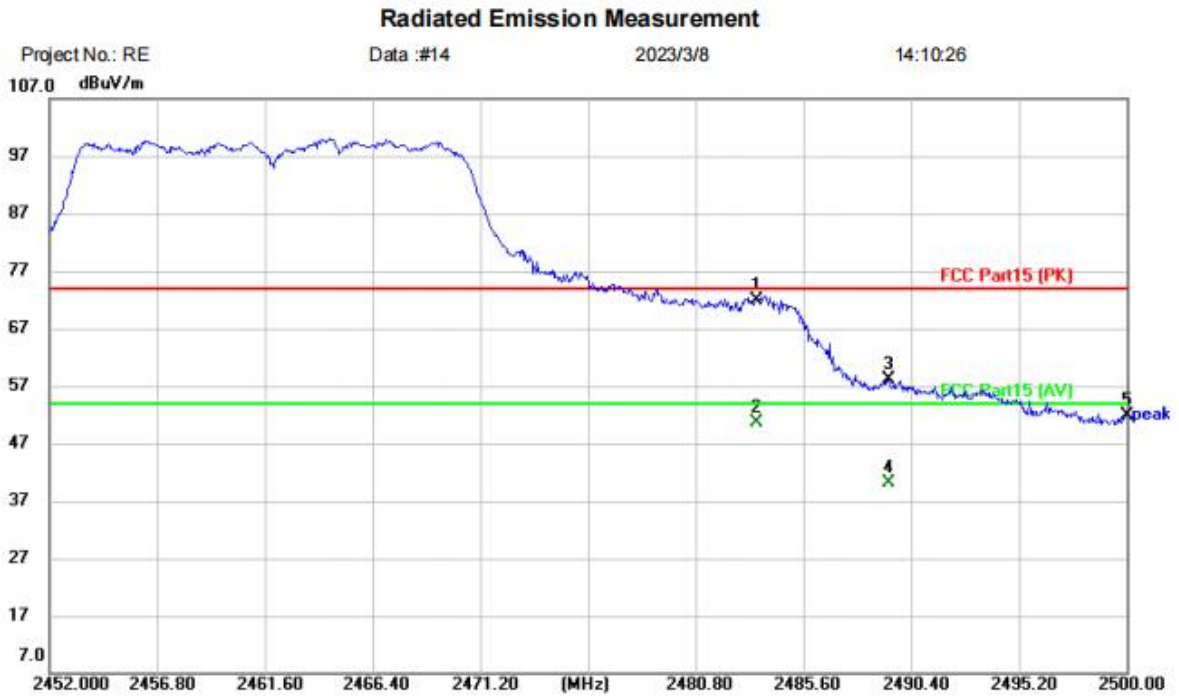


Site	Polarization: Vertical	Temperature: (C)
Limit: FCC Part15 (PK)	Power:	Humidity: %RH
EUT: Dash Cam		
M/N: mini Pro		
Mode: 11N20 TX-H		
Note:		

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	2483.500	75.83	-3.96	71.87	74.00	-2.13	peak	
2		2483.500	54.51	-3.96	50.55	54.00	-3.45	AVG	
3		2489.392	62.10	-3.97	58.13	74.00	-15.87	peak	
4		2489.392	44.18	-3.97	40.21	54.00	-13.79	AVG	
5		2500.000	55.95	-4.00	51.95	74.00	-22.05	peak	

Test Result: Pass

[TestMode: TX N20 high channel]; [Polarity: Horizontal]

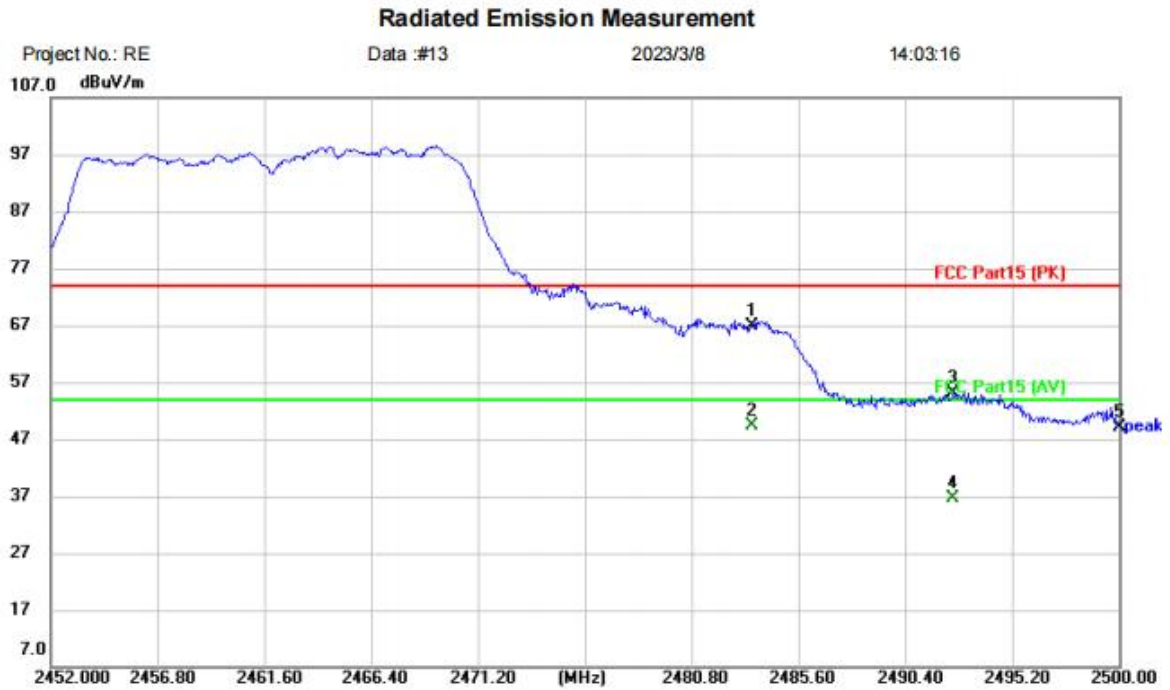

Site: Polarization: **Horizontal** Temperature: (C)
 Limit: FCC Part15 (PK) Power: Humidity: %RH
 EUT: Dash Cam
 M/N: mini Pro
 Mode: 11N20 TX-H
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2483.500	70.83	-3.96	66.87	74.00	-7.13	peak	
2	*	2483.500	53.37	-3.96	49.41	54.00	-4.59	AVG	
3		2492.560	59.20	-3.98	55.22	74.00	-18.78	peak	
4		2492.560	40.51	-3.98	36.53	54.00	-17.47	AVG	
5		2500.000	53.12	-4.00	49.12	74.00	-24.88	peak	

Test Result: Pass


13 CONDUCTED SPURIOUS EMISSIONS

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.6 & Section 11.11
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	William
Temperature	25°C
Humidity	60%

13.1 LIMITS

Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
---------------	--

13.2 BLOCK DIAGRAM OF TEST SETUP

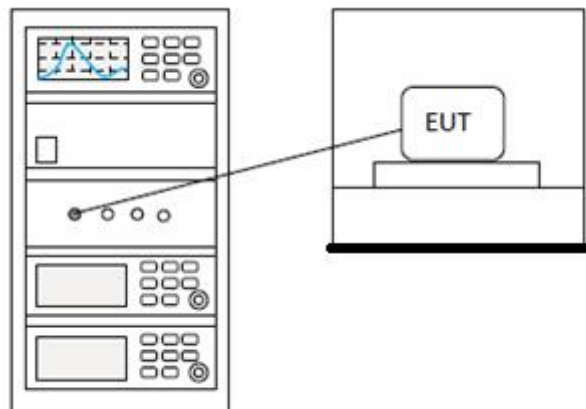

13.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details

BlueAsia

14 CONDUCTED BAND EDGES MEASUREMENT

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.8 & Section 11.13.3.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	William
Temperature	25°C
Humidity	60%

14.1 LIMITS

Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
---------------	--

14.2 BLOCK DIAGRAM OF TEST SETUP

