

### FCC REPORT

**Applicant:** NOKTA MUHENDISLIK INS. ELEK. PLAS. GIDA VE REKLAM SAN. TIC. LTD. STI.

**Address of Applicant:** EMEK MAH. SIVATYOLU CAD SAKIZ SOK NO4 SANCAKTEPE ISTANBUL TURKEY

**Manufacturer/Factory:** NOKTA MUHENDISLIK INS. ELEK. PLAS. GIDA VE REKLAM SAN. TIC. LTD. STI.

**Address of Manufacturer/Factory:** EMEK MAH. SIVATYOLU CAD SAKIZ SOK NO4 SANCAKTEPE ISTANBUL TURKEY

**Equipment Under Test (EUT)**

Product Name: METAL DETECTOR

Model No.: Kruzer, Multi Kruzer, Gold Kruzer

Trade Mark: MAKRO METAL DETECTORS

**FCC ID:** 2AJJ2-KRUZER

**Applicable standards:** FCC CFR Title 47 Part 15 Subpart C Section 15.249

**Date of sample receipt:** January 18, 2018

**Date of Test:** January 18, 2018-February 02, 2018

**Date of report issued:** February 02, 2018

**Test Result :** PASS \*

\* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



**Robinson Lo**

**Laboratory Manager**

This results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

## 2 Version

Version No.	Date	Description
00	February 02, 2018	Original

Prepared By:




Date:

February 02, 2018

Project Engineer

Check By:



Date:

February 02, 2018

Reviewer

## 3 Contents

	Page
1 COVER PAGE.....	1
2 VERSION.....	2
3 CONTENTS.....	3
4 TEST SUMMARY.....	4
4.1 MEASUREMENT UNCERTAINTY.....	4
5 GENERAL INFORMATION.....	5
5.1 GENERAL DESCRIPTION OF EUT.....	5
5.2 TEST MODE.....	7
5.3 DESCRIPTION OF SUPPORT UNITS.....	7
5.4 TEST FACILITY.....	7
5.5 TEST LOCATION.....	7
5.6 ADDITIONAL INSTRUCTIONS.....	8
6 TEST INSTRUMENTS LIST.....	9
7 TEST RESULTS AND MEASUREMENT DATA.....	10
7.1 ANTENNA REQUIREMENT.....	10
7.2 CONDUCTED EMISSIONS.....	11
7.3 RADIATED EMISSION METHOD.....	14
7.3.1 <i>Field Strength of The Fundamental Signal</i> .....	16
7.3.2 <i>Spurious emissions</i> .....	17
7.3.3 <i>Bandedge emissions</i> .....	22
7.4 20dB OCCUPY BANDWIDTH.....	23
8 TEST SETUP PHOTO.....	25
9 EUT CONSTRUCTIONAL DETAILS.....	27

## 4 Test Summary

Test Item	Section in CFR 47	Result
Antenna requirement	15.203	Pass
AC Power Line Conducted Emission	15.207	Pass
Field strength of the fundamental signal	15.249 (a)	Pass
Spurious emissions	15.249 (a) (d)/15.209	Pass
Band edge	15.249 (d)/15.205	Pass
20dB Occupied Bandwidth	15.215 (c)	Pass

*Pass: The EUT complies with the essential requirements in the standard.*

*Remark: Test according to ANSI C63.10: 2013 and ANSI C63.4: 2014.*

### 4.1 Measurement Uncertainty

Test Item	Frequency Range	Measurement Uncertainty	Notes
Radiated Emission	9kHz ~ 30MHz	± 4.34dB	(1)
Radiated Emission	30MHz ~ 1000MHz	± 4.24dB	(1)
Radiated Emission	1GHz ~ 26.5GHz	± 4.68dB	(1)
AC Power Line Conducted Emission	0.15MHz ~ 30MHz	± 3.45dB	(1)

Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

## 5 General Information

### 5.1 General Description of EUT

Product Name:	METAL DETECTOR
Model No.:	Kruzer, Multi Kruzer, Gold Kruzer
Test Model No:	Kruzer
<i>Remark: All above models are identical in the same PCB layout, interior structure and electrical circuits. The differences are color and model name for commercial purpose.</i>	
Quantity of tested samples	1
Serial No.:	T180629
Test sample(s) ID:	N/A
Sample(s) Status	Engineer sample
Hardware:	N/A
Software:	N/A
Operation Frequency:	2402MHz~2480MHz
Channel numbers:	79
Channel separation:	1MHz
Modulation type:	GFSK
Antenna Type:	PCB antenna
Antenna gain:	0 dBi(declare by Applicant)
Power supply:	DC 3.7V by battery

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	21	2422MHz	41	2442MHz	61	2462MHz
2	2403MHz	22	2423MHz	42	2443MHz	62	2463MHz
⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮
19	2420MHz	39	2440MHz	59	2460MHz	79	2480MHz
20	2421MHz	40	2441MHz	60	2461MHz		

**Note:**

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The lowest channel	2402MHz
The middle channel	2441MHz
The Highest channel	2480MHz

## 5.2 Test mode

Transmitting mode	Keep the EUT in continuously transmitting mode.
<i>Remark: During the test, the dutycycle &gt;98%, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.</i>	

### Per-test mode.

We have verified the construction and function in typical operation, The EUT was placed on three different polar directions; i.e. X axis, Y axis, Z axis. which was shown in this test report and defined as follows:

Axis	X	Y	Z
Field Strength(dBuV/m)	93.36	94.19	92.63

## 5.3 Description of Support Units

None
------

## 5.4 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC —Registration No.: 381383**

Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 381383, January 08, 2018.

- **Industry Canada (IC) —Registration No.: 9079A-2**

The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A-2, August 15, 2016

## 5.5 Test Location

All tests were performed at:
Global United Technology Services Co., Ltd. Address: No. 301-309, 3/F., Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, Guangdong, China 518102 Tel: 0755-27798480 Fax: 0755-27798960

## 5.6 Additional instructions

Software (Used for test) from client

Mode	/
------	---

Channel	Power level
Lowest	Default
Middle	Default
Highest	Default



## 6 Test Instruments list


Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	July 03 2015	July 02 2020
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	Spectrum Analyzer	Agilent	E4440A	GTS533	June 28 2017	June 27 2018
4	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	June 28 2017	June 27 2018
5	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	GTS214	June 28 2017	June 27 2018
6	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	9120D-829	GTS208	June 28 2017	June 27 2018
7	Horn Antenna	ETS-LINDGREN	3160	GTS217	June 28 2017	June 27 2018
8	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
9	Coaxial Cable	GTS	N/A	GTS213	June 28 2017	June 27 2018
10	Coaxial Cable	GTS	N/A	GTS211	June 28 2017	June 27 2018
11	Coaxial cable	GTS	N/A	GTS210	June 28 2017	June 27 2018
12	Coaxial Cable	GTS	N/A	GTS212	June 28 2017	June 27 2018
13	Amplifier(100kHz-3GHz)	HP	8347A	GTS204	June 28 2017	June 27 2018
14	Amplifier(2GHz-20GHz)	HP	8349B	GTS206	June 28 2017	June 27 2018
15	Amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	June 28 2017	June 27 2018
16	Band filter	Amindeon	82346	GTS219	June 28 2017	June 27 2018
17	Power Meter	Anritsu	ML2495A	GTS540	June 28 2017	June 27 2018
18	Power Sensor	Anritsu	MA2411B	GTS541	June 28 2017	June 27 2018

Conducted Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Shielding Room	ZhongYu Electron	7.3(L)x3.1(W)x2.9(H)	GTS252	May.16 2014	May.15 2019
2	EMI Test Receiver	R&S	ESCI 7	GTS552	June 28 2017	June 27 2018
3	Coaxial Switch	ANRITSU CORP	MP59B	GTS225	June 28 2017	June 27 2018
4	Artificial Mains Network	SCHWARZBECK MESS	NSLK8127	GTS226	June 28 2017	June 27 2018
5	Coaxial Cable	GTS	N/A	GTS227	N/A	N/A
6	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
7	Thermo meter	KTJ	TA328	GTS233	June 28 2017	June 27 2018

General used equipment:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Barometer	ChangChun	DYM3	GTS257	June 28 2017	June 27 2018

## 7 Test results and Measurement Data

### 7.1 Antenna requirement
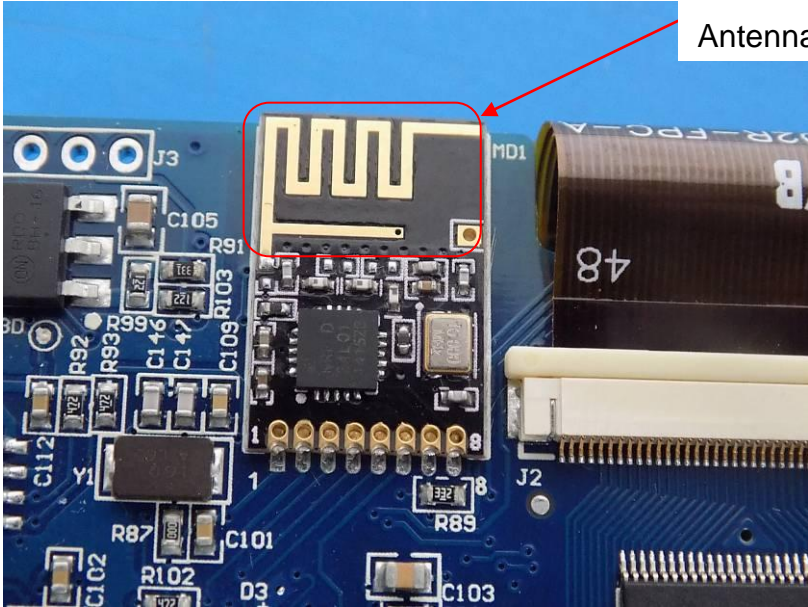
<b>Standard requirement:</b>	FCC Part15 C Section 15.203
<p><b>15.203 requirement:</b></p> <p>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p>	
<p><b>EUT Antenna:</b></p> <p><i>The antenna is PCB antenna, the best case gain of the antenna is 0dBi</i></p>	
	


## 7.2 Conducted Emissions

Test Requirement:	FCC Part15 C Section 15.207														
Test Method:	ANSI C63.10:2013														
Test Frequency Range:	150KHz to 30MHz														
Class / Severity:	Class B														
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto														
Limit:	<table border="1"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th> <th colspan="2">Limit (dBuV)</th> </tr> <tr> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table> <p>* Decreases with the logarithm of the frequency.</p>	Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)														
	Quasi-peak	Average													
0.15-0.5	66 to 56*	56 to 46*													
0.5-5	56	46													
5-30	60	50													
Test setup:	<p><i>Remark</i>  E.U.T: Equipment Under Test  LISN: Line Impedance Stabilization Network  Test table height=0.8m</p>														
Test procedure:	<ol style="list-style-type: none"> <li>1. The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment.</li> <li>2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs).</li> <li>3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement.</li> </ol>														
Test Instruments:	Refer to section 6.0 for details														
Test mode:	Refer to section 5.2 for details														
Test results:	Pass														

## Measurement data

Line:

### Conducted Emission Measurement

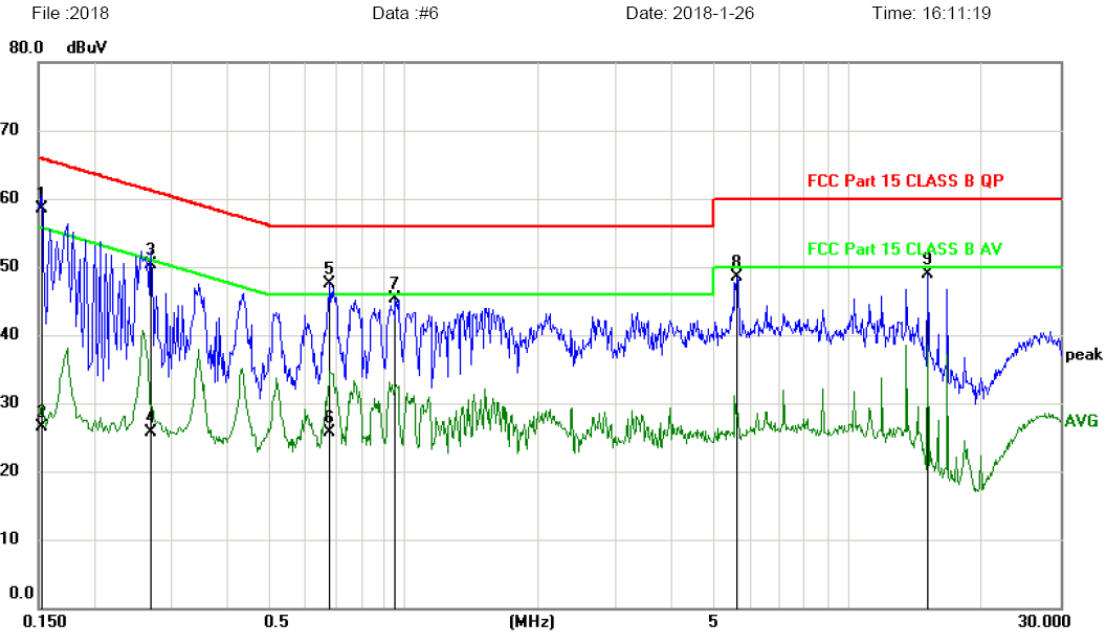


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1	*	0.1530	48.78	9.66	58.44	65.84	-7.40	QP	
2		0.1530	16.91	9.66	26.57	55.84	-29.27	AVG	
3		0.2700	40.64	9.69	50.33	61.12	-10.79	QP	
4		0.2700	16.01	9.69	25.70	51.12	-25.42	AVG	
5		0.6809	37.68	9.74	47.42	56.00	-8.58	QP	
6		0.6809	15.96	9.74	25.70	46.00	-20.30	AVG	
7		0.9540	35.58	9.77	45.35	56.00	-10.65	peak	
8		5.6190	38.24	10.20	48.44	60.00	-11.56	peak	
9		15.0990	38.60	10.39	48.99	60.00	-11.01	peak	

\*:Maximum data x:Over limit !:over margin

Note: Measurement=Reading Level+Correc Factor. Factor=(LISN or ISN or PLC or Current Probe)Factor+Cable

Neutral:

### Conducted Emission Measurement

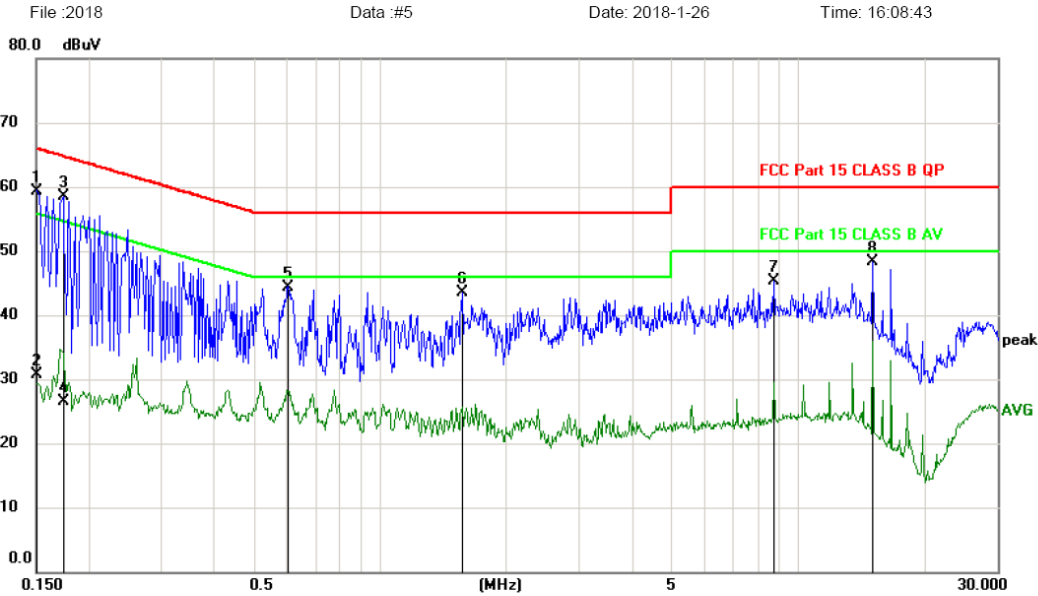

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1500	49.66	9.66	59.32	66.00	-6.68	QP	
2		0.1500	21.10	9.66	30.76	56.00	-25.24	AVG	
3	*	0.1740	48.82	9.66	58.48	64.77	-6.29	QP	
4		0.1740	16.86	9.66	26.52	54.77	-28.25	AVG	
5		0.6029	34.68	9.72	44.40	56.00	-11.60	peak	
6		1.5690	33.58	9.83	43.41	56.00	-12.59	peak	
7		8.7420	34.97	10.28	45.25	60.00	-14.75	peak	
8		15.0990	37.96	10.39	48.35	60.00	-11.65	peak	


\*:Maximum data x:Over limit !:over margin

Note: Measurement=Reading Level+Correc Factor. Factor=(LISN or ISN or PLC or Current Probe)Factor+Cable

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level =Receiver Read level + LISN Factor + Cable Loss
4. If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the average detector receiver is unnecessary.

### 7.3 Radiated Emission Method

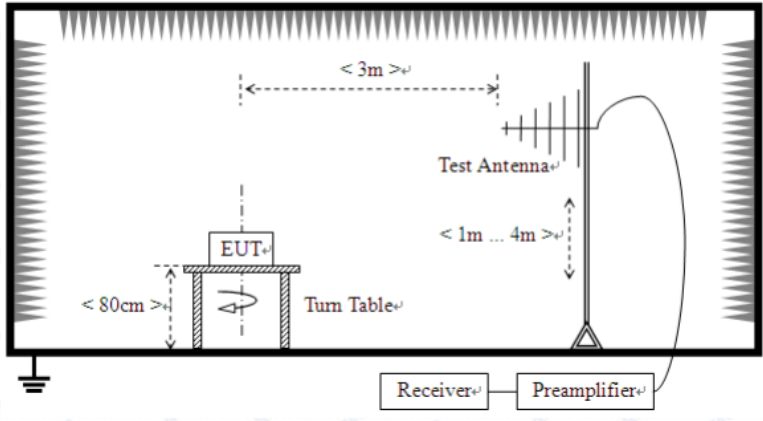Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	30MHz to 25GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Remark
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
Peak		1MHz	10Hz	Average Value	
Limit: (Field strength of the fundamental signal)	Frequency	Limit (dBuV/m @3m)		Remark	
	2400MHz-2483.5MHz	94.00		Average Value	
Limit: (Spurious Emissions)	Frequency	Limit (dBuV/m @3m)		Remark	
	30MHz-88MHz	40.00		Quasi-peak Value	
	88MHz-216MHz	43.50		Quasi-peak Value	
	216MHz-960MHz	46.00		Quasi-peak Value	
	960MHz-1GHz	54.00		Quasi-peak Value	
	Above 1GHz	54.00		Average Value	
74.00		Peak Value			
Limit: (band edge)	Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.				
Test setup:	Below 1GHz				
	 <p>The diagram illustrates the test setup for frequencies below 1GHz. It shows an Equipment Under Test (EUT) placed on a turn table. The EUT is positioned at a distance of less than 80cm from the antenna. The antenna is located at a distance of less than 3m from the EUT. The antenna is connected to a receiver and a preamplifier. The antenna height is indicated as being between 1m and 4m.</p>				
	Above 1GHz				

	<p>The diagram illustrates the test setup. An EUT (Equipment Under Test) is placed on a rotating table. The table is positioned 150 cm above the ground. The EUT is 3 meters away from the test antenna. The test antenna is mounted on a tower that can be adjusted in height from 1 meter to 4 meters above the ground. The antenna is connected to a receiver and a preamplifier. The entire setup is enclosed in a shielded chamber.</p>
<p>Test Procedure:</p>	<ol style="list-style-type: none"> <li>1. The EUT was placed on the top of a rotating table (0.8m for below 1GHz and 1.5 meters for above 1GHz) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li> <li>3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li> <li>4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.</li> <li>5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li> <li>6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</li> </ol>
<p>Test Instruments:</p>	<p>Refer to section 6.0 for details</p>
<p>Test mode:</p>	<p>Refer to section 5.2 for details</p>
<p>Test results:</p>	<p>Pass</p>

**Measurement data:**



### 7.3.1 Field Strength of The Fundamental Signal

**Peak value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
2402.00	92.30	27.58	5.39	34.01	91.26	114.00	-22.74	Vertical
2402.00	87.94	27.58	5.39	34.01	86.90	114.00	-27.10	Horizontal
2441.00	93.47	27.48	5.43	33.96	92.42	114.00	-21.58	Vertical
2441.00	89.01	27.48	5.43	33.96	87.96	114.00	-26.04	Horizontal
2480.00	95.16	27.52	5.47	33.92	94.23	114.00	-19.77	Vertical
2480.00	89.57	27.52	5.47	33.92	88.64	114.00	-25.36	Horizontal

**Average value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
2402.00	80.96	27.58	5.39	34.01	79.92	94.00	-14.08	Vertical
2402.00	76.21	27.58	5.39	34.01	75.17	94.00	-18.83	Horizontal
2441.00	82.62	27.48	5.43	33.96	81.57	94.00	-12.43	Vertical
2441.00	77.92	27.48	5.43	33.96	76.87	94.00	-17.13	Horizontal
2480.00	84.12	27.52	5.47	33.92	83.19	94.00	-10.81	Vertical
2480.00	79.16	27.52	5.47	33.92	78.23	94.00	-15.77	Horizontal




## 7.3.2 Spurious emissions

■ Below 1GHz

Horizontal:

### Radiated Emission Measurement

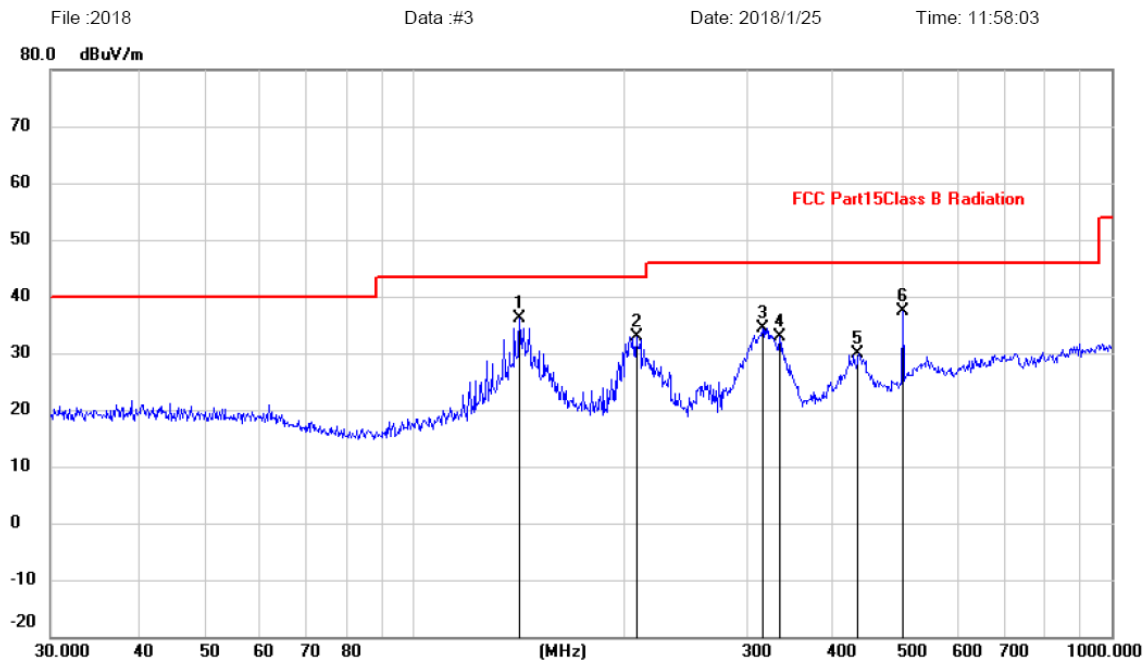


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	141.3298	22.17	13.93	36.10	43.50	-7.40			peak
2		207.8500	22.35	10.61	32.96	43.50	-10.54			peak
3		316.5889	20.53	13.79	34.32	46.00	-11.68			peak
4		333.6865	18.54	14.34	32.88	46.00	-13.12			peak
5		434.0649	13.43	16.37	29.80	46.00	-16.20			peak
6		501.1789	20.14	17.22	37.36	46.00	-8.64			peak

Note:1. \*:Maximum data; x:Over limit; !:over margin.

2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

Vertical:

### Radiated Emission Measurement

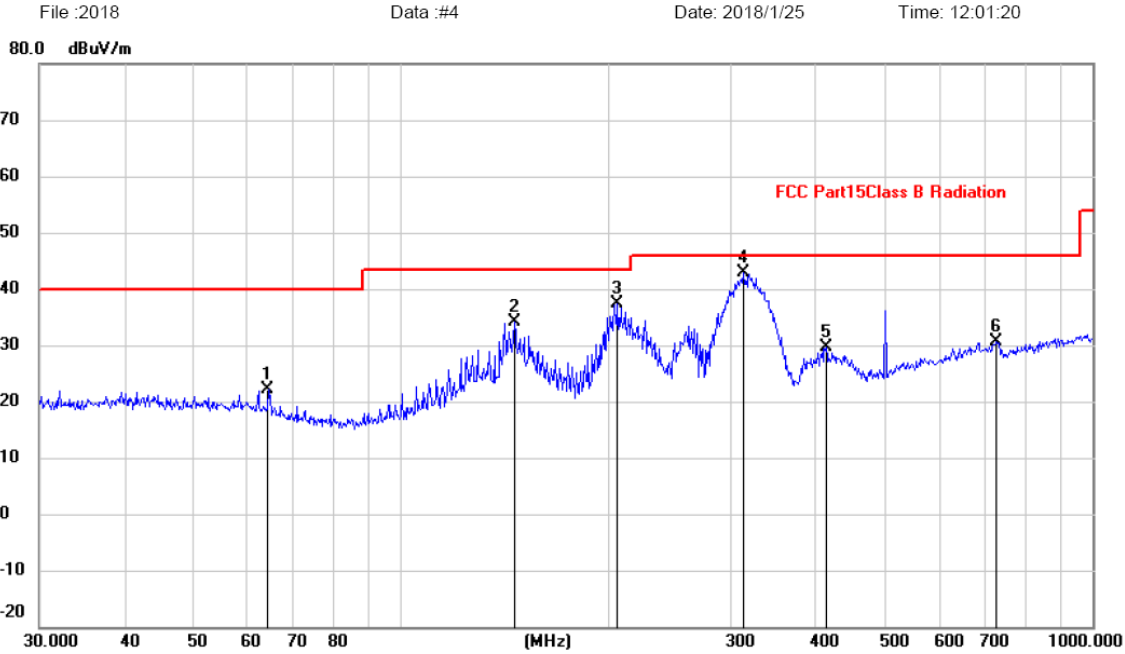

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		64.4330	10.04	12.05	22.09	40.00	-17.91			peak
2		145.8611	19.78	14.25	34.03	43.50	-9.47			peak
3		206.3975	26.70	10.56	37.26	43.50	-6.24			peak
4	*	313.2760	29.15	13.71	42.86	46.00	-3.14			peak
5		411.8240	13.65	15.94	29.59	46.00	-16.41			peak
6		726.8052	9.25	21.33	30.58	46.00	-15.42			peak

Note: 1. \*:Maximum data; x:Over limit; !:over margin.  
 2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

■ Above 1GHz

Test channel:	Lowest channel
---------------	----------------

**Peak value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4804.00	35.82	31.78	8.60	32.09	44.11	74.00	-29.89	Vertical
7206.00	31.19	36.15	11.65	32.00	46.99	74.00	-27.01	Vertical
9608.00	31.06	37.95	14.14	31.62	51.53	74.00	-22.47	Vertical
12010.00	*					74.00		Vertical
14412.00	*					74.00		Vertical
4804.00	39.77	31.78	8.60	32.09	48.06	74.00	-25.94	Horizontal
7206.00	32.39	36.15	11.65	32.00	48.19	74.00	-25.81	Horizontal
9608.00	30.30	37.95	14.14	31.62	50.77	74.00	-23.23	Horizontal
12010.00	*					74.00		Horizontal
14412.00	*					74.00		Horizontal

**Average value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4804.00	24.75	31.78	8.60	32.09	33.04	54.00	-20.96	Vertical
7206.00	20.09	36.15	11.65	32.00	35.89	54.00	-18.11	Vertical
9608.00	19.01	37.95	14.14	31.62	39.48	54.00	-14.52	Vertical
12010.00	*					54.00		Vertical
14412.00	*					54.00		Vertical
4804.00	29.60	31.78	8.60	32.09	37.89	54.00	-16.11	Horizontal
7206.00	22.28	36.15	11.65	32.00	38.08	54.00	-15.92	Horizontal
9608.00	18.65	37.95	14.14	31.62	39.12	54.00	-14.88	Horizontal
12010.00	*					54.00		Horizontal
14412.00	*					54.00		Horizontal

**Remark:**

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “\*”, means this data is the too weak instrument of signal is unable to test.

Test channel:	Middle
---------------	--------

**Peak value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4882.00	36.43	31.85	8.67	32.12	44.83	74.00	-29.17	Vertical
7323.00	31.09	36.37	11.72	31.89	47.29	74.00	-26.71	Vertical
9764.00	31.36	38.35	14.25	31.62	52.34	74.00	-21.66	Vertical
12205.00	*					74.00		Vertical
14646.00	*					74.00		Vertical
4882.00	40.46	31.85	8.67	32.12	48.86	74.00	-25.14	Horizontal
7323.00	33.47	36.37	11.72	31.89	49.67	74.00	-24.33	Horizontal
9764.00	30.78	38.35	14.25	31.62	51.76	74.00	-22.24	Horizontal
12205.00	*					74.00		Horizontal
14646.00	*					74.00		Horizontal

**Average value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4882.00	25.61	31.85	8.67	32.12	34.01	54.00	-19.99	Vertical
7323.00	20.32	36.37	11.72	31.89	36.52	54.00	-17.48	Vertical
9764.00	19.62	38.35	14.25	31.62	40.60	54.00	-13.40	Vertical
12205.00	*					54.00		Vertical
14646.00	*					54.00		Vertical
4882.00	29.49	31.85	8.67	32.12	37.89	54.00	-16.11	Horizontal
7323.00	22.57	36.37	11.72	31.89	38.77	54.00	-15.23	Horizontal
9764.00	18.91	38.35	14.25	31.62	39.89	54.00	-14.11	Horizontal
12205.00	*					54.00		Horizontal
14646.00	*					54.00		Horizontal

**Remark:**

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “\*”, means this data is the too weak instrument of signal is unable to test.

Test channel:	Highest
---------------	---------

**Peak value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4960.00	37.34	31.93	8.73	32.16	45.84	74.00	-28.16	Vertical
7440.00	31.37	36.59	11.79	31.78	47.97	74.00	-26.03	Vertical
9920.00	31.06	38.81	14.38	31.88	52.37	74.00	-21.63	Vertical
12400.00	*					74.00		Vertical
14880.00	*					74.00		Vertical
4960.00	41.21	31.93	8.73	32.16	49.71	74.00	-24.29	Horizontal
7440.00	33.08	36.59	11.79	31.78	49.68	74.00	-24.32	Horizontal
9920.00	31.14	38.81	14.38	31.88	52.45	74.00	-21.55	Horizontal
12400.00	*					74.00		Horizontal
14880.00	*					74.00		Horizontal

**Average value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4960.00	25.98	31.93	8.73	32.16	34.48	54.00	-19.52	Vertical
7440.00	20.39	36.59	11.79	31.78	36.99	54.00	-17.01	Vertical
9920.00	19.78	38.81	14.38	31.88	41.09	54.00	-12.91	Vertical
12400.00	*					54.00		Vertical
14880.00	*					54.00		Vertical
4960.00	30.34	31.93	8.73	32.16	38.84	54.00	-15.16	Horizontal
7440.00	22.38	36.59	11.79	31.78	38.98	54.00	-15.02	Horizontal
9920.00	19.44	38.81	14.38	31.88	40.75	54.00	-13.25	Horizontal
12400.00	*					54.00		Horizontal
14880.00	*					54.00		Horizontal

**Remark:**

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “\*”, means this data is the too weak instrument of signal is unable to test.
3. The emission levels of other frequencies are very lower than the limit and not show in test report.

### 7.3.3 Bandedge emissions

All of the restriction bands were tested, and only the data of worst case was exhibited.

Test channel:	Lowest channel
---------------	----------------

**Peak value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	46.31	27.59	5.38	30.18	49.10	74.00	-24.90	Horizontal
2400.00	52.99	27.58	5.39	30.18	55.78	74.00	-18.22	Horizontal
2390.00	47.09	27.59	5.38	30.18	49.88	74.00	-24.12	Vertical
2400.00	54.31	27.58	5.39	30.18	57.10	74.00	-16.90	Vertical

**Average value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	36.25	27.59	5.38	30.18	39.04	54.00	-14.96	Horizontal
2400.00	37.26	27.58	5.39	30.18	40.05	54.00	-13.95	Horizontal
2390.00	36.01	27.59	5.38	30.18	38.80	54.00	-15.20	Vertical
2400.00	38.31	27.58	5.39	30.18	41.10	54.00	-12.90	Vertical

Test channel:	Highest channel
---------------	-----------------

**Peak value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	48.36	27.53	5.47	29.93	51.43	74.00	-22.57	Horizontal
2500.00	46.89	27.55	5.49	29.93	50.00	74.00	-24.00	Horizontal
2483.50	50.03	27.53	5.47	29.93	53.10	74.00	-20.90	Vertical
2500.00	48.36	27.55	5.49	29.93	51.47	74.00	-22.53	Vertical


**Average value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	38.42	27.53	5.47	29.93	41.49	54.00	-12.51	Horizontal
2500.00	36.15	27.55	5.49	29.93	39.26	54.00	-14.74	Horizontal
2483.50	40.10	27.53	5.47	29.93	43.17	54.00	-10.83	Vertical
2500.00	36.58	27.55	5.49	29.93	39.69	54.00	-14.31	Vertical

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor


## 7.4 20dB Occupy Bandwidth

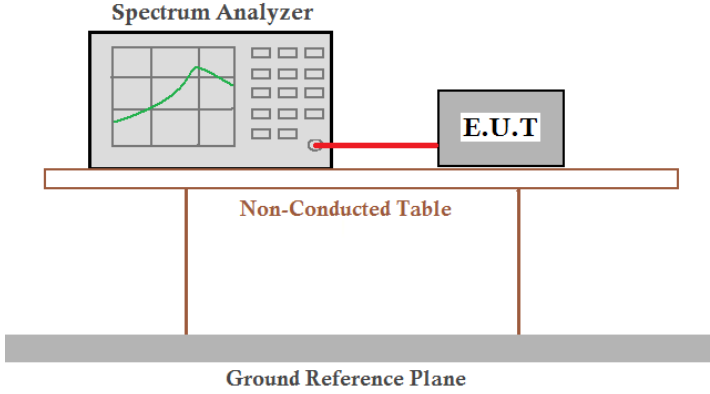Test Requirement:	FCC Part15 C Section 15.249/15.215
Test Method:	ANSI C63.10:2013
Limit:	Operation Frequency range 2400MHz~2483.5MHz
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both are placed on a Non-Conducted Table, which is supported by a Ground Reference Plane.</p>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass


### Measurement Data

Test channel	20dB bandwidth(MHz)	Result
Lowest	0.748	Pass
Middle	0.746	Pass
Highest	0.838	Pass


Test plot as follows:

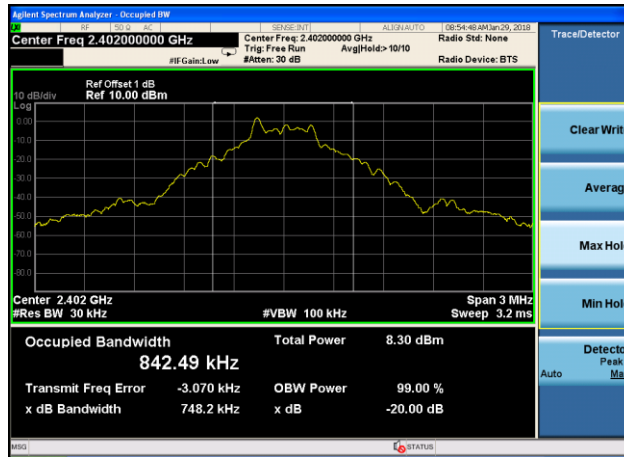

Lowest channel

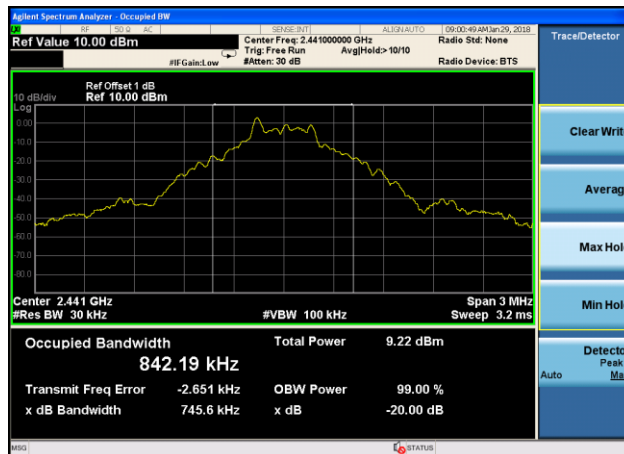

Middle channel


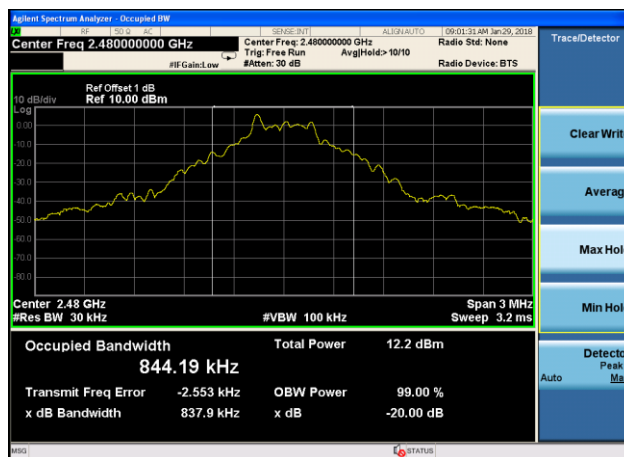


Highest channel



## 8 Test Setup Photo

Radiated Emission

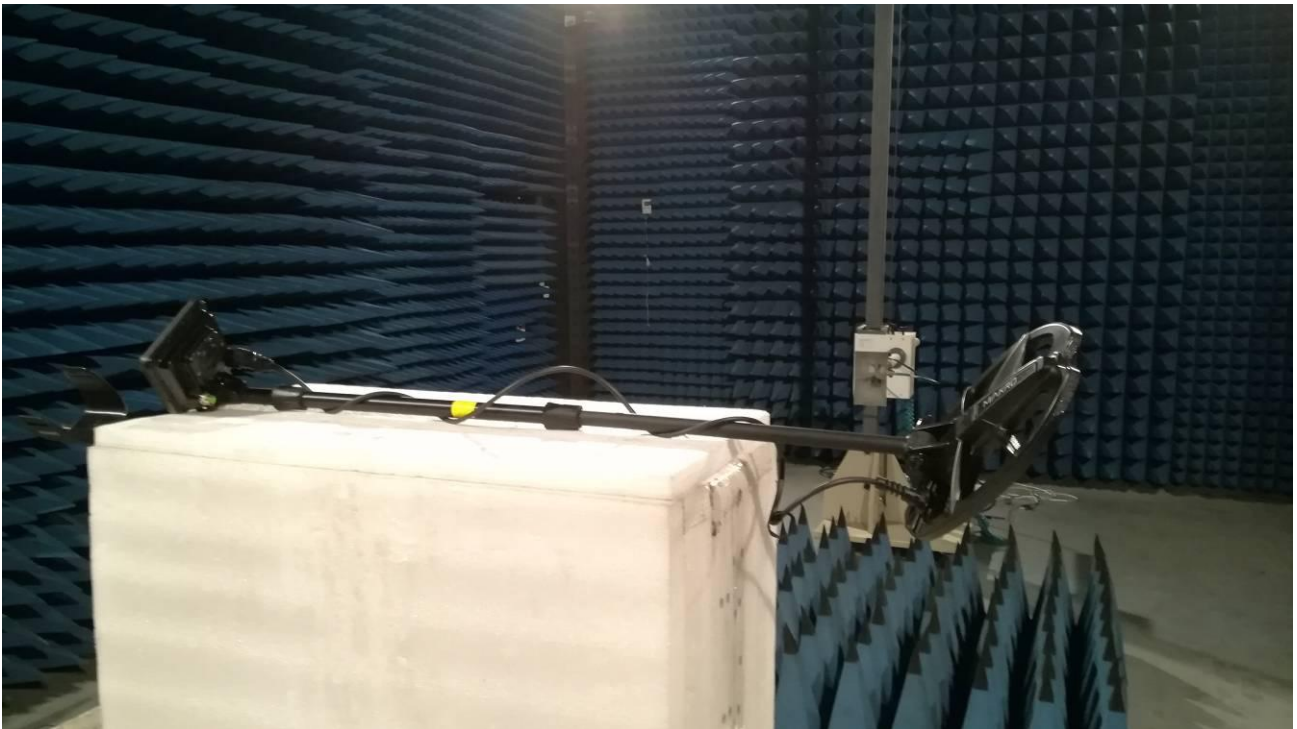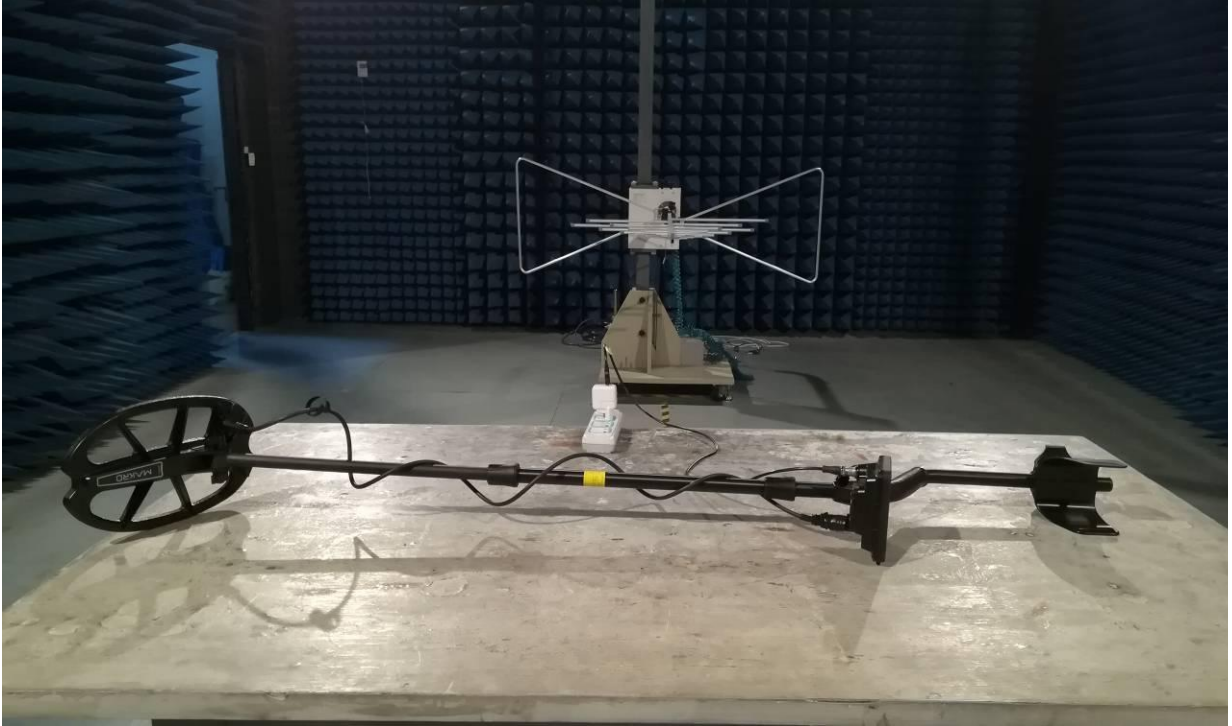

## Conducted Emission



## 9 EUT Constructional Details



























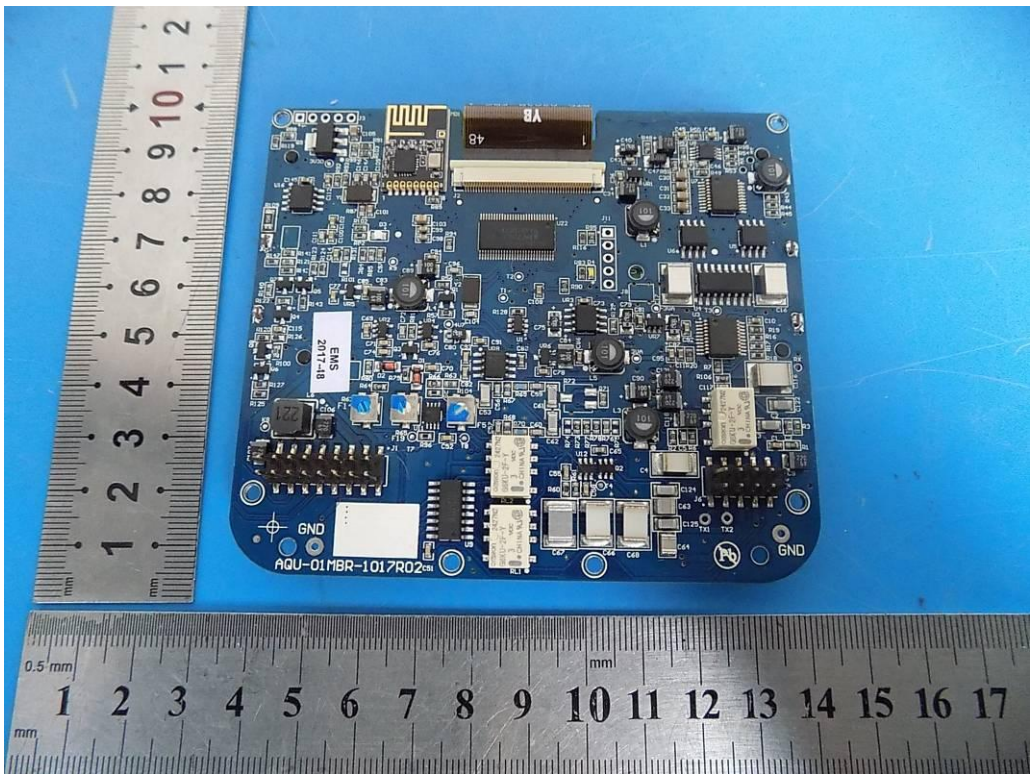




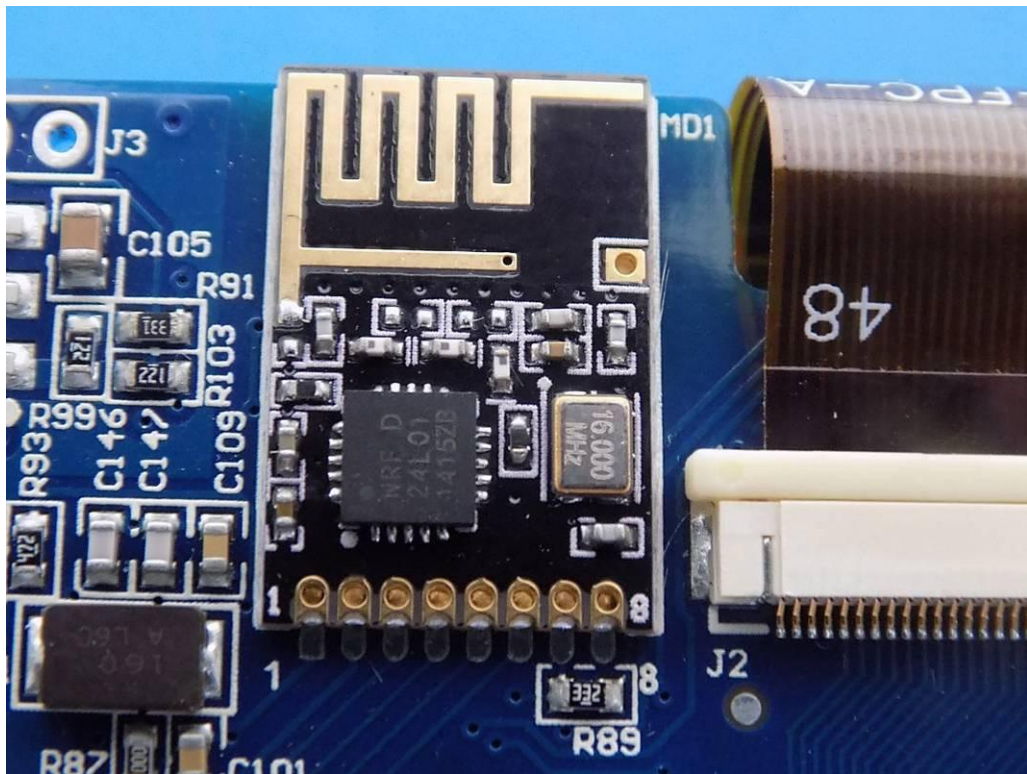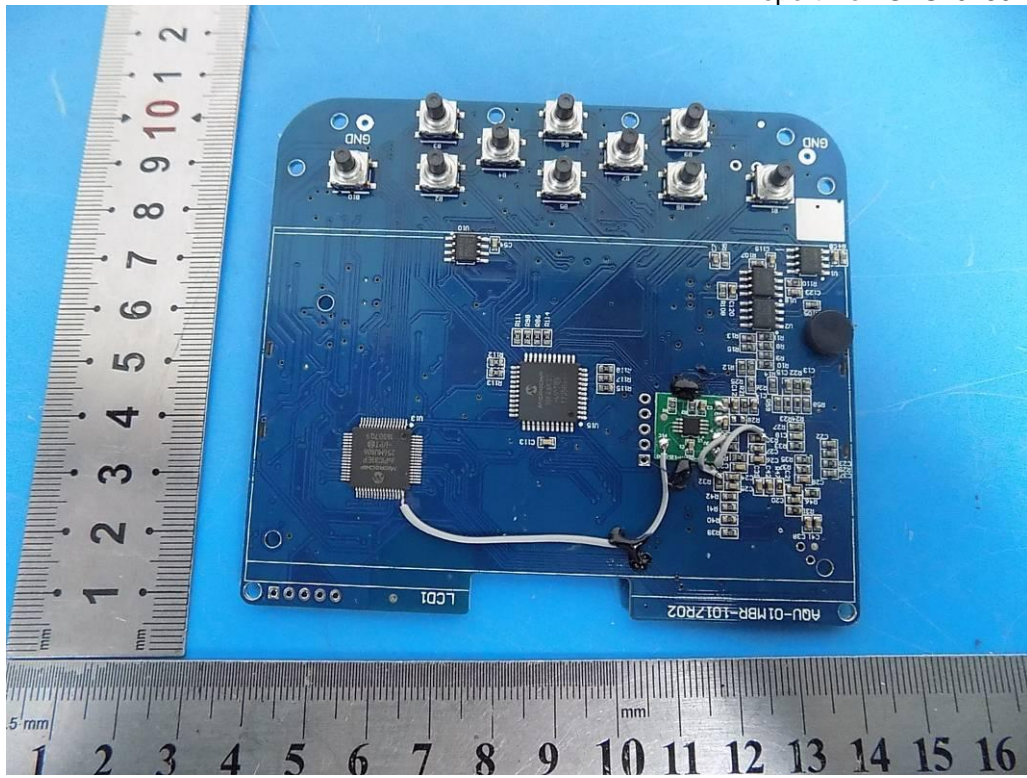

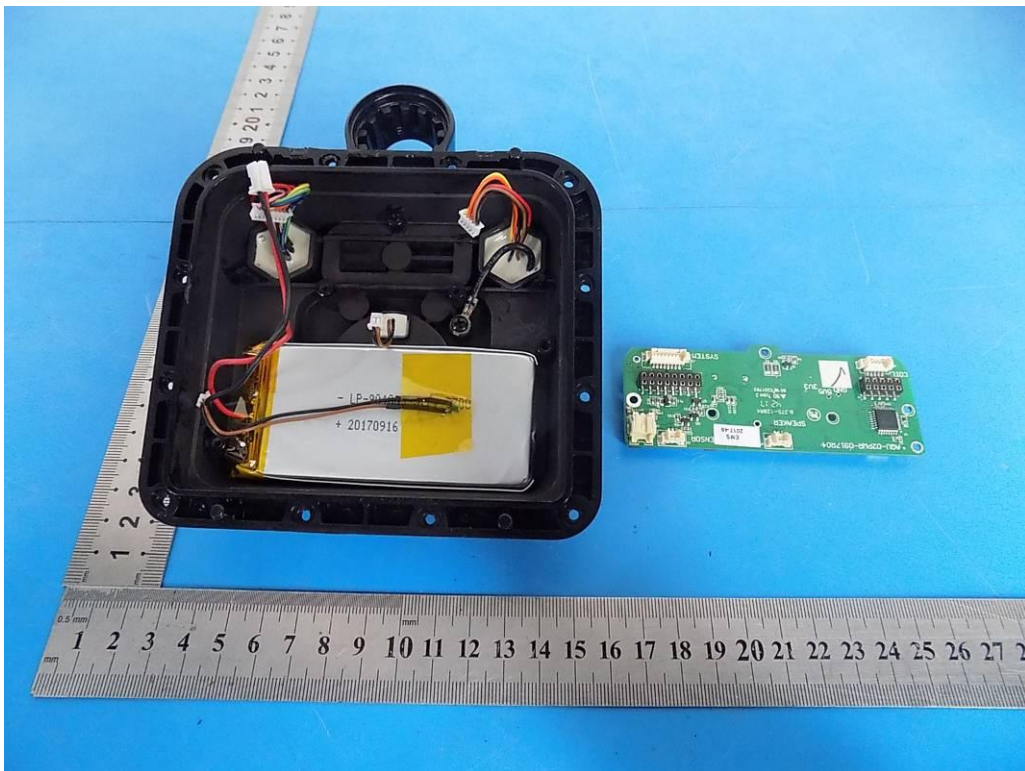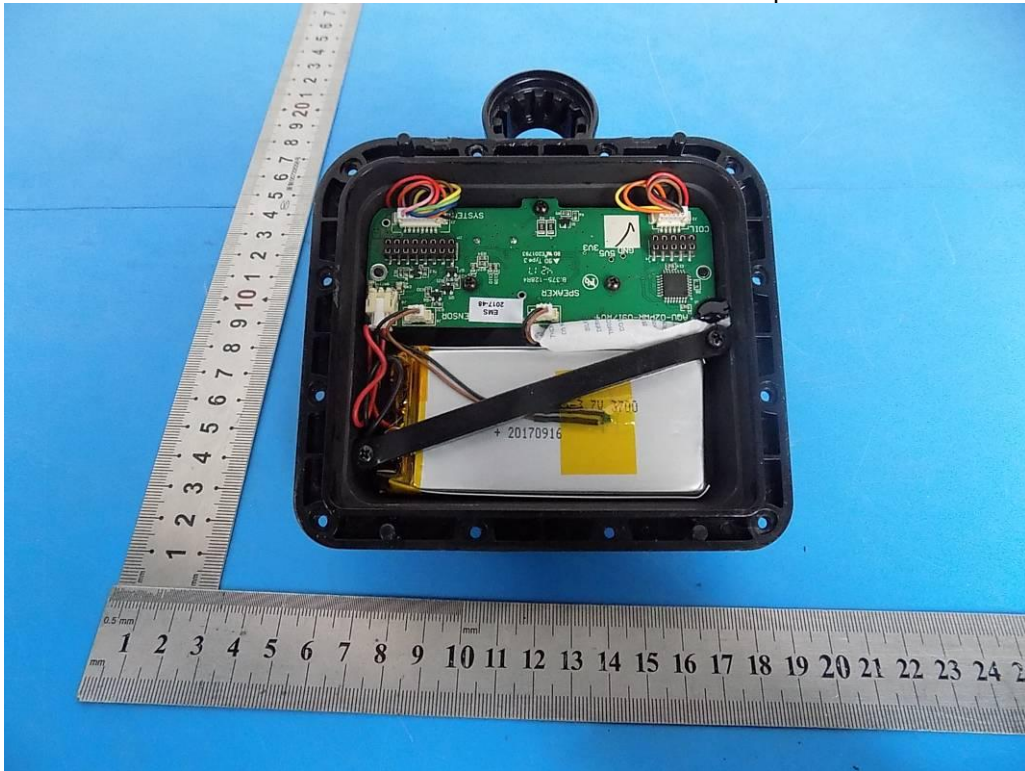



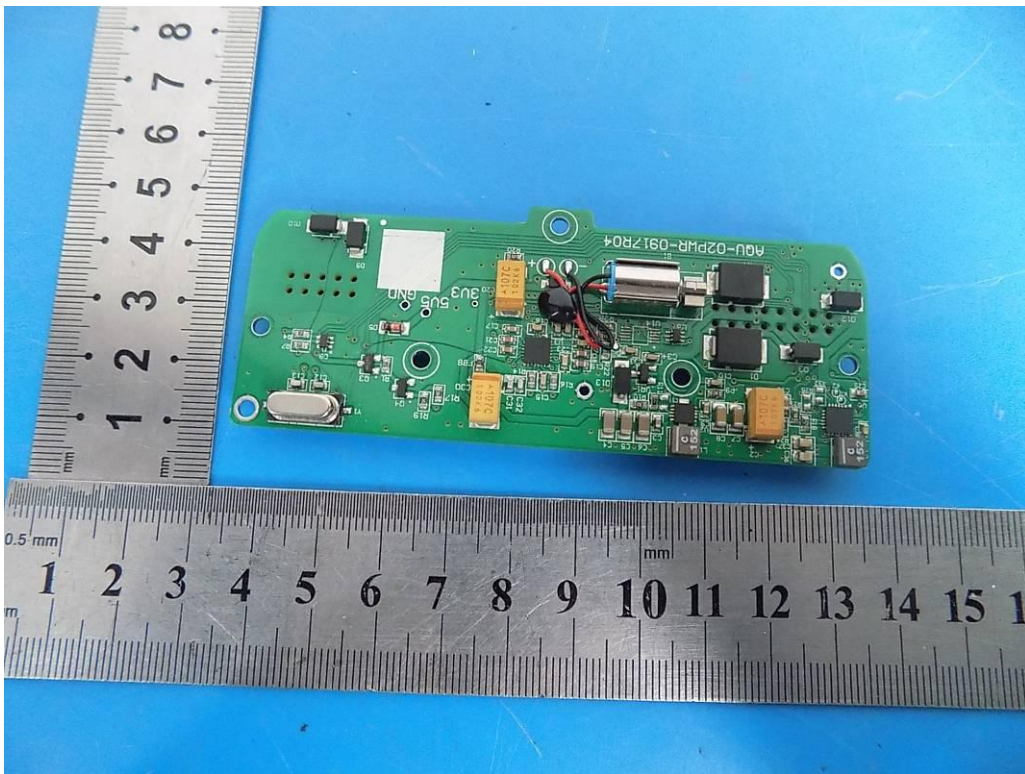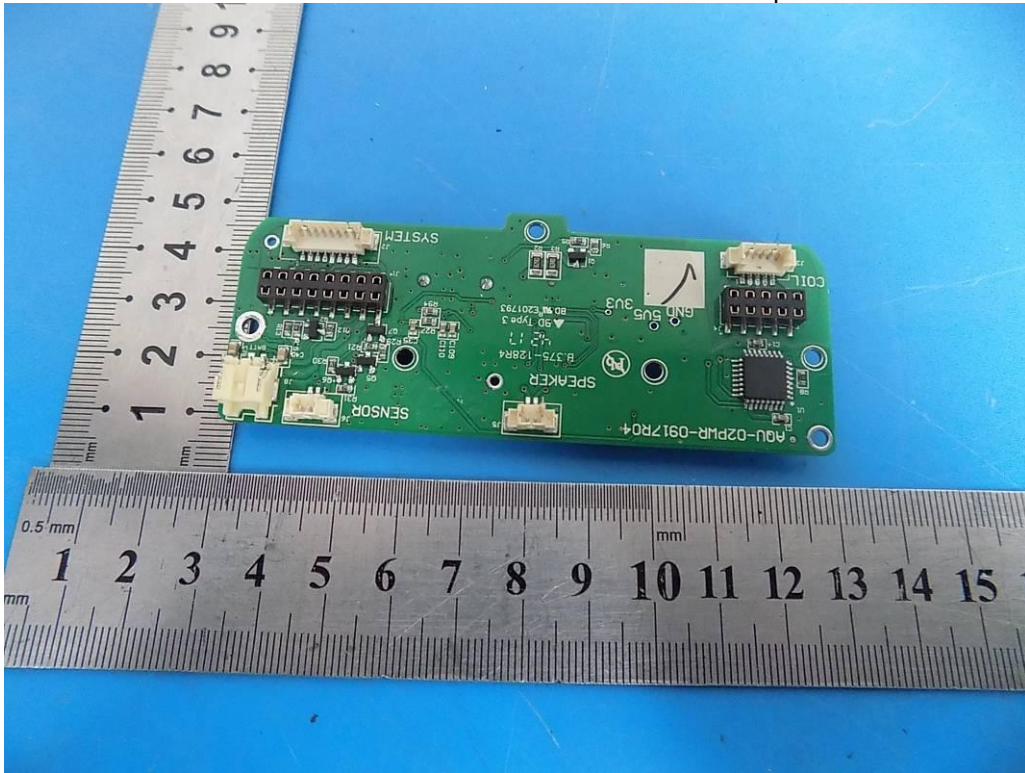



-----End-----