

MVOICE 1000 USB Conference Speakerphone

Welcome!


MVOICE series speakerphone is specially designed to fulfill the customers' increasing demand for web-conferencing calls, hands-free calls and teleconferencing.

MVOICE 1000 USB speakerphone can connect to computer with USB cable to realize hands-free audio and video conference based on internet application.

Highlights and features

- Connect to PC via USB.
- Three built-in 360° coverage microphones.
- Hi-Fi sound quality.

- DSP noise and echo cancellation.
- Low power consumption.

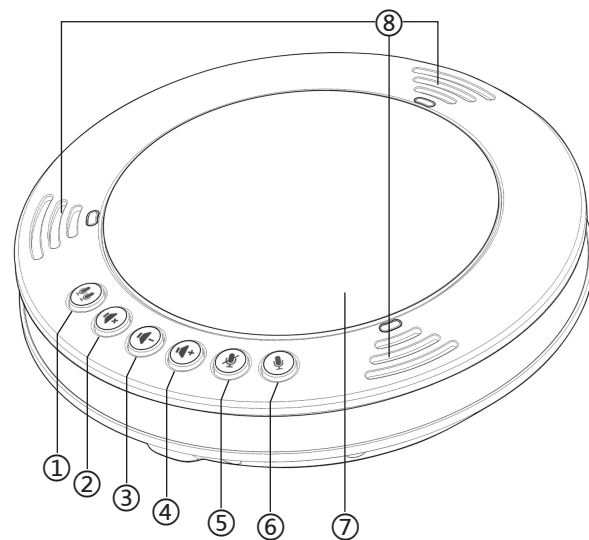


- | | |
|---------------------------|-----------------------------|
| 1. Choose two microphones | 5. Mute microphone |
| 2. Mute speaker | 6. Choose single microphone |
| 3. Volume down | 7. Speaker |
| 4. Volume up | 8. Microphones |

Connecting to PC or laptop

Plug and play, simply connect the MVOICE 1000 to the USB port on your PC with USB cable. Support Windows XP, Windows Vista, Windows7/8/10 etc.

Attention: MVOICE 1000 works excellently in web-conferencing via Skype or other VoIP software. The PC can automatically identify the MVOICE device, but you may need to choose MEETEASY USB AUDIO in application software. For example, you would need to choose MEETEASY USB AUDIO in Skype audio setting section.

Mute the speaker

Press the button  can mute the speaker, the button turns orange

Mute the microphones

Press the button  can mute the microphones all, the button turns orange

Increase the volume

Press the button  can increase the volume level

Decrease the volume

Press the button  can decrease the volume level


Separate microphone selection



In normal room conditions, the reception distance can reach to 3 meters. Built-in three microphones provides with 360-degree coverage.

For group meetings, all three microphones open can make proper audio reception of all participants.

In a conference room with weak sound absorption

and strong acoustic reflection (particularly the glass rooms), and the talker is far from the microphones, the microphones will receive the echo from different directions, which is impossible to eliminate completely. The other side of the conference may hear unclear voice. Speak close to the microphone and use only one microphone pointed to the speaker can receive the voice more clearly.

Press  button can turn on one microphone and mute two others in turn.

Press   button can turn on two microphones and mute the rest one in turn.

Specification:

System requirements	Windows XP/ Windows Vista Windows7/8/10 etc.
Connections	USB version 2.0
Max volume	83dB
Speaker frequency	30-16KHz
Microphone frequency	30-16KHz
Power voltage	5V DC
Power consumption	300mAh max.
Operating temperature	5°C-40°C
Storage temperature	-30°C-55°C
Accessories	6ft USB cable/ User Guide Protective bag/Gift box
Compliance	RoHS/FCC/CE

For more information, please visit

www.meeteasy.com.hk

Meeteasy Technology Limited

Add: 6F Jianda Building, Keyuan Road, Science
and Technology Park, Nanshan District,
Shenzhen, 518053, China

Tel: (+86) 755 8884 1683

Fax: (+86) 755 2690 5650

E-mail: info@meeteasy.com.hk

MVOICE 1000

USB Conference Speakerphone
User Guide



FCC Warning

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions

- (1) this device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation. Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note 1: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Note 2: Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.