

# FCC TEST REPORT

Client Name : ShenZhen YuYuanXin Electronic Technology Co., LTD.  
Address : Building 11, Tianluohu Industry Park, Guihua Industry Area, Guanguang Road, Guanlan Town, Longhua District, Shenzhen, Guangdong, China  
Product Name : Wireless Keyboard  
Date : Nov. 26, 2020



**Shenzhen Anbotek Compliance Laboratory Limited**



# Contents

1. General Information.....	4
1.1. Client Information.....	4
1.2. Description of Device (EUT).....	4
1.3. Auxiliary Equipment Used During Test.....	5
1.4. Description of Test Modes.....	5
1.5. List of Channels.....	5
1.6. Description of Test Setup.....	6
1.7. Test Equipment List.....	7
1.8. Measurement Uncertainty.....	8
1.9. Description of Test Facility.....	8
2. Summary of Test Results.....	9
3. Conducted Emission Test.....	10
3.1. Test Standard and Limit.....	10
3.2. Test Setup.....	10
3.3. Test Procedure.....	10
3.4. Test Data.....	11
4. Radiated Emission and Band Edge.....	16
4.1. Test Standard and Limit.....	16
4.2. Test Setup.....	17
4.3. Test Procedure.....	18
4.4. Test Data.....	19
5. 20dB Bandwidth Test.....	29
5.1. Test Standard and Limit.....	29
5.2. Test Setup.....	29
5.3. Test Procedure.....	29
5.4. Test Data.....	29
6. Antenna Requirement.....	32
6.1. Test Standard and Requirement.....	32
6.2. Antenna Connected Construction.....	32
APPENDIX I -- TEST SETUP PHOTOGRAPH.....	33
APPENDIX II -- EXTERNAL PHOTOGRAPH.....	33
APPENDIX III -- INTERNAL PHOTOGRAPH.....	33

# TEST REPORT

Applicant : ShenZhen YuYuanXin Electronic Technology Co., LTD.  
Manufacturer : ShenZhen YuYuanXin Electronic Technology Co., LTD.  
Product Name : Wireless Keyboard  
Model No. : TP4-022  
Trade Mark : N.A.  
Keyboard Input: DC 5V, 1A(with DC 3.7V battery inside)  
Rating(s) : Output: DC 5V, 0.8A  
Dongle Input: DC 5V via USB Port

**Test Standard(s) : FCC Part15 Subpart C, Paragraph 15.249**

**Test Method(s) : ANSI C63.10: 2013**

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC Part 15 Subpart C requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.

Date of Receipt

Oct. 12, 2020

Date of Test

Oct. 12~Nov. 17, 2020

Prepared by

*Yilia Zhong*

(Engineer / Yilia Zhong)

Reviewer

*Bibo Zhang*

(Supervisor / Bibo Zhang)

Approved & Authorized Signer

*Kingkong Jin*

(Manager / Kingkong Jin)

## 1. General Information

### 1.1. Client Information

Applicant	:	ShenZhen YuYuanXin Electronic Technology Co., LTD.
Address	:	Building 11, Tianluohu Industry Park, Guihua Industry Area, Guanguang Road, Guanlan Town, Longhua District, Shenzhen, Guangdong, China
Manufacturer	:	ShenZhen YuYuanXin Electronic Technology Co., LTD.
Address	:	Building 11, Tianluohu Industry Park, Guihua Industry Area, Guanguang Road, Guanlan Town, Longhua District, Shenzhen, Guangdong, China
Factory	:	ShenZhen YuYuanXin Electronic Technology Co., LTD.
Address	:	Building 11, Tianluohu Industry Park, Guihua Industry Area, Guanguang Road, Guanlan Town, Longhua District, Shenzhen, Guangdong, China

### 1.2. Description of Device (EUT)

Product Name	:	Wireless Keyboard	
Model No.	:	TP4-022	
Trade Mark	:	N.A.	
Test Power Supply	:	DC 3.7V battery inside	
Test Sample No.	:	1-2-1(Normal Sample), 1-2-2(Engineering Sample)	
Product Description	:	Operation Frequency:	2402~2480MHz
	:	Number of Channel:	3 Channels
	:	Modulation Type:	GFSW
	:	Antenna Type:	PCB Antenna
	:	Antenna Gain(Peak):	-0.58 dBi

**Remark:** 1) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

### 1.3. Auxiliary Equipment Used During Test

Adapter	:	Manufacturer: ZTE
		M/N: STC-A2050I1000USBA-C S/N: 201202102100876 Input: 100-240V~ 50/60Hz, 0.3A Output: DC 5V, 1000mA

### 1.4. Description of Test Modes

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

#### TEST MODE:

Mode 1	GFSW	CH00	TX+ Charging Mode/TX Only
Mode 2		CH39	
Mode 3		CH78	

#### Note:


1. The engineering test program was provided and the EUT was programmed to be in continuously transmitting mode.

### 1.5. List of Channels


Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
1	2402	02	2441	03	2480

## 1.6. Description of Test Setup

CE

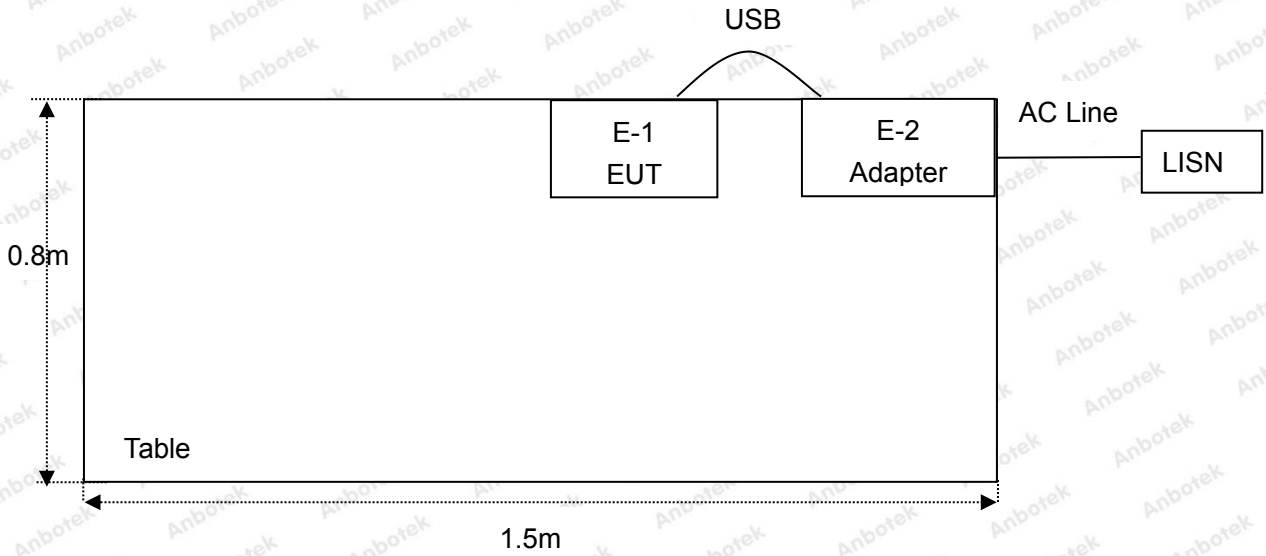

RE

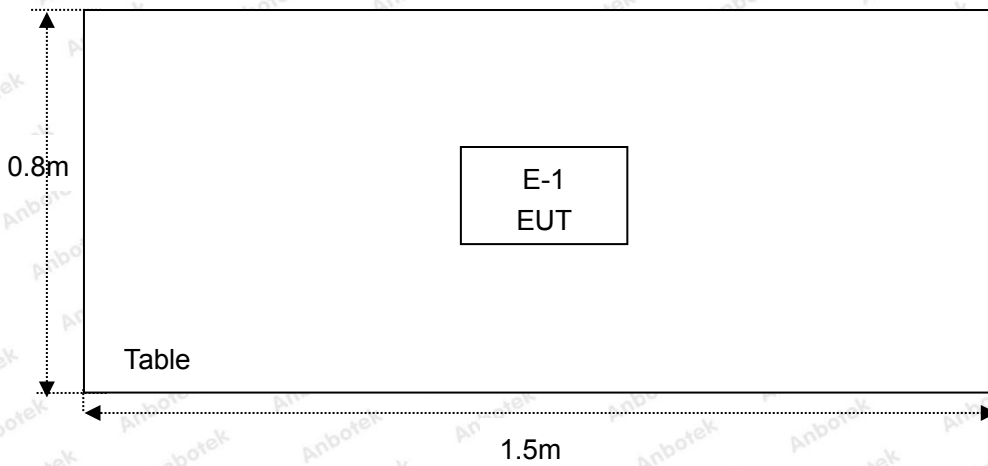

## 1.7. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	L.I.S.N. Artificial Mains Network	Rohde & Schwarz	ENV216	100055	Oct. 26, 2020	1 Year
2.	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	Oct. 26, 2020	1 Year
3.	EMI Test Receiver	Rohde & Schwarz	ESR26	101481	Oct. 26, 2020	1 Year
4.	RF Switching Unit	Compliance Direction	RSU-M2	38303	Oct. 26, 2020	1 Year
5.	MAX Spectrum Analysis	Agilent	N9020A	MY51170037	Oct. 26, 2020	1 Year
6.	Preamplifier	SKET Electronic	BK1G18G30 D	KD17503	Oct. 26, 2020	1 Year
7.	Double Ridged Horn Antenna	Instruments corporation	GTH-0118	351600	Nov. 02, 2020	2 Year
8.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	Nov. 02, 2020	2 Year
9.	Loop Antenna	Schwarzbeck	FMZB1519B	00053	Nov. 02, 2020	2 Year
10.	Horn Antenna	A-INFO	LB-180400- KF	J211060628	Nov. 02, 2020	2 Year
11.	Pre-amplifier	SONOMA	310N	186860	Oct. 26, 2020	1 Year
12.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A
13.	RF Test Control System	YIHENG	YH3000	2017430	Oct. 26, 2020	1 Year
14.	Power Sensor	DAER	RPR3006W	15100041SN045	Oct. 26, 2020	1 Year
15.	Power Sensor	DAER	RPR3006W	15100041SN046	Oct. 26, 2020	1 Year
16.	MXA Spectrum Analysis	Agilent	N9020A	MY51170037	Oct. 26, 2020	1 Year
17.	MXG RF Vector Signal Generator	Agilent	N5182A	MY48180656	Oct. 26, 2020	1 Year
18.	Signal Generator	Agilent	E4421B	MY41000743	Oct. 26, 2020	1 Year
19.	DC Power Supply	IVYTECH	IV3605	1804D360510	Oct. 26, 2020	1 Year
20.	Constant Temperature Humidity Chamber	ZHONGJIAN	ZJ-KHWS80 B	N/A	Oct. 26, 2020	1 Year

### 1.8. Measurement Uncertainty

Radiation Uncertainty	:	Ur = 3.9 dB (Horizontal)
		Ur = 3.8 dB (Vertical)
Conduction Uncertainty	:	Uc = 3.4 dB

### 1.9. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

#### FCC-Registration No.: 184111

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 184111, September 30, 2020.

#### ISED-Registration No.: 8058A

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (ISED) Innovation, Science and Economic Development Canada. The acceptance letter from the ISED is maintained in our files. Registration 8058A, September 30, 2020.

#### Test Location

Shenzhen Anbotek Compliance Laboratory Limited.

1/F, Building D, Sogood Science and Technology Park, Sanwei community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.518102



## 2. Summary of Test Results

Standard Section	Test Item	Result
15.203	Antenna Requirement	PASS
15.207	Conducted Emission	PASS
15.249	Radiated Emission	PASS
15.215(c)	20dB Bandwidth	PASS
15.249(c)	Band Edge	PASS

**Remark:** "N/A" is an abbreviation for Not Applicable.




## 3. Conducted Emission Test

### 3.1. Test Standard and Limit

Test Standard	FCC Part15 Section 15.207		
Test Limit	Frequency	Maximum RF Line Voltage (dBuV)	
		Quasi-peak Level	Average Level
	150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
	500kHz~5MHz	56	46
5MHz~30MHz	60	50	

**Remark:** (1) \*Decreasing linearly with logarithm of the frequency.  
 (2) The lower limit shall apply at the transition frequency.

### 3.2. Test Setup

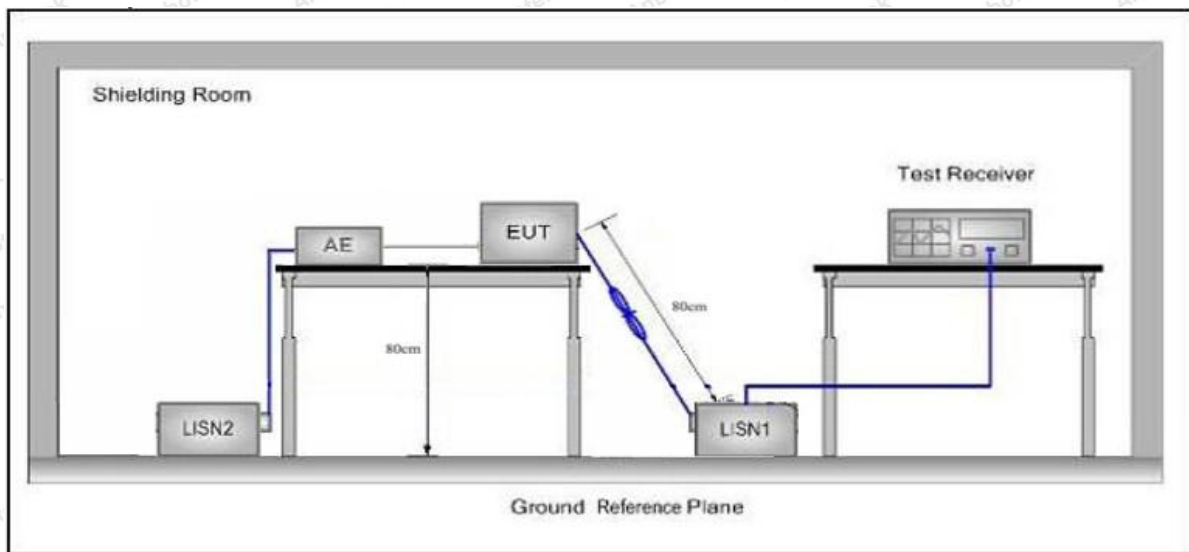

### 3.3. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.10-2013 on Conducted Emission Measurement.

The bandwidth of test receiver (ESCI) set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.

### 3.4. Test Data


During the test, pre-scan the Low, Middle, High channel, and found the Low channel(TX+Charging Mode) which is the worst case, only the worst case is recorded in the report.

Please to see the following pages.



### Conducted Emission Test Data


Test Site: 1# Shielded Room  
 Operating Condition: Mode 1  
 Test Specification: AC 120V, 60Hz for adapter  
 Comment: Live Line  
 Tem.: 23.2°C Hum.: 52%

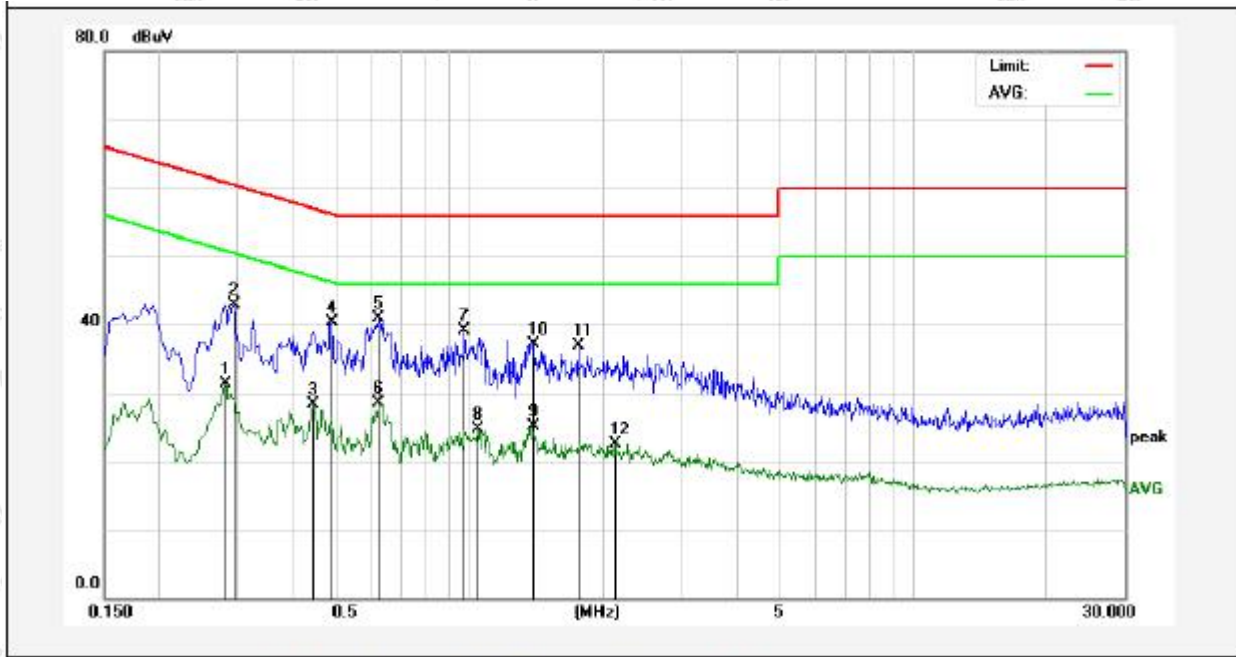

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.2819	11.46	19.89	31.35	50.76	-19.41	AVG	
2	0.2940	23.08	19.89	42.97	60.41	-17.44	QP	
3	0.4460	8.29	19.96	28.25	46.95	-18.70	AVG	
4	0.4900	20.31	19.98	40.29	56.17	-15.88	QP	
5	0.6260	20.96	20.02	40.98	56.00	-15.02	QP	
6	0.6260	8.46	20.02	28.48	46.00	-17.52	AVG	
7	0.9780	18.97	20.11	39.08	56.00	-16.92	QP	
8	1.0460	4.67	20.12	24.79	46.00	-21.21	AVG	
9	1.3820	4.99	20.13	25.12	46.00	-20.88	AVG	
10	1.3940	17.03	20.13	37.16	56.00	-18.84	QP	
11	1.7540	16.71	20.14	36.85	56.00	-19.15	QP	
12	2.1300	2.42	20.14	22.56	46.00	-23.44	AVG	

### Conducted Emission Test Data


Test Site: 1# Shielded Room  
 Operating Condition: Mode 1  
 Test Specification: AC 120V, 60Hz for adapter  
 Comment: Neutral Line  
 Tem.: 23.2°C Hum.: 52%

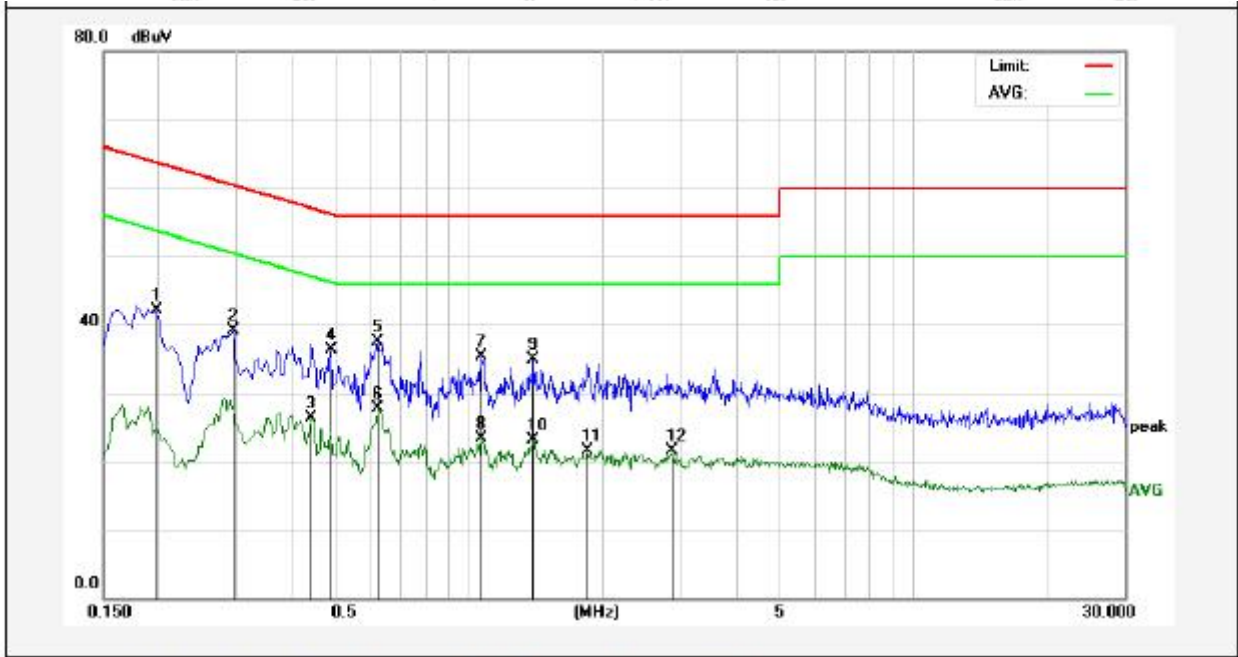

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.1980	22.17	19.90	42.07	63.69	-21.62	QP	
2	0.2940	19.22	19.89	39.11	60.41	-21.30	QP	
3	0.4420	6.36	19.95	26.31	47.02	-20.71	AVG	
4	0.4900	16.30	19.98	36.28	56.17	-19.89	QP	
5	0.6260	17.44	20.02	37.46	56.00	-18.54	QP	
6	0.6260	7.61	20.02	27.63	46.00	-18.37	AVG	
7	1.0700	15.09	20.12	35.21	56.00	-20.79	QP	
8	1.0700	3.22	20.12	23.34	46.00	-22.66	AVG	
9	1.3980	14.72	20.13	34.85	56.00	-21.15	QP	
10	1.3980	2.94	20.13	23.07	46.00	-22.93	AVG	
11	1.8500	1.36	20.14	21.50	46.00	-24.50	AVG	
12	2.8580	1.29	20.16	21.45	46.00	-24.55	AVG	

### Conducted Emission Test Data


Test Site: 1# Shielded Room  
 Operating Condition: Mode 1  
 Test Specification: AC 240V, 60Hz for adapter  
 Comment: Live Line  
 Tem.: 23.2°C Hum.: 52%

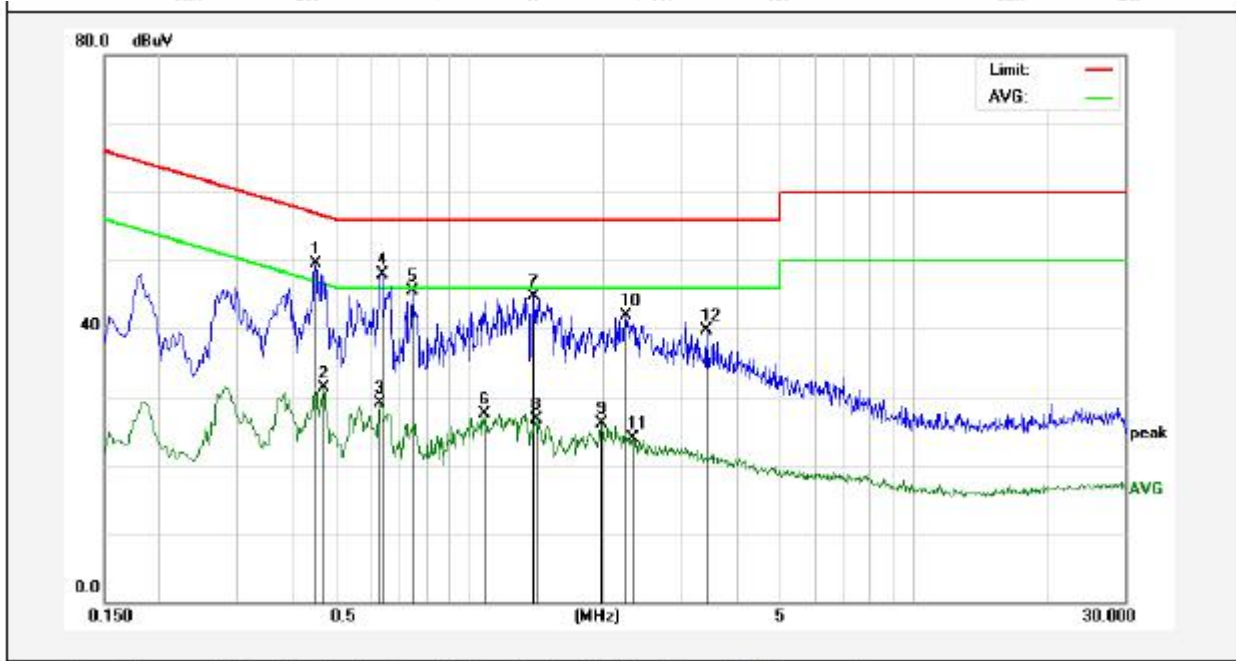

No.	Freq. (MHz)	Reading (dBUV)	Factor (dB)	Result (dBUV)	Limit (dBUV)	Over Limit (dB)	Detector	Remark
1	0.4500	29.52	19.96	49.48	56.87	-7.39	QP	
2	0.4700	11.24	19.97	31.21	46.51	-15.30	AVG	
3	0.6300	9.08	20.02	29.10	46.00	-16.90	AVG	
4	0.6340	27.93	20.02	47.95	56.00	-8.05	QP	
5	0.7460	25.40	20.05	45.45	56.00	-10.55	QP	
6	1.0820	7.40	20.12	27.52	46.00	-18.48	AVG	
7	1.4020	24.48	20.13	44.61	56.00	-11.39	QP	
8	1.4180	6.50	20.13	26.63	46.00	-19.37	AVG	
9	1.9820	6.03	20.14	26.17	46.00	-19.83	AVG	
10	2.2580	21.72	20.15	41.87	56.00	-14.13	QP	
11	2.3420	3.68	20.15	23.83	46.00	-22.17	AVG	
12	3.4260	19.62	20.17	39.79	56.00	-16.21	QP	

### Conducted Emission Test Data

Test Site: 1# Shielded Room  
 Operating Condition: Mode 1  
 Test Specification: AC 240V, 60Hz for adapter  
 Comment: Neutral Line  
 Tem.: 23.2°C Hum.: 52%

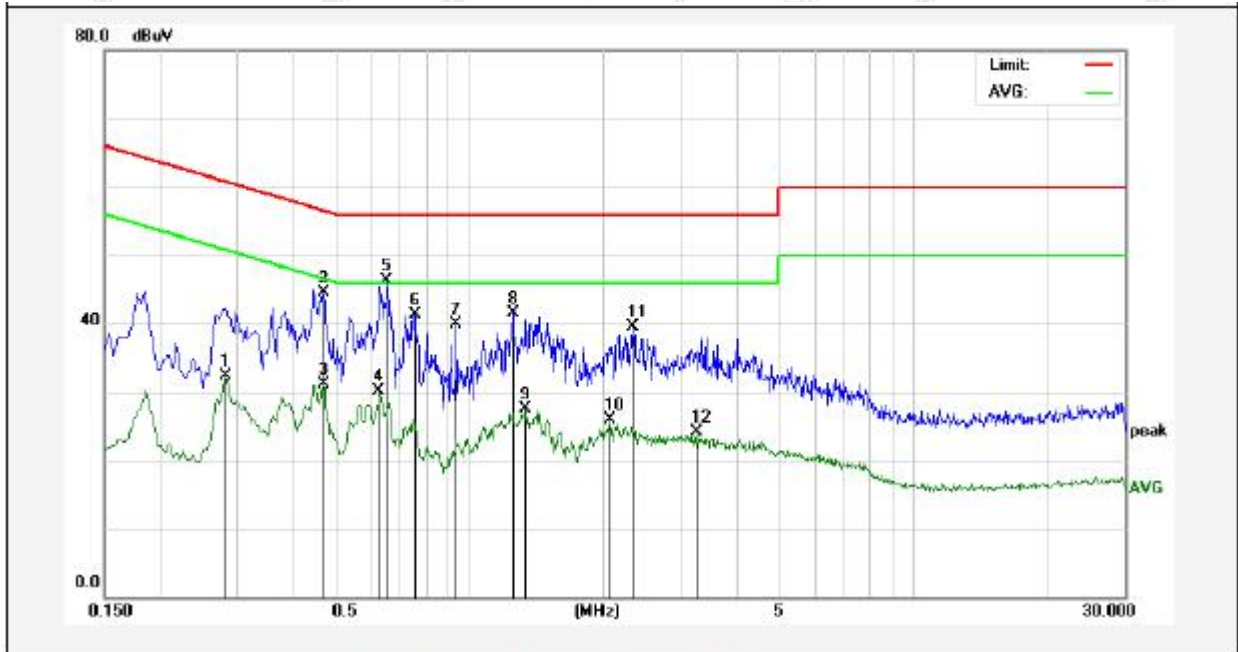

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.2819	12.37	19.89	32.26	50.76	-18.50	AVG	
2	0.4700	24.56	19.97	44.53	56.51	-11.98	QP	
3	0.4700	11.23	19.97	31.20	46.51	-15.31	AVG	
4	0.6260	10.03	20.02	30.05	46.00	-15.95	AVG	
5	0.6540	26.18	20.03	46.21	56.00	-9.79	QP	
6	0.7539	21.22	20.05	41.27	56.00	-14.73	QP	
7	0.9380	19.78	20.10	39.88	56.00	-16.12	QP	
8	1.2540	21.44	20.13	41.57	56.00	-14.43	QP	
9	1.3380	7.30	20.13	27.43	46.00	-18.57	AVG	
10	2.0660	5.72	20.14	25.86	46.00	-20.14	AVG	
11	2.3420	19.39	20.15	39.54	56.00	-16.46	QP	
12	3.2500	4.01	20.16	24.17	46.00	-21.83	AVG	

## 4. Radiated Emission and Band Edge

### 4.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.209 and 15.205				
Test Limit	Frequency (MHz)	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz~0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz~88MHz	100	40.0	Quasi-peak	3
	88MHz~216MHz	150	43.5	Quasi-peak	3
	216MHz~960MHz	200	46.0	Quasi-peak	3
	960MHz~1000MHz	500	54.0	Quasi-peak	3
	Above 1000MHz	500	54.0	Average	3
-		74.0	Peak	3	

**Remark:**

(1)The lower limit shall apply at the transition frequency.

(2) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

Test Standard	FCC Part15 C Section 15.249					
Test Limit	Frequency (MHz)	Field Strength of fundamental ((millivolts /meter)	Field Strength of Harmonics (microvolts/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	2400~2483.5	50	-	114.0	Peak	3
	2400~2483.5	50	-	94.0	Average	3
	2400~2483.5	-	500	74.0	Peak	3
	2400~2483.5	-	500	54.0	Average	3

**Remark:**

(1) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.



## 4.2. Test Setup

Figure 1. Below 30MHz

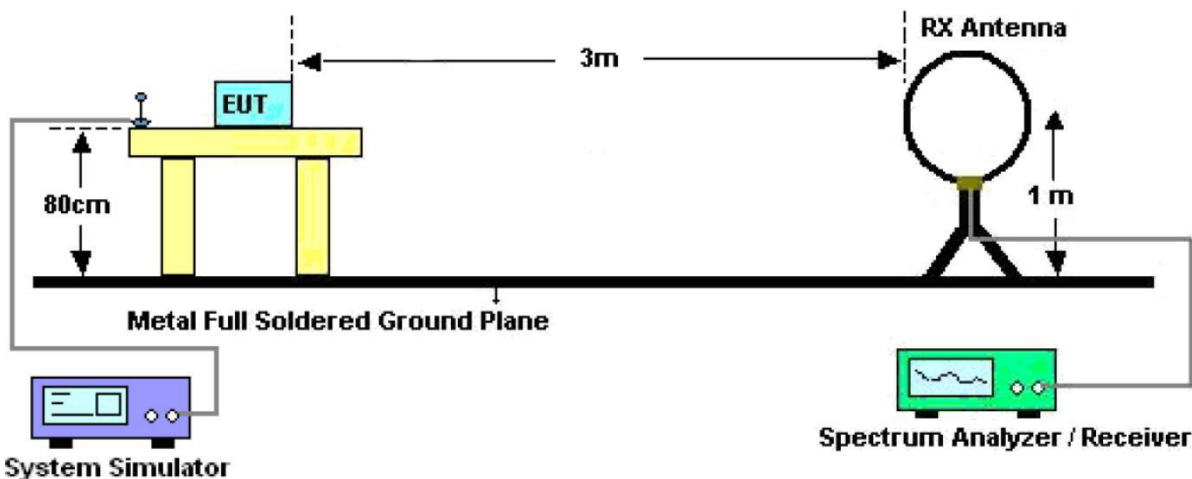


Figure 2. 30MHz to 1GHz


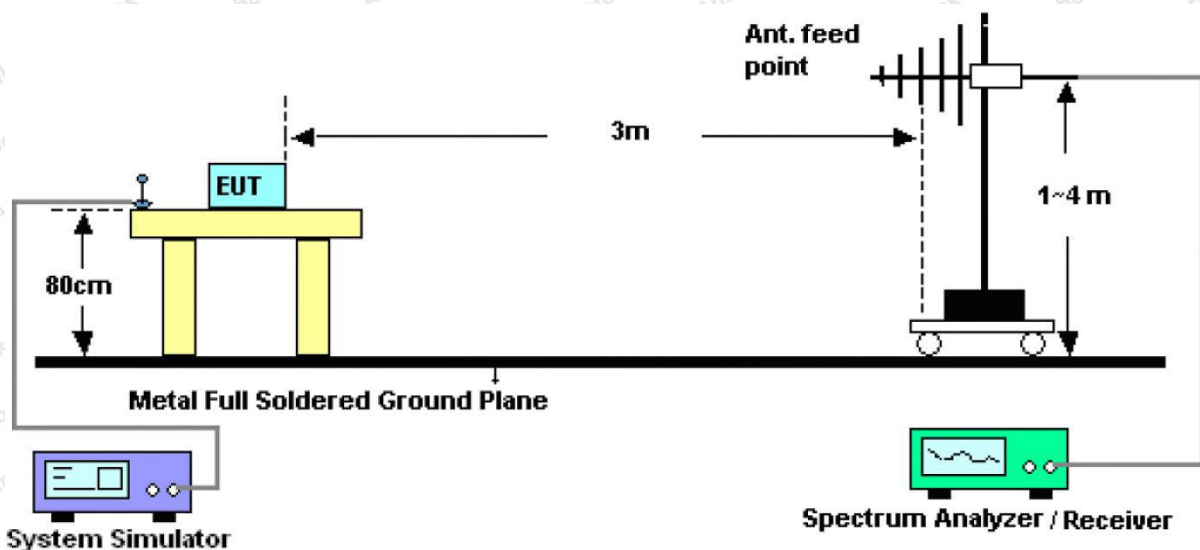


Figure 3. Above 1 GHz

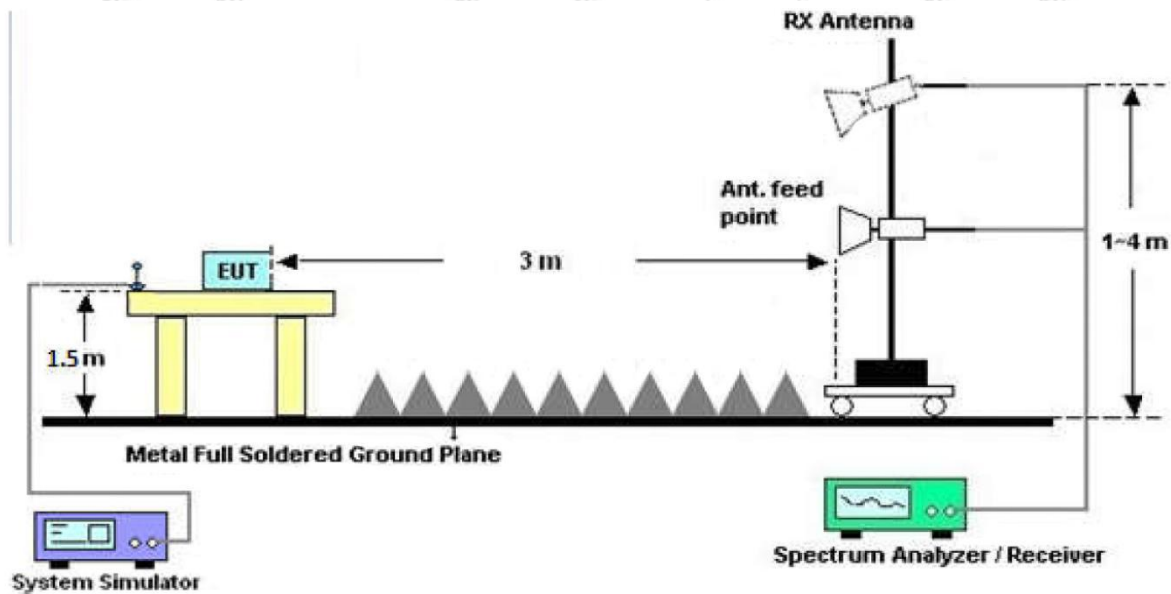

### 4.3. Test Procedure

For below 1GHz: The EUT is placed on a turntable, which is 0.8m above the ground plane.

For above 1GHz: The EUT is placed on a turntable, which is 1.5m above the ground plane.

The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Rotated the EUT through three orthogonal axes to determine the maximum emissions, both horizontal and vertical polarization of the antenna are set on test. The EUT is tested in 9\*6\*6 Chamber. The device is evaluated in xyz orientation.

For the radiated emission test above 1GHz:

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

For 9kHz to 150kHz, Set the spectrum analyzer as:

RBW = 200Hz, VBW = 1kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 150kHz to 30MHz, Set the spectrum analyzer as:

RBW = 9KHz, VBW = 30kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 30MHz to 1000MHz, Set the spectrum analyzer as:

RBW = 100kHz, VBW = 300kHz, Detector = Quasi-Peak, Trace mode = Max hold, Sweep = auto couple.

For above 1GHz, Set the spectrum analyzer as:

RBW = 1MHz, VBW = 1MHz, Detector = Peak, Trace mode = Max hold, Sweep = auto couple.

RBW = 1MHz, VBW = 10Hz, Detector = Average, Trace mode = Max hold, Sweep = auto couple.

#### 4.4. Test Data

##### PASS

During the test, Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the X-axis is the worst case.


The test results of 9kHz-30MHz was attenuated more than 20dB below the permissible limits, so the results don't record in the report.

During the test, pre-scan all the modes, and found the Middle channel (TX only) which is the worst case, only the worst case is recorded in the report.



**Test Results (30~1000MHz)**

Test Mode: Mode 2  
 Power Source: DC 3.7V battery inside  
 Polarization: Vertical  
 Temp.(°C)/Hum.(%RH): 23.1°C/50%RH

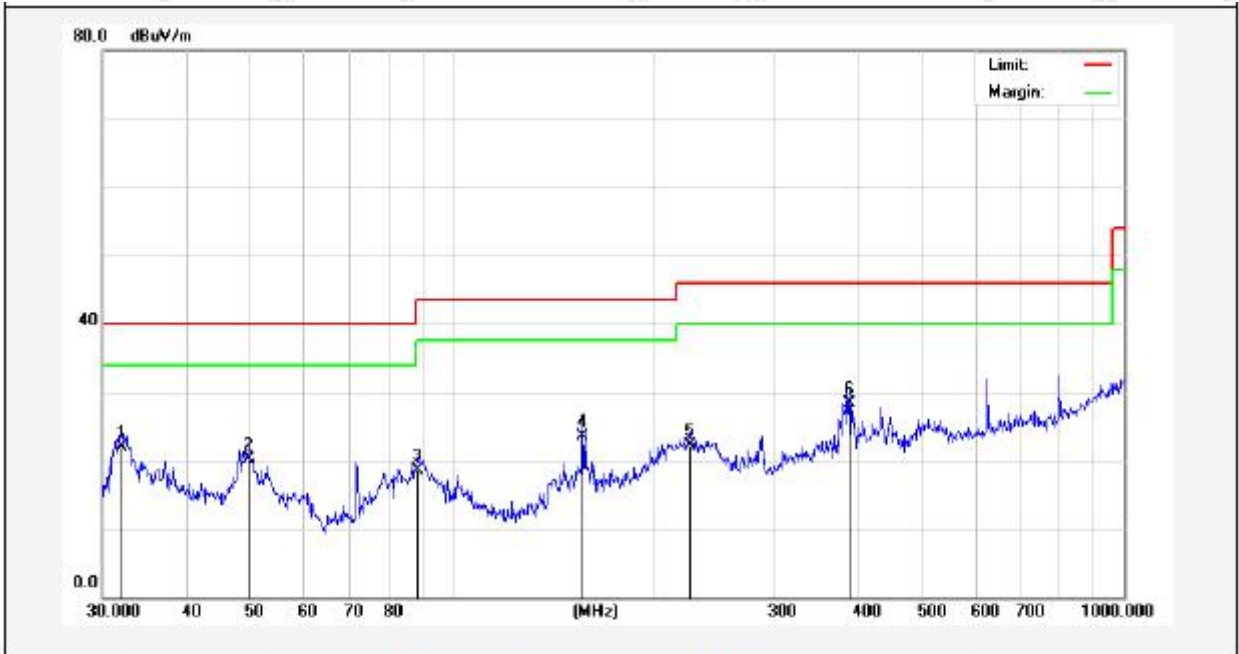

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	32.0667	38.76	-16.82	21.94	40.00	-18.06	QP	100	0	
2	49.5328	34.90	-14.78	20.12	40.00	-19.88	QP	100	360	
3	88.6524	34.60	-16.05	18.55	43.50	-24.95	QP	100	0	
4	155.9099	43.21	-19.62	23.59	43.50	-19.91	QP	100	360	
5	225.3078	38.24	-16.23	22.01	46.00	-23.99	QP	100	0	
6	389.3548	39.64	-11.43	28.21	46.00	-17.79	QP	100	360	

### Test Results (30~1000MHz)

Test Mode: Mode 2  
 Power Source: DC 3.7V battery inside  
 Polarization: Horizontal  
 Temp.(°C)/Hum.(%RH): 23.1°C/50%RH



No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	71.8319	39.80	-20.71	19.09	40.00	-20.91	QP	100	0	
2	92.1388	47.22	-20.33	26.89	43.50	-16.61	QP	100	360	
3	181.9199	40.34	-20.73	19.61	43.50	-23.89	QP	100	0	
4	234.9909	48.40	-19.15	29.25	46.00	-16.75	QP	100	360	
5	385.2805	43.54	-12.98	30.56	46.00	-15.44	QP	100	0	
6	625.0778	38.92	-6.78	32.14	46.00	-13.86	QP	100	360	

**Test Results (1GHz-25GHz)**

Test Mode: CH01 (Low channel)									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.	Detector
2402.0000	96.08	31.09	2.10	35.23	94.04	114.00	-19.96	V	Peak
2402.0000	83.91	31.09	2.10	35.23	81.87	94.00	-12.13	V	AVG
4804.0000	49.05	33.98	2.49	34.54	50.98	74.00	-23.02	V	Peak
4804.0000	39.23	33.98	2.49	34.54	41.16	54.00	-12.84	V	AVG
7206.0000	45.19	36.01	2.78	34.89	49.09	74.00	-24.91	V	Peak
7206.0000	36.19	36.01	2.78	34.89	40.09	54.00	-13.91	V	AVG
9608.0000	*								
12010.0000	*								
14412.0000	*								
16814.0000	*								
2402.0000	93.71	31.09	2.10	35.23	91.67	114.00	-22.33	H	Peak
2402.0000	84.94	31.09	2.10	35.23	82.90	94.00	-11.10	H	AVG
4804.0000	48.87	33.98	2.49	34.54	50.80	74.00	-23.20	H	Peak
4804.0000	39.73	33.98	2.49	34.54	41.66	54.00	-12.34	H	AVG
7206.0000	48.29	36.01	2.78	34.89	52.19	74.00	-21.81	H	Peak
7206.0000	35.52	36.01	2.78	34.89	39.42	54.00	-14.58	H	AVG
9608.0000	*								
12010.0000	*								
14412.0000	*								
16814.0000	*								

**Note:**

1. Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor
2. “\*” means the test results were attenuated more than 20dB below the permissible limits, so the results don't record in the report.

Test Mode: CH02 (Middle channel)									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.	Detector
2441.0000	94.22	31.12	2.20	34.51	93.03	114.00	-20.97	V	Peak
2441.0000	83.59	31.22	2.20	34.51	82.50	94.00	-11.50	V	AVG
4882.0000	50.73	34.98	2.49	34.14	54.06	74.00	-19.94	V	Peak
4882.0000	38.72	34.98	2.49	34.14	42.05	54.00	-11.95	V	AVG
7323.0000	48.56	36.01	3.01	34.56	53.02	74.00	-20.98	V	Peak
7323.0000	35.98	36.01	3.01	34.56	40.44	54.00	-13.56	V	AVG
9764.0000	*								
12205.0000	*								
14646.0000	*								
17087.0000	*								
2441.0000	93.43	31.12	2.20	34.51	92.24	114.00	-21.76	H	Peak
2441.0000	82.04	31.12	2.20	34.51	80.85	94.00	-13.15	H	AVG
4882.0000	47.98	34.98	2.49	34.14	51.31	74.00	-22.69	H	Peak
4882.0000	41.84	34.98	2.49	34.14	45.17	54.00	-8.83	H	AVG
7323.0000	45.80	36.01	3.01	34.56	50.26	74.00	-23.74	H	Peak
7323.0000	35.44	36.01	3.01	34.56	39.90	54.00	-14.10	H	AVG
9764.0000	*								
12205.0000	*								
14646.0000	*								
17087.0000	*								

**Note:**

1. Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor
2. "\*" means the test results were attenuated more than 20dB below the permissible limits, so the results don't record in the report.

Test Mode: CH03(High channel)									
Frequency (MHz)	Read Level (dBUV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBUV/m)	Limit (dBUV/m)	Over Limit (dB)	Pol.	Detector
2480.0000	94.67	31.66	2.23	36.08	92.48	114.00	-21.52	V	Peak
2480.0000	84.50	31.66	2.23	36.08	82.31	94.00	-11.69	V	AVG
4960.0000	47.22	35.06	2.61	34.94	49.95	74.00	-24.05	V	Peak
4960.0000	41.58	35.06	2.61	34.94	44.31	54.00	-9.69	V	AVG
7440.0000	47.24	36.20	3.12	35.12	51.44	74.00	-22.56	V	Peak
7440.0000	38.21	36.20	3.12	35.12	42.41	54.00	-11.59	V	AVG
9920.0000	*								
12400.0000	*								
14880.0000	*								
17360.0000	*								
2480.0000	94.78	31.66	2.23	36.08	92.59	114.00	-21.41	H	Peak
2480.0000	82.43	31.66	2.23	36.08	80.24	94.00	-13.76	H	AVG
4960.0000	50.78	35.06	2.61	34.94	53.51	74.00	-20.49	H	Peak
4960.0000	39.59	35.06	2.61	34.94	42.32	54.00	-11.68	H	AVG
7440.0000	45.89	36.20	3.12	35.12	50.09	74.00	-23.91	H	Peak
7440.0000	38.13	36.20	3.12	35.12	42.33	54.00	-11.67	H	AVG
9920.0000	*								
12400.0000	*								
14880.0000	*								
17360.0000	*								


**Note:**

1. Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor
2. "\*" means the test results were attenuated more than 20dB below the permissible limits, so the results don't record in the report.




**Radiated Band Edge:**



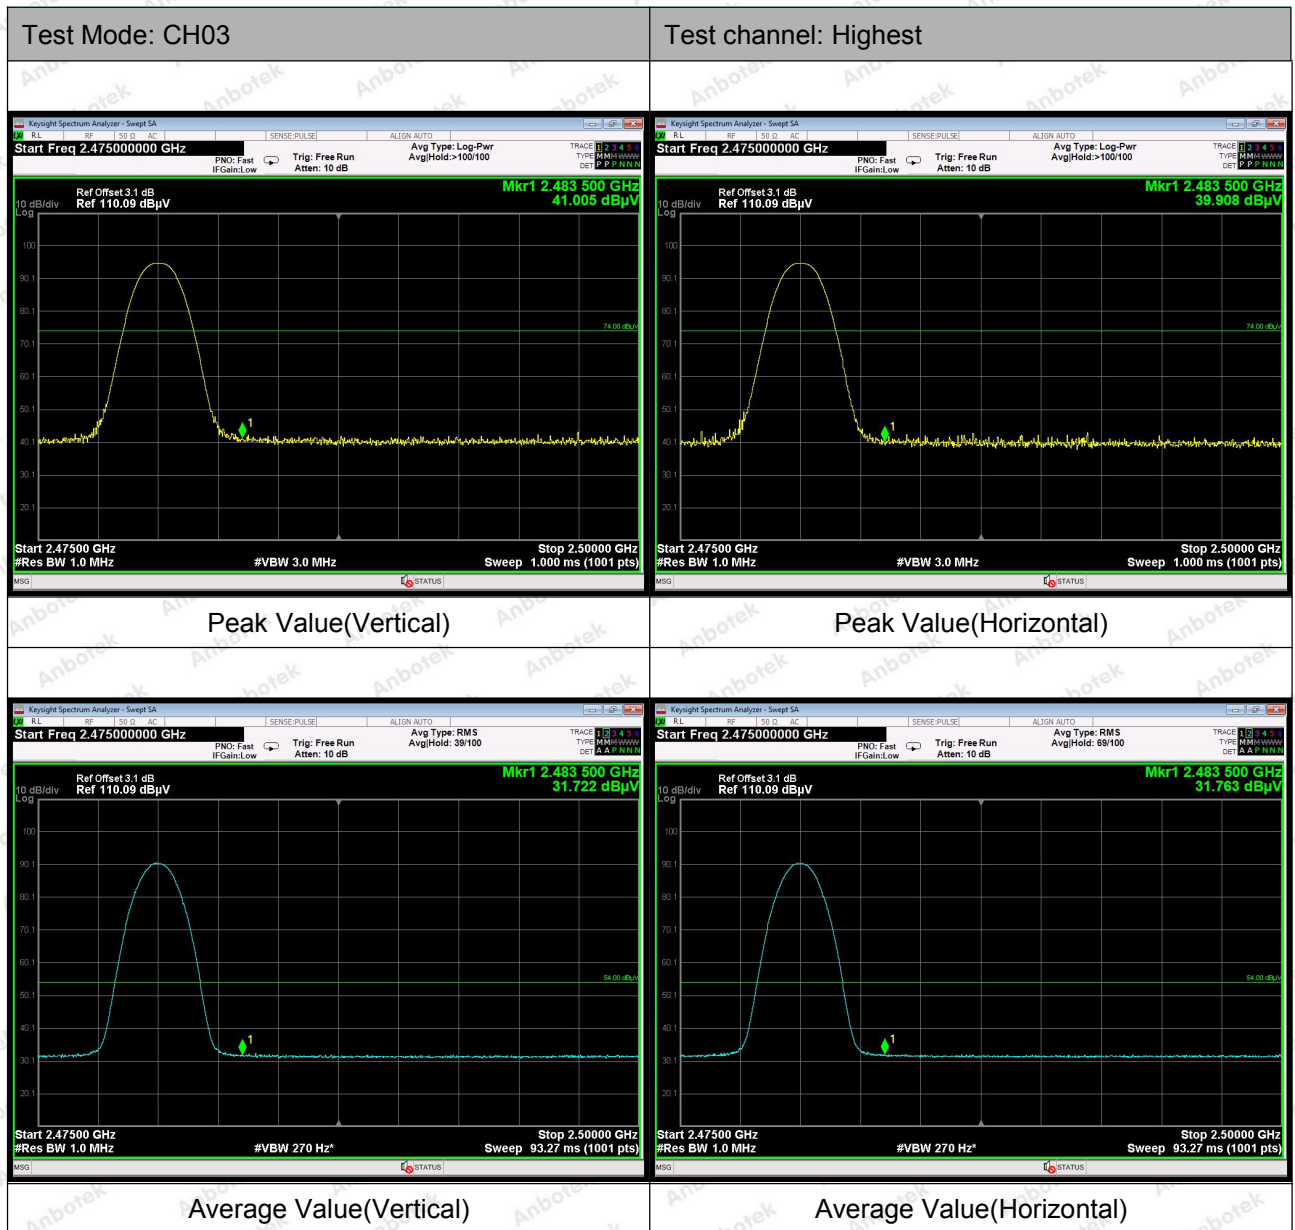


Remark:


1. Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor

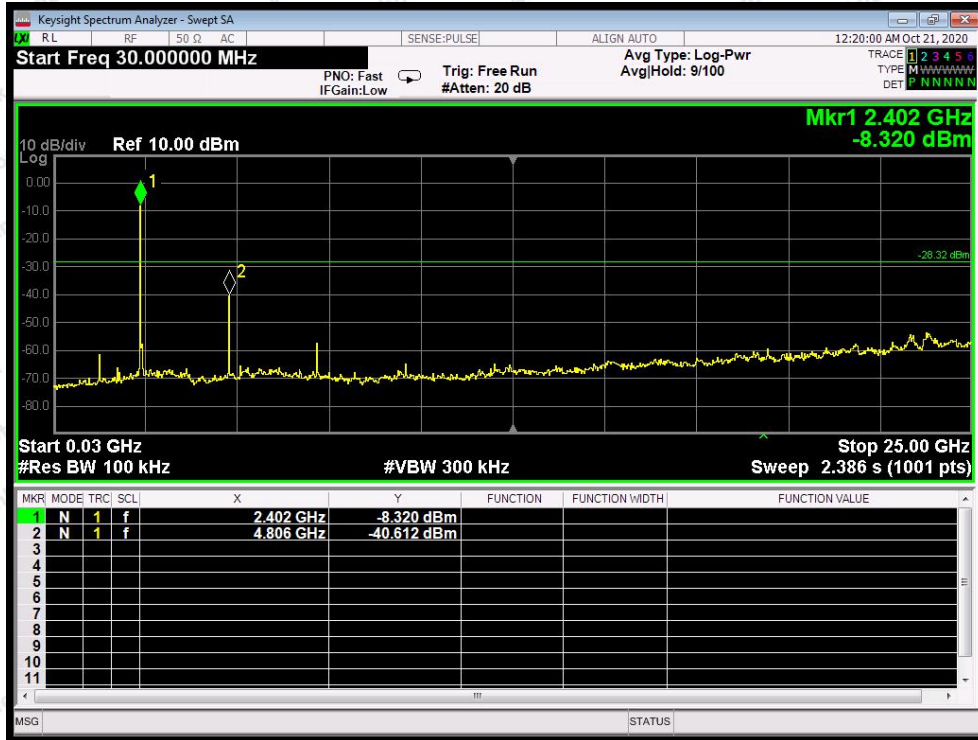

CH: Low

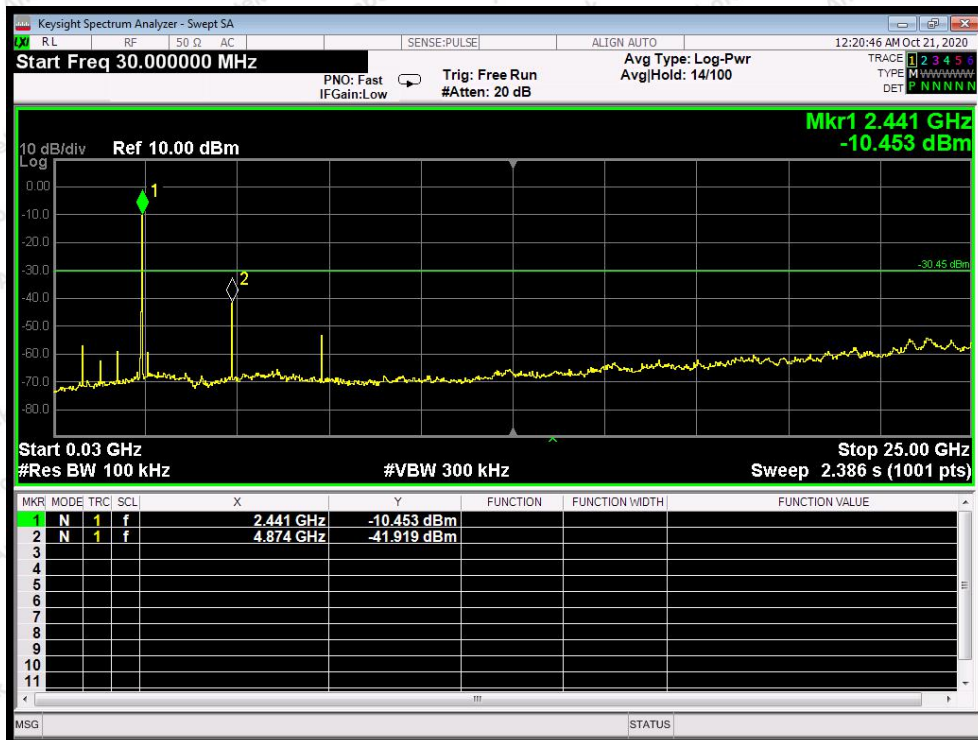

CH: Middle

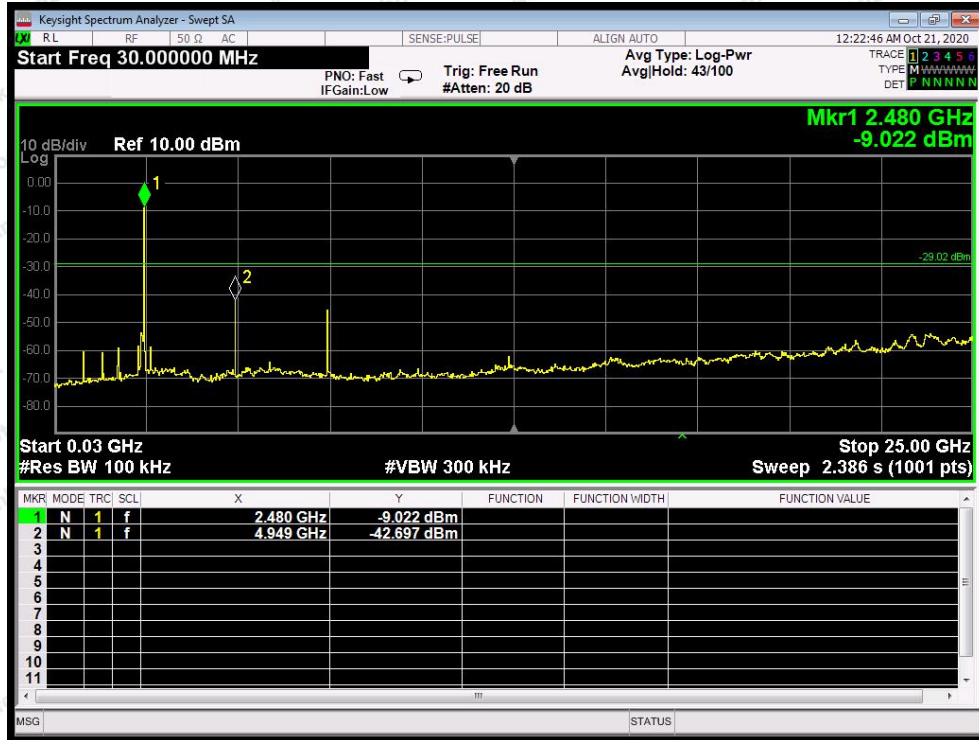


CH: High

## 5. 20dB Bandwidth Test

### 5.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.249
---------------	-----------------------------

### 5.2. Test Setup

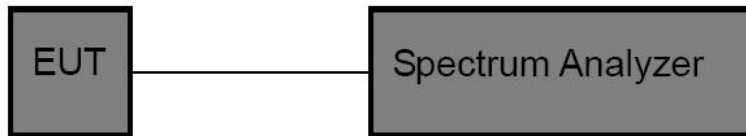


### 5.3. Test Procedure

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as:  
 RBW = 30kHz, VBW ≥ 3 \* RBW = 100kHz,  
 Detector = Average  
 Trace mode = Max hold.  
 Sweep = auto couple.
4. Mark the peak frequency and -20dB (upper and lower) frequency.
5. Repeat until all the rest channels are investigated.


### 5.4. Test Data

Test Item	: 20dB Bandwidth	Test Mode	: Mode 1
Test Voltage	: DC 3.7V battery inside	Temperature	: 22.5°C
Test Result	: PASS	Humidity	: 54%RH


Frequency (MHz)	Bandwidth (kHz)	Result
2402MHZ	883.5	PASS
2441MHZ	881.9	PASS
2480MHZ	889.5	PASS

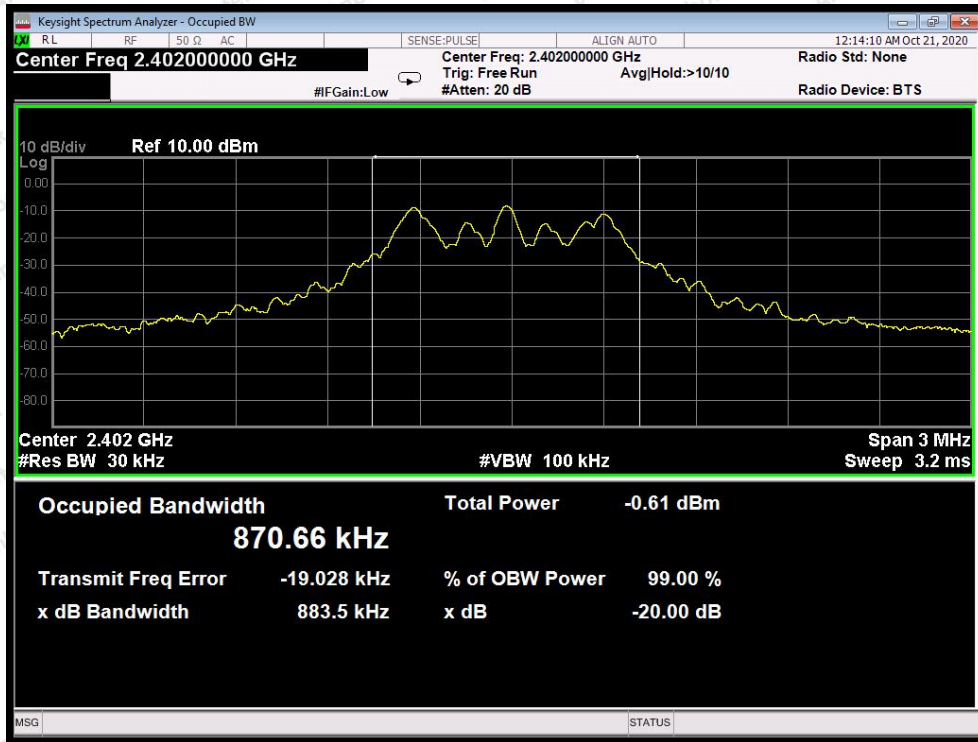

Test Mode: Low

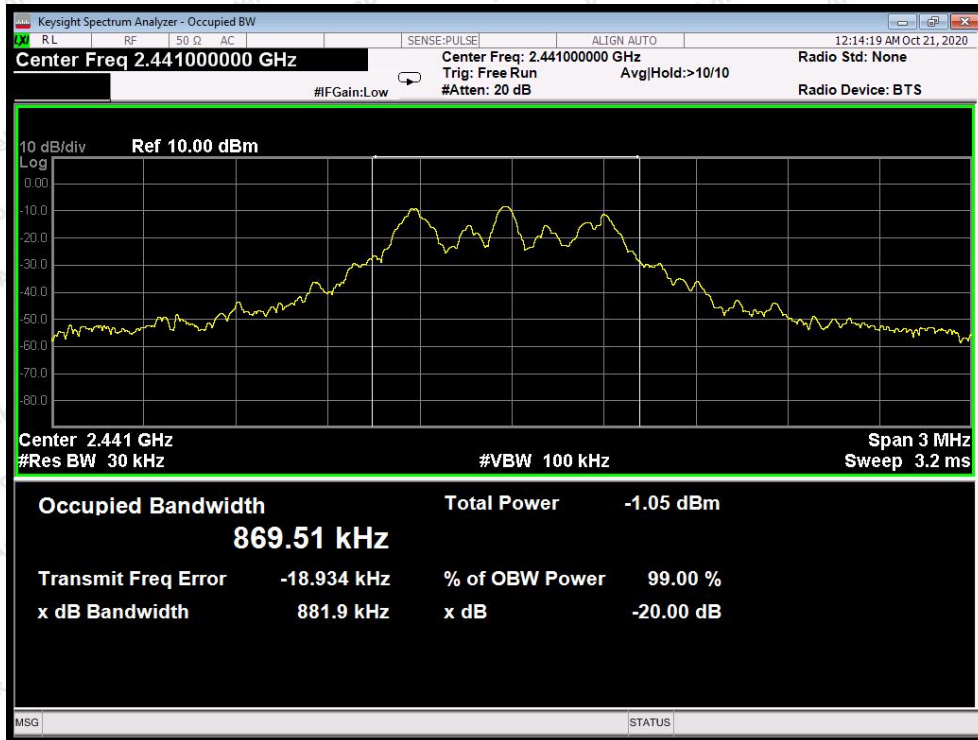

Test Mode: Middle

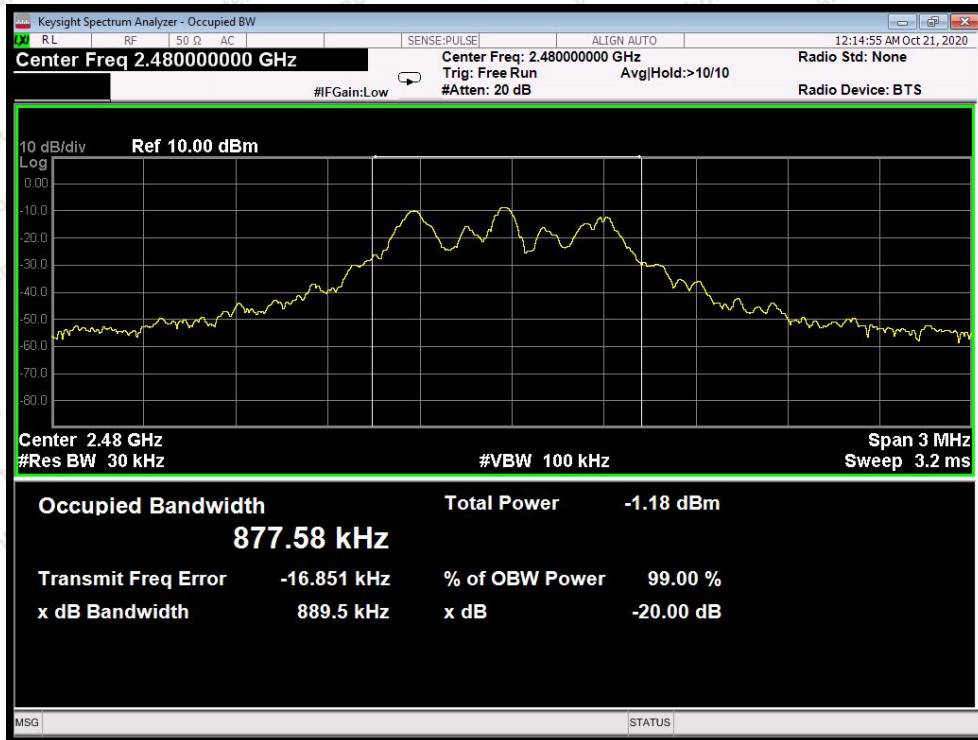

Test Mode: High

## 6. Antenna Requirement

### 6.1. Test Standard and Requirement

Test Standard	FCC Part15 Section 15.203
Requirement	1) 15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

### 6.2. Antenna Connected Construction

The antenna is a PCB Antenna which permanently attached, and the best case gain of the antenna is -0.58 dBi. It complies with the standard requirement.



## **APPENDIX I -- TEST SETUP PHOTOGRAPH**

Please refer to separated files for Test Setup Photos of the EUT.

## **APPENDIX II -- EXTERNAL PHOTOGRAPH**

Please refer to separated files for External Photos of the EUT.

## **APPENDIX III -- INTERNAL PHOTOGRAPH**

Please refer to separated files for Internal Photos of the EUT.

----- End of Report -----

