



# FCC RADIO TEST REPORT

**FCC ID** : 2AJN7-TP00122AUC  
**Equipment** : Notebook Computer/Foldable PC  
**Brand Name** : Lenovo  
**Model Name** : TP00122A  
**Applicant** : LC Future Center Limited Taiwan Branch  
7F., No. 780, Bei'an Rd., Zhongshan Dist.,  
Taipei City 104, Taiwan  
**Manufacturer** : LCFC (HeFei) Electronics Technology Co., Ltd.  
No. 3188-1, Yungu Road (Hefei Export  
Processing Zone), Hefei Economics &  
Technology Development Area, Anhui, CHINA  
**Standard** : FCC 47 CFR Part 2, Part 27(D)

Equipment: Foxconn T99W175 tested inside of Lenovo Notebook Computer/Foldable PC

The product was received on Jul. 21, 2020 and testing was started from Aug. 17, 2020 and completed on Aug. 28, 2020. We, SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA-603-E and has been in compliance with the applicable technical standards.

The test results in this partial report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

*Louis Wu*

Approved by: Louis Wu

**SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory**

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan



## Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
<b>1 General Description .....</b>	<b>5</b>
1.1 Product Feature of Equipment Under Test.....	5
1.2 Product Specification of Equipment Under Test.....	5
1.3 Modification of EUT .....	5
1.4 Testing Site.....	6
1.5 Applied Standards .....	6
<b>2 Test Configuration of Equipment Under Test .....</b>	<b>7</b>
2.1 Test Mode.....	7
2.2 Connection Diagram of Test System.....	7
2.3 Support Unit used in test configuration and system .....	8
2.4 Frequency List of Low/Middle/High Channels .....	8
<b>3 Radiated Test Items .....</b>	<b>9</b>
3.1 Measuring Instruments .....	9
3.2 Radiated Spurious Emission Measurement .....	10
<b>4 List of Measuring Equipment.....</b>	<b>11</b>
<b>5 Uncertainty of Evaluation.....</b>	<b>12</b>
<b>Appendix A. Test Results of Radiated Test</b>	
<b>Appendix B. Test Setup Photographs</b>	



### History of this test report

Report No.	Version	Description	Issued Date
FG072019D	01	Initial issue of report	Sep. 18, 2020



### Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
-	§2.1046	Conducted Output Power and Effective Isotropic Radiated Power	-	See Note
-	-	Peak-to-Average Ratio		
-	§27.50 (a)(3)	EIRP Power Density		
-	§2.1049	Occupied Bandwidth		
-	§2.1051 §27.53 (a)(4)	Conducted Band Edge Measurement	-	See Note
-	§2.1051 §27.53 (a)(4)	Conducted Spurious Emission	-	See Note
-	§2.1055 §27.54	Frequency Stability Temperature & Voltage	-	See Note
3	§2.1053 §27.53 (a)(4)	Radiated Spurious Emission	Pass	Under limit 2.55 dB at 6930.000 MHz

**Note:** The module (Model: T99W175) makes no difference after verifying output power, this report reuses test data from the module report.

<b>Declaration of Conformity:</b>
The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.
<b>Comments and Explanations:</b>
The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

**Reviewed by: Wii Chang**

**Report Producer: Tina Chuang**

# 1 General Description

## 1.1 Product Feature of Equipment Under Test

Product Feature	
Equipment	Notebook Computer/Foldable PC
Brand Name	Lenovo
Model Name	TP00122A
FCC ID	2AJN7-TP00122AUC
EUT supports Radios application	WCDMA/HSPA/LTE/GNSS/5G NR WLAN 11a/b/g/n HT20/HT40 WLAN 11ac VHT20/VHT40/VHT80/VHT160 WLAN 11ax HE20/HE40/HE80/HE160 Bluetooth BR/EDR/LE
EUT Stage	Production Unit

**Remark:**

1. The above EUT's information was declared by manufacturer.
2. Equipment: Foxconn T99W175 tested inside of Lenovo Notebook Computer/Foldable PC.

WWAN Antenna Information				
Main Antenna	Manufacturer	Amphenol	Peak gain (dBi)	1.94
	Part number	LXA494-16-000-C	Type	PIFA
MIMO 2 Antenna	Manufacturer	Amphenol	Peak gain (dBi)	1.44
	Part number	LXA493-16-000-C	Type	PIFA

## 1.2 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx Frequency	2307.5 MHz ~ 2312.5 MHz
Rx Frequency	2352.5 MHz ~ 2357.5 MHz
Bandwidth	5MHz / 10MHz
Type of Modulation	QPSK / 16QAM / 64QAM

## 1.3 Modification of EUT

No modifications are made to the EUT during all test items.



## 1.4 Testing Site

<b>Test Site</b>	SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory
<b>Test Site Location</b>	No.58 , Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City, Taiwan
<b>Test Site No.</b>	<b>Sporton Site No.</b> 03CH12-HY
<b>Test Engineer</b>	Jack Cheng , Lance Chiang and Chuan Chu
<b>Temperature</b>	22.8~26.2°C
<b>Relative Humidity</b>	56.5~68.6%

**Note:** The test site complies with ANSI C63.4 2014 requirement.

FCC Designation No.: TW0007

## 1.5 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ ANSI C63.26-2015
- ♦ FCC 47 CFR Part 2, Part 27(D)
- ♦ ANSI / TIA-603-E
- ♦ FCC KDB 971168 Power Meas License Digital Systems D01 v03r01
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. The TAF code is not including all the FCC KDB listed without accreditation.

## 2 Test Configuration of Equipment Under Test


### 2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.

For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Z plane) were recorded in this report.

Test Items	Band	Bandwidth (MHz)						Modulation			RB #			Test Channel			
		1.4	3	5	10	15	20	QPSK	16QAM	64QAM	1	Half	Full	L	M	H	
Radiated Spurious Emission	30	-	-	v	v	-	-	v				v			v	v	v
Remark	<ol style="list-style-type: none"> <li>The mark "v" means that this configuration is chosen for testing</li> <li>The mark "- " means that this bandwidth is not supported.</li> <li>The device is investigated from 1GHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.</li> <li>All the radiated test cases were performed with Adapter 1.</li> </ol>																

### 2.2 Connection Diagram of Test System

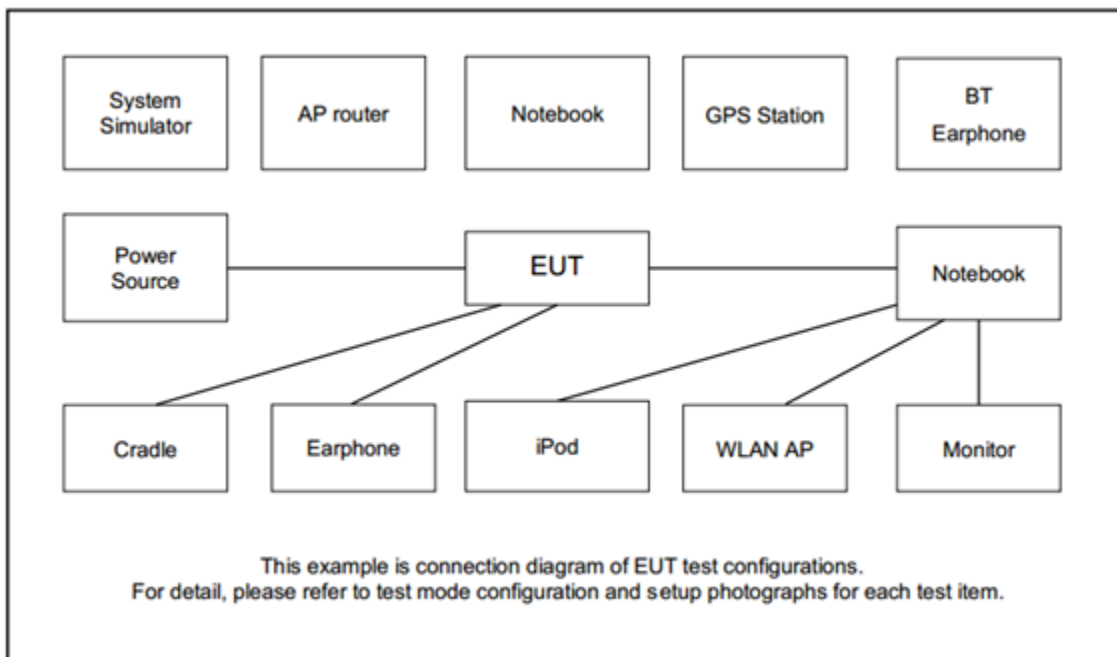



### 2.3 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8821C	N/A	N/A	Unshielded, 1.8 m

### 2.4 Frequency List of Low/Middle/High Channels

LTE Band 30 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
10	Channel	-	27710	-
	Frequency	-	2310	-
5	Channel	27685	27710	27735
	Frequency	2307.5	2310	2312.5




### 3 Radiated Test Items

#### 3.1 Measuring Instruments


See list of measuring instruments of this test report.

##### 3.1.1 Test Setup

For radiated emissions from 1GHz to 18GHz

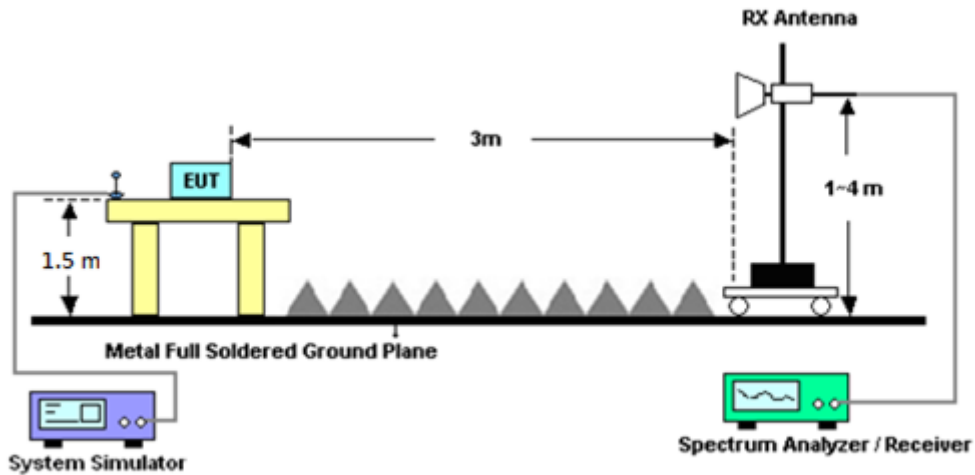

For radiated test above 18GHz

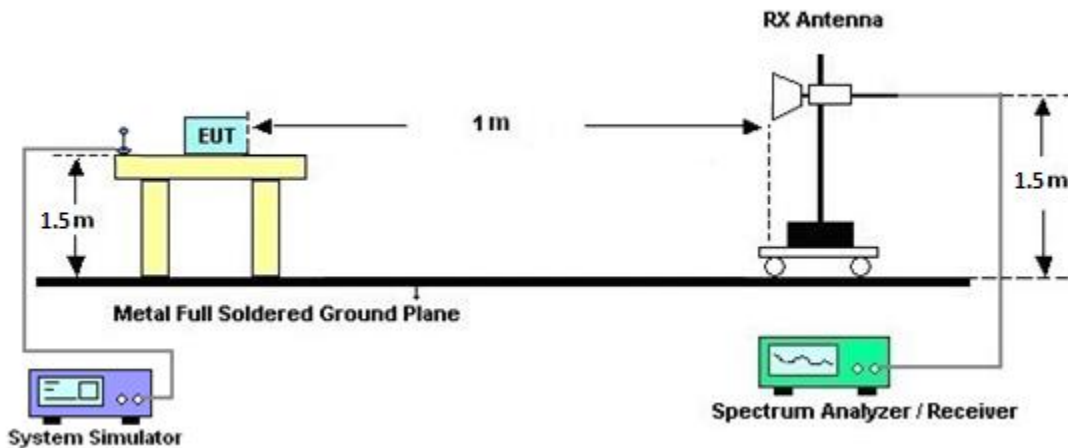

##### 3.1.2 Test Result of Radiated Test

Please refer to Appendix A.



## 3.2 Radiated Spurious Emission Measurement

### 3.2.1 Description of Radiated Spurious Emission Measurement

The radiated spurious emission was measured by substitution method according to ANSI / TIA-603-E  
The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least  $70 + 10 \log (P)$  dB.  
The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

### 3.2.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 7 and ANSI / TIA-603-E Section 2.2.12.

1. The EUT was placed on a turntable with 1.5 meter height for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
5. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
7. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
8. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.

$$\text{EIRP (dBm)} = \text{S.G. Power} - \text{Tx Cable Loss} + \text{Tx Antenna Gain}$$

$$\text{ERP (dBm)} = \text{EIRP} - 2.15$$

1. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from  $70 + 10\log(P)$ dB below the transmitter power P(Watts)

$$= P(W) - [70 + 10\log(P)] \text{ (dB)}$$

$$= [30 + 10\log(P)] \text{ (dBm)} - [70 + 10\log(P)] \text{ (dB)}$$

$$= -40\text{dBm.}$$



## 4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-1328	1GHz~18GHz	Nov. 14, 2019	Aug. 17, 2020~ Aug. 28, 2020	Nov. 13, 2020	Radiation (03CH12-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170584	18GHz~40GHz	Dec. 10, 2019	Aug. 17, 2020~ Aug. 28, 2020	Dec. 09, 2020	Radiation (03CH12-HY)
Preamplifier	Agilent	8449B	3008A02375	1GHz~26.5GHz	Mar. 26, 2020	Aug. 17, 2020~ Aug. 28, 2020	Mar. 25, 2021	Radiation (03CH12-HY)
Preamplifier	Jet-Power	JPA0118-55-303K	1710001800054002	1GHz~18GHz	Feb. 07, 2020	Aug. 17, 2020~ Aug. 28, 2020	Feb. 06, 2021	Radiation (03CH12-HY)
Preamplifier	EMEC	EM18G40G	060715	18GHz~40GHz	Dec. 13, 2019	Aug. 17, 2020~ Aug. 28, 2020	Dec. 12, 2020	Radiation (03CH12-HY)
Spectrum Analyzer	Rohde & Schwarz	FSV3044	101048	10Hz~44GHz	Apr. 29, 2020	Aug. 17, 2020~ Aug. 28, 2020	Apr. 28, 2021	Radiation (03CH12-HY)
Signal Generator	Anritsu	MG3694C	163401	0.1Hz~40GHz	Feb. 15, 2020	Aug. 17, 2020~ Aug. 28, 2020	Feb. 14, 2021	Radiation (03CH12-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 126E	0058/126E	30MHz~18GHz	Dec. 12, 2019	Aug. 17, 2020~ Aug. 28, 2020	Dec. 11, 2020	Radiation (03CH12-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	505134/2	30MHz~40GHz	Feb. 25, 2020	Aug. 17, 2020~ Aug. 28, 2020	Feb. 24, 2021	Radiation (03CH12-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	800740/2	30MHz~40GHz	Feb. 25, 2020	Aug. 17, 2020~ Aug. 28, 2020	Feb. 24, 2021	Radiation (03CH12-HY)
Hygrometer	TECPEL	DTM-303B	TP140349	N/A	Oct. 25, 2019	Aug. 17, 2020~ Aug. 28, 2020	Oct. 24, 2020	Radiation (03CH12-HY)
Controller	EMEC	EM1000	N/A	Control Turn table & Ant Mast	N/A	Aug. 17, 2020~ Aug. 28, 2020	N/A	Radiation (03CH12-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1m~4m	N/A	Aug. 17, 2020~ Aug. 28, 2020	N/A	Radiation (03CH12-HY)
Turn Table	EMEC	TT2000	N/A	0~360 Degree	N/A	Aug. 17, 2020~ Aug. 28, 2020	N/A	Radiation (03CH12-HY)
Software	Audix	E3 6.2009-8-24	RK-000989	N/A	N/A	Aug. 17, 2020~ Aug. 28, 2020	N/A	Radiation (03CH12-HY)



## 5 Uncertainty of Evaluation

### Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	3.21
---	------

### Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	3.80
---	------



# Appendix A. Test Results of Radiated Test

## LTE Band 30

LTE Band 30 / 5MHz / QPSK									
Channel	Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	4614	-59.16	-40	-19.16	-52.69	-70.38	1.46	12.68	H
	6924	-47.91	-40	-7.91	-48.18	-58.19	1.73	12.01	H
	9225	-58.11	-40	-18.11	-60.93	-67.73	2.16	11.78	H
									H
									H
									H
	4614	-60.70	-40	-20.70	-53.46	-71.92	1.46	12.68	V
	6924	-55.14	-40	-15.14	-54.96	-65.42	1.73	12.01	V
	9225	-57.32	-40	-17.32	-61.14	-66.94	2.16	11.78	V
									V
									V
									V
Middle	4620	-57.93	-40	-17.93	-51.48	-69.15	1.46	12.68	H
	6930	-42.55	-40	-2.55	-42.86	-52.82	1.73	12.00	H
	9234	-57.85	-40	-17.85	-60.65	-67.46	2.16	11.77	H
									H
									H
									H
	4620	-60.12	-40	-20.12	-52.9	-71.34	1.46	12.68	V
	6930	-43.08	-40	-3.08	-42.94	-53.35	1.73	12.00	V
	9234	-56.52	-40	-16.52	-60.33	-66.13	2.16	11.77	V
									V
									V
									V



Highest	4626	-54.61	-40	-14.61	-48.18	-65.82	1.46	12.67	H
	6936	-46.10	-40	-6.10	-46.44	-56.36	1.73	11.99	H
	9243	-58.18	-40	-18.18	-60.98	-67.77	2.16	11.76	H
									H
									H
									H
	4626	-58.82	-40	-18.82	-51.62	-70.03	1.46	12.67	V
	6936	-54.38	-40	-14.38	-54.27	-64.64	1.73	11.99	V
	9243	-56.72	-40	-16.72	-60.53	-66.31	2.16	11.76	V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



LTE Band 30 / 10MHz / QPSK									
Channel	Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	4611	-58.28	-40	-18.28	-51.8	-69.50	1.45	12.68	H
	6917	-43.99	-40	-3.99	-44.21	-54.27	1.73	12.02	H
	9222	-58.01	-40	-18.01	-60.84	-67.63	2.16	11.78	H
									H
									H
									H
	4611	-61.11	-40	-21.11	-53.85	-72.33	1.45	12.68	V
	6917	-58.40	-40	-18.40	-58.17	-68.68	1.73	12.02	V
	9222	-56.81	-40	-16.81	-60.63	-66.43	2.16	11.78	V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.